

Application Circuit

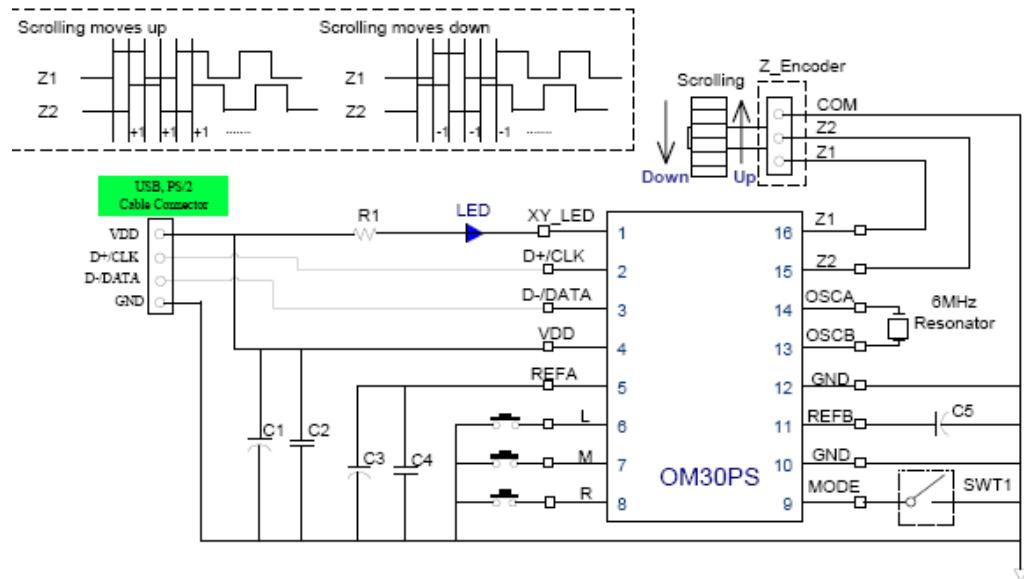


Figure 8-1 MODE-I for Basic Circuit

Where: $R1: 33 \sim 51 \text{ Ohm}$, $C1: 10\text{uF}$, $C2: 0.1\mu\text{F}$, $C3: 10\text{uF}$, $C4: 0.1\mu\text{F}$, $C5: 4.7\mu\text{F}$,

$SWT1$: Open for $USB+PS/2$, short for USB only (one time detection after power on).