

# Test report for GPS-Pod

Report Date: July 7, 2006

Signatures:



Tested by:

Jani Kiiski

Test Engineer

Contents approved:



Mika Koivunen

Test Engineer

**CONTENTS**

<b>1</b>	<b>LABORATORY INFORMATION .....</b>	<b>3</b>
<b>2</b>	<b>CUSTOMER INFORMATION .....</b>	<b>3</b>
<b>3</b>	<b>SUMMARY OF TEST RESULTS .....</b>	<b>4</b>
<b>4</b>	<b>EUT INFORMATION.....</b>	<b>5</b>
4.1	EUT description .....	5
4.2	EUT TEST SETUPS .....	6
<b>5</b>	<b>APPLICABLE STANDARDS.....</b>	<b>6</b>
<b>6</b>	<b>FIELD STRENGTH OF FUNDAMENTAL .....</b>	<b>7</b>
6.1	Test setup and measurement method .....	7
6.2	EUT operation mode .....	7
6.3	Limit.....	7
6.4	Results.....	8
<b>7</b>	<b>RADIATED SPURIOUS EMISSIONS .....</b>	<b>9</b>
7.1	Test setup .....	9
7.2	Test method.....	10
7.3	EUT operation mode .....	10
7.4	Limit.....	10
7.5	Results.....	11
<b>8</b>	<b>20 dB BANDWIDTH.....</b>	<b>12</b>
8.1	Test setup and measurement method .....	12
8.2	EUT operation mode .....	12
8.3	Results.....	13
8.4	Screen shots .....	13
<b>9</b>	<b>99 % BANDWIDTH.....</b>	<b>14</b>
9.1	Test setup and measurement method .....	14
9.2	EUT operation mode .....	14
9.3	Results.....	15
9.4	Screen shots .....	15
<b>10</b>	<b>FREQUENCY STABILITY.....</b>	<b>16</b>
10.1	Test setup and measurement method .....	16
10.2	EUT operation mode .....	16
10.3	Results.....	17
<b>11</b>	<b>TEST EQUIPMENT.....</b>	<b>18</b>
11.1	Radiated measurements.....	18
<b>12</b>	<b>TEST SETUP PHOTOGRAPHS .....</b>	<b>19</b>

## 1 LABORATORY INFORMATION

<b>Test Laboratory</b>	NATLABS OY EMC Laboratory Koneenkatu 12 / K17 05830 Hyvinkää FINLAND  Tel: +358 20 475 2600 Fax: +358 20 475 2719 e-mail: firstname.surname@ette.com
<b>FCC registration number: IC file number:</b>	910391 (January 27, 2003) IC 4616A-1 (June, 2006)

## 2 CUSTOMER INFORMATION

<b>Client</b>	Suunto Oy Valimotie 7 01510 Vantaa Finland  Tel. +358 9 875 870 Fax +358 9 875 87301
<b>Contact person:</b>	Heikki Puuri Suunto Oy Valimotie 7 01510 Vantaa Finland  Tel: +358 9 875 870 Fax: +358 9 875 87301
<b>Receipt of EUT:</b>	June 26. 2006
<b>Testing date:</b>	June 26. – July 5. 2006
<b>Report date:</b>	July 7. 2006

The tests listed in this report have been done to demonstrate compliance to the FCC rules section §15.249, §15.209 and IC standard RSS-210.

### 3 SUMMARY OF TEST RESULTS

#### Transmitter measurements

Section in CFR 47	Section in RSS-210	Test	Result
§ 15.249 (a)	A2.9 (1)	Field strength of fundamental	PASS
§ 15.249 (a) (d)	2.7, A2.9 (2)	Spurious radiated emissions	PASS
§ 15.215 (c)		20 dB bandwidth	PASS
	RSS-GEN 4.4.1	99% bandwidth	PASS
§ 15.215 (c)	RSS-GEN 7.2.4	Frequency stability	PASS

#### Receiver measurements

Section in CFR 47	Section in RSS-GEN	Test	Result
§15.109	7.2.3	Radiated emissions	PASS

PASS Pass  
FAIL Fail  
X Measured, but there is no applicable performance criteria  
Na Not applicable

## 4 EUT INFORMATION

The EUT and accessories used in the tests are listed below. Later in this report only EUT numbers are used as reference.

	Device	Type	S/N	EUT number
<b>EUT</b>	GPS receiver	GPS-Pod	Unit CW	10701 *1
	GPS receiver	GPS-Pod	Unit CW	10702 *2
	GPS receiver	GPS-Pod	Unit TX	10703 *3
	GPS receiver	GPS-Pod	Unit TX	10704 *4
<b>Accessories</b>	Battery	AA	-	10705

Notes:

- \*1 Modified to transmit carrier continuously
- \*2 Modified to transmit carrier continuously , antenna connector
- \*3 Modified to transmit modulated carrier continuously
- \*4 Modified to transmit modulated carrier continuously , antenna connector

### 4.1 EUT description

EUT is battery powered GPS receiver that transmits speed and distance data to wrist computer via radio link. Radio link uses fixed frequency (2465 MHz) and GFSK modulation.

The EUT was not modified during the tests.

## 4.2 EUT TEST SETUPS

For each test the EUT was exercised to find out the worst case of operation modes and device configuration.

Two different test setups were used: one for conducted measurements, another for radiated measurements. Two EUT were equipped with an external antenna connector for conductive measurements.

The test setup photographs are in the document referenced in section 12.

## 5 APPLICABLE STANDARDS

The tests were performed in guidance of CFR 47 Part 15.249, 15.209, 15.109 and Part 2, ANSI C63.4 (2003), RSS-GEN / RSS-210

Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method" for each test case.

## 6 FIELD STRENGTH OF FUNDAMENTAL

<b>EUT</b>	10701		
<b>Accessories</b>	10705		
<b>Temp, Humidity, Air Pressure</b>	21°C	75 RH%	1007hPa
<b>Date of measurement</b>	June 27. 2006		
<b>FCC rule part</b>	§15.249 (a)		
<b>RSS-210 section</b>	A2.9 (1)		
<b>Measured by</b>	Jani Kiiski		

### 6.1 Test setup and measurement method

The EUT was set on a non-conductive turntable in a semi-anechoic chamber. The EUT was set at 0.8m height. Measuring antenna was scanned 1 – 4 m in height.

The measurements were repeated in three EUT orientations and two antenna polarizations.

The measured signal was routed from the measuring antenna to the spectrum analyzer.

The measurement was made using 1 MHz resolution bandwidth and 1 MHz video bandwidth and maximum hold function to record the maximum peak output power.

### 6.2 EUT operation mode

<b>EUT operation mode</b>	Continuous transmission
<b>EUT frequency</b>	2465 MHz
<b>EUT TX power level</b>	0 dBm (Software configuration)

### 6.3 Limit

Table 1: Field strength of fundamental (Measured with average detector)

Frequency (MHz)	mV/m (@3m)	dBuV/m (@3m)
2400-2483.5	50 (Avg)	94 (Avg) 114 (Peak)

## 6.4 Results

Table 2: Maximum field strength of fundamental (Peak value)

Freq MHz	Measured Value dBuV	Correction Factor dB	Result dBuV/m	EUT orientation	Antenna Pol.	Antenna height	Turntable angle
2465	56,4	34	<b>89,4</b>	POS1	V	120cm	233

Since the measurements are made with sample that is modified to continuous transmission, average results are calculated from peak results using duty cycle.

$$\text{Average level} \leq \text{Peak level} - 20 \log (\text{duty cycle}).$$

According to manufacturer the Duty cycle for this product is 150 $\mu$ s long transmission at 5Hz frequency.

Therefore,

$$\begin{aligned} \text{Average level} &\leq \text{Peak level} - 20 \log ((100 \text{ ms} - 150 \mu\text{s}) / 150\mu\text{s}) \\ \text{Average level} &\leq \text{Peak level} - \mathbf{56.5 \text{ dB}} \end{aligned}$$




## 7 RADIATED SPURIOUS EMISSIONS

<b>EUT</b>	10701		
<b>Accessories</b>	10705		
<b>Temp, Humidity, Air Pressure</b>	21°C	72 RH%	1007hPa
<b>Date of measurement</b>	June 27. 2006		
<b>FCC rule part</b>	§15.249 (a) (d)		
<b>RSS-210 section</b>	2.7, A2.9 (2)		
<b>Measured by</b>	Jani Kiiski		


### 7.1 Test setup

EUT was modified to send constant carrier at nominal frequency.

The test was done using an automated test system, where a computer controlled the measurement equipments.

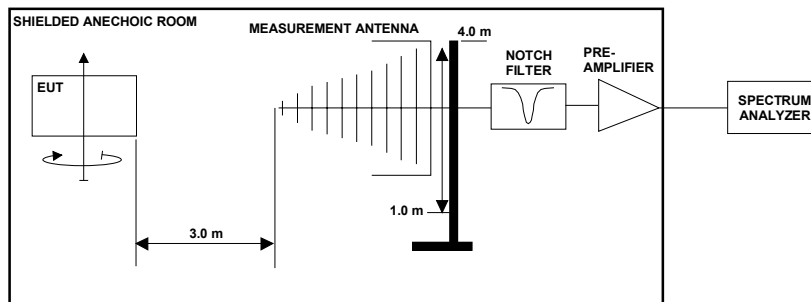

Picture 1: Test setup for radiated spurious emissions measurement  
30 MHz - 3 GHz frequencies

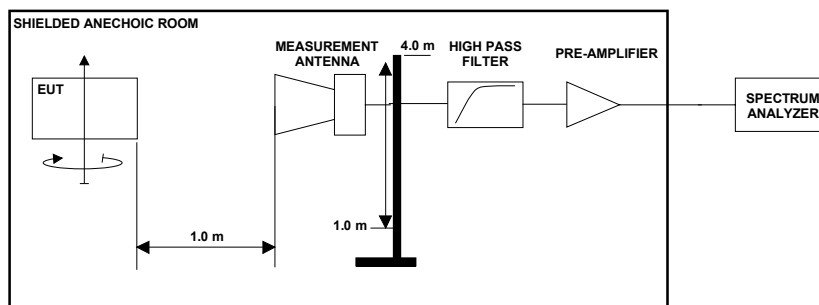

Picture 2: Test setup for radiated spurious emissions measurement  
3 GHz – 25 GHz frequencies

## 7.2 Test method

1. The emissions were searched and maximized by moving the turntable, changing the measuring antenna polarization and height and manipulating the EUT.
2. Levels of suspicious signals and levels of EUT transmitter harmonics were recorded.
3. The recorded levels were corrected in the automated test system with the measurement antenna factor, cable attenuations and filter attenuation.
4. The corrected values, giving the EUT radiated spurious emission levels as dB $\mu$ V/m at 3 m distance, are reported.

## 7.3 EUT operation mode

<b>EUT operation mode</b>	Continuous transmission
<b>EUT frequency</b>	2465 MHz
<b>EUT TX power level</b>	0 dBm (Software configuration)

## 7.4 Limit

Table 3: Radiated spurious emission limits at measurement distance of 3m

<b>Frequency band (MHz)</b>	<b>3m Limit (<math>\mu</math>V/m)</b>	<b>3m Limit (dB<math>\mu</math>V/m)</b>	<b>Detector</b>
30 – 88	100	40	QP
88 -216	150	43.5	QP
216 - 960	200	46	QP
960 - 1000	500	54.0	QP
1000 - 25000	500	54.0	AVG
1000 - 25000	5000	74.0	PEAK

As default, all emissions were compared against the general limits. If any emission exceeded that limit, it was further checked, that it complies with the -50dBc requirement.

## 7.5 Results

Measurement system noise level was least 20 dB below the spurious emission limit. Only levels of suspicious signals and transmitter harmonic frequencies, which were above the measurement system noise, are reported.

Table 4: Emission levels PEAK detector

Freq MHz	Measured Value dBuV	Correction Factor dB	Result dBuV/m	Marginal dBuV/m	EUT Position	Ant Pol.	Ant height cm	TT angle
1230	42,7	7,8	50,5	-23,5	POS1	H	170	9
4930	79,9	-15,3	64,6	-9,4	POS1	H	100	226
7400	59,3	-3,1	56,2	-17,8	POS3	V	100	106
9860	58,2	-3,6	54,6	-19,4	POS3	H	110	336
12300	47,9	1,4	49,2	-24,8	POS2	H	100	343
20200	44,1	2,2	46,3	-27,7	POS1	V	165	357
23400	42,1	5,8	47,8	-26,2	POS3	H	175	209

Since the measurements are made with sample that is modified to continuous transmission, average results are calculated from peak results using duty cycle.

$$\text{Average level} \leq \text{Peak level} - 20 \log(\text{duty cycle}).$$

According to manufacturer the Duty cycle for this product is 150 $\mu$ s long transmission at 5Hz frequency.

Therefore,

$$\begin{aligned} \text{Average level} &\leq \text{Peak level} - 20 \log((100 \text{ ms} - 150 \mu\text{s}) / 150\mu\text{s}) \\ \text{Average level} &\leq \text{Peak level} - \mathbf{56.5 \text{ dB}} \end{aligned}$$

## 8 20 dB BANDWIDTH

<b>EUT</b>	10704		
<b>Accessories</b>	10705		
<b>Temp, Humidity, Air Pressure</b>	26°C	63 RH%	1009hPa
<b>Date of measurement</b>	June 26. 2006		
<b>FCC rule part</b>	§15.215 (c)		
<b>RSS-210 section</b>			
<b>Measured by</b>	Jani Kiiski		

### 8.1 Test setup and measurement method

The 20dB bandwidth was measured using 10 kHz resolution bandwidth and maximum hold function of the spectrum analyzer. 20dB bandwidth was defined by measuring the maximum level on the measured channel and by placing display line 20 dB below this value and by reading the bandwidth from the intersection of the measured trace and display line.

### 8.2 EUT operation mode


<b>EUT operation mode</b>	Normal modulation
<b>EUT frequency</b>	2465 MHz
<b>EUT TX power level</b>	0 dBm (Software configuration)

## 8.3 Results

Table 5: 20dB bandwidth measurement results

EUT Frequency MHz	Limit MHz	Measured value MHz
2465	-	0,558

## 8.4 Screen shots

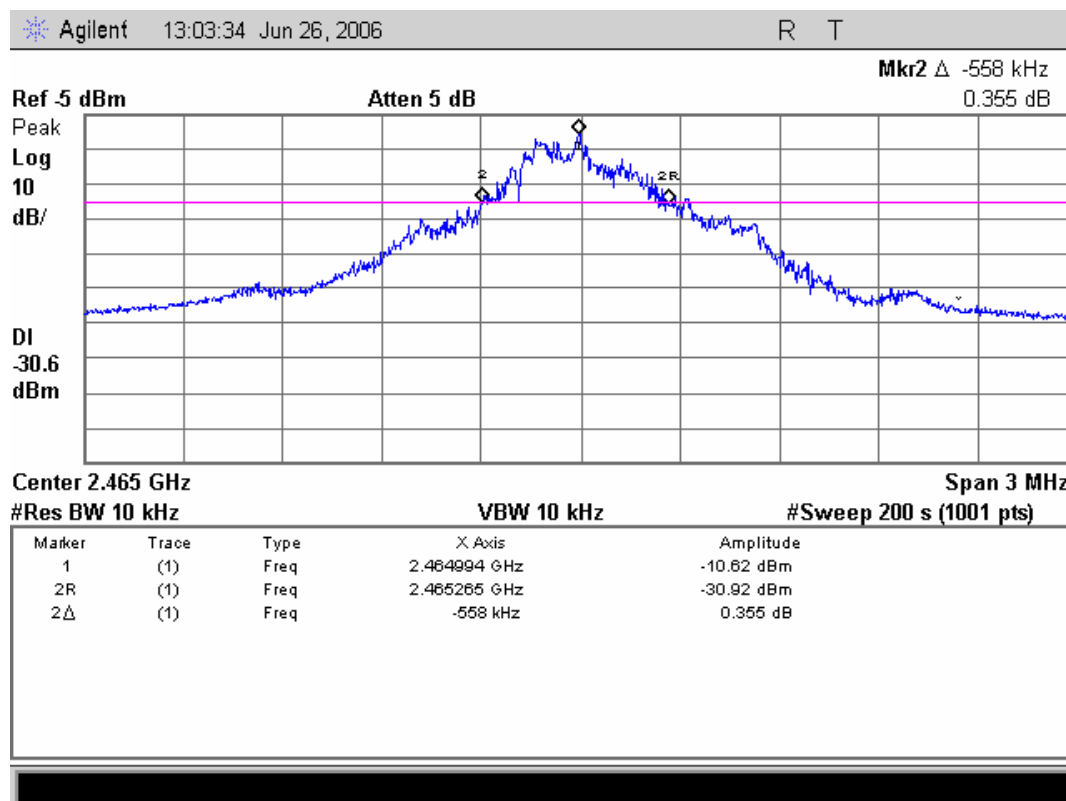

Picture 3: 20dB Bandwidth measurement result

## 9 99 % BANDWIDTH

<b>EUT</b>	10704		
<b>Accessories</b>	10705		
<b>Temp, Humidity, Air Pressure</b>	26°C	63 RH%	1009hPa
<b>Date of measurement</b>	June 26. 2006		
<b>FCC rule part</b>			
<b>RSS-GEN section</b>	4.4.1		
<b>Measured by</b>	Jani Kiiski		

### 9.1 Test setup and measurement method

The 99% occupied bandwidth was calculated from spectrum analyzer measurements.

The measurement data was read from the analyzer to computer.

Software in computer calculated the total power from the measurement data and defined the frequency band containing 99% of the total power.

Markers in the spectrum analyzer were then placed between the calculated frequencies to show the calculated 99% power band in the screenshots.

### 9.2 EUT operation mode


<b>EUT operation mode</b>	Normal modulation
<b>EUT frequency</b>	2465 MHz
<b>EUT TX power level</b>	0 dBm (Software configuration)

## 9.3 Results

Table 6: 99% bandwidth measurement results

EUT Frequency MHz	Limit MHz	Measured value MHz
2465	-	0,800

## 9.4 Screen shots

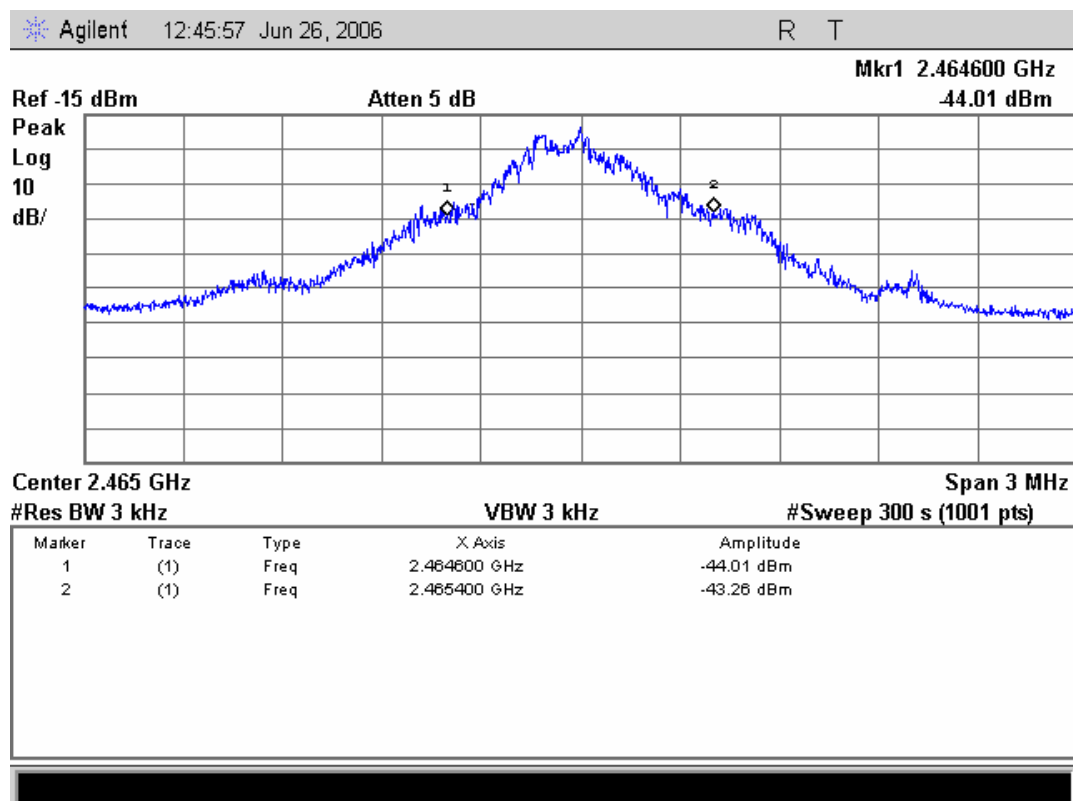


Picture 4: 99% Bandwidth measurement result

## 10 FREQUENCY STABILITY

<b>EUT</b>	10702		
<b>Accessories</b>	10705		
<b>Temp, Humidity, Air Pressure</b>	- °C	- RH%	- hPa
<b>Date of measurement</b>	July 5. 2006		
<b>FCC rule part</b>	§15.215 (c)		
<b>RSS-GEN section</b>	7.2.4		
<b>Measured by</b>	Jani Kiiski		

### 10.1 Test setup and measurement method

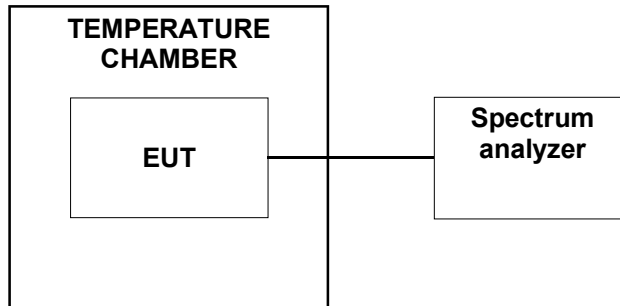

1. The climate chamber temperature was set to the maximum value and the temperature was allowed to stabilize
2. The EUT was placed in the chamber power off
3. The EUT temperature was allowed to stabilize for 30 minutes
4. The EUT was turned on and set to transmit
5. Transmitter peak frequency was measured with spectrum analyzer
6. The steps 3 - 5 were repeated for each temperature

### 10.2 EUT operation mode

<b>EUT operation mode</b>	Continuous transmission
<b>EUT channel</b>	2465 MHz
<b>EUT TX power level</b>	0 dBm (Software configuration)



## 10.3 Results

Table 7: Frequency stability measurement results

Temperature (°C)	Transmitter frequency (MHz)
50	2464,970
40	2464,976
30	2464,982
20	2464,989
10	2464,994
0	2464,997
-10	2464,996
-20	2464,991
-30	2464,975

## 11 TEST EQUIPMENT

All testing and measurement equipment has been calibrated once a year, except the antennas that are calibrated every two years.

### 11.1 Radiated measurements

<b>Equipment</b>	<b>Manufacturer</b>	<b>Model</b>
Spectrum Analyzer	Agilent	E7405A
Antenna	Chase	CBL 6141
Antenna	Schwarzbeck	BBHA 9120D
Antenna	Schwarzbeck	BBHA 9170
Band reject filter	Wainwright Instruments	WRCT2400/2483
High pass filter	Wainwright Instruments	WHK3.0/18GST
Pre-amplifier	Agilent	87405B
Pre-amplifier	JCA	118-400
Pre-amplifier	Miteq	AMF-6F-18002650-25-10P
Turn table / antenna mast controller	EMCO	2090

## 12 TEST SETUP PHOTOGRAPHS

Test setup photograph can be found in a separate document

T06-107C-EMC\_PHOTOS.doc