

Page 1 of 127

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C AND INDUSTRY CANADA RSS 247 REQUIREMENT

OF

Applicant: Suunto Ov

Tammiston kauppatie 7A, 01510 Vantaa, Finland

Product Name: SUUNTO 7 **Brand Name:** SUUNTO Model No.: OW185

Model Difference:

Report Number: T190307W01-RP1

FCC ID: RYP2540 IC: 5175A-2540

FCC Rule Part: §15.247, Cat: DTS

IC Rule Part: RSS-247 issue 2 Feb 2017

Issue Date: Aug. 15, 2019

Date of Test: Mar. 08, 2019 ~ Mar. 12, 2019

N/A

Date of EUT Received: Mar. 08, 2019

Compliance Certification Services Inc.Wugu Lab. Issued by

No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Taiwan.

(R.O.C.)

service@ccsrf.com

Note: The test Result was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were given in ANSI C63.10: 2013 and compliance standards.

The test results of this report relate only to the tested sample (EUT) identified in this report.

The test Report of full or partial shall not copy. Without written approval of Compliance Certification Services Inc. (Wugu Laboratory).

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留切天。本報告未經本公司書面許可,不可都份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm.

Attention is drawn to the limitation of liability, indemnification and www.sgs.com/terms e-document.htm. jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page 2 of 127

Tested By:

Wei Chang / Engineer

Approved By:

Kevin Tsai / Deputy Manager





Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 3 of 127

Revision History

Report Number	Revision	Description	Effected Page	Issue Date	Revised By
T190307W01-RP1	Rev.00	Initial creation of docu- ment	All	Mar. 15, 2019	Violetta Tang
T190307W01-RP1	Rev.01	Updated product name, brand name, Docking model no.	1,5	Aug. 15, 2019	Violetta Tang

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.








Table of Contents

1	GENERAL INFORMATION	5
2	SYSTEM TEST CONFIGURATION	7
3	SUMMARY OF TEST RESULTS	9
4	DESCRIPTION OF TEST MODES	9
5	MEASUREMENT UNCERTAINTY	11
6	CONDUCTED EMISSION TEST	12
7	DUTY CYCLE OF TEST SIGNAL	16
8	PEAK OUTPUT POWER MEASUREMENT	18
9	6dB & 99% BANDWIDTH MEASUREMENT	23
10	CONDUCTED BAND EDGE AND SPURIOUS EMISSION MEASUREMENT	44
11	RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT	59
12	POWER SPECTRAL DENSITY	122
13	ANTENNA REQUIREMENT	127

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 5 of 127

GENERAL INFORMATION

1.1 Product description

Product Name:	SUUNTO 7			
Brand Name:	SUUNTO	SUUNTO		
Model No.:	OW185			
Model difference:	N/A			
Hardware Version:	1100			
Software Version:	ESW1.CERT.31039.18400			
Docking:	Model No.: CB848N, Supplier: Simula Tech Inc.			
Dower Supply:	3.8Vdc from Rechargeable Li-ion Battery or 5Vdc from USE Port			
Power Supply: Battery:		Model No.: APP00289, Supplier: APACK TECHNOLOGY CO LTD		

WLAN 2.4GHz:

Wi-Fi	Frequency Range	Channels	Rated Power in dBm (Peak)	Rated Power in dBm (EIRP)	Type of Emission	Modulation Technology		
802.11b			18.01	10.50	18M0G1D	DSSS		
802.11g	2412-2472	13	19.71	5.48	17M1D1D			
802.11n HT20			19.71	5.50	18M1D1D	OFDM		
Antenna Designation:		Monopole	Monopole Antenna, Peak Gain: -4.49dBi					
Modulation	ı type:	· · · · · · · · · · · · · · · · · · ·	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM					
Transition Rate: 802.11 b: 1/2/5.5/11 Mbps 802.11 g: 6/9/12/18/24/36/48/54 Mbps 802.11 n_20MHz: 6.5 – 72.2Mbps								

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 6 of 127

1.2 Test Methodology of Applied Standards

FCC Part 15, Subpart C §15.247

FCC KDB 558074 D01 DTS Meas. Guidance v05r01

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

RSS-247 issue 2 Feb. 2017

RSS-Gen. issue 5 Apr. 2018

ANSI C63.10:2013

Note: All test items have been performed and record as per the above standards.

1.3 Test Facility

Compliance Certification Services Inc. Wugu Lab. No.11, Wugong 6th Rd.,

Wugu Dist., New Taipei City 24891, Taiwan. (R.O.C.) (TAF code 1309)

FCC Designation number: TW1309 Canada Registration number: 2324G

1.4 Special Accessories

There are no special accessories used while test was conducted.

1.5 Equipment Modifications

There was no modification incorporated into the EUT.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留切天。本報告未經本公司書面許可,不可都份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm.

Attention is drawn to the limitation of liability, indemnification and www.sgs.com/terms e-document.htm. jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page 7 of 127

SYSTEM TEST CONFIGURATION

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

2.3 Test Procedure

2.3.1 Conducted Emissions

The EUT is a placed on a table which is 0.8 m above ground plane. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz. The CISPR Quasi-Peak and Average detector mode is employed according to §15.207. The two LISNs provide 50uH/50 ohm of coupling impedance for the measuring instrument. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

2.3.2 Conducted Test (RF)

The active antenna port of the unlicensed wireless device is connected to the spectrum analyzer with attenuator to protect the instrumentation. If a second antenna port is available, it is tested at one operating frequency, with other port(s) appropriately terminated, to verify it has similar output characteristics as the fully tested port.

2.3.3 Radiated Emissions

The EUT is a placed on a turn table. For emissions testing at or below 1 GHz, the table height shall be 0.8 m above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留切天。本報告未經本公司書面許可,不可都份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm.

Attention is drawn to the limitation of liability, indemnification and www.sgs.com/terms e-document.htm. jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuation factor between EUT conducted port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly EUT RF output level.

Note:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor. Following shows an offset computation example with cable loss and attenuator.

2.5 Configuration of Tested System

Fig. 2-1 Radiated Emission Configuration



Fig. 2-2 Conducted Emission (AC Power Line) Configuration



Fig.2-3 Conducted Emission (Antenna Port) Configuration





Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Data Cable	Power Cord
1.	WLAN Test Software	N/A	N/A	N/A	N/A	N/A
2.	Notebook	Lenovo	L430	R9-XFG0X	Shielded	Unshielded
3.	DC Power Supply	Agilent	E3640A	MY52410006	N/A	Unshielded

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留切天。本報告未經本公司書面許可,不可都份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm.

Attention is drawn to the limitation of liability, indemnification and www.sgs.com/terms e-document.htm. jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.





SUMMARY OF TEST RESULTS

FCC Rules	IC Rules	Description Of Test	Result
§15.207(a)	RSS-Gen §8.8	AC Power Line Conducted Emission	Compliant
§15.247(b) (3)	RSS-247 §5.4(4)	Peak Output Power	Compliant
§15.247(a)(2)	RSS-247 §5.1 (1) RSS-Gen §6.7	6dB & 99% Emission Bandwidth	Compliant
§15.247(d)	RSS-247 §5.5 RSS-Gen §8.10	Conducted Band Edge and Spurious Emission	Compliant
§15.247(d)	RSS-247 §5.5 RSS-Gen §8.8 RSS-Gen §8.9 RSS-Gen §6.13	Radiated Band Edge and Spurious Emission	Compliant
§15.247(e)	RSS-247 §5.2(2)	Power Spectral Density	Compliant
§15.203 §15.247(b)	RSS- Gen §6.8	Antenna Requirement	Compliant

DESCRIPTION OF TEST MODES

4.1 Operated in 2400 ~ 2483.5MHz Band

13 channels are provided for 802.11b, g and n HT20

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412 MHz	8	2447 MHz
2	2417 MHz	9	2452 MHz
3	2422 MHz	10	2457 MHz
4	2427 MHz	11	2462 MHz
5	2432 MHz	12	2467 MHz
6	2437 MHz	13	2472 MHz
7	2442 MHz		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 10 of 127

4.2 The Worst Test Modes and Channel Details

- 1. The EUT has been tested under operating condition.
- 2. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.
- 3. Investigation has been done on all the possible configurations for searching the worst case.

AC POWER LINE CONDUCTED EMISSION TEST:

Test Condition	AC Power line conducted emission for line and neutral
Worst Case	Operation in normal mode

RADIATED EMISSION TEST:

RADIATED EMISSION TEST (BELOW 1 GHz)						
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)	ANTENNA PORT	
802.11g	1 to 13	6	OFDM	6	Ch0	

RADIATED EMISSION TEST (ABOVE 1 GHz)						
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)	ANTENNA PORT	
802.11b	1 to 13	1,6,11,12,13	DSSS	1	Ch0	
802.11g	1 to 13	1,6,11,12,13	OFDM	6	Ch0	
802.11n (HT20)	1 to 13	1,6,11,12,13	OFDM	MCS 0	Ch0	

Note:

The field strength of radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for 802.11b/g/n WLAN Transmitter for channel Low, Mid and High, the worst case H position was reported.


ANTENNA PORT CONDUCTED MEASUREMENT:

	CONDUCTED TEST						
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)	ANTENNA PORT		
802.11b	1 to 13	1, 6, 11, 12, 13	DSSS	1	Ch0		
802.11g	1 to 13	1, 6, 11, 12, 13	OFDM	6	Ch0		
802.11n (HT20)	1 to 13	1, 6, 11, 12, 13	OFDM	MCS 0	Ch0		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留切天。本報告未經本公司書面許可,不可都份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm.

Attention is drawn to the limitation of liability, indemnification and www.sgs.com/terms e-document.htm. jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.





MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
AC Powerline Conducted Emission	+/- 1.2575 dB
Peak Output Power	+/- 1.922 dB
6dB Bandwidth	+/- 61.248 Hz
100 kHz Bandwidth of Frequency Band Edges	+/- 1.922 dB
Peak Power Density	+/- 2.004 dB
3M Semi Anechoic Chamber / 30M~200M	+/- 4.12 dB
3M Semi Anechoic Chamber / 200M~1000M	+/- 4.68 dB
3M Semi Anechoic Chamber / 1G~8G	+/- 5.18 dB
3M Semi Anechoic Chamber / 8G~18G	+/- 5.47 dB
3M Semi Anechoic Chamber / 18G~26G	+/- 3.81 dB
3M Semi Anechoic Chamber / 26G~40G	+/- 3.87 dB

Note:

- 1. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
- 2. ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report.
- 3. The conformity assessment statement in this report is based solely on the test results, measurement uncertainty is excluded.

Page 12 of 127

CONDUCTED EMISSION TEST

6.1 Standard Applicable

Frequency range within 150kHz to 30MHz shall not exceed the Limit table as below.

Frequency range	Limits dB(uV)			
MHz	Quasi-peak	Average		
0.15 to 0.50	66 to 56	56 to 46		
0.50 to 5	56	46		
5 to 30	60	50		

6.2 Measurement Equipment Used

	Conducted Emission Test Site										
EQUIPMENT TYPE	MFR	MODEL Number	SERIAL NUMBER	LAST CAL.	CAL DUE.						
CABLE	EMCI	CFD300-NL	CERF	06/29/2018	06/28/2019						
EMI Test Receiver	R&S	ESCI	100064	07/24/2018	07/23/2019						
LISN	SCHWARZ- BECK	NSLK 8127	8127-541	01/31/2019	01/30/2020						
LISN	SCHAFFNER	NNB 41	03/10013	02/13/2019	02/12/2020						
Software		EZ-EMC(CCS-3A1-CE)								

6.3 EUT Setup

- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI 63.10:2013.
- 2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
- 3. The LISN was connected with 120Vac/60Hz power source.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留切天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms at www.sgs.com/terms and conditions for Electronic Documents at www.sgs.com/terms at ww Jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

^{1.} The lower limit shall apply at the transition frequencies

^{2.} The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.



6.4 Test SET-UP (Block Diagram of Configuration)

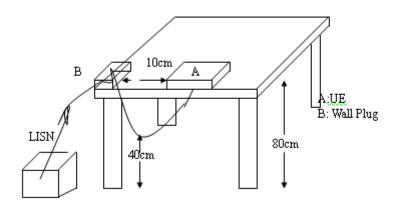

6.5 Measurement Procedure

- 1. The EUT was placed on a table which is 0.8m above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all phases of power being supplied by given UE are completed

6.6 Measurement Result


Note: Refer to next page for measurement data and plots.

Note2: The * reveals the worst-case results that closet to the limit.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留切天。本報告未經本公司書面許可,不可都份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm.

Attention is drawn to the limitation of liability, indemnification and www.sgs.com/terms e-document.htm. jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.





AC POWER LINE CONDUCTED EMISSION TEST DATA

T190307W01-RP1 Job No.: 2019/3/11 Date:

Company: **Suunto Oy** Time: 01:35:48 PM


Temp.(°C)/Hum.(%): 23(°C)/52% Standard: NCC/FCC/IC QP

Test item: Test By: **Conduction test** Peter

Test Voltage: AC 120V/60Hz Line: L1

OW185 Model:


Description: Operation

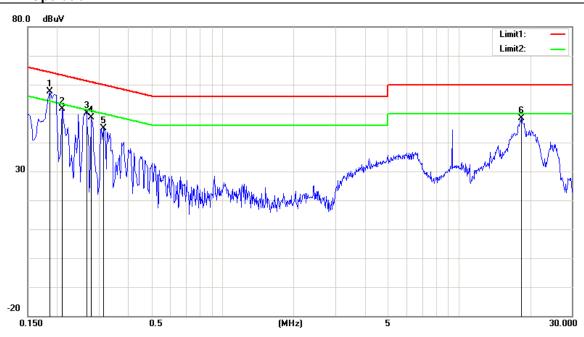

No.	Frequency	QuasiPeak	Average	Correction	QuasiPeak	Average	QuasiPeak	Average	QuasiPeak	Average	Remark
		reading	reading	factor	result	result	limit	limit	margin	margin	
	(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	(dB)	
1*	0.1860	55.01	37.50	0.15	55.16	37.65	64.21	54.21	-9.05	-16.56	Pass
2	0.2100	50.73	31.14	0.15	50.88	31.29	63.21	53.21	-12.33	-21.92	Pass
3	0.2660	46.85	28.58	0.15	47.00	28.73	61.24	51.24	-14.24	-22.51	Pass
4	0.2780	45.13	23.99	0.15	45.28	24.14	60.88	50.88	-15.60	-26.74	Pass
5	0.3140	41.04	23.75	0.16	41.20	23.91	59.86	49.86	-18.66	-25.95	Pass
6	18.4180	42.24	33.44	0.66	42.90	34.10	60.00	50.00	-17.10	-15.90	Pass

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留切天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms at www.sgs.com/terms and conditions for Electronic Documents at www.sgs.com/terms at ww jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.





Job No.: T190307W01-RP1 Date: 2019/3/11

Company: **Suunto Oy** 01:40:20 PM Time:


Temp.(°C)/Hum.(%): 23(°C)/52% Standard: NCC/FCC/IC QP

Test item: **Conduction test** Test By: Peter

Test Voltage: AC 120V/60Hz Line:

Model: **OW185**


Description: Operation

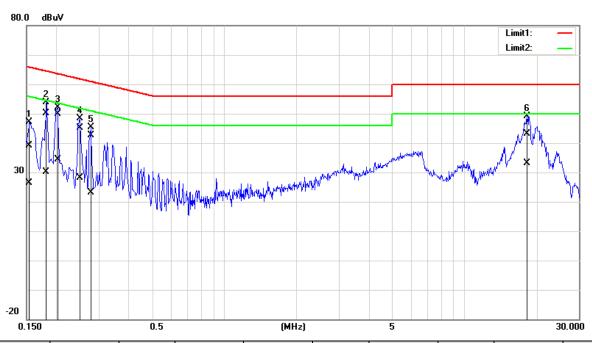

No.	Frequency	QuasiPeak	Average	Correction	QuasiPeak	Average	QuasiPeak	Average	QuasiPeak	Average	Remark
		reading	reading	factor	result	result	limit	limit	margin	margin	
	(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	(dB)	
1	0.1540	39.10	26.35	0.10	39.20	26.45	65.78	55.78	-26.58	-29.33	Pass
2	0.1820	49.91	30.06	0.10	50.01	30.16	64.39	54.39	-14.38	-24.23	Pass
3*	0.2020	49.90	34.18	0.10	50.00	34.28	63.53	53.53	-13.53	-19.25	Pass
4	0.2500	45.14	28.13	0.10	45.24	28.23	61.76	51.76	-16.52	-23.53	Pass
5	0.2780	42.50	23.12	0.10	42.60	23.22	60.88	50.88	-18.28	-27.66	Pass
6	18.3060	42.62	32.59	0.52	43.14	33.11	60.00	50.00	-16.86	-16.89	Pass

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留切天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms at www.sgs.com/terms and conditions for Electronic Documents at www.sgs.com/terms at ww jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.





DUTY CYCLE OF TEST SIGNAL

Pre-analysis Check: While conducting average power measurement, duty cycle of each mode shall be checked to ensure its duty cycle in order to compensate for the loss due to insufficient ratio of duty cycle.

All duty cycle is pre-scanned, and result as obtained below shows only the most representative ones where duty cycle is conducted as the given transmission with given virtual operation that expresses the percentage.

Formula:

Duty Cycle = Ton / (Ton+Toff)

Measurement Procedure:

- 1. Set span = Zero
- 2. RBW = 8MHz
- 3. VBW = 8MHz,
- 4. Detector = Peak

Duty Cycle:

	Duty Cycle (%)	Duty Factor (dB)	1/T (kHz)	VBW setting (kHz)
802.11b	97.63	0.10	0.12	1.00
802.11g	87.32	0.59	0.73	1.00
802.11n_20	86.57	0.63	0.78	1.00

b = 97.63%, q = 87.32%, n ht 20 = 86.57%

Duty Cycle Factor: $10 * \log(1/0.9763) = 0.1$ Duty Cycle Factor: $10 * \log(1/0.8732) = 0.59$ Duty Cycle Factor: $10 * \log(1/0.8657) = 0.63$ Duty Cycle Factor: $10 * \log(1/0.99) = 0.04$

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留切天。本報告未經本公司書面許可,不可都份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm.

Attention is drawn to the limitation of liability, indemnification and www.sgs.com/terms e-document.htm. Jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




7.1 DUTY CYCLE TEST SIGNAL Measurement Result


802.11 b



802.11 n 20 MHz

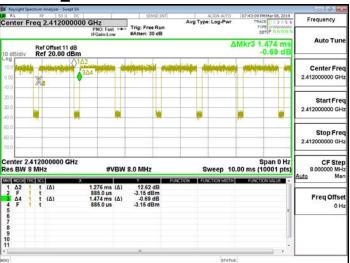

802.11 g

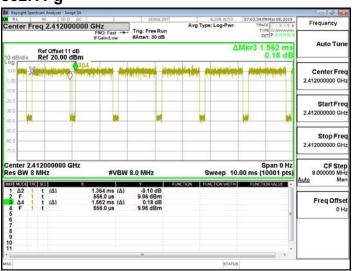

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 18 of 127

PEAK OUTPUT POWER MEASUREMENT

8.1 Standard Applicable

For systems using digital modulation in the 2400-2483.5 MHz bands, the limit for peak output power is 1Watt.

If the transmitting antenna of directional gain greater than 6dBi are used the peak output power form the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the Antenna exceeds 6dBi.

In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of Antenna exceeds 6dBi.

The antenna gain is not grater than 6 dBi. Therefore, reduction of power is not required.

Per RSS-247 §5.4(4)

For DTSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1W. Except as provided in Section 5.4(5), the e.i.r.p. shall not exceed 4 W.


8.2 Measurement Equipment Used

Conducted Emission Test Site										
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.					
TYPE		NUMBER	NUMBER	CAL.						
Power Meter	Anritsu	ML2496A	1242004	10/23/2018	10/22/2019					
Power Sensor	Anritsu	MA2411B	1207365	10/23/2018	10/22/2019					
Power Sensor	Anritsu	MA2411B	1207368	10/24/2018	10/23/2019					
Attenuator	Agilent	8494B	MY42152151	02/26/2019	02/25/2020					
Cable	HUBER SUHNER	SUCOFLEX 104PEA	25157	02/26/2019	02/25/2020					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留切天。本報告未經本公司書面許可,不可都份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm.

Attention is drawn to the limitation of liability, indemnification and www.sgs.com/terms e-document.htm. jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



8.3 Test Set-up

Power Meter:



8.4 Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter.


Power Meter:

It is used as the auxiliary test equipment to conduct the output power measurement.

4. Record the max. Reading as observed from Spectrum or Power Meter.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留切天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms at www.sgs.com/terms and conditions for Electronic Documents at www.sgs.com/terms at ww jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



8.5 Measurement Result

802.1	1b Ch0				
СН	Freq. (MHz)	Data Rate	Peak Output Power (dBm)	Limit (dBm)	RESULT
1	2412	1	17.87	30.00	PASS
6	2437	1	17.88	30.00	PASS
11	2462	1	17.88	30.00	PASS
12	2467	1	18.01	30.00	PASS
13	2472	1	17.89	30.00	PASS
802.1	1b Ch0				
СН	Freq. (MHz)	Data Rate	Max. Avg. Output include tune up tolerance Power (dBm)	Limit (dBm)	RESULT
1	2412	1	14.94	30.00	PASS
6	2437	1	14.93	30.00	PASS
11	2462	1	14.96	30.00	PASS
12	2467	1	14.98	30.00	PASS
13	2472	1	14.99	30.00	PASS
802.1	1g Ch0				
СН	Freq. (MHz)	Data Rate	Peak Output Power (dBm)	Limit (dBm)	RESULT
1	2412	6	19.71	30.00	PASS
6	2437	6	19.22	30.00	PASS
11	2462	6	19.67	30.00	PASS
802.1	1g Ch0				
СН	Freq. (MHz)	Data Rate	Max. Avg. Output include tune up tolerance Power (dBm)	Limit (dBm)	RESULT
1	2412	6	9.95	30.00	PASS
6	2437	6	9.88	30.00	PASS
11	2462	6	9.93	30.00	PASS

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.





802.1	802.11n_HT20M Ch0								
СН	Freq. (MHz)	Data Rate	Peak Output Power (dBm)	Limit (dBm)	RESULT				
1	2412	MCS0	19.67	30.00	PASS				
6	2437	MCS0	19.71	30.00	PASS				
11	2462	MCS0	19.32	30.00	PASS				
802.1	1n_HT20	M Ch0							
СН	Freq. (MHz)	Data Rate	Max. Avg. Output include tune up tolerance Power (dBm)	Limit (dBm)	RESULT				
1	2412	MCS0	9.69	30.00	PASS				
6	2437	MCS0	9.95	30.00	PASS				
11	2462	MCS0	9.97	30.00	PASS				

^{*} Note: The duty cycle factor is compensated to obtain the maximum value of measurement in average.



EIRP

802.1	802.11b Ch0									
СН	Freq. (MHz)	Data Rate	Avg. Output Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	RESULT			
1	2412	1	14.94	-4.49	10.45	36	PASS			
6	2437	1	14.93	-4.49	10.44	36	PASS			
11	2462	1	14.96	-4.49	10.47	36	PASS			
12	2467	1	14.98	-4.49	10.49	36	PASS			
13	2472	1	14.99	-4.49	10.50	36	PASS			

802.1	802.11g Ch0									
СН	Freq. (MHz)	Data Rate	Avg. Output Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	RESULT			
1	2412	6	9.95	-4.49	5.46	36	PASS			
6	2437	6	9.88	-4.49	5.39	36	PASS			
11	2462	6	9.93	-4.49	5.44	36	PASS			
12	2467	6	9.95	-4.49	5.46	36	PASS			
13	2472	6	9.97	-4.49	5.48	36	PASS			

802.11	1n_HT20N	/I Ch0					
СН	Freq. (MHz)	Data Rate	Avg. Output Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	RESULT
1	2412	MCS0	9.69	-4.49	5.20	36	PASS
6	2437	MCS0	9.95	-4.49	5.46	36	PASS
11	2462	MCS0	9.97	-4.49	5.48	36	PASS
12	2467	MCS0	9.98	-4.49	5.49	36	PASS
13	2472	MCS0	9.99	-4.49	5.50	36	PASS

* Note: EIRP = Average Power + Gain

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 23 of 127

6DB & 99% BANDWIDTH MEASUREMENT

9.1 Standard Applicable


The minimum 6 dB bandwidth shall be at least 500 kHz.

The occupied bandwidth or the "99% emission bandwidth" is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs

9.2 Measurement Equipment Used

Conducted Emission Test Site									
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.				
Spectrum Analyzer	Agilent	N9010A	MY53400256	11/21/2018	11/20/2019				
DC Power Supply	Agilent	E3640A	KR93300208	08/15/2018	08/14/2019				
Attenuator	Agilent	8494B	MY42152151	02/26/2019	02/25/2020				
Cable	HUBER SUHNER	SUCOFLEX 104PEA	25157	02/26/2019	02/25/2020				

9.3 Test Set-up



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留切天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms at www.sgs.com/terms and conditions for Electronic Documents at www.sgs.com/terms at ww jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



9.4 Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. For 6dB Bandwidth:
 - Set the spectrum analyzer as RBW = 100 kHz, VBW = 3*RBW, Span = 30M/50MHz, Detector=peak, Sweep=auto.
- 5. Mark the peak frequency and –6dB (upper and lower) frequency.
- 6. For 99% Bandwidth:
 - Set the spectrum analyzer as RBW=1%, VBW = 3*RBW, Span = 30M/50MHz, Detector=Sample, Sweep=auto.
- 7. Turn on the 99% bandwidth function, max reading.
- 8. Repeat above procedures until all frequency of interest measured was complete.

9.5 Measurement Result

6dB Bandwidth

802.11b Ch0

Freq. (MHz)	6dB BW (kHz)	Limit (kHz)	Result
2412	8558.00	> 500	PASS
2437	8589.00	> 500	PASS
2462	8117.00	> 500	PASS
2467	9047.00	> 500	PASS
2472	8084.00	> 500	PASS

802.11q Ch0

802.11 n HT20 Ch0

J							
Freq.	6dB BW	Limit	Result	Freq.	6dB BW	Limit	Result
(MHz)	(kHz)	(kHz)	Result	(MHz)	(kHz)	(kHz)	Result
2412	16420.00	> 500	PASS	2412	17620.00	> 500	PASS
2437	16460.00	> 500	PASS	2437	17620.00	> 500	PASS
2462	16410.00	> 500	PASS	2462	17620.00	> 500	PASS
2467	16420.00	> 500	PASS	2467	17620.00	> 500	PASS
2472	16410.00	> 500	PASS	2472	17620.00	> 500	PASS

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留切天。本報告未經本公司書面許可,不可都份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm.

Attention is drawn to the limitation of liability, indemnification and www.sgs.com/terms e-document.htm. jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page 25 of 127

99% Bandwidth

802.11b Ch0		
Freq. (MHz)	99% BW (MHz)	
2412	13.156	
2437	13.158	
2462	13.176	
2467	18.062	
2472	13.237	

802.11g Ch0		
Freq.	99% BW	
(MHz)	(MHz)	
2412	17.039	
2437	17.030	
2462	17.035	
2467	17.051	
2472	17.040	


802.11n_HT20M Ch0		
Freq.	99% BW	
(MHz)	(MHz)	
2412	18.051	
2437	18.056	
2462	18.055	
2467	18.069	
2472	18.069	

*Refer to next page for plots


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




802.11b 6dB Band Width Test Data CH-Low

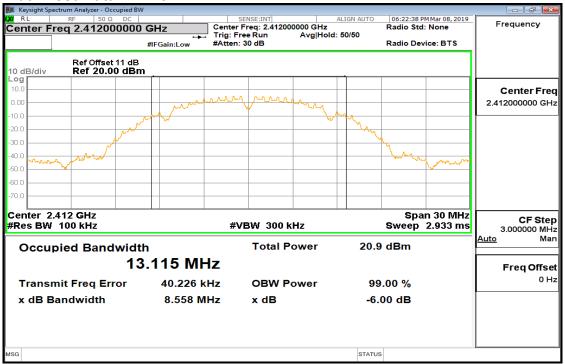

6dB Band Width Test Data CH-Mid

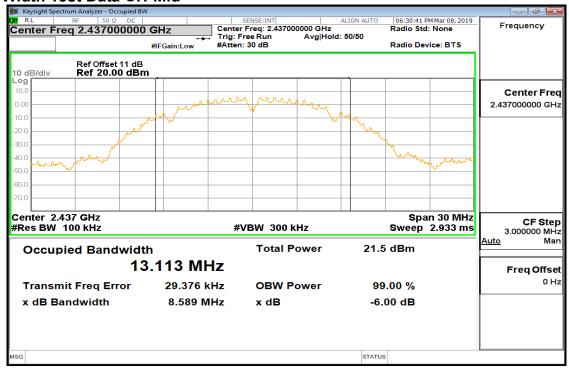


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Page 27 of 127




6dB Band Width Test Data CH-High

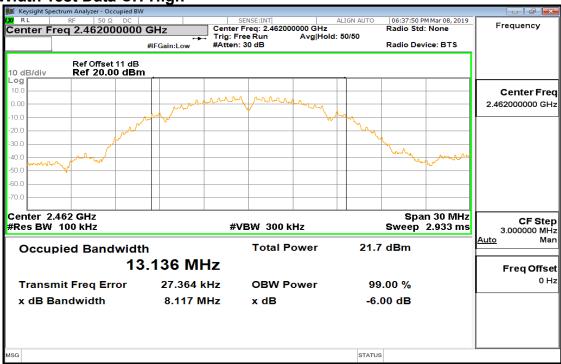


6dB Band Width Test Data CH-High (2467MHz)

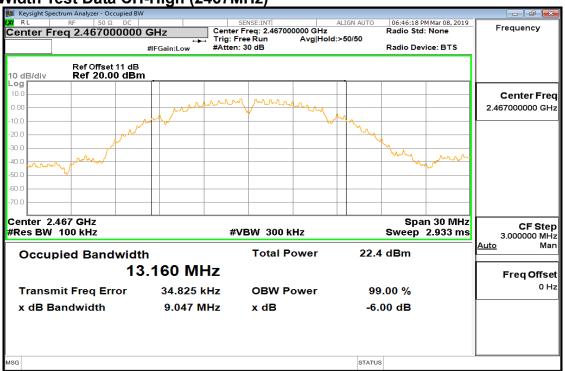

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




6dB Band Width Test Data CH-High (2472MHz)

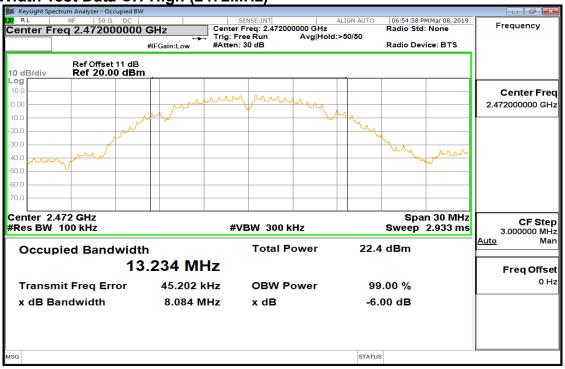


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



802.11g 6dB Band Width Test Data CH-Low

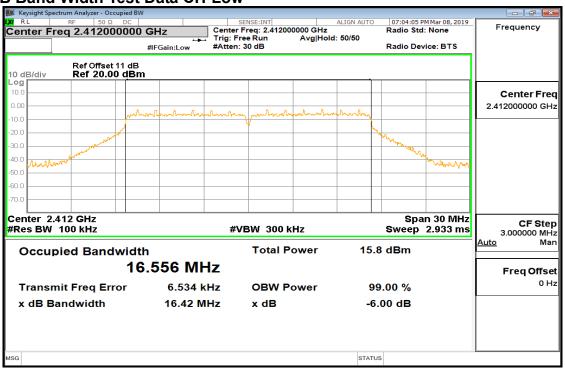


6dB Band Width Test Data CH-Mid

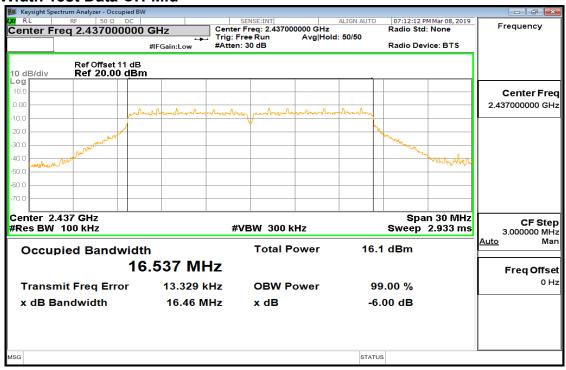


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




6dB Band Width Test Data CH-High

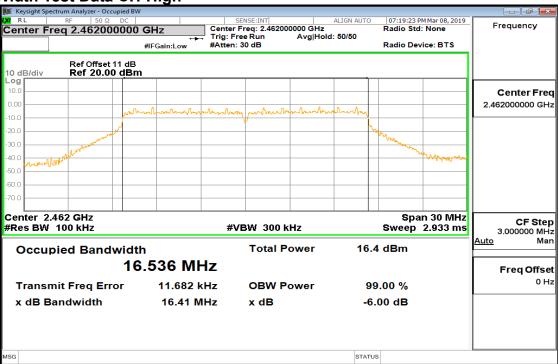


6dB Band Width Test Data CH-High (2467MHz)

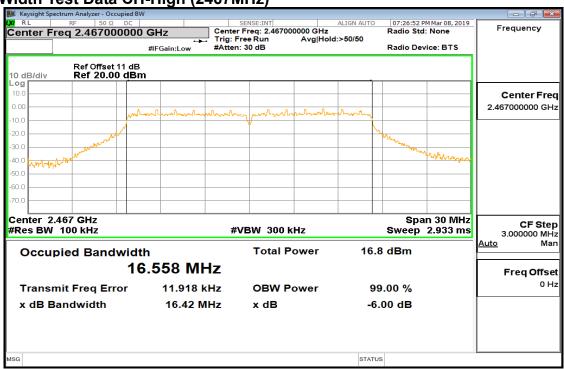

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




6dB Band Width Test Data CH-High (2472MHz)

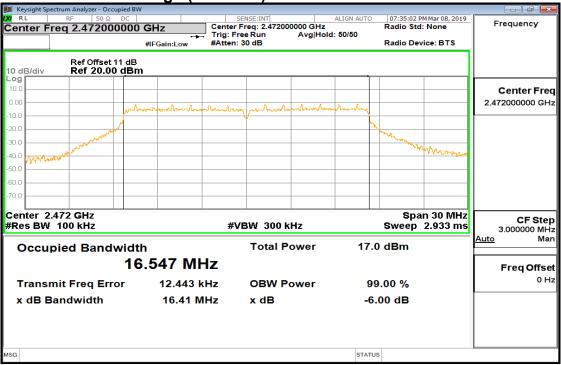


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




802.11n_20M 6dB Band Width Test Data CH-Low

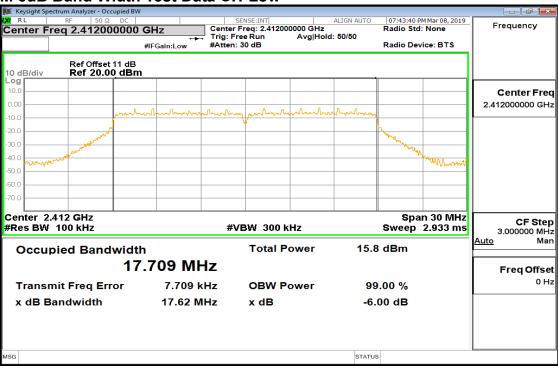

6dB Band Width Test Data CH-Mid

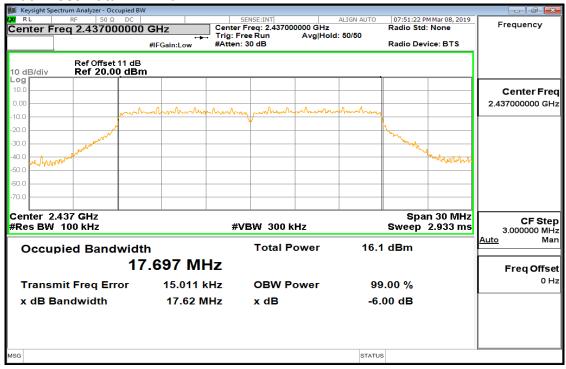


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






6dB Band Width Test Data CH-High

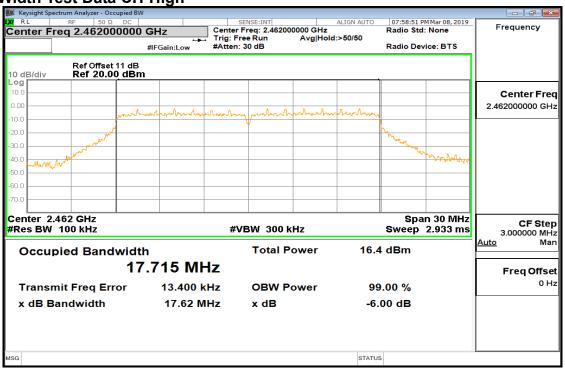

6dB Band Width Test Data CH-High (2467MHz)

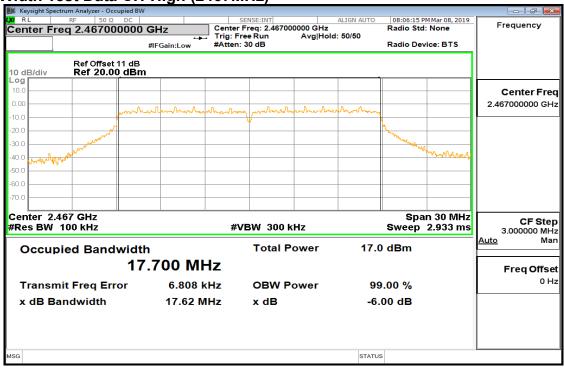


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 34 of 127




6dB Band Width Test Data CH-High (2472MHz)

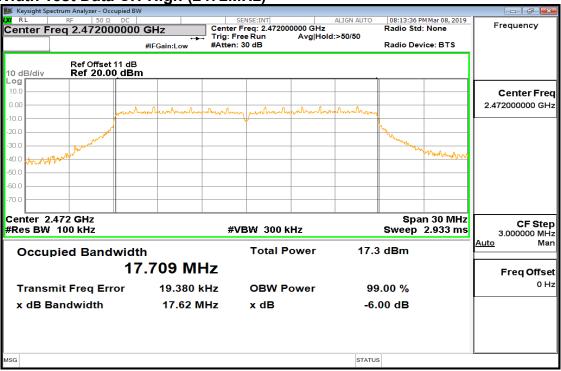


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




802.11b 99% Band Width Test Data CH-Low

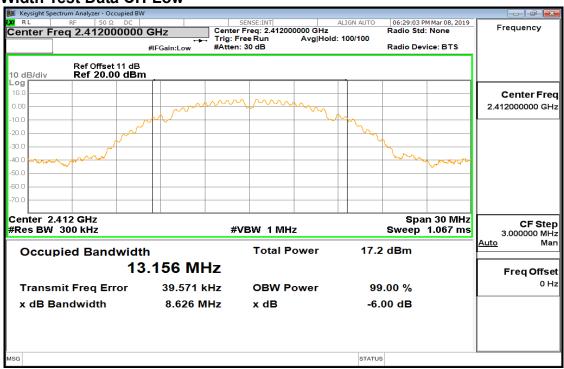

99% Band Width Test Data CH-Mid

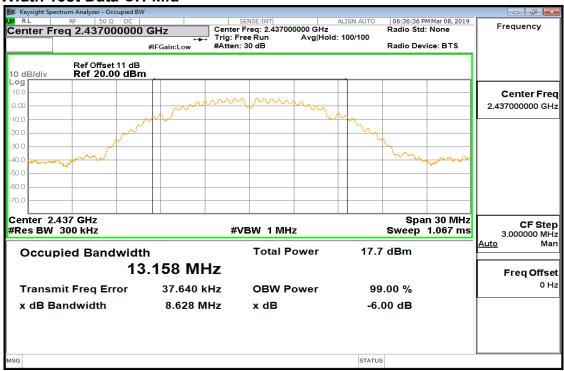


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.







99% Band Width Test Data CH-High

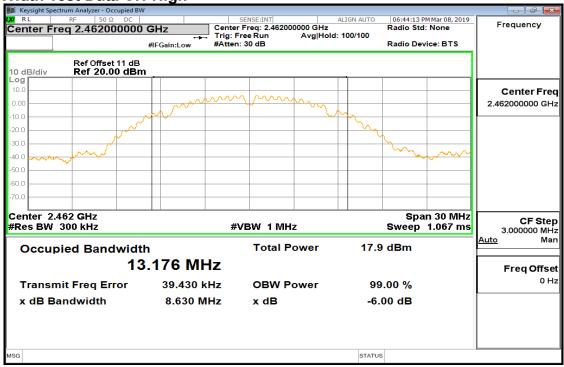


99% Band Width Test Data CH-High (2467MHz)

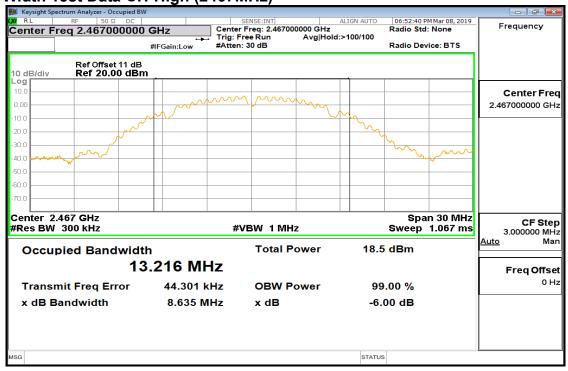

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




99% Band Width Test Data CH-High (2472MHz)

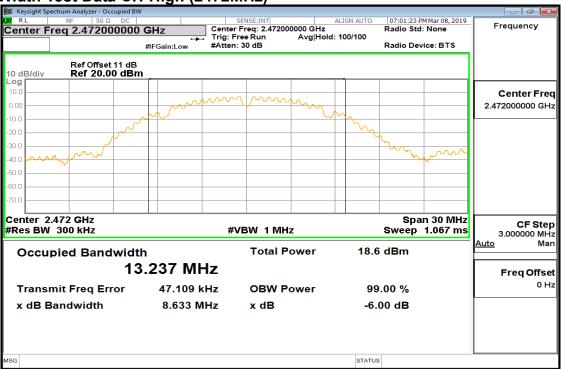


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




802.11g 99% Band Width Test Data CH-Low

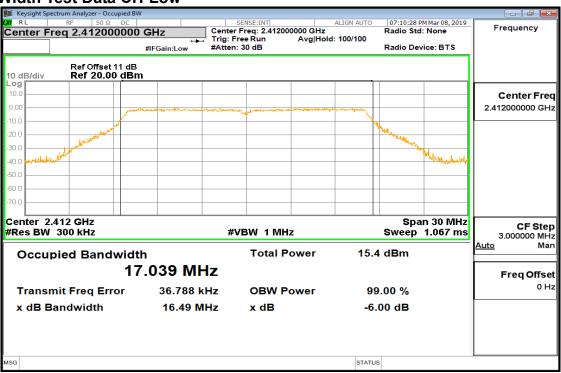


99% Band Width Test Data CH-Mid

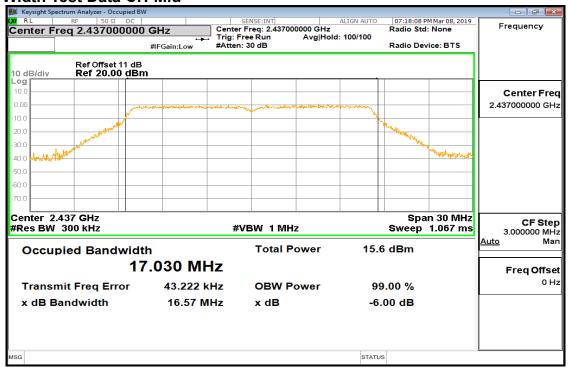


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




99% Band Width Test Data CH-High

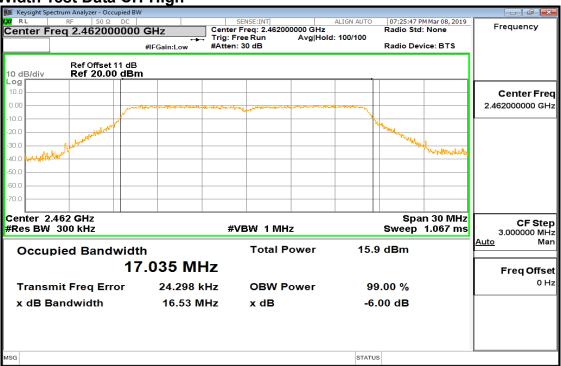


99% Band Width Test Data CH-High (2467MHz)

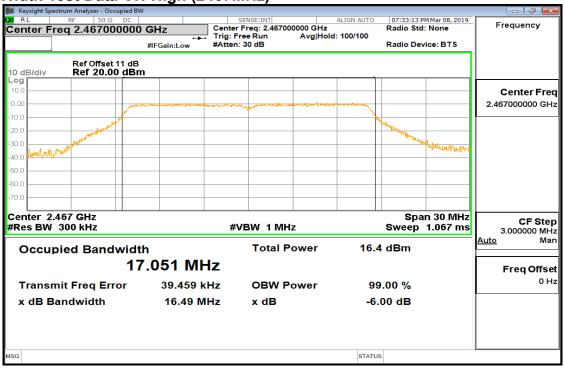


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



99% Band Width Test Data CH-High (2472MHz)

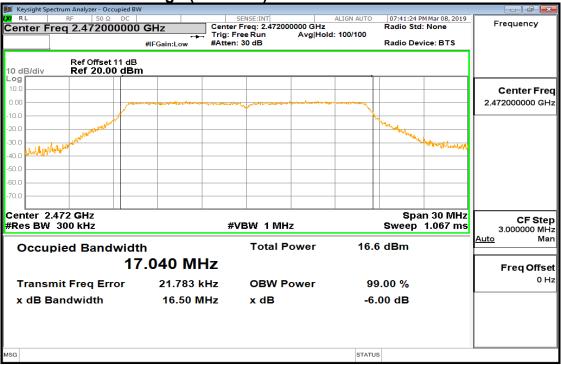


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.







802.11n_20M 99% Band Width Test Data CH-Low

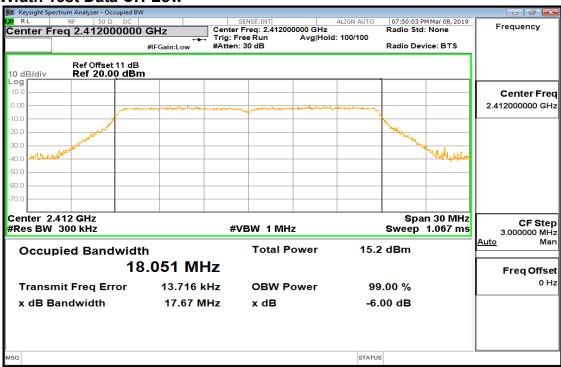

99% Band Width Test Data CH-Mid

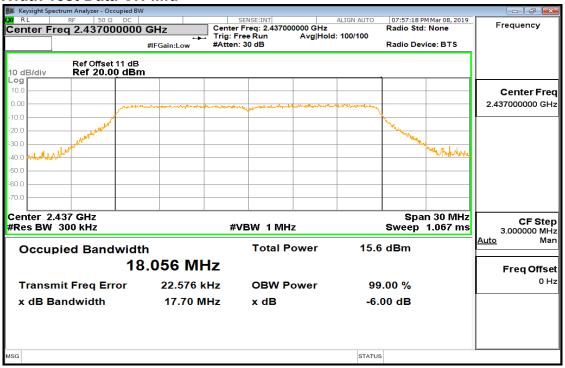


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Page 42 of 127




99% Band Width Test Data CH-High

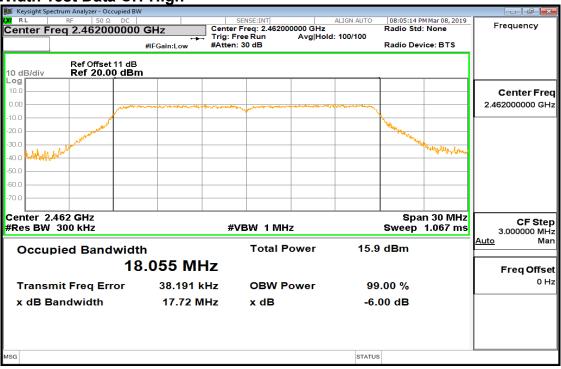


99% Band Width Test Data CH-High (2467MHz)

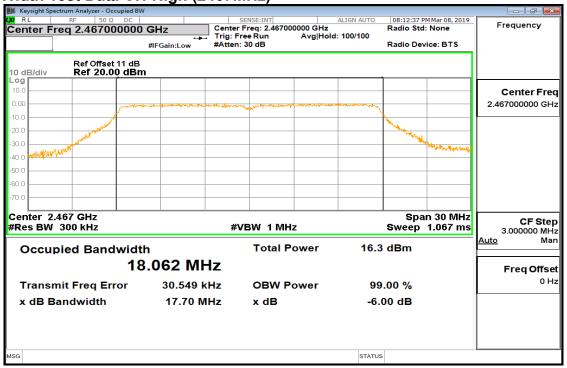


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



99% Band Width Test Data CH-High (2472MHz)

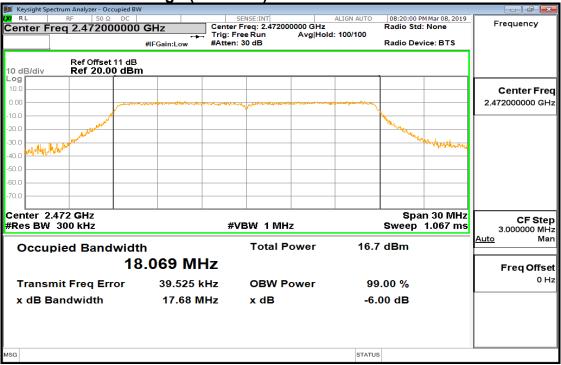

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 44 of 127



CONDUCTED BAND EDGE AND SPURIOUS EMISSION MEASUREMENT

Standard Applicable 10.1

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.


In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a) & RSS-Gen §8.10, must also comply with the radiated emission limits specified in §15.209(a) & RSS-Gen §8.9.

If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

Measurement Equipment Used 10.2

Conducted Emission Test Site								
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.			
Spectrum Analyzer	Agilent	N9010A	MY53400256	11/21/2018	11/20/2019			
DC Power Supply	Agilent	E3640A	KR93300208	08/15/2018	08/14/2019			
Attenuator	Agilent	8494B	MY42152151	02/26/2019	02/25/2020			
Cable	HUBER SUHNER	SUCOFLEX 104PEA	25157	02/26/2019	02/25/2020			


10.3 **Test SET-UP**



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留切天。本報告未經本公司書面許可,不可都份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm.

Attention is drawn to the limitation of liability, indemnification and www.sgs.com/terms e-document.htm. jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.





10.4 Measurement Procedure

Conducted Band Edge Limt

- Set analyzer center frequency to DTS channel center frequency.
- The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance & ANSI C63.10.
- Set the span to 1.5 times the DTS channel bandwidth.
- Set the RBW = 100kHz & VBW = 300 kHz.
- Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9.Use the peak marker function to determine the maximum amplitude level.


Conducted Band Edge:

- To connect Antenna Port of EUT to Spectrum.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance & ANSI C63.10.
- Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set start to edge frequency, and stop frequency of spectrum analyzer so as to encompass the spectrum to be examined.
- 5. Set the spectrum analyzer as RBW=100 kHz, VBW=300 kHz, Detector = Peak, Sweep = auto
- 6. Mark the highest reading of the emission as the reference level measurement.
- 7. Set DL as the limit = reading on marker 1 20dBm
- 8. Marker on frequency, 2.3999GHz and 2.4836GHz, and examine shall 100 kHz immediately outside the authorized (2400~2483.5) be attenuated by 20dB at least relative to the maximum emission of power.
- 9. Repeat above procedures until all default test channel (low, middle, and high) was complete.

Conducted Spurious Emission:

- To connect Antenna Port of EUT to Spectrum
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance & ANSI C63.10.
- 3. Set RBW = 100 kHz & VBW= 300 kHz, Detector = Peak, Sweep = Auto.
- 4. Allow trace to fully stabilize.
- 5. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.
- Repeat above procedures until all default test channel measured were complete.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






10.5 **Measurement Result**

Refere	nce Leve	l of Limit 802.11b mode	Reference Level of Limit 802.11g mode			
Freq. (MHz)	PSD (dBm)	Reference Level of Limit (dBm)	Freq. (MHz)	PSD (dBm)	Reference Level of Limit (dBm)	
2412	5.05	-14.95	2412	-2.37	-22.37	
2437	5.64	-14.36	2437	-2.17	-22.17	
2462	6.04	-13.96	2462	-1.86	-21.86	
2467	6.81	-13.19	2467	-1.53	-21.53	
2472	6.66	-13.34	2472	-1.19	-21.19	

Reference Level of Limit 802.11n20 mod						
Freq.	PSD	Reference Level of Limit				
(MHz)	(dBm)	(dBm)				
2412	-2.52	-22.52				
2437	-2.41	-22.41				
2462	-2.18	-22.18				
2467	-1.45	-21.45				
2472	-1.11	-21.11				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms edocument.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or approaches of this document is unlawful and effenders may be prosequed to the fullest extent of the law pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.






Reference Level_802.11b_20MHz_Chain0_2412MHz




Reference Level_802.11b_20MHz_Chain0_2462MHz

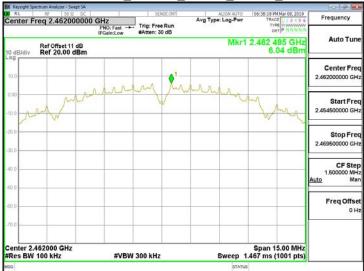


Reference Level_802.11b_20MHz_Chain0_2437MHz



Reference Level_802.11b_20MHz_Chain0_2467MHz

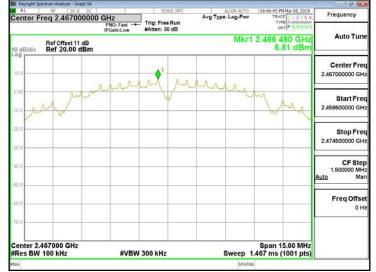


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






Reference Level_802.11b_20MHz_Chain0_2472MHz

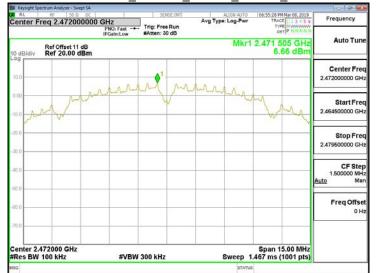


Reference Level_802.11g_20MHz_Chain0_2412MHz



Reference Level_802.11g_20MHz_Chain0_2437MHz

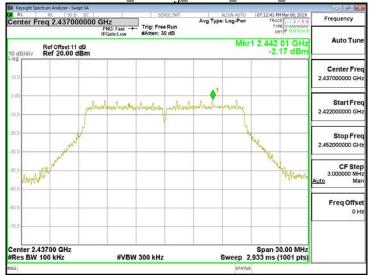

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.





Reference Level_802.11g_20MHz_Chain0_2462MHz




Reference Level_802.11g_20MHz_Chain0_2467MHz



Reference Level_802.11g_20MHz_Chain0_2472MHz




Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.





Reference Level_802.11n_20MHz_Chain0_2412MHz



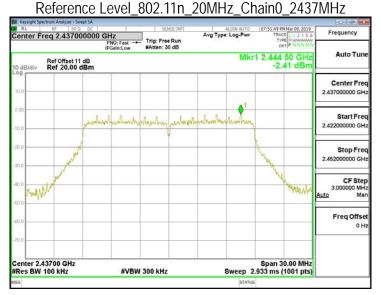


Reference Level_802.11n_20MHz_Chain0_2462MHz



Reference Level_802.11n_20MHz_Chain0_2467MHz



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






Reference Level_802.11n_20MHz_Chain0_2472MHz




Band Edge_802.11b_20MHz_Chain0_2412MHz

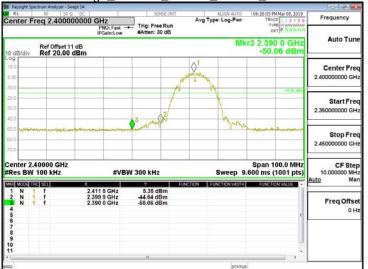


Band Edge_802.11b_20MHz_Chain0_2462MHz




Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Band Edge_802.11b_20MHz_Chain0_2467MHz

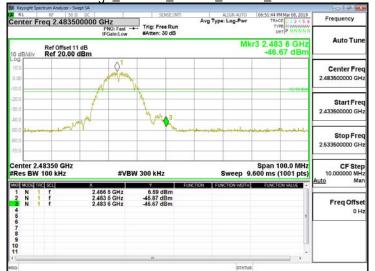

Band Edge_802.11b_20MHz_Chain0_2472MHz

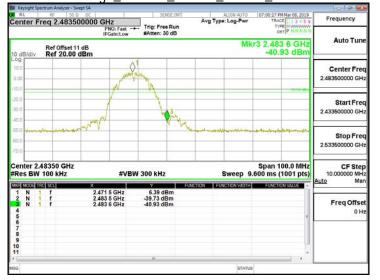


Band Edge_802.11g_20MHz_Chain0_2412MHz




Band Edge_802.11g_20MHz_Chain0_2462MHz



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Band Edge_802.11g_20MHz_Chain0_2467MHz

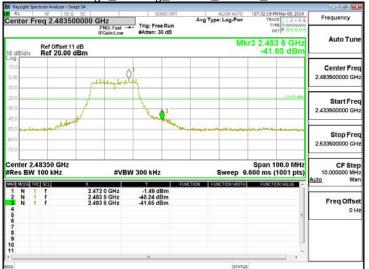


Band Edge_802.11g_20MHz_Chain0_2472MHz




Band Edge_802.11n_20MHz_Chain0_2412MHz

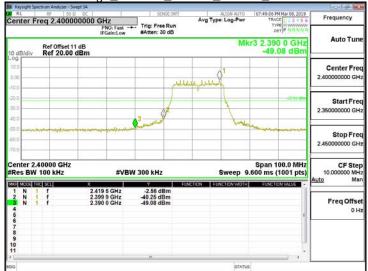

Band Edge_802.11n_20MHz_Chain0_2462MHz

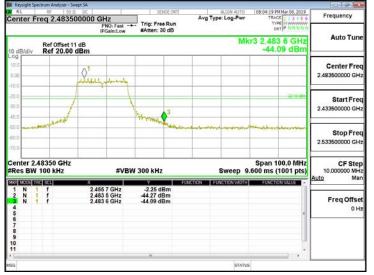

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Band Edge_802.11n_20MHz_Chain0_2467MHz




Band Edge_802.11n_20MHz_Chain0_2472MHz




Spurious Emission_802.11b_20MHz_Chain0_2412MHz

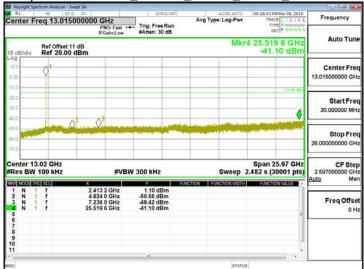

Spurious Emission 802.11b 20MHz Chain0 2437MHz

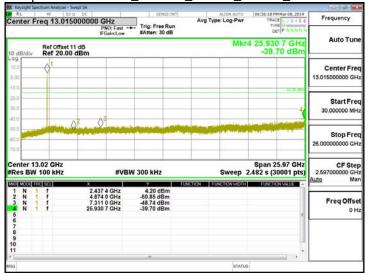


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.







Spurious Emission_802.11b_20MHz_Chain0_2462MHz

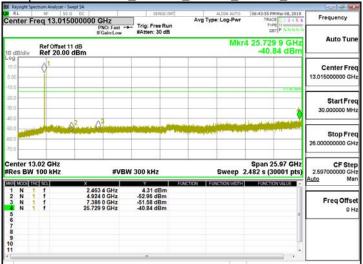


Spurious Emission 802.11b 20MHz Chain0 2467MHz

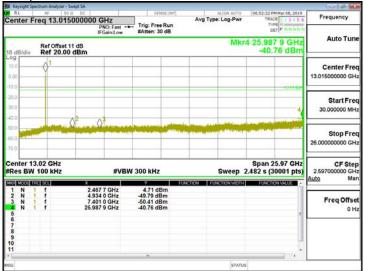

Spurious Emission_802.11b_20MHz_Chain0_2472MHz

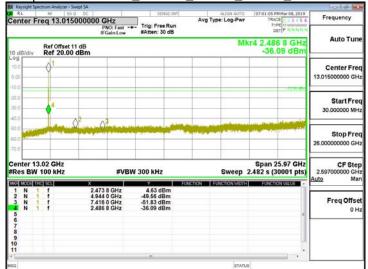


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.







Spurious Emission_802.11g_20MHz_Chain0_2412MHz

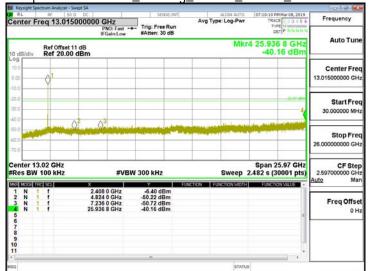


20MHz Chain0 2437MHz Spurious Emission 802.11g

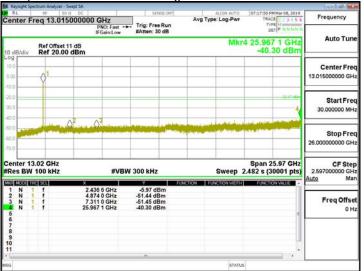


Spurious Emission_802.11g_20MHz_Chain0_2462MHz

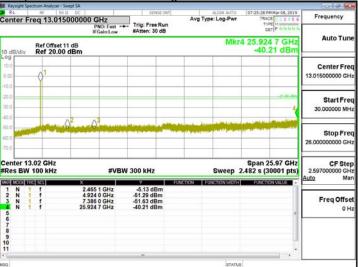

Spurious Emission 802.11g 20MHz Chain0 2467MHz

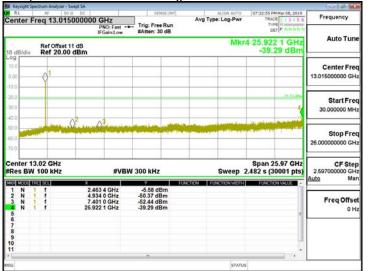


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.







Spurious Emission_802.11g_20MHz_Chain0_2472MHz

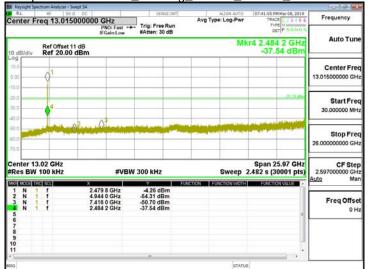


Spurious Emission_802.11n_20MHz_Chain0_2412MHz

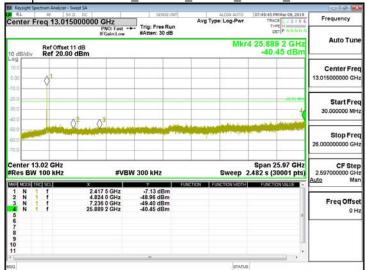

Spurious Emission 802.11n 20MHz Chain0 2437MHz

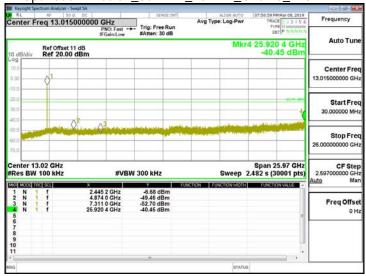


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.







Spurious Emission_802.11n_20MHz_Chain0_2462MHz

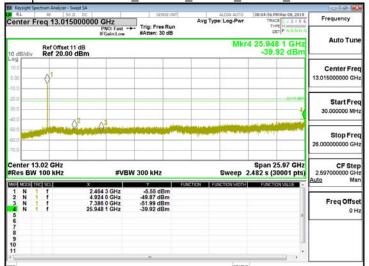

Spurious Emission 802.11n 20MHz Chain0 2467MHz

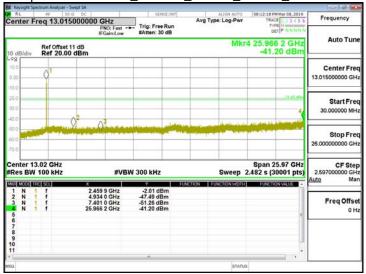

Spurious Emission_802.11n_20MHz_Chain0_2472MHz

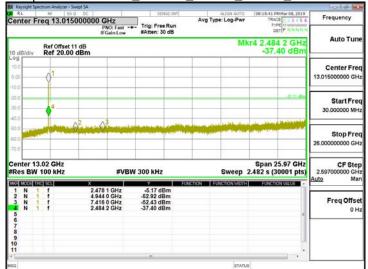

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.





11 RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT

11.1 Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands must also comply with the RSS-Gen §8.10 Table 7.

And according to 15.33(a)(1) & RSS-Gen §6.13(a) for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

According to RSS-Gen §8.9 Table 5 & 6 Except where otherwise indicated in the applicable RSS, radiated emissions shall comply with the field strength limits shown in table 5 and table 6. Additionally, the level of any transmitter unwanted emission shall not exceed the level of the transmitter's fundamental emission

Frequency (MHz)	Field strength (microvolts/meter)	Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

- 1. The lower limit shall apply at the transition frequencies.
- 2. Emission level $(dB\mu V/m) = 20 \log Emission level (dB\mu V/m)$

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留切天。本報告未經本公司書面許可,不可都份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm.

Attention is drawn to the limitation of liability, indemnification and www.sgs.com/terms e-document.htm. jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page 60 of 127

11.2 Measurement Equipment Used:

966A Chamber								
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.			
Band Reject Filters	MICRO TRONICS	BRM 50702	120	02/26/2019	02/25/2020			
Bilog Antenna	Sunol Sciences	JB3	A030105	07/13/2018	07/12/2019			
Cable	HUBER SUHNER	SUCOFLEX 104PEA	25157	02/26/2019	02/25/2020			
Cable	HUBER SUHNER	SUCOFLEX 104PEA	20995	02/26/2019	02/25/2020			
Digital Ther- mo-Hygro Meter	WISEWIND	1206	D07	01/30/2019	01/29/2020			
double Ridged Guide Horn Anten- na	ETC	MCTD 1209	DRH13M02003	08/20/2018	08/19/2019			
Loop Ant	COM-POWER	AL-130	121051	03/21/2018	03/20/2019			
Pre-Amplifier	EMEC	EM330	060609	02/26/2019	02/25/2020			
Pre-Amplifier	HP	8449B	3008A00965	02/26/2019	02/25/2020			
PSA Series Spec- trum Analyzer	Agilent	E4446A	MY46180323	05/31/2018	05/30/2019			
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R	N.C.R			
Controller	CCS	CC-C-1F	N/A	N.C.R	N.C.R			
Turn Table	CCS	CC-T-1F	N/A	N.C.R	N.C.R			
Software		e3 V6	.11-20180413					


NOTE: N.C.R refers to Not Calibrated Required.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




11.3 Test SET-UP

(A) Radiated Emission Test Set-UP Frequency Below 30MHz.

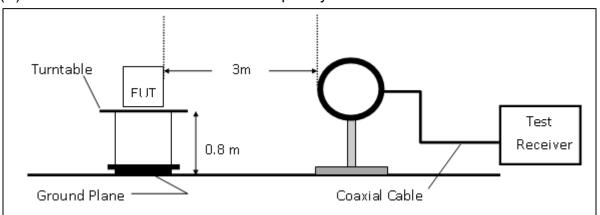


(B) Radiated Emission Test Set-Up, Frequency form 30MHz to 1000MHz

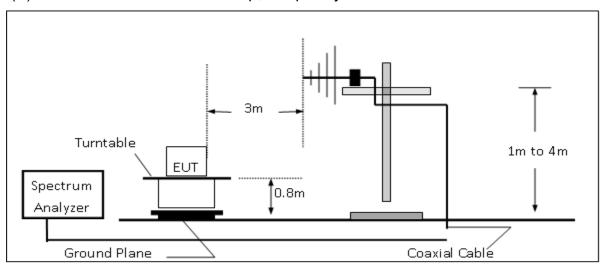

(C) Radiated Emission Test Set-UP Frequency Over 1 GHz Turntable 3m 1m to 4m **EUT** Spectrum 1.5m Analyzer Ground Plane Absorber Coaxial Cable

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.





11.4 Measurement Procedure

- The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance & ANSI C63.10.
- 2. The EUT was placed on a turn table with 0.8m for frequency< 1GHz and 1.5m for frequency> 1GHz above ground plane.
- 3. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 4. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
- 5. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.
- 6. Set the spectrum analyzer as RBW=120 kHz and VBW=300 kHz for Peak Detector (PK) and Quasi-peak (QP) at frequency below 1 GHz.
- 7. Set the spectrum analyzer as RBW=1 MHz, VBW=3 MHz for Peak Detector at frequency above 1 GHz.
- 8. Set the spectrum analyzer as RBW=1 MHz, VBW=10 Hz (Duty cycle > 98%) or VBW ≥ 1/T (Duty cycle < 98%) for Average Detector at frequency above 1 GHz.
- 9. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- 10. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 11. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. On spectrum, change spectrum mode in linear display mode, and reduce VBW = 10Hz if average reading is measured.
- 12. Repeat above procedures until all default test channel measured were complete.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only



Page 63 of 127

11.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where	<u> </u>	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

Actual FS(dB μ V/m) = SPA. Reading level(dB μ V) + Factor(dB)

Factor(dB) = Antenna Factor(dBµV/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

Test Results of Radiated Spurious Emissions form 9 kHz to 30 MHz 11.6

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit per 15.31(o) was not reported.

11.7 **Measurement Result**

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留切天。本報告未經本公司書面許可,不可都份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm.

Attention is drawn to the limitation of liability, indemnification and www.sgs.com/terms e-document.htm. Jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Page 64 of 127

Radiated Band Edge Measurement Result (802.11b)

Operation Band :802.11b Test Date :2019-03-10

:2412 MHz Fundamental Frequency Temp./Humi. :23 deg C / 61 RH **Operation Mode** :Bandedge CH LOW Engineer :Wei

EUT Pol. :H Plane Measurement Antenna Pol. :VERTICAL

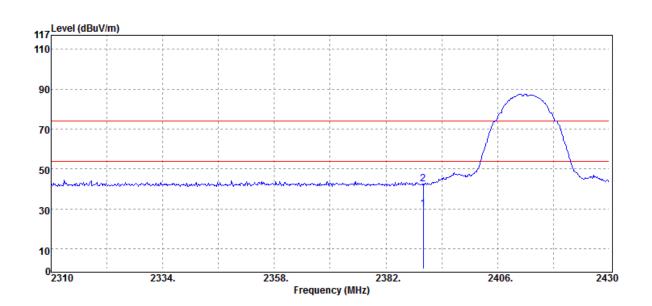

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	_
MHz	PK/QP/AV	$dB\mu V$	dB	dBµV/m	dBµV/m	dB
2390.04	Average	33.27	-3.32	29.95	54.00	-24.05
2390.04	Peak	45.94	-3.32	42.62	74.00	-31.38

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 65 of 127

Operation Band Fundamental Frequency **Operation Mode** EUT Pol.

:802.11b :2412 MHz


:Bandedge CH LOW

:H Plane

Test Date :2019-03-10 Temp./Humi. :23 deg C / 61 RH

Engineer :Wei

:HORIZONTAL Measurement Antenna Pol.

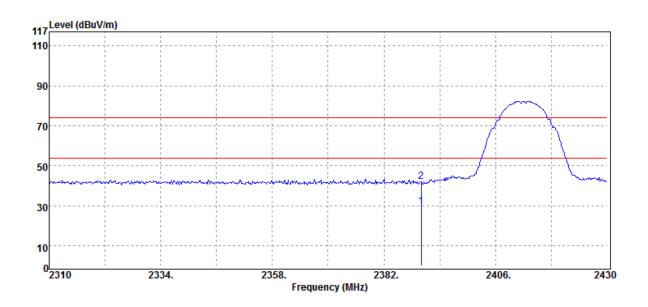

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	-
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
2390.00	Average	32.74	-3.33	29.41	54.00	-24.59
2390.00	Peak	45.28	-3.33	41.95	74.00	-32.05

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 66 of 127

Operation Band Fundamental Frequency **Operation Mode** EUT Pol.

:802.11b :2462 MHz

:Bandedge CH HIGH


:H Plane

Test Date :2019-03-10

Temp./Humi. :23 deg C / 61 RH

Engineer :Wei

:VERTICAL Measurement Antenna Pol.

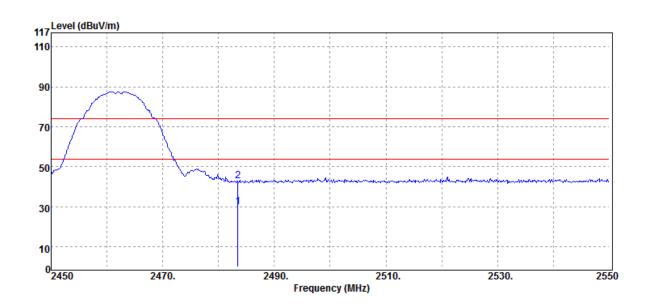

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	32.71	-2.72	29.99	54.00	-24.01
2483.50	Peak	45.60	-2.72	42.88	74.00	-31.12

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 67 of 127

Operation Band Fundamental Frequency **Operation Mode** EUT Pol.

:802.11b :2462 MHz

:Bandedge CH HIGH


:H Plane

Test Date :2019-03-10

Temp./Humi. :23 deg C / 61 RH

Engineer :Wei

:HORIZONTAL Measurement Antenna Pol.

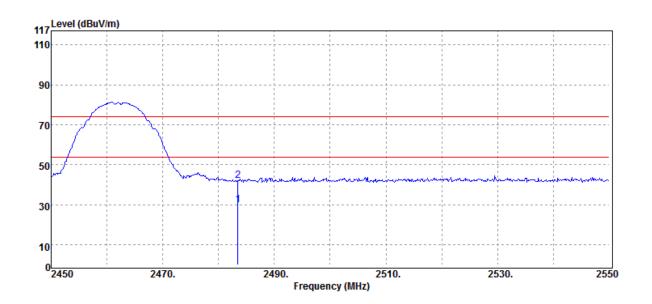

Fred	p. Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	-
MH:	z PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
2483.	50 Average	32.86	-2.72	30.14	54.00	-23.86
2483.	50 Peak	44.98	-2.72	42.26	74.00	-31.74

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 68 of 127

Operation Band Fundamental Frequency **Operation Mode** EUT Pol.

:802.11b :2467 MHz

:Bandedge CH HIGH


:H Plane

Test Date :2019-03-10

Temp./Humi. :23 deg C / 61 RH

Engineer :Wei

:VERTICAL Measurement Antenna Pol.

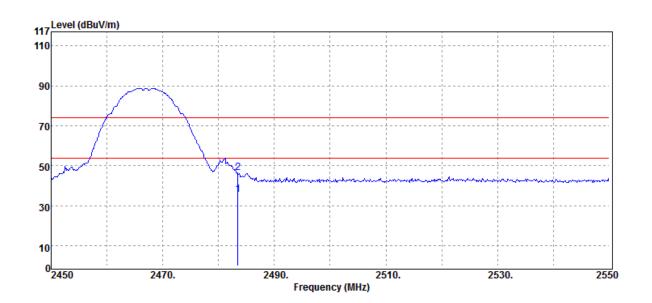

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	-
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	38.42	-2.72	35.70	54.00	-18.30
2483.50	Peak	49.09	-2.72	46.37	74.00	-27.63

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 69 of 127

Operation Band Fundamental Frequency **Operation Mode** EUT Pol.

:802.11b :2467 MHz

:Bandedge CH HIGH


:H Plane

Test Date :2019-03-10

Temp./Humi. :23 deg C / 61 RH

Engineer :Wei

:HORIZONTAL Measurement Antenna Pol.

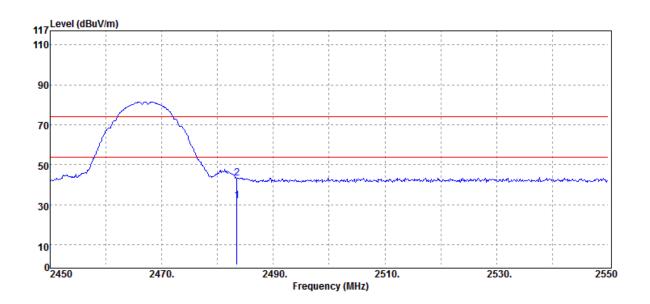

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	-
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	34.77	-2.72	32.05	54.00	-21.95
2483.50	Peak	45.90	-2.72	43.18	74.00	-30.82

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 70 of 127

Operation Band Fundamental Frequency **Operation Mode** EUT Pol.

:802.11b :2472 MHz

:Bandedge CH HIGH


:H Plane

Test Date :2019-03-10

Temp./Humi. :23 deg C / 61 RH

Engineer :Wei

:VERTICAL Measurement Antenna Pol.

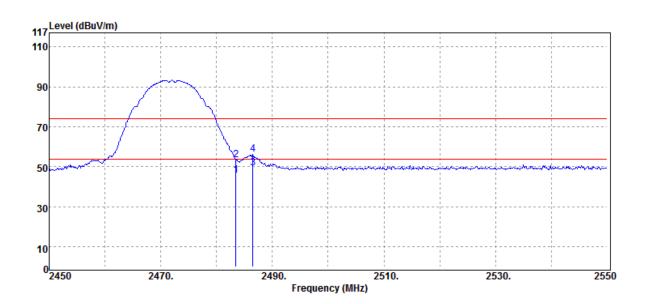

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	48.33	-2.72	45.61	54.00	-8.39
2483.50	Peak	56.14	-2.72	53.42	74.00	-20.58
2486.50	Average	51.89	-2.69	49.20	54.00	-4.80
2486.50	Peak	59.01	-2.69	56.32	74.00	-17.68

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 71 of 127

Operation Band Fundamental Frequency **Operation Mode** EUT Pol.

:802.11b :2472 MHz


:Bandedge CH HIGH

:H Plane

Test Date :2019-03-10 Temp./Humi. :23 deg C / 61 RH

Engineer :Wei

:HORIZONTAL Measurement Antenna Pol.

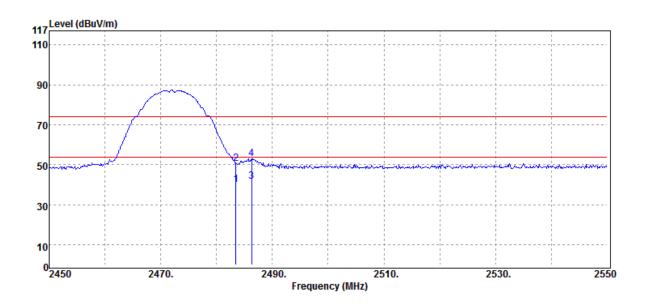

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	42.95	-2.72	40.23	54.00	-13.77
2483.50	Peak	53.46	-2.72	50.74	74.00	-23.26
2486.30	Average	44.20	-2.69	41.51	54.00	-12.49
2486.30	Peak	55.85	-2.69	53.16	74.00	-20.84

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Page 72 of 127

Radiated Band Edge Measurement Result (802.11g)

Operation Band :802.11g :2019-03-12 **Test Date**

Fundamental Frequency :2412 MHz Temp./Humi. :21.5 deg_C / 63 RH **Operation Mode** :Bandedge CH LOW Engineer :Wei

EUT Pol. :H Plane Measurement Antenna Pol. :VERTICAL

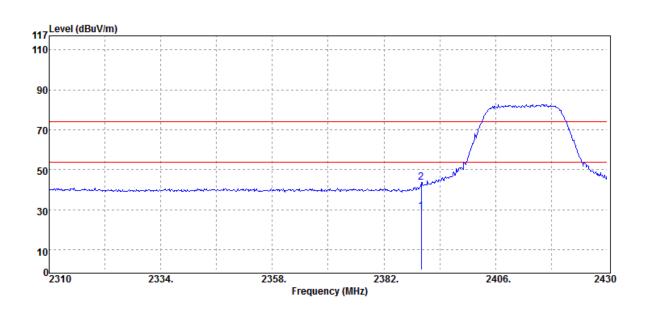

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	-
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	Average	32.62	-3.33	29.29	54.00	-24.71
2390.00	Peak	46.98	-3.33	43.65	74.00	-30.35

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 73 of 127

Operation Band Fundamental Frequency **Operation Mode** EUT Pol.

:802.11g :2412 MHz

:Bandedge CH LOW


:H Plane

Test Date :2019-03-12

Temp./Humi. :21.5 deg_C / 63 RH

Engineer :Wei

:HORIZONTAL Measurement Antenna Pol.

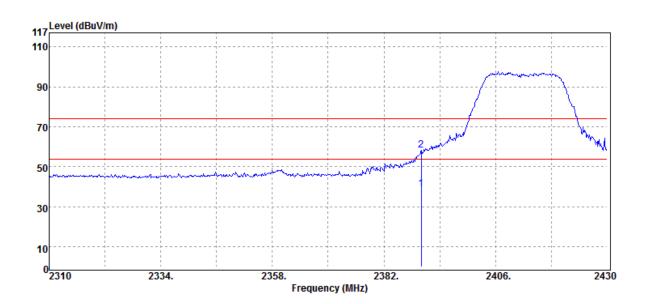

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
	MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
2	2390.00	Average	42.39	-3.33	39.06	54.00	-14.94
2	2390.00	Peak	61.63	-3.33	58.30	74.00	-15.70

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 74 of 127

Operation Band Fundamental Frequency **Operation Mode** EUT Pol.

:802.11g :2462 MHz

:Bandedge CH High


:H Plane

Test Date :2019-03-12

Temp./Humi. :21.5 deg_C / 63 RH

Engineer :Wei

:VERTICAL Measurement Antenna Pol.

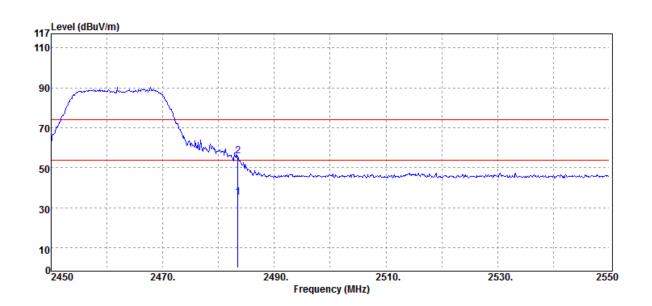

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	-
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	38.12	-2.72	35.40	54.00	-18.60
2483.50	Peak	58.41	-2.72	55.69	74.00	-18.31

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 75 of 127

Operation Band Fundamental Frequency **Operation Mode** EUT Pol.

:802.11g :2462 MHz

:Bandedge CH High


:H Plane

Test Date :2019-03-12

Temp./Humi. :21.5 deg_C / 63 RH

Engineer :Wei

:HORIZONTAL Measurement Antenna Pol.

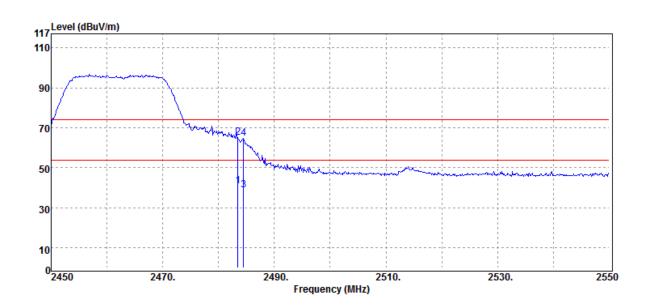

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	43.71	-2.72	40.99	54.00	-13.01
2483.50	Peak	67.76	-2.72	65.04	74.00	-8.96
2484.50	Average	41.57	-2.70	38.87	54.00	-15.13
2484.50	Peak	67.48	-2.70	64.78	74.00	-9.22

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 76 of 127

Operation Band Fundamental Frequency **Operation Mode** EUT Pol.

:802.11g :2467 MHz

:Bandedge CH High


:H Plane

Test Date :2019-03-12

Temp./Humi. :21.5 deg_C / 63 RH

Engineer :Wei

:VERTICAL Measurement Antenna Pol.

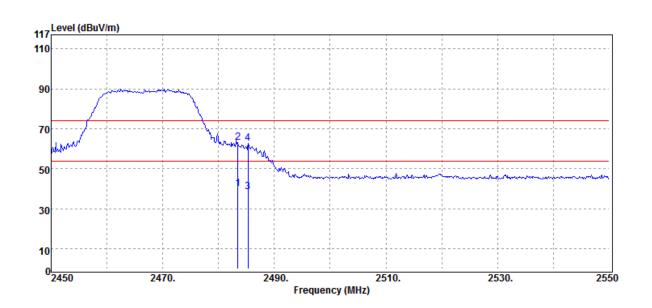

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	42.73	-2.72	40.01	54.00	-13.99
2483.50	Peak	65.76	-2.72	63.04	74.00	-10.96
2485.30	Average	41.36	-2.71	38.65	54.00	-15.35
2485.30	Peak	65.39	-2.71	62.68	74.00	-11.32

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 77 of 127

Operation Band Fundamental Frequency **Operation Mode** EUT Pol.

:802.11g :2467 MHz

:Bandedge CH High


:H Plane

Test Date :2019-03-12

Temp./Humi. :21.5 deg_C / 63 RH

Engineer :Wei

:HORIZONTAL Measurement Antenna Pol.

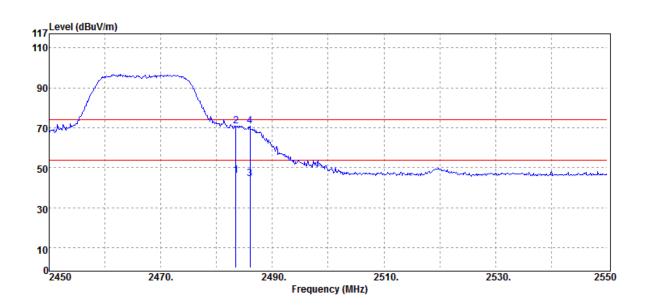

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	48.85	-2.72	46.13	54.00	-7.87
2483.50	Peak	73.52	-2.72	70.80	74.00	-3.20
2486.00	Average	47.26	-2.71	44.55	54.00	-9.45
2486.00	Peak	73.47	-2.71	70.76	74.00	-3.24

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 78 of 127

Operation Band Fundamental Frequency **Operation Mode** EUT Pol.

:802.11g :2472 MHz

:Bandedge CH High


:H Plane

Test Date :2019-03-12

Temp./Humi. :21.5 deg_C / 63 RH

Engineer :Wei

:VERTICAL Measurement Antenna Pol.

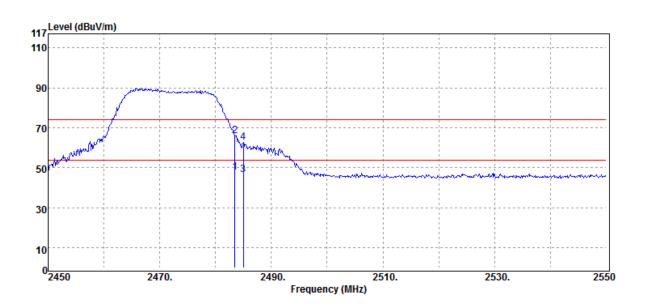

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	50.62	-2.72	47.90	54.00	-6.10
2483.50	Peak	68.51	-2.72	65.79	74.00	-8.21
2485.00	Average	49.31	-2.70	46.61	54.00	-7.39
2485.00	Peak	65.45	-2.70	62.75	74.00	-11.25

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 79 of 127

Operation Band Fundamental Frequency **Operation Mode** EUT Pol.

:802.11g :2472 MHz

:Bandedge CH High


:H Plane

Test Date :2019-03-12

Temp./Humi. :21.5 deg_C / 63 RH

Engineer :Wei

:HORIZONTAL Measurement Antenna Pol.

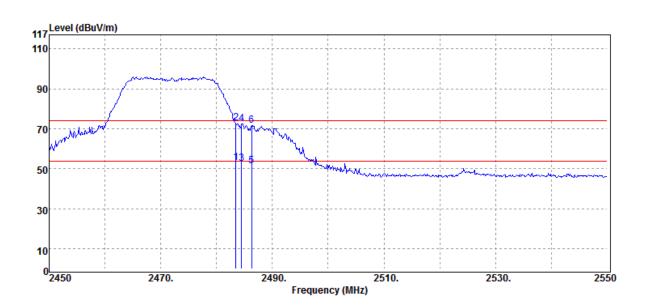

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	55.70	-2.72	52.98	54.00	-1.02
2483.50	Peak	75.69	-2.72	72.97	74.00	-1.03
2484.50	Average	55.31	-2.70	52.61	54.00	-1.39
2484.50	Peak	75.15	-2.70	72.45	74.00	-1.55
2486.30	Average	54.24	-2.69	51.55	54.00	-2.45
2486.30	Peak	74.45	-2.69	71.76	74.00	-2.24

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 80 of 127


Radiated Band Edge Measurement Result (802.11 HT20)

Operation Band :802.11n20 **Test Date** :2019-03-12

Fundamental Frequency :2412 MHz Temp./Humi. :21.5 deg C / 63 RH

Operation Mode :Bandedge CH LOW Engineer :Wei

EUT Pol. :H Plane Measurement Antenna Pol. :VERTICAL

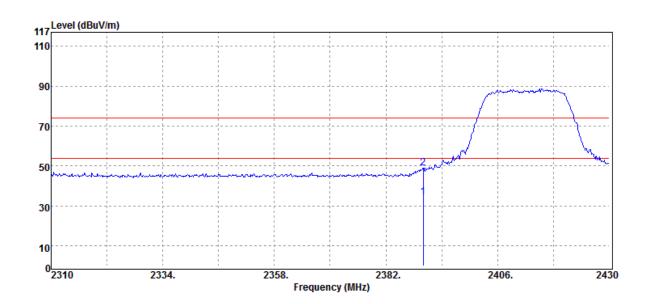

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	-
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
2390.00	Average	37.82	-3.33	34.49	54.00	-19.51
2390.00	Peak	52.26	-3.33	48.93	74.00	-25.07

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 81 of 127

Operation Band Fundamental Frequency

:802.11n20 :2412 MHz :Bandedge CH LOW


Operation Mode

EUT Pol. :H Plane **Test Date** :2019-03-12

Temp./Humi. :21.5 deg_C / 63 RH

Engineer :Wei

:HORIZONTAL Measurement Antenna Pol.

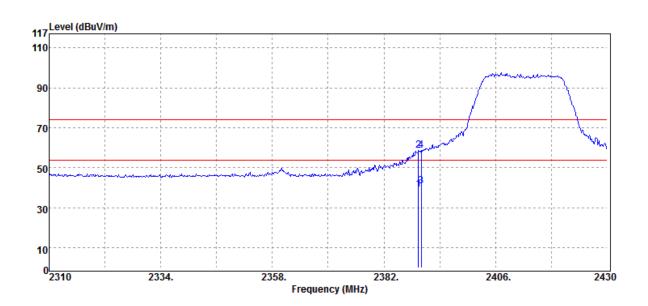

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
2389.44	Average	42.43	-3.33	39.10	54.00	-14.90
2389.44	Peak	61.98	-3.33	58.65	74.00	-15.35
2390.00	Average	44.03	-3.33	40.70	54.00	-13.30
2390.00	Peak	62.06	-3.33	58.73	74.00	-15.27

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 82 of 127

Operation Band Fundamental Frequency **Operation Mode** EUT Pol.

:802.11n20 :2462 MHz


:Bandedge CH High

:H Plane

Test Date :2019-03-12

Temp./Humi. :21.5 deg_C / 63 RH Engineer :Wei

:VERTICAL Measurement Antenna Pol.

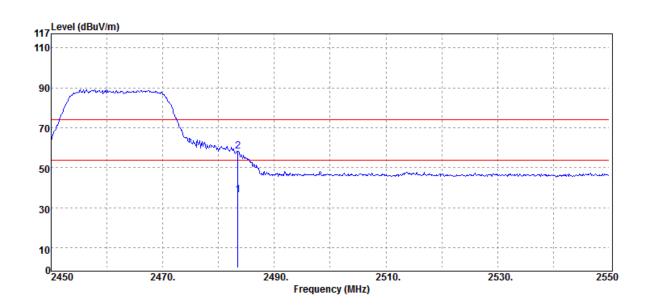

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	-
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	39.21	-2.72	36.49	54.00	-17.51
2483.50	Peak	61.21	-2.72	58.49	74.00	-15.51

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 83 of 127

Operation Band Fundamental Frequency **Operation Mode** EUT Pol.

:802.11n20 :2462 MHz

:Bandedge CH High


:H Plane

Test Date :2019-03-12

Temp./Humi. :21.5 deg_C / 63 RH

Engineer :Wei

:HORIZONTAL Measurement Antenna Pol.

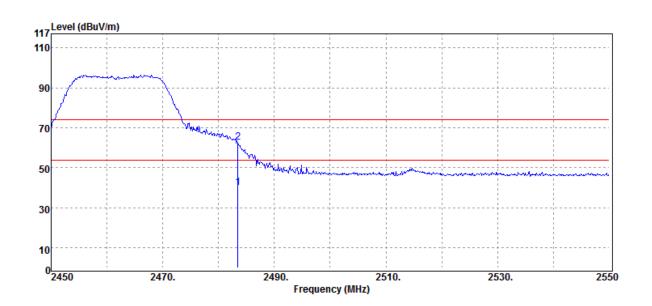

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	-
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	42.95	-2.72	40.23	54.00	-13.77
2483.50	Peak	65.50	-2.72	62.78	74.00	-11.22

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 84 of 127

Operation Band Fundamental Frequency **Operation Mode** EUT Pol.

:802.11n20 :2467 MHz

:Bandedge CH High


:H Plane

Test Date :2019-03-12

Temp./Humi. :21.5 deg_C / 63 RH

Engineer :Wei

:VERTICAL Measurement Antenna Pol.

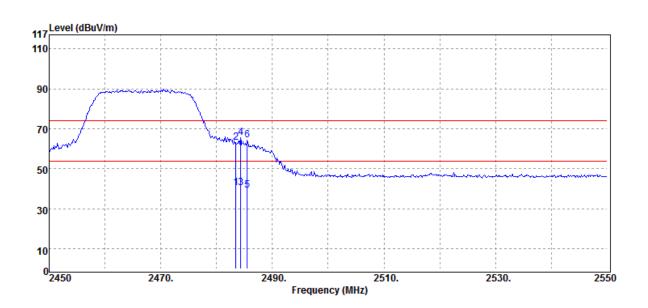

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	43.38	-2.72	40.66	54.00	-13.34
2483.50	Peak	66.03	-2.72	63.31	74.00	-10.69
2484.30	Average	43.30	-2.71	40.59	54.00	-13.41
2484.30	Peak	68.15	-2.71	65.44	74.00	-8.56
2485.50	Average	42.11	-2.71	39.40	54.00	-14.60
2485.50	Peak	67.07	-2.71	64.36	74.00	-9.64

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 85 of 127

Operation Band Fundamental Frequency **Operation Mode** EUT Pol.

:802.11n20 :2467 MHz

:Bandedge CH High


:H Plane

Test Date :2019-03-12

Temp./Humi. :21.5 deg_C / 63 RH

Engineer :Wei

:HORIZONTAL Measurement Antenna Pol.

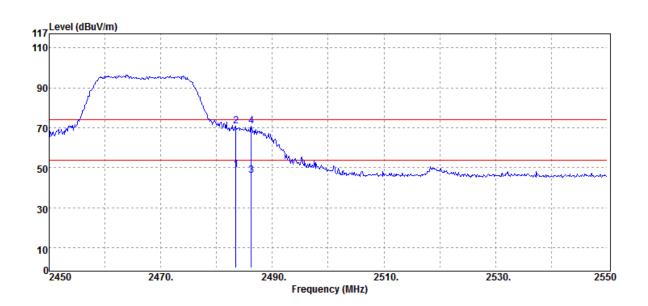

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	51.52	-2.72	48.80	54.00	-5.20
2483.50	Peak	73.44	-2.72	70.72	74.00	-3.28
2486.20	Average	48.82	-2.69	46.13	54.00	-7.87
2486.20	Peak	73.61	-2.69	70.92	74.00	-3.08

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 86 of 127

Operation Band Fundamental Frequency **Operation Mode** EUT Pol.

:802.11n20 :2472 MHz

:Bandedge CH High


:H Plane

Test Date :2019-03-12

Temp./Humi. :21.5 deg_C / 63 RH

Engineer :Wei

:VERTICAL Measurement Antenna Pol.

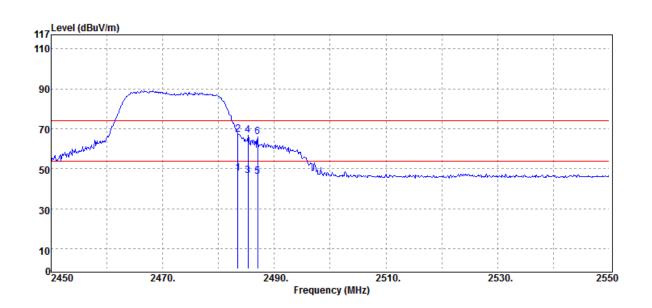

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	50.51	-2.72	47.79	54.00	-6.21
2483.50	Peak	69.87	-2.72	67.15	74.00	-6.85
2485.30	Average	49.33	-2.71	46.62	54.00	-7.38
2485.30	Peak	69.62	-2.71	66.91	74.00	-7.09
2487.00	Average	48.77	-2.69	46.08	54.00	-7.92
2487.00	Peak	68.75	-2.69	66.06	74.00	-7.94

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 87 of 127

Operation Band Fundamental Frequency **Operation Mode** EUT Pol.

:802.11n20 :2472 MHz

:Bandedge CH High


:H Plane

Test Date :2019-03-12

Temp./Humi. :21.5 deg_C / 63 RH

Engineer :Wei

:HORIZONTAL Measurement Antenna Pol.

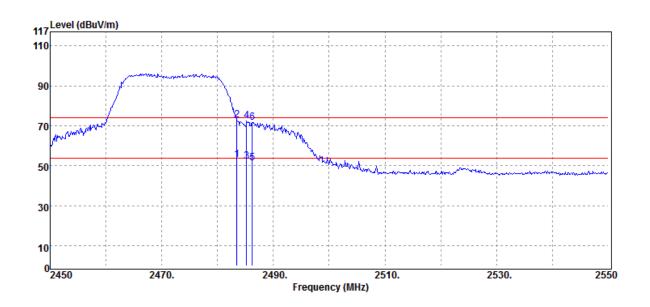

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
2483.50	Average	55.71	-2.72	52.99	54.00	-1.01
2483.50	Peak	75.69	-2.72	72.97	74.00	-1.03
2485.20	Average	55.12	-2.70	52.42	54.00	-1.58
2485.20	Peak	75.20	-2.70	72.50	74.00	-1.50
2486.20	Average	54.16	-2.69	51.47	54.00	-2.53
2486.20	Peak	74.42	-2.69	71.73	74.00	-2.27

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 88 of 127

Below 1GHz Worst-Case Data:


Radiated Spurious Emission Measurement Result (802.11 g)

Operation Band :802.11g **Test Date** :2019-03-12

Fundamental Frequency :2437 MHz Temp./Humi. :21.5 deg C / 63 RH

Operation Mode :Tx CH MID Engineer :Wei

EUT Pol. :H Plan :VERTICAL Measurement Antenna Pol.

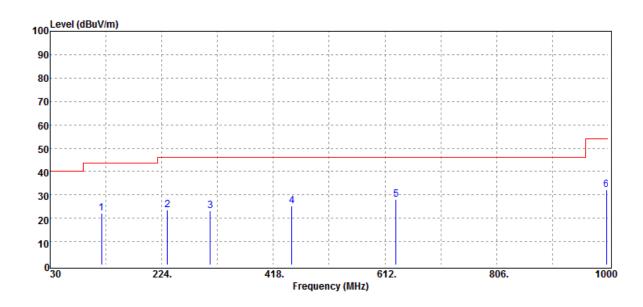

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
119.24	Peak	30.40	-8.41	21.99	43.50	-21.51
233.70	Peak	33.49	-9.97	23.52	46.00	-22.48
308.39	Peak	30.50	-7.25	23.25	46.00	-22.75
450.01	Peak	28.14	-3.03	25.11	46.00	-20.89
631.40	Peak	27.26	0.88	28.14	46.00	-17.86
997.09	Peak	25.76	6.35	32.11	54.00	-21.89

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 89 of 127

Operation Band :802.11g Fundamental Frequency :2437 MHz **Operation Mode**

EUT Pol.


:Tx CH MID :H Plan

Test Date :2019-03-12

Temp./Humi. :21.5 deg_C / 63 RH

Engineer :Wei

:HORIZONTAL Measurement Antenna Pol.

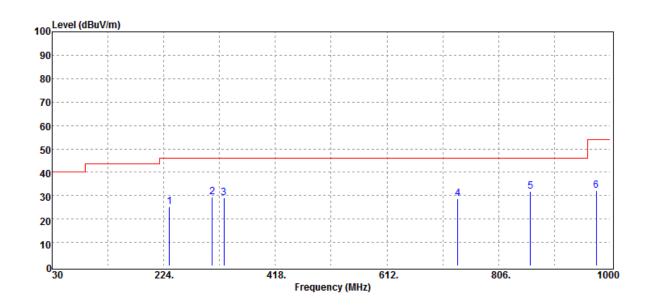

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
233.70	Peak	35.37	-9.97	25.40	46.00	-20.60
308.39	Peak	36.58	-7.25	29.33	46.00	-16.67
328.76	Peak	35.32	-6.37	28.95	46.00	-17.05
735.19	Peak	26.92	1.77	28.69	46.00	-17.31
861.29	Peak	27.67	4.16	31.83	46.00	-14.17
975.75	Peak	25.46	6.64	32.10	54.00	-21.90

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 90 of 127


Above 1GHz Data:

Radiated Spurious Emission Measurement Result (802.11 b)

Operation Band :802.11b **Test Date** :2019-03-10

Temp./Humi. Fundamental Frequency :2412 MHz :21.5 deg C / 63 RH

Operation Mode :Tx CH LOW Engineer :Wei EUT Pol. :H Plane :VERTICAL Measurement Antenna Pol.

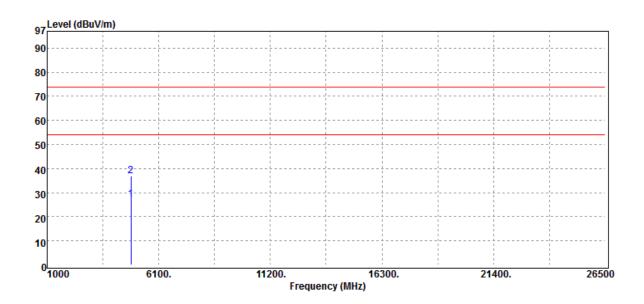

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4824.00	Average	24.10	3.02	27.12	54.00	-26.88
4824 00	Peak	33 98	3.02	37 00	74 00	-37 00

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 91 of 127


Operation Band :802.11b Fundamental Frequency :2412 MHz **Operation Mode** :Tx CH LOW EUT Pol. :H Plane

Test Date :2019-03-10

Temp./Humi. :21.5 deg_C / 63 RH

Engineer :Wei

:HORIZONTAL Measurement Antenna Pol.

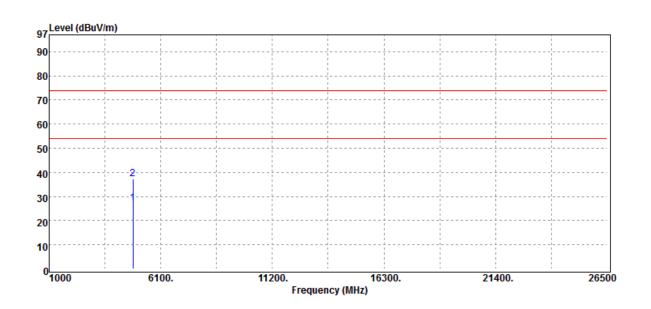

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4824.00	Average	24.01	3.02	27.03	54.00	-26.97
4824.00	Peak	34.30	3.02	37.32	74.00	-36.68

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 92 of 127

Operation Band :802.11b Fundamental Frequency **Operation Mode**

EUT Pol.


:2437 MHz :Tx CH MID :H Plane

Test Date :2019-03-10

Temp./Humi. :21.5 deg_C / 63 RH

Engineer :Wei

:VERTICAL Measurement Antenna Pol.

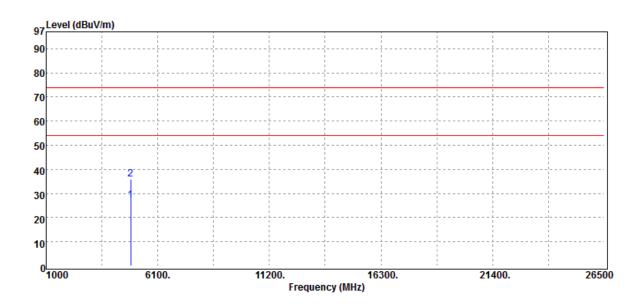

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	-
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4874.00	Average	23.76	3.36	27.12	54.00	-26.88
4874.00	Peak	32.40	3.36	35.76	74.00	-38.24

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 93 of 127

Operation Band Fundamental Frequency **Operation Mode** EUT Pol.


:802.11b :2437 MHz :Tx CH MID :H Plane

Test Date :2019-03-10

Temp./Humi. :21.5 deg_C / 63 RH

Engineer :Wei

:HORIZONTAL Measurement Antenna Pol.

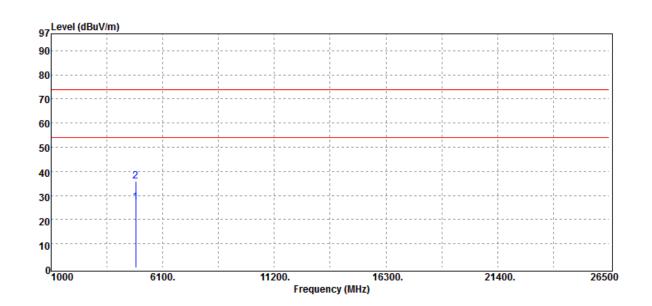

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	-
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
4874.00	Average	23.77	3.36	27.13	54.00	-26.87
4874.00	Peak	32.63	3.36	35.99	74.00	-38.01

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 94 of 127

Operation Band Fundamental Frequency **Operation Mode** EUT Pol.


:802.11b :2462 MHz :Tx CH HIGH :H Plane

Test Date :2019-03-10

Temp./Humi. :21.5 deg_C / 63 RH

Engineer :Wei

:VERTICAL Measurement Antenna Pol.

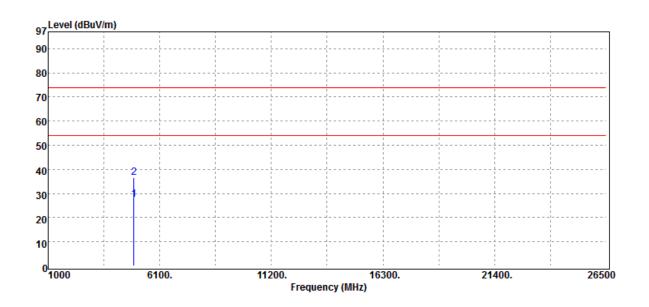

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	-
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4924.00	Average	23.67	3.93	27.60	54.00	-26.40
4924.00	Peak	32.77	3.93	36.70	74.00	-37.30

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 95 of 127

Operation Band Fundamental Frequency **Operation Mode** EUT Pol.


:802.11b :2462 MHz :Tx CH HIGH :H Plane

Test Date :2019-03-10

Temp./Humi. :21.5 deg_C / 63 RH

Engineer :Wei

:HORIZONTAL Measurement Antenna Pol.

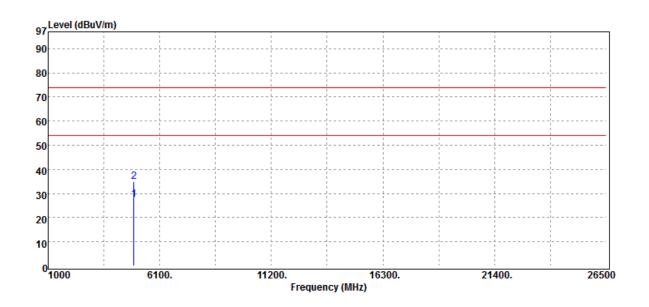

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	-
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4924.00	Average	23.60	3.93	27.53	54.00	-26.47
4924.00	Peak	30.94	3.93	34.87	74.00	-39.13

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 96 of 127

Operation Band Fundamental Frequency **Operation Mode** EUT Pol.


:802.11b :2467 MHz :Tx CH HIGH :H Plane

Test Date :2019-03-10

Temp./Humi. :21.5 deg_C / 63 RH

Engineer :Wei

:VERTICAL Measurement Antenna Pol.

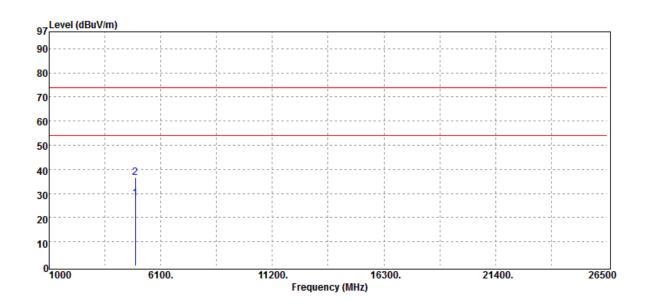

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	-
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
4934.00	Average	23.71	4.12	27.83	54.00	-26.17
4934.00	Peak	32.61	4.12	36.73	74.00	-37.27

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 97 of 127

Operation Band Fundamental Frequency **Operation Mode** EUT Pol.


:802.11b :2467 MHz :Tx CH HIGH :H Plane

Test Date :2019-03-10

Temp./Humi. :21.5 deg_C / 63 RH

Engineer :Wei

:HORIZONTAL Measurement Antenna Pol.

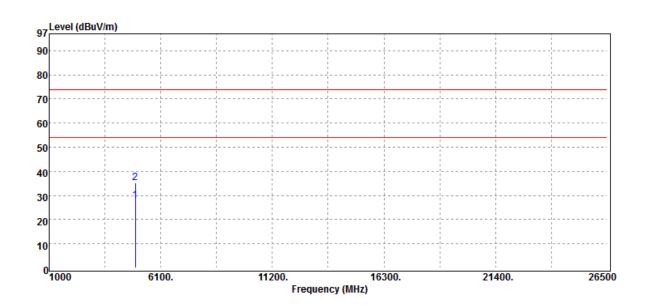

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	-
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4934.00	Average	23.75	4.12	27.87	54.00	-26.13
4934.00	Peak	30.99	4.12	35.11	74.00	-38.89

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 98 of 127


Operation Band :802.11b Fundamental Frequency :2472 MHz **Operation Mode** :Tx CH HIGH EUT Pol. :H Plane

Test Date :2019-03-10

Temp./Humi. :21.5 deg_C / 63 RH

Engineer :Wei

:VERTICAL Measurement Antenna Pol.

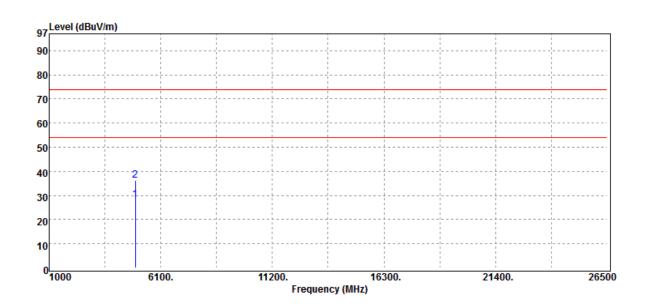

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	-
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
4944.00	Average	23.75	4.30	28.05	54.00	-25.95
4944.00	Peak	31.79	4.30	36.09	74.00	-37.91

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 99 of 127

Operation Band Fundamental Frequency **Operation Mode** EUT Pol.


:802.11b :2472 MHz :Tx CH HIGH :H Plane

Test Date :2019-03-10

Temp./Humi. :21.5 deg_C / 63 RH

Engineer :Wei

:HORIZONTAL Measurement Antenna Pol.

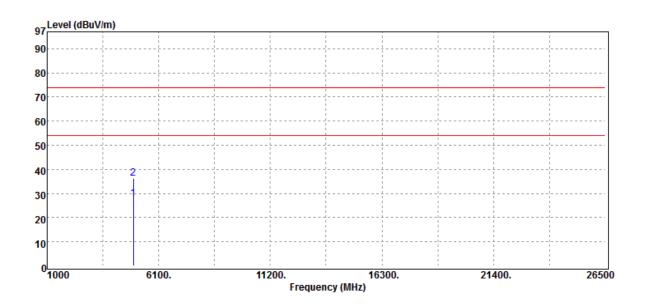

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	-
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
4944.00	Average	23.66	4.30	27.96	54.00	-26.04
4944.00	Peak	31.99	4.30	36.29	74.00	-37.71

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Page 100 of 127

Radiated Spurious Emission Measurement Result (802.11 g)

Operation Band :802.11g **Test Date** :2019-03-10


Fundamental Frequency :2412 MHz Temp./Humi. :21.5 deg C / 63 RH Operation Mode :Tx CH LOW :Wei

Engineer EUT Pol. :H Plane Measurement Antenna Pol. :VERTICAL

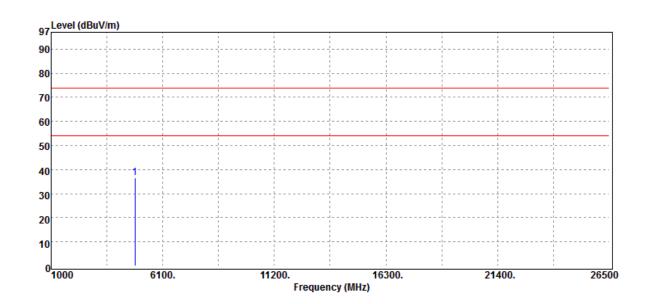

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
4824 00	Peak	33.62	3.02	36 64	74 00	-37 36

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.





Operation Band Fundamental Frequency **Operation Mode** EUT Pol.


:802.11g :2412 MHz :Tx CH LOW :H Plane

Test Date :2019-03-10

Temp./Humi. :21.5 deg_C / 63 RH


Engineer :Wei

:HORIZONTAL Measurement Antenna Pol.

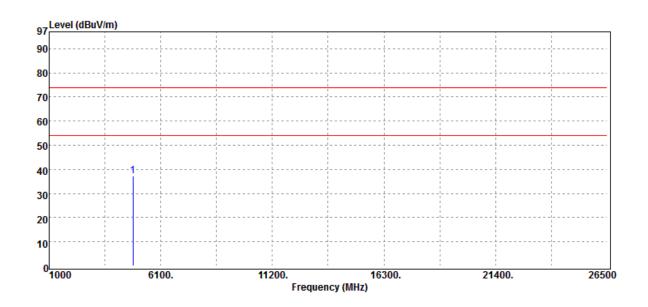

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m	_	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB	
4824.00	Peak	34.14	3.02	37.16	74.00	-36.84	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.





Operation Band Fundamental Frequency **Operation Mode** EUT Pol.


:802.11g :2412 MHz :Tx CH LOW :H Plane

Test Date :2019-03-10

Temp./Humi. :21.5 deg_C / 63 RH


Engineer :Wei

:VERTICAL Measurement Antenna Pol.

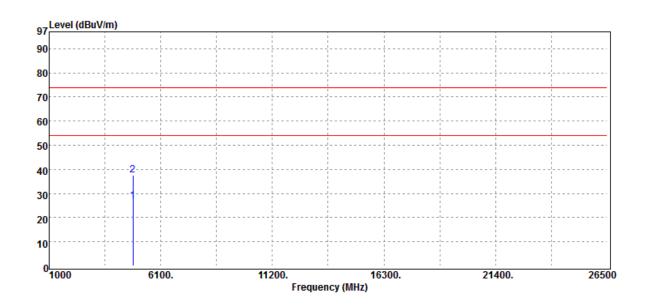

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	-
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4824.00	Average	23.86	3.02	26.88	54.00	-27.12
4824.00	Peak	34.60	3.02	37.62	74.00	-36.38

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.





Operation Band Fundamental Frequency **Operation Mode** EUT Pol.


:802.11g :2412 MHz :Tx CH LOW :H Plane

Test Date :2019-03-10

Temp./Humi. :21.5 deg_C / 63 RH

Engineer :Wei

:HORIZONTAL Measurement Antenna Pol.

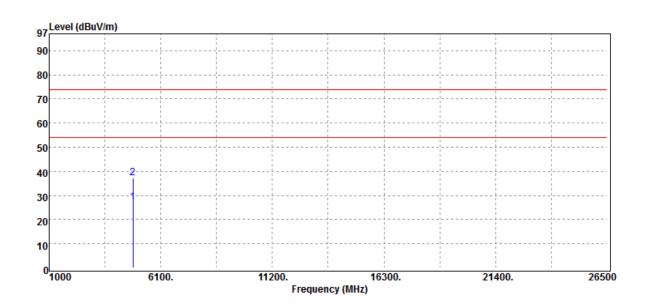

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	-
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
4824.00	Average	24.02	3.02	27.04	54.00	-26.96
4824.00	Peak	34.11	3.02	37.13	74.00	-36.87

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 104 of 127


Operation Band :802.11g Fundamental Frequency :2437 MHz **Operation Mode** :Tx CH MID EUT Pol. :H Plane

Test Date :2019-03-10

Temp./Humi. :21.5 deg_C / 63 RH


Engineer :Wei

:VERTICAL Measurement Antenna Pol.

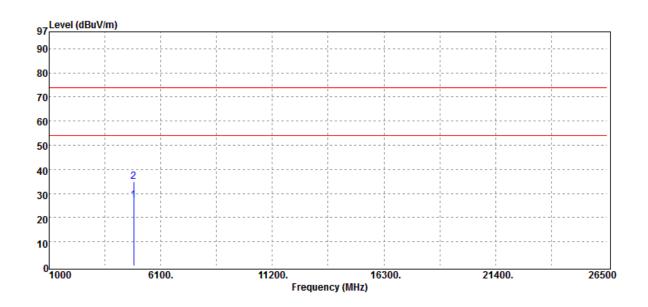

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	-
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4874.00	Average	23.67	3.36	27.03	54.00	-26.97
4874.00	Peak	31.64	3.36	35.00	74.00	-39.00

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.





Operation Band Fundamental Frequency **Operation Mode**

:2437 MHz :Tx CH MID EUT Pol. :H Plane


:802.11g

Test Date :2019-03-10

Temp./Humi. :21.5 deg_C / 63 RH


Engineer :Wei

:HORIZONTAL Measurement Antenna Pol.

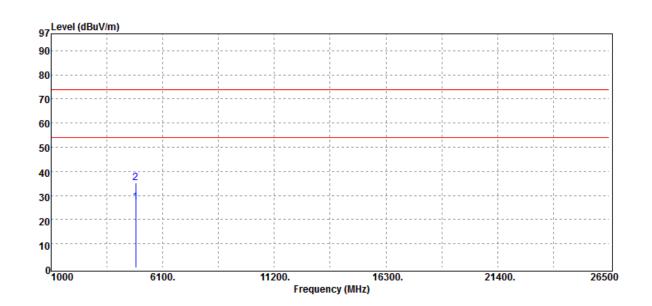

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	-
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
4874.00	Average	23.82	3.36	27.18	54.00	-26.82
4874.00	Peak	31.94	3.36	35.30	74.00	-38.70

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.





Operation Band Fundamental Frequency **Operation Mode** EUT Pol.


:802.11g :2462 MHz :Tx CH HIGH :H Plane

Test Date :2019-03-10

Temp./Humi. :21.5 deg_C / 63 RH


Engineer :Wei

:VERTICAL Measurement Antenna Pol.

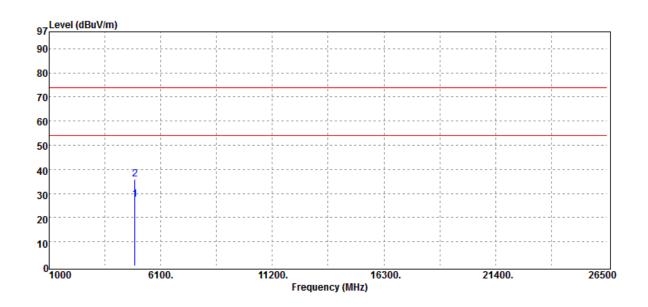

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	-
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4924.00	Average	23.66	3.93	27.59	54.00	-26.41
4924.00	Peak	31.83	3.93	35.76	74.00	-38.24

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.





Operation Band Fundamental Frequency **Operation Mode** EUT Pol.


:802.11g :2462 MHz :Tx CH HIGH ·H Plane

Test Date :2019-03-10

Temp./Humi. :21.5 deg_C / 63 RH

Engineer :Wei

:HORIZONTAL Measurement Antenna Pol.

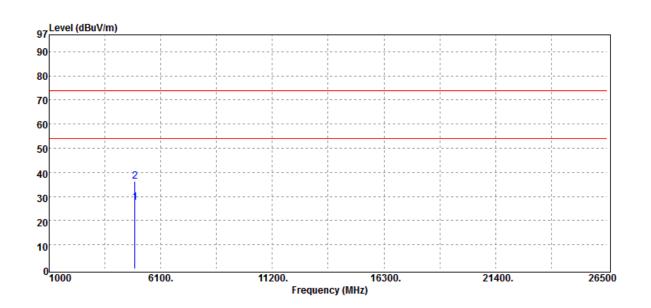

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
4924.00	Average	23.62	3.93	27.55	54.00	-26.45
4924.00	Peak	32.18	3.93	36.11	74.00	-37.89

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 108 of 127

Operation Band Fundamental Frequency **Operation Mode** EUT Pol.


:802.11g :2467 MHz :Tx CH HIGH ·H Plane

Test Date :2019-03-10

Temp./Humi. :21.5 deg_C / 63 RH

Engineer :Wei

:VERTICAL Measurement Antenna Pol.

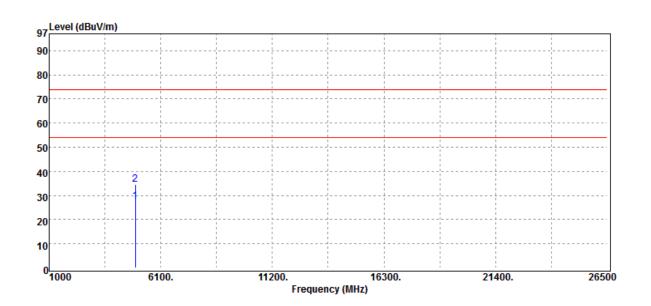

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
4934.00	Average	23.45	4.12	27.57	54.00	-26.43
4934.00	Peak	30.42	4.12	34.54	74.00	-39.46

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 109 of 127

Operation Band Fundamental Frequency **Operation Mode** EUT Pol.


:802.11g :2467 MHz :Tx CH HIGH ·H Plane

Test Date :2019-03-10

Temp./Humi. :21.5 deg_C / 63 RH

Engineer :Wei

:HORIZONTAL Measurement Antenna Pol.

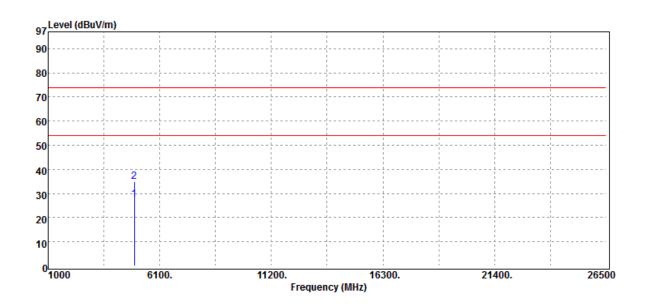

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	-
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
4934.00	Average	23.47	4.12	27.59	54.00	-26.41
4934.00	Peak	30.63	4.12	34.75	74.00	-39.25

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 110 of 127

Operation Band Fundamental Frequency **Operation Mode** EUT Pol.


:802.11g :2472 MHz :Tx CH HIGH :H Plane

Test Date :2019-03-10

Temp./Humi. :21.5 deg_C / 63 RH

Engineer :Wei

:VERTICAL Measurement Antenna Pol.

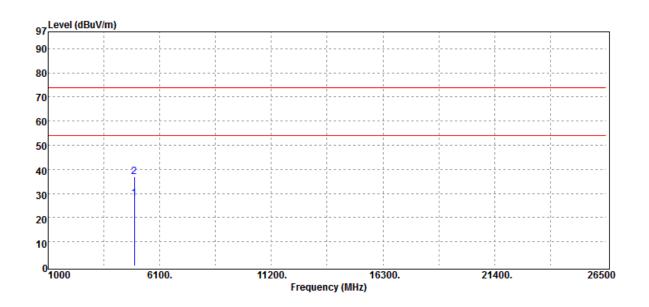

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4944.00	Average	23.67	4.30	27.97	54.00	-26.03
4944.00	Peak	32.53	4.30	36.83	74.00	-37.17

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 111 of 127

Operation Band Fundamental Frequency **Operation Mode** EUT Pol.


:802.11g :2472 MHz :Tx CH HIGH :H Plane

Test Date :2019-03-10

Temp./Humi. :21.5 deg_C / 63 RH

Engineer :Wei

:HORIZONTAL Measurement Antenna Pol.

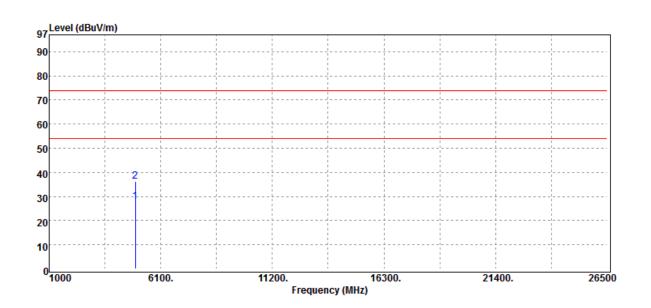

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	-
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
4944.00	Average	23.71	4.30	28.01	54.00	-25.99
4944.00	Peak	32.01	4.30	36.31	74.00	-37.69

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 112 of 127


Radiated Spurious Emission Measurement Result (802.11n HT20)

Operation Band :802.11n20 **Test Date** :2019-03-10

Fundamental Frequency :2412 MHz Temp./Humi. :21.5 deg C / 63 RH

Operation Mode :Tx CH LOW Engineer :Wei


EUT Pol. :H Plane Measurement Antenna Pol. :VERTICAL

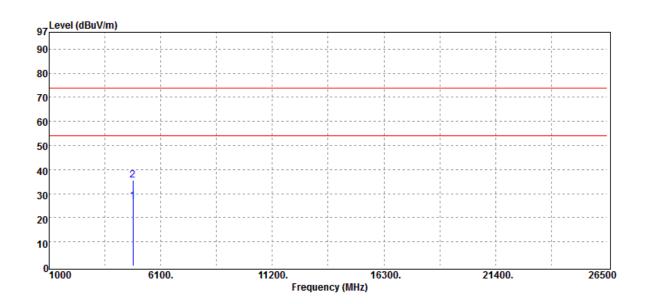

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB	
4824.00	Average	23.93	3.02	26.95	54.00	-27.05	_
4824.00	Peak	32.55	3.02	35.57	74.00	-38.43	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留切天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms at www.sgs.com/terms and conditions for Electronic Documents at www.sgs.com/terms at ww jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.





Operation Band Fundamental Frequency **Operation Mode** EUT Pol.


:802.11n20 :2412 MHz :Tx CH LOW :H Plane

Test Date :2019-03-10

Temp./Humi. :21.5 deg_C / 63 RH

Engineer :Wei

:HORIZONTAL Measurement Antenna Pol.

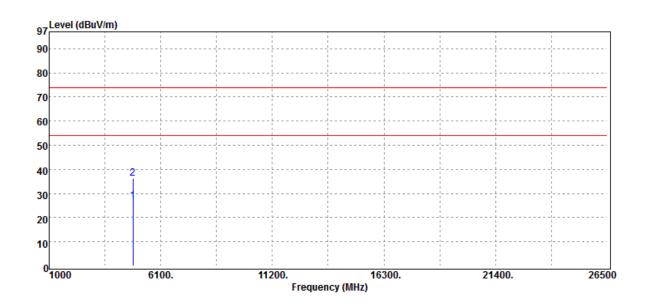

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	-
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4824.00	Average	23.99	3.02	27.01	54.00	-26.99
4824.00	Peak	33.35	3.02	36.37	74.00	-37.63

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 114 of 127


Operation Band :802.11n20 Fundamental Frequency :2437 MHz **Operation Mode** :Tx CH MID EUT Pol. :H Plane

Test Date :2019-03-10

Temp./Humi. :21.5 deg_C / 63 RH


Engineer :Wei

:VERTICAL Measurement Antenna Pol.

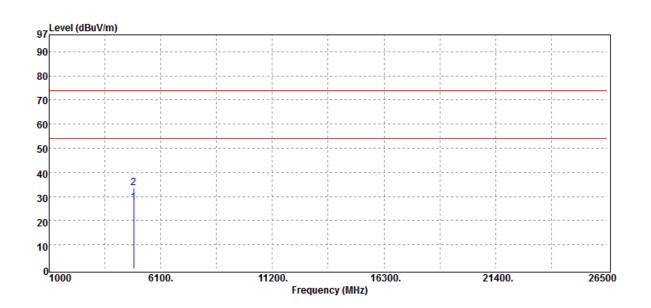

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	-
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4874.00	Average	24.11	3.36	27.47	54.00	-26.53
4874.00	Peak	30.35	3.36	33.71	74.00	-40.29

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.





Operation Band :802.11n20 Fundamental Frequency :2437 MHz **Operation Mode**

EUT Pol.


:Tx CH MID :H Plane

Test Date :2019-03-10

Temp./Humi. :21.5 deg_C / 63 RH

Engineer :Wei

:HORIZONTAL Measurement Antenna Pol.

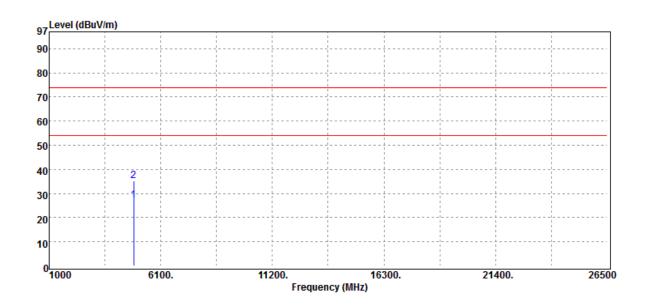

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	-
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
4874.00	Average	23.94	3.36	27.30	54.00	-26.70
4874.00	Peak	31.76	3.36	35.12	74.00	-38.88

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 116 of 127


Operation Band Fundamental Frequency **Operation Mode** EUT Pol.

:802.11n20 :2462 MHz :Tx CH HIGH :H Plane

Test Date :2019-03-10

Temp./Humi. :21.5 deg_C / 63 RH Engineer :Wei

:VERTICAL Measurement Antenna Pol.

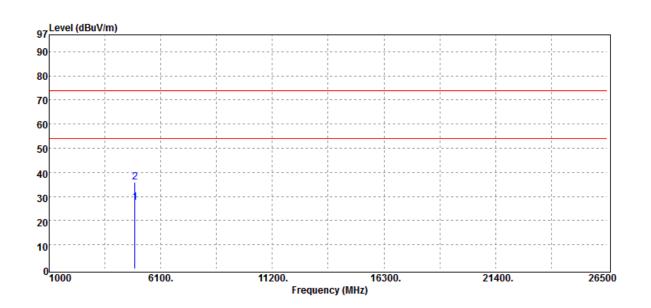

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	-
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4924.00	Average	23.66	3.93	27.59	54.00	-26.41
4924.00	Peak	32.13	3.93	36.06	74.00	-37.94

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 117 of 127

Operation Band Fundamental Frequency **Operation Mode** EUT Pol.


:802.11n20 :2462 MHz :Tx CH HIGH :H Plane

Test Date :2019-03-10

Temp./Humi. :21.5 deg_C / 63 RH

Engineer :Wei

:HORIZONTAL Measurement Antenna Pol.

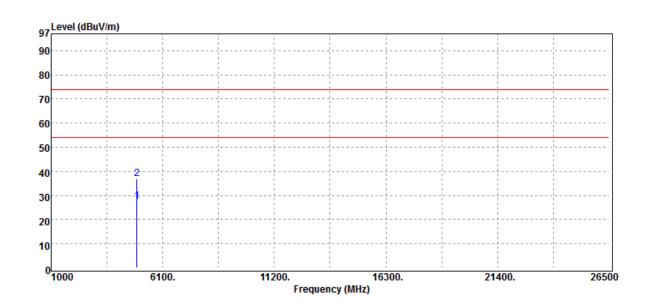

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	-
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4924.00	Average	23.59	3.93	27.52	54.00	-26.48
4924.00	Peak	32.93	3.93	36.86	74.00	-37.14

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 118 of 127

Operation Band Fundamental Frequency **Operation Mode** EUT Pol.


:802.11n20 :2467 MHz :Tx CH HIGH ·H Plane

Test Date :2019-03-10

Temp./Humi. :21.5 deg_C / 63 RH


Engineer :Wei

:VERTICAL Measurement Antenna Pol.

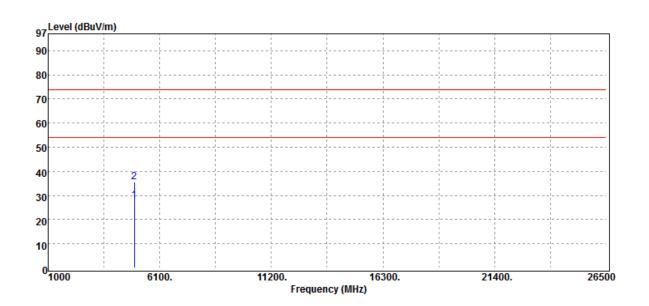

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	-
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
4934.00	Average	23.64	4.12	27.76	54.00	-26.24
4934.00	Peak	31.61	4.12	35.73	74.00	-38.27

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Operation Band Fundamental Frequency **Operation Mode** EUT Pol.


:802.11n20 :2467 MHz :Tx CH HIGH ·H Plane

Test Date :2019-03-10

Temp./Humi. :21.5 deg_C / 63 RH

Engineer :Wei

:HORIZONTAL Measurement Antenna Pol.

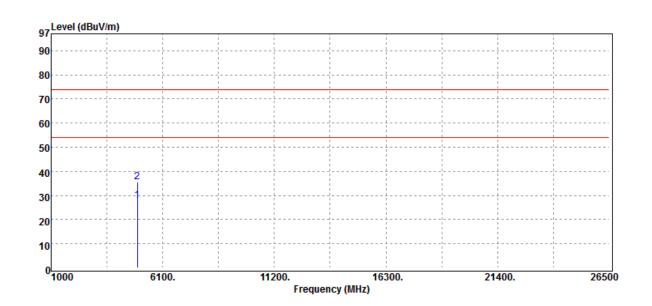

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	-
MHz	PK/QP/AV	dBµV	dB	dBμV/m	dBµV/m	dB
4934.00	Average	23.60	4.12	27.72	54.00	-26.28
4934.00	Peak	31.53	4.12	35.65	74.00	-38.35

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 120 of 127

Operation Band Fundamental Frequency **Operation Mode** EUT Pol.


:802.11n20 :2472 MHz :Tx CH HIGH :H Plane

Test Date :2019-03-10

Temp./Humi. :21.5 deg_C / 63 RH


Engineer :Wei

:VERTICAL Measurement Antenna Pol.

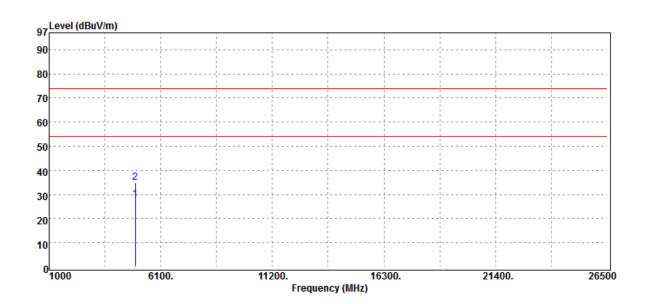

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	-
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4944.00	Average	23.60	4.30	27.90	54.00	-26.10
4944.00	Peak	30.66	4.30	34.96	74.00	-39.04

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.





Operation Band Fundamental Frequency **Operation Mode** EUT Pol.


:802.11n20 :2472 MHz :Tx CH HIGH :H Plane

Test Date :2019-03-10

Temp./Humi. :21.5 deg_C / 63 RH

Engineer :Wei

:HORIZONTAL Measurement Antenna Pol.

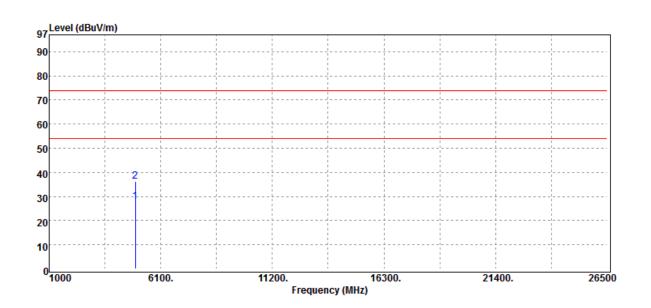

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	-
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
4944.00	Average	23.67	4.30	27.97	54.00	-26.03
4944.00	Peak	31.89	4.30	36.19	74.00	-37.81

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



12 POWER SPECTRAL DENSITY

Standard Applicable 12.1

Per Part 15.247 (e)

The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

The antenna gain is not grater than 6 dBi. Therefore, reduction of power is not required.


Per RSS-247 section 5.4 d

For DTSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e).

12.2 **Measurement Equipment Used**

Conducted Emission Test Site							
EQUIPMENT MFR		MODEL	SERIAL	LAST	CAL DUE.		
TYPE		NUMBER	NUMBER	CAL.			
Spectrum Analyzer	Agilent	N9010A	MY53400256	11/21/2018	11/20/2019		
DC Power Supply	Agilent	E3640A	KR93300208	08/15/2018	08/14/2019		
Attenuator	Agilent	8494B	MY42152151	02/26/2019	02/25/2020		
Cable	HUBER SUHNER	SUCOFLEX 104PEA	25157	02/26/2019	02/25/2020		

12.3 **Test Set-up**



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留切天。本報告未經本公司書面許可,不可都份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm.

Attention is drawn to the limitation of liability, indemnification and www.sgs.com/terms e-document.htm. jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Measurement Procedure 12.4

- 1. Set analyzer center frequency to DTS channel center frequency.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance & ANSI C63.10.
- 3. Set the span to 1.5 times the DTS channel bandwidth.
- 4. Set the RBW = 3 kHz. & the VBW = 10 kHz
- 5. For defining Restricted Band Edge Limit: Set the RBW = 100kHz & VBW = 300 kHz.
- 6. Detector = peak.
- 7. Sweep time = auto couple.
- 8. Trace mode = max hold.
- 9. Allow trace to fully stabilize.
- 10. Use the peak marker function to determine the maximum amplitude level.

12.5 Measurement Result

POWER DENSITY 802.11b				POWER DENSITY 802.11g			
Freq.	PPSD	Limit	Result	Freq.	PPSD	Limit	Result
(MHz)	(dBm/3kHz)	(dBm/3kHz)	Result	(MHz)	(dBm/3kHz)	(dBm/3kHz)	Kesuii
2412	-9.67	8.00	PASS	2412	-17.26	8.00	PASS
2437	-8.73	8.00	PASS	2437	-16.71	8.00	PASS
2462	-8.22	8.00	PASS	2462	-16.40	8.00	PASS
2467	-7.64	8.00	PASS	2467	-15.42	8.00	PASS
2472	-7.84	8.00	PASS	2472	-15.47	8.00	PASS

POWER DENSITY 802.11n HT20						
Freq.	PPSD	Limit	Result			
(MHz)	(dBm/3kHz)	(dBm/3kHz)				
2412	-17.87	8.00	PASS			
2437	-17.63	8.00	PASS			
2462	-16.52	8.00	PASS			
2467	-15.71	8.00	PASS			
2472	-15.52	8.00	PASS			

Note


Cable Loss 11.00 dB

*Refer to next page for plots

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留切天。本報告未經本公司書面許可,不可都份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm.

Attention is drawn to the limitation of liability, indemnification and www.sgs.com/terms e-document.htm. Jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.









Power Spectral Density Test Plot (CH-Mid)



Power Spectral Density Test Plot (CH-High)




Power Spectral Density Test Plot (CH-High) (2467MHz)



Power Spectral Density Test Plot (CH-High) (2472MHz)




Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






802.11g Power Spectral Density Test Plot (CH-Low)

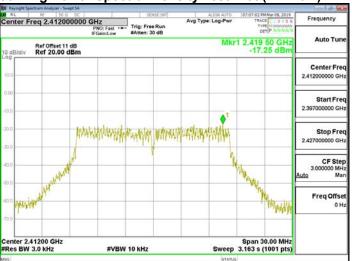

Power Spectral Density Test Plot (CH-Mid)




Power Spectral Density Test Plot (CH-High)

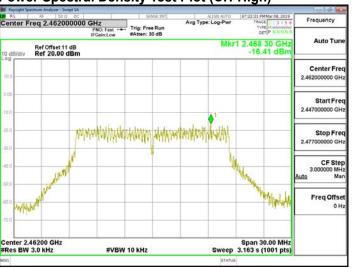


Power Spectral Density Test Plot (CH-High) (2467MHz)



Power Spectral Density Test Plot (CH-High) (2472MHz)

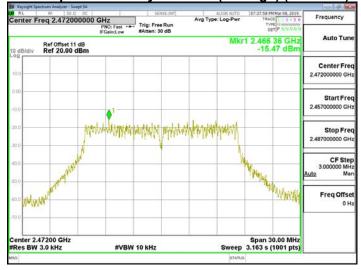


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.







802.11n_HT20 Power Spectral Density Test Plot (CH-Low)

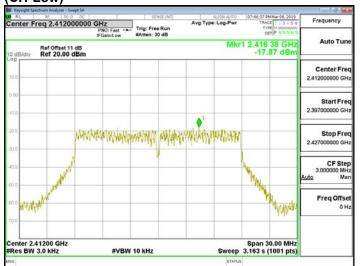


Power Spectral Density Test Plot (CH-Mid)

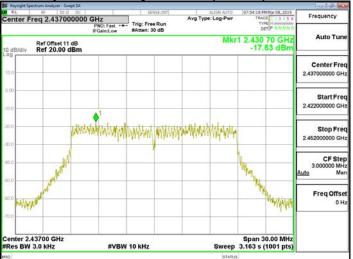

Power Spectral Density Test Plot (CH-High)

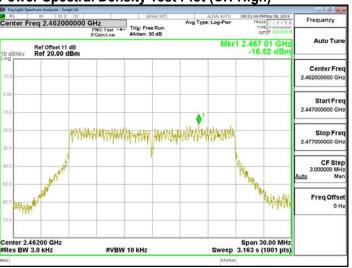

Power Spectral Density Test Plot (CH-High) (2467MHz)

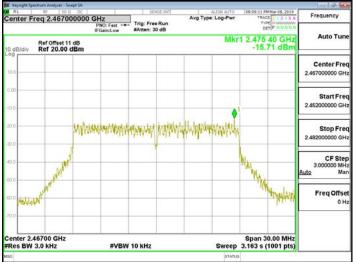

Power Spectral Density Test Plot (CH-High) (2472MHz)



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 127 of 127

13 ANTENNA REQUIREMENT

13.1 Standard Applicable

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device.

If the transmitting antenna is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi.

13.2 Antenna Connected Construction

The antenna is designed as permanently attached and no consideration of replacement. Please see EUT photo for details.

~ End of Report ~

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.