

Page 1 of 50

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C AND INDUSTRY CANADA RSS 247 REQUIREMENT

Applicant:

Suunto Oy

Tammiston kauppatie 7A, 01510 Vantaa, Finland

Product Name:

SUUNTO 7

Brand Name:

SUUNTO

Model No.:

OW185

Model Difference:

N/A

Report Number:

T190307W01-RP2

FCC ID:

RYP2540

IC:

5175A-2540

FCC Rule Part:

§15.247, Cat: DTS

IC Rule Part:

RSS-247 issue 2 Feb 2017

Issue Date:

Aug. 15, 2019

Date of Test:

Mar. 08, 2019 ~ Mar. 12, 2019

Date of EUT Received:

Mar. 08. 2019

Issued by

Compliance Certification Services Inc.Wugu Lab.

No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Tai-

wan. (R.O.C.)

service@ccsrf.com

Note: The test Result was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were given in ANSI C63.10: 2013 and compliance standards.

The test results of this report relate only to the tested sample (EUT) identified in this re-

The test Report of full or partial shall not copy. Without written approval of Compliance Certification Services Inc. (Wugu Laboratory).

Tested By:

Wei Chang / Engineer

Wei Chang

Approved By:

Kevin Tsai / Deputy Manager





Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page 2 of 50

Revision History

| Report Number | Revision | Description | Effected Page | Issue Date | Revised By |
|----------------|----------|---|------------------|---------------|---------------|
| T190307W01-RP2 | Rev.00 | Initial creation of docu- ment | All | Mar. 15, 2019 | Violetta Tang |
| T190307W01-RP2 | Rev.01 | Updated product name, brand name, Docking model no. | 1,4 | Aug. 15, 2019 | Violetta Tang |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留例天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and dispursation issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unawful and offenders may be prosecuted to the full lest extent of the low. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.






Table of Contents

| 1 | GENERAL INFORMATION | 4 |
|----|--|----|
| 2 | SYSTEM TEST CONFIGURATION | 6 |
| 3 | SUMMARY OF TEST RESULTS | 9 |
| 4 | DESCRIPTION OF TEST MODES | 10 |
| 5 | MEASUREMENT UNCERTAINTY | 12 |
| 6 | CONDUCTED EMISSION TEST | 13 |
| 7 | PEAK OUTPUT POWER MEASUREMENT | 17 |
| 8 | 6dB & 99% BANDWIDTH MEASUREMENT | 20 |
| 9 | CONDUCTED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT | 25 |
| 10 | RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT | 30 |
| 11 | POWER SPECTRAL DENSITY | 47 |
| 12 | ANTENNA REQUIREMENT | 50 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留例天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and dispursation issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unawful and offenders may be prosecuted to the full lest extent of the low. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: T190307W01-RP2 Page 4 of 50



GENERAL INFORMATION

1.1 Product Description

| Product Name: | SUUNTO 7 | | |
|-------------------|--|--|--|
| Brand Name: | SUUNTO | | |
| Model No.: | OW185 | | |
| Model difference: | N/A | | |
| Hardware Version: | 1100 | | |
| Software Version: | ESW1.CERT.31039.18400 | | |
| Docking: | Model No.: CB848N, Supplier: Simula Tech Inc. | | |
| Dower Supply | 3.8Vdc from Rechargeable Li-ion Battery or 5Vdc from USB Port | | |
| Power Supply: | Battery: Model No.: APP00289, Supplier: APACK TECHNOLOGY CO LTD | | |

| Bluetooth Version: | Bluetooth V4.2 LE dual mode |
|----------------------|---------------------------------------|
| Channel number: | 40 channels |
| Modulation type: | GFSK |
| Transmit Power: | 1.54dBm |
| Frequency Range: | 2402 – 2480MHz |
| Antenna Designation: | Monopole Antenna, Peak Gain: -4.49dBi |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留例天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and dispursation issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unawful and offenders may be prosecuted to the full lest extent of the low. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page 5 of 50

1.2 Test Methodology of Applied Standards

FCC Part 15, Subpart C §15.247

FCC KDB 558074 D01 DTS Meas. Guidance v05r01.

RSS-Gen. issue 5 Apr. 2018

RSS-247 issue 2 Feb. 2017

ANSI C63.10:2013

Note: All test items have been performed and record as per the above standards.

1.3 Test Facility

Compliance Certification Services Inc. Wugu Lab. No.11, Wugong 6th Rd.,

Wugu Dist., New Taipei City 24891, Taiwan. (R.O.C.) (TAF code 1309)

FCC Designation number: TW1309

Canada Registration number: 2324G

1.4 Special Accessories

There are no special accessories used while test was conducted.

1.5 Equipment Modifications

There was no modification incorporated into the EUT.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page 6 of 50

SYSTEM TEST CONFIGURATION

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

2.3 Test Procedure

2.3.1 **Conducted Emissions**

The EUT is a placed on a table which is 0.8 m above ground plane. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz. The CISPR Quasi-Peak and Average detector mode is employed according to §15.207. The two LISNs provide 50uH/50 ohm of coupling impedance for the measuring instrument. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

2.3.2 **Conducted Test (RF)**

The active antenna port of the unlicensed wireless device is connected to the spectrum analyzer with attenuator to protect the instrumentation. If a second antenna port is available, it is tested at one operating frequency, with other port(s) appropriately terminated, to verify it has similar output characteristics as the fully tested port.

2.3.3 **Radiated Emissions**

The EUT is a placed on a turn table. For emissions testing at or below 1 GHz, the table height shall be 0.8 m above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page 7 of 50

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuation factor between EUT conducted port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly EUT RF output level.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留列天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions if any. The Company's call their right and obligations under the Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Page 8 of 50



2.5 Configuration of Tested System

Fig. 2-1 Conducted (Antenna Port) Emission Configuration




Fig 2-3 Conduction (AC Power Line) Radiated Emission



Fig 2-2 Radiated Emission



Table 2-1 Equipment Used in Tested System

| Item | Equipment | Mfr/Brand | Model/Type No. | Series No. | Data Ca- ble | Power Cord |
|------|----------------------------|-----------|----------------|------------|-----------------|---------------|
| 1. | Bluetooth Test Software | N/A | N/A | N/A | N/A | N/A |
| 2. | Notebook | Lenovo | L430 | R9-XFG0X | Shielded | Unshielded |
| 3. | DC Power Supply | Agilent | E3640A | KR93300208 | N/A | Unshielded |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留列天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions if any. The Company's call their right and obligations under the Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page 9 of 50

SUMMARY OF TEST RESULTS

| FCC Rules | IC Rules | Description Of Test | Result |
|-----------------------|--|--|-----------|
| §15.207(a) | RSS-Gen §8.8 | AC Power Line Conducted Emission | Compliant |
| §15.247(b) (3) | RSS-247 §5.4(4) | Peak Output Power | Compliant |
| §15.247(a)(2) | RSS-247 §5.1 (1) RSS-Gen §6.7 | 6dB & 99% Emission Bandwidth | Compliant |
| §15.247(d) | RSS-247 §5.5 RSS-Gen §8.10 | Conducted Band Edge and Spurious Emission | Compliant |
| §15.247(d) | RSS-247 §5.5 RSS-Gen §8.9 RSS-Gen §8.10 RSS-Gen §6.13 | Radiated Band Edge and Spurious Emission | Compliant |
| §15.247(e) | RSS-247 §5.2(2) | Peak Power Density | Compliant |
| §15.203 §15.247(b) | RSS- Gen §6.8 | Antenna Requirement | Compliant |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms edocument.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or approaches of this document is unlawful and effenders may be prosequed to the fullest extent of the law pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page 10 of 50

DESCRIPTION OF TEST MODES

4.1 Operated in 2400 ~ 2483.5MHz Band

40 channels are provided for Bluetooth LE

| ITEM | FREQUENCY | ITEM | FREQUENCY | ITEM | FREQUENCY |
|------|-----------|------|-----------|------|-----------|
| 1 | 2402 MHz | 15 | 2430 MHz | 29 | 2458 MHz |
| 2 | 2404 MHz | 16 | 2432 MHz | 30 | 2460 MHz |
| 3 | 2406 MHz | 17 | 2434 MHz | 31 | 2462 MHz |
| 4 | 2408 MHz | 18 | 2436 MHz | 32 | 2464 MHz |
| 5 | 2410 MHz | 19 | 2438 MHz | 33 | 2466 MHz |
| 6 | 2412 MHz | 20 | 2440 MHz | 34 | 2468 MHz |
| 7 | 2414 MHz | 21 | 2442 MHz | 35 | 2470 MHz |
| 8 | 2416MHz | 22 | 2444 MHz | 36 | 2472 MHz |
| 9 | 2418 MHz | 23 | 2446 MHz | 37 | 2474 MHz |
| 10 | 2420 MHz | 24 | 2448 MHz | 38 | 2476 MHz |
| 11 | 2422 MHz | 25 | 2450 MHz | 39 | 2478 MHz |
| 12 | 2424 MHz | 26 | 2452 MHz | 40 | 2480 MHz |
| 13 | 2426 MHz | 27 | 2454 MHz | | |
| 14 | 2428 MHz | 28 | 2456 MHz | | |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms edocument.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or approaches of this document is unlawful and effenders may be prosequed to the fullest extent of the law pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page 11 of 50

4.2 The Worst Test Modes and Channel Details

- 1. The EUT has been tested under operating condition.
- 2. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

AC POWER LINE CONDUCTED EMISSION TEST:

| Test Condition | AC Power line conducted emission for line and neutra | |
|----------------|--|--|
| Worst Case | Operation in normal mode | |

RADIATED EMISSION TEST:

| MODE | AVAILABLE FREQUENCY (MHz) | TESTED FREQUENCY (MHz) | MODULATION | DATA RATE (Mbps) | |
|--------------------------------------|---------------------------------|---------------------------|------------|---------------------|--|
| RADIATED EMISSION TEST (BELOW 1 GHz) | | | | | |
| Bluetooth LE | 2402 to 2480 | 2402, 2442, 2480 | GFSK | 1 | |
| RADIATED EMISSION TEST (ABOVE 1 GHz) | | | | | |
| Bluetooth LE | 2402 to 2480 | 2402, 2442, 2480 | GFSK | 1 | |
| N. 4 | | | | | |

Note:

The field strength of radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for Bluetooth LE Transmitter for channel Low, Mid and High, the worst case H position was reported.


ANTENNA PORT CONDUCTED MEASUREMENT:

| CONDUCTED TEST | | | | | |
|----------------|---------------------------------|---------------------------|------------|---------------------|--|
| MODE | AVAILABLE FREQUENCY (MHz) | TESTED FREQUENCY (MHz) | MODULATION | DATA RATE (Mbps) | |
| Bluetooth LE | 2402 to 2480 | 2402, 2442, 2480 | GFSK | 1 | |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留切天。本報告未經本公司書面許可,不可都份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm.

Attention is drawn to the limitation of liability, indemnification and www.sgs.com/terms e-document.htm. Jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.





MEASUREMENT UNCERTAINTY

| PARAMETER | UNCERTAINTY |
|---|---------------|
| AC Powerline Conducted Emission | +/- 1.2575 dB |
| Peak Output Power | +/- 1.922 dB |
| 6dB Bandwidth | +/- 61.248 Hz |
| 100 kHz Bandwidth of Frequency Band Edges | +/- 1.922 dB |
| Peak Power Density | +/- 2.004 dB |
| 3M Semi Anechoic Chamber / 30M~200M | +/- 4.12 dB |
| 3M Semi Anechoic Chamber / 200M~1000M | +/- 4.68 dB |
| 3M Semi Anechoic Chamber / 1G~8G | +/- 5.18 dB |
| 3M Semi Anechoic Chamber / 8G~18G | +/- 5.47 dB |
| 3M Semi Anechoic Chamber / 18G~26G | +/- 3.81 dB |
| 3M Semi Anechoic Chamber / 26G~40G | +/- 3.87 dB |

Note:

- 1. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
- 2. ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report.
- 3. The conformity assessment statement in this report is based solely on the test results, measurement uncertainty is excluded.

Page 13 of 50



CONDUCTED EMISSION TEST

6.1 Standard Applicable:

Frequency range within 150kHz to 30MHz shall not exceed the Limit table as below.

| Frequency range | Limits dB(uV) | | | |
|-----------------|--------------------|----------|--|--|
| MHz | Quasi-peak Average | | | |
| 0.15 to 0.50 | 66 to 56 | 56 to 46 | | |
| 0.50 to 5 | 56 | 46 | | |
| 5 to 30 | 60 | 50 | | |

6.2 Measurement Equipment Used:

| | Conducted Emission Test Site | | | | | | |
|-------------------|------------------------------|--|------------------|--------------|------------|--|--|
| EQUIPMENT TYPE | MFR | MODEL Number | SERIAL NUMBER | LAST CAL. | CAL DUE. | | |
| CABLE | EMCI | CFD300-NL | CERF | 06/29/2018 | 06/28/2019 | | |
| EMI Test Receiver | R&S | ESCI | 100064 | 07/24/2018 | 07/23/2019 | | |
| LISN | SCHWARZ- BECK | NSLK 8127 | 8127-541 | 01/31/2019 | 01/30/2020 | | |
| LISN | SCHAFFNER | CHAFFNER NNB 41 03/10013 02/13/2019 02/12/2020 | | | | | |
| Software | | EZ-EMC(CCS-3A1-CE) | | | | | |

6.3 EUT Setup:

- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.10:2013.
- 2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
- 3. The LISN was connected with 120Vac/60Hz power source.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留切天。本報告未經本公司書面許可,不可都份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm.


Attention is drawn to the limitation of liability, indemnification and www.sgs.com/terms e-document.htm. jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

^{1.} The lower limit shall apply at the transition frequencies

^{2.} The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50



6.4 Test SET-UP (Block Diagram of Configuration)

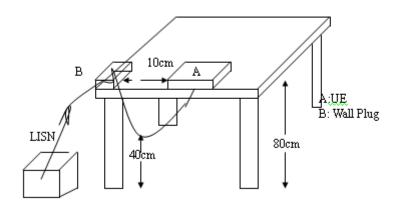

6.5 Measurement Procedure:

- 1. The EUT was placed on a table which is 0.8m above ground plan.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all phases of power being supplied by given UE are completed

6.6 Measurement Result:


Note: Refer to next page for measurement data and plots.

Note2: The * reveals the worst-case results that closet to the limit.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留切天。本報告未經本公司書面許可,不可都份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm.

Attention is drawn to the limitation of liability, indemnification and www.sgs.com/terms e-document.htm. jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.





Page 15 of 50

AC POWER LINE CONDUCTED EMISSION TEST DATA

Job No.: T190307W01-RP2 Date: 2019/3/11

01:35:48 PM Company: **Suunto Oy** Time:


Temp.(°C)/Hum.(%): 23(°C)/52% NCC/FCC/IC QP Standard:

Test item: **Conduction test** Test By: Peter

L1 Test Voltage: AC 120V/60Hz Line:

Model: **OW185**


Description: Operation

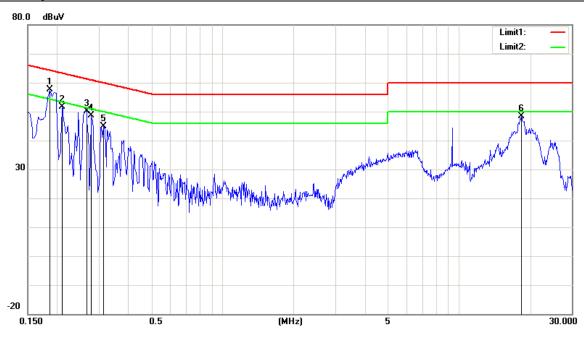

| No. | Frequency | QuasiPeak | Average | Correction | QuasiPeak | Average | QuasiPeak | Average | QuasiPeak | Average | Remark |
|-----|-----------|-----------|---------|------------|-----------|---------|-----------|---------|-----------|---------|--------|
| | | reading | reading | factor | result | result | limit | limit | margin | margin | |
| | (MHz) | (dBuV) | (dBuV) | (dB) | (dBuV) | (dBuV) | (dBuV) | (dBuV) | (dB) | (dB) | |
| 1* | 0.1860 | 55.01 | 37.50 | 0.15 | 55.16 | 37.65 | 64.21 | 54.21 | -9.05 | -16.56 | Pass |
| 2 | 0.2100 | 50.73 | 31.14 | 0.15 | 50.88 | 31.29 | 63.21 | 53.21 | -12.33 | -21.92 | Pass |
| 3 | 0.2660 | 46.85 | 28.58 | 0.15 | 47.00 | 28.73 | 61.24 | 51.24 | -14.24 | -22.51 | Pass |
| 4 | 0.2780 | 45.13 | 23.99 | 0.15 | 45.28 | 24.14 | 60.88 | 50.88 | -15.60 | -26.74 | Pass |
| 5 | 0.3140 | 41.04 | 23.75 | 0.16 | 41.20 | 23.91 | 59.86 | 49.86 | -18.66 | -25.95 | Pass |
| 6 | 18.4180 | 42.24 | 33.44 | 0.66 | 42.90 | 34.10 | 60.00 | 50.00 | -17.10 | -15.90 | Pass |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留切天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms at www.sgs.com/terms and conditions for Electronic Documents at www.sgs.com/terms at ww jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.





Job No.: T190307W01-RP2 Date: 2019/3/11

01:40:20 PM Time: Company: **Suunto Oy**


Temp.(°C)/Hum.(%): 23(°C)/52% NCC/FCC/IC QP Standard:

Test item: **Conduction test** Test By: Peter

Test Voltage: AC 120V/60Hz Line:

Model: **OW185**


Description: Operation

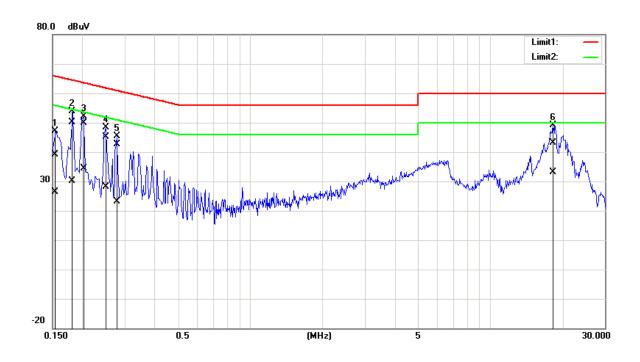

| No. | Frequency | QuasiPeak | Average | Correction | QuasiPeak | Average | QuasiPeak | Average | QuasiPeak | Average | Remark |
|-----|-----------|-----------|---------|------------|-----------|---------|-----------|---------|-----------|---------|--------|
| | | reading | reading | factor | result | result | limit | limit | margin | margin | |
| | (MHz) | (dBuV) | (dBuV) | (dB) | (dBuV) | (dBuV) | (dBuV) | (dBuV) | (dB) | (dB) | |
| 1 | 0.1540 | 39.10 | 26.35 | 0.10 | 39.20 | 26.45 | 65.78 | 55.78 | -26.58 | -29.33 | Pass |
| 2 | 0.1820 | 49.91 | 30.06 | 0.10 | 50.01 | 30.16 | 64.39 | 54.39 | -14.38 | -24.23 | Pass |
| 3* | 0.2020 | 49.90 | 34.18 | 0.10 | 50.00 | 34.28 | 63.53 | 53.53 | -13.53 | -19.25 | Pass |
| 4 | 0.2500 | 45.14 | 28.13 | 0.10 | 45.24 | 28.23 | 61.76 | 51.76 | -16.52 | -23.53 | Pass |
| 5 | 0.2780 | 42.50 | 23.12 | 0.10 | 42.60 | 23.22 | 60.88 | 50.88 | -18.28 | -27.66 | Pass |
| 6 | 18.3060 | 42.62 | 32.59 | 0.52 | 43.14 | 33.11 | 60.00 | 50.00 | -16.86 | -16.89 | Pass |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留切天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms at www.sgs.com/terms and conditions for Electronic Documents at www.sgs.com/terms at ww jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page 17 of 50



PEAK OUTPUT POWER MEASUREMENT

7.1 Standard Applicable:

For systems using digital modulation in the 2400-2483.5 MHz bands, the limit for peak output power is 1Watt.


If the transmitting antenna of directional gain greater than 6dBi are used the peak output power form the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the Antenna exceeds 6dBi.

In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of Antenna exceeds 6dBi.

7.2 Measurement Equipment Used:

| | Conducted Emission Test Site | | | | | | | |
|-------------------|------------------------------|--------------------|------------------|--------------|------------|--|--|--|
| EQUIPMENT TYPE | MFR | MODEL NUMBER | SERIAL NUMBER | LAST CAL. | CAL DUE. | | | |
| Power Meter | Anritsu | ML2496A | 1242004 | 10/23/2018 | 10/22/2019 | | | |
| Power Sensor | Anritsu | MA2411B | 1207365 | 10/23/2018 | 10/22/2019 | | | |
| Power Sensor | Anritsu | MA2411B | 1207368 | 10/24/2018 | 10/23/2019 | | | |
| Attenuator | Agilent | 8494B | MY42152151 | 02/26/2019 | 02/25/2020 | | | |
| Cable | HUBER SU- HNER | SUCOFLEX 104PEA | 25157 | 02/26/2019 | 02/25/2020 | | | |

7.3 Test Set-up:



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留切天。本報告未經本公司書面許可,不可都份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm.

Attention is drawn to the limitation of liability, indemnification and www.sgs.com/terms e-document.htm. jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



7.4 Measurement Procedure:

- 1.Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas Guidance & ANSI C63.10..
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter.

Power Meter:

It is used as the auxiliary test equipment to conduct the output power measurement.

- 4. Record the max. Reading as observed from Power Meter.
- 5. Repeat above procedures until all test default channel measured was complete.


Formula:

Duty Cycle = Ton / (Ton+Toff)

Duty Factor:

| | Duty Cycle (%) | Duty Factor (dB) | 1/T (kHz) | VBW setting (kHz) |
|-----|----------------|---------------------|--------------|-------------------------|
| BLE | 62.00 | 2.08 | 2.56 | 3.00 |

Duty Cycle Factor: 10*log(1/(62/100))=2.08

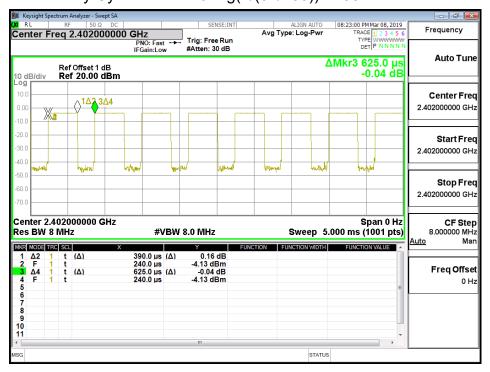

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留切天。本報告未經本公司書面許可,不可都份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm.

Attention is drawn to the limitation of liability, indemnification and www.sgs.com/terms e-document.htm. jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.





7.5 **Measurement Result:**

BI F mode.

| PLE IIIO | ue. | | |
|----------|--------------------|--|-----------------|
| СН | Frequency (MHz) | Peak Power Output (dBm) | Required Limit |
| 0 | 2402 | 1.54 | 1 Watt = 30 dBm |
| 20 | 2442 | 0.92 | 1 Watt = 30 dBm |
| 39 | 2480 | 0.44 | 1 Watt = 30 dBm |
| BLE mo | de: | | |
| СН | Frequency (MHz) | Max. Avg. Output include tune up tolerance Power (dBm) | Required Limit |
| 0 | 2402 | 1.43 | 1 Watt = 30 dBm |
| 20 | 2442 | 0.76 | 1 Watt = 30 dBm |
| 39 | 2480 | 0.24 | 1 Watt = 30 dBm |

^{*}Note: Measured by power meter, cable loss as 1 dB that offsets on the power meter in Peak

EIRP

| СН | Frequency (MHz) | Max. Avg. Output include tune up tolerance Power (dBm) | Antenna Gain (dBi) | EIRP (dBm) | | Limit | |
|----|--------------------|--|--------------------------|---------------|-----|-------|-----|
| 0 | 2402 | 1.43 | -4.49 | -3.06 | 4W= | 36 | dBm |
| 20 | 2442 | 0.76 | -4.49 | -3.73 | 4W= | 36 | dBm |
| 39 | 2480 | 0.24 | -4.49 | -4.25 | 4W= | 36 | dBm |


^{*} Note: EIRP = Average Power + Gain

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留切天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms at www.sgs.com/terms and conditions for Electronic Documents at www.sgs.com/terms at ww jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appropriate in plantful and effective provided to the full and of the content or approval. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

^{*}Note: Measured by power meter, as cable loss+ Duty cycle factor that offsets on the power meter

^{*}Note: Max. Output include tune up tolerance Power is average power



Page 20 of 50



6DB & 99% BANDWIDTH MEASUREMENT 8


8.1 Standard Applicable

The minimum 6 dB bandwidth shall be at least 500 kHz.

8.2 Measurement Equipment Used

| | Conducted Emission Test Site | | | | | | | | |
|-------------------|------------------------------|--------------------|------------------|--------------|------------|--|--|--|--|
| EQUIPMENT TYPE | MFR | MODEL NUMBER | SERIAL NUMBER | LAST CAL. | CAL DUE. | | | | |
| Spectrum Analyzer | Agilent | N9010A | MY53400256 | 11/21/2018 | 11/20/2019 | | | | |
| DC Power Supply | Agilent | E3640A | KR93300208 | 08/15/2018 | 08/14/2019 | | | | |
| Attenuator | Agilent | 8494B | MY42152151 | 02/26/2019 | 02/25/2020 | | | | |
| Cable | HUBER SU- HNER | SUCOFLEX 104PEA | 25157 | 02/26/2019 | 02/25/2020 | | | | |

8.3 Test Set-up:



8.4 Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance & ANSI C63.10.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. For 6dB Bandwidth:

Set the spectrum analyzer as RBW=100 kHz, VBW= 3*RBW, Span = 5MHz, Detector=Peak, Sweep=auto.

- 5. Mark the peak frequency and -6dB (upper and lower) frequency.
- 6. For 99% Bandwidth:

Set the spectrum analyzer as RBW=1%, VBW=3*RBW, Span = 2MHz, Detector=Sample, Sweep=auto.

- 7. Turn on the 99% bandwidth function, max reading.
- 8. Repeat above procedures until all test default channel is completed

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留切天。本報告未經本公司書面許可,不可都份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm.

Attention is drawn to the limitation of liability, indemnification and www.sgs.com/terms e-document.htm. jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page 21 of 50

8.5 Measurement Result:

BLE mode

| Frequency (MHz) | 6dB BW (MHz) | BW (MHz) | Result |
|--------------------|--------------------|-------------|--------|
| 2402 | 0.688 | > 0.5 | PASS |
| 2442 | 0.693 | > 0.5 | PASS |
| 2480 | 0.676 | > 0.5 | PASS |

BLE mode

| Frequency (MHz) | 99%Bandwidth (MHz) |
|-----------------|--------------------|
| 2402 | 1.0558 |
| 2442 | 1.0568 |
| 2480 | 1.0483 |


Note: Refer to next page for plots.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms edocument.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or approaches of this document is unlawful and effenders may be prosequed to the fullest extent of the law pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



6dB Band Width Test Data CH-Low

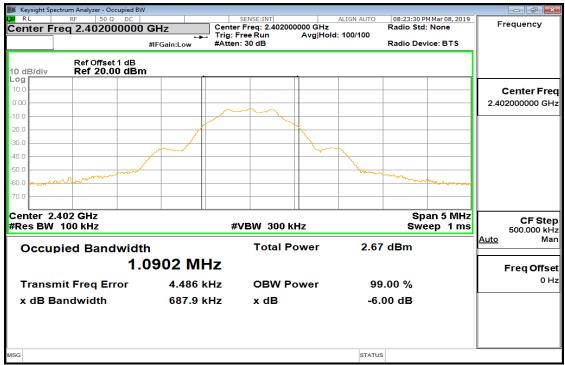


6dB Band Width Test Data CH-Mid




Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



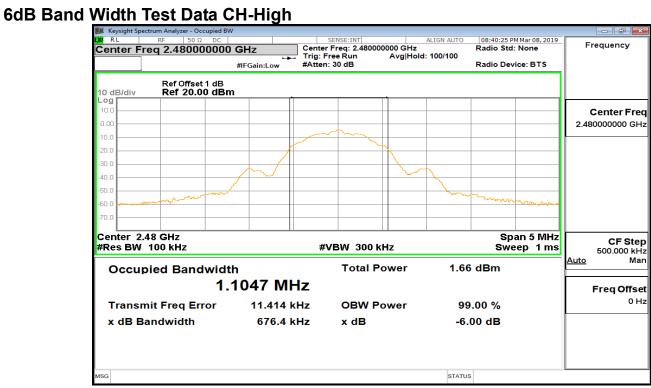


99% Band Width Test Data CH-Low

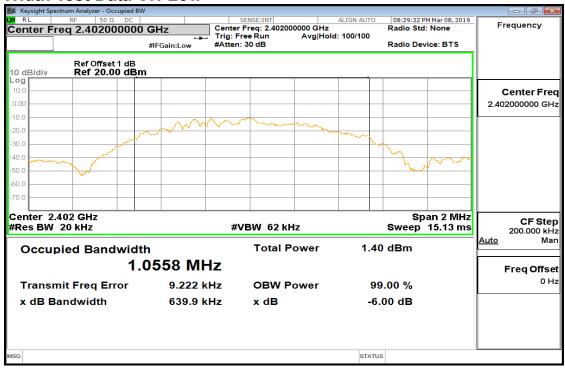


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




99% Band Width Test Data CH-Mid

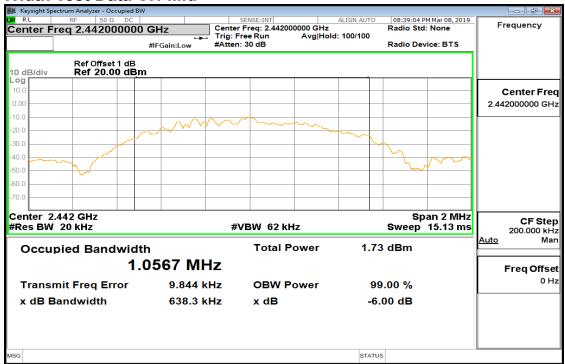

99% Band Width Test Data CH-High

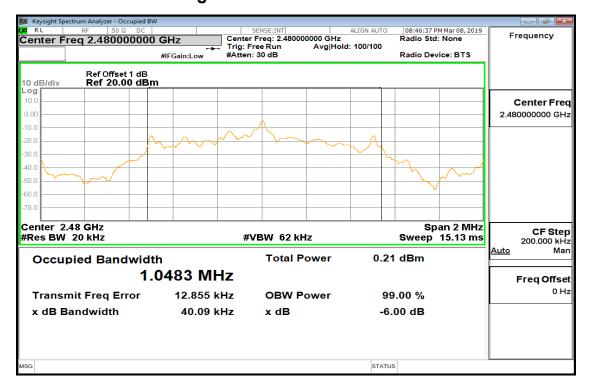

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 25 of 50



CONDUCTED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT

9.1 Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power


In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a) & RSS-Gen §8.10, must also comply with the radiated emission limits specified in §15.209(a) & RSS-Gen §8.9.

If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

9.2 Measurement Equipment Used:

| | Conducted Emission Test Site | | | | | | | |
|-------------------|------------------------------|--------------------|------------------|--------------|------------|--|--|--|
| EQUIPMENT TYPE | MFR | MODEL NUMBER | SERIAL NUMBER | LAST CAL. | CAL DUE. | | | |
| Spectrum Analyzer | Agilent | N9010A | MY53400256 | 11/21/2018 | 11/20/2019 | | | |
| DC Power Supply | Agilent | E3640A | KR93300208 | 08/15/2018 | 08/14/2019 | | | |
| Attenuator | Agilent | 8494B | MY42152151 | 02/26/2019 | 02/25/2020 | | | |
| Cable | HUBER SUHNER | SUCOFLEX 104PEA | 25157 | 02/26/2019 | 02/25/2020 | | | |


9.3 Test SET-UP:



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留切天。本報告未經本公司書面許可,不可都份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm.

Attention is drawn to the limitation of liability, indemnification and www.sgs.com/terms e-document.htm. jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.





9.4 Measurement Procedure

Reference Level of Emission Limit:

- Set analyzer center frequency to DTS channel center frequency.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance & ANSI C63.10.
- 3. Set the span to 1.5 times the DTS channel bandwidth.
- 4. Set the RBW = 100kHz & VBW = 300 kHz.
- 5. Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum amplitude level.

Conducted Band Edge:

- To connect Antenna Port of EUT to Spectrum.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance & ANSI C63.10.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set start to edge frequency, and stop frequency of spectrum analyzer so as to encompass the spectrum to be examined.
- 5. Set the spectrum analyzer as RBW=100 kHz, VBW=300 kHz, Detector = Peak, Sweep = auto
- 6. Mark the highest reading of the emission as the reference level measurement.
- 7. Marker on frequency, 2.3999GHz and 2.4836GHz, and examine shall 100 kHz immediately outside the authorized (2400~2483.5) be attenuated by 20dB at least relative to the maximum emission of power.
- 8. Repeat above procedures until all default test channel (low, middle, and high) was complete.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only



Page 27 of 50

Conducted Spurious Emission:

- To connect Antenna Port of EUT to Spectrum.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance & ANSI C63.10.
- Set RBW = 100 kHz & VBW=300 kHz, Detector =Peak, Sweep = Auto
- 4. Allow trace to fully stabilize.
- 5. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.
- 6. Repeat above procedures until all default test channel measured were complete.

9.5 Measurement Result

Reference Level of Limit

| Frequency (MHz) | RF Power Density (dBm) | Reference Level of Limit = PSD - 20dB (dBm) |
|--------------------|---------------------------|---|
| 2402 | -4.18 | -24.18 |
| 2442 | -4.13 | -24.13 |
| 2480 | -4.35 | -24.35 |


NOTE: cable loss as 1dB that offsets in the spectrum

NOTE: Refer to next page for plots.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留切天。本報告未經本公司書面許可,不可都份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm.

Attention is drawn to the limitation of liability, indemnification and www.sgs.com/terms e-document.htm. Jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.






Reference Level of Emission Limit (CH-Low)

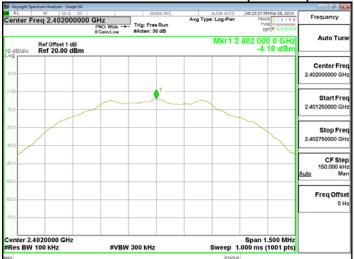


Reference Level of Emission Limit (CH-Mid)




Reference Level of Emission Limit (CH-High)

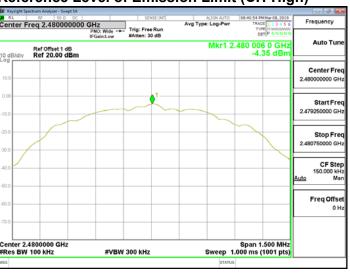


Band Edges Test Data CH-Low

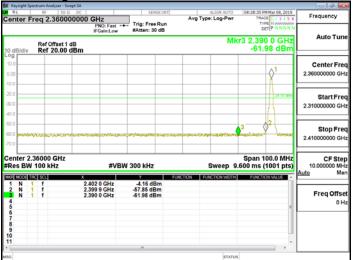

Band Edges Test Data CH-High

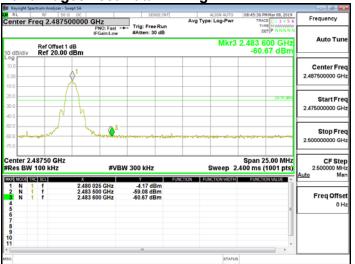


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






Conducted Spurious Emission Measurement Result


CH-Low

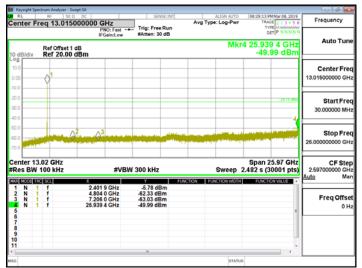


CH-Mid

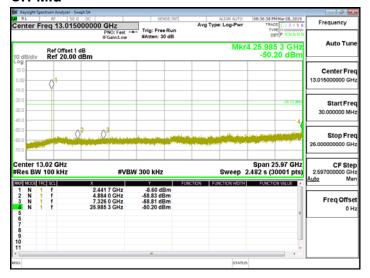

CH-High

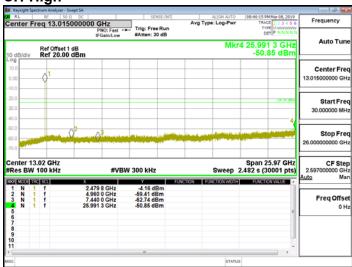

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 30 of 50



10 RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT

Standard Applicable 10.1

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands must also comply with the RSS-Gen §8.10 Table 7.

And according to 15.33(a)(1) & RSS-Gen §6.13(a) for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

According to RSS-Gen §8.9 Table 5 & 6 Except where otherwise indicated in the applicable RSS, radiated emissions shall comply with the field strength limits shown in table 5 and table 6. Additionally, the level of any transmitter unwanted emission shall not exceed the level of the transmitter's fundamental emission

| Frequency (MHz) | Field strength (microvolts/meter) | Distance (meters) |
|--------------------|--------------------------------------|----------------------|
| 0.009-0.490 | 2400/F(kHz) | 300 |
| 0.490-1.705 | 24000/F(kHz) | 30 |
| 1.705-30 | 30 | 30 |
| 30-88 | 100 | 3 |
| 88-216 | 150 | 3 |
| 216-960 | 200 | 3 |
| Above 960 | 500 | 3 |


Note:

- 1. The lower limit shall apply at the transition frequencies.
- 2. Emission level $(dB\mu V/m) = 20 \log Emission level (dB\mu V/m)$

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留切天。本報告未經本公司書面許可,不可都份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm.

Attention is drawn to the limitation of liability, indemnification and www.sgs.com/terms e-document.htm. jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.





10.2 **Measurement Equipment Used**

| 966A Chamber | | | | | | | |
|-------------------------------------|-------------------|--------------------|------------------|--------------|------------|--|--|
| EQUIPMENT TYPE | MFR | MODEL NUMBER | SERIAL NUMBER | LAST CAL. | CAL DUE. | | |
| Band Reject Filters | MICRO TRONICS | BRM 50702 | 120 | 02/26/2019 | 02/25/2020 | | |
| Bilog Antenna | Sunol Sciences | JB3 | A030105 | 07/13/2018 | 07/12/2019 | | |
| Cable | HUBER SUHNER | SUCOFLEX 104PEA | 25157 | 02/26/2019 | 02/25/2020 | | |
| Cable | HUBER SUHNER | SUCOFLEX 104PEA | 20995 | 02/26/2019 | 02/25/2020 | | |
| Digital Thermo-Hygro Meter | WISEWIND | 1206 | D07 | 01/30/2019 | 01/29/2020 | | |
| double Ridged Guide Horn Antenna | ETC | MCTD 1209 | DRH13M0200 3 | 08/20/2018 | 08/19/2019 | | |
| Loop Ant | COM-POWER | AL-130 | 121051 | 03/21/2018 | 03/20/2019 | | |
| Pre-Amplifier | EMEC | EM330 | 060609 | 02/26/2019 | 02/25/2020 | | |
| Pre-Amplifier | HP | 8449B | 3008A00965 | 02/26/2019 | 02/25/2020 | | |
| PSA Series Spectrum Analyzer | Agilent | E4446A | MY46180323 | 05/31/2018 | 05/30/2019 | | |
| Antenna Tower | CCS | CC-A-1F | N/A | N.C.R | N.C.R | | |
| Controller | CCS | CC-C-1F | N/A | N.C.R | N.C.R | | |
| Turn Table | CCS | CC-T-1F | N/A | N.C.R | N.C.R | | |
| Software | e3 V6.11-20180413 | | | | | | |

NOTE: N.C.R refers to Not Calibrated Required.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms edocument.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or approaches of this document is unlawful and effenders may be prosequed to the fullest extent of the law pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




10.3 **Test SET-UP**


(A) Radiated Emission Test Set-UP Frequency Below 30MHz.

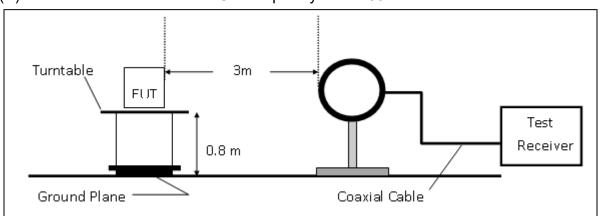

(B) Radiated Emission Test Set-Up, Frequency form 30MHz to 1000MHz

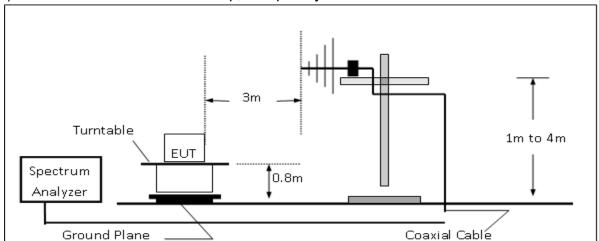


(C) Radiated Emission Test Set-UP Frequency Over 1 GHz

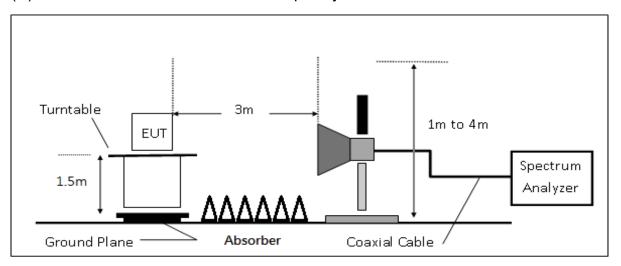

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留切天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms at www.sgs.com/terms and conditions for Electronic Documents at www.sgs.com/terms at ww jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



10.4 **Measurement Procedure**

- 1. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance & ANSI C63.10.
- 2. The EUT was placed on a turn table with 0.8m for frequency< 1GHz and 1.5m for frequency> 1GHz above ground plan.
- 3. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 4. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
- 5. Set the spectrum analyzer as RBW=120 kHz and VBW=300 kHz for Peak Detector (PK) and Quasi-peak (QP) at frequency below 1 GHz.
- 6. Set the spectrum analyzer as RBW=1 MHz, VBW=3 MHz for Peak Detector at frequency above 1 GHz.
- Set the spectrum analyzer as RBW=1 MHz, VBW=10 Hz (Duty cycle > 98%) or VBW ≥ 1/T (Duty cycle < 98%) for Average Detector at frequency above 1 GHz.
- 8. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.
- 9. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 10. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. On spectrum, change spectrum mode in linear display mode, and reduce VBW = 10Hz if average reading is measured.
- 11. Repeat above procedures until all default test channel measured were complete.



Page 34 of 50

10.5 **Field Strength Calculation**

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

| Where | <u> </u> | CL = Cable Attenuation Factor (Cable Loss) |
|-------|------------------------|--|
| | RA = Reading Amplitude | AG = Amplifier Gain |
| | AF = Antenna Factor | |

Actual FS(dB μ V/m) = SPA. Reading level(dB μ V) + Factor(dB)

Factor(dB) = Antenna Factor(dBµV/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

10.6 Test Results of Radiated Spurious Emissions form 9 kHz to 30 MHz

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit per 15.31(o) was not reported.

10.7 **Measurement Result:**

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留切天。本報告未經本公司書面許可,不可都份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm.

Attention is drawn to the limitation of liability, indemnification and www.sgs.com/terms e-document.htm. Jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page 35 of 50


Radiated Band Edge Measurement Result

:BLE **Operation Band Test Date** :2019-03-10

Fundamental Frequency Temp./Humi. :2402 MHz :21.5 deg C / 63 RH

Operation Mode :Bandedge CH LOW Engineer :Wei

EUT Pol. :H Plane :VERTICAL Measurement Antenna Pol.

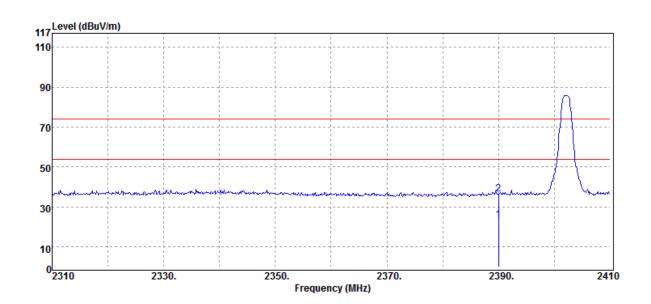

| Freq. | Detector | Spectrum | Factor | Actual | Limit | Margin | |
|---------|----------|---------------|--------|--------|--------|--------|--|
| | Mode | Reading Level | | FS | @3m | - | |
| MHz | PK/QP/AV | dΒμV | dB | dBµV/m | dBµV/m | dB | |
| 2390.00 | Average | 26.77 | -3.33 | 23.44 | 54.00 | -30.56 | |
| 2390.00 | Peak | 39.68 | -3.33 | 36.35 | 74.00 | -37.65 | |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留切天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms at www.sgs.com/terms and conditions for Electronic Documents at www.sgs.com/terms at ww jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page 36 of 50

Operation Band Fundamental Frequency **Operation Mode** EUT Pol.

:BLE :2402 MHz

:Bandedge CH LOW


:H Plane

Test Date :2019-03-10

Temp./Humi. :21.5 deg_C / 63 RH

Engineer :Wei

:HORIZONTAL Measurement Antenna Pol.

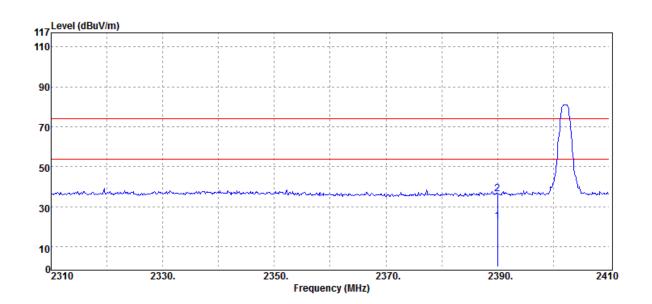

| Freq. | Detector | Spectrum | Factor | Actual | Limit | Margin |
|---------|----------|---------------|--------|--------|--------|--------|
| | Mode | Reading Level | | FS | @3m | |
| MHz | PK/QP/AV | dΒμV | dB | dBµV/m | dBµV/m | dB |
| 2390.00 | Average | 25.93 | -3.33 | 22.60 | 54.00 | -31.40 |
| 2390.00 | Peak | 39.89 | -3.33 | 36.56 | 74.00 | -37.44 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留切天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms at www.sgs.com/terms and conditions for Electronic Documents at www.sgs.com/terms at ww jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page 37 of 50

Operation Band Fundamental Frequency **Operation Mode** EUT Pol.

:BLE :2480 MHz :Bandedge CH HIGH


:H Plane

Test Date :2019-03-10

Temp./Humi. :21.5 deg_C / 63 RH

Engineer :Wei

:VERTICAL Measurement Antenna Pol.

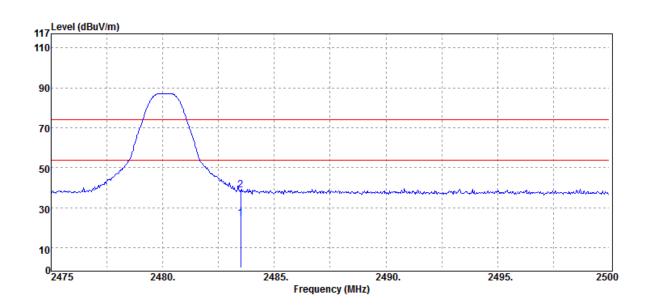

| Freq. | Detector | Spectrum | Factor | Actual | Limit | Margin |
|---------|----------|---------------|--------|--------|--------|--------|
| | Mode | Reading Level | | FS | @3m | - |
| MHz | PK/QP/AV | dBµV | dB | dBµV/m | dBµV/m | dB |
| 2483.50 | Average | 27.31 | -2.72 | 24.59 | 54.00 | -29.41 |
| 2483.50 | Peak | 41.73 | -2.72 | 39.01 | 74.00 | -34.99 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 38 of 50

Operation Band Fundamental Frequency Operation Mode EUT Pol. :BLE :2480 MHz

:Bandedge CH HIGH


:H Plane

Test Date :2019-03-10

Temp./Humi. :21.5 deg_C / 63 RH


Engineer :Wei

Measurement Antenna Pol. :HORIZONTAL

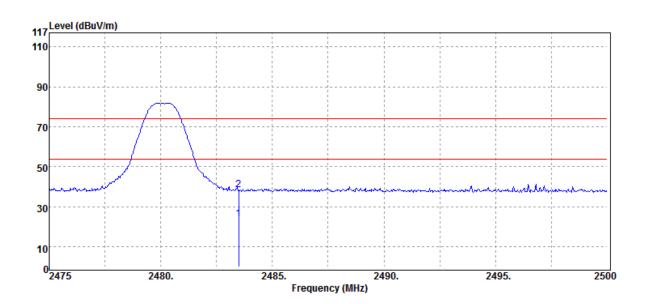

| Freq. | Detector | Spectrum | Factor | Actual | Limit | Margin |
|---------|----------|---------------|--------|--------|--------|--------|
| | Mode | Reading Level | | FS | @3m | - |
| MHz | PK/QP/AV | dΒμV | dB | dBµV/m | dBµV/m | dB |
| 2483.50 | Average | 26.55 | -2.72 | 23.83 | 54.00 | -30.17 |
| 2483.50 | Peak | 41.13 | -2.72 | 38.41 | 74.00 | -35.59 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






Radiated Spurious Emission Measurement Result For Frequency form 30MHz to 1000MHz

Operation Band :BLE **Test Date** :2019-03-12

Fundamental Frequency :2442 MHz Temp./Humi. :21.5 deg C / 63 RH

Operation Mode :Tx CH MID Engineer :Wei

EUT Pol. :H Plan :VERTICAL Measurement Antenna Pol.

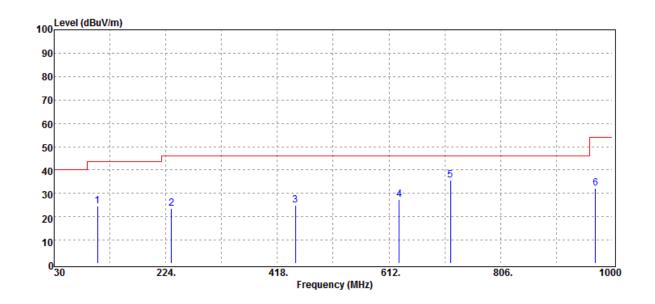

| Freq. | Detector Mode | Spectrum Reading Level | Factor | Actual FS | Limit @3m | Margin |
|--------|------------------|---------------------------|--------|--------------|--------------|--------|
| MHz | PK/QP/AV | dΒμV | dB | dBµV/m | dBμV/m | dB |
| 105.66 | Peak | 35.08 | -10.45 | 24.63 | 43.50 | -18.87 |
| 233.70 | Peak | 33.53 | -9.97 | 23.56 | 46.00 | -22.44 |
| 449.04 | Peak | 28.05 | -3.07 | 24.98 | 46.00 | -21.02 |
| 629.46 | Peak | 26.66 | 0.83 | 27.49 | 46.00 | -18.51 |
| 718.70 | Peak | 34.51 | 1.28 | 35.79 | 46.00 | -10.21 |
| 970.90 | Peak | 25.70 | 6.65 | 32.35 | 54.00 | -21.65 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 40 of 50


Operation Band :BLE Fundamental Frequency :2442 MHz **Operation Mode** :Tx CH MID

EUT Pol. ·H Plan **Test Date** :2019-03-12

Temp./Humi. :21.5 deg_C / 63 RH

Engineer :Wei

:HORIZONTAL Measurement Antenna Pol.

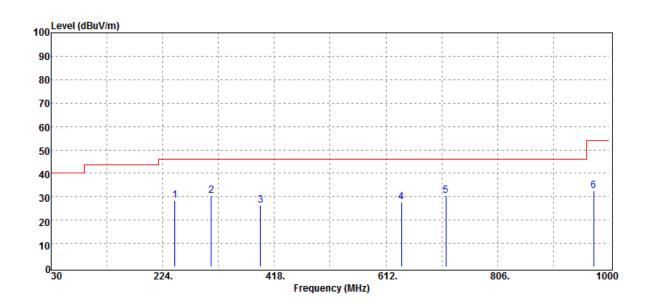

| Freq. | Detector | Spectrum | Factor | Actual | Limit | Margin |
|--------|----------|---------------|--------|--------|--------|--------|
| | Mode | Reading Level | | FS | @3m | |
| MHz | PK/QP/AV | dΒμV | dB | dBµV/m | dBµV/m | dB |
| 245.34 | Peak | 38.23 | -9.70 | 28.53 | 46.00 | -17.47 |
| 308.39 | Peak | 37.64 | -7.25 | 30.39 | 46.00 | -15.61 |
| 393.75 | Peak | 31.08 | -4.94 | 26.14 | 46.00 | -19.86 |
| 639.16 | Peak | 26.95 | 0.83 | 27.78 | 46.00 | -18.22 |
| 715.79 | Peak | 29.32 | 1.24 | 30.56 | 46.00 | -15.44 |
| 972.84 | Peak | 25.73 | 6.65 | 32.38 | 54.00 | -21.62 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 41 of 50


Radiated Spurious Emission Measurement Result For Frequency above 1GHz

Operation Band Test Date :2019-03-10

Fundamental Frequency :2402 MHz Temp./Humi. :21.5 deg C / 63 RH

Operation Mode :Tx CH LOW Engineer :Wei

EUT Pol. :H Plane Measurement Antenna Pol. :VERTICAL

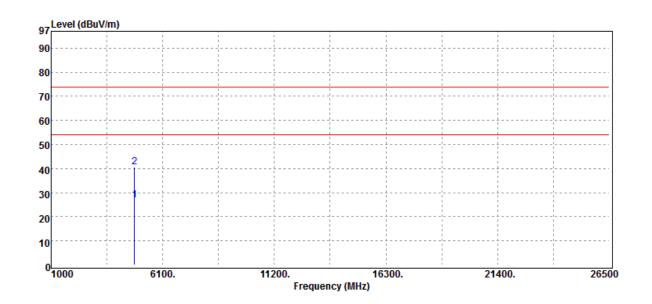

| Freq. | Detector | Spectrum | Factor | Actual | Limit | Margin | |
|---------|----------|---------------|--------|--------|--------|--------|--|
| | Mode | Reading Level | | FS | @3m | | |
| MHz | PK/QP/AV | dΒμV | dB | dBµV/m | dBµV/m | dB | |
| 4804.00 | Average | 23.70 | 3.11 | 26.81 | 54.00 | -27.19 | |
| 4804.00 | Peak | 37.58 | 3.11 | 40.69 | 74.00 | -33.31 | |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 42 of 50

Operation Band Fundamental Frequency **Operation Mode** EUT Pol.


:BLE :2402 MHz :Tx CH LOW :H Plane

Test Date :2019-03-10

Temp./Humi. :21.5 deg_C / 63 RH

Engineer :Wei

:HORIZONTAL Measurement Antenna Pol.

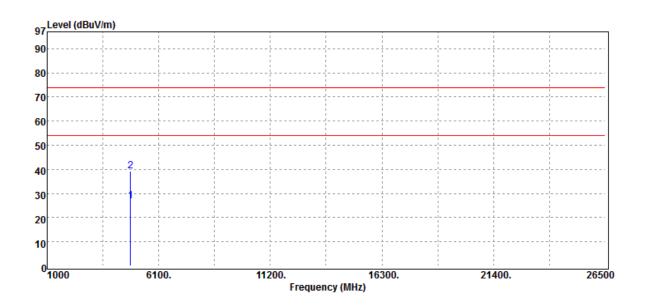

| Freq. | Detector | Spectrum | Factor | Actual | Limit | Margin |
|---------|----------|---------------|--------|--------|--------|--------|
| | Mode | Reading Level | | FS | @3m | - |
| MHz | PK/QP/AV | dBµV | dB | dBµV/m | dBµV/m | dB |
| 4804.00 | Average | 23.81 | 3.11 | 26.92 | 54.00 | -27.08 |
| 4804.00 | Peak | 36.12 | 3.11 | 39.23 | 74.00 | -34.77 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 43 of 50

Operation Band Fundamental Frequency **Operation Mode** EUT Pol.


:BLE :2442 MHz :Tx CH MID :H Plane

Test Date :2019-03-10

Temp./Humi. :21.5 deg_C / 63 RH

Engineer :Wei

:VERTICAL Measurement Antenna Pol.

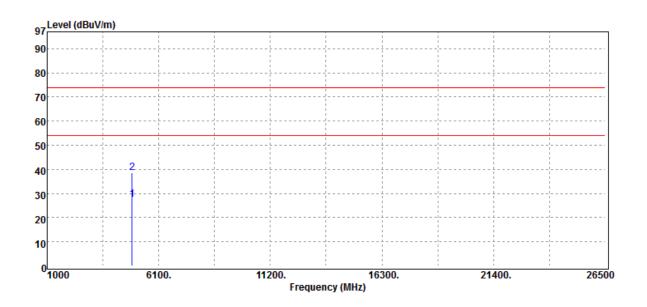

| Freq. | Detector | Spectrum | Factor | Actual | Limit | Margin |
|---------|----------|---------------|--------|--------|--------|--------|
| | Mode | Reading Level | | FS | @3m | - |
| MHz | PK/QP/AV | dBµV | dB | dBµV/m | dBµV/m | dB |
| 4884.00 | Average | 23.94 | 3.47 | 27.41 | 54.00 | -26.59 |
| 4884.00 | Peak | 35.18 | 3.47 | 38.65 | 74.00 | -35.35 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 44 of 50

Operation Band Fundamental Frequency **Operation Mode** EUT Pol.


:BLE :2442 MHz :Tx CH MID :H Plane

Test Date :2019-03-10

Temp./Humi. :21.5 deg_C / 63 RH

Engineer :Wei

:HORIZONTAL Measurement Antenna Pol.

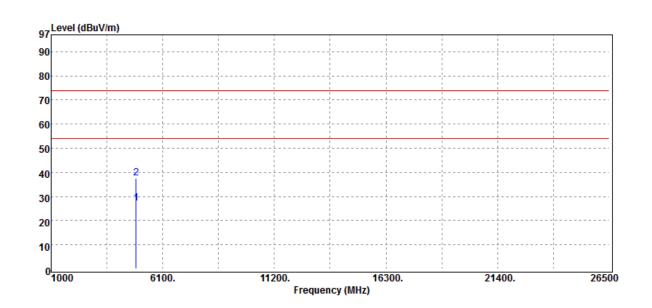

| Freq. | Detector | Spectrum | Factor | Actual | Limit | Margin |
|---------|----------|---------------|--------|--------|--------|--------|
| | Mode | Reading Level | | FS | @3m | - |
| MHz | PK/QP/AV | dΒμV | dB | dBμV/m | dBµV/m | dB |
| 4884.00 | Average | 23.78 | 3.47 | 27.25 | 54.00 | -26.75 |
| 4884.00 | Peak | 34.23 | 3.47 | 37.70 | 74.00 | -36.30 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 45 of 50

Operation Band Fundamental Frequency **Operation Mode** EUT Pol.


:BLE :2480 MHz :Tx CH HIGH :H Plane

Test Date :2019-03-10

Temp./Humi. :21.5 deg_C / 63 RH

Engineer :Wei

:VERTICAL Measurement Antenna Pol.

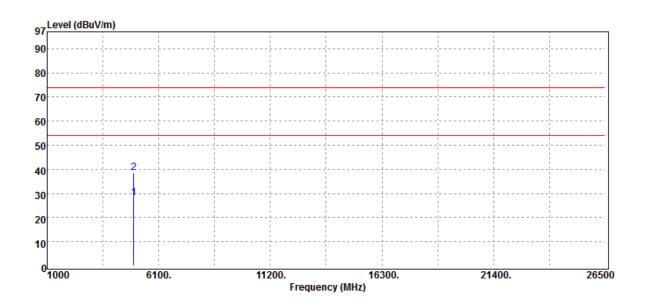

| Freq. | Detector | Spectrum | Factor | Actual | Limit | Margin |
|---------|----------|---------------|--------|--------|--------|--------|
| | Mode | Reading Level | | FS | @3m | - |
| MHz | PK/QP/AV | dΒμV | dB | dBµV/m | dBµV/m | dB |
| 4960.00 | Average | 23.73 | 4.48 | 28.21 | 54.00 | -25.79 |
| 4960.00 | Peak | 34.03 | 4.48 | 38.51 | 74.00 | -35.49 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 46 of 50

Operation Band Fundamental Frequency **Operation Mode** EUT Pol.


:BLE :2480 MHz :Tx CH HIGH :H Plane

Test Date :2019-03-10

Temp./Humi. :21.5 deg_C / 63 RH


Engineer :Wei

:HORIZONTAL Measurement Antenna Pol.

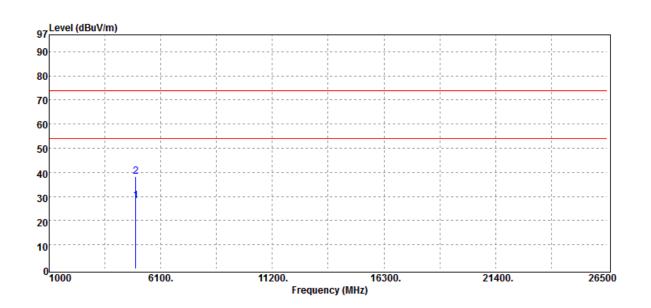

| Freq. | Detector | Spectrum | Factor | Actual | Limit | Margin |
|---------|----------|---------------|--------|--------|--------|--------|
| | Mode | Reading Level | | FS | @3m | |
| MHz | PK/QP/AV | dΒμV | dB | dBµV/m | dBµV/m | dB |
| 4960.00 | Average | 23.61 | 4.48 | 28.09 | 54.00 | -25.91 |
| 4960.00 | Peak | 33.77 | 4.48 | 38.25 | 74.00 | -35.75 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.





11 POWER SPECTRAL DENSITY


11.1 Standard Applicable:

The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

11.2 **Measurement Equipment Used:**

| Conducted Emission Test Site | | | | | | |
|------------------------------|--------------|--------------------|------------------|--------------|------------|--|
| EQUIPMENT TYPE | MFR | MODEL NUMBER | SERIAL NUMBER | LAST CAL. | CAL DUE. | |
| Spectrum Analyzer | Agilent | N9010A | MY53400256 | 11/21/2018 | 11/20/2019 | |
| DC Power Supply | Agilent | E3640A | KR93300208 | 08/15/2018 | 08/14/2019 | |
| Attenuator | Agilent | 8494B | MY42152151 | 02/26/2019 | 02/25/2020 | |
| Cable | HUBER SUHNER | SUCOFLEX 104PEA | 25157 | 02/26/2019 | 02/25/2020 | |

11.3 Test Set-up:




11.4 Measurement Procedure:

- 1. Set analyzer center frequency to DTS channel center frequency.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance & ANSI C63.10.
- 3. Set the span to 1.5 times the DTS channel bandwidth.
- 4. Set the RBW = 3 kHz. & the VBW = 10 kHz
- 5. For defining Restricted Band Edge Limit: Set the RBW = 100kHz & VBW = 300 kHz.
- 6. Detector = peak.
- 7. Sweep time = auto couple.
- 8. Trace mode = max hold.
- 9. Allow trace to fully stabilize.
- 10. Use the peak marker function to determine the maximum amplitude level.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留切天。本報告未經本公司書面許可,不可都份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm.

Attention is drawn to the limitation of liability, indemnification and www.sgs.com/terms e-document.htm. jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.





11.5 **Measurement Result:**


BI F mode

| DEE IIIOGC | | | |
|--------------------|---------------------------|------------------------|--------|
| Frequency (MHz) | RF Power Density (dBm) | Maximum Limit (dBm) | Result |
| 2402 | -14.28 | 8 | PASS |
| 2442 | -13.90 | 8 | PASS |
| 2480 | -13.81 | 8 | PASS |

NOTE: cable loss as 1dB that offsets in the spectrum

BLE mode

Power Spectral Density Test Plot (CH-Low)

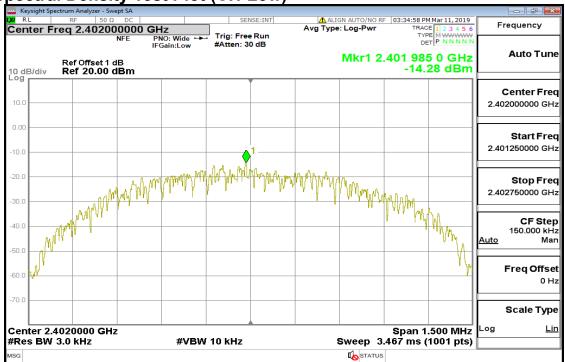


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Page 49 of 50



Power Spectral Density Test Plot (CH-Mid)

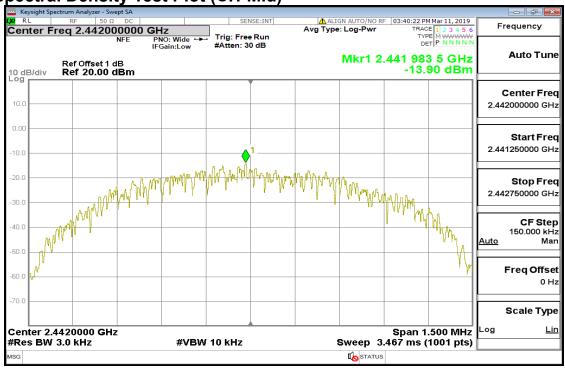

Power Spectral Density Test Plot (CH-High)

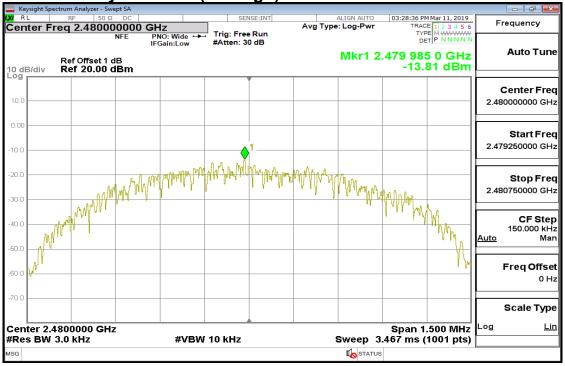

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留切天。本報告未經本公司書面許可,不可都份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm.

Attention is drawn to the limitation of liability, indemnification and www.sgs.com/terms e-document.htm. jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page 50 of 50

12 ANTENNA REQUIREMENT

12.1 Standard Applicable:

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device.

If the transmitting antenna is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi.

In case of point-to-point operation, the power shall be reduced by the one dB for every 3 dB that the directional gain of antenna exceeds 6dBi.

12.2 **Antenna Connected Construction:**

The antenna is designed as permanently attached and no consideration of replacement. Please see EUT photo for details.

~ End of Report ~

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留切天。本報告未經本公司書面許可,不可都份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm.

Attention is drawn to the limitation of liability, indemnification and www.sgs.com/terms e-document.htm. jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.