



<b>Prüfbericht-Nr.:</b> <i>Test report no.:</i>	60404737 001	<b>Auftrags-Nr.:</b> <i>Order no.:</i>	238487762	Seite 1 von 32 Page 1 of 32
<b>Kunden-Referenz-Nr.:</b> <i>Client reference no.:</i>	N/A	<b>Auftragsdatum:</b> <i>Order date:</i>	12-Jun-2020	
<b>Auftraggeber:</b> <i>Client:</i>	TAIYO YUDEN CO., LTD. 43-1, Yawatabara-machi, Takasaki-shi, Gunma, 370-0024, Japan			
<b>Prüfgegenstand:</b> <i>Test item:</i>	Bluetooth low energy/ ANT/ 802.15.4 Module			
<b>Bezeichnung / Typ-Nr.:</b> <i>Identification / Type no.:</i>	EYSPBN			
<b>Auftrags-Inhalt:</b> <i>Order content:</i>	FCC Part 15C Test report			
<b>Prüfgrundlage:</b> <i>Test specification:</i>	FCC 47CFR Part 15: Subpart C Section 15.247			
<b>Wareneingangsdatum:</b> <i>Date of sample receipt:</i>	15-Jul-2020			
<b>Prüfmuster-Nr.:</b> <i>Test sample no.:</i>	A002859576-002			
<b>Prüfzeitraum:</b> <i>Testing period:</i>	20-Jul-2020 – 4-Aug-2020			
<b>Ort der Prüfung:</b> <i>Place of testing:</i>	EMC/RF Laboratory Taipei			
<b>Prüflaboratorium:</b> <i>Testing laboratory:</i>	Taipei Testing Laboratories			
<b>Prüfergebnis*:</b> <i>Test result*:</i>	Pass			
<b>überprüft von:</b> <i>reviewed by:</i>	<b>genehmigt von</b> <i>authorized by:</i>			
<b>Datum:</b> 18-Aug-2020 <i>Date:</i>	 Jack H.C. Chang	<b>Datum:</b> 19-Aug-2020 <i>Date:</i>	 Brenda S.H. Chen	
<b>Stellung / Position:</b>	Project Manager	<b>Stellung / Position:</b>	Project Manager	
<b>Sonstiges / Other:</b>				
<b>Zustand des Prüfgegenstandes bei Anlieferung:</b> <i>Condition of the test item at delivery:</i>		Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>		
* Legende:	1 = sehr gut P(ass) = entspricht o.g. Prüfgrundlage(n)	2 = gut F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	3 = befriedigend N/A = nicht anwendbar	4 = ausreichend N/T = nicht getestet
* Legend:	1 = very good P(ass) = passed a.m. test specification(s)	2 = good F(ail) = failed a.m. test specification(s)	3 = satisfactory N/A = not applicable	4 = sufficient N/T = not tested
<p><b>Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.</b>  <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i></p>				

v05

## TEST SUMMARY

Report Section	FCC Clause	Test Item	Result
5.1.1	15.247(b) & 15.203	Antenna Requirement	Pass
5.1.2	15.247(b)	Peak Output Power	Pass
5.1.3	15.247(a)(2)	6 dB Bandwidth	Pass
5.1.3	2.1049	99% Occupied Bandwidth	Pass
5.1.4	15.247(e)	Power Spectral Density	Pass
5.1.5	15.247(d)	Conducted Spurious Emissions and Band Edges	Pass
5.1.6	15.247(d) & 15.205 & 15.209	Radiated Spurious Emissions and Band Edges	Pass
5.2.1	15.207	Mains Conducted Emission	Pass
6.1	FCC KDB 447498 D01 v06	RF Exposure Compliance	Pass

**Note:** Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

## Contents

<b>HISTORY OF THIS TEST REPORT .....</b>	<b>5</b>
<b>1. GENERAL REMARKS .....</b>	<b>6</b>
<b>1.1 COMPLEMENTARY MATERIALS .....</b>	<b>6</b>
<b>1.2 DECISION RULE OF CONFORMITY .....</b>	<b>6</b>
<b>2. TEST SITES .....</b>	<b>7</b>
<b>2.1 TEST LABORATORY .....</b>	<b>7</b>
<b>2.2 TEST FACILITY .....</b>	<b>7</b>
<b>2.3 TRACEABILITY .....</b>	<b>8</b>
<b>2.4 CALIBRATION .....</b>	<b>8</b>
<b>2.5 MEASUREMENT UNCERTAINTY .....</b>	<b>8</b>
<b>3. GENERAL PRODUCT INFORMATION .....</b>	<b>9</b>
<b>3.1 PRODUCT FUNCTION AND INTENDED USE .....</b>	<b>9</b>
<b>3.2 SYSTEM DETAILS AND RATINGS .....</b>	<b>9</b>
<b>3.3 NOISE GENERATING AND NOISE SUPPRESSING PARTS .....</b>	<b>10</b>
<b>3.4 SUBMITTED DOCUMENTS .....</b>	<b>10</b>
<b>4. TEST SET-UP AND OPERATION MODES .....</b>	<b>11</b>
<b>4.1 PRINCIPLE OF CONFIGURATION SELECTION .....</b>	<b>11</b>
<b>4.2 CARRIER FREQUENCY AND CHANNEL .....</b>	<b>11</b>
<b>4.3 TEST OPERATION AND TEST SOFTWARE .....</b>	<b>13</b>
<b>4.4 SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT .....</b>	<b>14</b>
<b>4.5 TEST SETUP DIAGRAM .....</b>	<b>15</b>
<b>5. TEST RESULTS .....</b>	<b>16</b>
<b>5.1 TRANSMITTER REQUIREMENT &amp; TEST SUITES .....</b>	<b>16</b>
5.1.1 <i>Antenna Requirement .....</i>	<i>16</i>
5.1.2 <i>Peak Output Power .....</i>	<i>17</i>
5.1.3 <i>6 dB Bandwidth and 99% Occupied Bandwidth .....</i>	<i>22</i>
5.1.4 <i>Power Spectral Density .....</i>	<i>23</i>
5.1.5 <i>Conducted Spurious Emissions and Frequency Band Edges Measured in 100kHz Bandwidth .....</i>	<i>24</i>
5.1.6 <i>Radiated Spurious Emissions and Band Edges .....</i>	<i>25</i>
<b>5.2 MAINS EMISSION .....</b>	<b>30</b>
5.2.1 <i>Mains Conducted Emission .....</i>	<i>30</i>
<b>6. SAFETY HUMAN EXPOSURE .....</b>	<b>32</b>

<b>6.1</b>	<b>RF EXPOSURE COMPLIANCE .....</b>	<b>32</b>
6.1.1	<i>SAR Test Exclusion Thresholds.....</i>	<i>32</i>

**APPENDIX A - TEST RESULT OF CONDUCTED TEST**

**APPENDIX B - TEST RESULT OF RADIATED SPURIOUS EMISSIONS & MAINS CONDUCTED EMISSION**

**APPENDIX SP - PHOTOGRAPHS OF TEST SETUP**

**APPENDIX EP - PHOTOGRAPHS OF EUT**

**Prüfbericht- Nr.: 60404737 001**  
Test Report No.Seite 5 von 32  
Page 5 of 32**HISTORY OF THIS TEST REPORT**

Report No.	Description	Date Issued
60404737 001	Original Release	19-Aug-2020

# 1. General Remarks

## 1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

**Appendix A - Test Result of Conducted Test**

**Appendix B - Test Result of Radiated Spurious Emissions & Mains Conducted Emission**

**Appendix SP - Photographs of Test Setup**

**Appendix EP - Photographs of EUT**

### Applied Standard and Test Levels

Radio
FCC CFR47 Part 15: Subpart C Section 15.247
ANSI C63.10:2013
KDB 558074 D01 15.247 Meas Guidance v05r02
KDB 447498 D01 General RF Exposure Guidance v06

## 1.2 Decision Rule of Conformity

The decision rule of conformity of this test report is following the requirements of the requested standard in the quotation, and agreed among testing laboratory and manufacturer (applicant) to exclude the consideration of Measurement Uncertainty, unless it is required by the specific standard.

## 2. Test Sites

### 2.1 Test Laboratory

Taipei Testing Laboratories

11F. No.758, Sec. 4, Bade Rd., Songshan Dist.  
Taipei City 105  
Taiwan (R.O.C.)

### 2.2 Test Facility

Taipei Testing Laboratories

No.458-18, Sec. 2, Fenliao Rd., Linkou Dist.,  
New Taipei City 244  
Taiwan (R.O.C.)  
FCC Registration No.: 226631  
ISED Registration No.: 25563



## 2.3 Traceability

All measurement equipment calibrations are traceable to NML(Taiwan)/NIST(USA) or where calibration is performed outside Taiwan, to equivalent nationally recognized standards organizations.

## 2.4 Calibration

Equipment requiring calibration is calibrated periodically in a suitably accredited Calibration Lab. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

## 2.5 Measurement Uncertainty

All measurement uncertainty values are shown with a coverage factor of  $k=2$  to indicate a 95% level of confidence.

### Emission Measurement Uncertainty

Parameter	Uncertainty
Radiated Emission (9 kHz ~ 30 MHz)	$\pm 1.15$ dB
Radiated Emission (30 MHz ~ 200 MHz)	$\pm 1.30$ dB
Radiated Emission (200 MHz ~ 1 GHz)	$\pm 1.30$ dB
Radiated Emission (1 GHz ~ 18 GHz)	$\pm 1.54$ dB
Radiated Emission (18 GHz ~ 40 GHz)	$\pm 2.52$ dB
Mains Conducted Emission	$\pm 1.65$ dB



### 3. General Product Information

#### 3.1 Product Function and Intended Use

The EUT is a Bluetooth low energy/ ANT/ 802.15.4 Module. It contains a Bluetooth compatible module enabling the user to communicate data through a Wireless interface.

For details refer to the User Guide, Data Sheet and Circuit Diagram.

#### 3.2 System Details and Ratings

##### Basic Information of EUT

Item	EUT information
Kind of Equipment/Test Item	Bluetooth low energy/ ANT/ 802.15.4 Module
Type Identification	EYSPBN
FCC ID	RYYEYSPBN

##### Technical Specification of EUT

Bluetooth Low Energy(1Mbps, 2Mbps), Bluetooth Long Range(125kbps, 500kbps)	
Item	EUT information
Operating Frequency	2402MHz ~ 2480MHz
Channel Spacing	2MHz
Channel number	40
Data Rate	1Mbps, 2Mbps, 125kbps, 500kbps
Operation Voltage	3Vdc
Modulation	GFSK
Maximum Output Power (mW)	5.75
Antenna Information	Refer to 5.1.1
Accessory Device	Refer to 4.4

<b>ANT 1Mbps, Nordic Original 2Mbps</b>	
Item	EUT information
Operating Frequency	2402MHz ~ 2480MHz
Channel Spacing	1MHz
Channel number	79
Data Rate	1Mbps, 2Mbps
Operation Voltage	3Vdc
Modulation	GFSK
Maximum Output Power (mW)	5.83
Antenna Information	Refer to 5.1.1
Accessory Device	Refer to 4.4

<b>IEEE802.15.4</b>	
Item	EUT information
Operating Frequency	2405MHz ~ 2475MHz
Channel Spacing	5MHz
Channel number	15
Operation Voltage	3Vdc
Modulation	O-QPSK
Maximum Output Power (mW)	5.73
Antenna Information	Refer to 5.1.1
Accessory Device	Refer to 4.4

### 3.3 Noise Generating and Noise Suppressing Parts

Refer to the Circuit Diagram.

### 3.4 Submitted Documents

- Circuit Diagram
- Instruction Manual
- Rating Label
- Technical Description

## 4. Test Set-up and Operation Modes

### 4.1 Principle of Configuration Selection

The test modes were adapted accordingly in reference to the instructions for use. During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output expected by the customer and is going to be fixed on the firmware of the final end product.

#### Table for Parameters of Test Software Setting

Mode	Channel Frequency		
	2402MHz	2440MHz	2480MHz
Bluetooth Low Energy 1Mbps	8	8	8
Bluetooth Low Energy 2Mbps	8	8	8
Bluetooth Long Range 125kbps	8	8	8
Bluetooth Long Range 500kbps	8	8	8

Mode	Channel Frequency		
	2402MHz	2441MHz	2480MHz
ANT 1Mbps	8	8	8
Nordic Original 2Mbps	8	8	8

Mode	Channel Frequency		
	2405MHz	2440MHz	2475MHz
IEEE802.15.4	8	8	8

### 4.2 Carrier Frequency and Channel

#### Bluetooth Low Energy, Bluetooth Long Range

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

**ANT 1Mbps, Nordic Original 2Mbps**

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		

**IEEE802.15.4**

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
11	2405	15	2425	19	2445	23	2465
12	2410	16	2430	20	2450	24	2470
13	2415	17	2435	21	2455	25	2475
14	2420	18	2440	22	2460		

### 4.3 Test Operation and Test Software

Setup for testing: Test samples are provided with a USB interface which makes it possible to control them through a test software installed on a notebook computer.

This software was running on the laptop computer connected to the EUT. It was used to enable the operation modes listed as below.

Test Software	Radio Test Tool_20200730
---------------	--------------------------

The samples were used as follows:  
A002859576-002

Full test was applied on all test modes, but only worst case was shown.

EUT Configure Mode	Applicable To				Description
	Antenna Port Conducted Measurement	Radiated Spurious Emissions above 1 GHz	Radiated Spurious Emissions below 1 GHz	Mains Conducted Emission	
-	√	√	√	√	-

Note:

1. The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when position on **Z-plane**.
2. "-" means no effect.

#### Antenna Port Conducted Measurement

- Pre-Scan full test was applied on all test modes, but only worst case was shown.
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel (MHz)	Tested Channel (MHz)	Data Rate
Bluetooth Long Range Bluetooth Low Energy	2402 to 2480	2402, 2440, 2480	125kbps, 500kbps 1Mbps, 2Mbps
ANT, Nordic Original	2402 to 2480	2402, 2441, 2480	1Mbps, 2Mbps
IEEE802.15.4	2405 to 2475	2405, 2440, 2475	250kbps

#### Radiated Spurious Emissions (Above 1 GHz)

- Pre-Scan full test was applied on all test modes, but only worst case was shown.
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel (MHz)	Tested Channel (MHz)	Data Rate
Bluetooth Low Energy	2402 to 2480	2402, 2440, 2480	1Mbps, 2Mbps
ANT, Nordic Original	2402 to 2480	2402, 2441, 2480	1Mbps, 2Mbps
IEEE802.15.4	2405 to 2475	2405, 2440, 2475	250kbps

#### Radiated Spurious Emissions (Below 1 GHz)

- Pre-Scan full test was applied on all test modes, but only worst case was shown.
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel (MHz)	Tested Channel (MHz)	Data Rate
Bluetooth Low Energy	2402 to 2480	2480	2Mbps
ANT, Nordic Original	2402 to 2480	2480	1Mbps
IEEE802.15.4	2405 to 2475	2475	250kbps

**Mains Conducted Emission**

- Pre-Scan full test was applied on all test modes, but only worst case was shown.
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Frequency (MHz)	Tested Frequency (MHz)	Date Rate
Bluetooth Low Energy	2402 to 2480	2480	2Mbps
ANT, Nordic Original	2402 to 2480	2480	1Mbps
IEEE802.15.4	2405 to 2475	2475	250kbps

**Test Condition**

Test Item	Ambient Temperature	Relative Humidity	Tested by
Conducted Measurement	22-26 °C	50-65 %	Stanislas Charles
Radiated Spurious Emissions above 1 GHz	22-26 °C	50-65 %	Simon Tsai
Radiated Spurious Emissions below 1 GHz	22-26 °C	50-65 %	Simon Tsai
Mains Conducted Emission	22-26 °C	50-65 %	Temo Chen

## 4.4 Special Accessories and Auxiliary Equipment

The product has been tested together with the following additional accessories:

**Accessory of EUT**

N/A


**Support Unit**

Support Unit for radiated					
No.	Description	Brand	Model	S/N	Remark
1	Fixture	N/A	TE8707	N/A	-
Support Unit for AC mains					
No.	Description	Brand	Model	S/N	Remark
1	Fixture	N/A	TE8707	N/A	-
2	Adapter	TOSHIBA	PA3283U-1ACA	3607359	-


Interface Cable for radiated					
No.	Description	Shielded Type	Ferrite Core (Qty)	Length (m)	Remark
A	Signal Cable	YES	0	0.13	-
B	DC Power Cable	NO	0	3	-
Interface Cable for AC mains					
No.	Description	Shielded Type	Ferrite Core (Qty)	Length (m)	Remark
A	Signal Cable	YES	0	0.13	-
B	DC Power Cable	NO	0	3	-
C	Power cable	NO	0	3	-

### 4.5 Test Setup Diagram

<Radiated Spurious Emissions Tx mode >

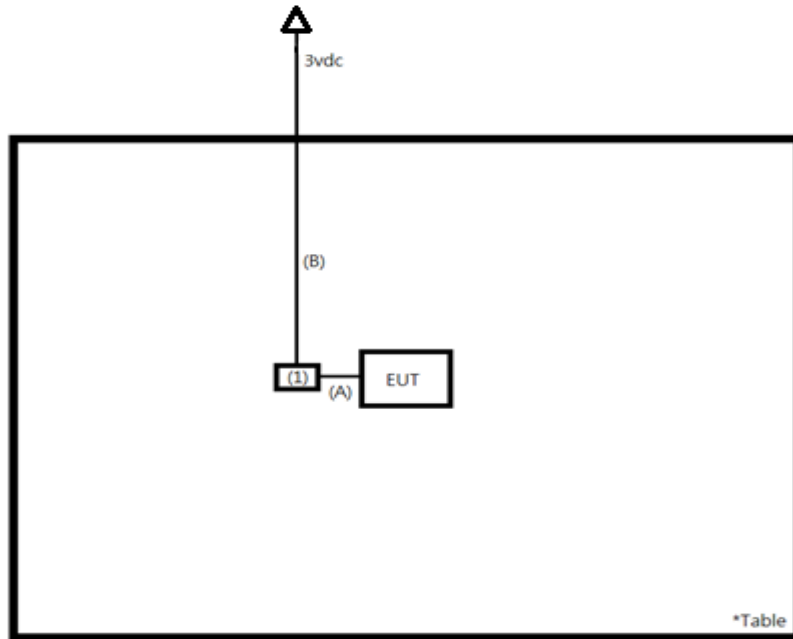

<Mains Conducted Emission mode >

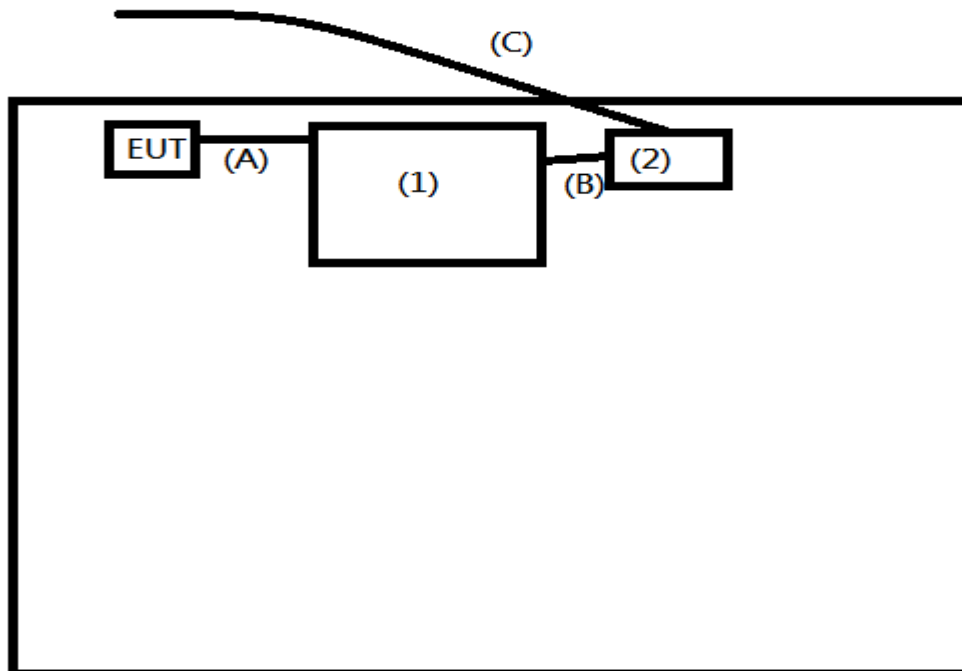

## 5. Test Results

### 5.1 Transmitter Requirement & Test Suites

#### 5.1.1 Antenna Requirement

**Requirement** Use of approved antennas only

According to the manufacturer declaration, the EUT has an antenna with a directional gain of -0.6 dBi. The antenna is a printed PCB trace with no possibility of replacement with a non-approved antenna by the end-user. Therefore, the EUT is considered to comply with this provision.

Refer to EUT photo for details.




### 5.1.2 Peak Output Power

**Limit** 1 watt (30 dBm)

**Kind of Test Site** Shielded room

#### Test Setup



#### Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date
Power Meter	Anritsu	ML2495A	1901008	2020/4/6	2021/4/5
Power Sensor	Anritsu	MA2411B	1725269	2020/4/7	2021/4/6

#### Test Procedures

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

**Test Result**
**Peak Output Power**
**<Bluetooth Long Range 125kbps>**

Channel	Channel Frequency	Peak Output Power		Limit (dBm)
	(MHz)	(dBm)	(mW)	
Low Channel	2402	7.58	5.73	30
Middle Channel	2440	7.44	5.55	30
High Channel	2480	7.04	5.06	30

Max E.I.R.P: 6.98 dBm

**<Bluetooth Long Range 500kbps>**

Channel	Channel Frequency	Peak Output Power		Limit (dBm)
	(MHz)	(dBm)	(mW)	
Low Channel	2402	7.53	5.66	30
Middle Channel	2440	7.42	5.52	30
High Channel	2480	7.11	5.14	30

Max E.I.R.P: 6.93 dBm

**Average Power**
**<Bluetooth Long Range 125kbps>**

Channel	Channel Frequency	Average Power	
	(MHz)	(dBm)	(mW)
Low Channel	2402	7.56	5.70
Middle Channel	2440	7.42	5.52
High Channel	2480	7.02	5.04

**<Bluetooth Long Range 500kbps>**

Channel	Channel Frequency	Average Power	
	(MHz)	(dBm)	(mW)
Low Channel	2402	7.51	5.64
Middle Channel	2440	7.40	5.50
High Channel	2480	7.09	5.12

**Peak Output Power**
**<Bluetooth Low Energy 1Mbps>**

Channel	Channel Frequency	Peak Output Power		Limit (dBm)
	(MHz)	(dBm)	(mW)	
Low Channel	2402	7.60	5.75	30
Middle Channel	2440	7.51	5.64	30
High Channel	2480	7.13	5.16	30

Max E.I.R.P: 7.00 dBm

**<Bluetooth Low Energy 2Mbps>**

Channel	Channel Frequency	Peak Output Power		Limit (dBm)
	(MHz)	(dBm)	(mW)	
Low Channel	2402	7.44	5.55	30
Middle Channel	2440	7.32	5.40	30
High Channel	2480	7.08	5.11	30

Max E.I.R.P: 6.84 dBm

**Average Power**
**<Bluetooth Low Energy 1Mbps>**

Channel	Channel Frequency	Average Power	
	(MHz)	(dBm)	(mW)
Low Channel	2402	7.58	5.73
Middle Channel	2440	7.49	5.61
High Channel	2480	7.10	5.13

**<Bluetooth Low Energy 2Mbps>**

Channel	Channel Frequency	Average Power	
	(MHz)	(dBm)	(mW)
Low Channel	2402	7.42	5.52
Middle Channel	2440	7.30	5.37
High Channel	2480	7.06	5.08

**Peak Output Power**
**<ANT 1Mbps>**

Channel	Channel Frequency	Peak Output Power		Limit (dBm)
	(MHz)	(dBm)	(mW)	
Low Channel	2402	7.61	5.77	30
Middle Channel	2441	7.66	5.83	30
High Channel	2480	7.13	5.16	30

Max E.I.R.P: 7.06 dBm

**<Nordic Original 2Mbps>**

Channel	Channel Frequency	Peak Output Power		Limit (dBm)
	(MHz)	(dBm)	(mW)	
Low Channel	2402	7.61	5.77	30
Middle Channel	2441	7.66	5.83	30
High Channel	2480	7.09	5.12	30

Max E.I.R.P: 7.06 dBm

**Average Power**
**<ANT 1Mbps>**

Channel	Channel Frequency	Average Power	
	(MHz)	(dBm)	(mW)
Low Channel	2402	7.58	5.73
Middle Channel	2441	7.64	5.81
High Channel	2480	7.11	5.14

**<Nordic Original 2Mbps>**

Channel	Channel Frequency	Average Power	
	(MHz)	(dBm)	(mW)
Low Channel	2402	7.59	5.74
Middle Channel	2441	7.63	5.79
High Channel	2480	7.07	5.09

**Peak Output Power**
**<IEEE802.15.4>**

Channel	Channel Frequency	Peak Output Power		Limit (dBm)
	(MHz)	(dBm)	(mW)	
Low Channel	2405	7.58	5.73	30
Middle Channel	2440	7.45	5.56	30
High Channel	2475	7.44	5.55	30

Max E.I.R.P: 6.98 dBm

**Average Power**
**<IEEE802.15.4>**


Channel	Channel Frequency	Average Power	
	(MHz)	(dBm)	(mW)
Low Channel	2405	7.56	5.70
Middle Channel	2440	7.43	5.53
High Channel	2475	7.40	5.50

### 5.1.3 6 dB Bandwidth and 99% Occupied Bandwidth

**Limit** The minimum 6 dB bandwidth shall be at least 500 kHz.

**Kind of Test Site** Shielded room

#### Test Setup



#### Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date
Spectrum Analyzer	R&S	FSV40	101512	2020/2/18	2021/2/16

#### Test Procedure

- a. Set resolution bandwidth (RBW) = 100 kHz
- b. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW, Detector = Peak.
- c. Trace mode = max hold.
- d. Sweep = auto couple.
- e. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.
- f. For 99% occupied bandwidth measurement, the transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to PEAK. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean power of a given emission.

#### Test Results

Please refer to Appendix A.


## 5.1.4 Power Spectral Density

### Limit

The power spectral density shall not be greater than 8 dBm in any 3 kHz band.

**Kind of Test Site**                      Shielded room

### Test Setup



### Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date
Spectrum Analyzer	R&S	FSV40	101512	2020/2/18	2021/2/16

### Test Procedure

- a. Set analyzer center frequency to DTS channel center frequency.
- b. Set the span to 1.5 times the DTS bandwidth.
- c. Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- d. Set the VBW  $\geq 3 \times \text{RBW}$ .
- e. Detector = peak.
- f. Sweep time = auto couple.
- g. Trace mode = max hold.
- h. Allow trace to fully stabilize.
- i. Use the peak marker function to determine the maximum amplitude level within the RBW.

### Test Results


Please refer to Appendix A.

### 5.1.5 Conducted Spurious Emissions and Frequency Band Edges Measured in 100kHz Bandwidth

**Limit**

20dB (below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.)

**Kind of Test Site**                      Shielded room

**Test Setup**

**Test Instruments**

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date
Spectrum Analyzer	R&S	FSV40	101512	2020/2/18	2021/2/16

**Test Procedure**

Measurement procedure REF

1. Set the RBW = 100 kHz.
2. Set the VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

Measurement procedure OOBE

1. Set RBW = 100 kHz.
2. Set VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

**Test Results**

Please refer to Appendix A.



## 5.1.6 Radiated Spurious Emissions and Band Edges

### Limit


Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must comply with the radiated emission limits specified in §15.209(a).

Emissions radiated outside the restricted and authorized frequency bands must either comply with the radiated emission limits specified for the restricted bands or in §15.247(d).


**Kind of Test Site**                      3m Semi-Anechoic Chamber

### Test Setup


#### <Radiated Emissions below 30 MHz>

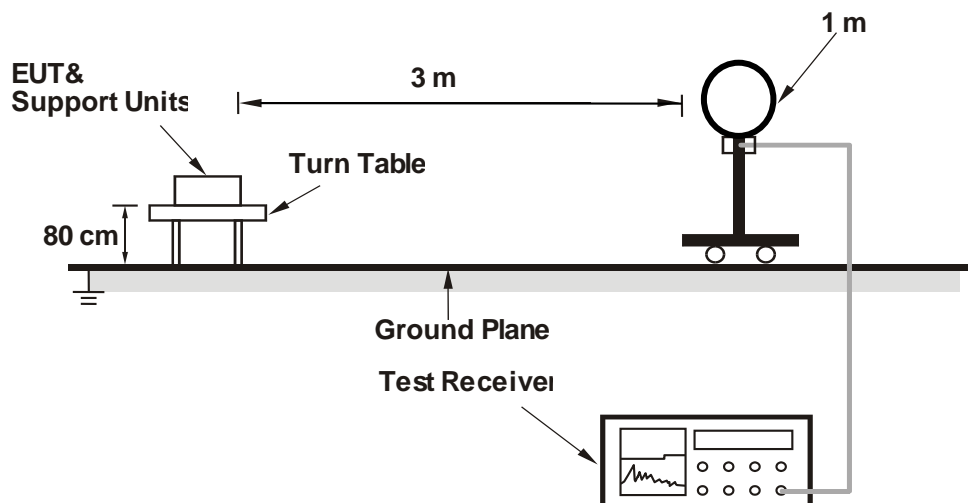

#### <Radiated Emissions 30 MHz to 1 GHz>

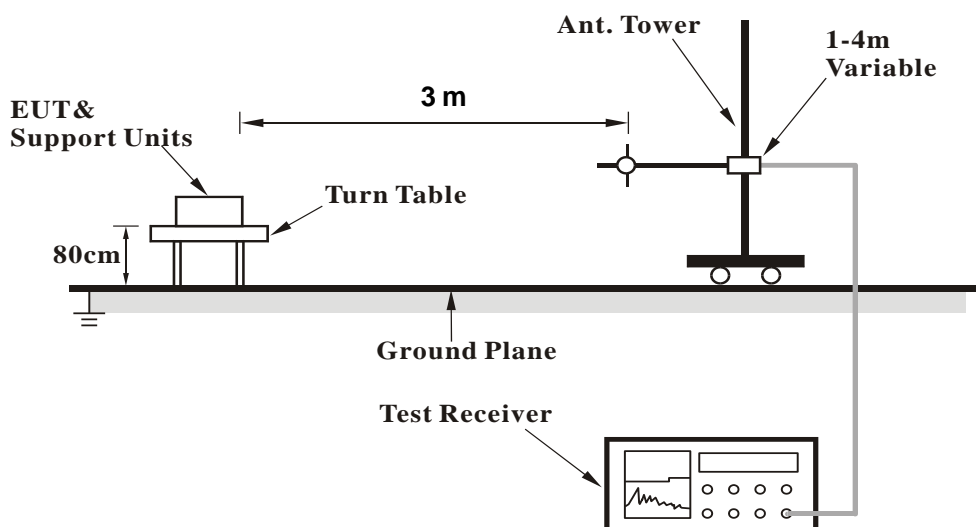

## &lt;Radiated Emissions above 1 GHz&gt;

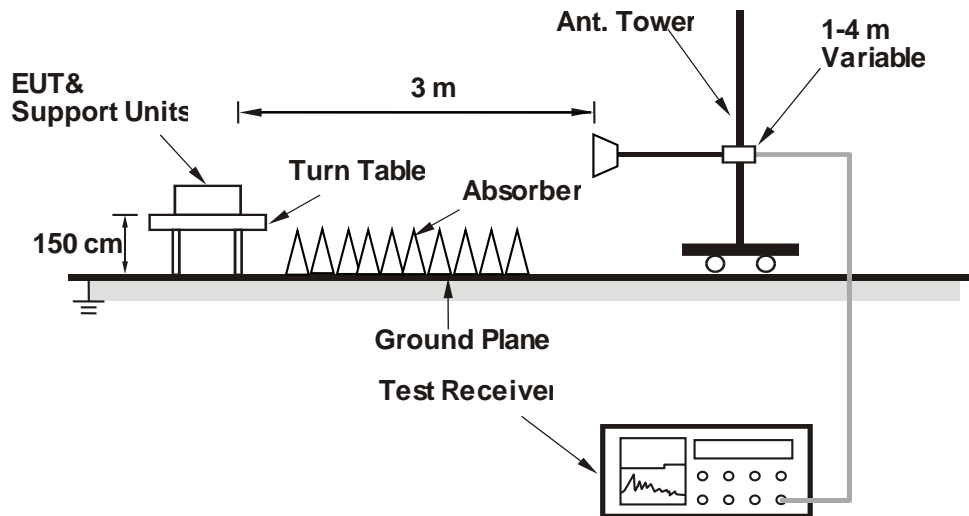

For the actual test configuration, please refer to the attached file (Test Setup Photo).

**Test Instruments**

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date
Signal Analyzer	R&S	FSV40	101508	2020/3/16	2021/3/15
Receiver	R&S	ESR7	102108	2020/4/22	2021/4/21
Bilog Antenna	SCHWARZBECK	VULB-9168	00951	2020/2/14	2021/2/12
Horn Antenna	ETS-Lindgren	3117	00218930	2019/12/6	2020/12/4
LF-AMP	Agilent	8447D	2944A10772	2020/2/11	2021/2/9
HF-AMP + AC source	EMCI	EMC051845SE	980633	2020/2/17	2021/2/15
HF-AMP + AC source	EMCI	EMC184045SE	980657	2020/2/17	2021/2/15
Horn Antenna	SCHWARZBECK	BBHA 9170	00887	2020/4/10	2021/4/9
Microwave Cable	HUBER+SUHNER	SUCOFLEX 104EA	800056/4EA	2020/3/25	2021/3/24
Microwave Cable	HUBER+SUHNER	SUCOFLEX 104	804680/4	2020/3/25	2021/3/24
Microwave Cable	HUBER+SUHNER	SUCOFLEX 104	MY37202/4	2020/3/25	2021/3/24
Microwave Cable	HUBER+SUHNER	SUCOFLEX 102EA	800898/2EA	2020/4/22	2021/4/21
Microwave Cable	HUBER+SUHNER	SUCOFLEX 102EA	800901/2EA	2020/4/22	2021/4/21
Microwave Cable	HUBER+SUHNER	SUCOFLEX 102EA	801027/2EA	2020/4/22	2021/4/21
Loop Antenna	Chance Most	EMCILPA600 +calibration	287	2020/1/9	2021/1/7

**Test Procedures****For Radiated Emissions below 30 MHz**

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

**Note:** The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz at frequency below 30 MHz.

**For Radiated Emissions above 30 MHz**

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30 MHz ~ 1 GHz) / 1.5 meters (for above 1 GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detected function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

**Note:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) or Peak detection (PK) at frequency below 1 GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1 GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle < 98 %) or 10 Hz (Duty cycle  $\geq 98$  %) for Average detection (AV) at frequency above 1 GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.
5. The Radiated Emissions testing was performed in the X, Y and Z axis orientation. The worst-case Axis orientation is recorded in this test report.

**Prüfbericht- Nr.: 60404737 001**  
*Test Report No.***Seite 29 von 32**  
*Page 29 of 32***Test Results**

Factor (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)  
Level (dBuV/m) = Reading (dBuV) + Factor (dB/m)

Please refer to Appendix B.


## 5.2 Mains Emission

### 5.2.1 Mains Conducted Emission

**Limit**

Mains Conducted Emission as defined in §15.207 must comply with the mains conducted emission limits.

**Kind of Test Site**                      Shielded room

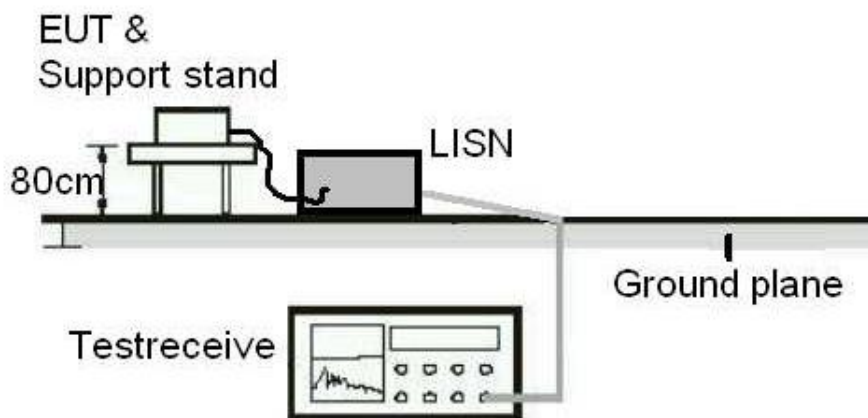**Test Setup**

**Test Instruments**

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date
TWO-LINE V-NETWORK	SCHHWARZBECK	NSLK 8127	8127-00976	2019/10/2	2020/9/30
EMI Test Receiver	R&S	ESR7	102108	2020/4/22	2021/4/21
10dB attenuation	SCHHWARZBECK	VTSD 9561 F-N	660	2020/2/24	2021/2/23
Measurement Software	EZ	EZ EMC (Version NB-03A)	N/A	N/A	N/A

**Test Procedures**

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/50 uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz – 30 MHz.

**Test Results**

Please refer to Appendix B.

## 6. Safety Human Exposure

### 6.1 RF Exposure Compliance

#### 6.1.1 SAR Test Exclusion Thresholds

##### Results

Since the maximum output power of the transmitter is 5.83 mW < 10 mW (Distance: 5 mm), hence the EUT is excluded from SAR evaluation according to FCC KDB publication 447498 D01: Mobile Portable RF Exposure.




## Appendix A: Test Results of Conducted Test

### Test Result of 6 dB Bandwidth


#### Bluetooth Low Energy 1Mbps

Channel	Channel Frequency (MHz)	6 dB Bandwidth (kHz)	Limit (kHz)	Result
Low Channel	2402	710.3	> 500	Pass
Middle Channel	2440	710.3	> 500	Pass
High Channel	2480	707.3	> 500	Pass

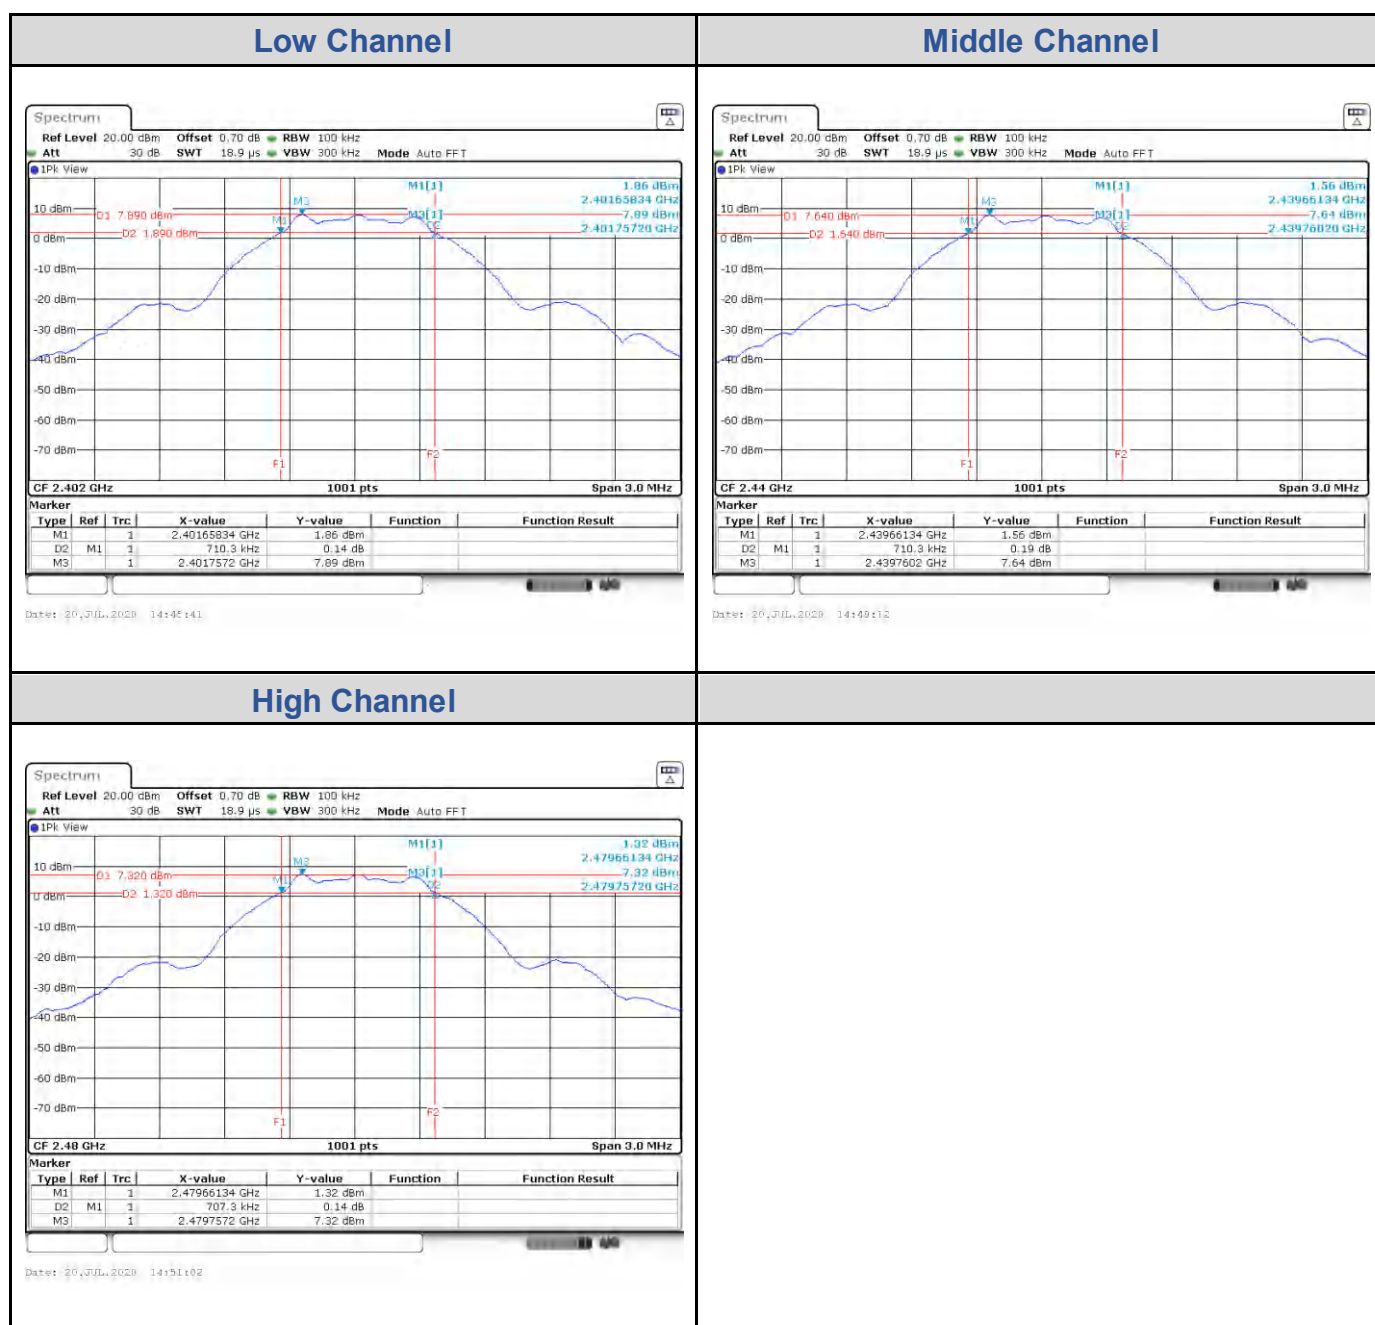

**Bluetooth Low Energy 2Mbps**

Channel	Channel Frequency (MHz)	6 dB Bandwidth (kHz)	Limit (kHz)	Result
Low Channel	2402	1148.9	> 500	Pass
Middle Channel	2440	1148.9	> 500	Pass
High Channel	2480	1153.8	> 500	Pass

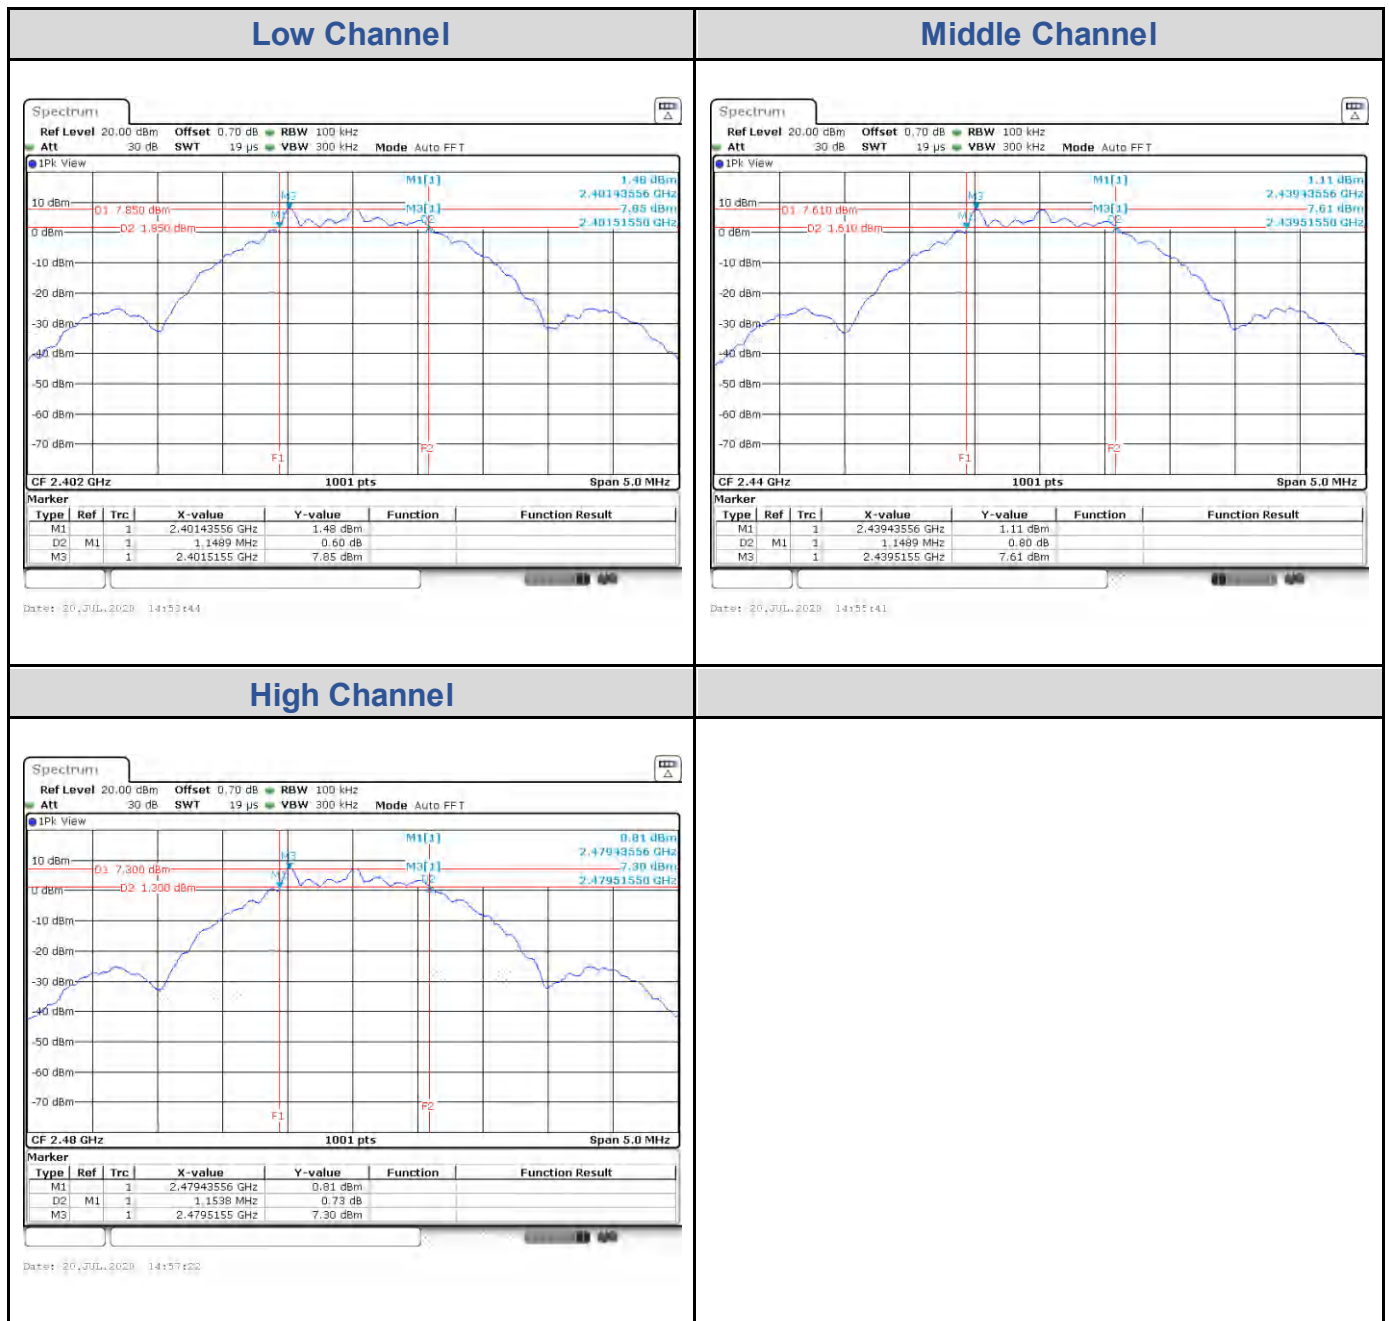

## Test Result of 99% Occupied Bandwidth


### Bluetooth Low Energy 1Mbps

Channel	Channel Frequency (MHz)	99% Bandwidth (KHz)
Low Channel	2402	1042.9
Middle Channel	2440	1045.9
High Channel	2480	1051.9



**Bluetooth Low Energy 2Mbps**


Channel	Channel Frequency (MHz)	99% Bandwidth (KHz)
Low Channel	2402	2017.9
Middle Channel	2442	2027.9
High Channel	2480	2037.9

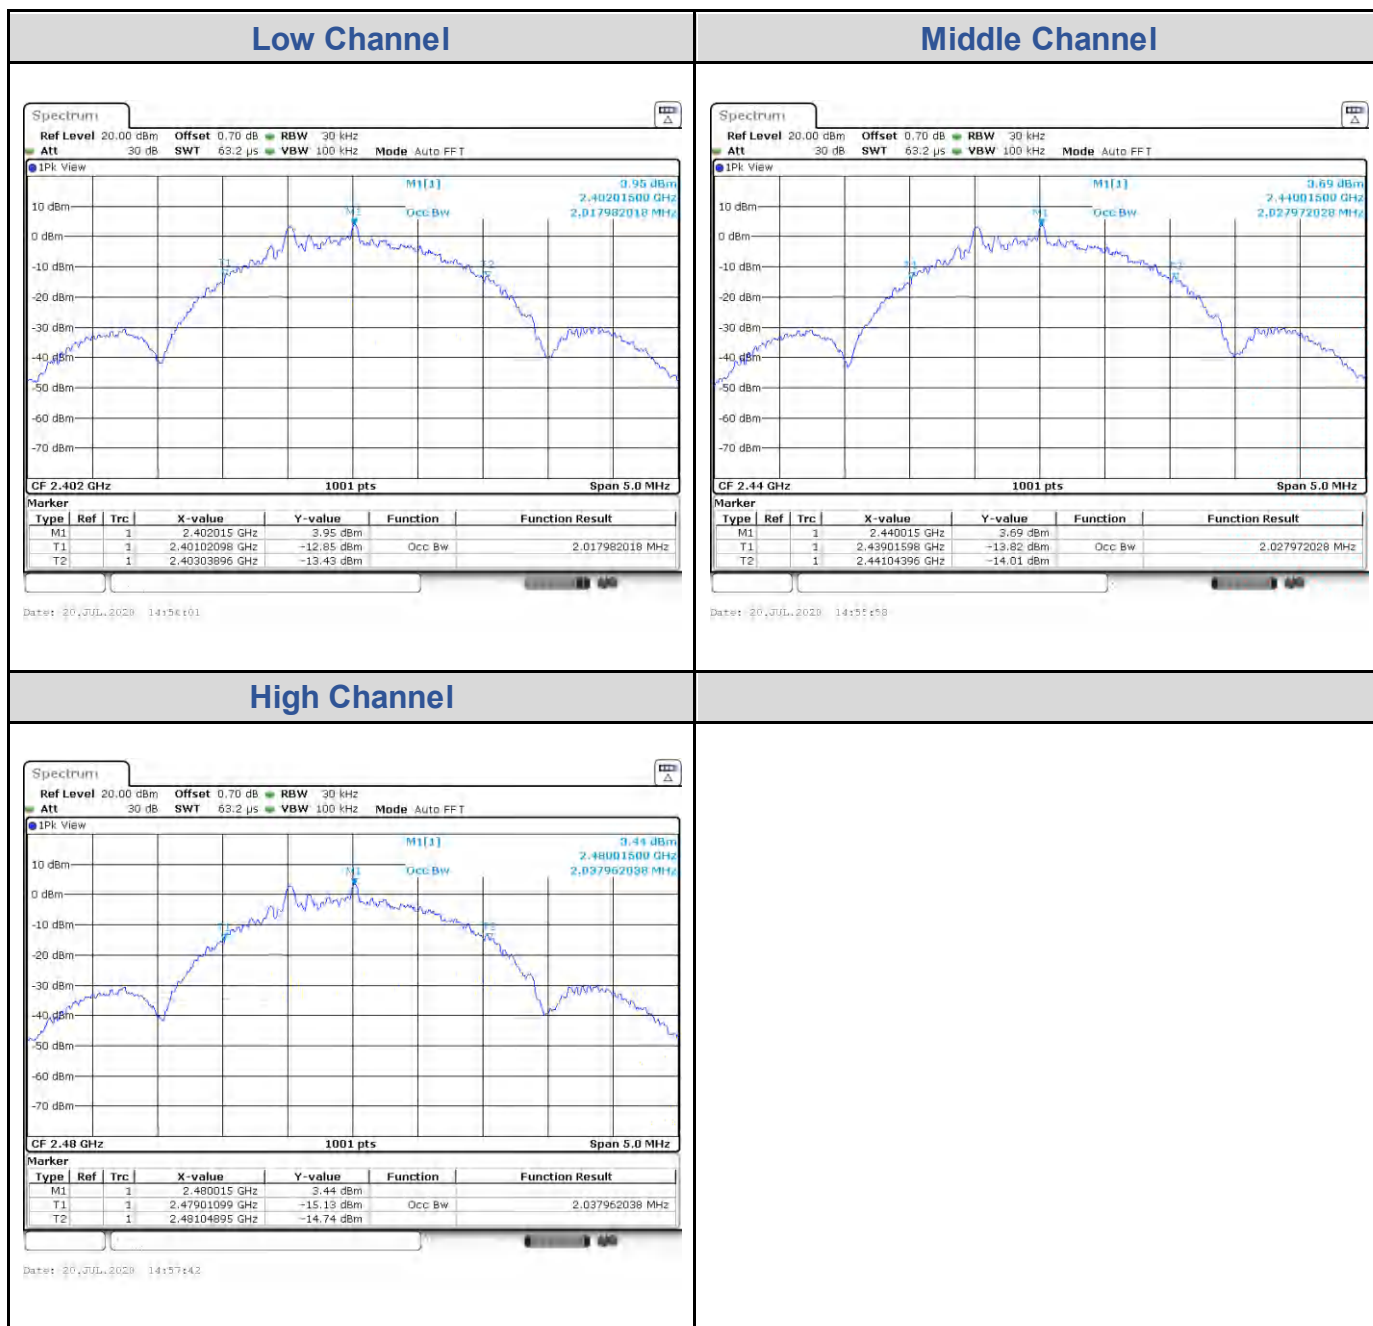

## Test Result of Power Spectral Density

### Bluetooth Low Energy 1Mbps


Channel	Channel Frequency (MHz)	Power Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
Low Channel	2402	-8.14	8	Pass
Middle Channel	2440	-8.44	8	Pass
High Channel	2480	-8.71	8	Pass

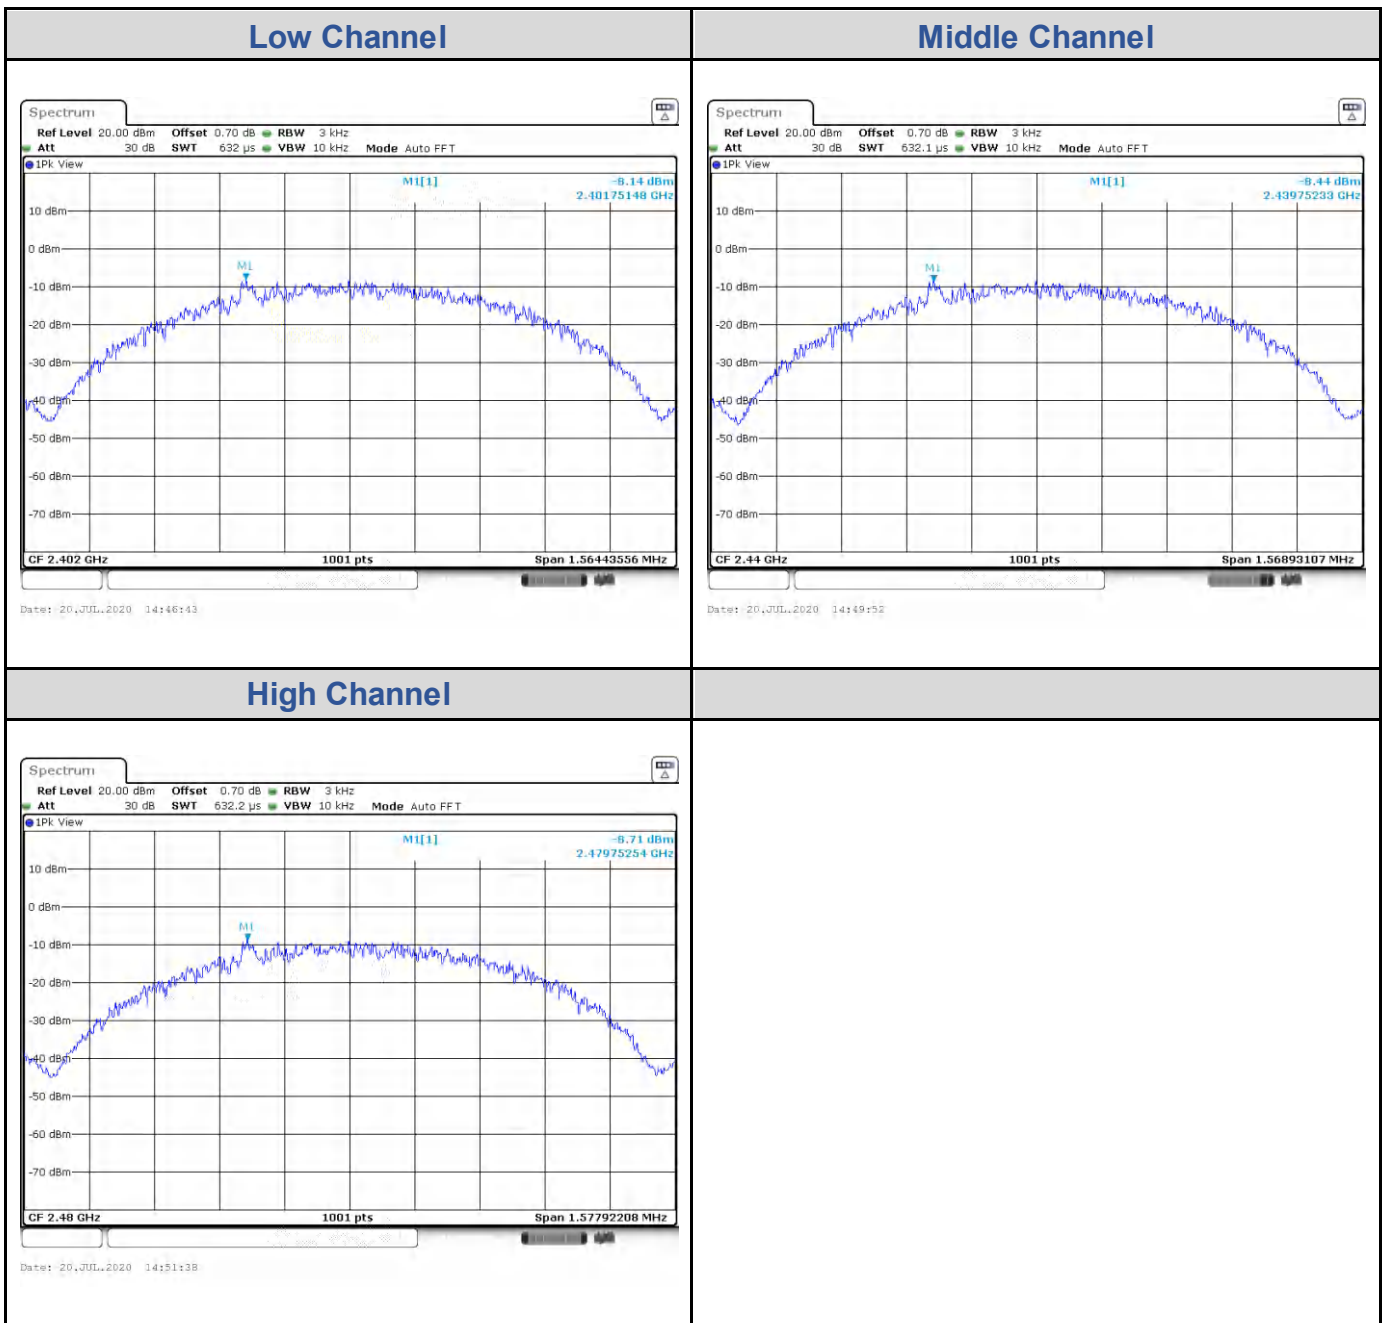




**Bluetooth Low Energy 2Mbps**


Channel	Channel Frequency (MHz)	Power Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
Low Channel	2402	-10.50	8	Pass
Middle Channel	2442	-10.60	8	Pass
High Channel	2480	-11.05	8	Pass

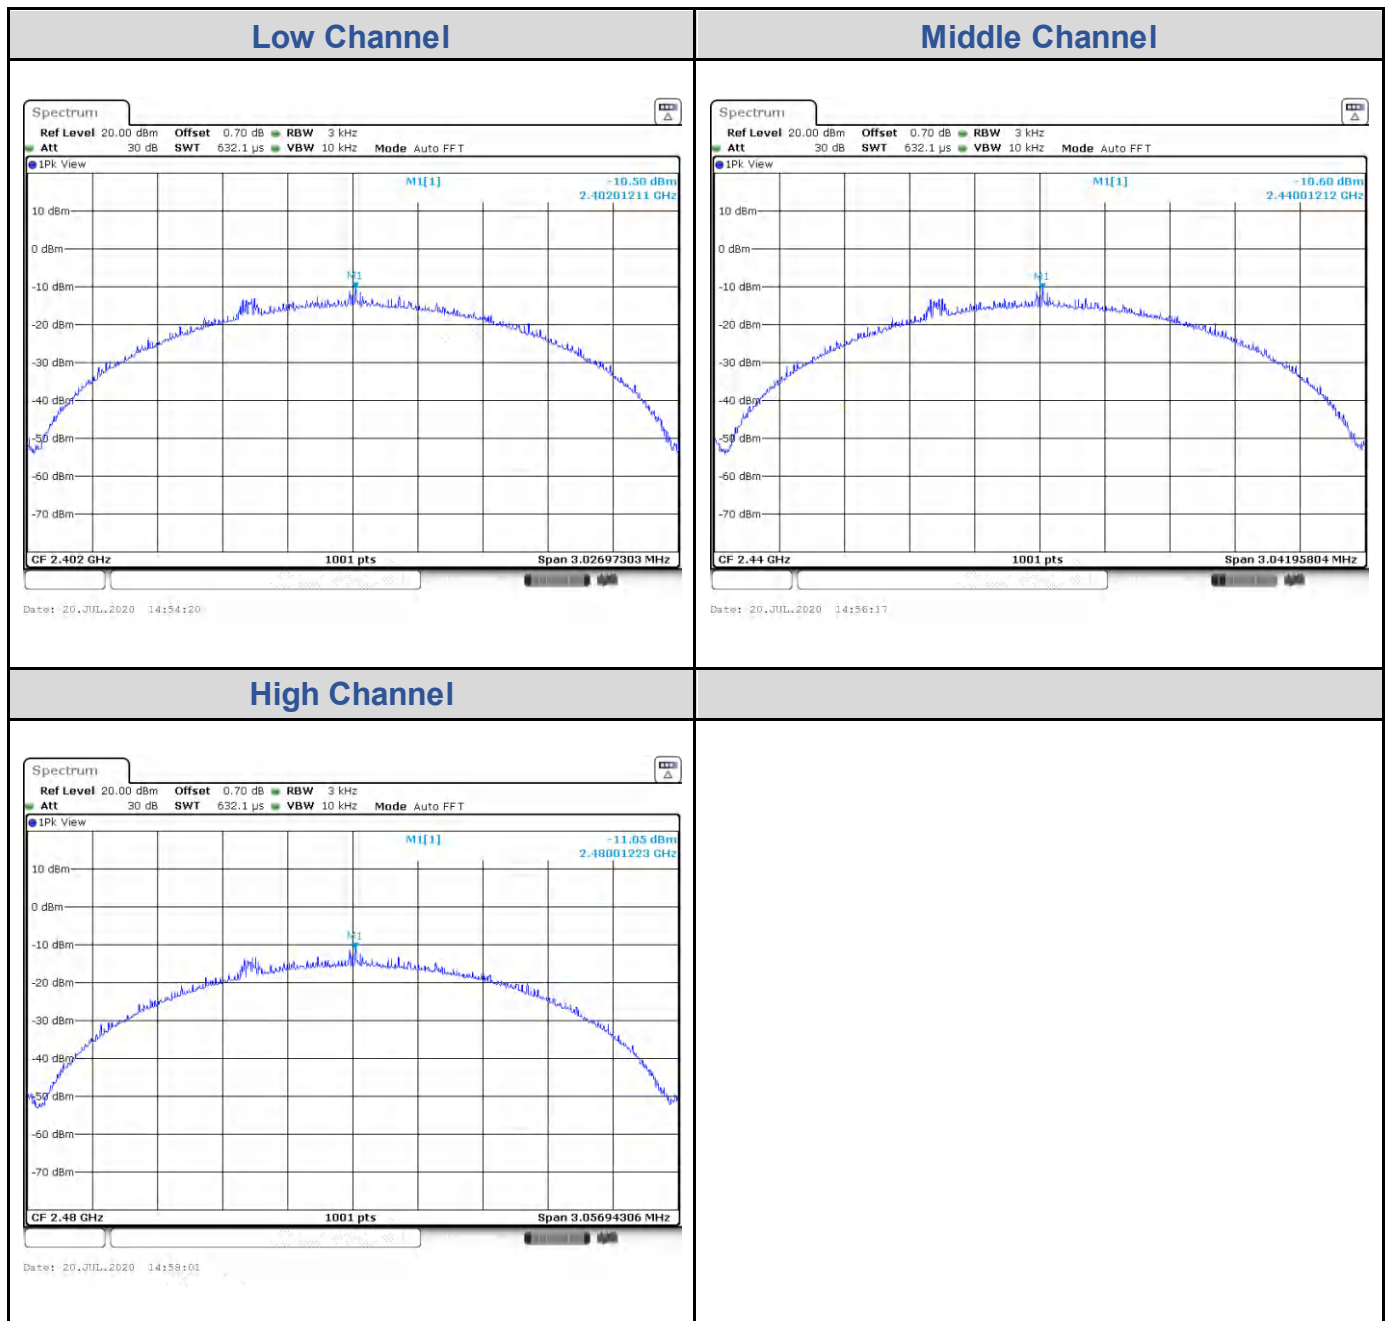

**Test Result of Conducted Spurious Emissions, Tx Mode**  
**Bluetooth Low Energy 1Mbps**

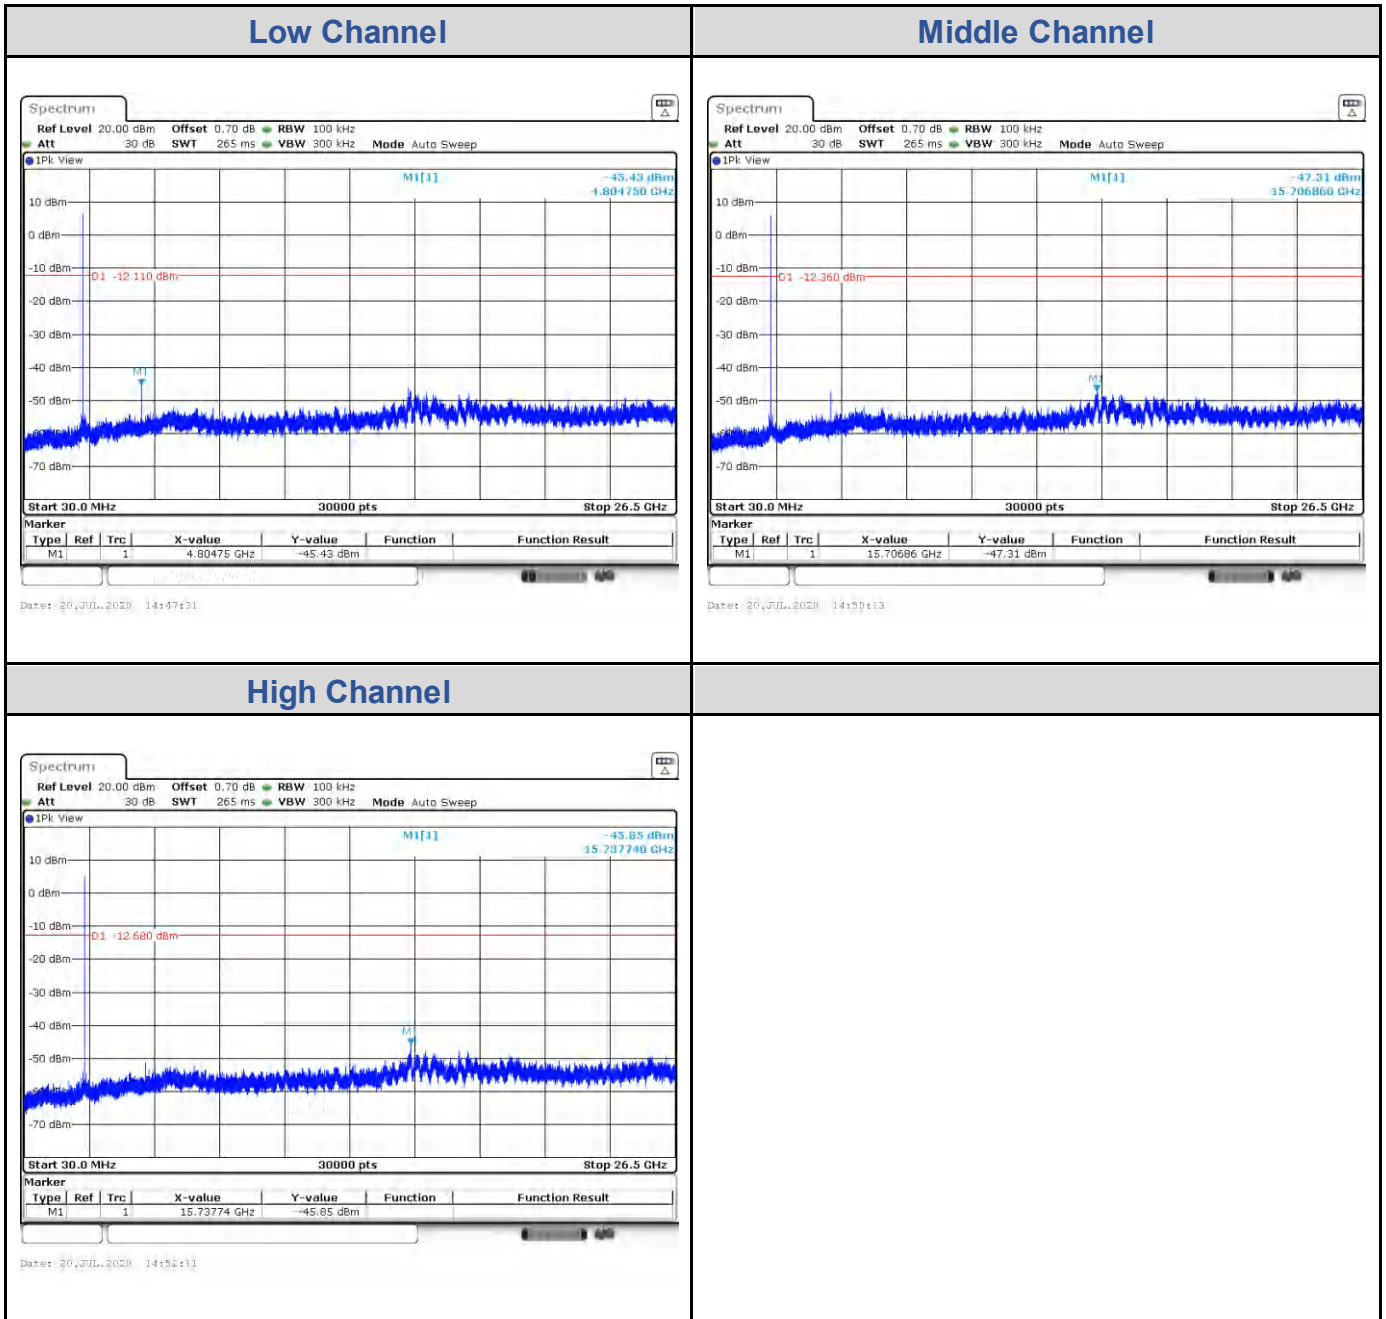


Bluetooth Low Energy 2Mbps

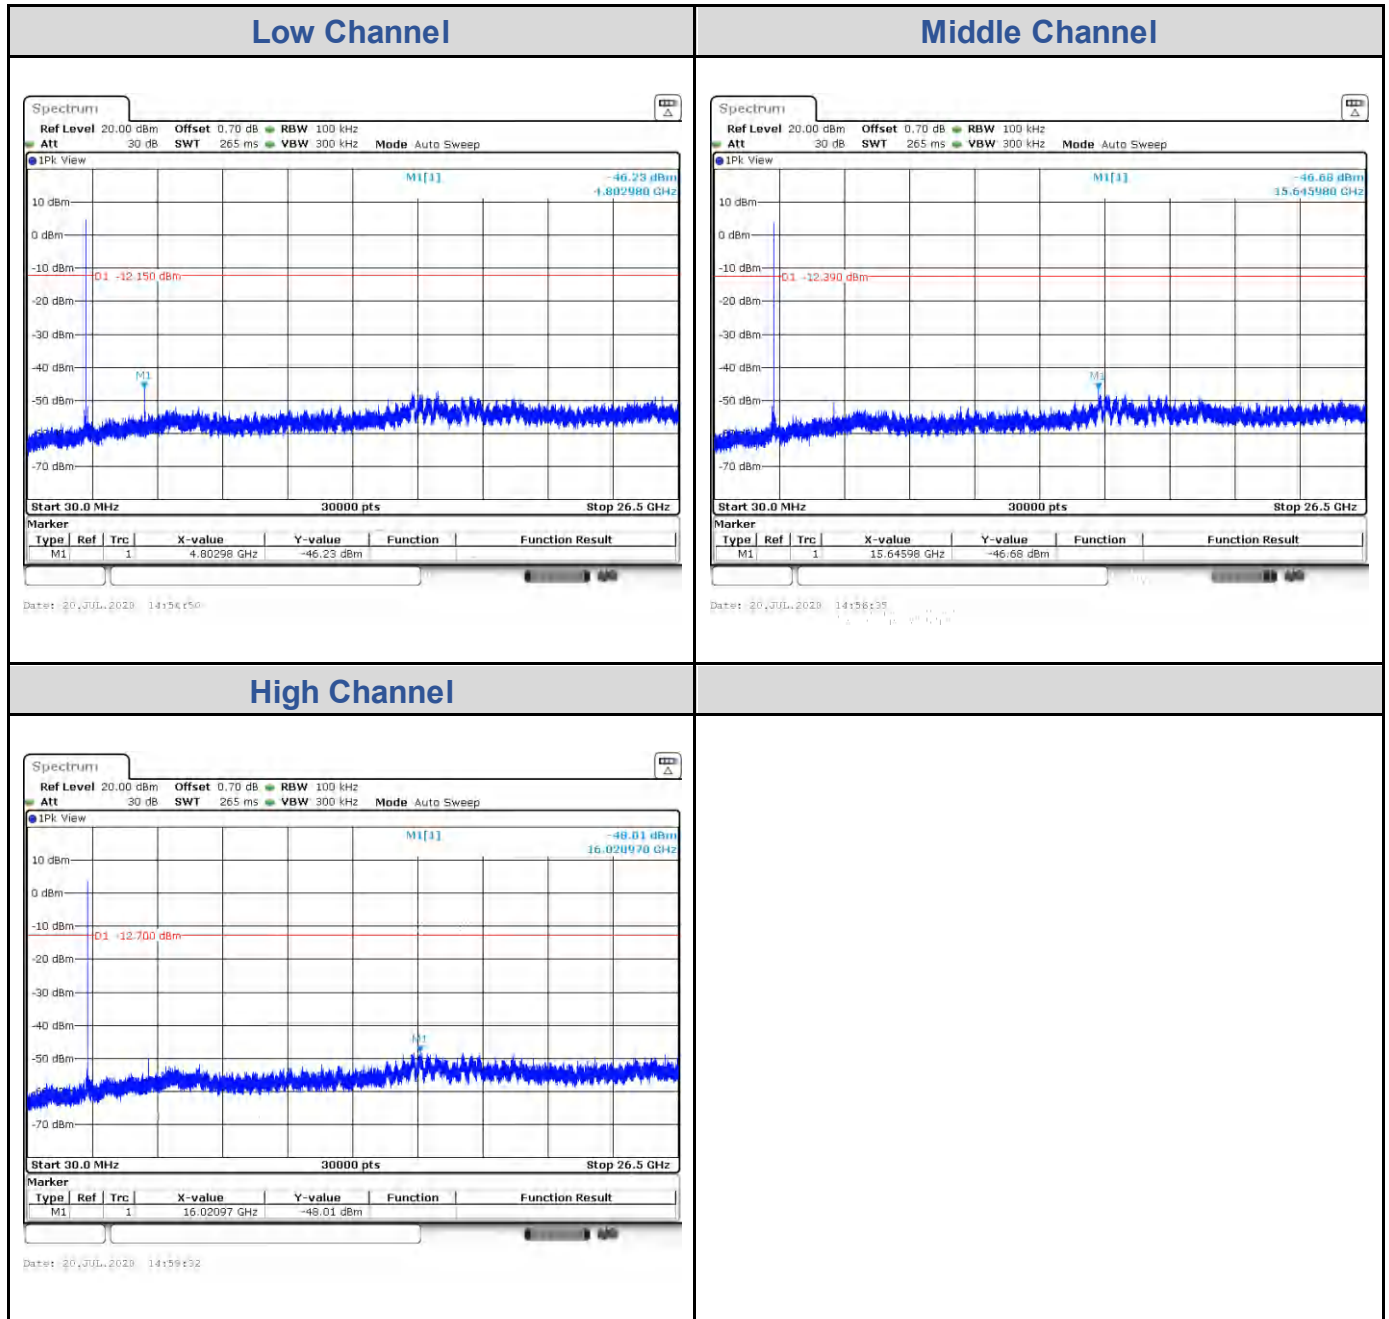




**Test Result of Conducted Band Edge, Tx Mode**  
**Bluetooth Low Energy 1Mbps**

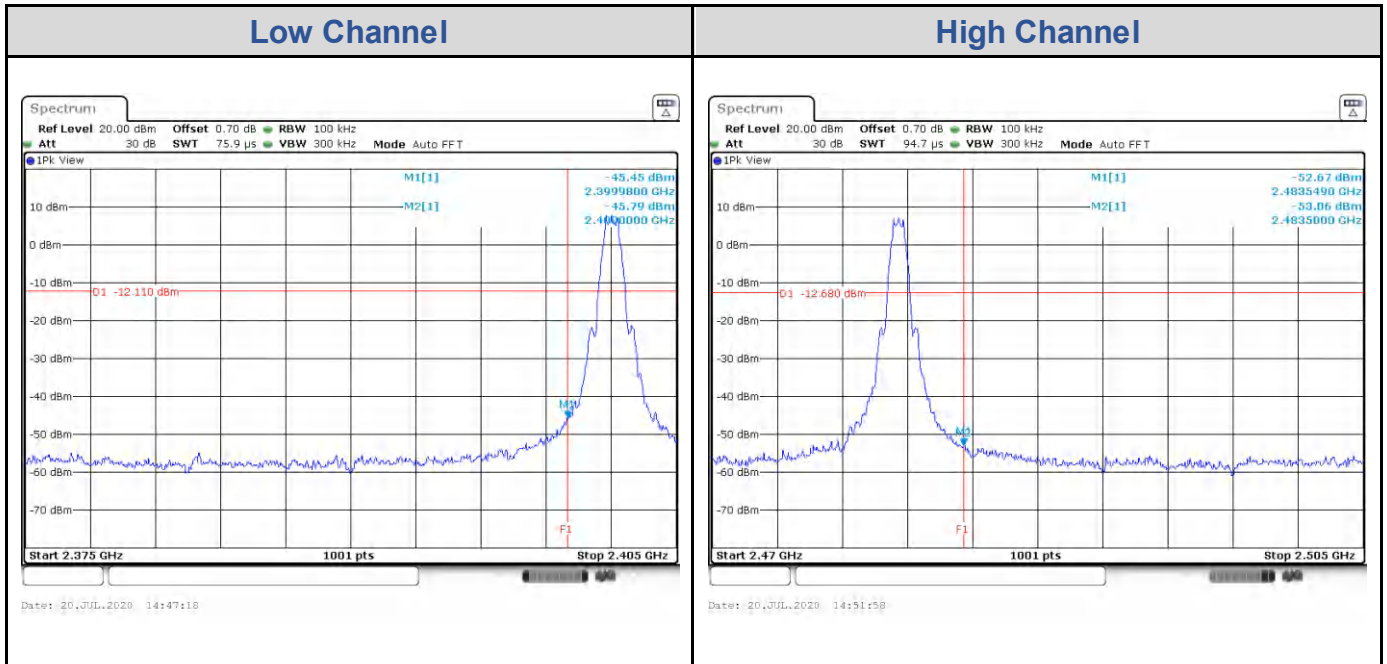


Bluetooth Low Energy 2Mbps

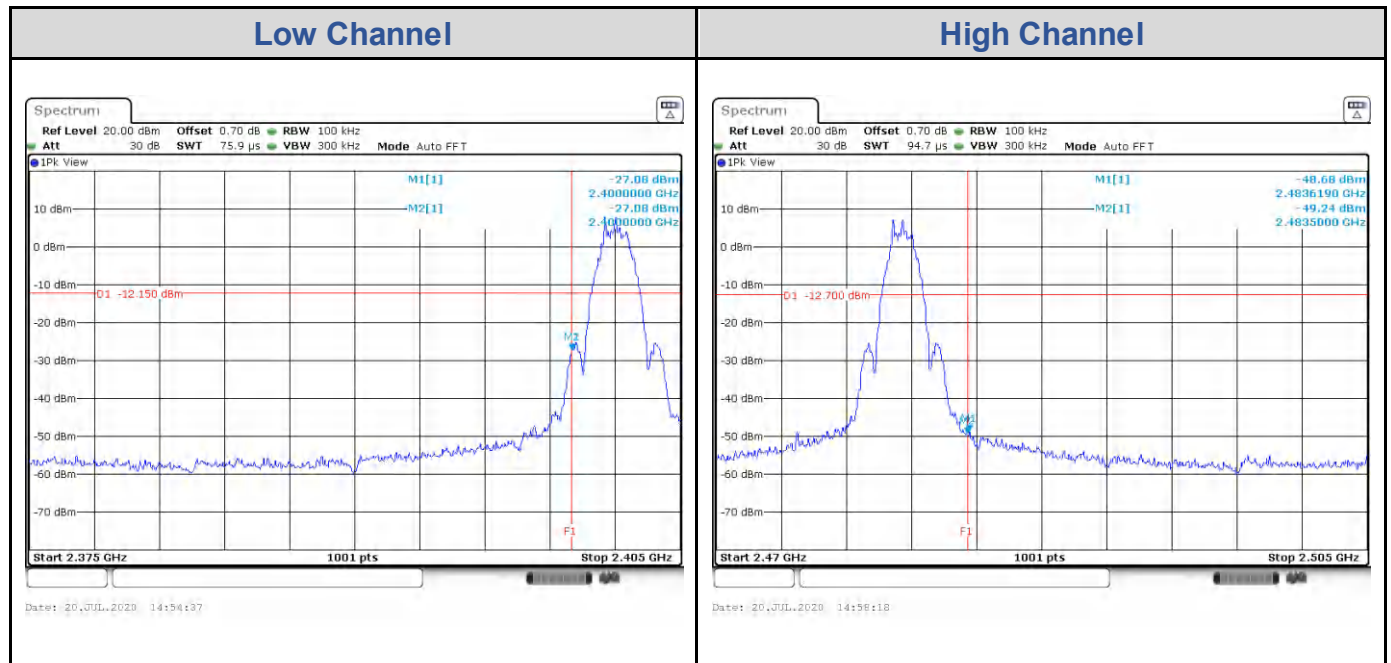

## Test Result of 6 dB Bandwidth


### ANT 1Mbps

Channel	Channel Frequency (MHz)	6 dB Bandwidth (kHz)	Limit (kHz)	Result
Low Channel	2402	500.5	> 500	Pass
Middle Channel	2441	500.5	> 500	Pass
High Channel	2480	500.5	> 500	Pass

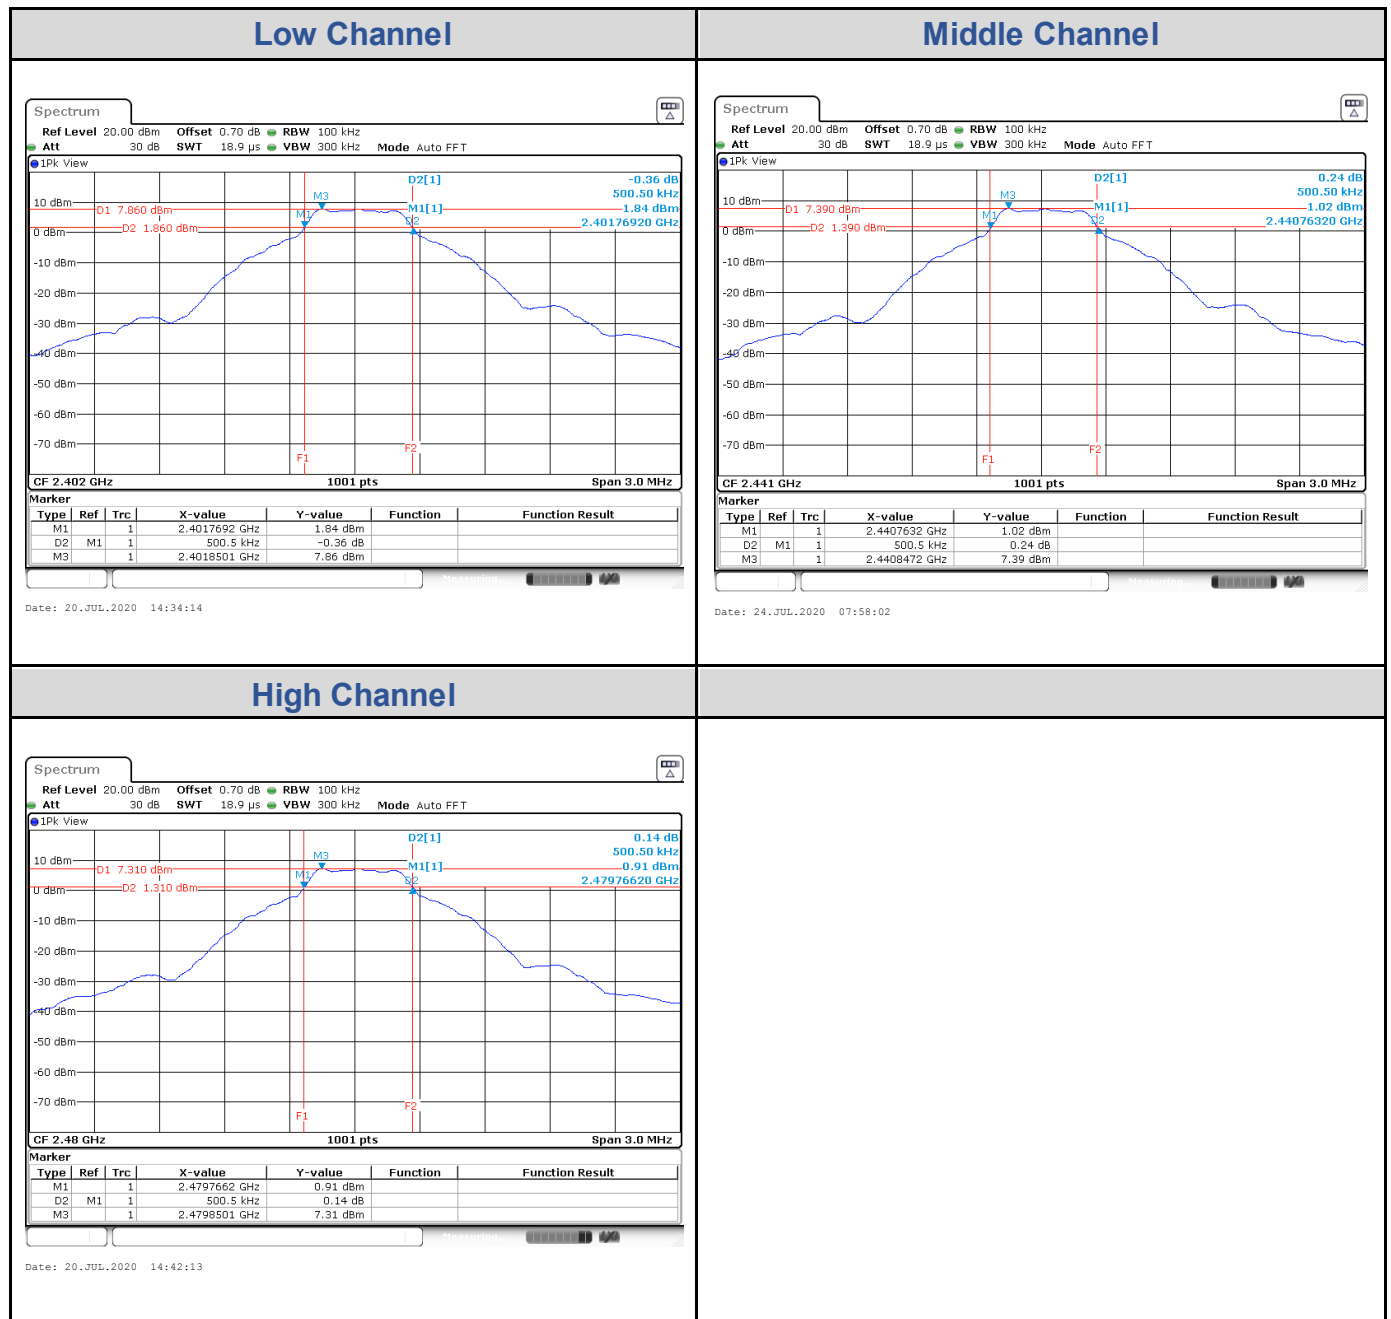

**Nordic Original 2Mbps**


Channel	Channel Frequency (MHz)	6 dB Bandwidth (kHz)	Limit (kHz)	Result
Low Channel	2402	839.2	> 500	Pass
Middle Channel	2441	839.2	> 500	Pass
High Channel	2480	839.2	> 500	Pass

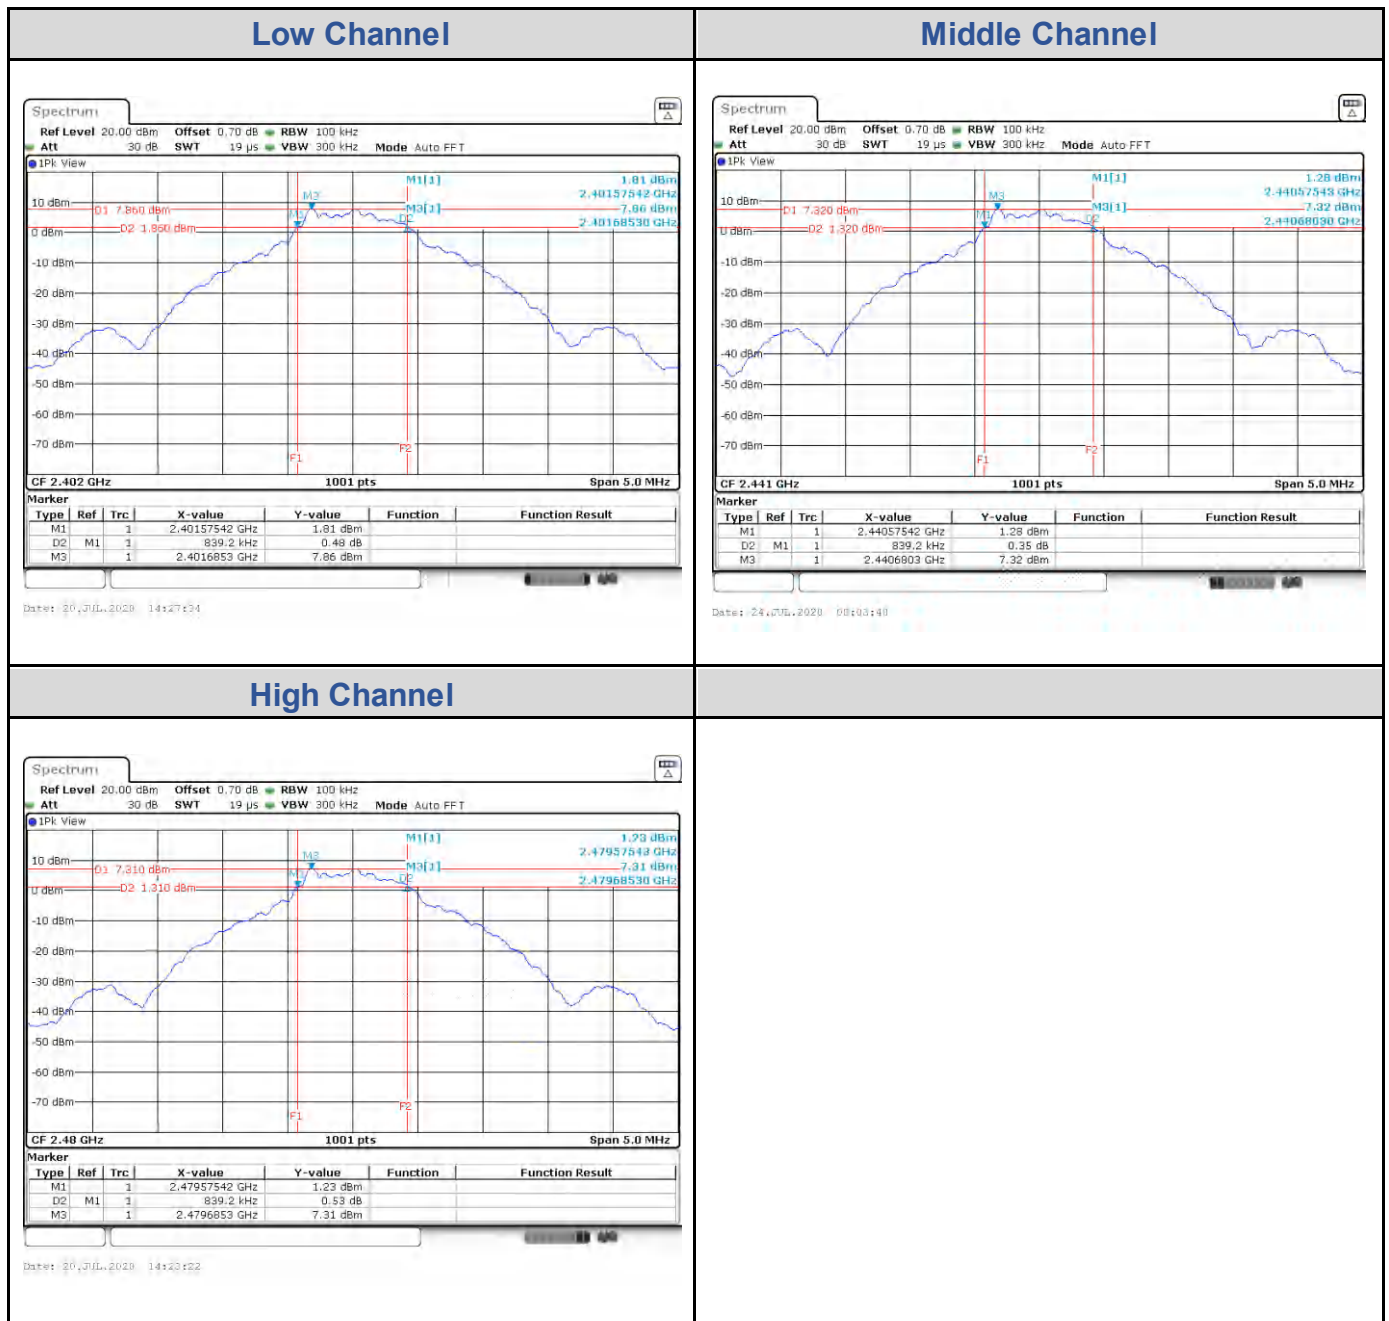

## Test Result of 99% Occupied Bandwidth


### ANT 1Mbps

Channel	Channel Frequency (MHz)	99% Bandwidth (kHz)
Low Channel	2402	905.09
Middle Channel	2441	908.09
High Channel	2480	914.09

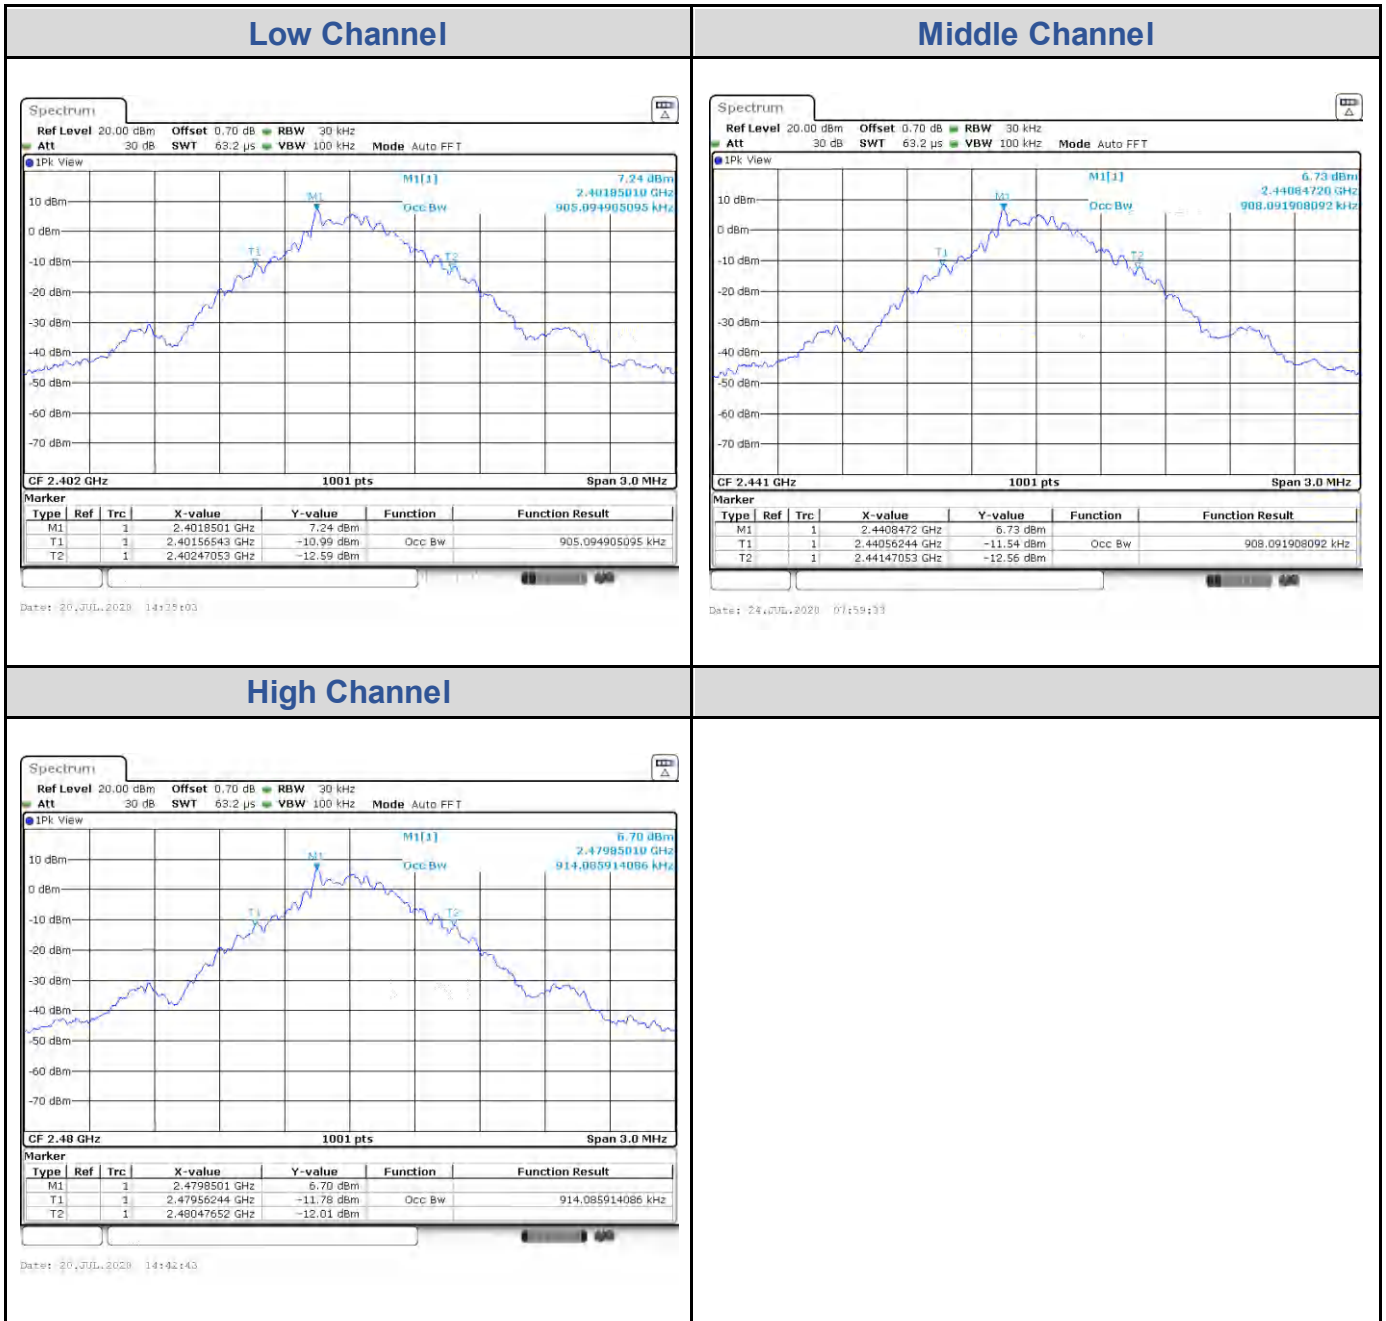

**Nordic Original 2Mbps**

Channel	Channel Frequency (MHz)	99% Bandwidth (kHz)
Low Channel	2402	1718.2
Middle Channel	2441	1723.2
High Channel	2480	1733.2

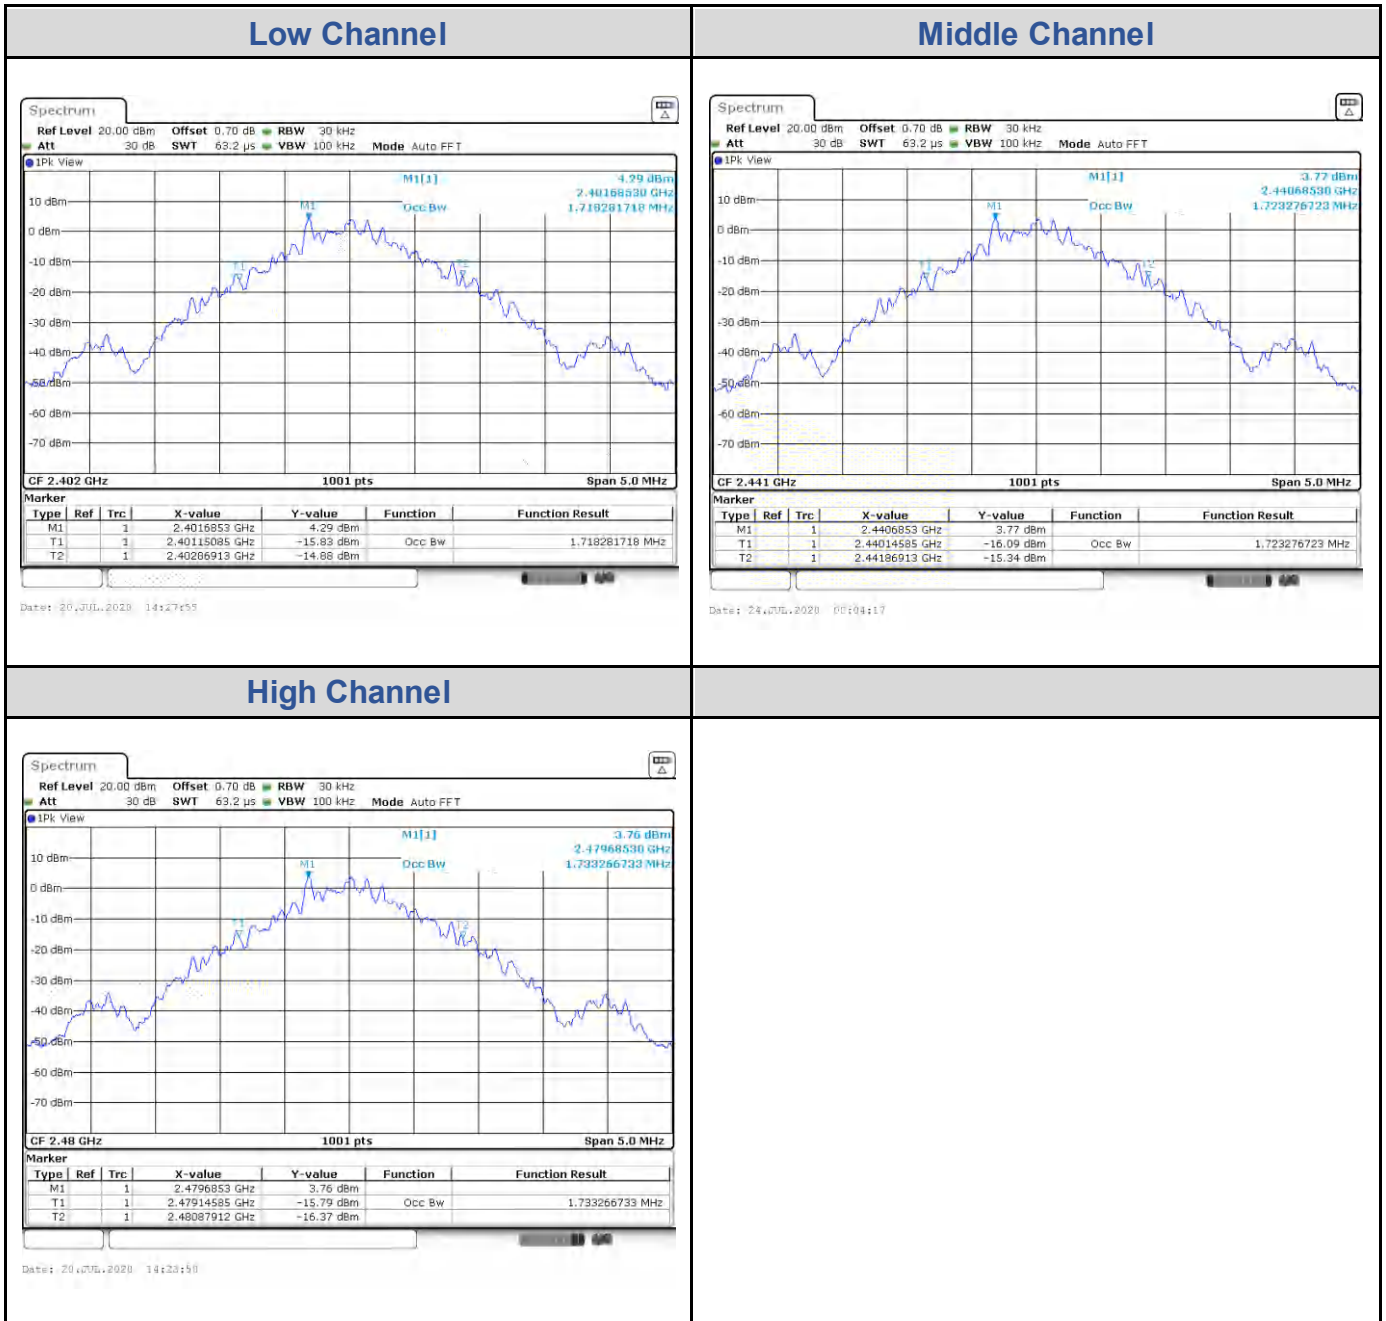




## Test Result of Power Spectral Density


### ANT 1Mbps

Channel	Channel Frequency (MHz)	Power Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
Low Channel	2402	-4.02	8	Pass
Middle Channel	2441	-4.47	8	Pass
High Channel	2480	-4.52	8	Pass

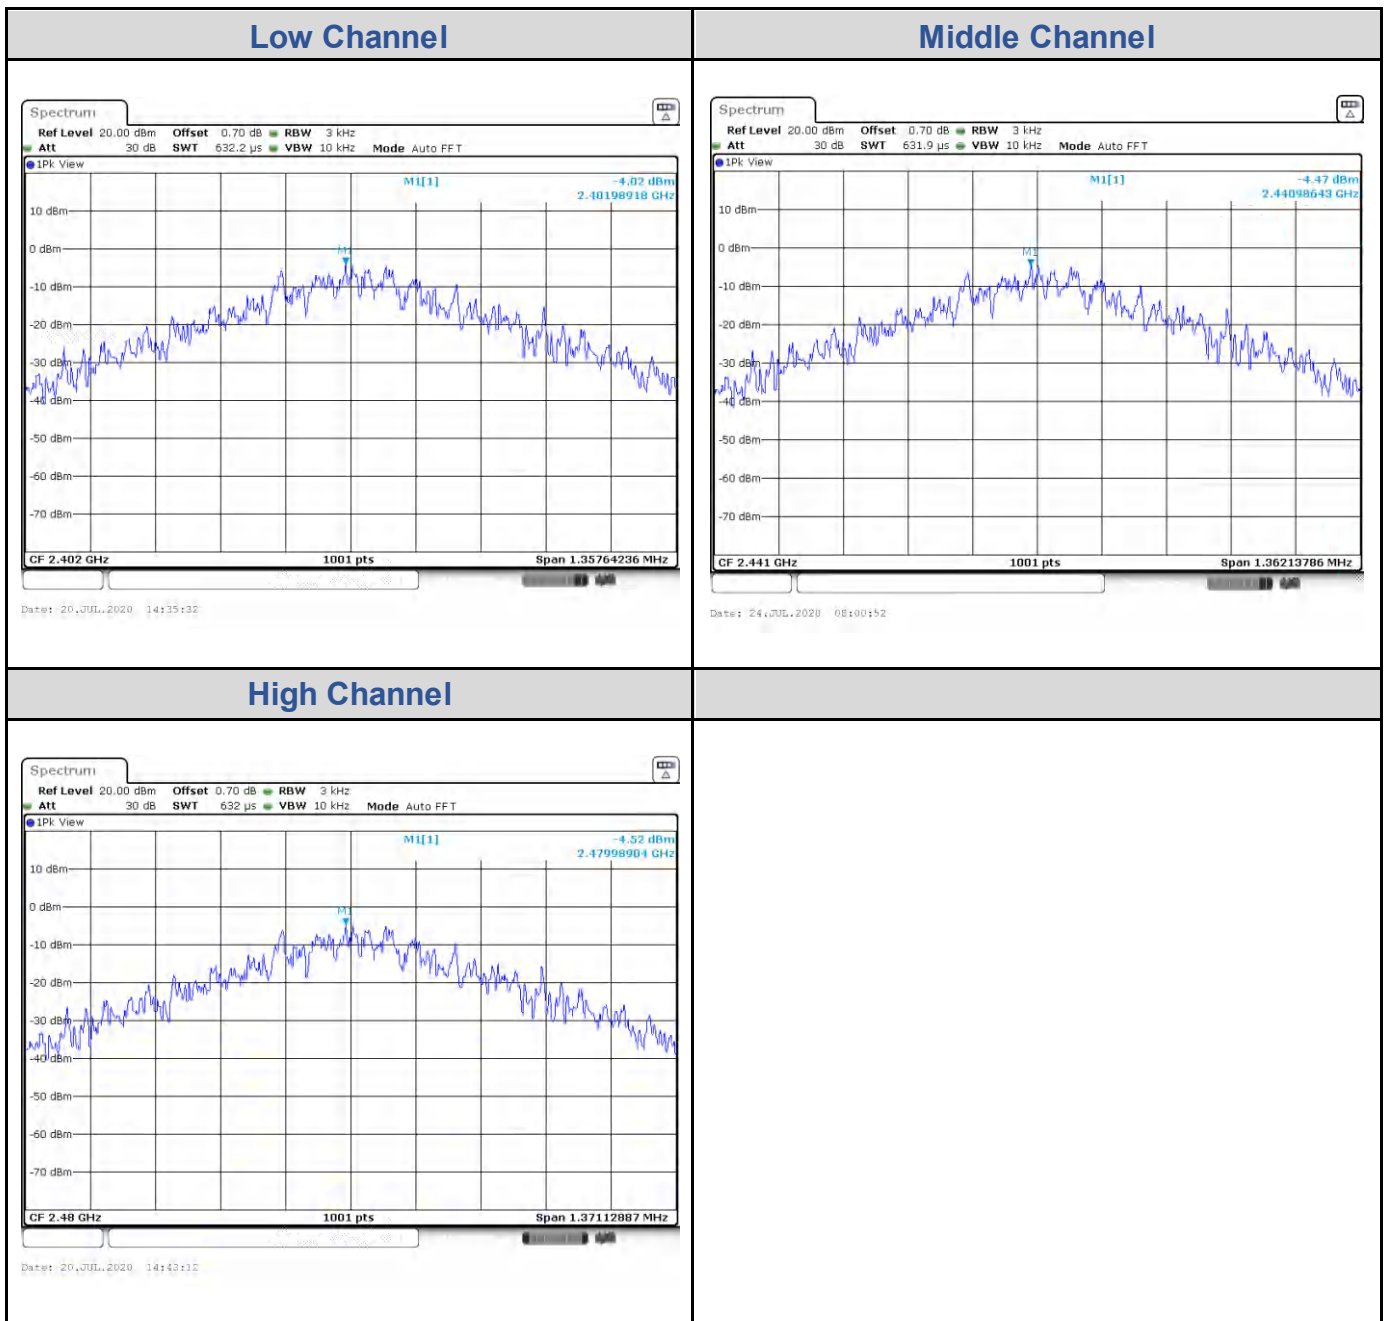


**Nordic Original 2Mbps**

Channel	Channel Frequency (MHz)	Power Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
Low Channel	2402	-6.51	8	Pass
Middle Channel	2441	-6.97	8	Pass
High Channel	2480	-7.10	8	Pass

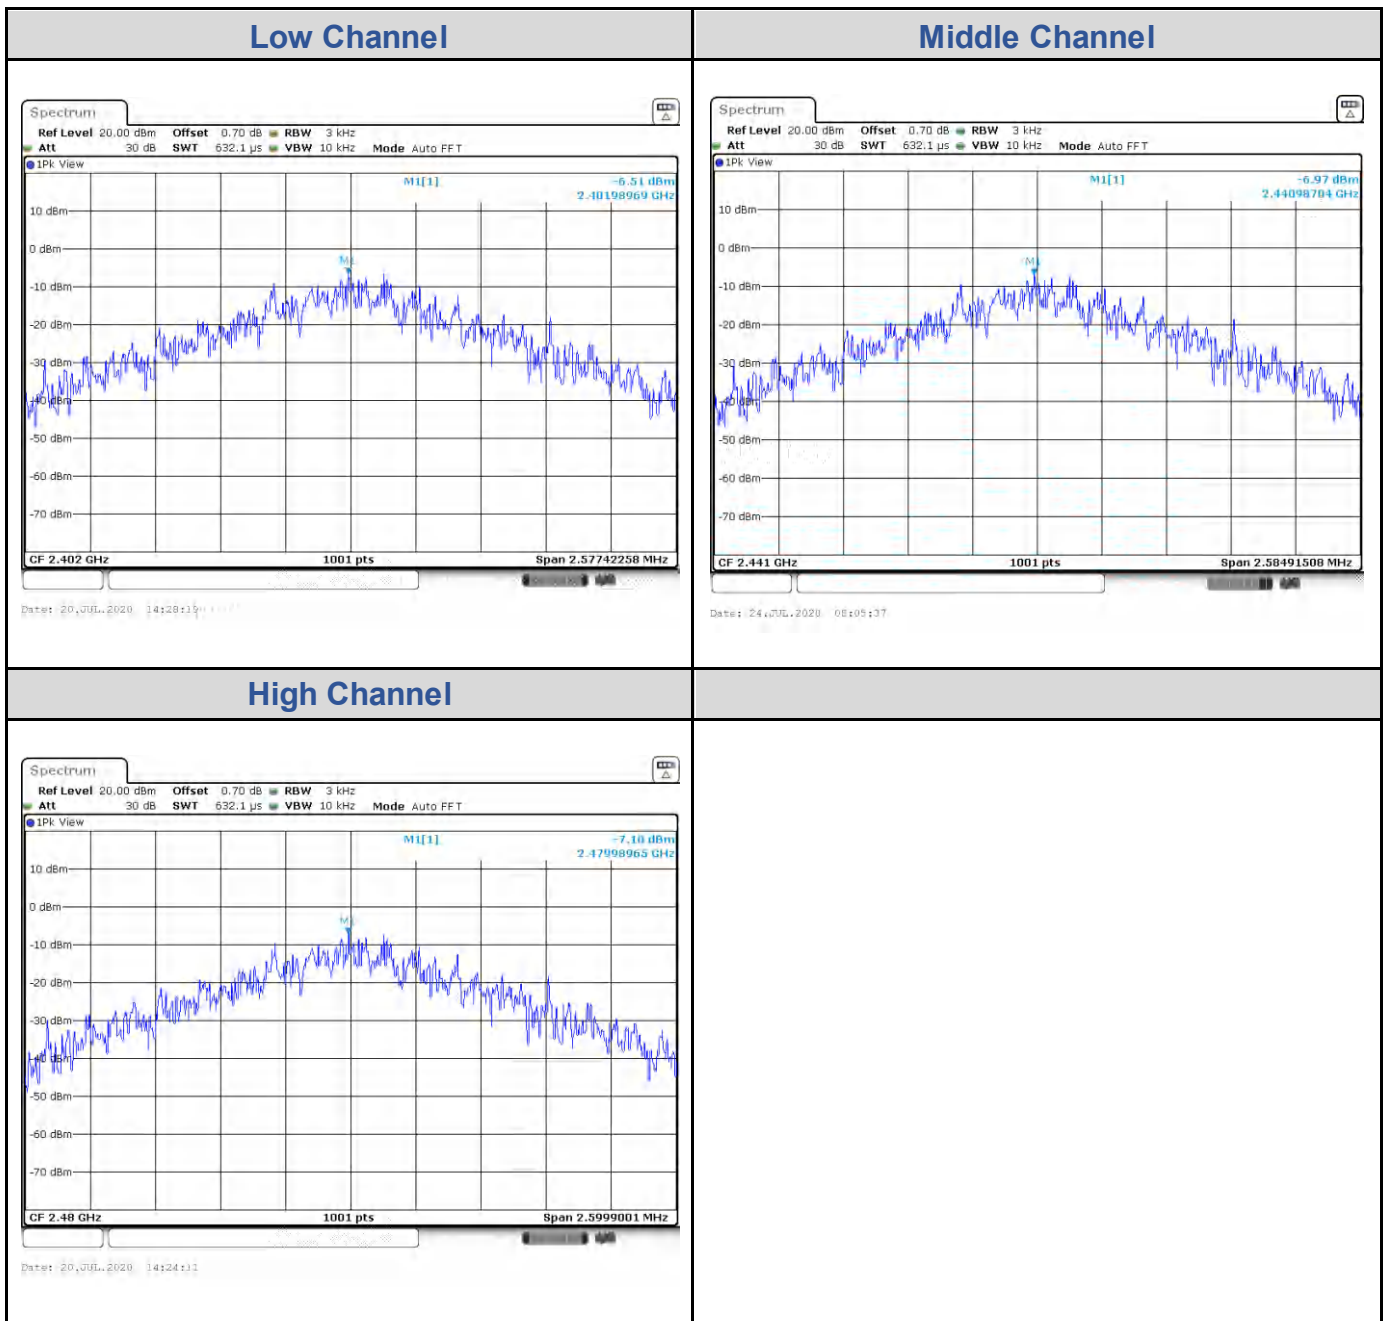



**Test Result of Conducted Spurious Emissions, Tx Mode**  
**ANT 1Mbps**

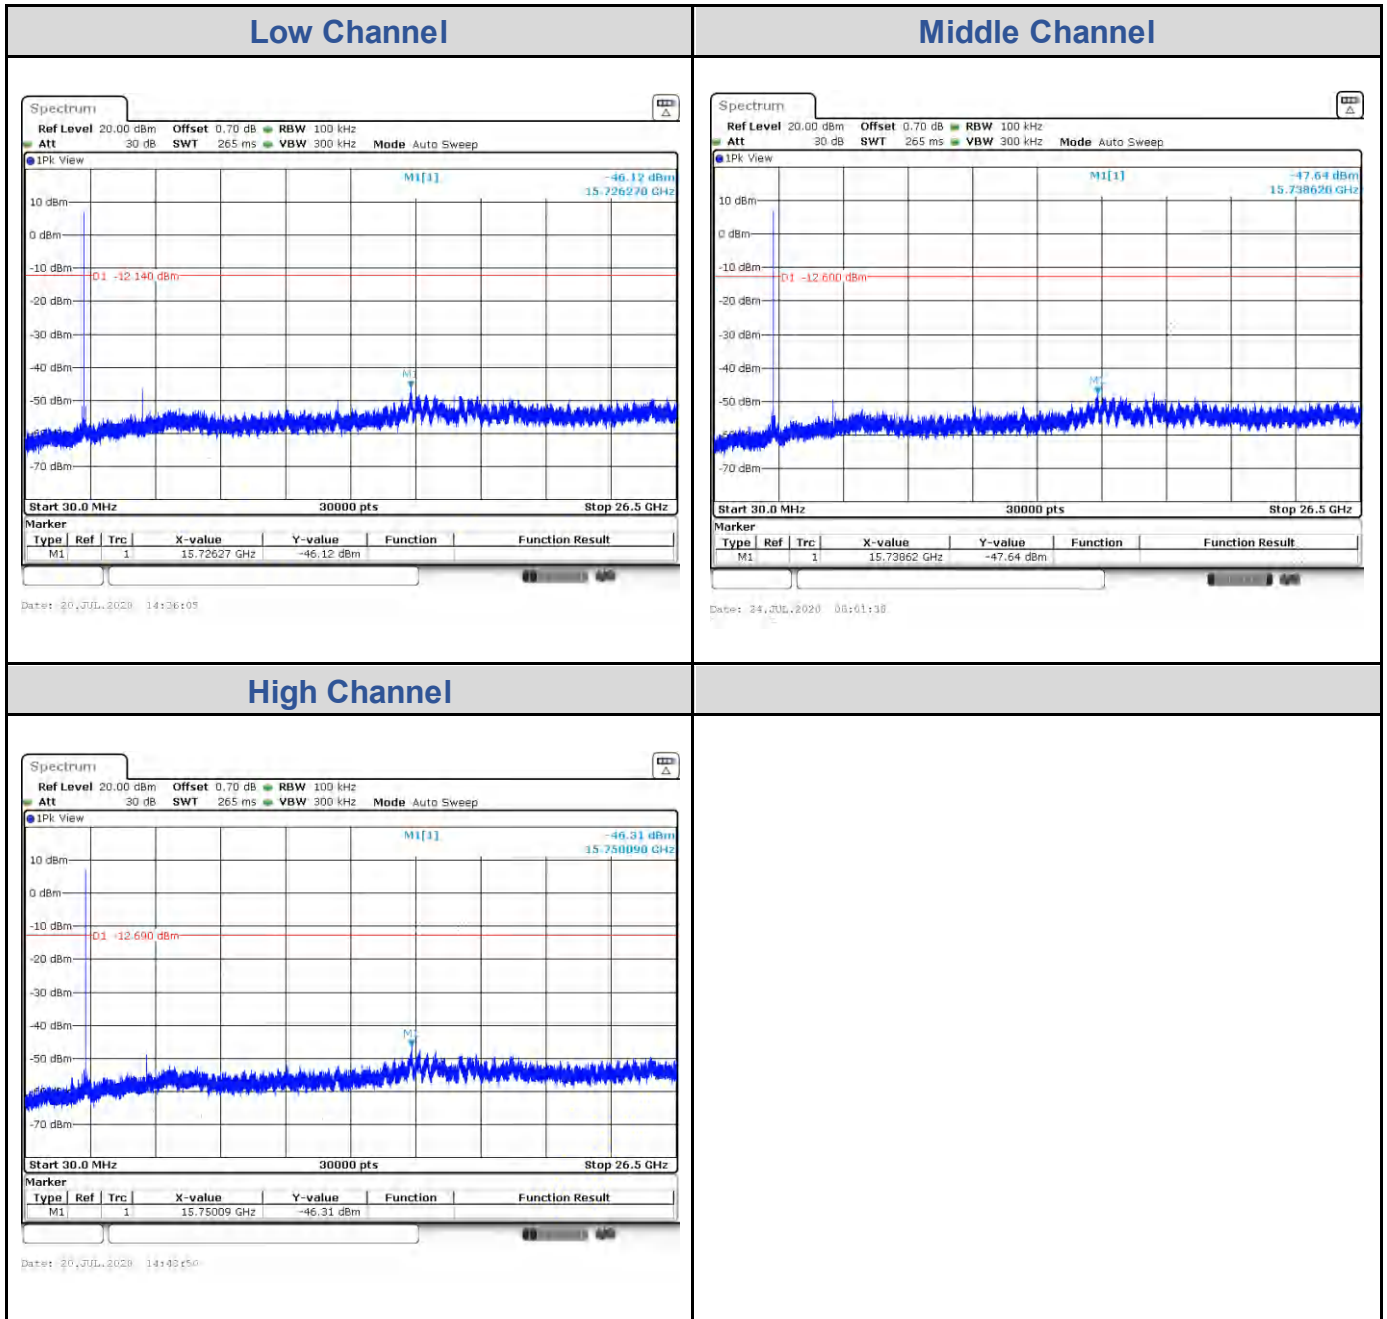

Nordic Original 2Mbps

