
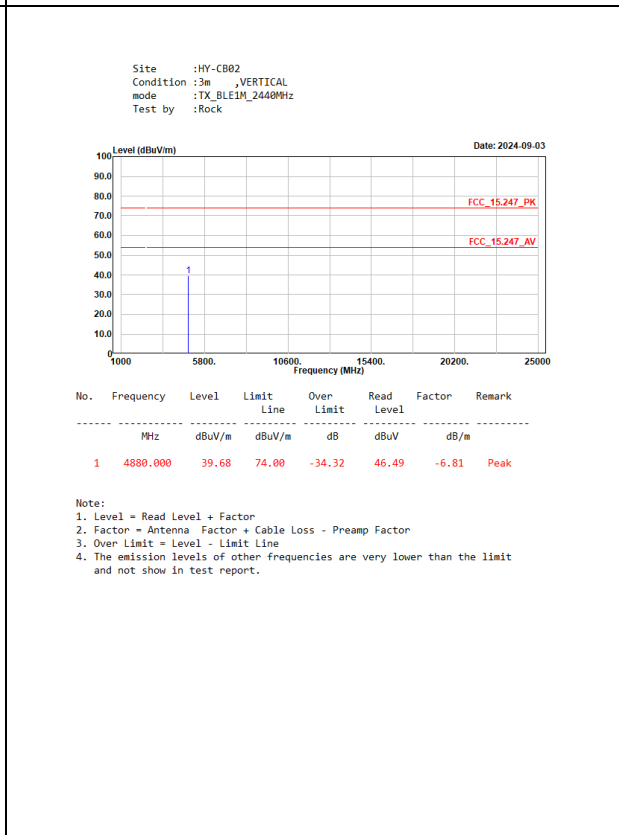
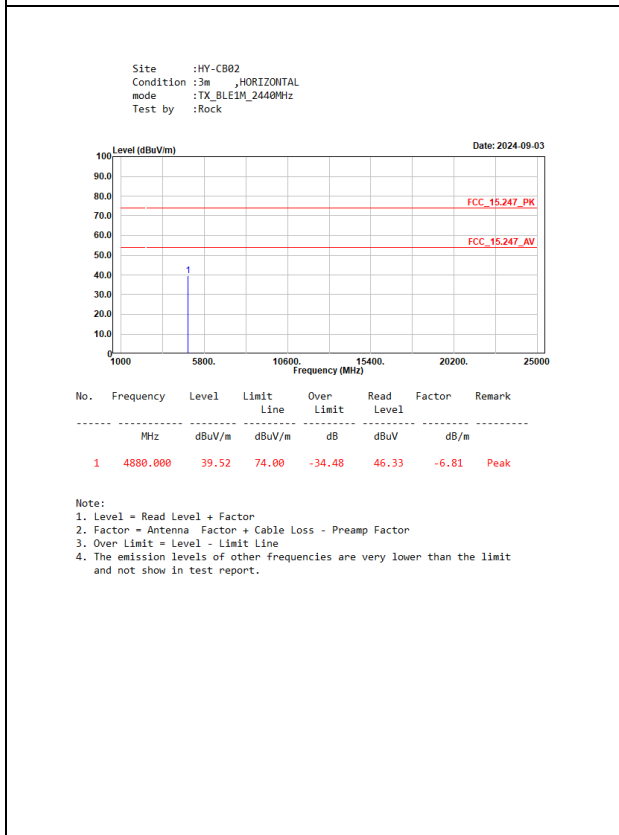
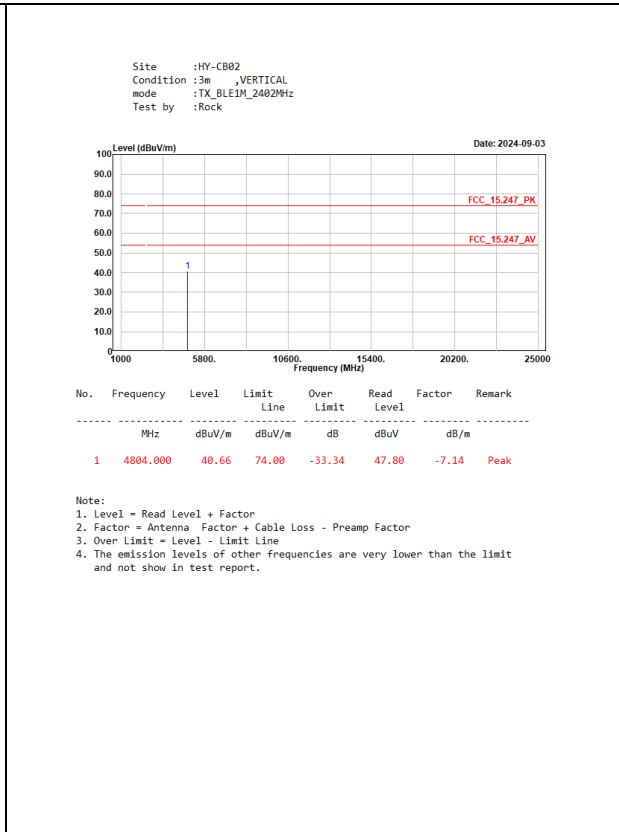



**Appendix A. Test Result of Maximum Conducted Output Power**

Modulation	Frequency (MHz)	Maximum Conducted Peak Output Power (dBm)	Limit (dBm)	Result
GFSK	2402	9.10	30.00	Pass
	2440	9.36	30.00	Pass
	2480	9.57	30.00	Pass

### Appendix B. Test Result of Radiated Emission

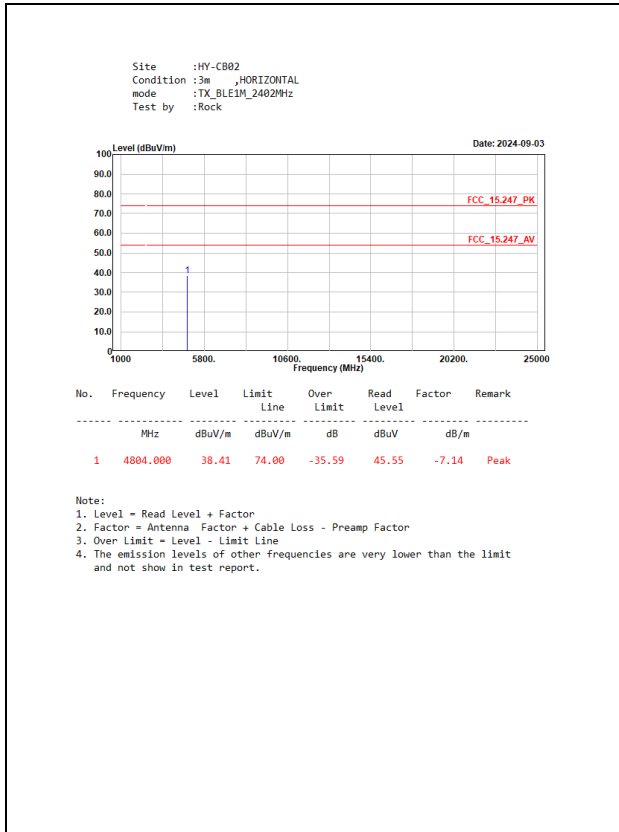


Site :HY-CB02  
 Condition :3m ,HORIZONTAL  
 mode :TX\_BLE1M\_2480MHz  
 Test by :Rock

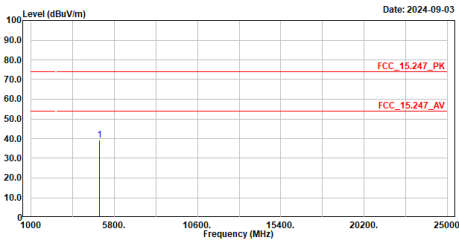

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4960.000	39.36	74.00	-34.64	45.87	-6.51	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02  
 Condition :3m ,VERTICAL  
 mode :TX\_BLE1M\_2480MHz  
 Test by :Rock

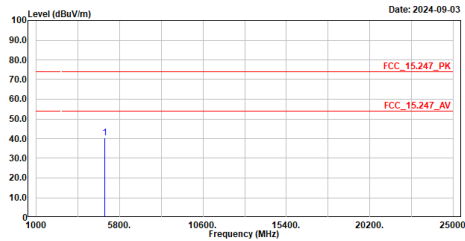

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4960.000	40.37	74.00	-33.63	46.88	-6.51	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02  
 Condition :3m ,HORIZONTAL  
 mode :TX\_BLE1M\_2440MHz  
 Test by :Rock

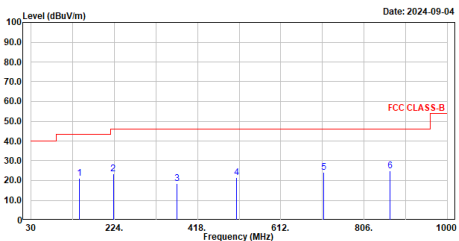

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	142.132	21.22	43.50	-22.28	44.99	-23.77	QP
2	221.575	23.38	46.00	-22.62	49.27	-25.89	QP
3	370.664	18.31	46.00	-27.69	39.07	-20.76	QP
4	509.277	21.56	46.00	-24.44	38.90	-17.34	QP
5	711.328	24.13	46.00	-21.87	37.59	-13.46	QP
6	865.849	25.04	46.00	-20.96	36.52	-11.48	QP





Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB02  
 Condition :3m ,VERTICAL  
 mode :TX\_BLE1M\_2440MHz  
 Test by :Rock

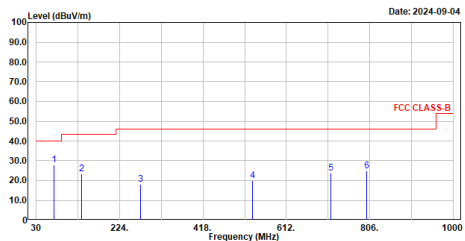


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	70.643	27.75	40.00	-12.25	53.93	-26.18	QP
2	135.051	23.23	43.50	-20.27	47.65	-24.42	QP
3	273.567	18.18	46.00	-27.82	41.62	-23.44	QP
4	534.012	20.08	46.00	-25.92	36.98	-16.90	QP
5	715.790	23.85	46.00	-22.15	37.22	-13.37	QP
6	799.598	24.89	46.00	-21.11	36.90	-12.01	QP

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The emission under 30MHz was not included since the emission levels are very low against the limit.

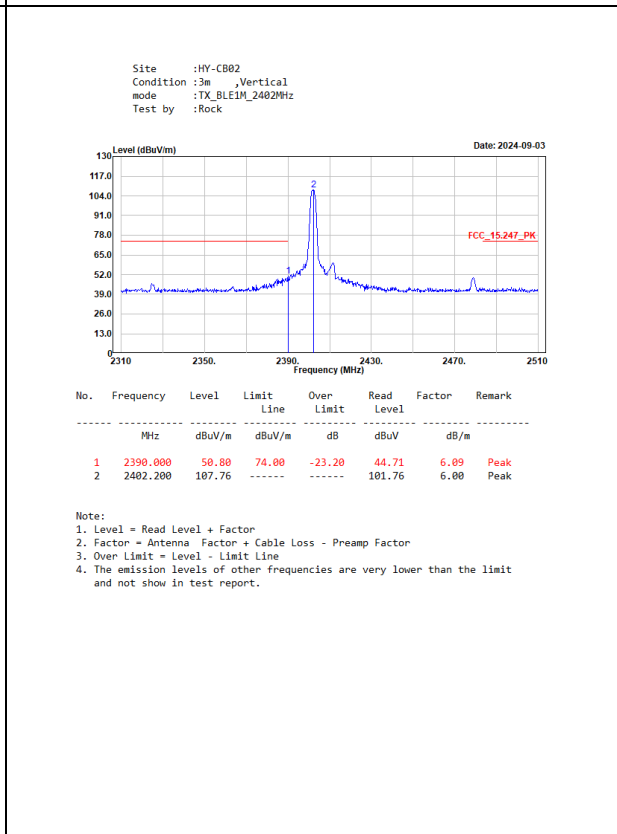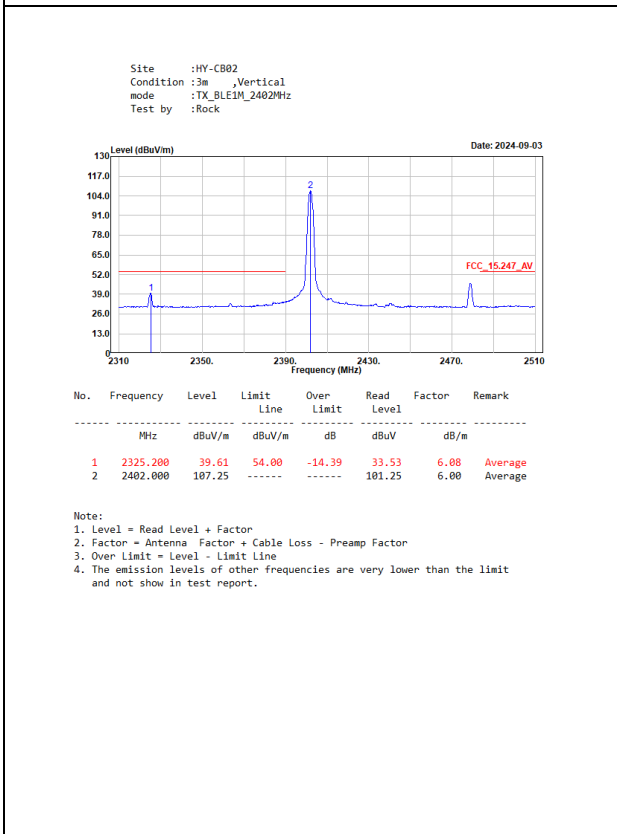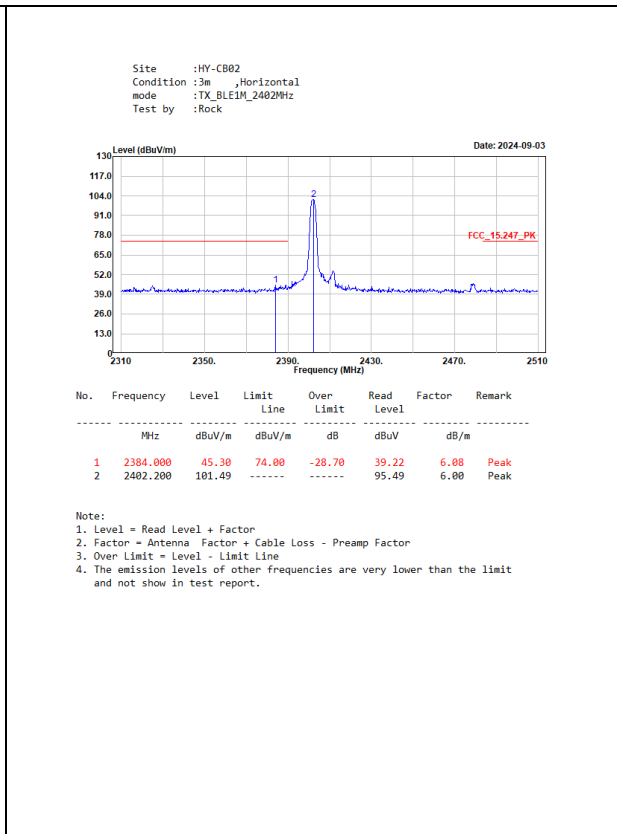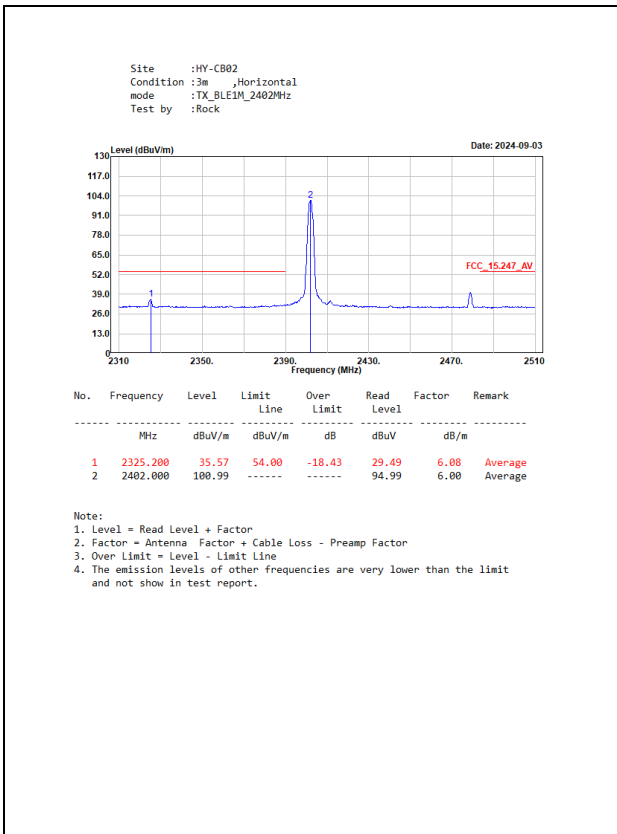


Site :HY-CB02  
 Condition :3m ,Horizontal  
 mode :TX\_BLE1M\_2480MHz  
 Test by :Rock

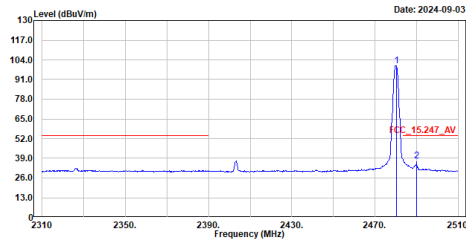

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2480.200	100.26	-----	-----	94.32	5.94	Average
2	2490.000	37.05	54.00	-16.95	31.00	6.05	Average

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02  
 Condition :3m ,Horizontal  
 mode :TX\_BLE1M\_2480MHz  
 Test by :Rock

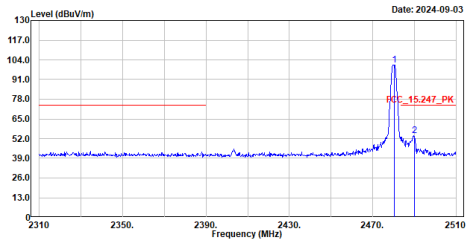

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2480.200	100.75	-----	-----	94.81	5.94	Peak
2	2490.000	54.13	74.00	-19.87	48.08	6.05	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02  
 Condition :3m ,Vertical  
 mode :TX\_BLE1M\_2480MHz  
 Test by :Rock

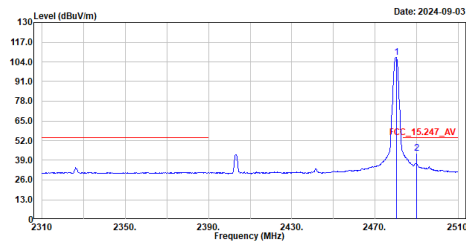

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2480.200	106.94	-----	-----	101.00	5.94	Average
2	2490.000	43.59	54.00	-10.41	37.54	6.05	Average

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02  
 Condition :3m ,Vertical  
 mode :TX\_BLE1M\_2480MHz  
 Test by :Rock

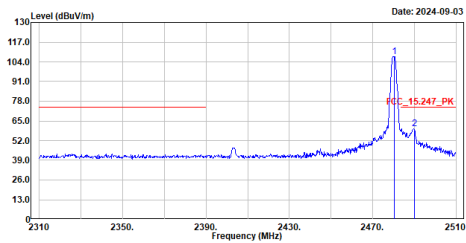

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2480.200	107.44	-----	-----	101.50	5.94	Peak
2	2490.000	59.96	74.00	-14.04	53.91	6.05	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.