

**FCC Part 15C
MEASUREMENT AND TEST REPORT
For**

Guangzhou Walkera Technology Co., Ltd

Taishi Industrial Park, Yuwotou Town, Panyu District,
Guangzhou, Guangdong, China

FCC ID: S29WK-2601

July 05, 2008

| | |
|---|--|
| This Report Concerns: <input checked="" type="checkbox"/> Original Report | Equipment Type: Transmitter for Model Plane |
| Test Engineer: | Joey Du |
| Report Number: | SE08F-096F |
| Test Date: | June 25- July 05, 2008 |
| Reviewed By: | |
| Prepared By: | S&E Technologies Laboratory Ltd Room 407, Block A Shennan Garden, Hi-Tech Industrial Park, Shenzhen 518057, P.R. China. Tel: 86-755-26636573, 26630631 Fax: 86-755-26630557 |

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior written consent of S&E Technologies Laboratory Ltd.

Table of Contents

1-Test Result Certification3

2- EUT Description.....4

3-Test Methodology5

 3.1 EUT CONFIGURATION5

 3.2 EUT EXERCISE.....5

 3.3 GENERAL TEST PROCEDURES.....5

 3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS6

 3.5 DESCRIPTION OF TEST MODES6

4- Instrument Calibration7

5- Facilities and Accreditations8

 5.1 FACILITIES8

 5.2 EQUIPMENT8

 5.3 LABORATORY ACCREDITATION AND LISTING8

6- Setup of Equipment Under Test10

 6.1 SETUP CONFIGURATION OF EUT10

 6.2 SUPPORT EQUIPMENT10

7- FCC Part 15.249 Requirements11

 7.1 RADIATED EMISSIONS..... 11

 7.2 POWER LINE CONDUCTED EMISSION17

 7.3 BAND EDGE18

Appendix 1 Photographs of Test Setup.....19

Appendix 2 Photographs of Constructional Details20

 EUT – FRONT VIEW.....20

 EUT – REAR VIEW.....20

 EUT – TOP VIEW21

 EUT – INTERNAL VIEW.....21

 EUT – PCB VIEW.....22

Appendix 3 FCC ID Label24

1-Test Result Certification

Applicant: Guangzhou Walkera Technology Co., Ltd
 Taishi Industrial Park, Yuwotou Town, Panyu District,
 Guangzhou, Guangdong, China

Equipment Under Test: Transmitter for Model Plane

Trade Name: Walkera

Model: WK-2601

Operation Frequency: 2404 ~2481 MHz

Antenna Designation: Non-user replaceable (fixed)

Date of Test: June 25- July 05, 2008

| Applicable Standards | |
|------------------------------|-------------------------|
| Standard | Test Result |
| FCC 47 CFR Part 15 Subpart C | No non-compliance noted |

We hereby certify that:

The above equipment was tested at Shenzhen Huatongwei International Inspection Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.207, 15.209 and Part 15.249. The test results of this report relate only to the tested sample identified in this report.

2- EUT Description

| | |
|---------------------|-------------------------------------|
| Product | Transmitter for Model Plane |
| Trade Name | Walkera |
| Model Number | WK-2601 |
| Model Difference | N/A |
| Power Supply | Powered by 8x1.5V AA size batteries |
| Frequency Range | 2404 ~2481 MHz |
| Antenna Designation | Non-user replaceable (fixed) |

Remark: This submitted test report is intended for FCC ID: S29WK-2601 filing to comply with Section 15.207, 15.209 and 15.249 of the FCC Part 15, Subpart C Rules.

3-Test Methodology

The tests documented in this report were performed in accordance with ANSI C63.4 (2003) and FCC CFR 47 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057, 15.207, 15.209 and 15.249.

3.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT Exercise

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

3.3 General Test Procedures

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4.

3.4 FCC Part 15.205 Restricted Bands of Operations

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

| MHz | MHz | MHz | GHz |
|----------------------------|-----------------------|-----------------|---------------|
| 0.090 - 0.110 | 16.42 - 16.423 | 399.9 - 410 | 4.5 - 5.15 |
| ¹ 0.495 - 0.505 | 16.69475 - 16.69525 | 608 - 614 | 5.35 - 5.46 |
| 2.1735 - 2.1905 | 16.80425 - 16.80475 | 960 - 1240 | 7.25 - 7.75 |
| 4.125 - 4.128 | 25.5 - 25.67 | 1300 - 1427 | 8.025 - 8.5 |
| 4.17725 - 4.17775 | 37.5 - 38.25 | 1435 - 1626.5 | 9.0 - 9.2 |
| 4.20725 - 4.20775 | 73 - 74.6 | 1645.5 - 1646.5 | 9.3 - 9.5 |
| 6.215 - 6.218 | 74.8 - 75.2 | 1660 - 1710 | 10.6 - 12.7 |
| 6.26775 - 6.26825 | 108 - 121.94 | 1718.8 - 1722.2 | 13.25 - 13.4 |
| 6.31175 - 6.31225 | 123 - 138 | 2200 - 2300 | 14.47 - 14.5 |
| 8.291 - 8.294 | 149.9 - 150.05 | 2310 - 2390 | 15.35 - 16.2 |
| 8.362 - 8.366 | 156.52475 - 156.52525 | 2483.5 - 2500 | 17.7 - 21.4 |
| 8.37625 - 8.38675 | 156.7 - 156.9 | 2655 - 2900 | 22.01 - 23.12 |
| 8.41425 - 8.41475 | 162.0125 - 167.17 | 3260 - 3267 | 23.6 - 24.0 |
| 12.29 - 12.293 | 167.72 - 173.2 | 3332 - 3339 | 31.2 - 31.8 |
| 12.51975 - 12.52025 | 240 - 285 | 3345.8 - 3358 | 36.43 - 36.5 |
| 12.57675 - 12.57725 | 322 - 335.4 | 3600 - 4400 | (2) |
| 13.36 - 13.41 | | | |

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

3.5 Description of Test Modes

The EUT has been tested under engineering test mode condition and the EUT staying in continuous transmitting mode.

4- Instrument Calibration

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

5- Facilities and Accreditations

5.1 Facilities

All measurement facilities used to collect the measurement data are located on the address of Shenzhen Huatongwei International Inspection Co., Ltd at Huatongwei Building, Keji Rd. 12 S., High-tech Park, Nanshan District, Shenzhen, Guangdong, P.R.China
The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

5.2 Equipment

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn.
Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.3 Laboratory Accreditation and Listing

CNAS-Lab Code: L1225

Shenzhen Huatongwei International Inspection Co., Ltd has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories, Date of Registration: August 02, 2007. Valid time is until March 04, 2009.

A2LA-Lab Cert. No. 2243.01

Shenzhen Huatongwei International Inspection Co., Ltd, EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 1999 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing. Valid time is from Aug 24, 2005 to Sept 30, 2009.

FCC-Registration No.: 662850

Shenzhen Huatongwei International Inspection Co., Ltd, EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 662850, Renewal date September 12, 2006.

IC-Registration No.: 5377

The 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 5377 on November 28th, 2005.

VCCI

The 3m Semi-anechoic chamber (12.2m×7.95m×6.7m) and Shielded Room (8m×4m×3m) of Shenzhen Huatongwei International Inspection Co., Ltd has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2484. Date of Registration: December 20, 2006. Valid time is until December 19, 2009.

Main Ports Conducted Interference Measurement of Shenzhen Huatongwei International Inspection Co., Ltd has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: C-2726. Date of Registration: December 20, 2006. Valid time is until December 19, 2009.

IECEE CB

Shenzhen Huatongwei International Inspection Co Ltd has been assessed and determined to fully comply with the requirements of ISO/IEC 17025: 2005-05, The Basic Rules, IECEE 01: 2006-10 and Rules of Procedure IECEE 02: 2006-10, and the relevant IECEE CB-Scheme Operational Documents.

It is therefore entitled to operate as a CB Testing Laboratory under the responsibility of Nemko A/S. This certificate remains valid until May 25th 2009 at which time it will be reissued by the IECEE Executive Secretary upon successful completion of the normally scheduled 3-year Reassessment Program administered by the IECEE CB Scheme.

6- Setup of Equipment Under Test

6.1 Setup Configuration of EUT

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

6.2 Support Equipment

| Device Type | Brand | Model | FCC ID | Series No. | Data Cable | Power Cord |
|-------------|-------|-------|--------|------------|------------|------------|
| N/A | | | | | | |

Remark:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer’s requirements and conditions for the intended use.

7- FCC Part 15.249 Requirements

7.1 Radiated Emissions

Limit

1. Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| Frequency (MHz) | Field Strength (mV/m) | Measurement Distance (m) |
|-----------------|-----------------------|--------------------------|
| 30-88 | 100* | 3 |
| 88-216 | 150* | 3 |
| 216-960 | 200* | 3 |
| Above 960 | 500 | 3 |

Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections and 15.241.

2. In the above emission table, the tighter limit applies at the band edges.

| Frequency (Hz) | Field Strength (μ V/m at 3-meter) | Field Strength (dB μ V/m at 3-meter) |
|----------------|--|--|
| 30-88 | 100 | 40 |
| 88-216 | 150 | 43.5 |
| 216-960 | 200 | 46 |
| Above 960 | 500 | 54 |

3. Fundamental and harmonics Emissions Limits


| Frequency (MHz) | Field Strength of Fundamental | | Field Strength of Harmonics | |
|--------------------|-------------------------------|--------------|-----------------------------|--------------|
| | mV/m@3m | dBuV/m@3m | uV/m@3m | dBuV/m@3m |
| 2400-2483.5 | 50 | 94 (Average) | 500 | 54 (Average) |
| | | 114 (Peak) | | 74 (Peak) |

Measurement Equipment Used


| 3/5 Anechoic Chamber Radiation Test Site # 4 | | | | |
|--|-----------------|-------------|---------------|-----------------|
| Equipment type | Manufacturer | Model | Serial Number | Calibration Due |
| Ultra-Broadband Antenna | ROHDE & SCHWARZ | HL562 | 100015 | 10/2008 |
| EMI Test Receiver | ROHDE & SCHWARZ | ESI 26 | 100009 | 10/2008 |
| Double-Ridged-Waveguide Horn Antenna | ROHDE & SCHWARZ | HF906 | 100039 | 10/2008 |
| Turntable | ETS | 2088 | 2149 | N/A |
| RF Test Panel | ROHDE & SCHWARZ | TS / RSP | 335015/ 0017 | N/A |
| Antenna Mast | ETS | 2075 | 2346 | N/A |
| EMI Test Software | ROHDE & SCHWARZ | ES-K1 V1.71 | N/A | 10/2008 |

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration Below 1 GHz

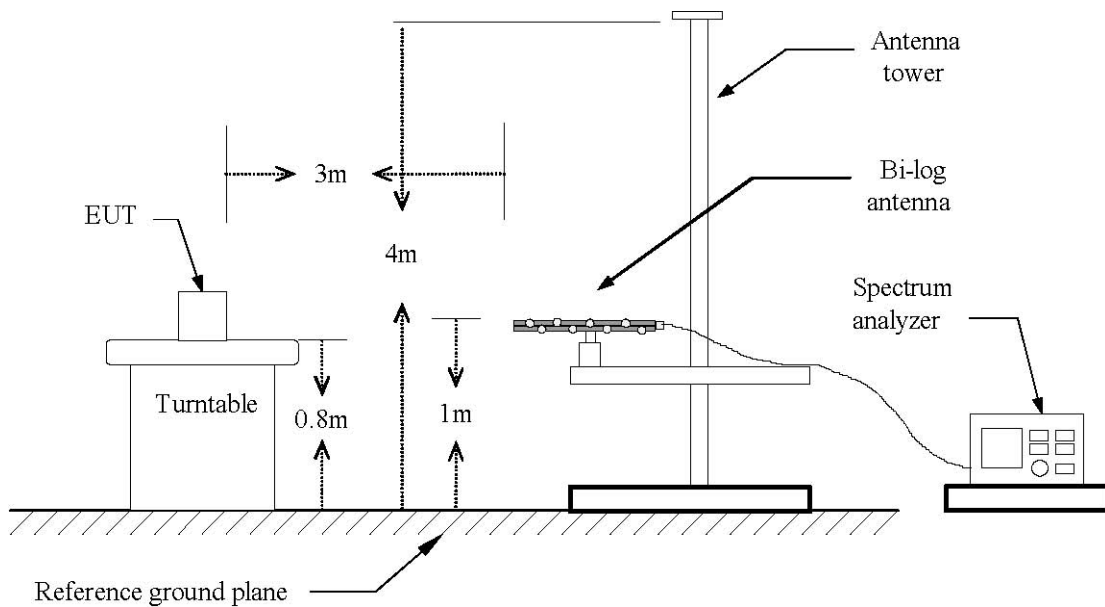

Above 1 GHz

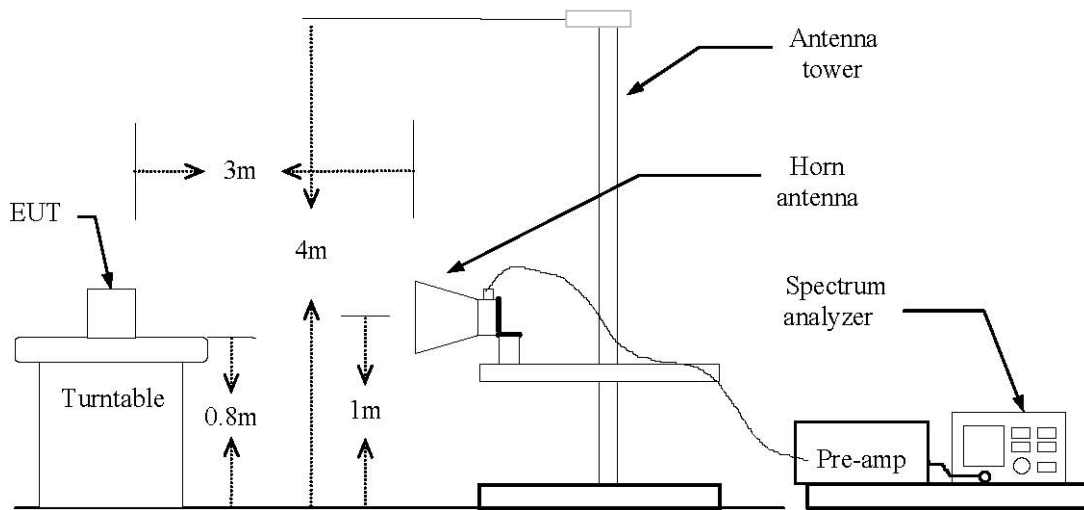**Test Procedure**

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.

Test Results

Operation Mode: TX on top channel Test date: June 27, 2008

Temperature: 23 °C Humidity: 74 % RH Polarity: Ver. / Hor.

| Freq. (MHz) | Ant.Pol. (H/V) | Detector Mode (PK/AV) | Reading (dBuV) | Ant./CL/ Amp.CF (dB) | Actual FS (dBuV/m) | Limit 3m (dBuV/m) | Safe Margin (dB) | Note |
|-------------|----------------|-----------------------|----------------|----------------------|--------------------|-------------------|------------------|------|
| 2481 | V | Peak | 94.00 | -3.30 | 90.70 | 93.98 | -3.28 | F |
| 2481 | H | Peak | 92.20 | -3.30 | 88.90 | 93.98 | -5.08 | F |
| 4962 | V | Peak | 48.50 | 3.80 | 52.30 | 73.98 | -21.68 | H |
| 4962 | H | Peak | 41.30 | 3.80 | 45.10 | 73.98 | -28.88 | H |
| 7443 | V | | --- | | | | | H |
| 7443 | H | | --- | | | | | H |
| | | | | | | | | |
| 70.82 | V | Peak | 5.00 | 10.80 | 15.80 | 40.40 | -24.20 | |
| 70.82 | H | Peak | 6.40 | 10.80 | 17.20 | 40.40 | -22.80 | |
| Others | | | | | | | | |

Remark

- (1) Measuring frequencies from 30 MHz to the 25 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency, "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) The IF bandwidth of EMI Test Receiver was 120KHz for measuring from 30 MHz to 1 GHz and 1 MHz for measuring above 1 GHz

Operation Mode: TX on middle channel Test date: June 27, 2008

Temperature: 23 °C Humidity: 74 % RH Polarity: Ver. / Hor.

| Freq. (MHz) | Ant.Pol. (H/V) | Detector Mode (PK/AV) | Reading (dBuV) | Ant./CL/ Amp.CF (dB) | Actual FS (dBuV/m) | Limit 3m (dBuV/m) | Safe Margin (dB) | Note |
|-------------|----------------|-----------------------|----------------|----------------------|--------------------|-------------------|------------------|------|
| 2441 | V | Peak | 93.50 | -3.30 | 90.20 | 93.98 | -3.78 | F |
| 2441 | H | Peak | 92.40 | -3.30 | 89.10 | 93.98 | -4.88 | F |
| 4882 | V | Peak | 45.00 | 3.80 | 48.80 | 73.98 | -25.18 | H |
| 4882 | H | Peak | 44.90 | 3.80 | 48.70 | 73.98 | -25.28 | H |
| 7323 | V | | --- | | | | | H |
| 7323 | H | | --- | | | | | H |
| | | | | | | | | |
| 72.77 | V | Peak | 4.30 | 11.10 | 15.40 | 40.00 | -24.60 | |
| 72.77 | H | Peak | 6.10 | 11.10 | 17.20 | 40.00 | -22.80 | |
| Others | | | | | | | | |

Remark

- (1) Measuring frequencies from 30 MHz to the 25 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency, "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) The IF bandwidth of EMI Test Receiver was 120KHz for measuring from 30 MHz to 1 GHz and 1 MHz for measuring above 1 GHz

Operation Mode: TX on low channel Test date: June 27, 2008

Temperature: 23 °C Humidity: 74 % RH Polarity: Ver. / Hor.

| Freq. (MHz) | Ant.Pol. (H/V) | Detector Mode (PK/AV) | Reading (dBuV) | Ant./CL/ Amp.CF (dB) | Actual FS (dBuV/m) | Limit 3m (dBuV/m) | Safe Margin (dB) | Note |
|-------------|----------------|-----------------------|----------------|----------------------|--------------------|-------------------|------------------|------|
| 2404 | V | Peak | 94.40 | -3.30 | 91.10 | 93.98 | -2.88 | F |
| 2404 | H | Peak | 92.80 | -3.30 | 89.50 | 93.98 | -4.48 | F |
| 4808 | V | Peak | 49.40 | 3.80 | 53.20 | 73.98 | -20.78 | H |
| 4808 | H | Peak | 47.70 | 3.80 | 51.50 | 73.98 | -22.48 | H |
| 7212 | V | | --- | | | | | H |
| 7212 | H | | --- | | | | | H |
| | | | | | | | | |
| 70.83 | V | Peak | 4.40 | 11.80 | 15.20 | 40.00 | -24.80 | |
| 70.83 | H | Peak | 5.70 | 11.80 | 16.50 | 40.00 | -23.50 | |
| Others | | | | | | | | |

Remark:

- (1) Measuring frequencies from 30 MHz to the 25 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency, "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) The IF bandwidth of EMI Test Receiver was 120KHz for measuring from 30 MHz to 1 GHz and 1 MHz for measuring above 1 GHz

7.2 Power line Conducted Emission

Limit

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

| Frequency Range (MHz) | Limits (dB μ V) | |
|-----------------------|---------------------|----------|
| | Quasi-peak | Average |
| 0.15 to 0.50 | 66 to 56 | 56 to 46 |
| 0.50 to 5 | 56 | 46 |
| 5 to 30 | 60 | 50 |

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Measurement Equipment Used

| Conducted Emission Test Site # 3 | | | | |
|----------------------------------|-----------------|-------------|---------------|-----------------|
| Equipment type | Manufacturer | Model | Serial Number | Calibration Due |
| EMI Test Receiver | ROHDE & SCHWARZ | ESCI | 100106 | 10/2008 |
| Artificial Mains | ROHDE & SCHWARZ | ESH2-Z5 | 100028 | 10/2008 |
| Pulse Limiter | ROHDE & SCHWARZ | ESHSZ2 | 100044 | 10/2008 |
| EMI Test Software | ROHDE & SCHWARZ | ES-K1 V1.71 | N/A | 10/2008 |

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

Test Procedure

Not applicable (Since the EUT is powered by batteries)

Test Results

Not applicable (Since the EUT is powered by battery)

7.3 Band Edge


Limit

FCC Part 15.249(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

Measurement Equipment Used

The same as clause 7.1.

Test Results

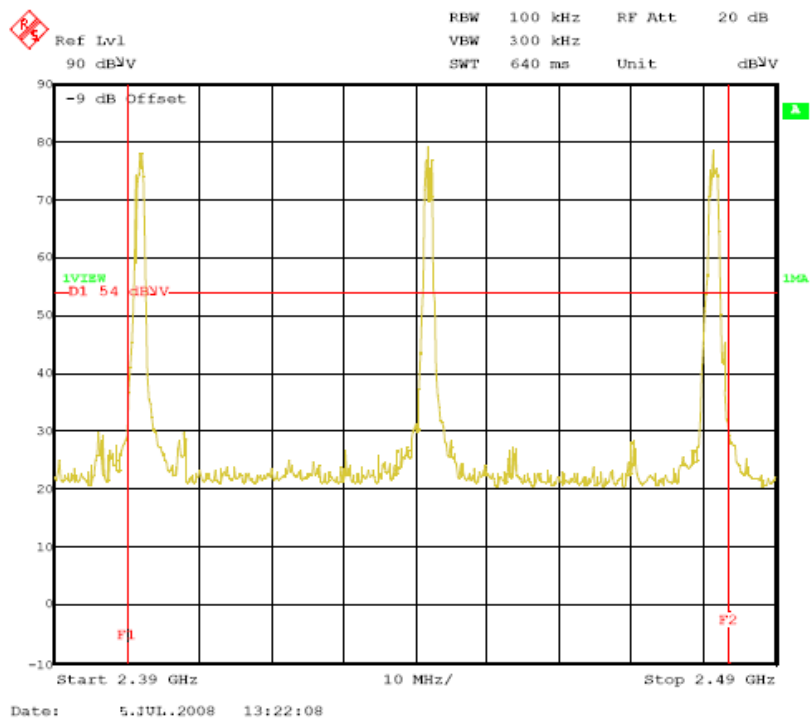

F1 : 2400 MHz
 F2 : 2483.5 MHz
 D1 : Radiated emission limits; general requirements, 500µV/m or 54 dBµV/m

Note:

1. The field strength of any emissions which appear outside of this band shall not exceed the general radiated emission limits in Section 15.209.
2. The average measurement was not performed when the peak measured data under the limit of average detection.

Appendix 1 Photographs of Test Setup

Radiated Emission Set up Photos



Appendix 2 Photographs of Constructional Details

EUT – Front View



EUT – Rear View






EUT – Top View







EUT – Internal View



EUT – PCB View

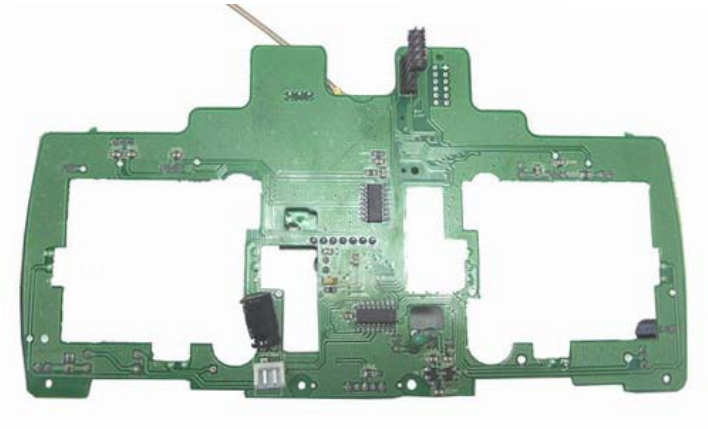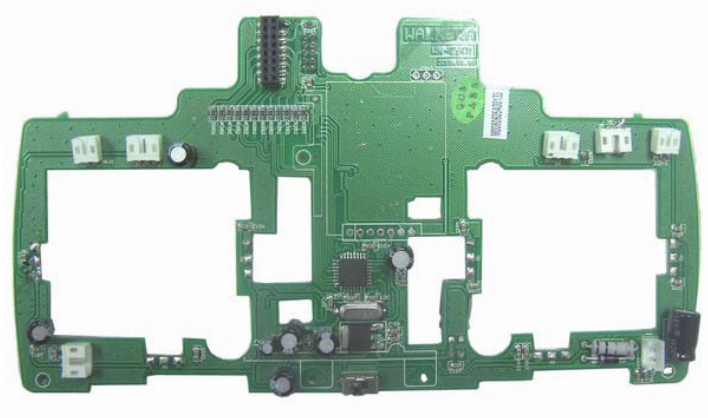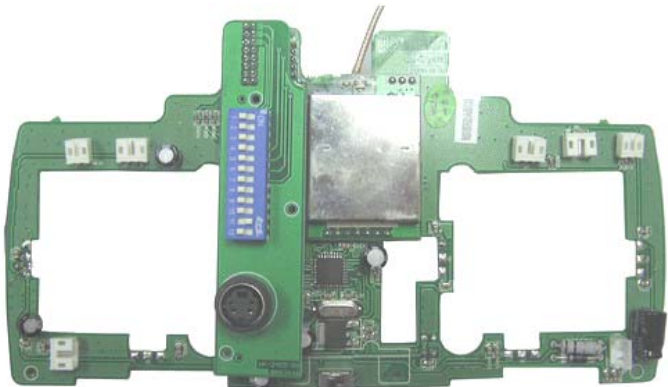

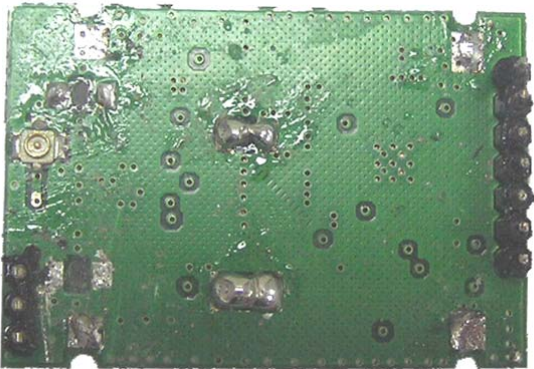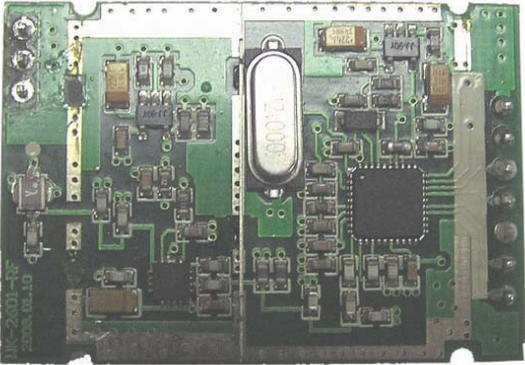

Appendix 3 FCC ID Label

FCC ID: S29WK-2601

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation

The Label must not be a stick-on paper. The Label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Proposed Label Location on EUT EUT Bottom View/proposed FCC Mark Location

