



## MET Laboratories, Inc. *Safety Certification - EMI - Telecom Environmental Simulation*

33439 WESTERN AVENUE ! UNION CITY, CALIFORNIA 94587 ! PHONE (510) 489-6300 ! FAX (510) 489-6372

April 3, 2007

Advanced RF Technologies  
2607 Colorado Blvd.  
Los Angeles, CA 90041

Dear Julie Song,

Enclosed is the EMC test report for compliance testing of the Advanced RF Technologies., Epoch-HP-20, Epoch-HP-10, Epoch-HP-05 and Epoch-HP-XX with 5MHz and 15MHz filters (1900MHz band). The Advanced RF Technologies , Epoch-HP-20, Epoch-HP-10, Epoch-HP-05 and Epoch-HP-XX with 5MHz and 15MHz filters (1900MHz band) was tested to the requirements of the FCC Certification rules under Title 47 of the CFR Part 24 Subpart E for Broadband PCS Devices and Part 15 Subpart B for Class A Digital Devices.

Thank you for using the services of MET Laboratories, Inc. If you have any questions regarding these results or if MET can be of further service to you, please feel free to contact me.

Sincerely yours,

MET LABORATORIES, INC.


Jennifer Sanchez  
Documentation Department

Reference: (\Advanced RF Technologies\EMCS20745-FCC24)

Certificates and reports shall not be reproduced except in full, without the written permission of MET Laboratories, Inc. While use of the National Voluntary Laboratory Accreditation Program (NVLAP) letters or the NVLAP Logo, the Standards Council of Canada Logo, or the Nationally Recognized Testing Laboratory (NRTL) Letters in this report reflects MET Accreditation under these programs, these letters, logo, or statements do not claim product endorsement by NVLAP or any Agency of the U.S. Government.



*The Nation's First Licensed Nationally Recognized Testing Laboratory*





**MET Laboratories, Inc.** *Safety Certification - EMI - Telecom Environmental Simulation*

33439 WESTERN AVENUE ! UNION CITY, CALIFORNIA 94587 ! PHONE (510) 489-6300 ! FAX (510) 489-6372

## **Electromagnetic Compatibility Criteria Test Report**

For the

**Advanced RF Technologies  
Model Epoch-HP-20, Epoch-HP-10, Epoch-HP-05 and Epoch-HP-XX with 5MHz and 15MHz  
filters (1900MHz band)**

Tested under

**FCC Certification Rules  
Title 47 of the CFR, Part 24 Subpart E for Broadband PCS Devices  
and Part 15 Subpart B for Class A Digital Devices**

**MET Report: EMCS20745-FCC24**

April 3, 2007

### **Prepared For:**

**Advanced RF Technologies  
2607 Colorado Blvd.  
Los Angeles, CA 90041**

**Prepared By:  
MET Laboratories, Inc.  
4855 Patrick Henry Dr., Building 6  
Santa Clara, CA 95054**



Advanced RF Technologies  
Epoch-HP-20, Epoch-HP-10, Epoch-HP-05 and  
Epoch-HP-XX with 5MHz and 15MHz filters (1900MHz band)

Electromagnetic Compatibility  
Cover Page  
CFR Title 47 Part 24 Subpart E & Part 15 Subpart B

## Electromagnetic Compatibility Criteria Test Report

For the


**Advanced RF Technologies**  
**Model Epoch-HP-20, Epoch-HP-10, Epoch-HP-05 and Epoch-HP-XX with 5MHz and 15MHz**  
**filters (1900MHz band)**

### Tested Under

**FCC Certification Rules**  
**Title 47 of the CFR, Part 24 Subpart E for Broadband PCS Devices**  
**and Part 15 Subpart B for Class A Digital Devices**



Shawn McMillen  
Electromagnetic Compatibility Lab



Jennifer Sanchez  
Documentation Department

**Engineering Statement:** The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of Part 24 Subpart E and Part 15 Subpart B of the FCC Rules under normal use and maintenance.



Tony Permsombut  
Electromagnetic Compatibility Lab



Advanced RF Technologies  
Epoch-HP-20, Epoch-HP-10, Epoch-HP-05 and  
Epoch-HP-XX with 5MHz and 15MHz filters (1900MHz band)

Electromagnetic Compatibility  
Report Status  
CFR Title 47 Part 24 Subpart E & Part 15 Subpart B

## Report Status Sheet

Revision	Report Date	Reason for Revision
Ø	April 3, 2007	Initial Issue.



## Table of Contents

<b>1. Executive Summary .....</b>	<b>1</b>
<b>1.1. Purpose of Test.....</b>	<b>2</b>
<b>1.2. Executive Summary .....</b>	<b>2</b>
<b>2. Equipment Configuration.....</b>	<b>3</b>
<b>2.1. Overview .....</b>	<b>4</b>
<b>2.2. References .....</b>	<b>5</b>
<b>2.3. Test Site .....</b>	<b>6</b>
<b>2.4. Description of Test Sample .....</b>	<b>6</b>
<b>2.5. Equipment Configuration.....</b>	<b>13</b>
<b>2.6. Support Equipment .....</b>	<b>13</b>
<b>2.7. Ports and Cabling Information .....</b>	<b>14</b>
<b>2.8. Mode of Operation .....</b>	<b>15</b>
<b>2.9. Method of Monitoring EUT Operation .....</b>	<b>15</b>
<b>2.10. Modifications .....</b>	<b>15</b>
<b>2.10.1. Modifications to EUT .....</b>	<b>15</b>
<b>2.10.2. Modifications to Test Standard .....</b>	<b>15</b>
<b>2.11. Disposition of EUT .....</b>	<b>15</b>
<b>3. Electromagnetic Compatibility Criteria for Unintentional Radiators .....</b>	<b>16</b>
<b>    § 15.207(a) Conducted Emissions Limits.....</b>	<b>17</b>
<b>    § 15.209 Radiated Emissions Limits .....</b>	<b>22</b>
<b>4. Electromagnetic Compatibility Criteria for Intentional Radiators .....</b>	<b>25</b>
<b>4.1. § 2.1046 RF Power Output.....</b>	<b>26</b>
<b>4.2. Occupied Bandwidth.....</b>	<b>29</b>
<b>    § 2.1053 Radiated Spurious Emissions .....</b>	<b>48</b>
<b>4.3. Spurious Emissions at Antenna Terminals.....</b>	<b>53</b>
<b>    2-11-04/EAB/RF Out of Band Rejection .....</b>	<b>72</b>
<b>    2-11-04/EAB/RF Out of Band Rejection .....</b>	<b>73</b>
<b>    § 2.1055 Frequency Stability over Temperature and Voltage Variations.....</b>	<b>74</b>
<b>5. Test Equipment .....</b>	<b>76</b>
<b>6. Certification Label &amp; User's Manual Information .....</b>	<b>77</b>
<b>6.1. Certification Information .....</b>	<b>78</b>
<b>6.2. Label and User's Manual Information .....</b>	<b>82</b>



## List of Tables

Table 1. Requirements Summary of EMC Part 24 Compliance Testing .....	2
Table 2. Equipment Configuration .....	13
Table 3. Support Equipment (Radiated Emissions).....	13
Table 4. Ports and Cabling Information .....	14
Table 5. Conducted Limits for Radio Frequency Devices calculated from FCC Part 15 Subsections 15.107(a) (b) and 15.207(a) .....	17
Table 6. Conducted Emissions Test Results, Phase Line .....	18
Table 7. Conducted Emissions Test Results, Neutral Line.....	18
Table 8. Radiated Emissions Limits calculated from FCC Part 15 Subpart B, 15.109 (a)(b) .....	22
Table 9. 802.11a Radiated Emissions from 30 MHz – 1 GHz .....	23
Table 10. Temperature Vs. Frequency Test Results.....	75
Table 11. Frequency vs. Voltage Test Results .....	75

## List of Photographs

Photograph 1. Advanced RF Technologies Epoch-HP-20, Epoch-HP-10, Epoch-HP-05 and Epoch-HP-XX with 5MHz and 15MHz filters (1900MHz band) .....	6
Photograph 2. Conducted Emissions Test Setup Photograph.....	20
Photograph 3. Conducted Emissions Test Setup Photograph.....	21
Photograph 4. Radiated Emission Limits, Test Setup .....	24
Photograph 5. EUT Test Setup for Part 24.....	52

## List of Plots

Plot 1. Conducted Emissions Phase Line Plot.....	19
Plot 2. Conducted Emissions Neutral Line Plot .....	19
Plot 3. Radiated Emissions 30MHz – 1GHz Plot.....	23



## List of Terms and Abbreviations

<b>AC</b>	Alternating Current
<b>ACF</b>	Antenna Correction Factor
<b>Cal</b>	Calibration
<i>d</i>	Measurement Distance
<b>dB</b>	Decibels
<b>dB<math>\mu</math>A</b>	Decibels above one <b>microamp</b>
<b>dB<math>\mu</math>V</b>	Decibels above one <b>microvolt</b>
<b>dB<math>\mu</math>A/m</b>	Decibels above one <b>microamp per meter</b>
<b>dB<math>\mu</math>V/m</b>	Decibels above one <b>microvolt per meter</b>
<b>DC</b>	Direct Current $\mu$
<b>E</b>	Electric Field
<b>DSL</b>	Digital Subscriber Line
<b>ESD</b>	Electrostatic Discharge
<b>EUT</b>	Equipment Under Test
<i>f</i>	Frequency
<b>FCC</b>	Federal Communications Commission
<b>GR-1089-CORE</b>	( <b>GR</b> ) General Requirement(s) imposed by the NEBS standard, ( <b>CORE</b> ) Central Office Recovery Express (AT&T), ( <b>1089</b> ) specifies various parts of the General Requirements under Bellcore Technical Standard, Requirements for Electromagnetic Compatibility and Electrical Safety - Generic Criteria for Network Telecommunications Equipment
<b>GRP</b>	Ground Reference Plane
<b>H</b>	Magnetic Field
<b>HCP</b>	Horizontal Coupling Plane
<b>Hz</b>	Hertz
<b>IEC</b>	International Electrotechnical Commission
<b>kHz</b>	kilohertz
<b>kPa</b>	kilopascal
<b>kV</b>	kilovolt
<b>LISN</b>	Line Impedance Stabilization Network
<b>MHz</b>	Megahertz
<b><math>\mu</math>H</b>	<b>microhenry</b>
<b><math>\mu</math></b>	<b>microfarad</b>
<b><math>\mu</math>s</b>	<b>microseconds</b>
<b>NEBS</b>	Network Equipment-Building System
<b>PRF</b>	Pulse Repetition Frequency
<b>RF</b>	Radio Frequency
<b>RMS</b>	Root-Mean-Square
<b>TWT</b>	Traveling Wave Tube
<b>V/m</b>	Volts <b>per meter</b>
<b>VCP</b>	Vertical Coupling Plane



Advanced RF Technologies  
Epoch-HP-20, Epoch-HP-10, Epoch-HP-05 and  
Epoch-HP-XX with 5MHz and 15MHz filters (1900MHz band)

Electromagnetic Compatibility  
Executive Summary  
CFR Title 47 Part 24 Subpart E & Part 15 Subpart B

## I. Executive Summary



## A. Purpose of Test

An EMC evaluation to determine compliance of the Advanced RF Technologies model Epoch-HP-20, Epoch-HP-10, Epoch-HP-05 and Epoch-HP-XX with 5MHz and 15MHz filters (1900MHz band) with the requirements of Part 24 Subpart E and Part 15 Subpart B was performed. All references are to the most current version of Title 47 of the Code of Federal Regulations in effect. In accordance with §2.1033, the following data is presented in support of the Certification of the Advanced RF Technologies model Epoch-HP-20, Epoch-HP-10, Epoch-HP-05 and Epoch-HP-XX with 5MHz and 15MHz filters (1900MHz band). Advanced RF Technologies should retain a copy of this document which should be kept on file for at least two years after the manufacturing of the Epoch-HP-20, Epoch-HP-10, Epoch-HP-05 and Epoch-HP-XX with 5MHz and 15MHz filters (1900MHz band) has been **permanently** discontinued.

## B. Executive Summary

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 24 Subpart E, and Part 15 Subpart B, in accordance with Advanced RF Technologies, purchase order 1153. All tests were conducted using measurement procedure *ANSI C63.4-1992*.

Reference	Description	Compliance
Part 15 Subpart B §15.109(a)	Conducted Emissions	Compliant
Part 15 Subpart B §15.107(a)	Radiated Emissions	Compliant
§2.1046; §24.232	RF Power Output	Compliant
§2.1047	Modulation Characteristics	Not Applicable
§2.1049	Occupied Bandwidth	Compliant
§2.1051; §24.238	Spurious Emissions at Antenna Terminals	Compliant
§2.1053; §24.238	Radiated Spurious Emissions	Compliant
§2.1055; §24.135	Frequency Stability	Compliant
2-11-04/EAB/RF	Out of Band Rejection	Compliant

**Table 1. Requirements Summary of EMC Part 24 Compliance Testing**



Advanced RF Technologies  
Epoch-HP-20, Epoch-HP-10, Epoch-HP-05 and  
Epoch-HP-XX with 5MHz and 15MHz filters (1900MHz band)

Electromagnetic Compatibility  
Equipment Configuration  
CFR Title 47 Part 24 Subpart E & Part 15 Subpart B

## II. Equipment Configuration



## A. Overview

MET Laboratories, Inc. was contracted by Advanced RF Technologies to perform testing on the Epoch-HP-20, Epoch-HP-10, Epoch-HP-05 and Epoch-HP-XX with 5MHz and 15MHz filters (1900MHz band), under Advanced RF Technologies' purchase order number 1153.

This document describes the test setups, test methods, required test equipment, and the test limit criteria used to perform compliance testing of the Advanced RF Technologies, Epoch-HP-20, Epoch-HP-10, Epoch-HP-05 and Epoch-HP-XX with 5MHz and 15MHz filters (1900MHz band).

The results obtained relate only to the item(s) tested.

<b>Model(s) Tested:</b>	Epoch-HP-20, Epoch-HP-10, Epoch-HP-05 and Epoch-HP-XX with 5MHz and 15MHz filters (1900MHz band)	
<b>Model(s) Covered:</b>	Epoch-HP-20, Epoch-HP-10, Epoch-HP-05 and Epoch-HP-XX with 5MHz and 15MHz filters (1900MHz band)	
<b>EUT Specifications:</b>	Primary Power: 120V	
	FCC ID: S20-EPOCH-HP-20	
	Type of Modulations:	CDMA (F9W)
		TDMA (DXW)
		GSM (GXW)
	Equipment Code:	TNB
	Peak RF Output Power:	<b>DownLink</b>
		CDMA: 42.8dBm
		GSM: 42.4dBm
		TDMA: 42.1dBm
	EUT Frequency Ranges:	<b>UpLink</b>
		CDMA: 28.0dBm
		GSM: 27.0dBm
		TDMA: 27.4dBm
<b>Analysis:</b>	<b>DownLink:</b> 1930-1990 MHz	
	<b>UpLink:</b> 1850-1910 MHz	
	The results obtained relate only to the item(s) tested.	
	Temperature: 15-35° C	
<b>Environmental Test Conditions:</b>	Relative Humidity: 30-60%	
	Barometric Pressure: 860-1060 mbar	
	Shawn McMillen	
<b>Date(s):</b>	April 3, 2007	



Advanced RF Technologies  
Epoch-HP-20, Epoch-HP-10, Epoch-HP-05 and  
Epoch-HP-XX with 5MHz and 15MHz filters (1900MHz band)

Electromagnetic Compatibility  
Equipment Configuration  
CFR Title 47 Part 24 Subpart E & Part 15 Subpart B

## B. References

<b>CFR 47, Part 24, Subpart E</b>	Federal Communication Commission, Code of Federal Regulations, Title 47, Part 24: Rules and Regulations for Personal Communications Services
<b>CFR 47, Part 15, Subpart B</b>	Electromagnetic Compatibility: Criteria for Radio Frequency Devices
<b>ANSI C63.4:2003</b>	Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical And Electronic Equipment in the Range of 9 kHz to 40 GHz
<b>ANSI/NCSL Z540-1-1994</b>	Calibration Laboratories and Measuring and Test Equipment - General Requirements
<b>ANSI/ISO/IEC 17025:2000</b>	General Requirements for the Competence of Testing and Calibration Laboratories



### C. Test Site

All testing was performed at MET Laboratories, Inc., 4855 Patrick Henry Dr., Building 6, Santa Clara, CA 95054. All equipment used in making physical determinations is accurate and bears recent traceability to the National Institute of Standards and Technology.

Radiated Emissions measurements were performed in semi-anechoic chamber. In accordance with §2.948(a)(3), a complete site description is contained at MET Laboratories. In accordance with §2.948(d), MET Laboratories has been accredited by A2LA (Certificate Number 591.02).

### D. Description of Test Sample

The Advanced RF Technologies Epoch-HP-20, Epoch-HP-10, Epoch-HP-05 and Epoch-HP-XX with 5MHz and 15MHz filters (1900MHz band), is a high power (up to 20W composite output power) repeater that amplifies both downlink and uplink signals in the PCS frequency spectrum (1900 MHz).



**Photograph 1. Advanced RF Technologies Epoch-HP-20, Epoch-HP-10, Epoch-HP-05 and Epoch-HP-XX with 5MHz and 15MHz filters (1900MHz band)**

### Spurious Emission (Downlink)

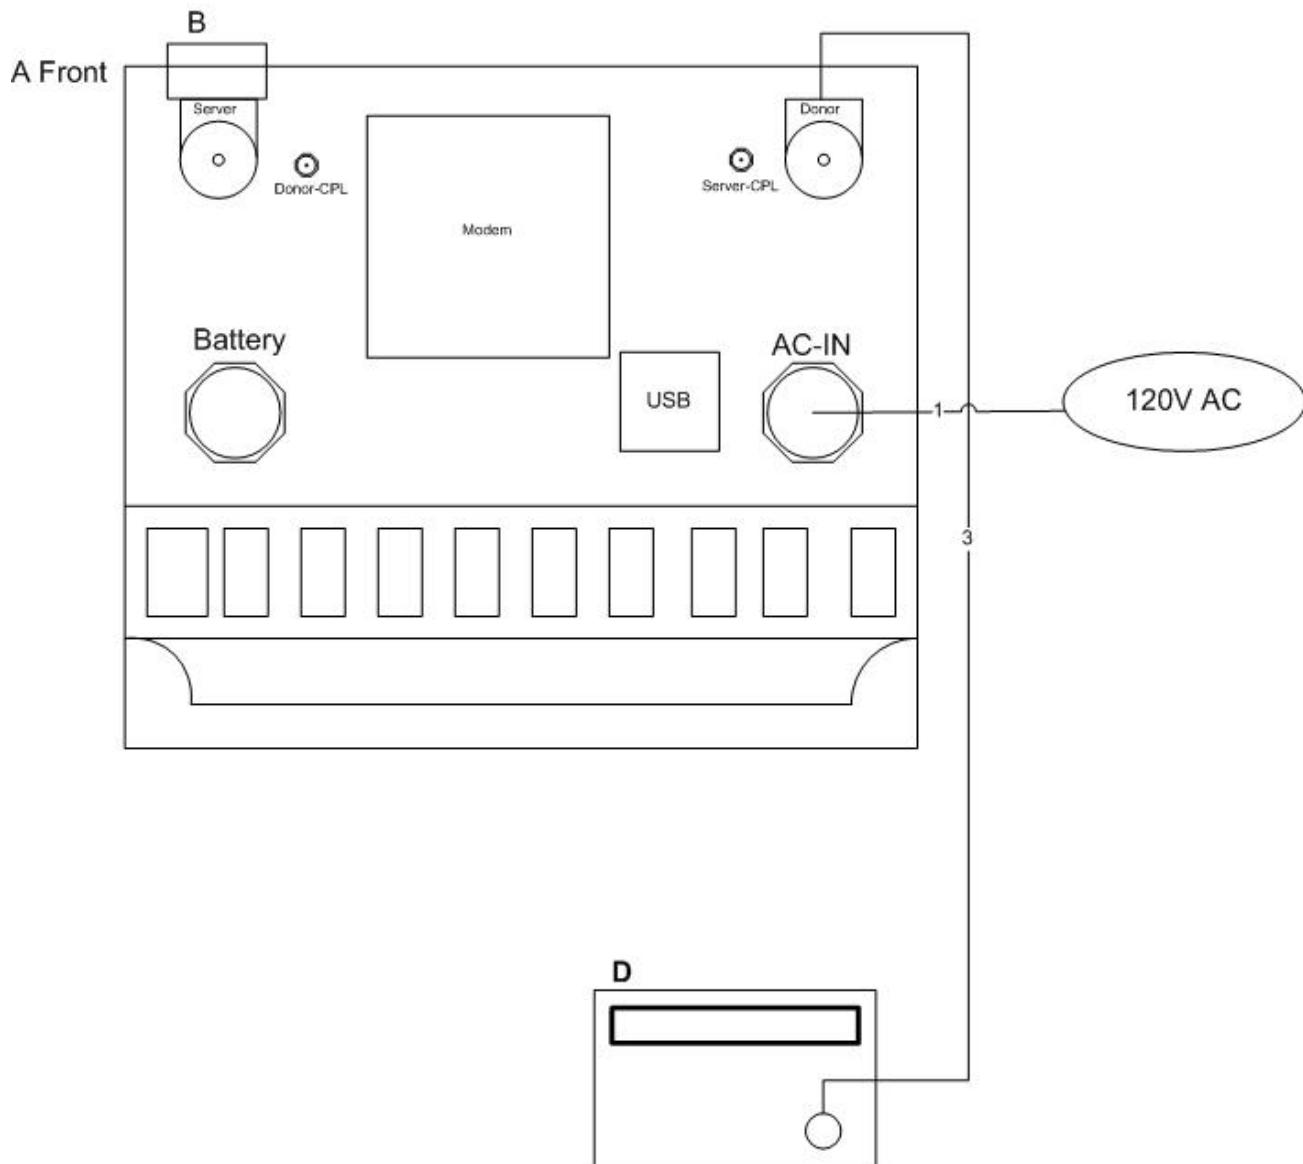


Figure 1. Block Diagram of Test Configuration (Spurious Emissions - Downlink)

### Spurious Emission (Uplink)

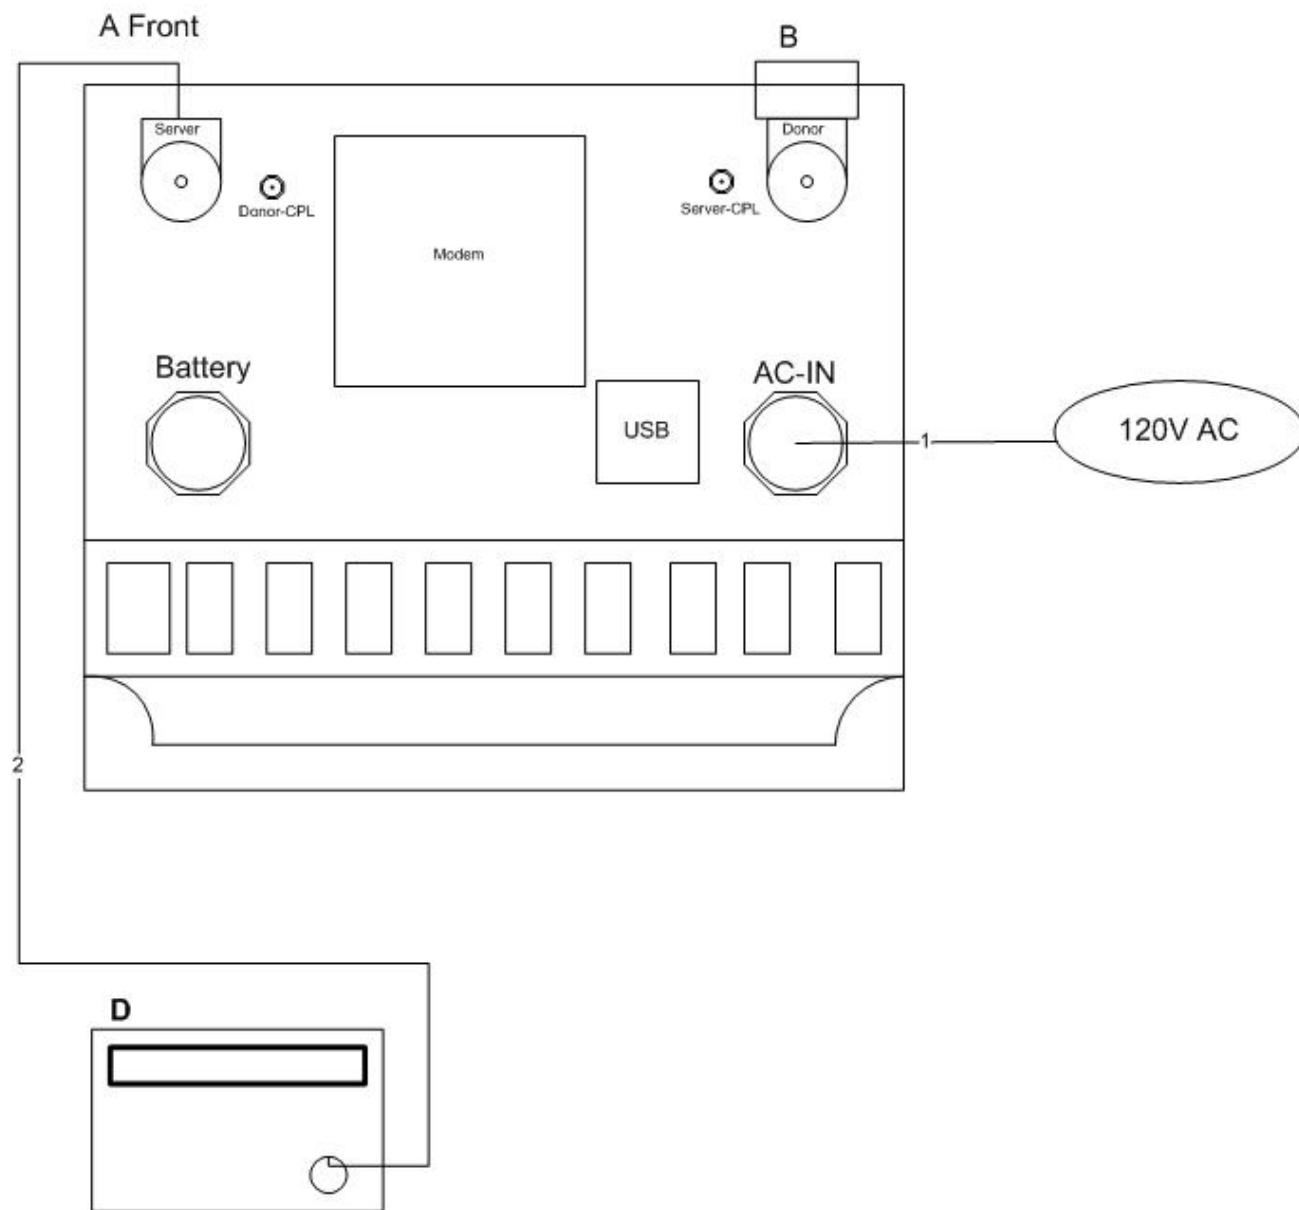
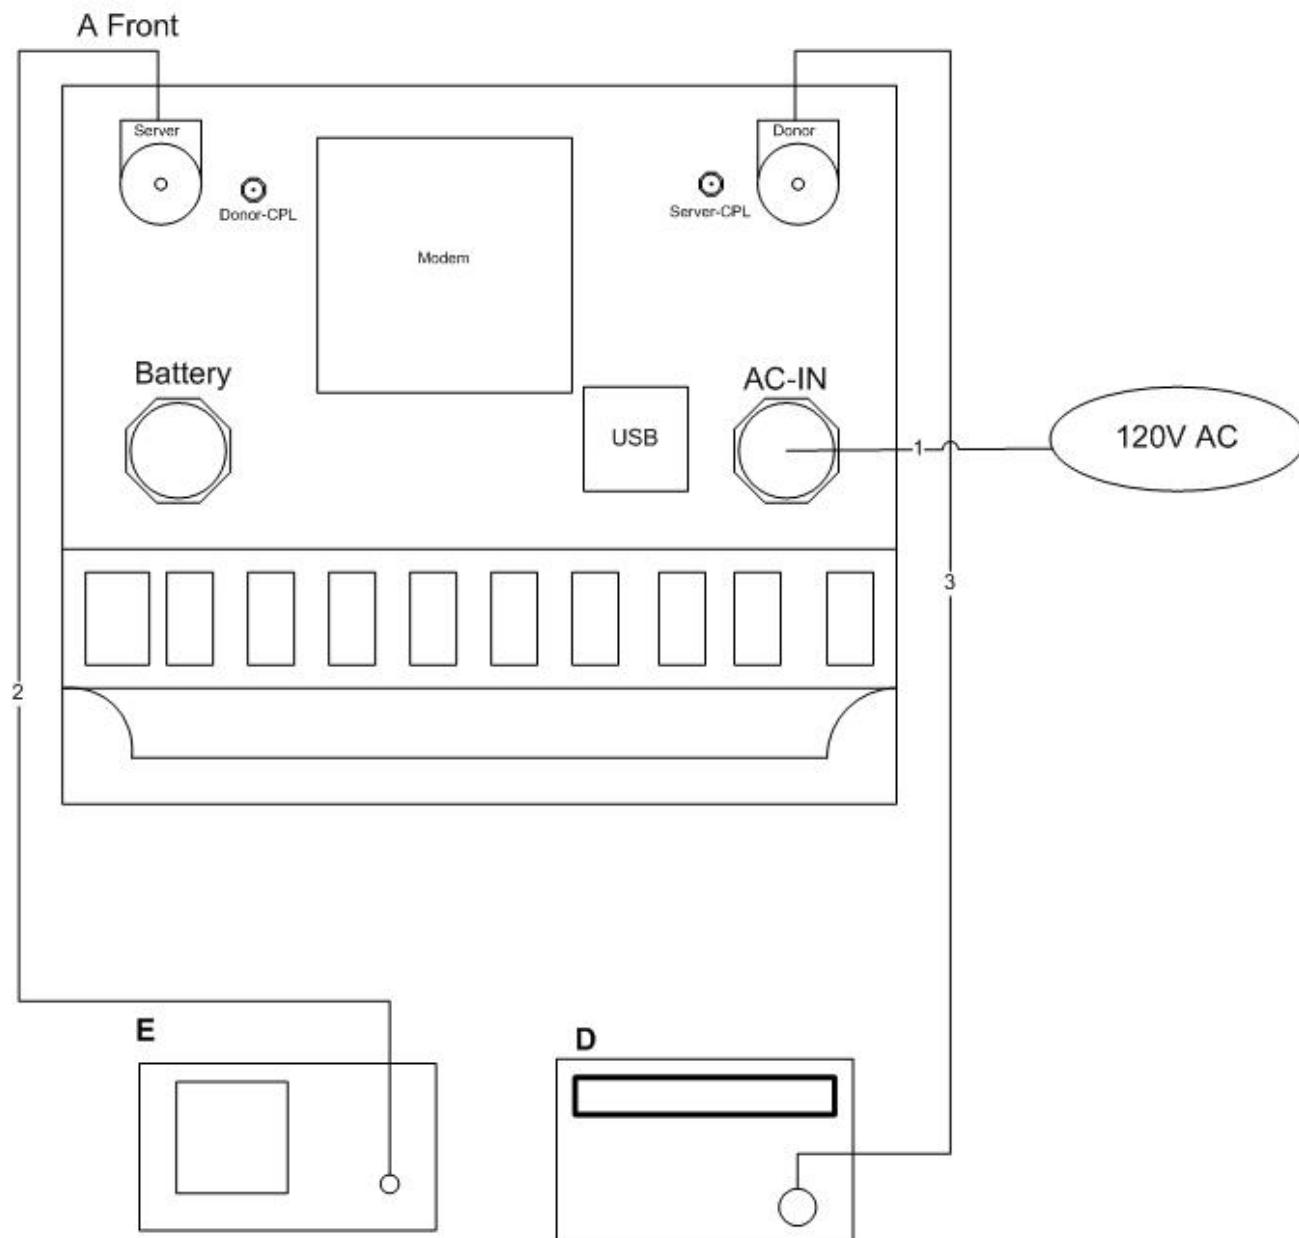


Figure 2. Block Diagram of Test Configuration (Spurious Emissions – Uplink)

**Conducted Measurement  
 (Downlink)**



**Figure 3. Block Diagram of Test Configuration (Conducted Measurement - Downlink)**

### Conducted Measurement (Uplink)

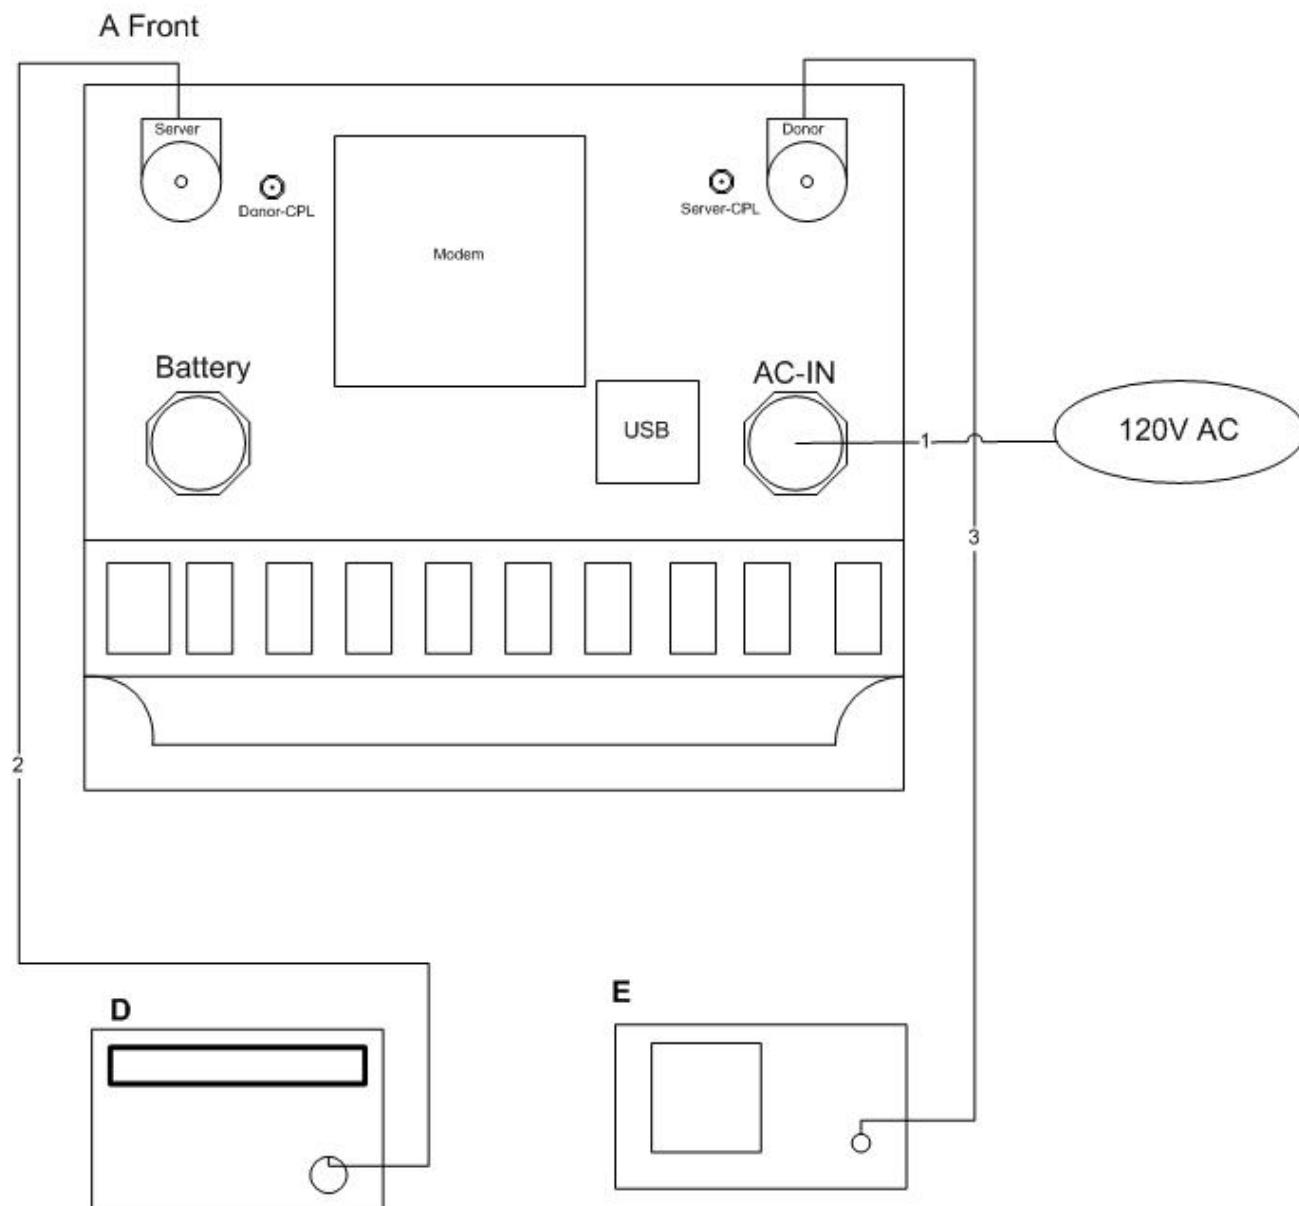


Figure 4. Block Diagram of Test Configuration (Conducted Measurement – Uplink)

Radiated & Conducted  
 Emission

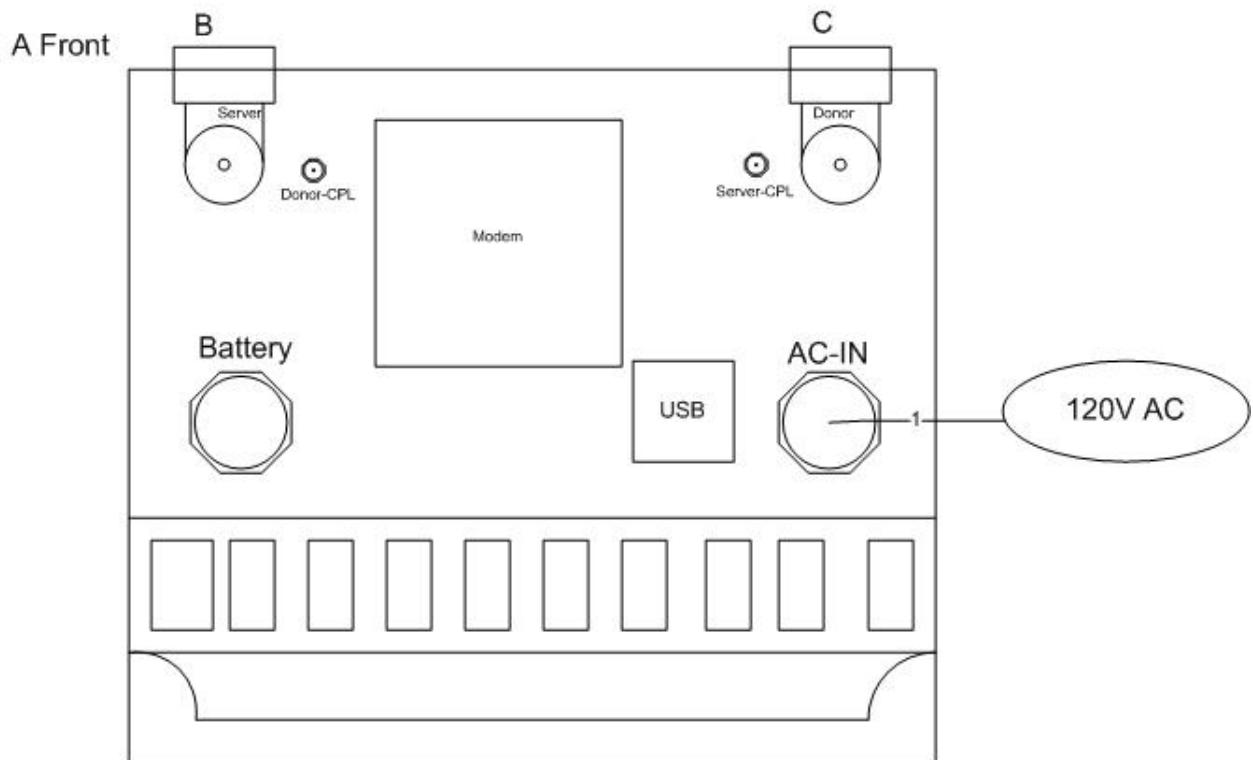


Figure 5. Block Diagram of Test Configuration (Unintentional)

### Frequency Stability

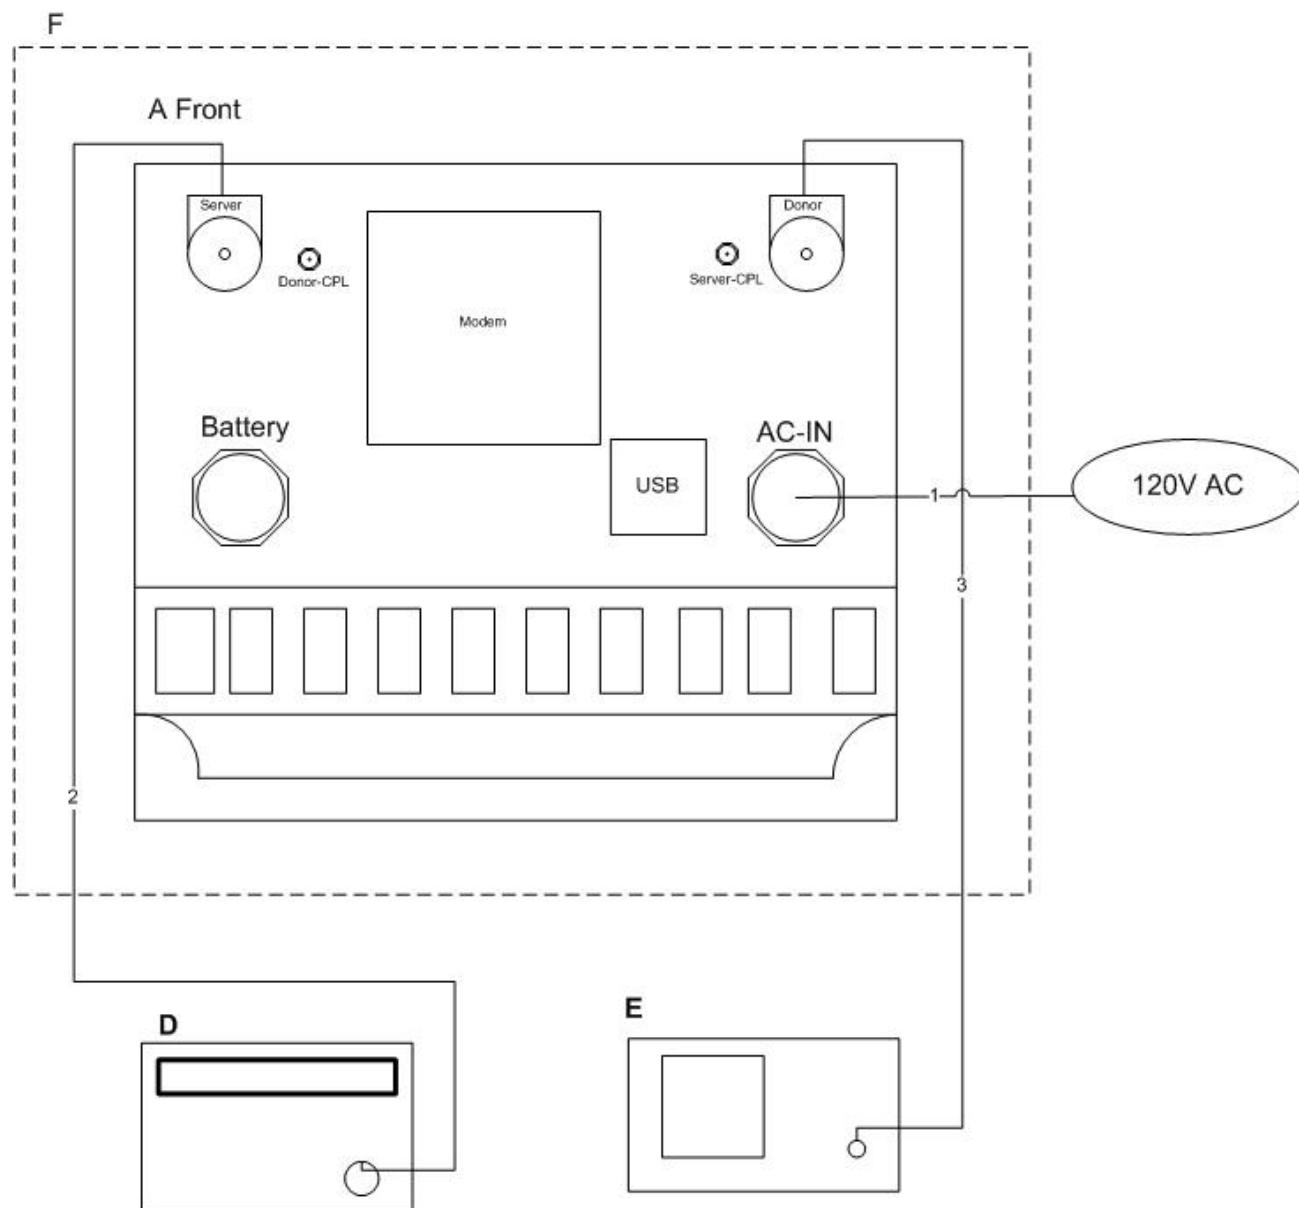


Figure 6. Block Diagram of Test Configuration (Frequency Stability)



Advanced RF Technologies  
Epoch-HP-20, Epoch-HP-10, Epoch-HP-05 and  
Epoch-HP-XX with 5MHz and 15MHz filters (1900MHz band)

Electromagnetic Compatibility  
Equipment Configuration  
CFR Title 47 Part 24 Subpart E & Part 15 Subpart B

## E. Equipment Configuration

The EUT was set up as outlined in Figure 1. All cards, racks, etc., incorporated as part of the EUT is included in the following list.

Ref. ID	Name / Description	Model Number	Serial Number
A	Repeater	EPOCH-HP-20	HP20060007

Table 2. Equipment Configuration

## F. Support Equipment

Advanced RF Technologies supplied support equipment necessary for the operation and testing of the Epoch-HP-20, Epoch-HP-10, Epoch-HP-05 and Epoch-HP-XX with 5MHz and 15MHz filters (1900MHz band). All support equipment supplied is listed in the following Support Equipment List.

Ref. ID	Name / Description	Manufacturer	Model Number	Serial Number
B	50 Ohms Terminator	Narda	375BNB	07
C	50 Ohms Terminator	Narda	375BNB	53
D	Signal Generator	HP	E4432B	US38080117
E	Spectrum Analyzer	HP	E4407B	MY45102898
F	Temperature Chamber	Tenny Engineering	T630	11939-5

Table 3. Support Equipment (Radiated Emissions)



Advanced RF Technologies  
Epoch-HP-20, Epoch-HP-10, Epoch-HP-05 and  
Epoch-HP-XX with 5MHz and 15MHz filters (1900MHz band)

Electromagnetic Compatibility  
Equipment Configuration  
CFR Title 47 Part 24 Subpart E & Part 15 Subpart B

## G. Ports and Cabling Information

Ref. ID	Port name on EUT	Cable Description or reason for no cable	Qty.	Length (m)	Shielded?	Termination Box ID & Port ID
<b>Radiated &amp; Conducted Emission</b>						
1	A , AC Input	AC PWR Cord	1	1	No	AC PWR Outlet
<b>Conducted Measurement (Up-Link)</b>						
1	A , AC Input	AC PWR Cord	1	1	No	AC PWR Outlet
2	A Front, Server	Coax	1	2	Yes	D
3	A Front, Donor	Coax	1	2	Yes	E
<b>Conducted Measurement (Down-Link)</b>						
1	A , AC Input	AC PWR Cord	1	1	No	AC PWR Outlet
2	A Front, Server	Coax	1	2	Yes	E
3	A Front, Donor	Coax	1	2	Yes	D
<b>Spurious Emission (Up-Link)</b>						
1	A , AC Input	AC PWR Cord	1	1	No	AC PWR Outlet
2	A Front, Server	Coax	1	2	Yes	D
3	A Front, Donor	Direct Connect	1			B
<b>Spurious Emission (Down-Link)</b>						
1	A , AC Input	AC PWR Cord	1	1	No	AC PWR Outlet
2	A Front, Server	Direct Connect	1			B
3	A Front, Donor	Coax	1	2	Yes	D
<b>Frequency Stability (Down-link)</b>						
1	A , AC Input	AC PWR Cord	1	1	No	AC PWR Outlet
2	A Front, Server	Coax	1	2	Yes	D
3	A Front, Donor	Coax	1	2	Yes	E

**Table 4. Ports and Cabling Information**



Advanced RF Technologies  
Epoch-HP-20, Epoch-HP-10, Epoch-HP-05 and  
Epoch-HP-XX with 5MHz and 15MHz filters (1900MHz band)

Electromagnetic Compatibility  
Equipment Configuration  
CFR Title 47 Part 24 Subpart E & Part 15 Subpart B

## **H. Mode of Operation**

There are two path links for the repeater. The downlink or forward link is the RF signal path flow from BTS-Repeater-Handset. While uplink or reverse link path is the RF signal from the Handset-Repeater-BTS.

For each link, the repeater has its own Auto Gain Control circuitry and different layers of amplifiers.

## **I. Method of Monitoring EUT Operation**

A Spectrum Analyzer and a Power Meter was use to monitor the EUT's transmitter channel and power output.

## **J. Modifications**

- a) Modifications to EUT**
- b) Modifications to Test Standard**

## **K. Disposition of EUT**

The test sample including all support equipment submitted to the Electro-Magnetic Compatibility Lab for testing was returned to Advanced RF Technologies upon completion of testing.



Advanced RF Technologies  
Epoch-HP-20, Epoch-HP-10, Epoch-HP-05 and  
Epoch-HP-XX with 5MHz and 15MHz filters (1900MHz band)

Electromagnetic Compatibility  
Unintentional Radiators  
CFR Title 47 Part 15 Subpart B

### III. Electromagnetic Compatibility Criteria for Unintentional Radiators



## Electromagnetic Compatibility Criteria

### § 15.207 Conducted Emissions Limits

**Test Requirement(s):** **15.107 (a)** Except for Class A digital devices, for equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in Table 5. Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.

**15.107 (b)** For a Class A digital device that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in Table 5. Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals. The lower limit applies at the band edges.

**15.207(a)**, Except as shown in paragraphs (b) and (c) of this section\*, charging, AC adapters or battery eliminators the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the Table 5, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequencies ranges.

Frequency range (MHz)	Class A Conducted Limits (dB $\mu$ V)		*Class B Conducted Limits (dB $\mu$ V)	
	Quasi-Peak	Average	Quasi-Peak	Average
* 0.15- 0.45	79	66	66 - 56	56 - 46
0.45 - 0.5	79	66	56	46
0.5 - 30	73	60	60	50

Note 1 — The lower limit shall apply at the transition frequencies.

Note 2 — The limit decreases linearly with the logarithm if the frequency in the range 0.15 MHz to 0.5 MHz.

\* -- Limits per Subsection 15.207(a).

**Table 5. Conducted Limits for Radio Frequency Devices calculated from FCC Part 15 Subsections 15.107(a) (b) and 15.207(a)**

**Test Results:** The EUT was found compliant with the Class A requirement(s) of this section. Measured emissions were below applicable limits.

**Test Engineer(s):** Mihn Ly

**Test Date(s):** March 21, 2007



## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.207 Conducted Emissions Limits


Freq. (MHz)	Corrected Amplitude (dBuV) QP	Limit (dBuV) QP	Results QP	Margin (dB) QP	Corrected Amplitude (dBuV) AVG	Limit (dBuV) AVG	Results AVG	Margin (dB) AVG
3.999	33.76	73	PASS	-39.24	32.72	60	PASS	-27.28
5.761	34.42	73	PASS	-38.58	33.07	60	PASS	-26.93
26.387	17.29	73	PASS	-55.71	11.99	60	PASS	-48.01
5.56	24.3	73	PASS	-48.7	20.05	60	PASS	-39.95

Table 6. Conducted Emissions Test Results, Phase Line


Freq. (MHz)	Corrected Amplitude (dBuV) QP	Limit (dBuV) QP	Results QP	Margin (dB) QP	Corrected Amplitude (dBuV) AVG	Limit (dBuV) AVG	Results AVG	Margin (dB) AVG
4.0006	33.56	73	PASS	-39.44	32.47	60	PASS	-27.53
5.7625	33.04	73	PASS	-39.96	31.43	60	PASS	-28.57
5.55	25.51	73	PASS	-47.49	21.44	60	PASS	-38.56

Table 7. Conducted Emissions Test Results, Neutral Line

**Electromagnetic Compatibility Criteria for Intentional Radiators**  
**§ 15.207      Conducted Emissions Plots**

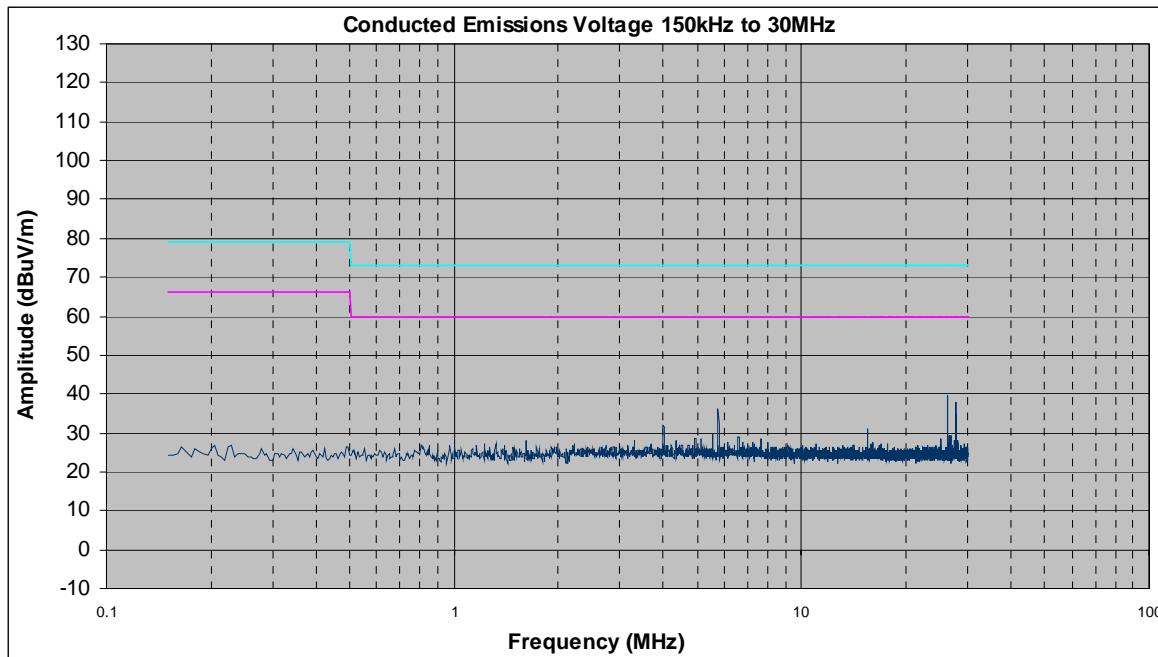

**Plot 1. Conducted Emissions Phase Line Plot**

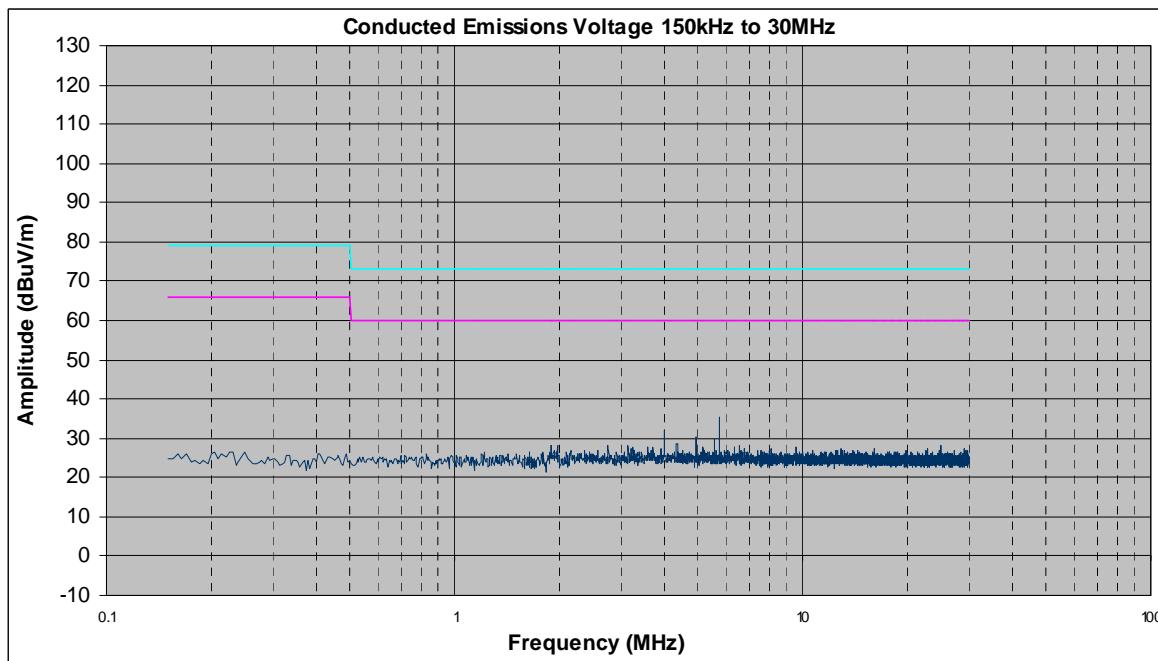

**Plot 2. Conducted Emissions Neutral Line Plot**



Advanced RF Technologies  
Epoch-HP-20, Epoch-HP-10, Epoch-HP-05 and  
Epoch-HP-XX with 5MHz and 15MHz filters (1900MHz band)

Electromagnetic Compatibility  
Unintentional Radiators  
CFR Title 47 Part 15 Subpart B

**Electromagnetic Compatibility Criteria for Intentional Radiators**  
**§ 15.207      Conducted Emissions Photographs**




**Photograph 2. Conducted Emissions Test Setup Photograph**



Advanced RF Technologies  
Epoch-HP-20, Epoch-HP-10, Epoch-HP-05 and  
Epoch-HP-XX with 5MHz and 15MHz filters (1900MHz band)

Electromagnetic Compatibility  
Unintentional Radiators  
CFR Title 47 Part 15 Subpart B

**Electromagnetic Compatibility Criteria for Intentional Radiators**  
**§ 15.207      Conducted Emissions Photographs**

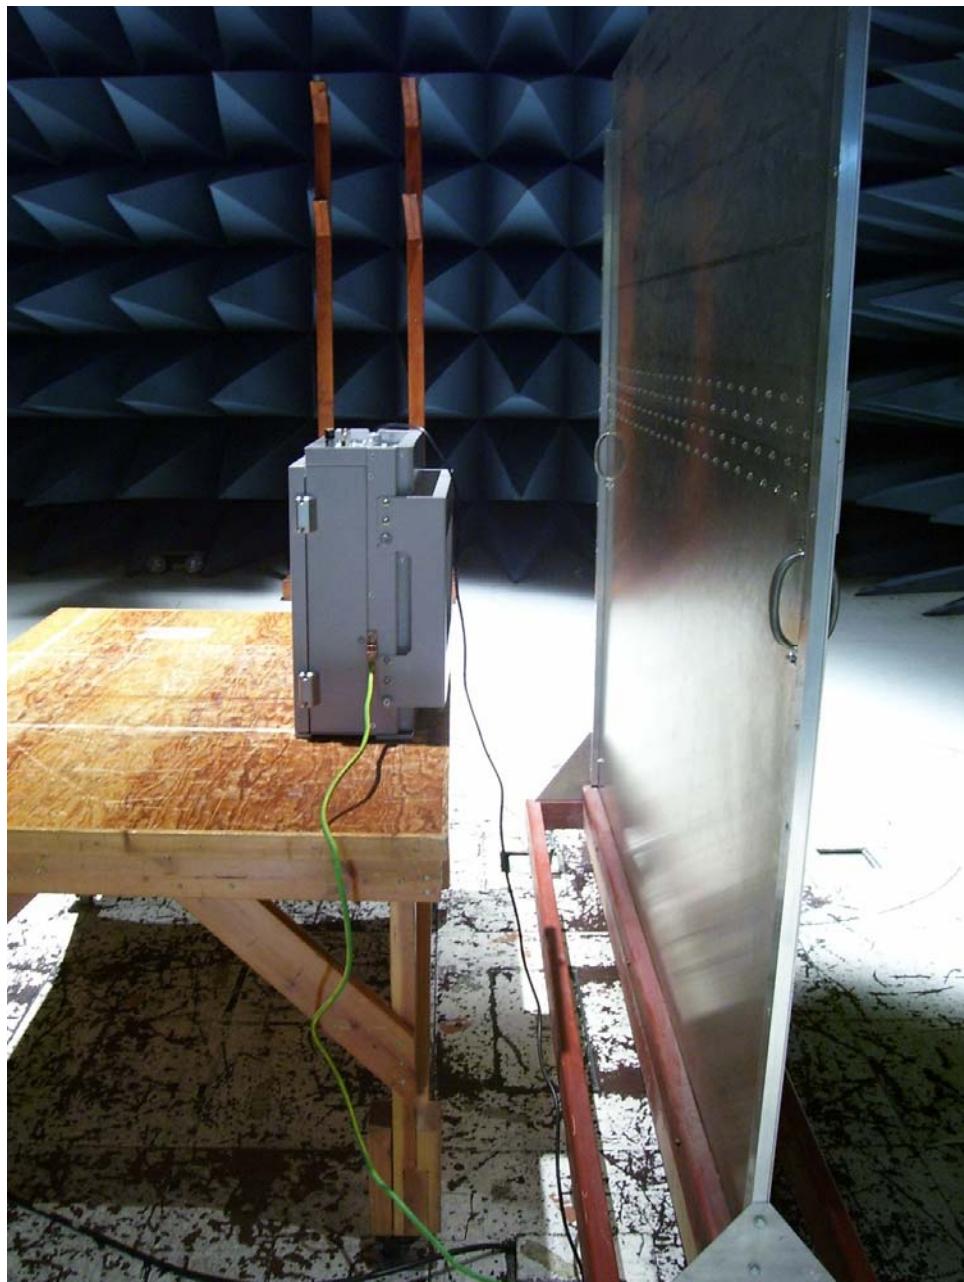

**Photograph 3. Conducted Emissions Test Setup Photograph**



## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.209 Radiated Emissions Limits

**Test Requirement(s):**

**15.109 (a)** Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the Class B limits expressed in Table 8.

**15.109 (b)** The field strength of radiated emissions from a Class A digital device, as determined at a distance of 10 meters, shall not exceed the Class A limits expressed in Table 8.

Frequency (MHz)	Field Strength (dB $\mu$ V/m)	
	§ 15.109 (b), Class A Limit (dB V) @ 10m	§ 15.109 (a), Class B Limit (dB V) @ 3m
30 - 88	39.00	40.00
88 - 216	43.50	43.50
216 - 960	46.40	46.00
Above 960	49.50	54.00

**Table 8. Radiated Emissions Limits calculated from FCC Part 15 Subpart B, 15.109 (a)(b)**

**Test Procedure:**

- a) The EUT was placed on a 0.8 m high wooden table (See Photograph 4).
- b) Various antennas were placed near the EUT and measurements were taken of the field strengths and frequencies. For final radiated measurements, the EUT was placed in semi-anechoic chamber, and located 1 m and 3 m from an adjustable antenna mast.
- c) For pre-scanning, the spectrum analyzer scanned the frequency range from 30 MHz to 1 GHz to obtain an emission profile of the EUT. For each point of measurement, the turntable was rotated, and the antenna height was varied between 1 m and 4 m, in order to find the maximum radiated emissions.
- d) Measurements above 30 MHz were taken using the above procedures with the antenna in two polarizations: horizontal and vertical. Unless otherwise specified, measurements between 30 MHz and 1 GHz were made using a quasi-peak detector with a 120 kHz bandwidth.
- e) For measurements above 1 GHz, a 1 MHz detector was used with either a "peak" detector or an "average" detector. In general, all radiated emissions above 1 GHz measurements were made with the average detector unless otherwise noted.

**Test Results:**

The EUT was found Compliant with the Class A requirement(s) of this section. Measured emissions were below applicable limits

**Test Engineer(s):** Mihn Ly

**Test Date(s):** March 21, 2007


## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.209 Radiated Emissions Limits

Frequency (MHz)	Antenna Polarity (H/V)	EUT Azimuth (Degrees)	Antenna HEIGHT (m)	Uncorrected Amplitude QP Detector (dBuV)	Antenna Correction Factor (dB/m) (+)	Cable Loss (dB) (+)	Corrected Amplitude (dBuV/m)	Limit (dBuV/m)	Margin (dB)
298.56	H	149	2.69	3.74	13.23	2.92	19.89	46.40	-26.51
497.6	H	275	1.39	1.20	17.80	4.02	23.02	46.40	-23.38
497.64	V	98	1	3.13	17.15	4.02	24.29	46.40	-22.11
572.24	V	0	3.85	2.39	18.86	4.44	25.68	46.40	-20.72
597.16	H	234	1	4.70	18.70	4.57	27.97	46.40	-18.43
895.72	V	31	1.46	7.04	21.33	5.89	34.26	46.40	-12.14

Table 9. 802.11a Radiated Emissions from 30 MHz – 1 GHz

**Note:** When transmit mode or receive mode were activated, there are no differences to emissions. For above 1 GHz measurement up to 5<sup>th</sup> harmonic of the highest operating frequency, emissions are noise floor during receive mode.

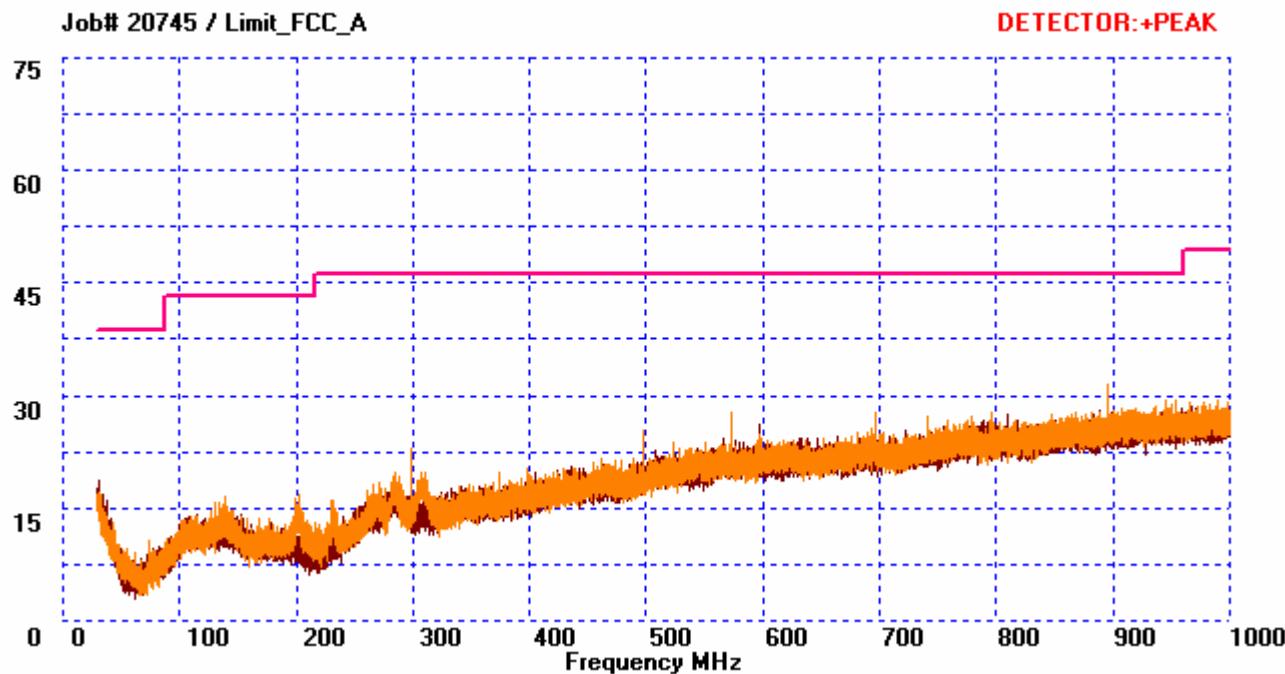

Plot 3.Radiated Emissions 30MHz – 1GHz Plot



Advanced RF Technologies  
Epoch-HP-20, Epoch-HP-10, Epoch-HP-05 and  
Epoch-HP-XX with 5MHz and 15MHz filters (1900MHz band)

Electromagnetic Compatibility  
Unintentional Radiators  
CFR Title 47 Part 15 Subpart B

## Radiated Emission Limits Test Setup



**Photograph 4. Radiated Emission Limits, Test Setup**



Advanced RF Technologies  
Epoch-HP-20, Epoch-HP-10, Epoch-HP-05 and  
Epoch-HP-XX with 5MHz and 15MHz filters (1900MHz band)

Electromagnetic Compatibility  
Intentional Radiators  
CFR Title 47 Part 24 Subpart E

## IV. Electromagnetic Compatibility Criteria for Intentional Radiators



## Electromagnetic Compatibility Criteria for Broadband PCS Devices

### § 2.1046 RF Power Output

**Test Requirement(s): § 2.1046 Measurements required: RF power output:**

**§ 2.1046 (a)** For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in § 2.1033(c)(8). The electrical characteristics of the radio frequency load attached to the output terminals when this test is made shall be stated.

**§ 2.1046 (b)** For single sideband, independent sideband, and single channel, controlled carrier radiotelephone transmitters, the procedure specified in paragraph (a) of this section shall be employed and, in addition, the transmitter shall be modulated during the test as specified and as applicable in § 2.1046 (b) (1-5). In all tests, the input level of the modulating signal shall be such as to develop rated peak envelope power or carrier power, as appropriate, for the transmitter.

**§ 2.1046 (c)** For measurements conducted pursuant to paragraphs (a) and (b) of this section, all calculations and methods used by the applicant for determining carrier power or peak envelope power, as appropriate, on the basis of measured power in the radio frequency load attached to the transmitter output terminals shall be shown. Under the test conditions specified, no components of the emission spectrum shall exceed the limits specified in the applicable rule parts as necessary for meeting occupied bandwidth or emission limitations.

### § 24.232 Power and antenna height limits.

**§ 24.232 (b):** Mobile/portable stations are limited to 2 watts e.i.r.p. peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications.

**Test Procedures:** As required by 47 CFR 2.1046, RF power output measurements were made at the RF output terminals using an attenuator and spectrum analyzer. This test was performed with carrier modulated by a PCS GSM, modulated signal.

**Test Results:** The EUT complies with the requirements of this section. The EUT conducted power does not exceed limit at the carrier frequency.

**Test Engineer(s):** Shawn McMillen

**Test Date(s):** March 26, 2007



Advanced RF Technologies  
Epoch-HP-20, Epoch-HP-10, Epoch-HP-05 and  
Epoch-HP-XX with 5MHz and 15MHz filters (1900MHz band)

Electromagnetic Compatibility  
Intentional Radiators  
CFR Title 47 Part 24 Subpart E

## RF Power Output Test Results

Downlink			
Modulation	Frequency (MHz)	Input Power dBm	Modulated Output Power dBm (mW)
CDMA	1931.25	-52.0	42.8
CDMA	1960.00	-52.0	42.4
CDMA	1988.75	-52.0	41.7

Uplink			
Modulation	Frequency (MHz)	Input Power dBm	Modulated Output Power dBm (mW)
CDMA	1851.25	-52.0	28.0
CDMA	1880.00	-52.0	28.0
CDMA	1908.75	-52.0	27.2

Downlink			
Modulation	Frequency (MHz)	Input Power dBm	Modulated Output Power dBm (mW)
GSM	1930.50	-52.0	42.2
GSM	1960.00	-52.0	42.4
GSM	1989.50	-52.0	39.1

Uplink			
Modulation	Frequency (MHz)	Input Power dBm	Modulated Output Power dBm (mW)
GSM	1850.5	-52.0	27.0
GSM	1880.0	-52.0	26.7
GSM	1909.5	-52.0	26.5



Advanced RF Technologies  
Epoch-HP-20, Epoch-HP-10, Epoch-HP-05 and  
Epoch-HP-XX with 5MHz and 15MHz filters (1900MHz band)

Electromagnetic Compatibility  
Intentional Radiators  
CFR Title 47 Part 24 Subpart E

## RF Power Output Test Results Continued

Downlink			
Modulation	Frequency (MHz)	Input Power dBm	Modulated Output Power dBm (mW)
TDMA	1930.50	-52.0	42.1
TDMA	1960.00	-52.0	42.0
TDMA	1989.50	-52.0	39.5

Uplink			
Modulation	Frequency (MHz)	Input Power dBm	Modulated Output Power dBm (mW)
TDMA	1850.5	-52.0	27.4
TDMA	1880.0	-52.0	26.8
TDMA	1909.5	-52.0	26.5



Advanced RF Technologies  
Epoch-HP-20, Epoch-HP-10, Epoch-HP-05 and  
Epoch-HP-XX with 5MHz and 15MHz filters (1900MHz band)

Electromagnetic Compatibility  
Intentional Radiators  
CFR Title 47 Part 24 Subpart E

## Occupied Bandwidth

### § 2.1049 Measurements required: Occupied bandwidth

**Test Requirement(s):** **§ 2.1049 Measurements required: Occupied bandwidth:** The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured under the specified conditions of § 2.1049 (a) through (i) as applicable.

**Test Procedures:** As required by 47 CFR 2.1049, *occupied bandwidth measurements* were made with a Spectrum Analyzer connected to the RF ports for both Uplink and Downlink

The modulation characteristics of signal generator's carrier was measured first at a maximum RF level prescribed by the OEM. The signal generator was then connected to either the Uplink or Downlink input at the appropriate RF level. The resulting modulated signal through the EUT was measured and compared against the original signal.

**Test Results:** The EUT complies with the requirements of this section.

**Test Engineer(s):** Shawn McMillen



**Test Date(s):** March 26, 2007



Advanced RF Technologies  
Epoch-HP-20, Epoch-HP-10, Epoch-HP-05 and  
Epoch-HP-XX with 5MHz and 15MHz filters (1900MHz band)

Electromagnetic Compatibility  
Intentional Radiators  
CFR Title 47 Part 24 Subpart E

## Occupied Bandwidth Test Results - CDMA

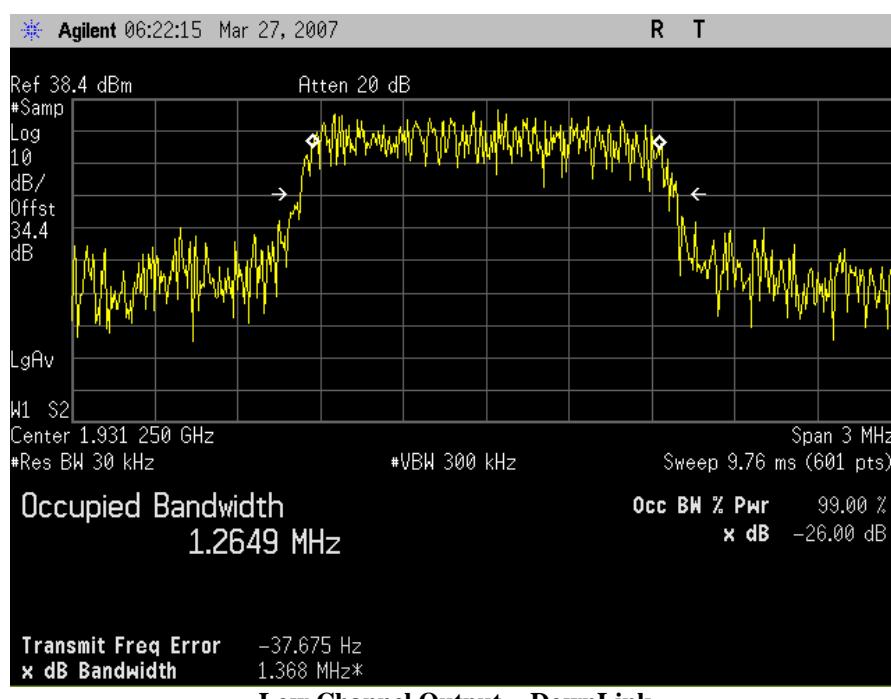
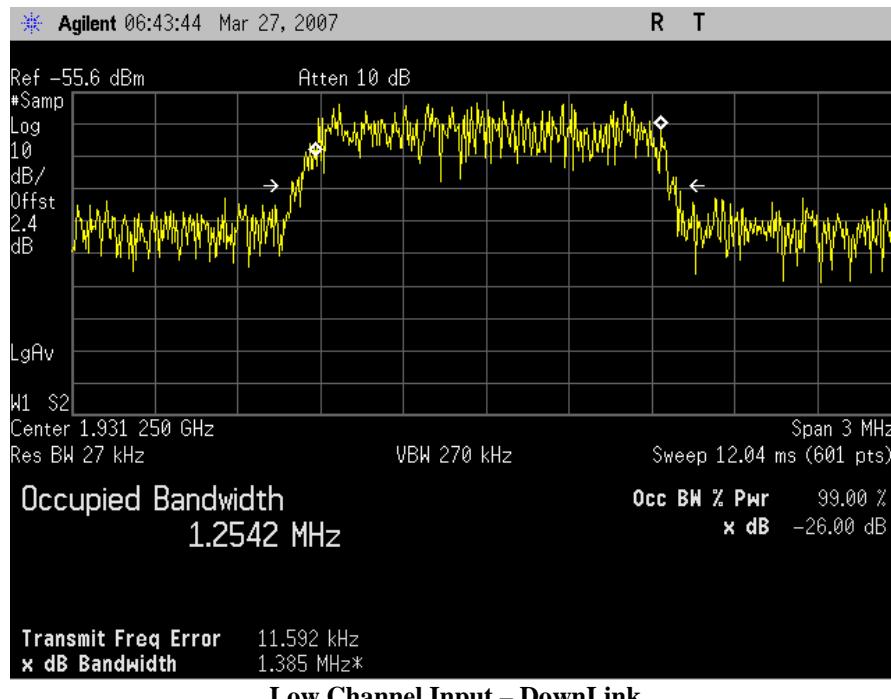




Advanced RF Technologies  
Epoch-HP-20, Epoch-HP-10, Epoch-HP-05 and  
Epoch-HP-XX with 5MHz and 15MHz filters (1900MHz band)

Electromagnetic Compatibility  
Intentional Radiators  
CFR Title 47 Part 24 Subpart E

## Occupied Bandwidth Test Results - CDMA

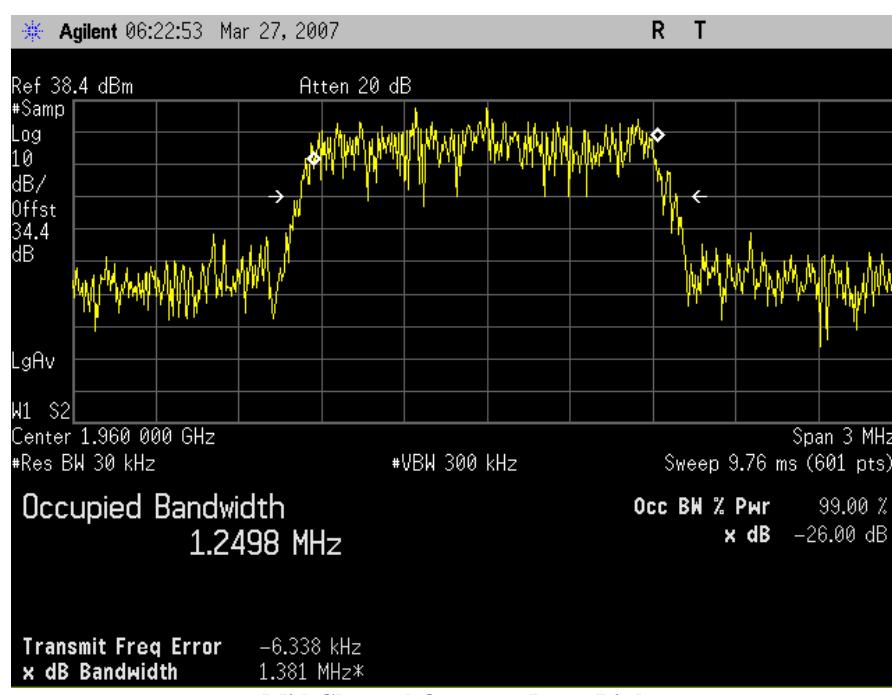
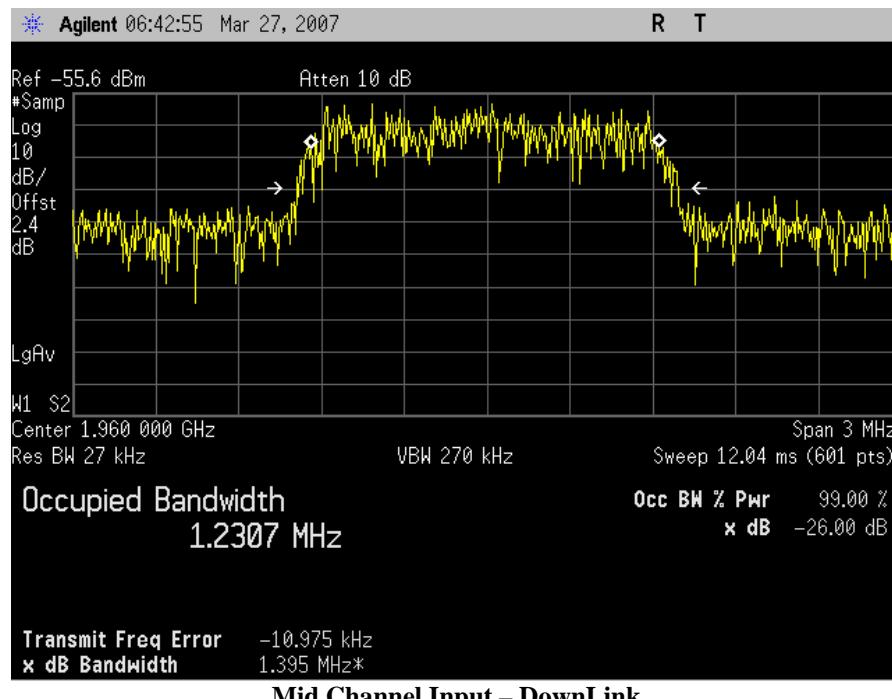




Advanced RF Technologies  
Epoch-HP-20, Epoch-HP-10, Epoch-HP-05 and  
Epoch-HP-XX with 5MHz and 15MHz filters (1900MHz band)

Electromagnetic Compatibility  
Intentional Radiators  
CFR Title 47 Part 24 Subpart E

## Occupied Bandwidth Test Results - CDMA

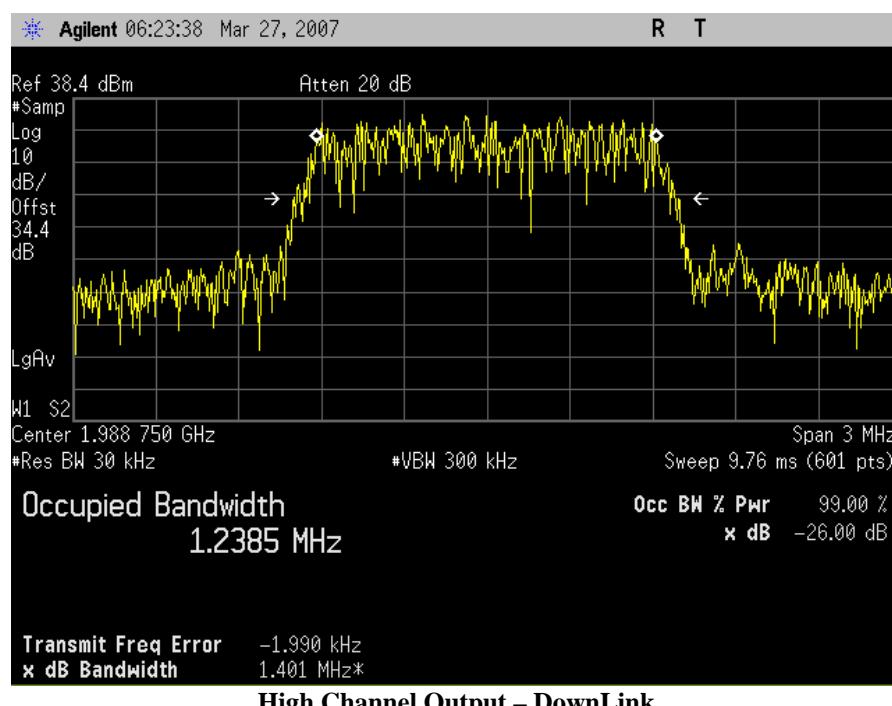
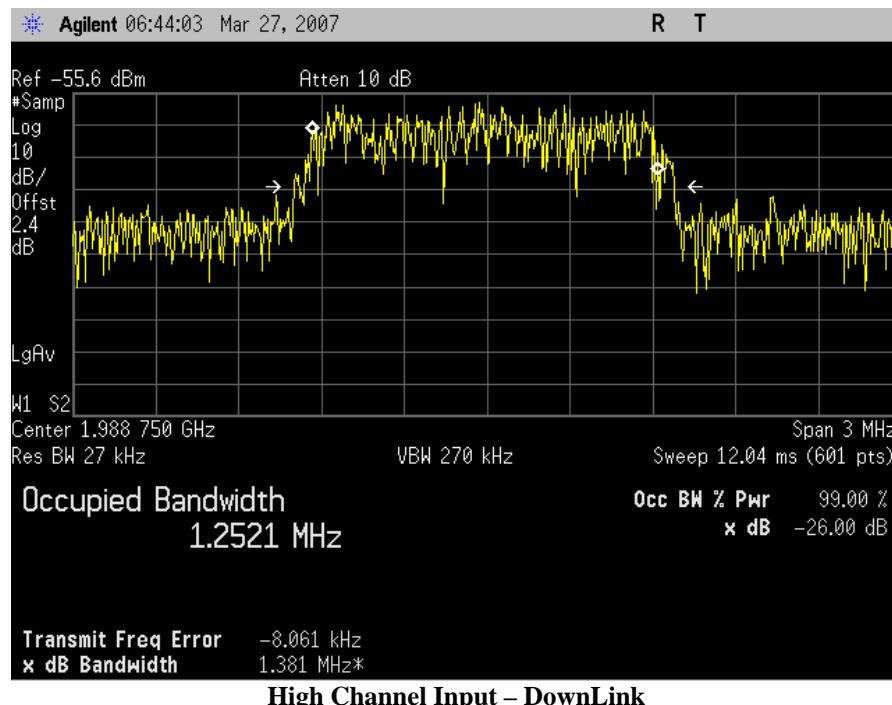




Advanced RF Technologies  
Epoch-HP-20, Epoch-HP-10, Epoch-HP-05 and  
Epoch-HP-XX with 5MHz and 15MHz filters (1900MHz band)

Electromagnetic Compatibility  
Intentional Radiators  
CFR Title 47 Part 24 Subpart E

## Occupied Bandwidth Test Results - CDMA

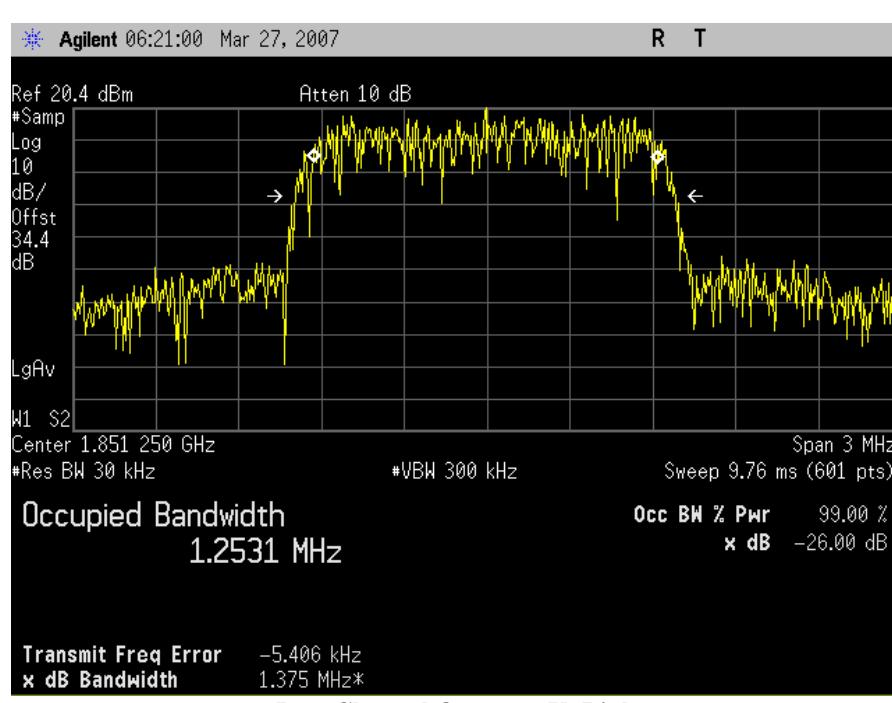
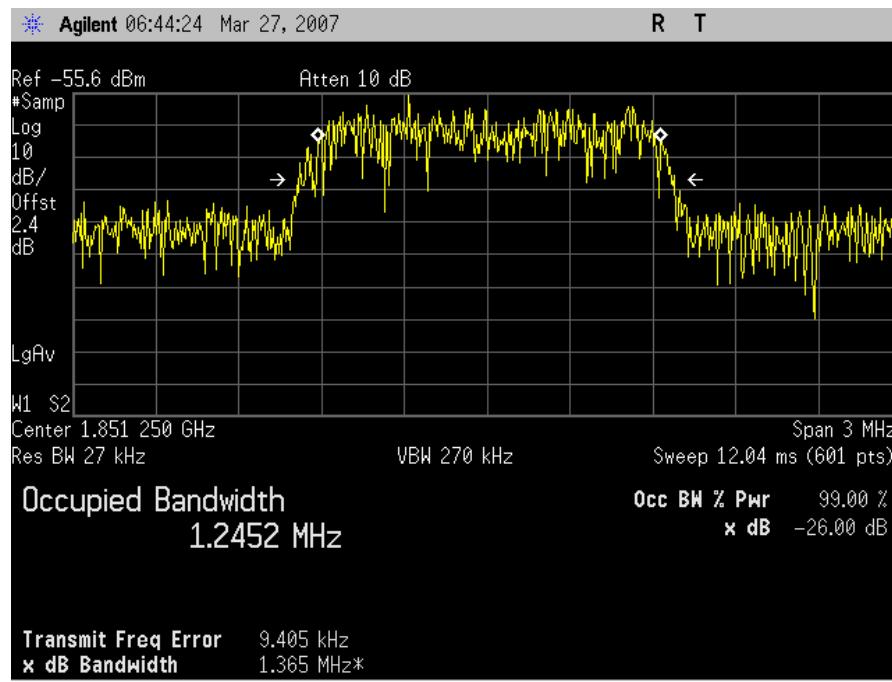




Advanced RF Technologies  
Epoch-HP-20, Epoch-HP-10, Epoch-HP-05 and  
Epoch-HP-XX with 5MHz and 15MHz filters (1900MHz band)

Electromagnetic Compatibility  
Intentional Radiators  
CFR Title 47 Part 24 Subpart E

## Occupied Bandwidth Test Results - CDMA

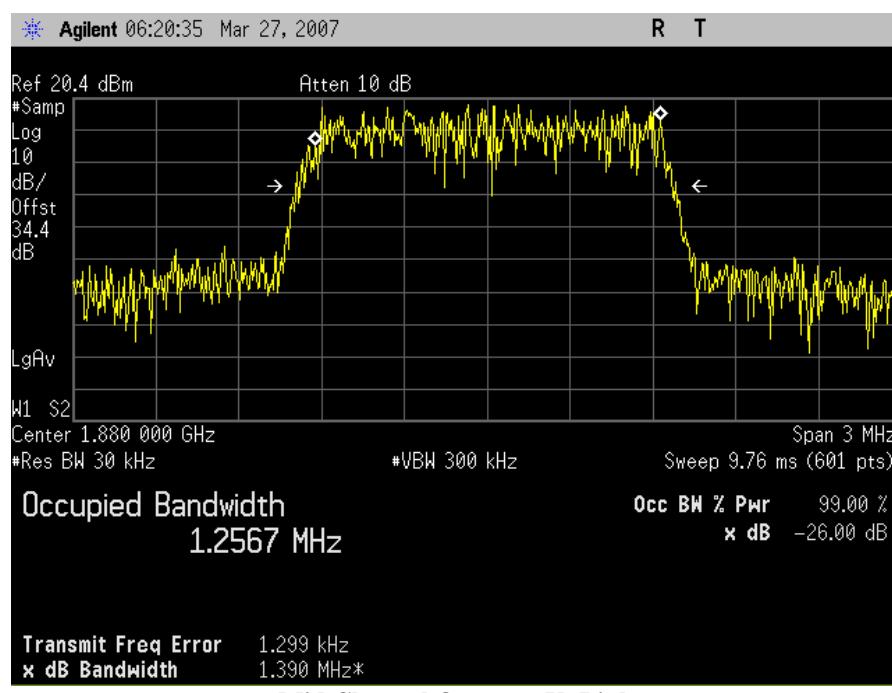
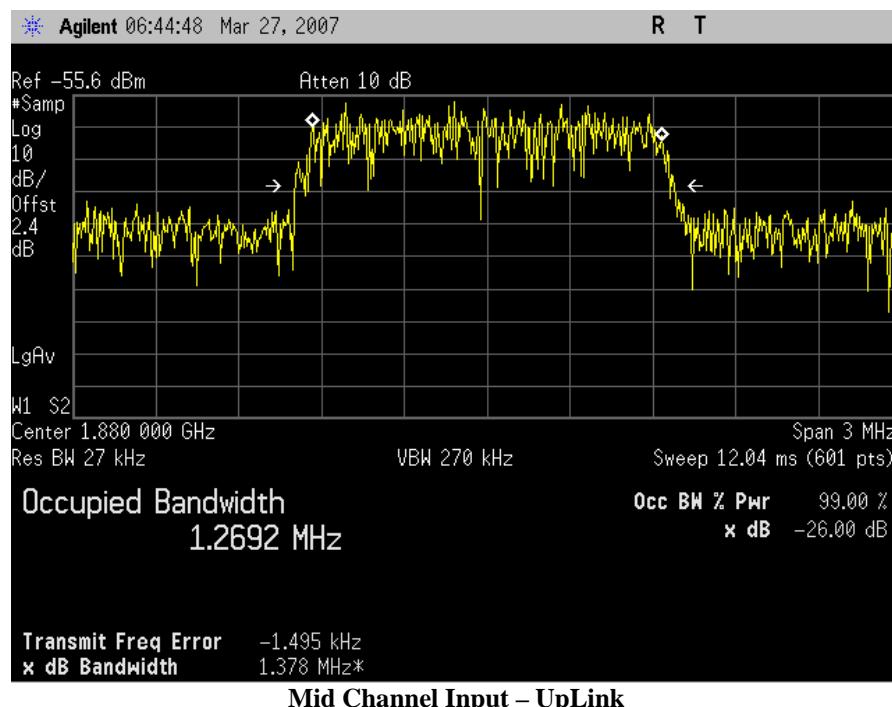




Advanced RF Technologies  
Epoch-HP-20, Epoch-HP-10, Epoch-HP-05 and  
Epoch-HP-XX with 5MHz and 15MHz filters (1900MHz band)

Electromagnetic Compatibility  
Intentional Radiators  
CFR Title 47 Part 24 Subpart E

## Occupied Bandwidth Test Results - CDMA

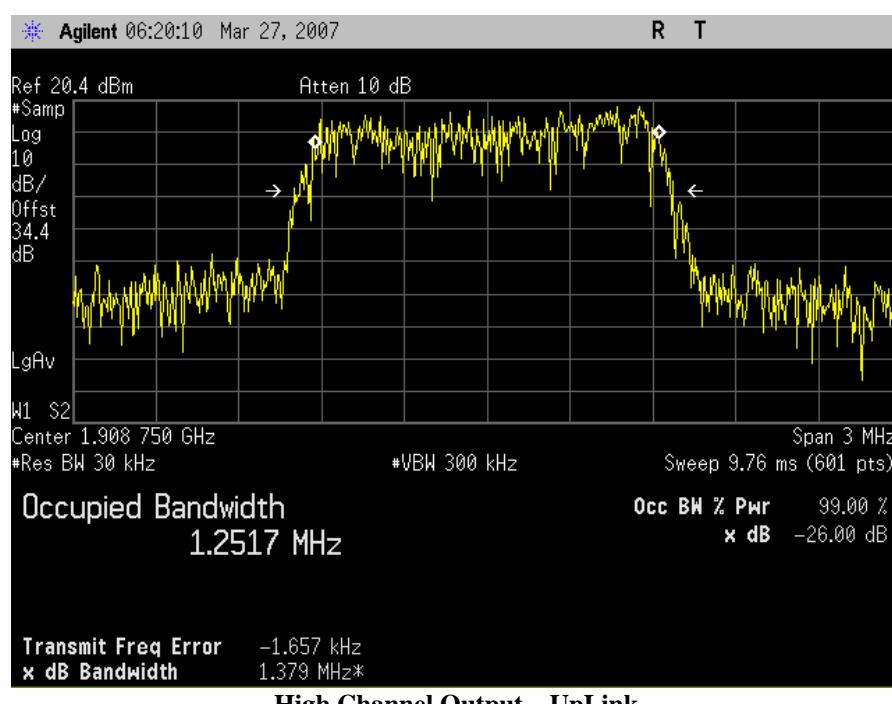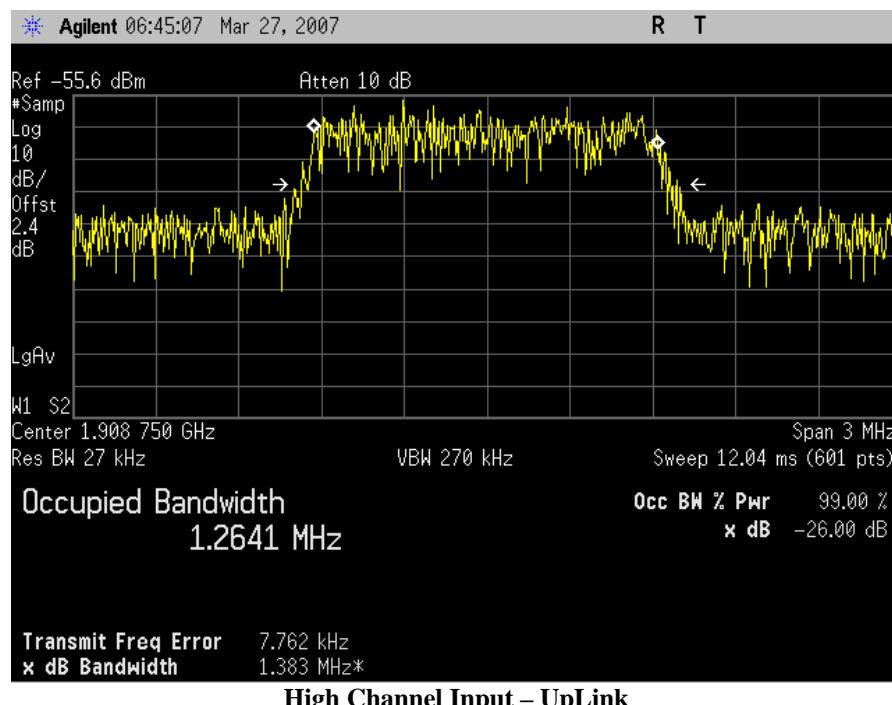





Advanced RF Technologies  
Epoch-HP-20, Epoch-HP-10, Epoch-HP-05 and  
Epoch-HP-XX with 5MHz and 15MHz filters (1900MHz band)

Electromagnetic Compatibility  
Intentional Radiators  
CFR Title 47 Part 24 Subpart E

## Occupied Bandwidth Test Results - GSM

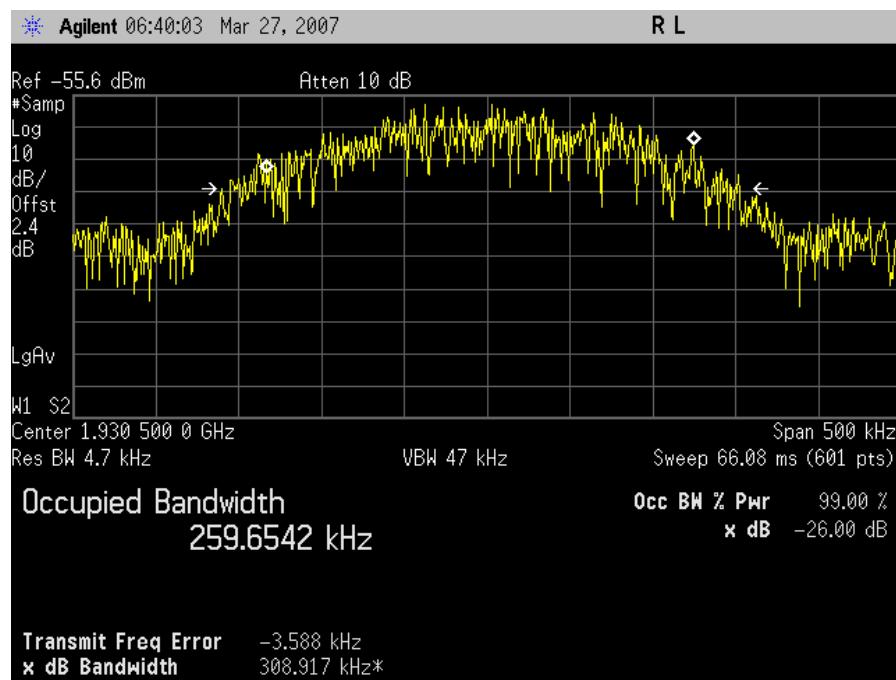

### Low Channel Input – DownLink

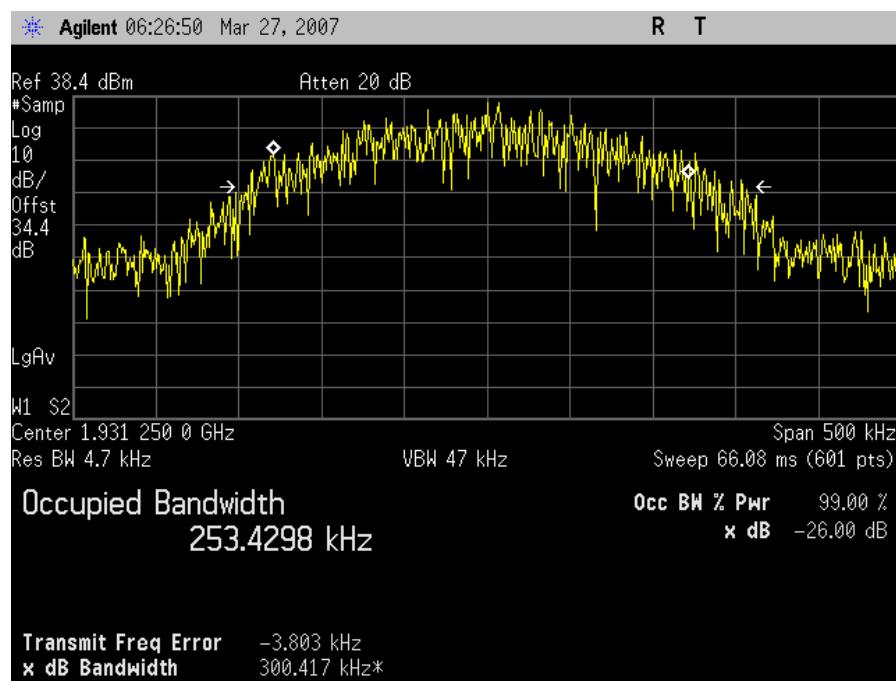



### Low Channel Output - DownLink



Advanced RF Technologies  
Epoch-HP-20, Epoch-HP-10, Epoch-HP-05 and  
Epoch-HP-XX with 5MHz and 15MHz filters (1900MHz band)

Electromagnetic Compatibility  
Intentional Radiators  
CFR Title 47 Part 24 Subpart E

## Occupied Bandwidth Test Results - GSM

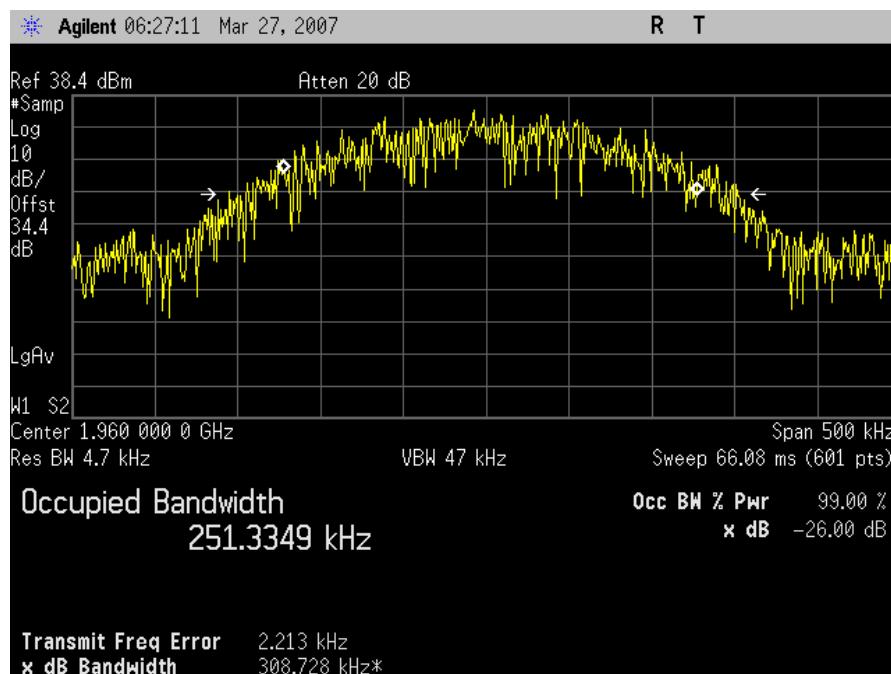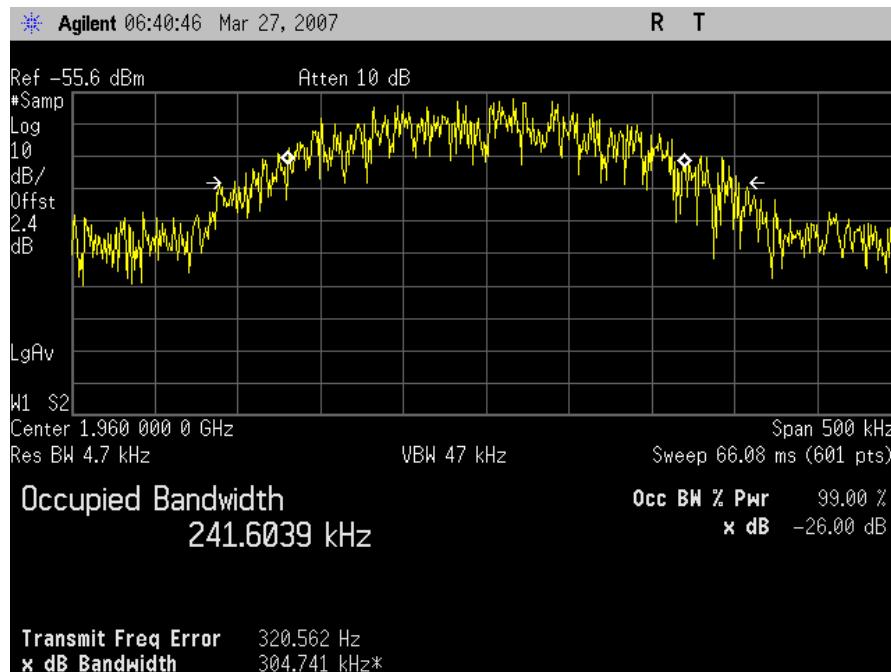





Advanced RF Technologies  
Epoch-HP-20, Epoch-HP-10, Epoch-HP-05 and  
Epoch-HP-XX with 5MHz and 15MHz filters (1900MHz band)

Electromagnetic Compatibility  
Intentional Radiators  
CFR Title 47 Part 24 Subpart E

## Occupied Bandwidth Test Results - GSM

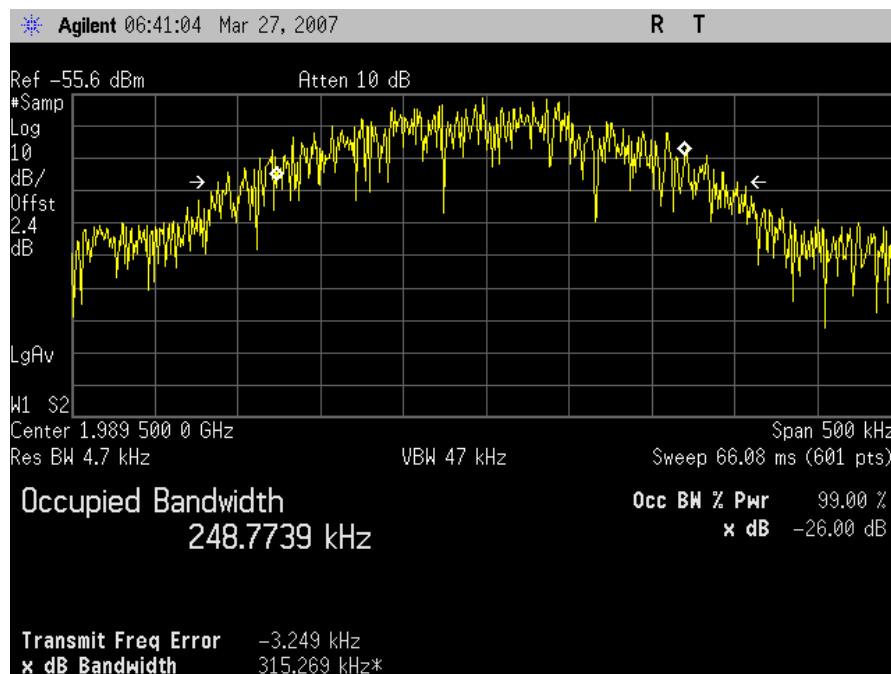

High Channel Input – DownLink

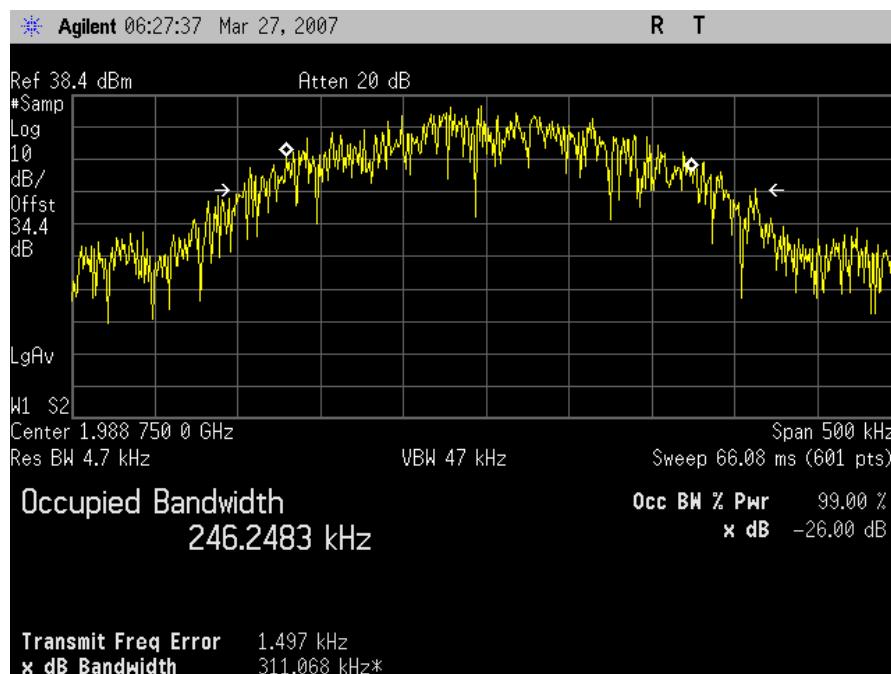


High Channel Output – DownLink




Advanced RF Technologies  
Epoch-HP-20, Epoch-HP-10, Epoch-HP-05 and  
Epoch-HP-XX with 5MHz and 15MHz filters (1900MHz band)

Electromagnetic Compatibility  
Intentional Radiators  
CFR Title 47 Part 24 Subpart E

## Occupied Bandwidth Test Results - GSM

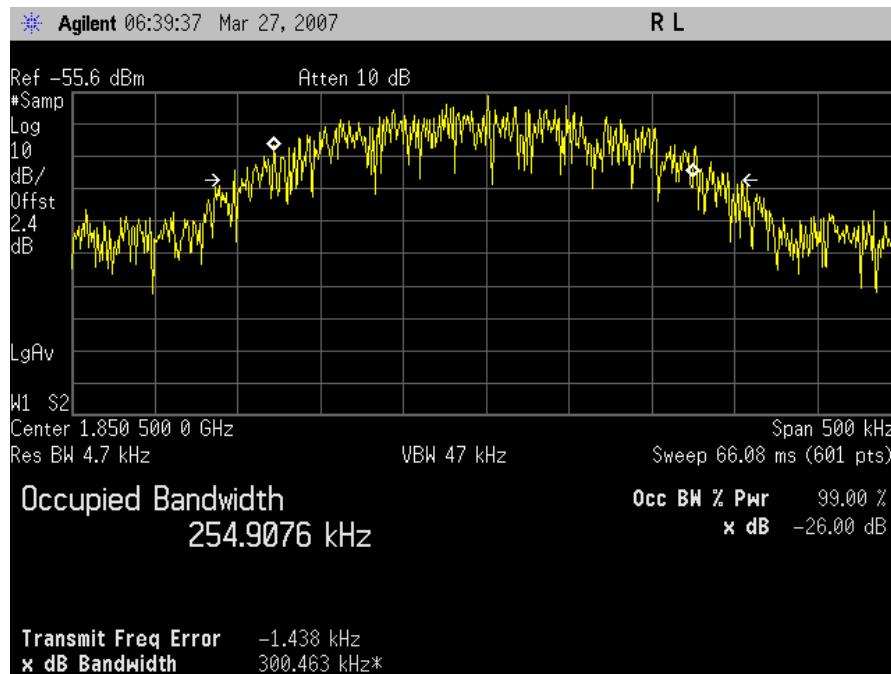

Low Channel Input – UpLink

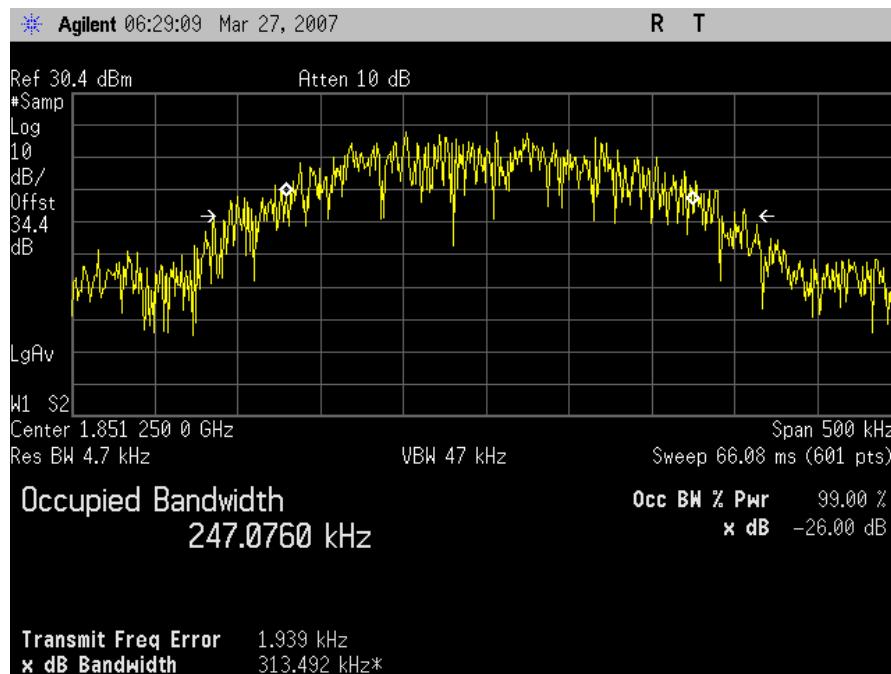


Low Channel Output - UpLink




Advanced RF Technologies  
Epoch-HP-20, Epoch-HP-10, Epoch-HP-05 and  
Epoch-HP-XX with 5MHz and 15MHz filters (1900MHz band)

Electromagnetic Compatibility  
Intentional Radiators  
CFR Title 47 Part 24 Subpart E

## Occupied Bandwidth Test Results - GSM

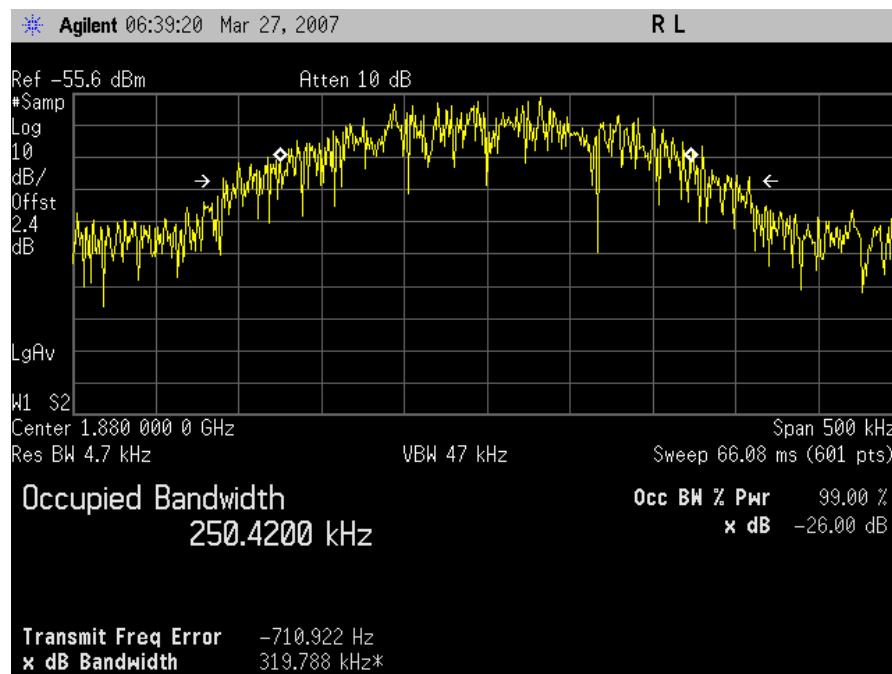

Mid Channel Input – UpLink

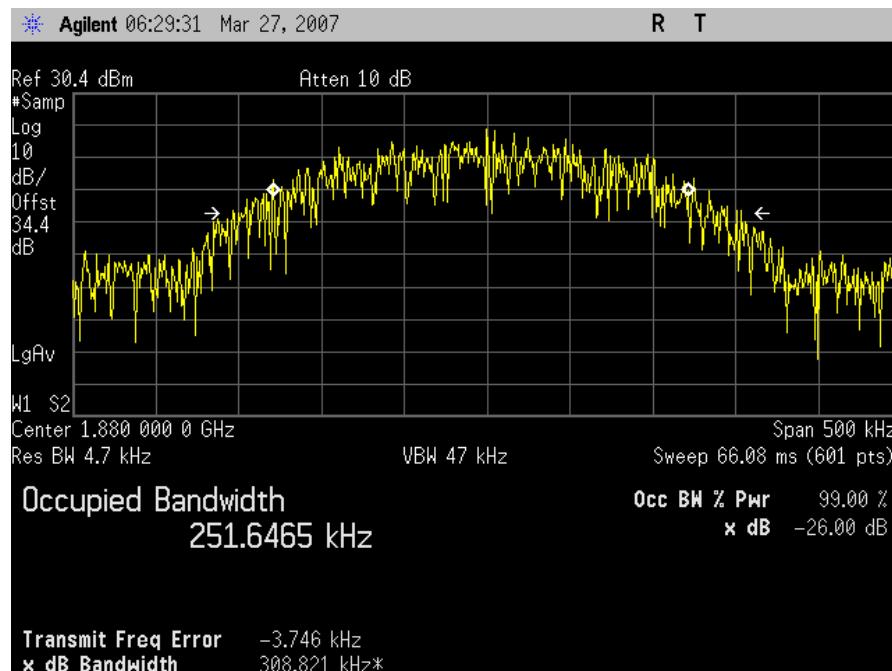


Mid Channel Output – UpLink




Advanced RF Technologies  
Epoch-HP-20, Epoch-HP-10, Epoch-HP-05 and  
Epoch-HP-XX with 5MHz and 15MHz filters (1900MHz band)

Electromagnetic Compatibility  
Intentional Radiators  
CFR Title 47 Part 24 Subpart E

## Occupied Bandwidth Test Results - GSM

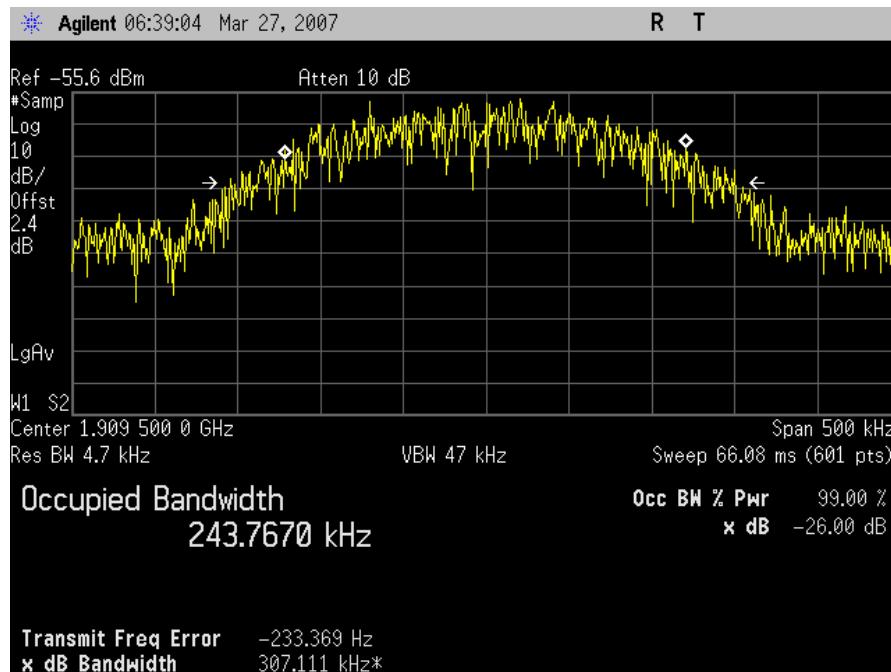

High Channel Input – UpLink

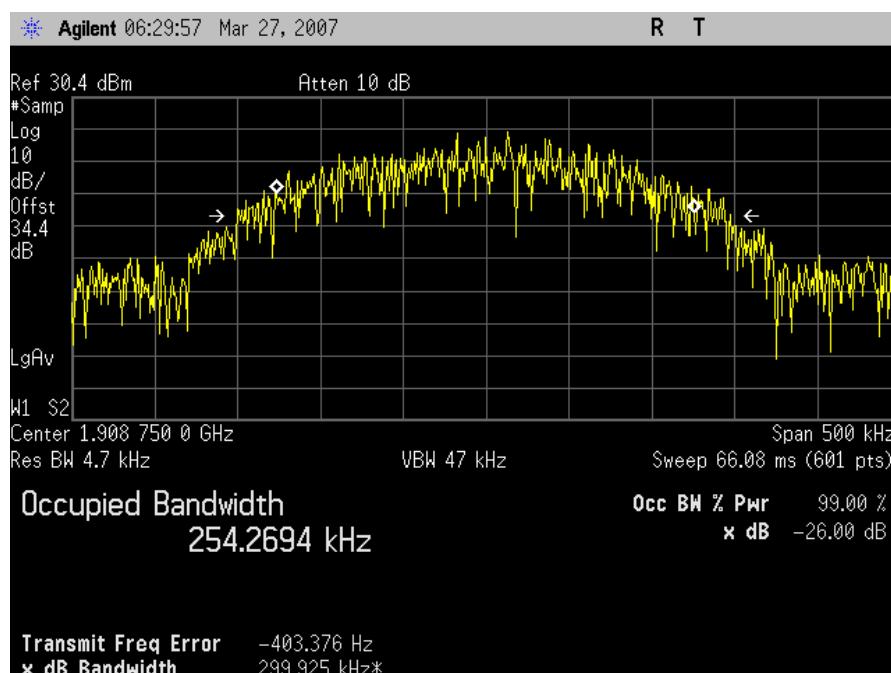


High Channel Output – UpLink




Advanced RF Technologies  
Epoch-HP-20, Epoch-HP-10, Epoch-HP-05 and  
Epoch-HP-XX with 5MHz and 15MHz filters (1900MHz band)

Electromagnetic Compatibility  
Intentional Radiators  
CFR Title 47 Part 24 Subpart E

## Occupied Bandwidth Test Results - TDMA

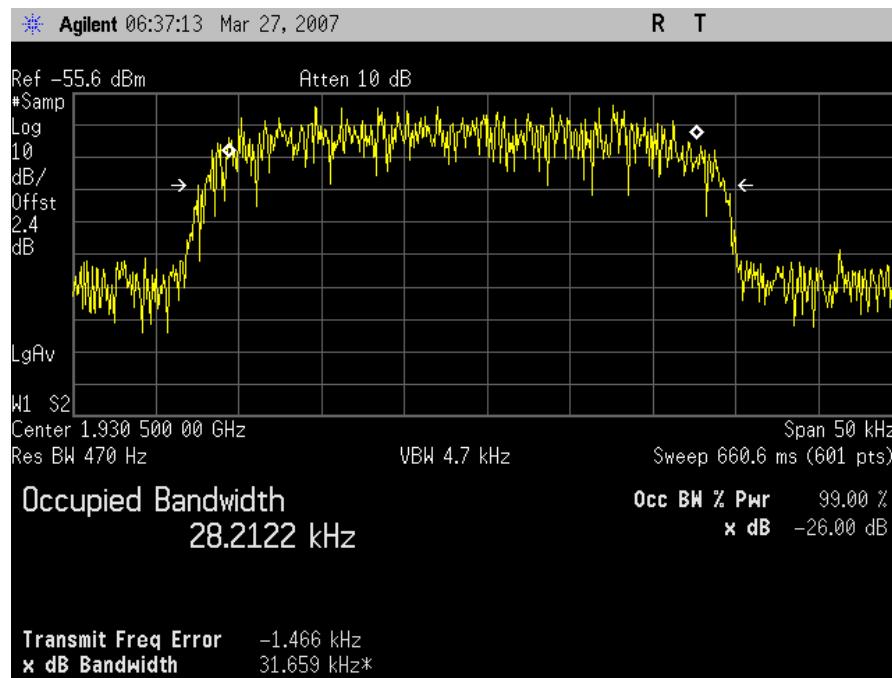

### Low Channel Input – DownLink

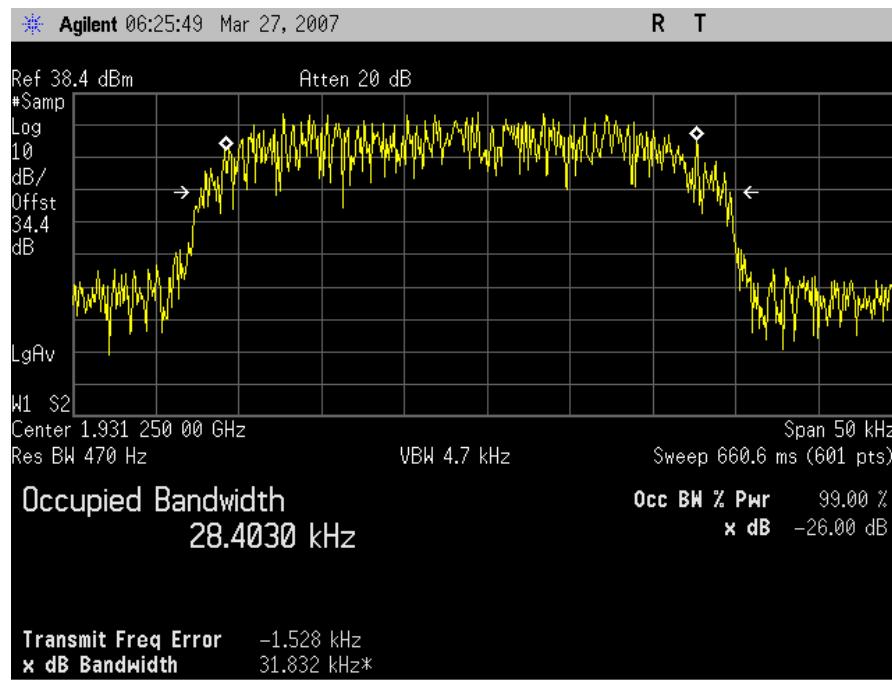



### Low Channel Output - DownLink



Advanced RF Technologies  
Epoch-HP-20, Epoch-HP-10, Epoch-HP-05 and  
Epoch-HP-XX with 5MHz and 15MHz filters (1900MHz band)

Electromagnetic Compatibility  
Intentional Radiators  
CFR Title 47 Part 24 Subpart E

## Occupied Bandwidth Test Results - TDMA

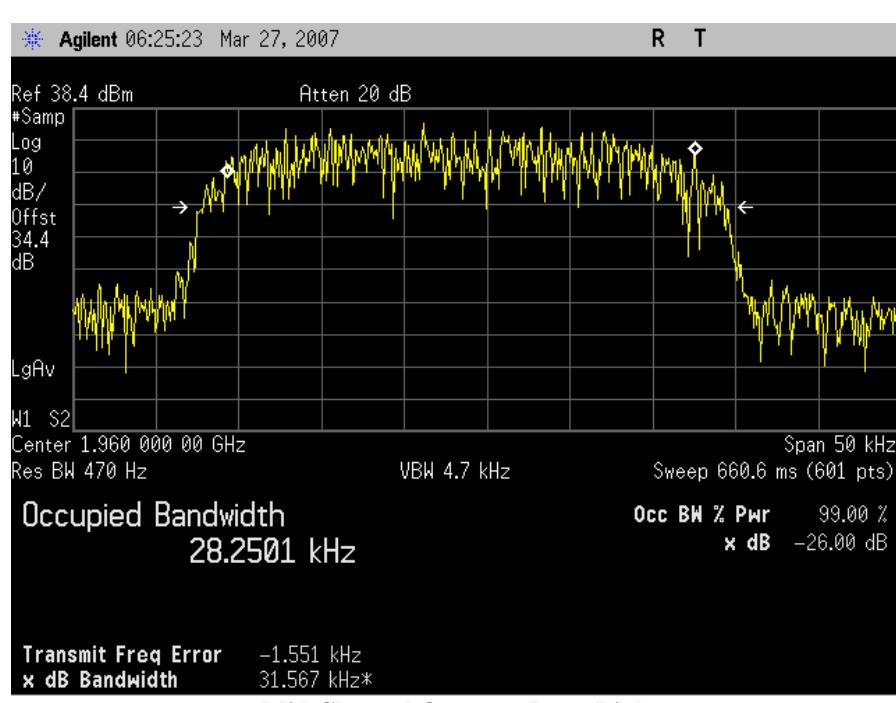
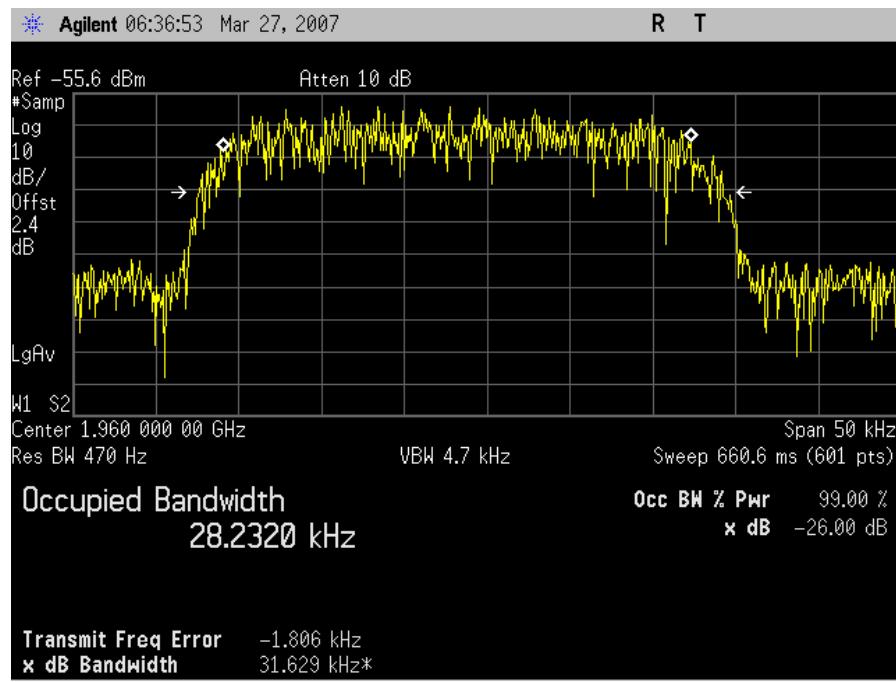




Advanced RF Technologies  
Epoch-HP-20, Epoch-HP-10, Epoch-HP-05 and  
Epoch-HP-XX with 5MHz and 15MHz filters (1900MHz band)

Electromagnetic Compatibility  
Intentional Radiators  
CFR Title 47 Part 24 Subpart E

## Occupied Bandwidth Test Results - TDMA

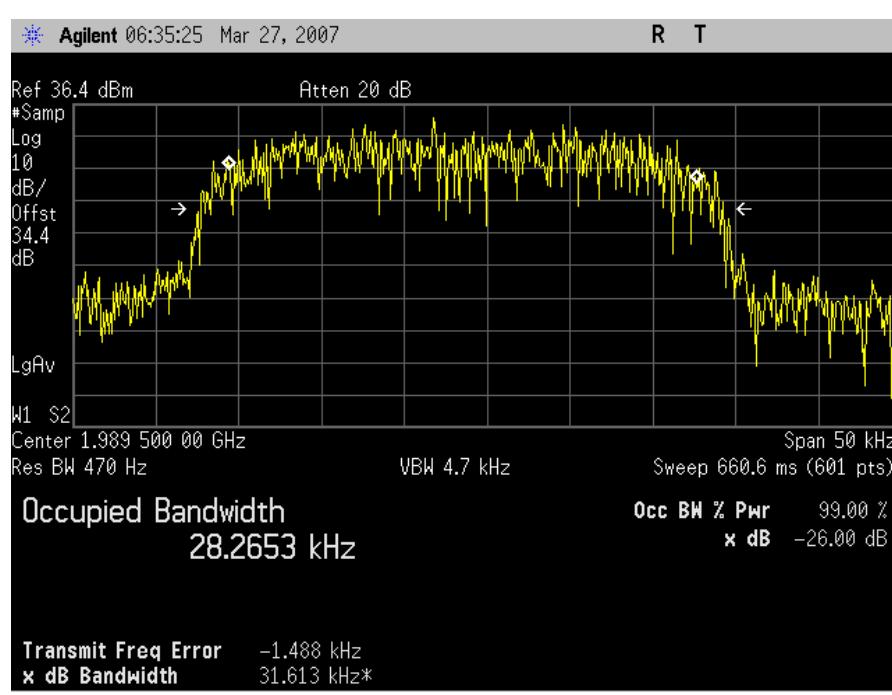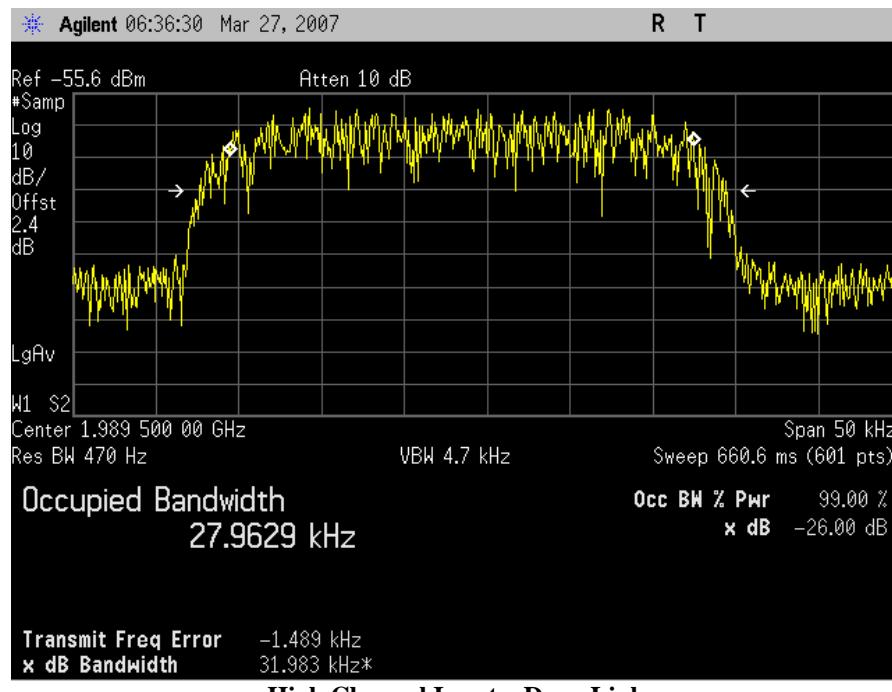





Advanced RF Technologies  
Epoch-HP-20, Epoch-HP-10, Epoch-HP-05 and  
Epoch-HP-XX with 5MHz and 15MHz filters (1900MHz band)

Electromagnetic Compatibility  
Intentional Radiators  
CFR Title 47 Part 24 Subpart E

## Occupied Bandwidth Test Results - TDMA

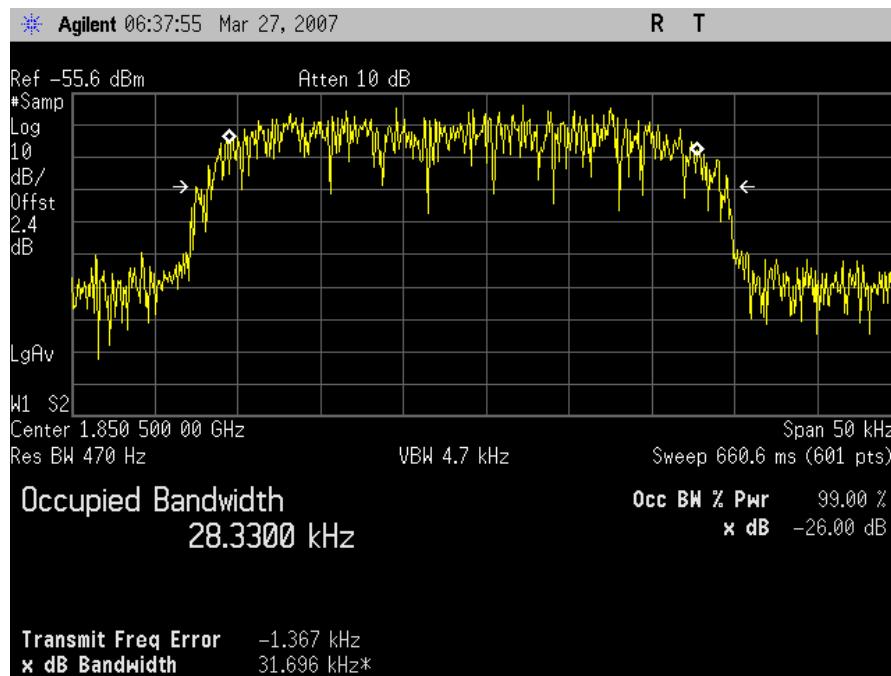

### Low Channel Input – UpLink

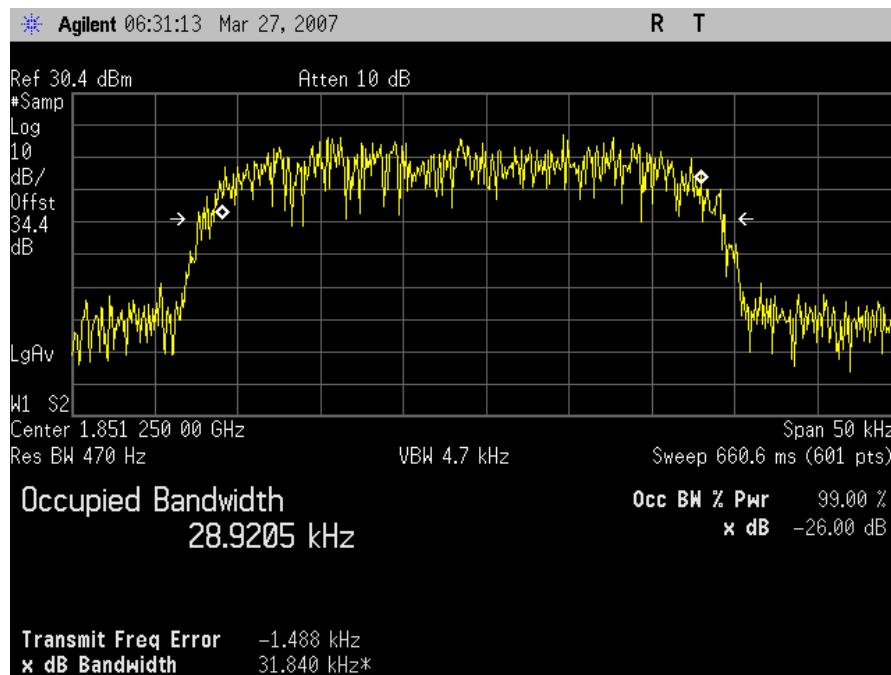


### Low Channel Output - UpLink




Advanced RF Technologies  
Epoch-HP-20, Epoch-HP-10, Epoch-HP-05 and  
Epoch-HP-XX with 5MHz and 15MHz filters (1900MHz band)

Electromagnetic Compatibility  
Intentional Radiators  
CFR Title 47 Part 24 Subpart E

## Occupied Bandwidth Test Results - TDMA

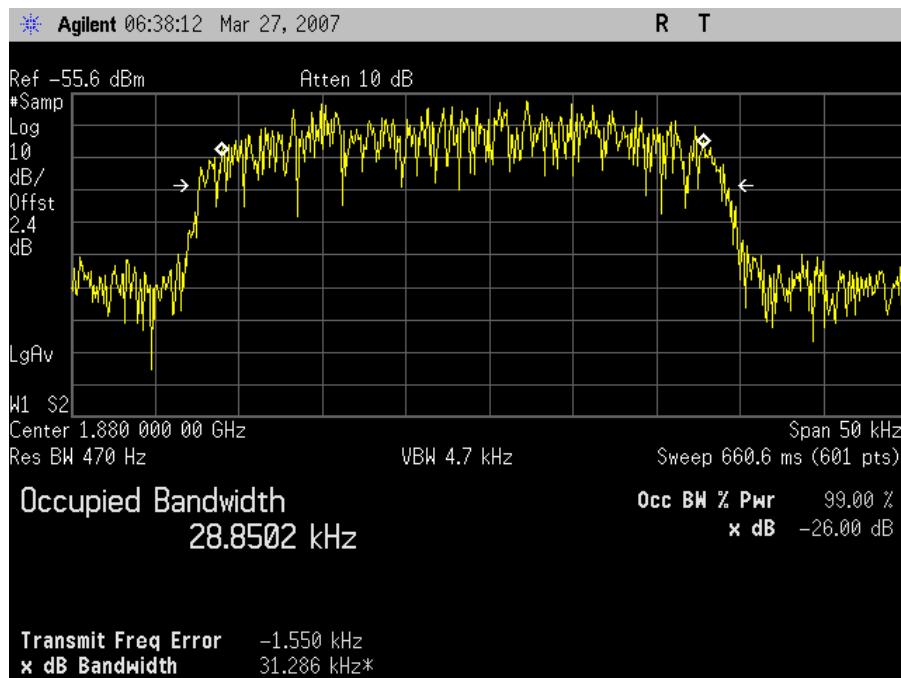

Mid Channel Input – UpLink

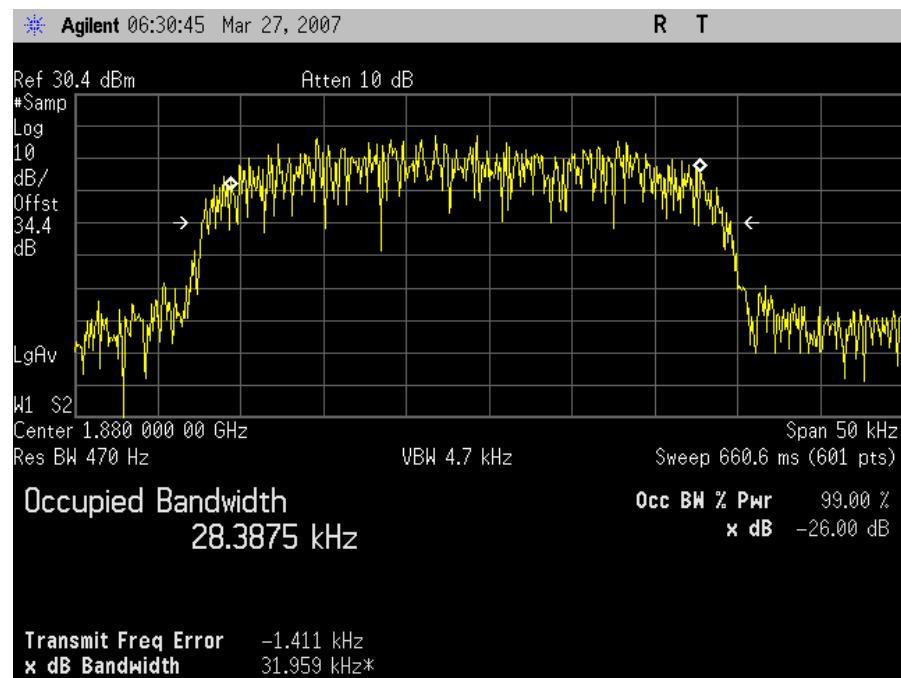



Mid Channel Output – UpLink



Advanced RF Technologies  
Epoch-HP-20, Epoch-HP-10, Epoch-HP-05 and  
Epoch-HP-XX with 5MHz and 15MHz filters (1900MHz band)

Electromagnetic Compatibility  
Intentional Radiators  
CFR Title 47 Part 24 Subpart E

## Occupied Bandwidth Test Results - TDMA

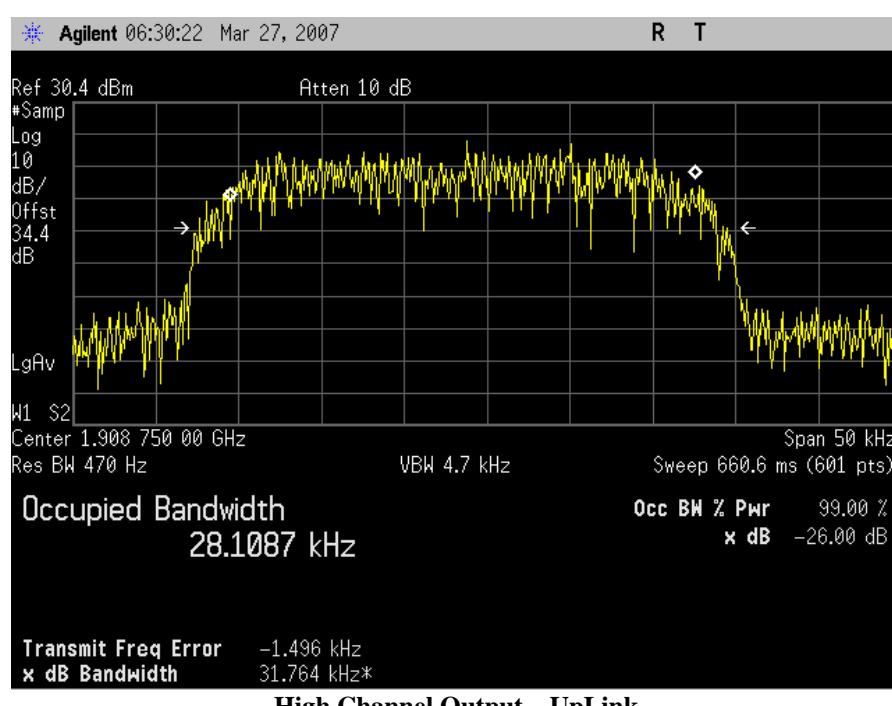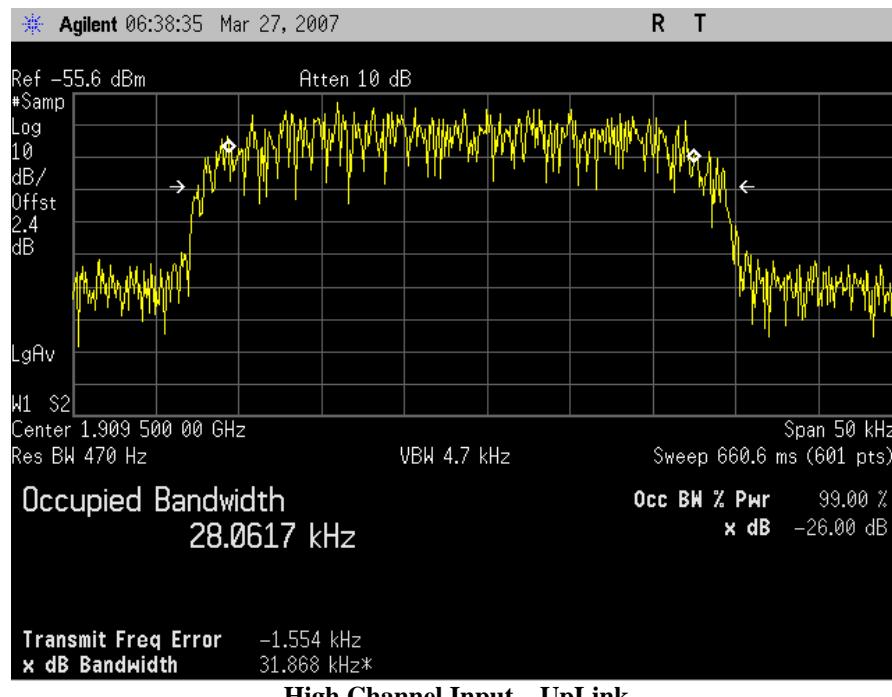



## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 2.1053 Radiated Spurious Emissions

**Test Requirement(s):** **§ 2.1053 Measurements required: Field strength of spurious radiation.**

**§ 2.1053 (a)** Measurements shall be made to detect spurious emissions that may be radiated directly from the cabinet, control circuits, power leads, or intermediate circuit elements under normal conditions of installation and operation. Curves or equivalent data shall be supplied showing the magnitude of each harmonic and other spurious emission. For this test, single sideband, independent sideband, and controlled carrier transmitters shall be modulated under the conditions specified in paragraph (c) of § 2.1049, as appropriate. For equipment operating on frequencies below 890 MHz, an open field test is normally required with the measuring instrument antenna located in the far-field at all test frequencies. In the event it is either impractical or impossible to make open field measurements (e.g. a broadcast transmitter installed in a building) measurements will be accepted of the equipment as installed. Such measurements must be accompanied by a description of the site where the measurements were made showing the location of any possible source of reflections which might distort the field strength measurements. Information submitted shall include the relative radiated power of each spurious emission with reference to the rated power output of the transmitter, assuming all emissions are radiated from half-wave dipole antennas.

**§ 2.1053 (b):** The measurements specified in paragraph (a) of this section shall be made for the following equipment:

- (1) Those in which the spurious emissions are required to be 60 dB or more below the mean power of the transmitter.
- (2) All equipment operating on frequencies higher than 25 MHz.
- (3) All equipment where the antenna is an integral part of, and attached directly to the transmitter.
- (4) Other types of equipment as required, when deemed necessary by the Commission.

**§ 24.238 Emission limitations for Broadband PCS equipment:** The rules in this section govern the spectral characteristics of emissions in the Broadband Personal Communications Service.

**§ 24.238 (a)** Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$ .



Advanced RF Technologies  
Epoch-HP-20, Epoch-HP-10, Epoch-HP-05 and  
Epoch-HP-XX with 5MHz and 15MHz filters (1900MHz band)

Electromagnetic Compatibility  
Intentional Radiators  
CFR Title 47 Part 24 Subpart E

**Test Procedures:** As required by 47 CFR 2.1053, *field strength of radiated spurious measurements* were made in accordance with the procedures of TIA/EIA-603-A-2001 "Land Mobile FM or PM Communications Equipment Measurement and Performance Standards".

Radiated emission measurements were performed inside a 10 meter semi-anechoic chamber. The EUT was set at a distance of 3m from the receiving antenna. The EUT's RF ports were terminated to 50ohm load. The EUT was set to transmit at the low, mid and high channels of the transmitter frequency range at its maximum power level. The EUT was rotated about 360° and the receiving antenna scanned from 1-4m in order to capture the maximum emission. A calibrated antenna source was positioned in place of the EUT and the previously recorded signal was duplicated. The maximum EIRP of the emission was calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps were carried out with the receiving antenna in both vertical and horizontal polarization. Harmonic emissions up to the 10<sup>th</sup> or 40GHz, which ever was the lesser, were investigated.

**Test Results:** The EUT complies with the requirements of this section.

**Test Engineer:** Shawn McMillen

**Test Date(s):** March 26, 2007



Advanced RF Technologies  
Epoch-HP-20, Epoch-HP-10, Epoch-HP-05 and  
Epoch-HP-XX with 5MHz and 15MHz filters (1900MHz band)

Electromagnetic Compatibility  
Intentional Radiators  
CFR Title 47 Part 24 Subpart E

## Electromagnetic Compatibility Criteria for Intentional Radiators

§ 2.1053 Measurements required: Field strength of spurious radiation. (Part 24E Downlink)

Frequency (MHz)	Antenna Polarity (H/V)	Field Strength of Spurious Harmonics (dBm)	Substitution Antenna Gain (dBi)	Power into Substitution Antenna (dBm)	EIRP (dBm)	Limit (dBm)	Margin	Detector Type
3861.0	V	-62.65	9.6	-55.3	-45.7	-13	-32.7	Peak
3861.0	H	-65	9.6	-57.9	-48.3	-13	-35.3	Peak
5791.5	V	-65.29	11.4	-57.2	-45.8	-13	-32.8	Peak
5791.5	H	-63.33	11.4	-53.2	-41.8	-13	-28.8	Peak
<b>Low Channel</b>								
3920.0	V	-62.41	9.6	-54.2	-44.6	-13	-31.6	Peak
3920.0	H	-62.84	9.6	-53.3	-43.7	-13	-30.7	Peak
5880.0	V	-62.96	11.4	-54.3	-42.9	-13	-29.9	Peak
5880.0	H	-63.76	11.4	-55.3	-43.9	-13	-30.9	Peak
<b>Mid Channel</b>								
3979.0	V	-61.8	9.6	-53.2	-43.6	-13	-30.6	Peak
3979.0	H	-62.56	9.6	-54.9	-45.3	-13	-32.3	Peak
5968.5	V	-62.98	11.4	-54.3	-42.9	-13	-29.9	Peak
5968.5	H	-64.05	11.4	-55.3	-43.9	-13	-30.9	Peak
<b>High Channel</b>								

**Note:** All other emissions were measured at the noise floor of the spectrum analyzer. The Uplink harmonic emissions were at the noise floor of the spectrum analyzer.



Advanced RF Technologies  
Epoch-HP-20, Epoch-HP-10, Epoch-HP-05 and  
Epoch-HP-XX with 5MHz and 15MHz filters (1900MHz band)

Electromagnetic Compatibility  
Intentional Radiators  
CFR Title 47 Part 24 Subpart E

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 2.1053 Measurements required: Field strength of spurious radiation. (Part 24E Downlink)

Frequency (MHz)	Antenna Polarity (H/V)	Field Strength of Spurious Harmonics (dBm)	Substitution Antenna Gain (dBi)	Power into Substitution Antenna(dBm)	EIRP (dBm)	Limit (dBm)	Margin	Detector Type
3702.0	V	-62.29	9.6	-54.3	-44.7	-13	-31.7	Peak
3702.0	H	-62.51	9.6	-54.2	-44.6	-13	-31.6	Peak
5553.0	V	-62.44	11.4	-54.8	-43.4	-13	-30.4	Peak
5553.0	H	-63.49	11.4	-55.3	-43.9	-13	-30.9	Peak
<b>Low Channel</b>								
3760.0	V	-62.75	9.6	-54.2	-44.6	-13	-31.6	Peak
3760.0	H	-62.24	9.6	-53.1	-43.5	-13	-30.5	Peak
5640.0	V	-63.51	11.4	-55.6	-44.2	-13	-31.2	Peak
5640.0	H	-62.81	11.4	-54.8	-43.4	-13	-30.4	Peak
<b>Mid Channel</b>								
3819.0	V	-62.28	9.6	-54.8	-45.2	-13	-32.2	Peak
3819.0	H	-62.45	9.6	-54.2	-44.6	-13	-31.6	Peak
5728.5	V	-62.44	11.4	-54.2	-42.8	-13	-29.8	Peak
5728.5	H	-63.29	11.4	-55.2	-43.8	-13	-30.8	Peak
<b>High Channel</b>								


**Note:** All other emissions were measured at the noise floor of the spectrum analyzer. The Uplink harmonic emissions were at the noise floor of the spectrum analyzer.



Advanced RF Technologies  
Epoch-HP-20, Epoch-HP-10, Epoch-HP-05 and  
Epoch-HP-XX with 5MHz and 15MHz filters (1900MHz band)

Electromagnetic Compatibility  
Intentional Radiators  
CFR Title 47 Part 24 Subpart E

**Epoch-HP-20, Epoch-HP-10, Epoch-HP-05 and Epoch-HP-XX with 5MHz and 15MHz filters  
(1900MHz band) Part 24 Test Setup**

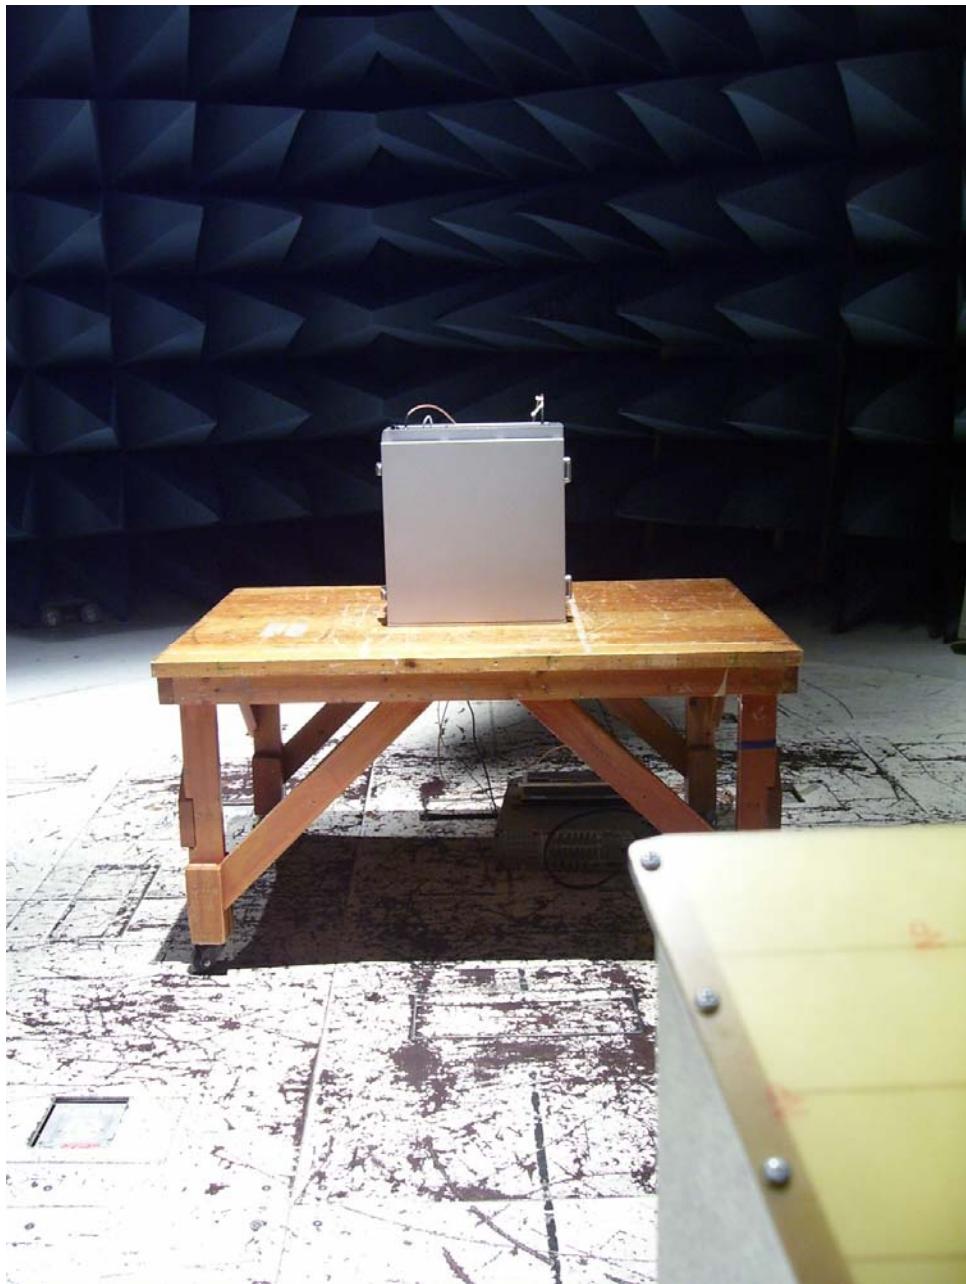

**Photograph 5. EUT Test Setup for Part 24**



Advanced RF Technologies  
Epoch-HP-20, Epoch-HP-10, Epoch-HP-05 and  
Epoch-HP-XX with 5MHz and 15MHz filters (1900MHz band)

Electromagnetic Compatibility  
Intentional Radiators  
CFR Title 47 Part 24 Subpart E

## Spurious Emissions at Antenna Terminals Conducted Spurious

### § 2.1051 Spurious Emissions at Antenna Terminals

**Test Requirement(s):** **§ 2.1051 Measurements required: Spurious emissions at antenna terminals:** The radio frequency voltage or powers generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of each harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in § 2.1049 as appropriate. The magnitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be specified.

**24.238 Emission limitations for Broadband PCS equipment:** The rules in this section govern the spectral characteristics of emissions in the Broadband Personal Communications Service.

**§ 24.238 (a) Out of band emissions.** The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

**Test Procedures:** A modulated carrier generated by the signal generator carrier was connected to either the Uplink or Downlink RF port at a maximum level as determined by the OEM. A spectrum analyzer was connected to either the Uplink or Downlink port depending on the circuitry being measured. The spectrum analyzer was set to 1MHz RBW and 3MHz VBW. The spectrum was investigated from 30MHz to the 10<sup>th</sup> harmonic of the carrier.

The inter-modulation requirements were performed in a similar manner as described above. The spectrum analyzer was set to 100KHz RBW and 300KHz VBW. Two modulated carriers were injected into the EUT. One carrier was set at the band edge of either the Uplink or Downlink band and the other at carrier set at 6MHz deviation from the first carrier. The in band spurious emissions were investigated.



**Test Results:** The EUT complies with the requirements of this section. There were no detectable spurious emissions for this EUT.

**Test Engineer(s):** Shawn McMillen

**Test Date(s):** March 26, 2007

## Spurious Emissions at Antenna Terminals Test Results - CDMA

### § 2.1051 Spurious Emissions at Antenna Terminals

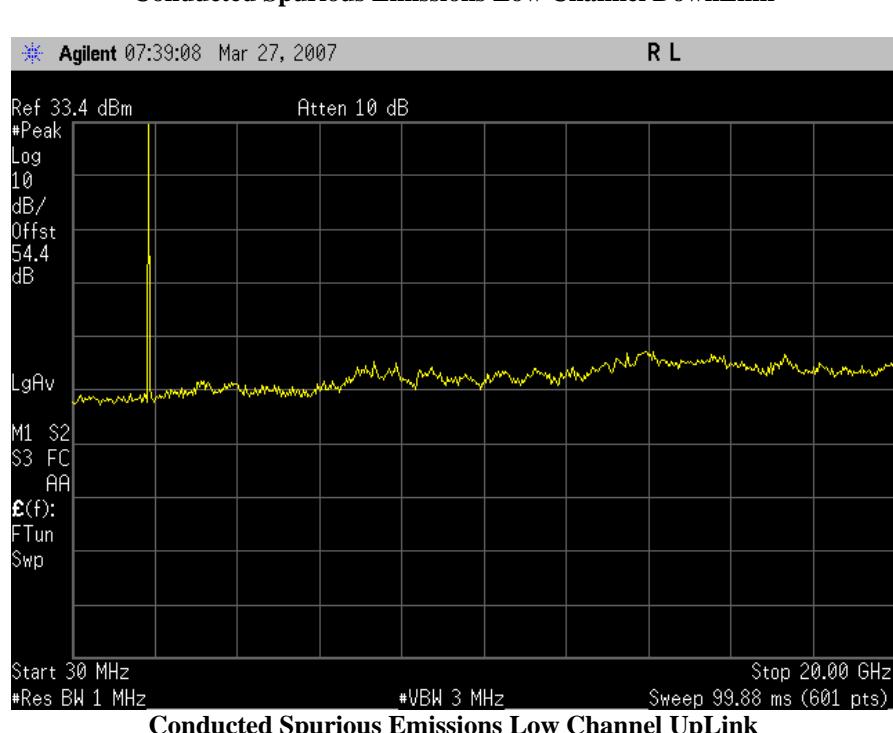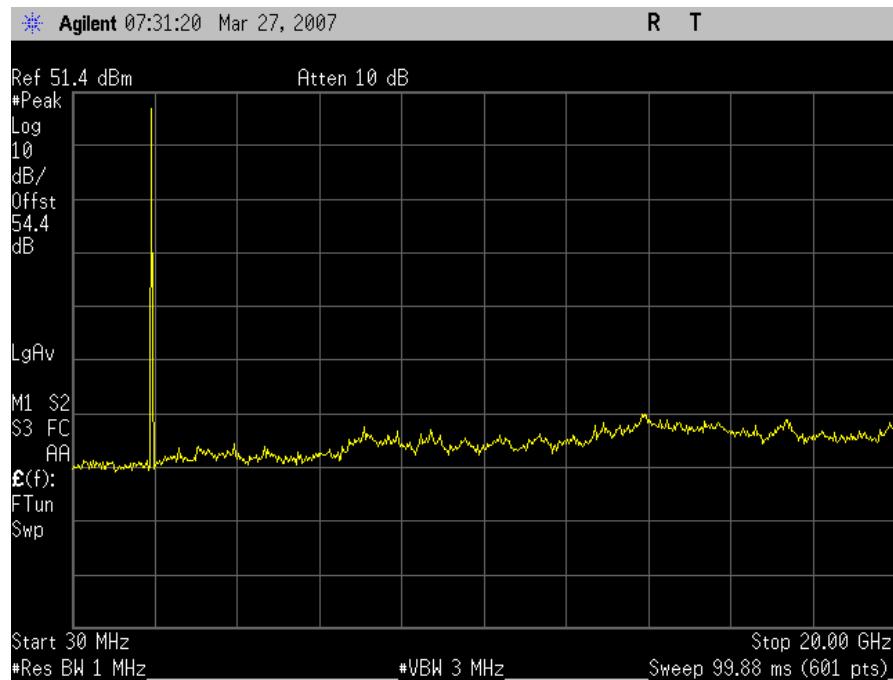




Advanced RF Technologies  
Epoch-HP-20, Epoch-HP-10, Epoch-HP-05 and  
Epoch-HP-XX with 5MHz and 15MHz filters (1900MHz band)

Electromagnetic Compatibility  
Intentional Radiators  
CFR Title 47 Part 24 Subpart E

## Spurious Emissions at Antenna Terminals Test Results - CDMA



Conducted Spurious Emissions Mid Channel DownLink

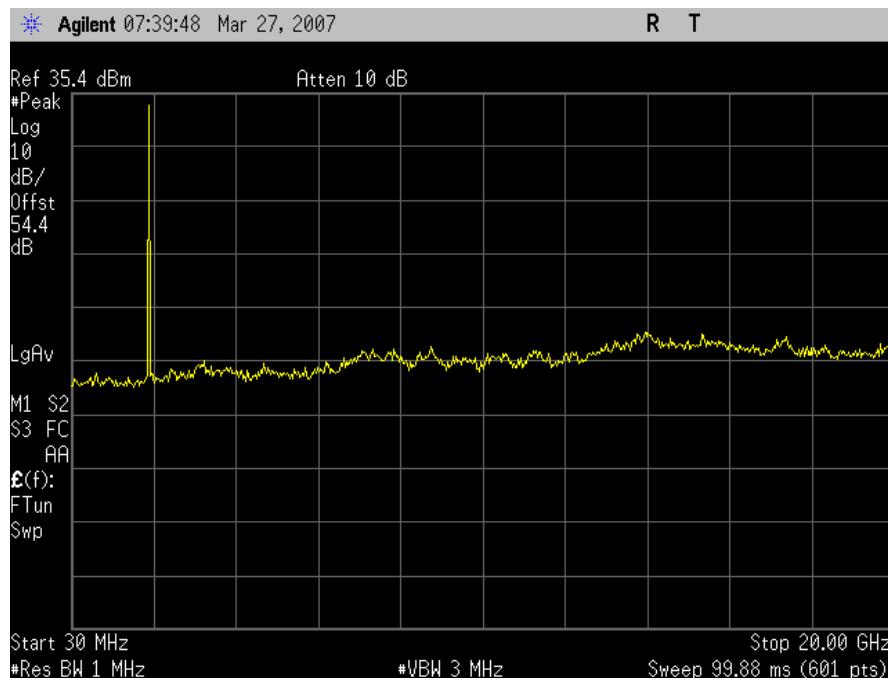


Conducted Spurious Emissions Mid Channel UpLink




Advanced RF Technologies  
Epoch-HP-20, Epoch-HP-10, Epoch-HP-05 and  
Epoch-HP-XX with 5MHz and 15MHz filters (1900MHz band)

Electromagnetic Compatibility  
Intentional Radiators  
CFR Title 47 Part 24 Subpart E

## Spurious Emissions at Antenna Terminals Test Results - CDMA

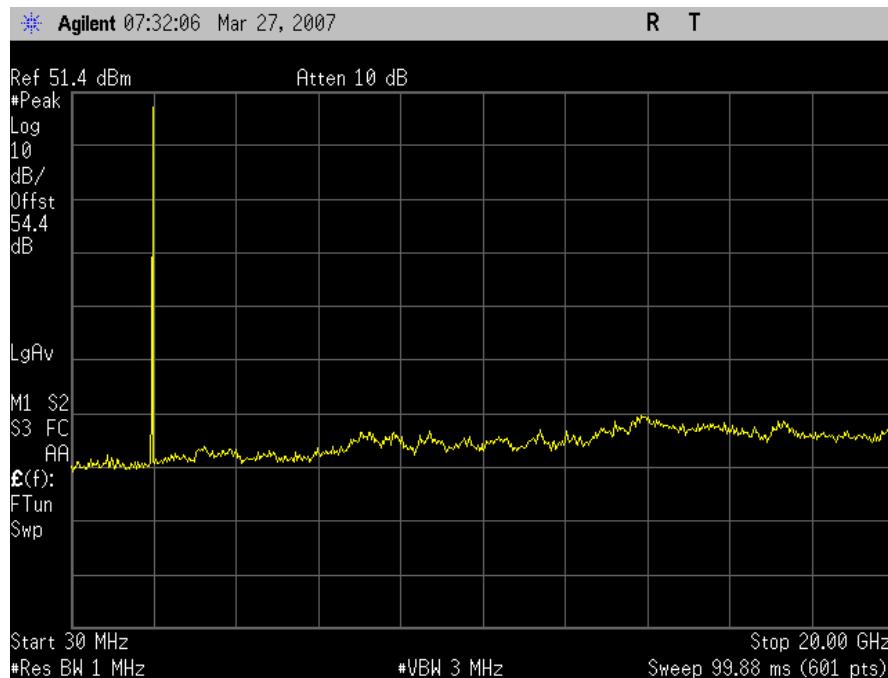



Conducted Spurious Emissions High Channel DownLink

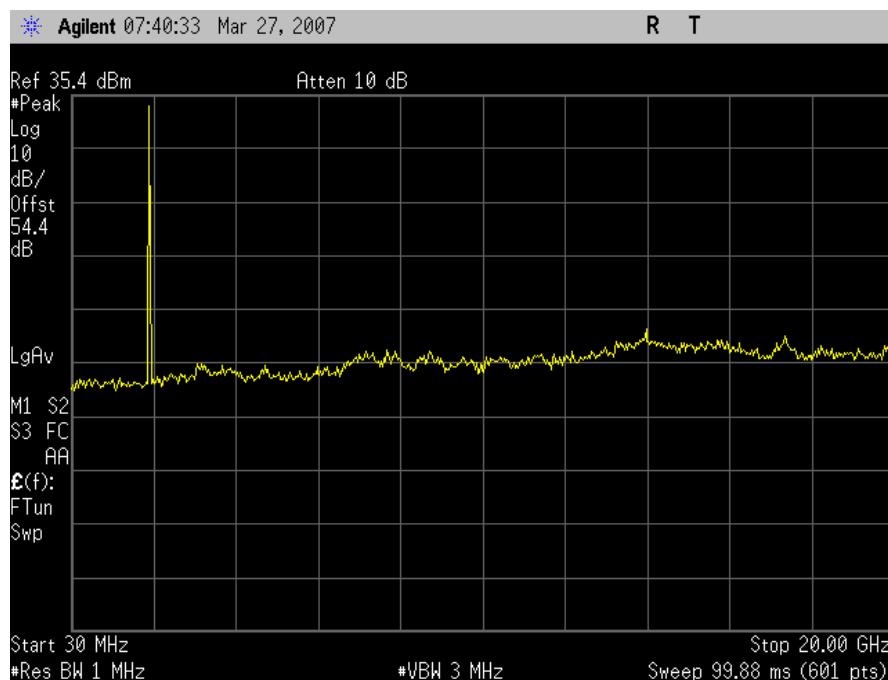

Conducted Spurious Emissions High Channel UpLink

## Spurious Emissions at Antenna Terminals Test Results - GSM

### § 2.1051 Spurious Emissions at Antenna Terminals

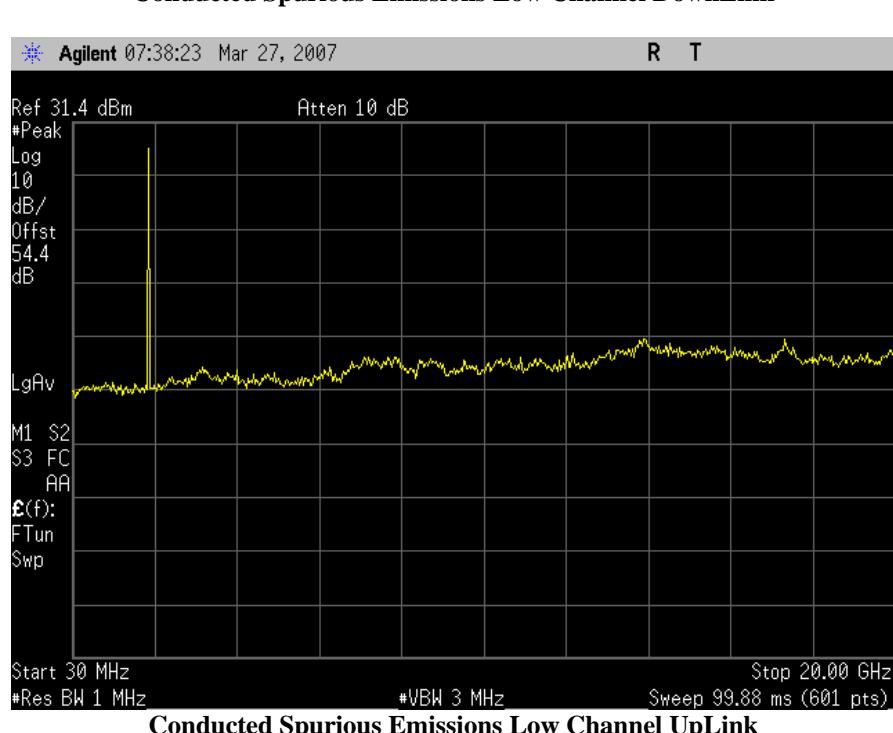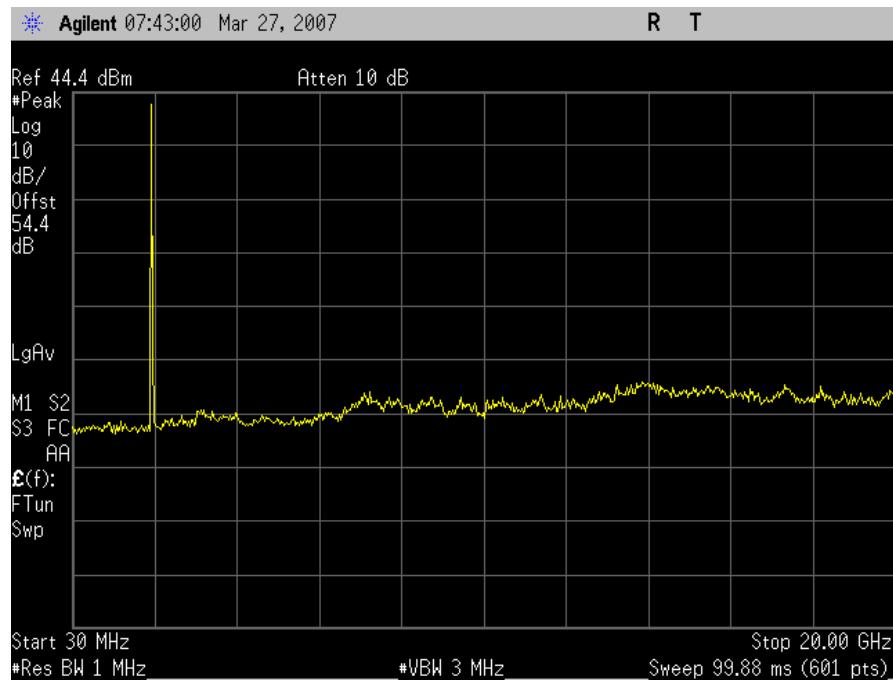





Advanced RF Technologies  
Epoch-HP-20, Epoch-HP-10, Epoch-HP-05 and  
Epoch-HP-XX with 5MHz and 15MHz filters (1900MHz band)

Electromagnetic Compatibility  
Intentional Radiators  
CFR Title 47 Part 24 Subpart E

## Spurious Emissions at Antenna Terminals Test Results - GSM

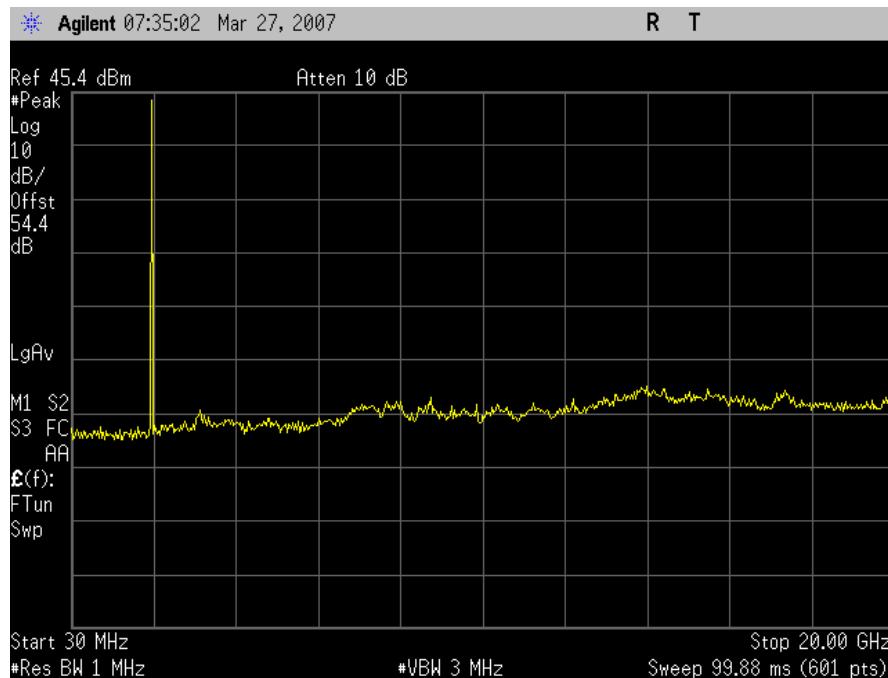

Conducted Spurious Emissions Mid Channel DownLink

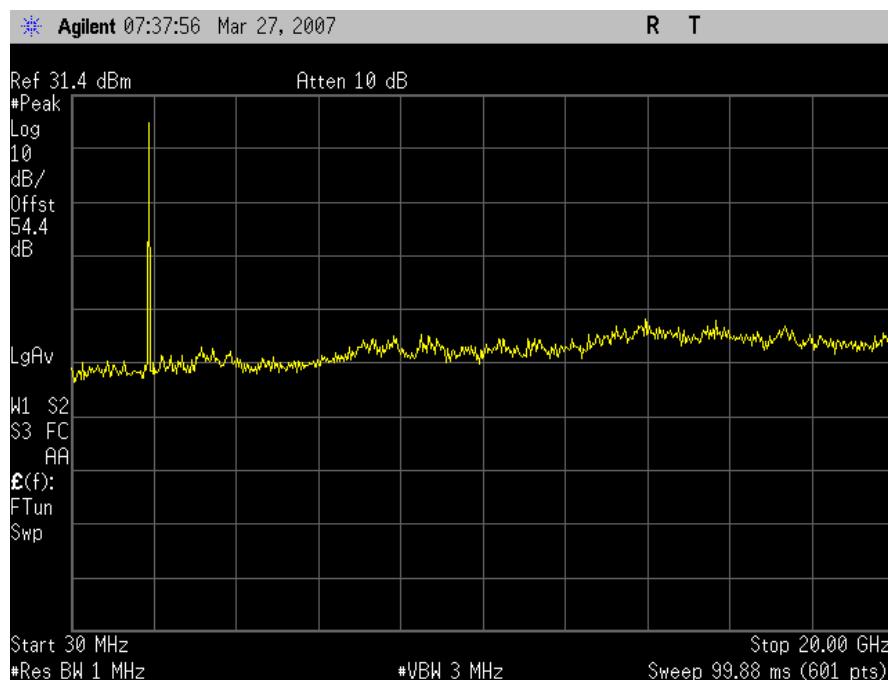



Conducted Spurious Emissions Mid Channel UpLink



Advanced RF Technologies  
Epoch-HP-20, Epoch-HP-10, Epoch-HP-05 and  
Epoch-HP-XX with 5MHz and 15MHz filters (1900MHz band)

Electromagnetic Compatibility  
Intentional Radiators  
CFR Title 47 Part 24 Subpart E

## Spurious Emissions at Antenna Terminals Test Results - GSM

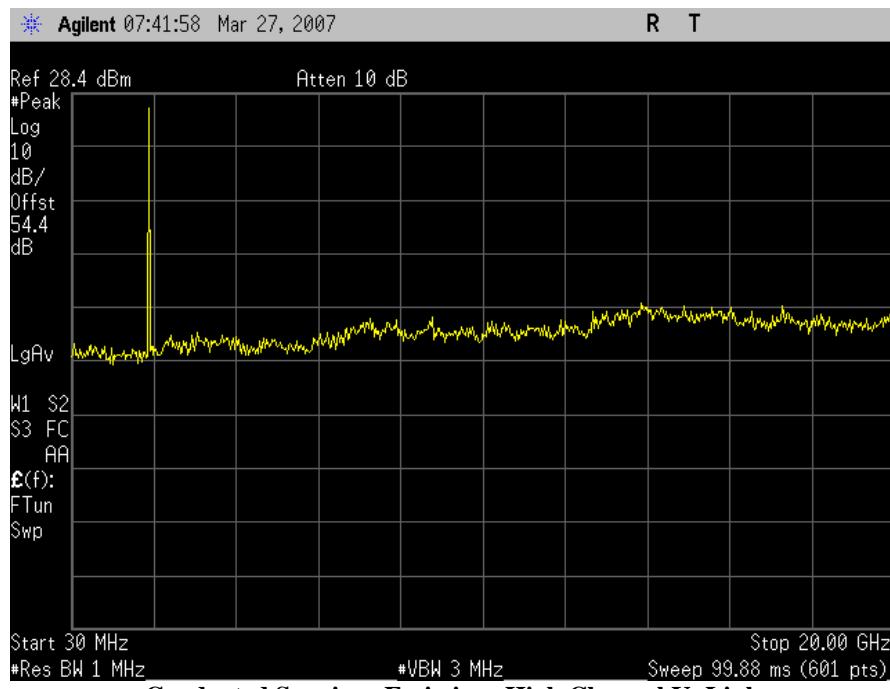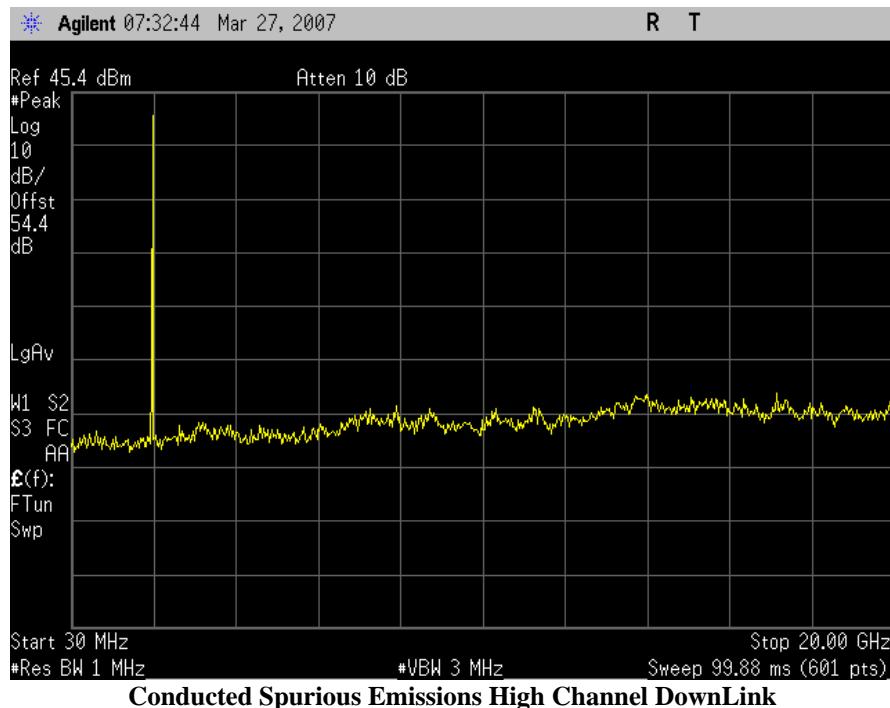





Advanced RF Technologies  
Epoch-HP-20, Epoch-HP-10, Epoch-HP-05 and  
Epoch-HP-XX with 5MHz and 15MHz filters (1900MHz band)

Electromagnetic Compatibility  
Intentional Radiators  
CFR Title 47 Part 24 Subpart E

## Spurious Emissions at Antenna Terminals Test Results - TDMA

### § 2.1051 Spurious Emissions at Antenna Terminals

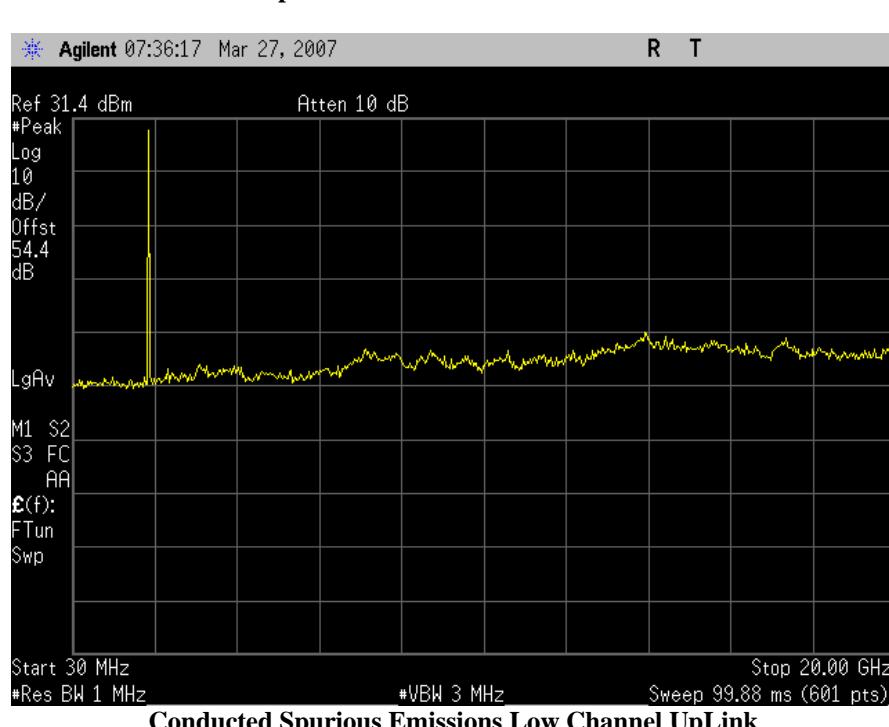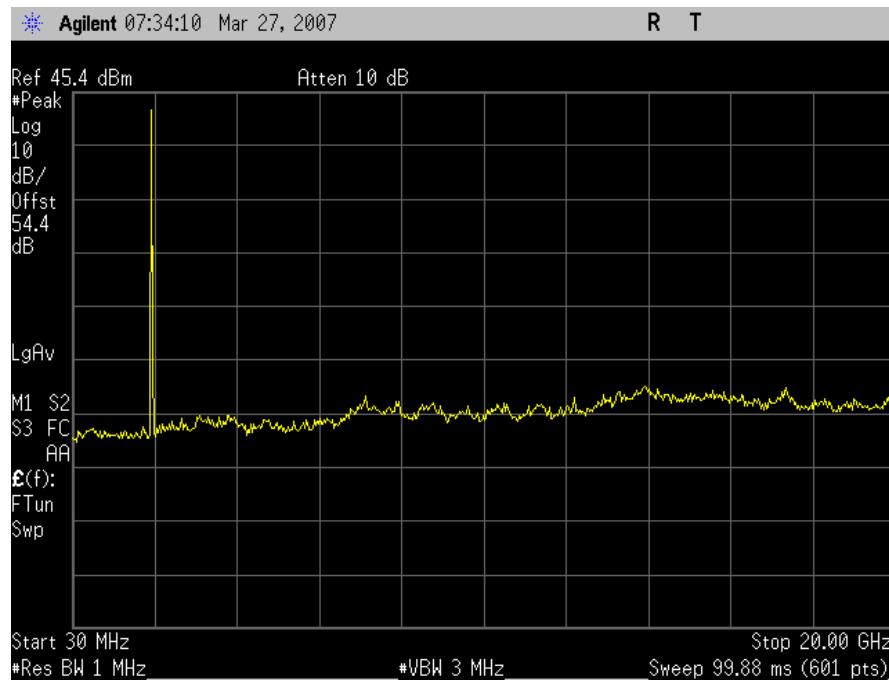





Advanced RF Technologies  
Epoch-HP-20, Epoch-HP-10, Epoch-HP-05 and  
Epoch-HP-XX with 5MHz and 15MHz filters (1900MHz band)

Electromagnetic Compatibility  
Intentional Radiators  
CFR Title 47 Part 24 Subpart E

## Spurious Emissions at Antenna Terminals Test Results - TDMA

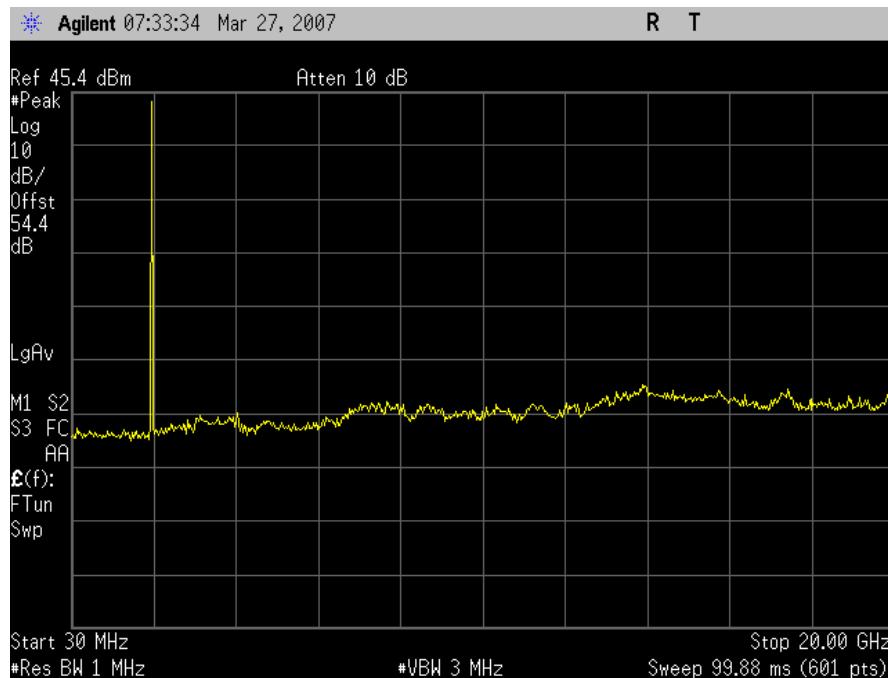

Conducted Spurious Emissions Mid Channel DownLink

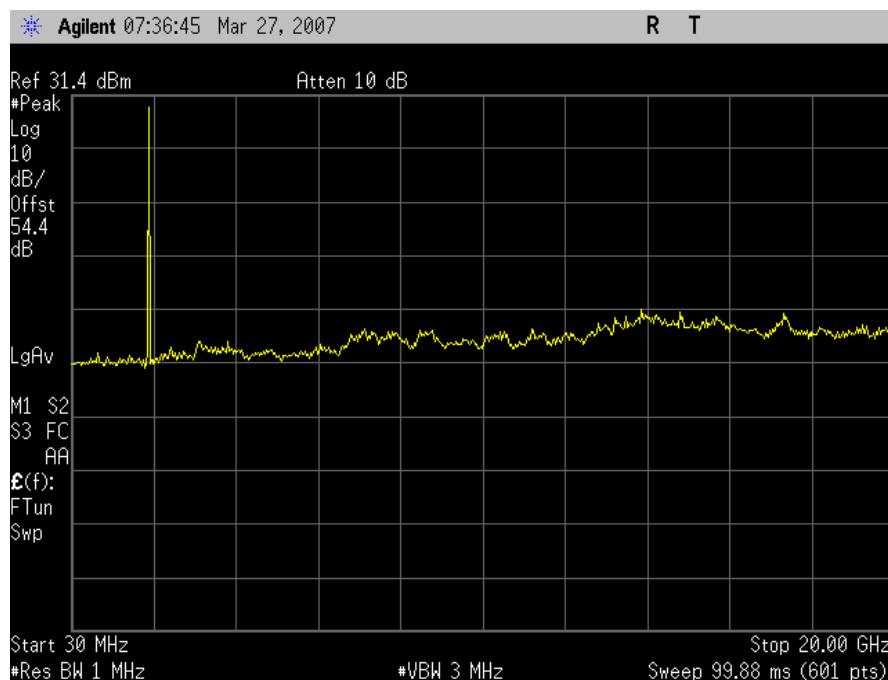


Conducted Spurious Emissions Mid Channel UpLink




Advanced RF Technologies  
Epoch-HP-20, Epoch-HP-10, Epoch-HP-05 and  
Epoch-HP-XX with 5MHz and 15MHz filters (1900MHz band)

Electromagnetic Compatibility  
Intentional Radiators  
CFR Title 47 Part 24 Subpart E

## Spurious Emissions at Antenna Terminals Test Results - TDMA

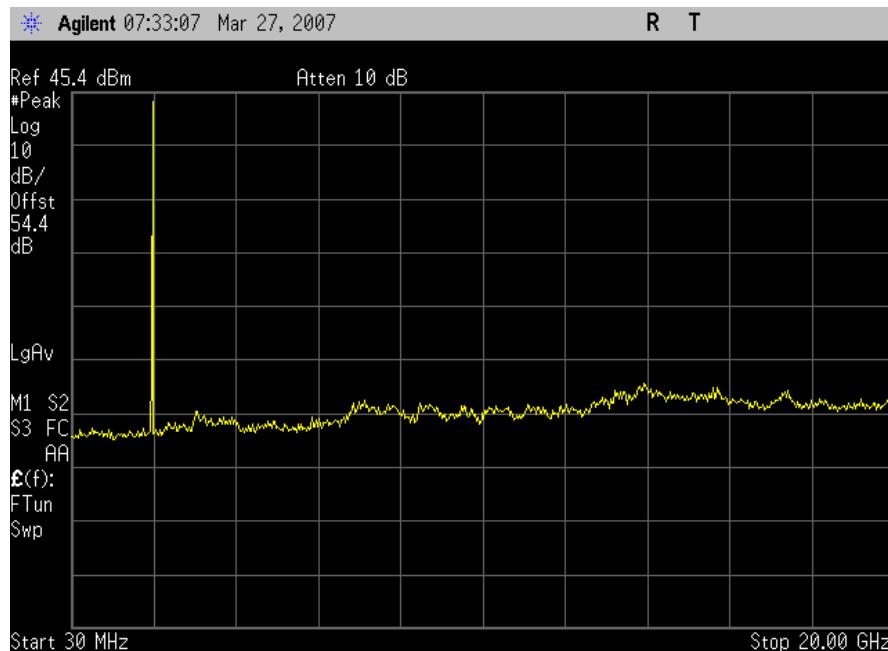

Conducted Spurious Emissions High Channel DownLink


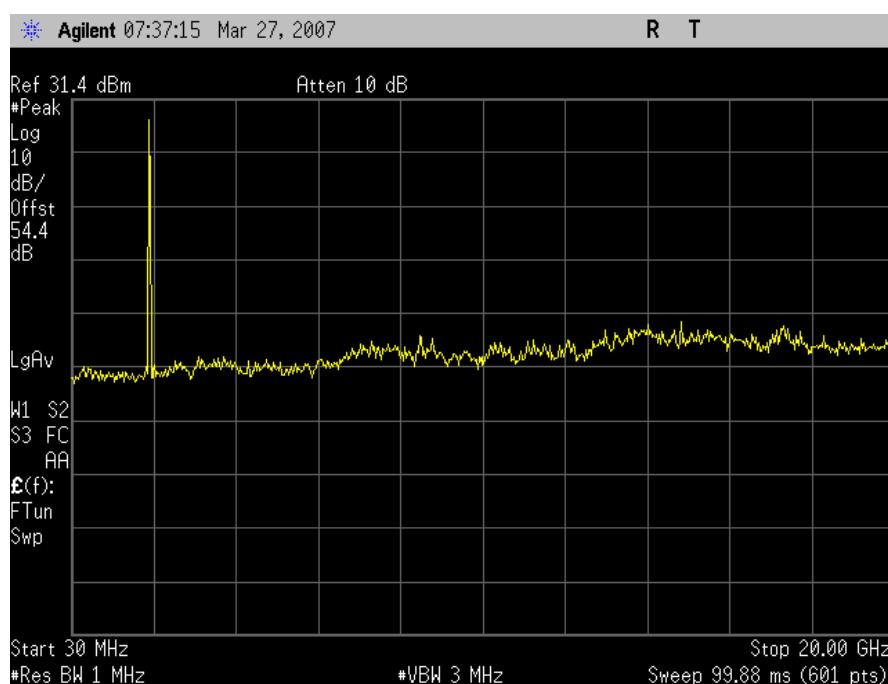


Conducted Spurious Emissions High Channel UpLink



Advanced RF Technologies  
Epoch-HP-20, Epoch-HP-10, Epoch-HP-05 and  
Epoch-HP-XX with 5MHz and 15MHz filters (1900MHz band)



Electromagnetic Compatibility  
Intentional Radiators  
CFR Title 47 Part 24 Subpart E

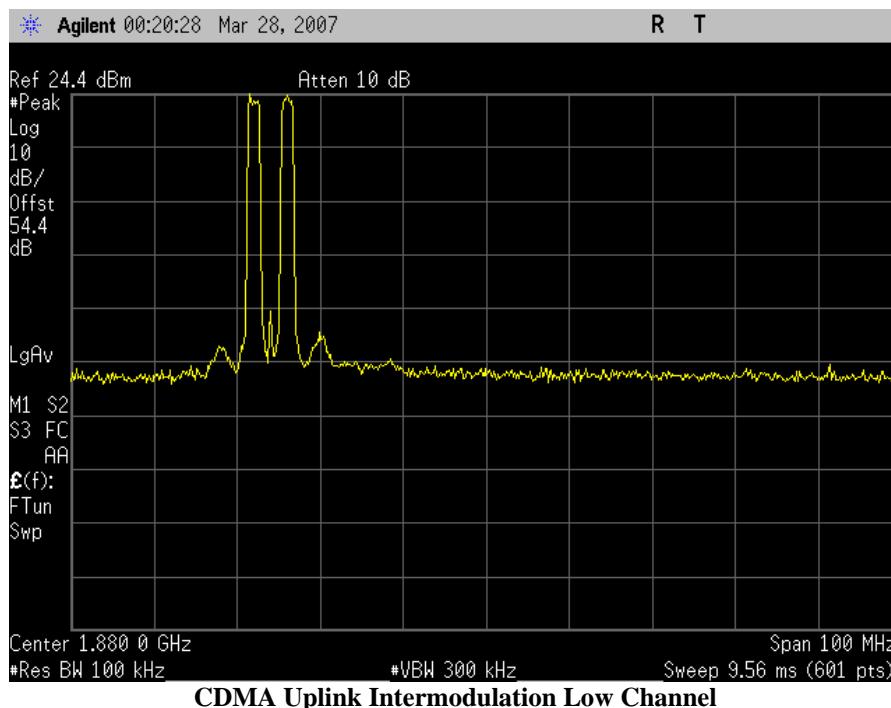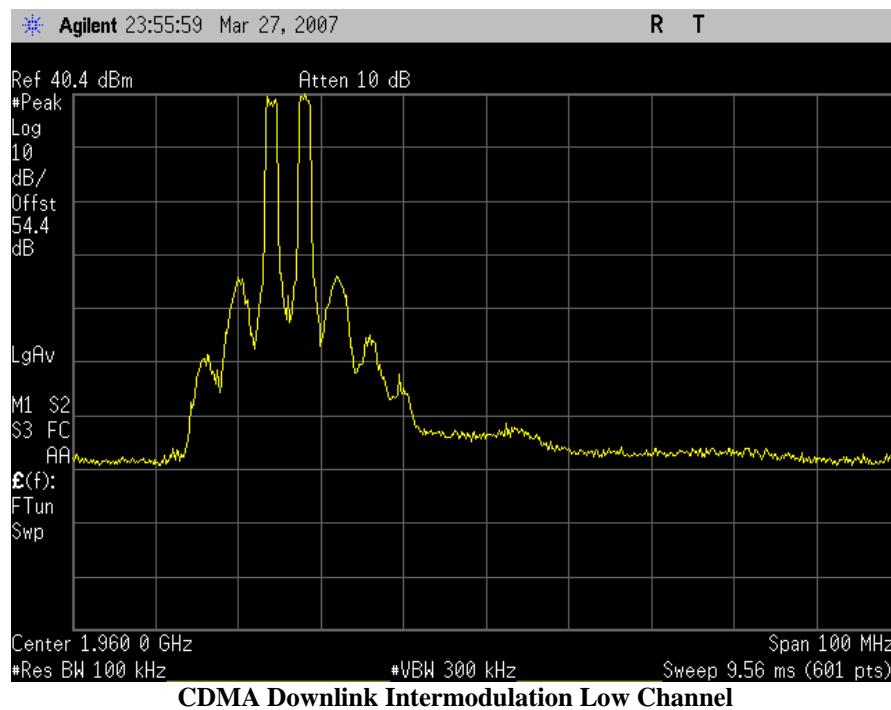



Advanced RF Technologies  
Epoch-HP-20, Epoch-HP-10, Epoch-HP-05 and  
Epoch-HP-XX with 5MHz and 15MHz filters (1900MHz band)



Electromagnetic Compatibility  
Intentional Radiators  
CFR Title 47 Part 24 Subpart E

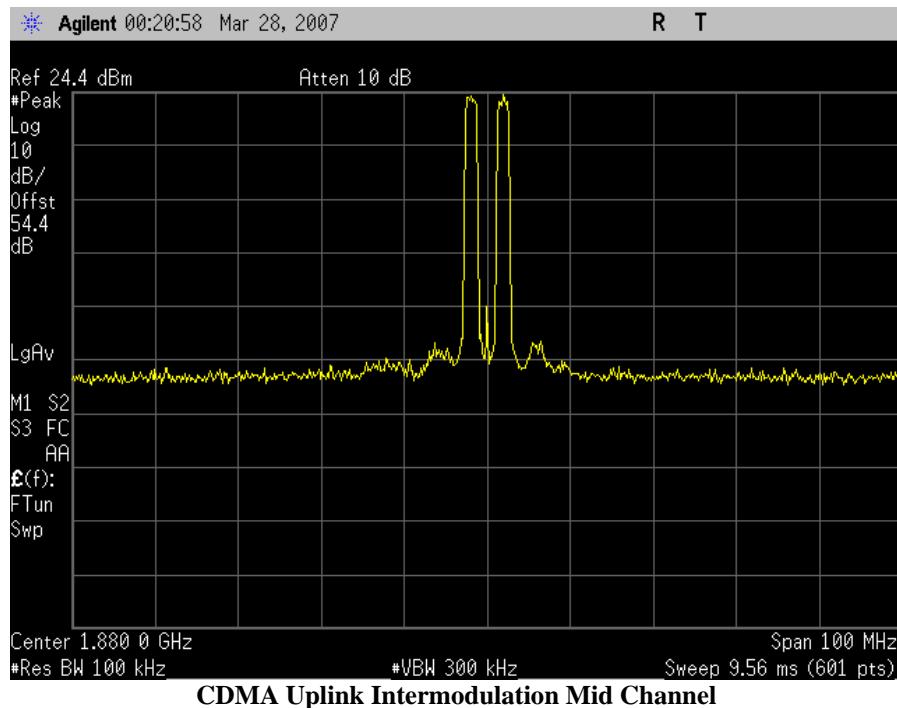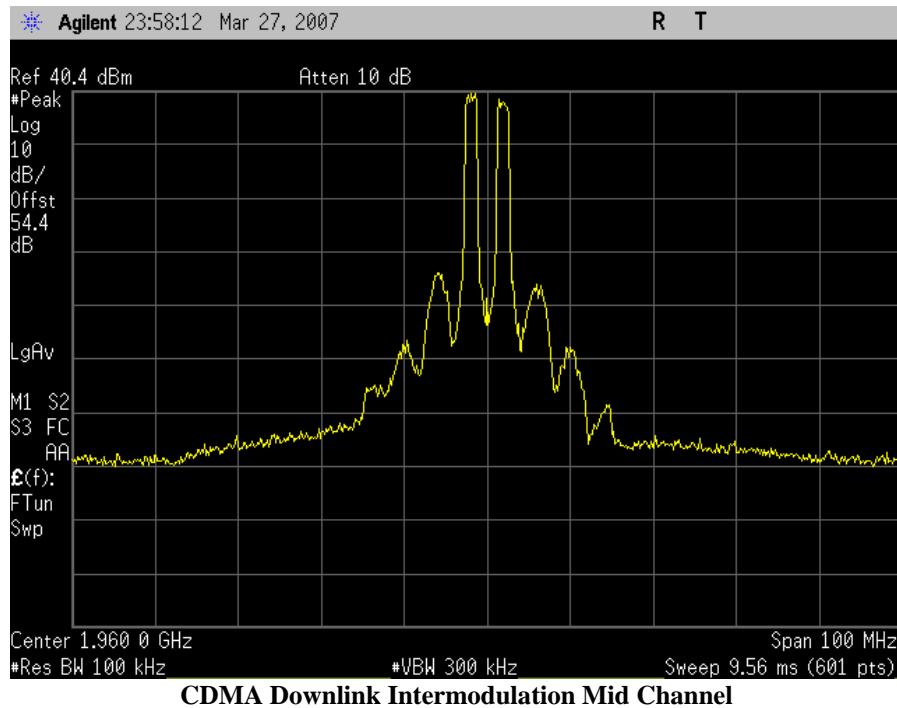





Advanced RF Technologies  
Epoch-HP-20, Epoch-HP-10, Epoch-HP-05 and  
Epoch-HP-XX with 5MHz and 15MHz filters (1900MHz band)

Electromagnetic Compatibility  
Intentional Radiators  
CFR Title 47 Part 24 Subpart E

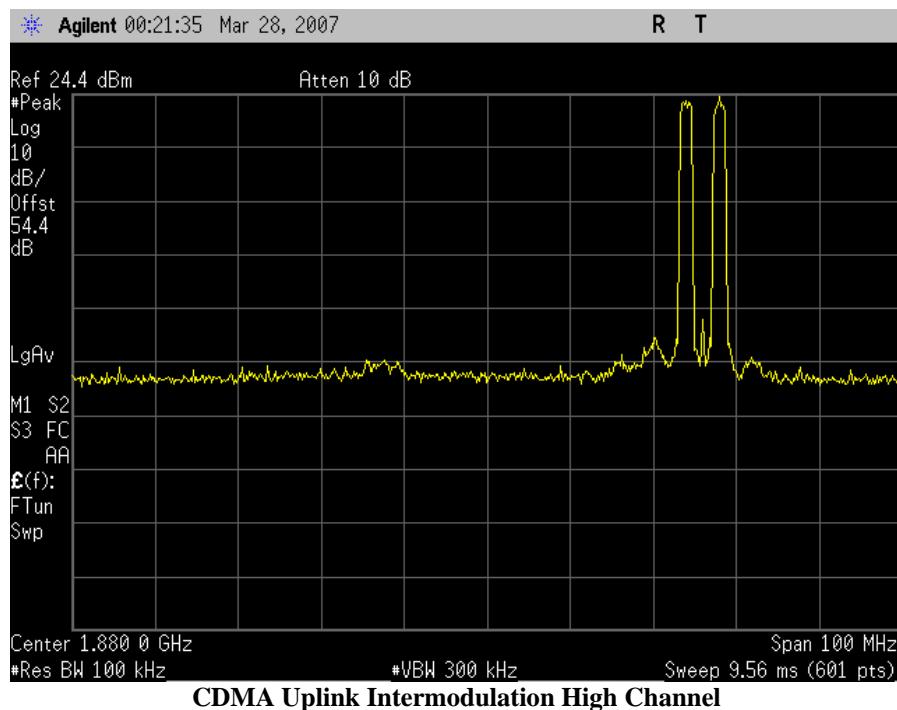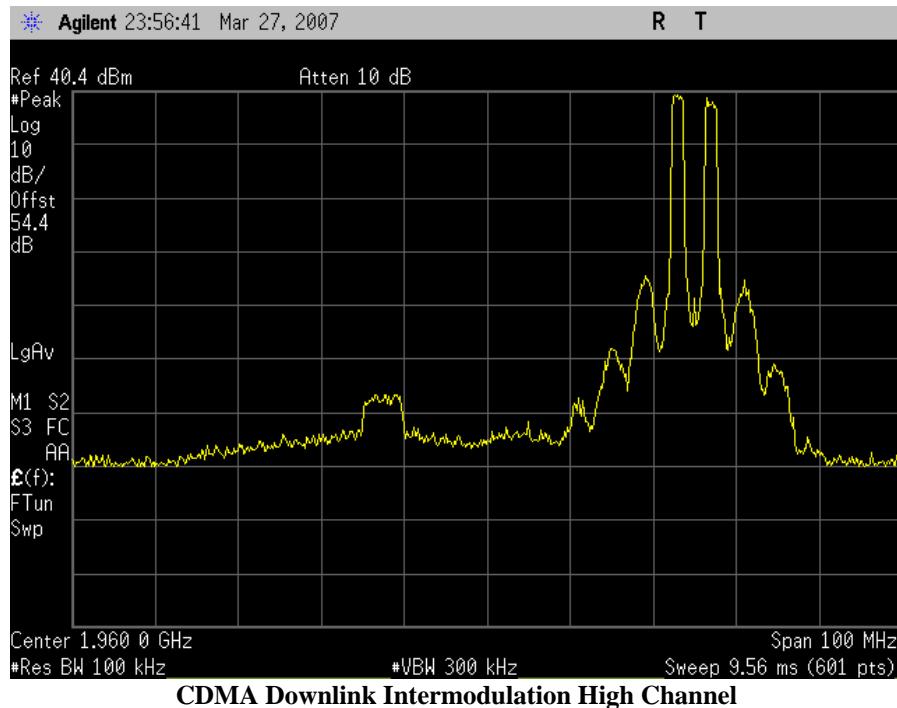

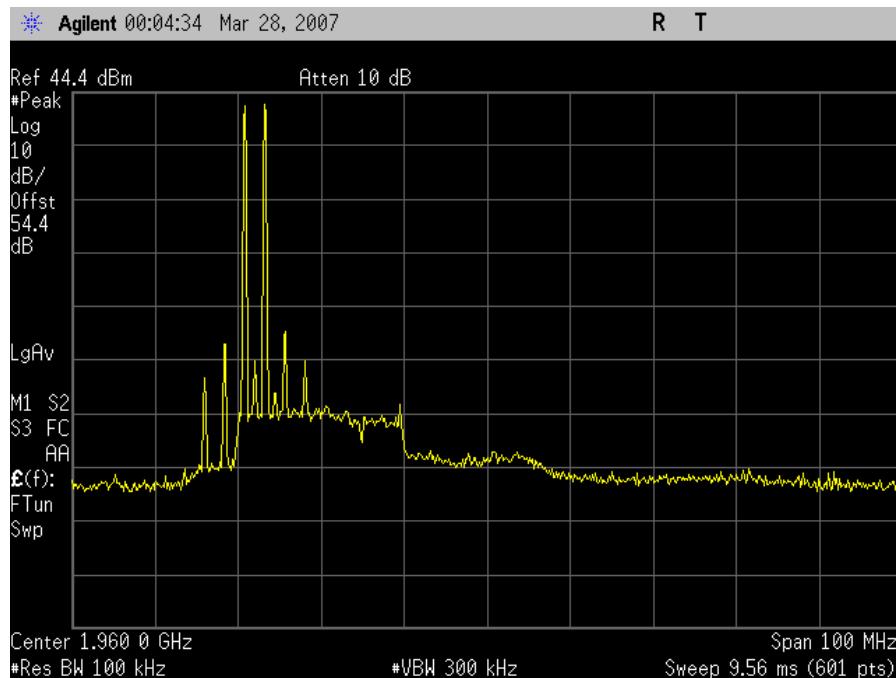

**GSM Downlink Intermodulation Low Channel**

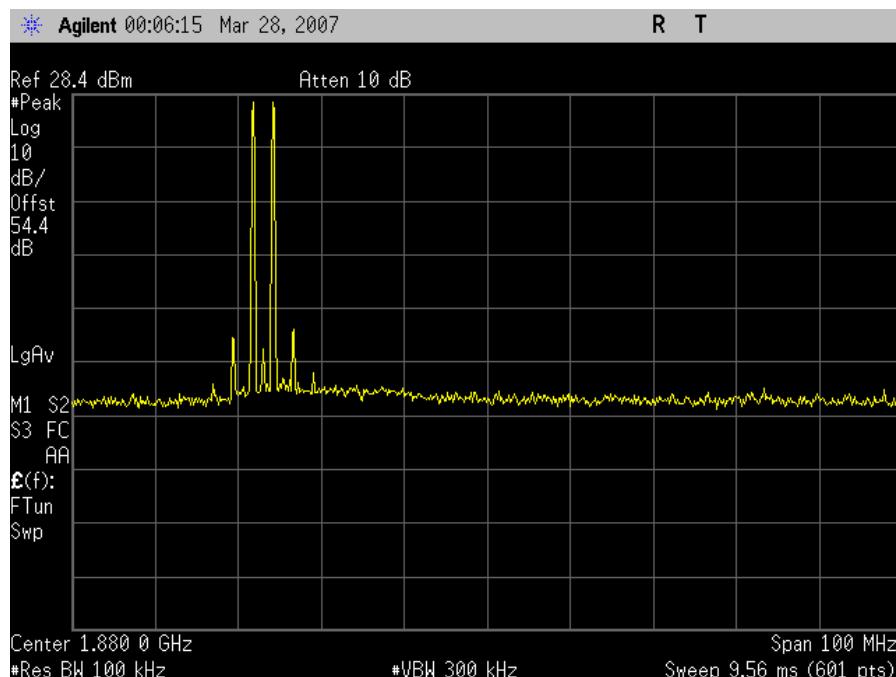


**GSM Uplink Intermodulation Low Channel**




Advanced RF Technologies  
Epoch-HP-20, Epoch-HP-10, Epoch-HP-05 and  
Epoch-HP-XX with 5MHz and 15MHz filters (1900MHz band)

Electromagnetic Compatibility  
Intentional Radiators  
CFR Title 47 Part 24 Subpart E

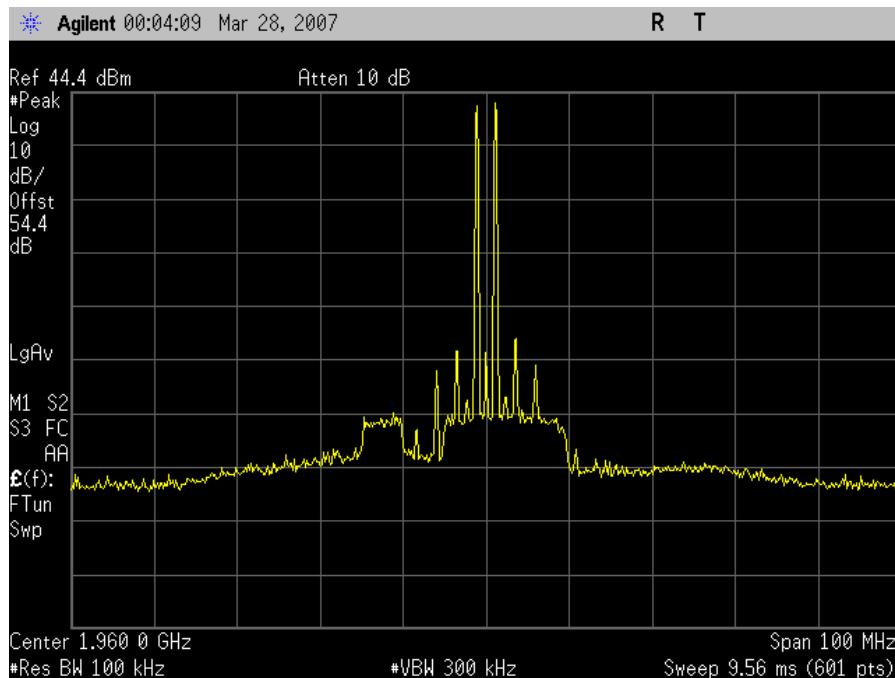

GSM Downlink Intermodulation Mid Channel


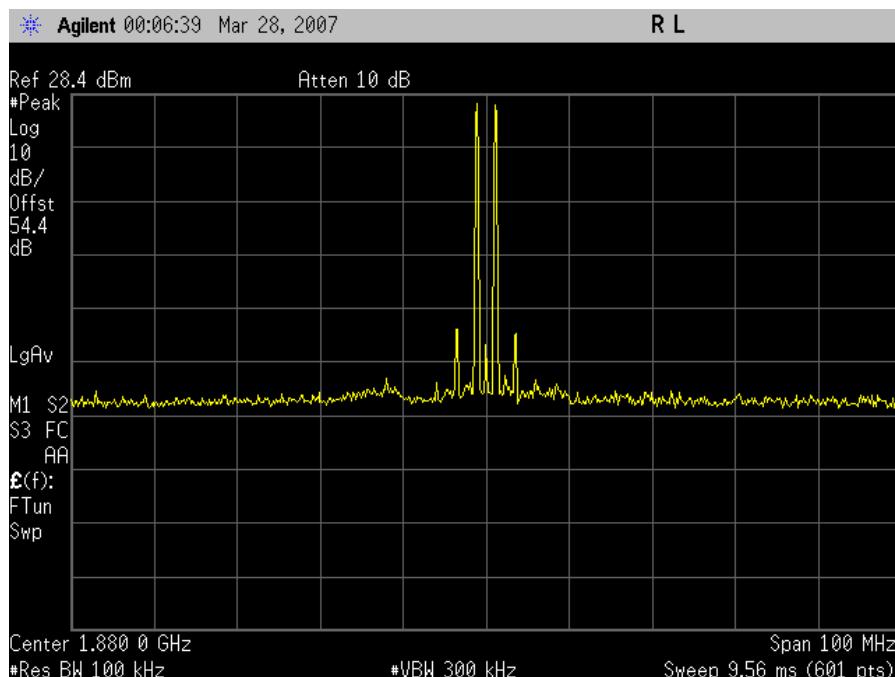


GSM Uplink Intermodulation Mid Channel



Advanced RF Technologies  
Epoch-HP-20, Epoch-HP-10, Epoch-HP-05 and  
Epoch-HP-XX with 5MHz and 15MHz filters (1900MHz band)


Electromagnetic Compatibility  
Intentional Radiators  
CFR Title 47 Part 24 Subpart E

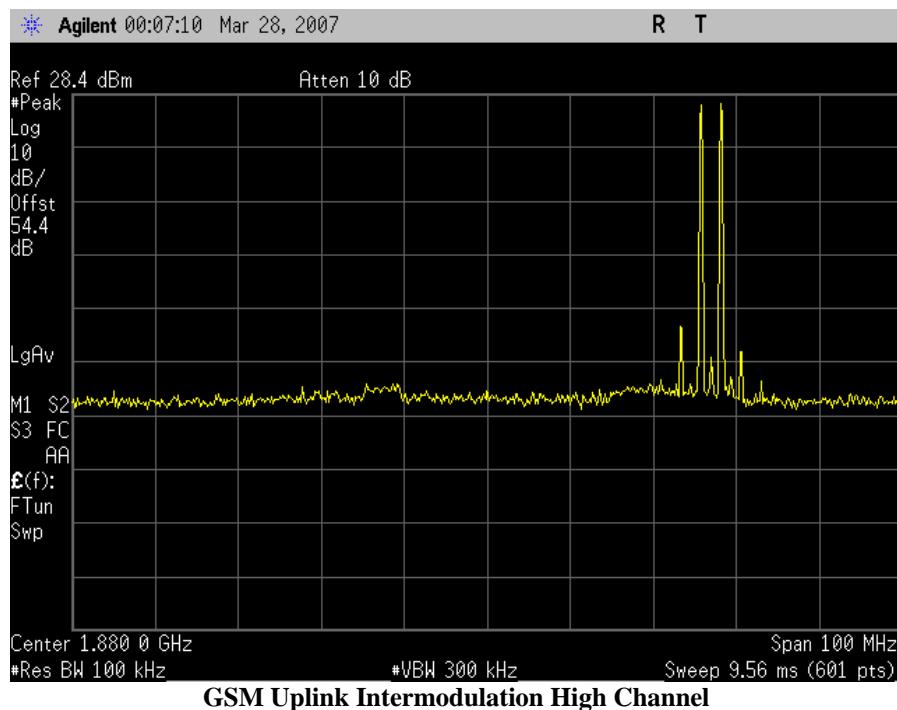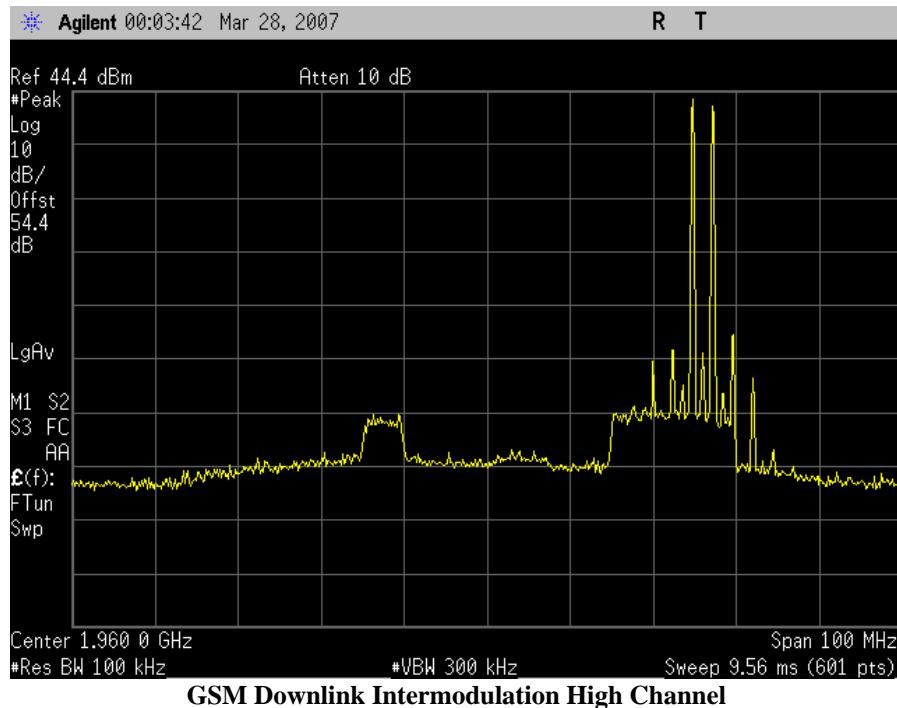




Advanced RF Technologies  
Epoch-HP-20, Epoch-HP-10, Epoch-HP-05 and  
Epoch-HP-XX with 5MHz and 15MHz filters (1900MHz band)

Electromagnetic Compatibility  
Intentional Radiators  
CFR Title 47 Part 24 Subpart E

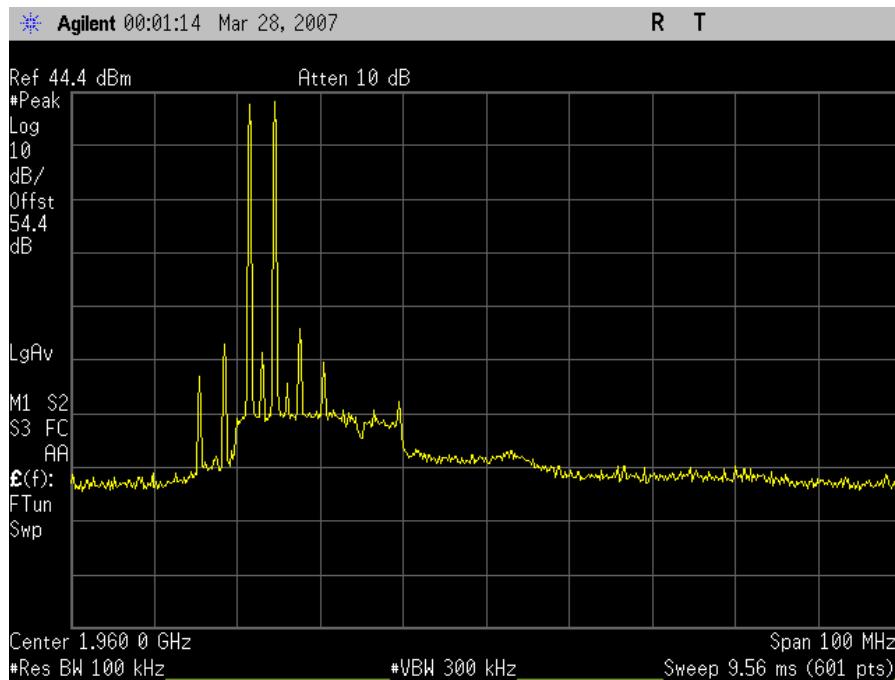

TDMA Downlink Intermodulation Low Channel


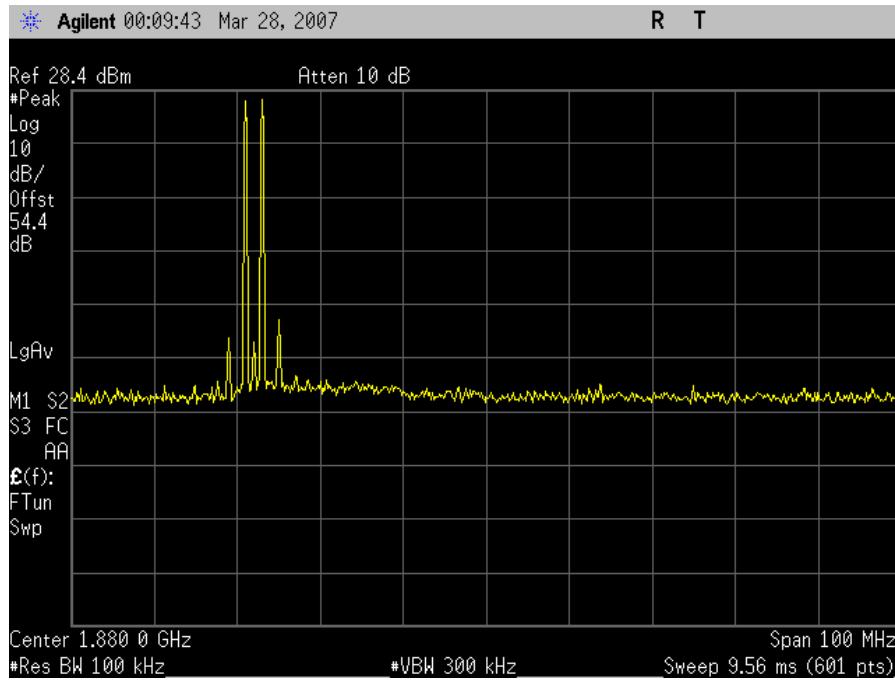


TDMA Uplink Intermodulation Low Channel



Advanced RF Technologies  
Epoch-HP-20, Epoch-HP-10, Epoch-HP-05 and  
Epoch-HP-XX with 5MHz and 15MHz filters (1900MHz band)



Electromagnetic Compatibility  
Intentional Radiators  
CFR Title 47 Part 24 Subpart E

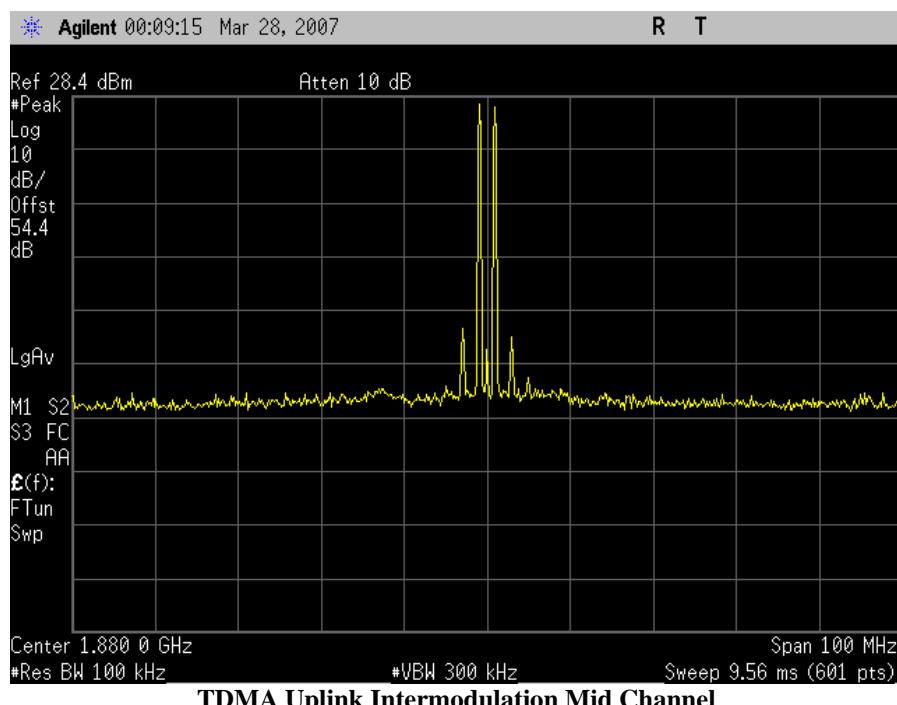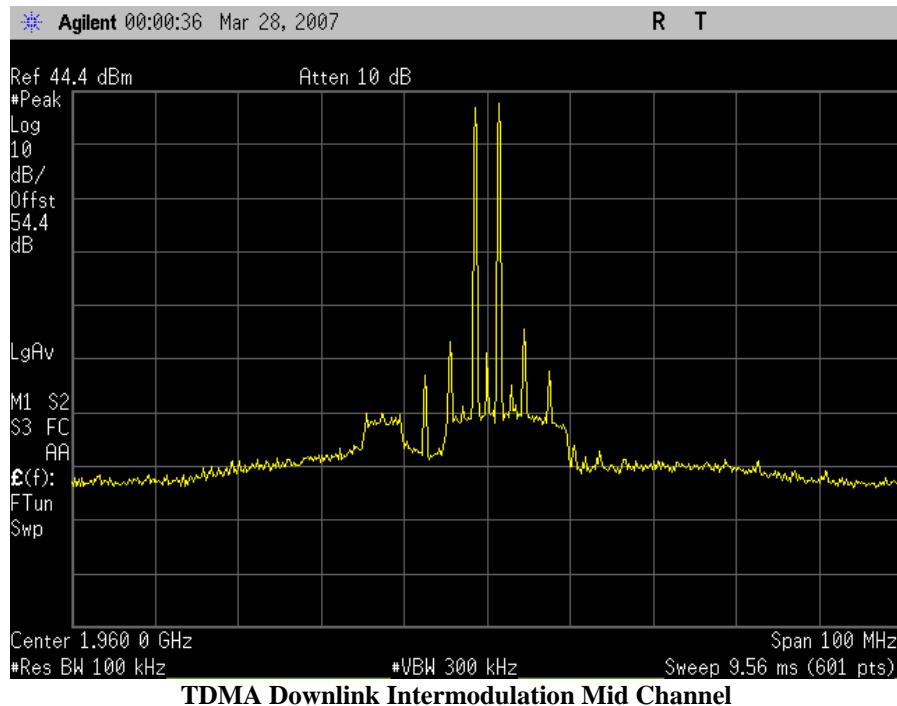





Advanced RF Technologies  
Epoch-HP-20, Epoch-HP-10, Epoch-HP-05 and  
Epoch-HP-XX with 5MHz and 15MHz filters (1900MHz band)

Electromagnetic Compatibility  
Intentional Radiators  
CFR Title 47 Part 24 Subpart E

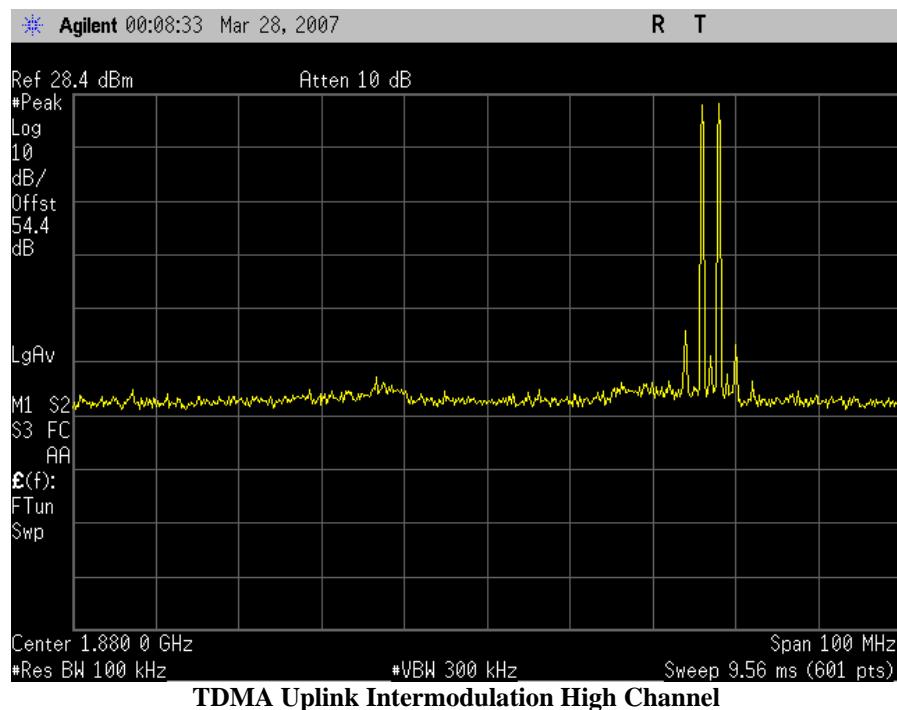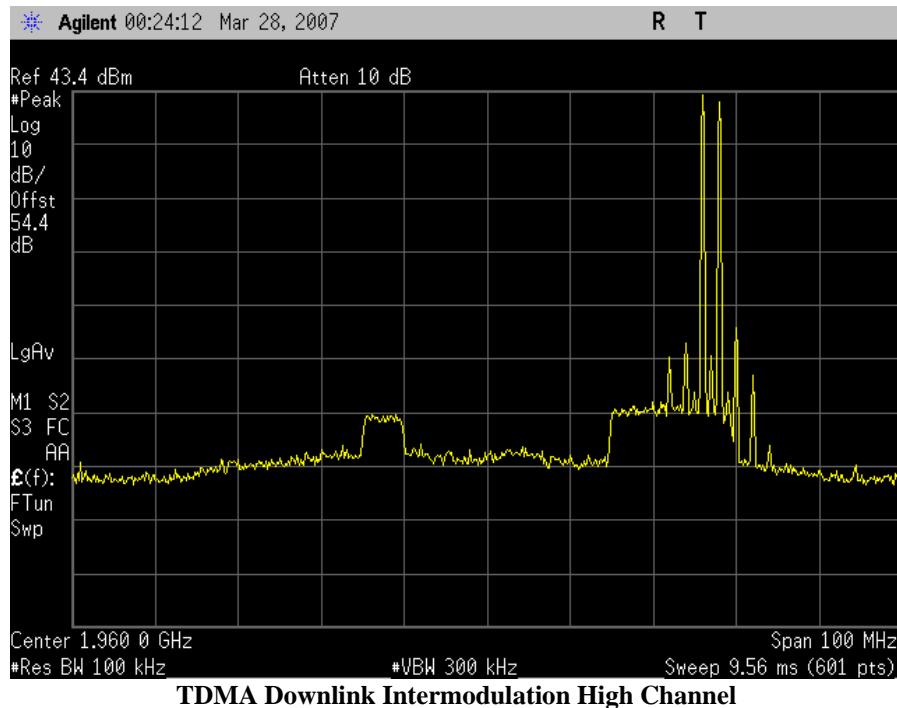

## Electromagnetic Compatibility Criteria for Intentional Radiators

### 2-11-04/EAB/RF Out of Band Rejection

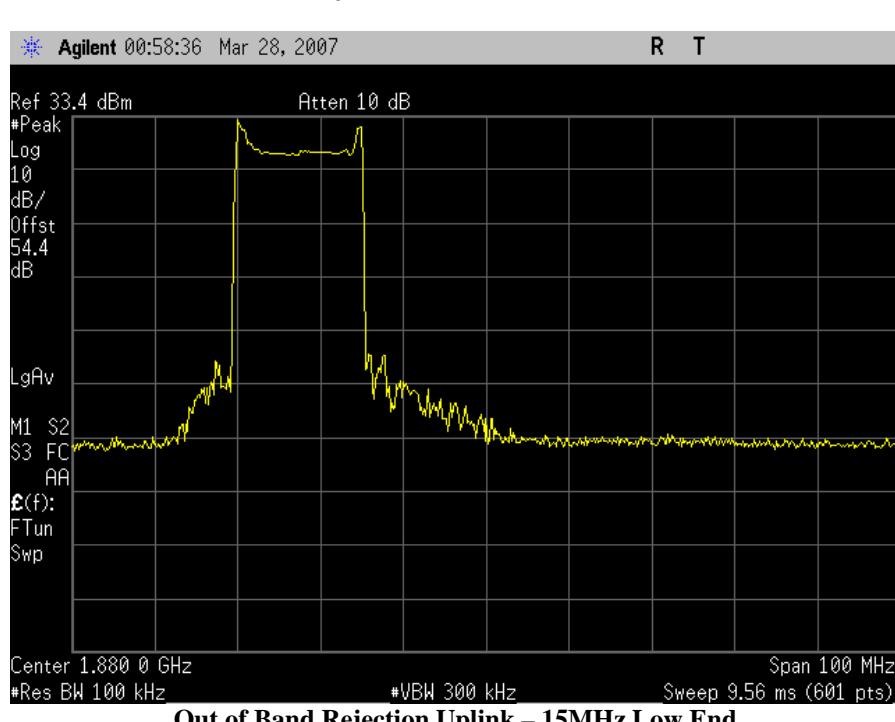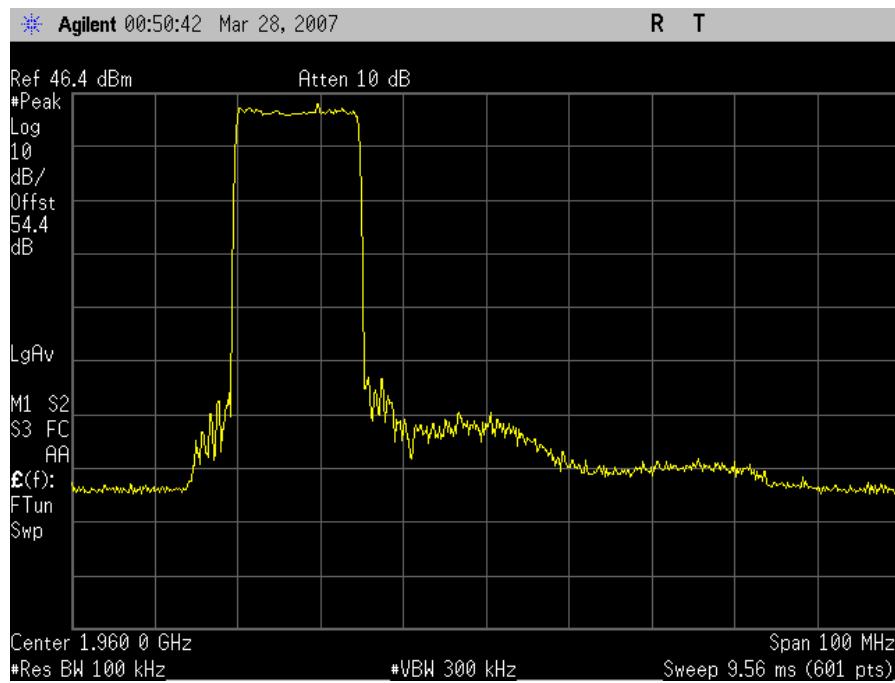




Advanced RF Technologies  
Epoch-HP-20, Epoch-HP-10, Epoch-HP-05 and  
Epoch-HP-XX with 5MHz and 15MHz filters (1900MHz band)


Electromagnetic Compatibility  
Intentional Radiators  
CFR Title 47 Part 24 Subpart E

## Electromagnetic Compatibility Criteria for Intentional Radiators

### 2-11-04/EAB/RF Out of Band Rejection

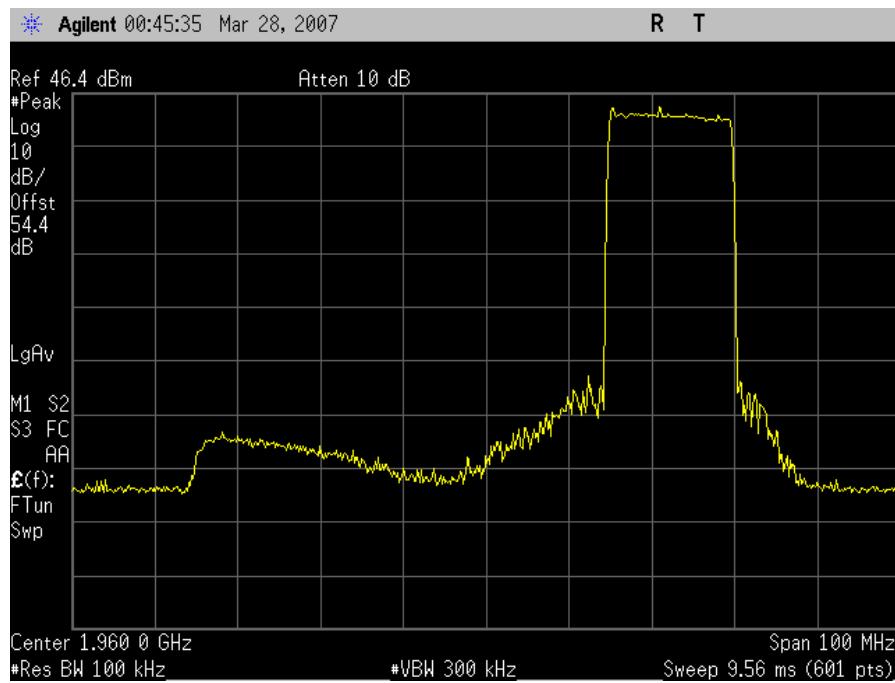

Out of Band Rejection Downlink – 15MHz High End

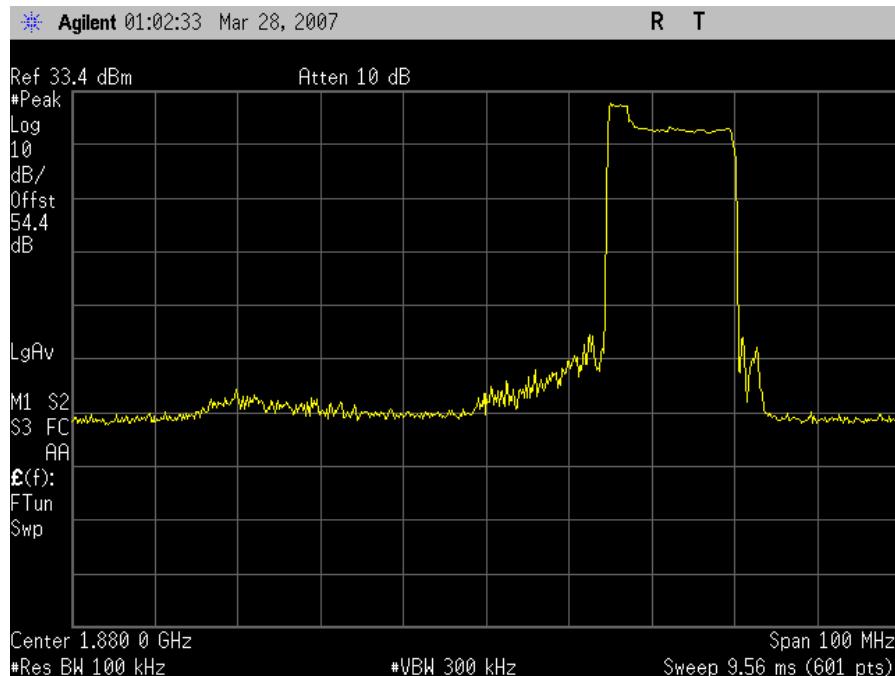

Out of Band Rejection Uplink – 15MHz High End



Advanced RF Technologies  
Epoch-HP-20, Epoch-HP-10, Epoch-HP-05 and  
Epoch-HP-XX with 5MHz and 15MHz filters (1900MHz band)

Electromagnetic Compatibility  
Intentional Radiators  
CFR Title 47 Part 24 Subpart E

## Electromagnetic Compatibility Criteria for Intentional Radiators

### §2.1055 Frequency Stability over Temperature and Voltage Variations

**Test Requirement(s):** §2.1055(a)(1), §24.235

**Test Procedures:** As required by 47 CFR 2.1055, *Frequency Stability measurements* were made at the RF output terminals using a Directional Coupler through a Spectrum Analyzer and Power Meter.

The EUT was placed in the Environmental Chamber and support equipments are outside the chamber on a table. A CW signal was injected into the EUT at the appropriate RF level. The frequency counter option on the Spectrum Analyzer was used to measure frequency deviations. The frequency drift was investigated for every  $10^{\circ}\text{C}$  increment until the unit is stabilized then recorded the reading in tabular format with the temperature range of -30 to  $50^{\circ}\text{C}$ .

Voltage supplied to EUT is 120 VAC reference temperature was done at  $20^{\circ}\text{C}$ . The voltage was varied by  $\pm 15\%$  of nominal

**Test Results:** Equipment complies with Section 2.1055 and 22.355

**Test Engineer(s):** Shawn McMillen

**Test Date(s):** March 26, 2007



Advanced RF Technologies  
Epoch-HP-20, Epoch-HP-10, Epoch-HP-05 and  
Epoch-HP-XX with 5MHz and 15MHz filters (1900MHz band)

Electromagnetic Compatibility  
Intentional Radiators  
CFR Title 47 Part 24 Subpart E

## Frequency Stability Test Results

Reference Freq 1880.000212MHz at 20°C		
Temperature (Celsius)	Measured Freq (MHz)	Drift ppm
50	1880.000200	0.006
40	1880.000229	0.009
30	1880.000217	0.003
20	Reference	
10	1880.000200	0.006
0	1880.000213	0.001
-10	1880.000214	0.001
-20	1880.000222	0.005
-30	1880.000212	0.000

Table 10. Temperature Vs. Frequency Test Results

Reference: 120Vac at 20°C Freq. = 1880.000212MHz

Measured Voltage(dc)	Measured Freq (MHz)	Drift ppm
+/-15% of nominal		
102	1880.000229	0.009
138	1880.000227	0.008

Table 11. Frequency vs. Voltage Test Results



## Test Equipment

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of *ANSI/NCSL Z540-1-1994* and *ANSI/ISO/IEC 17025:2000*.

MET Asset #	Equipment	Manufacturer	Model	Last Cal Date	Cal Due Date
1S2421	EMI RECEIVER	ROHDE&SCHWARZ	ESIB 7	3/22/2006	4/22/2007
1S2184	BILOG ANTENNA	CHASE	CBL6112A	1/3/2007	1/3/2008
1S2121	PRE-AMPLIFIER	HEWLETT PACKARD	8449B	11/28/2006	11/28/2007
1S2198	ANTENNA, HORN	EMCO	3115	8/17/2006	8/17/2007
1S2202	ANTENNA, HORN, 1 METER	EMCO	3116	3/23/2004	3/23/2007
N/A	HIGH PASS FILTER	MICRO-TRONICS	HPM13146	SEE NOTE	
1S2263	CHAMBER, 10 METER	RANTEC	N2-14	8/15/2006	8/15/2007
1S2430	WIDEBAND POWER METER	ANRITSU COMPANY	ML2488A	1/12/2006	2/12/2007
1S2432	WIDEBAND POWER SENSOR	ANRITSU COMPANY	MA2491A	1/12/2006	2/12/2007
1S2034	COUPLER, DIRECTIONAL 1-20 GHz	KRYTAR	101020020	SEE NOTE	
1S2041	COUPLER, BI DIRECTIONALCOAXIAL	NARDA	N/A	SEE NOTE	
1S2460	Analyzer, Spectrum 9 kHz-40GHz	Agilent	E4407B	07/06/2005	07/06/2008
1S2034	COUPLER, DIRECTIONAL 1-20 GHz	KRYTAR	101020020	SEE NOTE	
1S2041	COUPLER, BI DIRECTIONALCOAXIAL	NARDA	N/A	SEE NOTE	
1S2128	Harmonic Mixer	Hewlett Packard	11970A	10/26/2006	10/26/2008
1S2129	Harmonic Mixer	Hewlett Packard	11970K	10/26/2006	10/26/2008



Advanced RF Technologies  
Epoch-HP-20, Epoch-HP-10, Epoch-HP-05 and  
Epoch-HP-XX with 5MHz and 15MHz filters (1900MHz band)

Electromagnetic Compatibility  
Certification & User Manual Information  
CFR Title 47 Part 24 Subpart E & Part 15 Subpart B

# Certification & User's Manual Information



## Certification & User's Manual Information

### L. Certification Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart I — Marketing of Radio frequency devices:

#### § 2.801 Radio-frequency device defined.

As used in this part, a radio-frequency device is any device which in its operation is capable of Emitting radio-frequency energy by radiation, conduction, or other means. Radio- frequency devices include, but are not limited to:

- (a) The various types of radio communication transmitting devices described throughout this chapter.
- (b) *The incidental, unintentional and intentional radiators defined in Part 15 of this chapter.*
- (c) The industrial, scientific, and medical equipment described in Part 18 of this chapter.
- (d) Any part or component thereof which in use emits radio-frequency energy by radiation, conduction, or other means.

#### § 2.803 Marketing of radio frequency devices prior to equipment authorization.

- (a) Except as provided elsewhere in this chapter, no person shall sell or lease, or offer for sale or lease (including advertising for sale or lease), or import, ship or distribute for the purpose of selling or leasing or offering for sale or lease, any radio frequency device unless:
  - (1) In the case of a device subject to certification, such device has been authorized by the Commission in accordance with the rules in this chapter and is properly identified and labeled as required by §2.925 and other relevant sections in this chapter; or
  - (2) In the case of a device that is not required to have a grant of equipment authorization issued by the Commission, but which must comply with the specified technical standards prior to use, such device also complies with all applicable administrative (including verification of the equipment or authorization under a Declaration of Conformity, where required), technical, labeling and identification requirements specified in this chapter.
- (d) Notwithstanding the provisions of paragraph (a) of this section, the offer for sale solely to business, commercial, industrial, scientific or medical users (but not an offer for sale to other parties or to end users located in a residential environment) of a radio frequency device that is in the conceptual, developmental, design or pre-production stage is permitted prior to equipment authorization or, for devices not subject to the equipment authorization requirements, prior to a determination of compliance with the applicable technical requirements *provided* that the prospective buyer is advised in writing at the time of the offer for sale that the equipment is subject to the FCC rules and that the equipment will comply with the appropriate rules before delivery to the buyer or to centers of distribution.



(e)(1) Notwithstanding the provisions of paragraph (a) of this section, prior to equipment authorization or determination of compliance with the applicable technical requirements any radio frequency device may be operated, but not marketed, for the following purposes and under the following conditions:

- (i) *Compliance testing;*
- (ii) Demonstrations at a trade show provided the notice contained in paragraph (c) of this section is displayed in a conspicuous location on, or immediately adjacent to, the device;
- (iii) Demonstrations at an exhibition conducted at a business, commercial, industrial, scientific or medical location, but excluding locations in a residential environment, provided the notice contained in paragraphs (c) or (d) of this section, as appropriate, is displayed in a conspicuous location on, or immediately adjacent to, the device;
- (iv) Evaluation of product performance and determination of customer acceptability, provided such operation takes place at the manufacturer's facilities during developmental, design or pre-production states; or
- (v) Evaluation of product performance and determination of customer acceptability where customer acceptability of a radio frequency device cannot be determined at the manufacturer's facilities because of size or unique capability of the device, provided the device is operated at a business, commercial, industrial, scientific or medical user's site, but not at a residential site, during the development, design or pre-production stages.

(e)(2) For the purpose of paragraphs (e)(1)(iv) and (e)(1)(v) of this section, the term *manufacturer's facilities* includes the facilities of the party responsible for compliance with the regulations and the manufacturer's premises, as well as the facilities of other entities working under the authorization of the responsible party in connection with the development and manufacture, but not the marketing, of the equipment.

(f) For radio frequency devices subject to verification and sold solely to business, commercial, industrial, scientific and medical users (excluding products sold to other parties or for operation in a residential environment), parties responsible for verification of the devices shall have the option of ensuring compliance with the applicable technical specifications of this chapter at each end user's location after installation, provided that the purchase or lease agreement includes a proviso that such a determination of compliance be made and is the responsibility of the party responsible for verification of the equipment.



## Certification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart J — Equipment Authorization Procedures:

### § 2.901 Basis and Purpose

- (a) In order to carry out its responsibilities under the Communications Act and the various treaties and international regulations, and in order to promote efficient use of the radio spectrum, the Commission has developed technical standards for radio frequency equipment and parts or components thereof. The technical standards applicable to individual types of equipment are found in that part of the rules governing the service wherein the equipment is to be operated.<sup>1</sup> *In addition to the technical standards provided, the rules governing the service may require that such equipment be verified by the manufacturer or importer,* be authorized under a Declaration of Conformity, or receive an equipment authorization from the Commission by one of the following procedures: certification or registration.
- (b) The following sections describe the verification procedure, the procedure for a Declaration of Conformity, and the procedures to be followed in obtaining certification from the Commission and the conditions attendant to such a grant.

### § 2.907 Certification.

- (a) Certification is an equipment authorization issued by the Commission, based on representation and test data submitted by the applicant.
- (b) Certification attaches to all units subsequently marketed by the grantee which are identical (see Section 2.908) to the sample tested except for permissive changes or other variations authorized by the Commission pursuant to Section 2.1043.

<sup>1</sup> In this case, the equipment is subject to the rules of Part 15. More specifically, the equipment falls under Subpart B (of Part 15), which deals with unintentional radiators.



## Certification & User's Manual Information

### § 2.948 Description of measurement facilities.

(a) Each party making measurements of equipment that is subject to an equipment authorization under Part 15 or Part 18 of this chapter, regardless of whether the measurements are filed with the Commission or kept on file by the party responsible for compliance of equipment marketed within the U.S. or its possessions, shall compile a description of the measurement facilities employed.

(1) If the measured equipment is subject to the verification procedure, the description of the measurement facilities shall be retained by the party responsible for verification of the equipment.

(i) *If the equipment is verified through measurements performed by an independent laboratory, it is acceptable for the party responsible for verification of the equipment to rely upon the description of the measurement facilities retained by or placed on file with the Commission by that laboratory. In this situation, the party responsible for the verification of the equipment is not required to retain a duplicate copy of the description of the measurement facilities.*

(ii) If the equipment is verified based on measurements performed at the installation site of the equipment, no specific site calibration data is required. It is acceptable to retain the description of the measurement facilities at the site at which the measurements were performed.

(2) If the equipment is to be authorized by the Commission under the certification procedure, the description of the measurement facilities shall be filed with the Commission's Laboratory in Columbia, Maryland. The data describing the measurement facilities need only be filed once but must be updated as changes are made to the measurement facilities or as otherwise described in this section. At least every three years, the organization responsible for filing the data with the Commission shall certify that the data on file is current.



## Certification & User's Manual Information

### Label and User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart A — General:

#### § 15.19 Labeling requirements.

(a) *In addition to the requirements in Part 2 of this chapter, a device subject to certification or verification shall be labeled as follows:*

(1) Receivers associated with the operation of a licensed radio service, e.g., FM broadcast under Part 73 of this chapter, land mobile operation under Part 90, etc., shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference.

(2) A stand-alone cable input selector switch, shall bear the following statement in a conspicuous location on the device:

This device is verified to comply with Part 15 of the FCC Rules for use with cable television service.

(3) All other devices shall bear the following statement in a conspicuous location on the device:

*This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.*

(4) Where a device is constructed in two or more sections connected by wires and marketed together, the statement specified under paragraph (a) of this section is required to be affixed only to the main control unit.

(5) When the device is so small or for such use that it is not practicable to place the statement specified under paragraph (a) of this section on it, the information required by this paragraph shall be placed in a prominent location in the instruction manual or pamphlet supplied to the user or, alternatively, shall be placed on the container in which the device is marketed. However, the FCC identifier or the unique identifier, as appropriate, must be displayed on the device.

#### § 15.21 Information to user.

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.



## Verification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart B — Unintentional Radiators:

### § 15.105 Information to the user.

(a) For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a residential environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.



Advanced RF Technologies  
Epoch-HP-20, Epoch-HP-10, Epoch-HP-05 and  
Epoch-HP-XX with 5MHz and 15MHz filters (1900MHz band)

Electromagnetic Compatibility  
End of Report  
CFR Title 47 Part 24 Subpart E & Part 15 Subpart B

## End of Report