



**CONFORMANCE TEST REPORT
FOR
FCC 47 CFR, Part 15 Subpart C**

Report No.: 06-01-MAS-059-02

Client: Spectec Computer Co.,Ltd
Product: SDIO Wireless Lan Card
Model: SDW-821
FCC ID: S2Y-WLAN-11B-G
Manufacturer/supplier: Spectec Computer Co.,Ltd.

Date test item received: 2006/01/06
Date test campaign completed: 2006/01/09
Date of issue: 2006/01/16




The test result only corresponds to the tested sample. It is not permitted to copy this report, in part or in full, without the permission of the test laboratory.

Total number of pages of this test report: 71 pages

Total number of pages of photos: External photos 1 pages

Internal photos 1 pages

Setup photos 3 pages

Test Engineer	Checked By	Approved By
 James	 Mark	 Joe Hsieh

ELECTRONICS TESTING CENTER, TAIWAN
NO.8, LANE 29, WENMING RD.,
LESHAN TSUEN, GUISHAN SHIANG,
TAOYUAN COUNTY, TAIWAN 33383,
R.O.C.TAIWAN, R.O.C.

TEL: (03) 3276170~4
INT: +886-3-3276170~4
FAX: (03) 3276188
INT: +886-3-3276188



Client : Spectec Computer Co.,Ltd
Address : 6F No.92 Nanking E. Rd. Sec.5 , Taipei , Taiwan , R.O.C
Manufacturer : Spectec Computer Co.,Ltd
Address : 6F No.92 Nanking E. Rd. Sec.5 , Taipei , Taiwan , R.O.C
EUT : SDIO Wireless Lan Card
Trade name : Spectec
Model No. : SDW-821
Power Source : 3.3V DC
Regulations applied : FCC 47 CFR, Part 15 Subpart C (2005)

The testing described in this report has been carried out to the best of our knowledge and ability, and our responsibility is limited to the exercise of reasonable care. This certification is not intended to believe the sellers from their legal and/or contractual obligations.

The compliance test is only certified for the test equipment and the results of the testing report relate only to the item tested. The compliance test of this report was conducted in accordance with the appropriate standards. It's not intention to assure the quality and performance of the product. This report shall not be reproduced except in full, without the approval of ETC. This report must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.

Laboratory Introduction: Electronics Testing Center, Taiwan is recognized, filed and mutual recognition arrangement as following:

- ① ISO9001: TÜV Product Service
- ② ISO/IEC 17025: BSMI, CNLA, DGT, NVLAP, CCIBLAC, UL, Compliance
- ③ Filing: FCC, Industry Canada, VCCI
- ④ MRA: Australia, Hong Kong, New Zealand, Singapore, USA, Japan, Korea, China, APLAC through CNLA
- ⑤ FCC Registration Number: 90588, 91094, 91095



NVLAP Lab Code 200133-0

Table of Contents	Page
1 GENERAL INFORMATION	5
1.1 Product Description.....	5
1.2 Characteristics of Device	5
1.3 Test Methodology	5
1.4 Test Facility.....	5
2 PROVISIONS APPLICABLE	6
2.1 Definition	6
2.2 Requirement for Compliance	7
2.3 Restricted Bands of Operation	9
2.4 Labeling Requirement	9
2.5 User Information	10
3. SYSTEM TEST CONFIGURATION	11
3.1 Devices for Tested System	11
4 CONDUCTED EMISSION MEASUREMENT	12
4.1 Standard Applicable	12
4.2 Measurement Procedure	12
4.3 Conducted Emission Data	13
4.4 Result Data Calculation.....	25
4.5 Conducted Measurement Equipment	25
5 ANTENNA REQUIREMENT	26
5.1 Standard Applicable	26
5.2 Antenna Construction and Directional Gain	26
6 EMISSION BANDWIDTH MEASUREMENT	27
6.1 Standard Applicable	27
6.2 Measurement Procedure	27
6.3 Measurement Equipment	27
6.4 Measurement Data.....	28
7 OUTPUT POWER MEASUREMENT	36
7.1 Standard Applicable	36
7.2 Measurement Procedure	36
7.3 Measurement Equipment	36
7.4 Measurement Data.....	37
8 POWER DENSITY MEASUREMENT	39

8.1 Standard Applicable 39

8.2 Measurement Procedure 39

8.3 Measurement Equipment 39

8.4 Measurement Data..... 40

 8.4.1 IEEE 802.11b..... 40

 8.4.2 IEEE 802.11g..... 44

9 SPURIOUS EMISSION - RF CONDUCTED MEASUREMENT 48

9.1 Standard Applicable 48

9.2 Measurement Procedure 48

9.3 Measurement Equipment 48

9.4 Measurement Data..... 49

 9.4.1 IEEE 802.11b..... 49

 9.4.2 IEEE 802.11g..... 49

10 RADIATED EMISSION MEASUREMENT 60

10.1 Standard Applicable 60

10.2 Measurement Procedure 60

10.3 Measuring Instrument 62

10.4 Radiated Emission Data 63

 10.4.1 Harmonic 63

 10.4.2 Spurious Emission 65

10.5 Field Strength Calculation..... 71

1 GENERAL INFORMATION

1.1 Product Description

- a) Type of EUT : SDIO Wireless Lan Card
 b) Trade Name : Spectec
 c) Model No. : SDW-821
 d) Power Supply : 3.3V DC

1.2 Characteristics of Device

The EUT is a 2.4 GHz SDIO Wireless Lan Card. It conforms to the IEEE 802.11b/g protocol and operates in the unlicensed ISM Band at 2.4 GHz. Support maximum 54 Mbps data rates and 11 channels (2412 MHz to 2462 MHz). Incorporates an intergral antenna.

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437		

1.3 Test Methodology

All testing were performed according to the procedures in ANSI C63.4 and FCC CFR 47 Part 2 and Part 15.

1.4 Test Facility

The semi-anechoic chamber and conducted measurement facility used to collect the radiated and conducted data are located inside the Building at No.8, Lane 29, Wen-ming Road, Lo-shan Tsun, Kweishan Hsiang, Taoyuan, Taiwan, R.O.C.

This site has been accreditation as a FCC filing site.

2 PROVISIONS APPLICABLE

2.1 Definition

Unintentional radiator:

A device that intentionally generates and radio frequency energy for use within the device, or that sends radio frequency signals by conduction to associated equipment via connecting wiring, but which is not intended to emit RF energy by radiation or induction.

Class A Digital Device:

A digital device which is marketed for use in commercial or business environment; exclusive of a device which is market for use by the general public, or which is intended to be used in the home.

Class B Digital Device :

A digital device which is marketed for use in a residential environment notwithstanding use in a commercial, business or industrial environment. Example of such devices that are marketed for the general public.

Note : A manufacturer may also qualify a device intended to be marketed in a commercial, business, or industrial environment as a Class B digital device, and in fact is encouraged to do so, provided the device complies with the technical specifications for a Class B Digital Device. In the event that a particular type of device has been found to repeatedly cause harmful interference to radio communications, the Commission may classify such a digital device as a Class B Digital Device, Regardless of its intended use.

Intentional radiator:

A device that intentionally generates and emits radio frequency energy by radiation or induction.

2.2 Requirement for Compliance

(1) Conducted Emission Requirement

For unintentional device, according to §15.107(a) Line Conducted Emission Limits is as following:

Frequency MHz	Quasi Peak dB μ V	Average dB μ V
0.15 - 0.5	66-56*	56-46*
0.5 - 5.0	56	46
5.0 - 30.0	60	50

*Decreases with the logarithm of the frequency.

For intentional device, according to §15.207(a) Line Conducted Emission Limits is same as above table.

(2) Radiated Emission Requirement

For unintentional device, according to §15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency MHz	Distance Meters	Radiated dB μ V/m	Radiated μ V/m
30 - 88	3	40.0	100
88 - 216	3	43.5	150
216 - 960	3	46.0	200
above 960	3	54.0	500

For intentional device, according to §15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table.

(3) Antenna Requirement

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

(4) Bandwidth Requirement

According to 15.247 (a)(2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

(5) Output Power Requirement

For systems using digital modulation , according to 15.247(b), the maximum peak output power of the intentional radiator shall not exceed 1 Watt. If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(6) Spurious Emissions Measurement

According to 15.247 (c) , in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

(7) Power Density Requirement

According to 15.247 (d) , for digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission..

2.3 Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below :

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42-16.423	399.9-410	4.5-5.25
0.495 - 0.505 **	16.69475 - 16.69525	608-614	5.35-5.46
2.1735 - 2.1905	16.80425 - 16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475 - 156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2655-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

2.4 Labeling Requirement

The device shall bear the following statement in a conspicuous location on the device :

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

2.5 User Information

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual.

The Federal Communications Commission Radio Frequency Interference Statement includes the following paragraph.

This equipment has been tested and found to comply with the limits for a Class B Digital Device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction may cause harmful interference to radio communication. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio / TV technician for help.

3. SYSTEM TEST CONFIGURATION

3.1 Devices for Tested System

Device	Manufacture	Model No.	S/N No.	Cable Description
SDIO Wireless Lan Card*	Spectec Computer Co.,Ltd	SDW-821	----	----
Notebook PC	TOSHIBA	PORTAGE S100	----	3.3m Unshielded Power Line/Adapter

Note:

1. Remark "*" means equipment under test.

2.

Test Software:	MediaTek WLAN RF Test Utility
Parameter setting:	802.11b: TX Power (hex) = (2a) h
	802.11g: TX Power (hex) = (35) h

4 CONDUCTED EMISSION MEASUREMENT


4.1 Standard Applicable

For unintentional and intentional device, Line Conducted Emission Limits are in accordance to § 15.107(a) and §15.207(a) respectively. Both Limits are identical specification.

4.2 Measurement Procedure


1. Setup the configuration per figure 3.
2. A preliminary scan with a spectrum monitor is performed to identify the frequency of emission that has the highest amplitude relative to the limit by operating the EUT in selected modes of operation, typical cable positions, and with a typical system configuration.
3. Record the 6 highest emissions relative to the limit.
4. Measure each frequency obtained from step 3 by a test receiver set on quasi peak detector function, and then record the accuracy frequency and emission level. If all emissions measured in the specified band are attenuated more than 20 dB from the limit, this step would be ignored, and the peak detector function would be used.
5. Confirm the highest three emissions with variation of the EUT cable configuration and record the final data.
6. Repeat all above procedures on measuring each operation mode of EUT.

Figure 1 : Conducted emissions measurement configuration

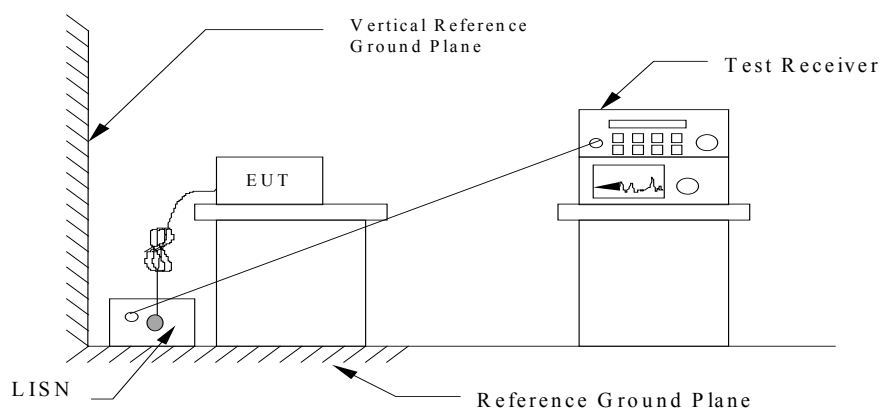

4.3 Conducted Emission Data

4.3.1

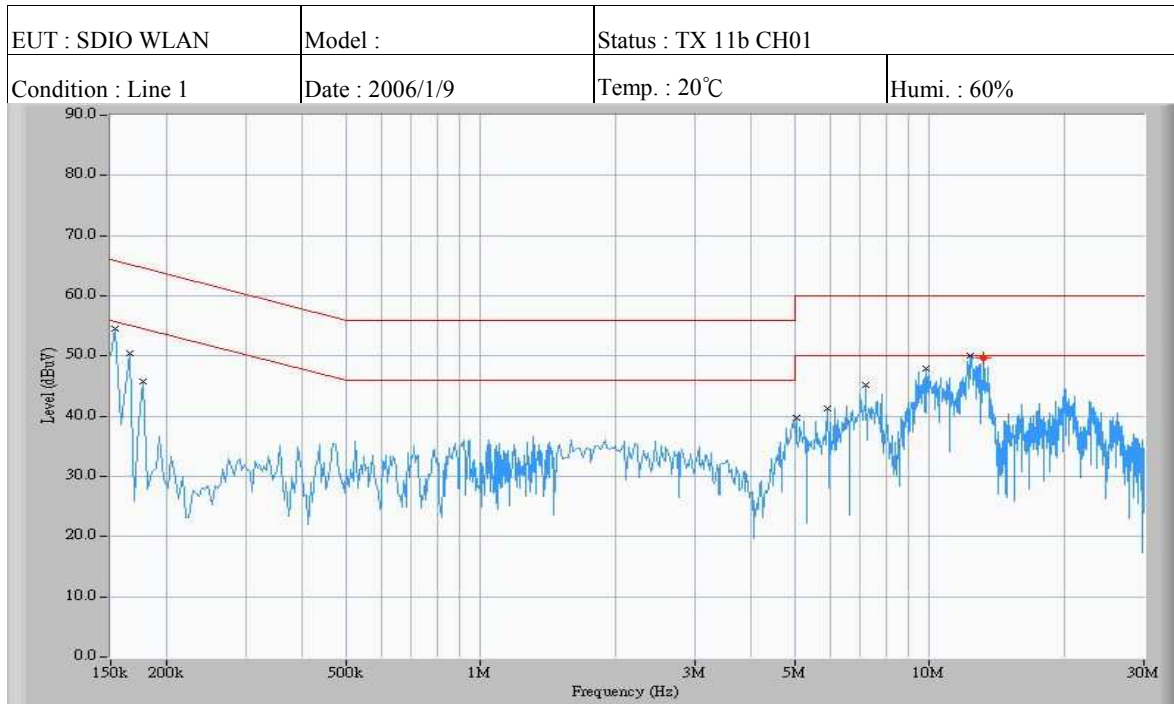


	Freq (MHz)	QP Level (dBuV)	AVG Level (dBuV)	Factor (dB)	QP Result (dBuV)	AVG Result (dBuV)	QP Limit (dBuV)	AVG Limit (dBuV)	QP Margin (dB)	AVG Margin (dB)
1	0.154	49.0	31.0	0.1	49.1	31.1	65.8	55.8	-16.7	-24.7
2	0.166	45.0	24.0	0.1	45.1	24.1	65.2	55.2	-20.1	-31.1
3	0.177	41.0	23.0	0.1	41.1	23.1	64.6	54.6	-23.5	-31.5
4	5.039	35.0	28.0	0.2	35.2	28.2	60.0	50.0	-24.8	-21.8
5	5.917	36.0	29.0	0.2	36.2	29.2	60.0	50.0	-23.8	-20.8
6	7.223	40.0	33.0	0.3	40.3	33.3	60.0	50.0	-19.7	-16.7
7	9.789	45.0	38.0	0.3	45.3	38.3	60.0	50.0	-14.7	-11.7
8	12.285	47.0	40.0	0.4	47.4	40.4	60.0	50.0	-12.6	-9.6
9	13.231	45.0	37.0	0.4	45.4	37.4	60.0	50.0	-14.6	-12.6

Note:

1. Place of measurement: EMC LAB. of the ETC.
2. “***” means the value was too low to be measured.
3. If the data table appeared symbol of "----" means the Q.P. value is under the limit of AVG. so, the AVG. value doesn't need to be measured.
4. “#” means the noise was too low, so record the peak value.
5. The estimated measurement uncertainty of the result measurement is ± 2.5 dB.

EUT : SDIO WLAN	Model :	Status : TX 11b CH01
Condition : Line 2	Date : 2006/1/9	Temp. : 20°C Humi. : 60%

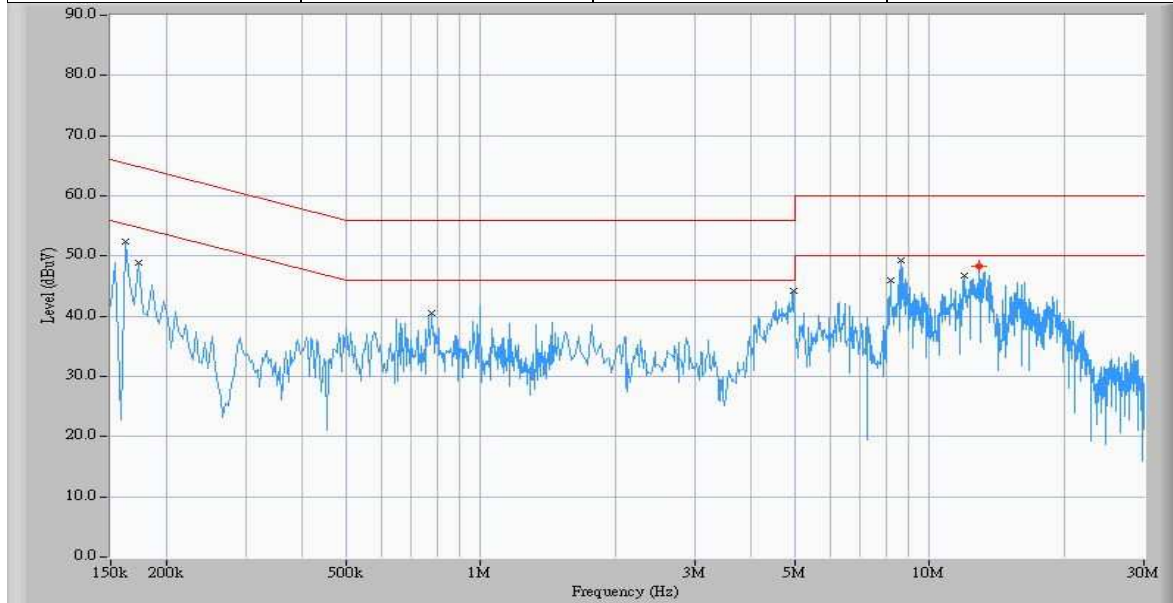


	Freq (MHz)	QP Level (dBuV)	AVG Level (dBuV)	Factor (dB)	QP Result (dBuV)	AVG Result (dBuV)	QP Limit (dBuV)	AVG Limit (dBuV)	QP Margin (dB)	AVG Margin (dB)
1	0.162	50.0	13.0	0.1	50.1	13.1	65.4	55.4	-15.3	-42.3
2	0.173	46.0	23.0	0.1	46.1	23.1	64.8	54.8	-18.7	-31.7
3	0.775	32.0	27.0	0.1	32.1	27.1	56.0	46.0	-23.9	-18.9
4	4.986	36.0	29.0	0.2	36.2	29.2	56.0	46.0	-19.8	-16.8
5	8.180	40.0	39.0	0.3	40.3	39.3	60.0	50.0	-19.7	-10.7
6	8.656	42.0	34.0	0.3	42.3	34.3	60.0	50.0	-17.7	-15.7
7	11.943	45.0	35.0	0.4	45.4	35.4	60.0	50.0	-14.6	-14.6
8	12.902	44.0	36.0	0.4	44.4	36.4	60.0	50.0	-15.6	-13.6

Note:

1. Place of measurement: EMC LAB. of the ETC.
2. “***” means the value was too low to be measured.
3. If the data table appeared symbol of “----” means the Q.P. value is under the limit of AVG. so, the AVG. value doesn't need to be measured.
4. “#” means the noise was too low, so record the peak value.
5. The estimated measurement uncertainty of the result measurement is ± 2.5 dB.


4.3.2

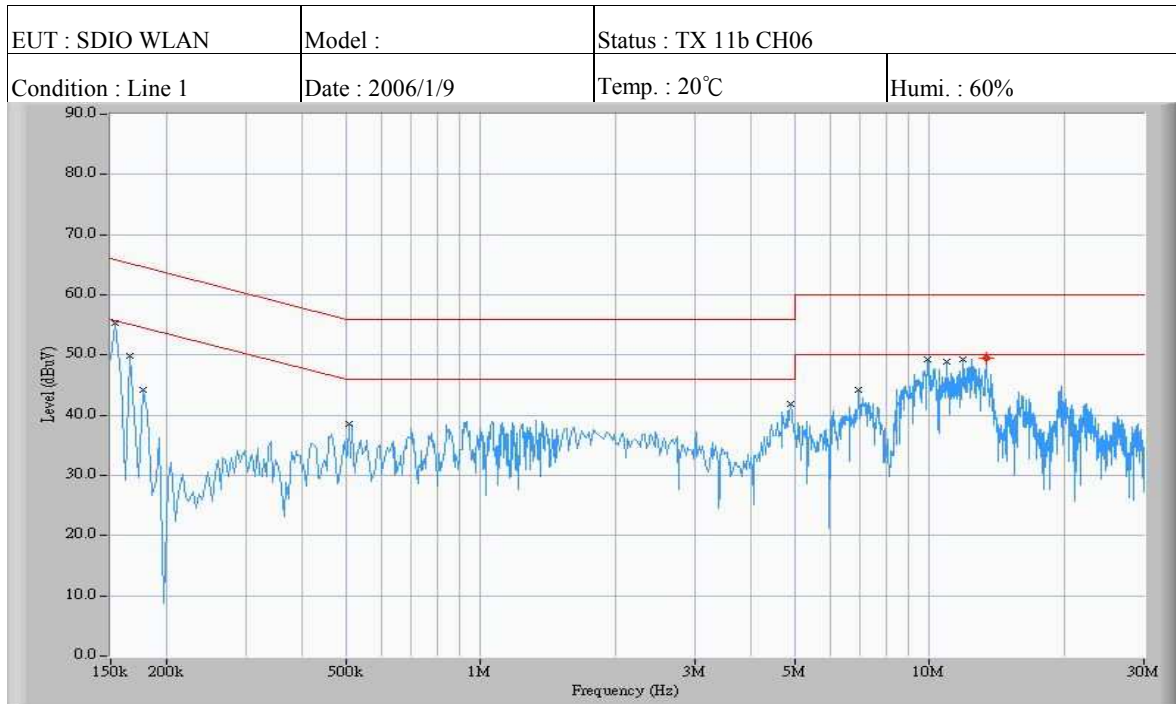

	Freq (MHz)	QP Level (dBuV)	AVG Level (dBuV)	Factor (dB)	QP Result (dBuV)	AVG Result (dBuV)	QP Limit (dBuV)	AVG Limit (dBuV)	QP Margin (dB)	AVG Margin (dB)
1	0.154	49.0	33.0	0.1	49.1	33.1	65.8	55.8	-16.7	-22.7
2	0.166	45.0	26.0	0.1	45.1	26.1	65.2	55.2	-20.1	-29.1
3	0.177	42.0	25.0	0.1	42.1	25.1	64.6	54.6	-22.5	-29.5
4	0.509	34.0	22.0	0.1	34.1	22.1	56.0	46.0	-21.9	-23.9
5	4.916	36.0	29.0	0.2	36.2	29.2	56.0	46.0	-19.8	-16.8
6	6.965	40.0	33.0	0.2	40.2	33.2	60.0	50.0	-19.8	-16.8
7	9.910	45.0	38.0	0.3	45.3	38.3	60.0	50.0	-14.7	-11.7
8	10.930	44.0	38.0	0.4	44.4	38.4	60.0	50.0	-15.6	-11.6
9	11.812	46.0	39.0	0.4	46.4	39.4	60.0	50.0	-13.6	-10.6
10	13.331	45.0	39.0	0.4	45.4	39.4	60.0	50.0	-14.6	-10.6

Note:

1. Place of measurement: EMC LAB. of the ETC.
2. “***” means the value was too low to be measured.
3. If the data table appeared symbol of "----" means the Q.P. value is under the limit of AVG. so, the AVG. value doesn't need to be measured.
4. “#” means the noise was too low, so record the peak value.
5. The estimated measurement uncertainty of the result measurement is ±2.5dB.

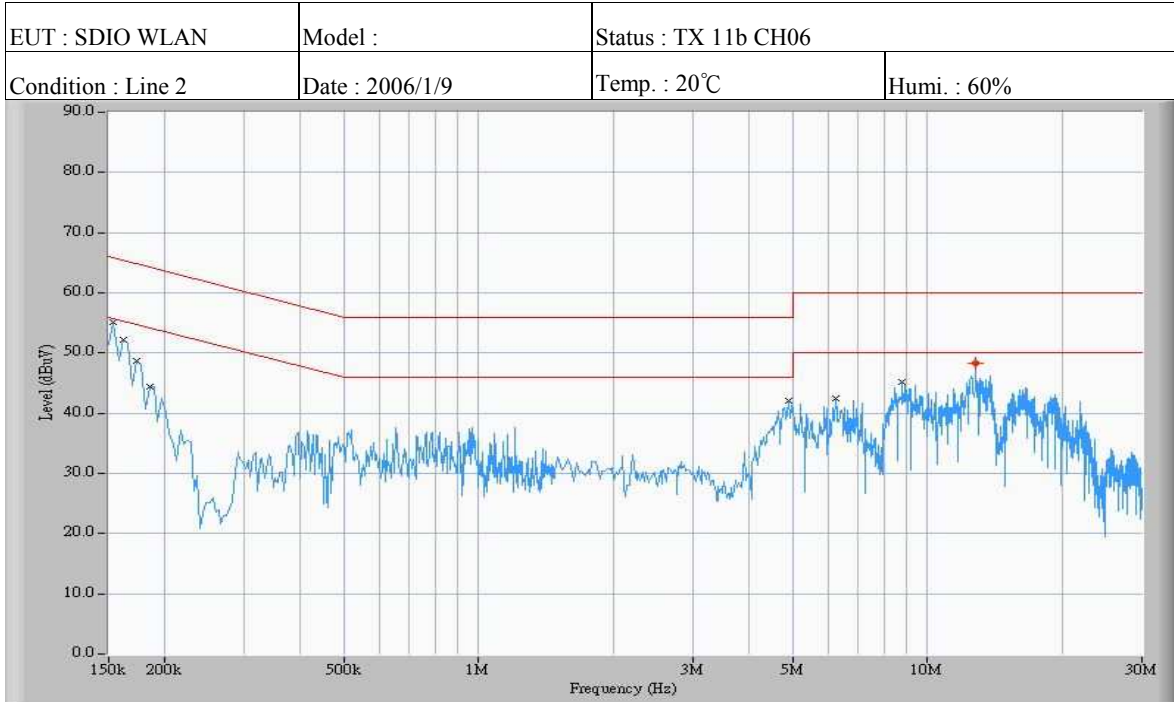


	Freq (MHz)	QP Level (dBuV)	AVG Level (dBuV)	Factor (dB)	QP Result (dBuV)	AVG Result (dBuV)	QP Limit (dBuV)	AVG Limit (dBuV)	QP Margin (dB)	AVG Margin (dB)
1	0.154	52.0	28.0	0.1	52.1	28.1	65.8	55.8	-13.7	-27.7
2	0.162	51.0	33.0	0.1	51.1	33.1	65.4	55.4	-14.3	-22.3
3	0.173	46.0	27.0	0.1	46.1	27.1	64.8	54.8	-18.7	-27.7
4	0.185	42.0	25.0	0.1	42.1	25.1	64.3	54.3	-22.2	-29.2
5	4.897	38.0	32.0	0.2	38.2	32.2	56.0	46.0	-17.8	-13.8
6	6.242	38.0	31.0	0.2	38.2	31.2	60.0	50.0	-21.8	-18.8
7	8.774	42.0	36.0	0.3	42.3	36.3	60.0	50.0	-17.7	-13.7
8	12.766	43.0	37.0	0.4	43.4	37.4	60.0	50.0	-16.6	-12.6

Note:

1. Place of measurement: EMC LAB. of the ETC.
2. “***” means the value was too low to be measured.
3. If the data table appeared symbol of “----” means the Q.P. value is under the limit of AVG. so, the AVG. value doesn't need to be measured.
4. “#” means the noise was too low, so record the peak value.
5. The estimated measurement uncertainty of the result measurement is ±2.5dB.

4.3.3

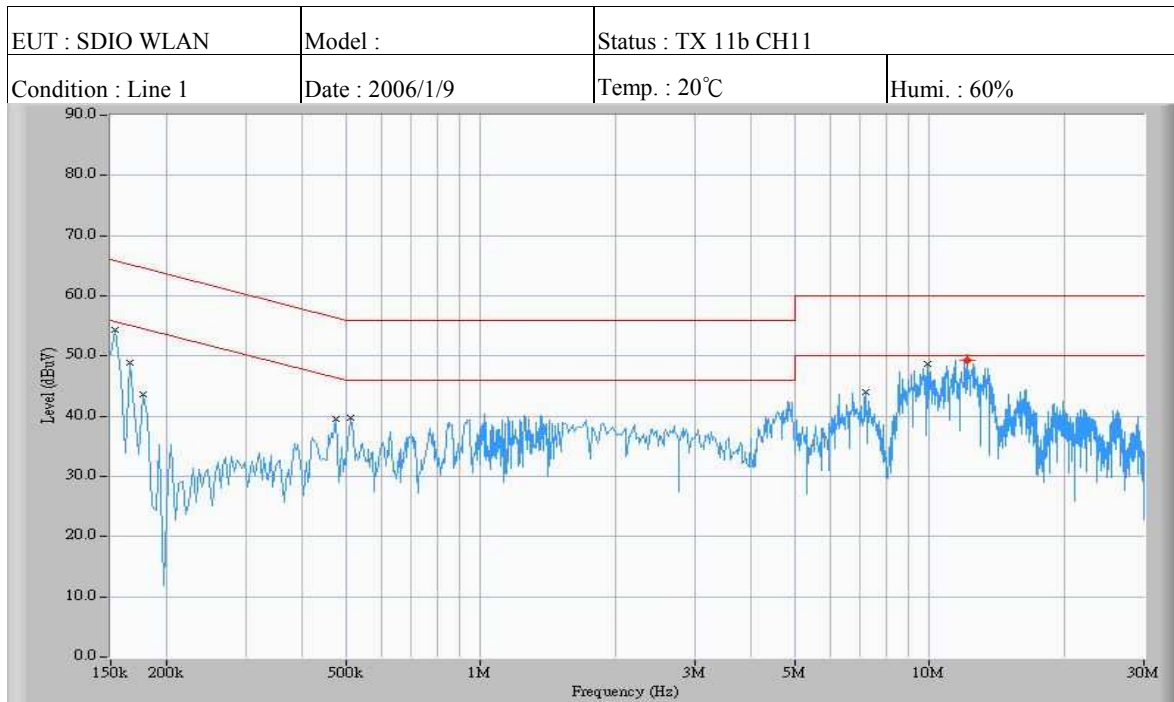


	Freq (MHz)	QP Level (dBuV)	AVG Level (dBuV)	Factor (dB)	QP Result (dBuV)	AVG Result (dBuV)	QP Limit (dBuV)	AVG Limit (dBuV)	QP Margin (dB)	AVG Margin (dB)
1	0.154	49.0	32.0	0.1	49.1	32.1	65.8	55.8	-16.7	-23.7
2	0.166	45.0	29.0	0.1	45.1	29.1	65.2	55.2	-20.1	-26.1
3	0.177	42.0	24.0	0.1	42.1	24.1	64.6	54.6	-22.5	-30.5
4	0.474	34.0	18.0	0.1	34.1	18.1	56.4	46.4	-22.3	-28.3
5	0.513	37.0	20.0	0.1	37.1	20.1	56.0	46.0	-18.9	-25.9
6	7.202	39.0	33.0	0.3	39.3	33.3	60.0	50.0	-20.7	-16.7
7	9.902	45.0	38.0	0.3	45.3	38.3	60.0	50.0	-14.7	-11.7
8	12.111	47.0	39.0	0.4	47.4	39.4	60.0	50.0	-12.6	-10.6

Note:

1. Place of measurement: EMC LAB. of the ETC.
2. “***” means the value was too low to be measured.
3. If the data table appeared symbol of "----" means the Q.P. value is under the limit of AVG. so, the AVG. value doesn't need to be measured.
4. “#” means the noise was too low, so record the peak value.
5. The estimated measurement uncertainty of the result measurement is ± 2.5 dB.

EUT : SDIO WLAN	Model :	Status : TX 11b CH11	
Condition : Line 2	Date : 2006/1/9	Temp. : 20°C	Humi. : 60%

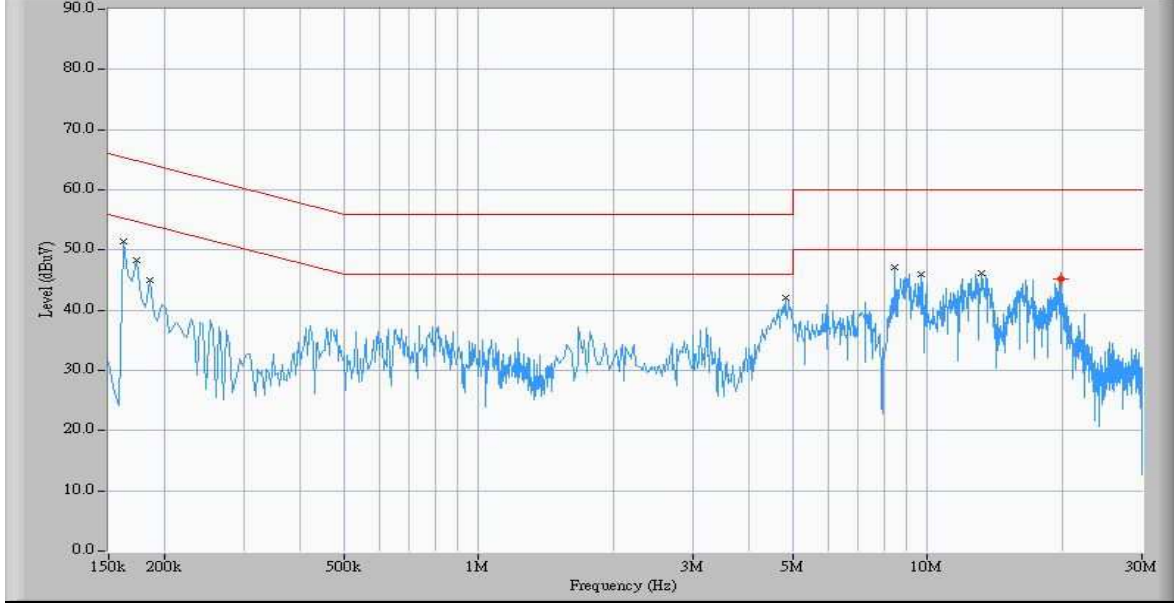


	Freq (MHz)	QP Level (dBuV)	AVG Level (dBuV)	Factor (dB)	QP Result (dBuV)	AVG Result (dBuV)	QP Limit (dBuV)	AVG Limit (dBuV)	QP Margin (dB)	AVG Margin (dB)
1	0.162	51.0	33.0	0.1	51.1	33.1	65.4	55.4	-14.3	-22.3
2	0.173	46.0	29.0	0.1	46.1	29.1	64.8	54.8	-18.7	-25.7
3	0.185	42.0	24.0	0.1	42.1	24.1	64.3	54.3	-22.2	-30.2
4	4.814	37.0	31.0	0.2	37.2	31.2	56.0	46.0	-18.8	-14.8
5	8.476	41.0	35.0	0.3	41.3	35.3	60.0	50.0	-18.7	-14.7
6	9.699	42.0	34.0	0.3	42.3	34.3	60.0	50.0	-17.7	-15.7
7	13.154	43.0	36.0	0.4	43.4	36.4	60.0	50.0	-16.6	-13.6
8	19.825	40.0	32.0	0.4	40.4	32.4	60.0	50.0	-19.6	-17.6

Note:


1. Place of measurement: EMC LAB. of the ETC.
2. “***” means the value was too low to be measured.
3. If the data table appeared symbol of “----” means the Q.P. value is under the limit of AVG. so, the AVG. value doesn't need to be measured.
4. “#” means the noise was too low, so record the peak value.
5. The estimated measurement uncertainty of the result measurement is ± 2.5 dB.

4.3.4

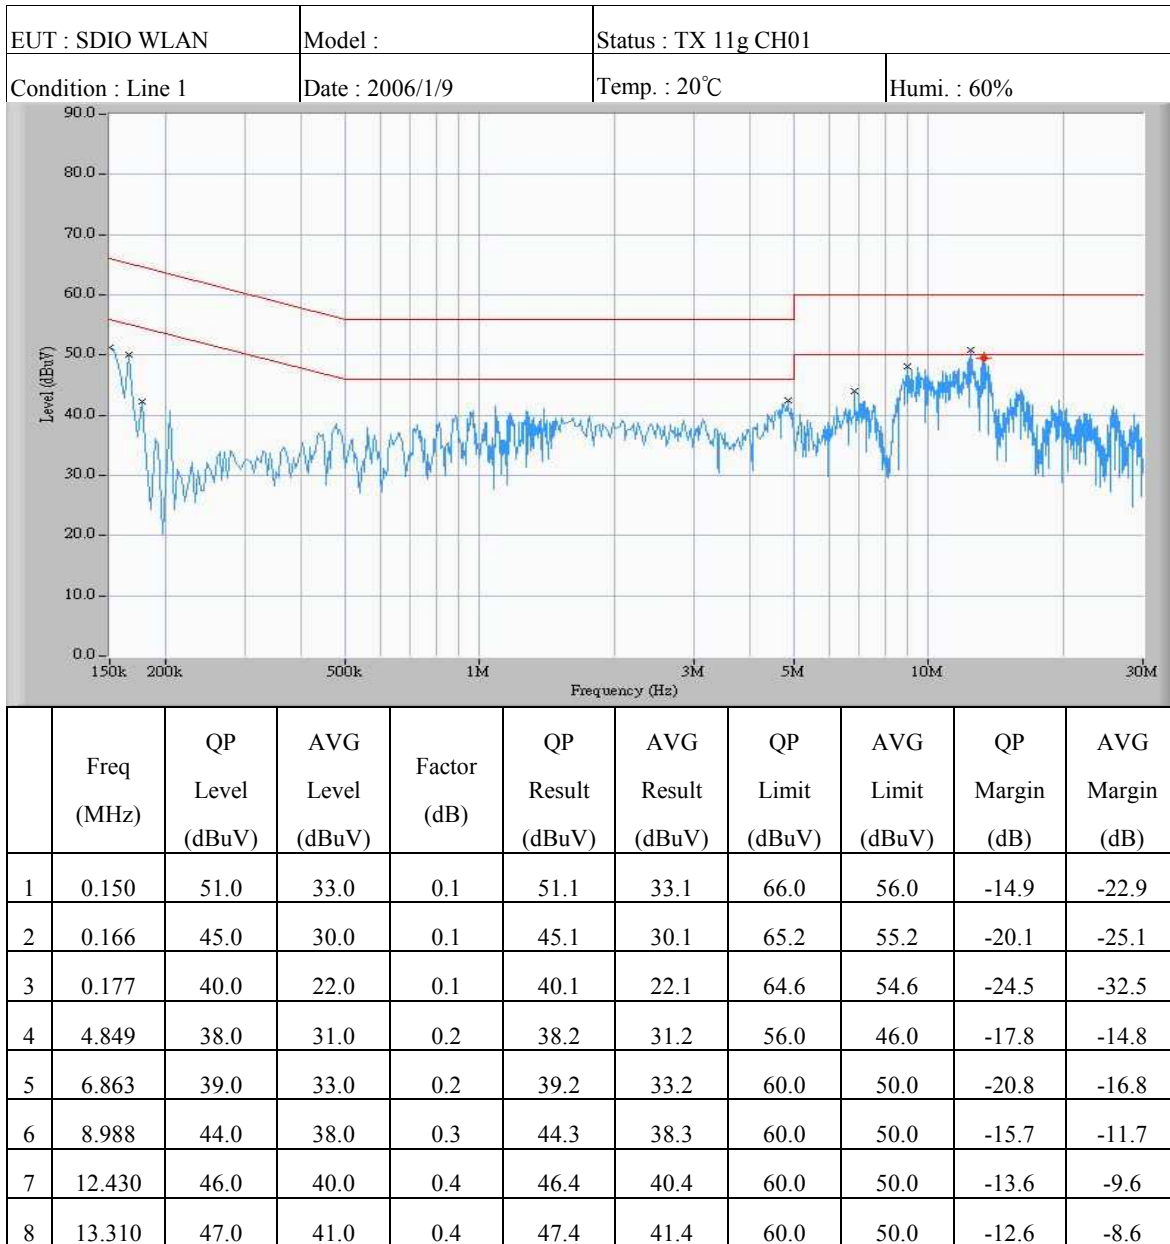

Note:

1. Place of measurement: EMC LAB. of the ETC.
2. “***” means the value was too low to be measured.
3. If the data table appeared symbol of "----" means the Q.P. value is under the limit of AVG. so, the AVG. value doesn't need to be measured.
4. “#” means the noise was too low, so record the peak value.
5. The estimated measurement uncertainty of the result measurement is ±2.5dB.

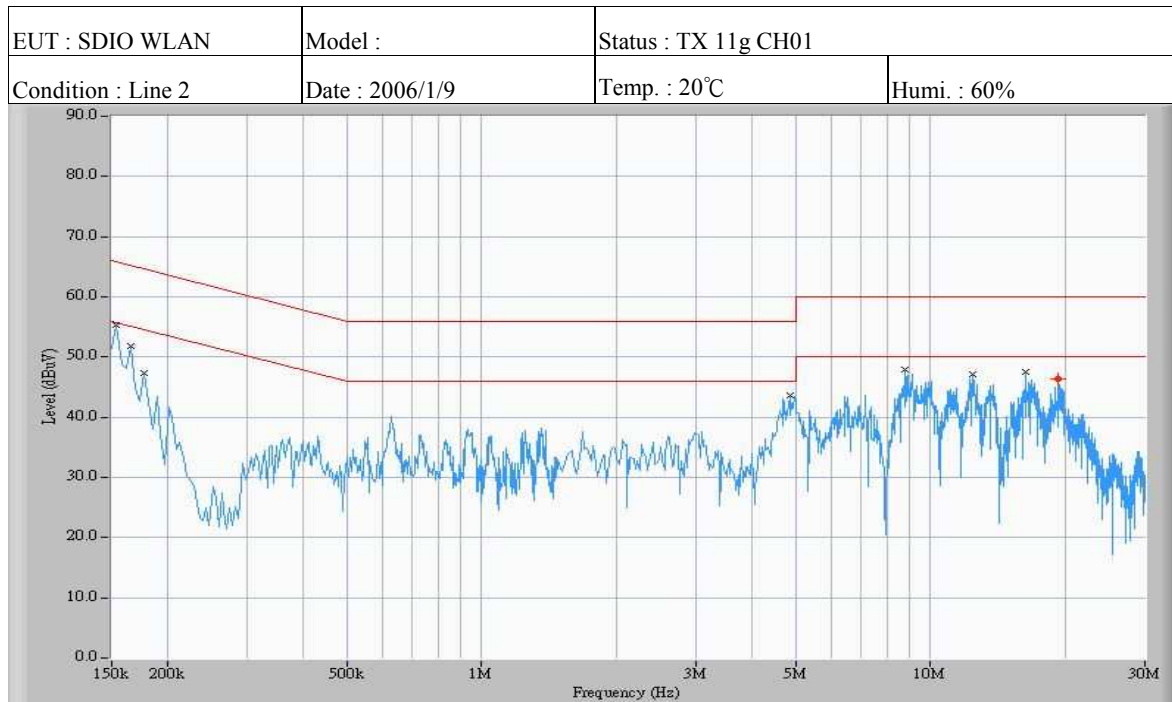


	Freq (MHz)	QP Level (dBuV)	AVG Level (dBuV)	Factor (dB)	QP Result (dBuV)	AVG Result (dBuV)	QP Limit (dBuV)	AVG Limit (dBuV)	QP Margin (dB)	AVG Margin (dB)
1	0.154	52.0	32.0	0.1	52.1	32.1	65.8	55.8	-13.7	-23.7
2	0.166	48.0	28.0	0.1	48.1	28.1	65.2	55.2	-17.1	-27.1
3	0.177	44.0	25.0	0.1	44.1	25.1	64.6	54.6	-20.5	-29.5
4	4.859	38.0	31.0	0.2	38.2	31.2	56.0	46.0	-17.8	-14.8
5	8.797	44.0	37.0	0.3	44.3	37.3	60.0	50.0	-15.7	-12.7
6	12.441	43.0	37.0	0.4	43.4	37.4	60.0	50.0	-16.6	-12.6
7	16.303	42.0	36.0	0.4	42.4	36.4	60.0	50.0	-17.6	-13.6
8	19.221	41.0	36.0	0.4	41.4	36.4	60.0	50.0	-18.6	-13.6

Note:

1. Place of measurement: EMC LAB. of the ETC.
2. “***” means the value was too low to be measured.
3. If the data table appeared symbol of "----" means the Q.P. value is under the limit of AVG. so, the AVG. value doesn't need to be measured.
4. “#” means the noise was too low, so record the peak value.
5. The estimated measurement uncertainty of the result measurement is ± 2.5 dB.

4.3.5

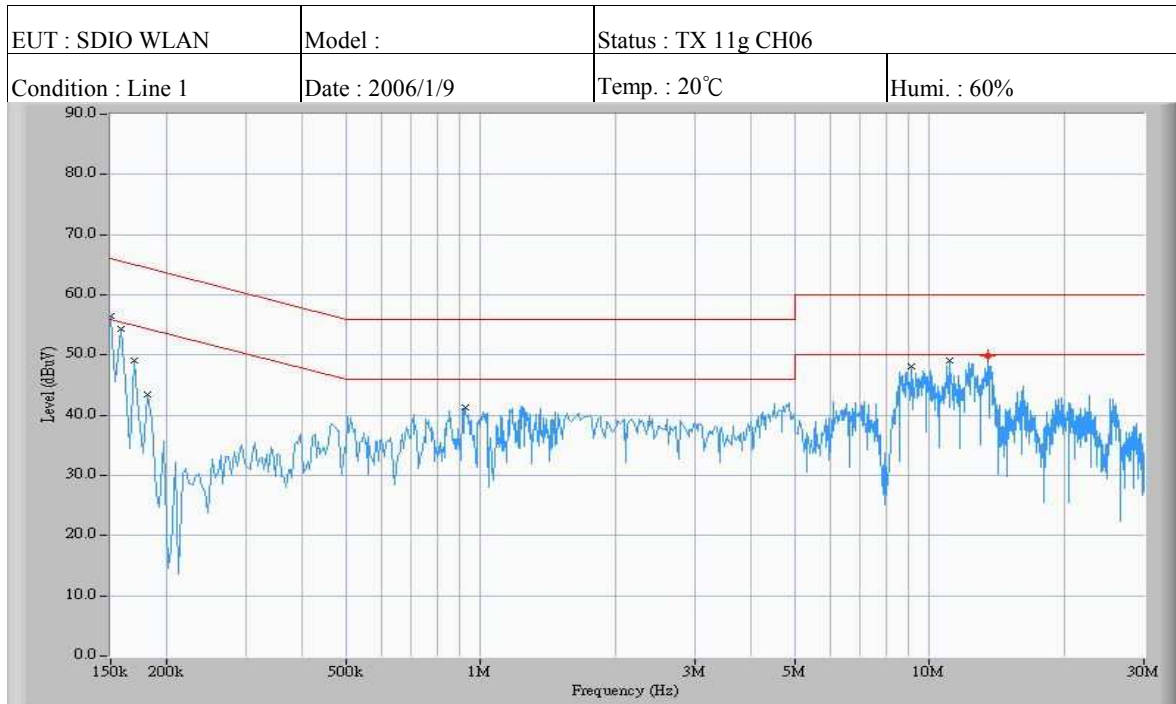


	Freq (MHz)	QP Level (dBuV)	AVG Level (dBuV)	Factor (dB)	QP Result (dBuV)	AVG Result (dBuV)	QP Limit (dBuV)	AVG Limit (dBuV)	QP Margin (dB)	AVG Margin (dB)
1	0.150	53.0	35.0	0.1	53.1	35.1	66.0	56.0	-12.9	-20.9
2	0.158	50.0	33.0	0.1	50.1	33.1	65.6	55.6	-15.5	-22.5
3	0.170	44.0	30.0	0.1	44.1	30.1	65.0	55.0	-20.9	-24.9
4	0.181	41.0	26.0	0.1	41.1	26.1	64.4	54.4	-23.3	-28.3
5	0.923	36.0	32.0	0.1	36.1	32.1	56.0	46.0	-19.9	-13.9
6	9.102	44.0	38.0	0.3	44.3	38.3	60.0	50.0	-15.7	-11.7
7	11.047	44.0	37.0	0.4	44.4	37.4	60.0	50.0	-15.6	-12.6
8	13.500	45.0	39.0	0.4	45.4	39.4	60.0	50.0	-14.6	-10.6

Note:

1. Place of measurement: EMC LAB. of the ETC.
2. “***” means the value was too low to be measured.
3. If the data table appeared symbol of "----" means the Q.P. value is under the limit of AVG. so, the AVG. value doesn't need to be measured.
4. “#” means the noise was too low, so record the peak value.
5. The estimated measurement uncertainty of the result measurement is ±2.5dB.

EUT : SDIO WLAN	Model :	Status : TX 11g CH06
Condition : Line 2	Date : 2006/1/9	Temp. : 20°C Humi. : 60%

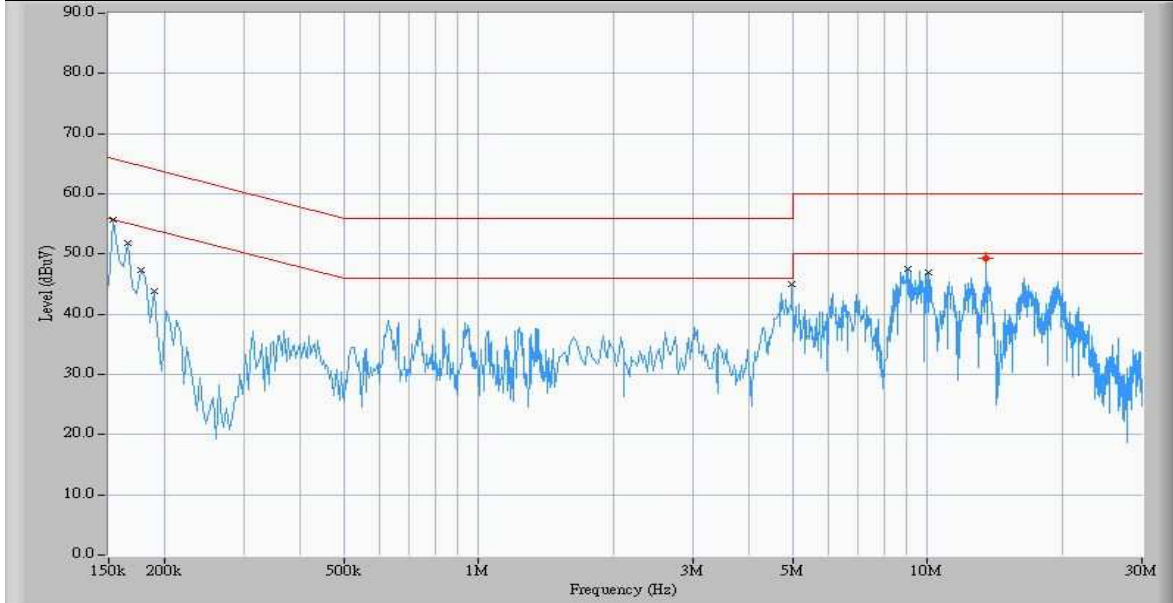


	Freq (MHz)	QP Level (dBuV)	AVG Level (dBuV)	Factor (dB)	QP Result (dBuV)	AVG Result (dBuV)	QP Limit (dBuV)	AVG Limit (dBuV)	QP Margin (dB)	AVG Margin (dB)
1	0.154	52.0	32.0	0.1	52.1	32.1	65.8	55.8	-13.7	-23.7
2	0.166	48.0	28.0	0.1	48.1	28.1	65.2	55.2	-17.1	-27.1
3	0.177	44.0	25.0	0.1	44.1	25.1	64.6	54.6	-20.5	-29.5
4	0.189	40.0	22.0	0.1	40.1	22.1	64.1	54.1	-24.0	-32.0
5	4.982	39.0	32.0	0.2	39.2	32.2	56.0	46.0	-16.8	-13.8
6	9.043	43.0	37.0	0.3	43.3	37.3	60.0	50.0	-16.7	-12.7
7	10.043	42.0	35.0	0.4	42.4	35.4	60.0	50.0	-17.6	-14.6
8	13.496	43.0	37.0	0.4	43.4	37.4	60.0	50.0	-16.6	-12.6

Note:

1. Place of measurement: EMC LAB. of the ETC.
2. “***” means the value was too low to be measured.
3. If the data table appeared symbol of “----” means the Q.P. value is under the limit of AVG. so, the AVG. value doesn't need to be measured.
4. “#” means the noise was too low, so record the peak value.
5. The estimated measurement uncertainty of the result measurement is ±2.5dB.


4.3.6

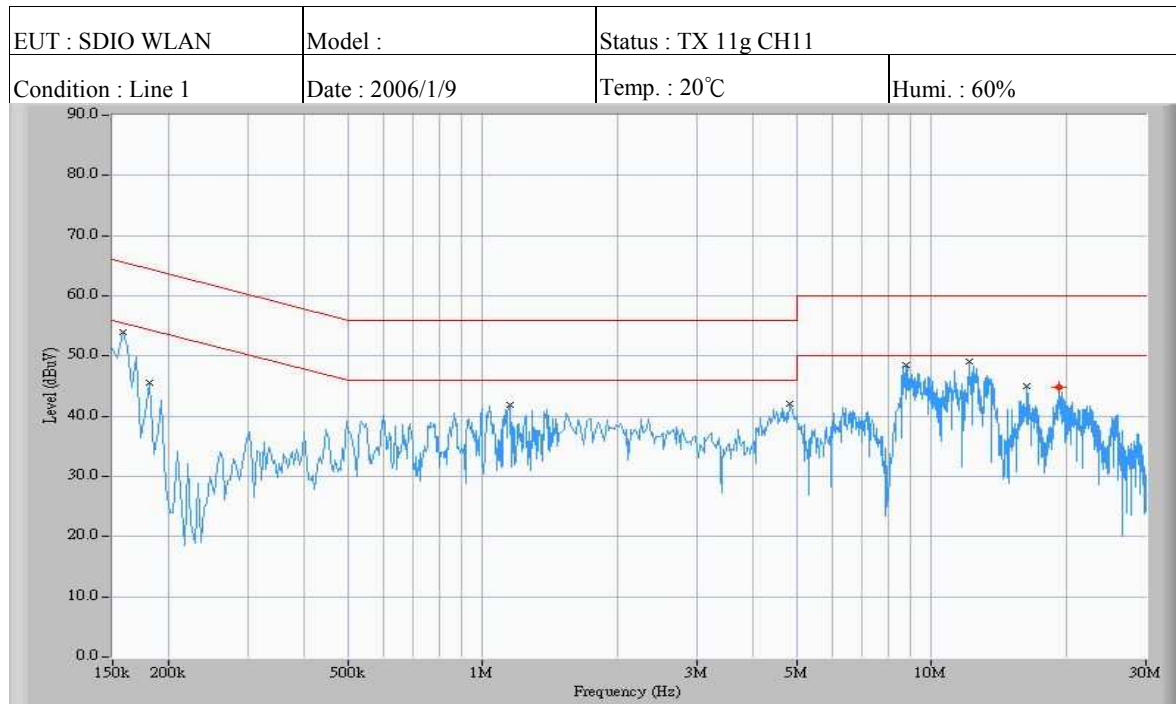

Line	Frequency (MHz)	Q.P. Level (dBuV)	AVG Level (dBuV)	Factor (dB)	Q.P. Result (dBuV)	AVG Result (dBuV)	Q.P. Limit (dBuV)	AVG Limit (dBuV)	Q.P. Margin (dB)	AVG Margin (dB)
1	0.158	51.0	30.0	0.1	51.1	30.1	65.6	55.6	-14.5	-25.5
2	0.181	42.0	24.0	0.1	42.1	24.1	64.4	54.4	-22.3	-30.3
3	1.148	39.0	28.0	0.2	39.2	28.2	56.0	46.0	-16.8	-17.8
4	4.834	37.0	30.0	0.2	37.2	30.2	56.0	46.0	-18.8	-15.8
5	8.793	44.0	37.0	0.3	44.3	37.3	60.0	50.0	-15.7	-12.7
6	12.160	43.0	36.0	0.4	43.4	36.4	60.0	50.0	-16.6	-13.6
7	16.334	41.0	35.0	0.4	41.4	35.4	60.0	50.0	-18.6	-14.6
8	19.256	42.0	36.0	0.4	42.4	36.4	60.0	50.0	-17.6	-13.6

Note:

1. Place of measurement: EMC LAB. of the ETC.
2. “***” means the value was too low to be measured.
3. If the data table appeared symbol of "----" means the Q.P. value is under the limit of AVG. so, the AVG. value doesn't need to be measured.
4. “#” means the noise was too low, so record the peak value.
5. The estimated measurement uncertainty of the result measurement is ± 2.5 dB.

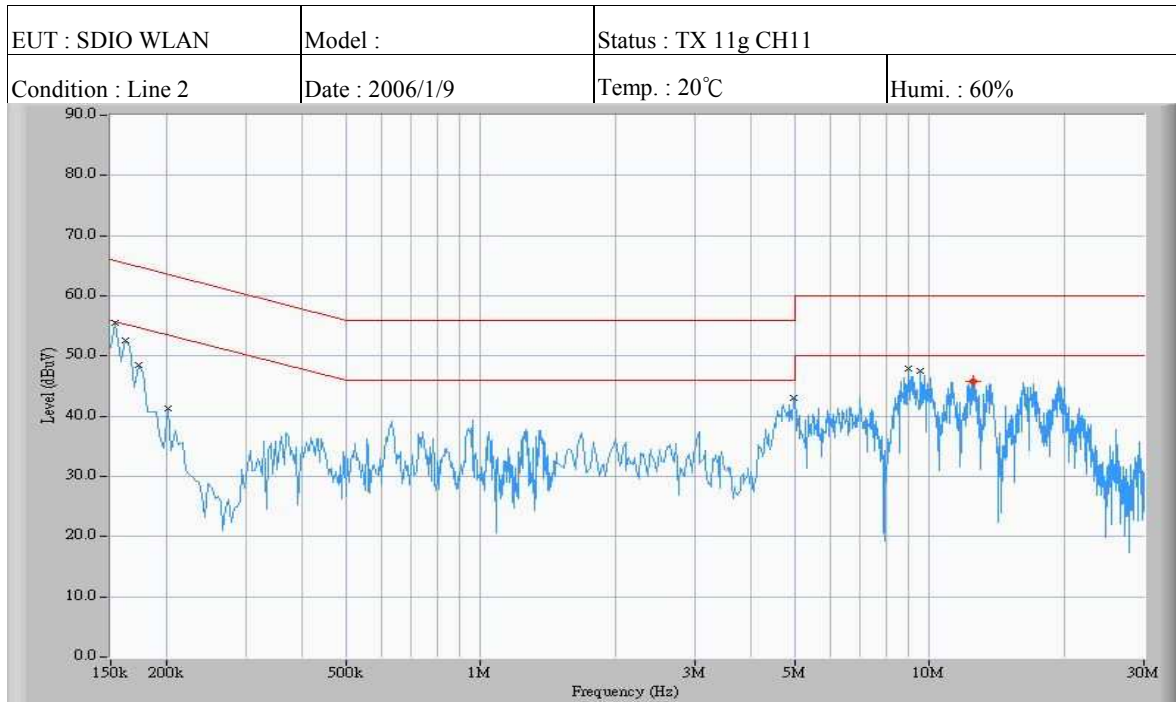

	Freq (MHz)	QP Level (dBuV)	AVG Level (dBuV)	Factor (dB)	QP Result (dBuV)	AVG Result (dBuV)	QP Limit (dBuV)	AVG Limit (dBuV)	QP Margin (dB)	AVG Margin (dB)
1	0.154	52.0	32.0	0.1	52.1	32.1	65.8	55.8	-13.7	-23.7
2	0.162	49.0	29.0	0.1	49.1	29.1	65.4	55.4	-16.3	-26.3
3	0.173	46.0	26.0	0.1	46.1	26.1	64.8	54.8	-18.7	-28.7
4	0.201	35.0	23.0	0.1	35.1	23.1	63.6	53.6	-28.5	-30.5
5	4.966	39.0	31.0	0.2	39.2	31.2	56.0	46.0	-16.8	-14.8
6	8.984	44.0	37.0	0.3	44.3	37.3	60.0	50.0	-15.7	-12.7
7	9.551	42.0	36.0	0.3	42.3	36.3	60.0	50.0	-17.7	-13.7
8	12.492	43.0	37.0	0.4	43.4	37.4	60.0	50.0	-16.6	-12.6

Note:

1. Place of measurement: EMC LAB. of the ETC.
2. “***” means the value was too low to be measured.
3. If the data table appeared symbol of "----" means the Q.P. value is under the limit of AVG. so, the AVG. value doesn't need to be measured.
4. “#” means the noise was too low, so record the peak value.
5. The estimated measurement uncertainty of the result measurement is ±2.5dB.

4.4 Result Data Calculation

The result data is calculated by adding the LISN Factor to the measured reading. The basic equation with a sample calculation is as follows:

$$\mathbf{RESULT = READING + LISN FACTOR (Included Cable Loss)}$$

Assume a receiver reading of 22.5 dB μ V is obtained, and LISN Factor is 0.1 dB, then the total of disturbance voltage is 22.6 dB μ V.

$$\text{RESULT} = 22.5 + 0.1 = 22.6 \text{ dB } \mu \text{ V}$$

$$\begin{aligned} \text{Level in } \mu \text{ V} &= \text{Common Antilogarithm}[(22.6 \text{ dB } \mu \text{ V})/20] \\ &= 13.48 \mu \text{ V} \end{aligned}$$

4.5 Conducted Measurement Equipment

The following test equipment are used during the conducted test.

Equipment	Manufacturer	Model No.	Next Cal. Due
RF Test Receiver	Rohde and Schwarz	ESCS30	04/01/2006
Line Impedance Stabilization network	EMCO	3825	11/09/2006

5 ANTENNA REQUIREMENT

5.1 Standard Applicable

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to §15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

5.2 Antenna Construction and Directional Gain

Antenna type: Inverted-F Antenna.

Antenna gain: 3.4 dBi.

6 EMISSION BANDWIDTH MEASUREMENT


6.1 Standard Applicable

According to 15.247(a)(2), system using digital modulation techniques, the minimum 6dB bandwidth shall be at least 500 kHz.

6.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 2. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Figure 2: Emission bandwidth measurement configuration.

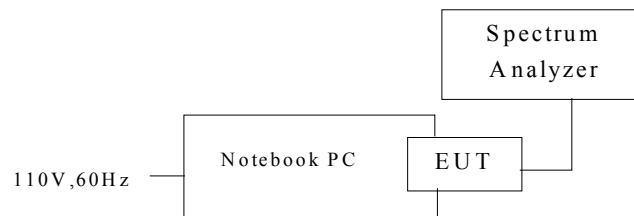

6.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Next Cal. Due
Spectrum Analyzer	Rohde & Schwarz	FSU46	11/02/2006

6.4 Measurement Data

6.4.1 IEEE 802.11b


Test Date: Jan. 03, 2006Temperature: 20°CHumidity: 58 %


Channel	Frequency (MHz)	Data Transfer Rate (Mbps)	6dB Bandwidth (MHz)	FCC Limit (kHz)	Chart
1	2412	1	10.077	500	Page 29
6	2437	1	10.024	500	Page 30
11	2462	1	10.048	500	Page 31


Note:

1. Please refer to page 29 to page 31 for chart

2. The estimated measurement uncertainty of the result measurement is 8.25×10^{-7} ($1\text{GHz} \leq f \leq 18\text{GHz}$)

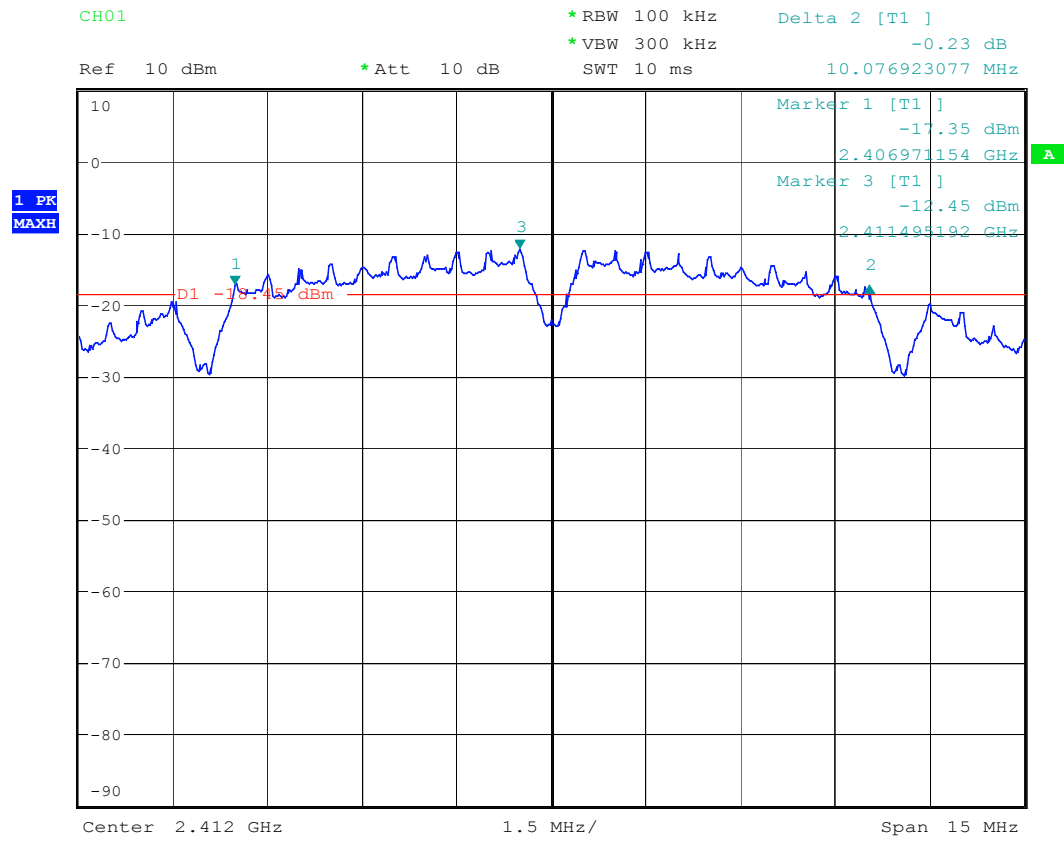

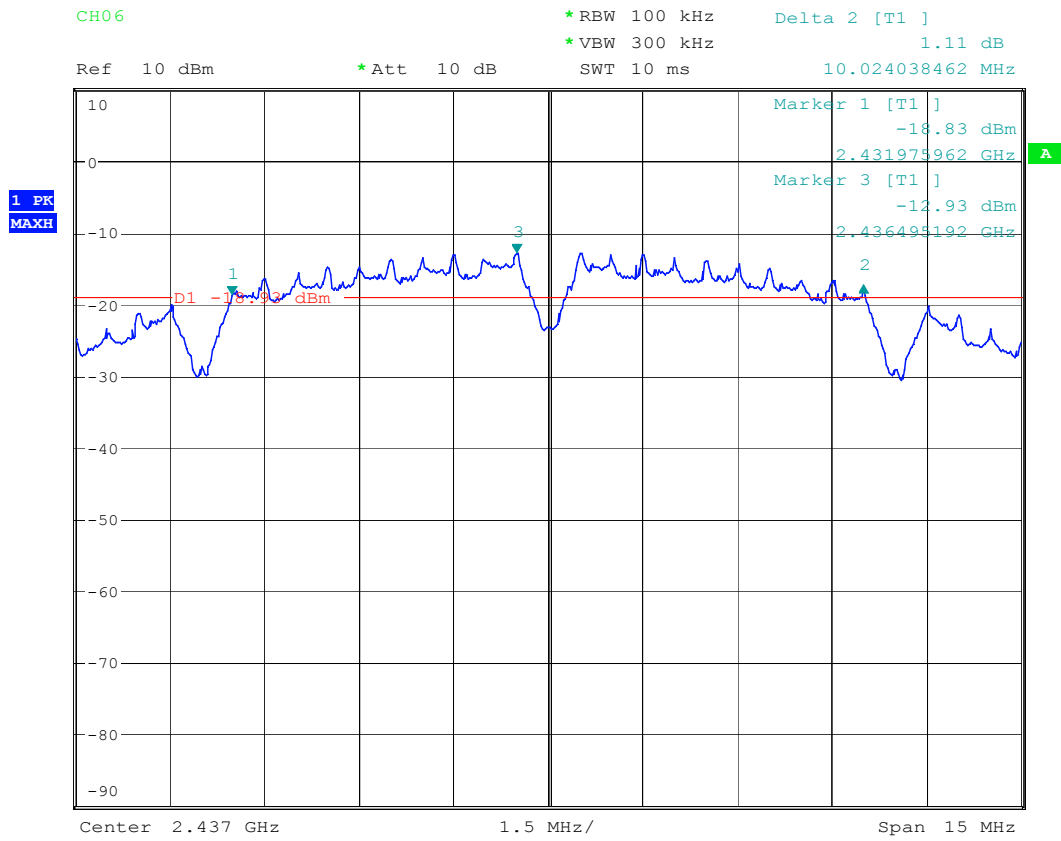

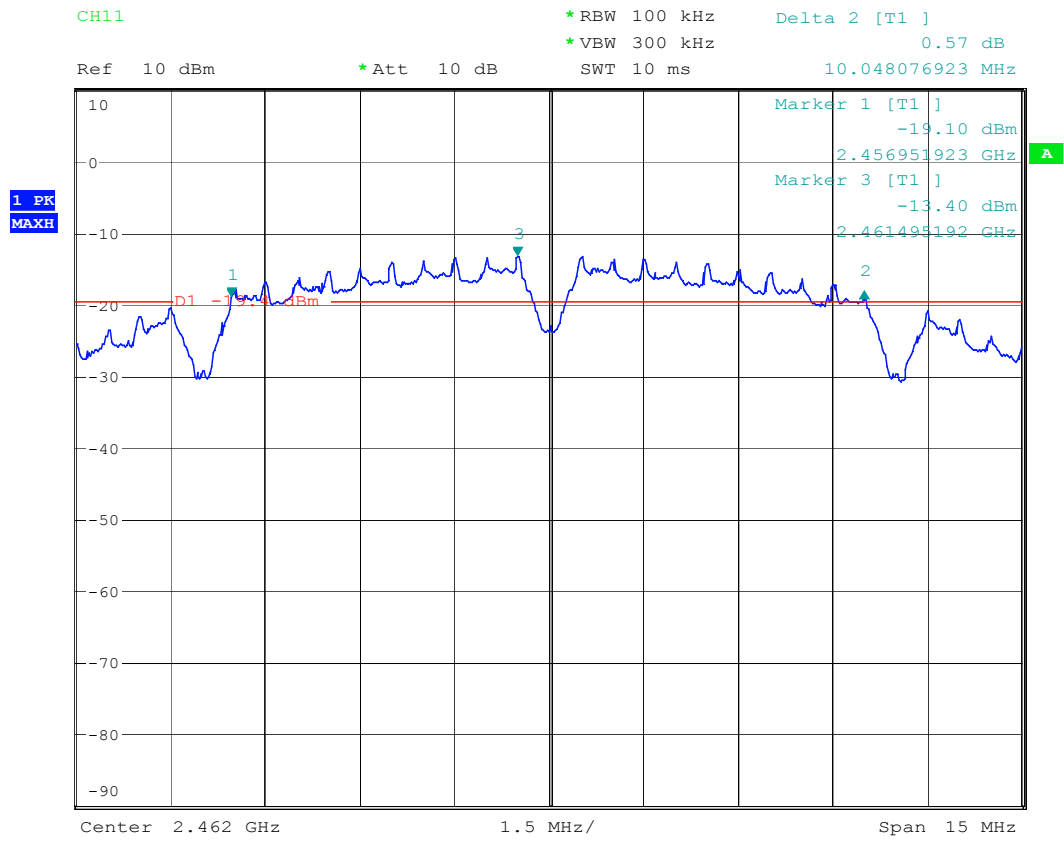


6.4.2 IEEE 802.11gTest Date: Jan. 03, 2006Temperature: 20°CHumidity: 58 %


Channel	Frequency (MHz)	Data Transfer Rate (Mbps)	6dB Bandwidth (MHz)	FCC Limit (kHz)	Chart
1	2412	6	16.250	500	Page 33
6	2437	6	16.346	500	Page 34
11	2462	6	15.817	500	Page 35


Note:

1. Please refer to page 33 to page 35 for chart

2. The estimated measurement uncertainty of the result measurement is 8.25×10^{-7} ($1\text{GHz} \leq f \leq 18\text{GHz}$)

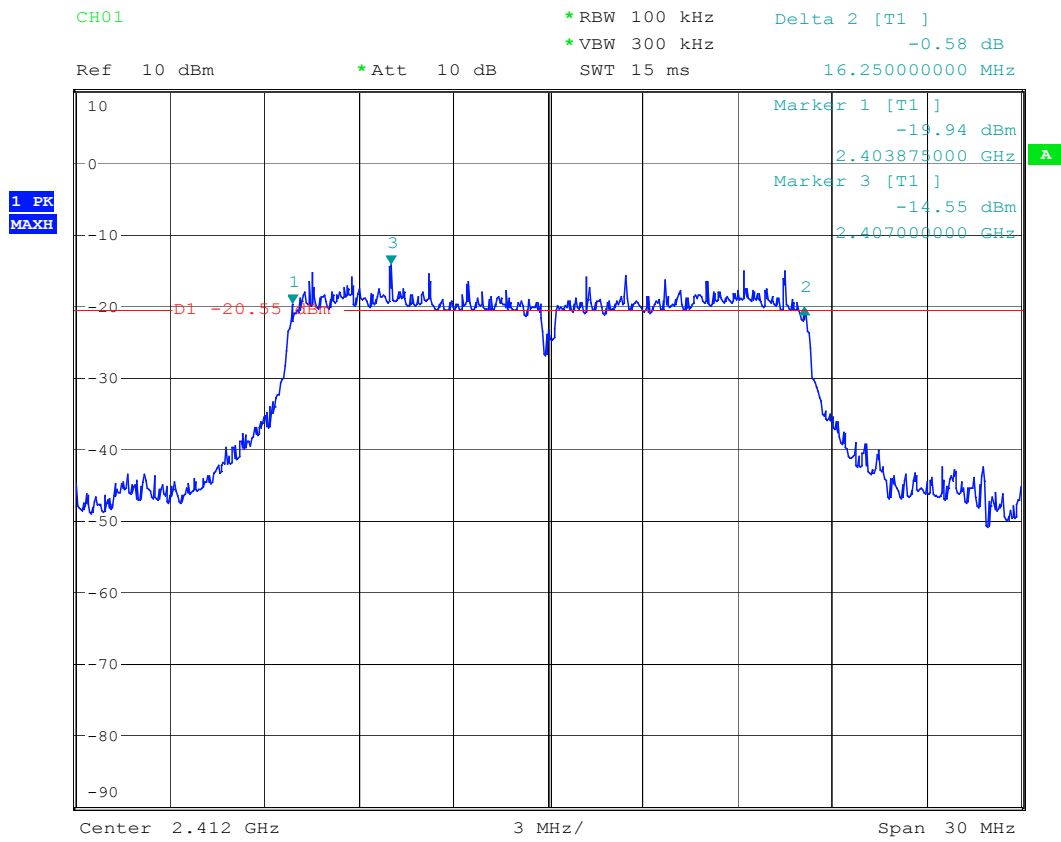

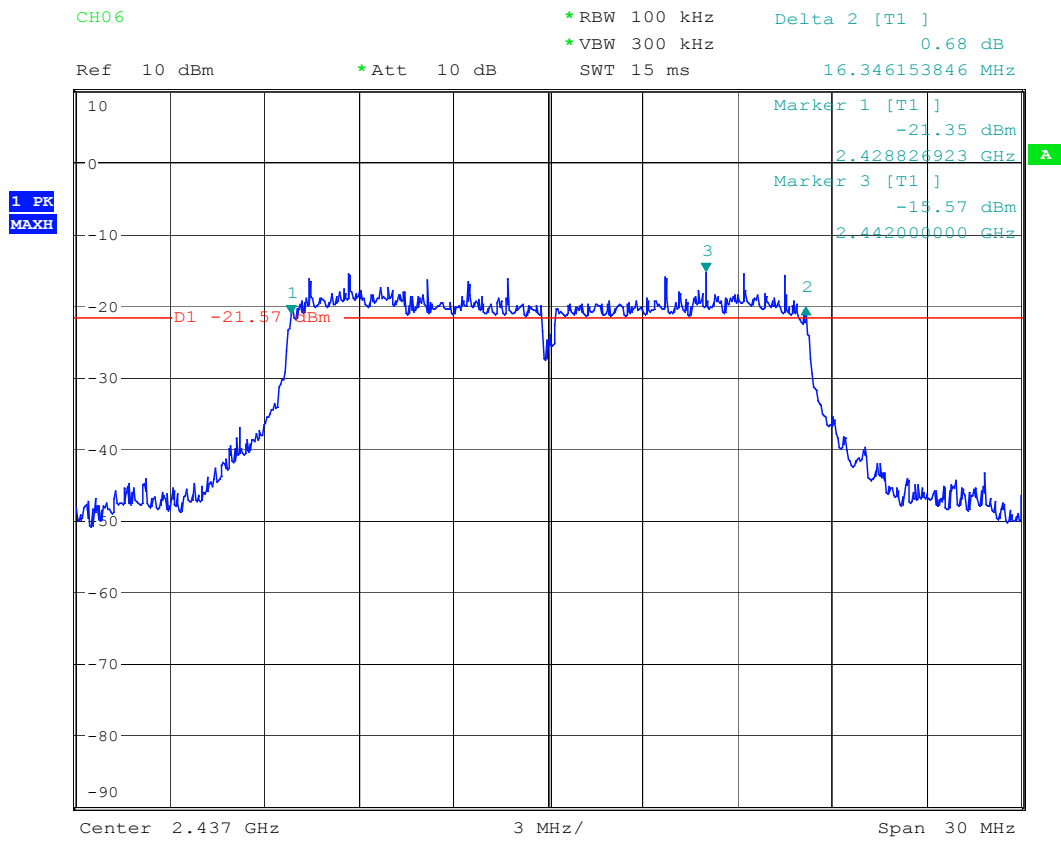

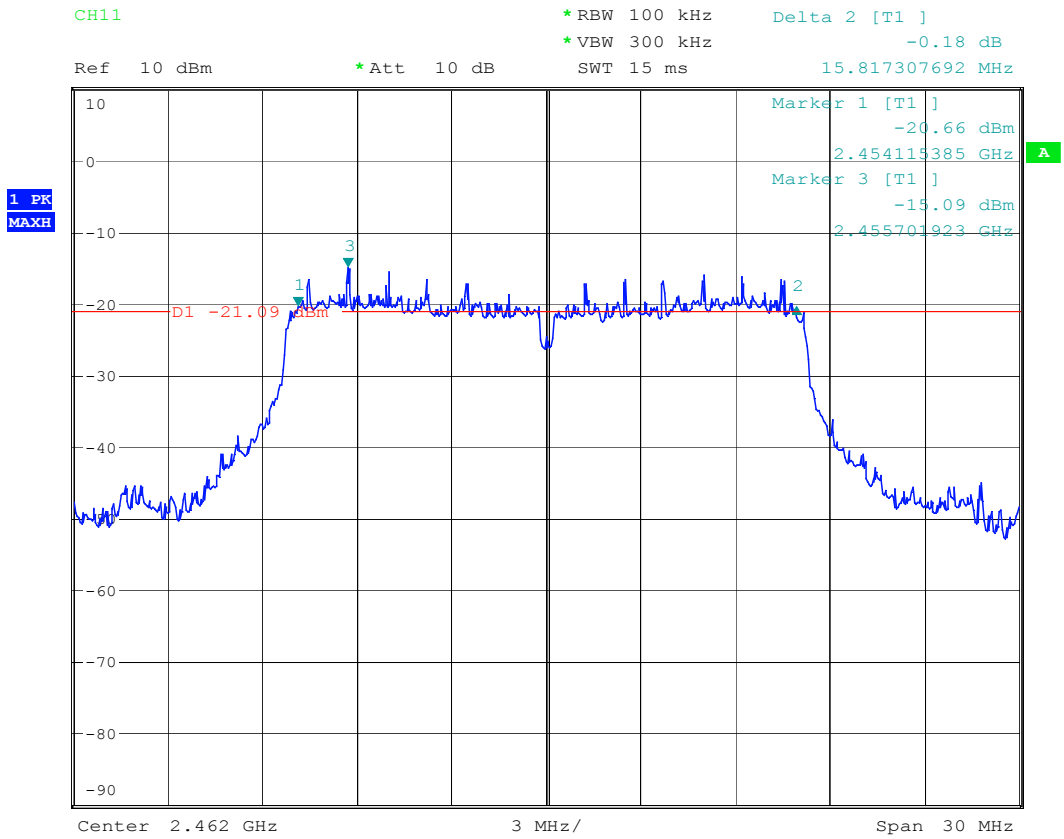

7 OUTPUT POWER MEASUREMENT


7.1 Standard Applicable

For direct sequence system, according to 15.247(b), the maximum peak output power of the transmitter shall not exceed 1 Watt. If transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

7.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 3. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range.
3. Measure the highest value appearing on power meter and record the level to calculate result data.
4. Repeat above procedures until all frequencies measured were complete.

Figure 3: Output power measurement configuration.



7.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Next Cal. Due
Spectrum Analyzer	Agilent	8564EC	09/23/2006
Power Meter	Boonton	4532	06/13/2006
Peak Power Sensor	Boonton	56518	07/21/2006

7.4 Measurement Data

7.4.1 IEEE 802.11b

Test Date: Jan. 03, 2006Temperature: 20°CHumidity: 58 %

Channel	Frequency (MHz)	Data Transfer Rate (Mbps)	Reading (dBm)	Attenuator & Cable Loss (dB)	Maximum Peak Output Power (dBm)	Maximum Peak Output Power (mW)	FCC Limit (mW)
1	2412	1	0.47	11.2	11.67	14.69	1000
		2	0.45	11.2	11.65	14.62	1000
		5.5	0.40	11.2	11.60	14.45	1000
		11	0.42	11.2	11.62	14.52	1000
6	2437	1	0.01	11.2	11.21	13.21	1000
		2	-0.05	11.2	11.15	13.03	1000
		5.5	-0.05	11.2	11.15	13.03	1000
		11	-0.03	11.2	11.17	13.09	1000
11	2462	1	-0.71	11.2	10.49	11.19	1000
		2	-0.79	11.2	10.41	10.99	1000
		5.5	-0.88	11.2	10.32	10.76	1000
		11	-0.83	11.2	10.37	10.89	1000

Note:

The estimated measurement uncertainty of the result measurement is $\pm 1.5\text{dB}$ ($1\text{GHz} \leq f \leq 18\text{GHz}$)

7.4.2 IEEE 802.11gTest Date: Jan. 03, 2006Temperature: 20°CHumidity: 58 %

Channel	Frequency (MHz)	Data Transfer Rate (Mbps)	Reading (dBm)	Attenuator & Cable Loss (dB)	Maximum Peak Output Power (dBm)	Maximum Peak Output Power (mW)	FCC Limit (mW)
1	2412	6	2.42	11.2	13.62	23.01	1000
		9	2.21	11.2	13.41	21.93	1000
		12	2.29	11.2	13.49	22.34	1000
		18	2.19	11.2	13.39	21.83	1000
		24	2.40	11.2	13.60	22.91	1000
		36	2.41	11.2	13.61	22.96	1000
		48	1.81	11.2	13.01	20.00	1000
		54	1.85	11.2	13.05	20.18	1000
6	2437	6	2.44	11.2	13.64	23.12	1000
		9	2.39	11.2	13.59	22.86	1000
		12	2.12	11.2	13.32	21.48	1000
		18	2.05	11.2	13.25	21.13	1000
		24	2.33	11.2	13.53	22.54	1000
		36	2.14	11.2	13.34	21.58	1000
		48	1.65	11.2	12.85	19.28	1000
		54	1.85	11.2	13.05	20.18	1000
11	2462	6	2.05	11.2	13.25	21.13	1000
		9	2.01	11.2	13.21	20.94	1000
		12	1.78	11.2	12.98	19.86	1000
		18	1.72	11.2	12.92	19.59	1000
		24	1.98	11.2	13.18	20.80	1000
		36	1.80	11.2	13.00	19.95	1000
		48	1.31	11.2	12.51	17.82	1000
		54	1.29	11.2	12.49	17.74	1000

*Note:**The estimated measurement uncertainty of the result measurement is $\pm 1.5\text{dB}$ ($1\text{GHz} \leq f \leq 18\text{GHz}$)*

8 POWER DENSITY MEASUREMENT

8.1 Standard Applicable

According to 15.247(d), for direct sequence systems, the transmitted power density averaged over any 1 second interval shall not be greater than 8 dBm in any 3 kHz bandwidth within these bands.

8.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 2. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set EUT to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Adjust the center frequency of spectrum analyzer on highest level appearing on spectral display within a 300 kHz frequency span.
4. Set the spectrum analyzer on a 3 kHz resolution bandwidth and 10 kHz video bandwidth as well as max. hold function, then record the measurement result.
5. Repeat above procedures until all measured frequencies were complete.

8.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Next Cal. Due
Spectrum Analyzer	Rohde & Schwarz	FSU46	11/02/2006

8.4 Measurement Data


8.4.1 IEEE 802.11b


Test Date: Jan. 03, 2006Temperature: 20 °CHumidity: 58 %


Channel	Frequency (MHz)	Data Transfer Rate (Mbps)	Reading (dBm)	Cable Loss (dB)	Peak Power Spectral Density (dBm)	FCC Limit (dBm)	Chart
1	2412	1	-36.8	11.2	-25.6	8	Page 41
6	2437	1	-36.6	11.2	-25.4	8	Page 42
11	2462	1	-37.7	11.2	-26.5	8	Page 43

Note:

1. Please refer to page 41 to page 43 for chart
2. The estimated measurement uncertainty of the result measurement is $\pm 1.5\text{dB}$ ($1\text{GHz} \leq f \leq 18\text{GHz}$)

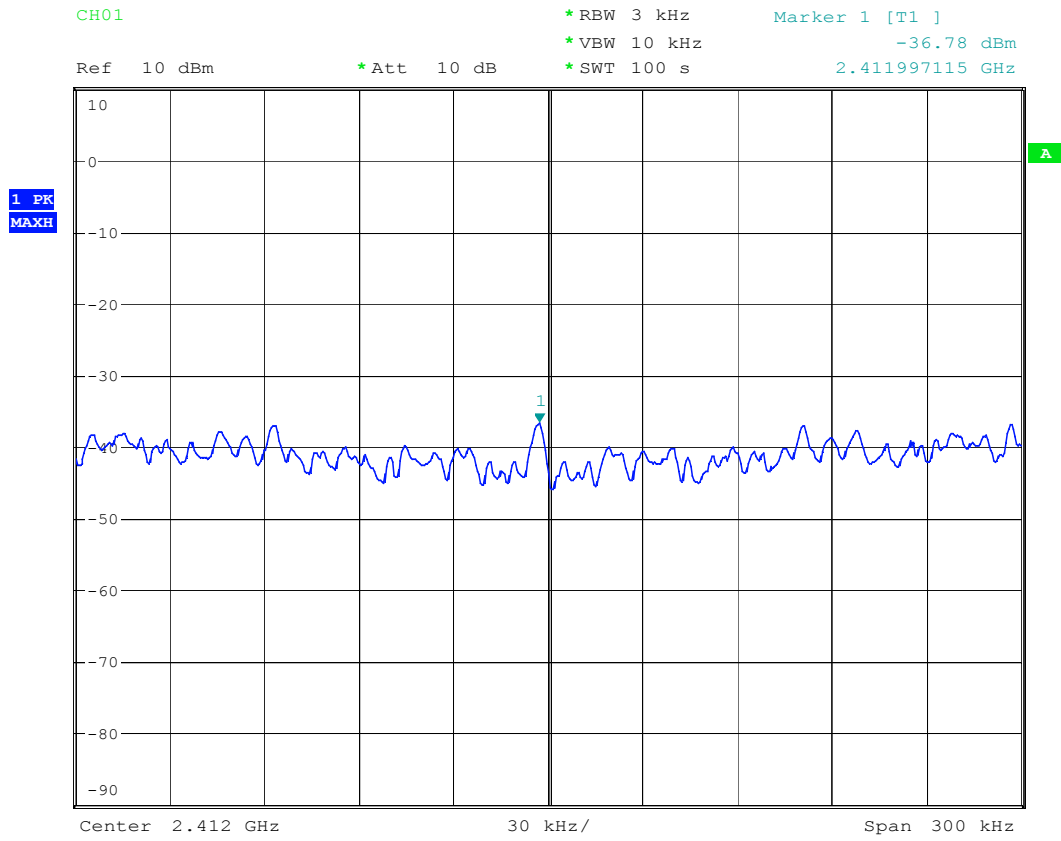

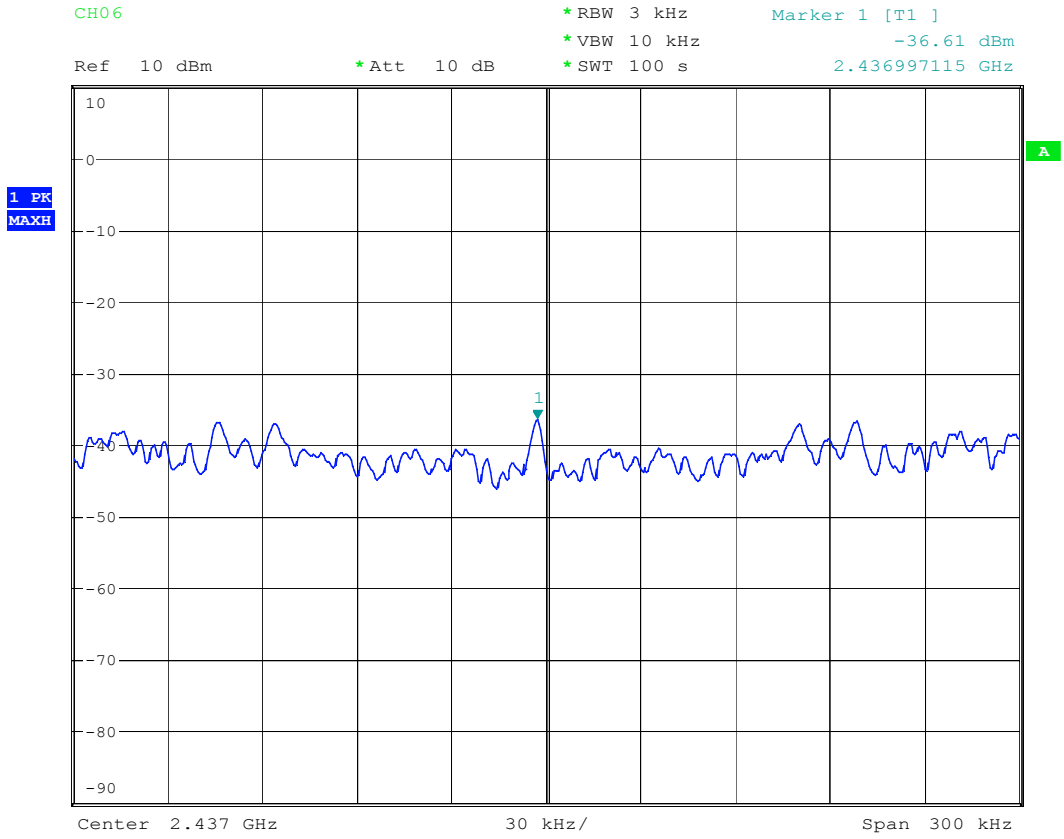

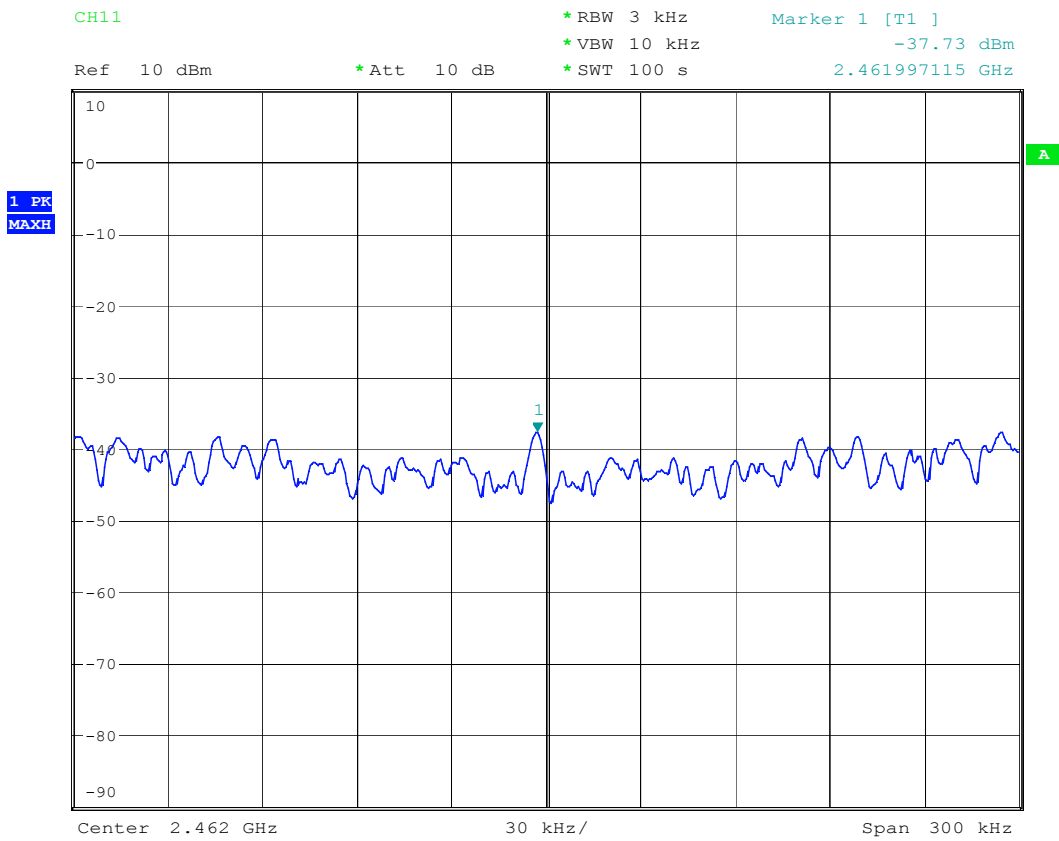



8.4.2 IEEE 802.11gTest Date: Jan. 03, 2006Temperature: 20 °CHumidity: 58 %


Channel	Frequency (MHz)	Data Transfer Rate (Mbps)	Reading (dBm)	Cable Loss (dB)	Peak Power Spectral Density (dBm)	FCC Limit (dBm)	Chart
1	2412	48	-33.5	11.2	-22.0	8	Page 45
6	2437	24	-33.8	11.2	-22.6	8	Page 46
11	2462	24	-33.7	11.2	-22.5	8	Page 47

Note:

1. Please refer to page 45 to page 47 for chart
2. The estimated measurement uncertainty of the result measurement is $\pm 1.5\text{dB}$ ($1\text{GHz} \leq f \leq 18\text{GHz}$)

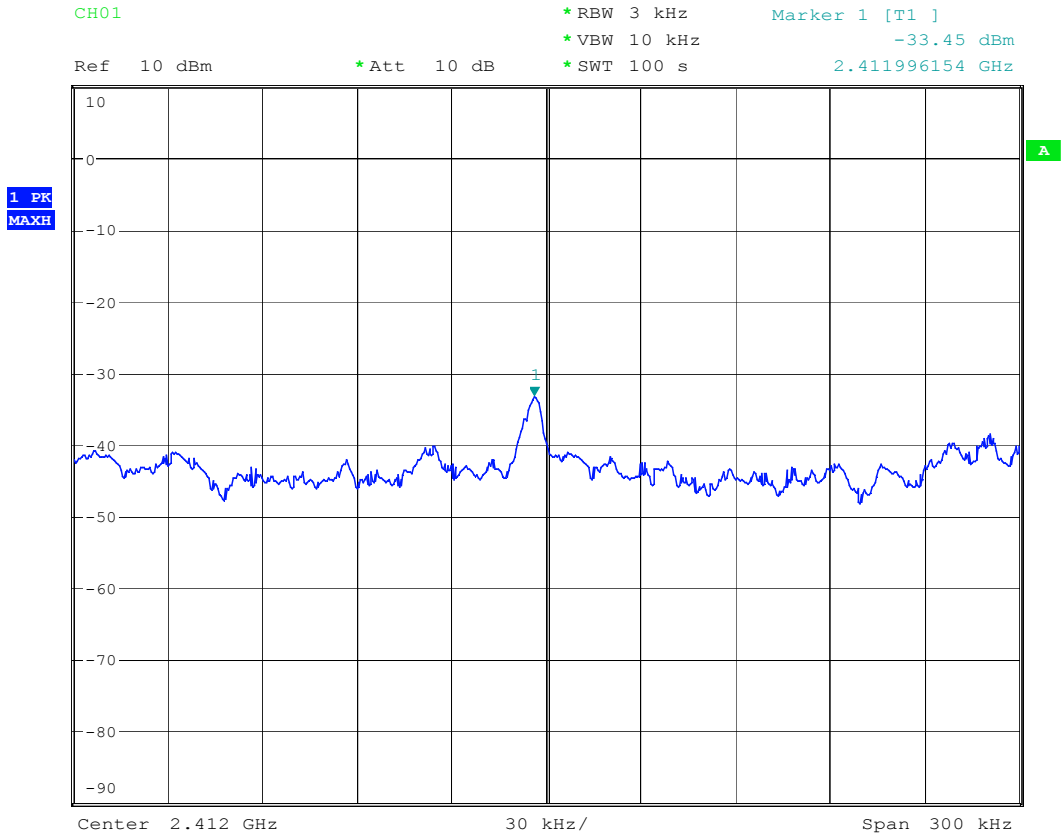

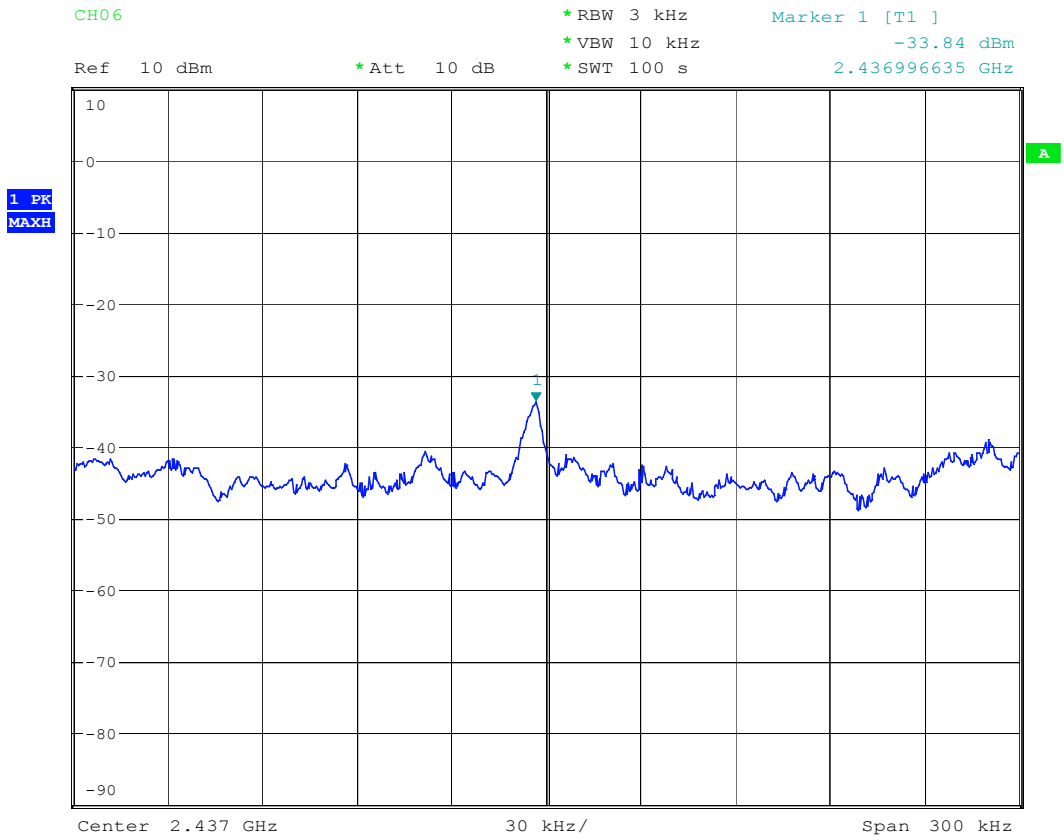

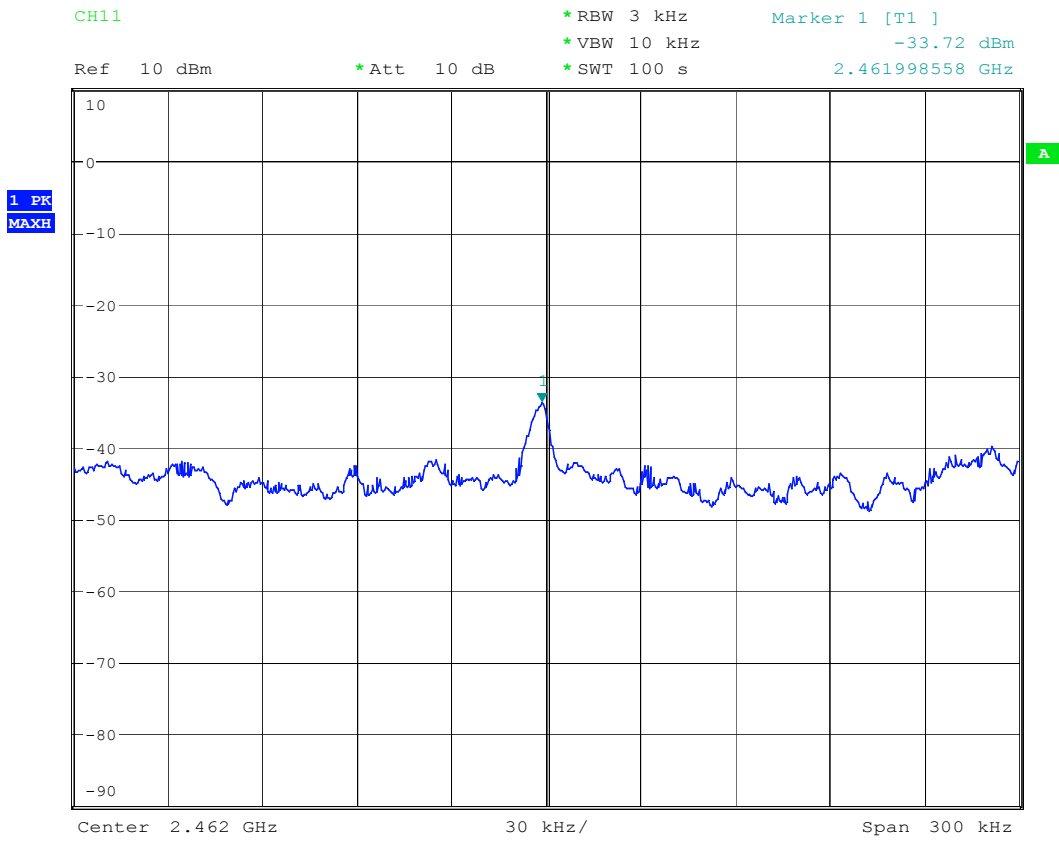

9 SPURIOUS EMISSION - RF CONDUCTED MEASUREMENT

9.1 Standard Applicable

According to 12.247 (c) , in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

9.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 2. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

9.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Next Cal. Due
Spectrum Analyzer	Rohde & Schwarz	FSU46	11/02/2006

9.4 Measurement Data

9.4.1 IEEE 802.11b

Test Date: Jan. 03, 2006Temperature: 20°CHumidity: 58 %

Channel	Frequency(MHz)	Chart
1	2412	Page 50, Page 52
6	2437	Page 53
11	2462	Page 51 Page 54

All out-of –band conducted emissions were more than 20dB below the carrier.

Note: Please refer to page 50 to page 54 for chart


9.4.2 IEEE 802.11g


Test Date: Jan. 03, 2006Temperature: 20°CHumidity: 58 %


Channel	Frequency(MHz)	Chart
1	2412	Page 55, Page 57
6	2437	Page 58
11	2462	Page 56 Page 59


All out-of –band conducted emissions were more than 20dB below the carrier.


Note: Please refer to page 55 to page 59 for chart

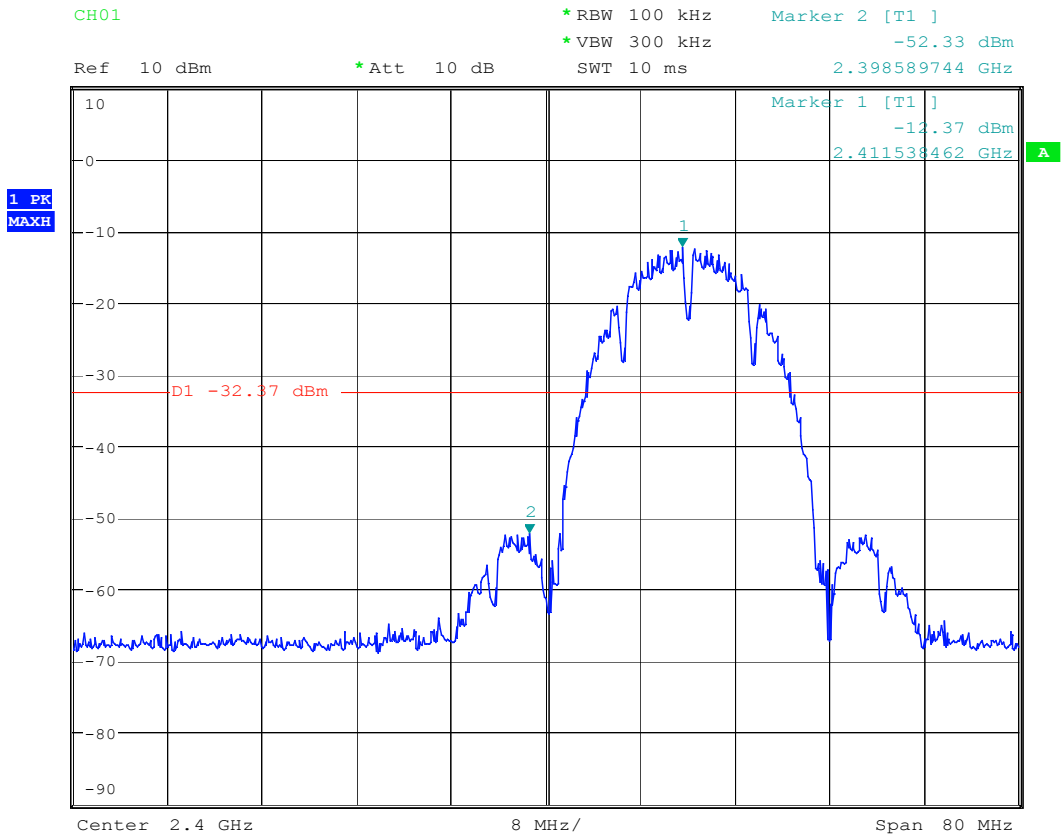


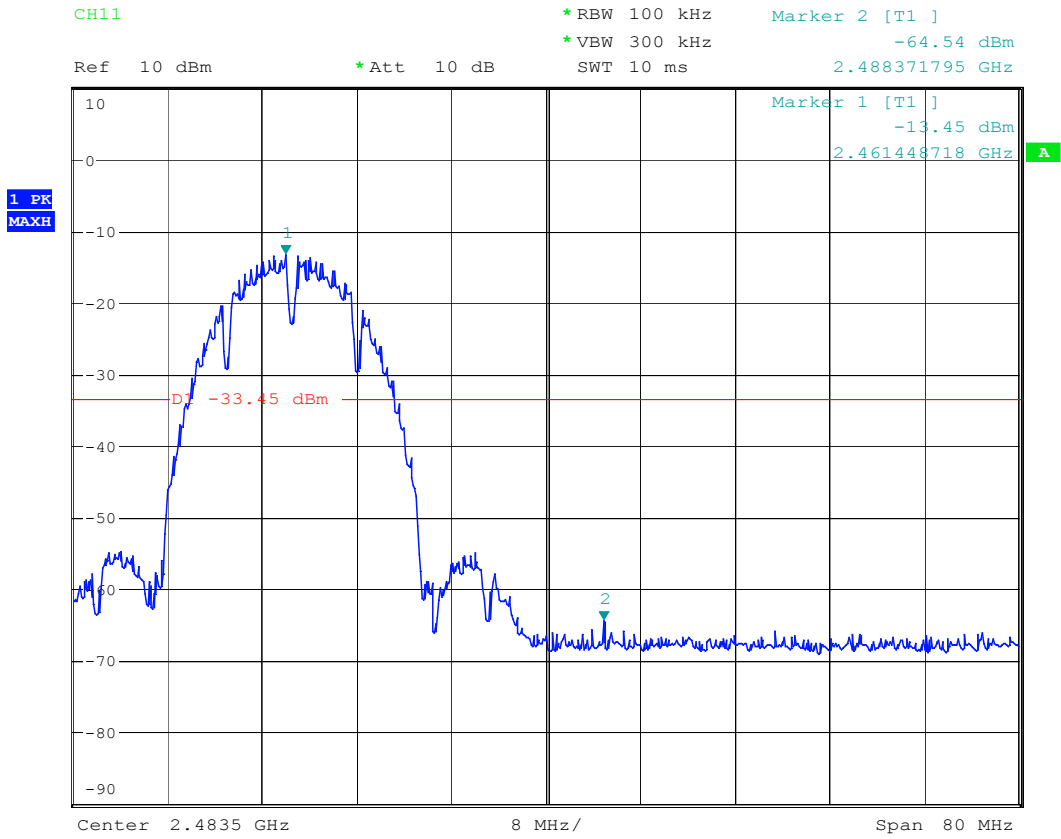

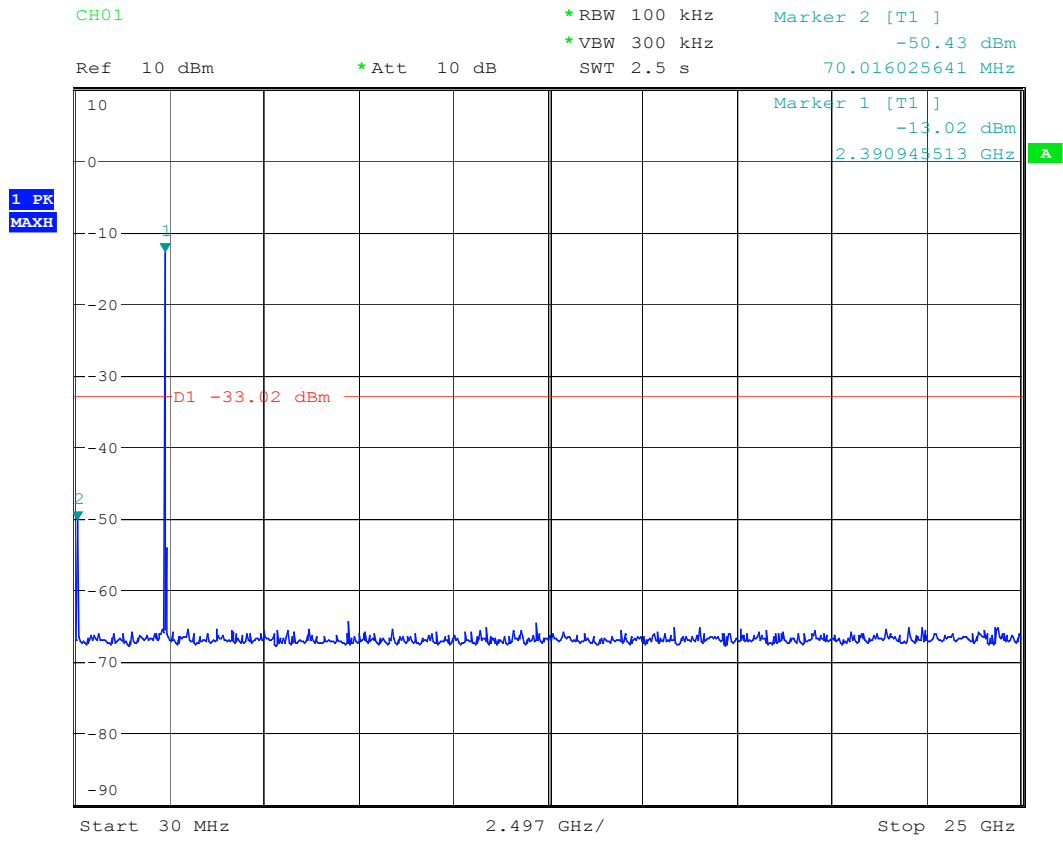


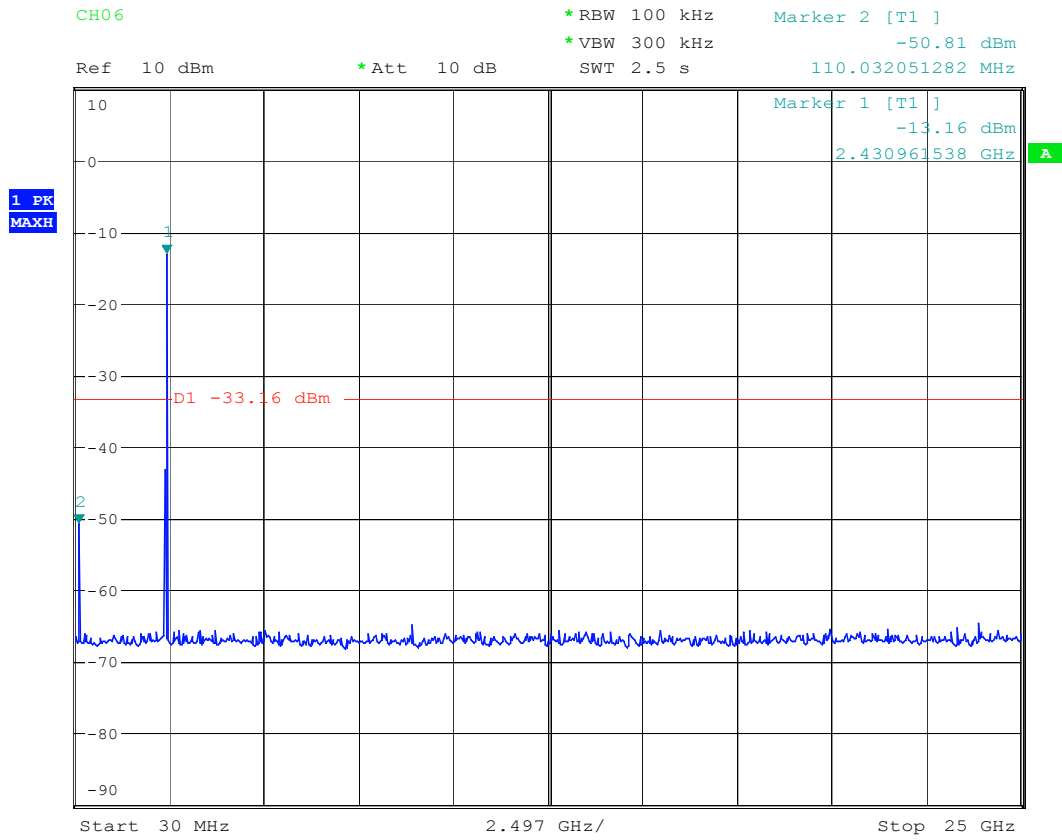


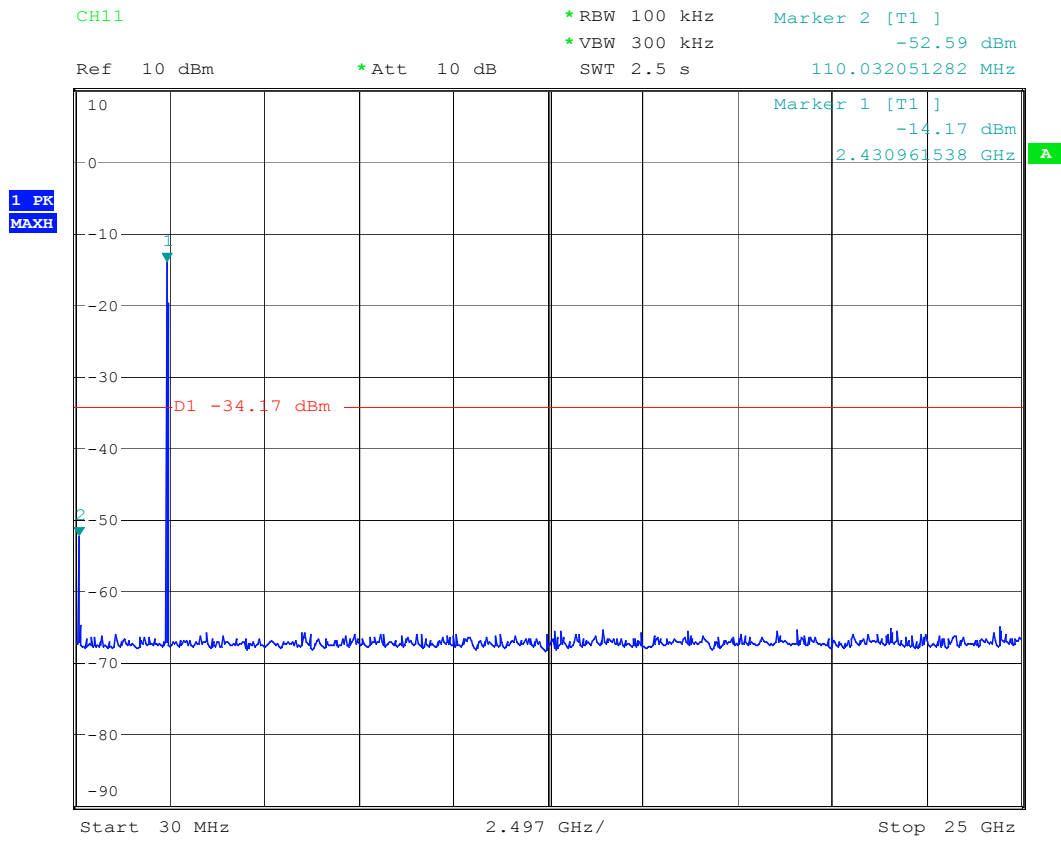


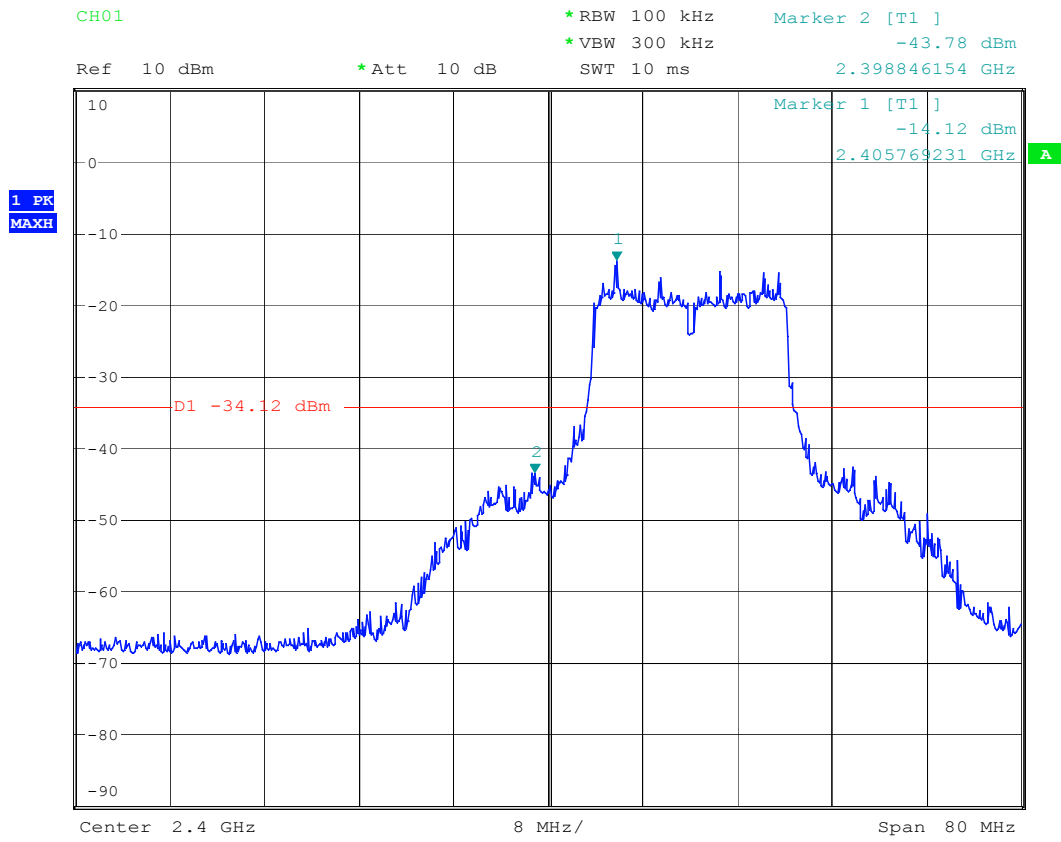



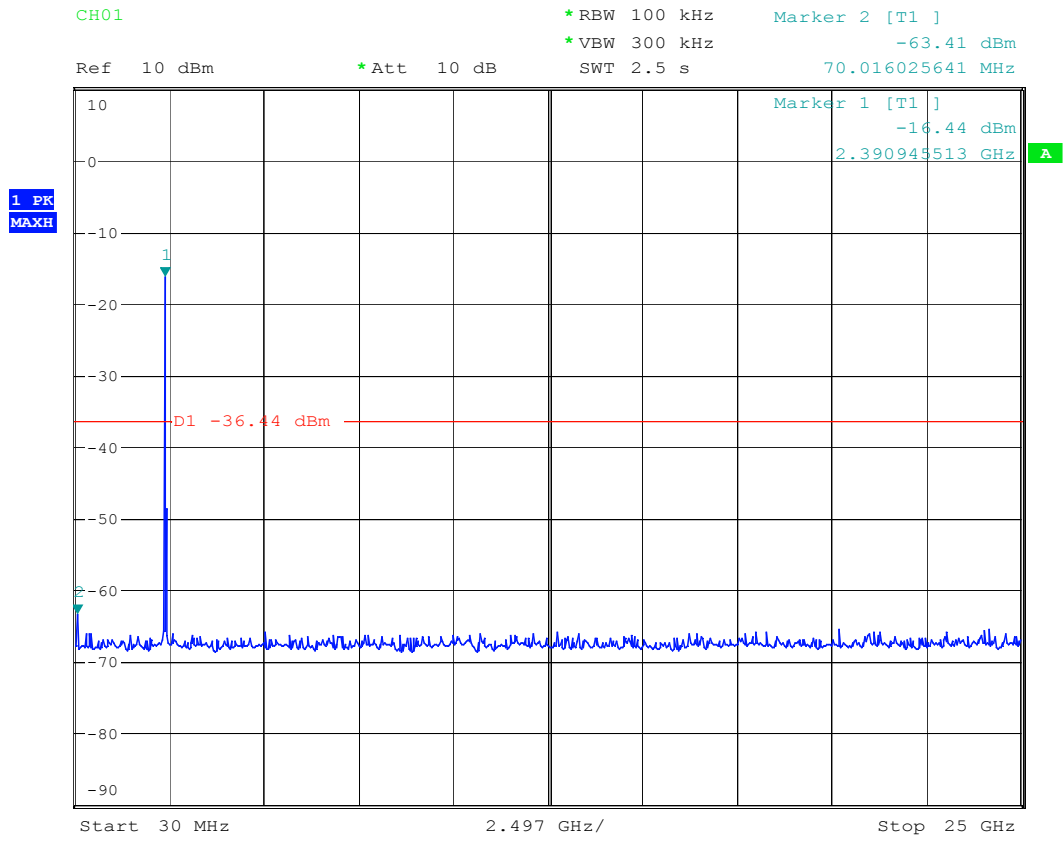

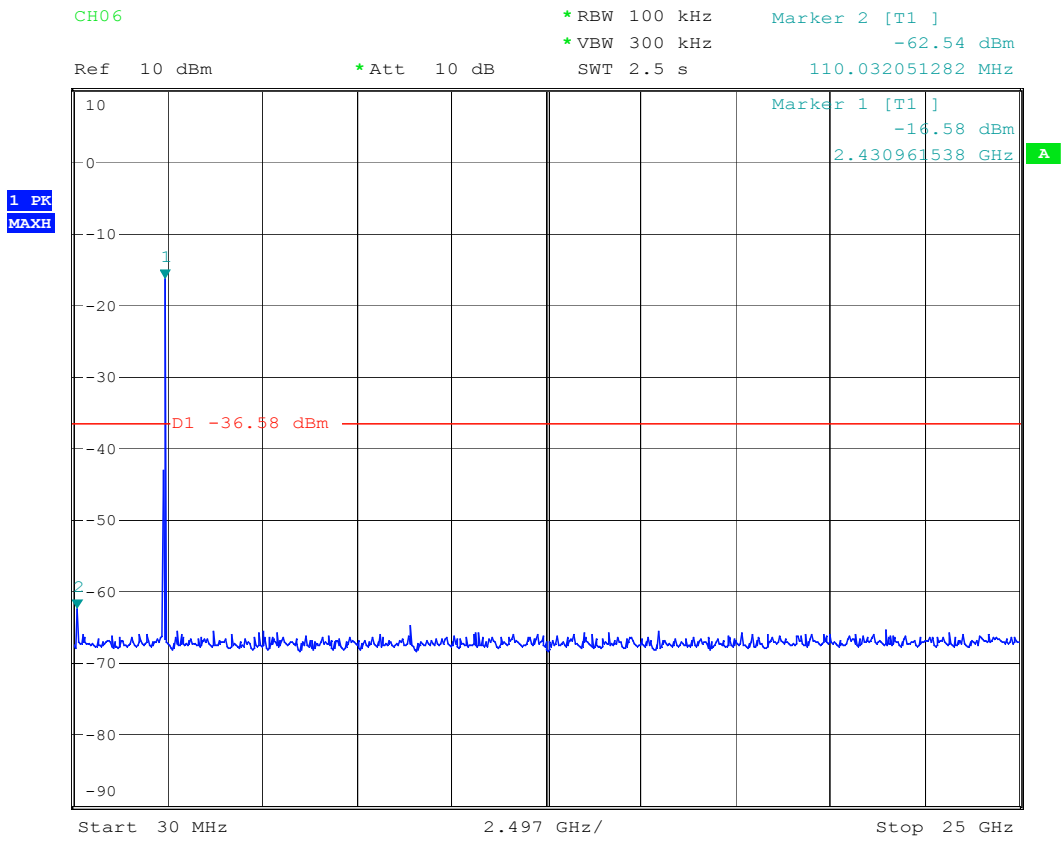

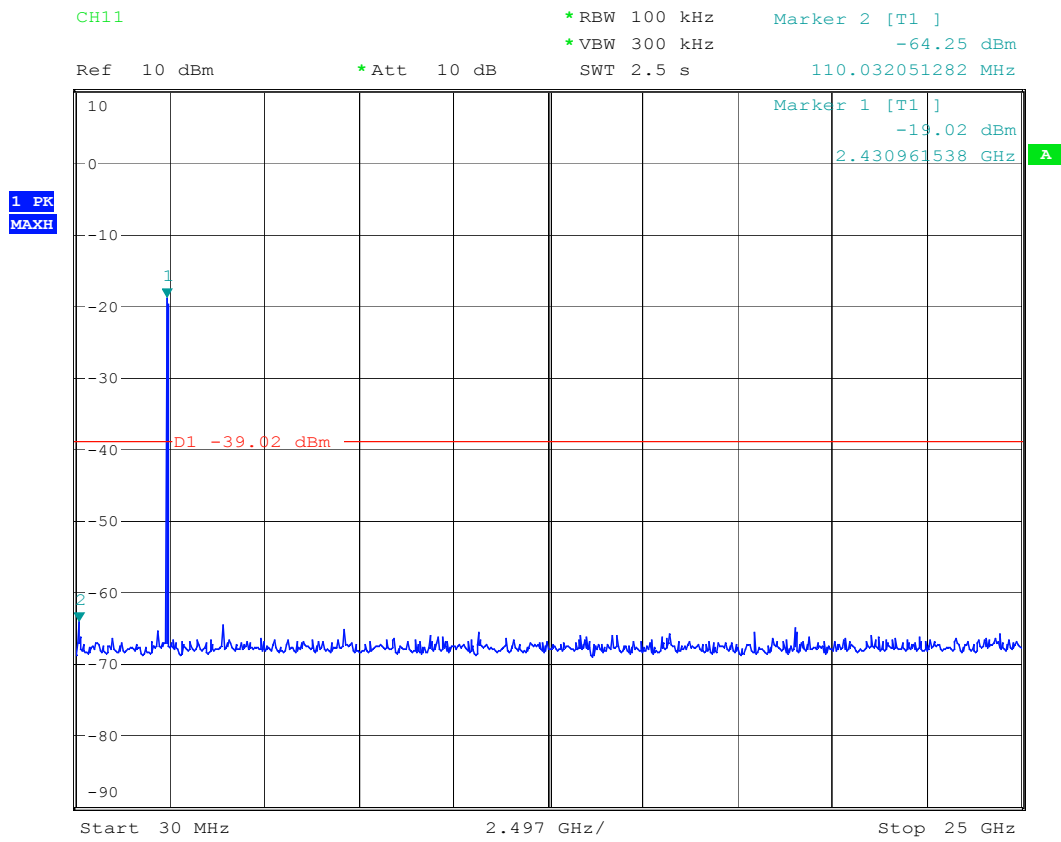

10 RADIATED EMISSION MEASUREMENT

10.1 Standard Applicable

For unintentional radiator, the radiated emission shall comply with §15.109(a).

For intentional radiators, according to §15.247 (a), operation under this provision is limited to frequency hopping and direct sequence spread spectrum, and the out band emission shall be comply with §15.247 (c)

10.2 Measurement Procedure

A.Preliminary Measurement For Portable Devices.

For portable devices, the following procedure was performed to determine the maximum emission axis of EUT (X,Y and Z axis):

1. With the receiving antenna is H polarization, rotate the EUT in turns with three orthogonal axes to determine the axis of maximum emission.
2. With the receiving antenna is V polarization, rotate the EUT in turns with three orthogonal axes to determine the axis of maximum emission.
3. Compare the results derived from above two steps. The axis of maximum emission from EUT was determined and the configuration was used to perform the final measurement.
4. The position in which the maximum noise occurred was “Y axis”. (Please see the test setup photos)

B. Final Measurement

1. Setup the configuration per figure 4 and 5 for frequencies measured below and above 1 GHz respectively.
2. For emission frequencies measured below 1 GHz, it is performed in a semi-anechoic chamber to determine the accurate frequencies of higher emissions. For emission frequencies measured above 1 GHz, a pre-scan be performed with a 1 meter measuring distance before final test.
3. For emission frequencies measured below and above 1 GHz, set the spectrum analyzer on a 120 kHz and 1 MHz resolution bandwidth respectively for each frequency measured in step 2.
4. The search antenna is to be raised and lowered over a range from 1 to 4 meters in horizontally polarized orientation. Position the highness when the highest value is indicated on spectrum analyzer, then change the orientation of EUT on test table over a range from 0 ° to 360 ° with a speed as slow as possible, and keep the azimuth that highest emission is indicated on the spectrum analyzer. Vary the antenna position again and record the highest value as a final reading. A RF test receiver is also used to confirm emissions measured.

Note : A filter was used to avoid pre-amplifier saturated when measure TX operation mode.

5. Repeat step 4 until all frequencies need to be measured were complete.
6. Repeat step 5 with search antenna in vertical polarized orientations.
7. Check the three frequencies of highest emission with varying the datarate, placement of ANT. cables associated with EUT to obtain the worse case and record the result.

Figure 4 : Frequencies measured below 1 GHz configuration


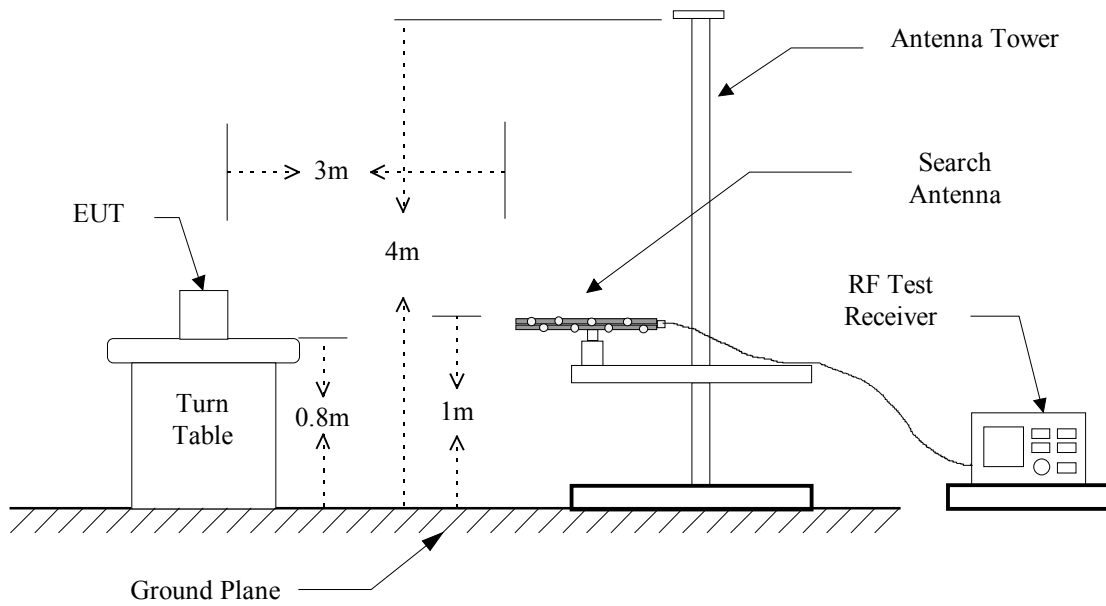


Figure 5 : Frequencies measured above 1 GHz configuration

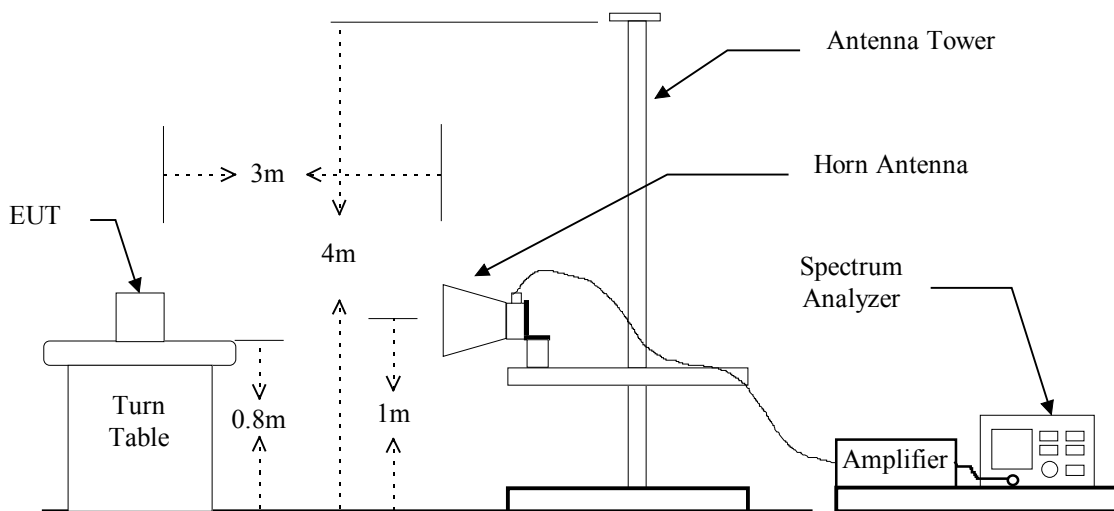

10.3 Measuring Instrument

The following instrument are used for radiated emissions measurement :

Equipment	Manufacturer	Model No.	Next Cal. Due
EMI Test Receiver	Hewlett-Packard	8546A	12/12/2006
BiLog Antenna	Schaffner	CBL 6112B	06/14/2006
Horn Antenna	EMCO	3115	06/04/2006
Horn Antenna	EMCO	3116	07/21/2006
Preamplifier	Hewlett-Packard	8449B	09/19/2006
Spectrum Analyzer	Hewlett-Packard	8564EC	09/23/2006
Spectrum Analyzer	Rohde & Schwarz	FSU46	11/02/2006

Measuring instrument setup in measured frequency band when specified detector function is used :

Frequency Band (MHz)	Instrument	Function	Resolution Bandwidth	Video Bandwidth
30 to 1000	RF Test Receiver	Quasi-Peak	120 kHz	300 kHz
	Spectrum Analyzer	Peak	120 kHz	300 kHz
Above 1000	Spectrum Analyzer	Peak	1 MHz	1 MHz
	Spectrum Analyzer	Average	1 MHz	10 Hz

10.4 Radiated Emission Data

10.4.1 Harmonic

10.4.1.1 IEEE 802.11b

Operation Mode: TXTest Date: Aug. 15, 2005Temperature: 24 °CHumidity: 54 %

a) Channel 1

Fundamental Frequency: 2412 MHz

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)	
	H		V			Peak	Ave	Peak	Ave.
	Peak	Ave	Peak	Ave					
4824.000	---	---	53.0	50.7	0.5	53.5	51.2	74.0	54.0
12060.000	---	---	---	---	5.8	---	---	74.0	54.0
14472.000	---	---	---	---	10.5	---	---	74.0	54.0
19296.000	---	---	---	---	13.3	---	---	74.0	54.0

b) Channel 6

Fundamental Frequency: 2437 MHz

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)	
	H		V			Peak	Ave	Peak	Ave.
	Peak	Ave	Peak	Ave					
4874.000	---	---	54.6	51.8	0.5	55.1	52.3	74.0	54.0
7311.000	---	---	---	---	3.7	---	---	74.0	54.0
12185.000	---	---	---	---	5.8	---	---	74.0	54.0
19496.000	---	---	---	---	13.3	---	---	74.0	54.0

c) Channel 11

Fundamental Frequency: 2462 MHz

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)	
	H		V			Peak	Ave	Peak	Ave.
	Peak	Ave	Peak	Ave					
4924.000	---	---	52.9	49.4	0.5	53.4	49.9	74.0	54.0
7386.000	---	---	---	---	3.7	---	---	74.0	54.0
12310.000	---	---	---	---	5.8	---	---	74.0	54.0
19696.000	---	---	---	---	13.3	---	---	74.0	54.0
22158.000	---	---	---	---	13.5	---	---	74.0	54.0

Note :

1. Item of margin shown in above table refer to average limit.
2. Remark “---” means that the emissions level is too low to be measured.

10.4.1.2 IEEE 802.11g

Operation Mode: TXTest Date: Aug. 15, 2005Temperature: 24 °CHumidity: 54 %

a) Channel 1

Fundamental Frequency: 2412 MHz

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)	
	H		V			Peak	Ave	Peak	Ave.
	Peak	Ave	Peak	Ave					
4824.000	---	---	---	---	0.5	---	---	74.0	54.0
12060.000	---	---	---	---	5.8	---	---	74.0	54.0
14472.000	---	---	---	---	10.5	---	---	74.0	54.0
19296.000	---	---	---	---	13.3	---	---	74.0	54.0

b) Channel 6

Fundamental Frequency: 2437 MHz

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)	
	H		V			Peak	Ave	Peak	Ave.
	Peak	Ave	Peak	Ave					
4874.000	---	---	---	---	0.5	---	---	74.0	54.0
7311.000	---	---	---	---	3.7	---	---	74.0	54.0
12185.000	---	---	---	---	5.8	---	---	74.0	54.0
19496.000	---	---	---	---	13.3	---	---	74.0	54.0

c) Channel 11

Fundamental Frequency: 2462 MHz

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)	
	H		V			Peak	Ave	Peak	Ave.
	Peak	Ave	Peak	Ave					
4924.000	---	---	53.4	49.5	0.5	53.9	50.0	74.0	54.0
7386.000	---	---	---	---	3.7	---	---	74.0	54.0
12310.000	---	---	---	---	5.8	---	---	74.0	54.0
19696.000	---	---	---	---	13.3	---	---	74.0	54.0
22158.000	---	---	---	---	13.5	---	---	74.0	54.0

Note :

1. Item of margin shown in above table refer to average limit.
2. Remark “---” means that the emissions level is too low to be measured.

10.4.2 Spurious Emission

10.4.2.1 IEEE 802.11b

10.4.2.1.1 Operation Mode: TX(CH 1)Test Date: Dec. 26, 2005Temperature: 20 °CHumidity: 55 %

a) Emission frequencies below 1 GHz

Emission Frequency (MHz)	Meter Reading (dBuV)		CORR'd Factor (dB/m)	Results (dBuV/m)		Limit (3m) (dBuV/m)	Margins (dB)	Table Degree (deg)		Ant. High (m)	
	HOR.	(dB/m)		HOR.	VERT.			HOR.	VERT.	HOR.	VERT.
30.000	16.1#	18.6#	13.1	29.2#	31.7#	40.0	-8.3	326	15	1.0	1.2
59.100	***	10.3#	13.2	***	23.5#	40.0	-16.5	***	15	***	1.4
97.900	***	17.8#	10.8	***	28.6#	43.5	-14.9	***	10	***	1.2
101.780	12.8#	***	10.8	23.6#	***	43.5	-19.9	350	***	1.0	***
225.940	14.4#	12.4#	13.7	28.1#	26.1#	46.0	-17.9	350	315	1.2	1.7
273.470	19.6#	***	15.7	35.3#	***	46.0	-10.7	15	***	1.4	***
322.940	18.8#	13.9#	17.5	36.3#	31.4#	46.0	-9.7	35	320	1.0	1.2
354.950	14.3#	***	18.1	32.4#	***	46.0	-13.6	315	***	1.4	***
388.900	***	13.4#	19.4	***	32.8#	46.0	-13.2	***	345	***	1.2

b) Emission frequencies above 1 GHz

Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result @3m (dBuV/m)	Limit @3m (dBuV/m)	Margin (dB)
Radiated emission frequencies above 1 GHz to 25 GHz were too low to be measured.						

Note:

1. Place of Measurement: Measuring site of the ETC.
2. If the data table appeared symbol of "***" means the value was too low to be measured.
3. The estimated measurement uncertainty of the result measurement is
 $\pm 4.6\text{dB}$ ($30\text{MHz} \leq f < 300\text{MHz}$).
 $\pm 4.4\text{dB}$ ($300\text{MHz} \leq f \leq 1000\text{MHz}$).

10.4.2.1.2 Operation Mode: TX(CH 6)Test Date: Dec. 26, 2005Temperature: 20 °CHumidity: 55 %

a) Emission frequencies below 1 GHz

Emission Frequency (MHz)	Meter Reading (dBuV)		CORR'd Factor (dB/m)	Results (dBuV/m)		Limit (3m) (dBuV/m)	Margins (dB)	Table Degree (deg)		Ant. High (m)	
	HOR.	(dB/m)		HOR.	VERT.			HOR.	VERT.	HOR.	VERT.
30.000	16.8#	19.7#	13.1	29.9#	32.8#	40.0	-7.3	17	343	1.7	1.2
59.100	***	14.0#	13.2	***	27.2#	40.0	-12.8	***	327	***	1.7
97.900	15.8#	17.1#	10.8	26.6#	27.9#	43.5	-15.6	28	326	1.6	1.5
175.500	10.9#	***	14.1	25.0#	***	43.5	-18.5	30	***	1.5	***
225.940	15.2#	***	13.7	28.9#	***	46.0	-17.1	323	***	1.7	***
269.590	18.7#	***	15.7	34.4#	***	46.0	-11.6	315	***	1.7	***
322.940	16.6#	17.4#	17.5	34.1#	34.9#	46.0	-11.1	345	350	1.2	1.3
388.900	***	14.5#	19.4	***	33.9#	46.0	-12.2	***	342	***	1.1
517.910	***	13.8#	22.3	***	36.1#	46.0	-9.9	***	17	***	1.0

b) Emission frequencies above 1 GHz

Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result @3m (dBuV/m)	Limit @3m (dBuV/m)	Margin (dB)
Radiated emission frequencies above 1 GHz to 25 GHz were too low to be measured.						

Note:

1. Place of Measurement: Measuring site of the ETC.
2. If the data table appeared symbol of "****" means the value was too low to be measured.
3. The estimated measurement uncertainty of the result measurement is
 $\pm 4.6\text{dB}$ ($30\text{MHz} \leq f < 300\text{MHz}$).
 $\pm 4.4\text{dB}$ ($300\text{MHz} \leq f \leq 1000\text{MHz}$).

10.4.2.1.3 Operation Mode: TX(CH 11)Test Date: Dec. 26, 2005Temperature: 20 °CHumidity: 55 %

a) Emission frequencies below 1 GHz

Emission Frequency (MHz)	Meter Reading (dBuV)		CORR'd Factor (dB/m)	Results (dBuV/m)		Limit (3m) (dBuV/m)	Margins (dB)	Table Degree (deg)		Ant. High (m)	
	HOR.	(dB/m)		HOR.	VERT.			HOR.	VERT.	HOR.	VERT.
30.000	16.0#	18.3#	13.1	29.1#	31.4#	40.0	-8.6	323	313	1.2	1.5
59.100	***	13.2#	13.2	***	26.4#	40.0	-13.6	***	317	***	1.7
97.900	***	18.0#	10.8	***	28.8#	43.5	-14.7	***	330	***	1.5
230.790	14.9#	***	13.7	28.6#	***	46.0	-17.4	330	***	1.1	***
272.500	20.0#	***	15.7	35.7#	***	46.0	-10.4	338	***	1.2	***
322.940	19.2#	18.0#	17.5	36.7#	35.5#	46.0	-9.3	343	345	1.7	1.2
354.950	12.8#	***	18.1	30.9#	***	46.0	-15.1	320	***	1.2	***
354.950	***	14.1#	18.1	***	32.2#	46.0	-13.8	***	313	***	1.0
517.910	***	14.3#	22.3	***	36.6#	46.0	-9.4	***	310	***	1.2
587.750	10.3#	***	23.6	33.9#	***	46.0	-12.1	326	***	1.0	***

b) Emission frequencies above 1 GHz

Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result @3m (dBuV/m)	Limit @3m (dBuV/m)	Margin (dB)
Radiated emission frequencies above 1 GHz to 25 GHz were too low to be measured.						

Note:

1. Place of Measurement: Measuring site of the ETC.
2. If the data table appeared symbol of "***" means the value was too low to be measured.
3. The estimated measurement uncertainty of the result measurement is
 $\pm 4.6\text{dB}$ ($30\text{MHz} \leq f < 300\text{MHz}$).
 $\pm 4.4\text{dB}$ ($300\text{MHz} \leq f \leq 1000\text{MHz}$).

10.4.2.2 IEEE 802.11g

10.4.2.2.1 Operation Mode: TX(CH 1)Test Date: Dec. 26, 2005Temperature: 20 °CHumidity: 55 %

a) Emission frequencies below 1 GHz

Emission Frequency (MHz)	Meter Reading (dBuV)		CORR'd Factor (dB/m)	Results (dBuV/m)		Limit (3m) (dBuV/m)	Margins (dB)	Table Degree (deg)		Ant. High (m)	
	HOR.	(dB/m)		HOR.	VERT.			HOR.	VERT.	HOR.	VERT.
30.000	16.3#	17.6#	13.1	29.4#	30.7#	40.0	-9.3	323	15	1.2	1.1
97.900	***	16.2#	10.8	***	27.0#	43.5	-16.5	***	18	***	1.2
114.390	11.4#	***	12.5	23.9#	***	43.5	-19.6	313	***	1.4	***
225.940	15.2#	12.2#	13.7	28.9#	25.9#	46.0	-17.1	350	327	1.5	1.5
272.500	19.1#	***	15.7	34.8#	***	46.0	-11.2	17	***	1.4	***
322.940	16.8#	14.3#	17.5	34.3#	31.8#	46.0	-11.7	39	325	1.7	1.2
388.900	11.7#	13.6#	19.4	31.1#	33.0#	46.0	-13.0	350	330	1.2	1.1
517.910	***	12.6#	22.3	***	34.9#	46.0	-11.1	***	343	***	1.7

b) Emission frequencies above 1 GHz

Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result @3m (dBuV/m)	Limit @3m (dBuV/m)	Margin (dB)
Radiated emission frequencies above 1 GHz to 25 GHz were too low to be measured.						

Note:

1. Place of Measurement: Measuring site of the ETC.
2. If the data table appeared symbol of "***" means the value was too low to be measured.
3. The estimated measurement uncertainty of the result measurement is
 $\pm 4.6\text{dB}$ ($30\text{MHz} \leq f < 300\text{MHz}$).
 $\pm 4.4\text{dB}$ ($300\text{MHz} \leq f \leq 1000\text{MHz}$).

10.4.2.2.2 Operation Mode: TX(CH 6)Test Date: Dec. 26, 2005Temperature: 20 °CHumidity: 55 %

a) Emission frequencies below 1 GHz

Emission Frequency (MHz)	Meter Reading (dBuV)		CORR'd Factor (dB/m)	Results (dBuV/m)		Limit (3m) (dBuV/m)	Margins (dB)	Table Degree (deg)		Ant. High (m)	
	HOR.	(dB/m)		HOR.	VERT.			HOR.	VERT.	HOR.	VERT.
30.000	16.4#	18.7#	13.1	29.5#	31.8#	40.0	-8.2	313	328	1.1	1.2
97.900	***	17.9#	10.8	***	28.7#	43.5	-14.9	***	313	***	1.7
101.780	13.1#	***	10.8	23.9#	***	43.5	-19.6	328	***	1.2	***
225.940	14.8#	***	13.7	28.5#	***	46.0	-17.5	330	***	1.5	***
272.500	18.6#	***	15.7	34.3#	***	46.0	-11.7	27	***	1.7	***
322.940	20.7#	15.4#	17.5	38.2#	32.9#	46.0	-7.8	42	328	1.2	1.5
354.950	13.9#	13.4#	18.1	32.0#	31.5#	46.0	-14.0	313	335	1.5	1.2
451.950	***	12.6#	20.7	***	33.3#	46.0	-12.7	***	17	***	1.0
517.910	***	13.0#	22.3	***	35.3#	46.0	-10.7	***	23	***	1.1

b) Emission frequencies above 1 GHz

Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result @3m (dBuV/m)	Limit @3m (dBuV/m)	Margin (dB)
Radiated emission frequencies above 1 GHz to 25 GHz were too low to be measured.						

Note:

1. Place of Measurement: Measuring site of the ETC.
2. If the data table appeared symbol of "****" means the value was too low to be measured.
3. The estimated measurement uncertainty of the result measurement is
 $\pm 4.6\text{dB}$ ($30\text{MHz} \leq f < 300\text{MHz}$).
 $\pm 4.4\text{dB}$ ($300\text{MHz} \leq f \leq 1000\text{MHz}$).

10.4.2.2.3 Operation Mode: TX(CH 11)Test Date: Dec. 26, 2005Temperature: 20 °CHumidity: 55 %

a) Emission frequencies below 1 GHz

Emission Frequency (MHz)	Meter Reading (dBuV)		CORR'd Factor (dB/m)	Results (dBuV/m)		Limit (3m) (dBuV/m)	Margins (dB)	Table Degree (deg)		Ant. High (m)	
	HOR.	(dB/m)		HOR.	VERT.			HOR.	VERT.	HOR.	VERT.
30.000	16.3#	18.9#	13.1	29.4#	32.0#	40.0	-8.0	355	350	1.1	1.2
101.780	***	17.3#	10.8	***	28.1#	43.5	-15.4	***	339	***	1.3
109.540	11.5#	***	12.5	24.0#	***	43.5	-19.5	10	***	1.5	***
225.940	14.0#	13.4#	13.7	27.7#	27.1#	46.0	-18.3	313	348	1.2	1.5
272.500	18.2#	***	15.7	33.9#	***	46.0	-12.1	320	***	1.1	***
322.940	16.6#	16.6#	17.5	34.1#	34.1#	46.0	-11.9	17	15	1.2	1.2
354.950	13.5#	15.2#	18.1	31.6#	33.3#	46.0	-12.7	45	17	1.5	1.0
517.910	***	13.1#	22.3	***	35.4#	46.0	-10.6	***	313	***	1.2

b) Emission frequencies above 1 GHz

Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result @3m (dBuV/m)	Limit @3m (dBuV/m)	Margin (dB)
Radiated emission frequencies above 1 GHz to 25 GHz were too low to be measured.						

Note:

1. Place of Measurement: Measuring site of the ETC.
2. If the data table appeared symbol of "****" means the value was too low to be measured.
3. The estimated measurement uncertainty of the result measurement is
 $\pm 4.6\text{dB}$ ($30\text{MHz} \leq f < 300\text{MHz}$).
 $\pm 4.4\text{dB}$ ($300\text{MHz} \leq f \leq 1000\text{MHz}$).

10.4.2.3 IEEE 802.11b

Test Date: Dec. 26, 2005Temperature: 20 °CHumidity: 55 %Operation Mode: TX

Operation Channel	Test Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)	
		H		V			Peak	Ave	Peak	Ave.
1	2387.474	34.8	19.1	34.3	19.0	30.3	65.1	49.4	74.0	54.0
11	2488.628	35.1	19.1	34.9	19.1	30.3	65.4	49.4	74.0	54.0

10.4.2.4 IEEE 802.11g

Test Date: Dec. 26, 2005Temperature: 20 °CHumidity: 55 %Operation Mode: TX

Operation Channel	Test Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)	
		H		V			Peak	Ave	Peak	Ave.
1	2387.474	34.8	19.1	34.3	19.0	30.3	65.1	49.4	74.0	54.0
11	2488.628	35.1	19.1	34.9	19.1	30.3	65.4	49.4	74.0	54.0

Note :

1. Remark “---” means that the emissions level is too low to be measured.
2. The result is the highest value of radiated emission from restrict band of 2310 ~ 2390 MHz and 2483.5 ~ 2500 MHz.

10.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor, High Pass Filter Loss(if used) and Cable Loss, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$

where

$$\text{Corrected Factor} = \text{Antenna Factor} + \text{Cable Loss} + \text{High Pass Filter Loss} - \text{Amplifier Gain}$$