

# TEST REPORT

of

## FCC Part 15 Subpart C

New Application;  Class I PC;  Class II PC

**Product :** Kamai  
**Brand:** entone  
**Model:** 500  
**Model Difference:** N/A  
**FCC ID:** S4A39-0007-00-00  
**FCC Rule Part:** §15.247, Cat: DTS  
**Applicant:** Entone Technologies (HK) Limited  
**Address:** Level 28, Saxon Tower, 7 Cheung Shun Street,  
Lai Chi Kok, Hong Kong

### Test Performed by:

#### International Standards Laboratory

<Lung-Tan LAB>

\*Site Registration No.

BSMI: SL2-IN-E-0013; MRA TW1036; TAF: 0997; IC: IC4067B-3;

\*Address:

No. 120, Lane 180, San Ho Tsuen, Hsin Ho Rd.

Lung-Tan Hsiang, Tao Yuan County 325, Taiwan

\*Tel : 886-3-407-1718; Fax: 886-3-407-1738

Report No.: **ISL-12LR111FC**

Issue Date : **2012/08/08**

Test results given in this report apply only to the specific sample(s) tested and are traceable to national or international standard through calibration of the equipment and evaluating measurement uncertainty herein.

This report **MUST** not be used to claim product endorsement by TAF, NVLAP or any agency of the Government.

This test report shall not be reproduced except in full, without the written approval of International Standards Laboratory.



## VERIFICATION OF COMPLIANCE

**Applicant:** Entone Technologies (HK) Limited  
**Product Description:** Kamai  
**Brand Name:** entone  
**Model No.:** 500  
**Model Difference:** N/A  
**FCC ID:** S4A39-0007-00-00  
**Date of test:** 2012/07/06 ~ 2012/07/10  
**Date of EUT Received:** 2012/07/06

### We hereby certify that:

All the tests in this report have been performed and recorded in accordance with the standards described above and performed by an independent electromagnetic compatibility consultant, International Standards Laboratory.

The test results contained in this report accurately represent the measurements of the characteristics and the energy generated by sample equipment under test at the time of the test. The sample equipment tested as described in this report is in compliance with the limits of above standards.

**Test By:**

*Dion Chen*

**Date:**

2012/08/08

*Dion Chang / Engineer*

**Prepared By:**

*Eva Kao*

**Date:**

2012/08/08

*Eva Kao / Technical Supervisor*

**Approved By:**

*Vincent Su*

**Date:**

2012/08/08

*Vincent Su / Technical Manager*

## Version

Version No.	Date	Description
00	2012/08/08	Initial creation of document

## Table of Contents

<b>1</b>	<b>GENERAL INFORMATION</b> .....	<b>6</b>
1.1	Related Submittal(s) / Grant (s) .....	7
1.2	Test Methodology .....	7
1.3	Test Facility .....	7
1.4	Special Accessories .....	7
1.5	Equipment Modifications .....	7
<b>2</b>	<b>SYSTEM TEST CONFIGURATION</b> .....	<b>8</b>
2.1	EUT Configuration .....	8
2.2	EUT Exercise .....	8
2.3	Test Procedure .....	8
2.4	Configuration of Tested System .....	9
<b>3</b>	<b>SUMMARY OF TEST RESULTS</b> .....	<b>10</b>
<b>4</b>	<b>DESCRIPTION OF TEST MODES</b> .....	<b>10</b>
<b>5</b>	<b>CONDUCTED EMISSION TEST</b> .....	<b>11</b>
5.1	Standard Applicable: .....	11
5.2	Measurement Equipment Used: .....	11
5.3	EUT Setup: .....	11
5.4	Measurement Procedure: .....	12
5.5	Measurement Result: .....	12
<b>6</b>	<b>PEAK /AVERAGE UTPUT POWER MEASUREMENT</b> .....	<b>15</b>
6.1	Standard Applicable: .....	15
6.2	Measurement Equipment Used: .....	16
6.3	Test Set-up: .....	16
6.4	Measurement Procedure: .....	16
6.5	Measurement Result: .....	18
<b>7</b>	<b>6dB Bandwidth(EBW)</b> .....	<b>19</b>
7.1	Standard Applicable: .....	19
7.2	Measurement Equipment Used: .....	19
7.3	Test Set-up: .....	19
7.4	Measurement Procedure: .....	19
7.5	Measurement Result: .....	20
<b>8</b>	<b>100KHz BANDWIDTH OF BAND EDGES MEASUREMENT</b> .....	<b>29</b>
8.1	Standard Applicable: .....	29
8.2	Measurement Equipment Used: .....	29
8.3	Test SET-UP: .....	30
8.4	Measurement Procedure: .....	31
8.5	Field Strength Calculation: .....	31
8.6	Measurement Result: .....	31
<b>9</b>	<b>SPURIOUS RADIATED EMISSION TEST</b> .....	<b>40</b>
9.1	Standard Applicable .....	40
9.2	Measurement Equipment Used: .....	40
9.3	Test SET-UP: .....	40
9.4	Measurement Procedure: .....	40
9.5	Field Strength Calculation .....	41
9.6	Measurement Result: .....	41

<b>10</b>	<b>Peak Power Spectral Density .....</b>	<b>78</b>
10.1	Standard Applicable: .....	78
10.2	Measurement Equipment Used: .....	78
10.3	Test Set-up: .....	78
10.4	Measurement Procedure: .....	78
10.5	Measurement Result: .....	79
<b>11</b>	<b>ANTENNA REQUIREMENT .....</b>	<b>88</b>
11.1	Standard Applicable: .....	88
11.2	Antenna Connected Construction: .....	88
<b>12</b>	<b>Maximum Permissible Exposure (MPE) .....</b>	<b>89</b>
12.1	Standard Applicable .....	89
12.2	Maximum Permissible Exposure (MPE) Evaluation .....	90

## 1 GENERAL INFORMATION

### General:

Product Name	Kamai
Brand Name	entone
Model Name	500
Model Difference	N/A
Power Supply	12Vdc by AC Adapter
	Model No.: WA-12M12FU

### WLAN:

Frequency Range:	802.11b/g/n HT20: 2412 – 2462MHz 802.11n HT40: 2422 – 2452MHz
Channel number:	802.11b/g/n HT20: 11 channels 802.11n HT40: 7 channels
Transmit Power:	802.11b: 20.12dBm 802.11g: 24.15dBm 802.11n HT20 : 23.55dBm 802.11n HT40 : 23.69dBm
Modulation Technology	11b/g: DSSS, OFDM 11n: OFDM
Modulation type:	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
Transition Rate:	802.11 b: 1/2/5.5/11 Mbps 802.11 g: 6/9/12/18/24/36/48/54 Mbps 802.11 n HT20MHz: 6.5 – 65Mbps 802.11 n HT40MHz: 13.5 – 135Mbps
Antenna Designation:	Printed Antenna,5dBi.

The EUT is compliance with IEEE 802.11 b/g/n Standard.

**Remark:** The above DUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

### 1.1 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID: S4A39-0007-00-00** filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules. The composite system (digital device) is compliance with Subpart B is authorized under a DoC procedure.

### 1.2 Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 (2003). Radiated testing was performed at an antenna to EUT distance 3 meters.

KDB Document:

558074 D01 DTS Meas Guidance v01

### 1.3 Test Facility

The measurement facilities used to collect the 3m Radiated Emission and AC power line conducted data are located on the address of **International Standards Laboratory** <Lung-Tan LAB> No. 120, Lane 180, San Ho Tsuen, Hsin Ho Rd., Lung-Tan Hsiang, Tao Yuan County 325, Taiwan which are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2003. FCC Registration Number is: TW1036, Canada Registration Number: 4067B-3.

### 1.4 Special Accessories

Not available for this EUT intended for grant.

### 1.5 Equipment Modifications

Not available for this EUT intended for grant.

## **2 SYSTEM TEST CONFIGURATION**

### **2.1 EUT Configuration**

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

### **2.2 EUT Exercise**

The EUT (Transmitter) was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements.

### **2.3 Test Procedure**

#### **2.3.1 Conducted Emissions**

The EUT is a placed on as turn table which is 0.8 m above ground plane. According to the requirements in Section 7 and 13 of ANSI C63.4-2003. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and Average detector mode.

#### **2.3.2 Radiated Emissions**

The EUT is a placed on as turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter(EUT) was rotated through three orthogonal axes according to the requirements in Section 8 and 13 of ANSI C63.4-2003.



## 2.4 Configuration of Tested System

Fig. 2-1 Configuration

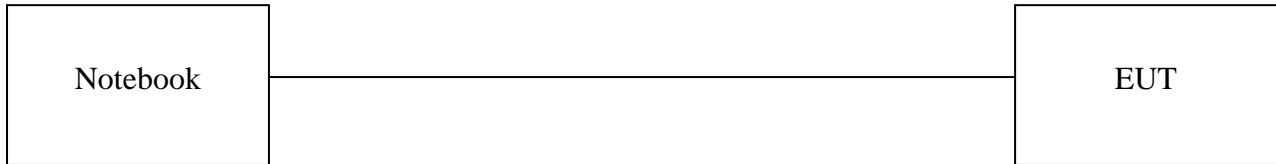


Table 1-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/ Type No.	Series No.	Data Cable	Power Cord
1	Notebook	lenovo	TP00018A	R9-KD8WD 11/12	Shield	Non-shield

### 3 SUMMARY OF TEST RESULTS

FCC Rules	Description Of Test	Result
§15.207(a)	AC Power Line Conducted Emission	Compliant
§15.247(b) (3),(4)	Peak Output Power	Compliant
§15.247(a)(2)	6dB Bandwidth	Compliant
§15.247(d)	100 KHz Bandwidth Of Frequency Band Edges	Compliant
§15.247(d)	Spurious Emission	Compliant
§15.247(e)	Peak Power Density	Compliant
§15.203	Antenna Requirement	Compliant

### 4 DESCRIPTION OF TEST MODES

The EUT has been tested under engineering operating condition.

Test program used to control the EUT for staying in continuous transmitting mode is programmed.

802.11 b mode: Channel low (2412MHz) 、 mid (2437MHz) and high (2462MHz) with 1Mbps lowest data rate are chosen for full testing.

802.11 g mode: Channel low (2412MHz) 、 mid (2437MHz) and high (2462MHz) with 6Mbps lowest data rate are chosen for full testing.

802.11 n \_20MHz: Channel low (2412MHz) 、 mid (2437MHz) and high (2462MHz) with 6.5Mbps lowest data rate are chosen for full testing.

802.11 n\_40MHz: Lowest (2422MHz), Mid (2437MHz) and Highest (2452MHz) with 13.5Mbps lowest data rate are chosen for full testing.

## 5 CONDUCTED EMISSION TEST

### 5.1 Standard Applicable:

According to §15.207, frequency range within 150KHz to 30MHz shall not exceed the Limit table as below.

Frequency range MHz	Limits dB(uV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Note

- 1.The lower limit shall apply at the transition frequencies
- 2.The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

### 5.2 Measurement Equipment Used:

Conducted Emission Test Site					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Conduction 03 -1 Cable	WOKEN	CFD 300-NL	Conduction 0-1	06/27/2012	06/27/2013
EMI Receiver 12	ROHDE & SCHWARZ	ESCI	100804	07/12/2012	07/12/2013
LISN 07	FCC Inc.	FCC-LISN-50-100-4 -02	07040	07/13/2012	07/13/2013
LISN 08	FCC	FCC-LISN50-25-2-0 1	07039	07/13/2012	07/13/2013

### 5.3 EUT Setup:

1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.4-2003.
2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
3. The LISN was connected with 120Vac/60Hz power source.

#### **5.4 Measurement Procedure:**

1. The EUT was placed on a table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

#### **5.5 Measurement Result:**

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Note: Refer to next page for measurement data and plots.

### AC POWER LINE CONDUCTED EMISSION TEST DATA

Operation Mode:	Operation Mode	Test Date:	2012/07/10
Test By:	Dino		




Address: No. 120, Lane 180, San Ho Tsuen, Hsin Ho Road, Lung-Tan Hsiang,  
Tao Yuan Conty, Taiwan R.O.C.  
Tel: 03-4071718

#### Conducted Emission Measurement

operator: Lake Cheng  
Temperature: 26 °C  
Humidity: 54 %

Date: 2012/7/10

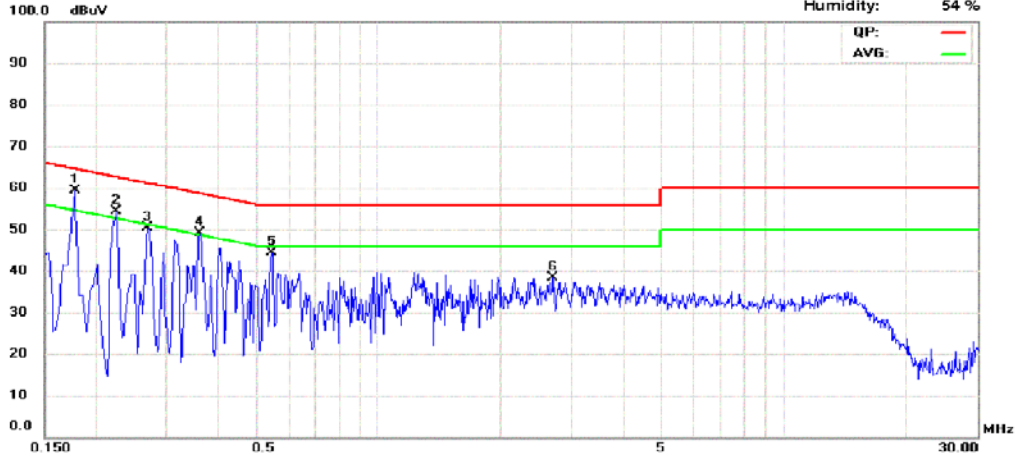

Site: Conduction 02

Phase: L1

Limit: CISPR22 Class B Conduction

No.	Frequency MHz	LISN Loss dB	Cable Loss dB	QP Correct. dBuV	QP Limit dBuV	QP Margin dB	AVG Correct. dBuV	AVG Limit dBuV	AVG Margin dB	Note
1	0.1780	9.64	0.02	58.30	64.58	-6.28	44.31	54.58	-10.27	
2	0.2260	9.64	0.03	53.15	62.60	-9.45	40.75	52.60	-11.85	
3	0.2700	9.64	0.03	48.39	61.12	-12.73	37.20	51.12	-13.92	
4	0.3620	9.63	0.03	46.63	58.68	-12.05	41.98	48.68	-6.70	
5	0.5460	9.62	0.04	40.42	56.00	-15.58	34.12	46.00	-11.88	
6	2.6940	9.62	0.09	32.65	56.00	-23.35	24.69	46.00	-21.31	



Address: No. 120, Lane 180, San Ho Tsuen, Hsin Ho Road, Lung-Tan Hsiang,  
 Tao Yuan Conty, Taiwan R.O.C.  
 Tel: 03-4071718


**Conducted Emission Measurement**

operator: Lake Cheng

Date: 2012/7/10

Temperature: 26 °C

Humidity: 54 %

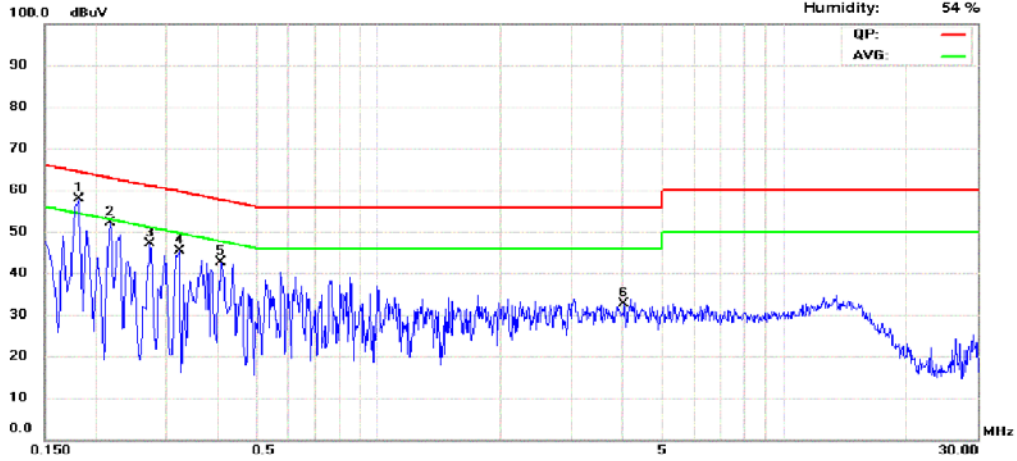

Site: Conduction 02

Phase: *N*

Limit: CISPR22 Class B Conduction

No.	Frequency MHz	LISN Loss dB	Cable Loss dB	QP Correct. dBuV	QP Limit dBuV	QP Margin dB	AVG Correct. dBuV	AVG Limit dBuV	AVG Margin dB	Note
1	0.1820	9.55	0.02	57.44	64.39	-6.95	43.15	54.39	-11.24	
2	0.2180	9.58	0.02	48.38	62.89	-14.51	22.06	52.89	-30.83	
3	0.2740	9.58	0.03	47.09	61.00	-13.91	33.41	51.00	-17.59	
4	0.3220	9.59	0.03	44.41	59.66	-15.25	29.75	49.66	-19.91	
5	0.4100	9.59	0.04	43.00	57.65	-14.65	28.80	47.65	-18.85	
6	4.0340	9.63	0.12	27.19	56.00	-28.81	19.30	46.00	-26.70	

## 6 PEAK /AVERAGE UTPUT POWER MEASUREMENT

### 6.1 Standard Applicable:

According to §15.247(b)(3),(4)

(b)

(3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(c) Operation with directional antenna gains greater than 6 dBi.

(1) Fixed point-to-point operation:


(i) Systems operating in the 2400-2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

(ii) Systems operating in the 5725-5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted output power.

## 6.2 Measurement Equipment Used:

Conducted Emission Test Site					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum analyzer (40GHz)	Agilent	N9030A	MY51360021	03/11/2012	03/10/2013
Power Meter 05	Anritsu	ML2495A	1116010	04/17/2012	04/16/2013
Power Sensor 05	Anritsu	MA2411B	34NKF50	04/16/2012	04/15/2013
Temperature Chamber	KSON	THS-B4H100	2287	03/03/2012	03/02/2013
DC Power supply	ABM	51850	N/A	06/17/2012	06/16/2013
AC Power supply	EXTECH	CFC105W	NA	12/19/2011	12/18/2012
Splitter	MCLI	PS4-199	12465	07/18/2012	07/17/2013

## 6.3 Test Set-up:

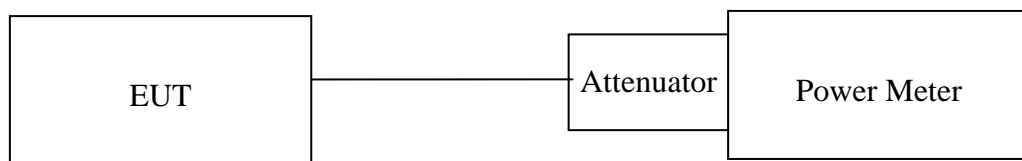

## 6.4 Measurement Procedure:

Refer to section 5.2.1.2 Measurement Procedure PK2:of KDB Document: 558074 D01 DTS Meas Guidance v01

1. This procedure provides an integrated measurement alternative when the maximum available  $RBW < EBW$ .
2. Set the  $RBW = 1$  MHz.
3. Set the  $VBW = 3$  MHz.
4. Set the span to a value that is 5-30 % greater than the  $EBW$ .
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the spectrum analyzer's integrated band power measurement function with band limits set equal to the  $EBW$  band edges (for some analyzers, this may require a manual override to ensure use of peak detector). If the spectrum analyzer does not have a band power function, sum the spectrum levels (in linear power units) at 1 MHz intervals extending across the  $EBW$  of the spectrum.



**Refer to section 5.2.2.2 Measurement Procedure AVG2 (trace averaging over the EBW):  
of KDB Document: 558074 D01 DTS Meas Guidance v01**

1. Set the analyzer span to 5-30% greater than the EBW.
2. Set the RBW = 1 MHz.
3. Set the VBW  $\geq$  3 MHz.
4. Ensure that the number of measurement points in the sweep  $\geq$  2 x (span/RBW).
5. Sweep time = auto couple.
6. Detector = power averaging (RMS) or sample.
7. Employ trace averaging in power averaging (RMS) mode over a minimum of 100 traces.
8. Use the spectrum analyzer's integrated band power measurement function with band limits set equal to the EBW band edges to determine the maximum conducted output power of the EUT over the EBW. If the analyzer does not have a band power function, sum the spectral levels (in linear power units) at 1 MHz intervals extending across the entire EBW.

**6.5 Measurement Result:**

802.11b

Cable loss = 0		Output Power		Limit (dBm)
CH	Frequency (MHz)	Detector		
		PK (dBm)	AV (dBm)	
1	2412	20.12	17.5	30
6	2437	18.62	16.62	
11	2462	17.66	15.19	

802.11g

Cable loss = 0		Output Power		Limit (dBm)
CH	Frequency (MHz)	Detector		
		PK (dBm)	AV (dBm)	
1	2412	24.15	13.8	30
6	2437	23.05	12.36	
11	2462	21.62	10.94	

802.11N 20MHz(2.4G)

Cable loss = 0		Output Power		Limit (dBm)
CH	Frequency (MHz)	Detector		
		PK (dBm)	AV (dBm)	
1	2412	23.55	13.81	30
6	2437	22.07	12.13	
11	2462	20.51	10.68	

802.11N 40MHz(2.4G)

Cable loss = 0		Output Power		Limit (dBm)
CH	Frequency (MHz)	Detector		
		PK (dBm)	AV (dBm)	
3	2422	23.69	13.86	30
6	2437	22.63	12.83	
9	2452	21.35	12.04	

## 7 6dB Bandwidth(EBW)

### 7.1 Standard Applicable:

According to §15.247(a)(2), Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500kHz.

### 7.2 Measurement Equipment Used:

Refer to section 6.2 for details.

### 7.3 Test Set-up:

Refer to section 6.3 for details.

### 7.4 Measurement Procedure:

**Refer to section 5.1.1 EBW Measurement Procedure of KDB Document: 558074 D01 DTS Meas Guidance v01**

1. Set resolution bandwidth (RBW) = 1-5 % of the emission bandwidth (EBW).  
(802.11bgnHT20MHz =200KHz),(802.11Nht40=400KHz)
2. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission. Compare the resultant bandwidth with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is 1-5 %.

**7.5 Measurement Result:**

802.11b

Frequency (MHz)	Bandwidth (MHz)	Bandwidth (KHz)	Result
2412	11.7	> 500	PASS
2437	11.25	> 500	PASS
2462	11.26	> 500	PASS

802.11g

Frequency (MHz)	Bandwidth (MHz)	Bandwidth (KHz)	Result
2412	16.5	> 500	PASS
2437	16.49	> 500	PASS
2462	16.5	> 500	PASS

802.11n HT20

Frequency (MHz)	Bandwidth (MHz)	Bandwidth (KHz)	Result
2412	17.64	> 500	PASS
2437	17.65	> 500	PASS
2462	17.67	> 500	PASS


802.11n HT40

Frequency (MHz)	Bandwidth (MHz)	Bandwidth (KHz)	Result
2422	36.41	> 500	PASS
2437	36.42	> 500	PASS
2452	36.42	> 500	PASS


Note: Refer to next page for plots.

802.11b


6dB Band Width Test Data CH-Low

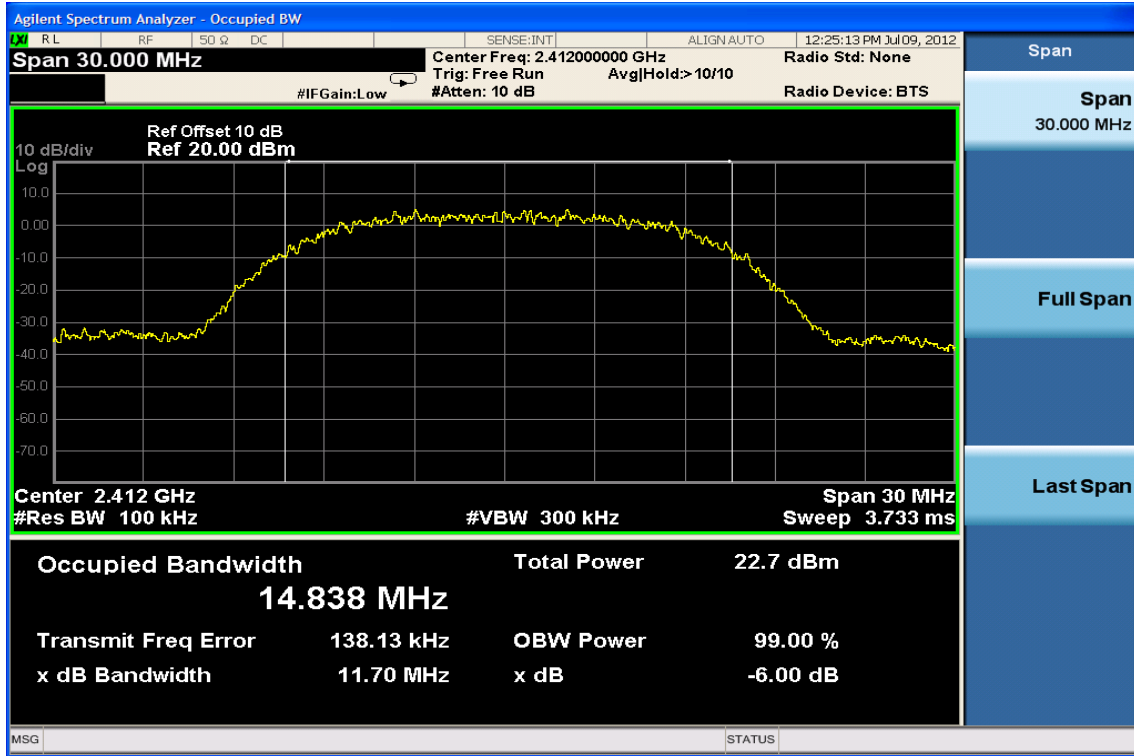

6dB Band Width Test Data CH-Mid

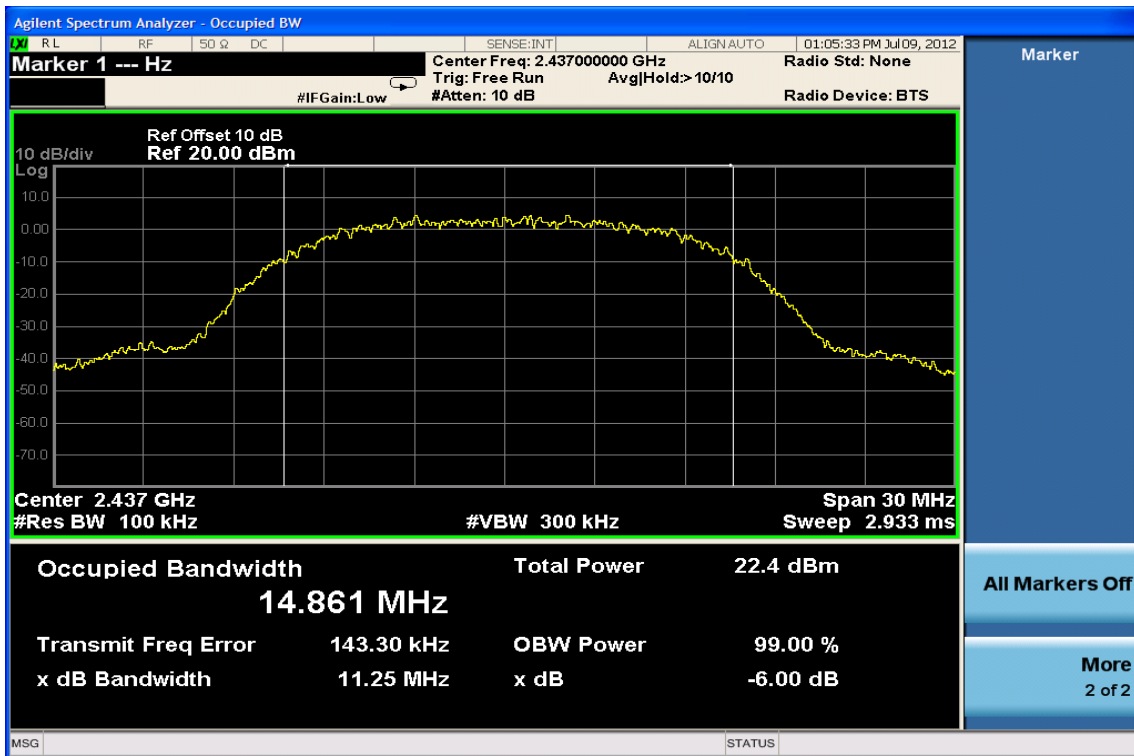


### 6dB Band Width Test Data CH-High

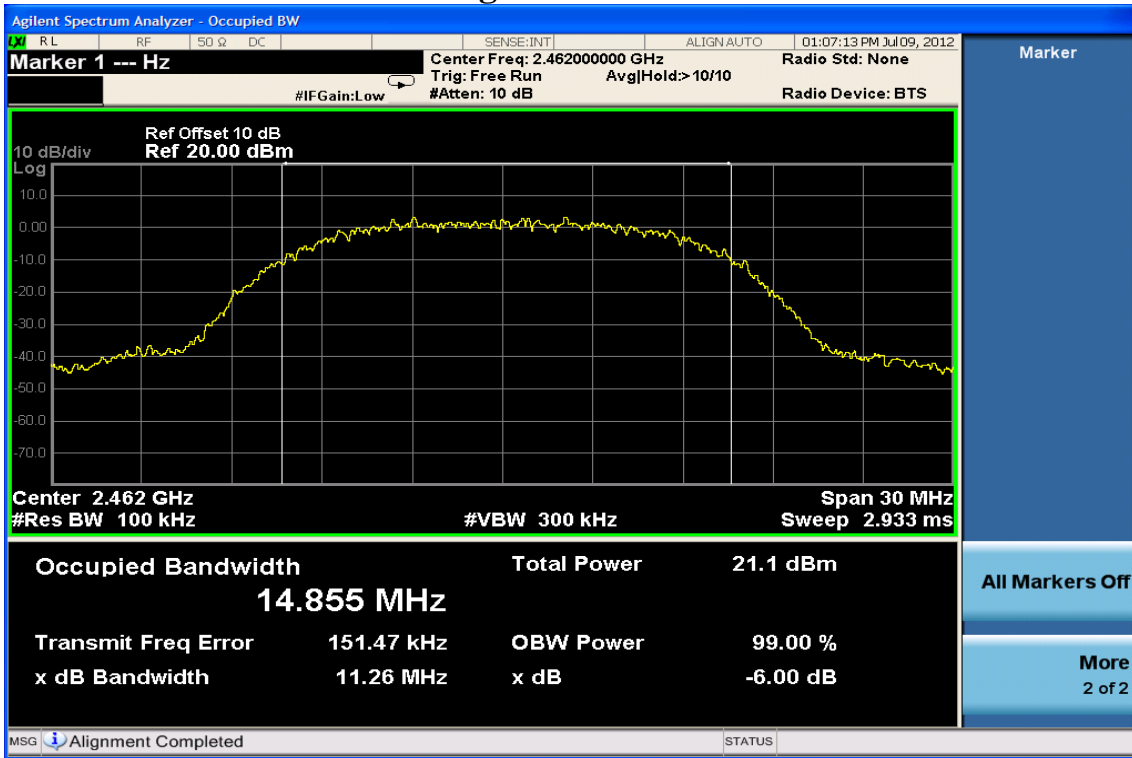


### 802.11g


### 6dB Band Width Test Data CH-Low

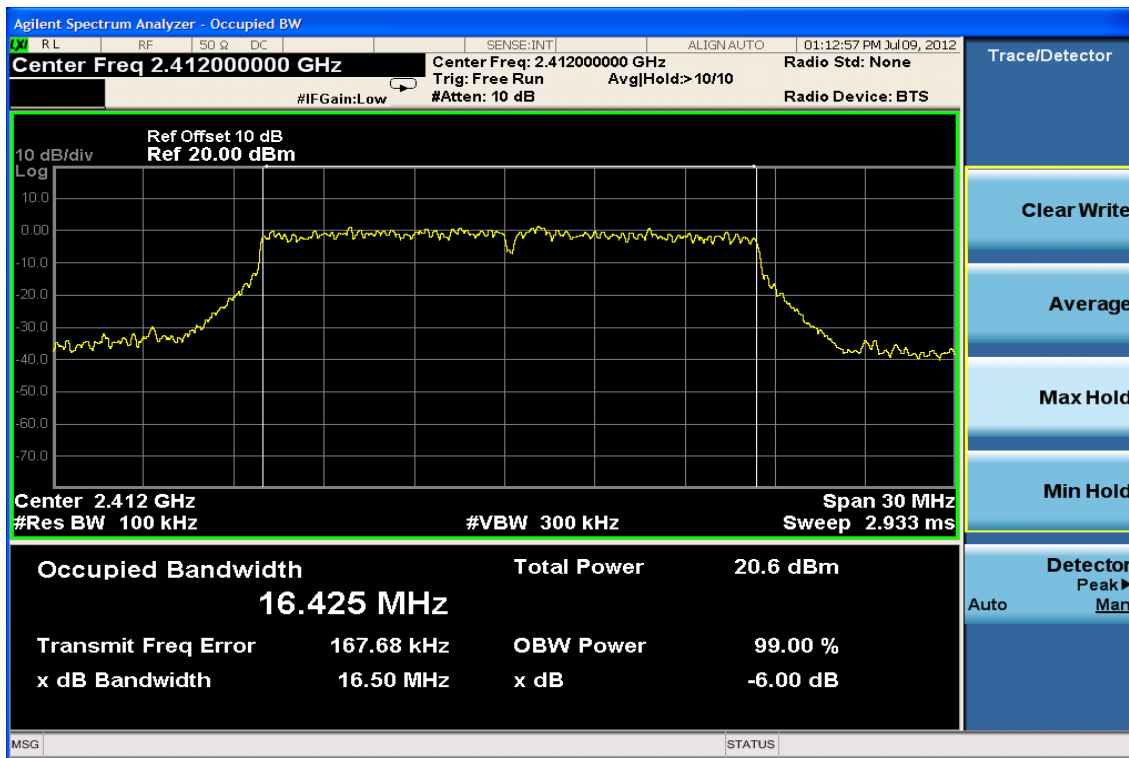

### 6dB Band Width Test Data CH-Mid

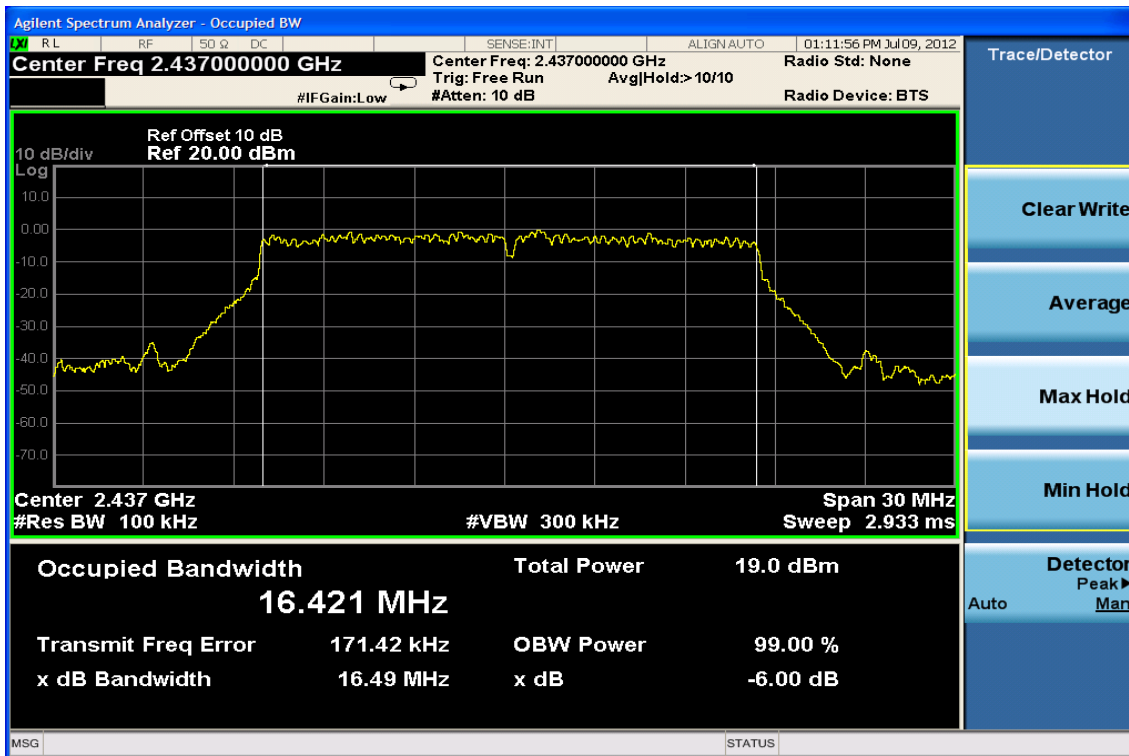


### 6dB Band Width Test Data CH-High

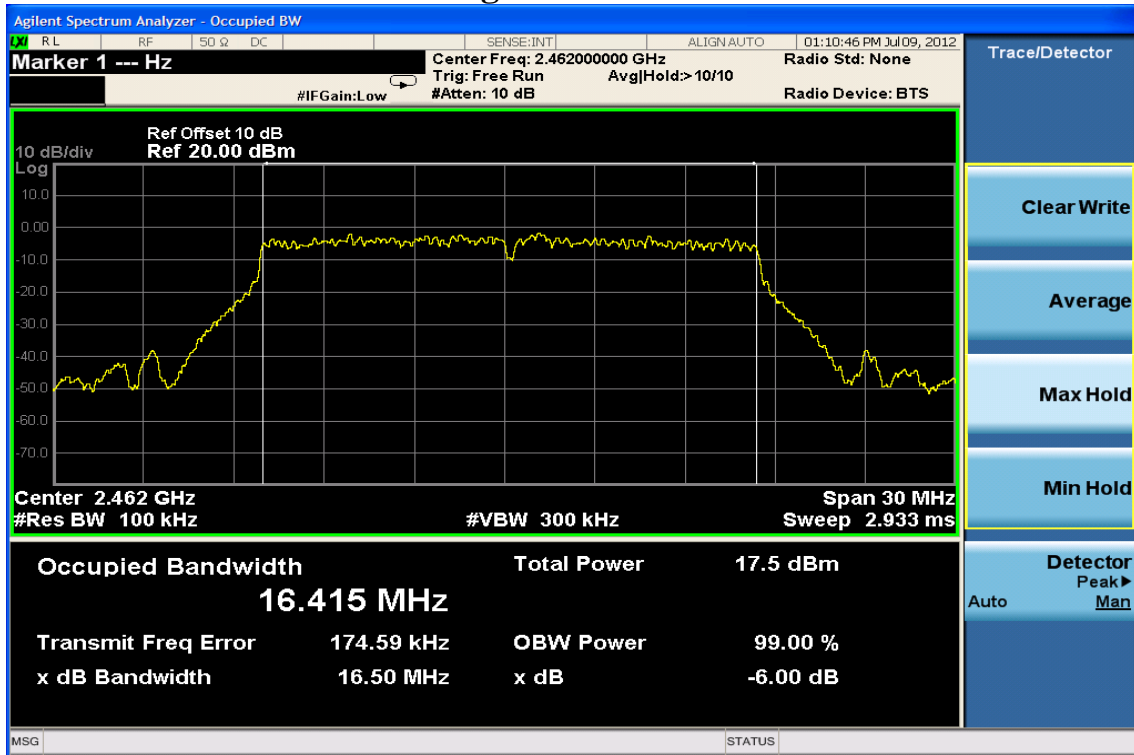




802.11n\_20M


6dB Band Width Test Data CH-Low

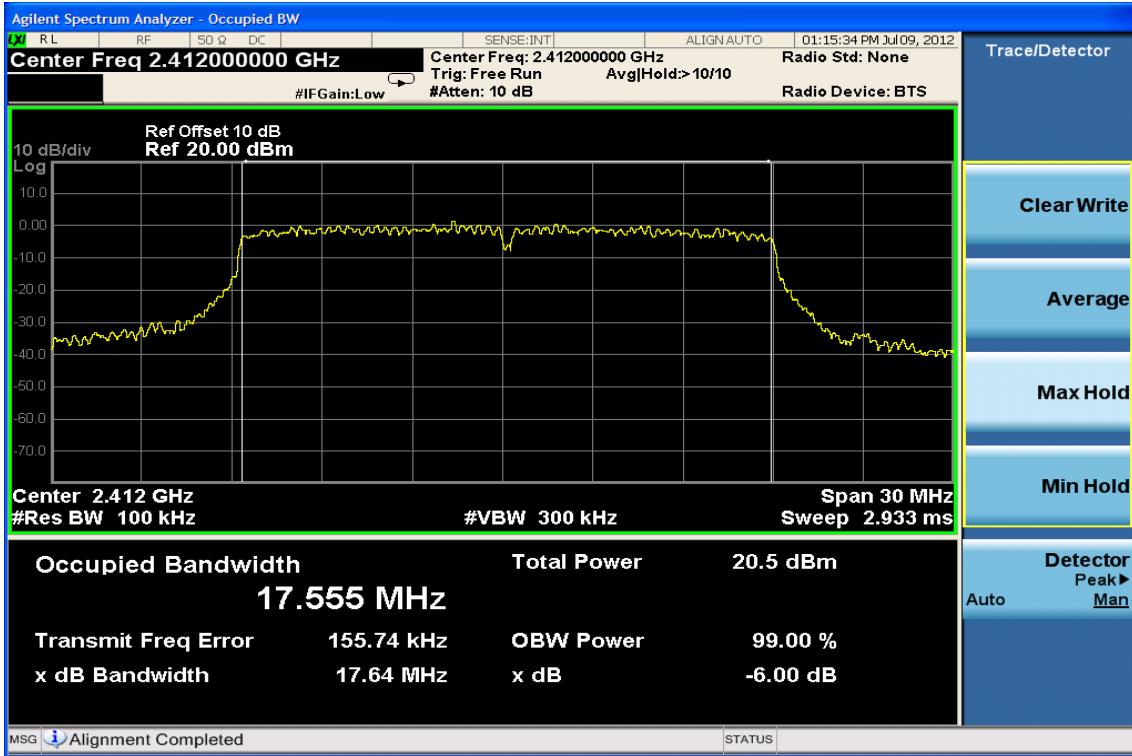

6dB Band Width Test Data CH-Mid

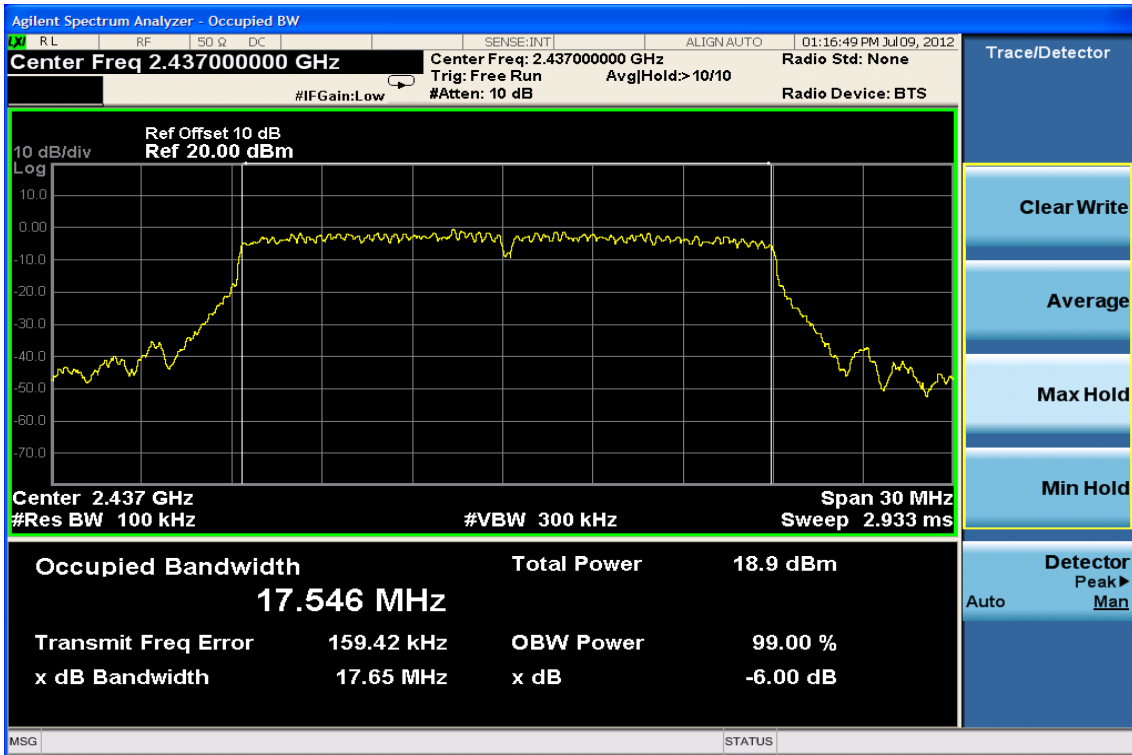


### 6dB Band Width Test Data CH-High

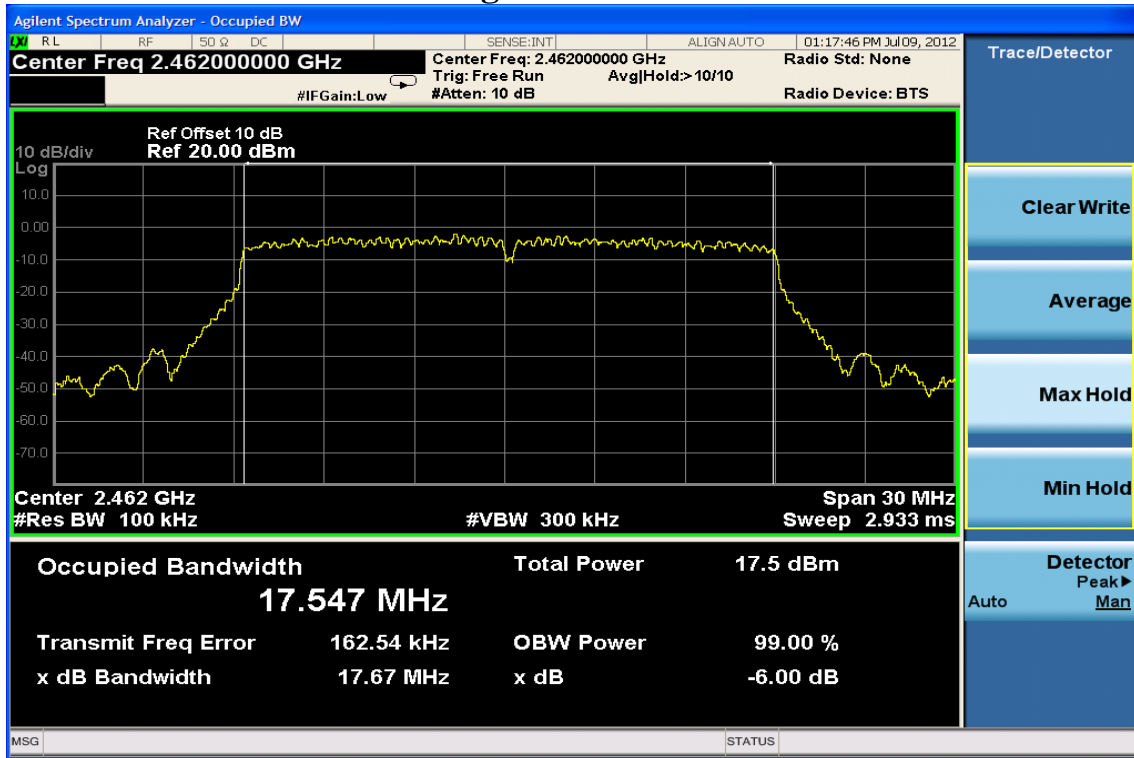


## 802.11n\_40M


### 6dB Band Width Test Data CH-Low

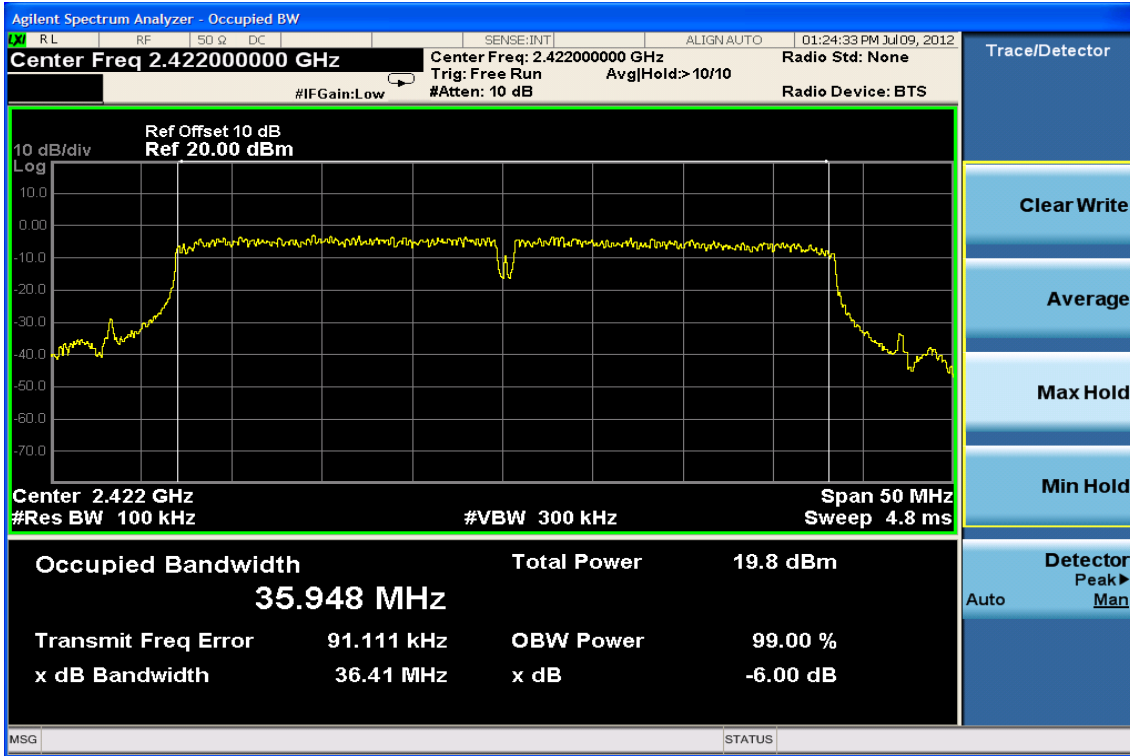

### 6dB Band Width Test Data CH-Mid

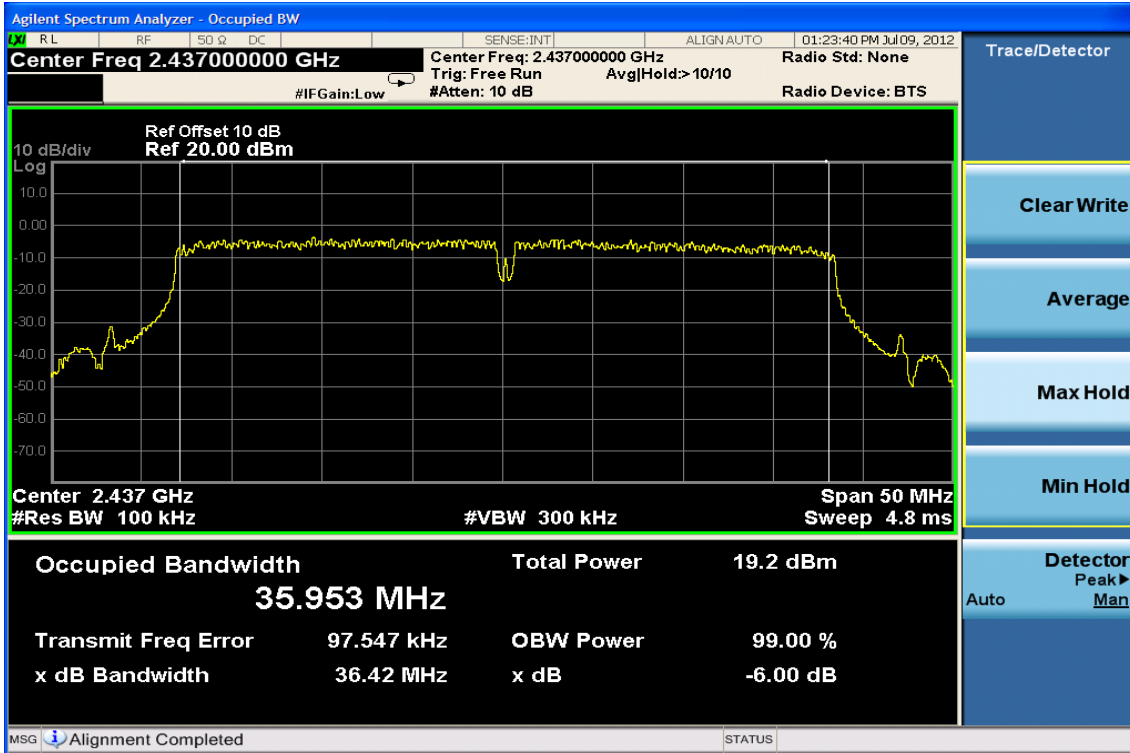

### 6dB Band Width Test Data CH-High

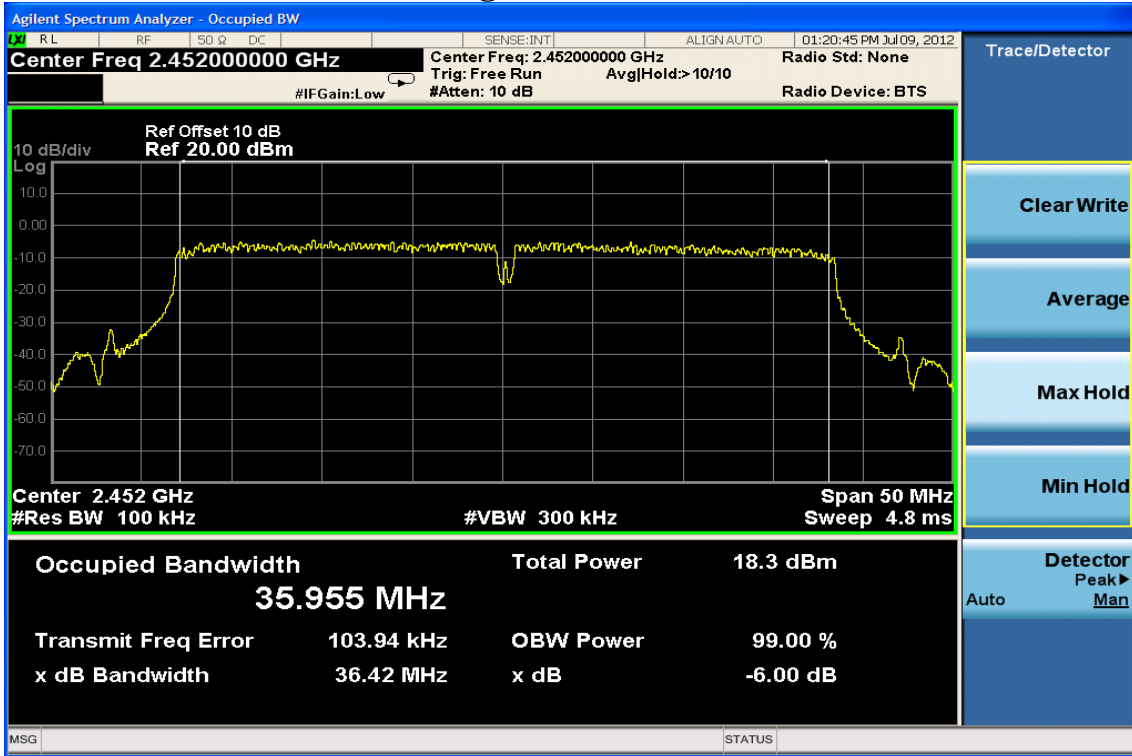

## 8 100KHz BANDWIDTH OF BAND EDGES MEASUREMENT

### 8.1 Standard Applicable:

According to §15.247(c), in any 100 KHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100KHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

### 8.2 Measurement Equipment Used:

#### 8.2.1 Conducted Emission at antenna port:

Refer to section 6.2 for details.

#### 8.2.2 Radiated emission:

Chamber 14(966)					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer 21(26.5GHz)	Agilent	N9010A	MY49060537	07/18/2012	07/17/2013
Spectrum Analyzer 20(6.5GHz)	Agilent	E4443A	MY48250315	05/24/2012	05/23/2013
Spectrum Analyzer 22(43GHz)	R&S	FSU43	100143	04/25/2012	04/24/2013
Loop Antenna9K-30M	A.H.SYSTEM	SAS-564	294	02/28/2011	02/27/2013
Bilog Antenna30-1G	Schaffner	CBL 6111B	2756	12/27/2011	12/26/2012
Horn antenna1-18G	COM-POWER	AH118	2011071401	03/01/2012	02/29/2013
Horn antenna1-18G(06)	EMCO	3117	0006665	09/21/2011	09/20/2012
Horn antenna18-26G(04)	Com-power	AH-826	081001	05/04/2012	05/03/2013
Preamplifier9-1000M	HP	8447D	NA	02/10/2012	02/09/2013
Preamplifier1-18G	MITEQ	AFS44-001018 00-25-10P-44	1329256	07/19/2012	07/18/2013
Preamplifier1-26G	EM	EM01M26G	NA	02/21/2012	02/20/2013
Cable1-18G	HUBER SUHNER	Sucoflex 106	NA	02/10/2012	02/09/2013
Cable UP to 1G	HUBER SUHNER	RG 214/U	NA	12/14/2011	12/13/2012
SUCOFLEX 1GHz~40GHz cable	HUBER SUHNER	Sucoflex 102	27963/2&3742 1/2	09/21/2011	09/20/2012
2.4G Filter	Micro-Tronics	Brm50702	76	10/22/2011	10/21/2012


**8.3 Test SET-UP:**

**8.3.1 Conducted Emission at antenna port:**


Refer to section 6.3 for details.

**8.3.2 Radiated emission:**

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

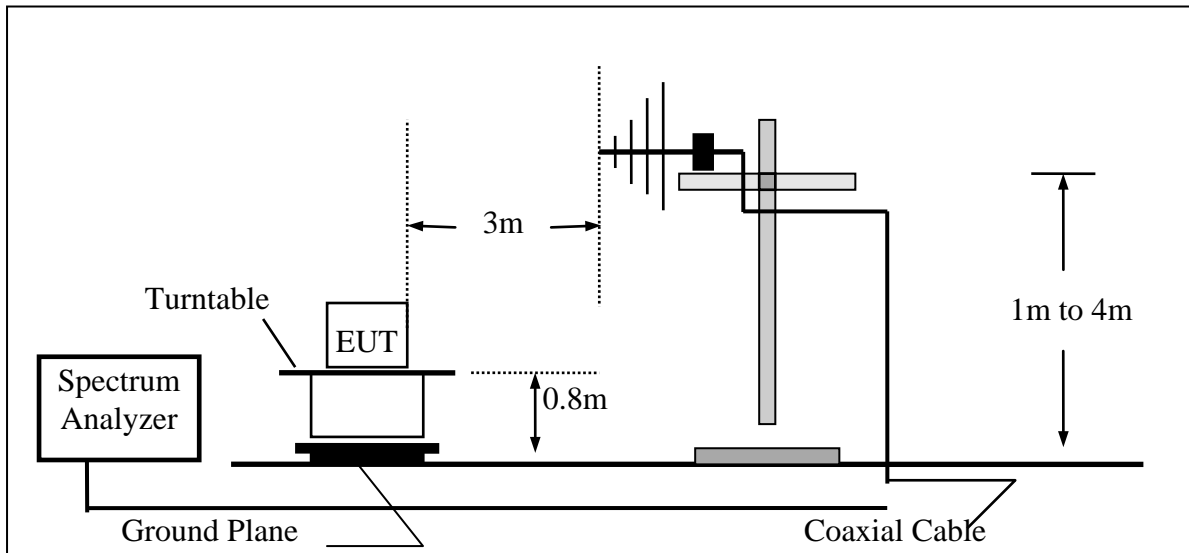

(B) Radiated Emission Test Set-Up Frequency Over 1 GHz

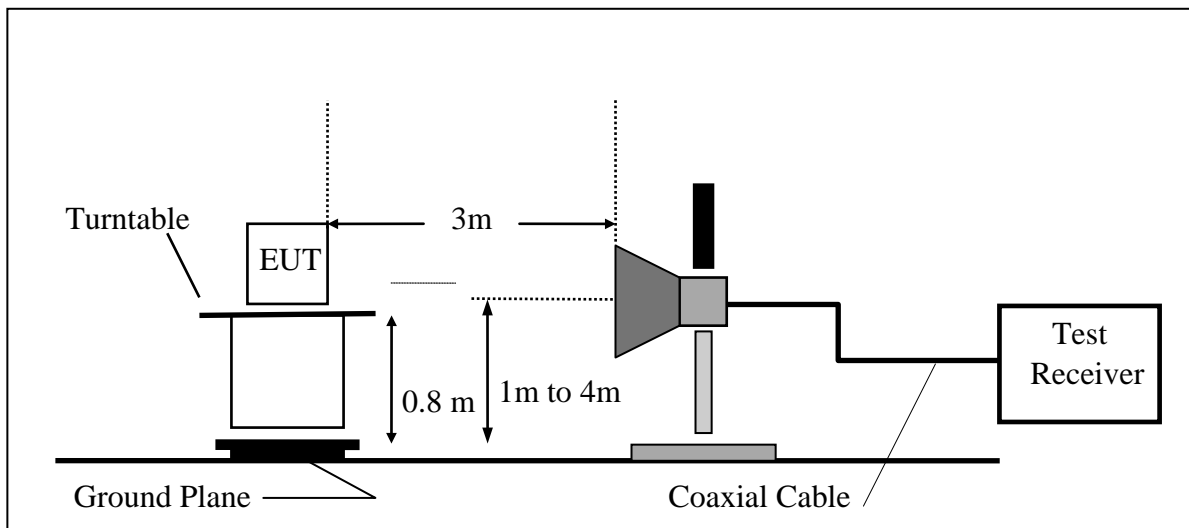

#### 8.4 Measurement Procedure:

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = operating frequency.
4. Set the spectrum analyzer as RBW, VBW=100KHz, Span=25MHz, Sweep = auto
5. Mark Peak, 2.390GHz and 2.4835GHz and record the max. level.
6. Repeat above procedures until all frequency measured were complete.

**Refer to section 5.4.2 and 5.4.2.2.4 Band-Edge Measurements of KDB Document: 558074 D01 DTS Meas Guidance v01**

The measurement of unwanted emissions at the edge of the authorized frequency bands can be complicated by the leakage of RF energy from the fundamental emission into the RBW passband. Thus, for measurements at the band edges, a narrower resolution bandwidth (no less than 10 kHz) can be used within the first 1 MHz beyond the fundamental emission, provided that that measured energy is subsequently integrated over the appropriate reference bandwidth (i.e., 100 kHz or 1 MHz). This integration can be performed using the band power function of the spectrum analyzer or by summing the spectral levels (in linear power units) over the appropriate reference bandwidth.

#### 8.5 Field Strength Calculation:

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$


Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

#### 8.6 Measurement Result:

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

802.11b

Band Edges Test Data CH-Low

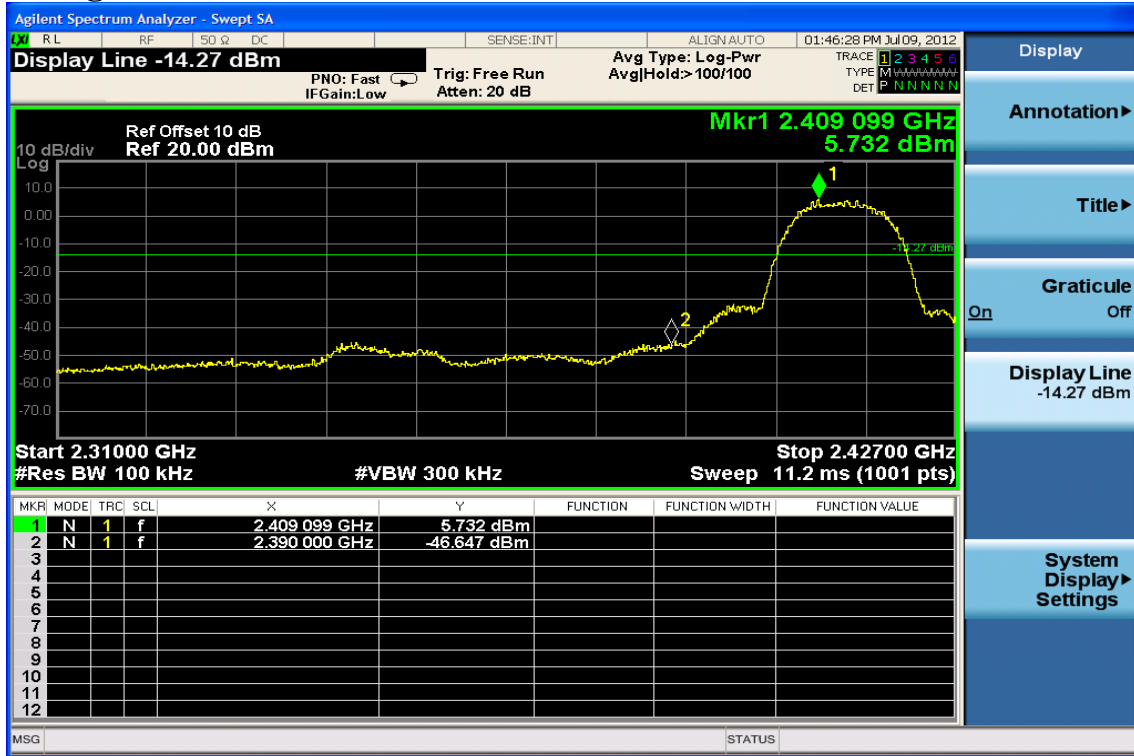

Band Edges Test Data CH-High





**Radiated Emission: 802.11 b mode**

Operation Mode TX CH Low  
Fundamental Frequency 2412 MHz  
Temperature 25 °C

Test Date 2012/07/06  
Test By Dino  
Humidity 60 %

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	2322.81	63.61	-11.66	51.95	74.00	-22.05	Peak	VERTICAL
2	2390.00	60.51	-11.48	49.03	74.00	-24.97	Peak	VERTICAL
1	2320.86	64.38	-11.67	52.71	74.00	-21.29	Peak	HORIZONTAL
2	2390.00	61.98	-11.48	50.50	74.00	-23.50	Peak	HORIZONTAL

Operation Mode TX CH High  
Fundamental Frequency 2462 MHz  
Temperature 25 °C


Test Date 2012/07/06  
Test By Dino  
Humidity 60 %

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	2483.50	59.71	-11.25	48.46	74.00	-25.54	Peak	VERTICAL
2	2486.43	62.61	-11.24	51.37	74.00	-22.63	Peak	VERTICAL
1	2483.50	61.29	-11.25	50.04	74.00	-23.96	Peak	HORIZONTAL
2	2483.93	61.84	-11.25	50.59	74.00	-23.41	Peak	HORIZONTAL


Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

### 802.11g Band Edges Test Data CH-Low

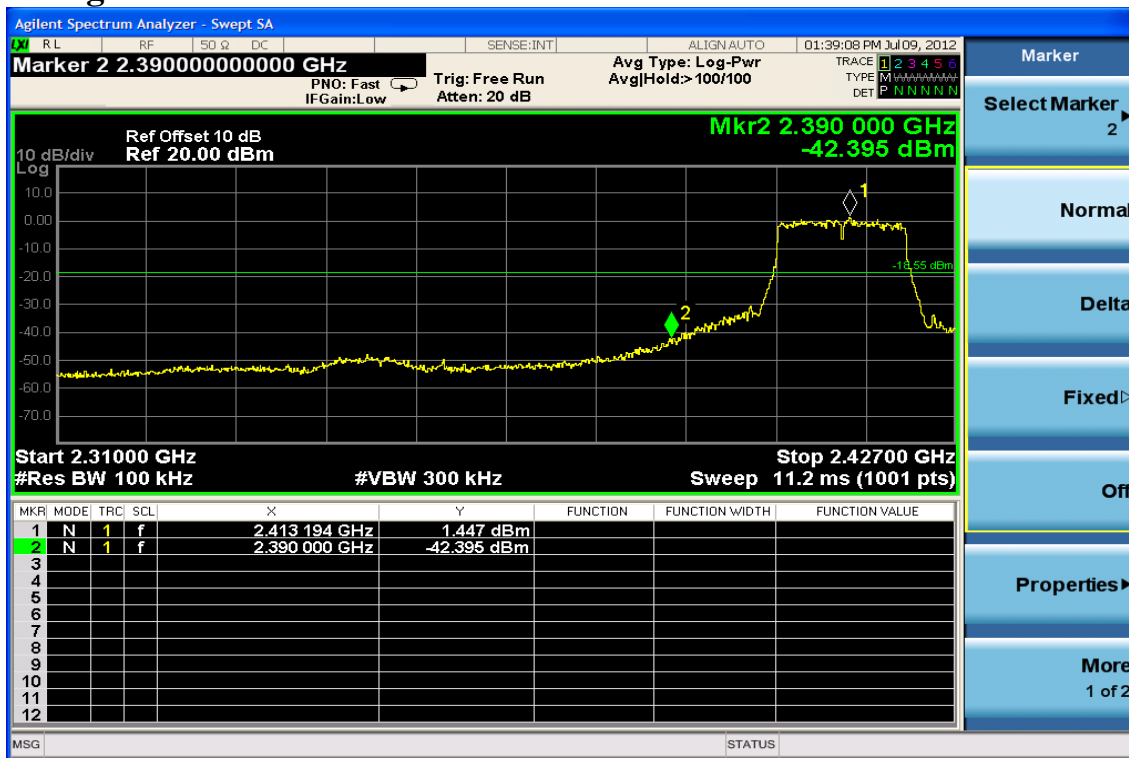

### Band Edges Test Data CH-High

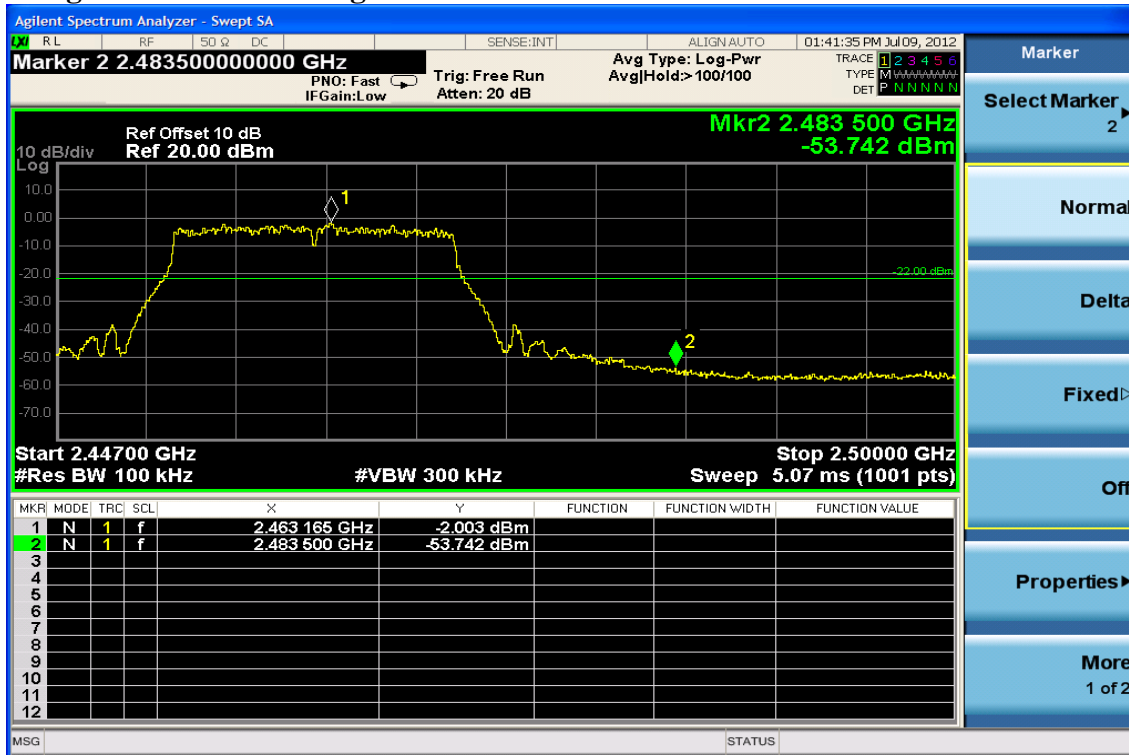

**Radiated Emission: 802.11 g mode**

Operation Mode TX CH Low  
 Fundamental Frequency 2412 MHz  
 Temperature 25 °C

Test Date 2012/07/06  
 Test By Dino  
 Humidity 60 %

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	2369.05	62.81	-11.54	51.27	74.00	-22.73	Peak	VERTICAL
2	2390.00	62.00	-11.48	50.52	74.00	-23.48	Peak	VERTICAL
1	2384.66	63.30	-11.51	51.79	74.00	-22.21	Peak	HORIZONTAL
2	2390.00	60.99	-11.48	49.51	74.00	-24.49	Peak	HORIZONTAL

Operation Mode TX CH High  
 Fundamental Frequency 2462 MHz  
 Temperature 25 °C

Test Date 2012/07/06  
 Test By Dino  
 Humidity 60 %

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	2483.50	61.06	-11.25	49.81	74.00	-24.19	Peak	VERTICAL
1	2483.50	61.37	-11.25	50.12	74.00	-23.88	Peak	HORIZONTAL
2	2483.93	64.00	-11.25	52.75	74.00	-21.25	Peak	HORIZONTAL

**Remark:**


- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

### 802.11n\_20M

### Band Edges Test Data CH-Low



### Band Edges Test Data CH-High

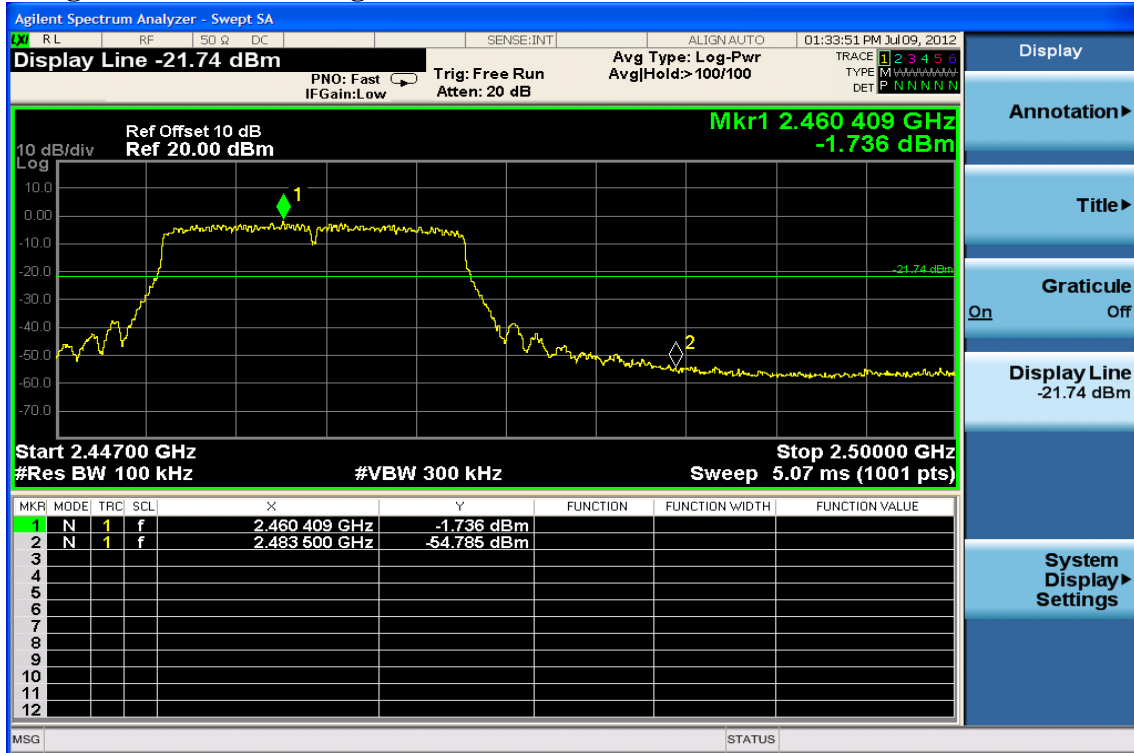

**Radiated Emission: 802.11 n\_20M mode**

Operation Mode TX CH Low  
 Fundamental Frequency 2412 MHz  
 Temperature 25 °C

Test Date 2012/07/06  
 Test By Dino  
 Humidity 60 %

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	2371.24	62.35	-11.54	50.81	74.00	-23.19	Peak	VERTICAL
2	2390.00	60.25	-11.48	48.77	74.00	-25.23	Peak	VERTICAL
1	2390.00	48.81	-11.48	37.33	54.00	-16.67	Average	HORIZONTAL
2	2390.00	67.38	-11.48	55.90	74.00	-18.10	Peak	HORIZONTAL

Operation Mode TX CH High  
 Fundamental Frequency 2462 MHz  
 Temperature 25 °C

Test Date 2012/07/06  
 Test By Dino  
 Humidity 60 %

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	2483.50	46.28	-11.25	35.03	54.00	-18.97	Average	VERTICAL
2	2483.50	64.82	-11.25	53.57	74.00	-20.43	Peak	VERTICAL
1	2483.50	56.37	-11.25	45.12	54.00	-8.88	Average	HORIZONTAL
2	2483.50	65.23	-11.25	53.98	74.00	-20.02	Peak	HORIZONTAL

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

802.11n\_40M

Band Edges Test Data CH-Low



Band Edges Test Data CH-High



**Radiated Emission: 802.11 n\_40M mode**

Operation Mode TX CH Low  
Fundamental Frequency 2422 MHz  
Temperature 25 °C

Test Date 2012/07/06  
Test By Dino  
Humidity 60 %

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	2390.00	59.29	-11.48	47.81	54.00	-6.19	Average	VERTICAL
2	2390.00	69.73	-11.48	58.25	74.00	-15.75	Peak	VERTICAL
1	2390.00	60.21	-11.48	48.73	54.00	-5.27	Average	HORIZONTAL
2	2390.00	73.03	-11.48	61.55	74.00	-12.45	Peak	HORIZONTAL

Operation Mode TX CH High  
Fundamental Frequency 2452 MHz  
Temperature 25 °C

Test Date 2012/07/06  
Test By Dino  
Humidity 60 %

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	2483.50	52.01	-11.25	40.76	54.00	-13.24	Average	VERTICAL
2	2483.50	64.38	-11.25	53.13	74.00	-20.87	Peak	VERTICAL
3	2484.48	52.03	-11.25	40.78	54.00	-13.22	Average	VERTICAL
4	2484.48	65.96	-11.25	54.71	74.00	-19.29	Peak	VERTICAL
1	2483.50	62.75	-11.25	51.50	74.00	-22.50	Peak	HORIZONTAL
2	2484.17	52.08	-11.25	40.83	54.00	-13.17	Average	HORIZONTAL
3	2484.17	65.22	-11.25	53.97	74.00	-20.03	Peak	HORIZONTAL

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



## 9 SPURIOUS RADIATED EMISSION TEST

### 9.1 Standard Applicable

According to §15.247(c), all other emissions outside these bands shall not exceed the general radiated emission limits specified in §15.209(a). And according to §15.33(a)(1), for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

### 9.2 Measurement Equipment Used:

#### 9.2.1 Conducted Emission at antenna port:

Refer to section 6.2 for details.

#### 9.2.2 Radiated emission:

Refer to section 7.2 for details.

### 9.3 Test SET-UP:

#### 9.3.1 Conducted Emission at antenna port:

Refer to section 6.3 for details.

#### 9.3.2 Radiated emission:

Refer to section 7.3 for details.

### 9.4 Measurement Procedure:

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
4. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made “while keeping the antenna in the ‘cone of radiation’ from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response.” is still within the 3dB illumination BW of the measurement antenna.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. Repeat above procedures until all frequency measured were complete.

**Refer to section 5.4.2 Unwanted Emissions into Restricted Frequency Bands of KDB Document: 558074 D01 DTS Meas Guidance v01**



## 9.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:


$$FS = RA + AF + CL - AG$$

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	


## 9.6 Measurement Result:

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.


### Conducted Spurious Emission Measurement Result (802.11b) Ch Low 30MHz – 3GHz

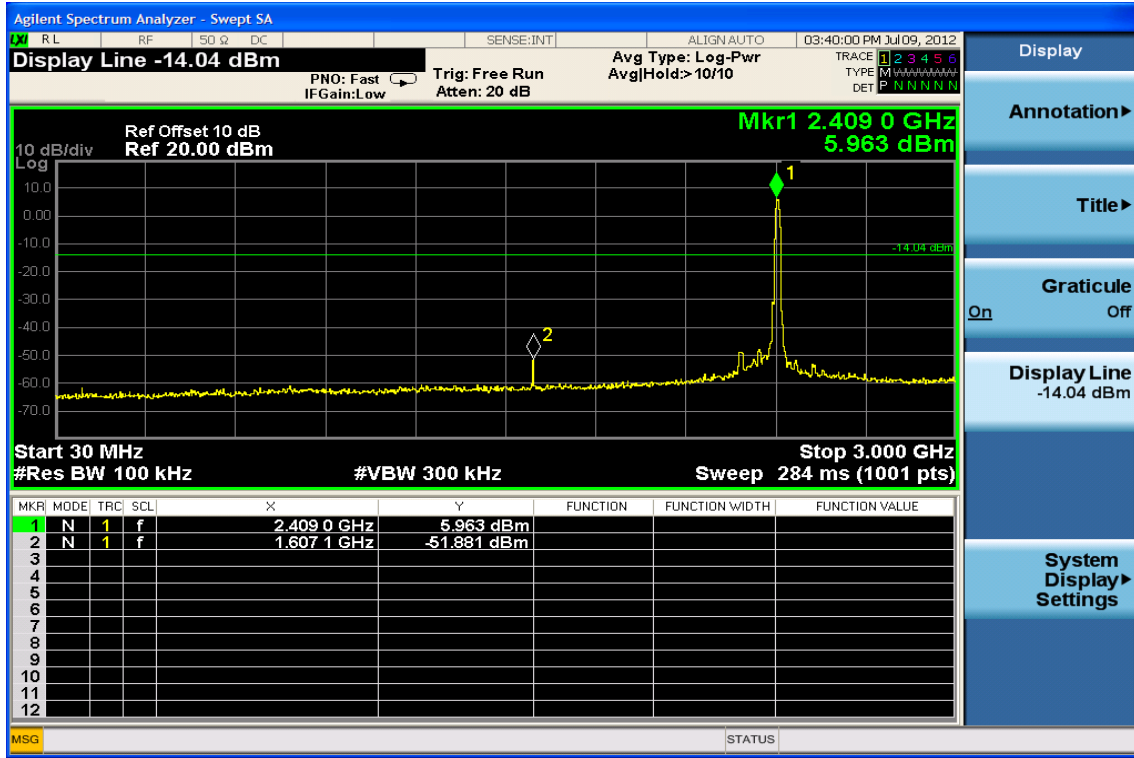


### Ch Low 3GHz – 26.5GHz

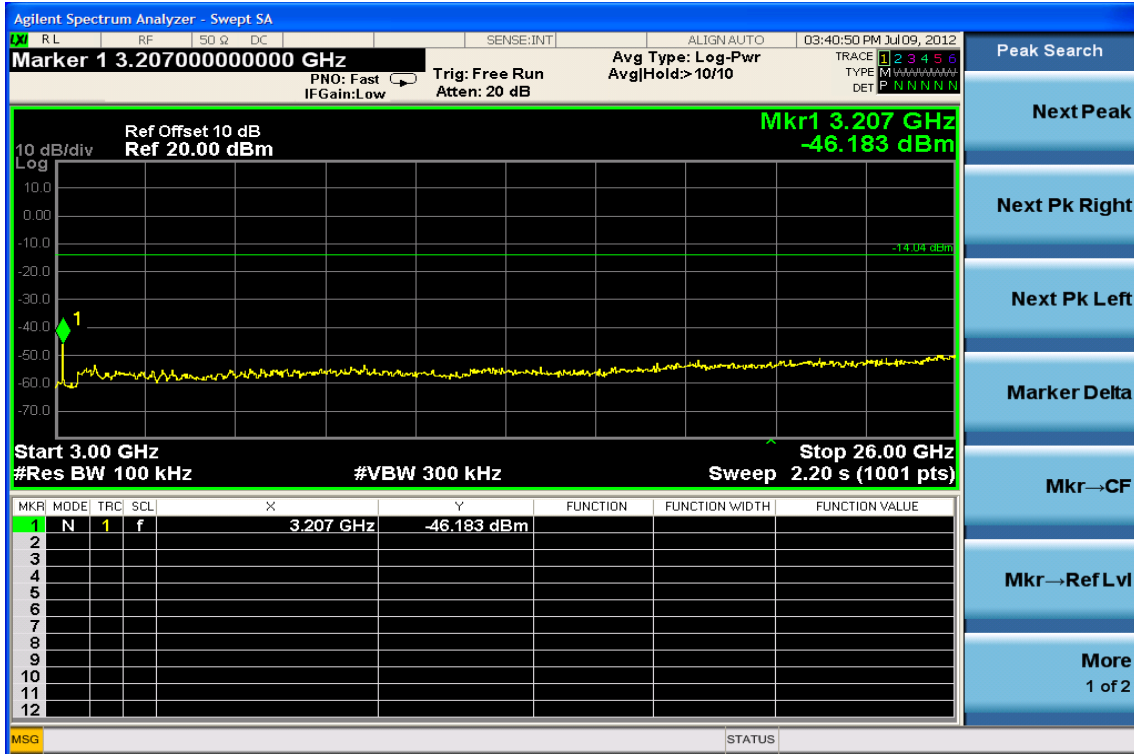


Ch Mid 30MHz – 3GHz

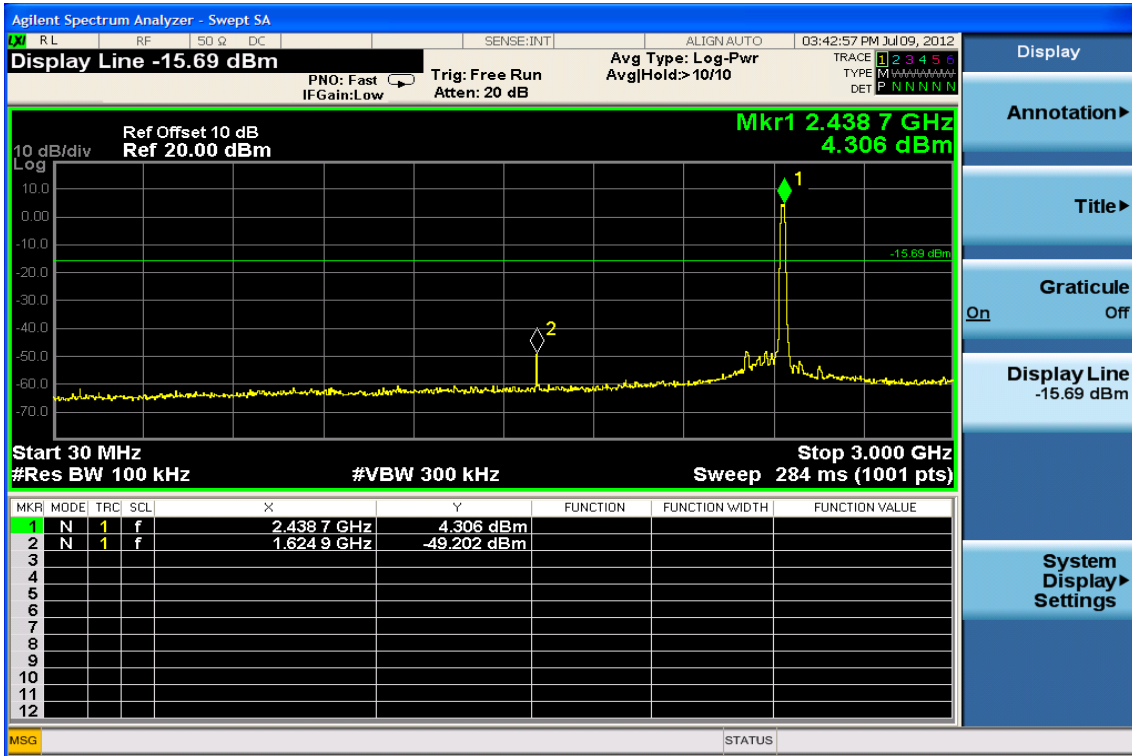


Ch Mid 3GHz – 26.5GHz

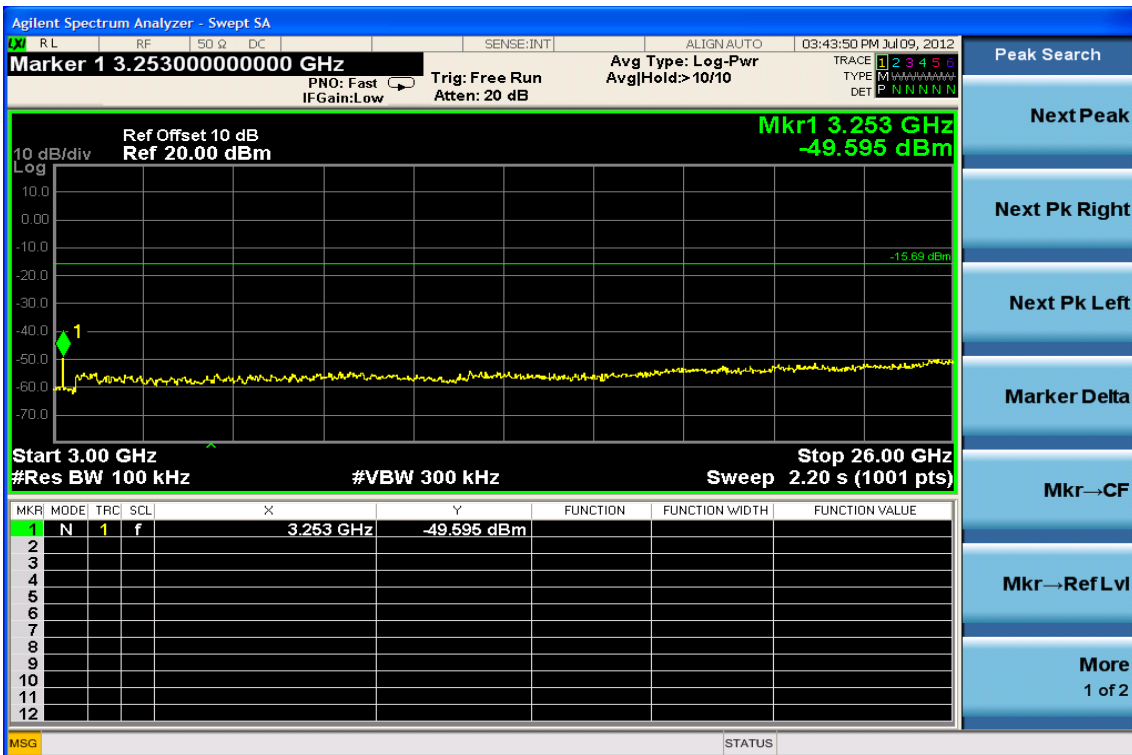


Ch High 30MHz – 3GHz

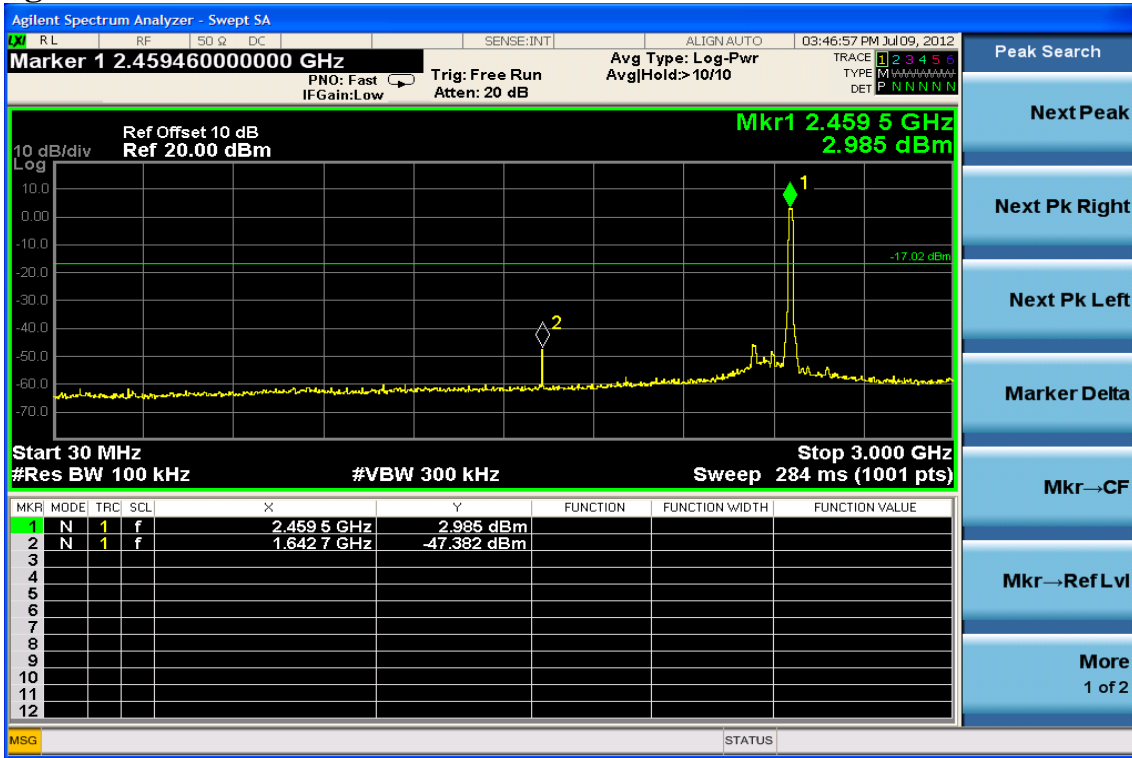


Ch High 3GHz – 26.5GHz

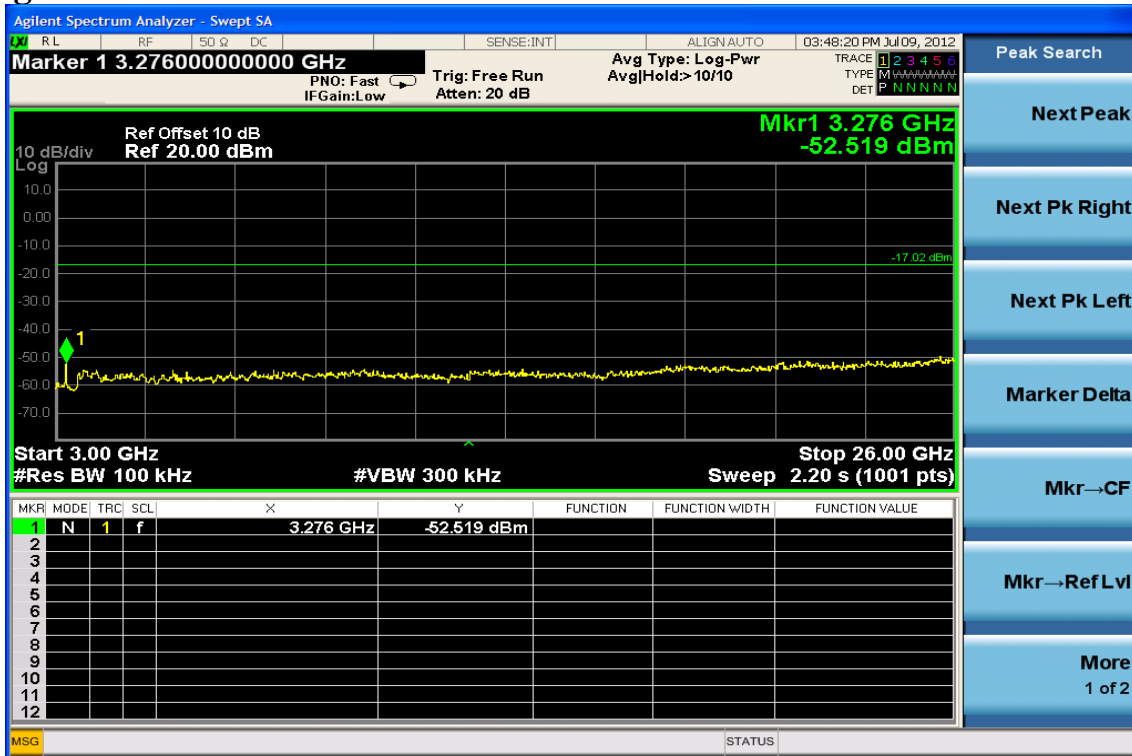


### Conducted Spurious Emission Measurement Result (802.11g) Ch Low 30MHz – 3GHz

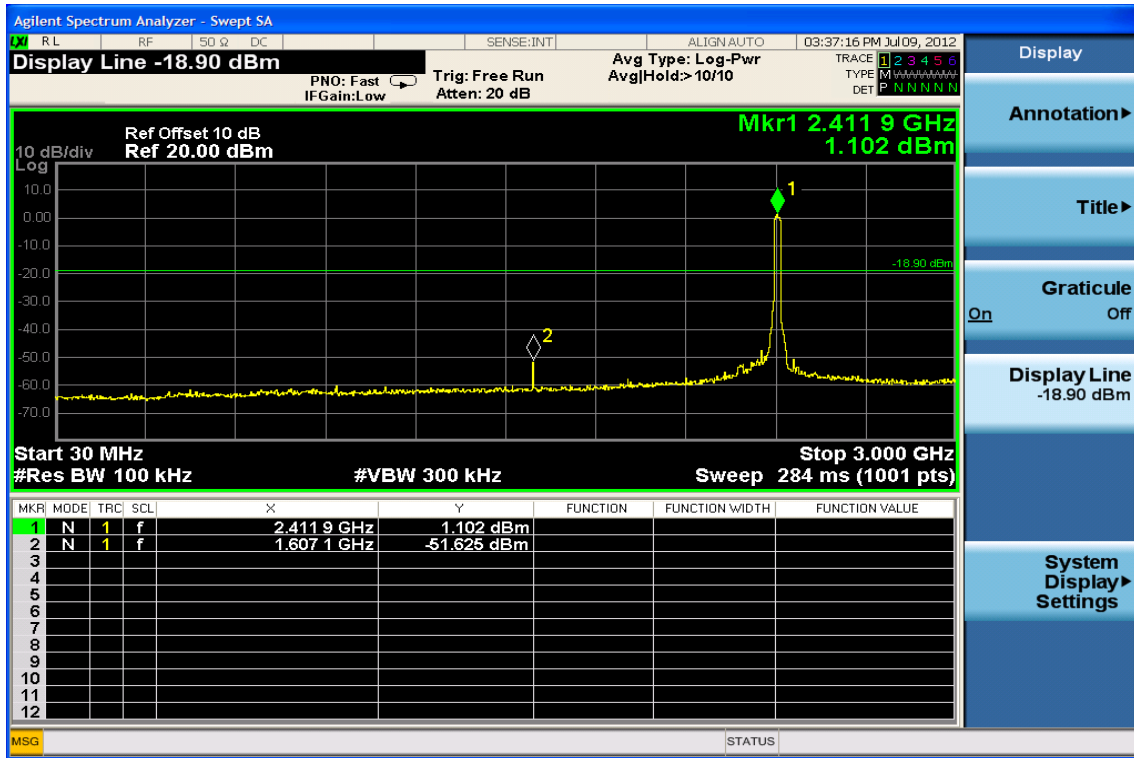


### Ch Low 3GHz – 26.5GHz

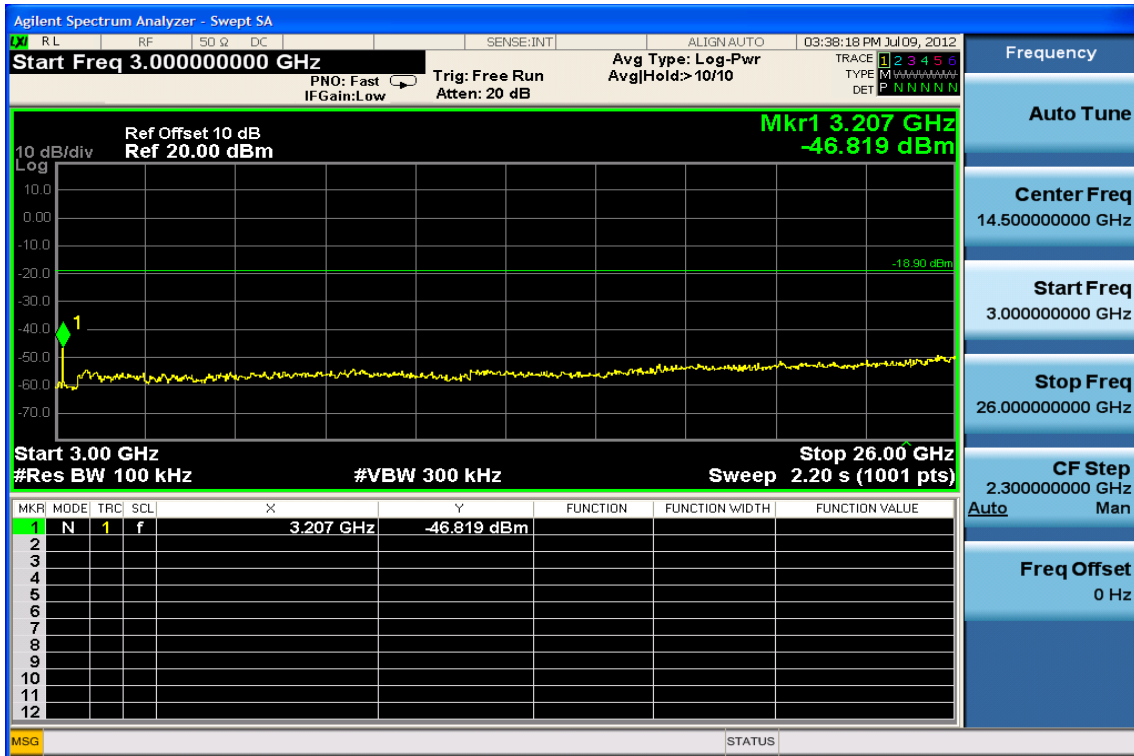


### Ch Mid 30MHz – 3GHz

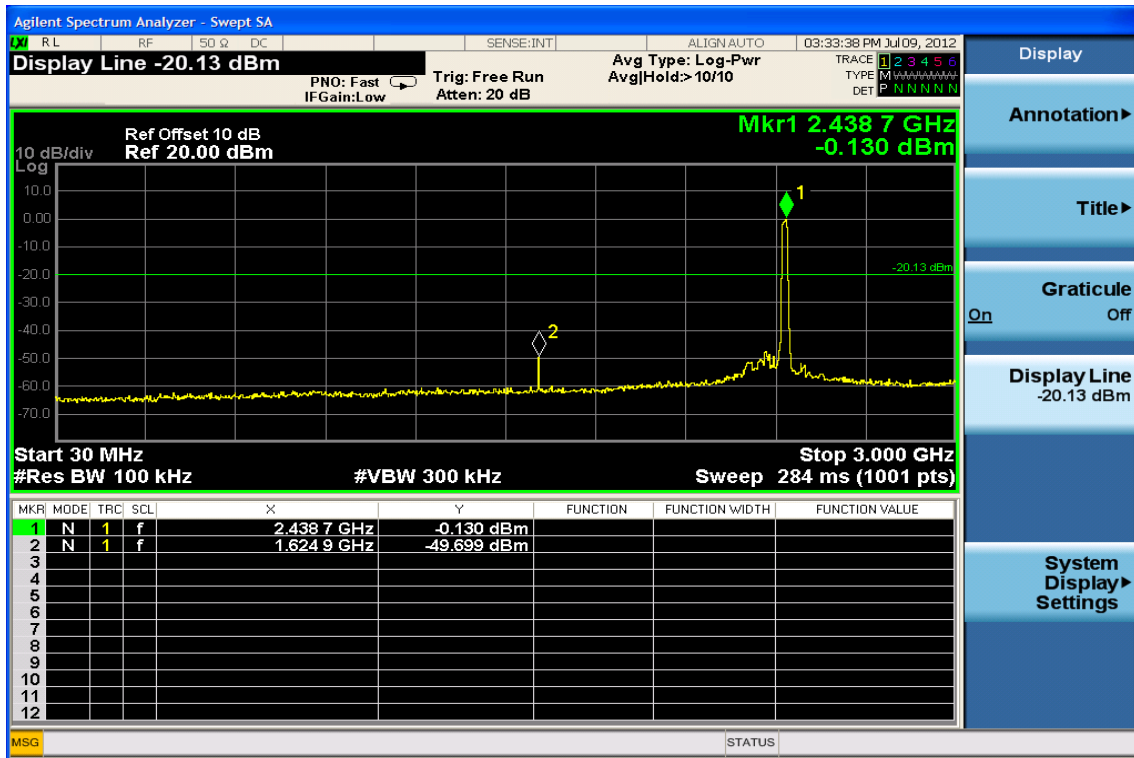


### Ch Mid 3GHz – 26.5GHz

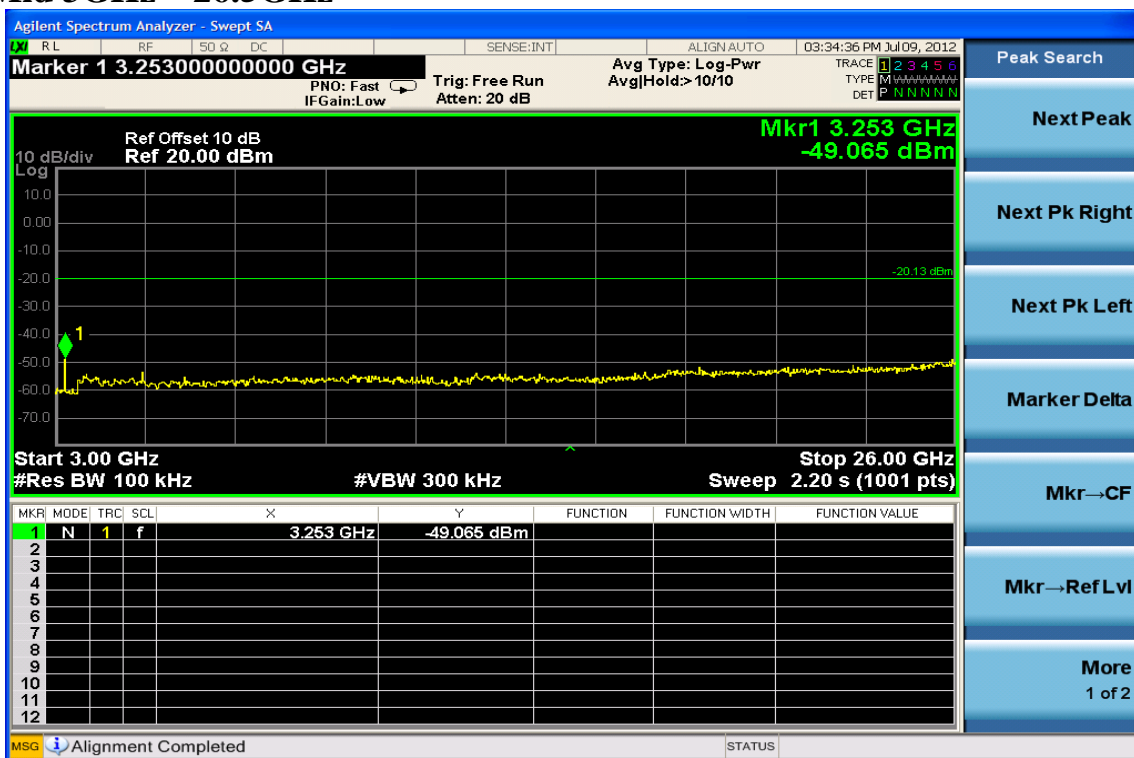


### Ch High 30MHz – 3GHz

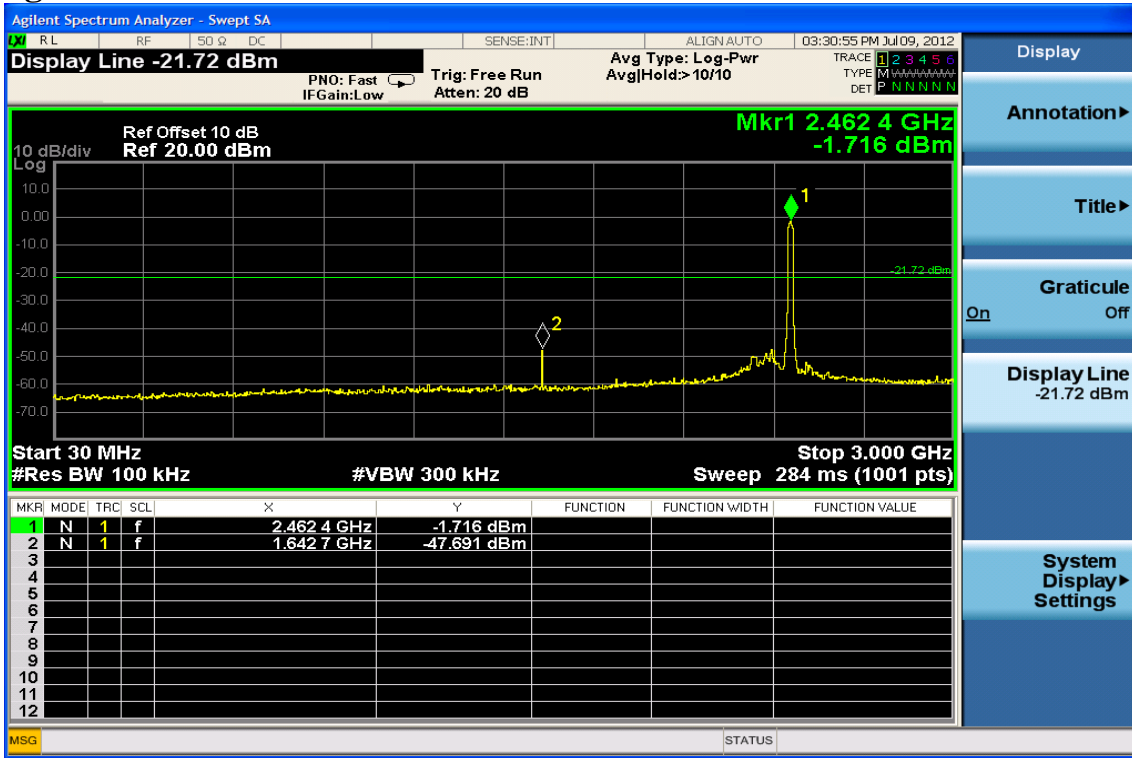


### Ch High 3GHz – 26.5GHz

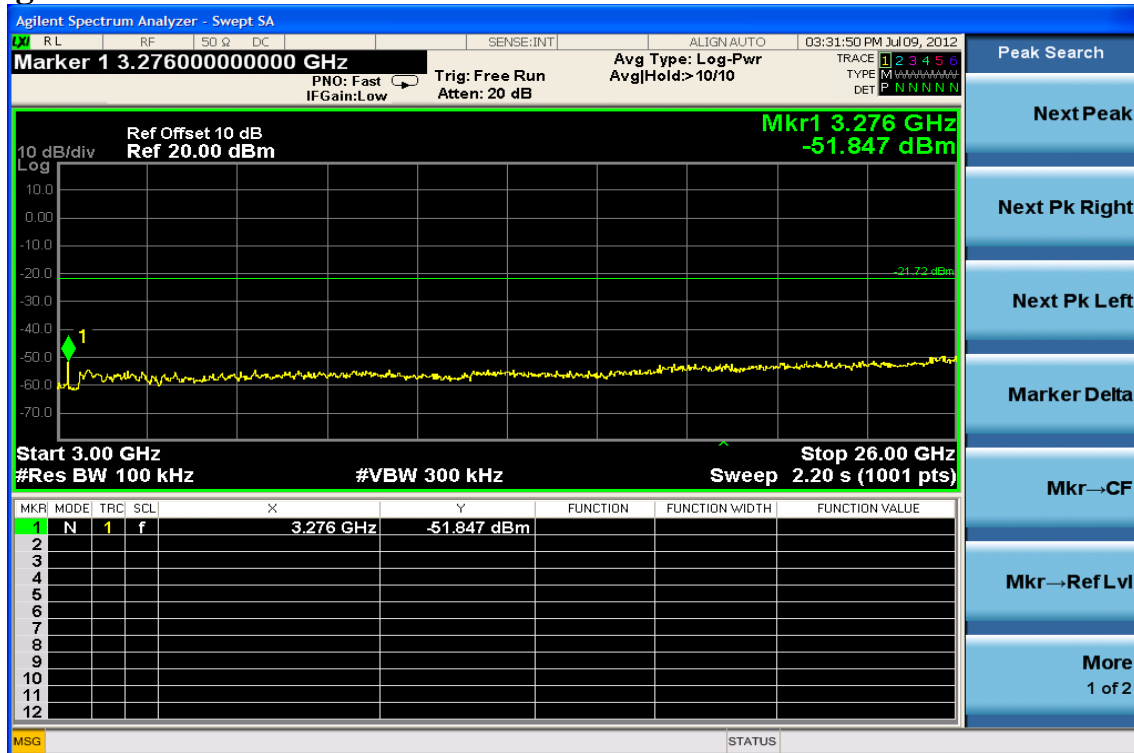

### Conducted Spurious Emission Measurement Result (802.11n\_20M) Ch Low 30MHz – 3GHz

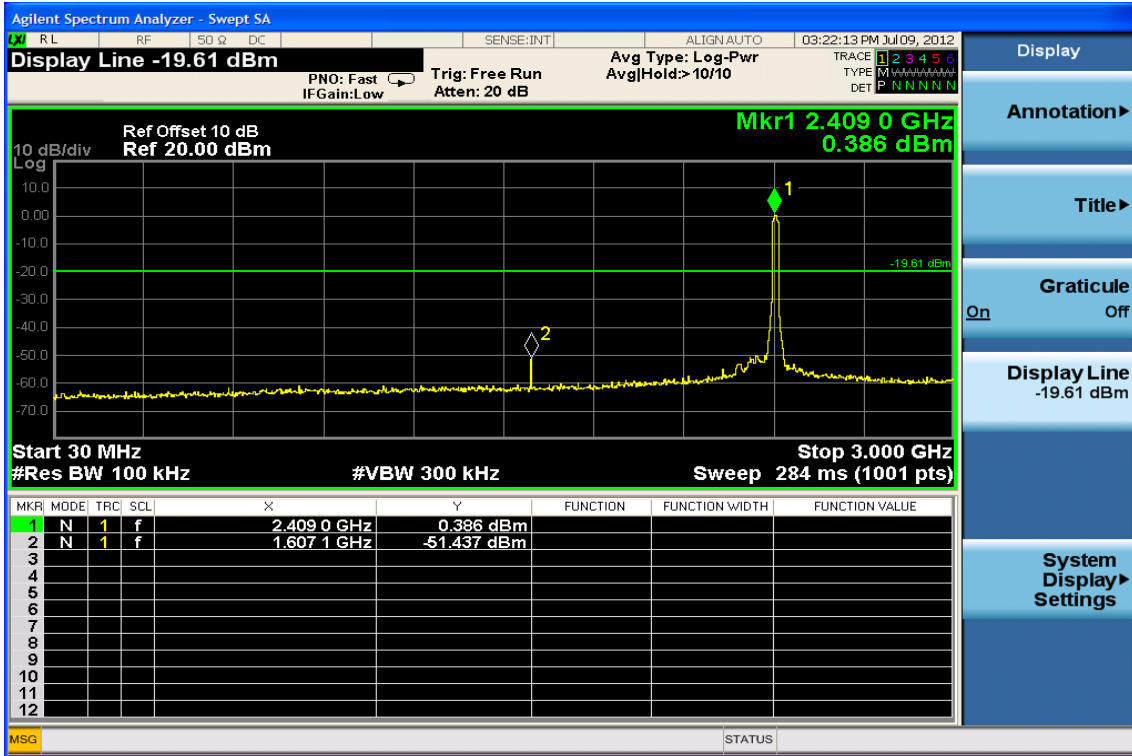


### Ch Low 3GHz – 26.5GHz

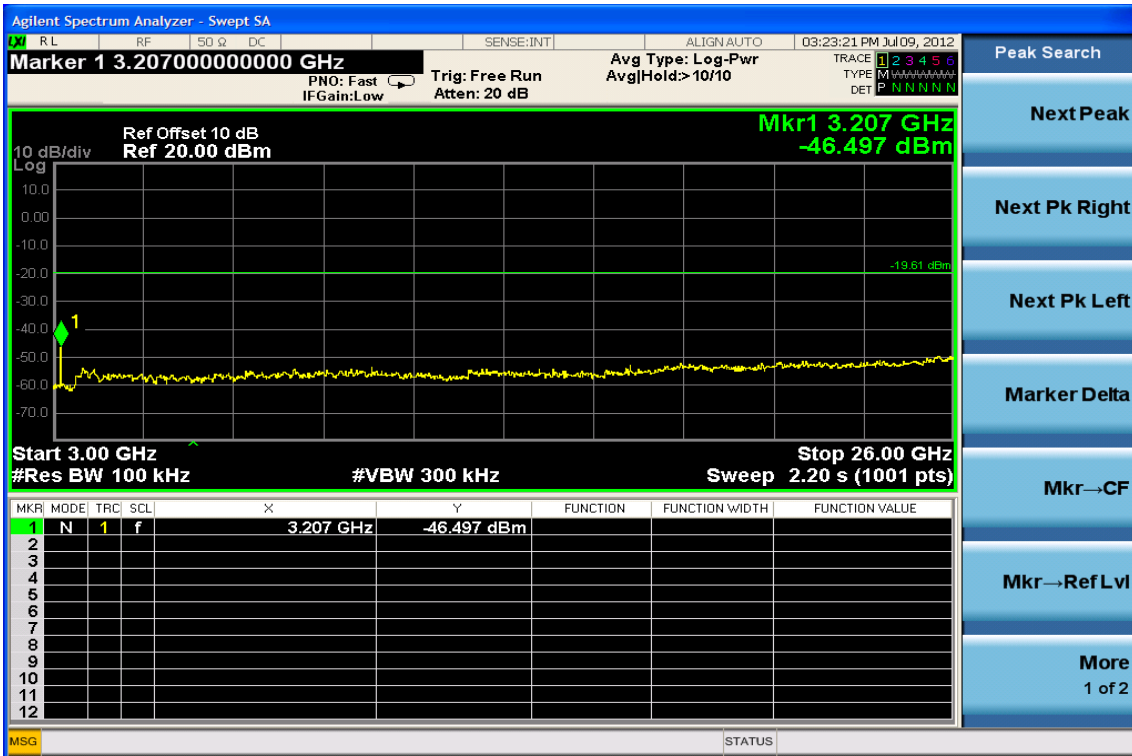





Ch Mid 30MHz – 3GHz

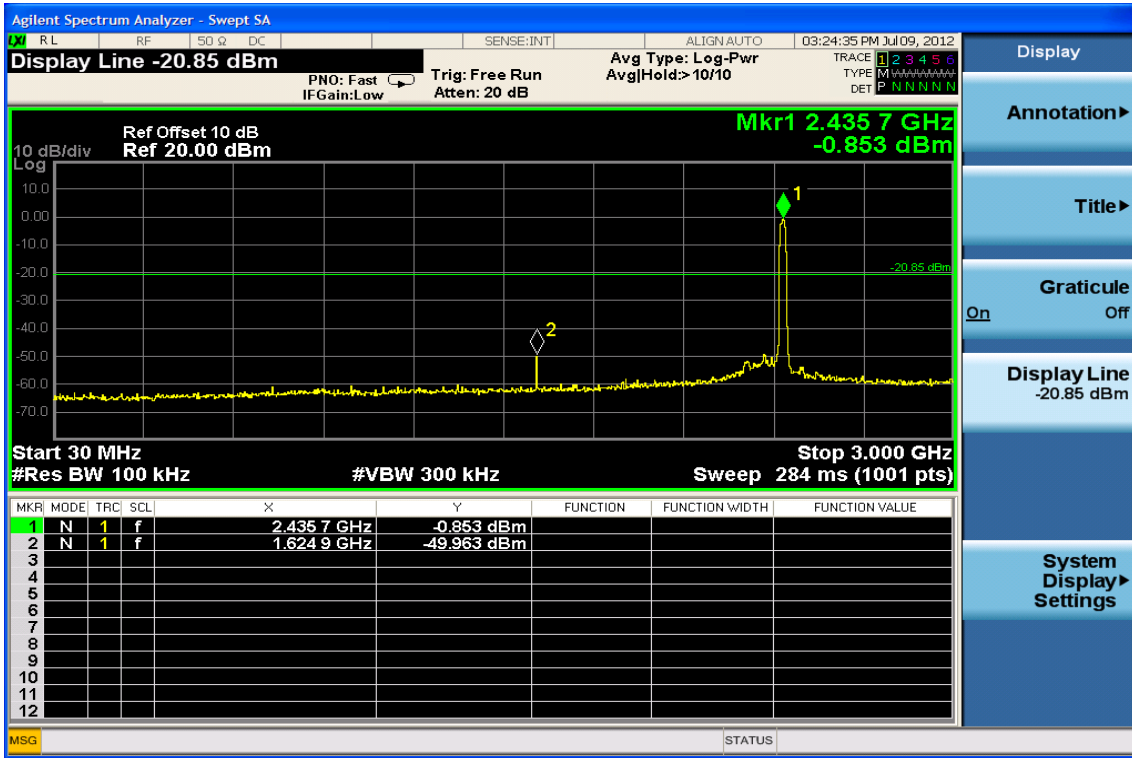


Ch Mid 3GHz – 26.5GHz

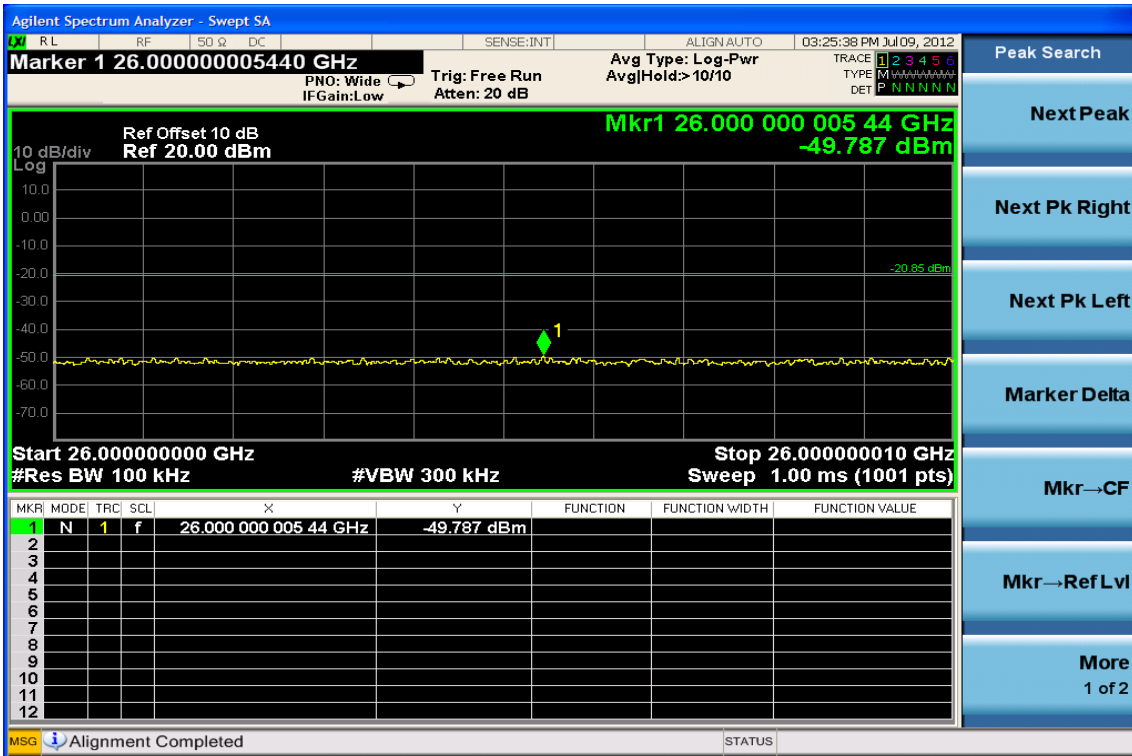


### Ch High 30MHz – 3GHz

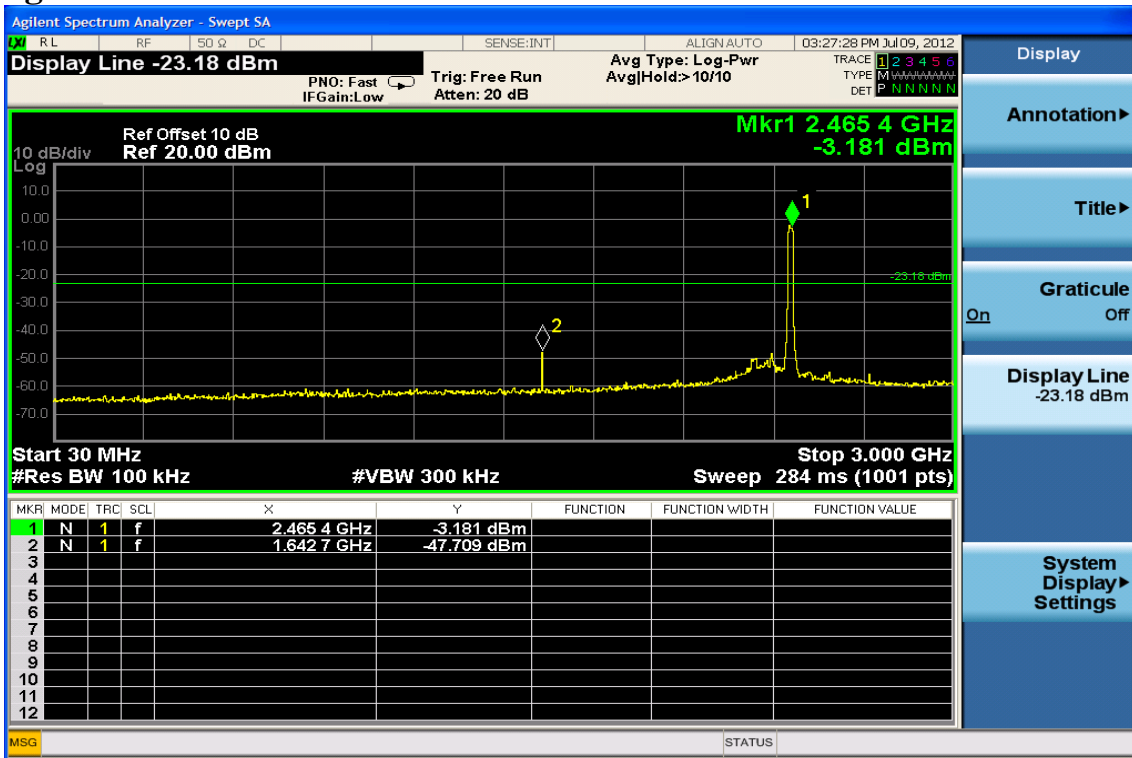


### Ch High 3GHz – 26.5GHz

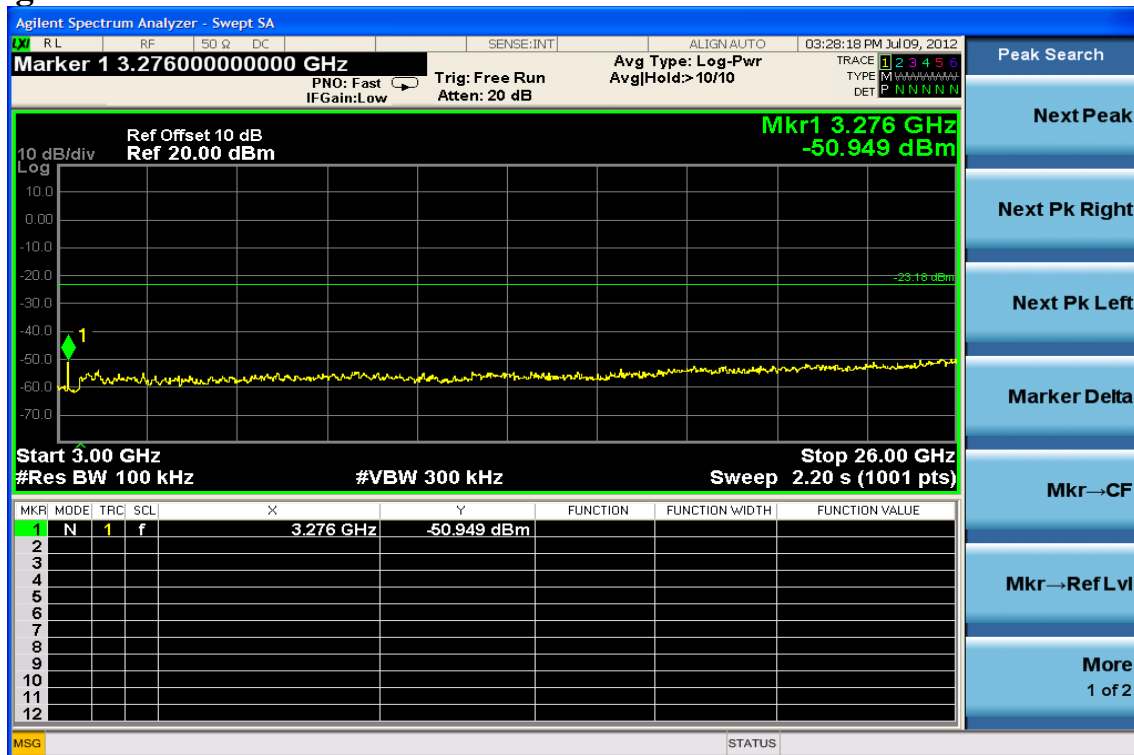


### Conducted Spurious Emission Measurement Result (802.11n\_40M) Ch Low 30MHz – 3GHz

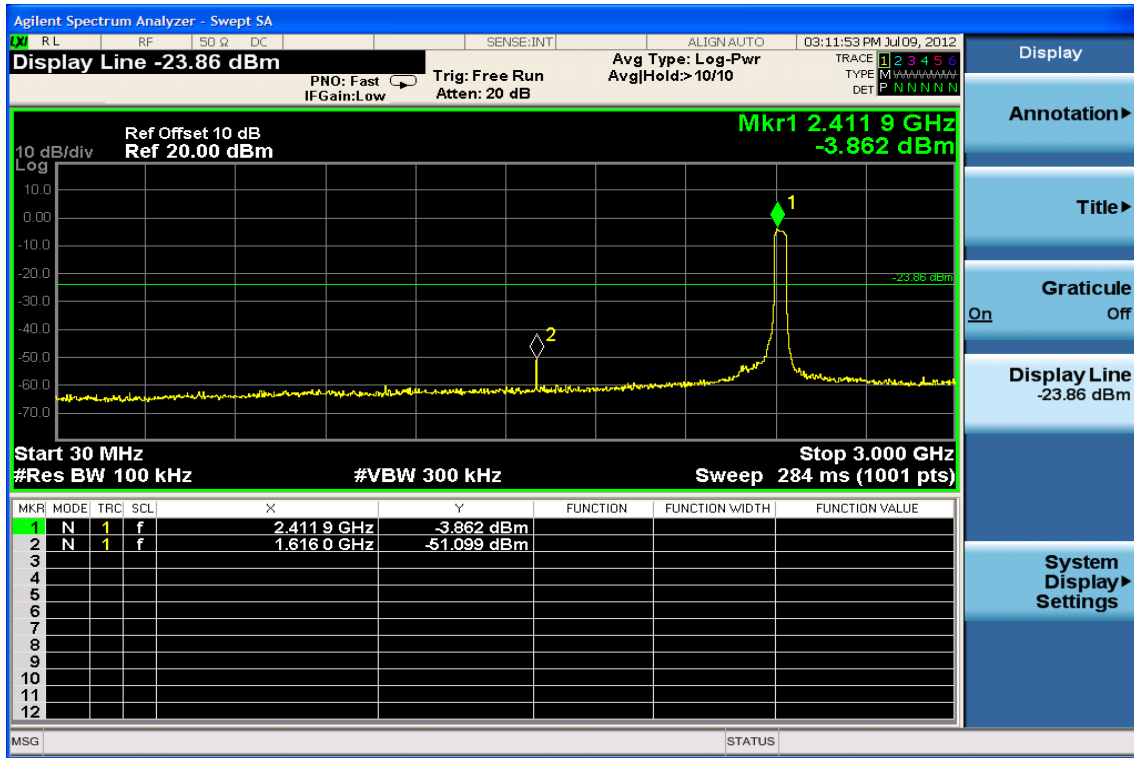


### Ch Low 3GHz – 26.5GHz

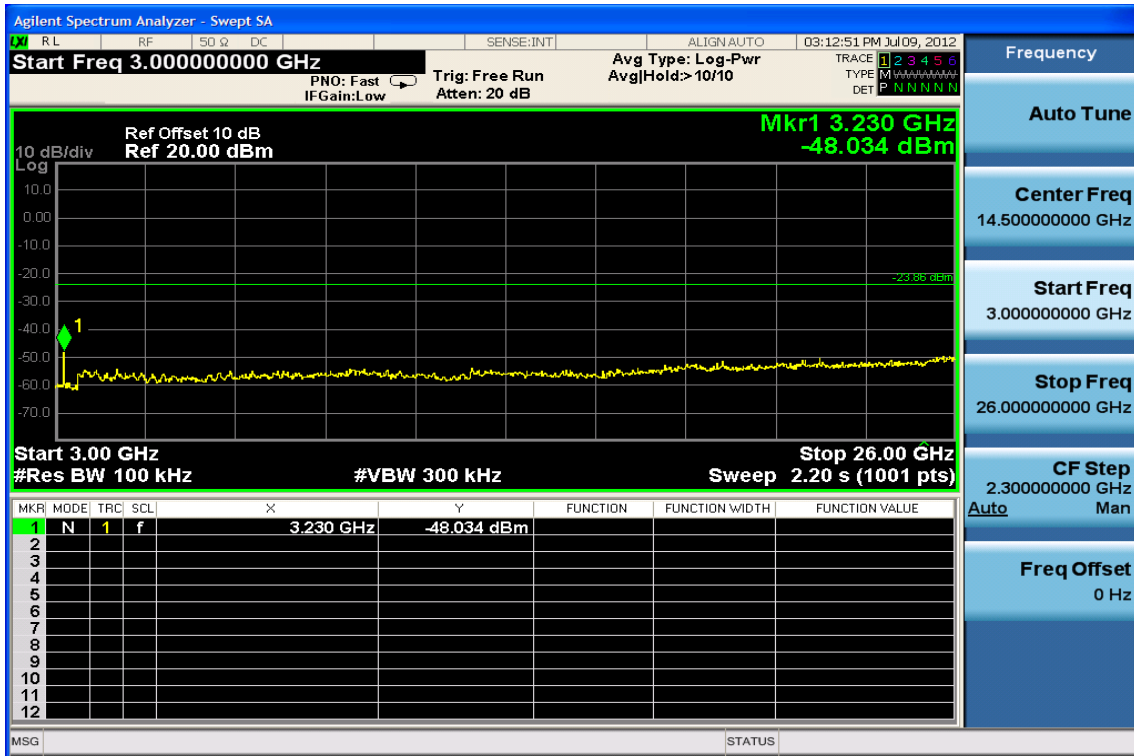


Ch Mid 30MHz – 3GHz

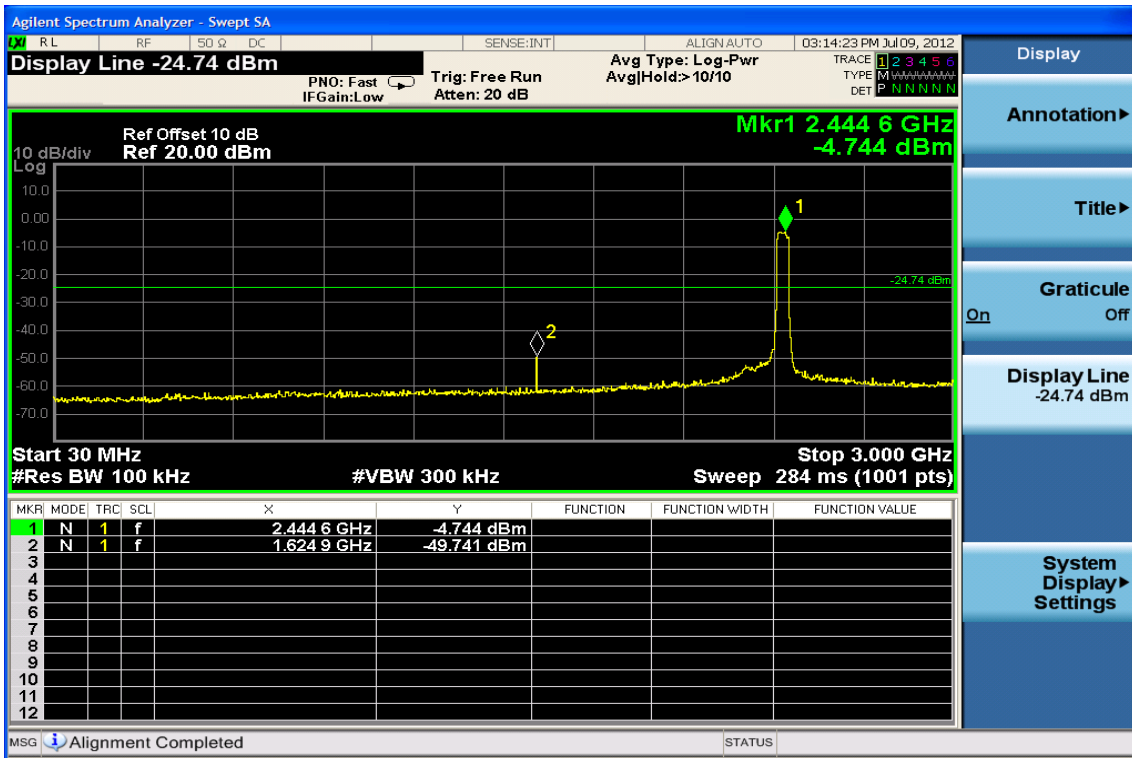


Ch Mid 3GHz – 26.5GHz

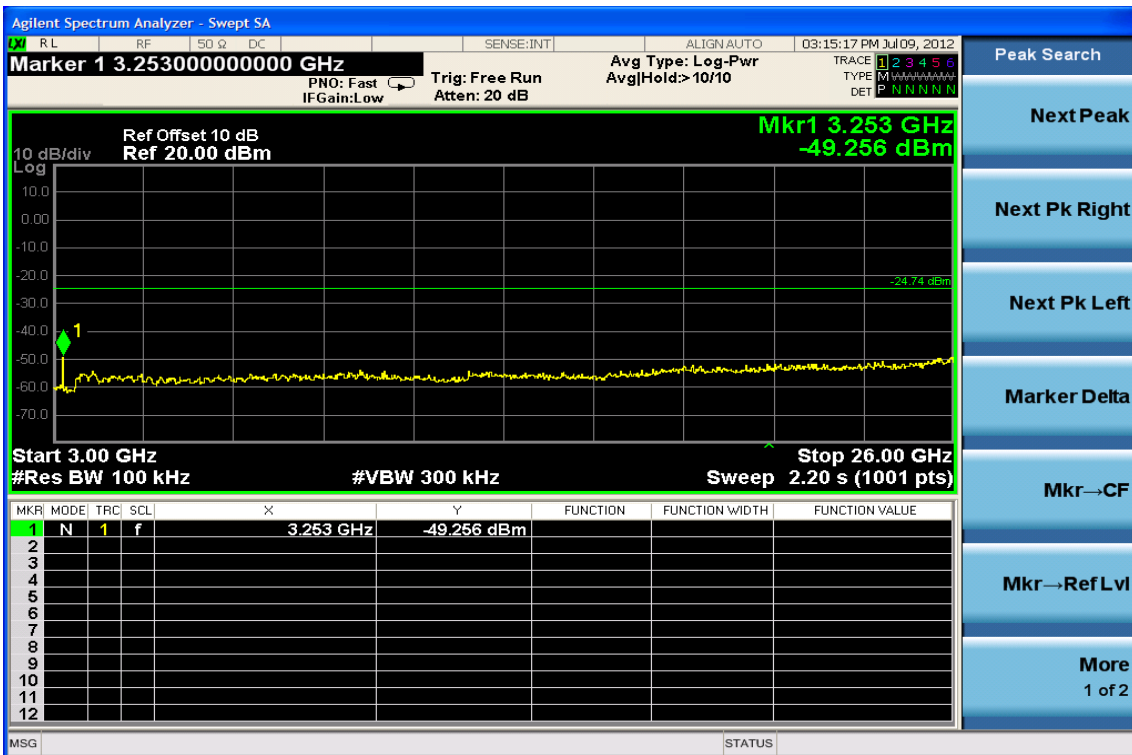

### Ch High 30MHz – 3GHz

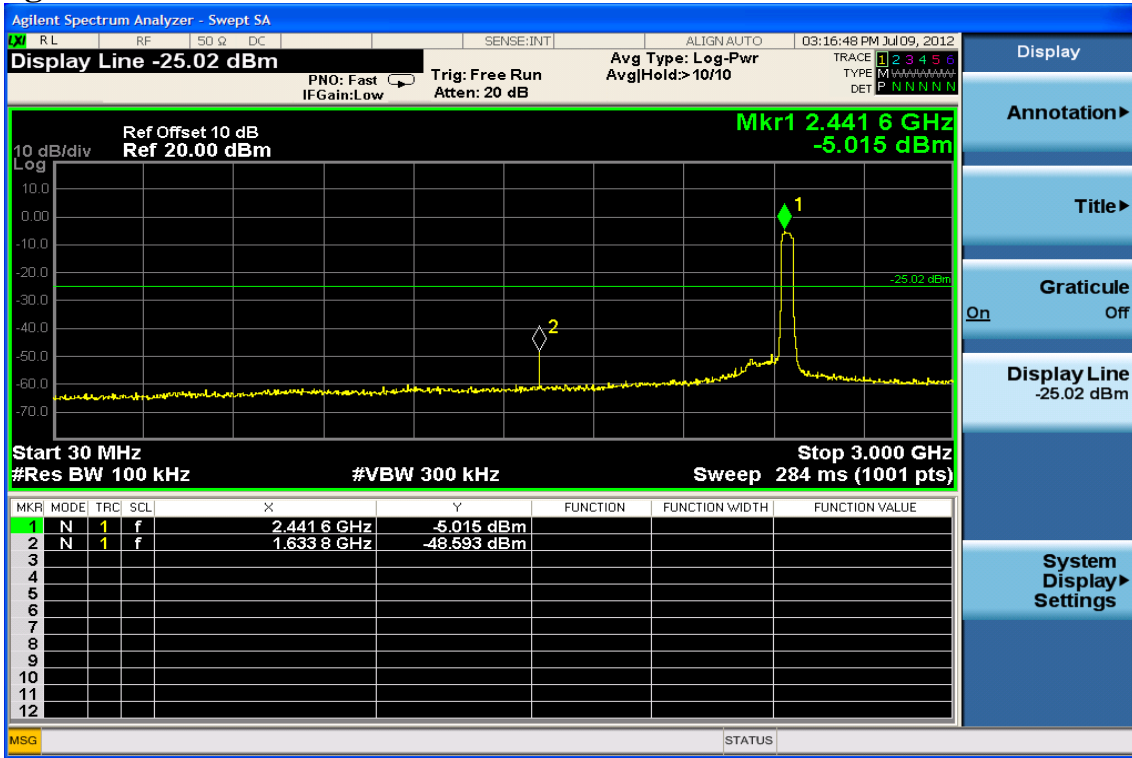

### Ch High 3GHz – 26.5GHz

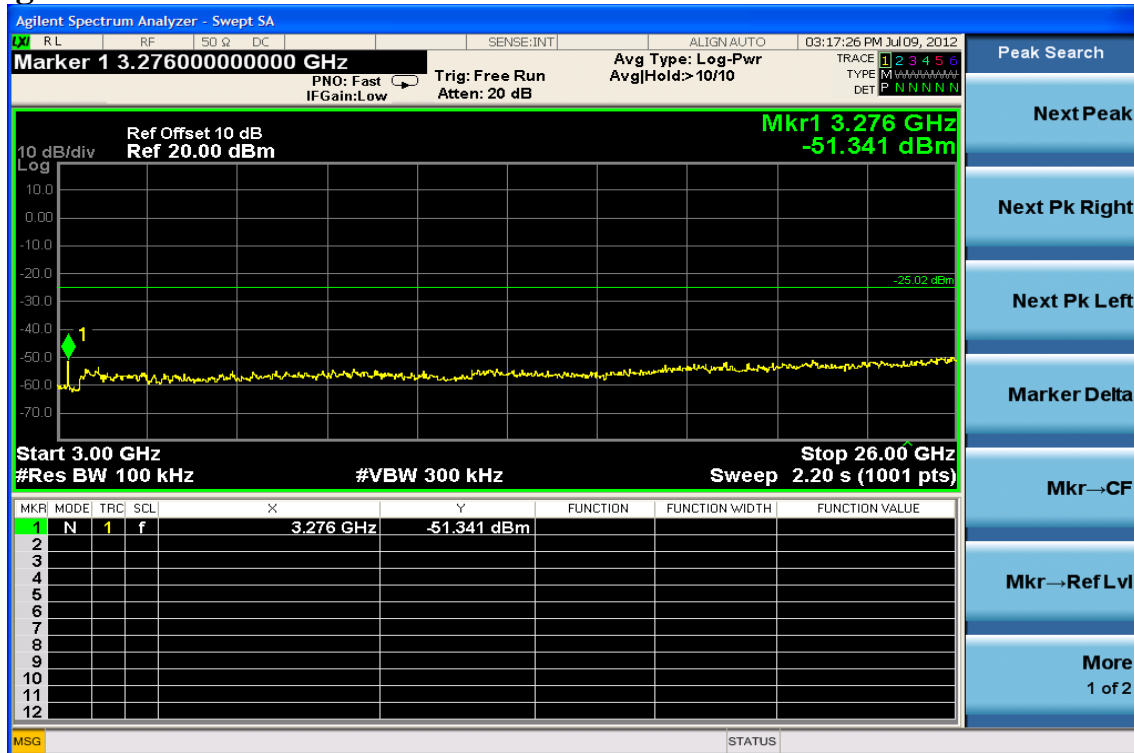

**Radiated Spurious Emission Measurement Result (below 1GHz)**

Operation Mode	802.11b TX CH Low	Test Date	2012/07/06
Fundamental Frequency	2412MHz	Test By	Dino
Temperature	25 °C	Humidity	60 %

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	168.71	47.86	-15.89	31.97	43.50	-11.53	Peak	VERTICAL
2	333.61	49.73	-10.94	38.79	46.00	-7.21	Peak	VERTICAL
3	444.19	37.95	-9.27	28.68	46.00	-17.32	Peak	VERTICAL
4	517.91	38.55	-8.39	30.16	46.00	-15.84	Peak	VERTICAL
5	668.26	45.12	-6.70	38.42	46.00	-7.58	Peak	VERTICAL
6	833.16	33.02	-4.94	28.08	46.00	-17.92	Peak	VERTICAL
1	168.71	55.22	-15.89	39.33	43.50	-4.17	Peak	HORIZONTAL
2	333.61	54.43	-10.94	43.49	46.00	-2.51	Peak	HORIZONTAL
3	426.73	40.78	-9.40	31.38	46.00	-14.62	Peak	HORIZONTAL
4	504.33	38.50	-8.66	29.84	46.00	-16.16	Peak	HORIZONTAL
5	666.32	42.04	-6.71	35.33	46.00	-10.67	Peak	HORIZONTAL
6	837.04	33.25	-4.88	28.37	46.00	-17.63	Peak	HORIZONTAL

Remark:

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 9MHz to 1000MHz were made with an instrument detector setting 9-90KHz/110-490KHz using PK/AV and other Frequency Band using PK/QP
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 The IF bandwidth of SPA between 9kHz to 30MHz was 10kHz, VBW= 30kHz; between 30MHz to 1GHz was 100KHz, VBW=300KHz.

**Radiated Spurious Emission Measurement Result (below 1GHz)**

Operation Mode	802.11b TX CH Mid	Test Date	2012/07/06
Fundamental Frequency	2437MHz	Test By	Dino
Temperature	25 °C	Humidity	60 %

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	151.25	53.31	-15.20	38.11	43.50	-5.39	Peak	VERTICAL
2	167.74	55.83	-15.86	39.97	43.50	-3.53	Peak	VERTICAL
3	333.61	53.12	-10.94	42.18	46.00	-3.82	Peak	VERTICAL
4	427.70	40.68	-9.40	31.28	46.00	-14.72	Peak	VERTICAL
5	667.29	42.09	-6.71	35.38	46.00	-10.62	Peak	VERTICAL
6	834.13	34.27	-4.92	29.35	46.00	-16.65	Peak	VERTICAL
1	151.25	51.41	-15.20	36.21	43.50	-7.29	Peak	HORIZONTAL
2	168.71	53.07	-15.89	37.18	43.50	-6.32	Peak	HORIZONTAL
3	333.61	52.50	-10.94	41.56	46.00	-4.44	Peak	HORIZONTAL
4	425.76	39.94	-9.41	30.53	46.00	-15.47	Peak	HORIZONTAL
5	667.29	42.99	-6.71	36.28	46.00	-9.72	Peak	HORIZONTAL
6	834.13	34.95	-4.92	30.03	46.00	-15.97	Peak	HORIZONTAL

Remark:

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 9MHz to 1000MHz were made with an instrument detector setting 9-90KHz/110-490KHz using PK/AV and other Frequency Band using PK/QP
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 The IF bandwidth of SPA between 9kHz to 30MHz was 10kHz, VBW= 30kHz; between 30MHz to 1GHz was 100KHz, VBW=300KHz.



**Radiated Spurious Emission Measurement Result (below 1GHz)**

Operation Mode	802.11b TX CH High	Test Date	2012/07/06
Fundamental Frequency	2462MHz	Test By	Dino
Temperature	25 °C	Humidity	60 %

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	151.25	52.13	-15.20	36.93	43.50	-6.57	Peak	VERTICAL
2	166.77	55.68	-15.84	39.84	43.50	-3.66	Peak	VERTICAL
3	333.61	52.92	-10.94	41.98	46.00	-4.02	Peak	VERTICAL
4	430.61	41.09	-9.37	31.72	46.00	-14.28	Peak	VERTICAL
5	667.29	41.06	-6.71	34.35	46.00	-11.65	Peak	VERTICAL
6	835.10	32.48	-4.91	27.57	46.00	-18.43	Peak	VERTICAL
1	167.74	56.78	-15.86	40.92	43.50	-2.58	Peak	HORIZONTAL
2	333.61	53.64	-10.94	42.70	46.00	-3.30	Peak	HORIZONTAL
3	356.89	47.40	-10.41	36.99	46.00	-9.01	Peak	HORIZONTAL
4	425.76	41.62	-9.41	32.21	46.00	-13.79	Peak	HORIZONTAL
5	668.26	41.12	-6.70	34.42	46.00	-11.58	Peak	HORIZONTAL
6	833.16	33.28	-4.94	28.34	46.00	-17.66	Peak	HORIZONTAL

Remark:

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 9MHz to 1000MHz were made with an instrument detector setting 9-90KHz/110-490KHz using PK/AV and other Frequency Band using PK/QP
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 The IF bandwidth of SPA between 9kHz to 30MHz was 10kHz, VBW= 30kHz; between 30MHz to 1GHz was 100KHz, VBW=300KHz.



**Radiated Spurious Emission Measurement Result (below 1GHz)**

Operation Mode	802.11g TX CH Low	Test Date	2012/07/06
Fundamental Frequency	2412MHz	Test By	Dino
Temperature	25 °C	Humidity	60 %

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	147.37	44.52	-14.97	29.55	43.50	-13.95	Peak	VERTICAL
2	168.71	45.24	-15.89	29.35	43.50	-14.15	Peak	VERTICAL
3	333.61	50.41	-10.94	39.47	46.00	-6.53	Peak	VERTICAL
4	504.33	38.43	-8.66	29.77	46.00	-16.23	Peak	VERTICAL
5	667.29	43.09	-6.71	36.38	46.00	-9.62	Peak	VERTICAL
6	834.13	33.02	-4.92	28.10	46.00	-17.90	Peak	VERTICAL
1	143.49	49.95	-14.72	35.23	43.50	-8.27	Peak	HORIZONTAL
2	166.77	53.90	-15.84	38.06	43.50	-5.44	Peak	HORIZONTAL
3	333.61	54.17	-10.94	43.23	46.00	-2.77	Peak	HORIZONTAL
4	426.73	40.49	-9.40	31.09	46.00	-14.91	Peak	HORIZONTAL
5	667.29	42.05	-6.71	35.34	46.00	-10.66	Peak	HORIZONTAL
6	835.10	35.33	-4.91	30.42	46.00	-15.58	Peak	HORIZONTAL

Remark:

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 9MHz to 1000MHz were made with an instrument detector setting 9-90KHz/110-490KHz using PK/AV and other Frequency Band using PK/QP
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 The IF bandwidth of SPA between 9kHz to 30MHz was 10kHz, VBW= 30kHz; between 30MHz to 1GHz was 100KHz, VBW=300KHz.

**Radiated Spurious Emission Measurement Result (below 1GHz)**

Operation Mode	802.11g TX CH Mid	Test Date	2012/07/06
Fundamental Frequency	2437MHz	Test By	Dino
Temperature	25 °C	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	101.78	45.04	-15.19	29.85	43.50	-13.65	Peak	VERTICAL
2	158.04	44.90	-15.58	29.32	43.50	-14.18	Peak	VERTICAL
3	333.61	51.34	-10.94	40.40	46.00	-5.60	Peak	VERTICAL
4	516.94	38.09	-8.41	29.68	46.00	-16.32	Peak	VERTICAL
5	668.26	41.35	-6.70	34.65	46.00	-11.35	Peak	VERTICAL
6	834.13	32.78	-4.92	27.86	46.00	-18.14	Peak	VERTICAL
1	166.77	52.39	-15.84	36.55	43.50	-6.95	Peak	HORIZONTAL
2	333.61	53.85	-10.94	42.91	46.00	-3.09	Peak	HORIZONTAL
3	425.76	38.45	-9.41	29.04	46.00	-16.96	Peak	HORIZONTAL
4	504.33	38.34	-8.66	29.68	46.00	-16.32	Peak	HORIZONTAL
5	666.32	42.87	-6.71	36.16	46.00	-9.84	Peak	HORIZONTAL
6	835.10	34.60	-4.91	29.69	46.00	-16.31	Peak	HORIZONTAL

Remark:

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 9MHz to 1000MHz were made with an instrument detector setting 9-90KHz/110-490KHz using PK/AV and other Frequency Band using PK/QP
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 The IF bandwidth of SPA between 9kHz to 30MHz was 10kHz, VBW= 30kHz; between 30MHz to 1GHz was 100KHz, VBW=300KHz.

**Radiated Spurious Emission Measurement Result (below 1GHz)**

Operation Mode	802.11g TX CH High	Test Date	2012/07/06
Fundamental Frequency	2462MHz	Test By	Dino
Temperature	25 °C	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	166.77	54.79	-15.84	38.95	43.50	-4.55	Peak	VERTICAL
2	333.61	53.93	-10.94	42.99	46.00	-3.01	Peak	VERTICAL
3	424.79	40.44	-9.42	31.02	46.00	-14.98	Peak	VERTICAL
4	504.33	36.69	-8.66	28.03	46.00	-17.97	Peak	VERTICAL
5	666.32	40.86	-6.71	34.15	46.00	-11.85	Peak	VERTICAL
6	834.13	36.39	-4.92	31.47	46.00	-14.53	Peak	VERTICAL
1	168.71	52.02	-15.89	36.13	43.50	-7.37	Peak	HORIZONTAL
2	333.61	53.39	-10.94	42.45	46.00	-3.55	Peak	HORIZONTAL
3	428.67	38.46	-9.39	29.07	46.00	-16.93	Peak	HORIZONTAL
4	491.72	38.92	-8.83	30.09	46.00	-15.91	Peak	HORIZONTAL
5	667.29	42.26	-6.71	35.55	46.00	-10.45	Peak	HORIZONTAL
6	835.10	34.56	-4.91	29.65	46.00	-16.35	Peak	HORIZONTAL

Remark:

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 9MHz to 1000MHz were made with an instrument detector setting 9-90KHz/110-490KHz using PK/AV and other Frequency Band using PK/QP
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 The IF bandwidth of SPA between 9kHz to 30MHz was 10kHz, VBW= 30kHz; between 30MHz to 1GHz was 100KHz, VBW=300KHz.

**Radiated Spurious Emission Measurement Result (below 1GHz)**

Operation Mode	802.11 n_20M TX CH Low	Test Date	2012/07/06
Fundamental Frequency	2412MHz	Test By	Dino
Temperature	25 °C	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	167.74	51.53	-15.86	35.67	43.50	-7.83	Peak	VERTICAL
2	312.27	44.80	-11.45	33.35	46.00	-12.65	Peak	VERTICAL
3	333.61	53.45	-10.94	42.51	46.00	-3.49	Peak	VERTICAL
4	455.83	38.13	-9.18	28.95	46.00	-17.05	Peak	VERTICAL
5	667.29	42.45	-6.71	35.74	46.00	-10.26	Peak	VERTICAL
6	834.13	34.84	-4.92	29.92	46.00	-16.08	Peak	VERTICAL
1	168.71	54.27	-15.89	38.38	43.50	-5.12	Peak	HORIZONTAL
2	333.61	54.14	-10.94	43.20	46.00	-2.80	Peak	HORIZONTAL
3	422.85	41.86	-9.43	32.43	46.00	-13.57	Peak	HORIZONTAL
4	492.69	39.39	-8.82	30.57	46.00	-15.43	Peak	HORIZONTAL
5	667.29	42.80	-6.71	36.09	46.00	-9.91	Peak	HORIZONTAL
6	833.16	36.46	-4.94	31.52	46.00	-14.48	Peak	HORIZONTAL

Remark:

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 9MHz to 1000MHz were made with an instrument detector setting 9-90KHz/110-490KHz using PK/AV and other Frequency Band using PK/QP
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 The IF bandwidth of SPA between 9kHz to 30MHz was 10kHz, VBW= 30kHz; between 30MHz to 1GHz was 100KHz, VBW=300KHz.

**Radiated Spurious Emission Measurement Result (below 1GHz)**

Operation Mode	802.11 n_20M TX CH Mid	Test Date	2012/07/06
Fundamental Frequency	2437MHz	Test By	Dino
Temperature	25 °C	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	148.34	51.05	-15.03	36.02	43.50	-7.48	Peak	VERTICAL
2	167.74	55.28	-15.86	39.42	43.50	-4.08	Peak	VERTICAL
3	333.61	53.16	-10.94	42.22	46.00	-3.78	Peak	VERTICAL
4	424.79	39.68	-9.42	30.26	46.00	-15.74	Peak	VERTICAL
5	667.29	40.71	-6.71	34.00	46.00	-12.00	Peak	VERTICAL
6	834.13	36.61	-4.92	31.69	46.00	-14.31	Peak	VERTICAL
1	148.34	51.70	-15.03	36.67	43.50	-6.83	Peak	HORIZONTAL
2	167.74	53.46	-15.86	37.60	43.50	-5.90	Peak	HORIZONTAL
3	333.61	53.89	-10.94	42.95	46.00	-3.05	Peak	HORIZONTAL
4	431.58	42.37	-9.37	33.00	46.00	-13.00	Peak	HORIZONTAL
5	666.32	41.65	-6.71	34.94	46.00	-11.06	Peak	HORIZONTAL
6	835.10	35.23	-4.91	30.32	46.00	-15.68	Peak	HORIZONTAL

Remark:

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 9MHz to 1000MHz were made with an instrument detector setting 9-90KHz/110-490KHz using PK/AV and other Frequency Band using PK/QP
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 The IF bandwidth of SPA between 9kHz to 30MHz was 10kHz, VBW= 30kHz; between 30MHz to 1GHz was 100KHz, VBW=300KHz.

**Radiated Spurious Emission Measurement Result (below 1GHz)**

Operation Mode	802.11 n_20M TX CH High	Test Date	2012/07/06
Fundamental Frequency	2462MHz	Test By	Dino
Temperature	25 °C	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	168.71	54.74	-15.89	38.85	43.50	-4.65	Peak	VERTICAL
2	186.17	51.01	-16.40	34.61	43.50	-8.89	Peak	VERTICAL
3	333.61	53.27	-10.94	42.33	46.00	-3.67	Peak	VERTICAL
4	423.82	41.17	-9.42	31.75	46.00	-14.25	Peak	VERTICAL
5	667.29	41.08	-6.71	34.37	46.00	-11.63	Peak	VERTICAL
6	834.13	35.31	-4.92	30.39	46.00	-15.61	Peak	VERTICAL
1	167.74	51.40	-15.86	35.54	43.50	-7.96	Peak	HORIZONTAL
2	312.27	43.19	-11.45	31.74	46.00	-14.26	Peak	HORIZONTAL
3	333.61	51.32	-10.94	40.38	46.00	-5.62	Peak	HORIZONTAL
4	504.33	38.07	-8.66	29.41	46.00	-16.59	Peak	HORIZONTAL
5	669.23	42.02	-6.70	35.32	46.00	-10.68	Peak	HORIZONTAL
6	834.13	35.22	-4.92	30.30	46.00	-15.70	Peak	HORIZONTAL

Remark:

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 9MHz to 1000MHz were made with an instrument detector setting 9-90KHz/110-490KHz using PK/AV and other Frequency Band using PK/QP
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 The IF bandwidth of SPA between 9kHz to 30MHz was 10kHz, VBW= 30kHz; between 30MHz to 1GHz was 100KHz, VBW=300KHz.

**Radiated Spurious Emission Measurement Result (below 1GHz)**

Operation Mode	802.11 n_40M TX CH Low	Test Date	2012/07/06
Fundamental Frequency	2422MHz	Test By	Dino
Temperature	25 °C	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	148.34	51.15	-15.03	36.12	43.50	-7.38	Peak	VERTICAL
2	167.74	55.11	-15.86	39.25	43.50	-4.25	Peak	VERTICAL
3	333.61	53.28	-10.94	42.34	46.00	-3.66	Peak	VERTICAL
4	425.76	40.97	-9.41	31.56	46.00	-14.44	Peak	VERTICAL
5	667.29	40.68	-6.71	33.97	46.00	-12.03	Peak	VERTICAL
6	835.10	34.37	-4.91	29.46	46.00	-16.54	Peak	VERTICAL
1	168.71	48.22	-15.89	32.33	43.50	-11.17	Peak	HORIZONTAL
2	312.27	44.59	-11.45	33.14	46.00	-12.86	Peak	HORIZONTAL
3	333.61	51.49	-10.94	40.55	46.00	-5.45	Peak	HORIZONTAL
4	504.33	38.07	-8.66	29.41	46.00	-16.59	Peak	HORIZONTAL
5	667.29	41.47	-6.71	34.76	46.00	-11.24	Peak	HORIZONTAL
6	833.16	35.01	-4.94	30.07	46.00	-15.93	Peak	HORIZONTAL

Remark:

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 9MHz to 1000MHz were made with an instrument detector setting 9-90KHz/110-490KHz using PK/AV and other Frequency Band using PK/QP
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 The IF bandwidth of SPA between 9kHz to 30MHz was 10kHz, VBW= 30kHz; between 30MHz to 1GHz was 100KHz, VBW=300KHz.

**Radiated Spurious Emission Measurement Result (below 1GHz)**

Operation Mode	802.11 n_40M TX CH Mid	Test Date	2012/07/06
Fundamental Frequency	2437MHz	Test By	Dino
Temperature	25 °C	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	148.34	52.31	-15.03	37.28	43.50	-6.22	Peak	VERTICAL
2	167.74	55.34	-15.86	39.48	43.50	-4.02	Peak	VERTICAL
3	333.61	53.72	-10.94	42.78	46.00	-3.22	Peak	VERTICAL
4	430.61	41.24	-9.37	31.87	46.00	-14.13	Peak	VERTICAL
5	666.32	39.63	-6.71	32.92	46.00	-13.08	Peak	VERTICAL
6	834.13	34.64	-4.92	29.72	46.00	-16.28	Peak	VERTICAL
1	151.25	50.34	-15.20	35.14	43.50	-8.36	Peak	HORIZONTAL
2	167.74	53.62	-15.86	37.76	43.50	-5.74	Peak	HORIZONTAL
3	333.61	53.63	-10.94	42.69	46.00	-3.31	Peak	HORIZONTAL
4	423.82	39.22	-9.42	29.80	46.00	-16.20	Peak	HORIZONTAL
5	667.29	40.52	-6.71	33.81	46.00	-12.19	Peak	HORIZONTAL
6	834.13	35.73	-4.92	30.81	46.00	-15.19	Peak	HORIZONTAL

Remark:

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 9MHz to 1000MHz were made with an instrument detector setting 9-90KHz/110-490KHz using PK/AV and other Frequency Band using PK/QP
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 The IF bandwidth of SPA between 9kHz to 30MHz was 10kHz, VBW= 30kHz; between 30MHz to 1GHz was 100KHz, VBW=300KHz.



**Radiated Spurious Emission Measurement Result (below 1GHz)**

Operation Mode	802.11 n_40M TX CH High	Test Date	2012/07/06
Fundamental Frequency	2452MHz	Test By	Dino
Temperature	25 °C	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	151.25	52.09	-15.20	36.89	43.50	-6.61	Peak	VERTICAL
2	167.74	54.60	-15.86	38.74	43.50	-4.76	Peak	VERTICAL
3	333.61	53.86	-10.94	42.92	46.00	-3.08	Peak	VERTICAL
4	427.70	41.55	-9.40	32.15	46.00	-13.85	Peak	VERTICAL
5	667.29	39.07	-6.71	32.36	46.00	-13.64	Peak	VERTICAL
6	833.16	34.50	-4.94	29.56	46.00	-16.44	Peak	VERTICAL
1	151.25	52.21	-15.20	37.01	43.50	-6.49	Peak	HORIZONTAL
2	167.74	55.19	-15.86	39.33	43.50	-4.17	Peak	HORIZONTAL
3	333.61	54.30	-10.94	43.36	46.00	-2.64	Peak	HORIZONTAL
4	423.82	40.31	-9.42	30.89	46.00	-15.11	Peak	HORIZONTAL
5	666.32	41.37	-6.71	34.66	46.00	-11.34	Peak	HORIZONTAL
6	835.10	34.90	-4.91	29.99	46.00	-16.01	Peak	HORIZONTAL

Remark:

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 9MHz to 1000MHz were made with an instrument detector setting 9-90KHz/110-490KHz using PK/AV and other Frequency Band using PK/QP
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 The IF bandwidth of SPA between 9kHz to 30MHz was 10kHz, VBW= 30kHz; between 30MHz to 1GHz was 100KHz, VBW=300KHz.

**Radiated Spurious Emission Measurement Result (above 1GHz)**

Operation Mode	802.11b TX CH Low	Test Date	2012/07/06
Fundamental Frequency	2412MHz	Test By	Dino
Temperature	25 °C	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	2001.00	57.32	-12.50	44.82	74.00	-29.18	Peak	VERTICAL
2	4824.00	37.12	-2.59	34.53	74.00	-39.47	Peak	VERTICAL
1	3219.00	51.90	-8.90	43.00	74.00	-31.00	Peak	HORIZONTAL
2	4824.00	37.13	-2.59	34.54	74.00	-39.46	Peak	HORIZONTAL

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

**Radiated Spurious Emission Measurement Result (above 1GHz)**

Operation Mode	802.11b TX CH Mid	Test Date	2012/07/06
Fundamental Frequency	2437MHz	Test By	Dino
Temperature	25 °C	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	2001.00	57.61	-12.50	45.11	74.00	-28.89	Peak	VERTICAL
2	4874.00	37.20	-2.42	34.78	74.00	-39.22	Peak	VERTICAL
1	2001.00	51.85	-12.50	39.35	74.00	-34.65	Peak	HORIZONTAL
2	4874.00	37.39	-2.42	34.97	74.00	-39.03	Peak	HORIZONTAL

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

**Radiated Spurious Emission Measurement Result (above 1GHz)**

Operation Mode	802.11b TX CH High	Test Date	2012/07/06
Fundamental Frequency	2462MHz	Test By	Dino
Temperature	25 °C	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	2001.00	57.88	-12.50	45.38	74.00	-28.62	Peak	VERTICAL
2	4924.00	38.48	-2.25	36.23	74.00	-37.77	Peak	VERTICAL
1	2001.00	53.53	-12.50	41.03	74.00	-32.97	Peak	HORIZONTAL
2	4924.00	38.04	-2.25	35.79	74.00	-38.21	Peak	HORIZONTAL

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

**Radiated Spurious Emission Measurement Result (above 1GHz)**

Operation Mode	802.11g TX CH Low	Test Date	2012/07/06
Fundamental Frequency	2412MHz	Test By	Dino
Temperature	25 °C	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	3338.00	53.59	-8.53	45.06	74.00	-28.94	Peak	VERTICAL
2	4824.00	37.02	-2.59	34.43	74.00	-39.57	Peak	VERTICAL
1	3219.00	52.26	-8.90	43.36	74.00	-30.64	Peak	HORIZONTAL
2	4824.00	36.42	-2.59	33.83	74.00	-40.17	Peak	HORIZONTAL

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

**Radiated Spurious Emission Measurement Result (above 1GHz)**

Operation Mode	802.11g TX CH Mid	Test Date	2012/07/06
Fundamental Frequency	2437MHz	Test By	Dino
Temperature	25 °C	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	2001.00	58.31	-12.50	45.81	74.00	-28.19	Peak	VERTICAL
2	4874.00	37.47	-2.42	35.05	74.00	-38.95	Peak	VERTICAL
1	2001.00	54.61	-12.50	42.11	74.00	-31.89	Peak	HORIZONTAL
2	4874.00	36.69	-2.42	34.27	74.00	-39.73	Peak	HORIZONTAL

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

**Radiated Spurious Emission Measurement Result (above 1GHz)**

Operation Mode	802.11g TX CH High	Test Date	2012/07/06
Fundamental Frequency	2462MHz	Test By	Dino
Temperature	25 °C	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	3338.00	53.47	-8.53	44.94	74.00	-29.06	Peak	VERTICAL
2	4924.00	37.88	-2.25	35.63	74.00	-38.37	Peak	VERTICAL
1	2001.00	53.18	-12.50	40.68	74.00	-33.32	Peak	HORIZONTAL
2	4924.00	36.88	-2.25	34.63	74.00	-39.37	Peak	HORIZONTAL

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

**Radiated Spurious Emission Measurement Result (above 1GHz)**

Operation Mode	802.11n_20M TX CH Low	Test Date	2012/07/06
Fundamental Frequency	2412MHz	Test By	Dino
Temperature	25 °C	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	2001.00	57.59	-12.50	45.09	74.00	-28.91	Peak	VERTICAL
2	4824.00	36.32	-2.59	33.73	74.00	-40.27	Peak	VERTICAL
1	3219.00	52.50	-8.90	43.60	74.00	-30.40	Peak	HORIZONTAL
2	4824.00	35.63	-2.59	33.04	74.00	-40.96	Peak	HORIZONTAL

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



**Radiated Spurious Emission Measurement Result (above 1GHz)**

Operation Mode	802.11n_20M TX CH Mid	Test Date	2012/07/06
Fundamental Frequency	2437MHz	Test By	Dino
Temperature	25 °C	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	3331.00	53.92	-8.56	45.36	74.00	-28.64	Peak	VERTICAL
2	4874.00	37.73	-2.42	35.31	74.00	-38.69	Peak	VERTICAL
1	2001.00	54.66	-12.50	42.16	74.00	-31.84	Peak	HORIZONTAL
2	4874.00	37.84	-2.42	35.42	74.00	-38.58	Peak	HORIZONTAL

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

**Radiated Spurious Emission Measurement Result (above 1GHz)**

Operation Mode	802.11n_20M TX CH High	Test Date	2012/07/06
Fundamental Frequency	2462MHz	Test By	Dino
Temperature	25 °C	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	3331.00	53.38	-8.56	44.82	74.00	-29.18	Peak	VERTICAL
2	4924.00	38.25	-2.25	36.00	74.00	-38.00	Peak	VERTICAL
1	2001.00	52.39	-12.50	39.89	74.00	-34.11	Peak	HORIZONTAL
2	4924.00	37.64	-2.25	35.39	74.00	-38.61	Peak	HORIZONTAL

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

**Radiated Spurious Emission Measurement Result (above 1GHz)**

Operation Mode	802.11n_40M TX CH Low	Test Date	2012/07/06
Fundamental Frequency	2422MHz	Test By	Dino
Temperature	25 °C	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	3338.00	50.69	-8.53	42.16	74.00	-31.84	Peak	VERTICAL
2	4844.00	35.74	-2.52	33.22	74.00	-40.78	Peak	VERTICAL
1	2001.00	51.85	-12.50	39.35	74.00	-34.65	Peak	HORIZONTAL
2	4844.00	36.62	-2.52	34.10	74.00	-39.90	Peak	HORIZONTAL

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

**Radiated Spurious Emission Measurement Result (above 1GHz)**

Operation Mode	802.11n_40M TX CH Mid	Test Date	2012/07/06
Fundamental Frequency	2437MHz	Test By	Dino
Temperature	25 °C	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	2001.00	57.17	-12.50	44.67	74.00	-29.33	Peak	VERTICAL
2	4874.00	36.11	-2.42	33.69	74.00	-40.31	Peak	VERTICAL
1	2001.00	51.29	-12.50	38.79	74.00	-35.21	Peak	HORIZONTAL
2	4874.00	35.85	-2.42	33.43	74.00	-40.57	Peak	HORIZONTAL

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

**Radiated Spurious Emission Measurement Result (above 1GHz)**

Operation Mode	802.11n_40M TX CH High	Test Date	2012/07/06
Fundamental Frequency	2452MHz	Test By	Dino
Temperature	25 °C	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	2001.00	58.42	-12.50	45.92	74.00	-28.08	Peak	VERTICAL
2	4904.00	36.44	-2.32	34.12	74.00	-39.88	Peak	VERTICAL
1	2001.00	53.48	-12.50	40.98	74.00	-33.02	Peak	HORIZONTAL
2	4906.00	37.04	-2.31	34.73	74.00	-39.27	Peak	HORIZONTAL

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

## 10 Peak Power Spectral Density

### 10.1 Standard Applicable:

According to §15.247(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

### 10.2 Measurement Equipment Used:

Refer to section 6.2 for details.

### 10.3 Test Set-up:

Refer to section 6.3 for details.

### 10.4 Measurement Procedure:

Refer to section 5.3.1 Measurement Procedure PKPSD:of KDB Document: 558074 D01 DTS Meas Guidance v01

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW = 100 kHz.
3. Set the VBW  $\geq$  300 kHz.
4. Set the span to 5-30 % greater than the EBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.
10. Scale the observed power level to an equivalent value in 3 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where  $BWCF = 10\log(3\text{ kHz}/100\text{ kHz}) = -15.2\text{ dB}$ .
11. The resulting peak PSD level must be  $\leq 8\text{ dBm}$ .

## 10.5 Measurement Result:

### 802.11b Mode

Frequency MHz	Power Density Reading (dBm)/100KHz	BWCF (dB)	Power Density Level (dBm)/3KHz	Maximum Limit (dBm)
2412	5.611	-15.2	-9.589	8
2437	5.397	-15.2	-9.803	8
2462	3.369	-15.2	-11.831	8

BWCF(bandwidth correction factor)= $10\log(3\text{ kHz}/100\text{KHz})$   
kHz = -15.2 dB)

### 802.11g Mode

Frequency MHz	Power Density Reading (dBm)/100KHz	BWCF (dB)	Power Density Level (dBm)/3KHz	Maximum Limit (dBm)
2412	1.499	-15.2	-13.701	8
2437	-0.066	-15.2	-15.266	8
2462	-1.487	-15.2	-16.687	8

BWCF(bandwidth correction factor)= $10\log(3\text{ kHz}/100\text{KHz})$   
kHz = -15.2 dB)

### 802.11n HT20 Mode

Frequency MHz	Power Density Reading (dBm)/100KHz	BWCF (dB)	Power Density Level (dBm)/3KHz	Maximum Limit (dBm)
2412	1.14	-15.2	-14.06	8
2437	-0.742	-15.2	-15.942	8
2462	-2.223	-15.2	-17.423	8

BWCF(bandwidth correction factor)= $10\log(3\text{ kHz}/100\text{KHz})$   
kHz = -15.2 dB)

### 802.11n HT40 Mode

Frequency MHz	Power Density Reading (dBm)/100KHz	BWCF (dB)	Power Density Level (dBm)/3KHz	Maximum Limit (dBm)
2422	-3.015	-15.2	-18.215	8
2437	-3.78	-15.2	-18.98	8
2452	-4.725	-15.2	-19.925	8

BWCF(bandwidth correction factor)= $10\log(3\text{ kHz}/100\text{KHz})$   
kHz = -15.2 dB)

### 802.11b Power Spectral Density Test Plot (CH-Low)



### Power Spectral Density Test Plot (CH-Mid)







### Power Spectral Density Test Plot (CH-High)




## 802.11g Power Spectral Density Test Plot (CH-Low)

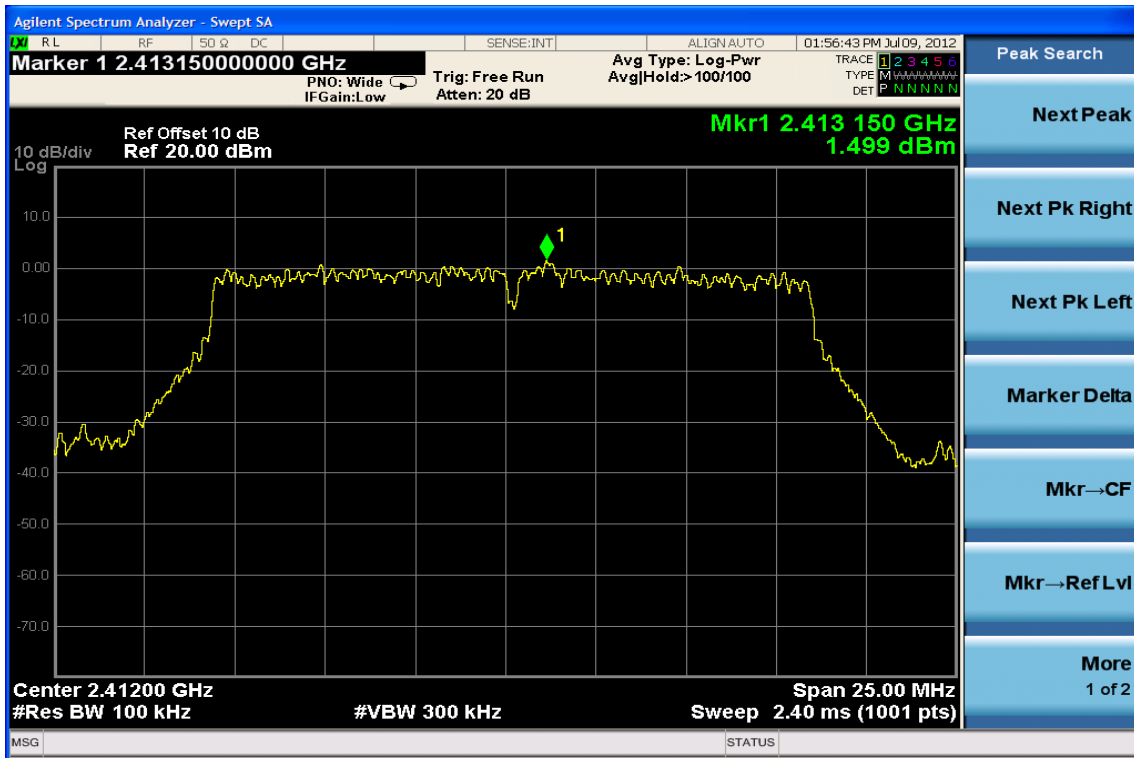


## Power Spectral Density Test Plot (CH-Mid)

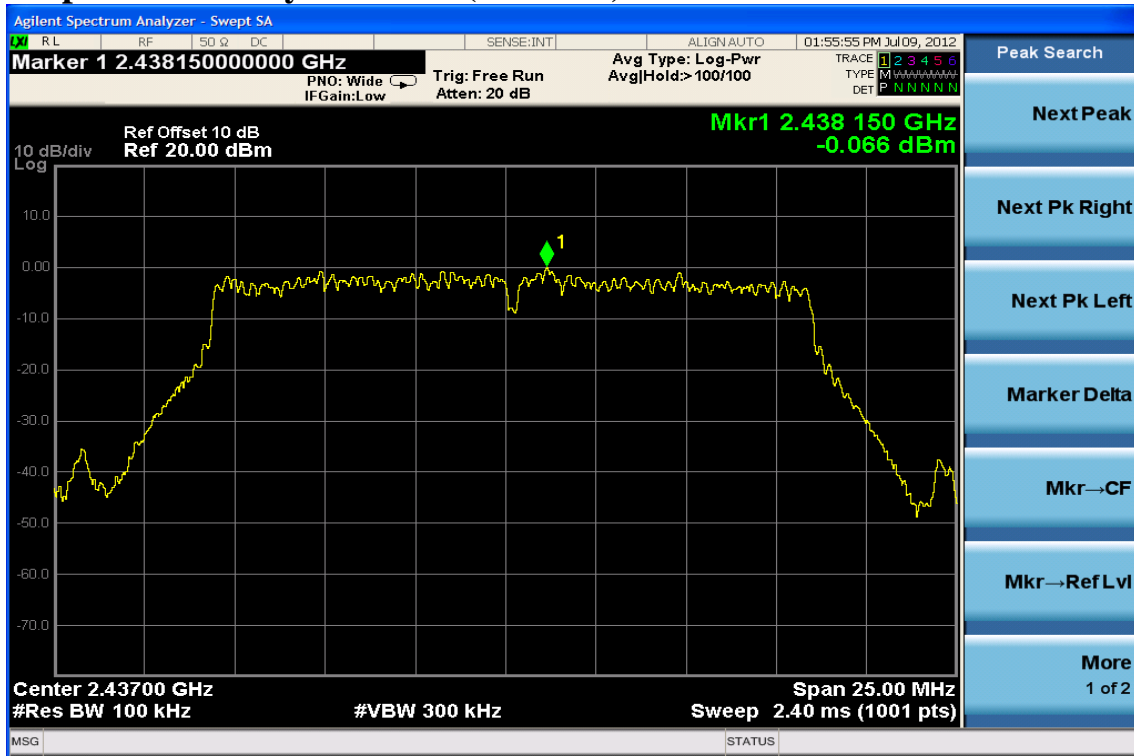


### Power Spectral Density Test Plot (CH-High)

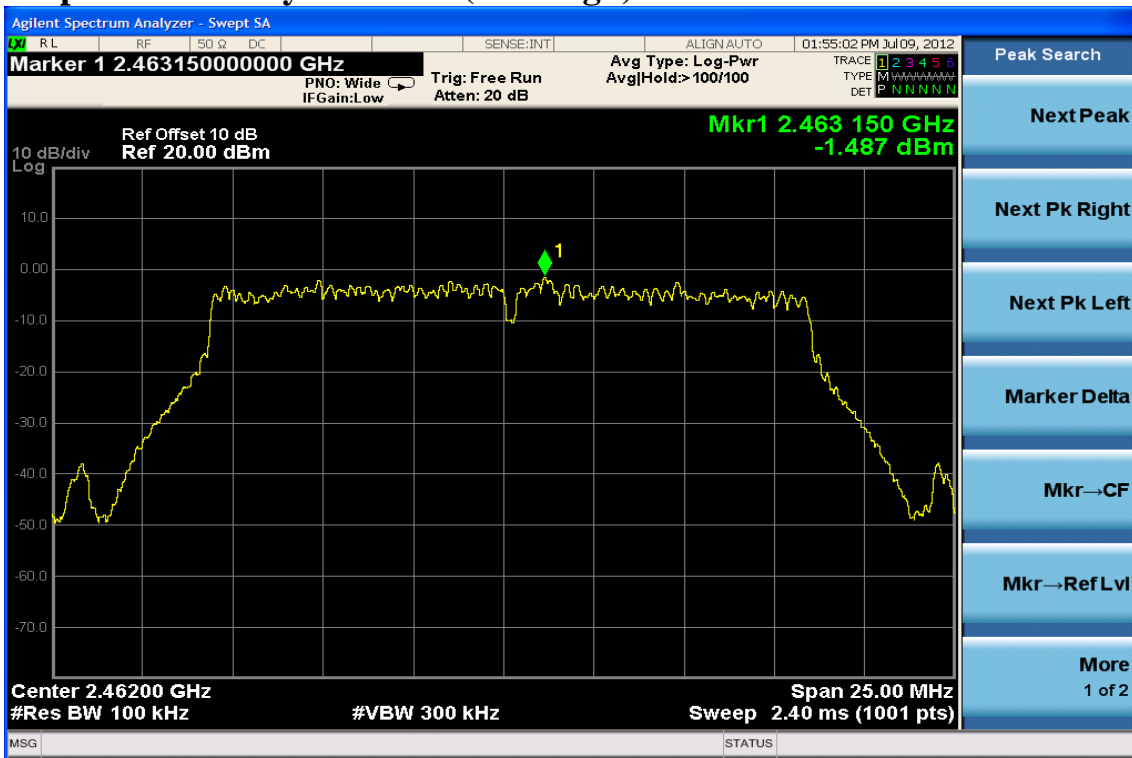


### 802.11n\_20M Power Spectral Density Test Plot (CH-Low)

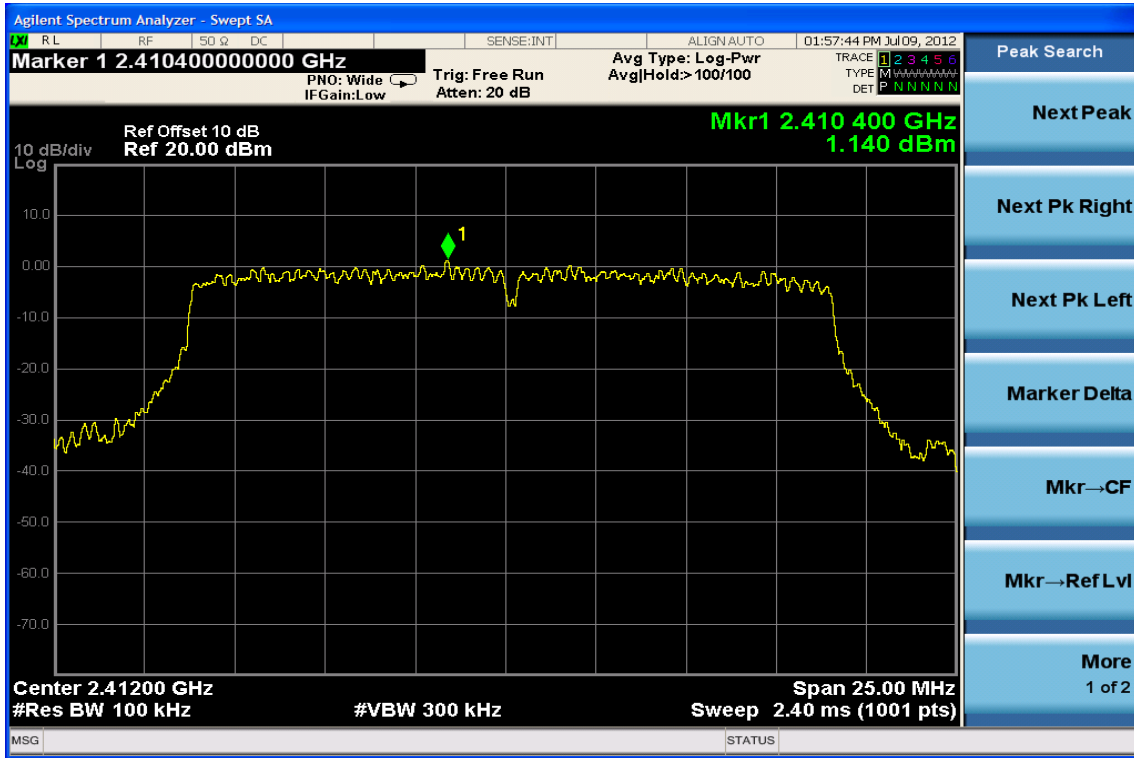


### Power Spectral Density Test Plot (CH-Mid)

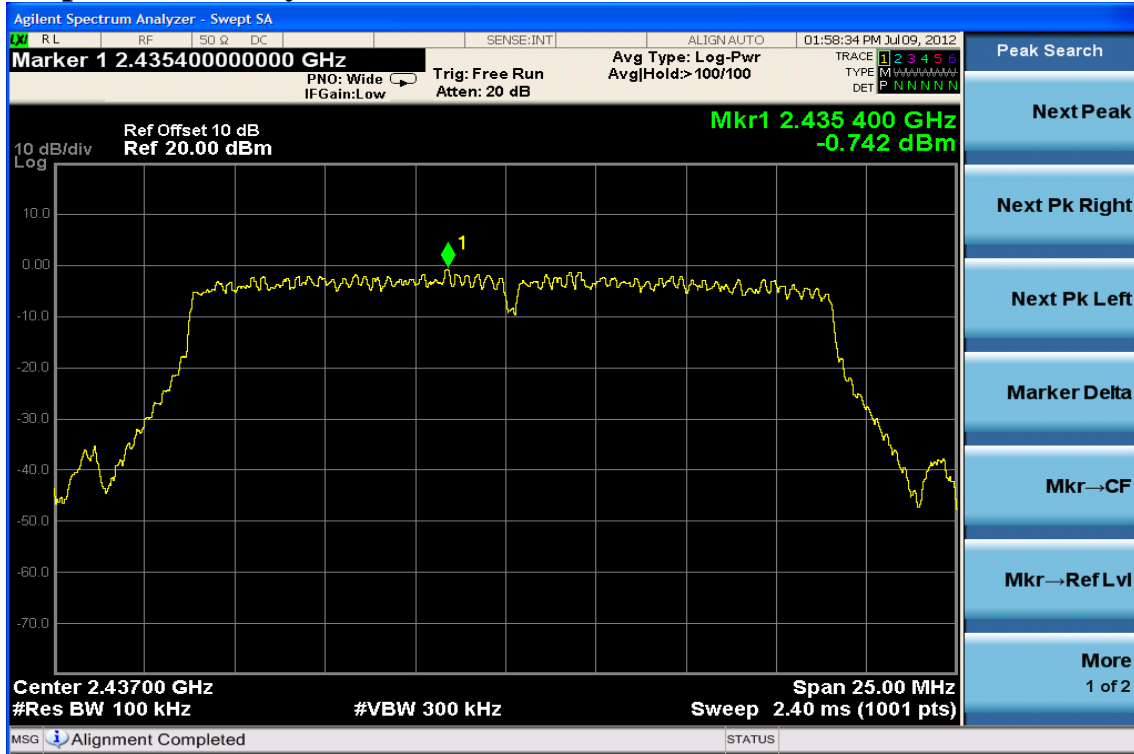


### Power Spectral Density Test Plot (CH-High)

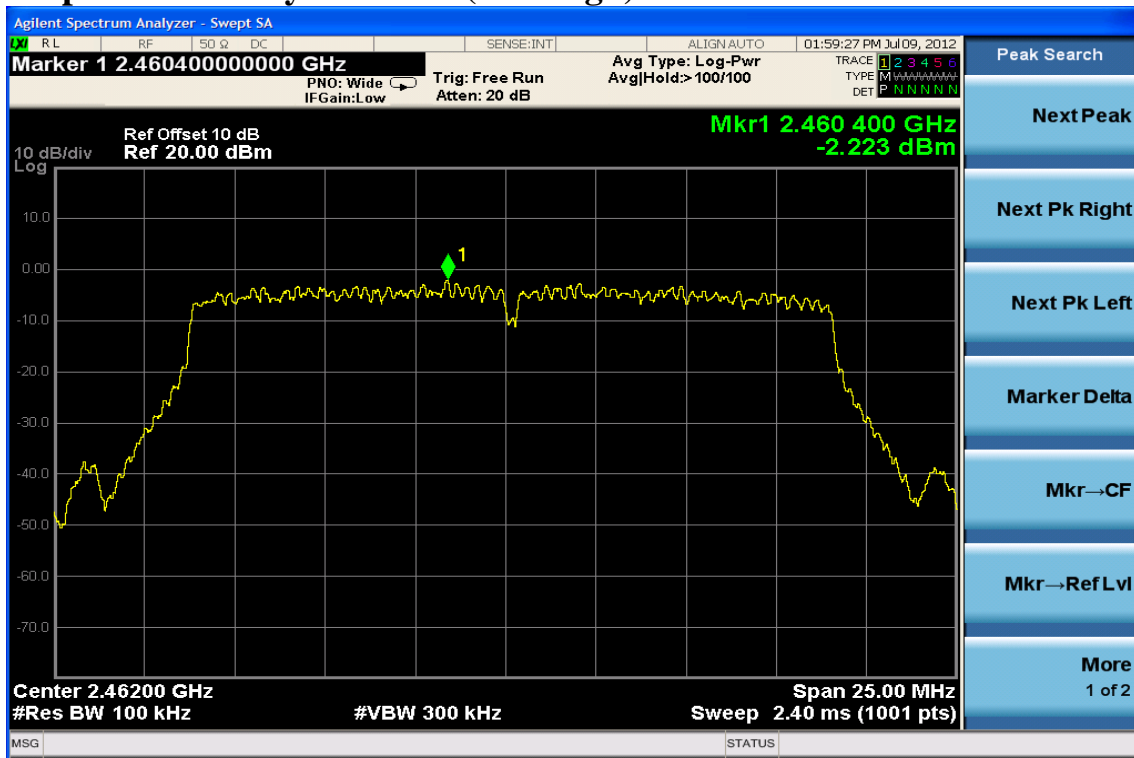


### 802.11n\_40M Power Spectral Density Test Plot (CH-Low)

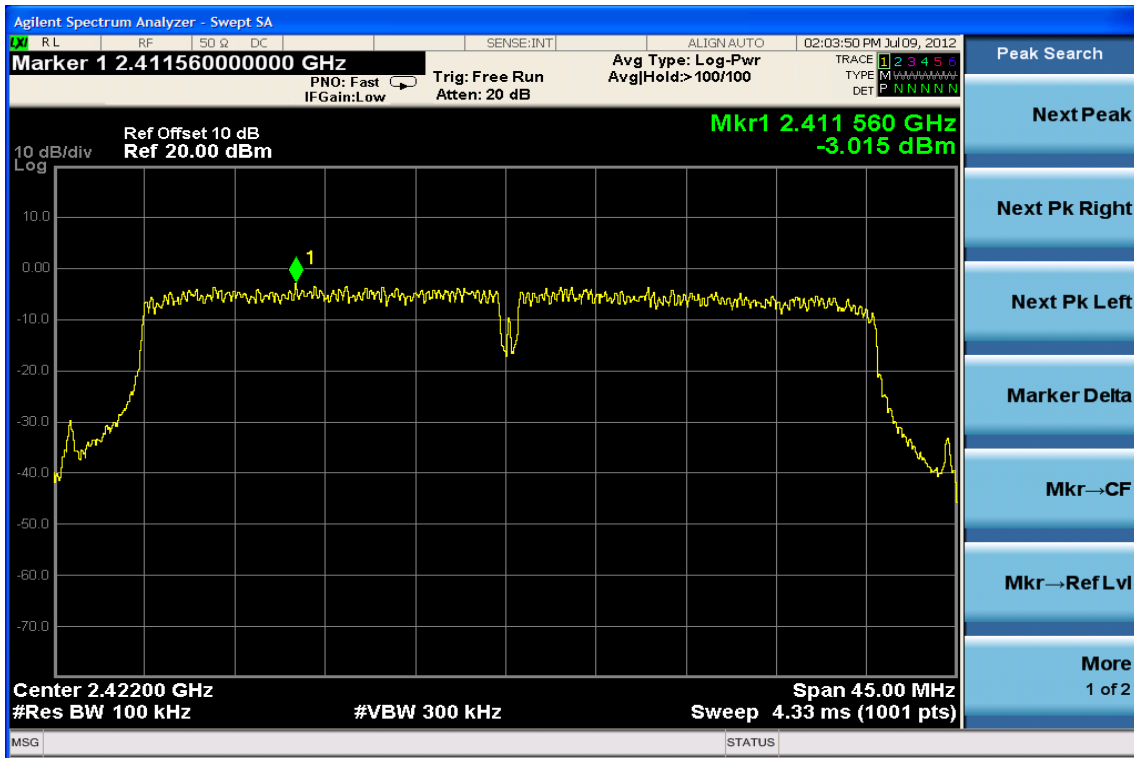

### Power Spectral Density Test Plot (CH-Mid)

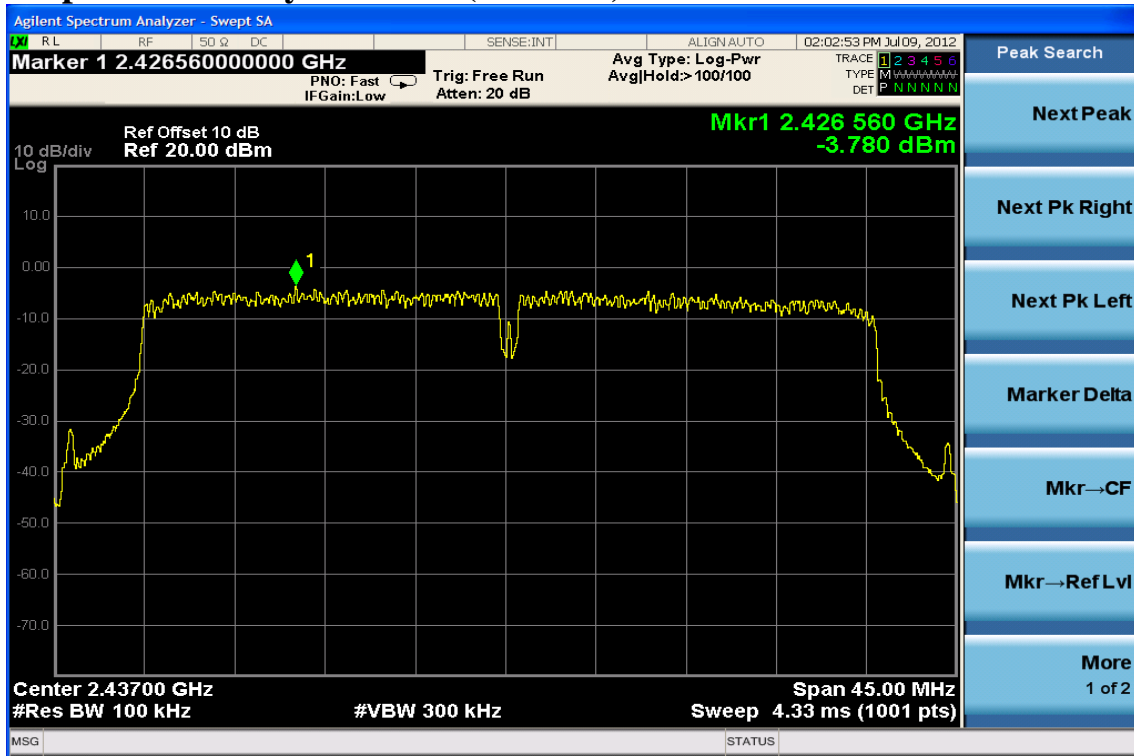

### Power Spectral Density Test Plot (CH-High)

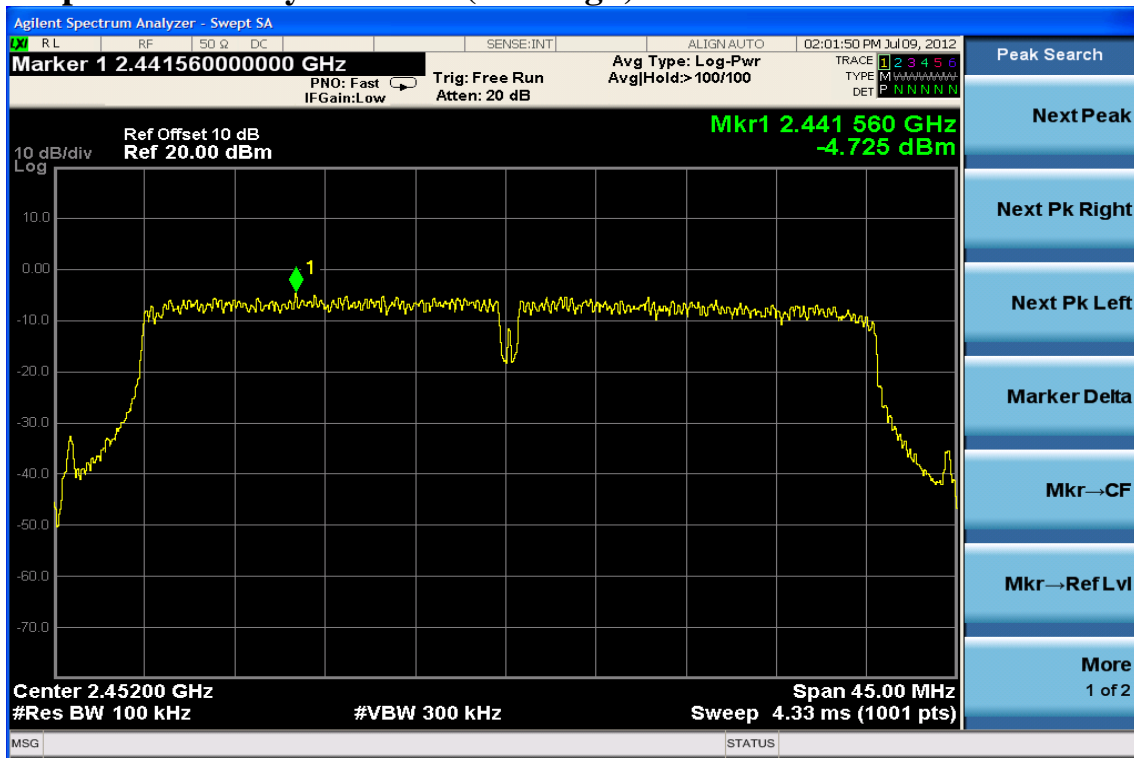

## 11 ANTENNA REQUIREMENT

### 11.1 Standard Applicable:

According to §15.203, Antenna requirement.

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

### 11.2 Antenna Connected Construction:

The directional gains of antenna used for transmitting is 5 dBi, and the antenna connector is designed with unique type RF connector and no consideration of replacement. Please see EUT photo and antenna spec. for details.



## 12 Maximum Permissible Exposure (MPE)

### 12.1 Standard Applicable

According to §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

This is a Mobile device, the MPE is required.

According to §1.1310 and §2.1093 RF exposure is calculated.

Limits for Maximum Permissive Exposure (MPE)

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm <sup>2</sup> )	Averaging Time (minute)
Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f <sup>2</sup> )	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	F/1500	30
1500-15000	/	/	1.0	30

F = frequency in MHz

\* = Plane-wave equipment power density

## 12.2 Maximum Permissible Exposure (MPE) Evaluation

### 802.11b Power Table

Frequency (MHz)	Reading Power (dBm)	Cable Loss	Output Power (dBm)	Output Power (W)
2412	20.12	0	20.12	0.103
2437	18.62	0	18.62	0.073
2462	17.66	0	17.66	0.058

### MPE Prediction (802.11b)

Prediction of MPE limit at a given distance

Equation from page 18 of OET Bulletin 65, Edition 97-01

$$S = PG / 4 \pi R^2$$

Where: S = Power density

P = Power input to antenna

G = Power gain of the antenna in the direction of interest relative to an isotropic radiator

R = Distance to the center of radiation of the antenna

Maximum peak output power at antenna input terminal:	20.12	(dBm)
Maximum peak output power at antenna input terminal:	102.8016298	(mW)
Duty cycle:	100	(%)
Maximum Pav :	102.8016298	(mW)
Antenna gain (typical):	5	(dBi)
Maximum antenna gain:	3.16227766	(numeric)
Prediction distance:	20	(cm)
Prediction frequency:	2412	(MHz)
MPE limit for uncontrolled exposure at prediction	1	(mW/cm <sup>2</sup> )
Power density at predication frequency at 20 (cm)	0.0647069	(mW/cm <sup>2</sup> )

### Measurement Result

The predicted power density level at 20 cm is 0.0647 mW/cm<sup>2</sup>. This is below the uncontrolled exposure limit of 1 mW/cm<sup>2</sup> at 2412MHz.

### 802.11g Power Table

Frequency (MHz)	Reading Power (dBm)	Cable Loss	Output Power (dBm)	Output Power (W)
2412	24.15	0	24.15	0.260
2437	23.05	0	23.05	0.202
2462	21.62	0	21.62	0.145

### MPE Prediction (802.11g)

Prediction of MPE limit at a given distance

Equation from page 18 of OET Bulletin 65, Edition 97-01

$$S = PG / 4 \pi R^2$$

Where: S = Power density

P = Power input to antenna

G = Power gain of the antenna in the direction of interest relative to an isotropic radiator

R = Distance to the center of radiation of the antenna

Maximum peak output power at antenna input terminal:	24.15	(dBm)
Maximum peak output power at antenna input terminal:	260.0159563	(mW)
Duty cycle:	100	(%)
Maximum Pav :	260.0159563	(mW)
Antenna gain (typical):	5	(dBi)
Maximum antenna gain:	3.16227766	(numeric)
Prediction distance:	20	(cm)
Prediction frequency:	2412	(MHz)
MPE limit for uncontrolled exposure at prediction	1	(mW/cm <sup>2</sup> )
Power density at predication frequency at 20 (cm)	0.1636629	(mW/cm <sup>2</sup> )

### Measurement Result

The predicted power density level at 20 cm is 0.1636 mW/cm<sup>2</sup>. This is below the uncontrolled exposure limit of 1 mW/cm<sup>2</sup> at 2412.

**802.11n\_20M Power Table**

Frequency (MHz)	Reading Power (dBm)	Cable Loss	Output Power (dBm)	Output Power (W)
2412	23.55	0	23.55	0.226
2437	22.07	0	22.07	0.161
2462	20.51	0	20.51	0.112

**MPE Prediction (802.11n\_20M)**

Prediction of MPE limit at a given distance

Equation from page 18 of OET Bulletin 65, Edition 97-01

$$S = PG / 4 \pi R^2$$

Where: S = Power density

P = Power input to antenna

G = Power gain of the antenna in the direction of interest relative to an isotropic radiator

R = Distance to the center of radiation of the antenna

Maximum peak output power at antenna input terminal:	23.55	(dBm)
Maximum peak output power at antenna input terminal:	226.4644308	(mW)
Duty cycle:	100	(%)
Maximum Pav :	226.4644308	(mW)
Antenna gain (typical):	5	(dBi)
Maximum antenna gain:	3.16227766	(numeric)
Prediction distance:	20	(cm)
Prediction frequency:	2412	(MHz)
MPE limit for uncontrolled exposure at prediction	1	(mW/cm <sup>2</sup> )
Power density at predication frequency at 20 (cm)	0.1425445	(mW/cm <sup>2</sup> )

**Measurement Result**

The predicted power density level at 20 cm is 0.1425 mW/cm<sup>2</sup>. This is below the uncontrolled exposure limit of 1 mW/cm<sup>2</sup> at 2412.

### 802.11n\_40M Power Table

Frequency (MHz)	Reading Power (dBm)	Cable Loss	Output Power (dBm)	Output Power (W)
2422	23.69	0	23.69	0.234
2437	22.63	0	22.63	0.183
2452	21.35	0	21.35	0.136

### MPE Prediction (802.11n\_40M)

Prediction of MPE limit at a given distance

Equation from page 18 of OET Bulletin 65, Edition 97-01

$$S = PG / 4 \pi R^2$$

Where: S = Power density

P = Power input to antenna

G = Power gain of the antenna in the direction of interest relative to an isotropic radiator

R = Distance to the center of radiation of the antenna

Maximum peak output power at antenna input terminal:	23.69	(dBm)
Maximum peak output power at antenna input terminal:	233.8837239	(mW)
Duty cycle:	100	(%)
Maximum Pav :	233.8837239	(mW)
Antenna gain (typical):	5	(dBi)
Maximum antenna gain:	3.16227766	(numeric)
Prediction distance:	20	(cm)
Prediction frequency:	2422	(MHz)
MPE limit for uncontrolled exposure at prediction	1	(mW/cm <sup>2</sup> )
Power density at predication frequency at 20 (cm)	0.1472144	(mW/cm <sup>2</sup> )

### Measurement Result

The predicted power density level at 20 cm is 0.1472 mW/cm<sup>2</sup>. This is below the uncontrolled exposure limit of 1 mW/cm<sup>2</sup> at 2422.