

Page 1 of 44

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

CLASS II PC REPORT

OF

Applicant: TomTom International B.V.

De Ruijterkade 154, 1011 AC Amsterdam, 1011 AC, The

Netherlands

Product Name: GPS Navigation System

Brand Name: TomTom Model No.: 4BA53A

Model Difference: N/A

Report Number: E2/2018/10099-01

FCC ID S4L4BA53

IC: 5767A-4BA53

FCC Rule Part: §15.247, Cat: DSS

IC RSS: RSS-247 issue 2 Feb 2017

Issue Date: Feb. 09, 2021

Date of Test: Nov. 23, 2020 ~ Dec. 23, 2020

Date of EUT Received: Nov. 23, 2020

We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. Central RF Lab The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10:2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits.

The test results of this report relate only to the tested sample identified in this report.

Approved By:





Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488 www.sgs.com.tw



Page 2 of 44

Revision History						
Report Number Revision Description Issue Date Remark						
E2/2018/10099	Rev.00	Original.	Feb. 14, 2018	Revised By: Violetta Tang		
E2/2018/10099-01	Rev.01	Class II Permissive change	Feb. 09, 2021	Revised By: Yuri Tsai		

Note:

1 · Disclaimer

Antenna information is provided by the applicant, test results of this report are applicable to the sample EUT received.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告结果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents and intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document cannot be reproduced to the company of the Company and the company of the Company is presented to the company is understanding the company of the company is understanding the company of the compan except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488 www.sgs.com.tw




Page 3 of 44

Table of Contents

1	GENERAL INFORMATION	4
2	SYSTEM TEST CONFIGURATION	6
3	SUMMARY OF TEST RESULTS	8
4	DESCRIPTION OF TEST MODES	9
5	MEASUREMENT UNCERTAINTY	. 11
6	CONDUCTED EMISSION TEST	. 12
7	RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT	. 16

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告结果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, available on request of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced to the company and the second of the company and the company a except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.





Page 4 of 44

GENERAL INFORMATION

Product description 1.1

Product Name:	GPS Navigation System
Brand Name:	TomTom
Model No.:	4BA53A
Model Difference:	N/A
Hardware Version:	N/A
Software Version:	N/A
EUT Series No.:	G52430100029
Class II Permissive change:	PCB layout change in non RF section and a new HVIN 4BA53A is designated for this modification
Power Supply:	3.7Vdc from Rechargeable Li-ion Battery

Radio Technology:	Bluetooth BR+EDR	
Channel number:	79 channels	
Modulation type:	GFSK + π/4DQPSK + 8DPSK	
Frequency Range:	2.402GHz – 2.480GHz	
Dwell Time:	≦ 0.4s	

1.2 **Antenna Designation**

Antenna Type	Supplier	Antenna Part No.	Freq. (MHz)	Peak Antenna Gain (dBi)	Worst An- tenna Gain
PIFA	N/A	N/A	2402-2480	-3	V

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告结果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, available on request of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced to the company and the second of the company and the company a except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號



Page 5 of 44

1.3 Test Methodology of Applied Standards

FCC Part 15, Subpart C §15.247 KDB 558074 D01 v05r02 DSS Meas. Guidance RSS-247 issue 2 Feb. 2017 RSS-Gen. issue 5, Amendment 1, March 2019 ANSI C63.10:2013

1.4 Test Facility

SGS Taiwan Ltd. Central RF Lab (TAF code 3702) Central RF Lab

FCC Designation number: TW0028

ISED CAB identifier: TW3702

1.5 Special Accessories

There is no special accessory used while test was conducted.

1.6 Equipment Modifications

There was no modification incorporated into the EUT.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page 6 of 44

SYSTEM TEST CONFIGURATION

2.1 **EUT Configuration**

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 **EUT Exercise**

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

Test Procedure 2.3

2.3.1 Conducted Emissions

The EUT is a placed on a table which is 0.8 m above ground plane. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz. The CISPR Quasi-Peak and Average detector mode is employed. The two LISNs provide 50uH/50 ohm of coupling impedance for the measuring instrument. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

2.3.2 Radiated Emissions

The EUT is a placed on a turn table. For emissions testing at or below 1 GHz, the table height shall be 0.8 m above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.

2.4 **Measurement Results Explanation Example**

2.4.1 Radiated Emission Test Sites For Measurements From 9 kHz To 30 MHz


Radiated emission below 30MHz is measured in a 9m*9m*6m semi-anechoic chamber. the measurements correspond to those obtained at an open-field test site. There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Termsand-Conditions therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488 www.sgs.com.tw



Page 7 of 44



Configuration of Tested System 2.5

Fig. 2-1 Radiated Emission



Fig 2-3 Conduction (AC Power Line) Radiated Emission



Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Data Cable	Power Cord
1	Bluetooth Test Software	N/A	N/A	N/A	N/A	N/A
2	Notebook	Lenovo	T420	S0012599	N/A	N/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained that information contained that information contained that information contained therein reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. I

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 f (886-2) 2298-0488



Page 8 of 44

SUMMARY OF TEST RESULTS

FCC Rules	IC Rules	Description Of Test	Result
§15.207(a)	RSS-Gen §8.8	AC Power Line Conducted Emission	Compliant
§15.247(d) §15.205	RSS-247 §5.5 RSS-Gen §8.10	Radiated Band Edge	Compliant
§15.247(d) §15.209	RSS-247 §5.5 RSS-Gen §8.9	Radiated Spurious Emission	Compliant

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此根告结果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced. except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279



DESCRIPTION OF TEST MODES

4.1 Operated in 2400 ~ 2483.5MHz Band

79 channels are provided for Bluetooth

ITEM	FREQUENCY	ITEM	FREQUENCY	ITEM	FREQUENCY	ITEM	FREQUENCY
1	2402 MHz	21	2422 MHz	41	2442 MHz	71	2462 MHz
2	2403 MHz	22	2423 MHz	42	2443 MHz	72	2463 MHz
3	2404 MHz	23	2424 MHz	43	2444 MHz	73	2464 MHz
4	2405 MHz	24	2425 MHz	44	2445 MHz	74	2465 MHz
5	2406 MHz	25	2426 MHz	45	2446 MHz	75	2466 MHz
6	2407 MHz	26	2427 MHz	46	2447 MHz	76	2467 MHz
7	2408 MHz	27	2428 MHz	47	2448 MHz	77	2468 MHz
8	2409 MHz	28	2429 MHz	48	2449 MHz	78	2469 MHz
9	2410 MHz	29	2430 MHz	49	2450 MHz	79	2470 MHz
10	2411 MHz	30	2431 MHz	50	2451 MHz	70	2471 MHz
11	2412 MHz	31	2432 MHz	51	2452 MHz	71	2472 MHz
12	2413 MHz	32	2433 MHz	52	2453 MHz	72	2473 MHz
13	2414 MHz	33	2434 MHz	53	2454 MHz	73	2474 MHz
14	2415 MHz	34	2435 MHz	54	2455 MHz	74	2475 MHz
15	2416 MHz	35	2436 MHz	55	2456 MHz	75	2476 MHz
16	2417 MHz	36	2437 MHz	56	2457 MHz	76	2477 MHz
17	2418 MHz	37	2438 MHz	57	2458 MHz	77	2478 MHz
18	2419 MHz	38	2439 MHz	58	2459 MHz	78	2479 MHz
19	2420 MHz	39	2440 MHz	59	2460 MHz	79	2480 MHz
20	2421 MHz	40	2441 MHz	60	2461 MHz		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此根告结果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced. except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 www.sgs.com.tw



Page 10 of 44

4.2 The Worst Test Modes and Channel Details

- The EUT has been tested under operating condition.
- Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.
- Investigation has been done on all the possible configurations for searching the worst case.

MODE	AVAILABLE FREQUENCY (MHz)	TESTED FREQUENCY (MHz)	MODULATION	PACKET TYPE	
RADIATED EMISSION TEST (BELOW 1 GHz)					
Bluetooth	2402 to 2480	2441	GFSK D		
RADIATED EMISSION TEST (ABOVE 1 GHz)					
Bluetooth	2402 to 2480	2402, 2441, 2480	GFSK	DH5	


Note: The field strength of radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for Bluetooth BR+EDR Transmitter for channel Low, Mid and High, the worst case H position was reported.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 www.sgs.com.tw





Page 11 of 44


MEASUREMENT UNCERTAINTY

Test Items	Uncertainty
AC Power Line Conducted Emission	+/- 2.586 dB
Peak Output Power	+/- 0.84 dB
20dB Bandwidth	+/- 51.33 Hz
100 KHz Bandwidth Of Frequency Band Edges	+/- 0.84 dB
Frequency Separation	+/- 51.33 Hz
Number of hopping frequency	+/- 51.33 Hz
Time of Occupancy	+/- 51.33 Hz
Temperature	+/- 0.65 °C
Humidity	+/- 4.6 %
DC / AC Power Source	DC= +/- 0.13%, AC= +/- 0.2%

Radiated Spurious Emission Measurement Uncertainty				
	9kHz~30MHz: +-2.3dB			
	30MHz - 180MHz: +/- 3.37dB			
Polarization: Vertical	180MHz -417MHz: +/- 3.19dB			
Polarization: Vertical	0.417GHz-1GHz: +/- 3.19dB			
	1GHz - 18GHz: +/- 4.04dB			
	18GHz - 40GHz: +/- 4.04dB			
	9kHz~30MHz: +-2.3dB			
	30MHz - 167MHz: +/- 4.22dB			
Polarization: Horizontal	167MHz -500MHz: +/- 3.44dB			
Polarization: Horizontal	0.5GHz-1GHz: +/- 3.39dB			
	1GHz - 18GHz: +/- 4.08dB			
	18GHz - 40GHz: +/- 4.08dB			

- 1. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
- 2. The conformity assessment statement in this report is based solely on the test results, measurement uncertainty is excluded.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製





6 CONDUCTED EMISSION TEST

6.1 Standard Applicable

Frequency within 150 kHz to 30MHz shall not exceed the limit table as below.

Frequency range	Limits dB(uV)			
MHz	Quasi-peak Average			
0.15 to 0.50	66 to 56	56 to 46		
0.50 to 5	56	46		
5 to 30	60	50		

Note

- 1. The lower limit shall apply at the transition frequencies
- 2.The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

6.2 Measurement Equipment Used

Conducted Emission Test Site							
EQUIPMENT	EQUIPMENT MFR MODEL SERIAL LAST						
TYPE		NUMBER	NUMBER	CAL.			
LISN	SCHWARZBECK Mess-Elektronik	NSLK8127	974	03/25/2020	03/24/2021		
EMI Test Receiver	R&S	ESCI	101342	04/28/2020	04/27/2021		

6.3 EUT Setup

- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI 63.10:2013.
- 2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
- 3. The LISN was connected with 120Vac/60Hz power source.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五殿區新北產業園區五工路 134 號 + (886.2), 2200, 2270



Test SET-UP (Block Diagram of Configuration) 6.4

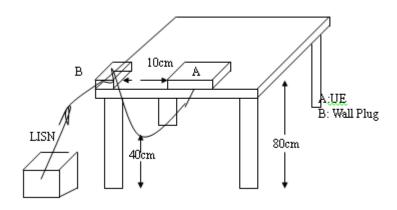

6.5 **Measurement Procedure**

- 1. The EUT was placed on a table which is 0.8m above ground plan.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all frequency measured were complete.

6.6 **Measurement Result**


Note: Refer to next page for measurement data and plots.

Note2: The * reveals the worst-case results that closet to the limit.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms- Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號



Page 14 of 44




AC POWER LINE CONDUCTED EMISSION TEST DATA

Report Number :E2-2018-10099-01 **Test Site** :Conduction Room C

Test Mode :BT **Test Date** :2020-12-23


Power :120V/60Hz Temp./Humi. :23.9/65

Probe :L1 Engineer :Ashton chiu

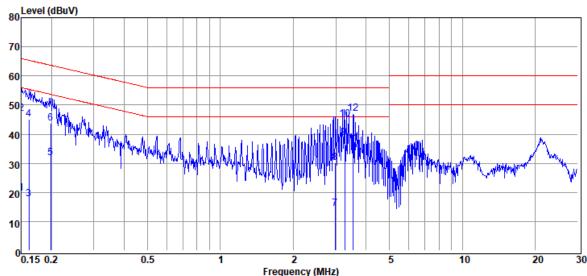

		rroquonoj	(111112)			
Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit	Margin
MHz	PK/QP/AV	dΒμV	dB	dΒμV	dΒμV	dB
						_
0.15	Average	9.56	10.22	19.78	55.98	-36.20
0.15	QP	36.93	10.22	47.15	65.98	-18.83
0.16	Average	7.39	10.22	17.61	55.38	-37.77
0.16	QP	34.99	10.22	45.21	65.38	-20.17
0.20	Average	21.60	10.22	31.82	53.66	-21.84
0.20	QP	33.39	10.22	43.61	63.66	-20.05
2.97	Average	4.01	10.47	14.48	46.00	-31.52
2.97	QP	19.63	10.47	30.10	56.00	-25.90
3.27	Average	28.32	10.47	38.79	46.00	-7.21
3.27	QP	34.61	10.47	45.08	56.00	-10.92
3.54	Average	26.25	10.47	36.72	46.00	-9.28
3.54	QP	36.52	10.47	46.99	56.00	-9.01

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 15 of 44




Report Number :E2-2018-10099-01 Test Site :Conduction Room C

Test Mode :BT Test Date :2020-12-23

Power :120V/60Hz Temp./Humi. :23.9/65

Probe :N Engineer :Ashton chiu

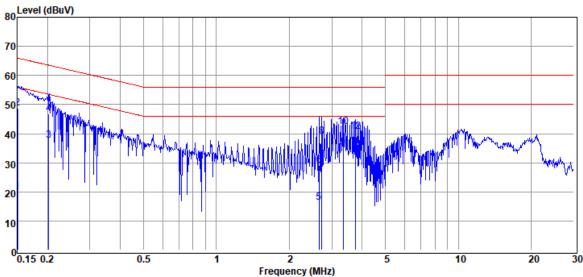

		quooj	(2)			
Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dΒμV	dBµV	dB
0.15	Average	9.64	10.21	19.85	55.95	-36.10
0.15	QP	38.62	10.21	48.83	65.95	-17.12
0.20	Average	27.34	10.21	37.55	53.50	-15.95
0.20	QP	36.67	10.21	46.88	63.50	-16.62
2.65	Average	5.79	10.47	16.26	46.00	-29.74
2.65	QP	18.48	10.47	28.95	56.00	-27.05
2.73	Average	20.55	10.47	31.02	46.00	-14.98
2.73	QP	28.68	10.47	39.15	56.00	-16.85
3.34	Average	24.67	10.48	35.15	46.00	-10.85
3.34	QP	31.93	10.48	42.41	56.00	-13.59
3.75	Average	25.30	10.49	35.79	46.00	-10.21
3.75	QP	30.10	10.49	40.59	56.00	-15.41

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page 16 of 44

RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT

7.1 Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands must also comply with the §15.209 limit as below.

And according to §15.33(a) (1), for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

Frequency (MHz)	Field strength (microvolts/meter)	Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3


Note:

- 1. The lower limit shall apply at the transition frequencies.
- 2. Emission level (dB μ V/m) = 20 log Emission level (dB μ V/m)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the





Measurement Equipment Used 7.2

	966 Chamber							
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.			
Broadband Antenna	TESEQ	CBL 6112D	35240	09/08/2020	09/07/2021			
Horn Antenna	Schwarzbeck	BBHA9120D	1341	06/22/2020	06/21/2021			
Horn Antenna	Schwarzbeck	BBHA9170	185	07/30/2020	07/29/2021			
Loop Antenna	ETS.LINDGREN	6502	143303	04/28/2020	04/27/2021			
3m Site NSA	SGS	966 chamber D	N/A	07/12/2020	07/11/2021			
Spectrum Analyzer	KEYSIGHT	N9010A	MY54510568	07/08/2020	07/07/2021			
Pre-Amplifier	EMC Instruments	EMC184045B	980135	10/27/2020	10/26/2021			
Pre-Amplifier	EMC Instruments	EMC9135	980234	11/19/2020	11/18/2021			
Pre-Amplifier	EMC Instruments	EMC12630SE	980271	11/19/2020	11/18/2021			
Attenuator	Marvelous	WATT-218FS-10	RF25	11/19/2020	11/18/2021			
High Pass Filter	R&S	F13 HPF 3GHz	RF175	11/19/2020	11/18/2021			
Lowpass Filter	Woken	EWT-56-0019	RF173	11/19/2020	11/18/2021			
Notch Filter	Woken	EWT-54-0038	RF178	11/19/2020	11/18/2021			
Coaxial Cable	Huber Suhner	EMC106-SM-SM- 7200	150703	11/19/2020	11/18/2021			
Coaxial Cable	Huber+Suhner	RG 214/U	W21.01	11/19/2020	11/18/2021			
Coaxial Cable	Huber Suhner	SUCOFLEX 104	MY17413/4	11/19/2020	11/18/2021			

NOTE: N.C.R refers to Not Calibrated Required.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此根告结果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced. except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司


No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

Page 18 of 44




7.3 Test SET-UP


(A) Radiated Emission Test Set-UP Frequency Below 30MHz.

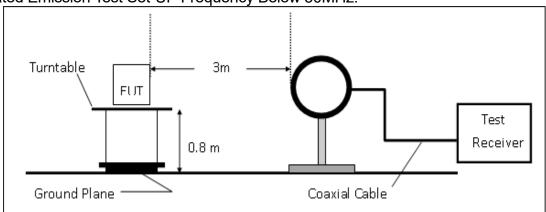

(B) Radiated Emission Test Set-Up, Frequency form 30MHz to 1000MHz

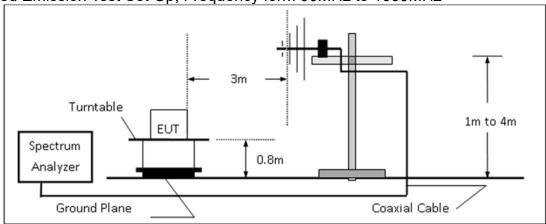

(C) Radiated Emission Test Set-UP Frequency Over 1 GHz

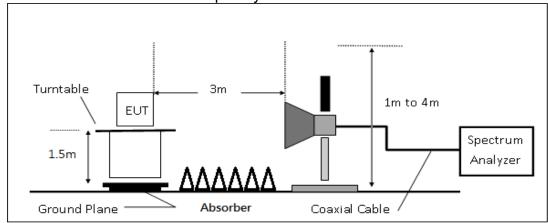

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page 19 of 44

7.4 **Measurement Procedure**

7.4.1 **Radiated Emission**

- The testing follows the Measurement Procedure of ANSI C63.10:2013. 1.
- The EUT was placed on a turn table with 0.8m for frequency< 1GHz and 1.5m for frequency> 1GHz above ground plan.
- 3. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 4. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
- 5. Set the spectrum analyzer as RBW=120 kHz and VBW=300 kHz for Peak Detector (PK) and Quasi-peak (QP) at frequency below 1 GHz.
- 6. Set the spectrum analyzer as RBW=1 MHz, VBW=3 MHz for Peak Detector at frequency above
- 7. Set the spectrum analyzer as RBW=1 MHz, VBW=10 Hz (Duty cycle > 98%) or VBW ≥ 1/T (Duty cycle < 98%) for Average Detector at frequency above 1 GHz.
- 8. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.
- 9. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 10. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. On spectrum, change spectrum mode in linear display mode, and reduce VBW = 10Hz if average reading is measured.
- 11. Repeat above procedures until all default test channel measured were complete.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 www.sgs.com.tw



Page 20 of 44

7.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where FS = Field Strength

CL = Cable Attenuation Factor (Cable Loss)

RA = Reading Amplitude

AG = Amplifier Gain

AF = Antenna Factor

The limit of the emission level is expressed in dBuV/m, which converts 20*log(uV/m)


Actual $FS(dB\mu V/m) = SPA$. Reading level $(dB\mu V) + Factor(dB)$

 $Factor(dB) = Antenna\ Factor(dB\mu V/m) + Cable\ Loss(dB) - Pre_Amplifier\ Gain(dB)$

7.6 Test Results of Radiated Spurious Emissions form 9 kHz to 30 MHz

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit per 15.31(o) & RSS-GEN §6.13.2 was not reported.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page 21 of 44

:Kailin Lee



EUT Pol

7.7 **Measurement Result:**

Radiated Bandedge Result (Hopping Mode)

:H Plan


Report Number :E2/2018/10099-01 Test Site :966 Chamber D

Operation Mode :BT BR Hopping Test Date :2020-12-16

Test Frequency :2402 MHz Temp./Humi. :20.9/62

Test Mode :BE CH LOW Antenna Pol. :Vertical



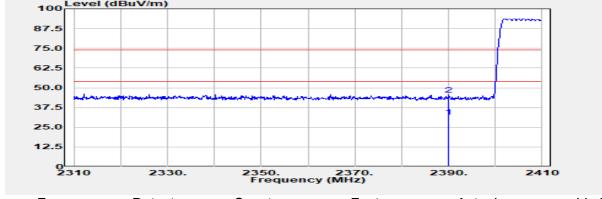


Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dΒμV/m	dB
2390.000	Average	39.77	-7.99	31.78	54.00	-22.22
2390.000	Peak	53.76	-7.99	45.77	74.00	-28.23

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at https://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號



Page 22 of 44




Report Number :E2/2018/10099-01 Test Site :966 Chamber D

Operation Mode :BT BR Hopping Test Date :2020-12-16

Test Frequency :2402 MHz Temp./Humi. :20.9/62


Test Mode :BE CH LOW Antenna Pol. :Horizontal

EUT Pol :H Plan Engineer :Kailin Lee

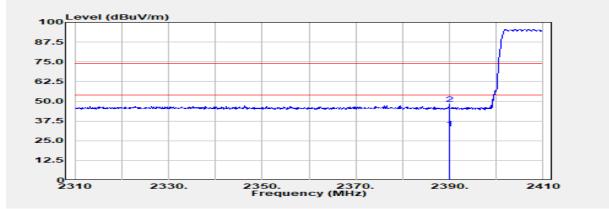

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
2390.000	Average	40.82	-7.99	32.83	54.00	-21.17
2390.000	Peak	56.14	-7.99	48.15	74.00	-25.85

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page 23 of 44




Report Number :E2/2018/10099-01 Test Site :966 Chamber D

Operation Mode :BT BR Hopping Test Date :2020-12-16


Test Frequency :2480 MHz Temp./Humi. :20.9/62
Test Mode :BE CH HIGH Antenna Pol. :Vertical

EUT Pol :H Plan Engineer :Kailin Lee

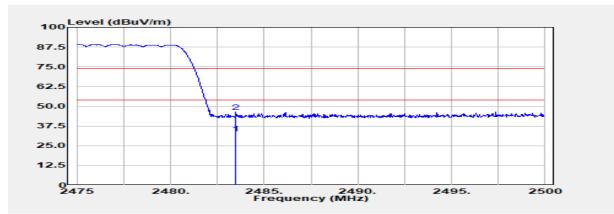

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
2483.500	Average	41.02	-8.12	32.90	54.00	-21.10
2483.500	Peak	54.46	-8.12	46.34	74.00	-27.66

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page 24 of 44




Report Number :E2/2018/10099-01 Test Site :966 Chamber D

Operation Mode :BT BR Hopping Test Date :2020-12-16

Test Frequency :2480 MHz Temp./Humi. :20.9/62


Test Mode :BE CH HIGH Antenna Pol. :Horizontal

EUT Pol :H Plan Engineer :Kailin Lee

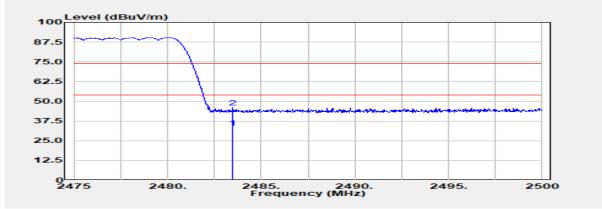

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB
2483.500	Average	41.16	-8.12	33.04	54.00	-20.96
2483.500	Peak	54.16	-8.12	46.05	74.00	-27.95

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page 25 of 44




Report Number :E2/2018/10099-01 Test Site :966 Chamber D

Operation Mode :BT EDR Hopping Test Date :2020-12-16


Test Frequency :2402 MHz Temp./Humi. :20.9/62
Test Mode :BE CH LOW Antenna Pol. :Vertical

EUT Pol :H Plan Engineer :Kailin Lee

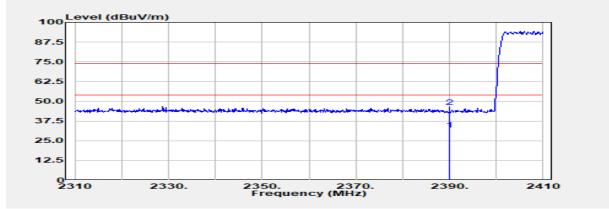

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dΒμV/m	dB
2390.000	Average	40.10	-7.99	32.11	54.00	-21.89
2390.000	Peak	54.29	-7.99	46.30	74.00	-27.70

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page 26 of 44




Report Number :E2/2018/10099-01 Test Site :966 Chamber D

Operation Mode :BT EDR Hopping Test Date :2020-12-16

Test Frequency :2402 MHz Temp./Humi. :20.9/62


Test Mode :BE CH LOW Antenna Pol. :Horizontal

EUT Pol :H Plan Engineer :Kailin Lee

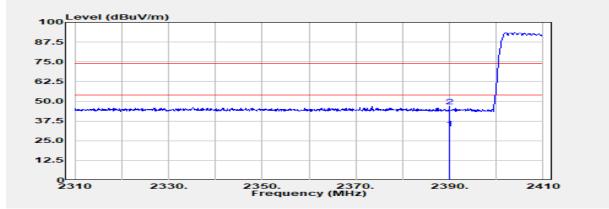

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB
2390.000	Average	40.87	-7.99	32.88	54.00	-21.12
2390.000	Peak	54.89	-7.99	46.90	74.00	-27.10

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page 27 of 44




Report Number :E2/2018/10099-01 Test Site :966 Chamber D

Operation Mode :BT EDR Hopping Test Date :2020-12-16


Test Frequency :2480 MHz Temp./Humi. :20.9/62
Test Mode :BE CH HIGH Antenna Pol. :Vertical

EUT Pol :H Plan Engineer :Kailin Lee

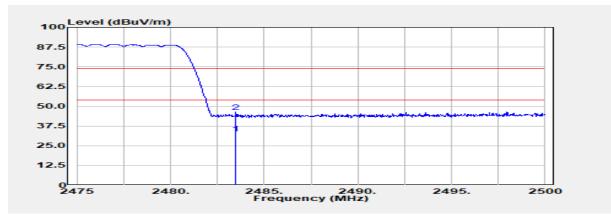

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB
2483.500	Average	40.93	-8.12	32.81	54.00	-21.19
2483.500	Peak	54.51	-8.12	46.39	74.00	-27.61

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page 28 of 44




Report Number **Test Site** :966 Chamber D :E2/2018/10099-01

Operation Mode :BT EDR Hopping **Test Date** :2020-12-16

Test Frequency :2480 MHz Temp./Humi. :20.9/62


Test Mode :BE CH HIGH Antenna Pol. :Horizontal

EUT Pol :H Plan Engineer :Kailin Lee

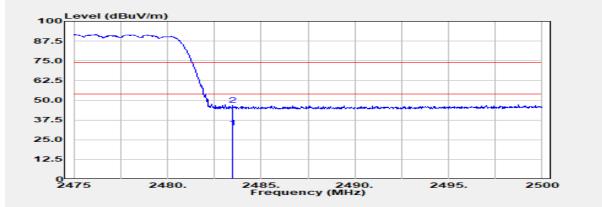

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB
2483.500	Average	40.83	-8.12	32.71	54.00	-21.29
2483.500	Peak	55.28	-8.12	47.16	74.00	-26.84

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製



Page 29 of 44




Radiated Bandedge Result (Non-Hopping Mode)

Test Site Report Number :E2/2018/10099-01 :966 Chamber D

Operation Mode :BT BR **Test Date** :2020-12-16


Test Frequency :2402 MHz Temp./Humi. :20.9/62 Test Mode :BE CH LOW Antenna Pol. :Vertical **EUT Pol** :H Plan :Kailin Lee

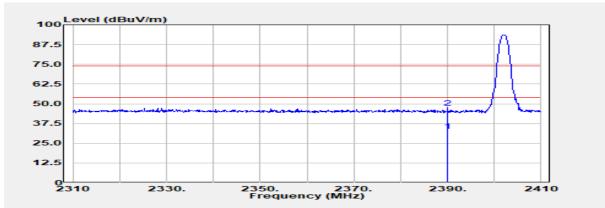

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
 MHz	PK/QP/AV	dBµV	dB	dΒμV/m	dBμV/m	dB
2390.000	Average	40.98	-7.99	32.99	54.00	-21.01
2390.000	Peak	55.36	-7.99	47.37	74.00	-26.63

Engineer

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製



Page 30 of 44




Report Number **Test Site** :966 Chamber D :E2/2018/10099-01

Operation Mode :BT BR **Test Date** :2020-12-16

Test Frequency :2402 MHz Temp./Humi. :20.9/62


Test Mode :BE CH LOW Antenna Pol. :Horizontal

EUT Pol :H Plan Engineer :Kailin Lee

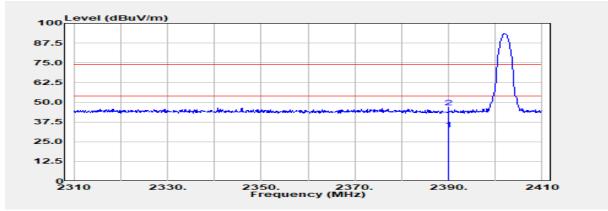

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB
2390.000	Average	40.96	-7.99	32.97	54.00	-21.03
2390.000	Peak	54.62	-7.99	46.63	74.00	-27.37

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製



Page 31 of 44




Report Number **Test Site** :966 Chamber D :E2/2018/10099-01

Operation Mode :BT BR **Test Date** :2020-12-16


Test Frequency :2480 MHz Temp./Humi. :20.9/62 Test Mode :BE CH HIGH Antenna Pol. :Vertical

EUT Pol :H Plan Engineer :Kailin Lee

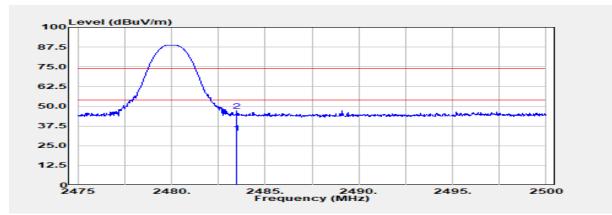

	Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
	MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
2	483.500	Average	41.38	-8.12	33.26	54.00	-20.74
2	483.500	Peak	55.41	-8.12	47.29	74.00	-26.71

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製



Page 32 of 44




Report Number :E2/2018/10099-01 Test Site :966 Chamber D

Operation Mode :BT BR Test Date :2020-12-16

Test Frequency :2480 MHz Temp./Humi. :20.9/62


Test Mode :BE CH HIGH Antenna Pol. :Horizontal

EUT Pol :H Plan Engineer :Kailin Lee

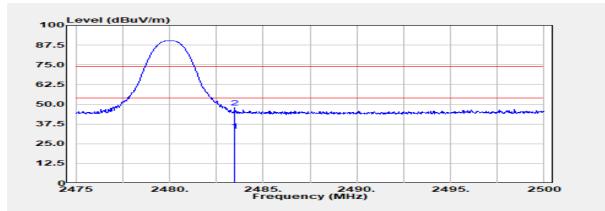

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
2483.500	Average	41.30	-8.12	33.18	54.00	-20.82
2483.500	Peak	55.93	-8.12	47.82	74.00	-26.18

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page 33 of 44




Report Number :E2/2018/10099-01 Test Site :966 Chamber D

Operation Mode :BT EDR Test Date :2020-12-16


Test Frequency :2402 MHz Temp./Humi. :20.9/62
Test Mode :BE CH LOW Antenna Pol. :Vertical

EUT Pol :H Plan Engineer :Kailin Lee

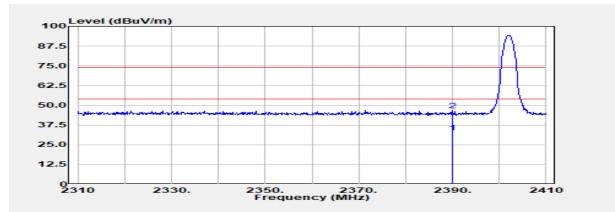

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
2390.000	Average	40.98	-7.99	32.99	54.00	-21.01
2390.000	Peak	54.89	-7.99	46.90	74.00	-27.10

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page 34 of 44




Report Number :E2/2018/10099-01 Test Site :966 Chamber D

Operation Mode :BT EDR Test Date :2020-12-16

Test Frequency :2402 MHz Temp./Humi. :20.9/62


Test Mode :BE CH LOW Antenna Pol. :Horizontal

EUT Pol :H Plan Engineer :Kailin Lee

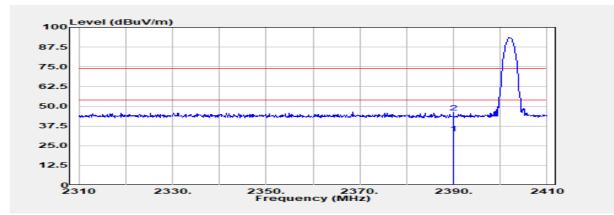

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBµV/m	dΒμV/m	dB
2390.000	Average	40.70	-7.99	32.71	54.00	-21.29
2390.000	Peak	54.12	-7.99	46.13	74.00	-27.87

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page 35 of 44




Report Number :E2/2018/10099-01 Test Site :966 Chamber D

Operation Mode :BT EDR Test Date :2020-12-16

Test Frequency :2480 MHz Temp./Humi. :20.9/62


Test Mode :BE CH HIGH Antenna Pol. :Vertical

EUT Pol :H Plan Engineer :Kailin Lee

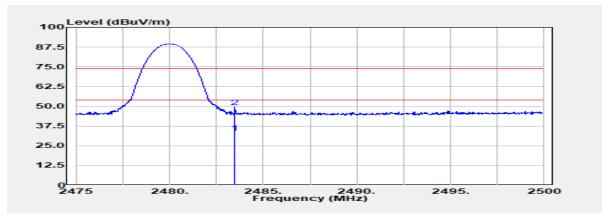

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
2483.500	Average	41.38	-8.12	33.26	54.00	-20.74
2483.500	Peak	57.42	-8.12	49.30	74.00	-24.70

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page 36 of 44




Report Number :E2/2018/10099-01 Test Site :966 Chamber D

Operation Mode :BT EDR Test Date :2020-12-16

Test Frequency :2480 MHz Temp./Humi. :20.9/62


Test Mode :BE CH HIGH Antenna Pol. :Horizontal

EUT Pol :H Plan Engineer :Kailin Lee

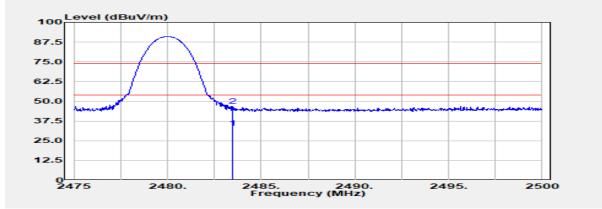

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dΒμV/m	dB
2483.500	Average	41.37	-8.12	33.25	54.00	-20.75
2483.500	Peak	55.12	-8.12	47.00	74.00	-27.00

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page 37 of 44




Radiated Spurious Emission form 30MHz to 1000MHz:

Report Number Test Site :966 Chamber D :E2/2018/10100-01

Operation Mode :BT EDR **Test Date** :2020-12-17

Test Frequency :2441 MHz Temp./Humi. :21.2/64 Test Mode :TX CH MID Antenna Pol. :Vertical

EUT Pol :H Plan Engineer :Kailin Lee

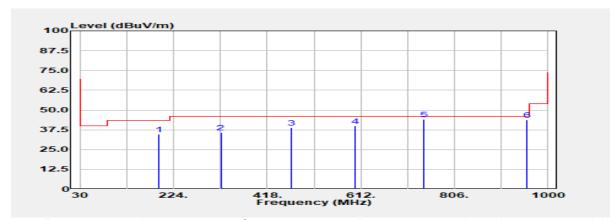


Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
192.960	Peak	54.46	-19.58	34.87	43.50	-8.63
321.970	Peak	51.16	-15.33	35.83	46.00	-10.17
467.470	Peak	50.76	-11.95	38.81	46.00	-7.19
600.360	Peak	48.76	-8.84	39.92	46.00	-6.08
742.950	Peak	52.05	-7.80	44.26	46.00	-1.74
955.380	Peak	48.61	-4.91	43.70	46.00	-2.30

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此根告结果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced. except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. | 台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488 www.sgs.com.tw



Page 38 of 44




Report Number :E2/2018/10100-01 Test Site :966 Chamber D

Operation Mode :BT EDR Test Date :2020-12-17

Test Frequency :2441 MHz Temp./Humi. :21.2/64


Test Mode :TX CH MID Antenna Pol. :Horizontal

EUT Pol :H Plan Engineer :Kailin Lee

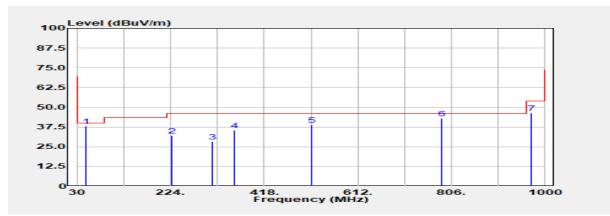

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
·	Mode	Reading Level		FS	@3m	•
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
		·			·	
48.430	Peak	55.58	-17.64	37.94	40.00	-2.06
226.910	Peak	51.99	-19.79	32.20	46.00	-13.80
310.330	Peak	43.89	-15.70	28.19	46.00	-17.81
355.920	Peak	50.33	-14.76	35.57	46.00	-10.43
515.970	Peak	49.60	-10.88	38.72	46.00	-7.28
784.660	Peak	50.17	-6.97	43.20	46.00	-2.80
970.900	Peak	50.44	-3.94	46.50	54.00	-7.50

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page 39 of 44




Radiated Spurious Emission above 1 GHz:

Test Site Report Number :E2/2018/10100-01 :966 Chamber D

Operation Mode :BT EDR **Test Date** :2020-12-17

Test Frequency :2402 MHz Temp./Humi. :21.2/64 Test Mode :TX CH LOW Antenna Pol. :Vertical

EUT Pol :H Plan :Kailin Lee Engineer

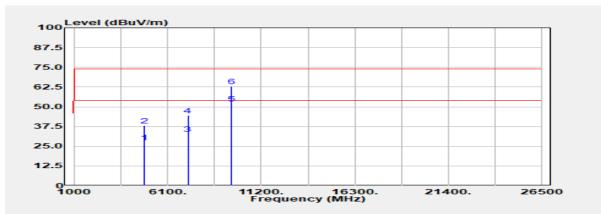


Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
4804.000	Average	30.56	-3.03	27.53	54.00	-26.47
4804.000	Peak	41.26	-3.03	38.23	74.00	-35.77
7206.000	Average	29.77	2.98	32.75	54.00	-21.25
7206.000	Peak	41.50	2.98	44.49	74.00	-29.51
9608.000	Average	46.30	5.74	52.04	54.00	-1.96
9608.000	Peak	57.43	5.74	63.16	74.00	-10.84

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless stated in the leasting structure in this estate point electronic to the sample(s) destated and such a feet leading to the sample(s) destated and such as feet leading to the sample so destated and such a documents, subject to Terms and Conditions for Electronic Documents at https://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279



Page 40 of 44




Report Number **Test Site** :966 Chamber D :E2/2018/10100-01

Operation Mode :BT EDR **Test Date** :2020-12-17

Test Frequency :2402 MHz Temp./Humi. :21.2/64


Test Mode :TX CH LOW Antenna Pol. :Horizontal

EUT Pol :H Plan Engineer :Kailin Lee

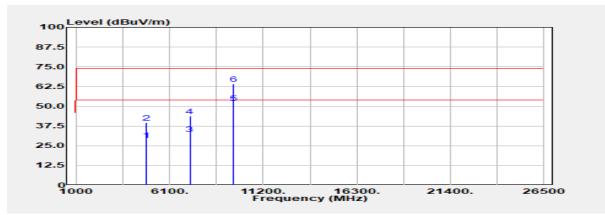

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB
4804.000	Average	31.69	-3.03	28.66	54.00	-25.34
4804.000	Peak	42.78	-3.03	39.75	74.00	-34.25
7206.000	Average	29.55	2.98	32.53	54.00	-21.47
7206.000	Peak	40.63	2.98	43.62	74.00	-30.38
9608.000	Average	46.40	5.74	52.14	54.00	-1.86
9608.000	Peak	58.58	5.74	64.32	74.00	-9.68

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製



Page 41 of 44




Report Number **Test Site** :966 Chamber D :E2/2018/10100-01

Operation Mode :BT EDR **Test Date** :2020-12-17


Test Frequency :2441 MHz Temp./Humi. :21.2/64 Test Mode :TX CH MID Antenna Pol. :Vertical

EUT Pol :H Plan Engineer :Kailin Lee

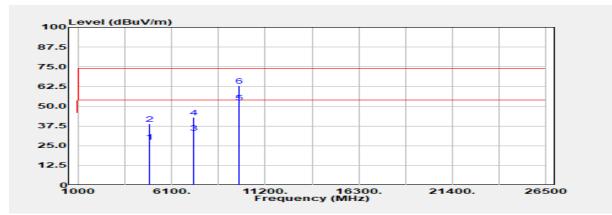

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
4882.000	Average	30.65	-3.02	27.63	54.00	-26.37
4882.000	Peak	41.70	-3.02	38.68	74.00	-35.32
7323.000	Average	29.80	3.28	33.08	54.00	-20.92
7323.000	Peak	39.93	3.28	43.21	74.00	-30.79
9764.000	Average	46.03	6.44	52.47	54.00	-1.53
9764.000	Peak	56.61	6.44	63.05	74.00	-10.95

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製



Page 42 of 44




Report Number **Test Site** :966 Chamber D :E2/2018/10100-01

Operation Mode :BT EDR **Test Date** :2020-12-17

Test Frequency :2441 MHz Temp./Humi. :21.2/64


Test Mode :TX CH MID Antenna Pol. :Horizontal

EUT Pol :H Plan Engineer :Kailin Lee

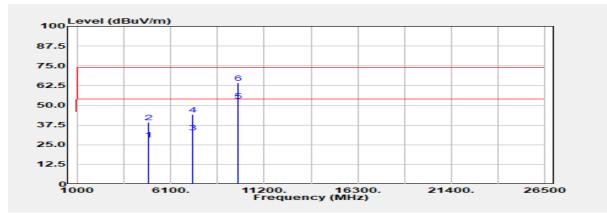

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
4882.000	Average	31.26	-3.02	28.24	54.00	-25.76
4882.000	Peak	42.24	-3.02	39.22	74.00	-34.78
7323.000	Average	29.43	3.28	32.71	54.00	-21.29
7323.000	Peak	40.74	3.28	44.02	74.00	-29.98
9764.000	Average	46.30	6.44	52.74	54.00	-1.26
9764.000	Peak	57.83	6.44	64.27	74.00	-9.73

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製



Page 43 of 44




Report Number **Test Site** :966 Chamber D :E2/2018/10100-01

Operation Mode :BT EDR **Test Date** :2020-12-17


Test Frequency :2480 MHz Temp./Humi. :21.2/64 :TX CH HIGH Test Mode Antenna Pol. :Vertical

EUT Pol :H Plan Engineer :Kailin Lee

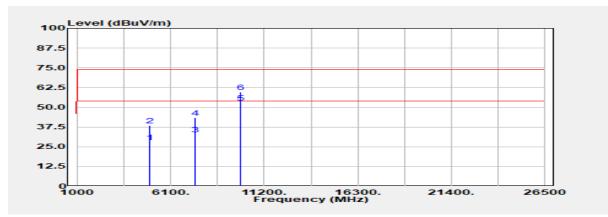

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
4960.000	Average	30.76	-2.89	27.87	54.00	-26.13
4960.000	Peak	41.54	-2.89	38.64	74.00	-35.36
7440.000	Average	29.05	3.65	32.70	54.00	-21.30
7440.000	Peak	39.77	3.65	43.42	74.00	-30.58
9920.000	Average	45.90	6.90	52.80	54.00	-1.20
9920.000	Peak	52.61	6.90	59.51	74.00	-14.49

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製



Page 44 of 44




Report Number :E2/2018/10100-01 Test Site :966 Chamber D

Operation Mode :BT EDR Test Date :2020-12-17

Test Frequency :2480 MHz Temp./Humi. :21.2/64

Test Mode :TX CH HIGH Antenna Pol. :Horizontal

EUT Pol :H Plan Engineer :Kailin Lee

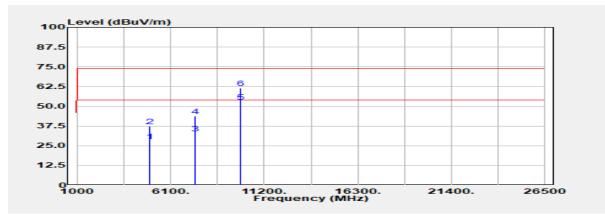

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
4960.000	Average	30.98	-2.89	28.09	54.00	-25.91
4960.000	Peak	40.14	-2.89	37.25	74.00	-36.75
7440.000	Average	29.05	3.65	32.70	54.00	-21.30
7440.000	Peak	40.18	3.65	43.83	74.00	-30.17
9920.000	Average	46.06	6.90	52.96	54.00	-1.04
9920.000	Peak	54.42	6.90	61.32	74.00	-12.68

~ End of Report ~

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製