



FCC 47 CFR PART 15 SUBPART C

TEST REPORT

For

GPS Navigation system

Model: 4EV52

Trade Name: TomTom

Issued to

TomTom International BV.
Rembrandtplein 35
1017 CT Amsterdam
The Netherlands

Issued by

Compliance Certification Services Inc.
No. 11, Wu-Gong 6th Rd., Wugu Industrial Park,
Taipei Hsien 248, Taiwan (R.O.C.)
<http://www.ccsrf.com>
service@ccsrf.com



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.



TABLE OF CONTENTS

1. TEST RESULT CERTIFICATION.....	3
2. EUT DESCRIPTION	4
3. TEST METHODOLOGY	6
3.1 EUT CONFIGURATION	6
3.2 EUT EXERCISE.....	6
3.3 GENERAL TEST PROCEDURES.....	6
3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS.....	7
3.5 DESCRIPTION OF TEST MODES	8
4. INSTRUMENT CALIBRATION.....	9
4.1 MEASURING INSTRUMENT CALIBRATION.....	9
4.2 MEASUREMENT EQUIPMENT USED.....	9
4.3 MEASUREMENT UNCERTAINTY	10
5. FACILITIES AND ACCREDITATIONS	11
5.1 FACILITIES	11
5.2 EQUIPMENT.....	11
5.3 TABLE OF ACCREDITATIONS AND LISTINGS.....	12
6. SETUP OF EQUIPMENT UNDER TEST	13
6.1 SETUP CONFIGURATION OF EUT.....	13
6.2 SUPPORT EQUIPMENT	13
7. FCC PART 15.247 REQUIREMENTS.....	14
7.1 20 DB BANDWIDTH.....	14
7.2 PEAK POWER.....	18
7.3 AVERAGE POWER	19
7.4 BAND EDGES MEASUREMENT	20
7.5 FREQUENCY SEPARATION	25
7.6 NUMBER OF HOPPING FREQUENCY	28
7.7 TIME OF OCCUPANCY (DWELL TIME)	31
7.8 POWERLINE CONDUCTED EMISSIONS.....	43
APPENDIX I RADIO FREQUENCY EXPOSURE	48
APPENDIX II PHOTOGRAPHS OF TEST SETUP	49
APPENDIX 1 - PHOTOGRAPHS OF EUT	



1. TEST RESULT CERTIFICATION

Product:	GPS Navigation system
Model:	4EV52
Brand:	TomTom
Applicant:	TomTom International BV. Rembrandtplein 35 1017 CT Amsterdam The Netherlands
Manufacturer:	TomTom International BV. Rembrandtplein 35 1017 CT Amsterdam The Netherlands
Factory:	Inventec Appliances (Pudong) Corporation No. 789 Puxing Road, Shanghai P.R.C.
Tested:	February 1 ~ 10, 2011

APPLICABLE STANDARDS

STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C	No non-compliance noted

We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in **ANSI C63.4: 2003** and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Rex Lai
Section Manager
Compliance Certification Services Inc.

Reviewed by:

Gina Lo
Section Manager
Compliance Certification Services Inc.



2. EUT DESCRIPTION

Product	GPS Navigation system		
Brand Name	TomTom		
Model	4EV52		
Applicant	TomTom International BV.		
Housing material	Plastic		
Serial Number	T110127001		
Received Date	January 27, 2011		
EUT Power Rating	1. VDC from Power Adapter 2. Battery Spec.: 920mAh(Max.) 3. VDC from Car Charger 4. Powered from host device via USB to DC cable		
Power Adapter Manufacturer	PHIHONG	Model	PSB05R-050Q
		Model	4UUC6B
	AK II	Model	A05T2-05MU
	CODE	Model	4UUC6
Power Adapter Power Rating	For PSB05R-050Q I/P: AC 100-240V, 200mA, 50-60Hz O/P: DC 5V, 1A MAX		
	For A05T2-05MU I/P: AC 100-240V, 0.2A, 47-63Hz O/P: DC 5V, 1A		
	For 4UUC6B I/P: AC 100-240V, 0.3A, 50-60Hz O/P: DC 5V, 1A		
	For 4UUC6 I/P: AC 100-240V, 0.23A, 50-60Hz O/P: DC 5.15V, 1.2A		
Car Charger Manufacturer	Supa	Model	4UUC3Z
		Power Rating	I/P: 12/24V O/P: 5V, 1.2A
	Monoeric	Model	4UUC3Z
		Power Rating	I/P: 12/24V O/P: 5V, 1.2A
USB Cable Manufacturer	TomTom	Model	Car charger cable
		Power Rating	I/P: 12/24V O/P: 5V, 1.2A
	TomTom	P/N	4UUC.001.04B
		Cable Type	Shielded, 1.5m (Detachable) without ferrite core
RDS-TMC Traffic Receiver Manufacturer	Supa	Model	4UUC5B
		P/N	4UUC.001.05B
		Model	4UUC1B
		P/N	4UUC.001.01B
	Foxlink	Model	4UUC5
		P/N	4UUC5.001.05
		Model	4UUC1
		P/N	4UUC.001.01
Micro USB to Mini USB adapter	TomTom	P/N	4UUC.001.08
Dock2	TomTom	Model	4UCB3
Dock3		Model	4UEB3
CPU Manufacturer	Broadcom	Model	BCM4760
5" LCD Panel Manufacturer	Samsung	Model	LMS500HF06
	AUO	Model	A050FW03V4



NAND Flash	4GB (Max.)
DRAM	1GB (Max.)
Battery Pack	3.7Vdc 920mAh (Max.)
Frequency Range	2402 ~ 2480 MHz
Transmit Power	-5.45 dBm
Modulation Technique	FHSS (GFSK)
Transmit Data Rate	1Mbps
Number of Channels	79 Channels
Antenna Specification	Gain: 1.57 dBi
Antenna Designation	Embedded Single-Band Antenna

Remark:

1. *The sample selected for test was production product and was provided by manufacturer.*
2. *This submittal(s) (test report) is intended for FCC ID: S4L4EV52 filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules..*



3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4: 2003 and FCC CFR 47 Part 15.207, 15.209 and 15.247.

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4: 2003 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4: 2003.

**3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS**

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	(²)
13.36 - 13.41	322 - 335.4		

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



3.5 DESCRIPTION OF TEST MODES

The EUT (model: 4EV52) had been tested under standby condition.

Software used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz and power line conducted emissions below 30MHz, which worst case was in normal link mode only.

Channel Low (2402MHz), Mid (2441MHz) and High (2480MHz) with 1Mbps data rate was chosen for full testing.

The field strength of spurious emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Z axis) and the worst case was recorded.



4. INSTRUMENT CALIBRATION

4.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

4.2 MEASUREMENT EQUIPMENT USED

Equipment Used for Emissions Measurement

Remark: Each piece of equipment is scheduled for calibration once a year and Loop Antenna is scheduled for calibration once three years.

Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY43360131	03/03/2011
Power Meter	Anritsu	ML2495A	1012009	03/28/2011
Power Sensor	Anritsu	MA2411B	0917072	03/09/2011

Wugu 966 Chamber A				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US42510252	10/25/2011
EMI Test Receiver	R&S	ESCI	100064	02/03/2012
Pre-Amplifier	Mini-Circuits	ZFL-1000LN	SF350700823	01/12/2012
Pre-Amplifier	MITEQ	AFS44-00102650-42-10P-44	1415367	11/19/2011
Bilog Antenna	Sunol Sciences	JB3	A030105	09/10/2011
Horn Antenna	EMCO	3117	00055165	12/06/2011
Loop Antenna	EMCO	6502	8905/2356	06/10/2013
Turn Table	CCS	CC-T-1F	N/A	N.C.R
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R
Controller	CCS	CC-C-1F	N/A	N.C.R
Site NSA	CCS	N/A	N/A	12/30/2011
Test S/W	EZ-EMC (CCS-3A1RE)			

Conducted Emission room # A				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	R&S	ESHS30	828144/003	12/05/2011
LISN	EMCO	3825/2	9106-1809	05/02/2011
LISN	SCHAFFNER	NNB 41	03/10013	12/02/2011
Test S/W	CCS-3A1-CE			



4.3 MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
Powerline Conducted Emission	+/- 1.6202
3M Semi Anechoic Chamber / 30M~200M	+/- 4.0606
3M Semi Anechoic Chamber / 200M~1000M	+/- 3.9979
3M Semi Anechoic Chamber / 1G~8G	+/- 2.5790
3M Semi Anechoic Chamber / 8G~18G	+/- 2.5928
3M Semi Anechoic Chamber / 18G~26G	+/- 2.7212
3M Semi Anechoic Chamber / 26G~40G	+/- 2.9520

Remark: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

No.199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.

Tel: 886-2-2217-0894 / Fax: 886-2-2217-1029

No.11, Wugong 6th Rd., Wugu Industrial Park, Taipei Hsien 248, Taiwan

Tel: 886-2-2299-9720 / Fax: 886-2-2298-4045

No.81-1, Lane 210, Bade 2nd Rd., Luchu Hsiang, Taoyuan Hsien 338, Taiwan

Tel: 886-3-324-0332 / Fax: 886-3-324-5235

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."



5.3 TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3M Semi Anechoic Chamber (FCC MRA: TW1039) to perform FCC Part 15 measurements	 FCC MRA: TW1039
Taiwan	TAF	LP0002, RTTE01, FCC Method-47 CFR Part 15 Subpart C, D, E, RSS-210, RSS-310 IDA TS SRD, AS/NZS 4268, AS/NZS 4771, TS 12.1 & 12.2, ETSI EN 300 440-1, ETSI EN 300 440-2, ETSI EN 300 328, ETSI EN 300 220-1, ETSI EN 300 220-2, ETSI EN 301 893, ETSI EN 301 489-1/3/7/17 FCC OET Bulletin 65 + Supplement C, EN 50360, EN 50361, EN 50371, RSS 102, EN 50383, EN 50385, EN 50392, IEC 62209, CNS 14958-1, CNS 14959 FCC Method -47 CFR Part 15 Subpart B IEC / EN 61000-3-2, IEC / EN 61000-3-3, IEC / EN 61000-4-2/3/4/5/6/8/11	 Testing Laboratory 1309
Canada	Industry Canada	3M Semi Anechoic Chamber (IC 2324G-1 / IC 2324G-2) to perform	 IC 2324G-1 IC 2324G-2

** No part of this report may be used to claim or imply product endorsement by A2LA or any agency of the US Government.*



6. SETUP OF EQUIPMENT UNDER TEST

6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

6.2 SUPPORT EQUIPMENT

No.	Device Type	Brand	Model	Series No.	FCC ID	Data Cable	Power Cord
1.	LCD Monitor	DELL	2407WFPb	CN-0FC255-4663 3-675-22TJS	FCC DoC	Shielded, 1.8m with 2 cores	Unshielded, 1.8m
2.	Notebook PC	HP	dv6-1332TX	CNF9491GLJ	PD9112BNHU	N/A	AC I/P: Unshielded, 1.8m DC O/P: Unshielded, 1.8m with a core
3.	Notebook PC	IBM	1951-I3V(T60)	L3B2188	FCC DoC	N/A	AC I/P: Unshielded, 1.8m DC O/P: Unshielded, 1.8m with a core
4.	USB Mouse	DELL	M-UV69a	323617-001	FCC DoC	Shielded, 1.8m	N/A
5.	320GB 2.5" HDD	Seagate	9ZA2MG-500	538224 2809	FCC DoC	Shielded, 1.8m	N/A
6.	Micro SD Card	N/A	N/A	N/A	N/A	N/A	N/A
7.	Bluetooth Cellphone (Remote)	NOKIA	6125	N/A	LJPRM-178	N/A	N/A
8.	GPS Simulator (Remote)	HWajeat	GPS-101	EN001	N/A	N/A	N/A

Remark:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.




7. FCC PART 15.247 REQUIREMENTS

7.1 20 DB BANDWIDTH

LIMIT

None; for reporting purposes only.

Test Configuration

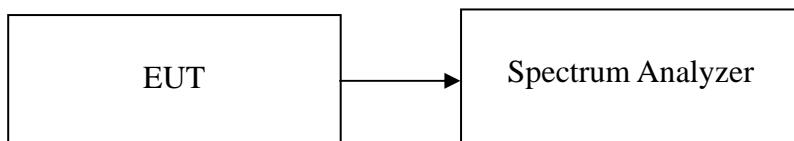

TEST PROCEDURE


1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW=30kHz, VBW = 100kHz, Span = 3MHz, Sweep = 3.2ms, Att = 10dB.
4. Mark the peak frequency and 20dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.

TEST RESULTS

No non-compliance noted.


Test Data

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
Low	2402	1.025
Mid	2441	0.965
High	2480	1.045

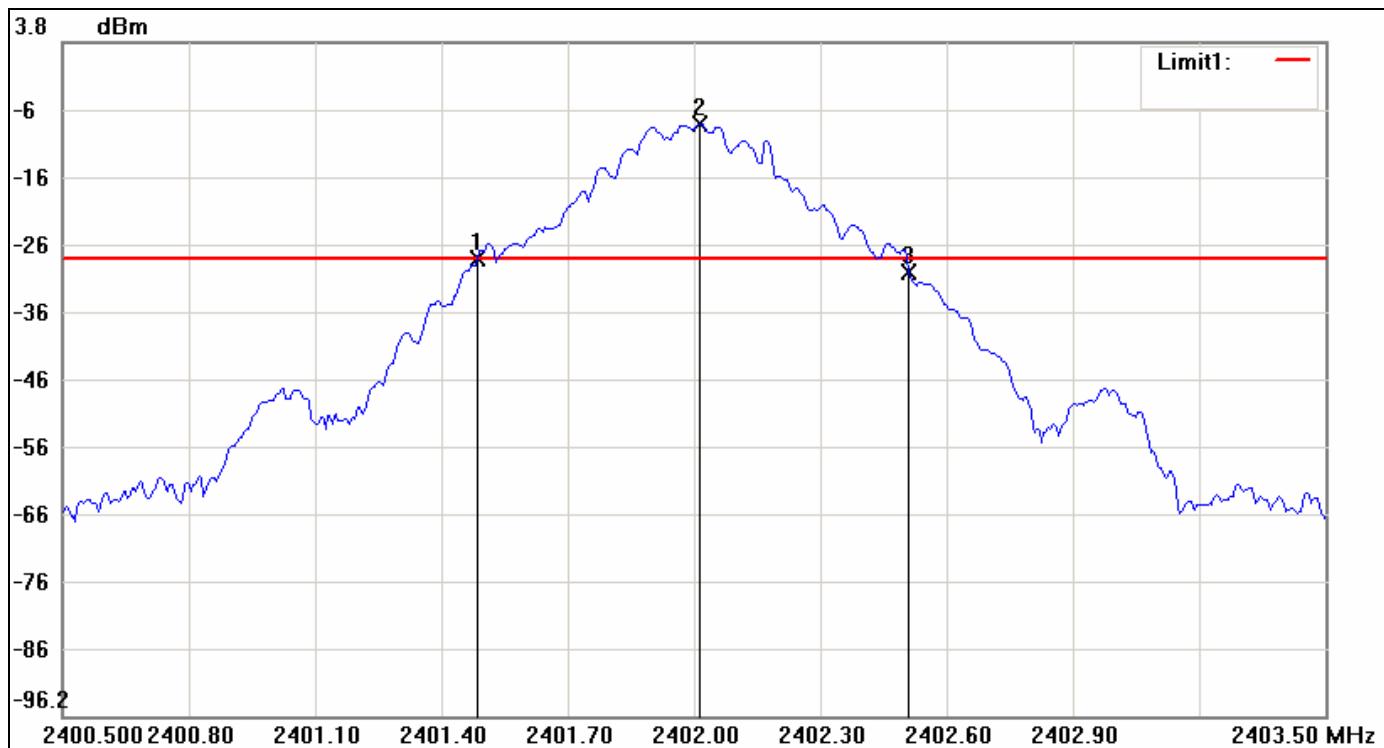**Test Plot****20dB Bandwidth (CH Low)**


No.	Frequency(MHz)	Limit(dBm)	Level(dBm)	Margin(dBm)
1	2401.4850	-28.28	-28.30	-0.02
2	2402.0150	-28.28	-8.28	20.00
3	2402.5100	-28.28	-30.29	-2.01

No.		△Frequency(MHz)	△Level(dB)
1	mk3-mk1	1.025	-1.99

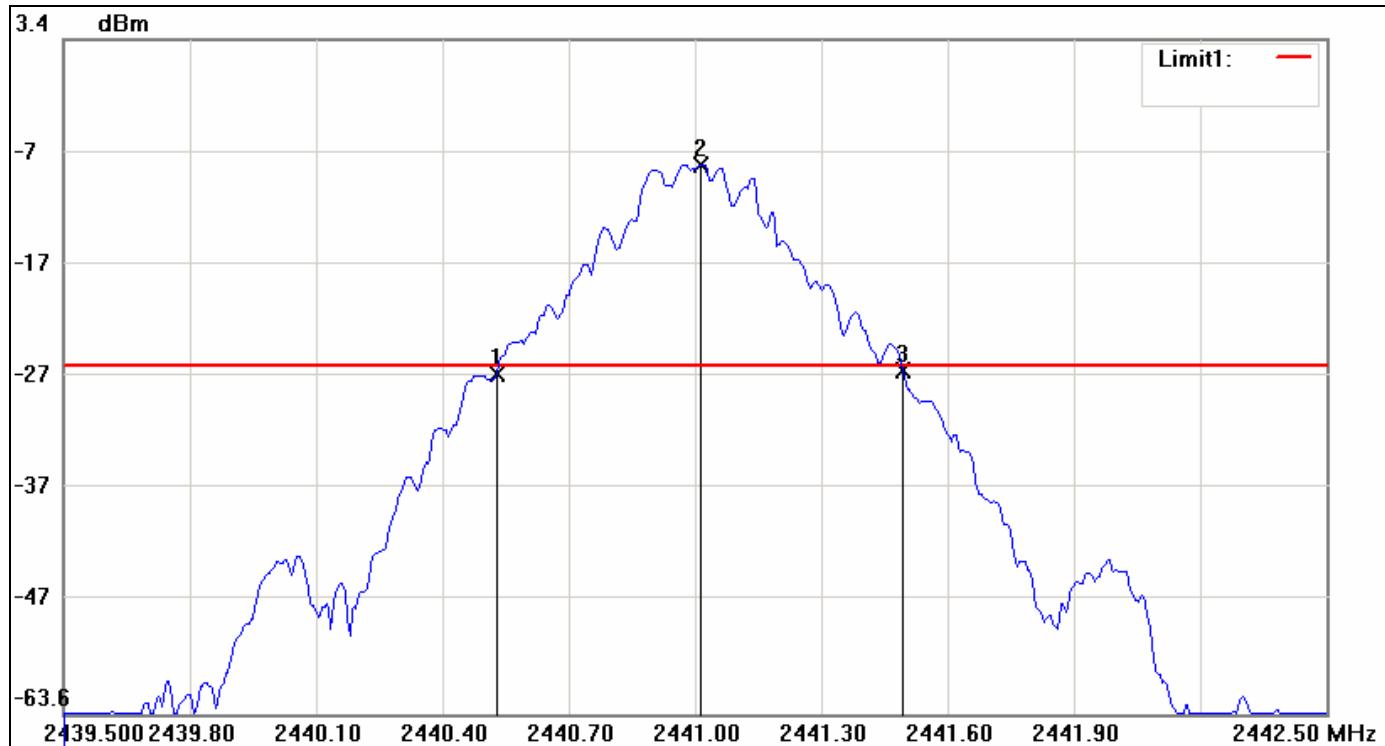**20dB Bandwidth (CH Mid)**

No.	Frequency(MHz)	Limit(dBm)	Level(dBm)	Margin(dBm)
1	2440.5300	-29.89	-29.05	-0.84
2	2441.0150	-9.05	-29.05	20.00
3	2441.4950	-29.50	-29.05	-0.45

No.		Δ Frequency(MHz)	Δ Level(dB)
1	mk3-mk1	0.965	0.39

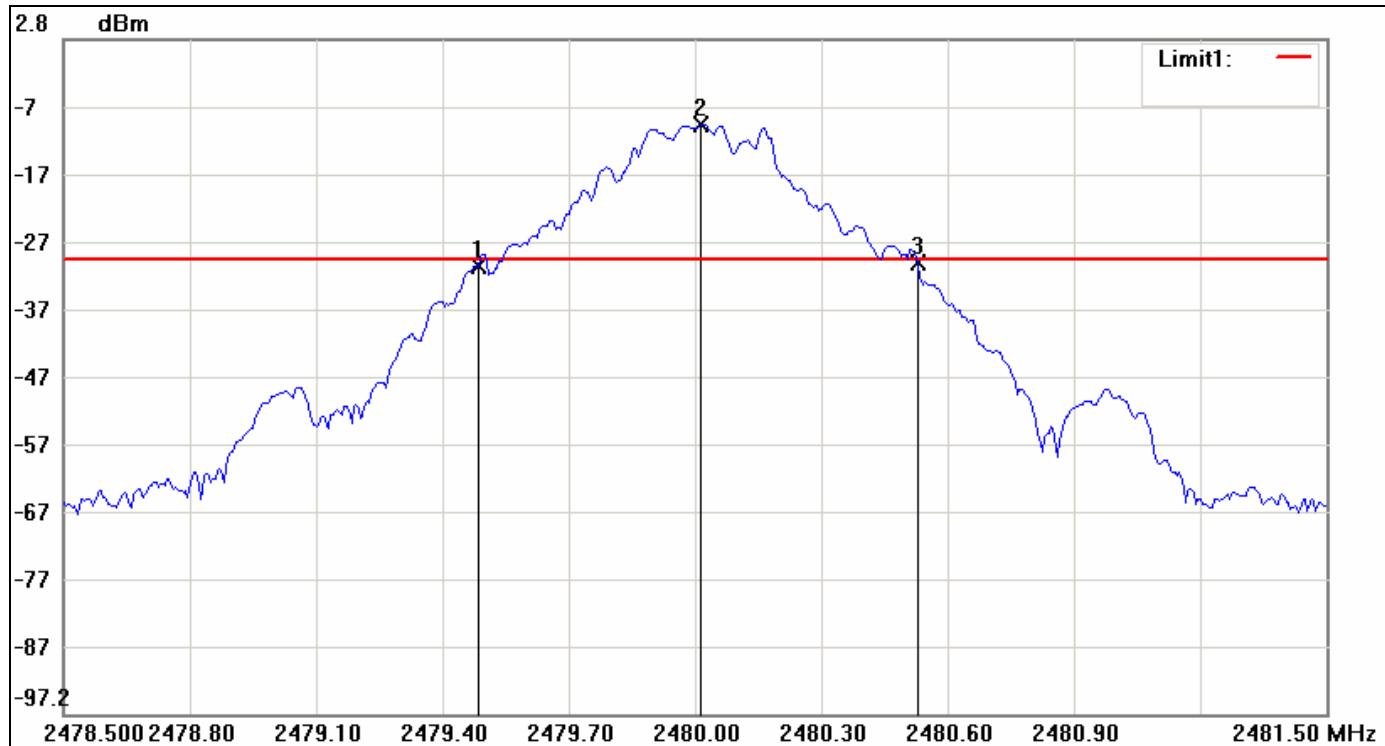**20dB Bandwidth (CH High)**

No.	Frequency(MHz)	Limit(dBm)	Level(dBm)	Margin(dBm)
1	2479.4850	-29.71	-30.82	-1.11
2	2480.0150	-29.71	-9.71	20.00
3	2480.5300	-29.71	-30.20	-0.49

No.		Δ Frequency(MHz)	Δ Level(dB)
1	mk3-mk1	1.045	0.62




7.2 PEAK POWER

LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.
2. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.
3. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test Configuration

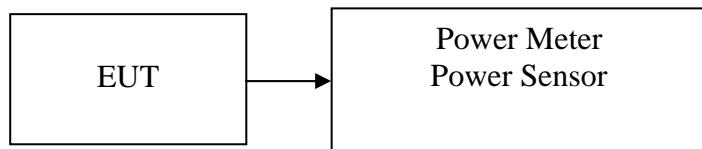

TEST PROCEDURE

The transmitter output is connected to the Power Meter. The Power Meter is set to the peak power detection.

TEST RESULTS

No non-compliance noted.

Test Data

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2402	-5.45	0.00029	1	PASS
Mid	2441	-5.73	0.00027		PASS
High	2480	-6.45	0.00023		PASS




7.3 AVERAGE POWER

LIMIT

None; for reporting purposes only.

Test Configuration

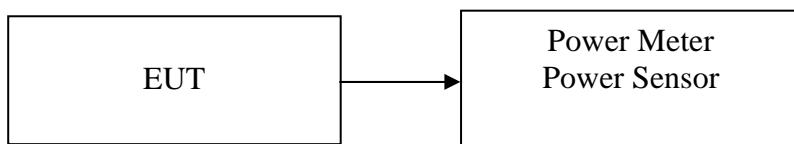

TEST PROCEDURE

The transmitter output is connected to the Power Meter. The Power Meter is set to the peak power detection.

TEST RESULTS

No non-compliance noted.

Test Data

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	2402	-8.36	0.00015
Mid	2441	-8.48	0.00014
High	2480	-10.02	0.00010




7.4 BAND EDGES MEASUREMENT

LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

Test Configuration

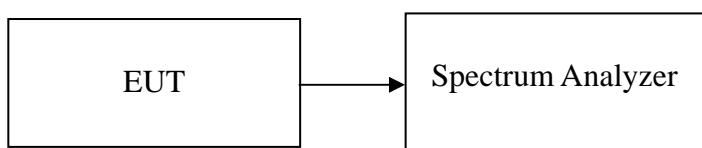

TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 300 kHz. The video bandwidth is set to 300 kHz.

TEST RESULTS


No non-compliance noted




Band Edges

TX Mode

(CH Low)

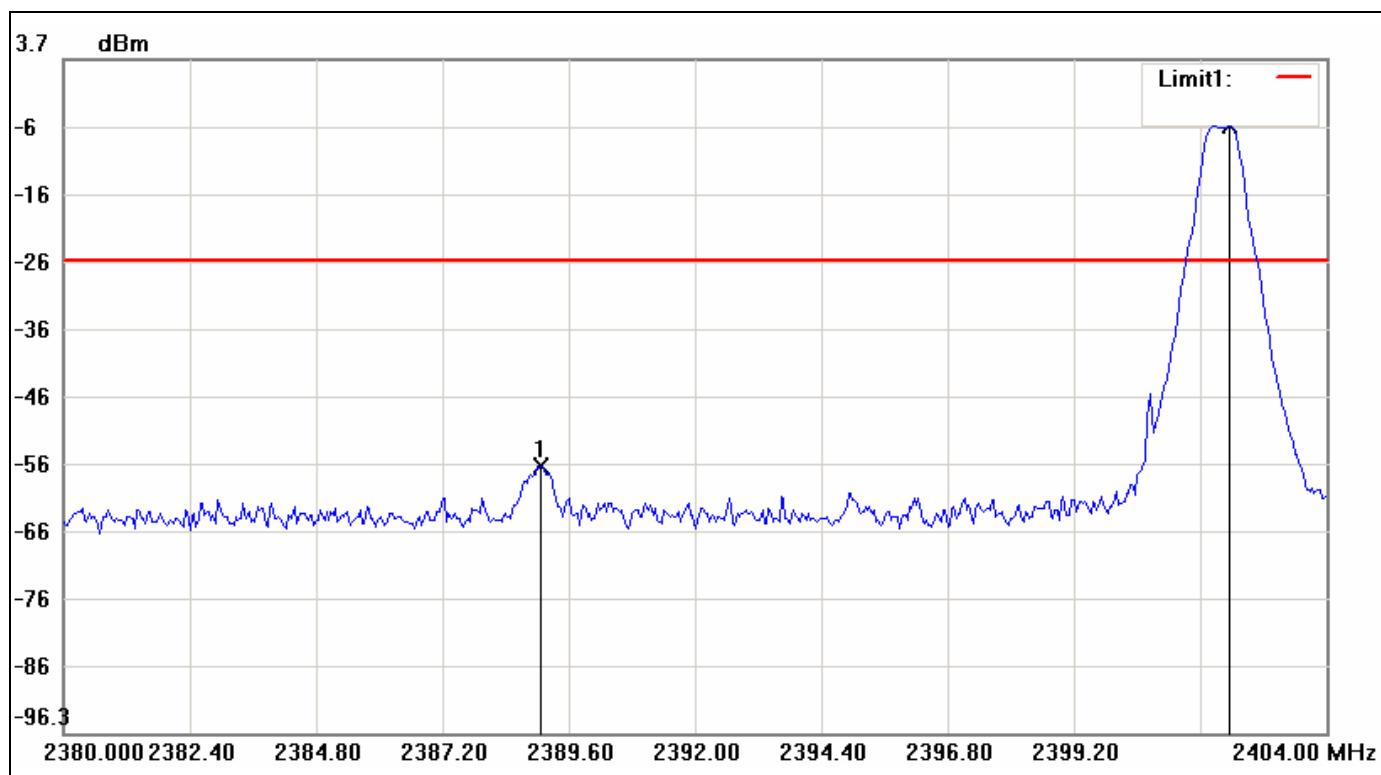

No.	Frequency(MHz)	Limit(dBm)	Level(dBm)	Margin(dBm)
1	2389.0800	-26.14	-56.74	-30.60
2	2402.1600	-26.14	-6.14	20.00

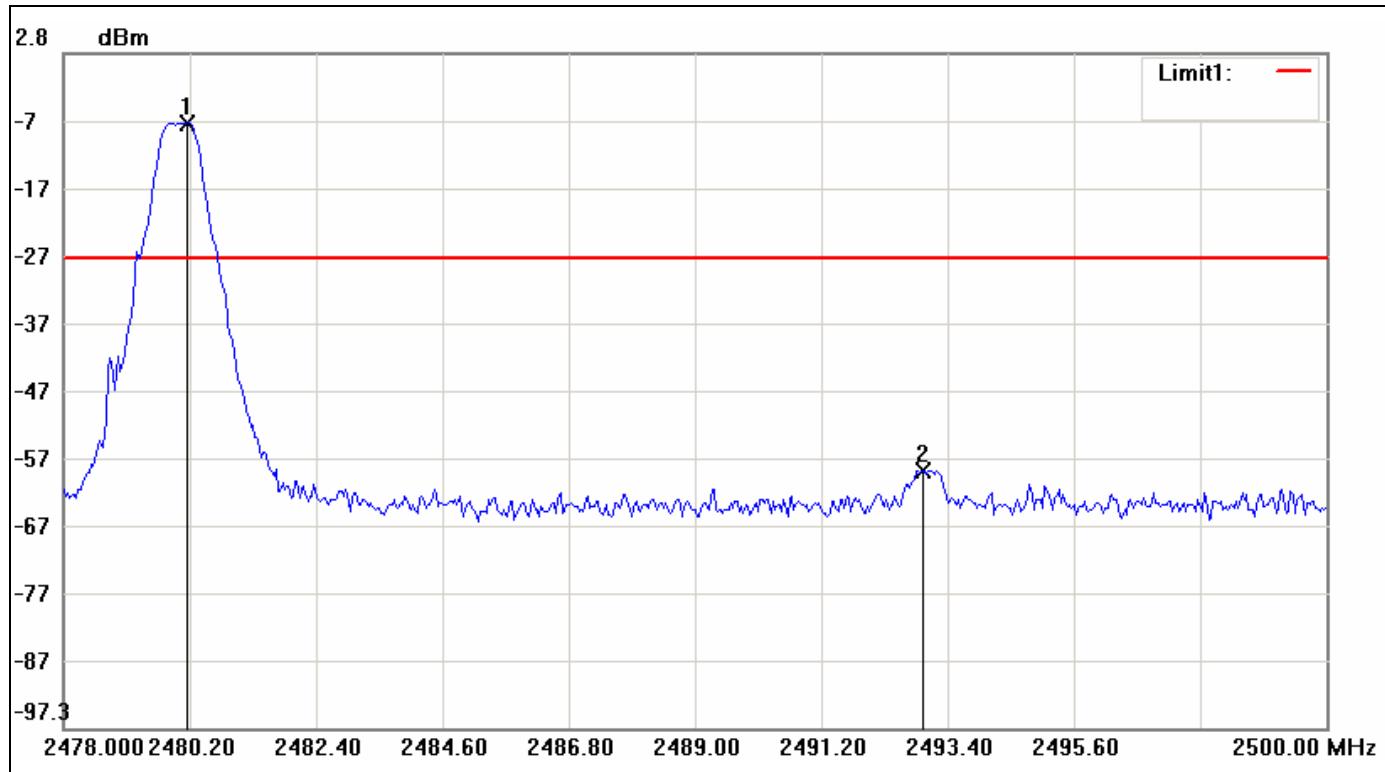
**(CH High)**

No.	Frequency(MHz)	Limit(dBm)	Level(dBm)	Margin(dBm)
1	2480.1633	-27.50	-7.50	20.00
2	2492.9600	-27.50	-59.03	-31.53



Hopping Mode


(CH Low)

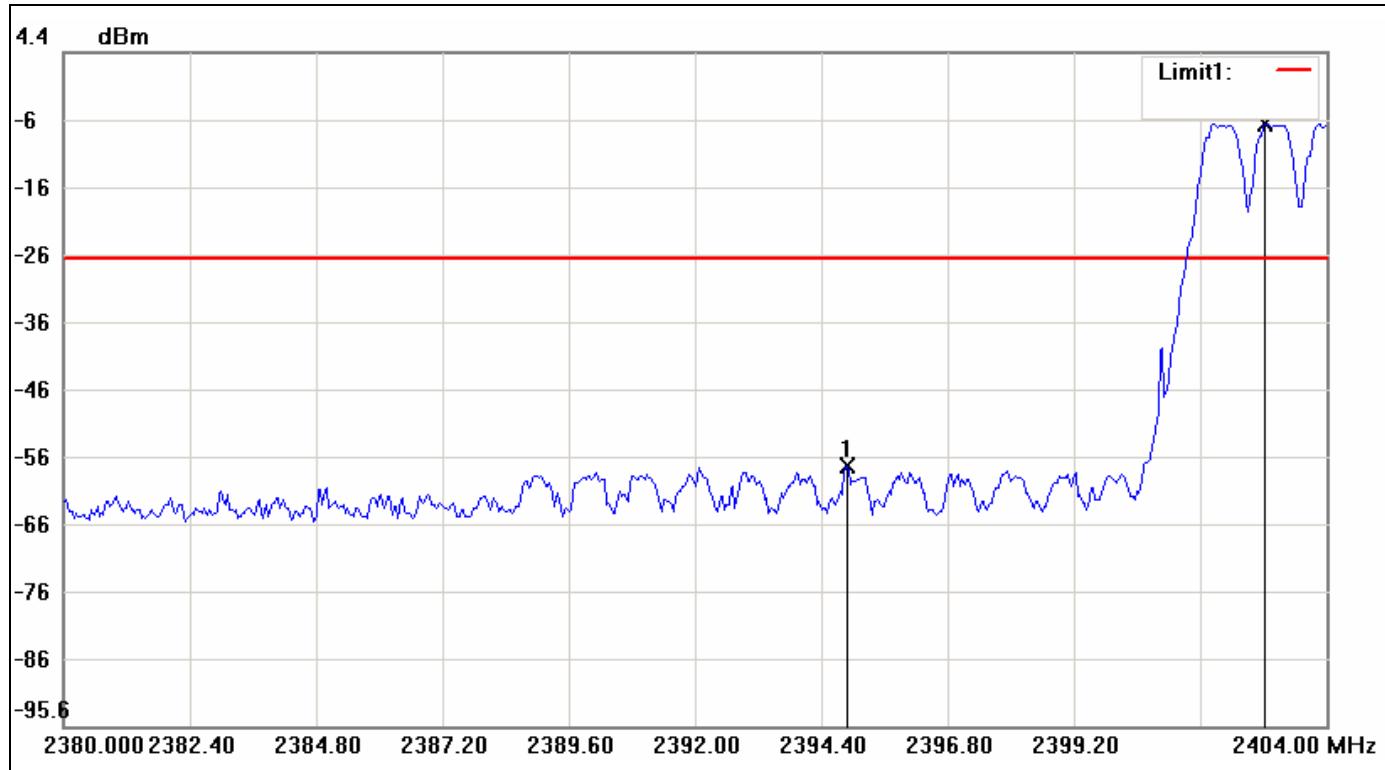

No.	Frequency(MHz)	Limit(dBm)	Level(dBm)	Margin(dBm)
1	2394.8800	-26.28	-56.89	-30.61
2	2402.8400	-26.28	-6.28	20.00



(CH High)

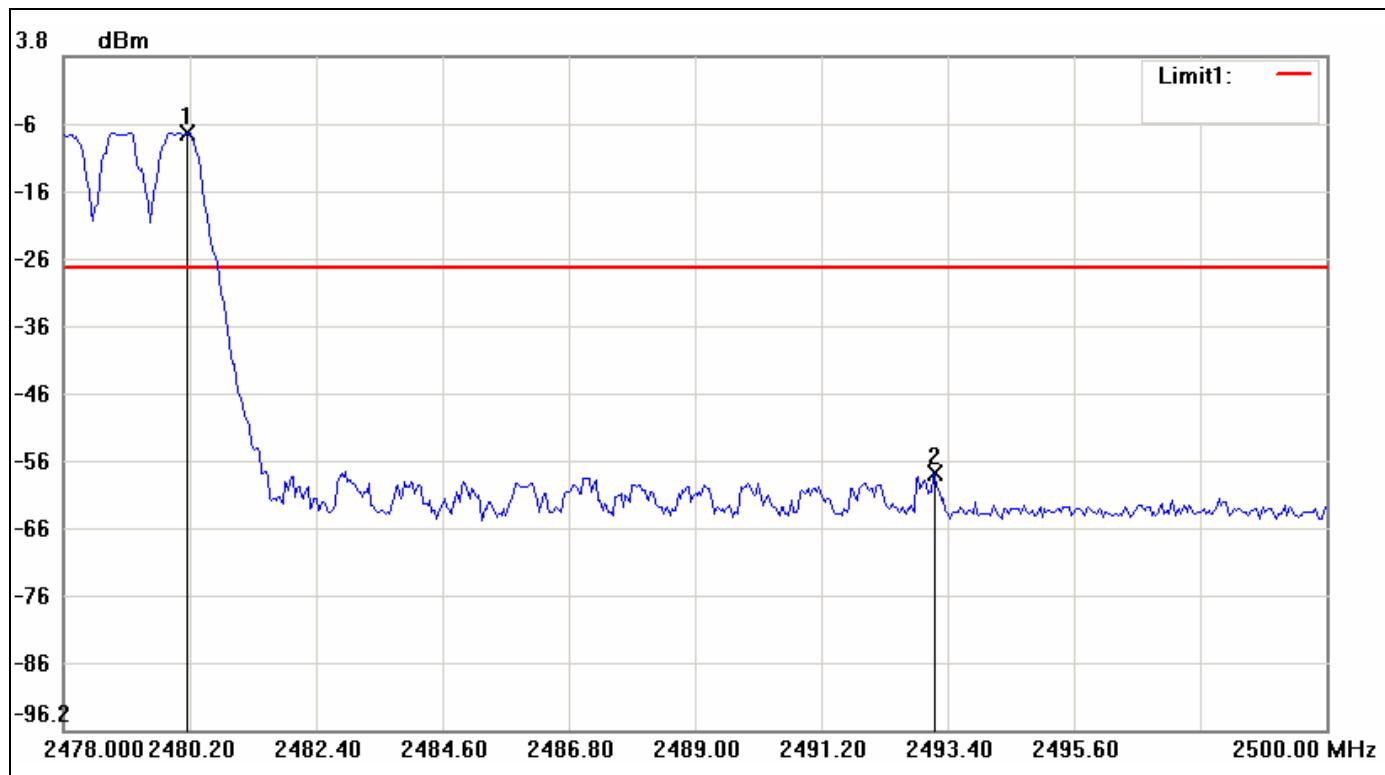

No.	Frequency(MHz)	Limit(dBm)	Level(dBm)	Margin(dBm)
1	2480.1633	-27.55	-7.55	20.00
2	2493.1800	-27.55	-57.97	-30.42




7.5 FREQUENCY SEPARATION

LIMIT

According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Configuration

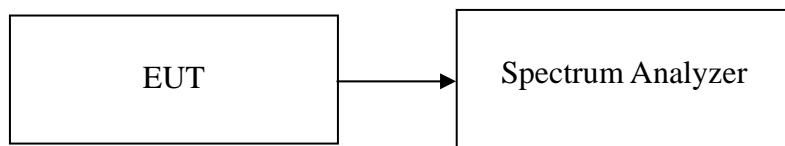

TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = middle of hopping channel.
4. Set the spectrum analyzer as RBW = 30kHz, VBW = 100kHz, Span = 3MHz, Sweep = auto.
5. Max hold, mark 3 peaks of hopping channel and record the 3 peaks frequency.

TEST RESULTS

No non-compliance noted


Test Data

Channel Separation (MHz)	two-thirds of the 20 dB bandwidth (kHz)	Channel Separation Limit	Result
1.00	696.66	>two-thirds of the 20 dB bandwidth	Pass




Test Plot

Measurement of Channel Separation

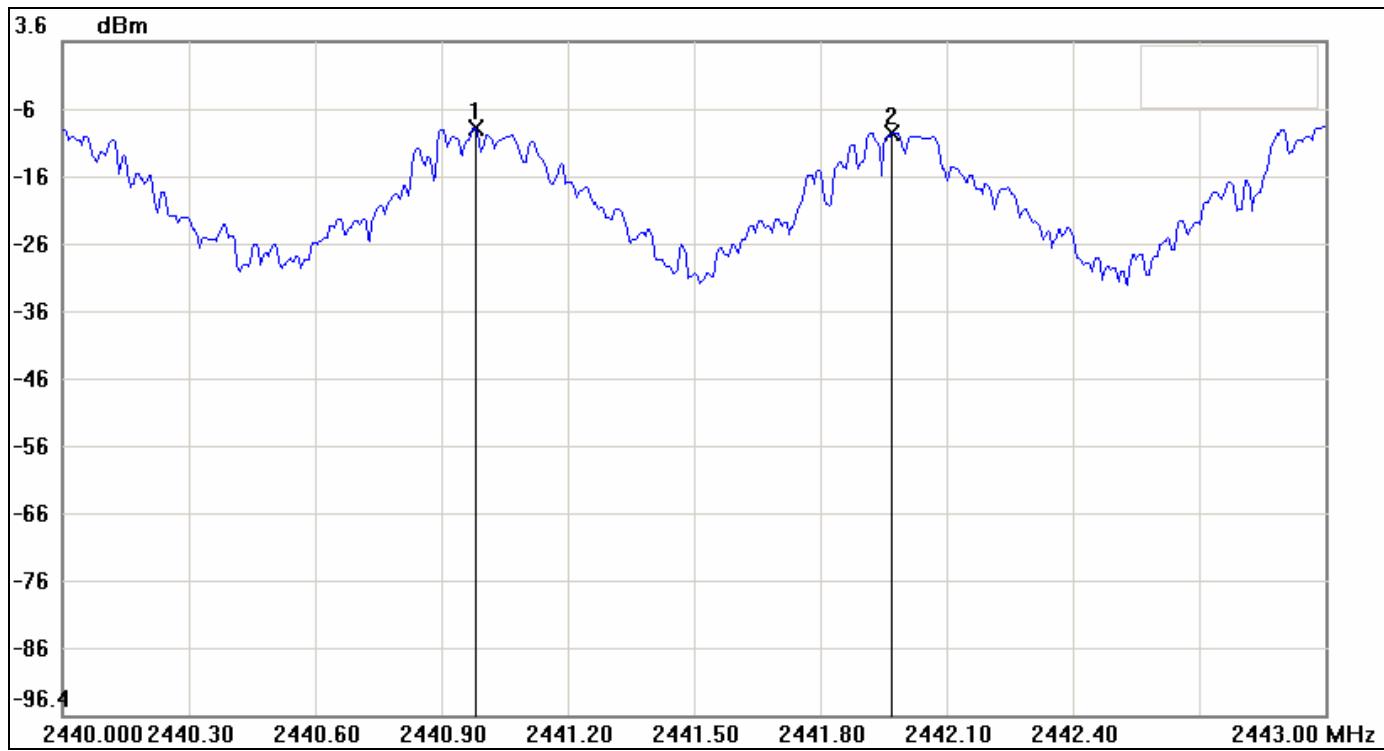

No.	Frequency(MHz)	Limit(dBm)	Level(dBm)	Margin(dBm)
1	2440.9800		-9.28	
2	2441.9800		-9.93	

No.	Δ Frequency(MHz)	Δ Level(dB)
1	mk2-mk1	1

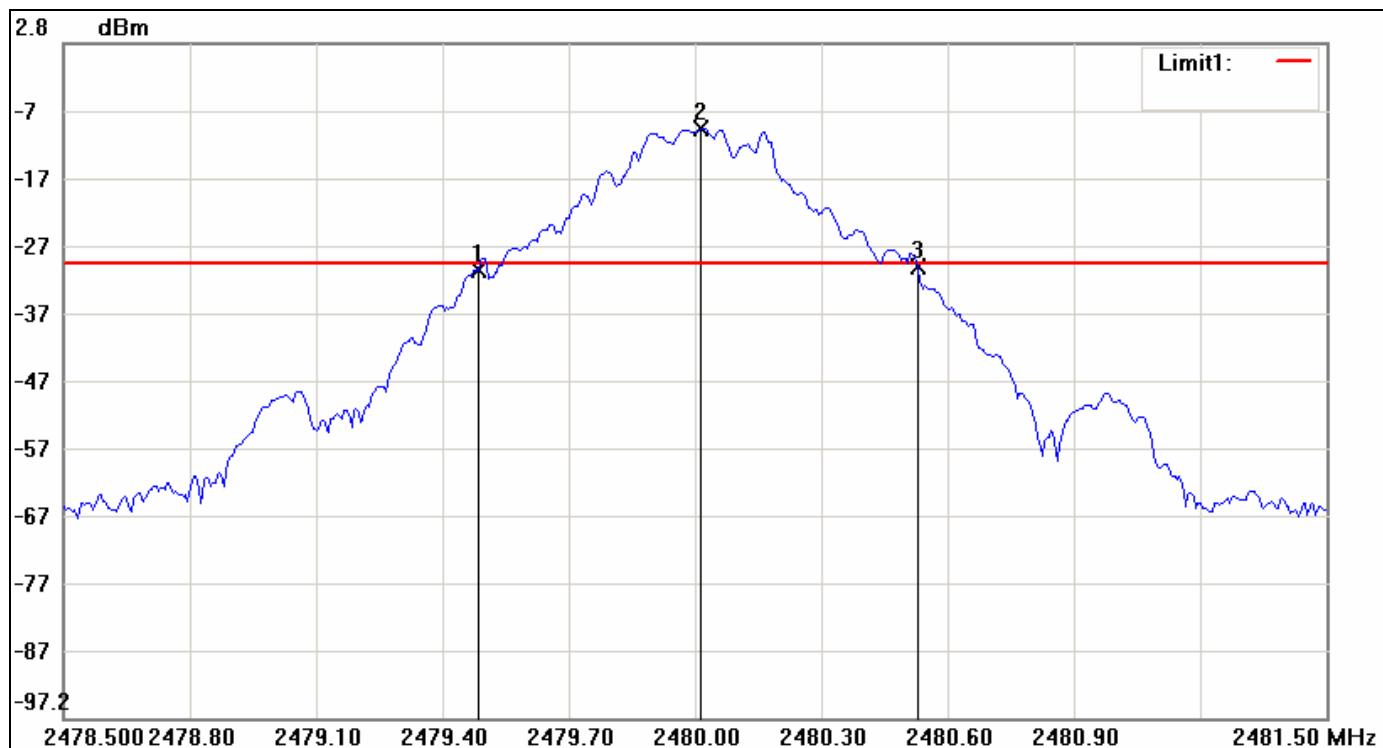**Measurement of 20dB Bandwidth**

No.	Frequency(MHz)	Limit(dBm)	Level(dBm)	Margin(dBm)
1	2479.4850	-29.71	-30.82	-1.11
2	2480.0150	-29.71	-9.71	20.00
3	2480.5300	-29.71	-30.20	-0.49

No.	△Frequency(MHz)	△Level(dB)	
1	mk3-mk1	1.045	0.62




7.6 NUMBER OF HOPPING FREQUENCY

LIMIT

According to §15.247(a)(1)(ii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands shall use at least 75 hopping frequencies.

Test Configuration

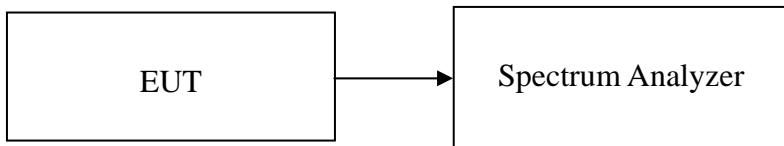

TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set spectrum analyzer Start=2400MHz, Stop = 2430.5MHz, Sweep = auto, Start=2430.5MHz, Stop = 2460.5MHz, Sweep = auto and Start=2460.5MHz, Stop = 2485.5MHz, Sweep = auto.
4. Set the spectrum analyzer as RBW, VBW=300kHz.
5. Max hold, view and count how many channel in the band.

TEST RESULTS

No non-compliance noted



Test Data


Result (No. of CH)	Limit (No. of CH)	Result
79	>75	PASS



Test Plot

Channel Number

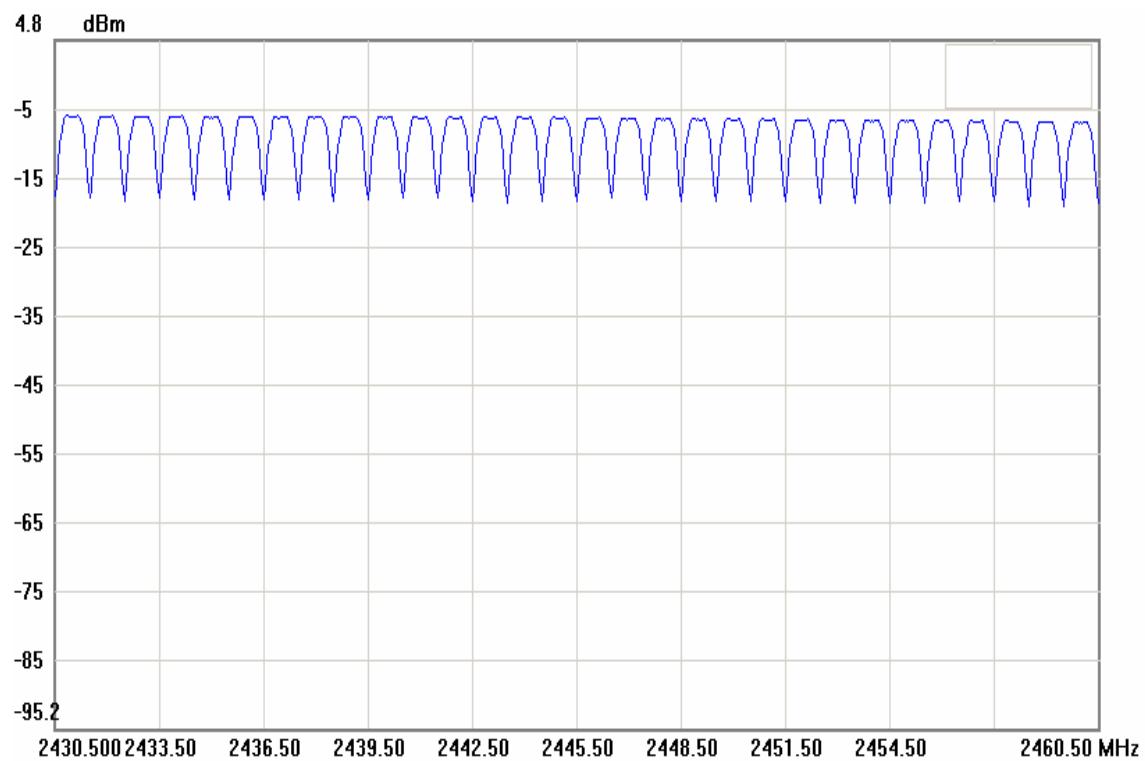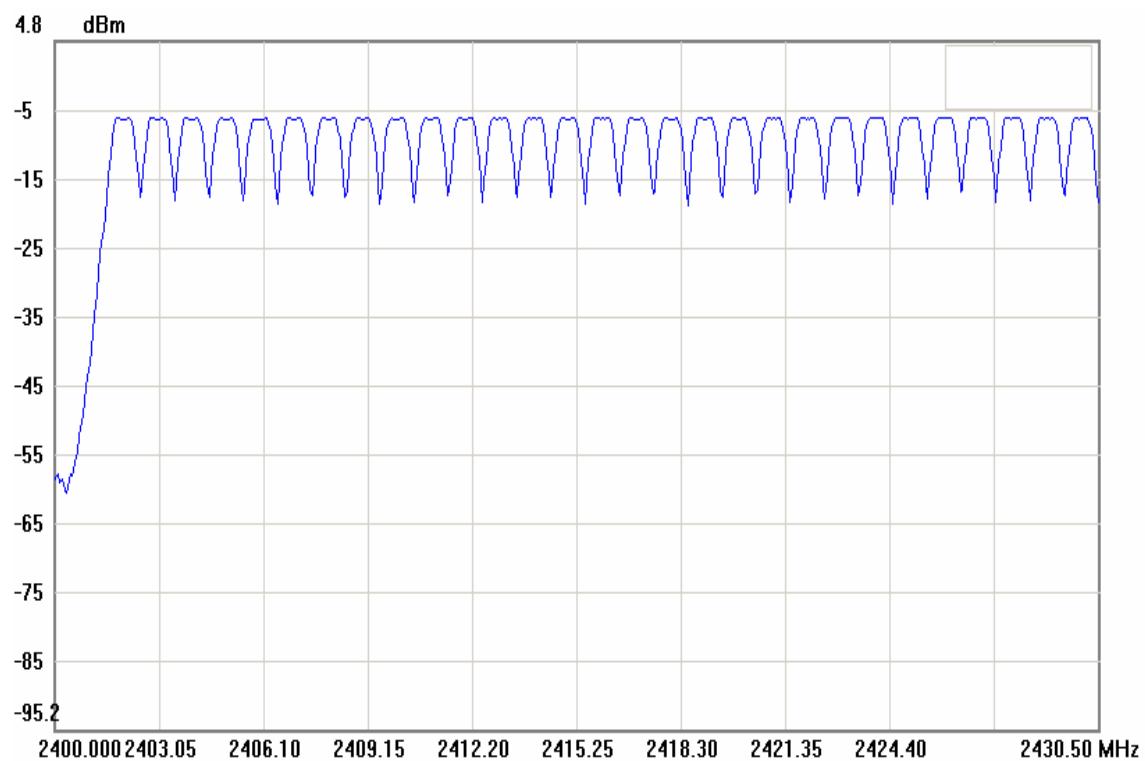

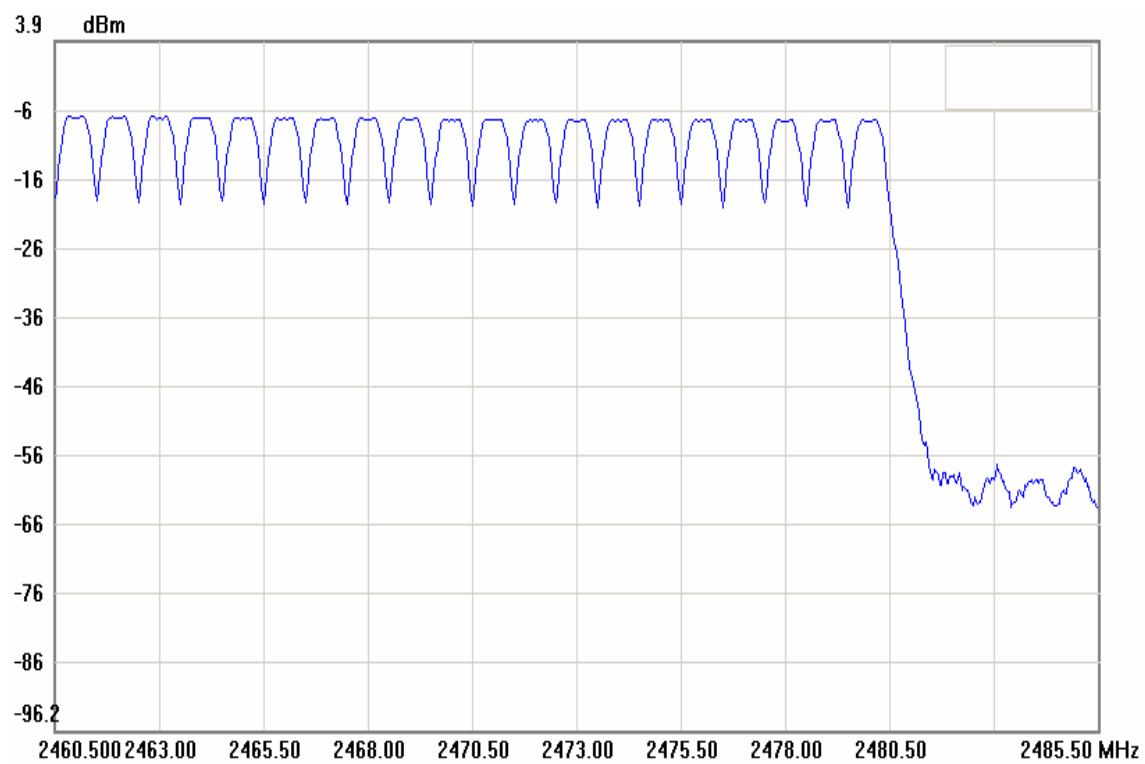




7.7 TIME OF OCCUPANCY (DWELL TIME)

LIMIT

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands. The average time of occupancy on any channels shall not greater than 0.4 s within a period 0.4 s multiplied by the number of hopping channels employed.

Test Configuration

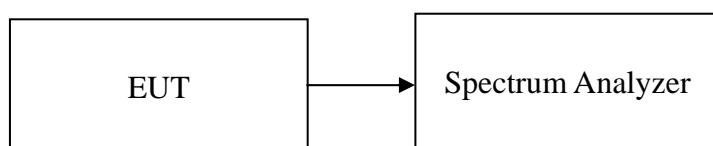

TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = operating frequency.
4. Set the spectrum analyzer as RBW, VBW=1MHz, Span = 0Hz, Sweep = auto.
5. Repeat above procedures until all frequency measured were complete.

Test Data

DH 1: $0.3850 * (1600/2)/79 * 31.6 = 123.200$ (ms)

DH 3: $1.6500 * (1600/4)/79 * 31.6 = 264.000$ (ms)


DH 5: $2.9083 * (1600/6)/79 * 31.6 = 310.219$ (ms)

	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
DH 1	0.3850	123.200	31.60	400.00	PASS
DH 3	1.6500	264.000	31.60		PASS
DH 5	2.9083	310.219	31.60		PASS



Test Plot

DH 1

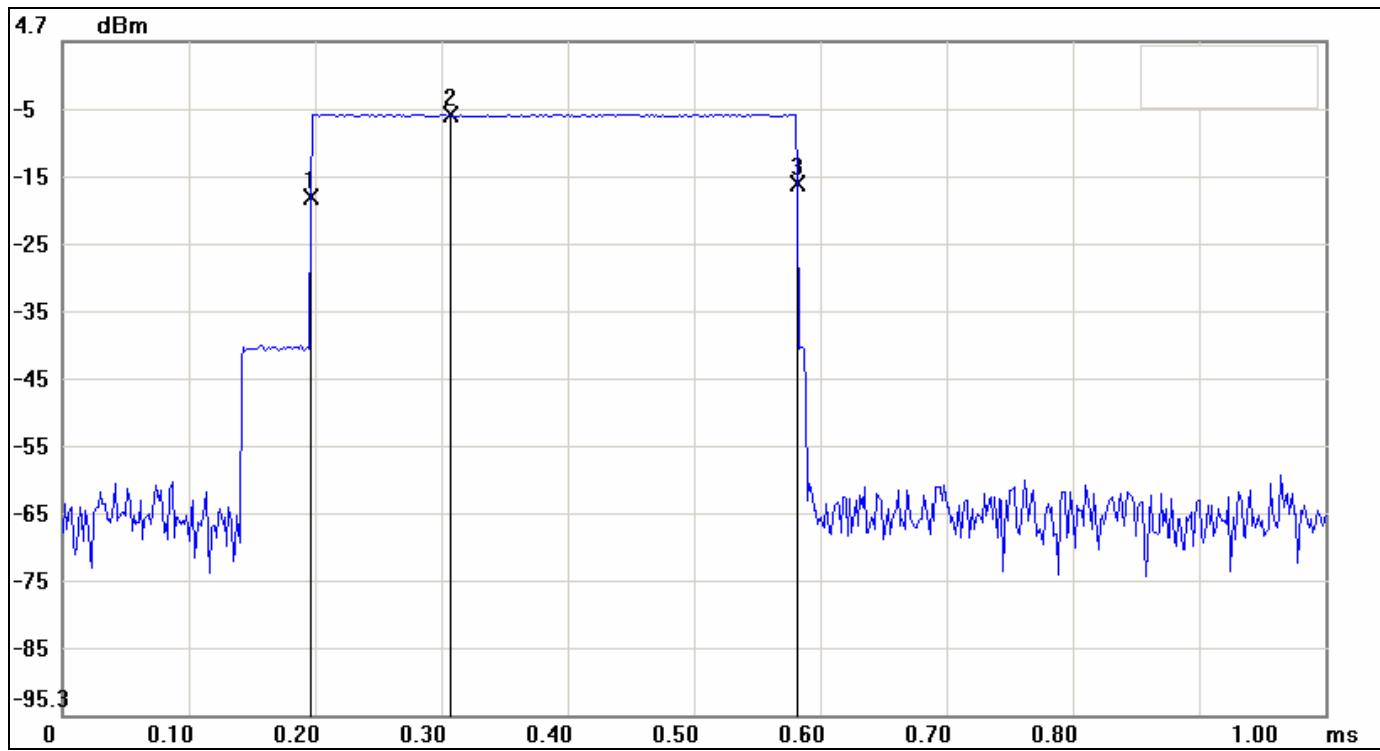

No.	Sweep time(ms)	Limit(dBm)	Level(dBm)	Margin(dBm)
1	0.1967		-18.53	
2	0.3067		-6.23	
3	0.5817		-16.39	

No.		△Time(ms)	△Level(dB)
1	mk3-mk1	0.385	2.14


**DH 3**

No.	Sweep time(ms)	Limit(dBm)	Level(dBm)	Margin(dBm)
1	0.7900		-41.26	
2	1.1350		-6.23	
3	2.4400		-41.20	

No.		Δ Time(ms)	Δ Level(dB)
1	mk3-mk1	1.65	0.06



DH 5

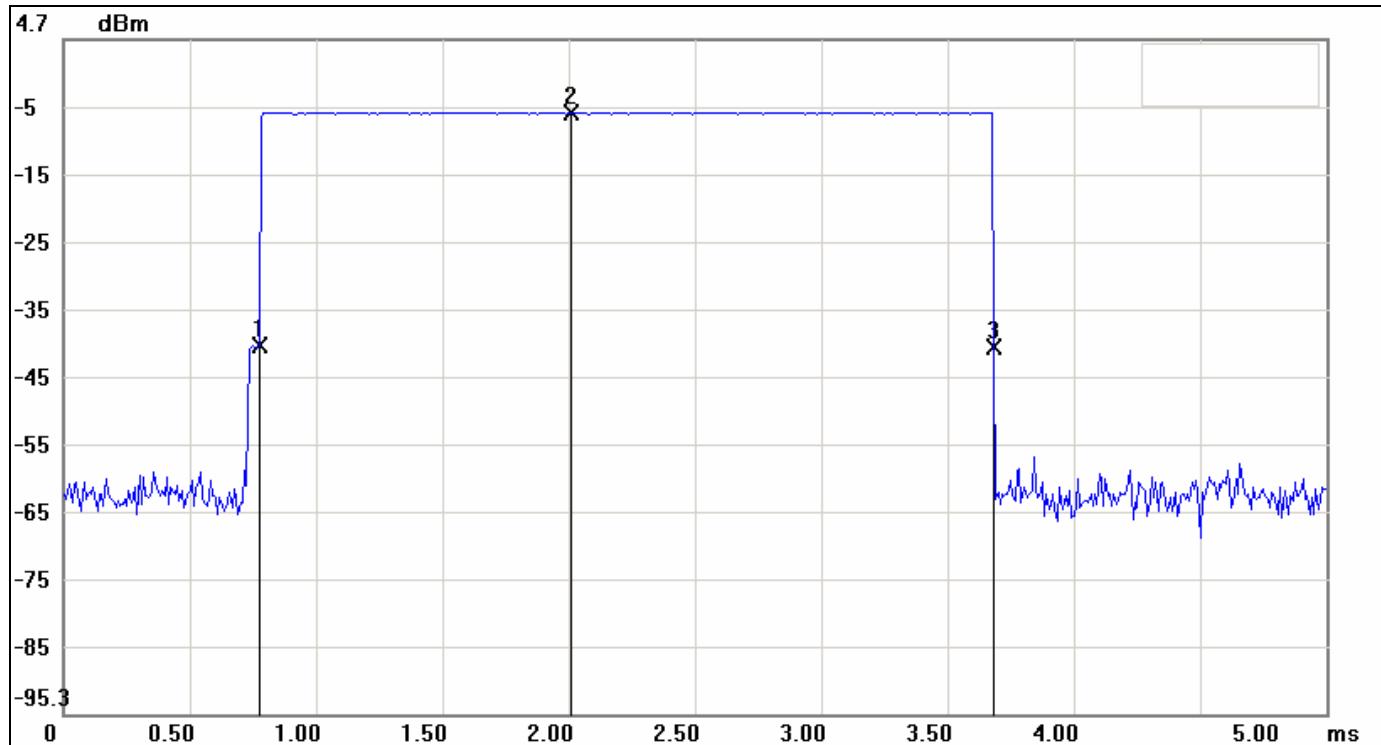

No.	Sweep time(ms)	Limit(dBm)	Level(dBm)	Margin(dBm)
1	0.7750		-40.73	
2	2.0083		-6.24	
3	3.6833		-40.98	

No.		△Time(ms)	△Level(dB)
1	mk3-mk1	2.9083	-0.25



7.7.1 Radiated Emissions

LIMIT

1. According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (μ V/m)	Measurement Distance (m)
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3


Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2. In the emission table above, the tighter limit applies at the band edges.


Frequency (MHz)	Field Strength (μ V/m at 3-meter)	Field Strength (dB μ V/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Test Configuration

9kHz ~ 30MHz

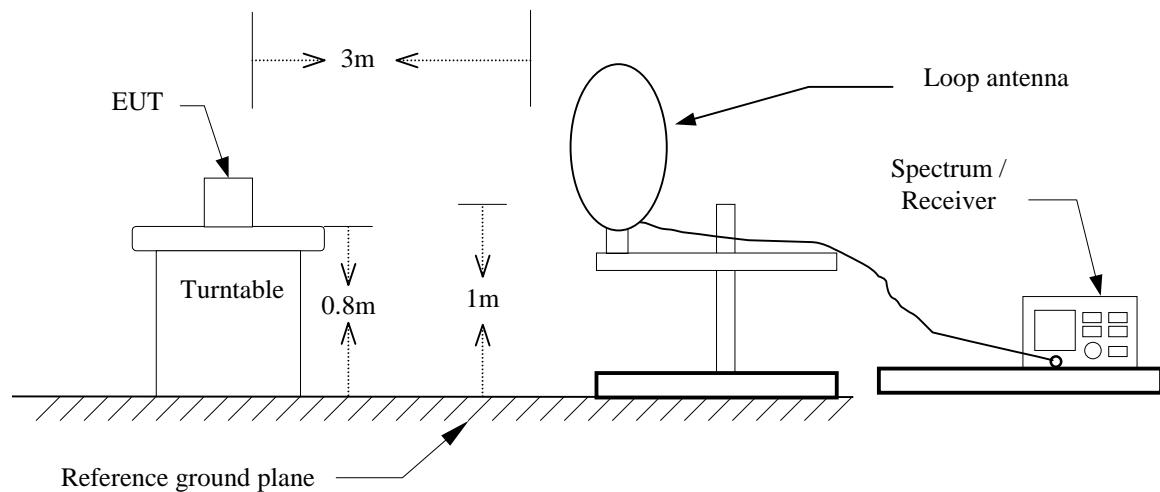


30MHz ~ 1GHz

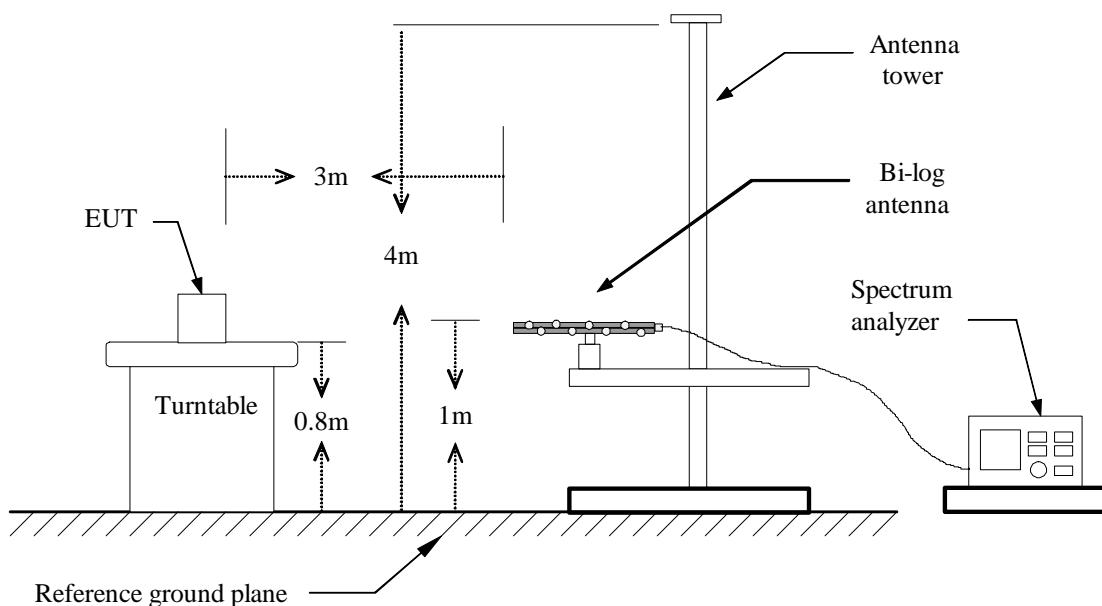



Above 1 GHz

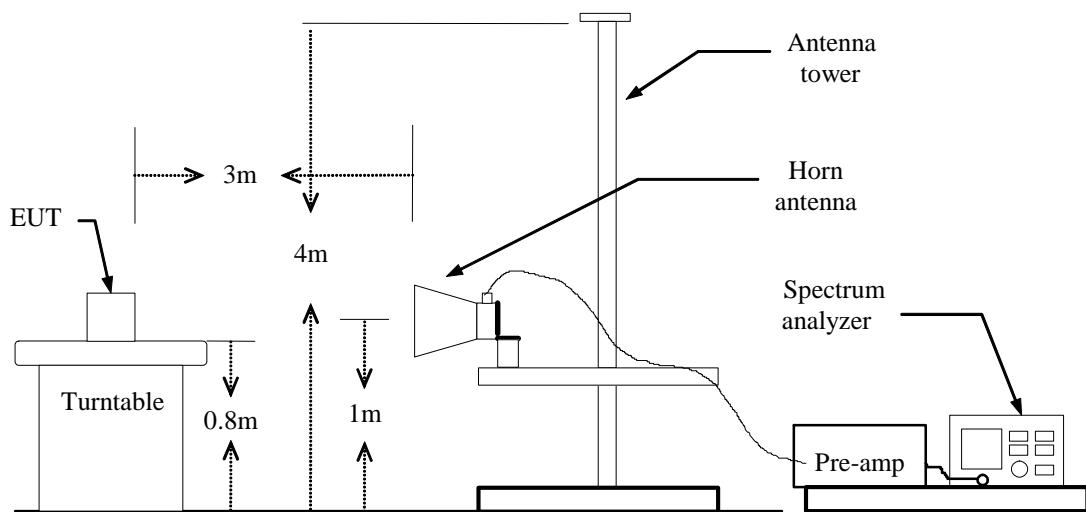



TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:

Below 1GHz:

RBW=100kHz / VBW=300kHz / Sweep=AUTO

Above 1GHz:

(a) PEAK: RBW=VBW=1MHz / Sweep=AUTO

(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO

7. Repeat above procedures until the measurements for all frequencies are complete.

**Below 1 GHz****Operation Mode:** Normal Link**Test Date:** February 1, 2011**Temperature:** 24°C**Tested by:** Leo Shi**Humidity:** 48 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
52.63	49.07	-15.24	33.83	40.00	-6.17	Peak	V
60.72	50.38	-15.89	34.49	40.00	-5.51	Peak	V
93.05	45.29	-14.74	30.54	43.50	-12.96	Peak	V
235.32	38.11	-11.18	26.93	46.00	-19.07	Peak	V
335.55	35.68	-8.39	27.29	46.00	-18.71	Peak	V
599.07	39.44	-4.07	35.37	46.00	-10.63	Peak	V
52.63	44.89	-15.24	29.65	40.00	-10.35	Peak	H
99.52	39.73	-13.16	26.57	43.50	-16.93	Peak	H
236.93	45.10	-11.15	33.95	46.00	-12.05	Peak	H
384.05	35.24	-7.40	27.85	46.00	-18.15	Peak	H
599.07	38.10	-4.07	34.04	46.00	-11.96	Peak	H
720.32	32.65	-2.25	30.40	46.00	-15.60	Peak	H

Remark:

1. *No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz).*
2. *Radiated emissions measured were made with an instrument using peak/quasi-peak detector mode.*
3. *Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.*
4. *Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.*
5. *Margin (dB) = Remark result (dBuV/m) - Quasi-peak limit (dBuV/m).*

**Above 1 GHz****Operation Mode:** TX / CH Low**Test Date:** February 1, 2011**Temperature:** 24°C**Tested by:** Leo Shi**Humidity:** 48 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (Peak) (dB)	Margin (Average) (dB)	Ant.Pol. (H/V)
1213.33	62.84	---	-10.85	52.00	---	74.00	54.00	-22.00	-2.00	V
4066.67	51.30	---	0.68	51.98	---	74.00	54.00	-22.02	-2.02	V
N/A										
1153.33	62.59	---	-10.91	51.68	---	74.00	54.00	-22.32	-2.32	H
4191.67	49.54	---	1.05	50.59	---	74.00	54.00	-23.41	-3.41	H
N/A										

Remark:

1. *Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.*
2. *Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.*
3. *Average test would be performed if the peak result were greater than the average limit or as required by the applicant.*
4. *Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*
5. *Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.*
6. *Peak Margin (dB) = Peak result (dBuV/m) - Peak limit (dBuV/m).
Average Margin (dB) = Peak result (dBuV/m) - Average limit (dBuV/m).*

**Operation Mode:** TX / CH Mid**Test Date:** February 1, 2011**Temperature:** 24°C**Tested by:** Leo Shi**Humidity:** 48 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (Peak) (dB)	Margin (Average) (dB)	Ant.Pol. (H/V)
1443.33	62.27	---	-10.61	51.66	---	74.00	54.00	-22.34	-2.34	V
4050.00	51.03	---	0.63	51.65	---	74.00	54.00	-22.35	-2.35	V
N/A										
1100.00	62.20	---	-10.97	51.23	---	74.00	54.00	-22.77	-2.77	H
4150.00	49.29	---	0.92	50.21	---	74.00	54.00	-23.79	-3.79	H
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Peak Margin (dB) = Peak result (dBuV/m) – Peak limit (dBuV/m).
Average Margin (dB) = Peak result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / CH High**Test Date:** February 1, 2011**Temperature:** 23°C**Tested by:** Leo Shi**Humidity:** 53 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (Peak) (dB)	Margin (Average) (dB)	Ant.Pol. (H/V)
1390.00	62.02	---	-10.66	51.36	---	74.00	54.00	-22.64	-2.64	V
4108.33	49.82	---	0.80	50.62	---	74.00	54.00	-23.38	-3.38	V
N/A										
1523.33	61.93	---	-10.31	51.61	---	74.00	54.00	-22.39	-2.39	H
4116.67	49.84	---	0.83	50.67	---	74.00	54.00	-23.33	-3.33	H
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Peak Margin (dB) = Peak result (dBuV/m) – Peak limit (dBuV/m).
Average Margin (dB) = Peak result (dBuV/m) – Average limit (dBuV/m).



7.8 POWERLINE CONDUCTED EMISSIONS

LIMIT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

* Decreases with the logarithm of the frequency.

Test Configuration

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.



TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Test Data

Operation Mode:	Normal Link	Test Date:	February 10, 2011
Temperature:	26°C	Tested by:	Edward Lin
Humidity:	60% RH	Test Mode:	Power Adapter Mode

Freq. (MHz)	QP Reading (dBuV)	AV Reading (dBuV)	Corr. factor (dB)	QP Result (dBuV)	AV Result (dBuV)	QP Limit (dBuV)	AV Limit (dBuV)	QP Margin (dB)	AV Margin (dB)	Note
0.1600	50.63	36.43	0.17	50.80	36.60	65.46	55.46	-14.66	-18.86	L1
0.1864	47.74	34.84	0.16	47.90	35.00	64.20	54.20	-16.30	-19.20	L1
0.2200	43.44	29.24	0.16	43.60	29.40	62.82	52.82	-19.22	-23.42	L1
0.2700	39.54	29.14	0.16	39.70	29.30	61.12	51.12	-21.42	-21.82	L1
1.6600	31.91	24.11	0.19	32.10	24.30	56.00	46.00	-23.90	-21.70	L1
2.6600	31.48	23.68	0.22	31.70	23.90	56.00	46.00	-24.30	-22.10	L1
0.1600	50.94	36.84	0.26	51.20	37.10	65.46	55.46	-14.26	-18.36	L2
0.2100	43.45	30.85	0.25	43.70	31.10	63.21	53.21	-19.51	-22.11	L2
0.2700	38.95	29.35	0.25	39.20	29.60	61.12	51.12	-21.92	-21.52	L2
0.5899	36.25	28.15	0.25	36.50	28.40	56.00	46.00	-19.50	-17.60	L2
1.6100	33.93	26.33	0.27	34.20	26.60	56.00	46.00	-21.80	-19.40	L2
2.5000	33.22	24.92	0.28	33.50	25.20	56.00	46.00	-22.50	-20.80	L2


Remark:

1. Measuring frequencies from 0.15 MHz to 30MHz.
2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Quasi-peak detector and average detector.
3. The IF bandwidth of SPA between 0.15MHz and 30MHz was 10kHz; the IF bandwidth of Test Receiver between 0.15MHz and 30MHz was 9kHz;
4. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)
5. "-" means Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.




Test Plots

Conducted emissions (Line 1)

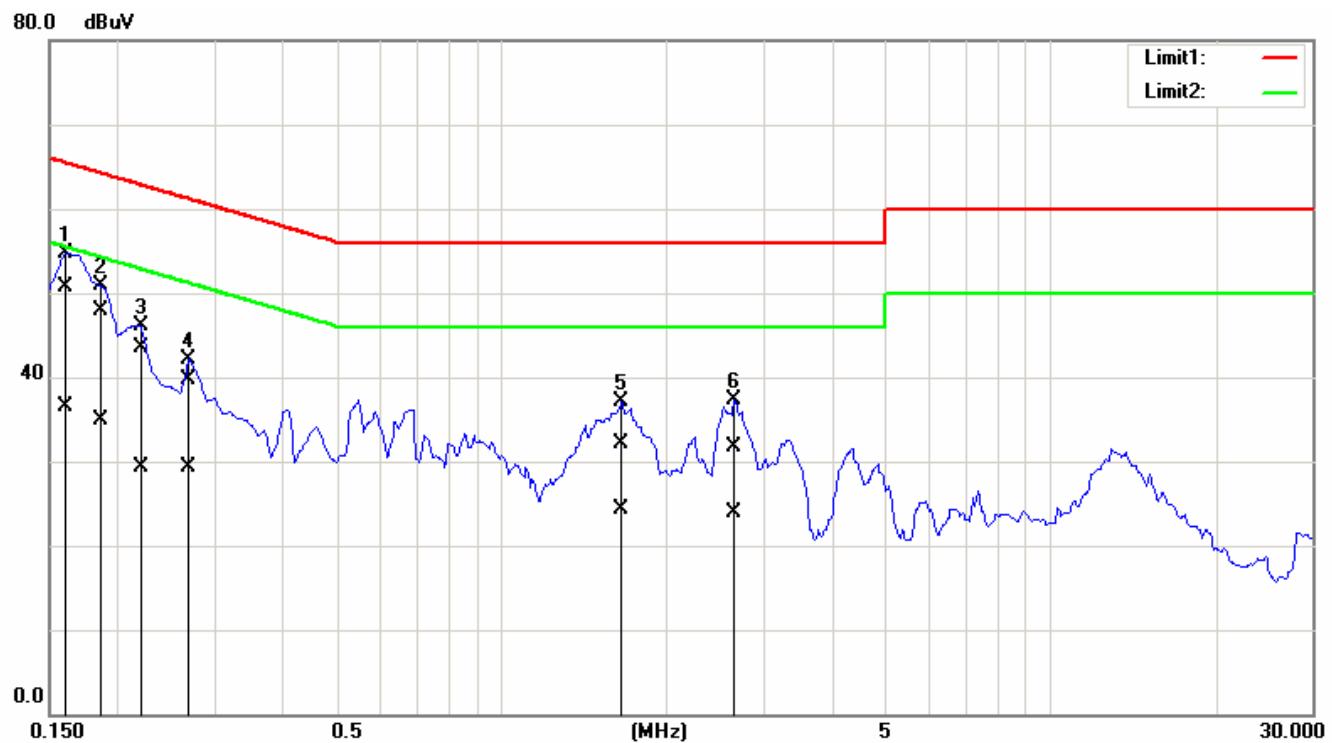

Conducted emissions (Line 2)

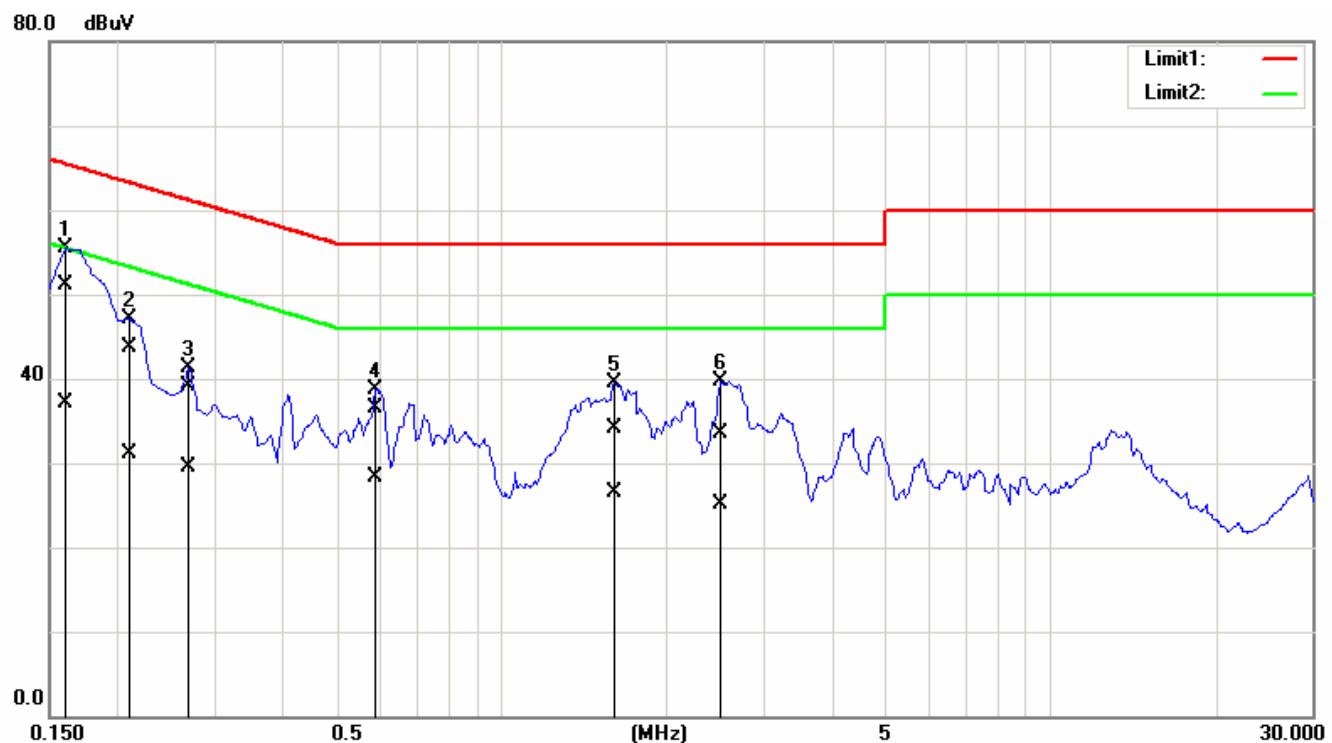

**Test Data****Operation Mode:** Normal Link**Test Date:** February 10, 2011**Temperature:** 26°C**Tested by:** Edward Lin**Humidity:** 60% RH**Test Mode:** USB Mode

Freq. (MHz)	QP Reading (dBuV)	AV Reading (dBuV)	Corr. factor (dB)	QP Result (dBuV)	AV Result (dBuV)	QP Limit (dBuV)	AV Limit (dBuV)	QP Margin (dB)	AV Margin (dB)	Note
0.1700	48.43	37.83	0.17	48.60	38.00	64.96	54.96	-16.36	-16.96	L1
0.2800	37.34	28.34	0.16	37.50	28.50	60.82	50.82	-23.32	-22.32	L1
0.3900	31.64	22.04	0.16	31.80	22.20	58.06	48.06	-26.26	-25.86	L1
2.2300	34.49	28.79	0.21	34.70	29.00	56.00	46.00	-21.30	-17.00	L1
3.9600	38.63	23.23	0.27	38.90	23.50	56.00	46.00	-17.10	-22.50	L1
26.6400	30.01	20.81	0.79	30.80	21.60	60.00	50.00	-29.20	-28.40	L1
0.1600	59.54	35.94	0.26	59.80	36.20	65.46	55.46	-5.66	-19.26	L2
0.1900	55.15	35.45	0.25	55.40	35.70	64.04	54.04	-8.64	-18.34	L2
0.2400	48.25	31.45	0.25	48.50	31.70	62.10	52.10	-13.60	-20.40	L2
0.3000	35.85	15.65	0.25	36.10	15.90	60.24	50.24	-24.14	-34.34	L2
0.3600	29.95	10.85	0.25	30.20	11.10	58.73	48.73	-28.53	-37.63	L2
14.6400	38.27	30.57	0.53	38.80	31.10	60.00	50.00	-21.20	-18.90	L2


Remark:

1. *Measuring frequencies from 0.15 MHz to 30MHz.*
2. *The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Quasi-peak detector and average detector.*
3. *The IF bandwidth of SPA between 0.15MHz and 30MHz was 10kHz; the IF bandwidth of Test Receiver between 0.15MHz and 30MHz was 9kHz;*
4. *L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)*
5. *" - " means Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.*




Test Plots

Conducted emissions (Line 1)

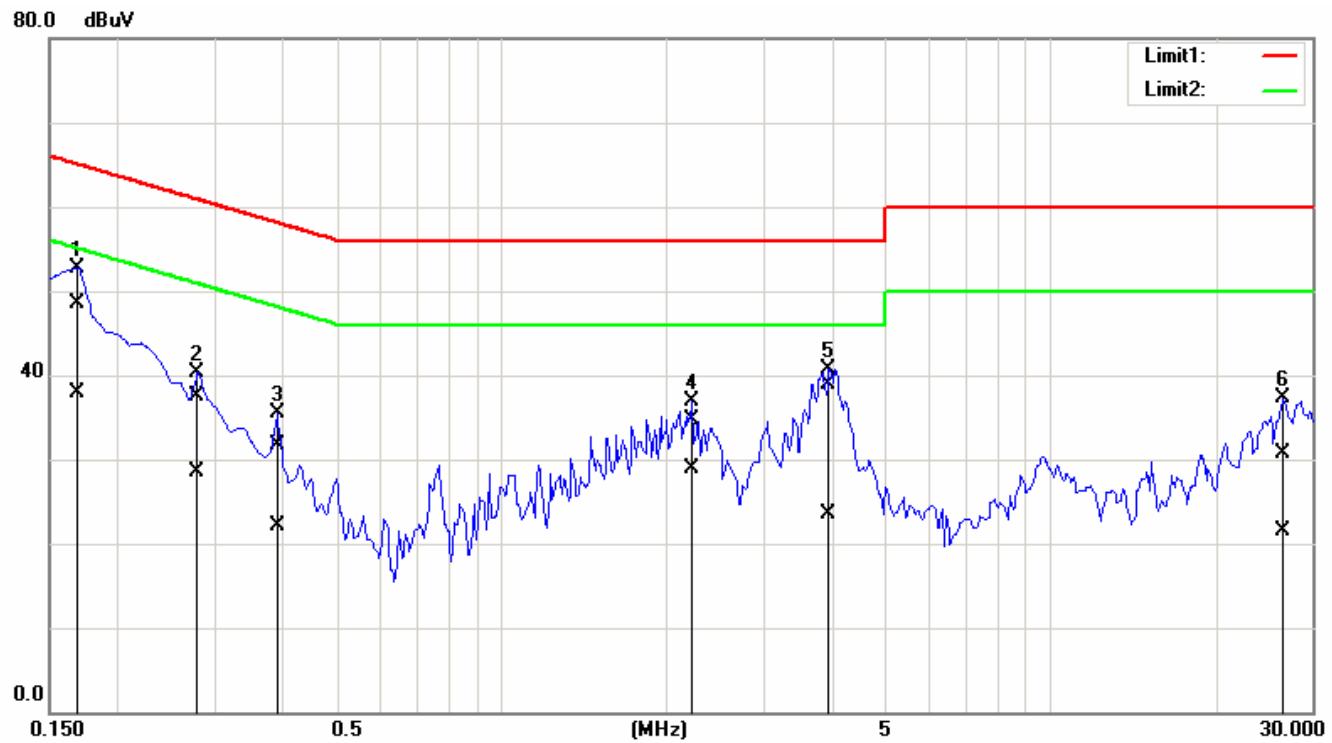

Conducted emissions (Line 2)

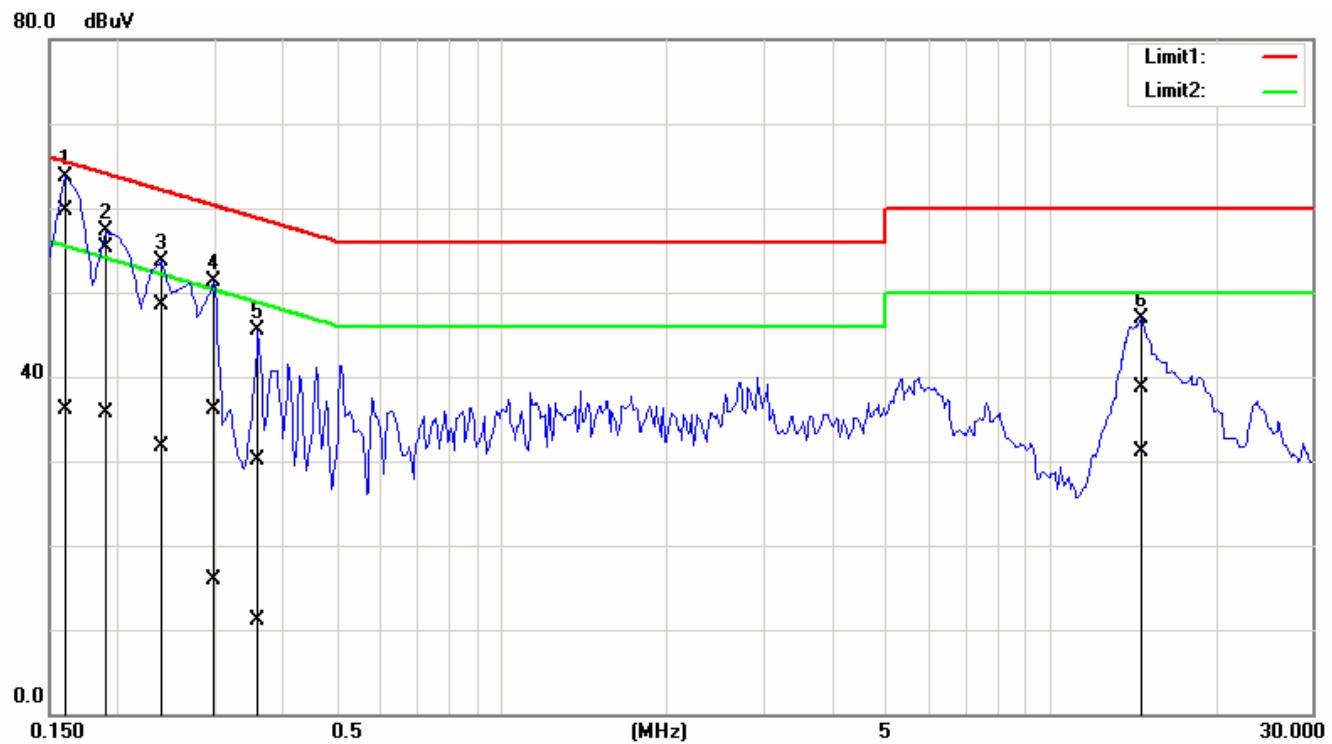



APPENDIX I

RADIO FREQUENCY EXPOSURE

LIMIT

According to §15.247(i), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines. See § 1.1307(b)(1) of this chapter.

EUT Specification

EUT	GPS Navigation system
Frequency band (Operating)	<input type="checkbox"/> WLAN: 2.412GHz ~ 2.462GHz <input type="checkbox"/> WLAN: 5.18GHz ~ 5.32GHz / 5.50GHz ~ 5.70GHz <input type="checkbox"/> WLAN: 5.745GHz ~ 5.825GHz <input checked="" type="checkbox"/> Others: <u>Bluetooth: 2.402GHz ~ 2.480GHz</u>
Device category	<input checked="" type="checkbox"/> Portable (<20cm separation) <input type="checkbox"/> Mobile (>20cm separation) <input type="checkbox"/> Others _____
Exposure classification	<input type="checkbox"/> Occupational/Controlled exposure (S = 5mW/cm ²) <input checked="" type="checkbox"/> General Population/Uncontrolled exposure (S=1mW/cm ²)
Antenna diversity	<input checked="" type="checkbox"/> Single antenna <input type="checkbox"/> Multiple antennas <input type="checkbox"/> Tx diversity <input type="checkbox"/> Rx diversity <input type="checkbox"/> Tx/Rx diversity
Max. output power	-5.45 dBm (0.29 mW)
Antenna gain (Max)	1.57 dBi (Numeric gain: 1.44)
Evaluation applied	<input type="checkbox"/> MPE Evaluation <input type="checkbox"/> SAR Evaluation <input checked="" type="checkbox"/> N/A*
Remark:	
1. The maximum output power is <u>-5.45 dBm (0.29mW)</u> at <u>2402MHz</u> (with <u>1.44 numeric antenna gain</u> .)	
2. DTS device is not subject to routine RF evaluation; MPE estimate is used to justify the compliance.	
3. For mobile or fixed location transmitters, no SAR consideration applied. The maximum power density is 1.0 mW/cm ² even if the calculation indicates that the power density would be larger.	

TEST RESULTS

No non-compliance noted.

(SAR evaluation is not required for the PORTABLE device while its maximum output power is lower than the general population low threshold: $60/f_{(GHz)} = 60/2.441 = 24.58\text{mW}$)