

# **Electromagnetic Compatibility Test Report**

Prepared in accordance with

**FCC Part 15 Subpart B:2019, ICES-003 Issue 6**

On

## **BLUtag Version 8**

Prepared for:

**Satellite Tracking of People**

**5353 W Sam Houston Parkway N, Suite 190**

**Houston, TX 77041-5186**

**USA**

Prepared by:

**TUV Rheinland of North America, Inc.**




**1279 Quarry Lane, Ste. A**

**Pleasanton, CA 94566 U.S.A.**

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.



**ATTESTATION OF TEST RESULTS**

<b>Client:</b>	Satellite Tracking of People 5353 W Sam Houston Parkway N, Suite 190 Houston, TX 77041-5186  USA	Mark Kirincic Tel: 281-658-7242 E-Mail: mkirincic@stopllc.com
<b>Model Name:</b>	BLUtag Version 8	<b>Serial Number:</b> PG22000037
<b>Model Numbers:</b>	BLUtag Version 8	<b>Date(s) Tested:</b> October 30, 2019
<b>Test Location:</b>	TUV Rheinland of North America 1279 Quarry Lane, Ste. A Pleasanton, CA 94566 U.S.A. Tel. (925) 249-9123	
<b>Test Specifications:</b>	Emissions:	FCC Part 15 Subpart B:2019, ICES-003 Issue 6
	Immunity:	N/A
<b>Test Result:</b>	<b>The above product was found to be Compliant to the above test standard(s)</b>	
<b>Prepared by: Donn Foster</b>		<b>Reviewed by: Richard Decker</b>
<u>November 11, 2019</u> Date Name Signature		<u>November 15, 2019</u> Date Name Signature
<b>Other aspects:</b>	None	
<b>PLEASANTON</b>		
 <b>US1131</b>	 <b>Testing Cert #3331.02</b>	<b>INDUSTRY CANADA</b> <b>2932M-1</b>
		 <b>1097 (A-0326)</b>

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.

**TABLE of CONTENTS**

<b>1</b>	<b>GENERAL INFORMATION .....</b>	<b>5</b>
1.1	SCOPE.....	5
1.2	PURPOSE .....	5
1.3	SUMMARY OF TEST RESULTS.....	6
<b>2</b>	<b>LABORATORY INFORMATION.....</b>	<b>7</b>
2.1	ACCREDITATIONS & ENDORSEMENTS .....	7
2.2	TEST FACILITIES AND EMC SOFTWARE.....	8
2.3	MEASUREMENT UNCERTAINTY.....	10
2.4	CALIBRATION TRACEABILITY.....	11
2.5	MEASUREMENT EQUIPMENT USED .....	12
<b>3</b>	<b>PRODUCT INFORMATION .....</b>	<b>13</b>
3.1	PRODUCT DESCRIPTION.....	13
3.2	EQUIPMENT MODIFICATIONS.....	13
3.3	TEST PLAN .....	13
<b>4</b>	<b>EMISSIONS.....</b>	<b>14</b>
4.1	RADIATED EMISSIONS .....	14
4.2	PHOTOS.....	18
4.3	CONDUCTED EMISSIONS .....	22
4.4	PHOTOS.....	27
	<b>APPENDIX A.....</b>	<b>29</b>
<b>5</b>	<b>TEST PLAN.....</b>	<b>29</b>
5.1	GENERAL INFORMATION.....	29
5.2	EUT DESIGNATION .....	29
5.3	TEST CONFIGURATIONS .....	29
5.4	TESTING TO BE PERFORMED .....	31
5.5	PRODUCT SPECIFICATIONS .....	31
5.6	PRODUCT ENVIRONMENTS .....	32
5.7	APPLICABLE DOCUMENTS.....	32
5.1	EUT ELECTRICAL POWER INFORMATION .....	33
5.2	EUT CLOCK/OSCILLATOR FREQUENCIES.....	33
5.3	RADIATED EMISSIONS, UPPER FREQUENCY .....	33
5.4	ELECTRICAL SUPPORT EQUIPMENT.....	33
5.5	NON - ELECTRICAL SUPPORT EQUIPMENT .....	34
5.6	EUT EQUIPMENT/CABLING INFORMATION .....	34
5.1	EUT TEST PROGRAM.....	34
5.2	MODE OF OPERATION.....	34
5.3	MONITORING THE EUT DURING TESTING.....	34
5.4	EMISSIONS.....	36

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.

## **1 General Information**

### **1.1 Scope**

This report is intended to document the status of conformance with the listed standards based on the results of testing performed on October 30 and November 8, 2019 for Satellite Tracking of People Co. on the BLUtag V8. This report only applies to the specific samples tested under the stated test conditions. It is the responsibility of the manufacturer to assure that additional production units of this model are manufactured with identical or EMI equivalent electrical and mechanical components. This report is further intended to document changes and modifications to the EUT throughout its life cycle. All documentation will be included as a supplement.

### **1.2 Purpose**

Testing was performed to evaluate the EMC performance of the EUT (Equipment Under Test) in accordance with the applicable requirements, procedures, and criteria defined in the application of regulations and application of standards listed in this report.

### 1.3 Summary of Test Results

<b>Applicant</b>	Satellite Tracking of People 5353 W Sam Houston Parkway N, Suite 190 Houston, TX 77041-5186 USA
<b>Contact</b>	Mark Kirincic
<b>Tel.</b>	Tel: 281-658-7242
<b>E-mail</b>	E-Mail: mkirincic@stopllc.com
<b>Description</b>	Satellite tracking ankle bracelet
<b>Model Name</b>	BLUtag V8
<b>Model Number</b>	BLUtag V8
<b>Serial Number</b>	PG22000037
<b>Input Power</b>	3.7VDC
<b>Test Date(s)</b>	October 30, 2019


Standards	Description	Severity Level or Limit	Criteria	Test Result
CFR47 part 15 B, ICES-003 Product Family Standard Emissions	Unintentional radiator	See called out basic standards below	See Below	Complies
FCC Part 15 Subpart B:2019, ICES-003 Issue 6	Radiated Emissions	30M-18 GHZ	Limit	Complies
FCC Part 15 Subpart B:2019, ICES-003 Issue 6	Conducted Emissions	150kHz-30 MHz	Limit	Complies

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.

## 2 Laboratory Information

### 2.1 Accreditations & Endorsements

#### 2.1.1 US Federal Communications Commission

 TUV Rheinland of North America EMC test facilities located at 1279 Quarry Lane, Ste. A, Pleasanton, CA, 94566, and 5015 Brandin Ct. Fremont, CA, 94538 are recognized by the Commission for performing testing services for the general public on a fee basis. These laboratory test facilities have been fully described in reports submitted to and accepted by the FCC (Pleasanton Registration No. US1131, Fremont Registration No. US1131). The laboratory Scopes of Accreditation include Title 47 CFR Parts 15, 18 and 90. The accreditations are updated every three years.

#### 2.1.2 A2LA



TUV Rheinland of North America EMC test facilities are accredited by the American Association for Laboratory Accreditation (A2LA). The laboratories have been assessed and accredited by A2LA in accordance with ISO Standard 17025:2017 (Testing Certificate #3331.02). The Scope of Laboratory Accreditation includes emission and immunity testing. The accreditations are

updated annually.

#### 2.1.3 Industry Canada



The Pleasanton 5-meter Semi-Anechoic Chamber, Registration No. 2932M-1, has been accepted by Industry Canada to perform testing to 3 and 5 meters based on the test procedures described in ANSI C63.4-2014. The Fremont 10-meter Semi-Anechoic Chamber, Registration No. 2932D-1, has been accepted by Industry Canada to perform testing to 3 and 10 meters based on the test procedures described in ANSI C63.4-2014.

#### 2.1.4 Japan – VCCI



The Voluntary Control Council for Interference by Information Technology Equipment (VCCI) is a group that consists of Information Technology Equipment (ITE) manufacturers and EMC test laboratories. The purpose of the Council is to take voluntary control measures against electromagnetic interference from Information Technology Equipment, and thereby contribute to the development of a socially beneficial and responsible state of affairs in the realm of Information Technology Equipment in Japan. TUV Rheinland of North America EMC test facilities located at 1279 Quarry Lane, Ste. A, Pleasanton, CA, 94566, and 5015 Brandin Ct. Fremont, CA, 94538, have been assessed and approved in accordance with the Regulations for Voluntary Control Measures.

VCCI Registration No. for Pleasanton: A-0326

VCCI Registration No. for Fremont: A-0327

## 2.2 Test Facilities and EMC Software

Test facilities are located at 1279 Quarry Lane, Ste. A, Pleasanton, California 94566, U.S.A. and 5015 Brandin Ct, Fremont, CA 94538.

### 2.2.1 Emission Test Facility

The Semi-Anechoic Chambers and AC Line Conducted measurement facilities used to collect radiated and conducted emissions data have been constructed in accordance with ANSI C63.7:1992. The Fremont 10 meter semi-anechoic chamber has been measured in accordance with and verified to comply with the theoretical volumetric normalized site attenuation of ANSI C63.4:2009 and SVSWR requirements of CISPR 16-1-4 Consol. Ed. 3.0 (2010-04), at test distances of 3 and 10 meters. This site has been described in reports dated November 1st, 2006, submitted to the FCC, and accepted by letter dated November 28, 2006. The site is listed with the FCC and accredited by A2LA (Testing Certificate #3331.02). The Pleasanton 5 meter semi-anechoic chamber has been verified to comply with the theoretical volumetric normalized site attenuation of ANSI C63.4:2009 and SVSWR requirements of CISPR 16-1-4 Consol. Ed. 3.0 (2010-04) at a test distance of 3 meters. This site has been described in reports dated November 1st, 2006, submitted to the FCC, and accepted by letter dated November 28, 2006. The site is listed with the FCC and accredited by A2LA (Testing Certificate #3331.02).

### 2.2.2 Immunity Test Facility

ESD, EFT, Surge, PQF: These tests are performed in an environmentally controlled room with a 3.7 m x 3.7 m x 3.175 mm thick aluminum floor connected to PE ground. For ESD testing, tabletop equipment is placed on an insulated mat with a surface resistivity of  $10^9$  Ohms/square on a 1.6 m x 0.8 m x 0.8 m high non-conductive table with a 3.175 mm aluminum top (Horizontal Coupling Plane). The HCP is connected to the main ground plane via a low impedance ground strap through two 470 k $\Omega$  resistors. The Vertical Coupling Plane consists of an aluminum plate 50 cm x 50 cm x 3.175 mm thick. The VCP is connected to the main ground plane via a low impedance ground strap through two 470 k $\Omega$  resistors. For each of the other tests, the HCP is removed.

RF Field Immunity testing is performed in a 3m semi-anechoic chamber with absorber added to floor.

RF Conducted and Magnetic Field Immunity testing is performed on a 4.9 m x 3.7 m x 3.175 mm thick aluminum ground plane which is connected to one end of the anechoic chamber.

All test areas allow a minimum distance of 1 meter from the EUT to walls or conducting objects.



**2.2.3 EMC Software - Fremont**

Manufacturer	Name	Version	Test Type
EMISoft	Vasona	5.0	Radiated & Conducted Emissions
ETS-Lindgren	TILE	4.2.A	Radiated Emissions > 1 GHz
ETS-Lindgren	TILE	V.3.4.K.22	Radiated & Conducted Immunity
Haefely	WinFEAT	1.6.3	Surge
Thermo Electron - Keytek	CEWare32	3.0	EFT/Surge/Voltage Dips & Interrupt
Voltech	IEC61000-3	1.15.07RC	Harmonic & Flicker

**2.2.4 EMC Software - Pleasanton**

Manufacturer	Name	Version	Test Type
ETS-Lindgren	TILE	3.4.K.14 @ 4.0.A.5	Radiated & Conducted Emissions
EMISoft	Vasona	5.0	Radiated & Conducted Emissions
Agilent	Agilent MXE	A.11.02	Radiated & Conducted Emissions
ETS-Lindgren	TILE	3.4.K.14	Radiated & Conducted Immunity
Thermo Electron - Keytek	CEWare32	4.00	EFT/Surge/Voltage Dips & Interrupt
Voltech	IEC61000-3	1.21.07RC2	Harmonic & Flicker

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.

## 2.3 Measurement Uncertainty

Two types of measurement uncertainty are expressed in this report, per ISO Guide To The Expression Of Uncertainty In Measurement, 1<sup>st</sup> Edition, 1995.

The Combined Standard Uncertainty is the standard uncertainty of the result of a measurement when that result is obtained from the values of a number of other quantities, equal to the positive square root of a sum of terms, the terms being the variances or co-variances of these other quantities weighted according to how the measurement result varies with changes in these quantities. The term standard uncertainty is the result of a measurement expressed as a standard deviation.

The Expanded Uncertainty defines an interval about the result of a measurement that may be expected to encompass a large fraction of the distribution of values that could reasonably be attributed to the measurand. The fraction may be viewed as the coverage probability or level of confidence of the interval.

### 2.3.1 Sample Calculation – radiated & conducted emissions

The field strength is calculated by subtracting the Amplifier Gain and adding the Cable Loss and Antenna Correction Factor to the measured reading. The basic equation is as follows:

$$\text{Field Strength (dB}\mu\text{V/m)} = \text{RAW} - \text{AMP} + \text{CBL} + \text{ACF}$$

Where: RAW = Measured level before correction (dB $\mu$ V)

AMP = Amplifier Gain (dB)

CBL = Cable Loss (dB)

ACF = Antenna Correction Factor (dB/m)

$$\mu\text{V/m} = 10^{\frac{\text{dB}\mu\text{V/m}}{20}}$$

#### Sample radiated emissions calculation @ 30 MHz

**Measurement +Antenna Factor–Amplifier Gain+Cable loss=Radiated Emissions (dBuV/m)**

$$25 \text{ dBuV/m} + 17.5 \text{ dB} - 20 \text{ dB} + 1.0 \text{ dB} = 23.5 \text{ dBuV/m}$$

### 2.3.2 Measurement Uncertainty Emissions

Per CISPR 16-4-2	$U_{lab}$	$U_{CISPR}$
<b>Radiated Disturbance @ 10 meters</b>		
30 – 1,000 MHz	2.25 dB	4.51 dB
<b>Radiated Disturbance @ 3 meters</b>		
30 – 1,000 MHz	2.26 dB	4.52 dB
1 – 6 GHz	2.12 dB	4.25 dB
6 – 18 GHz	2.47 dB	4.93 dB
<b>Conducted Disturbance @ Mains Terminals</b>		
150 kHz – 30 MHz	1.09 dB	2.18 dB
<b>Disturbance Power</b>		

#### Voltech PM6000A

The estimated combined standard uncertainty for harmonic current and flicker measurements is $\pm 5.0\%$ .	Per CISPR 16-4-2
--	------------------

### 2.3.3 Measurement Uncertainty Immunity

The estimated expanded uncertainty for ESD immunity measurements is $\pm 8.2\%$ .	Per IEC 61000-4-2
The estimated expanded uncertainty for radiated immunity measurements is $\pm 4.10$ dB.	Per IEC 61000-4-3
The estimated expanded uncertainty for EFT fast transient immunity measurements is $\pm 5.84\%$ .	Per IEC 61000-4-4
The estimated expanded uncertainty for surge immunity measurements is $\pm 5.84\%$ .	Per IEC 61000-4-4
The estimated expanded uncertainty for conducted immunity measurements with CDN is $\pm 3.66$ dB	Per IEC 61000-4-6
The estimated expanded uncertainty for power frequency magnetic field immunity is $\pm 11.6\%$ .	Per IEC 61000-4-8
The estimated expanded uncertainty for voltage variation and interruption measurements is $\pm 3.48\%$ .	Per IEC 61000-4-11

The expanded uncertainty at a level of 95% confidence is obtained by multiplying the combined standard uncertainty by a coverage factor of 2. Compliance criteria are not based on measurement uncertainty.

## 2.4 Calibration Traceability

All measurement instrumentation is traceable to the National Institute of Standards and Technology (NIST). Measurement method complies with ANSI/NCSL Z540-1-1994 and ISO Standard 17025:2005. Equipment calibration records are kept on file at the test facility.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.



### **3 Product Information**

#### **3.1 Product Description**

See Section 5.4.

#### **3.2 Equipment Modifications**

None

#### **3.3 Test Plan**

The EUT product information, test configuration, mode of operation, test types, test procedures, test levels, pass/failure criteria, in this report were carried out per the product test plan located in Appendix A of this report.

## 4 Emissions

### 4.1 Radiated Emissions

This test measures the electromagnetic levels of spurious signals generated by the EUT that radiated from the EUT and may affect the performance of other nearby electronic equipment.

#### 4.1.1 Overview of Test

<b>Results</b>	<b>Complies</b> (as tested per this report)			<b>Test Date(s)</b>	October 30, 2019		
<b>Standard</b>	FCC Part 15 Subpart B:2019, ICES-003 Issue 6						
<b>Model Number</b>	BLUtag V8			<b>Serial #</b>	PG2200037		
<b>Configuration</b>	See test plan for details.						
<b>Test Setup</b>	Tested in the 5-meter chamber, placed on turntable: see test plan for details.						
<b>EUT Powered By</b>	The EUT is battery powered at 3.7VDC the charger is only used for refreshing the battery						
<b>Environmental Conditions</b>		<b>Temp</b>	21° C	<b>Humidity</b>	37%	<b>Pressure</b>	1009 mbar
<b>Frequency Range</b>	30-18000 MHz						
<b>Perf. Criteria</b>	Class B			<b>Perf. Verification</b>	Readings Under Limit		
<b>Mod. to EUT</b>	None			<b>Test Performed By</b>	Donn Foster		

#### 4.1.2 Test Procedure

Radiated emissions tests were performed using the procedures of ANSI C63.4 including methods for signal maximizations and EUT configuration. The photos included with the report show the EUT in its maximized configuration.

The frequency range from 30-18000 MHz was investigated for radiated emissions.

#### 4.1.3 Deviations


There were no deviations from the test methodology listed in the test plan for the radiated emission test.

#### 4.1.4 Final Test

All final radiated emissions measurements were below the specification limits.


The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.

**4.1.5 Plots**

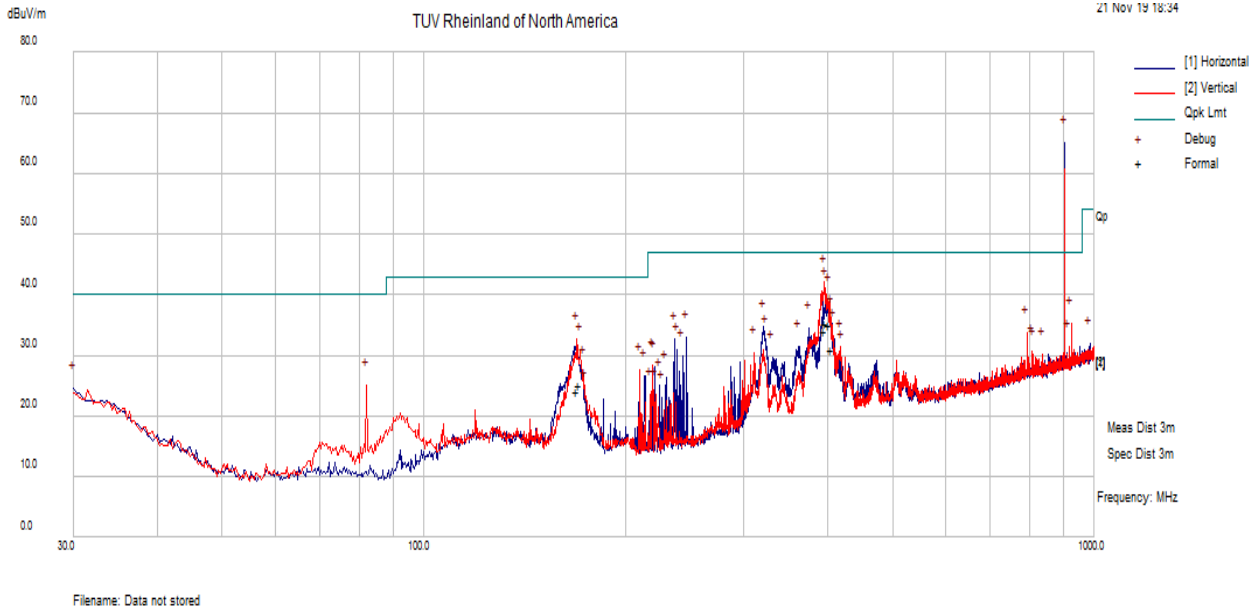

Radiated Emissions 30-1000 MHz.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.

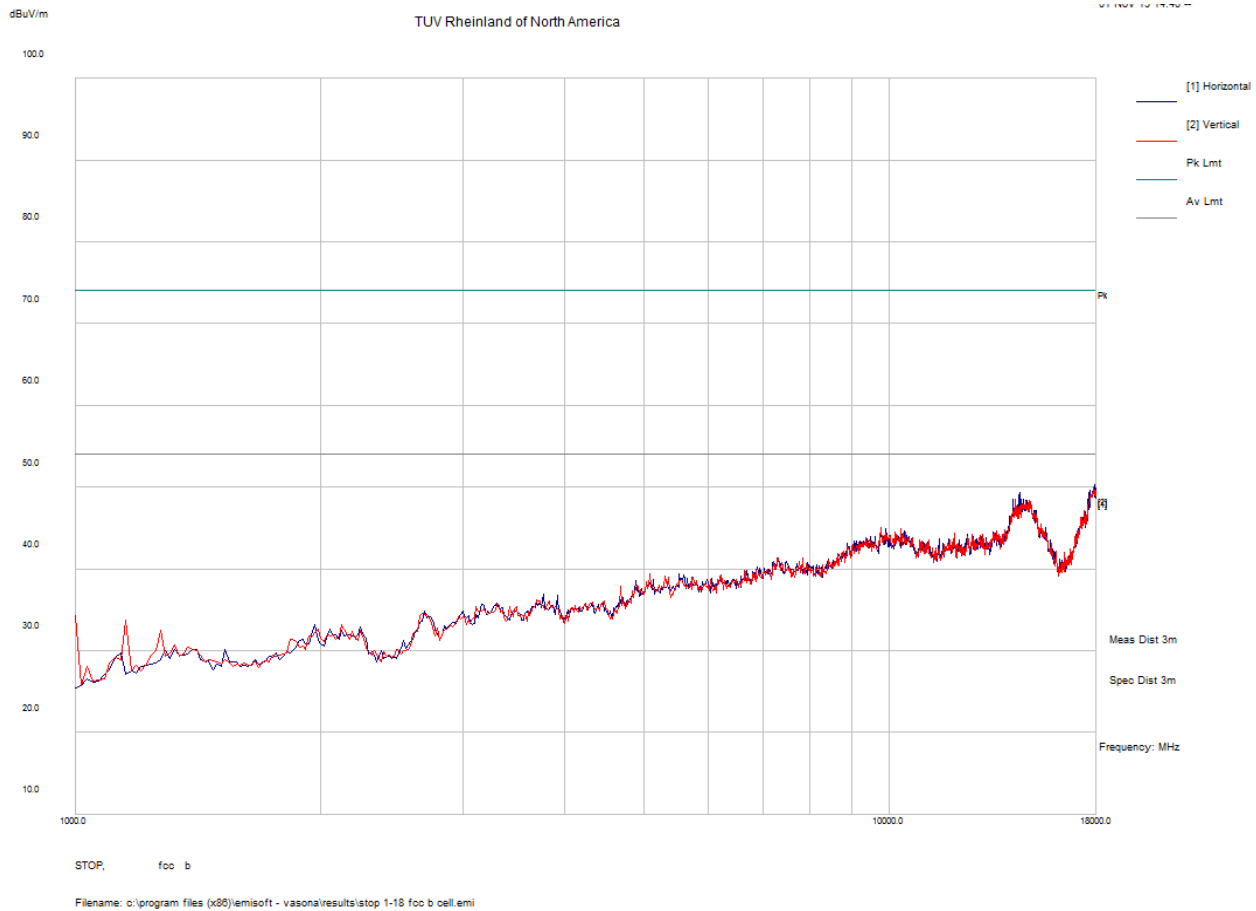

**Radiated Emissions 1-18 GHz.**

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.



## Radiated Emissions 30-1000 MHz.

Frequency	Raw dBu\Cable	Los AF	dB	Level dBu	Measure	Pol	Hgt cm	Azt	Deg	Limit dBu	Margin d	Pass /Fail
395.9963	42.3	3.86	-12.02	34.14	Quasi Ma	V	186	186		47	-12.86	Pass
397.8959	43.28	3.87	-11.92	35.23	Quasi Ma	V	135		333	47	-11.77	Pass
169.2856	37.16	3.18	-16.22	24.13	Quasi Ma	V	128		92	43	-18.87	Pass
402.8797	42.92	3.88	-11.73	35.07	Quasi Ma	V	139		352	47	-11.93	Pass
170.8641	38.35	3.18	-16.29	25.24	Quasi Ma	V	105		302	43	-17.76	Pass
405.8181	38.77	3.89	-11.64	31.02	Quasi Ma	H	104		178	47	-15.98	Pass

## Radiated Emissions 1-18 GHz.

Frequency	Raw dBu\Cable	Los AF	dB	Level dBu	Measure	Pol	Hgt cm	Azt	Deg	Limit dBu	Margin d	Pass /Fail
17761.52	54.64	4.07	-8.3	50.41	Peak [Scar	V	100		0	54	-3.59	Pass
14882.77	57.68	3.63	-12.89	48.42	Peak [Scar	H	100		0	54	-5.58	Pass
1136.273	68.25	0.49	-32.81	35.93	Peak [Scar	V	100		0	54	-18.07	Pass
1238.477	67.29	0.6	-32.48	35.41	Peak [Scar	V	100		0	54	-18.59	Pass

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.

## 4.2 Photos

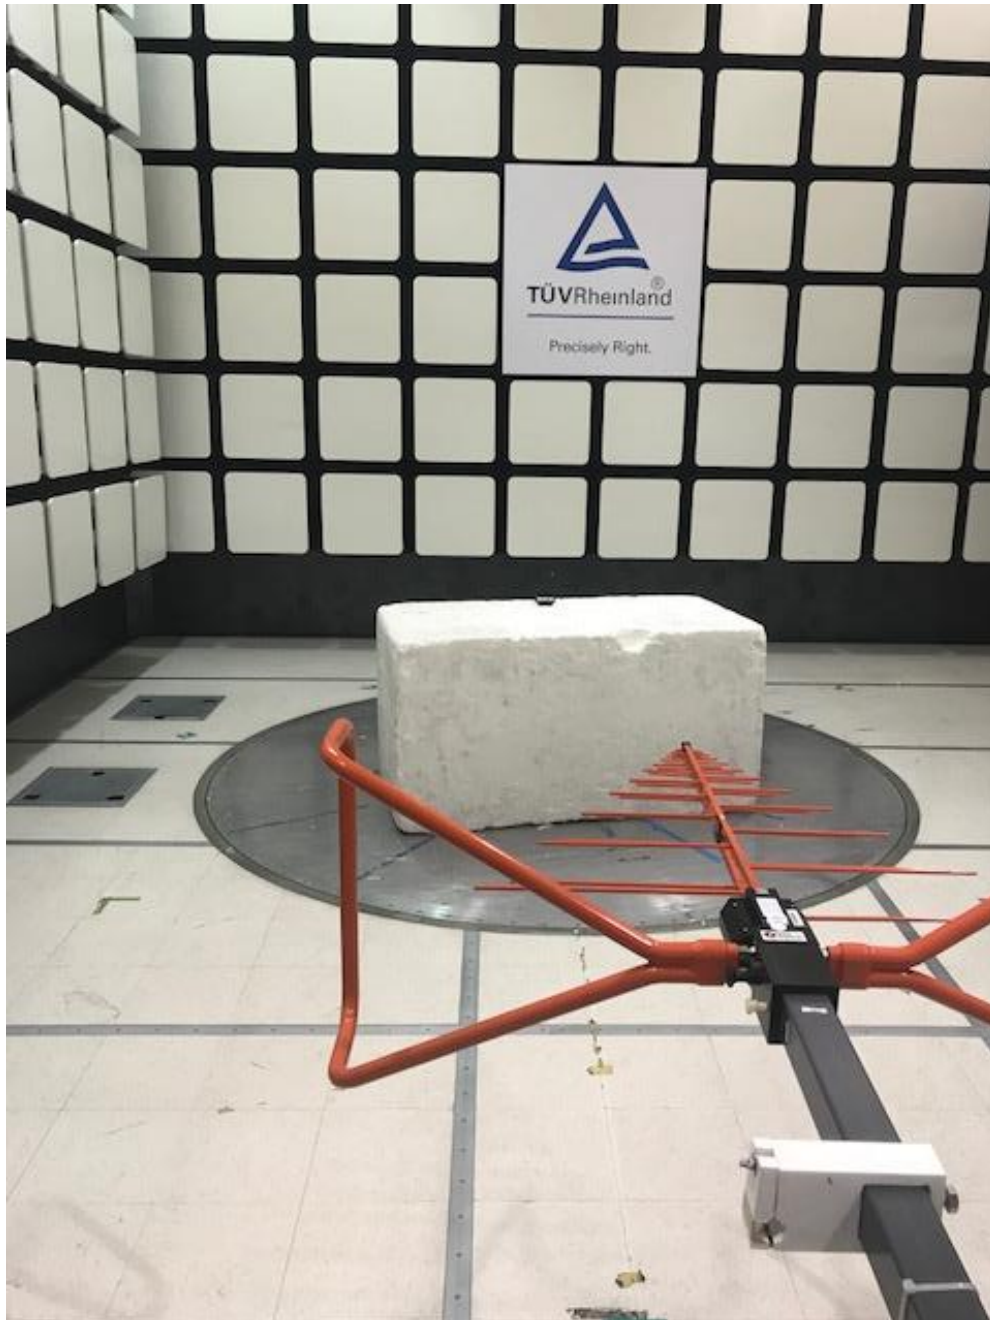



Figure 1 - Radiated Emissions Setup 30 - 1000 MHz - Front

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.




Radiated Emissions Setup 30 to 1000 MHz rear

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.

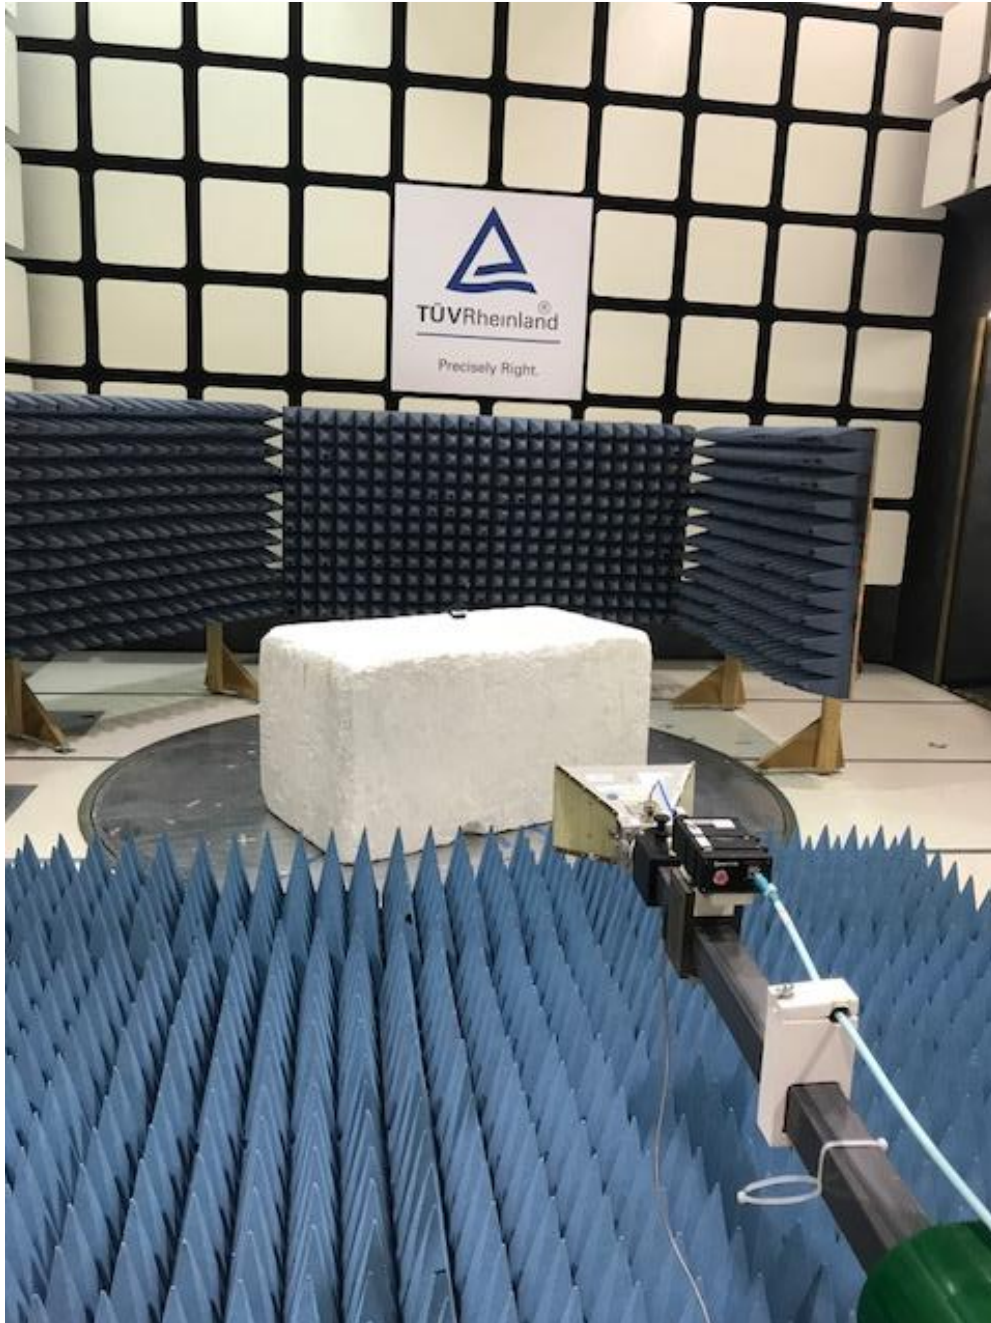

Radiated Emissions Setup 1-18 GHz front

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.

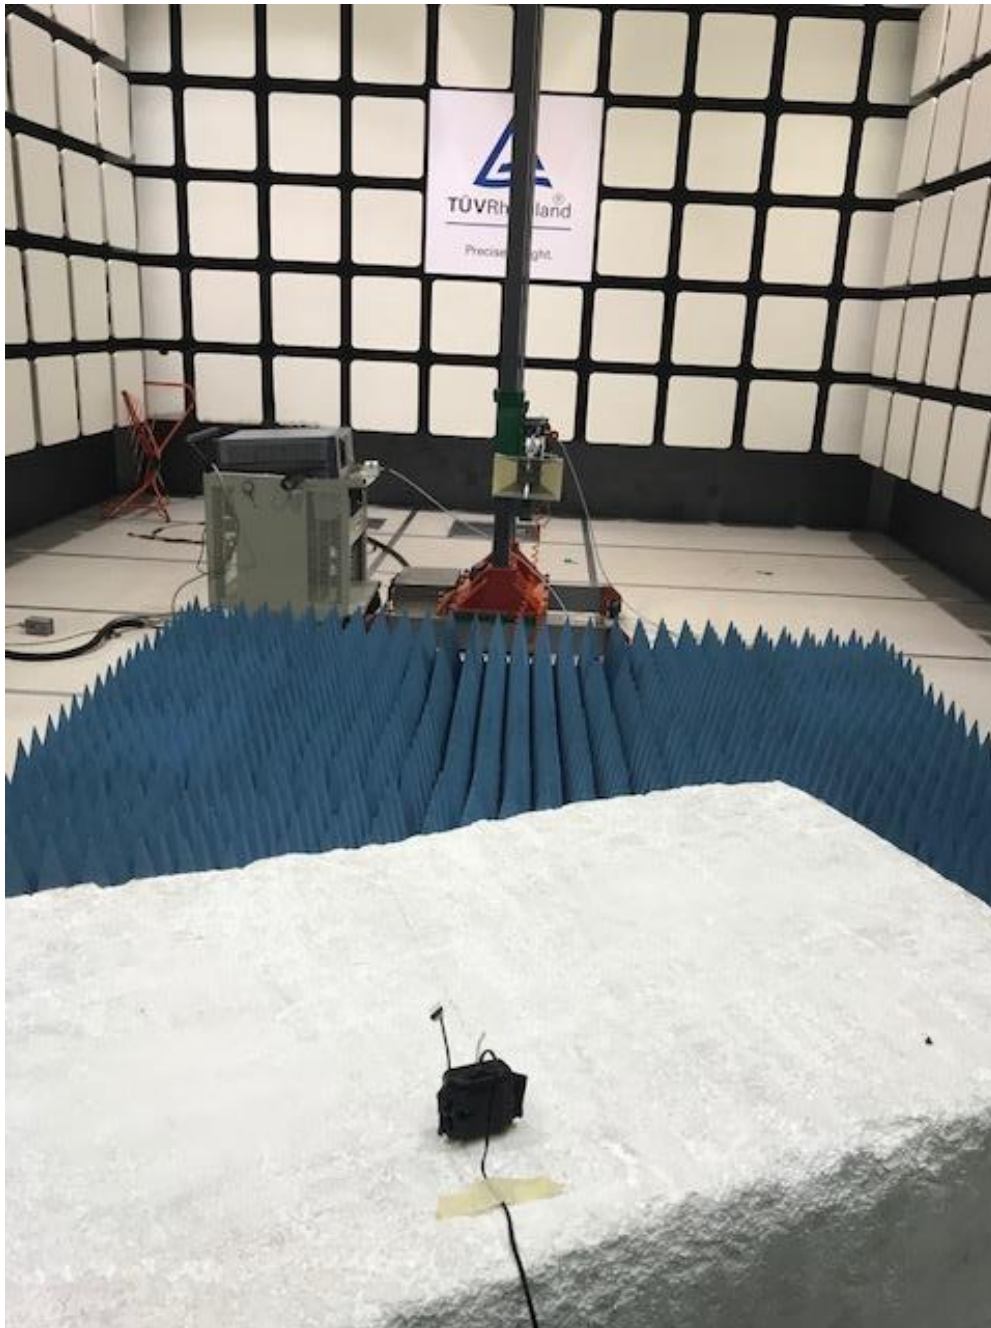

Radiated Emissions Setup 1 to 18 GHz rear

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.

### 4.3 Conducted Emissions

This test measures the electromagnetic levels of spurious signals generated by the EUT on the AC power line that may affect the performance of other nearby electronic equipment.

#### 4.3.1 Overview of Test

<b>Results</b>	<b>Complies</b> (as tested per this report)			<b>Test Date(s)</b>	November 8, 2019		
<b>Standard</b>	FCC Part 15 Subpart B:2019, ICES-003 Issue 6						
<b>Model Number</b>	BLUtag V8						
<b>Configuration</b>	See test plan for details.						
<b>Test Setup</b>	Tested in Lab 5, EUT placed on table: see test plan for details.						
<b>EUT Powered By</b>	The EUT is battery powered at 3.7VDC the charger is only used for refreshing the battery						
<b>Environmental Conditions</b>		<b>Temp</b>	22° C	<b>Humidity</b>	37%	<b>Pressure</b>	1006 mbar
<b>Frequency Range</b>	.150-30MHz						
<b>Perf. Criteria</b>	Class B			<b>Perf. Verification</b>	Readings Under Limit for L1 & Neutral		
<b>Mod. to EUT</b>	None			<b>Test Performed By</b>	Donn Foster		

#### 4.3.2 Test Procedure

Conducted emissions tests were performed using the procedures of ANSI C63.4 including methods for signal maximizations and EUT configuration. The photos included with the report show the EUT in its maximized configuration.

The frequency range from .150-30MHz was investigated for conducted emissions.

Conducted Emissions measurements were performed in the shielded room using procedures specified in the test plan and standard.


#### 4.3.3 Deviations

There were no deviations from the test methodology listed in the test plan for the conducted emission test.

#### 4.3.4 Final Test

All final conducted emissions measurements were below the specification limits.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.

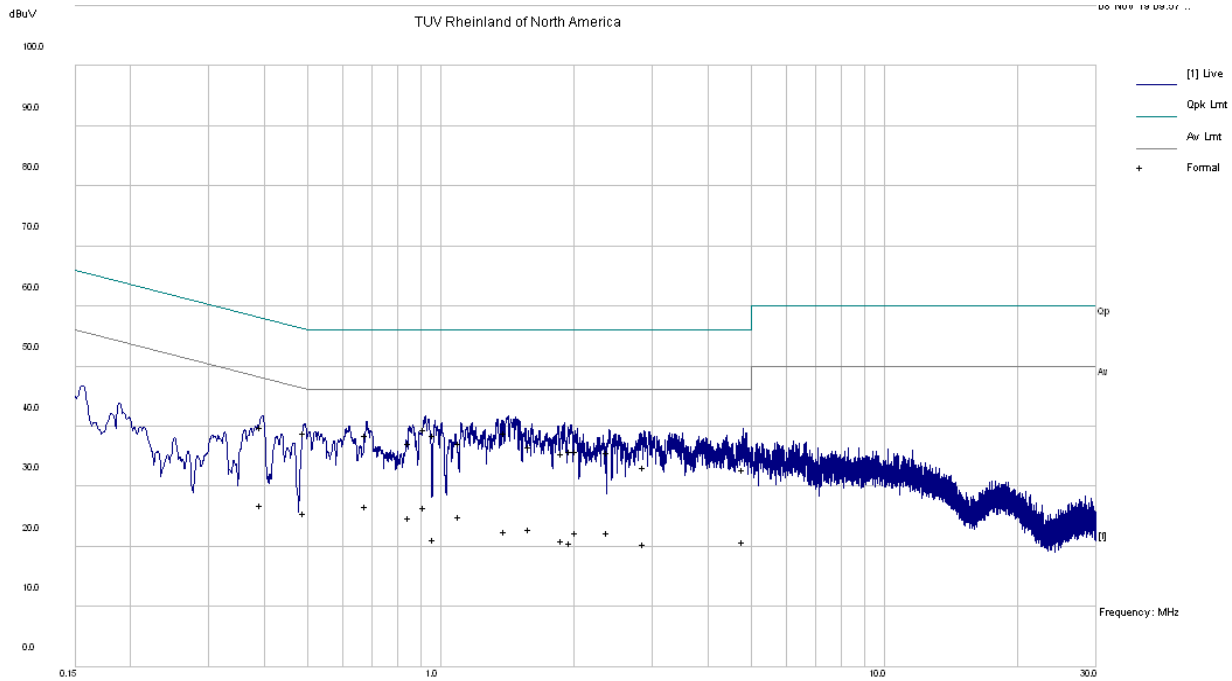


Filename: Data not stored

**Conducted Emissions .150-30 MHz. 110VAC line**

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.



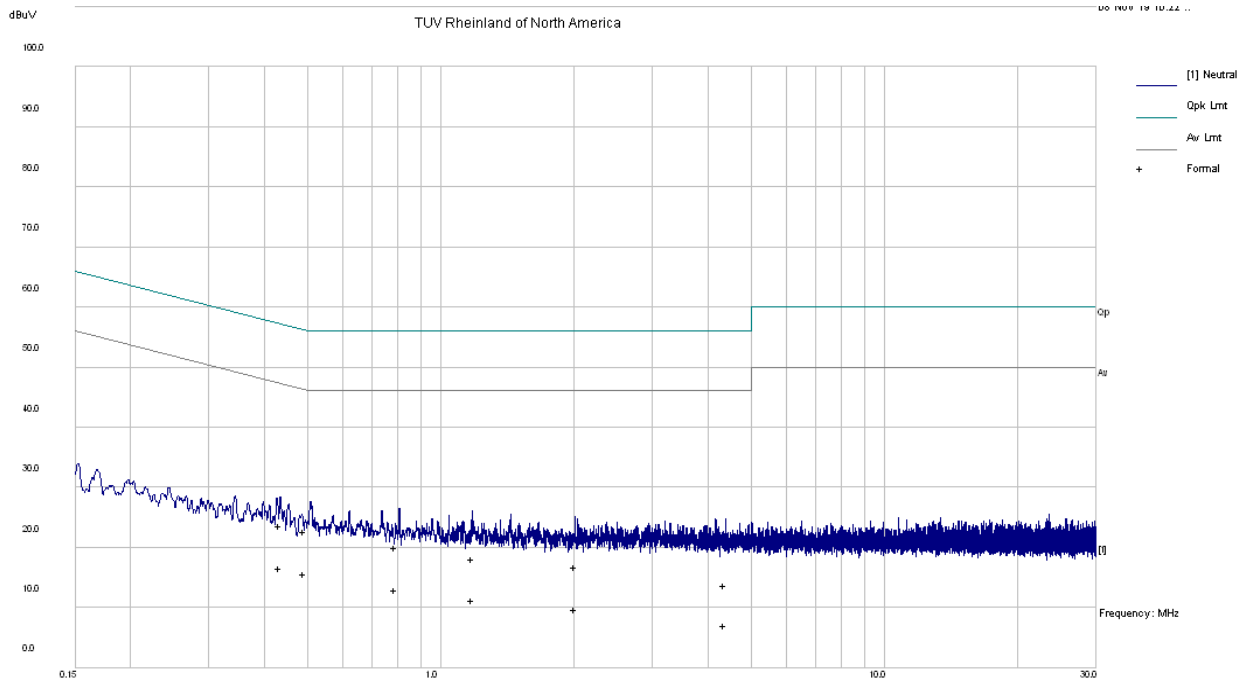

Filename: c:\program files\emisoft - vasona\results\STOP charger CE.emi

**Conducted Emissions .150-30 MHz. 110VAC neutral**

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.

## Conducted Emissions .150-30 MHz. 110VAC line


Frequency	Raw dBu\Cable	Los	Factors	d	Level dBu	Measurem	Line	Limit dBu	Margin	dE	Pass /Fail
0.394236	29.88	9.97	0.04		39.89	Quasi Pea	Live	57.97	-18.08		Pass
0.394236	16.99	9.97	0.04		27.01	Average	Live	47.97	-20.97		Pass
0.493103	28.83	9.98	0.04		38.85	Quasi Pea	Live	56.12	-17.26		Pass
0.493103	15.59	9.98	0.04		25.61	Average	Live	46.12	-20.51		Pass
0.678036	28.48	9.98	0.04		38.5	Quasi Pea	Live	56	-17.5		Pass
0.678036	16.65	9.98	0.04		26.67	Average	Live	46	-19.34		Pass
0.850873	27.22	9.99	0.04		37.25	Quasi Pea	Live	56	-18.75		Pass
0.850873	14.77	9.99	0.04		24.8	Average	Live	46	-21.2		Pass
0.919496	29.53	9.99	0.04		39.56	Quasi Pea	Live	56	-16.44		Pass
0.919496	16.56	9.99	0.04		26.59	Average	Live	46	-19.41		Pass
0.964364	28.51	9.99	0.04		38.54	Quasi Pea	Live	56	-17.46		Pass
0.964364	11.2	9.99	0.04		21.23	Average	Live	46	-24.77		Pass

## Conducted Emissions .150-30 MHz. 110VAC neutral

Frequency	Raw dBu\Cable	Los	Factors	d	Level dBu	Measurem	Line	Limit dBu	Margin	dE	Pass /Fail
0.491704	12.69	9.98	0.04		22.71	Quasi Pea	Neutral	56.14	-33.43		Pass
0.434543	13.75	9.97	0.04		23.76	Quasi Pea	Neutral	57.17	-33.41		Pass
0.791481	9.93	9.99	0.04		19.96	Quasi Pea	Neutral	56	-36.04		Pass
1.181179	8.12	9.99	0.04		18.15	Quasi Pea	Neutral	56	-37.85		Pass
2.014936	6.78	10.01	0.04		16.83	Quasi Pea	Neutral	56	-39.17		Pass
4.373818	3.72	10.05	0.04		13.81	Quasi Pea	Neutral	56	-42.19		Pass
0.491704	5.69	9.98	0.04		15.71	Average	Neutral	46.14	-30.43		Pass
0.434543	6.53	9.97	0.04		16.54	Average	Neutral	47.17	-30.63		Pass
0.791481	2.89	9.99	0.04		12.92	Average	Neutral	46	-33.08		Pass
1.181179	1.24	9.99	0.04		11.28	Average	Neutral	46	-34.72		Pass
2.014936	-0.3	10.01	0.04		9.75	Average	Neutral	46	-36.25		Pass
4.373818	-3.1	10.05	0.04		6.99	Average	Neutral	46	-39.01		Pass

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.

#### 4.4 Photos

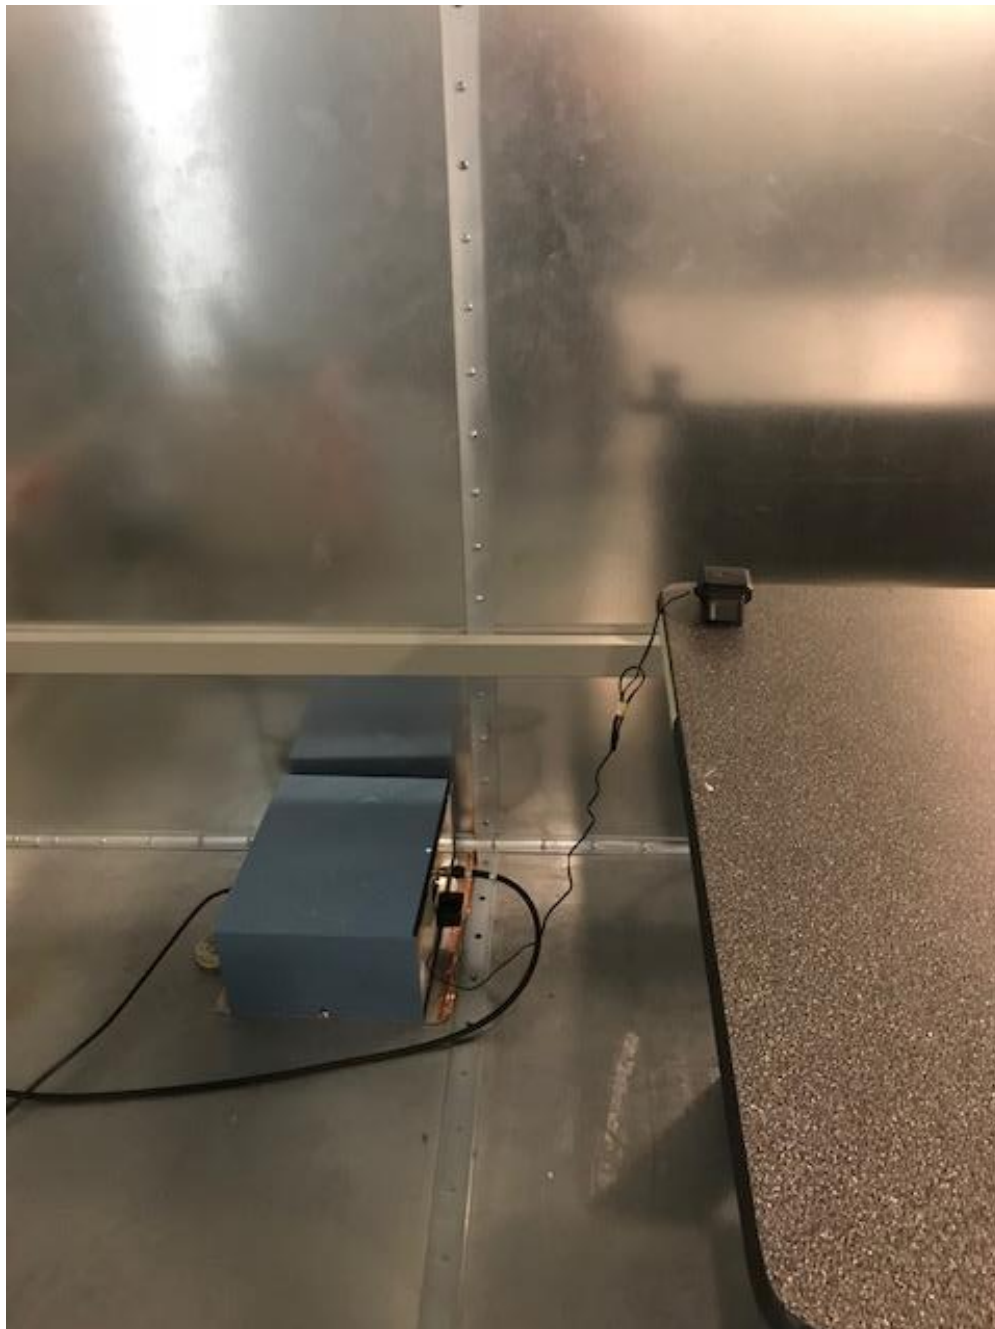

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.

Conducted Emissions side



Conducted Emissions front

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.

## Appendix A

### 5 Test Plan

This test report is intended to follow this test plan outlined here in unless otherwise stated in this here report. The following test plan will give details on product information, standards to be used, test set ups and refer to TUV test procedures. The test procedures will give the steps to be taken when performing the stated test. The product information below came via client, product manual, product itself and or the internet.

#### 5.1 General Information

<b>Client</b>	Satellite Tracking of People
<b>Address</b>	5353 W Sam Houston Parkway N, Suite 190
	Houston, TX 77041-5186
<b>Contact Person</b>	Mark Kirincic
<b>Telephone</b>	281-658-7242
<b>e-mail</b>	mkirincic@stopllc.com

#### 5.2 EUT Designation

<b>Model Name</b>	BLUtag V8
<b>Model Number(s)</b>	BLUtag V8

#### 5.3 Test configurations

The ankle bracelet will be powered with the battery charger and placed on the test table

### 5.3.1 Equipment Under Test (EUT) Description

The EUT is an ankle bracelet tracking and reporting system.

**Table 1:** EUT Specifications

<b>EUT Specifications</b>	
Dimensions	11x4x4.5 cm
AC Input	The EUT is battery powered at 3.7VDC the charger is only used for refreshing the battery at 110VAC
Environment	Indoor/Outdoor
Product Marketing Name (PMN)	BLUtag Version 8
Hardware Version Identification Number (HVIN)	8
Firmware Version Identification Number (FVIN)	

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.

**5.4 Testing to be performed**

Test Type	Required	Notes
<b>Radiated Emissions</b>	Yes	See Section 4.1
<b>Conducted Emissions</b>	Yes	See Section 4.3

**5.5 Product Specifications**

<b>Model Number</b>	BLÜtag V8
<b>Product Name</b>	BLÜtag V8
<b>Part Number/Capacity</b>	n/a

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.

**5.6 Product Environments**

<input checked="" type="checkbox"/>	<b>Domestic/Residential</b>	<input type="checkbox"/>	<b>Hospital</b>
<input checked="" type="checkbox"/>	<b>Light Industrial/Commercial</b>	<input type="checkbox"/>	<b>Small Clinic</b>
<input type="checkbox"/>	<b>Industrial</b>	<input type="checkbox"/>	<b>Doctor's office</b>
<input type="checkbox"/>	<b>Telecommunications Center</b>	<input type="checkbox"/>	<b>Other than Telecommunications Center</b>
<input type="checkbox"/>	<b>Other</b>		

\*Check all that apply

**5.7 Applicable Documents**

<b>Standards</b>	<b>Description</b>
FCC Part 15 Subpart B:2019, ICES-003 Issue 6	Unintentional Radiator

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.



### 5.8 EUT Electrical Power Information

Name	# of Phases	Type	Input Voltage		AC Voltage Frequency	Current Max.	Power
			Min	Max			
Ankle Bracelet Tracking system	1 <input type="checkbox"/> 3 <input type="checkbox"/> None <input checked="" type="checkbox"/>	AC <input type="checkbox"/> DC <input type="checkbox"/> Host <input type="checkbox"/> Batteries <input checked="" type="checkbox"/>	3.7	3.7	to Hz Hz	2200Ah	14Wh
<b>Notes</b>							

### 5.9 EUT Clock/Oscillator Frequencies

Reference Designation	Speed (MHz)	Type
Not Provided		

### 5.10 Radiated Emissions, Upper Frequency

<input type="checkbox"/>	Less than 108 MHz	Scan to 1 GHz
<input type="checkbox"/>	Less than 500 MHz	Scan to 2 GHz
<input type="checkbox"/>	Less than 1000 MHz	Scan to 5 GHz
<input checked="" type="checkbox"/>	Greater than 1000 MHz	Scan to 5 <sup>th</sup> Harmonic or 40 GHz (whichever is lower)

### 5.11 Electrical Support Equipment

Reference Designation	Manufacturer	Model	Serial Number
Laptop	Lenovo	Thinkpad	None listed
Battery Charger	Stonetrionics	DSA-13FFC-05-FUS	None listed (p/n T66345T)

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.

**5.12 Non - Electrical Support Equipment**

Reference Designation	Manufacturer	Model	Serial Number or Description (e.g., Type of Gas or Liquid)
None			

**5.13 EUT Equipment/Cabling Information**

EUT Port	Connected To	Cable Type		
		Length (Meters)	Shielded Yes / No	Bead Yes / No
Battery charger port	BLUtag charger port	1	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>

**Note:** The EUT is battery powered the charger is only used for refreshing the battery

**5.1 EUT Test Program**

STOP BLUtag 8 approvals application v0.4


**5.2 Mode of operation**

The server is running a test routine that will send traffic and monitor the stream for errors.

**5.3 Monitoring the EUT During Testing**

n/a

### 5.3.1 Block Diagram

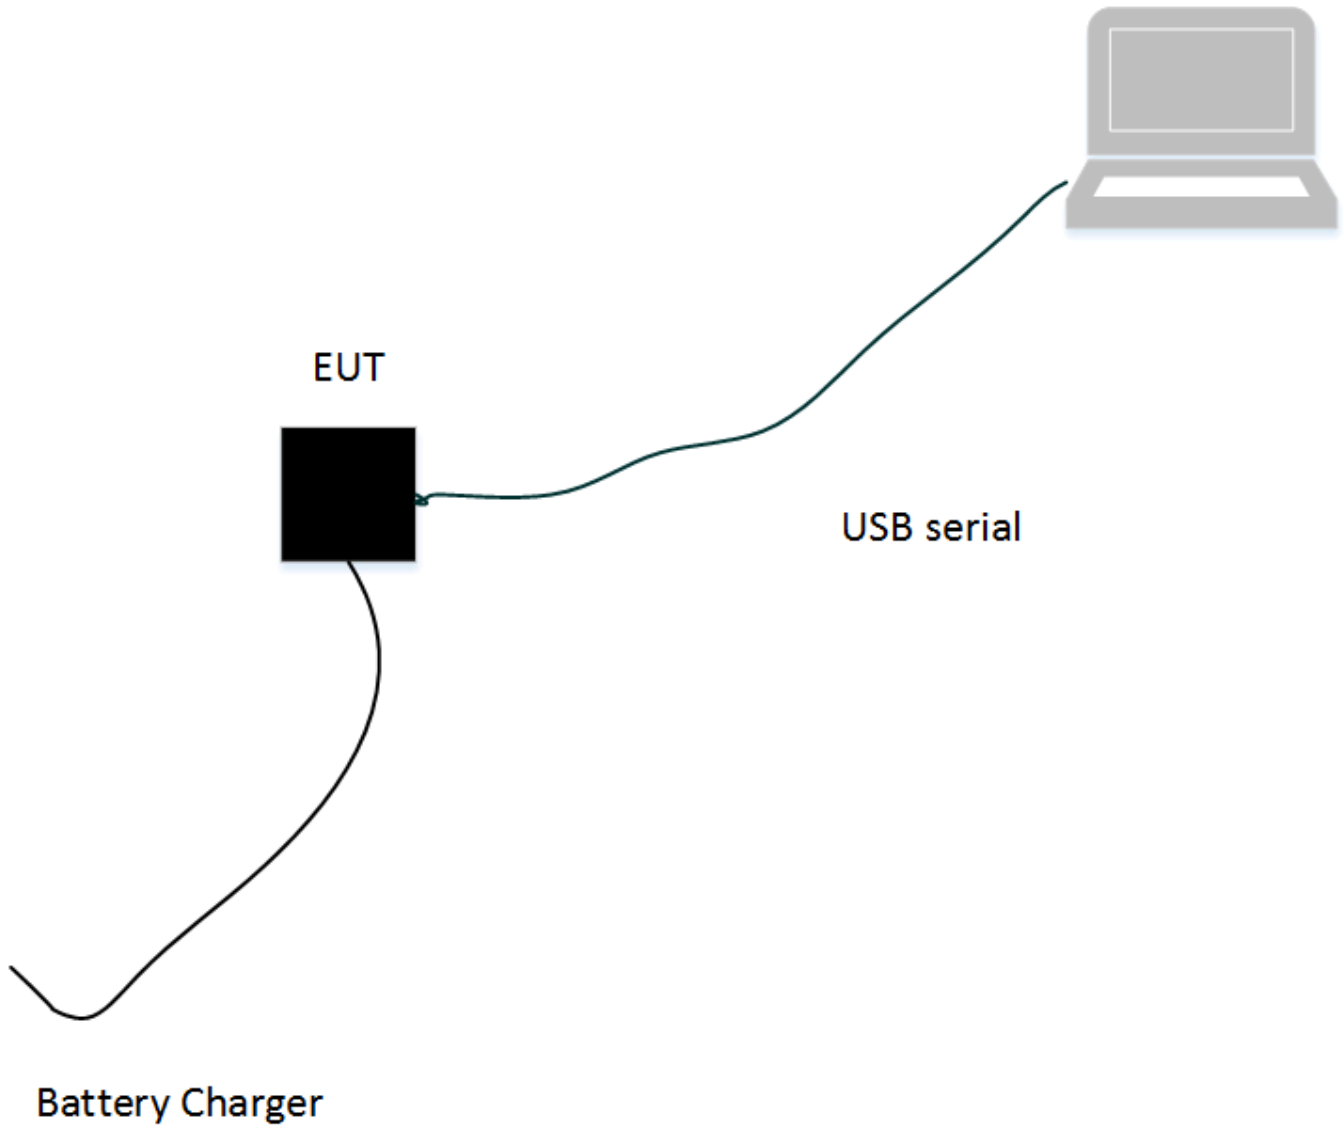

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.

## 5.4 Emissions

### 5.4.1.1 Final Radiated Emissions Test Setup

<b>Standard</b>	FCC Part 15 Subpart B:2019, ICES-003 Issue 6			<b>Procedure</b>	ANSI C63.4
<b>Limit</b>	Class B	<b>Emissions Verification</b>		Emissions Under Limit	
<b>Scan #1</b>	Final Scan 30 – 1000 MHz	<b>Antenna Distance</b>	3m	<b>Detector</b>	Quasi Peak
<b>Scan #2</b>	Final Scan 1 – 18 GHz	<b>Antenna Distance</b>	3m	<b>Detector</b>	Average
<b>Configuration</b>	See Section 5.3				
<b>Notes</b>	The system is running in the 915 radio mode				

### 5.4.1.2 Final Conducted Emissions Test Setup

<b>Standard</b>	FCC Part 15 Subpart B:2019, ICES-003 Issue 6			<b>Procedure</b>	ANSI C63.4
<b>Limit</b>	Class B	<b>Emissions Verification</b>		Emissions Under Limit	
<b>Scan #1</b>	Final Scan .150-30MHz 110VAC	<b>Antenna Distance</b>	n/a	<b>Detector</b>	Average Quasi Peak
<b>Configuration</b>	See Section 5.3				
<b>Notes</b>	The test is run in charging mode				

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.

## **END OF REPORT**

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.