


SDWF-2D Difference Statement


1. The first cases:

- SMD jack interface method connect to USB interface;
- 0 ohm resist connect to RF.

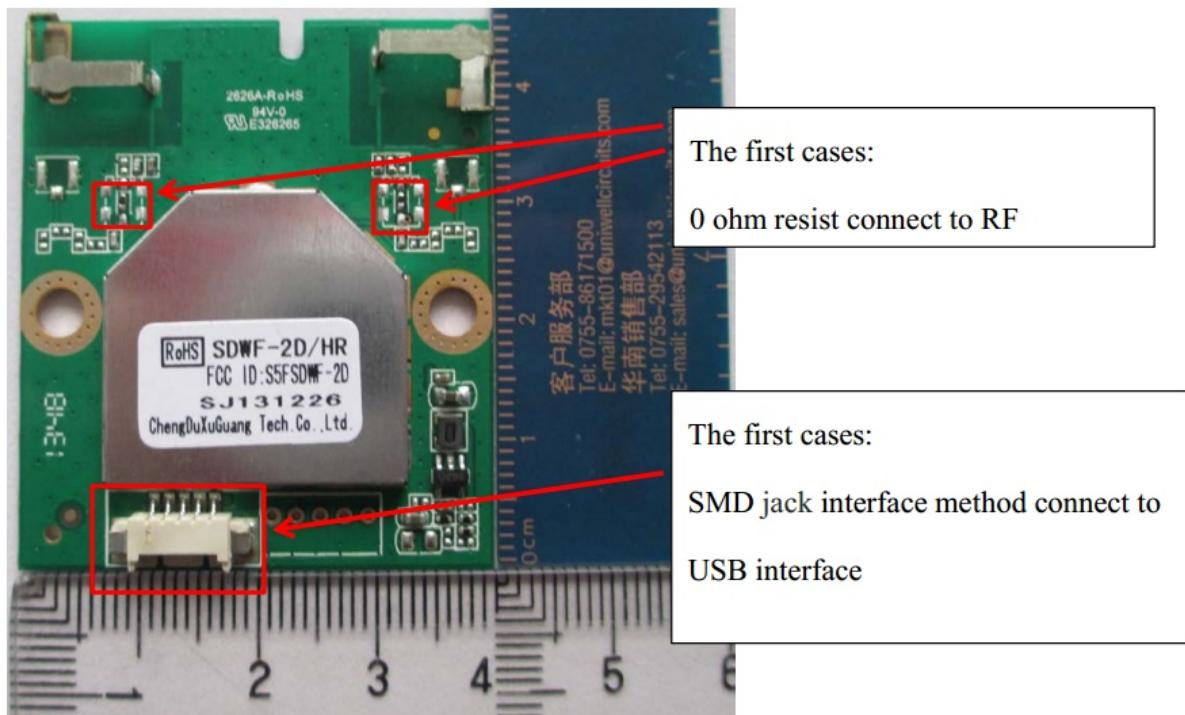


2. The second cases:

- SMD jack interface method connect to USB interface;
- IPEX Connector.

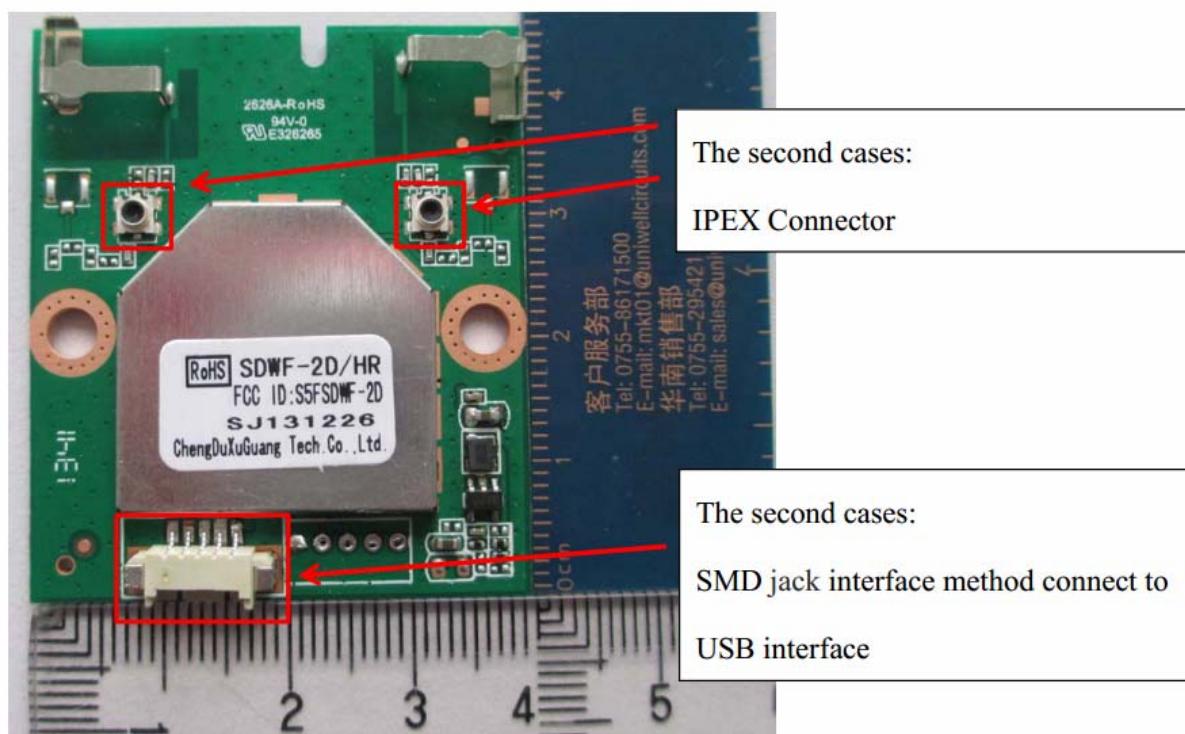

3. The third cases:

- a. Pin method connect to USB interface;
- b. 0 ohm resist connect to RF

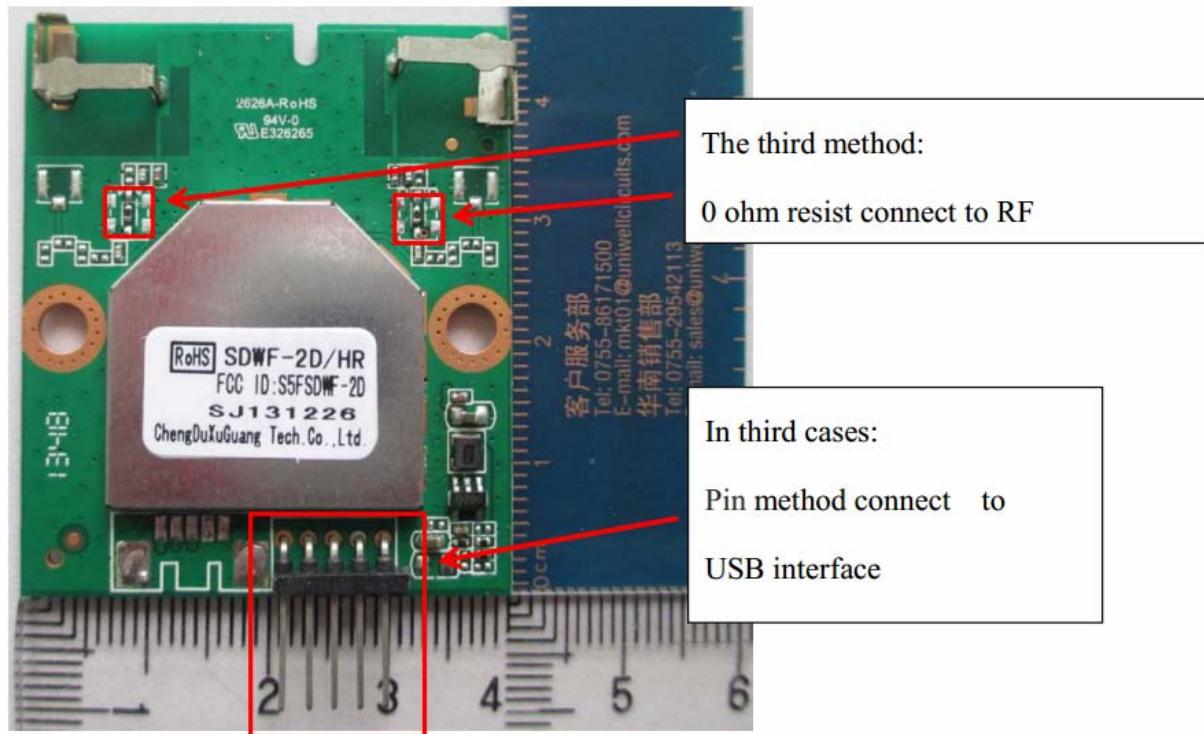

4. The fourth cases:

- a. Pin method connect to USB interface;
- b. IPEX Connector

