

TEST REPORT

Product : 8" Tablet PC
Trade mark : Dragon Touch, AKASO, KINGPAD
Model/Type reference : M7, M7X, M7 PLUS, M7X PLUS, T7, T7X, K7, K7X
Serial Number : N/A
Report Number : EED32H000661-2
FCC ID : S5V-D07M70
Date of Issue : Aug. 24, 2015
Test Standards : 47 CFR Part 15 Subpart C (2014)
Test result : PASS

Prepared for:

Proexpress Distributor LLC

11011 GREENWOOD AVE.N APT 5, SEATTLE, WA 98103, United States

Prepared by:

Centre Testing International (Shenzhen) Corporation

Building C, Scientific Innovation Park, Tiegang Reservior, Xixiang, Baoan District, Shenzhen, China

TEL: +86-755-3368 3668

FAX: +86-755-3368 3385

Tested by:

Ware Xin

Reviewed by:

Kevin Lan

Approved by:

Sheek Luo

Date:

Aug. 24, 2015

Sheek Luo

Lab supervisor

Check No.: 2193354641



2 Version

| Version No. | Date | Description |
|-------------|---------------|-------------|
| 00 | Aug. 24, 2015 | Original |
| | | |
| | | |

3 Test Summary

| Test Item | Test Requirement | Test method | Result |
|--------------------------------------------------------------------------|-----------------------------------------------------|------------------|--------|
| Antenna Requirement | 47 CFR Part 15, Subpart C Section 15.203/15.247 (c) | ANSI C63.10-2013 | PASS |
| AC Power Line Conducted Emission | 47 CFR Part 15, Subpart C Section 15.207 | ANSI C63.10-2013 | PASS |
| Conducted Peak Output Power | 47 CFR Part 15, Subpart C Section 15.247 (b)(3) | ANSI C63.10-2013 | PASS |
| 6dB Occupied Bandwidth | 47 CFR Part 15, Subpart C Section 15.247 (a)(2) | ANSI C63.10-2013 | PASS |
| Power Spectral Density | 47 CFR Part 15, Subpart C Section 15.247 (e) | ANSI C63.10-2013 | PASS |
| Band-edge for RF Conducted Emissions | 47 CFR Part 15, Subpart C Section 15.247(d) | ANSI C63.10-2013 | PASS |
| RF Conducted Spurious Emissions | 47 CFR Part 15, Subpart C Section 15.247(d) | ANSI C63.10-2013 | PASS |
| Radiated Spurious Emissions | 47 CFR Part 15, Subpart C Section 15.205/15.209 | ANSI C63.10-2013 | PASS |
| Restricted bands around fundamental frequency (Radiated Emission) | 47 CFR Part 15, Subpart C Section 15.205/15.209 | ANSI C63.10-2013 | PASS |

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

Remark:

All models are same except model name and brand name. Model M7 was selected for test.


4 Content

| | |
|-----------------------------------------------------------------------------------------------------|-----------|
| 1 COVER PAGE | 1 |
| 2 VERSION | 2 |
| 3 TEST SUMMARY | 3 |
| 4 CONTENT | 4 |
| 5 TEST REQUIREMENT | 5 |
| 5.1 TEST SETUP..... | 5 |
| 5.1.1 For Conducted test setup..... | 5 |
| 5.1.2 For Radiated Emissions test setup..... | 5 |
| 5.1.3 For Conducted Emissions test setup..... | 6 |
| 5.2 TEST ENVIRONMENT..... | 6 |
| 5.3 TEST CONDITION..... | 6 |
| 6 GENERAL INFORMATION | 8 |
| 6.1 CLIENT INFORMATION..... | 8 |
| 6.2 GENERAL DESCRIPTION OF EUT..... | 8 |
| 6.3 <i>PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD</i> | 8 |
| 6.4 DESCRIPTION OF SUPPORT UNITS..... | 9 |
| 6.5 TEST LOCATION..... | 9 |
| 6.6 TEST FACILITY..... | 9 |
| 6.7 DEVIATION FROM STANDARDS..... | 10 |
| 6.8 ABNORMALITIES FROM STANDARD CONDITIONS..... | 10 |
| 6.9 OTHER INFORMATION REQUESTED BY THE CUSTOMER..... | 10 |
| 6.10 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2)..... | 11 |
| 7 EQUIPMENT LIST | 12 |
| 8 RADIO TECHNICAL REQUIREMENTS SPECIFICATION | 15 |
| <i>Appendix A): Conducted Peak Output Power</i> | 16 |
| <i>Appendix B): 6dB Occupied Bandwidth</i> | 21 |
| <i>Appendix C): Band-edge for RF Conducted Emissions</i> | 26 |
| <i>Appendix D): RF Conducted Spurious Emissions</i> | 29 |
| <i>Appendix E): Power Spectral Density</i> | 37 |
| <i>Appendix F) Antenna Requirement</i> | 42 |
| <i>Appendix G) AC Power Line Conducted Emission</i> | 43 |
| <i>Appendix H) Restricted bands around fundamental frequency /Radiated Spurious Emissions</i> | 46 |
| PHOTOGRAPHS OF TEST SETUP | 53 |
| PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS | 55 |

5 Test Requirement

5.1 Test setup

5.1.1 For Conducted test setup

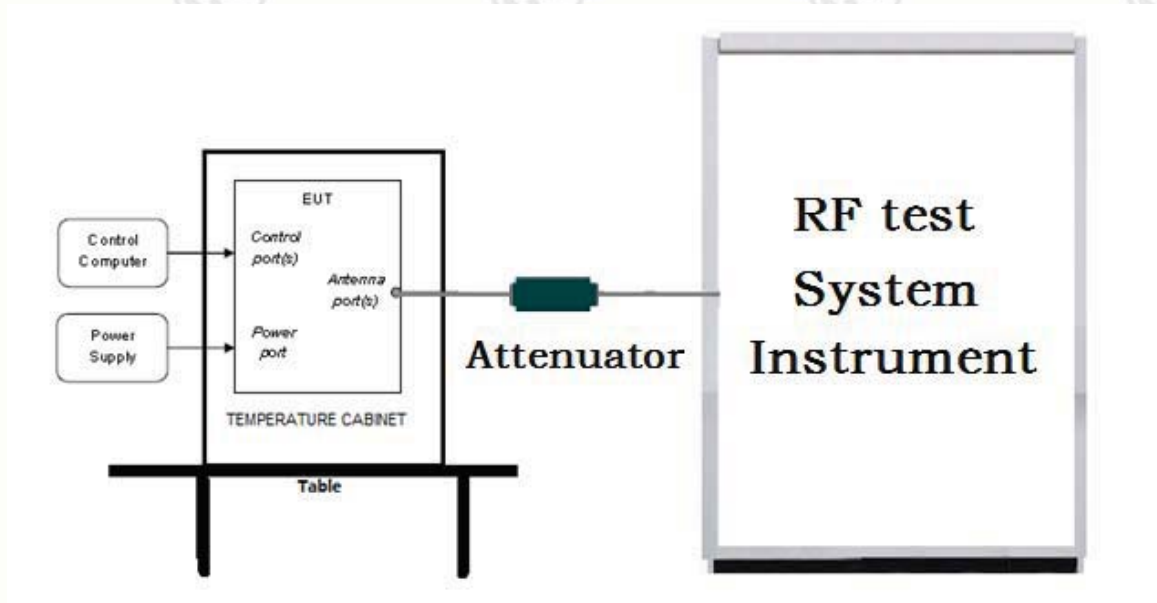

5.1.2 For Radiated Emissions test setup

Radiated Emissions setup:

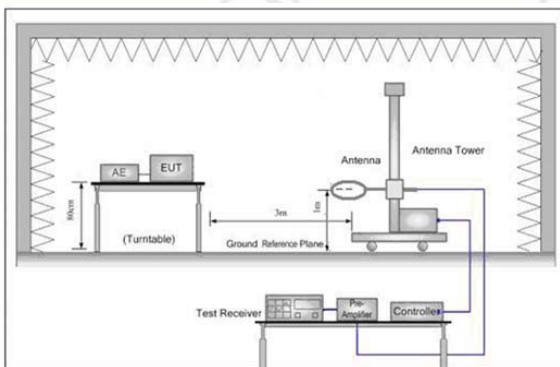


Figure 1. Below 30MHz

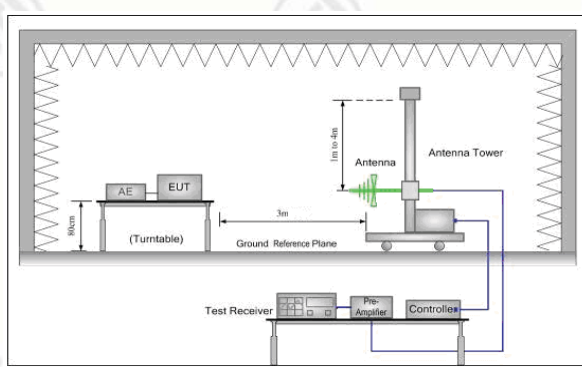


Figure 2. 30MHz to 1GHz


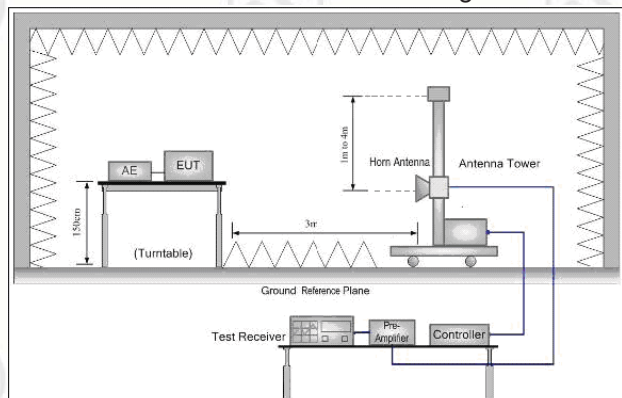


Figure 3. Above 1GHz

5.1.3 For Conducted Emissions test setup
Conducted Emissions setup

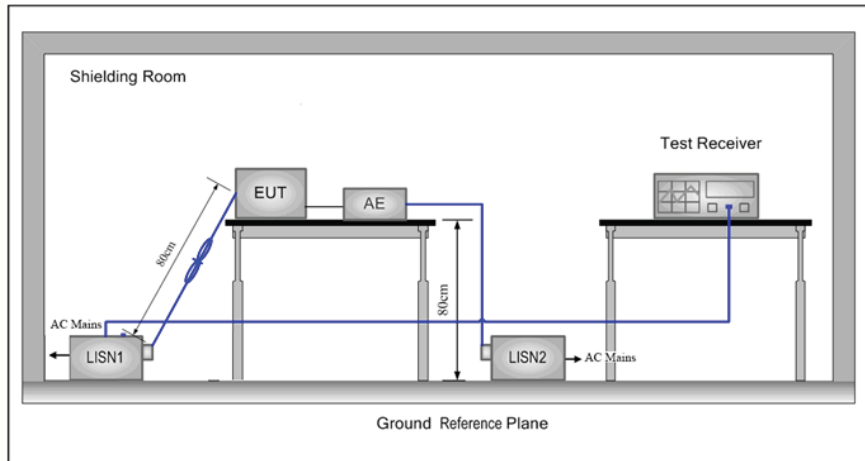

5.2 Test Environment

| Operating Environment: | |
|------------------------|---------|
| Temperature: | 25.0 °C |
| Humidity: | 53 % RH |
| Atmospheric Pressure: | 995mbar |


5.3 Test Condition

Test channel:

| Test Mode | Tx/Rx | RF Channel | | |
|--------------------|----------------------------------------------------------------------------------------------------------|------------|-----------|-----------|
| | | Low(L) | Middle(M) | High(H) |
| 802.11b/g/n(HT20) | 2412MHz ~2462 MHz | Channel 1 | Channel 6 | Channel11 |
| | | 2412MHz | 2437MHz | 2462MHz |
| 802.11n(HT40) | 2422MHz ~2452 MHz | Channel 1 | Channel 4 | Channel7 |
| | | 2422MHz | 2437MHz | 2452MHz |
| Transmitting mode: | Keep the EUT in transmitting mode with all kind of modulation and all kind of data rate. (Dutycycle>98%) | | | |

Test mode:

Pre-scan under all rate at lowest channel 1
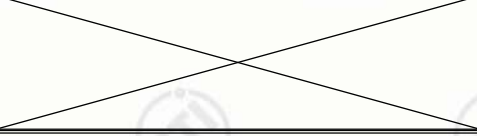
| | | | | | | | | | |
|------------------|-----------------------|---------------|-----------------|---------------|------------------------------------------------------------------------------------|----------------|------------------|----------------|--|
| Mode | 802.11b | | | |  | | | | |
| Data Rate | 1Mbps | 2Mbps | 5.5Mbps | 11Mbps | | | | | |
| EIRP(dBm) | 8.40 | 8.48 | 8.57 | 8.87 | | | | | |
| Mode | 802.11g | | | | | | | | |
| Data Rate | 6Mbps | 9Mbps | 12Mbps | 18Mbps | 24Mbps | 36Mbps | 48Mbps | 54Mbps | |
| EIRP(dBm) | 8.83 | 7.87 | 7.64 | 7.42 | 6.95 | 6.68 | 6.02 | 5.84 | |
| Mode | 802.11n (HT20) | | | | | | | | |
| Data Rate | 6.5Mbps | 13Mbps | 19.5Mbps | 26Mbps | 39Mbps | 52Mbps | 58.5Mbps | 65Mbps | |
| EIRP(dBm) | 8.94 | 8.68 | 8.09 | 7.57 | 6.84 | 6.51 | 6.67 | 6.25 | |
| Mode | 802.11n (HT40) | | | | | | | | |
| Data Rate | 13.5Mbps | 27Mbps | 40.5Mbps | 54Mbps | 81Mbps | 108Mbps | 121.5Mbps | 135Mbps | |
| EIRP(dBm) | 7.75 | 7.69 | 7.21 | 6.78 | 6.54 | 6.04 | 5.78 | 5.51 | |


Through Pre-scan, 11Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n (HT20); 13.5Mbps of rate is the worst case of 802.11n (HT40).

6 General Information

6.1 Client Information

| | |
|--------------------------|---------------------------------------------------------------|
| Applicant: | Proexpress Distributor LLC |
| Address of Applicant: | 11011 GREENWOOD AVE.N APT 5, SEATTLE, WA 98103, United States |
| Manufacturer: | Proexpress Distributor LLC |
| Address of Manufacturer: | 11011 GREENWOOD AVE.N APT 5, SEATTLE, WA 98103, United States |

6.2 General Description of EUT

| | |
|----------------------------------|------------------------------------------------------------------------------------------------|
| Product Name: | 8" Tablet PC |
| Model No.(EUT): | M7, M7X, M7 PLUS, M7X PLUS, T7, T7X, K7, K7X |
| Trade mark: | Dragon Touch, AKASO, KINGPAD |
| EUT Supports Radios application: | IEEE 802.11b/g/n |
| Power Supply: | Input: 5V  2A |
| Sample Received Date: | Jun. 29, 2015 |
| Sample tested Date: | Jun. 29, 2015 to Aug. 24, 2015 |

6.3 Product Specification subjective to this standard

| | |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Operation Frequency: | IEEE 802.11b/g/n(HT20): 2412MHz to 2462MHz IEEE 802.11n(HT40): 2422MHz to 2452MHz |
| Channel Numbers: | IEEE 802.11b/g, IEEE 802.11n HT20: 11 Channels IEEE 802.11n HT40: 7 Channels |
| Channel Separation: | 5MHz |
| Type of Modulation: | IEEE for 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE for 802.11g : OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE for 802.11n(HT20 and HT40) : OFDM (64QAM, 16QAM, QPSK,BPSK) |
| Sample Type: | Portable production |
| Antenna Type and Gain: | Type: Integral antenna Gain: 0dBi |
| Test Voltage: | DC 3.7V |

Operation Frequency each of channel(802.11b/g/n HT20)

| Channel | Frequency | Channel | Frequency | Channel | Frequency | Channel | Frequency |
|---------|-----------|---------|-----------|---------|-----------|---------|-----------|
| 1 | 2412MHz | 4 | 2427MHz | 7 | 2442MHz | 10 | 2457MHz |
| 2 | 2417MHz | 5 | 2432MHz | 8 | 2447MHz | 11 | 2462MHz |
| 3 | 2422MHz | 6 | 2437MHz | 9 | 2452MHz | | |

| Operation Frequency each of channel(802.11n HT40) | | | | | |
|---------------------------------------------------|-----------|---------|-----------|---------|-----------|
| Channel | Frequency | Channel | Frequency | Channel | Frequency |
| 1 | 2422MHz | 4 | 2437MHz | 7 | 2452MHz |
| 2 | 2427MHz | 5 | 2442MHz | | |
| 3 | 2432MHz | 6 | 2447MHz | | |

6.4 Description of Support Units

The EUT has been tested with associated equipment below:

| Device Type | Brand | Model | Data Cable | Remark |
|-------------|-------|-------|------------|--------|
| -- | -- | -- | -- | -- |
| -- | -- | -- | -- | -- |

6.5 Test Location

All tests were performed at:

Centre Testing International (Shenzhen) Corporation

Building C, Scientific Innovation Park, Tiegang Reservoir, Xixiang, Baoan District, Shenzhen, China

Telephone: +86 (0) 755 3368 3668 Fax: +86 (0) 755 3368 3385

No tests were sub-contracted.

6.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L1910

Centre Testing International Group Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories..

A2LA-Lab Cert. No. 3061.01

Centre Testing International Group Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 565659

Centre Testing International (Shenzhen) Corporation EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 565659.

IC-Registration No.: 7408A

The 3m Alternate Test Site of Centre Testing International Group Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 7408A .

IC-Registration No.: 7408B

The 10m Alternate Test Site of Centre Testing International Group Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 7408B.

NEMKO-Aut. No.: ELA503

Centre Testing International Group Co., Ltd. has been assessed the quality assurance system, the testing facilities, qualifications and testing practices of the relevant parts of the organization. The quality assurance system of the Laboratory has been validated against ISO/IEC 17025 or equivalent. The laboratory also fulfils the conditions described in Nemko Document NLA-10.

VCCI

The Radiation 3 &10 meters site of Centre Testing International Group Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-4096.

Main Ports Conducted Interference Measurement of Centre Testing International Group Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: C-4563.

Telecommunication Ports Conducted Disturbance Measurement of Centre Testing International Group Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: T-2146.

The Radiation 3 meters site of Centre Testing International Group Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-758

6.7 Deviation from Standards

None.

6.8 Abnormalities from Standard Conditions

None.

6.9 Other Information Requested by the Customer

None.

6.10 Measurement Uncertainty (95% confidence levels, k=2)

| No. | Item | Measurement Uncertainty |
|-----|---------------------------------|-------------------------|
| 1 | Radio Frequency | 7.9×10^{-8} |
| 2 | RF power, conducted | 0.31dB (30MHz-1GHz) |
| | | 0.57dB (1GHz-18GHz) |
| 3 | Radiated Spurious emission test | 4.5dB (30MHz-1GHz) |
| | | 4.8dB (1GHz-12.75GHz) |
| 4 | Conduction emission | 3.6dB (9kHz to 150kHz) |
| | | 3.2dB (150kHz to 30MHz) |
| 5 | Temperature test | 0.64°C |
| 6 | Humidity test | 2.8% |
| 7 | DC power voltages | 0.025% |

7 Equipment List

| RF test system | | | | | |
|----------------------------------|---------------|------------------------------|---------------|------------------------|----------------------------|
| Equipment | Manufacturer | Mode No. | Serial Number | Cal. Date (mm-dd-yyyy) | Cal. Due date (mm-dd-yyyy) |
| Signal Generator | Keysight | E8257D | MY53401106 | 04-14-2015 | 04-13-2016 |
| Communication test set test set | Agilent | N4010A | MY47230124 | 04-02-2015 | 04-01-2016 |
| Spectrum Analyzer | Keysight | N9010A | MY54510339 | 04-01-2015 | 03-31-2016 |
| Attenuator | HuaXiang | SHX370 | 15040701 | 04-01-2015 | 03-31-2016 |
| Signal Generator | Keysight | N5182B | MY53051549 | 03-31-2015 | 03-30-2016 |
| High-pass filter(3-18GHz) | Sinoscite | FL3CX03WG18 NM12-0398-002 | --- | 01-13-2015 | 01-12-2016 |
| High-pass filter(5-18GHz) | MICRO-TRONICS | SPA-F-63029-4 | --- | 01-13-2015 | 01-12-2016 |
| band rejection filter (GSM900) | Sinoscite | FL5CX01CA09C L12-0395-001 | --- | 01-13-2015 | 01-12-2016 |
| band rejection filter (GSM850) | Sinoscite | FL5CX01CA08C L12-0393-001 | --- | 01-13-2015 | 01-12-2016 |
| band rejection filter (GSM1800) | Sinoscite | FL5CX02CA04C L12-0396-002 | --- | 01-13-2015 | 01-12-2016 |
| band rejection filter (GSM1900) | Sinoscite | FL5CX02CA03C L12-0394-001 | --- | 01-13-2015 | 01-12-2016 |
| DC Power | Keysight | E3642A | MY54436035 | 03-31-2015 | 03-30-2016 |
| PC-1 | Lenovo | R4960d | --- | 04-01-2015 | 03-31-2016 |
| BT&WI-FI Automatic control | R&S | OSPB157 | 101374 | 04-01-2015 | 03-31-2016 |
| RF control unit | JS Tonscend | JS0806-2 | 2015860006 | 04-01-2015 | 03-31-2016 |
| BT&WI-FI Automatic test software | JS Tonscend | JSTS1120-2 | --- | 04-01-2015 | 03-31-2016 |

| Shielding Room No. 1 – Conduction Emission Test | | | | | |
|-------------------------------------------------|--------------|----------|---------------|------------------------|----------------------------|
| Equipment | Manufacturer | Mode No. | Serial Number | Cal. date (mm-dd-yyyy) | Cal. Due date (mm-dd-yyyy) |
| Receiver | R&S | ESCI | 100009 | 07-09-2014 | 07-08-2015 |
| Receiver | R&S | ESCI | 100009 | 07-09-2015 | 07-08-2016 |
| Receiver | R&S | ESCI | 100009 | 07-09-2014 | 07-08-2015 |
| Receiver | R&S | ESCI | 100009 | 07-09-2015 | 07-08-2016 |
| LISN | R&S | ENV216 | 100098 | 11-12-2014 | 11-13-2015 |

| 3M Semi/full-anechoic Chamber | | | | | |
|--------------------------------|--------------|------------------------------|---------------|------------------------|----------------------------|
| Equipment | Manufacturer | Mode No. | Serial Number | Cal. date (mm-dd-yyyy) | Cal. Due date (mm-dd-yyyy) |
| 3M Chamber | TDK | SAC-3 | --- | 06-02-2015 | 06-01-2016 |
| TRILOG Broadband Antenna | schwarzbeck | VULB9163 | 9163-617 | 07-14-2014 | 07-13-2015 |
| TRILOG Broadband Antenna | schwarzbeck | VULB9163 | 9163-617 | 07-14-2015 | 07-13-2016 |
| TRILOG Broadband Antenna | schwarzbeck | VULB9163 | 9163-617 | 07-14-2014 | 07-13-2015 |
| TRILOG Broadband Antenna | schwarzbeck | VULB9163 | 9163-617 | 07-14-2015 | 07-13-2016 |
| Microwave Preamplifier | Agilent | 8449B | 3008A02425 | 02-05-2015 | 02-04-2016 |
| Horn Antenna | ETS-LINDGREN | 3117 | 00057410 | 07-08-2014 | 07-07-2015 |
| Horn Antenna | ETS-LINDGREN | 3117 | 00057410 | 07-08-2015 | 07-07-2016 |
| Horn Antenna | ETS-LINDGREN | 3117 | 00057410 | 07-08-2014 | 07-07-2015 |
| Horn Antenna | ETS-LINDGREN | 3117 | 00057410 | 07-08-2015 | 07-07-2016 |
| Loop Antenna | ETS | 6502 | 00071730 | 07-23-2014 | 07-22-2015 |
| Loop Antenna | ETS | 6502 | 00071730 | 07-23-2015 | 07-22-2016 |
| Loop Antenna | ETS | 6502 | 00071730 | 07-23-2014 | 07-22-2015 |
| Loop Antenna | ETS | 6502 | 00071730 | 07-23-2015 | 07-22-2016 |
| Spectrum Analyzer | R&S | FSP40 | 100416 | 07-09-2014 | 07-08-2015 |
| Spectrum Analyzer | R&S | FSP40 | 100416 | 07-09-2015 | 07-08-2016 |
| Spectrum Analyzer | R&S | FSP40 | 100416 | 07-09-2014 | 07-08-2015 |
| Spectrum Analyzer | R&S | FSP40 | 100416 | 07-09-2015 | 07-08-2016 |
| Receiver | R&S | ESCI | 100435 | 07-09-2014 | 07-08-2015 |
| Receiver | R&S | ESCI | 100435 | 07-09-2015 | 07-08-2016 |
| Receiver | R&S | ESCI | 100435 | 07-09-2014 | 07-08-2015 |
| Receiver | R&S | ESCI | 100435 | 07-09-2015 | 07-08-2016 |
| Multi device Controller | matur | NCD/070/10711112 | --- | 01-13-2015 | 01-12-2016 |
| LISN | schwarzbeck | NNBM8125 | 81251547 | 07-09-2014 | 07-08-2015 |
| LISN | schwarzbeck | NNBM8125 | 81251547 | 07-09-2015 | 07-08-2016 |
| LISN | schwarzbeck | NNBM8125 | 81251547 | 07-09-2014 | 07-08-2015 |
| LISN | schwarzbeck | NNBM8125 | 81251547 | 07-09-2015 | 07-08-2016 |
| LISN | schwarzbeck | NNBM8125 | 81251546 | 07-09-2014 | 07-08-2015 |
| LISN | schwarzbeck | NNBM8125 | 81251546 | 07-09-2015 | 07-08-2016 |
| LISN | schwarzbeck | NNBM8125 | 81251546 | 07-09-2014 | 07-08-2015 |
| LISN | schwarzbeck | NNBM8125 | 81251546 | 07-09-2015 | 07-08-2016 |
| Signal Generator | Agilent | E4438C | MY45095744 | 04-19-2015 | 04-18-2016 |
| Signal Generator | Keysight | E8257D | MY53401106 | 04-14-2015 | 04-13-2016 |
| Temperature/Humidity Indicator | TAYLOR | 1451 | 5190 | 07-10-2014 | 07-09-2015 |
| Temperature/Humidity Indicator | TAYLOR | 1451 | 5190 | 07-10-2015 | 07-09-2016 |
| Temperature/Humidity Indicator | TAYLOR | 1451 | 5190 | 07-10-2014 | 07-09-2015 |
| Temperature/Humidity Indicator | TAYLOR | 1451 | 5190 | 07-10-2015 | 07-09-2016 |
| Communication test set | Agilent | E5515C | GB47050533 | 01-13-2015 | 01-12-2016 |
| Cable line | Fulai(7M) | SF106 | 5219/6A | 01-13-2015 | 01-12-2016 |
| Cable line | Fulai(6M) | SF106 | 5220/6A | 01-13-2015 | 01-12-2016 |
| Cable line | Fulai(3M) | SF106 | 5216/6A | 01-13-2015 | 01-12-2016 |
| Cable line | Fulai(3M) | SF106 | 5217/6A | 01-13-2015 | 01-12-2016 |
| Communication test set | R&S | CMW500 | 152394 | 04-19-2015 | 04-18-2016 |
| High-pass filter(3-18GHz) | Sinoscite | FL3CX03WG18NM 12-0398-002 | --- | 01-13-2015 | 01-12-2016 |

| | | | | | |
|---------------------------|---------------|------------------------------|-----|------------|------------|
| High-pass filter(5-18GHz) | MICRO-TRONICS | SPA-F-63029-4 | --- | 01-13-2015 | 01-12-2016 |
| band rejection filter | Sinoscite | FL5CX01CA09CL1 2-0395-001 | --- | 01-13-2015 | 01-12-2016 |
| band rejection filter | Sinoscite | FL5CX01CA08CL1 2-0393-001 | --- | 01-13-2015 | 01-12-2016 |
| band rejection filter | Sinoscite | FL5CX02CA04CL1 2-0396-002 | --- | 01-13-2015 | 01-12-2016 |
| band rejection filter | Sinoscite | FL5CX02CA03CL1 2-0394-001 | --- | 01-13-2015 | 01-12-2016 |

8 Radio Technical Requirements Specification

Reference documents for testing:

| No. | Identity | Document Title |
|-----|--------------------|--------------------------------------------------------------------|
| 1 | FCC Part15C (2014) | Subpart C-Intentional Radiators |
| 2 | ANSI C63.10-2013 | American National Standard for Testing Unlicensed Wireless Devices |

Test Results List:

| Test Requirement | Test method | Test item | Verdict | Note |
|-----------------------------------|-------------|-------------------------------------------------------------------|---------|-------------|
| Part15C Section 15.247 (b)(3) | ANSI C63.10 | Conducted Peak Output Power | PASS | Appendix A) |
| Part15C Section 15.247 (a)(2) | ANSI C63.10 | 6dB Occupied Bandwidth | PASS | Appendix B) |
| Part15C Section 15.247(d) | ANSI C63.10 | Band-edge for RF Conducted Emissions | PASS | Appendix C) |
| Part15C Section 15.247(d) | ANSI C63.10 | RF Conducted Spurious Emissions | PASS | Appendix D) |
| Part15C Section 15.247 (e) | ANSI C63.10 | Power Spectral Density | PASS | Appendix E) |
| Part15C Section 15.203/15.247 (c) | ANSI C63.10 | Antenna Requirement | PASS | Appendix F) |
| Part15C Section 15.207 | ANSI C63.10 | AC Power Line Conducted Emission | PASS | Appendix G) |
| Part15C Section 15.205/15.209 | ANSI C63.10 | Restricted bands around fundamental frequency (Radiated Emission) | PASS | Appendix H) |
| Part15C Section 15.205/15.209 | ANSI C63.10 | Radiated Spurious Emissions | PASS | Appendix H) |


Appendix A): Conducted Peak Output Power

Result Table

| Mode | Channel | Conducted Peak Output Power [dBm] | Verdict |
|-----------|---------|-----------------------------------|---------|
| 11B | LCH | 8.08 | PASS |
| 11B | MCH | 8.87 | PASS |
| 11B | HCH | 8.29 | PASS |
| 11G | LCH | 8.48 | PASS |
| 11G | MCH | 8.27 | PASS |
| 11G | HCH | 8.83 | PASS |
| 11N20SISO | LCH | 8.5 | PASS |
| 11N20SISO | MCH | 8.34 | PASS |
| 11N20SISO | HCH | 8.94 | PASS |
| 11N40SISO | LCH | 7.75 | PASS |
| 11N40SISO | MCH | 7.2 | PASS |
| 11N40SISO | HCH | 7.07 | PASS |



Remark: Peak detector is used



Test Graph

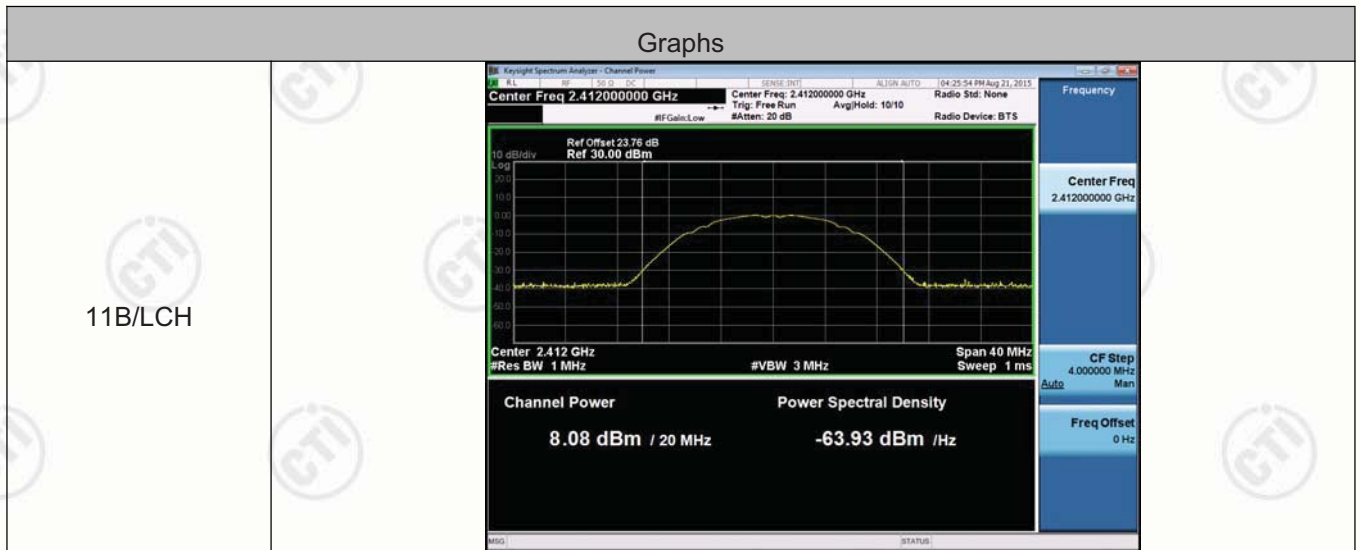

| | |
|---------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 11B/MCH |  <p>Keysight Spectrum Analyzer - Channel Power</p> <p>Center Freq: 2.437000000 GHz</p> <p>Channel Power: 8.87 dBm / 20 MHz</p> <p>Power Spectral Density: -64.14 dBm / Hz</p> |
| 11B/HCH |  <p>Keysight Spectrum Analyzer - Channel Power</p> <p>Center Freq: 2.462000000 GHz</p> <p>Channel Power: 8.29 dBm / 20 MHz</p> <p>Power Spectral Density: -63.02 dBm / Hz</p> |
| 11G/LCH |  <p>Keysight Spectrum Analyzer - Channel Power</p> <p>Center Freq: 2.412000000 GHz</p> <p>Channel Power: 8.48 dBm / 20 MHz</p> <p>Power Spectral Density: -64.53 dBm / Hz</p> |

| | |
|----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>11G/MCH</p> |  <p>Keysight Spectrum Analyzer - Channel Power</p> <p>Center Freq 2.437000000 GHz</p> <p>Center Freq: 2.437000000 GHz</p> <p>Trig: Free Run Avg/Hold: 10/10</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 23.76 dB</p> <p>Ref 30.00 dBm</p> <p>10 dB/div</p> <p>Center 2.437 GHz</p> <p>#Res BW 1 MHz</p> <p>#VBW 3 MHz</p> <p>Span 40 MHz</p> <p>Sweep 1 ms</p> <p>Channel Power</p> <p>Power Spectral Density</p> <p>8.27 dBm / 20 MHz</p> <p>-64.74 dBm /Hz</p> <p>Frequency</p> <p>Center Freq</p> <p>2.437000000 GHz</p> <p>CF Step</p> <p>4.000000 MHz</p> <p>Auto Man</p> <p>Freq Offset</p> <p>0 Hz</p> |
| <p>11G/HCH</p> |  <p>Keysight Spectrum Analyzer - Channel Power</p> <p>Center Freq 2.462000000 GHz</p> <p>Center Freq: 2.462000000 GHz</p> <p>Trig: Free Run Avg/Hold: 10/10</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 23.76 dB</p> <p>Ref 30.00 dBm</p> <p>10 dB/div</p> <p>Center 2.462 GHz</p> <p>#Res BW 1 MHz</p> <p>#VBW 3 MHz</p> <p>Span 40 MHz</p> <p>Sweep 1 ms</p> <p>Channel Power</p> <p>Power Spectral Density</p> <p>8.83 dBm / 20 MHz</p> <p>-64.18 dBm /Hz</p> <p>Frequency</p> <p>Center Freq</p> <p>2.462000000 GHz</p> <p>CF Step</p> <p>4.000000 MHz</p> <p>Auto Man</p> <p>Freq Offset</p> <p>0 Hz</p> |
| <p>11N20SISO/LCH</p> |  <p>Keysight Spectrum Analyzer - Channel Power</p> <p>Center Freq 2.412000000 GHz</p> <p>Center Freq: 2.412000000 GHz</p> <p>Trig: Free Run Avg/Hold: 10/10</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 23.76 dB</p> <p>Ref 30.00 dBm</p> <p>10 dB/div</p> <p>Center 2.412 GHz</p> <p>#Res BW 1 MHz</p> <p>#VBW 3 MHz</p> <p>Span 40 MHz</p> <p>Sweep 1 ms</p> <p>Channel Power</p> <p>Power Spectral Density</p> <p>8.50 dBm / 20 MHz</p> <p>-64.51 dBm /Hz</p> <p>Frequency</p> <p>Center Freq</p> <p>2.412000000 GHz</p> <p>CF Step</p> <p>4.000000 MHz</p> <p>Auto Man</p> <p>Freq Offset</p> <p>0 Hz</p> |
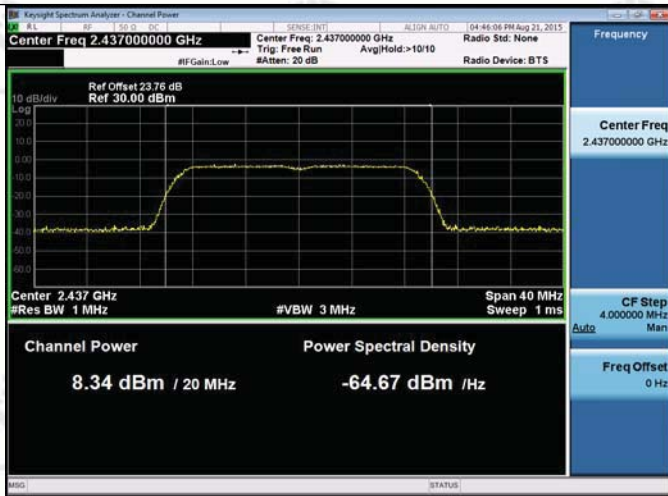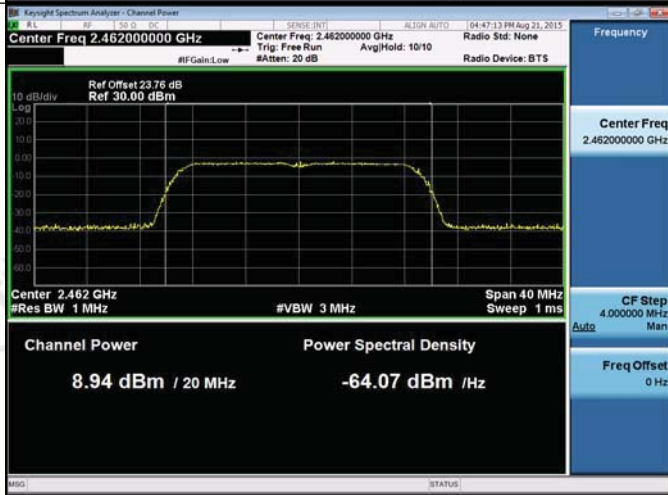
| | |
|----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>11N20SISO/MCH</p> |  <p>Keysight Spectrum Analyzer - Channel Power</p> <p>Center Freq 2.437000000 GHz</p> <p>Center Freq: 2.437000000 GHz</p> <p>Trig: Free Run Avg/Hold: >10/10</p> <p>#Gain: Low #Atten: 20 dB</p> <p>Ref Offset 23.76 dB Ref 30.00 dBm</p> <p>10 dB/div</p> <p>Center 2.437 GHz #Res BW 1 MHz #VBW 3 MHz Span 40 MHz Sweep 1 ms</p> <p>Channel Power Power Spectral Density</p> <p>8.34 dBm / 20 MHz -64.67 dBm / Hz</p> <p>Frequency</p> <p>Center Freq 2.437000000 GHz</p> <p>CF Step 4.000000 MHz</p> <p>Freq Offset 0 Hz</p> |
| <p>11N20SISO/HCH</p> |  <p>Keysight Spectrum Analyzer - Channel Power</p> <p>Center Freq 2.462000000 GHz</p> <p>Center Freq: 2.462000000 GHz</p> <p>Trig: Free Run Avg/Hold: 10/10</p> <p>#Gain: Low #Atten: 20 dB</p> <p>Ref Offset 23.76 dB Ref 30.00 dBm</p> <p>10 dB/div</p> <p>Center 2.462 GHz #Res BW 1 MHz #VBW 3 MHz Span 40 MHz Sweep 1 ms</p> <p>Channel Power Power Spectral Density</p> <p>8.94 dBm / 20 MHz -64.07 dBm / Hz</p> <p>Frequency</p> <p>Center Freq 2.462000000 GHz</p> <p>CF Step 4.000000 MHz</p> <p>Freq Offset 0 Hz</p> |
| <p>11N40SISO/LCH</p> |  <p>Keysight Spectrum Analyzer - Channel Power</p> <p>Center Freq 2.422000000 GHz</p> <p>Center Freq: 2.422000000 GHz</p> <p>Trig: Free Run Avg/Hold: 10/10</p> <p>#Gain: Low #Atten: 20 dB</p> <p>Ref Offset 23.76 dB Ref 30.00 dBm</p> <p>10 dB/div</p> <p>Center 2.422 GHz #Res BW 1 MHz #VBW 3 MHz Span 80 MHz Sweep 1 ms</p> <p>Channel Power Power Spectral Density</p> <p>7.75 dBm / 40 MHz -68.27 dBm / Hz</p> <p>Frequency</p> <p>Center Freq 2.422000000 GHz</p> <p>CF Step 8.000000 MHz</p> <p>Freq Offset 0 Hz</p> |
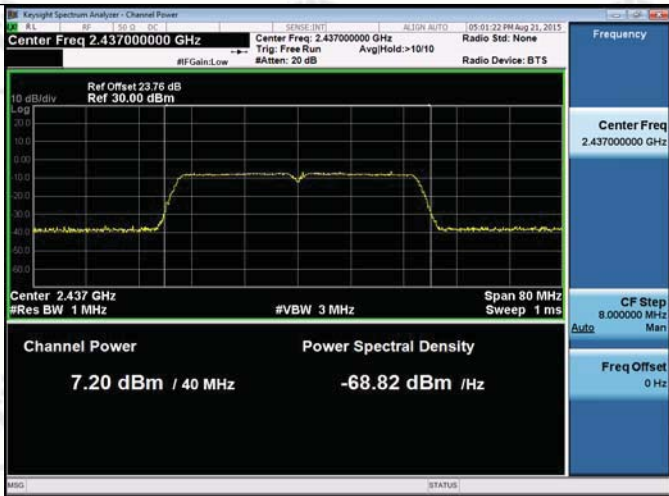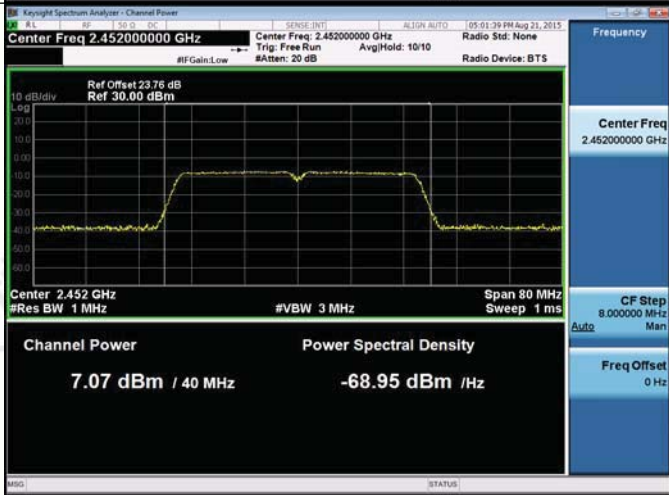
| | |
|----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>11N40SISO/MCH</p> |  <p>Keysight Spectrum Analyzer - Channel Power</p> <p>Center Freq: 2.437000000 GHz</p> <p>Ref Offset: 23.76 dB, Ref: 30.00 dBm</p> <p>Channel Power: 7.20 dBm / 40 MHz</p> <p>Power Spectral Density: -68.82 dBm / Hz</p> |
| <p>11N40SISO/HCH</p> |  <p>Keysight Spectrum Analyzer - Channel Power</p> <p>Center Freq: 2.452000000 GHz</p> <p>Ref Offset: 23.76 dB, Ref: 30.00 dBm</p> <p>Channel Power: 7.07 dBm / 40 MHz</p> <p>Power Spectral Density: -68.95 dBm / Hz</p> |


Appendix B): 6dB Occupied Bandwidth

Result Table




| Mode | Channel | 6dB Bandwidth [MHz] | 99% OBW [MHz] | Verdict |
|-----------|---------|---------------------|---------------|---------|
| 11B | LCH | 10.08 | 14.452 | PASS |
| 11B | MCH | 10.01 | 14.354 | PASS |
| 11B | HCH | 10.07 | 14.394 | PASS |
| 11G | LCH | 16.37 | 16.748 | PASS |
| 11G | MCH | 16.37 | 16.890 | PASS |
| 11G | HCH | 16.37 | 16.752 | PASS |
| 11N20SISO | LCH | 17.59 | 17.849 | PASS |
| 11N20SISO | MCH | 17.60 | 17.802 | PASS |
| 11N20SISO | HCH | 17.59 | 17.789 | PASS |
| 11N40SISO | LCH | 36.04 | 39.375 | PASS |
| 11N40SISO | MCH | 36.08 | 37.341 | PASS |
| 11N40SISO | HCH | 35.78 | 47.501 | PASS |




Remark: Peak detector is used


Test Graph

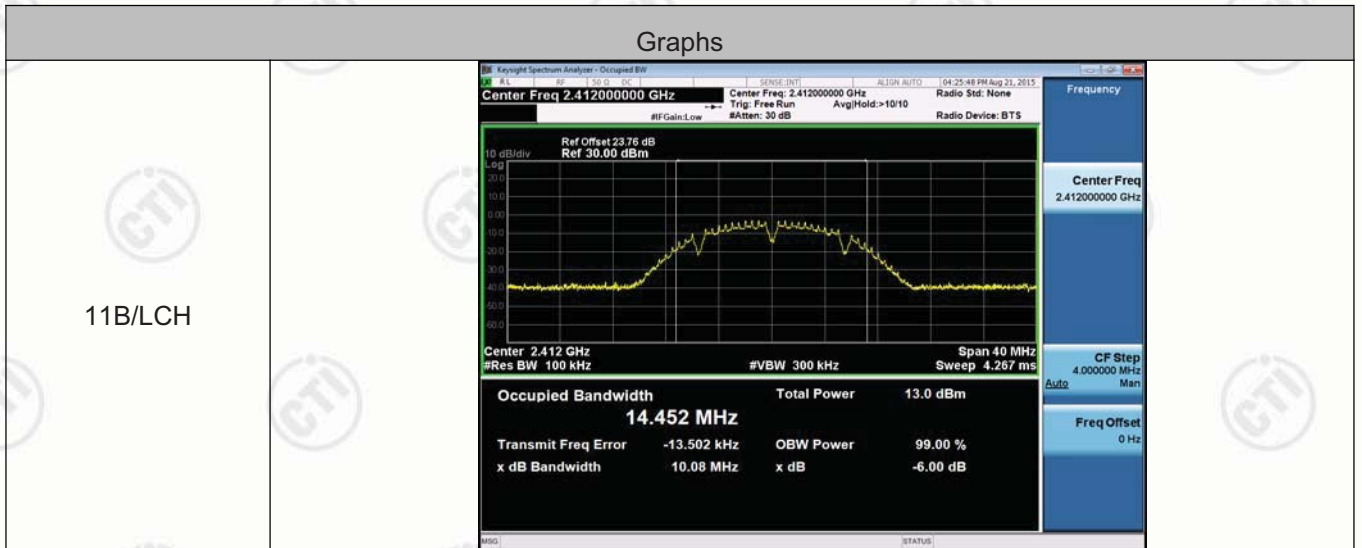

| | |
|----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>11B/MCH</p> | <p>Keight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.437000000 GHz</p> <p>Ref Offset 23.76 dB Ref 30.00 dBm</p> <p>Center 2.437 GHz #Res BW 100 kHz</p> <p>Occupied Bandwidth 14.354 MHz</p> <p>Total Power 14.1 dBm</p> <p>Transmit Freq Error 16.847 kHz</p> <p>x dB Bandwidth 10.01 MHz</p> <p>OBW Power 99.00 %</p> <p>x dB -6.00 dB</p> |
| <p>11B/HCH</p> | <p>Keight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.462000000 GHz</p> <p>Ref Offset 23.76 dB Ref 30.00 dBm</p> <p>Center 2.462 GHz #Res BW 100 kHz</p> <p>Occupied Bandwidth 14.394 MHz</p> <p>Total Power 14.5 dBm</p> <p>Transmit Freq Error -16.973 kHz</p> <p>x dB Bandwidth 10.07 MHz</p> <p>OBW Power 99.00 %</p> <p>x dB -6.00 dB</p> |
| <p>11G/LCH</p> | <p>Keight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.412000000 GHz</p> <p>Ref Offset 23.76 dB Ref 30.00 dBm</p> <p>Center 2.412 GHz #Res BW 100 kHz</p> <p>Occupied Bandwidth 16.748 MHz</p> <p>Total Power 6.99 dBm</p> <p>Transmit Freq Error -19.448 kHz</p> <p>x dB Bandwidth 16.37 MHz</p> <p>OBW Power 99.00 %</p> <p>x dB -6.00 dB</p> |

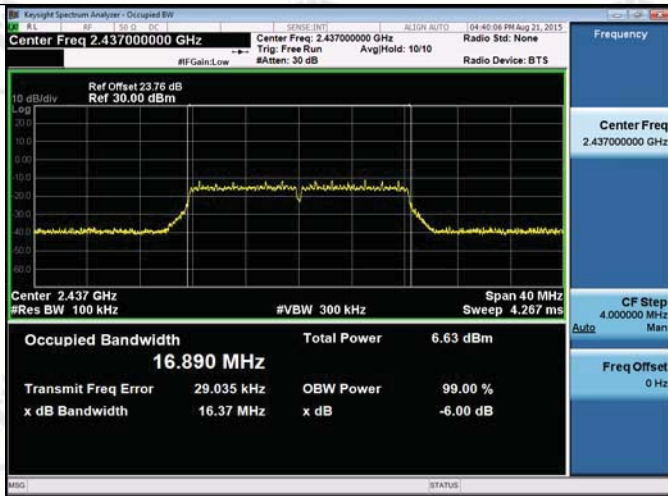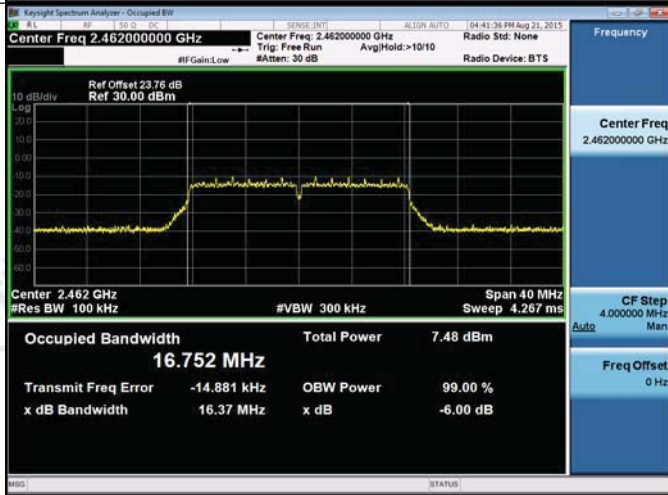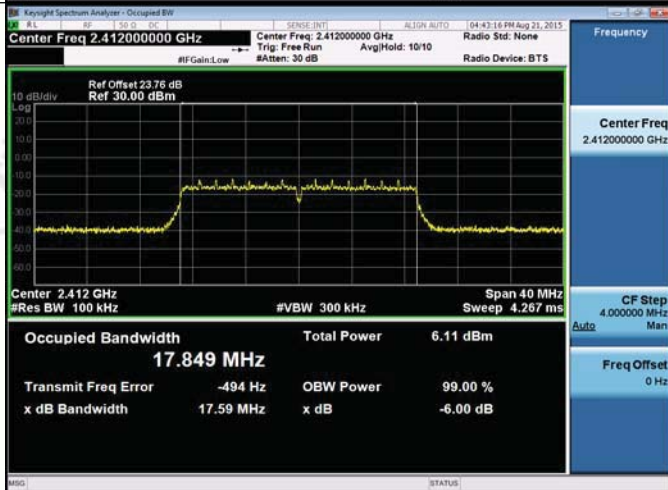
| | |
|---------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 11G/MCH |  <p>Center Freq: 2.437000000 GHz</p> <p>Occupied Bandwidth: 16.890 MHz</p> <p>Total Power: 6.63 dBm</p> <p>Transmit Freq Error: 29.035 kHz</p> <p>x dB Bandwidth: 16.37 MHz</p> |
| 11G/HCH |  <p>Center Freq: 2.462000000 GHz</p> <p>Occupied Bandwidth: 16.752 MHz</p> <p>Total Power: 7.48 dBm</p> <p>Transmit Freq Error: -14.881 kHz</p> <p>x dB Bandwidth: 16.37 MHz</p> |
| 11N20SISO/LCH |  <p>Center Freq: 2.412000000 GHz</p> <p>Occupied Bandwidth: 17.849 MHz</p> <p>Total Power: 6.11 dBm</p> <p>Transmit Freq Error: -494 Hz</p> <p>x dB Bandwidth: 17.59 MHz</p> |

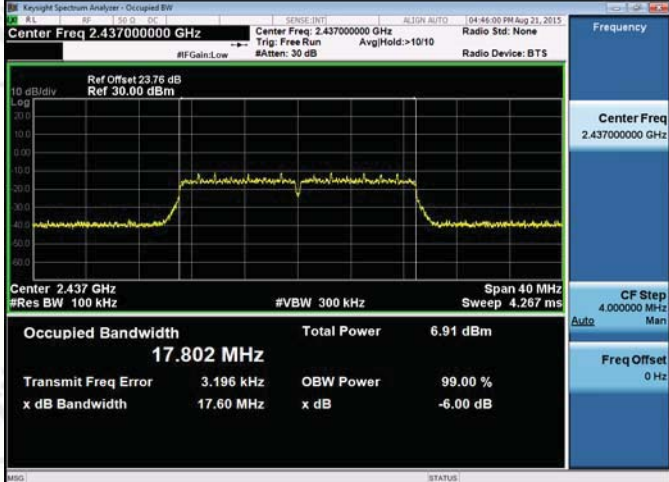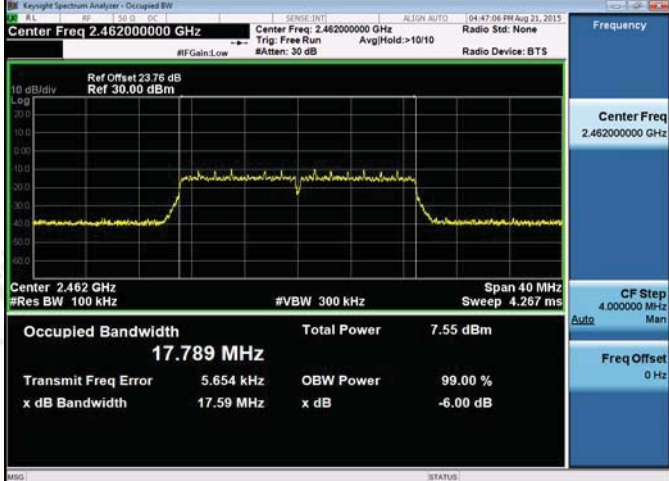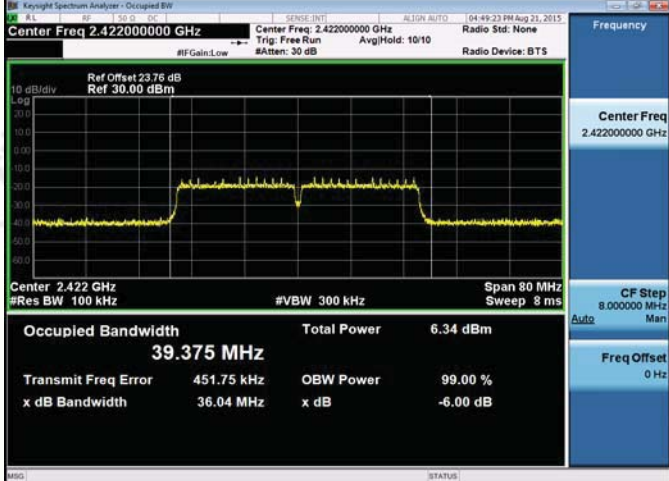
| | |
|----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>11N20SISO/MCH</p> |  <p>Center Freq: 2.437000000 GHz</p> <p>Occupied Bandwidth: 17.802 MHz</p> <p>Total Power: 6.91 dBm</p> <p>Transmit Freq Error: 3.196 kHz</p> <p>x dB Bandwidth: 17.60 MHz</p> |
| <p>11N20SISO/HCH</p> |  <p>Center Freq: 2.462000000 GHz</p> <p>Occupied Bandwidth: 17.789 MHz</p> <p>Total Power: 7.55 dBm</p> <p>Transmit Freq Error: 5.654 kHz</p> <p>x dB Bandwidth: 17.59 MHz</p> |
| <p>11N40SISO/LCH</p> |  <p>Center Freq: 2.422000000 GHz</p> <p>Occupied Bandwidth: 39.375 MHz</p> <p>Total Power: 6.34 dBm</p> <p>Transmit Freq Error: 451.75 kHz</p> <p>x dB Bandwidth: 36.04 MHz</p> |

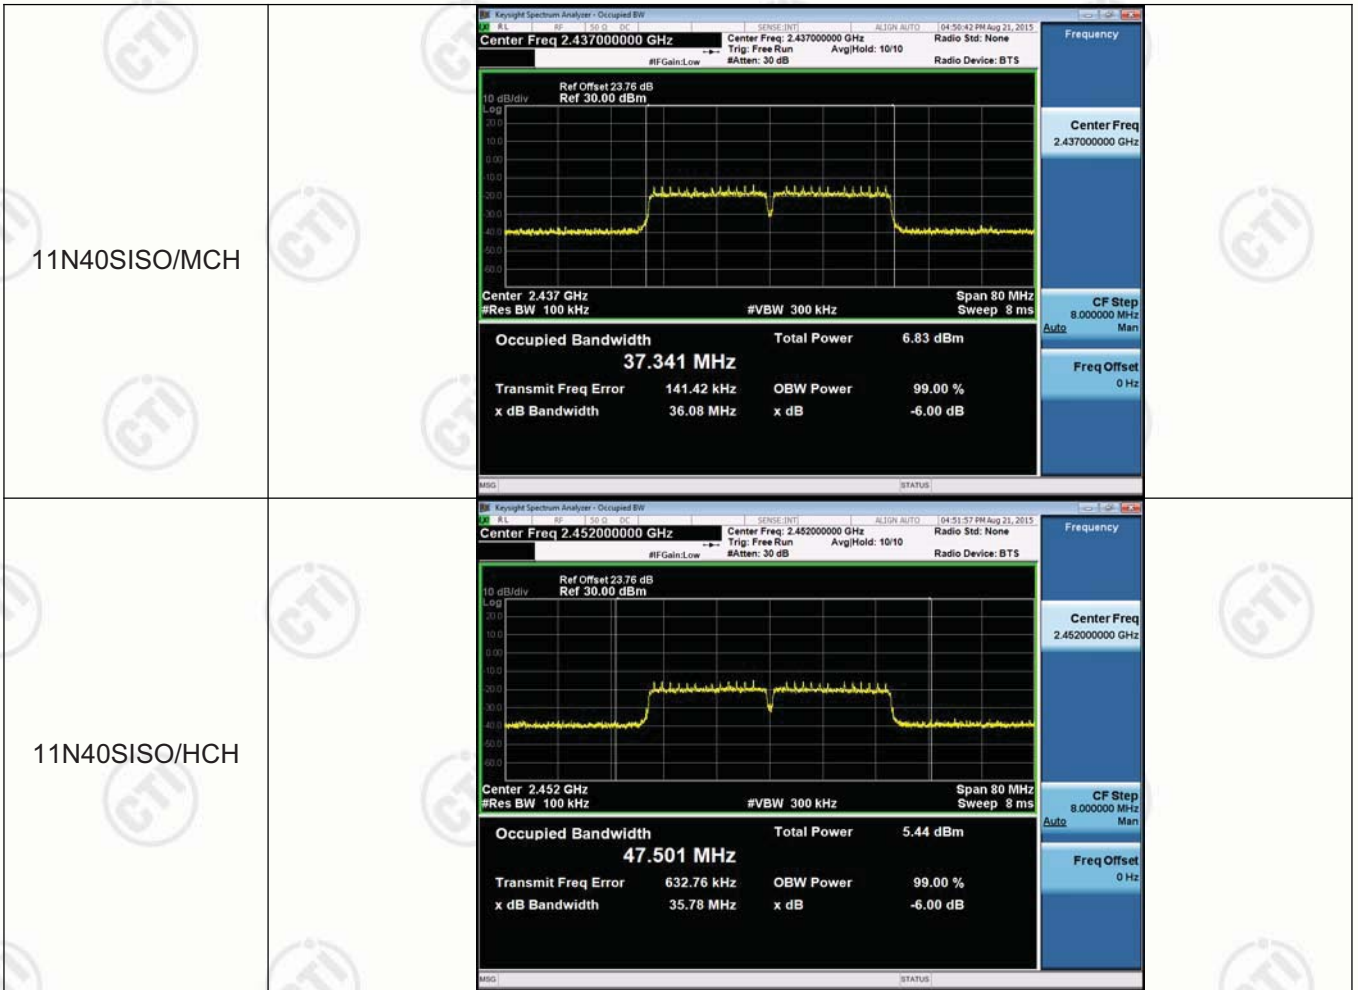


Appendix C): Band-edge for RF Conducted Emissions

Test Graph


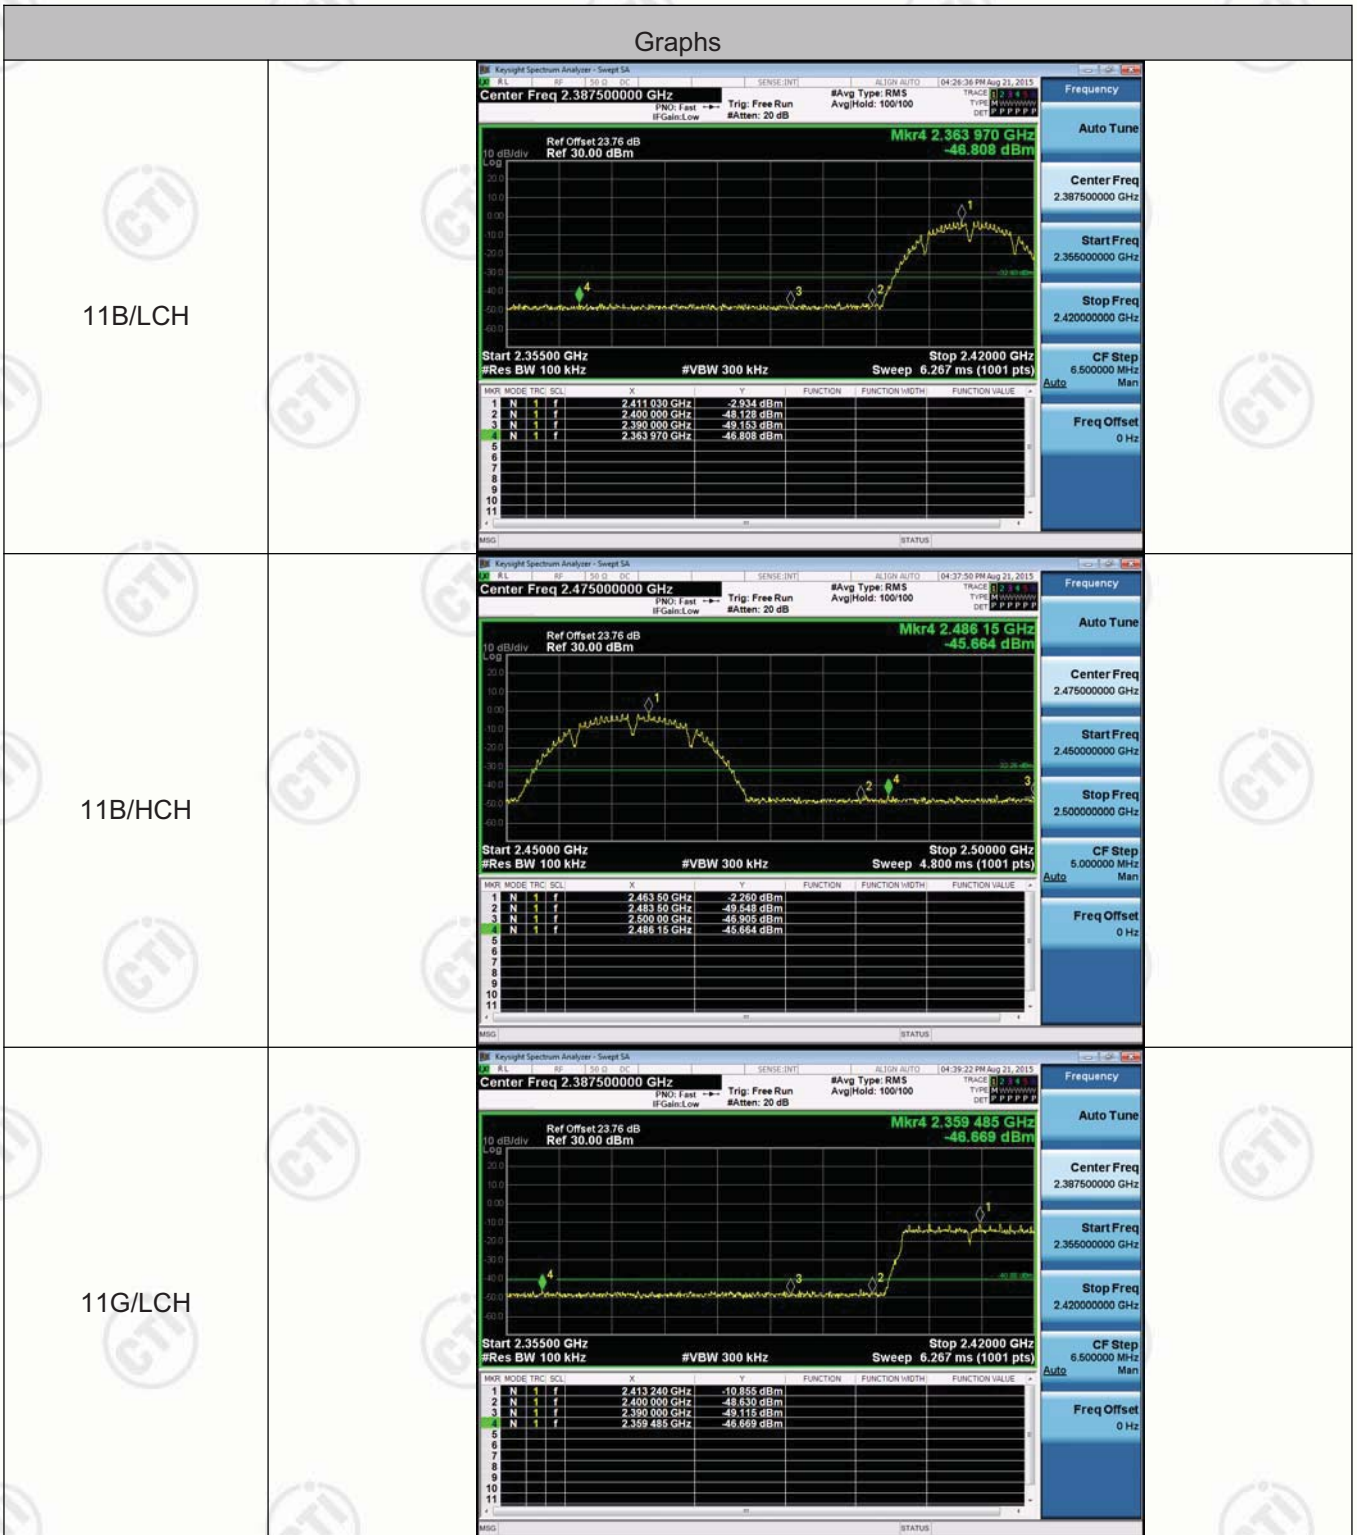


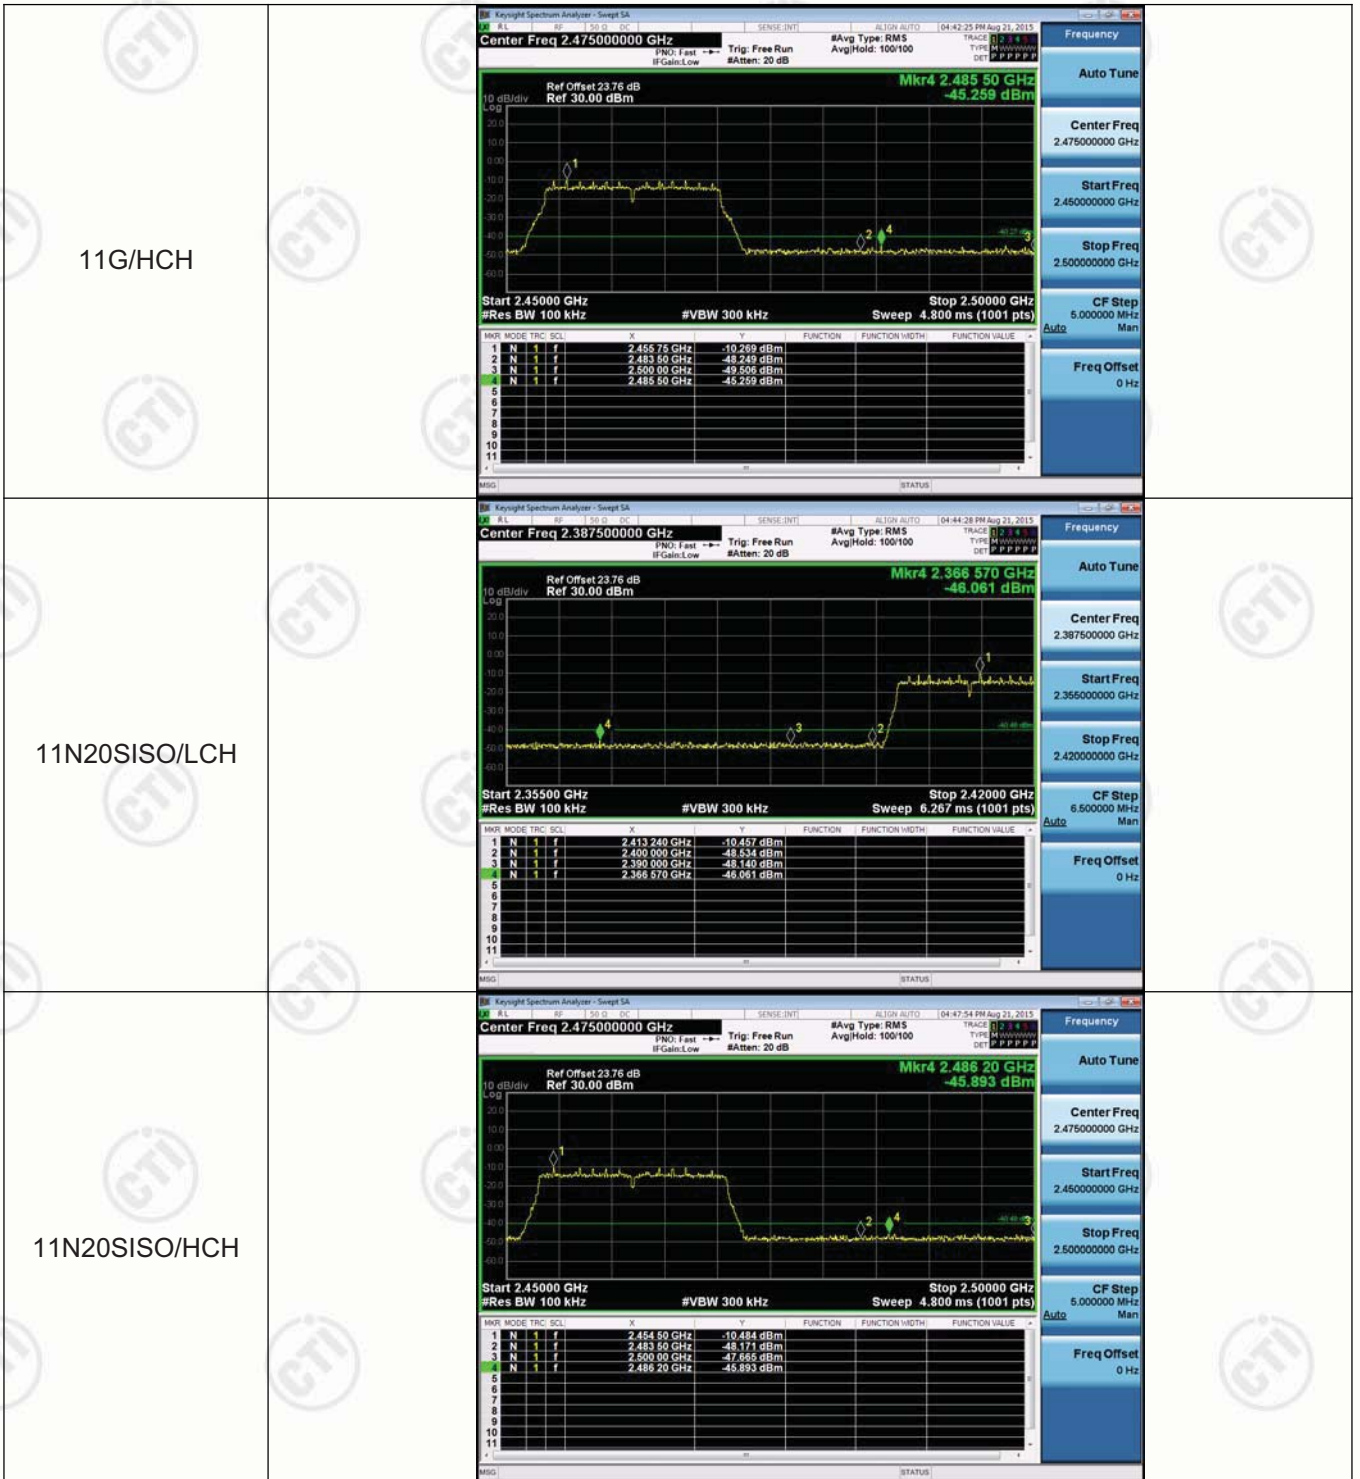


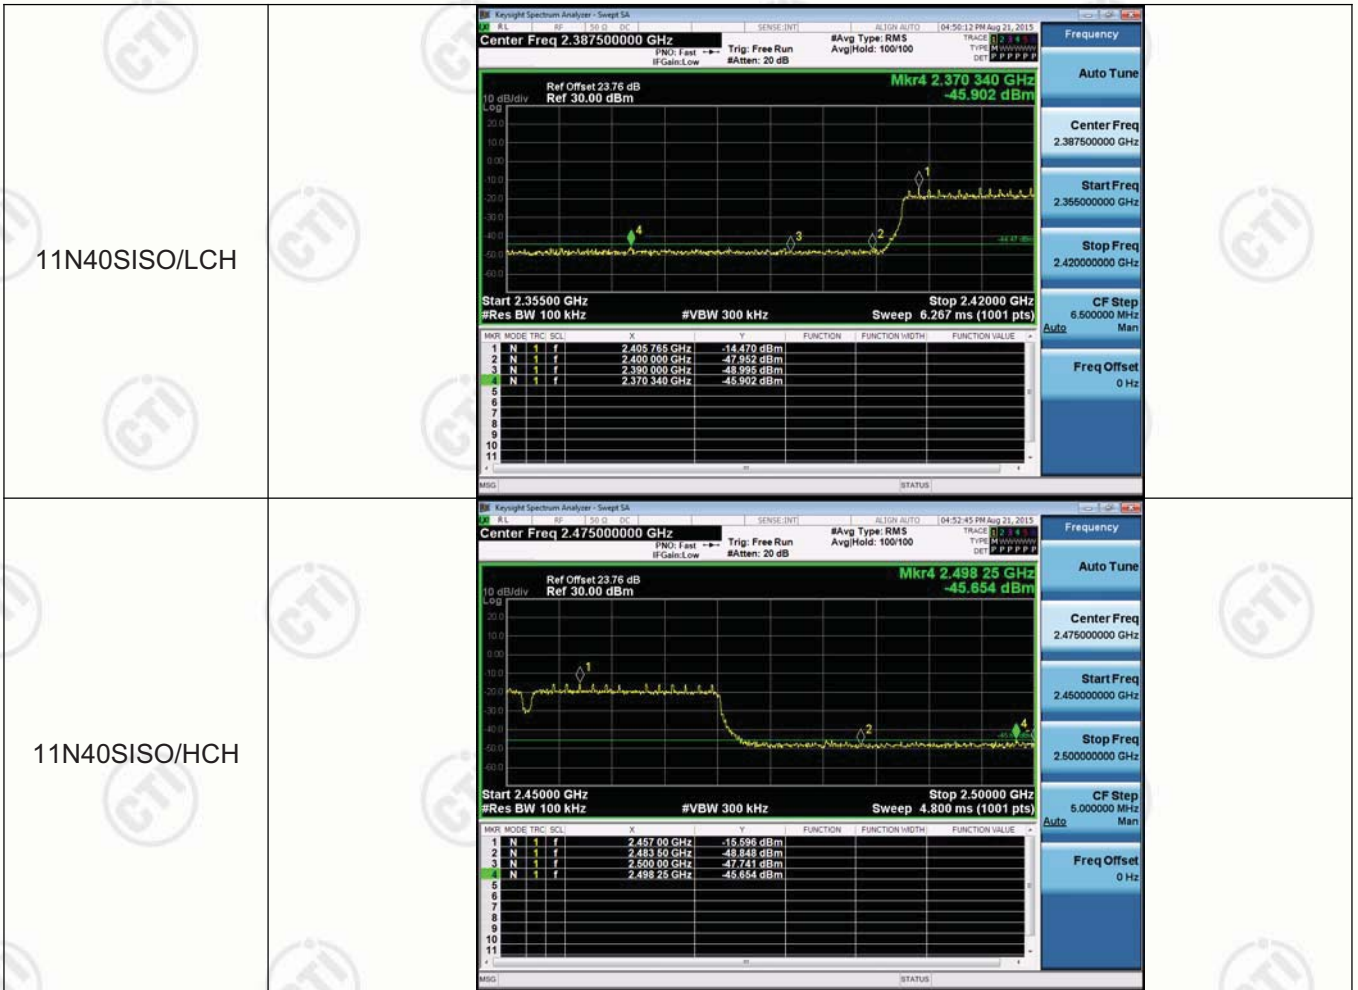


Appendix D): RF Conducted Spurious Emissions



Test Graph

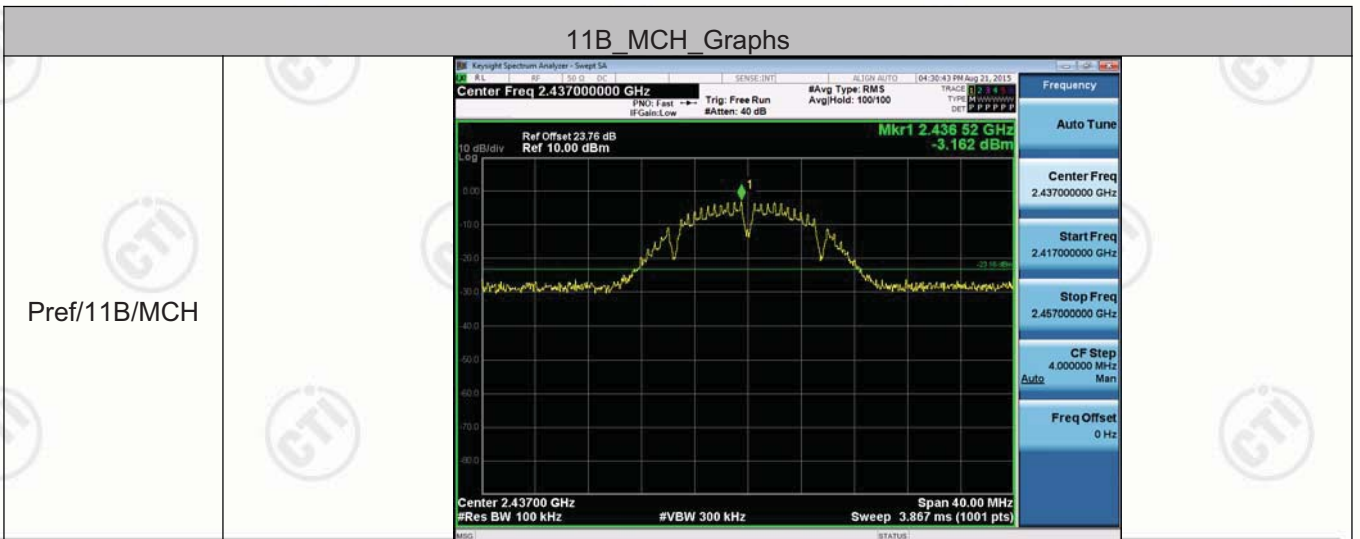
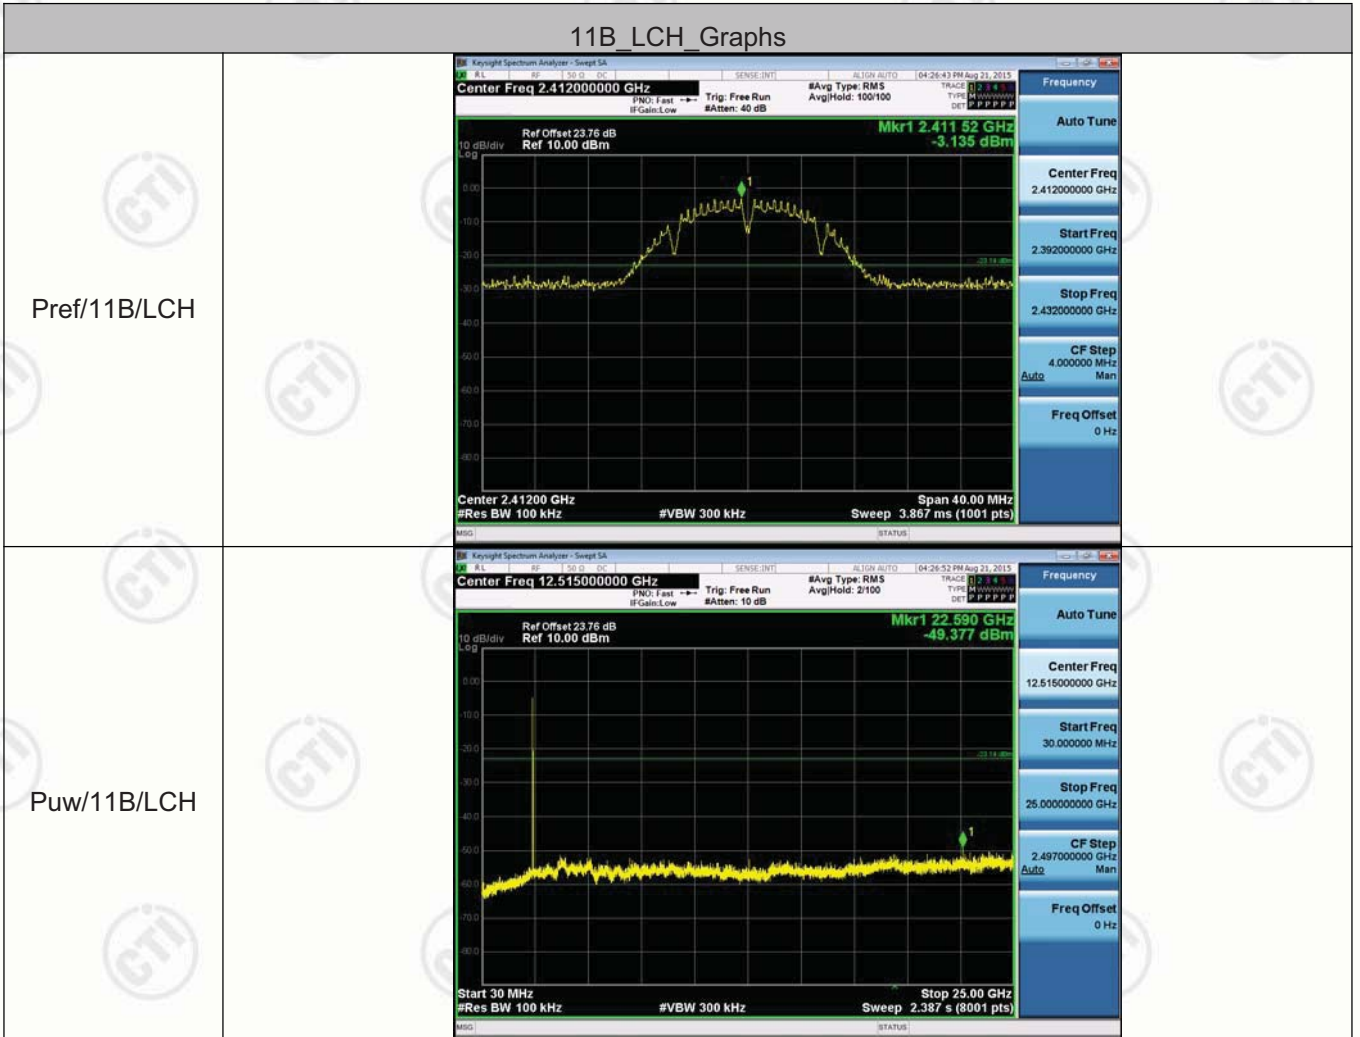



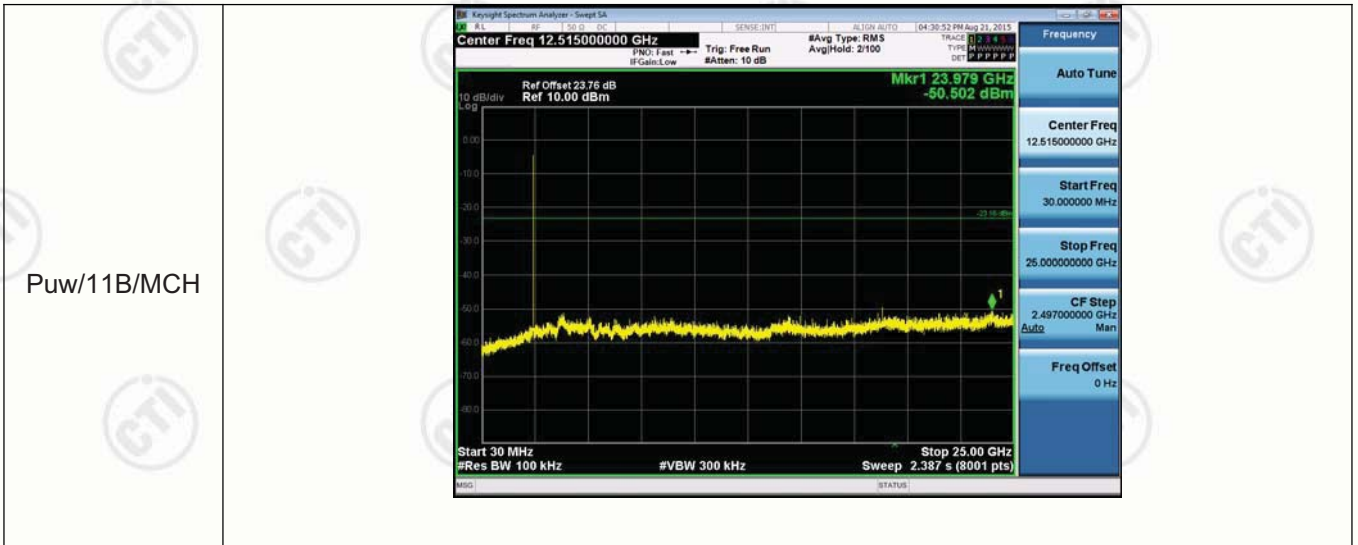



11B_HCH_Graphs


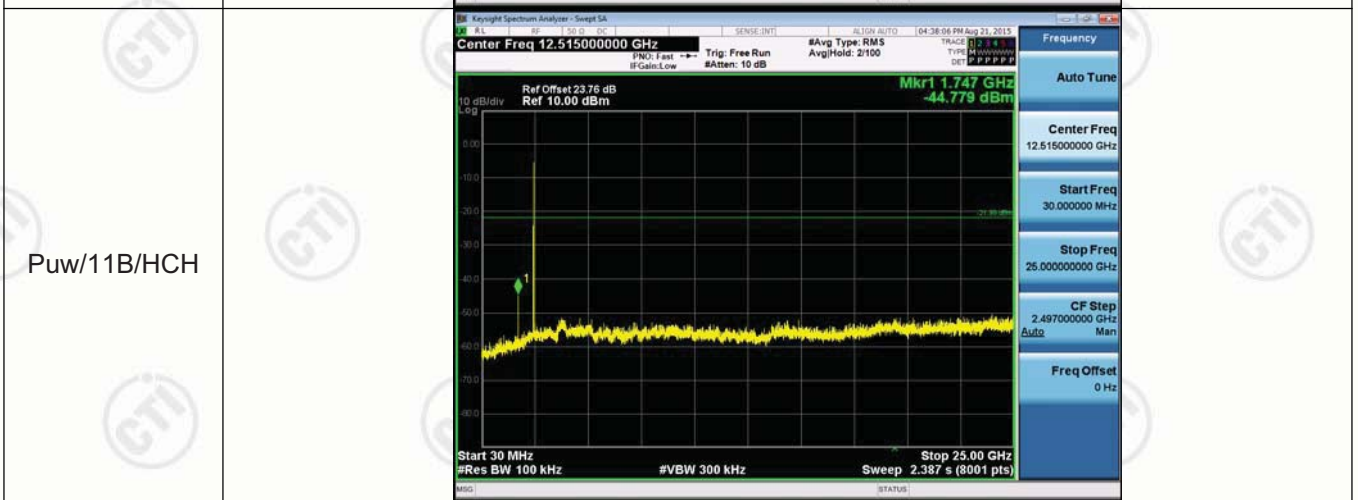



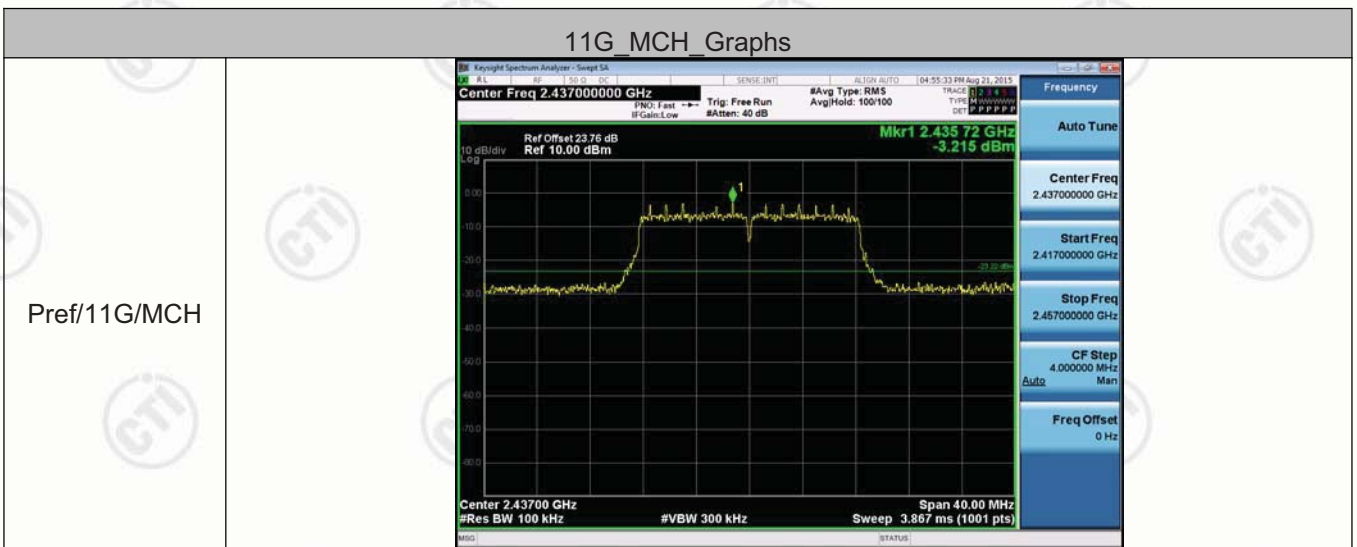
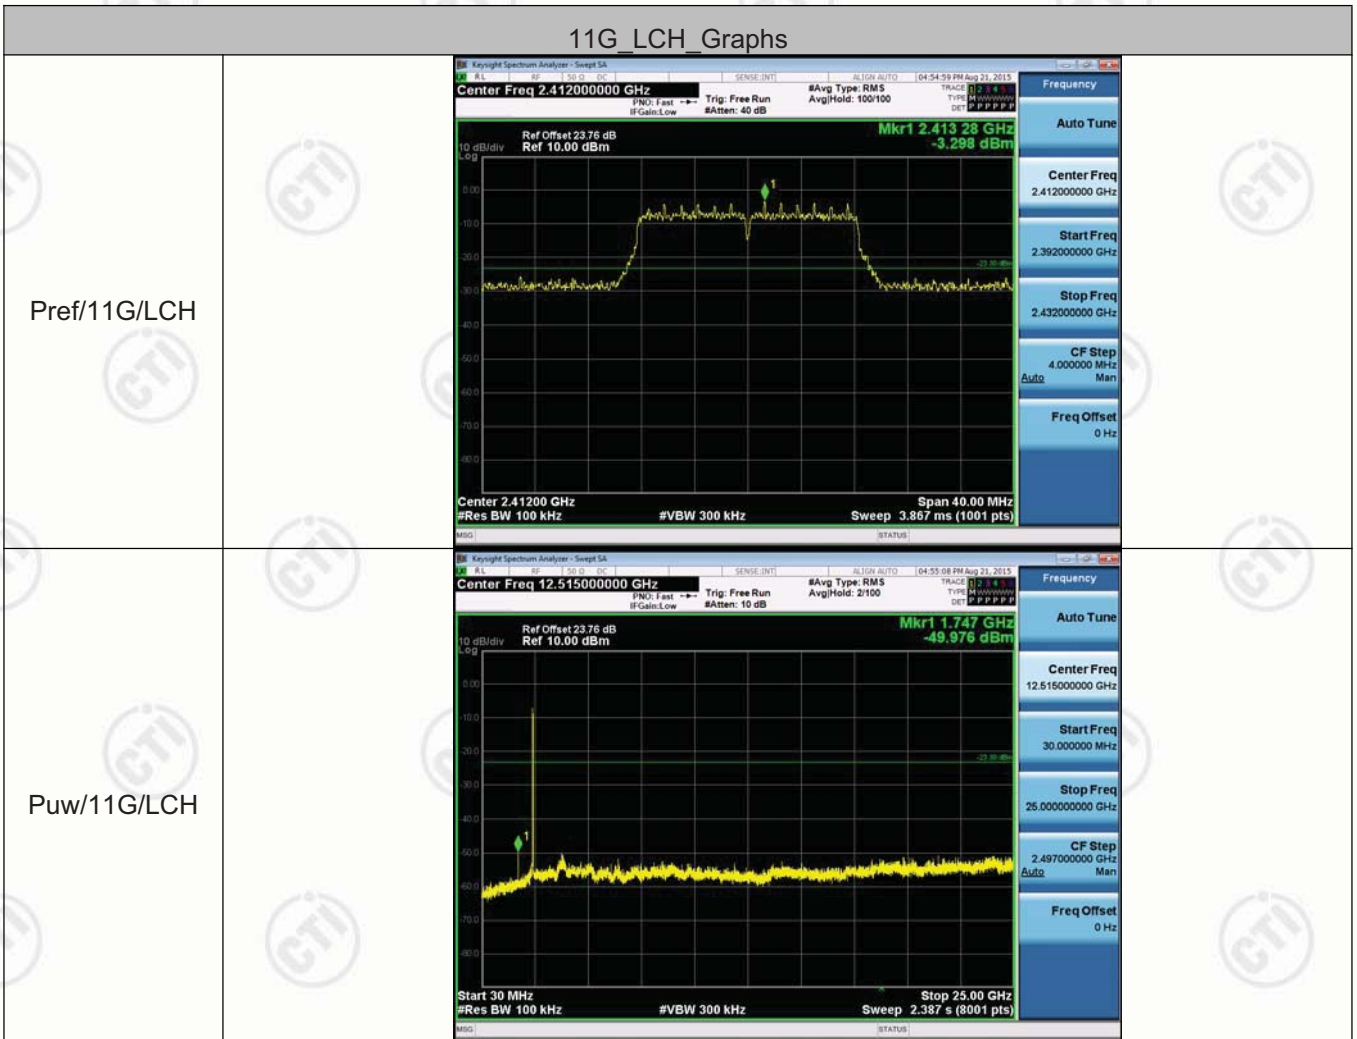


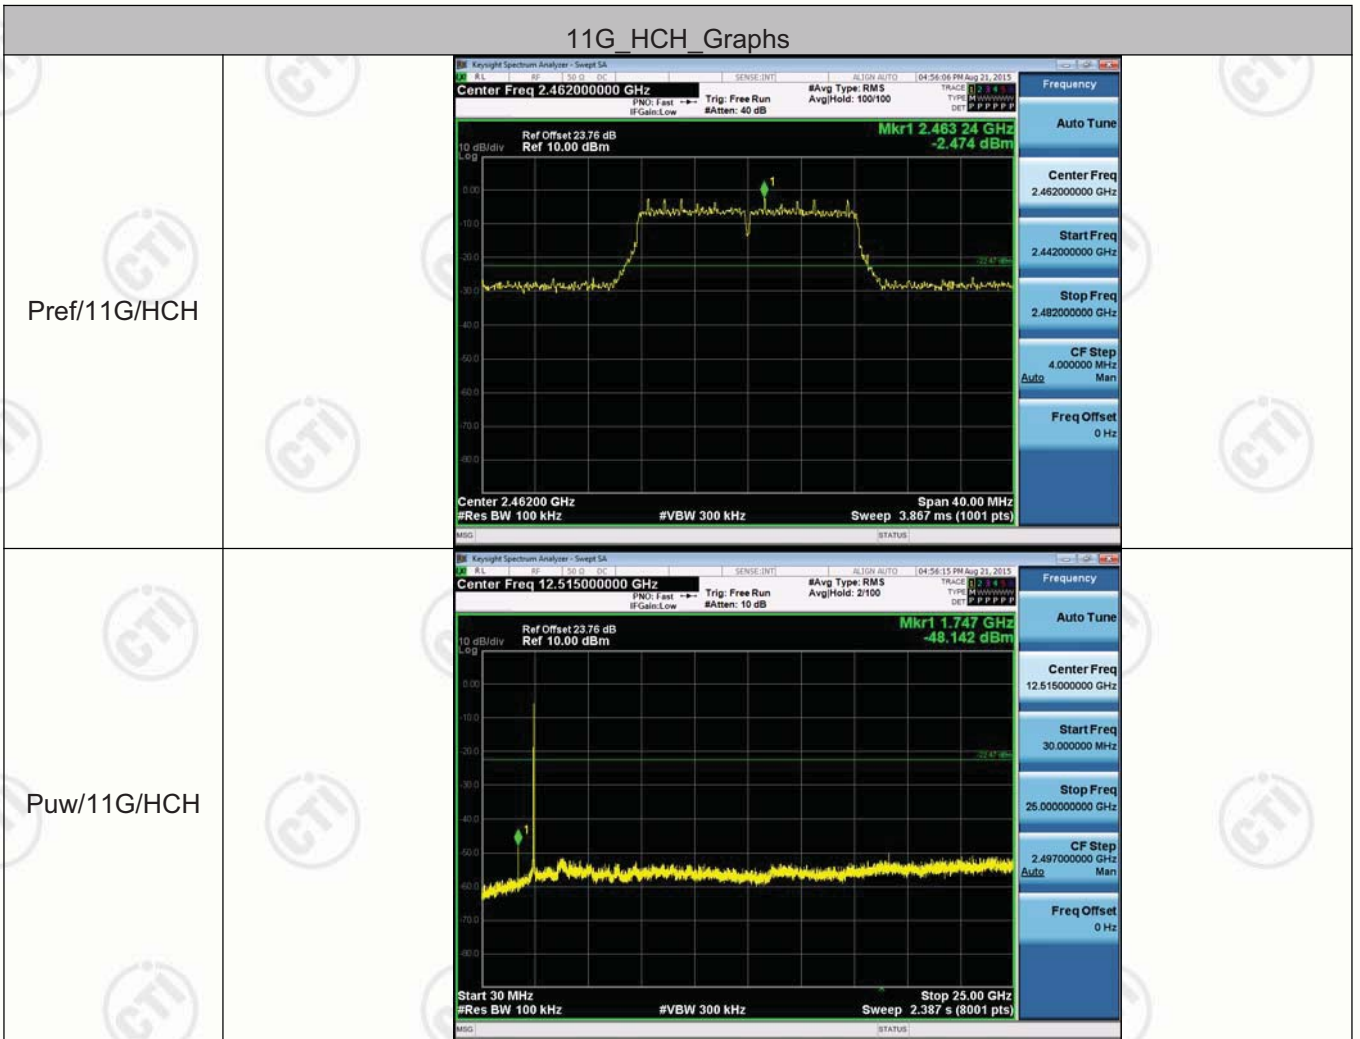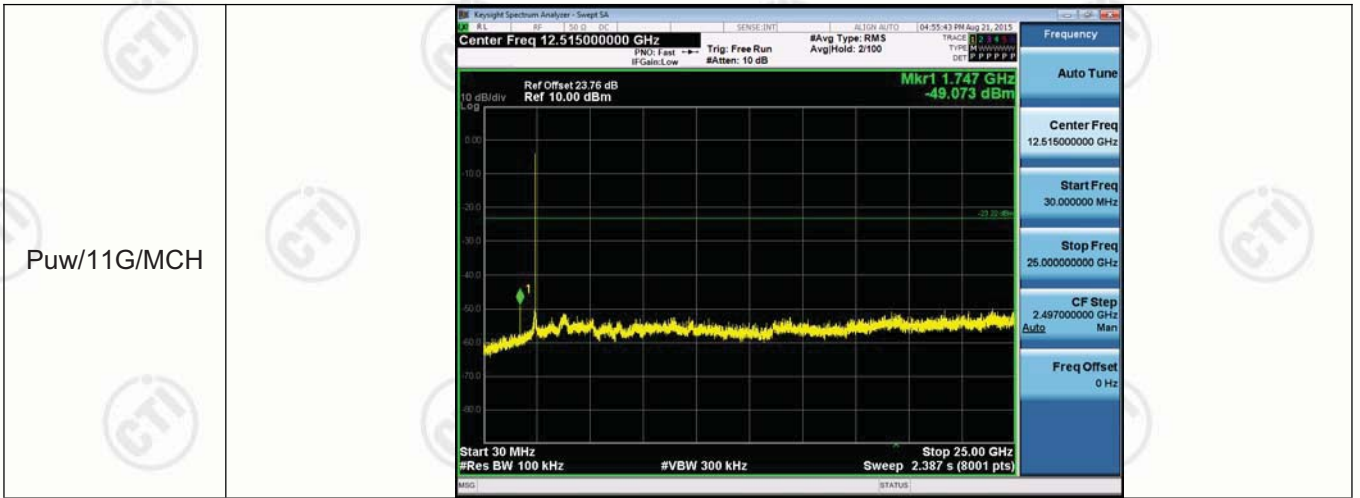

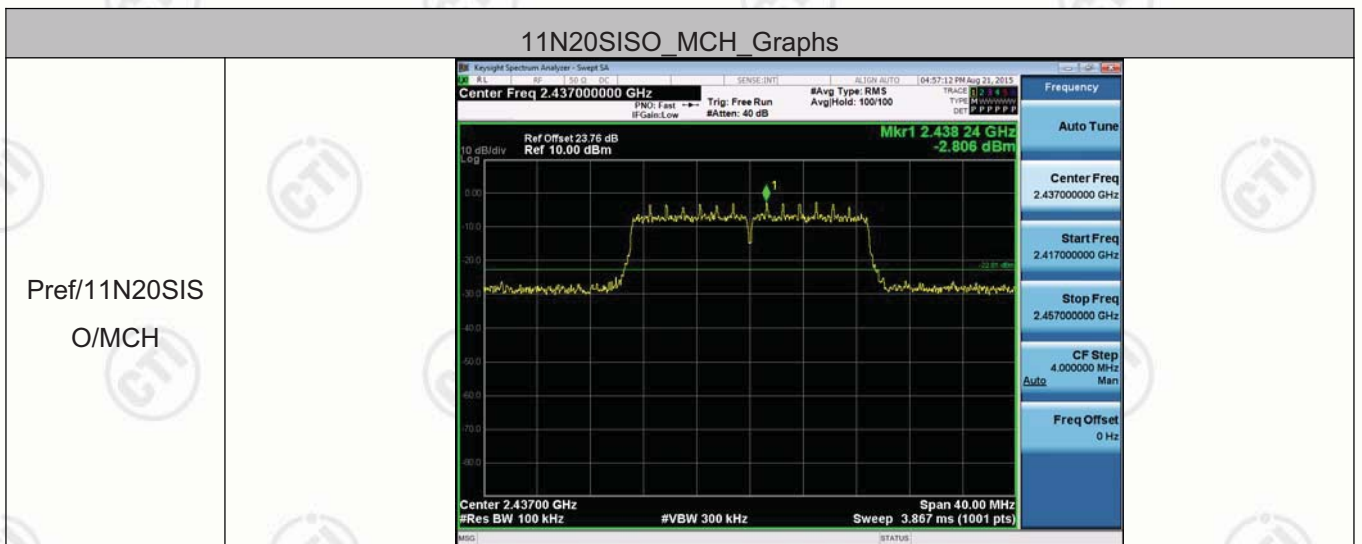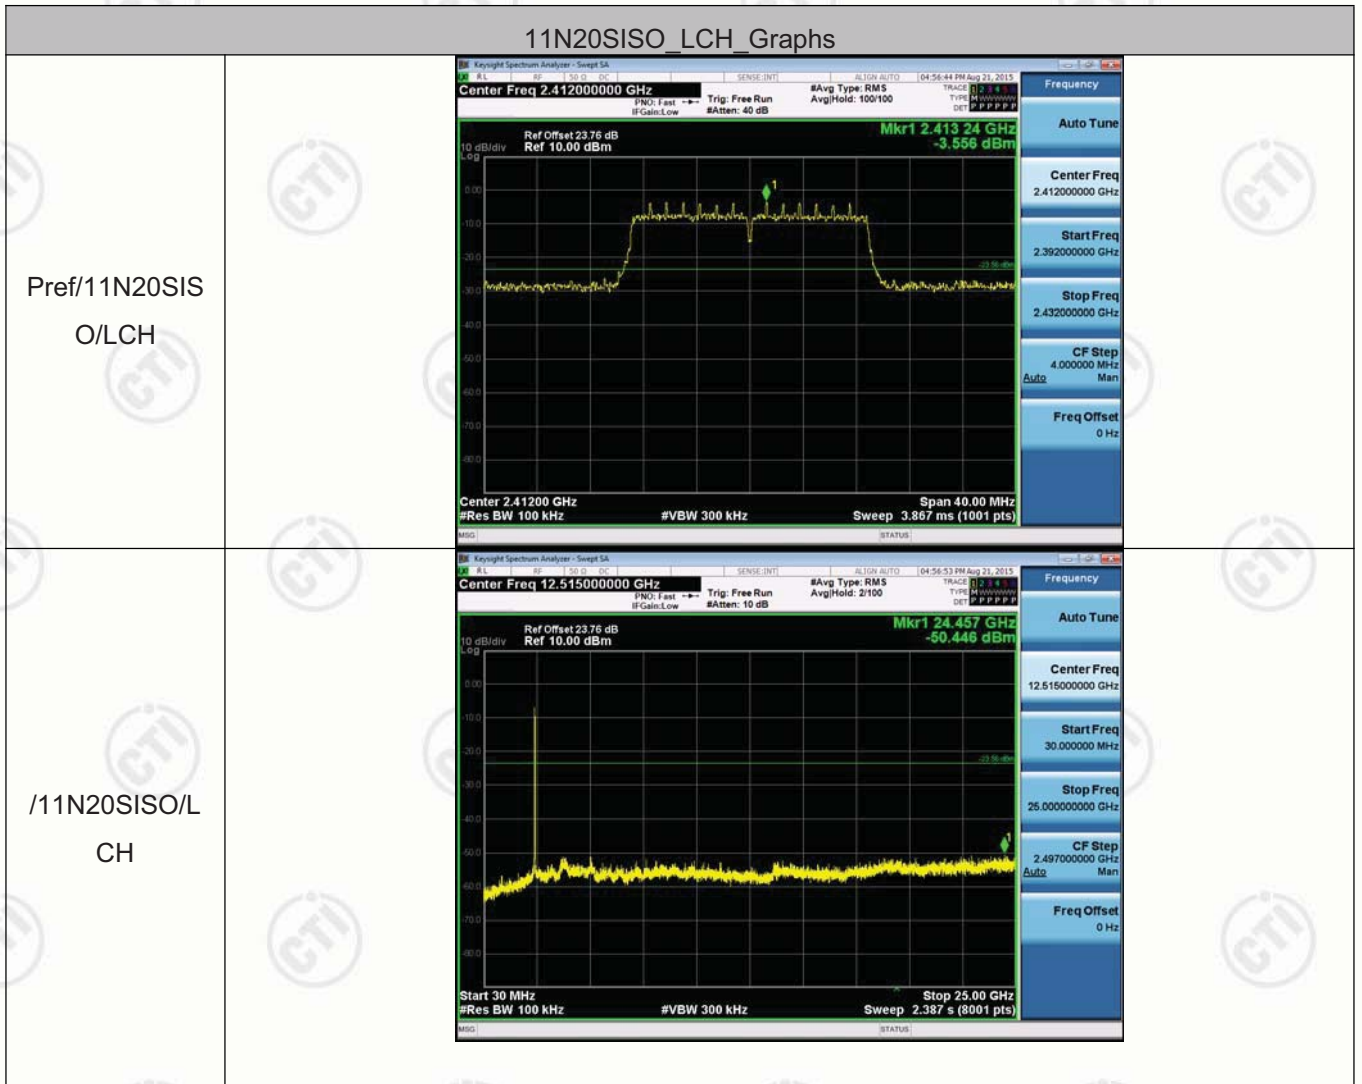

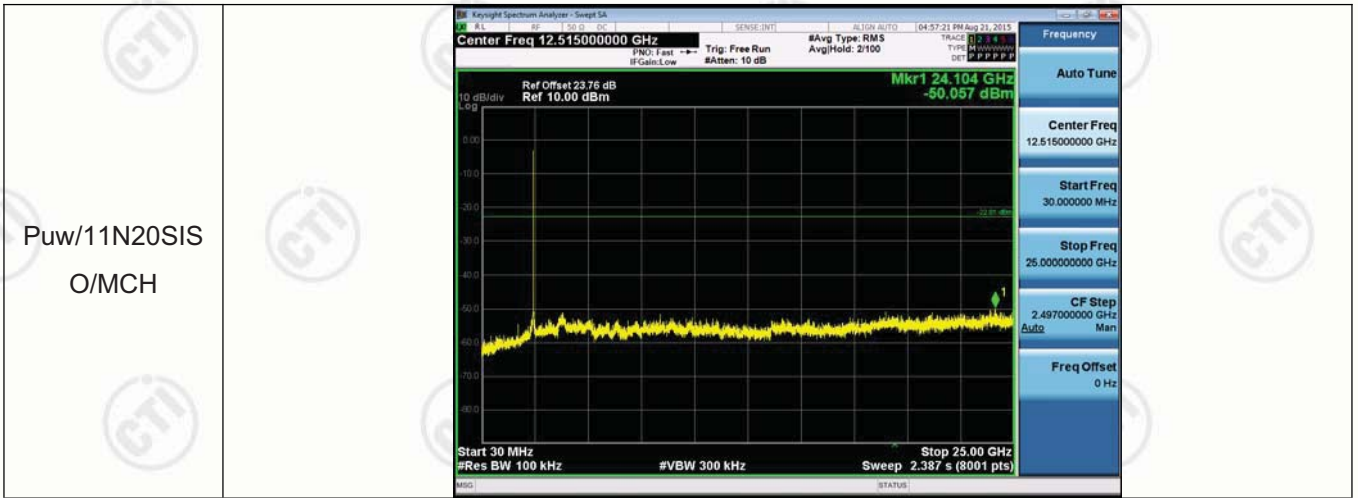

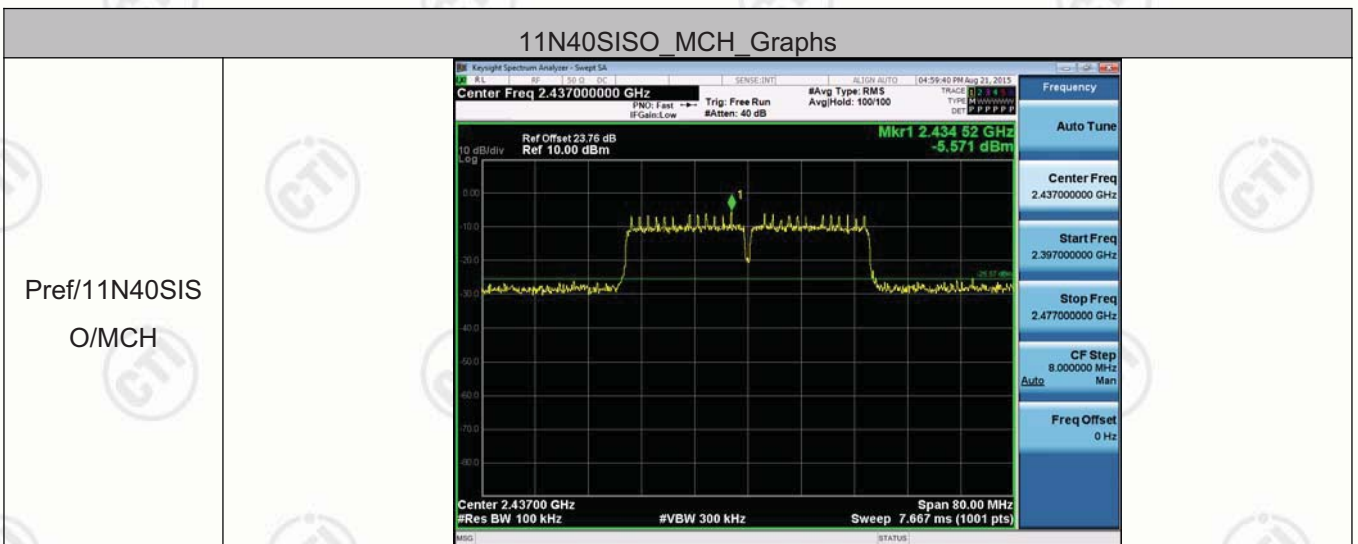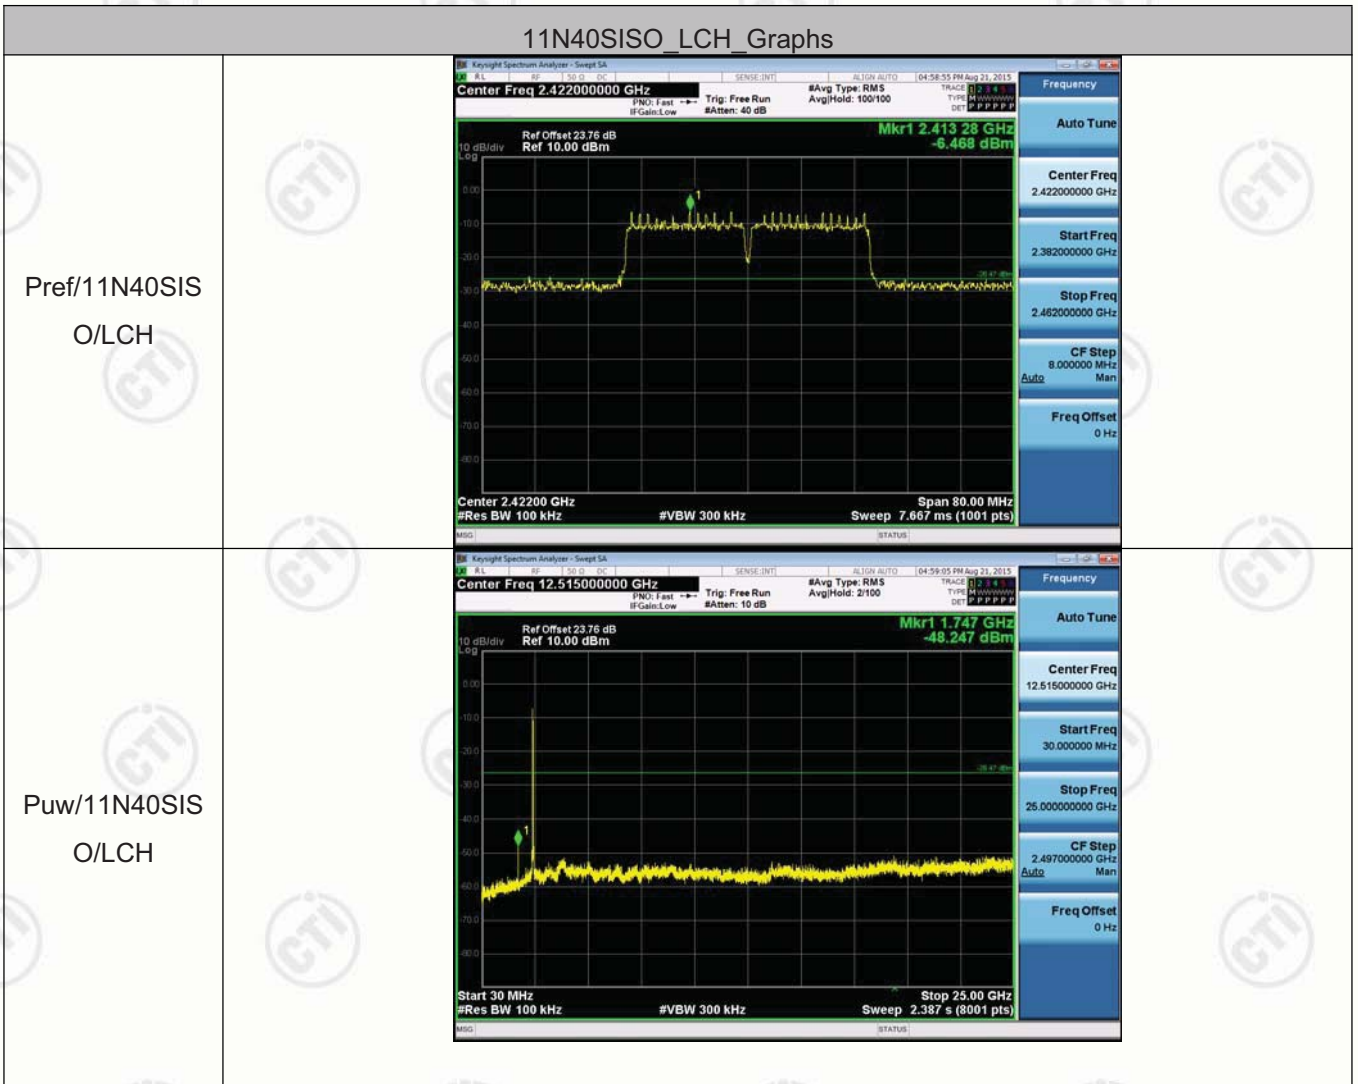

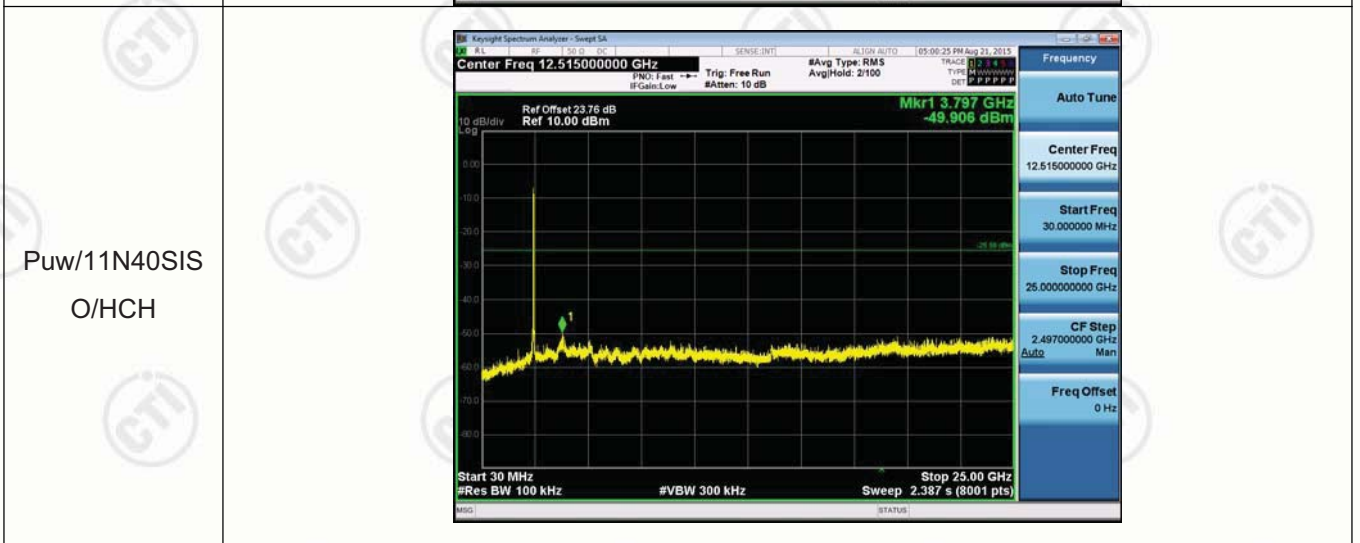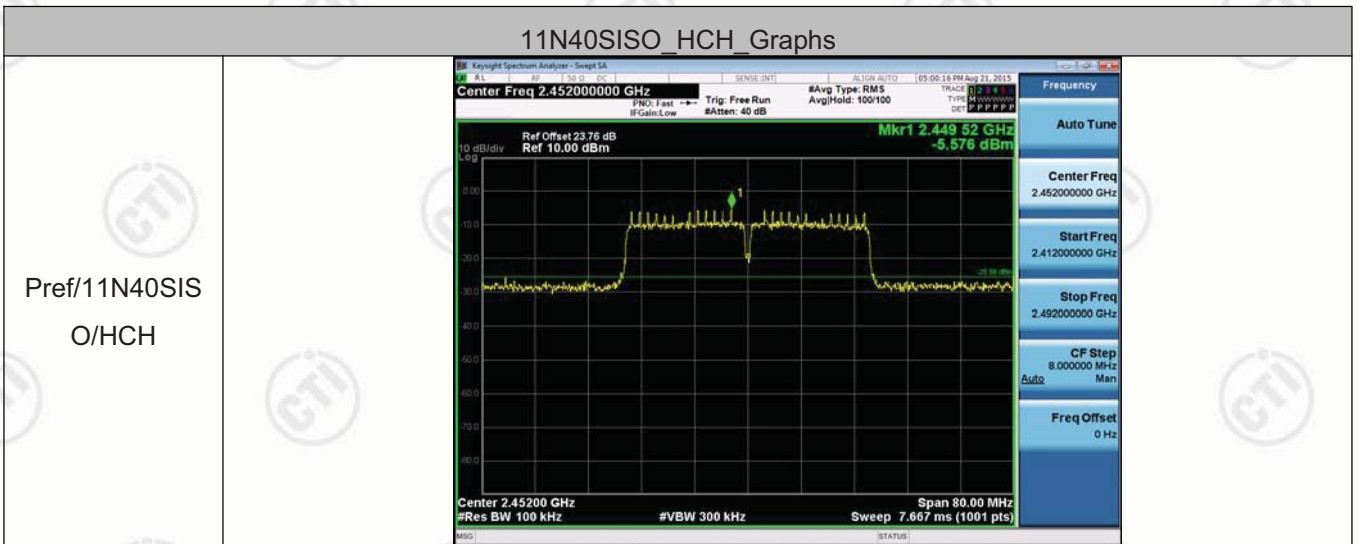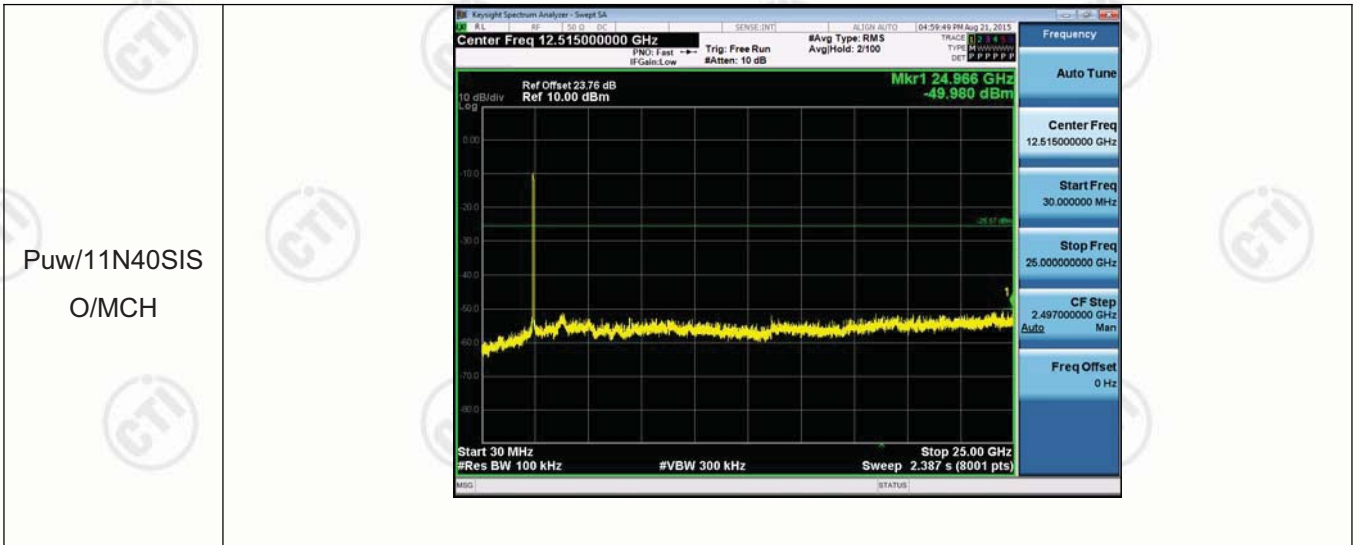



Appendix E): Power Spectral Density

Result Table



| Mode | Channel | Power Spectral Density [dBm] | Verdict |
|-----------|---------|------------------------------|---------|
| 11B | LCH | -16.978 | PASS |
| 11B | MCH | -17.268 | PASS |
| 11B | HCH | -15.181 | PASS |
| 11G | LCH | -24.733 | PASS |
| 11G | MCH | -24.492 | PASS |
| 11G | HCH | -21.215 | PASS |
| 11N20SISO | LCH | -25.207 | PASS |
| 11N20SISO | MCH | -24.812 | PASS |
| 11N20SISO | HCH | -24.083 | PASS |
| 11N40SISO | LCH | -27.548 | PASS |
| 11N40SISO | MCH | -28.577 | PASS |
| 11N40SISO | HCH | -29.321 | PASS |

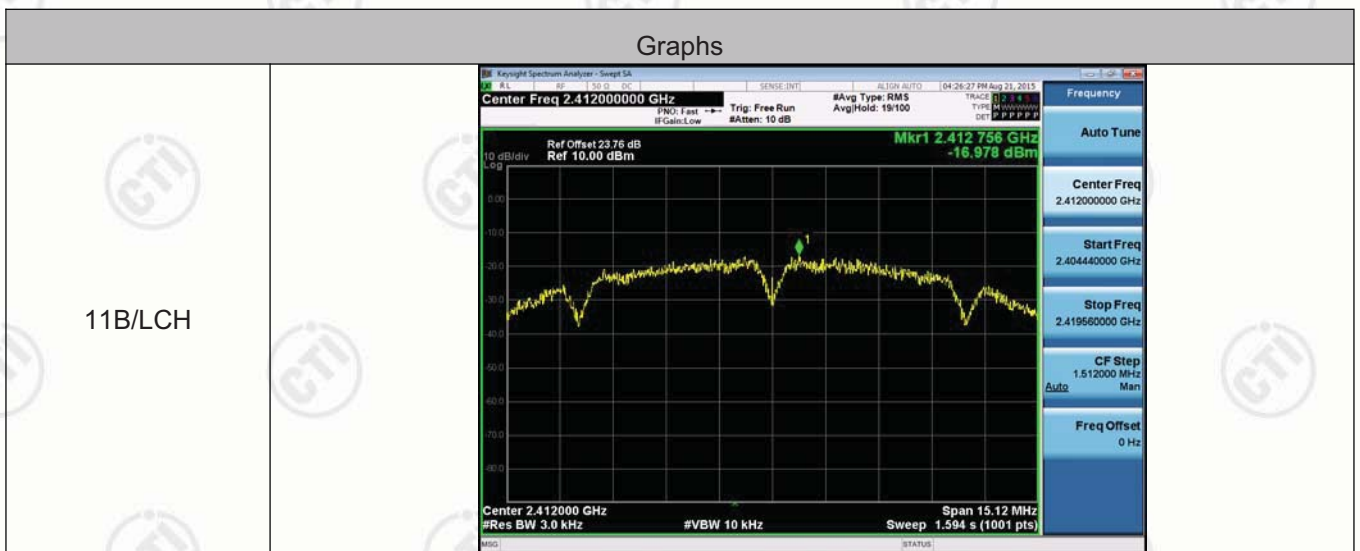
Test Graph

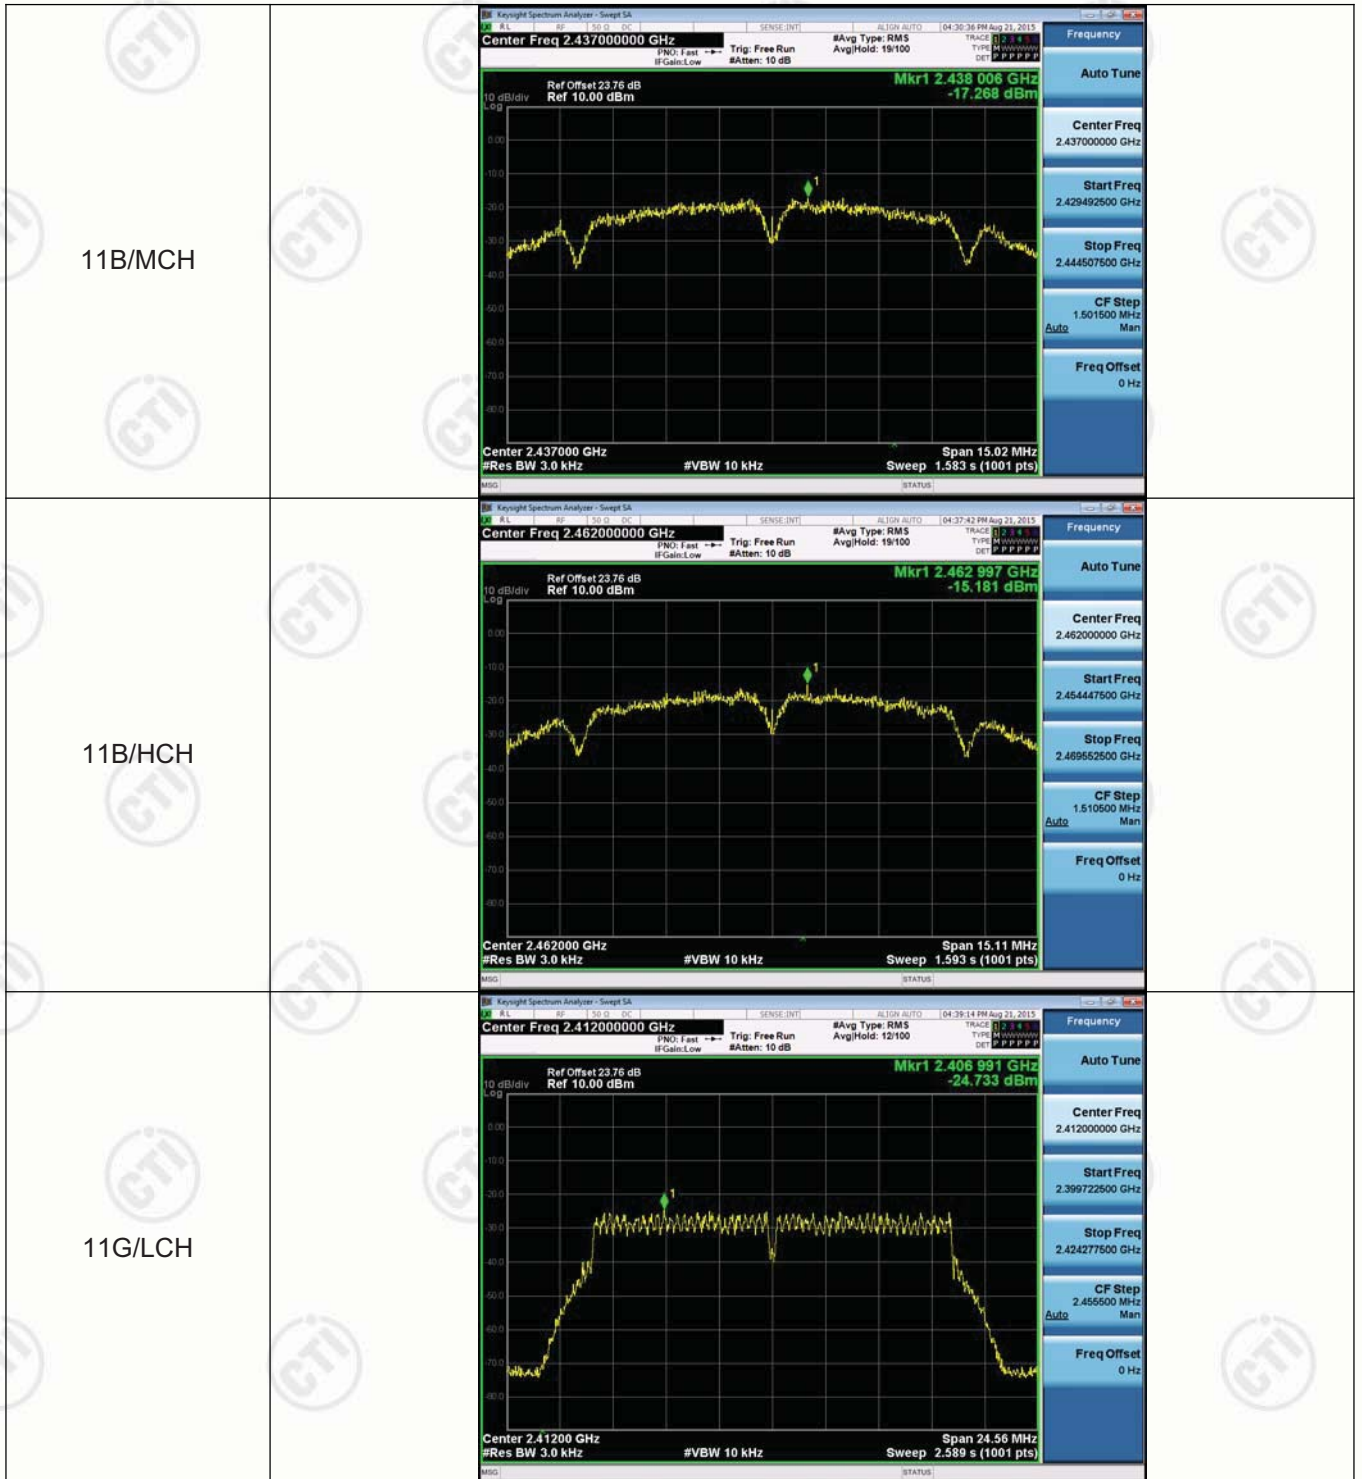



| | |
|----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>11G/MCH</p> |  <p>Center Freq 2.43700000 GHz</p> <p>Mkr1 2.436 067 GHz -24.492 dBm</p> <p>Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 24.56 MHz Sweep 2.589 s (1001 pts)</p> |
| <p>11G/HCH</p> |  <p>Center Freq 2.46200000 GHz</p> <p>Mkr1 2.468 237 GHz -21.215 dBm</p> <p>Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 24.56 MHz Sweep 2.589 s (1001 pts)</p> |
| <p>11N20SISO/LCH</p> |  <p>Center Freq 2.41200000 GHz</p> <p>Mkr1 2.403 240 GHz -25.207 dBm</p> <p>Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 26.39 MHz Sweep 2.782 s (1001 pts)</p> |

| | |
|----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>11N20SISO/MCH</p> |  <p>Center Freq 2.43700000 GHz</p> <p>Mkr1 2.441752 GHz -24.812 dBm</p> <p>Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Sweep 2.784 s (1001 pts)</p> |
| <p>11N20SISO/HCH</p> |  <p>Center Freq 2.46200000 GHz</p> <p>Mkr1 2.469493 GHz -24.083 dBm</p> <p>Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Sweep 2.782 s (1001 pts)</p> |
| <p>11N40SISO/LCH</p> |  <p>Center Freq 2.42200000 GHz</p> <p>Mkr1 2.43287 GHz -27.548 dBm</p> <p>Center 2.42200 GHz #Res BW 3.0 kHz #VBW 10 kHz Sweep 5.700 s (1001 pts)</p> |

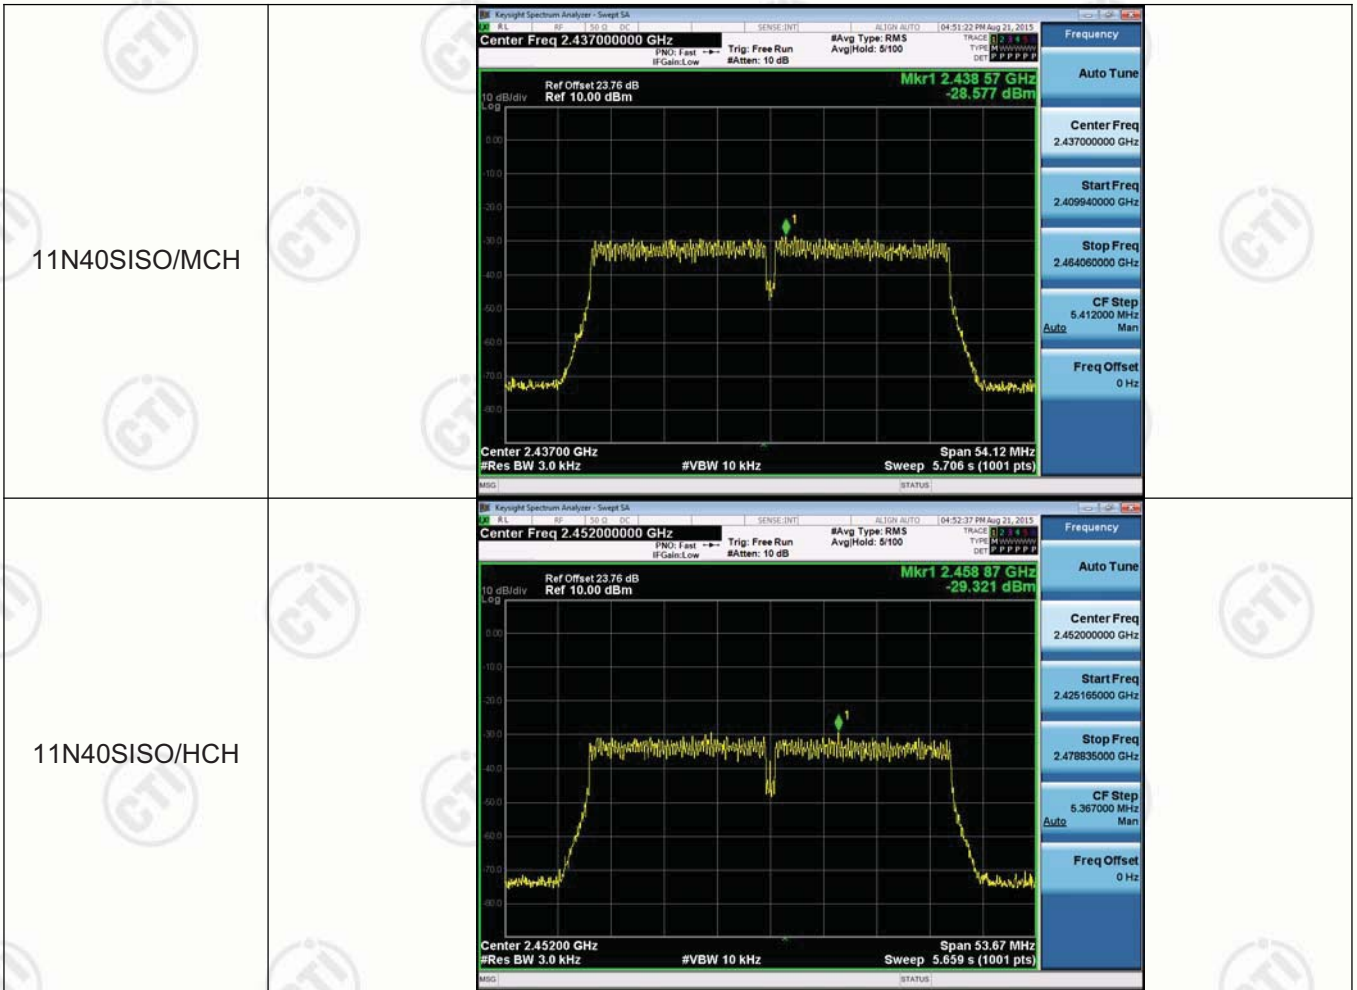

Appendix F) Antenna Requirement

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

| | |
|---------------------|--|
| EUT Antenna: | |
|---------------------|--|

| | |
|---------------------------------------------------------------------------------------------------------------------------|--|
| The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 0dBi. | |
|---------------------------------------------------------------------------------------------------------------------------|--|

Appendix G) AC Power Line Conducted Emission

| <p>Test Procedure:</p> | <p>Test frequency range :150KHz-30MHz</p> <ol style="list-style-type: none"> 1) The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement. | | | | | | | | | | | | | | | | |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|--------------|--|------------|---------|----------|-----------|-----------|-------|----|----|------|----|----|--|--|
| <p>Limit:</p> | <table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table> | Frequency range (MHz) | Limit (dBuV) | | Quasi-peak | Average | 0.15-0.5 | 66 to 56* | 56 to 46* | 0.5-5 | 56 | 46 | 5-30 | 60 | 50 | | |
| Frequency range (MHz) | Limit (dBuV) | | | | | | | | | | | | | | | | |
| | Quasi-peak | Average | | | | | | | | | | | | | | | |
| 0.15-0.5 | 66 to 56* | 56 to 46* | | | | | | | | | | | | | | | |
| 0.5-5 | 56 | 46 | | | | | | | | | | | | | | | |
| 5-30 | 60 | 50 | | | | | | | | | | | | | | | |
| <p>* The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.</p> <p>NOTE : The lower limit is applicable at the transition frequency</p> | | | | | | | | | | | | | | | | | |


Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.


Live line:

80.0 dBuV

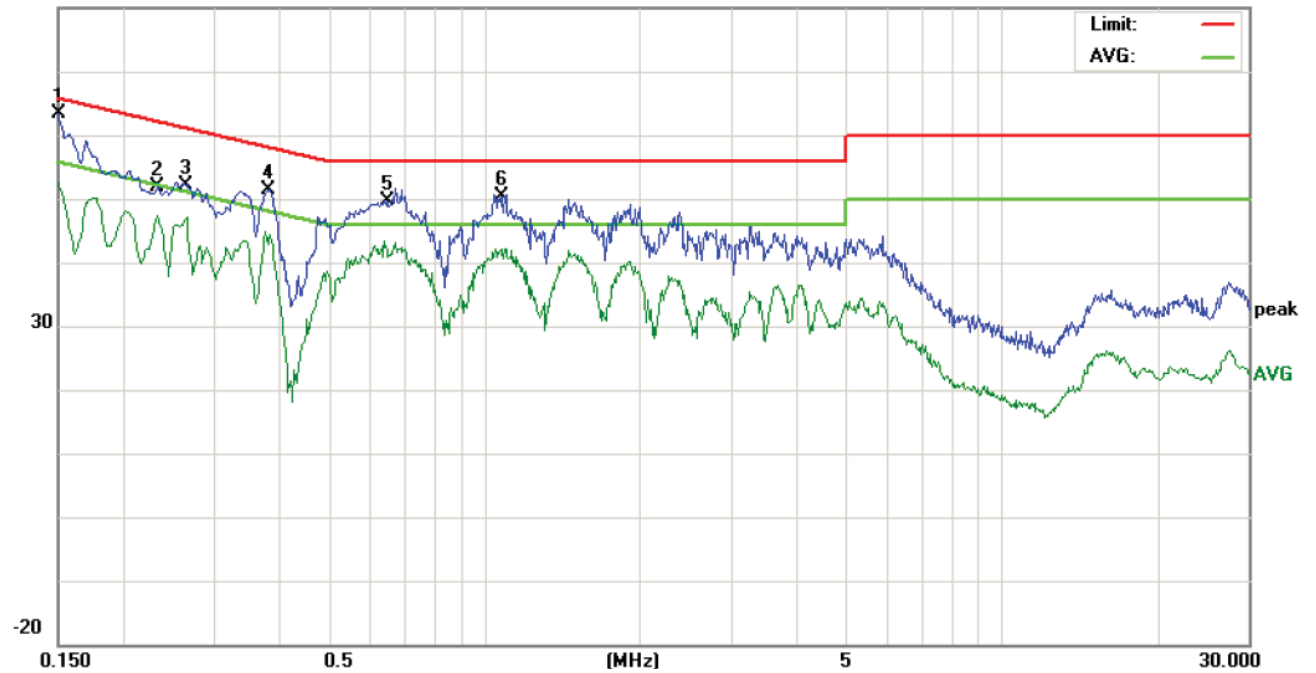

| No. | Freq. MHz | Reading_Level (dBuV) | | | Correct Factor dB | Measurement (dBuV) | | | Limit (dBuV) | | Margin (dB) | | P/F | Comment |
|-----|--------------|-------------------------|-------|-------|-------------------------|-----------------------|-------|-------|-----------------|-------|----------------|-------|-----|---------|
| | | Peak | QP | AVG | | peak | QP | AVG | QP | AVG | QP | AVG | | |
| 1 | 0.1500 | 53.41 | 51.28 | 42.57 | 9.90 | 63.31 | 61.18 | 52.47 | 65.99 | 55.99 | -4.81 | -3.52 | P | |
| 2 | 0.2340 | 42.01 | | 37.41 | 9.90 | 51.91 | | 47.31 | 62.30 | 52.30 | -10.39 | -4.99 | P | |
| 3 | 0.2660 | 42.22 | | 37.30 | 9.90 | 52.12 | | 47.20 | 61.24 | 51.24 | -9.12 | -4.04 | P | |
| 4 | 0.3780 | 40.95 | 39.23 | 32.96 | 9.90 | 50.85 | 49.13 | 42.86 | 58.32 | 48.32 | -9.19 | -5.46 | P | |
| 5 | 0.6419 | 39.61 | 37.75 | 31.96 | 9.90 | 49.51 | 47.65 | 41.86 | 56.00 | 46.00 | -8.35 | -4.14 | P | |
| 6 | 1.0820 | 39.00 | 37.21 | 31.76 | 9.90 | 48.90 | 47.11 | 41.66 | 56.00 | 46.00 | -8.89 | -4.34 | P | |

Neutral line:
80.0 dBuV

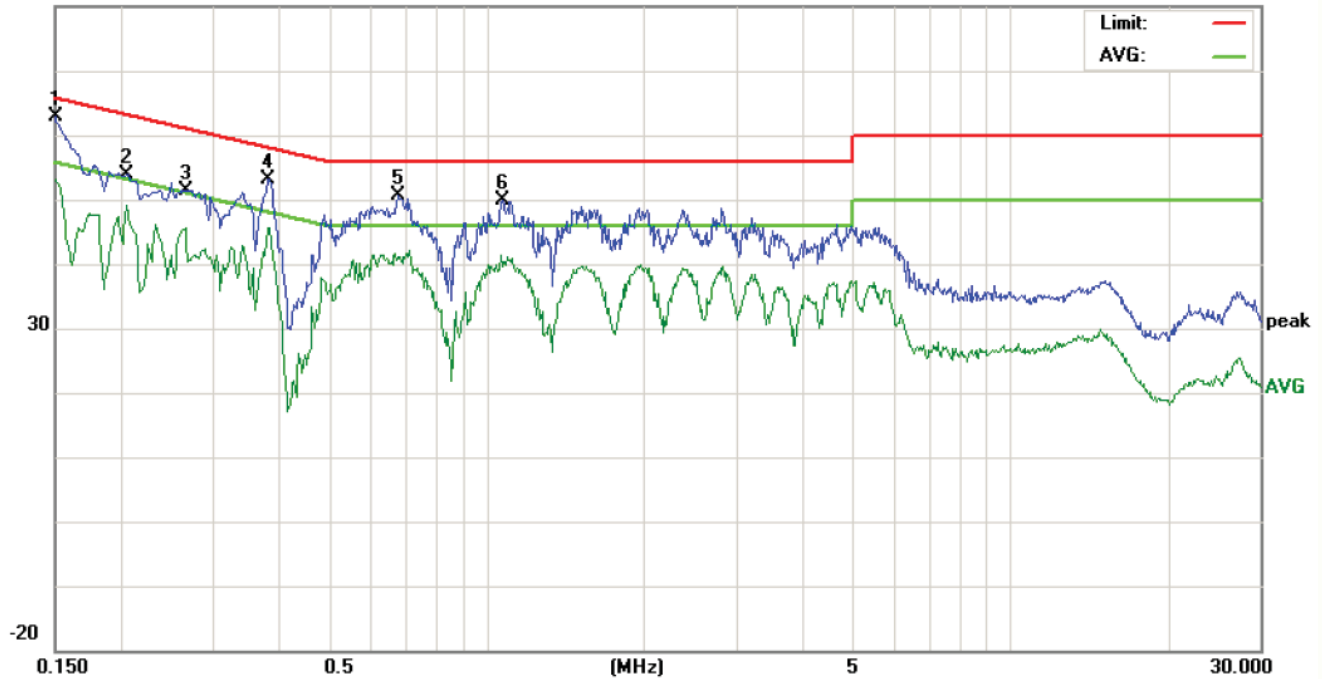

| No. | Freq. MHz | Reading_Level (dBuV) | | | Correct Factor dB | Measurement (dBuV) | | | Limit (dBuV) | | Margin (dB) | | P/F | Comment |
|-----|--------------|-------------------------|-------|-------|-------------------------|-----------------------|-------|-------|-----------------|-------|----------------|-------|-----|---------|
| | | Peak | QP | AVG | | peak | QP | AVG | QP | AVG | QP | AVG | | |
| 1 | 0.1500 | 52.92 | 51.28 | 43.24 | 9.90 | 62.82 | 61.18 | 53.14 | 65.99 | 55.99 | -4.81 | -2.85 | P | |
| 2 | 0.2060 | 43.99 | | 39.18 | 9.90 | 53.89 | | 49.08 | 63.36 | 53.36 | -9.47 | -4.28 | P | |
| 3 | 0.2660 | 41.49 | | 35.71 | 9.90 | 51.39 | | 45.61 | 61.24 | 51.24 | -9.85 | -5.63 | P | |
| 4 | 0.3860 | 43.11 | 40.07 | 34.00 | 9.90 | 53.01 | 49.97 | 43.90 | 58.15 | 48.15 | -8.18 | -4.25 | P | |
| 5 | 0.6700 | 37.93 | | 31.62 | 9.90 | 47.83 | | 41.52 | 56.00 | 46.00 | -8.17 | -4.48 | P | |
| 6 | 1.0700 | 39.38 | | 31.39 | 9.90 | 49.28 | | 41.29 | 56.00 | 46.00 | -6.72 | -4.71 | P | |

Notes:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.

Appendix H) Restricted bands around fundamental frequency /Radiated Spurious Emissions

| | | | | | |
|------------------------|-------------------|------------|---------|--------|------------|
| Receiver Setup: | Frequency | Detector | RBW | VBW | Remark |
| | 0.009MHz-0.090MHz | Peak | 10kHz | 30kHz | Peak |
| | 0.009MHz-0.090MHz | Average | 10kHz | 30kHz | Average |
| | 0.090MHz-0.110MHz | Quasi-peak | 10kHz | 30kHz | Quasi-peak |
| | 0.110MHz-0.490MHz | Peak | 10kHz | 30kHz | Peak |
| | 0.110MHz-0.490MHz | Average | 10kHz | 30kHz | Average |
| | 0.490MHz -30MHz | Quasi-peak | 10kHz | 30kHz | Quasi-peak |
| | 30MHz-1GHz | Quasi-peak | 120 kHz | 300kHz | Quasi-peak |
| | Above 1GHz | Peak | 1MHz | 3MHz | Peak |
| | | Peak | 1MHz | 10Hz | Average |
| Test Procedure: | | | | | |

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter)..
- h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case.
- j. Repeat above procedures until all frequencies measured was complete.

| Limit: | Frequency | Field strength (microvolt/meter) | Limit (dB μ V/m) | Remark | Measurement distance (m) |
|--------|-------------------|----------------------------------|----------------------|------------|--------------------------|
| | 0.009MHz-0.490MHz | 2400/F(kHz) | - | - | 300 |
| | 0.490MHz-1.705MHz | 24000/F(kHz) | - | - | 30 |
| | 1.705MHz-30MHz | 30 | - | - | 30 |
| | 30MHz-88MHz | 100 | 40.0 | Quasi-peak | 3 |
| | 88MHz-216MHz | 150 | 43.5 | Quasi-peak | 3 |
| | 216MHz-960MHz | 200 | 46.0 | Quasi-peak | 3 |
| | 960MHz-1GHz | 500 | 54.0 | Quasi-peak | 3 |
| | Above 1GHz | 500 | 54.0 | Average | 3 |

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

Radiated Spurious Emissions test Data:

All the modes of operation (X, Y, Z) were investigated and the worst-case emissions are reported.


A. Below 30MHz:

No emissions were found higher than the background below 30MHz and background is lower than the limit, so it deems to compliance with the limit without recorded.

B. 30MHz ~ 1GHz:


The test data of low channel, middle channel and high channel are almost same in frequency bands 30MHz to 1GHz, and the data of IEEE 802.11b are chosen as representative in below:

H:

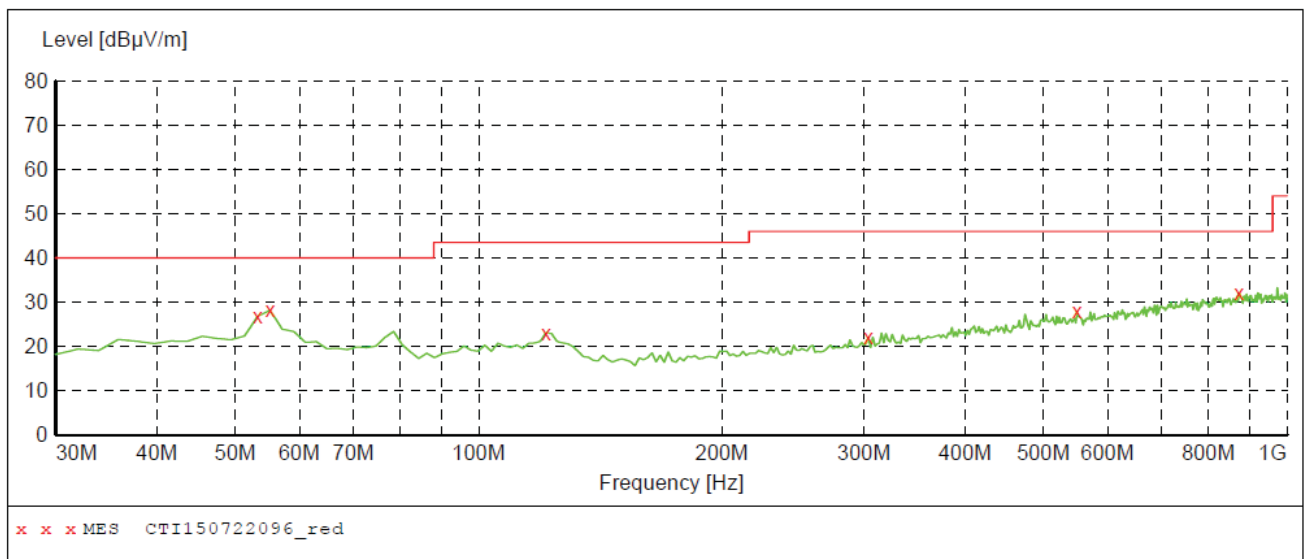

| Frequency MHz | Level dBµV/m | Transd dB | Limit dBµV/m | Margin dB | Det. | Height cm | Azimuth deg | Polarization |
|------------------|-----------------|--------------|-----------------|--------------|------|--------------|----------------|--------------|
| 53.280000 | 26.80 | 16.1 | 40.0 | 13.2 | --- | 100.0 | 141.00 | HORIZONTAL |
| 55.220000 | 28.20 | 15.8 | 40.0 | 11.8 | --- | 100.0 | 300.00 | HORIZONTAL |
| 121.180000 | 23.10 | 13.1 | 43.5 | 20.4 | --- | 100.0 | 127.00 | HORIZONTAL |
| 303.540000 | 22.10 | 16.0 | 46.0 | 23.9 | --- | 100.0 | 342.00 | HORIZONTAL |
| 549.920000 | 28.00 | 21.8 | 46.0 | 18.0 | --- | 100.0 | 48.00 | HORIZONTAL |
| 871.960000 | 32.20 | 26.4 | 46.0 | 13.8 | --- | 100.0 | 330.00 | HORIZONTAL |

V:

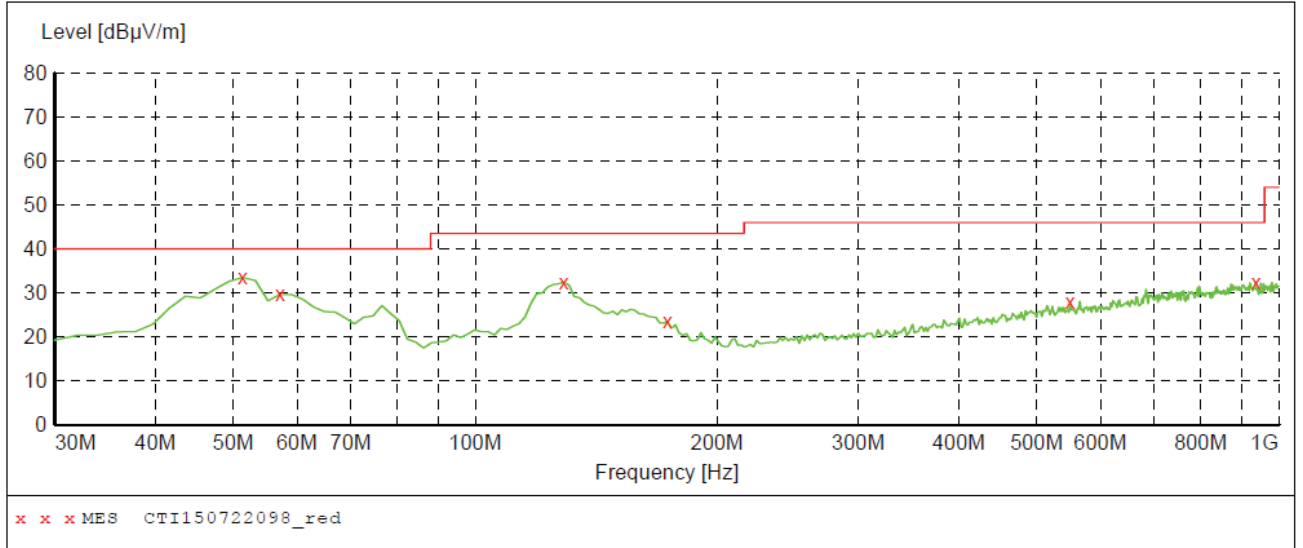

| Frequency MHz | Level dBµV/m | Transd dB | Limit dBµV/m | Margin dB | Det. | Height cm | Azimuth deg | Polarization |
|---------------|--------------|-----------|--------------|-----------|------|-----------|-------------|--------------|
| 51.340000 | 33.50 | 16.3 | 40.0 | 6.5 | --- | 100.0 | 242.00 | VERTICAL |
| 57.160000 | 29.60 | 15.6 | 40.0 | 10.4 | --- | 100.0 | 203.00 | VERTICAL |
| 128.940000 | 32.40 | 12.6 | 43.5 | 11.1 | --- | 100.0 | 43.00 | VERTICAL |
| 173.560000 | 23.50 | 12.6 | 43.5 | 20.0 | --- | 100.0 | 347.00 | VERTICAL |
| 549.920000 | 27.90 | 21.8 | 46.0 | 18.1 | --- | 100.0 | 227.00 | VERTICAL |
| 935.980000 | 32.40 | 26.7 | 46.0 | 13.6 | --- | 100.0 | 203.00 | VERTICAL |

C. Above 1GHz:

IEEE 802.11b, 11Mbps:

| Frequency (MHz) | Measurement (dBuV/m) | Limit (dBuV/m) | Detector Type | Antenna (H/V) | Result (P/F) |
|--------------------------|----------------------|----------------|---------------|---------------|--------------|
| Low channel (2412MHz) | | | | | |
| 2390.0 | 36.69 | 74 | PK | H | P |
| 2400.0 | 51.09 | 74 | PK | H | P |
| 4824.0 | 45.74 | 74 | PK | H | P |
| 2390.0 | 36.08 | 74 | PK | V | P |
| 2400.0 | 50.47 | 74 | PK | V | P |
| 4824.0 | 46.71 | 74 | PK | V | P |
| Middle channel (2437MHz) | | | | | |
| 4874.0 | 45.65 | 74 | PK | H | P |
| 4874.0 | 46.31 | 74 | PK | V | P |
| High channel (2462MHz) | | | | | |
| 2483.5 | 44.27 | 74 | PK | H | P |
| 4924.0 | 45.64 | 74 | PK | H | P |
| 2483.5 | 46.38 | 74 | PK | V | P |
| 4924.0 | 46.24 | 74 | PK | V | P |

IEEE 802.11g, 6Mbps:

| Frequency (MHz) | Measurement (dBuV/m) | Limit (dBuV/m) | Detector Type | Antenna (H/V) | Result (P/F) |
|--------------------------|----------------------|----------------|---------------|---------------|--------------|
| Low channel (2412MHz) | | | | | |
| 2390.0 | 36.14 | 74 | PK | H | P |
| 2400.0 | 50.14 | 74 | PK | H | P |
| 4824.0 | 45.28 | 74 | PK | H | P |
| 2390.0 | 37.01 | 74 | PK | V | P |
| 2400.0 | 50.73 | 74 | PK | V | P |
| 4824.0 | 46.25 | 74 | PK | V | P |
| Middle channel (2437MHz) | | | | | |
| 4874.0 | 46.28 | 74 | PK | H | P |
| 4874.0 | 45.34 | 74 | PK | V | P |
| High channel (2462MHz) | | | | | |
| 2483.5 | 45.34 | 74 | PK | H | P |
| 4924.0 | 46.09 | 74 | PK | H | P |
| 2483.5 | 45.93 | 74 | PK | V | P |
| 4924.0 | 45.94 | 74 | PK | V | P |

IEEE 802.11n HT20, 6.5Mbps:

| Frequency (MHz) | Measurement (dBuV/m) | Limit (dBuV/m) | Detector Type | Antenna (H/V) | Result (P/F) |
|--------------------------|----------------------|----------------|---------------|---------------|--------------|
| Low channel (2412MHz) | | | | | |
| 2390.0 | 36.19 | 74 | PK | H | P |
| 2400.0 | 50.16 | 74 | PK | H | P |
| 4824.0 | 45.23 | 74 | PK | H | P |
| 2390.0 | 36.08 | 74 | PK | V | P |
| 2400.0 | 50.14 | 74 | PK | V | P |
| 4824.0 | 47.38 | 74 | PK | V | P |
| Middle channel (2437MHz) | | | | | |
| 4874.0 | 46.27 | 74 | PK | H | P |
| 4874.0 | 45.98 | 74 | PK | V | P |
| High channel (2462MHz) | | | | | |
| 2483.5 | 45.72 | 74 | PK | H | P |
| 4924.0 | 47.27 | 74 | PK | H | P |
| 2483.5 | 46.12 | 74 | PK | V | P |
| 4924.0 | 46.93 | 74 | PK | V | P |

IEEE 802.11n HT40, 13.5Mbps:

| Frequency (MHz) | Measurement (dBuV/m) | Limit (dBuV/m) | Detector Type | Antenna (H/V) | Result (P/F) |
|--------------------------|----------------------|----------------|---------------|---------------|--------------|
| Low channel (2422MHz) | | | | | |
| 2390.0 | 36.27 | 74 | PK | H | P |
| 2400.0 | 51.06 | 74 | PK | H | P |
| 4844.0 | 46.74 | 74 | PK | H | P |
| 2390.0 | 36.98 | 74 | PK | V | P |
| 2400.0 | 51.03 | 74 | PK | V | P |
| 4844.0 | 48.38 | 74 | PK | V | P |
| Middle channel (2437MHz) | | | | | |
| 4874.0 | 48.28 | 74 | PK | H | P |
| 4874.0 | 47.27 | 74 | PK | V | P |
| High channel (2452MHz) | | | | | |
| 2483.5 | 46.47 | 74 | PK | H | P |
| 4904.0 | 49.02 | 74 | PK | H | P |
| 2483.5 | 45.25 | 74 | PK | V | P |
| 4904.0 | 47.23 | 74 | PK | V | P |

Note:

1) Through Pre-scan transmitting mode with all kind of modulation and data rate, find the 11Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40), and then Only the worst case is recorded in the report.

2) *The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:*

Final Test Level =Receiver Reading - Correct Factor


Correct Factor = Preamplifier Factor– Antenna Factor–Cable Factor

3) *Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.*

PHOTOGRAPHS OF TEST SETUP



Radiated spurious emission Test Setup-1(Below 1GHz)

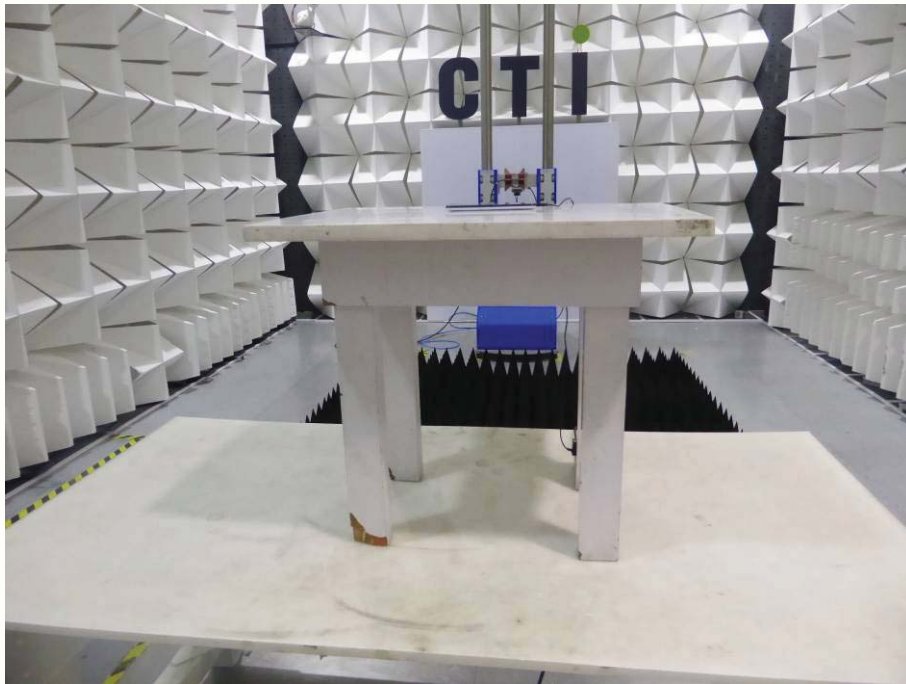

Radiated spurious emission Test Setup-2(Above 1GHz)



Conducted emission Test Setup


PHOTOGRAPHS OF EUT Constructional Details



View of External Product-1




View of External Product-2

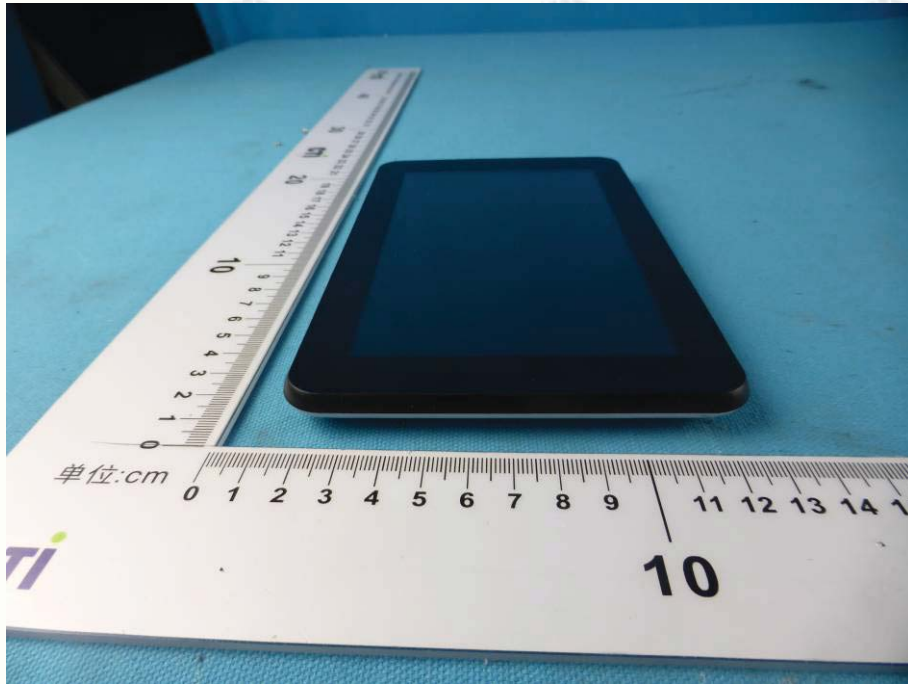

View of External Product-3



View of External Product-4

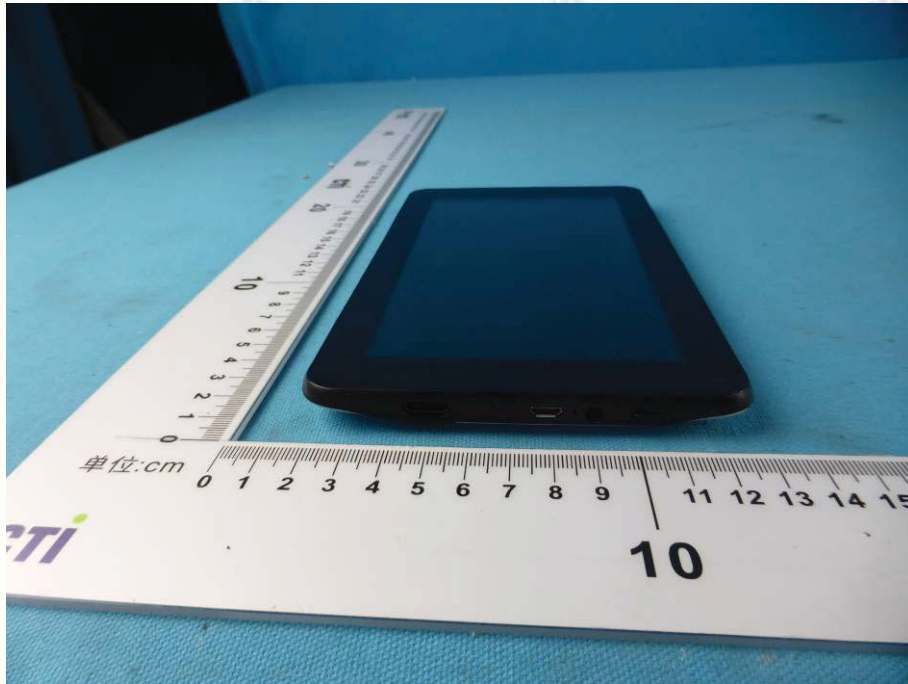


View of External Product-5




View of External Product-6




View of Internal Product-1

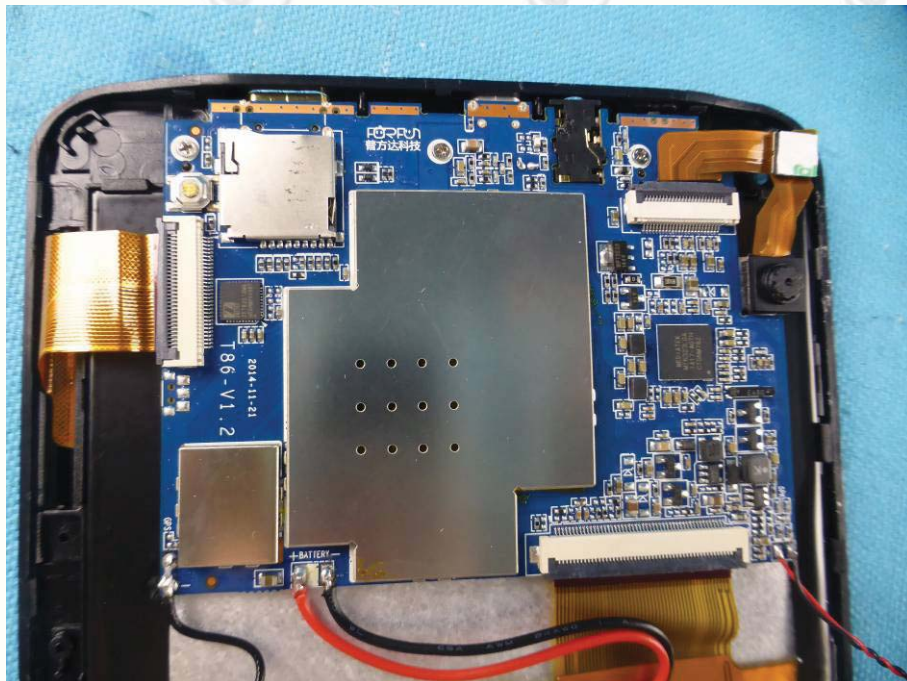

View of Internal Product-2

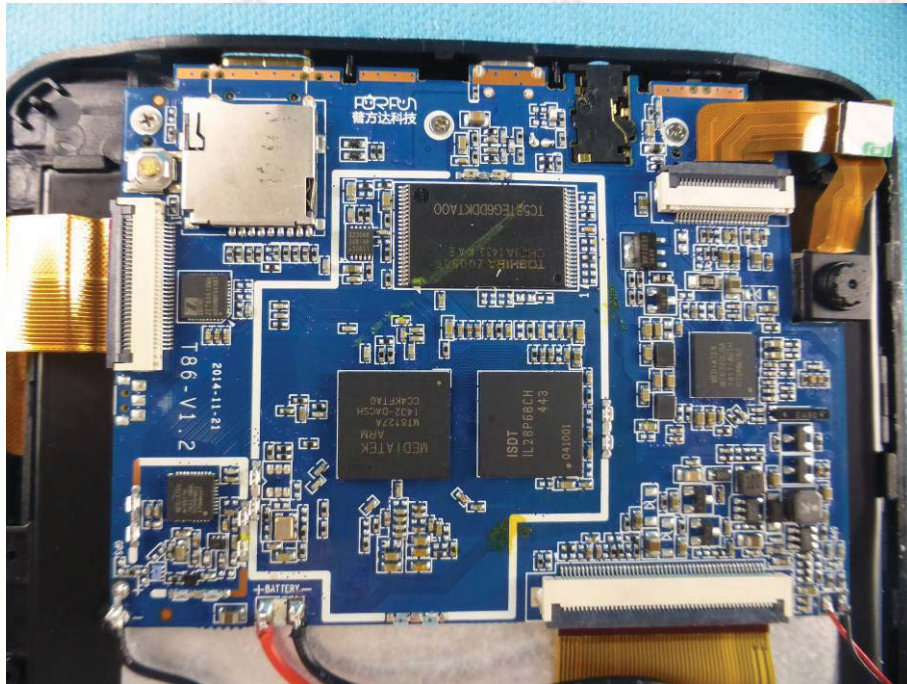


View of Internal Product-4

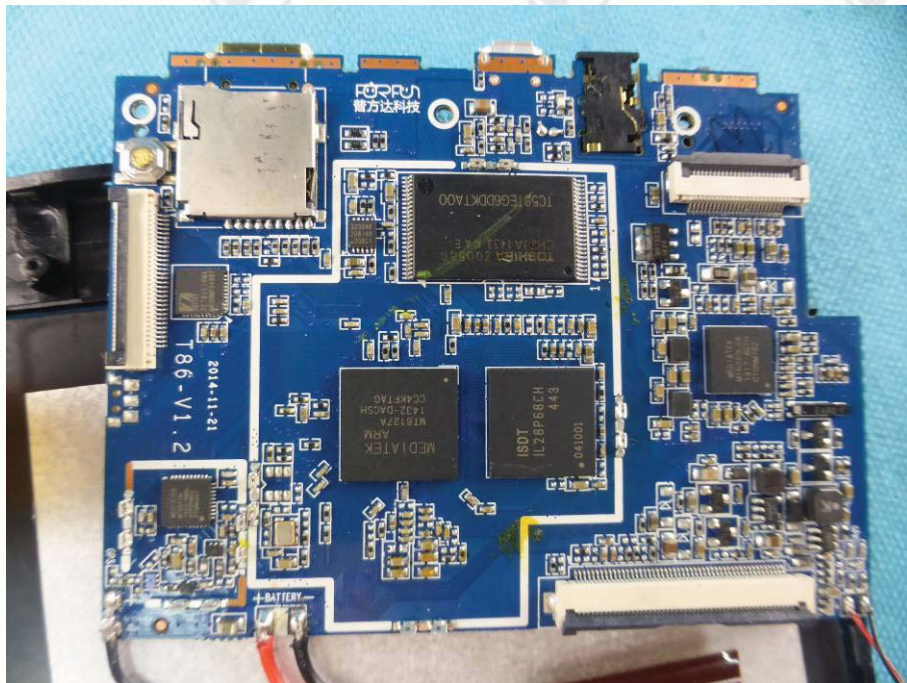


View of Internal Product-5



View of Internal Product-6

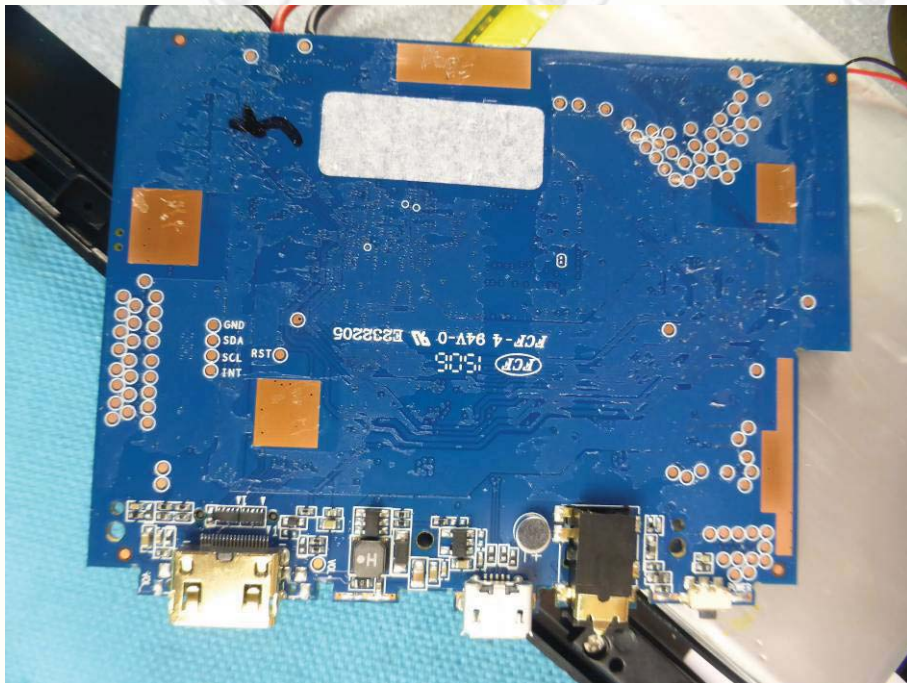

View of Internal Product-7

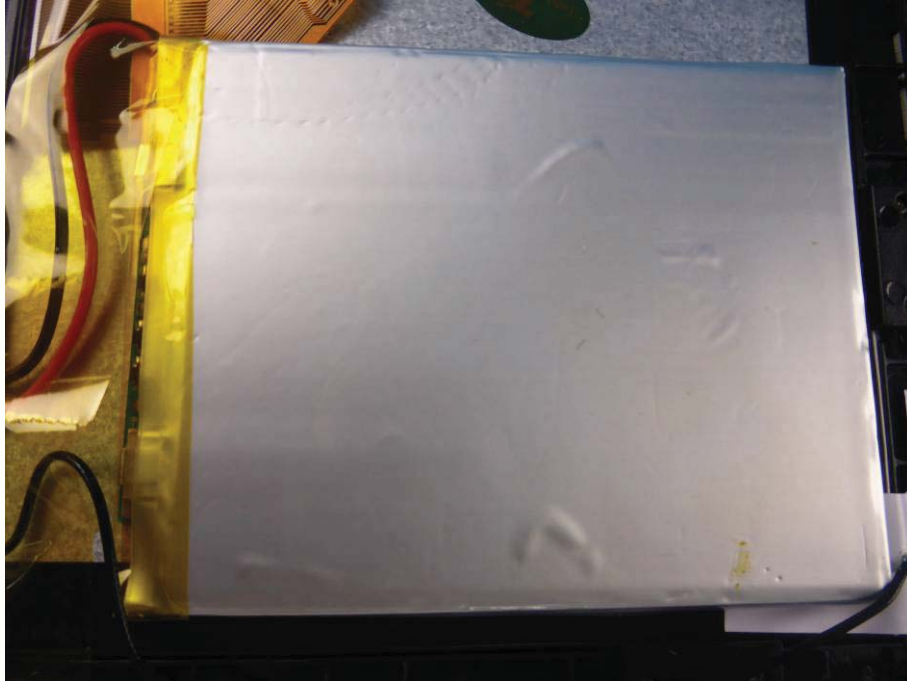

View of Internal Product-8

*** End of Report ***

The test report is effective only with both signature and specialized stamp. The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CTI, this report can't be reproduced except in full.