

TEST REPORT

Product : 10.1" Tablet PC
Trade mark : Dragon Touch, KINGPAD, KINGSLIM, AKASO
Model/Type reference : M10X, M10X PLUS, M10, M10X ULTIMATE, M100, M100X
Serial Number : N/A
Report Number : EED32H000980-1
FCC ID : S5V-D101M1
Date of Issue : Aug. 24, 2015
Test Standards : 47 CFR Part 15 Subpart C (2014)
Test result : PASS

Prepared for:

Proexpress Distributor LLC

11011 GREENWOOD AVE.N APT 5, SEATTLE, WA 98103, United States

Prepared by:

Centre Testing International (Shenzhen) Corporation

Building C, Scientific Innovation Park, Tiegang Reservoir, Xixiang, Baoan

District, Shenzhen, China

TEL: +86-755-3368 3668

FAX: +86-755-3368 3385

Tested by:

Ware Xin

Reviewed by:

Kevin Lan

Approved by:

Sheek Luo

Date:

Aug. 24, 2015

Sheek Luo

Lab supervisor

Check No.: 2212846931



2 Version

| Version No. | Date | Description |
|-------------|---------------|-------------|
| 00 | Aug. 24, 2015 | Original |
| | | |
| | | |

3 Test Summary

| Test Item | Test Requirement | Test method | Result |
|--|--|------------------|--------|
| Antenna Requirement | 47 CFR Part 15 Subpart C Section 15.203/15.247 (c) | ANSI C63.10-2013 | PASS |
| AC Power Line Conducted Emission | 47 CFR Part 15 Subpart C Section 15.207 | ANSI C63.10-2013 | PASS |
| Conducted Peak Output Power | 47 CFR Part 15 Subpart C Section 15.247 (b)(1) | ANSI C63.10-2013 | PASS |
| 20dB Occupied Bandwidth | 47 CFR Part 15 Subpart C Section 15.247 (a)(1) | ANSI C63.10-2013 | PASS |
| Carrier Frequencies Separation | 47 CFR Part 15 Subpart C Section 15.247 (a)(1) | ANSI C63.10-2013 | PASS |
| Hopping Channel Number | 47 CFR Part 15 Subpart C Section 15.247 (b) | ANSI C63.10-2013 | PASS |
| Dwell Time | 47 CFR Part 15 Subpart C Section 15.247 (a)(1) | ANSI C63.10-2013 | PASS |
| Pseudorandom Frequency Hopping Sequence | 47 CFR Part 15 Subpart C Section 15.247(b)(4)&TCB Exclusion List (7 July 2002) | ANSI C63.10-2013 | PASS |
| RF Conducted Spurious Emissions | 47 CFR Part 15 Subpart C Section 15.247(d) | ANSI C63.10-2013 | PASS |
| Radiated Spurious emissions | 47 CFR Part 15 Subpart C Section 15.205/15.209 | ANSI C63.10-2013 | PASS |

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

Remark:

All models are same except model name and brand name. Model M10X was selected for test.


4 Content

| | | |
|-------|---|----|
| 1 | COVER PAGE..... | 1 |
| 2 | VERSION..... | 2 |
| 3 | TEST SUMMARY..... | 3 |
| 4 | CONTENT..... | 4 |
| 5 | TEST REQUIREMENT..... | 5 |
| 5.1 | TEST SETUP..... | 5 |
| 5.1.1 | For Conducted test setup..... | 5 |
| 5.1.2 | For Radiated Emissions test setup..... | 5 |
| 5.1.3 | For Conducted Emissions test setup..... | 6 |
| 5.2 | TEST ENVIRONMENT..... | 6 |
| 5.3 | TEST CONDITION..... | 6 |
| 6 | GENERAL INFORMATION..... | 7 |
| 6.1 | CLIENT INFORMATION..... | 7 |
| 6.2 | GENERAL DESCRIPTION OF EUT..... | 7 |
| 6.3 | PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD..... | 7 |
| 6.4 | DESCRIPTION OF SUPPORT UNITS..... | 8 |
| 6.5 | TEST LOCATION..... | 8 |
| 6.6 | TEST FACILITY..... | 8 |
| 6.7 | DEVIATION FROM STANDARDS..... | 9 |
| 6.8 | ABNORMALITIES FROM STANDARD CONDITIONS..... | 9 |
| 6.9 | OTHER INFORMATION REQUESTED BY THE CUSTOMER..... | 9 |
| 6.10 | MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2)..... | 10 |
| 7 | EQUIPMENT LIST..... | 11 |
| 8 | RADIO TECHNICAL REQUIREMENTS SPECIFICATION..... | 13 |
| | Appendix A): 20dB Occupied Bandwidth..... | 14 |
| | Appendix B): Carrier Frequency Separation..... | 18 |
| | Appendix C): Dwell Time..... | 22 |
| | Appendix D): Hopping Channel Number..... | 27 |
| | Appendix E): Conducted Peak Output Power..... | 29 |
| | Appendix F): Band-edge for RF Conducted Emissions..... | 33 |
| | Appendix G): RF Conducted Spurious Emissions..... | 37 |
| | Appendix H) Pseudorandom Frequency Hopping Sequence..... | 43 |
| | Appendix I) Antenna Requirement..... | 44 |
| | Appendix J) AC Power Line Conducted Emission..... | 45 |
| | Appendix K) Restricted bands around fundamental frequency (Radiated)/Radiated Spurious Emissions..... | 48 |
| | PHOTOGRAPHS OF TEST SETUP..... | 52 |
| | PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS..... | 53 |

5 Test Requirement

5.1 Test setup

5.1.1 For Conducted test setup

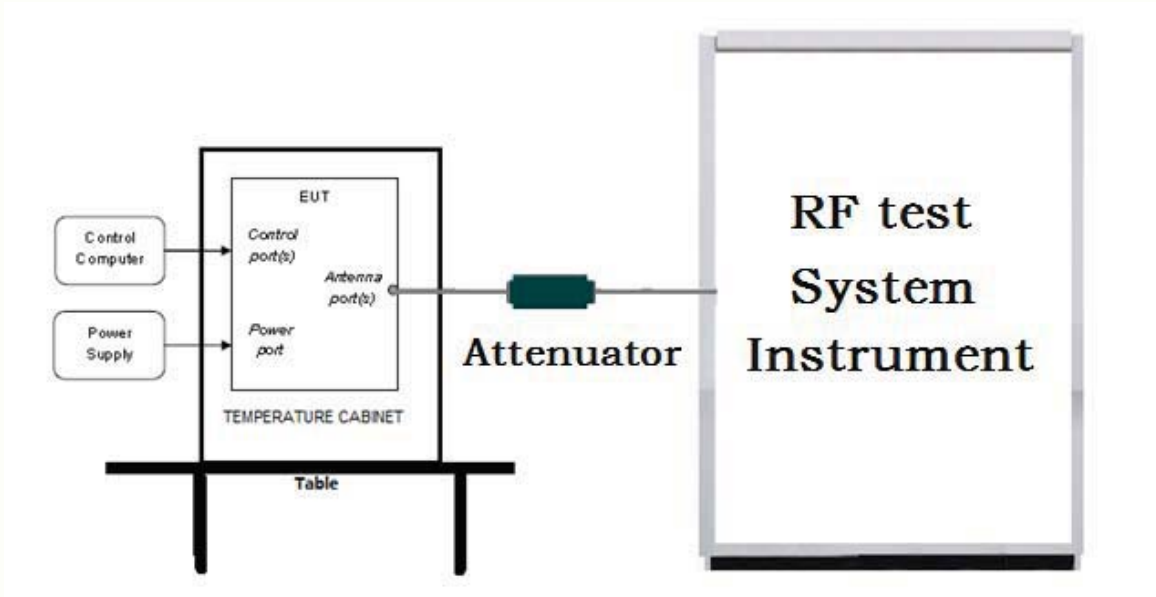

5.1.2 For Radiated Emissions test setup

Radiated Emissions setup:

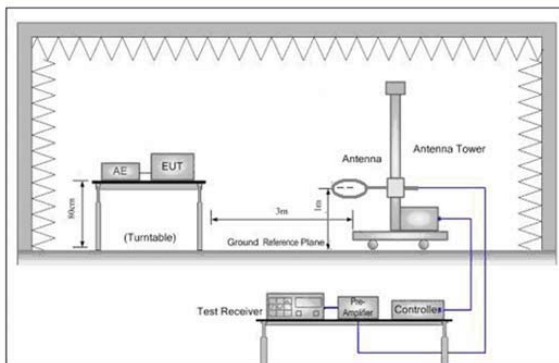


Figure 1. Below 30MHz

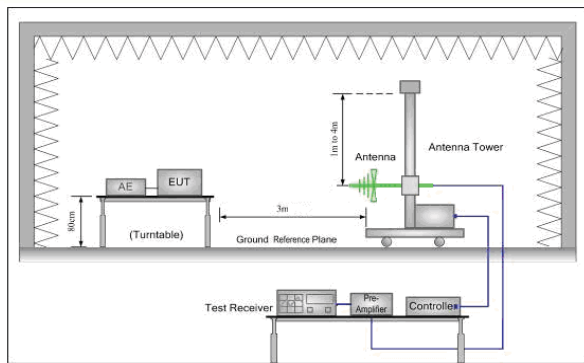


Figure 2. 30MHz to 1GHz


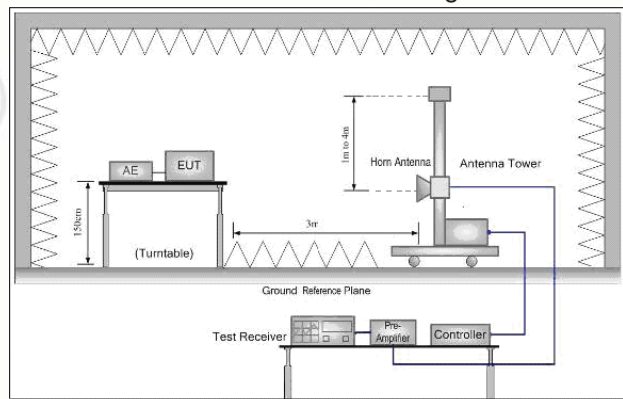


Figure 3. Above 1GHz

5.1.3 For Conducted Emissions test setup Conducted Emissions setup

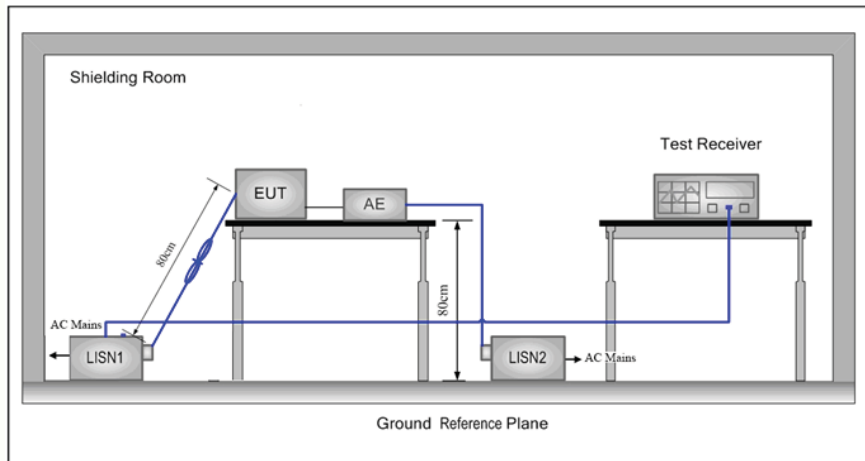

5.2 Test Environment

| Operating Environment: | |
|------------------------|----------|
| Temperature: | 24 °C |
| Humidity: | 53 % RH |
| Atmospheric Pressure: | 1010mbar |

5.3 Test Condition

| Test Mode | Tx/Rx | RF Channel | | |
|--------------------------------------|-------------------|------------|------------|-----------|
| | | Low(L) | Middle(M) | High(H) |
| GFSK/π/4DQPSK/ 8DPSK(DH1,DH3,DH5) | 2402MHz ~2480 MHz | Channel 1 | Channel 40 | Channel79 |
| | | 2402MHz | 2441MHz | 2480MHz |

6 General Information

6.1 Client Information

| | |
|--------------------------|---|
| Applicant: | Proexpress Distributor LLC |
| Address of Applicant: | 11011 GREENWOOD AVE.N APT 5, SEATTLE, WA 98103, United States |
| Manufacturer: | Proexpress Distributor LLC |
| Address of Manufacturer: | 11011 GREENWOOD AVE.N APT 5, SEATTLE, WA 98103, United States |

6.2 General Description of EUT

| | |
|----------------------------------|--|
| Product Name: | 10.1" Tablet PC |
| Model No.(EUT): | M10X, M10X PLUS, M10, M10X ULTIMATE, M100, M100X |
| Trade mark: | Dragon Touch, KINGPAD, KINGSLIM, AKASO |
| EUT Supports Radios application: | Bluetooth V3.0+EDR |
| Power Supply: | Input: 5V \equiv 2A |
| Sample Received Date: | Jun. 29, 2015 |
| Sample tested Date: | July. 29, 2015 to Aug. 24, 2015 |

6.3 Product Specification subjective to this standard

| | |
|-----------------------|---|
| Operation Frequency: | 2402MHz~2480MHz |
| Bluetooth Version: | 3.0+EDR |
| Modulation Technique: | Frequency Hopping Spread Spectrum(FHSS) |
| Modulation Type: | GFSK, $\pi/4$ DQPSK, 8DPSK |
| Number of Channel: | 79 |
| Sample Type: | Portable production |
| Antenna Type: | Integral |
| Antenna Gain: | 0dBi |
| Test Voltage: | DC 3.7V |

Operation Frequency each of channel

| Channel | Frequency | Channel | Frequency | Channel | Frequency | Channel | Frequency |
|---------|-----------|---------|-----------|---------|-----------|---------|-----------|
| 1 | 2402MHz | 21 | 2422MHz | 41 | 2442MHz | 61 | 2462MHz |
| 2 | 2403MHz | 22 | 2423MHz | 42 | 2443MHz | 62 | 2463MHz |
| 3 | 2404MHz | 23 | 2424MHz | 43 | 2444MHz | 63 | 2464MHz |
| 4 | 2405MHz | 24 | 2425MHz | 44 | 2445MHz | 64 | 2465MHz |
| 5 | 2406MHz | 25 | 2426MHz | 45 | 2446MHz | 65 | 2466MHz |
| 6 | 2407MHz | 26 | 2427MHz | 46 | 2447MHz | 66 | 2467MHz |
| 7 | 2408MHz | 27 | 2428MHz | 47 | 2448MHz | 67 | 2468MHz |
| 8 | 2409MHz | 28 | 2429MHz | 48 | 2449MHz | 68 | 2469MHz |
| 9 | 2410MHz | 29 | 2430MHz | 49 | 2450MHz | 69 | 2470MHz |
| 10 | 2411MHz | 30 | 2431MHz | 50 | 2451MHz | 70 | 2471MHz |
| 11 | 2412MHz | 31 | 2432MHz | 51 | 2452MHz | 71 | 2472MHz |

| | | | | | | | |
|----|---------|----|---------|----|---------|----|---------|
| 12 | 2413MHz | 32 | 2433MHz | 52 | 2453MHz | 72 | 2473MHz |
| 13 | 2414MHz | 33 | 2434MHz | 53 | 2454MHz | 73 | 2474MHz |
| 14 | 2415MHz | 34 | 2435MHz | 54 | 2455MHz | 74 | 2475MHz |
| 15 | 2416MHz | 35 | 2436MHz | 55 | 2456MHz | 75 | 2476MHz |
| 16 | 2417MHz | 36 | 2437MHz | 56 | 2457MHz | 76 | 2477MHz |
| 17 | 2418MHz | 37 | 2438MHz | 57 | 2458MHz | 77 | 2478MHz |
| 18 | 2419MHz | 38 | 2439MHz | 58 | 2459MHz | 78 | 2479MHz |
| 19 | 2420MHz | 39 | 2440MHz | 59 | 2460MHz | 79 | 2480MHz |
| 20 | 2421MHz | 40 | 2441MHz | 60 | 2461MHz | | |

6.4 Description of Support Units

The EUT has been tested with associated equipment below:

| Device Type | Brand | Model | Data Cable | Remark |
|-------------|-------|-------|------------|--------|
| -- | -- | -- | -- | -- |
| -- | -- | -- | -- | -- |

6.5 Test Location

All tests were performed at:

Centre Testing International (Shenzhen) Corporation

Building C, Scientific Innovation Park, Tiegang Reservoir, Xixiang, Baoan District, Shenzhen, China

Telephone: +86 (0) 755 3368 3668 Fax: +86 (0) 755 3368 3385

No tests were sub-contracted.

6.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L1910

Centre Testing International Group Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories..

A2LA-Lab Cert. No. 3061.01

Centre Testing International Group Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 565659

Centre Testing International (Shenzhen) Corporation EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 565659.

IC-Registration No.: 7408A

The 3m Alternate Test Site of Centre Testing International Group Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 7408A .

IC-Registration No.: 7408B

The 10m Alternate Test Site of Centre Testing International Group Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 7408B.

NEMKO-Aut. No.: ELA503

Centre Testing International Group Co., Ltd. has been assessed the quality assurance system, the testing facilities, qualifications and testing practices of the relevant parts of the organization. The quality assurance system of the Laboratory has been validated against ISO/IEC 17025 or equivalent. The laboratory also fulfils the conditions described in Nemko Document NLA-10.

VCCI

The Radiation 3 &10 meters site of Centre Testing International Group Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-4096.

Main Ports Conducted Interference Measurement of Centre Testing International Group Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: C-4563.

Telecommunication Ports Conducted Disturbance Measurement of Centre Testing International Group Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: T-2146.

The Radiation 3 meters site of Centre Testing International Group Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-758

6.7 Deviation from Standards

None.

6.8 Abnormalities from Standard Conditions

None.

6.9 Other Information Requested by the Customer

None.

6.10 Measurement Uncertainty (95% confidence levels, k=2)

| No. | Item | Measurement Uncertainty |
|-----|---------------------------------|-------------------------|
| 1 | Radio Frequency | 7.9×10^{-8} |
| 2 | RF power, conducted | 0.31dB (30MHz-1GHz) |
| | | 0.57dB (1GHz-18GHz) |
| 3 | Radiated Spurious emission test | 4.5dB (30MHz-1GHz) |
| | | 4.8dB (1GHz-12.75GHz) |
| 4 | Conduction emission | 3.6dB (9kHz to 150kHz) |
| | | 3.2dB (150kHz to 30MHz) |
| 5 | Temperature test | 0.64°C |
| 6 | Humidity test | 2.8% |
| 7 | DC power voltages | 0.025% |

7 Equipment List

| RF test system | | | | | |
|----------------------------------|---------------|------------------------------|---------------|------------------------|----------------------------|
| Equipment | Manufacturer | Mode No. | Serial Number | Cal. Date (mm-dd-yyyy) | Cal. Due date (mm-dd-yyyy) |
| Signal Generator | Keysight | E8257D | MY53401106 | 04-14-2015 | 04-13-2016 |
| Communication test set test set | Agilent | N4010A | MY47230124 | 04-02-2015 | 04-01-2016 |
| Spectrum Analyzer | Keysight | N9010A | MY54510339 | 04-01-2015 | 03-31-2016 |
| Attenuator | HuaXiang | SHX370 | 15040701 | 04-01-2015 | 03-31-2016 |
| Signal Generator | Keysight | N5182B | MY53051549 | 03-31-2015 | 03-30-2016 |
| High-pass filter(3-18GHz) | Sinoscite | FL3CX03WG18 NM12-0398-002 | --- | 01-13-2015 | 01-12-2016 |
| High-pass filter(5-18GHz) | MICRO-TRONICS | SPA-F-63029-4 | --- | 01-13-2015 | 01-12-2016 |
| band rejection filter (GSM900) | Sinoscite | FL5CX01CA09C L12-0395-001 | --- | 01-13-2015 | 01-12-2016 |
| band rejection filter (GSM850) | Sinoscite | FL5CX01CA08C L12-0393-001 | --- | 01-13-2015 | 01-12-2016 |
| band rejection filter (GSM1800) | Sinoscite | FL5CX02CA04C L12-0396-002 | --- | 01-13-2015 | 01-12-2016 |
| band rejection filter (GSM1900) | Sinoscite | FL5CX02CA03C L12-0394-001 | --- | 01-13-2015 | 01-12-2016 |
| DC Power | Keysight | E3642A | MY54436035 | 03-31-2015 | 03-30-2016 |
| PC-1 | Lenovo | R4960d | --- | 04-01-2015 | 03-31-2016 |
| BT&WI-FI Automatic control | R&S | OSPB157 | 101374 | 04-01-2015 | 03-31-2016 |
| RF control unit | JS Tonscend | JS0806-2 | 2015860006 | 04-01-2015 | 03-31-2016 |
| BT&WI-FI Automatic test software | JS Tonscend | JSTS1120-2 | --- | 04-01-2015 | 03-31-2016 |

| Shielding Room No. 1 – Conduction Emission Test | | | | | |
|---|--------------|----------|---------------|------------------------|----------------------------|
| Equipment | Manufacturer | Mode No. | Serial Number | Cal. date (mm-dd-yyyy) | Cal. Due date (mm-dd-yyyy) |
| Receiver | R&S | ESCI | 100009 | 07-09-2015 | 07-08-2016 |
| Receiver | R&S | ESCI | 100009 | 07-09-2015 | 07-08-2016 |
| LISN | R&S | ENV216 | 100098 | 11-12-2014 | 11-13-2015 |

| 3M Semi/full-anechoic Chamber | | | | | |
|--------------------------------|---------------|------------------------------|---------------|------------------------|----------------------------|
| Equipment | Manufacturer | Mode No. | Serial Number | Cal. date (mm-dd-yyyy) | Cal. Due date (mm-dd-yyyy) |
| 3M Chamber | TDK | SAC-3 | --- | 06-02-2015 | 06-01-2016 |
| TRILOG Broadband Antenna | schwarzbeck | VULB9163 | 9163-617 | 07-14-2015 | 07-13-2016 |
| TRILOG Broadband Antenna | schwarzbeck | VULB9163 | 9163-617 | 07-14-2015 | 07-13-2016 |
| Microwave Preamplifier | Agilent | 8449B | 3008A02425 | 02-05-2015 | 02-04-2016 |
| Horn Antenna | ETS-LINDGREN | 3117 | 00057410 | 07-08-2015 | 07-07-2016 |
| Horn Antenna | ETS-LINDGREN | 3117 | 00057410 | 07-08-2015 | 07-07-2016 |
| Loop Antenna | ETS | 6502 | 00071730 | 07-23-2015 | 07-22-2016 |
| Loop Antenna | ETS | 6502 | 00071730 | 07-23-2015 | 07-22-2016 |
| Spectrum Analyzer | R&S | FSP40 | 100416 | 07-09-2015 | 07-08-2016 |
| Spectrum Analyzer | R&S | FSP40 | 100416 | 07-09-2015 | 07-08-2016 |
| Receiver | R&S | ESCI | 100435 | 07-09-2015 | 07-08-2016 |
| Receiver | R&S | ESCI | 100435 | 07-09-2015 | 07-08-2016 |
| Multi device Controller | maturu | NCD/070/10711112 | --- | 01-13-2015 | 01-12-2016 |
| LISN | schwarzbeck | NNBM8125 | 81251547 | 07-09-2015 | 07-08-2016 |
| LISN | schwarzbeck | NNBM8125 | 81251547 | 07-09-2015 | 07-08-2016 |
| LISN | schwarzbeck | NNBM8125 | 81251546 | 07-09-2015 | 07-08-2016 |
| LISN | schwarzbeck | NNBM8125 | 81251546 | 07-09-2015 | 07-08-2016 |
| Signal Generator | Agilent | E4438C | MY45095744 | 04-19-2015 | 04-18-2016 |
| Signal Generator | Keysight | E8257D | MY53401106 | 04-14-2015 | 04-13-2016 |
| Temperature/Humidity Indicator | TAYLOR | 1451 | 5190 | 07-10-2015 | 07-09-2016 |
| Temperature/Humidity Indicator | TAYLOR | 1451 | 5190 | 07-10-2015 | 07-09-2016 |
| Communication test set | Agilent | E5515C | GB47050533 | 01-13-2015 | 01-12-2016 |
| Cable line | Fulai(7M) | SF106 | 5219/6A | 01-13-2015 | 01-12-2016 |
| Cable line | Fulai(6M) | SF106 | 5220/6A | 01-13-2015 | 01-12-2016 |
| Cable line | Fulai(3M) | SF106 | 5216/6A | 01-13-2015 | 01-12-2016 |
| Cable line | Fulai(3M) | SF106 | 5217/6A | 01-13-2015 | 01-12-2016 |
| Communication test set | R&S | CMW500 | 152394 | 04-19-2015 | 04-18-2016 |
| High-pass filter(3-18GHz) | Sinoscite | FL3CX03WG18NM 12-0398-002 | --- | 01-13-2015 | 01-12-2016 |
| High-pass filter(5-18GHz) | MICRO-TRONICS | SPA-F-63029-4 | --- | 01-13-2015 | 01-12-2016 |
| band rejection filter | Sinoscite | FL5CX01CA09CL1 2-0395-001 | --- | 01-13-2015 | 01-12-2016 |
| band rejection filter | Sinoscite | FL5CX01CA08CL1 2-0393-001 | --- | 01-13-2015 | 01-12-2016 |
| band rejection filter | Sinoscite | FL5CX02CA04CL1 2-0396-002 | --- | 01-13-2015 | 01-12-2016 |
| band rejection filter | Sinoscite | FL5CX02CA03CL1 2-0394-001 | --- | 01-13-2015 | 01-12-2016 |

8 Radio Technical Requirements Specification

Reference documents for testing:

| No. | Identity | Document Title |
|-----|--------------------|--|
| 1 | FCC Part15C (2014) | Subpart C-Intentional Radiators |
| 2 | ANSI C63.10-2013 | American National Standard for Testing Unlicensed Wireless Devices |

Test Results List:

| Test requirement | Test method | Test item | Verdict | Note |
|-----------------------------------|-------------|---|---------|-------------|
| Part15C Section 15.247 (a)(1) | ANSI 63.10 | 20dB Occupied Bandwidth | PASS | Appendix A) |
| Part15C Section 15.247 (a)(1) | ANSI 63.10 | Carrier Frequencies Separation | PASS | Appendix B) |
| Part15C Section 15.247 (a)(1) | ANSI 63.10 | Dwell Time | PASS | Appendix C) |
| Part15C Section 15.247 (b) | ANSI 63.10 | Hopping Channel Number | PASS | Appendix D) |
| Part15C Section 15.247 (b)(1) | ANSI 63.10 | Conducted Peak Output Power | PASS | Appendix E) |
| Part15C Section 15.247(d) | ANSI 63.10 | Band-edge for RF Conducted Emissions | PASS | Appendix F) |
| Part15C Section 15.247(d) | ANSI 63.10 | RF Conducted Spurious Emissions | PASS | Appendix G) |
| Part15C Section 15.247 (a)(1) | ANSI 63.10 | Pseudorandom Frequency Hopping Sequence | PASS | Appendix H) |
| Part15C Section 15.203/15.247 (c) | ANSI 63.10 | Antenna Requirement | PASS | Appendix I) |
| Part15C Section 15.207 | ANSI 63.10 | AC Power Line Conducted Emission | PASS | Appendix J) |
| Part15C Section 15.205/15.209 | ANSI 63.10 | Restricted bands around fundamental frequency (Radiated Emission) | PASS | Appendix K) |
| Part15C Section 15.205/15.209 | ANSI 63.10 | Radiated Spurious Emissions | PASS | Appendix K) |

Appendix A): 20dB Occupied Bandwidth

Test Result

| Mode | Channel. | 20dB Bandwidth [MHz] | 99% OBW [MHz] | Verdict |
|---------------|----------|----------------------|---------------|---------|
| GFSK | LCH | 0.9449 | 0.86656 | PASS |
| GFSK | MCH | 0.9431 | 0.85688 | PASS |
| GFSK | HCH | 0.9458 | 0.85698 | PASS |
| $\pi/4$ DQPSK | LCH | 1.260 | 1.1685 | PASS |
| $\pi/4$ DQPSK | MCH | 1.231 | 1.1677 | PASS |
| $\pi/4$ DQPSK | HCH | 1.231 | 1.1684 | PASS |
| 8DPSK | LCH | 1.283 | 1.1588 | PASS |
| 8DPSK | MCH | 1.264 | 1.1635 | PASS |
| 8DPSK | HCH | 1.265 | 1.1632 | PASS |


Remark: Peak detector is used

Test Graph



| | |
|------------------------------------|--|
| <p>GFSK/MCH</p> | <p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.441000000 GHz</p> <p>Ref Offset 23.76 dB Ref 23.76 dBm</p> <p>Center 2.441 GHz #Res BW 30 kHz</p> <p>Occupied Bandwidth 856.88 kHz</p> <p>Total Power 10.6 dBm</p> <p>Transmit Freq Error -1.107 kHz</p> <p>x dB Bandwidth 943.1 kHz</p> |
| <p>GFSK/HCH</p> | <p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.480000000 GHz</p> <p>Ref Offset 23.76 dB Ref 23.76 dBm</p> <p>Center 2.48 GHz #Res BW 30 kHz</p> <p>Occupied Bandwidth 856.98 kHz</p> <p>Total Power 10.6 dBm</p> <p>Transmit Freq Error -580 Hz</p> <p>x dB Bandwidth 945.8 kHz</p> |
| <p>$\pi/4$DQPSK/LCH</p> | <p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.402000000 GHz</p> <p>Ref Offset 23.96 dB Ref 23.95 dBm</p> <p>Center 2.402 GHz #Res BW 30 kHz</p> <p>Occupied Bandwidth 1.1685 MHz</p> <p>Total Power 5.95 dBm</p> <p>Transmit Freq Error 10.570 kHz</p> <p>x dB Bandwidth 1.260 MHz</p> |

| | |
|------------------------------------|--|
| <p>$\pi/4$DQPSK/MCH</p> |  |
| <p>$\pi/4$DQPSK/HCH</p> |  |
| <p>8DPSK/LCH</p> |  |

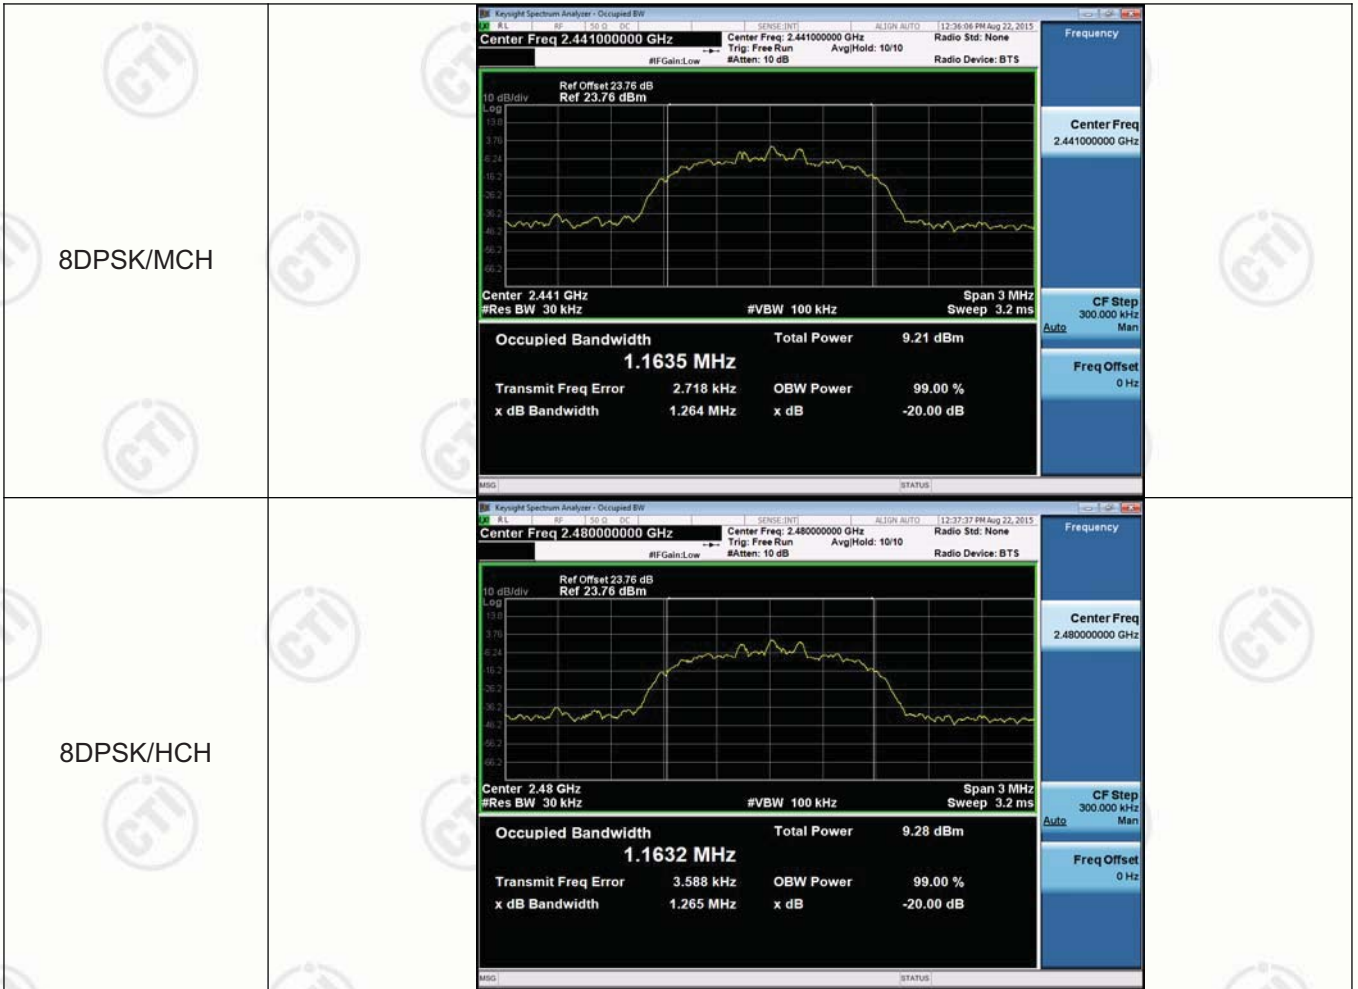


Appendix B): Carrier Frequency Separation

Result Table


| Mode | Channel. | Carrier Frequency Separation [MHz] | Verdict |
|---------------|----------|------------------------------------|---------|
| GFSK | LCH | 0.984 | PASS |
| GFSK | MCH | 0.974 | PASS |
| GFSK | HCH | 1.154 | PASS |
| $\pi/4$ DQPSK | LCH | 1.150 | PASS |
| $\pi/4$ DQPSK | MCH | 1.010 | PASS |
| $\pi/4$ DQPSK | HCH | 0.994 | PASS |
| 8DPSK | LCH | 1.158 | PASS |
| 8DPSK | MCH | 1.018 | PASS |
| 8DPSK | HCH | 1.004 | PASS |

Test Graph



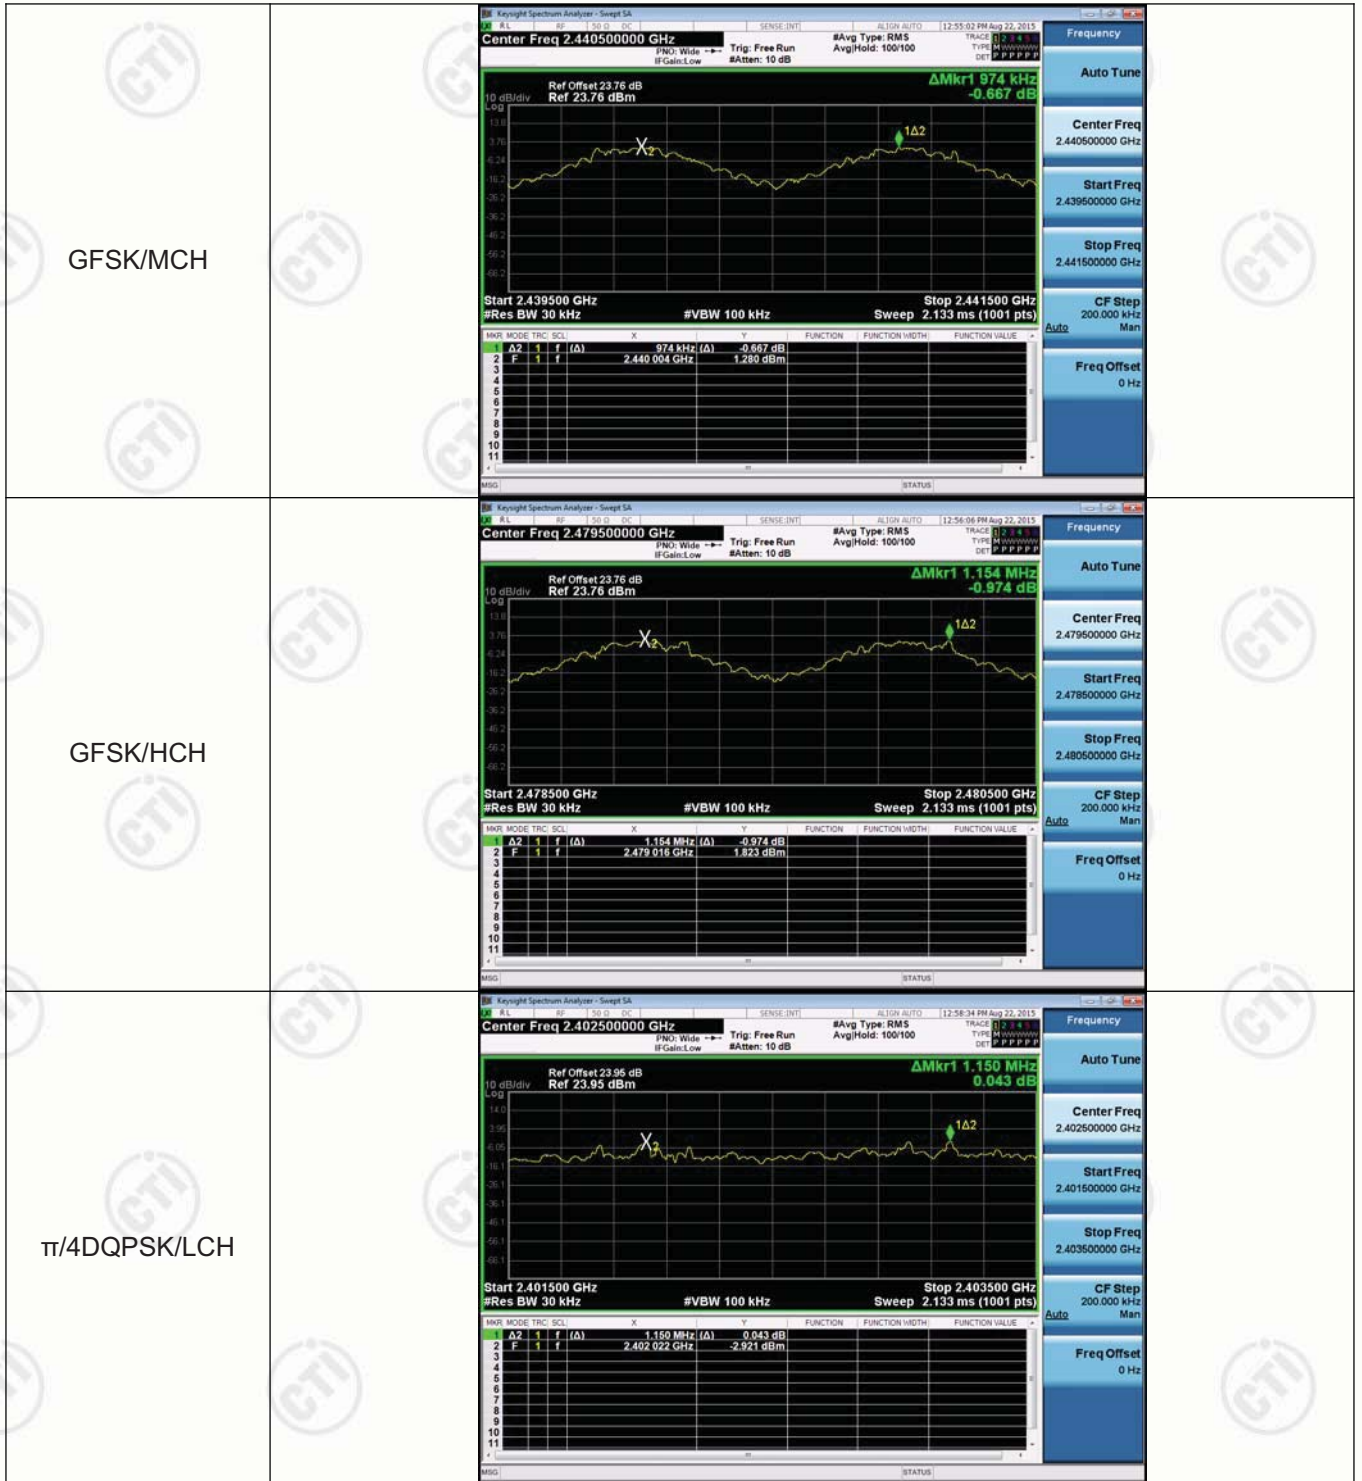

| | |
|------------------------------------|--|
| <p>$\pi/4$DQPSK/MCH</p> |  |
| <p>$\pi/4$DQPSK/HCH</p> |  |
| <p>8DPSK/LCH</p> |  |

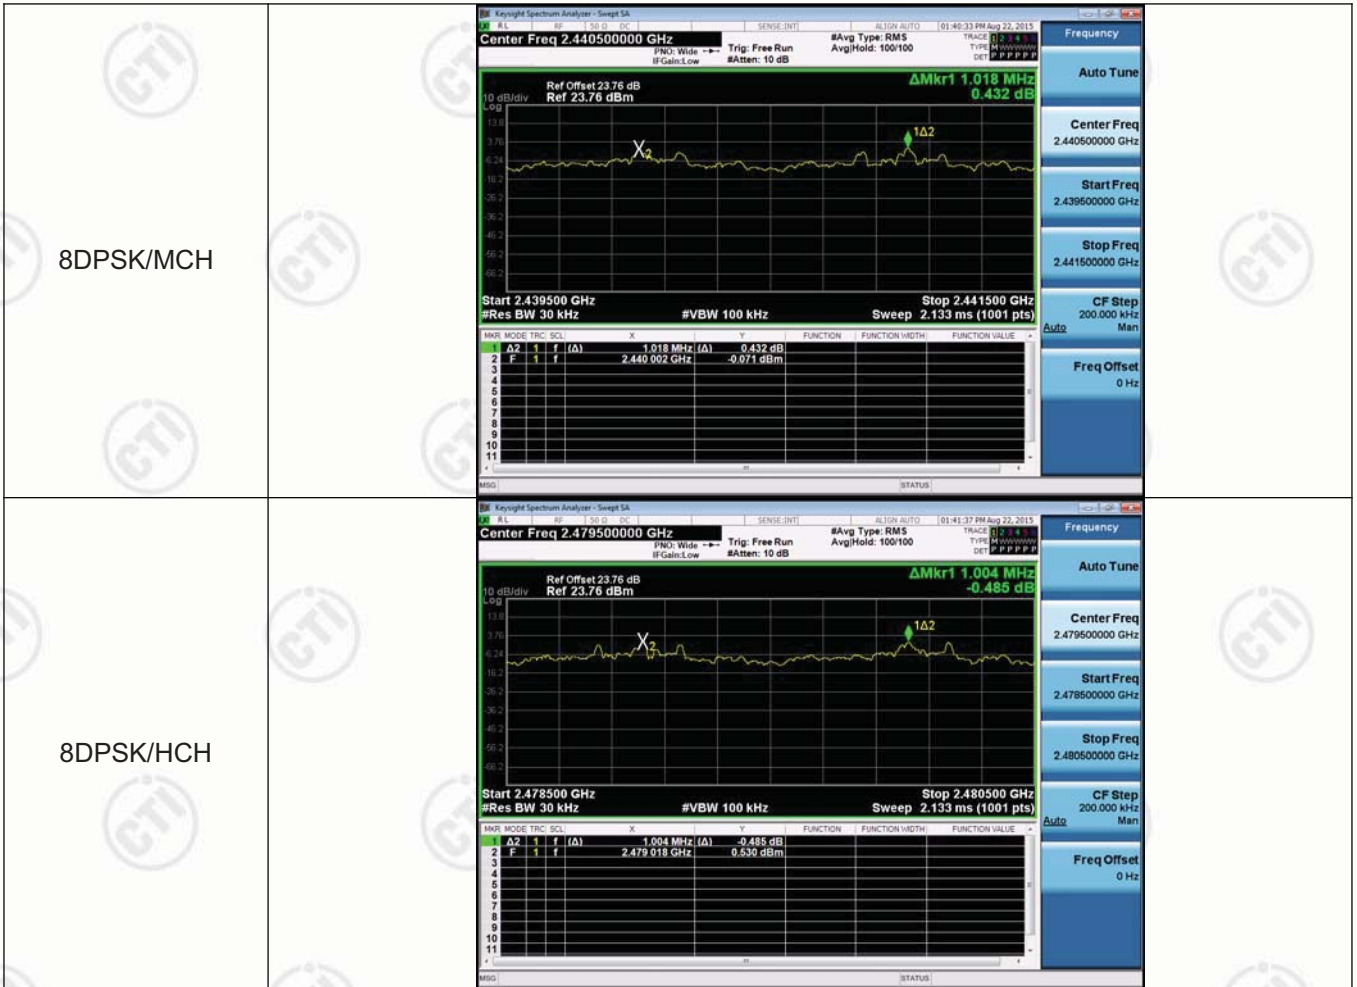


Appendix C): Dwell Time

Result Table

| Mode | Packet | Channel | Burst Width [ms/hop/ch] | Total Hops[hop*ch] | Dwell Time[s] | Verdict |
|------|--------|---------|----------------------------|-----------------------|------------------|---------|
| GFSK | DH1 | LCH | 0.408 | 320 | 0.131 | PASS |
| GFSK | DH1 | MCH | 0.408 | 320 | 0.131 | PASS |
| GFSK | DH1 | HCH | 0.408 | 320 | 0.131 | PASS |
| GFSK | DH3 | LCH | 1.663 | 160 | 0.266 | PASS |
| GFSK | DH3 | MCH | 1.663 | 160 | 0.266 | PASS |
| GFSK | DH3 | HCH | 1.663 | 160 | 0.266 | PASS |
| GFSK | DH5 | LCH | 2.912 | 106.7 | 0.311 | PASS |
| GFSK | DH5 | MCH | 2.912 | 106.7 | 0.311 | PASS |
| GFSK | DH5 | HCH | 2.911 | 106.7 | 0.311 | PASS |

Remark: Only worse case GFSK is reported.

Test Graph

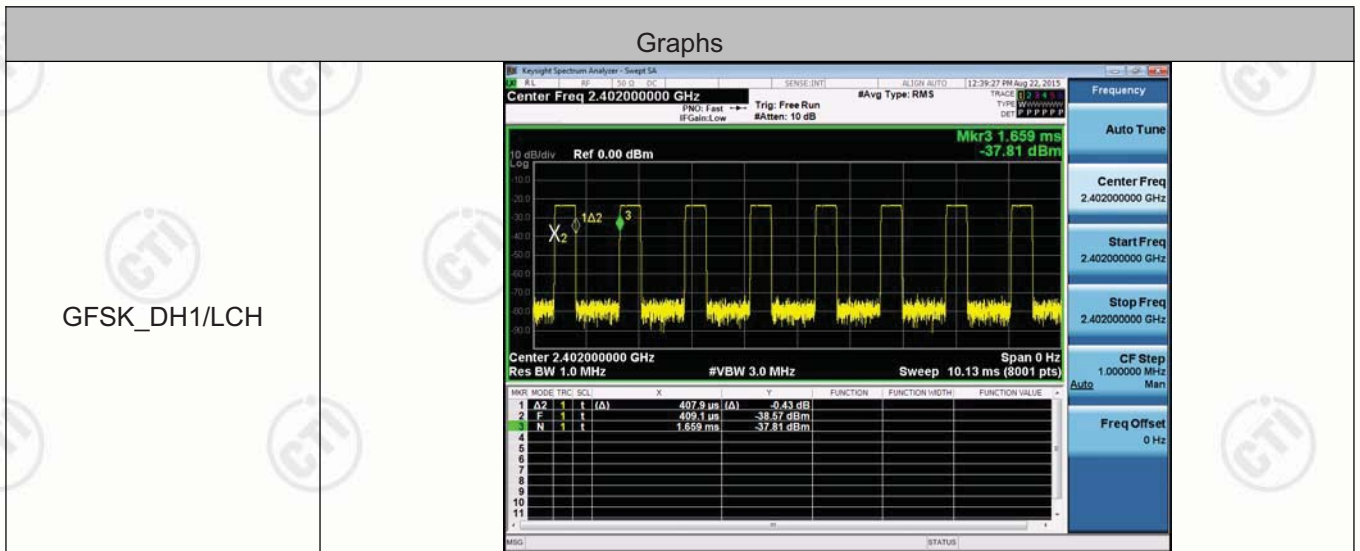



| <p>GFSK_DH3/MCH</p> |  <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>t</td> <td>(A)</td> <td>1.663 ms</td> <td>(A)</td> <td>-0.73 dB</td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>t</td> <td></td> <td>135.5 ms</td> <td></td> <td>-33.92 dBm</td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>t</td> <td></td> <td>2.635 ms</td> <td></td> <td>-36.17 dBm</td> <td></td> </tr> </tbody> </table> | MKR | MODE | TRIG | SCL | X | Y | FUNCTION | FUNCTION WIDTH | FUNCTION VALUE | 1 | A2 | 1 | t | (A) | 1.663 ms | (A) | -0.73 dB | | 2 | F | 1 | t | | 135.5 ms | | -33.92 dBm | | 3 | N | 1 | t | | 2.635 ms | | -36.17 dBm | | <p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.441000000 GHz</p> <p>Start Freq 2.441000000 GHz</p> <p>Stop Freq 2.441000000 GHz</p> <p>CF Step 1.000000 MHz</p> <p>Freq Offset 0 Hz</p> |
|---------------------|---|------|------|------|----------|----------|----------------|----------------|----------------|----------------|---|----|---|---|-----|----------|-----|----------|--|---|---|---|---|--|----------|--|------------|--|---|---|---|---|--|----------|--|------------|--|---|
| MKR | MODE | TRIG | SCL | X | Y | FUNCTION | FUNCTION WIDTH | FUNCTION VALUE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | A2 | 1 | t | (A) | 1.663 ms | (A) | -0.73 dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | F | 1 | t | | 135.5 ms | | -33.92 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | N | 1 | t | | 2.635 ms | | -36.17 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>GFSK_DH3/HCH</p> |  <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>t</td> <td>(A)</td> <td>1.663 ms</td> <td>(A)</td> <td>-0.43 dB</td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>t</td> <td></td> <td>273.8 ms</td> <td></td> <td>-35.07 dBm</td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>t</td> <td></td> <td>2.774 ms</td> <td></td> <td>-33.99 dBm</td> <td></td> </tr> </tbody> </table> | MKR | MODE | TRIG | SCL | X | Y | FUNCTION | FUNCTION WIDTH | FUNCTION VALUE | 1 | A2 | 1 | t | (A) | 1.663 ms | (A) | -0.43 dB | | 2 | F | 1 | t | | 273.8 ms | | -35.07 dBm | | 3 | N | 1 | t | | 2.774 ms | | -33.99 dBm | | <p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.480000000 GHz</p> <p>Start Freq 2.480000000 GHz</p> <p>Stop Freq 2.480000000 GHz</p> <p>CF Step 1.000000 MHz</p> <p>Freq Offset 0 Hz</p> |
| MKR | MODE | TRIG | SCL | X | Y | FUNCTION | FUNCTION WIDTH | FUNCTION VALUE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | A2 | 1 | t | (A) | 1.663 ms | (A) | -0.43 dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | F | 1 | t | | 273.8 ms | | -35.07 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | N | 1 | t | | 2.774 ms | | -33.99 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>GFSK_DH5/LCH</p> |  <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>t</td> <td>(A)</td> <td>2.912 ms</td> <td>(A)</td> <td>-0.88 dB</td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>t</td> <td></td> <td>1.282 ms</td> <td></td> <td>-38.76 dBm</td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>t</td> <td></td> <td>5.032 ms</td> <td></td> <td>-37.05 dBm</td> <td></td> </tr> </tbody> </table> | MKR | MODE | TRIG | SCL | X | Y | FUNCTION | FUNCTION WIDTH | FUNCTION VALUE | 1 | A2 | 1 | t | (A) | 2.912 ms | (A) | -0.88 dB | | 2 | F | 1 | t | | 1.282 ms | | -38.76 dBm | | 3 | N | 1 | t | | 5.032 ms | | -37.05 dBm | | <p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.402000000 GHz</p> <p>Start Freq 2.402000000 GHz</p> <p>Stop Freq 2.402000000 GHz</p> <p>CF Step 1.000000 MHz</p> <p>Freq Offset 0 Hz</p> |
| MKR | MODE | TRIG | SCL | X | Y | FUNCTION | FUNCTION WIDTH | FUNCTION VALUE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | A2 | 1 | t | (A) | 2.912 ms | (A) | -0.88 dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | F | 1 | t | | 1.282 ms | | -38.76 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | N | 1 | t | | 5.032 ms | | -37.05 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |





Appendix D): Hopping Channel Number

Result Table

| Mode | Channel. | Number of Hopping Channel | Verdict |
|---------------|----------|---------------------------|---------|
| GFSK | Hop | 79 | PASS |
| $\pi/4$ DQPSK | Hop | 79 | PASS |
| 8DPSK | Hop | 79 | PASS |

Test Graph

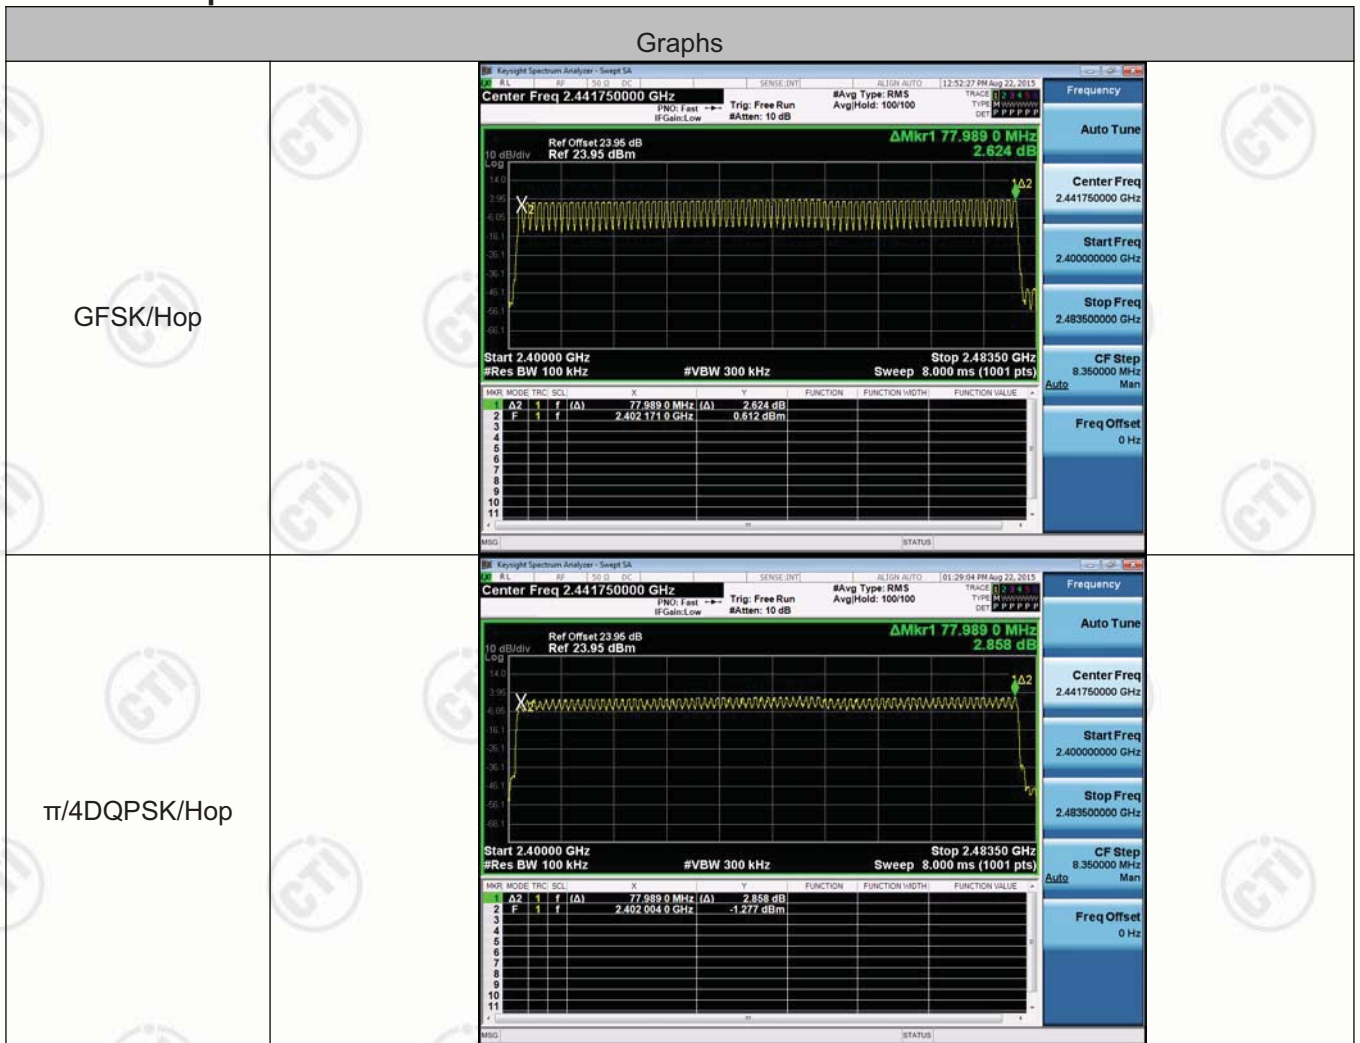

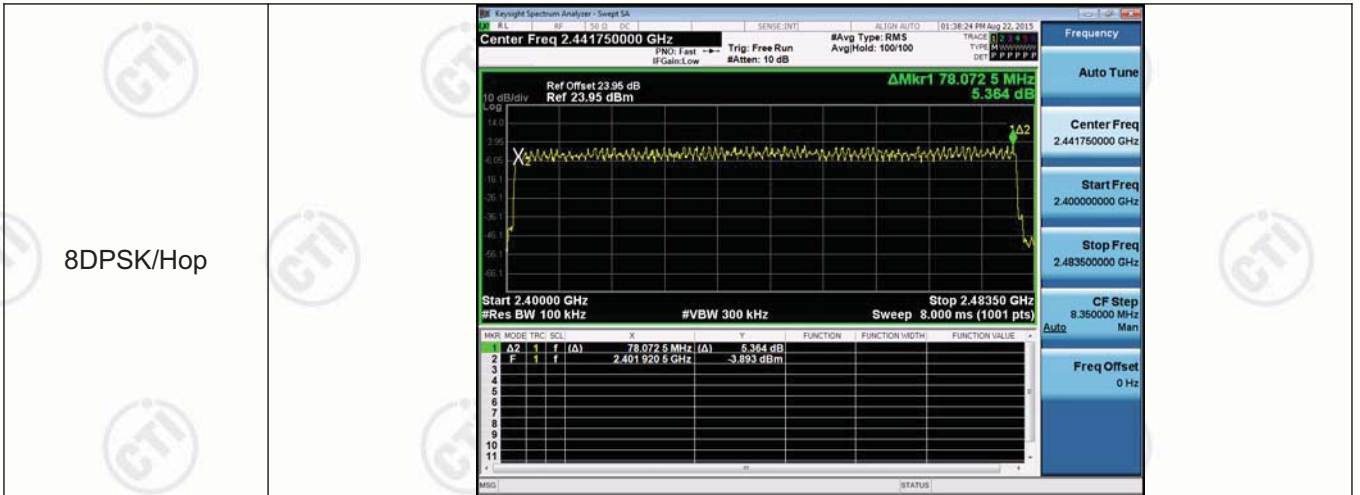





Appendix E): Conducted Peak Output Power

Result Table

| Mode | Channel. | Maximum Peak Output Power [dBm] | Verdict |
|---------------|----------|---------------------------------|---------|
| GFSK | LCH | 0.649 | PASS |
| GFSK | MCH | 3.265 | PASS |
| GFSK | HCH | 3.261 | PASS |
| $\pi/4$ DQPSK | LCH | -0.022 | PASS |
| $\pi/4$ DQPSK | MCH | 2.583 | PASS |
| $\pi/4$ DQPSK | HCH | 2.619 | PASS |
| 8DPSK | LCH | 0.402 | PASS |
| 8DPSK | MCH | 2.909 | PASS |
| 8DPSK | HCH | 2.916 | PASS |

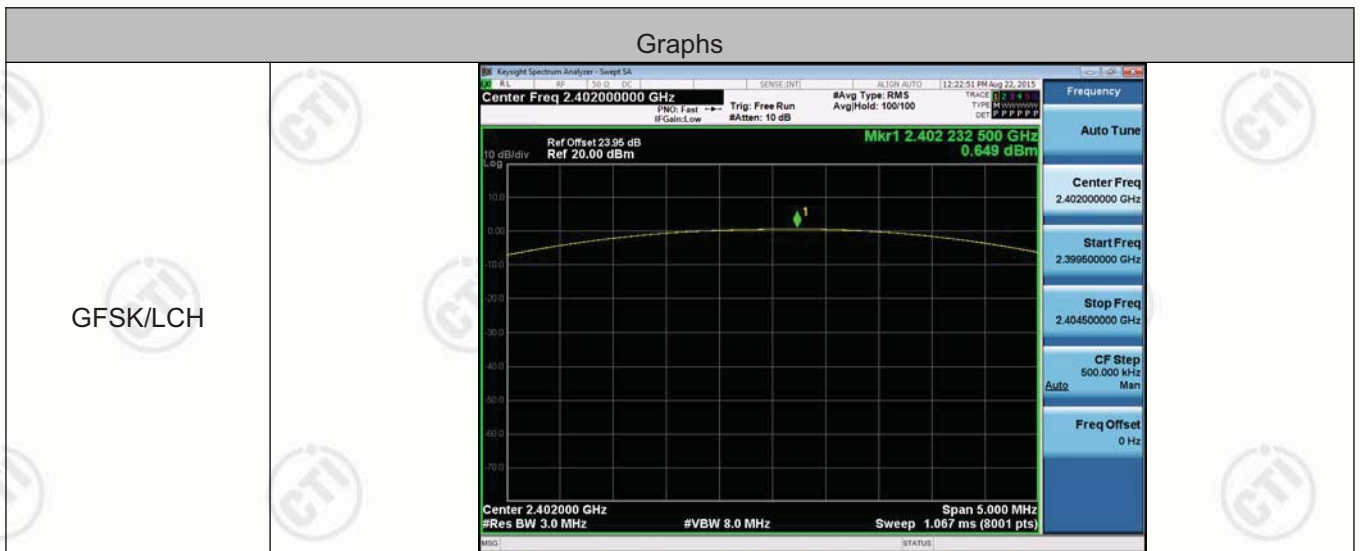Test Graph

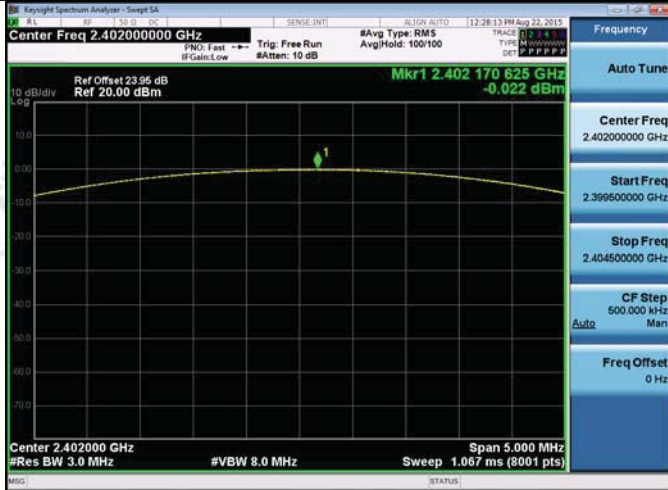


| | |
|------------------------------------|--|
| <p>GFSK/MCH</p> |  |
| <p>GFSK/HCH</p> |  |
| <p>$\pi/4$DQPSK/LCH</p> |  |




| | |
|------------------------------------|--|
| <p>$\pi/4$DQPSK/MCH</p> |  |
| <p>$\pi/4$DQPSK/HCH</p> |  |
| <p>8DPSK/LCH</p> |  |






Appendix F): Band-edge for RF Conducted Emissions

Test Graph

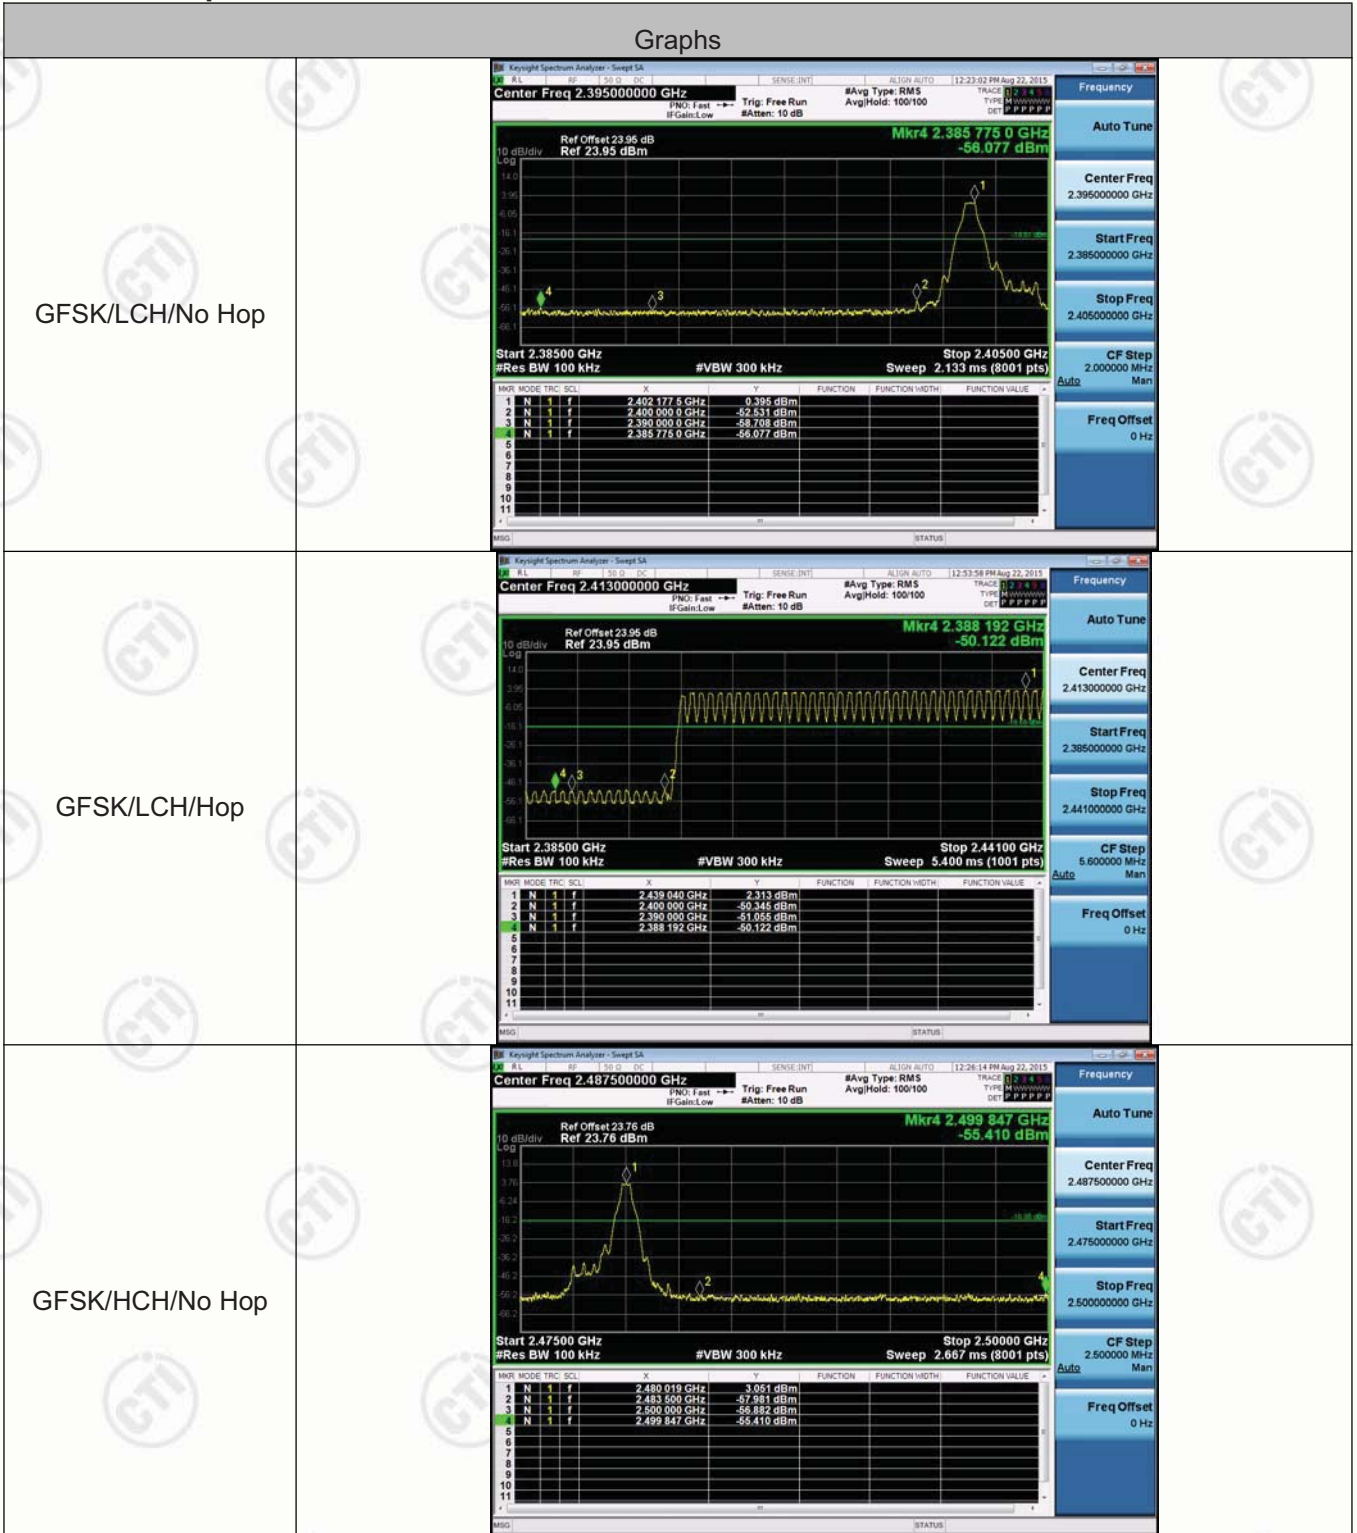
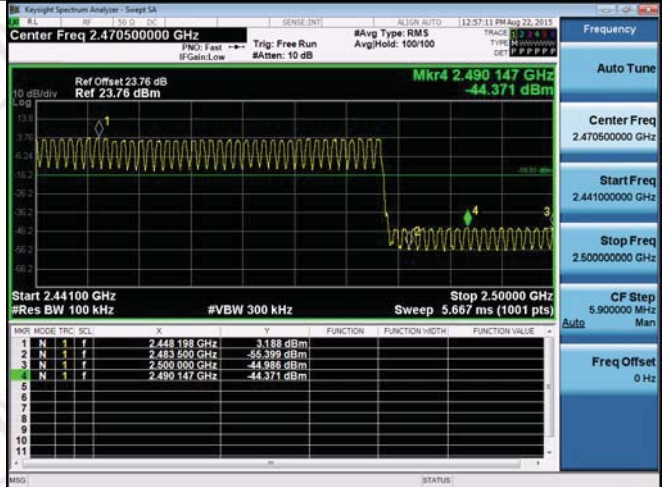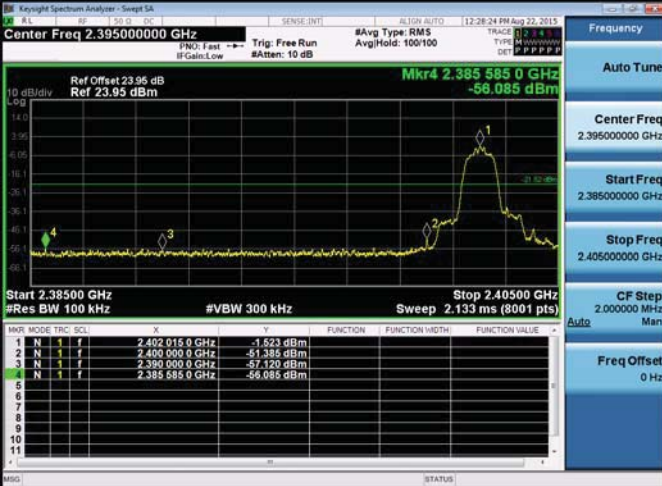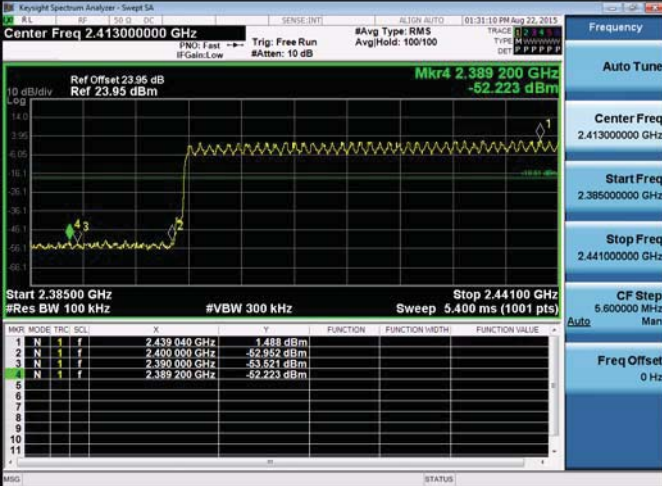
| | | |
|---|--|---|
| <p>GFSK/HCH/Hop</p> |  | <p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.470500000 GHz</p> <p>Start Freq 2.441000000 GHz</p> <p>Stop Freq 2.500000000 GHz</p> <p>CF Step 5.900000 MHz</p> <p>Auto</p> <p>Freq Offset 0 Hz</p> |
| <p>$\pi/4$DQPSK/LCH/No Hop</p> |  | <p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.395000000 GHz</p> <p>Start Freq 2.385000000 GHz</p> <p>Stop Freq 2.405000000 GHz</p> <p>CF Step 2.000000 MHz</p> <p>Auto</p> <p>Freq Offset 0 Hz</p> |
| <p>$\pi/4$DQPSK/LCH/Hop</p> |  | <p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.413000000 GHz</p> <p>Start Freq 2.385000000 GHz</p> <p>Stop Freq 2.441000000 GHz</p> <p>CF Step 5.600000 MHz</p> <p>Auto</p> <p>Freq Offset 0 Hz</p> |

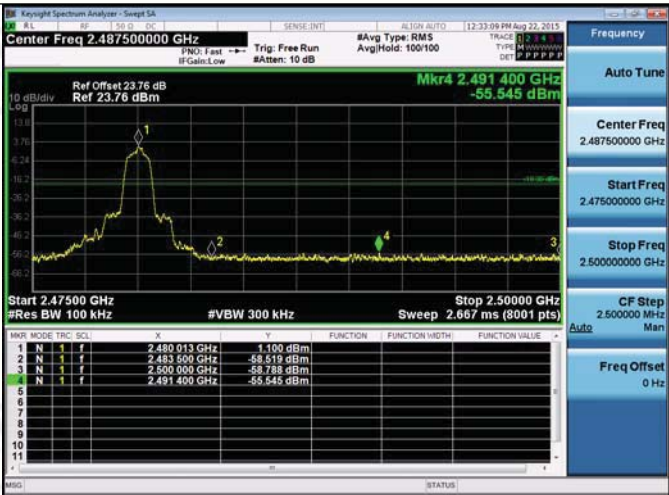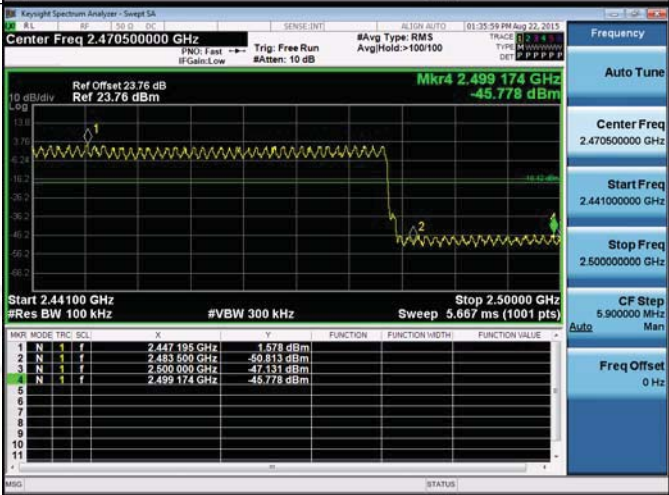
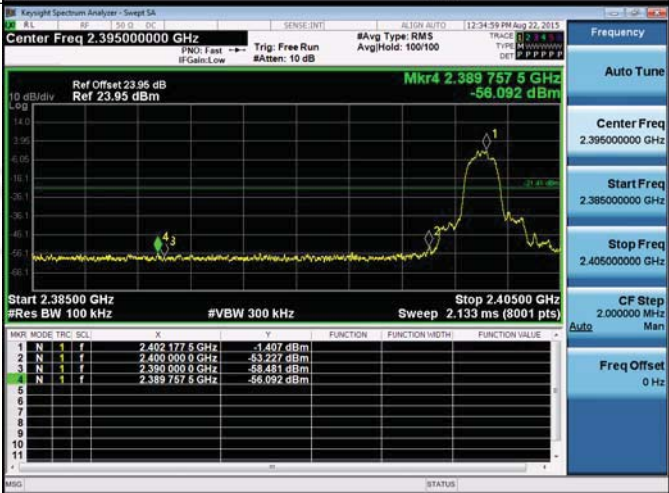
| | | |
|---|--|--|
| <p>$\pi/4$DQPSK/HCH/No Hop</p> |  | |
| <p>$\pi/4$DQPSK/HCH/Hop</p> |  | |
| <p>8DPSK/LCH/No Hop</p> |  | |

| | | |
|-------------------------|---|---|
| <p>8DPSK/LCH/Hop</p> | <p>Key parameters from screenshot:</p> <ul style="list-style-type: none"> Center Freq: 2.413000000 GHz Mkr4: 2.385840 GHz, -50.759 dBm Start: 2.38500 GHz Stop: 2.44100 GHz Sweep: 5.400 ms (1001 pts) | <p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.413000000 GHz</p> <p>Start Freq 2.385000000 GHz</p> <p>Stop Freq 2.441000000 GHz</p> <p>CF Step 5.600000 MHz</p> <p>Freq Offset 0 Hz</p> |
| <p>8DPSK/HCH/No Hop</p> | <p>Key parameters from screenshot:</p> <ul style="list-style-type: none"> Center Freq: 2.487500000 GHz Mkr4: 2.495450 GHz, -55.485 dBm Start: 2.47500 GHz Stop: 2.50000 GHz Sweep: 2.667 ms (8001 pts) | <p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.487500000 GHz</p> <p>Start Freq 2.475000000 GHz</p> <p>Stop Freq 2.500000000 GHz</p> <p>CF Step 2.500000 MHz</p> <p>Freq Offset 0 Hz</p> |
| <p>8DPSK/HCH/Hop</p> | <p>Key parameters from screenshot:</p> <ul style="list-style-type: none"> Center Freq: 2.470500000 GHz Mkr4: 2.498997 GHz, -45.774 dBm Start: 2.44100 GHz Stop: 2.50000 GHz Sweep: 5.667 ms (1001 pts) | <p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.470500000 GHz</p> <p>Start Freq 2.441000000 GHz</p> <p>Stop Freq 2.500000000 GHz</p> <p>CF Step 5.900000 MHz</p> <p>Freq Offset 0 Hz</p> |


Appendix G): RF Conducted Spurious Emissions

Test Graph





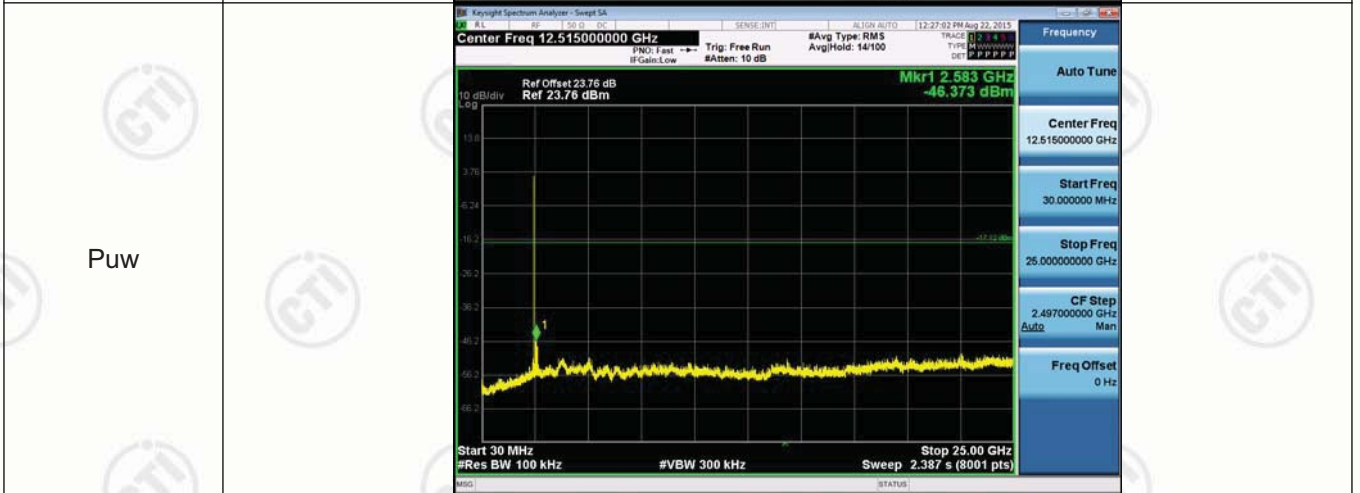
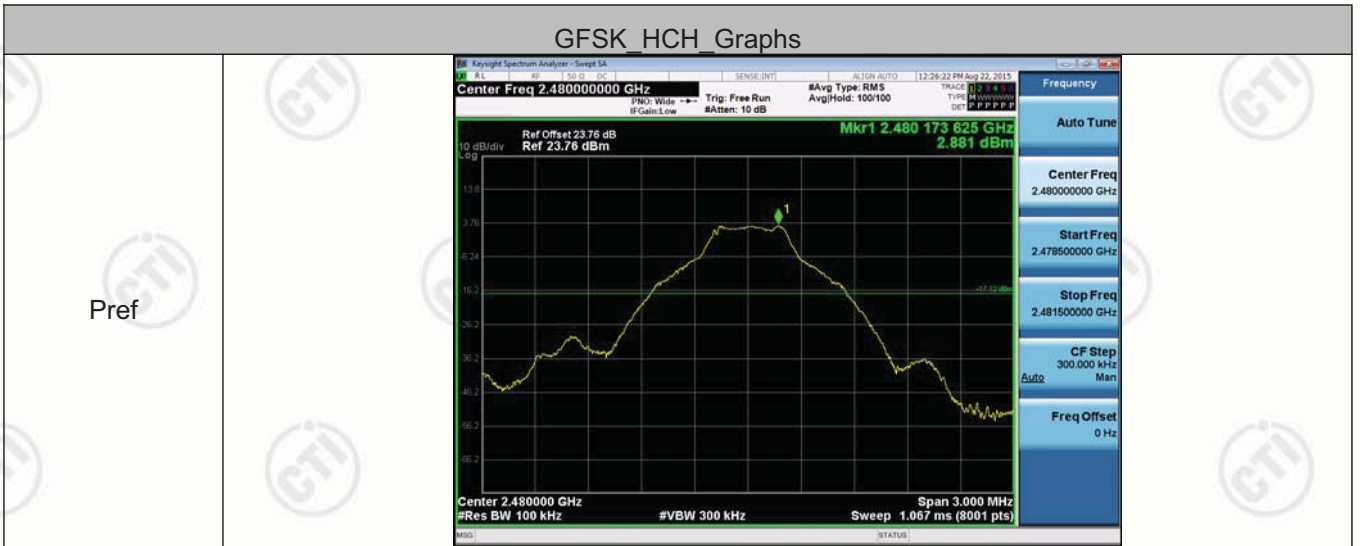


$\pi/4$ DQPSK LCH_Graphs

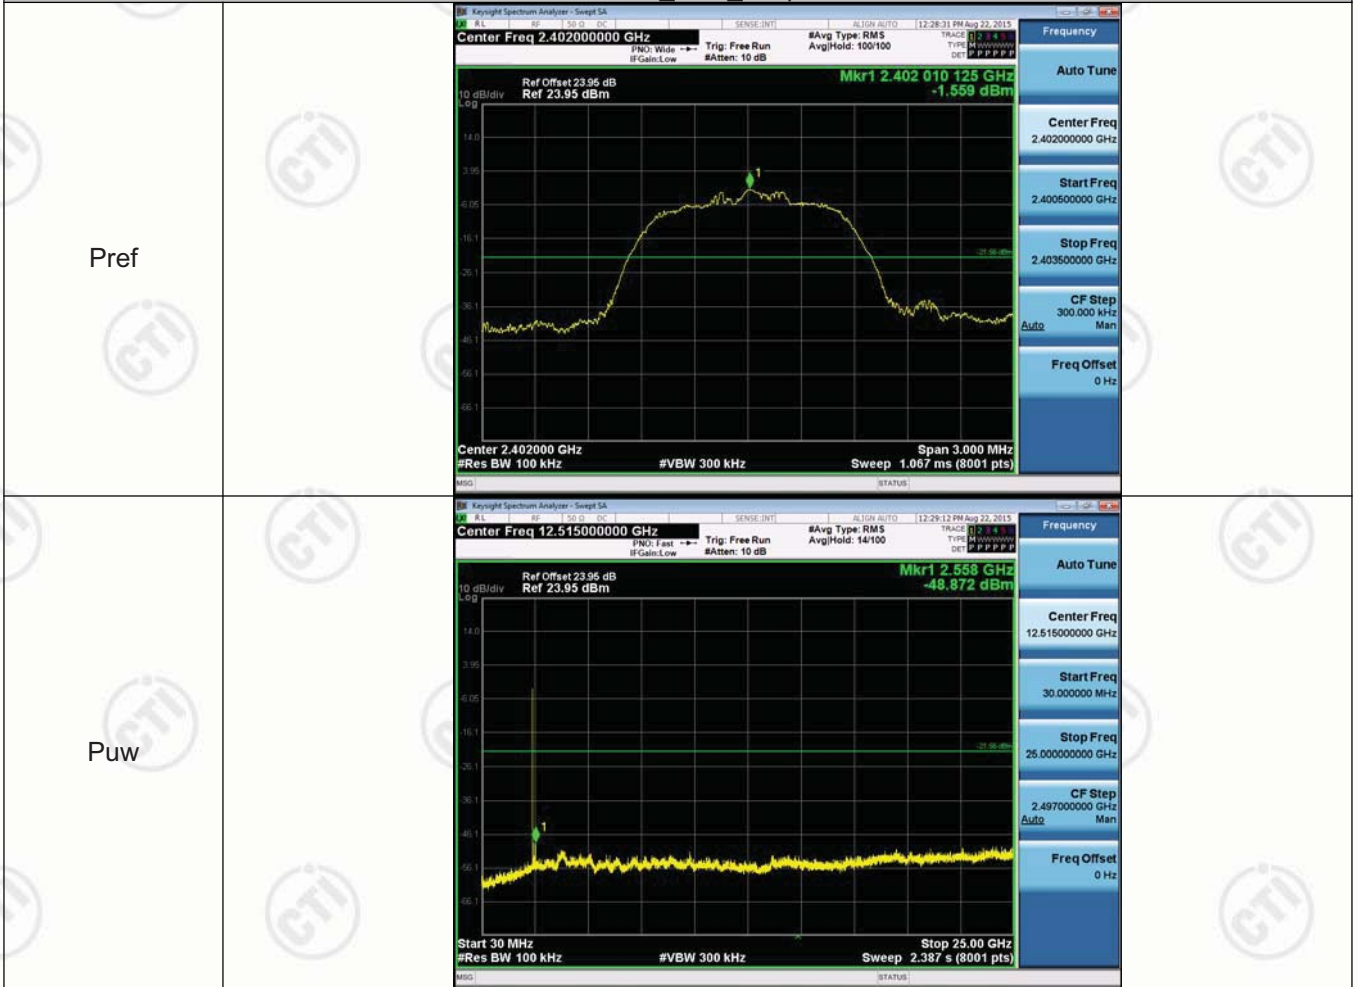


$\pi/4$ DQPSK MCH_Graphs

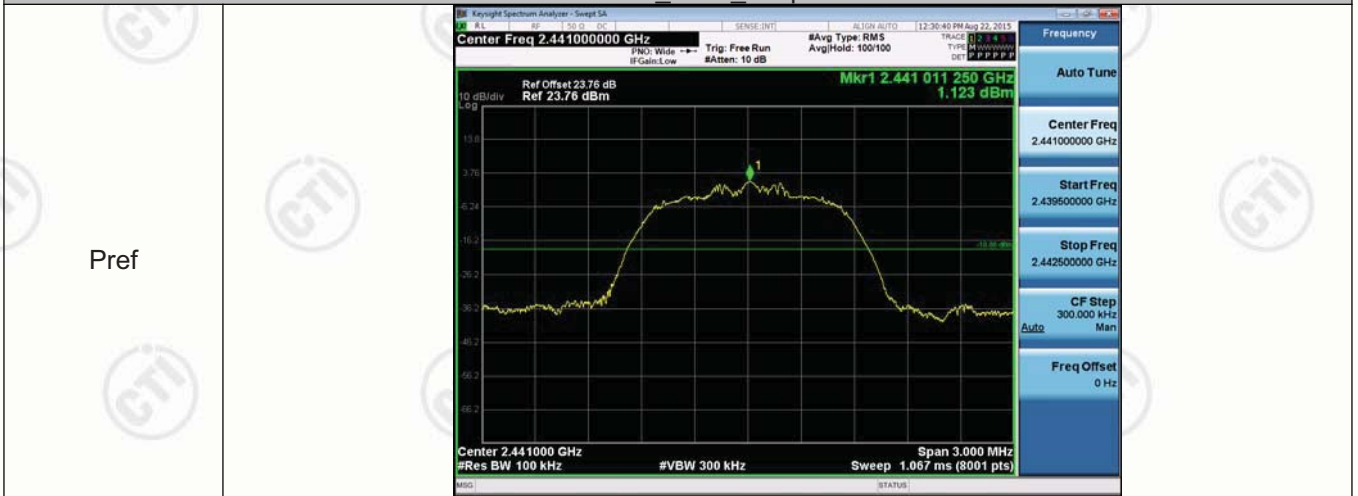

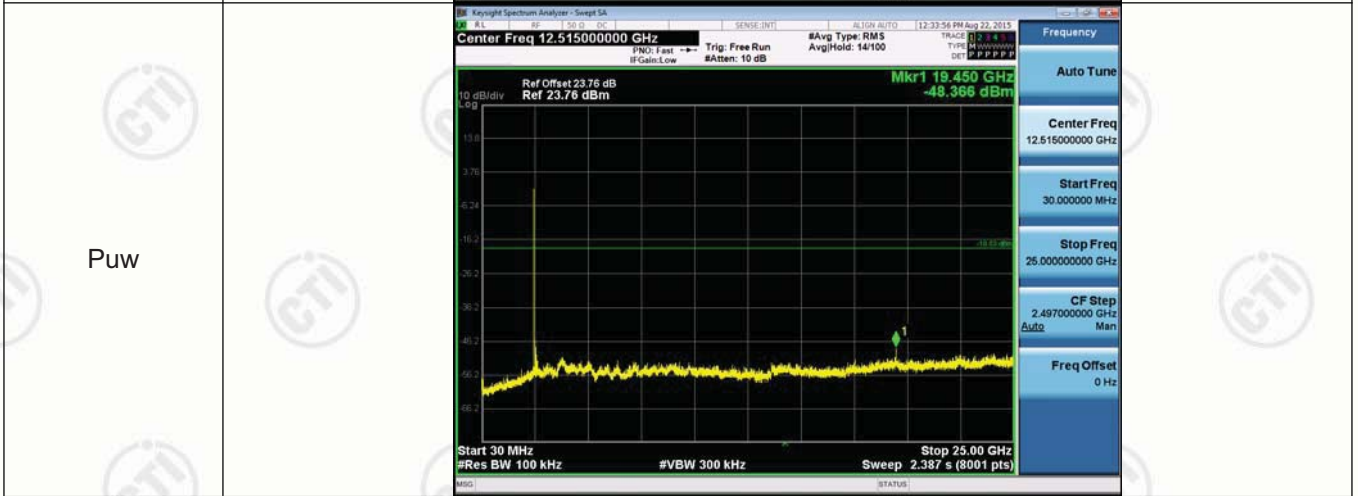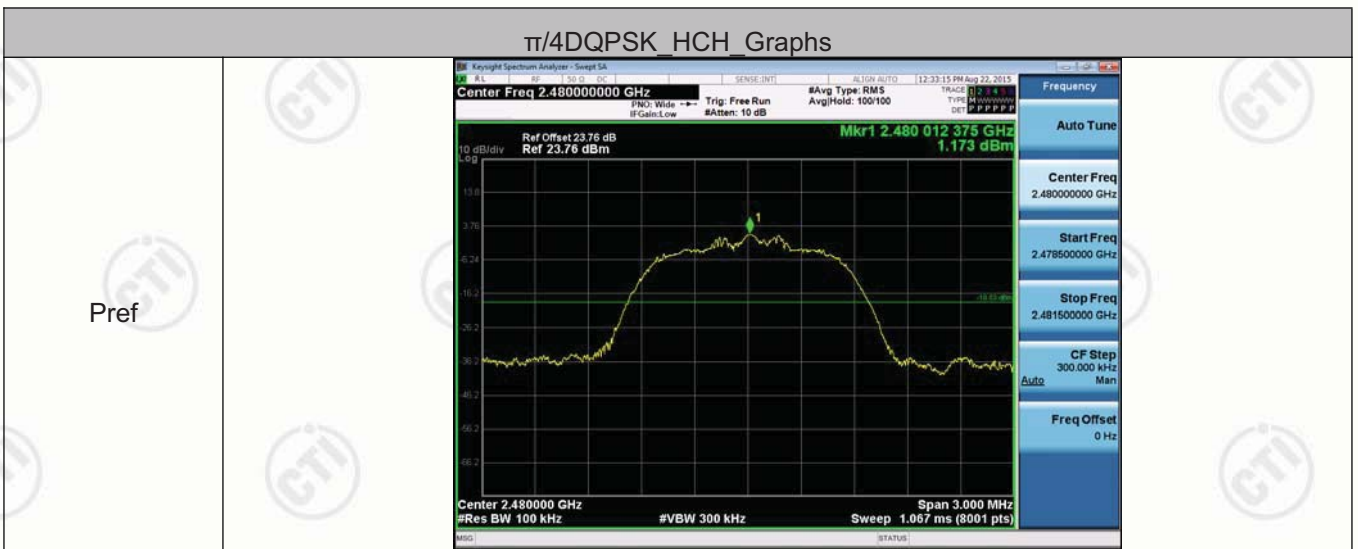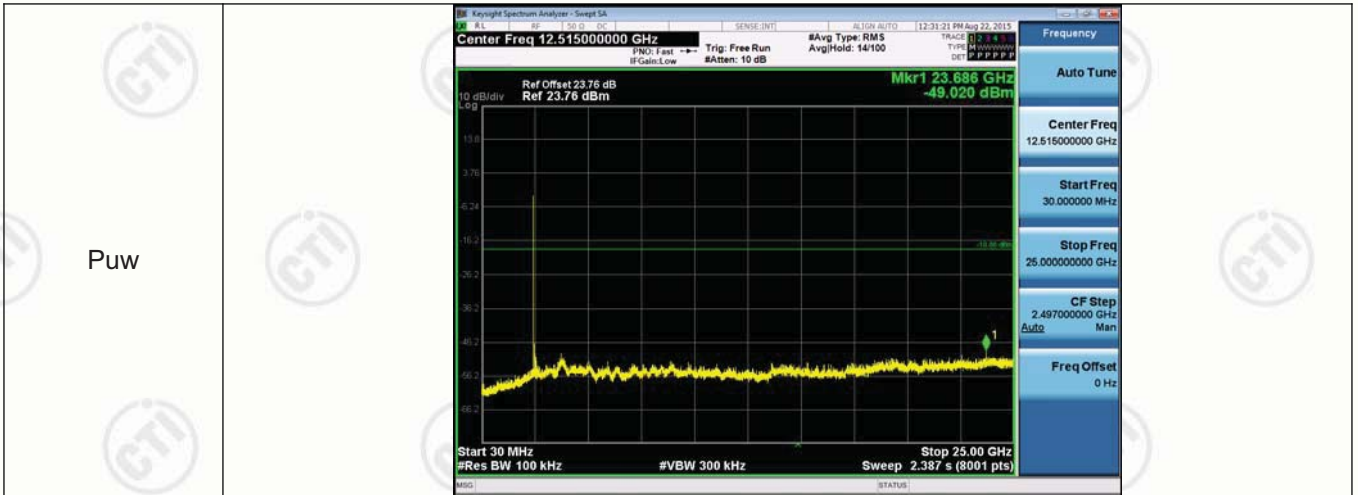


8DPSK LCH Graphs

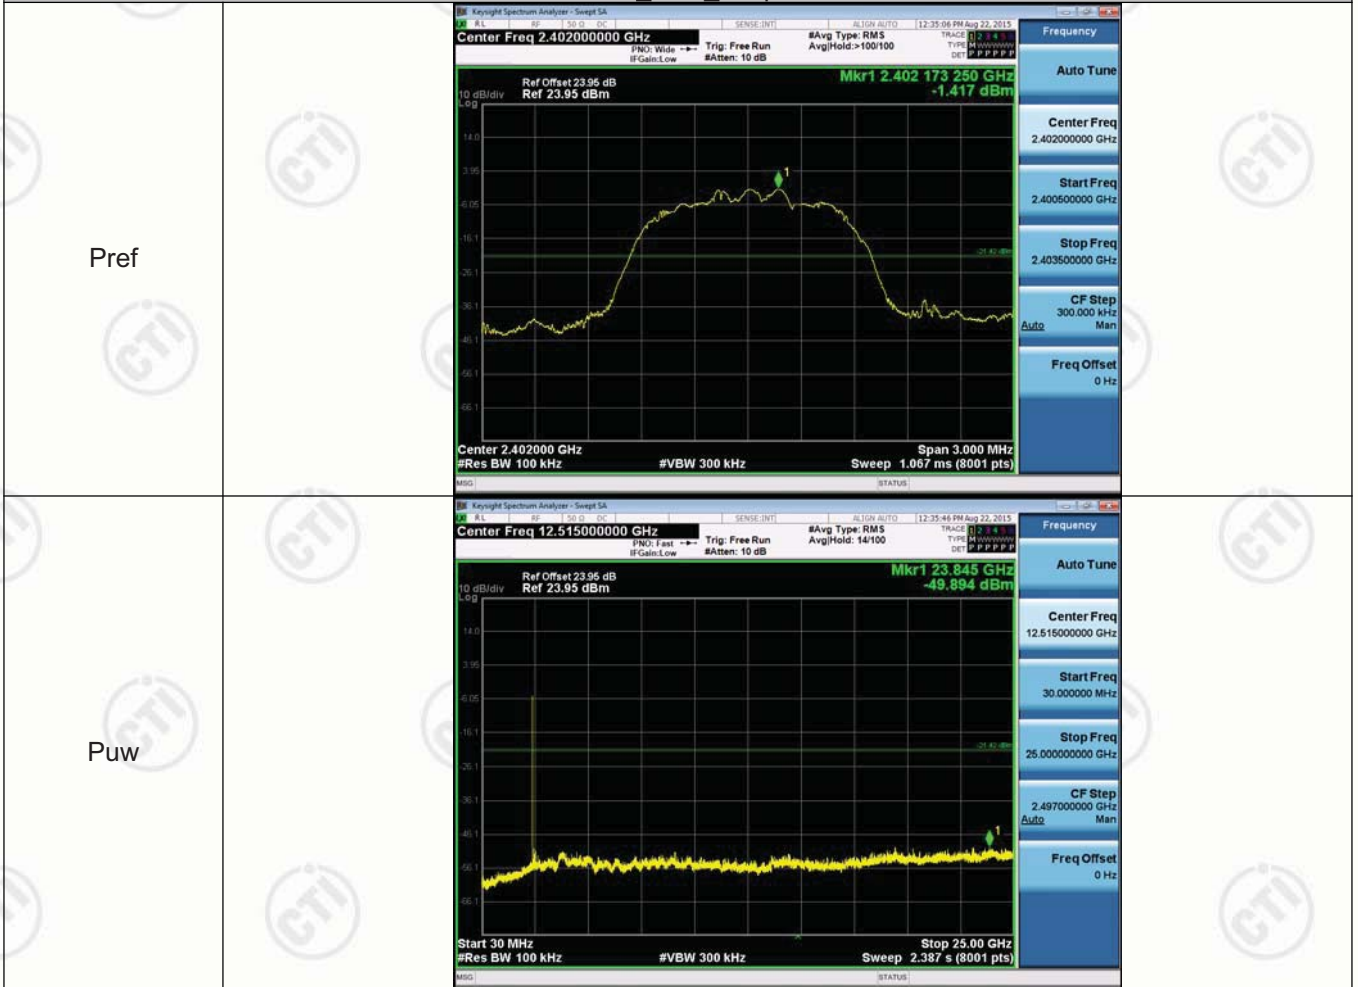

8DPSK MCH Graphs



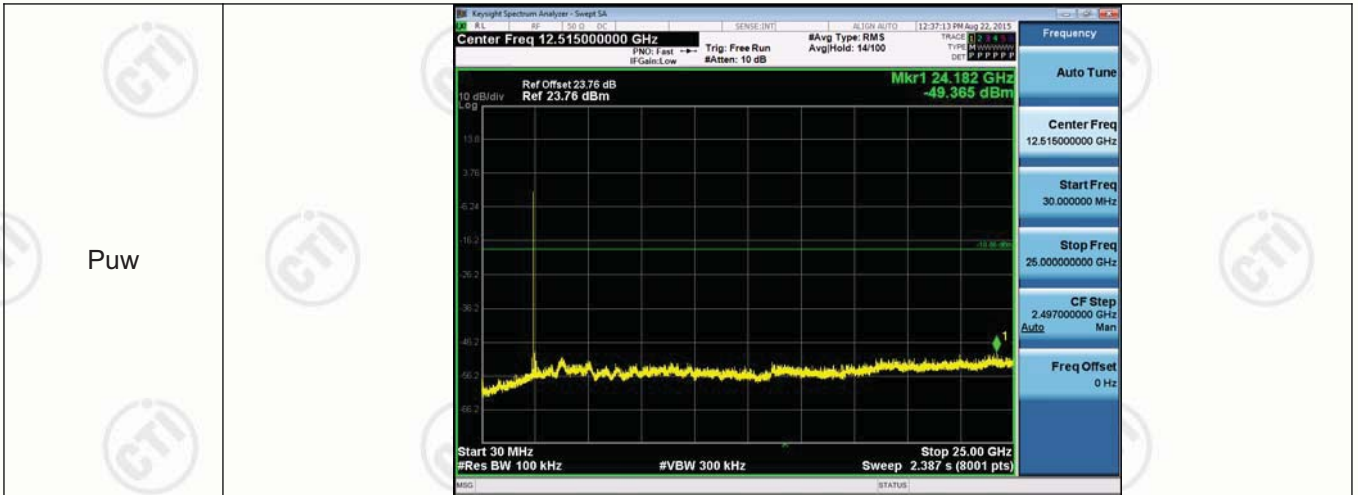

Appendix H) Pseudorandom Frequency Hopping Sequence

| Test Requirement: | 47 CFR Part 15C Section 15.247 (a)(1) requirement: |
|--|--|
| <p>Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.</p> <p>Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.</p> | |
| EUT Pseudorandom Frequency Hopping Sequence | |
| <p>The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones.</p> <ul style="list-style-type: none"> • Number of shift register stages: 9 • Length of pseudo-random sequence: $2^9 - 1 = 511$ bits • Longest sequence of zeros: 8 (non-inverted signal) <div data-bbox="317 952 1370 1099" style="text-align: center;"> </div> <p style="text-align: center;"><i>Linear Feedback Shift Register for Generation of the PRBS sequence</i></p> <p>An example of Pseudorandom Frequency Hopping Sequence as follow:</p> <div data-bbox="288 1198 1273 1346" style="text-align: center;"> </div> <p>Each frequency used equally on the average by each transmitter. The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals.</p> | |
| <p>The device does not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.</p> | |

Appendix I) Antenna Requirement

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

| | |
|---------------------|--|
| EUT Antenna: | |
|---------------------|--|

| | |
|---|--|
| The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 0dBi. | |
|---|--|

Appendix J) AC Power Line Conducted Emission


| <p>Test Procedure:</p> | <p>Test frequency range :150KHz-30MHz</p> <ol style="list-style-type: none"> 1) The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement. | | | | | | | | | | | | | | | | |
|------------------------|---|-----------|--|-----------------------|--------------|--|------------|---------|----------|-----------|-----------|-------|----|----|------|----|----|
| <p>Limit:</p> | <table border="1" data-bbox="497 1205 1369 1422"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table> <p>* The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.</p> <p>NOTE : The lower limit is applicable at the transition frequency</p> | | | Frequency range (MHz) | Limit (dBuV) | | Quasi-peak | Average | 0.15-0.5 | 66 to 56* | 56 to 46* | 0.5-5 | 56 | 46 | 5-30 | 60 | 50 |
| Frequency range (MHz) | Limit (dBuV) | | | | | | | | | | | | | | | | |
| | Quasi-peak | Average | | | | | | | | | | | | | | | |
| 0.15-0.5 | 66 to 56* | 56 to 46* | | | | | | | | | | | | | | | |
| 0.5-5 | 56 | 46 | | | | | | | | | | | | | | | |
| 5-30 | 60 | 50 | | | | | | | | | | | | | | | |

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.


Live line:

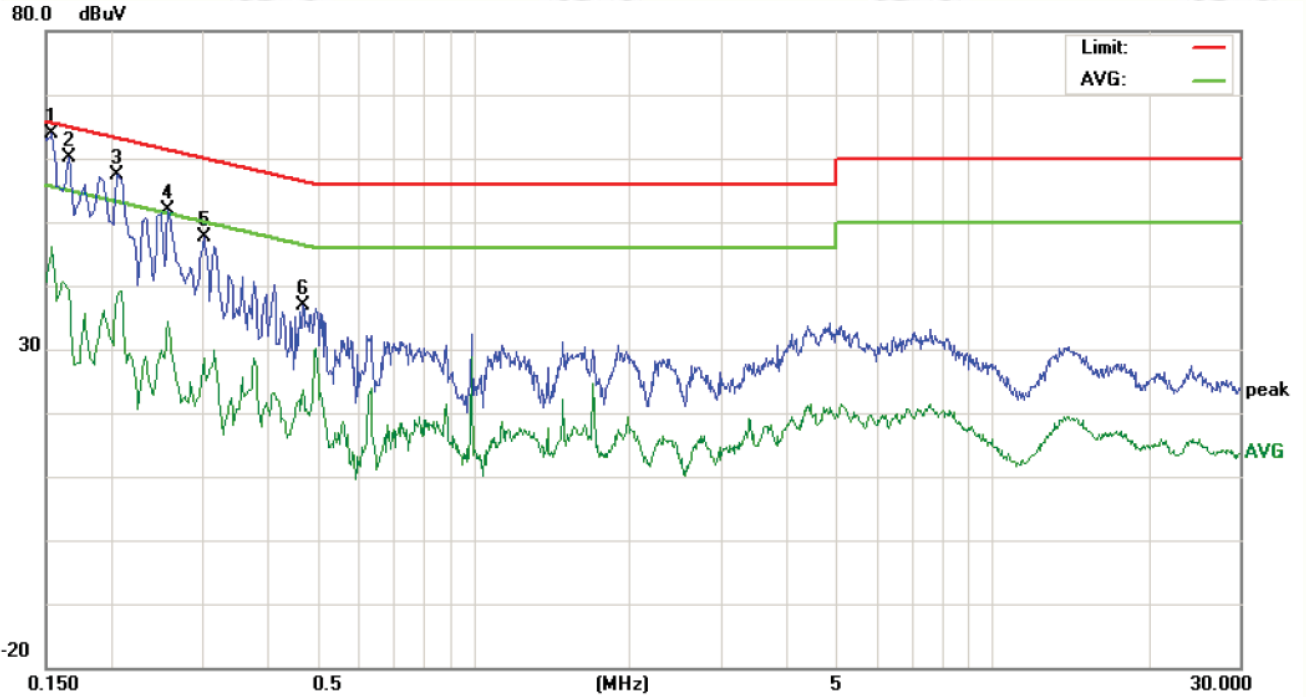

| No. | Freq. MHz | Reading_Level (dBuV) | | | Correct Factor dB | Measurement (dBuV) | | | Limit (dBuV) | | Margin (dB) | | P/F | Comment |
|-----|--------------|-------------------------|-------|-------|-------------------------|-----------------------|-------|-------|-----------------|-------|----------------|--------|-----|---------|
| | | Peak | QP | AVG | | peak | QP | AVG | QP | AVG | QP | AVG | | |
| 1 | 0.1539 | 53.86 | 52.05 | 34.52 | 9.90 | 63.76 | 61.95 | 44.42 | 65.78 | 55.78 | -3.83 | -11.36 | P | |
| 2 | 0.1660 | 50.34 | | 29.35 | 9.90 | 60.24 | | 39.25 | 65.15 | 55.15 | -4.91 | -15.90 | P | |
| 3 | 0.2060 | 47.52 | | 28.51 | 9.90 | 57.42 | | 38.41 | 63.36 | 53.36 | -5.94 | -14.95 | P | |
| 4 | 0.2580 | 41.95 | | 24.50 | 9.90 | 51.85 | | 34.40 | 61.49 | 51.49 | -9.64 | -17.09 | P | |
| 5 | 0.3020 | 37.82 | | 18.69 | 9.90 | 47.72 | | 28.59 | 60.19 | 50.19 | -12.47 | -21.60 | P | |
| 6 | 0.4700 | 27.09 | | 13.79 | 9.90 | 36.99 | | 23.69 | 56.51 | 46.51 | -19.52 | -22.82 | P | |

Neutral line:

80.0 dBuV

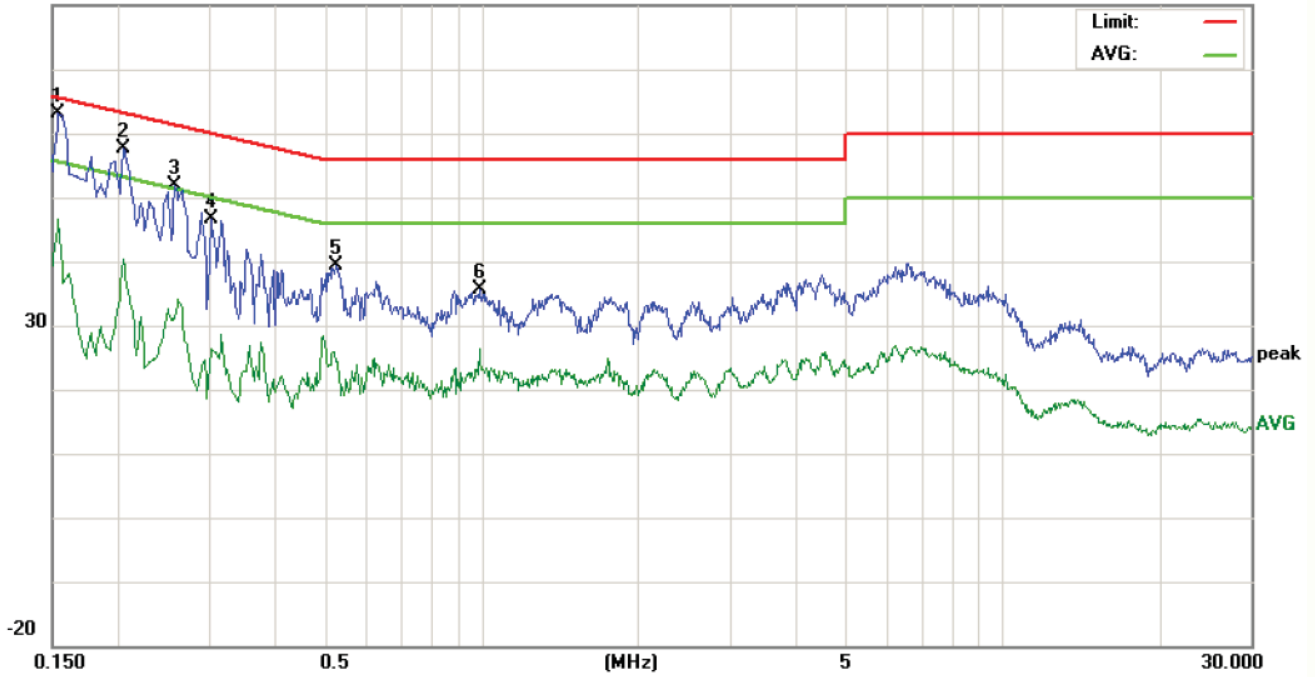

| No. | Freq. MHz | Reading_Level (dBuV) | | | Correct Factor dB | Measurement (dBuV) | | | Limit (dBuV) | | Margin (dB) | | P/F | Comment |
|-----|--------------|-------------------------|-------|-------|-------------------------|-----------------------|-------|-------|-----------------|-------|----------------|--------|-----|---------|
| | | Peak | QP | AVG | | peak | QP | AVG | QP | AVG | QP | AVG | | |
| 1 | 0.1539 | 53.13 | 51.59 | 33.49 | 9.90 | 63.03 | 61.49 | 43.39 | 65.78 | 55.78 | -4.29 | -12.39 | P | |
| 2 | 0.2060 | 47.64 | | 30.44 | 9.90 | 57.54 | | 40.34 | 63.36 | 53.36 | -5.82 | -13.02 | P | |
| 3 | 0.2580 | 41.94 | | 21.17 | 9.90 | 51.84 | | 31.07 | 61.49 | 51.49 | -9.65 | -20.42 | P | |
| 4 | 0.3020 | 36.84 | | 16.39 | 9.90 | 46.74 | | 26.29 | 60.19 | 50.19 | -13.45 | -23.90 | P | |
| 5 | 0.5260 | 29.57 | | 14.50 | 9.90 | 39.47 | | 24.40 | 56.00 | 46.00 | -16.53 | -21.60 | P | |
| 6 | 0.9900 | 25.66 | | 16.35 | 9.90 | 35.56 | | 26.25 | 56.00 | 46.00 | -20.44 | -19.75 | P | |

Notes:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.

Appendix K) Restricted bands around fundamental frequency (Radiated)/Radiated Spurious Emissions

| Receiver Setup: | | | | | |
|-------------------|------------|---------|--------|------------|--|
| Frequency | Detector | RBW | VBW | Remark | |
| 0.009MHz-0.090MHz | Peak | 10kHz | 30kHz | Peak | |
| 0.009MHz-0.090MHz | Average | 10kHz | 30kHz | Average | |
| 0.090MHz-0.110MHz | Quasi-peak | 10kHz | 30kHz | Quasi-peak | |
| 0.110MHz-0.490MHz | Peak | 10kHz | 30kHz | Peak | |
| 0.110MHz-0.490MHz | Average | 10kHz | 30kHz | Average | |
| 0.490MHz -30MHz | Quasi-peak | 10kHz | 30kHz | Quasi-peak | |
| 30MHz-1GHz | Quasi-peak | 120 kHz | 300kHz | Quasi-peak | |
| Above 1GHz | Peak | 1MHz | 3MHz | Peak | |
| | Peak | 1MHz | 10Hz | Average | |

| Test Procedure: | | | | | |
|--|-------------------|----------------------------------|----------------------|------------|--------------------------|
| Below 1GHz test procedure as below: | | | | | |
| a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. | | | | | |
| b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. | | | | | |
| c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. | | | | | |
| d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. | | | | | |
| e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. | | | | | |
| f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. | | | | | |
| Above 1GHz test procedure as below: | | | | | |
| g. Test the EUT in the lowest channel ,the middle channel ,the Highest channel | | | | | |
| h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case. | | | | | |
| i. Repeat above procedures until all frequencies measured was complete. | | | | | |
| Limit: | Frequency | Field strength (microvolt/meter) | Limit (dB μ V/m) | Remark | Measurement distance (m) |
| | 0.009MHz-0.490MHz | 2400/F(kHz) | - | - | 300 |
| | 0.490MHz-1.705MHz | 24000/F(kHz) | - | - | 30 |
| | 1.705MHz-30MHz | 30 | - | - | 30 |
| | 30MHz-88MHz | 100 | 40.0 | Quasi-peak | 3 |
| | 88MHz-216MHz | 150 | 43.5 | Quasi-peak | 3 |
| | 216MHz-960MHz | 200 | 46.0 | Quasi-peak | 3 |
| | 960MHz-1GHz | 500 | 54.0 | Quasi-peak | 3 |
| | Above 1GHz | 500 | 54.0 | Average | 3 |
| Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device. | | | | | |

Radiated Spurious Emissions test Data:

All the modes of operation (X, Y, Z) were investigated and the worst-case emissions are reported.


A. Below 30MHz:

No emissions were found higher than the background below 30MHz and background is lower than the limit, so it deems to compliance with the limit without recorded.

B. 30MHz ~ 1GHz:


The test data of low channel, middle channel and high channel are almost same in frequency bands 30MHz to 1GHz, and the data of middle channel (GFSK mode) are chosen as representative in below:

H:

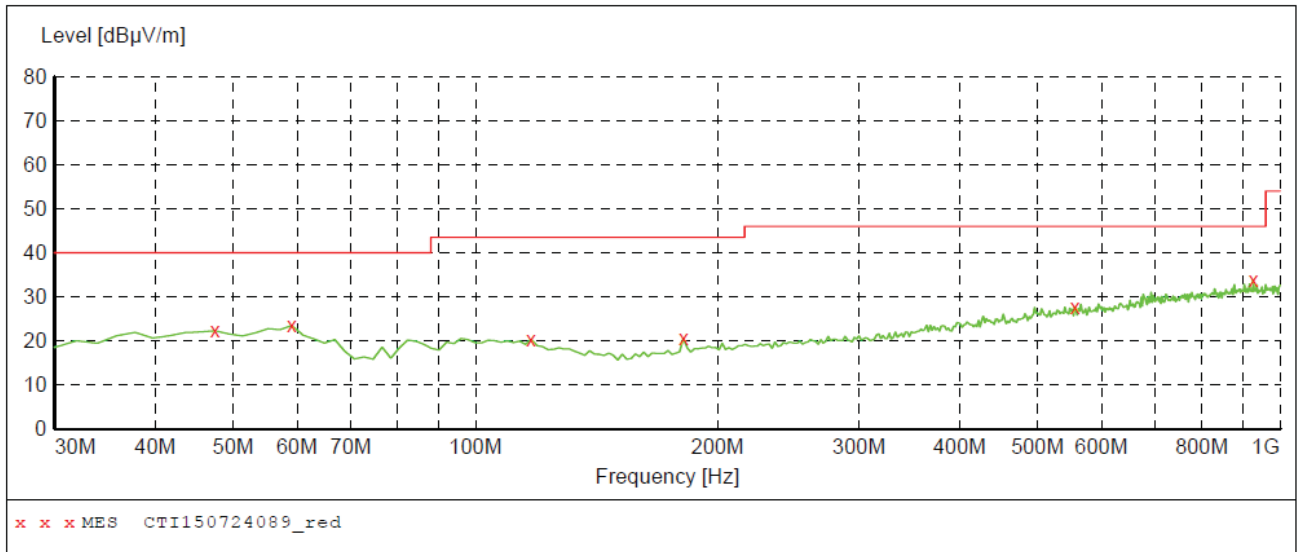

| Frequency MHz | Level dBµV/m | Transd dB | Limit dBµV/m | Margin dB | Det. | Height cm | Azimuth deg | Polarization |
|------------------|-----------------|--------------|-----------------|--------------|------|--------------|----------------|--------------|
| 47.460000 | 22.30 | 16.3 | 40.0 | 17.7 | --- | 200.0 | 321.00 | HORIZONTAL |
| 59.100000 | 23.50 | 15.3 | 40.0 | 16.5 | --- | 100.0 | 220.00 | HORIZONTAL |
| 117.300000 | 20.30 | 13.4 | 43.5 | 23.2 | --- | 100.0 | 157.00 | HORIZONTAL |
| 181.320000 | 20.60 | 12.9 | 43.5 | 22.9 | --- | 200.0 | 296.00 | HORIZONTAL |
| 555.740000 | 27.70 | 21.9 | 46.0 | 18.3 | --- | 100.0 | 277.00 | HORIZONTAL |
| 926.280000 | 33.90 | 26.7 | 46.0 | 12.1 | --- | 200.0 | 284.00 | HORIZONTAL |

V:

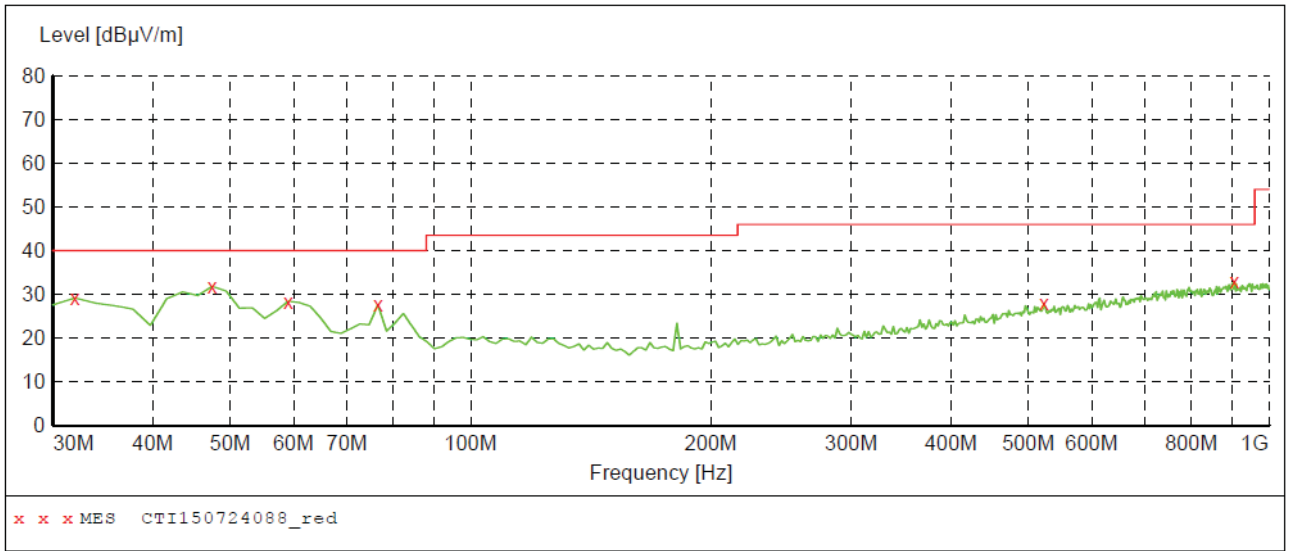

| Frequency MHz | Level dBµV/m | Transd dB | Limit dBµV/m | Margin dB | Det. | Height cm | Azimuth deg | Polarization |
|---------------|--------------|-----------|--------------|-----------|------|-----------|-------------|--------------|
| 31.940000 | 29.20 | 14.1 | 40.0 | 10.8 | --- | 100.0 | 42.00 | VERTICAL |
| 47.460000 | 31.80 | 16.3 | 40.0 | 8.2 | --- | 100.0 | 334.00 | VERTICAL |
| 59.100000 | 28.40 | 15.3 | 40.0 | 11.6 | --- | 100.0 | 202.00 | VERTICAL |
| 76.560000 | 27.60 | 10.7 | 40.0 | 12.4 | --- | 200.0 | 132.00 | VERTICAL |
| 522.760000 | 27.90 | 21.7 | 46.0 | 18.1 | --- | 200.0 | 10.00 | VERTICAL |
| 904.940000 | 32.90 | 26.7 | 46.0 | 13.1 | --- | 200.0 | 143.00 | VERTICAL |

C. Above 1GHz:
Test Results-(Measurement Distance: 3m)_Channel low_2402MHz_GFSK mode:

| Frequency (MHz) | Measurement (dBuV/m) | Limit (dBuV/m) | Detector Type | Antenna (H/V) | Result (P/F) |
|-----------------|----------------------|----------------|---------------|---------------|--------------|
| 2390.0 | 36.02 | 74 | PK | H | P |
| 2400.0 | 45.82 | 74 | PK | H | P |
| 2402.0* | 84.73 | --- | PK | H | P |
| 4804.0 | 42.11 | 74 | PK | H | P |
| 2390.0 | 36.13 | 74 | PK | V | P |
| 2400.0 | 44.03 | 74 | PK | V | P |
| 2402.0* | 86.35 | --- | PK | V | P |
| 4804.0 | 43.74 | 74 | PK | V | P |

*: fundamental frequency

Test Results-(Measurement Distance: 3m)_Channel middle_2441MHz_GFSK mode:

| Frequency (MHz) | Measurement (dBuV/m) | Limit (dBuV/m) | Detector Type | Antenna (H/V) | Result (P/F) |
|-----------------|----------------------|----------------|---------------|---------------|--------------|
| 2441.0* | 87.28 | --- | PK | H | P |
| 4882.0 | 44.75 | 74 | PK | H | P |
| 2441.0* | 88.01 | --- | PK | V | P |
| 4882.0 | 45.34 | 74 | PK | V | P |

*: fundamental frequency

Test Results-(Measurement Distance: 3m)_Channel high_2480MHz_GFSK mode:


| Frequency (MHz) | Measurement (dBuV/m) | Limit (dBuV/m) | Detector Type | Antenna (H/V) | Result (P/F) |
|-----------------|----------------------|----------------|---------------|---------------|--------------|
| 2480.0* | 86.57 | --- | PK | H | P |
| 2483.5 | 43.31 | 74 | PK | H | P |
| 4960.0 | 41.95 | 74 | PK | H | P |
| 2480.0* | 88.09 | --- | PK | V | P |
| 2483.5 | 42.87 | 74 | PK | V | P |
| 4960.0 | 44.08 | 74 | PK | V | P |

*: fundamental frequency


Remark:

- The above tables show that the frequencies peak data are all below the average limit, so the average data of these frequencies are deemed to fulfill the average limits and not reported.
- All the modes of GFSK, $\pi/4$ -DQPSK and 8DPSK have been tested. The worst case is GFSK mode, and the worst data of GFSK mode are chosen as above.
- No emission found from 18GHz to 25GHz.
- All outside of operating frequency band and restricted band specified are below 15.209.

PHOTOGRAPHS OF TEST SETUP

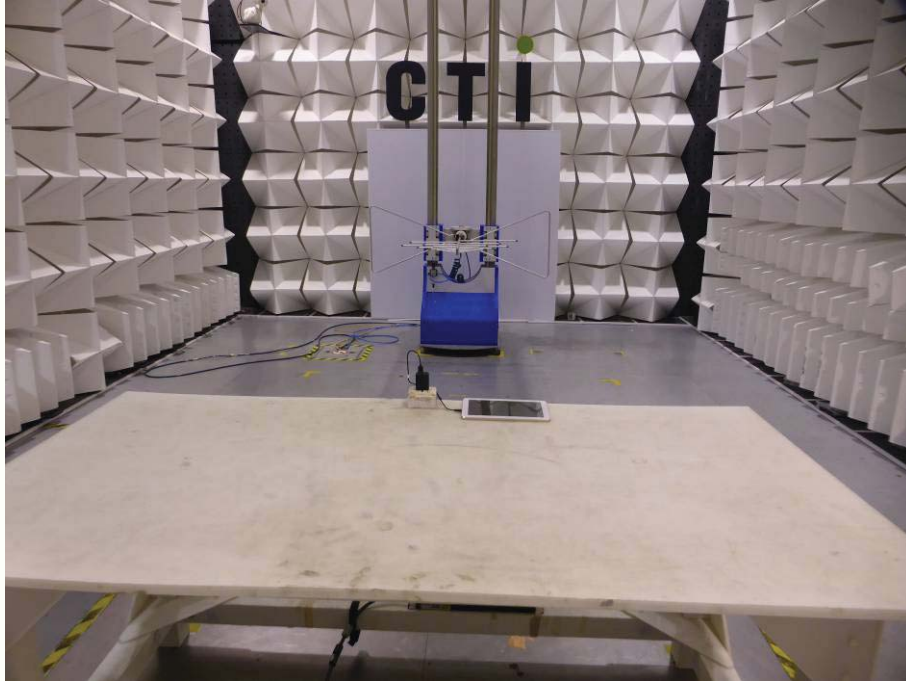

Radiated spurious emission Test Setup-1(Below 1GHz)

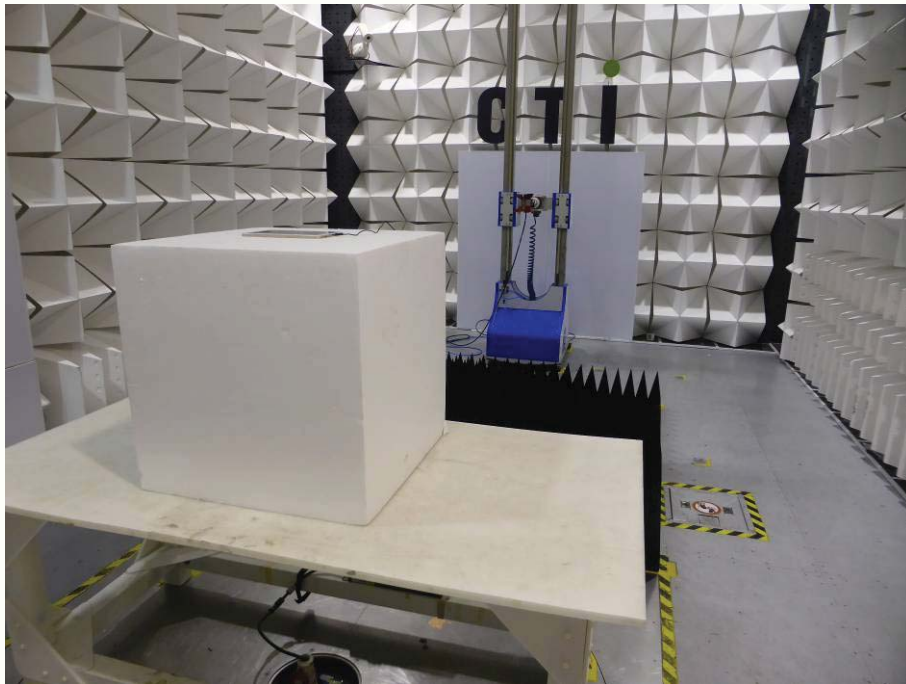

Radiated spurious emission Test Setup-2(Above 1GHz)



Conducted emission Test Setup


PHOTOGRAPHS OF EUT Constructional Details




View of General Product-1



View of External Product-1

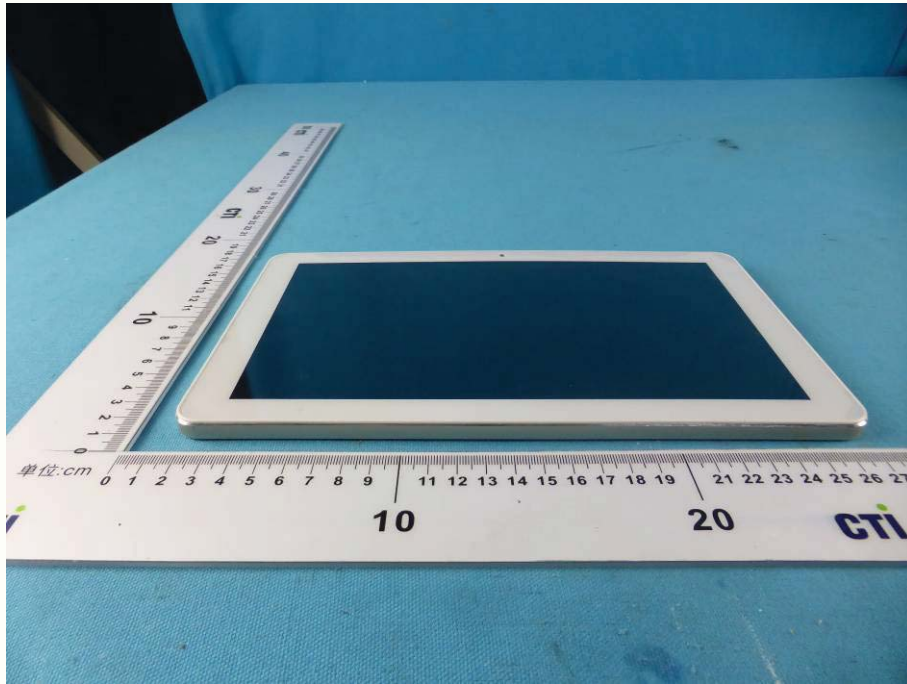


View of External Product-2

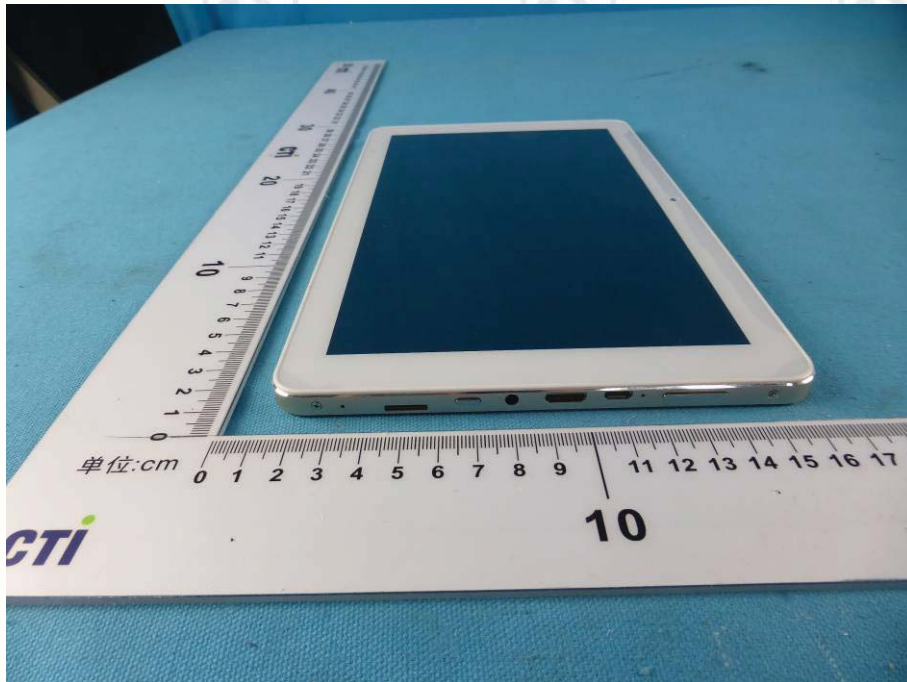


View of External Product-3



View of External Product-4

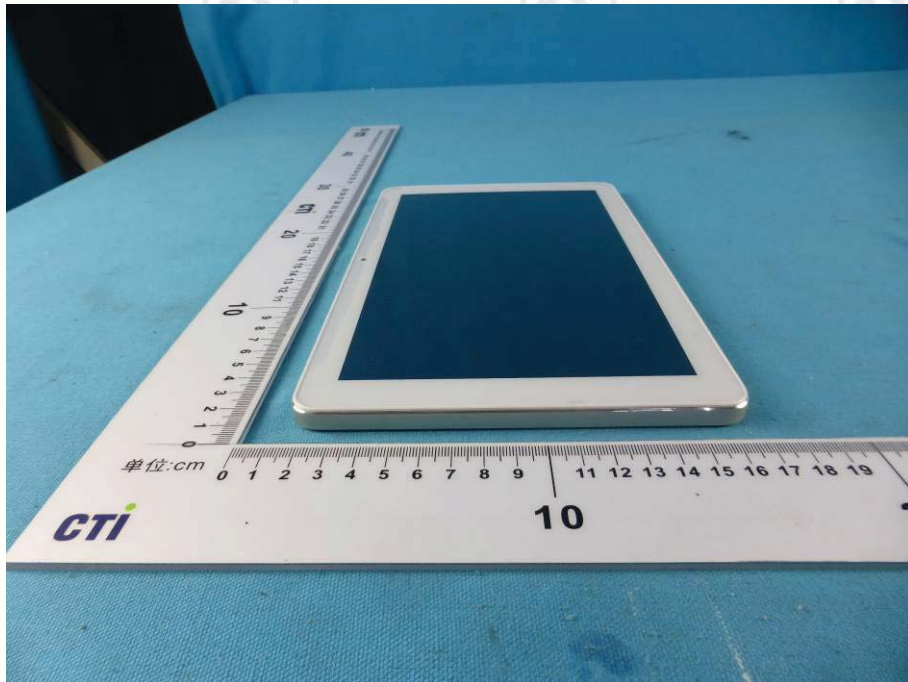


View of External Product-5

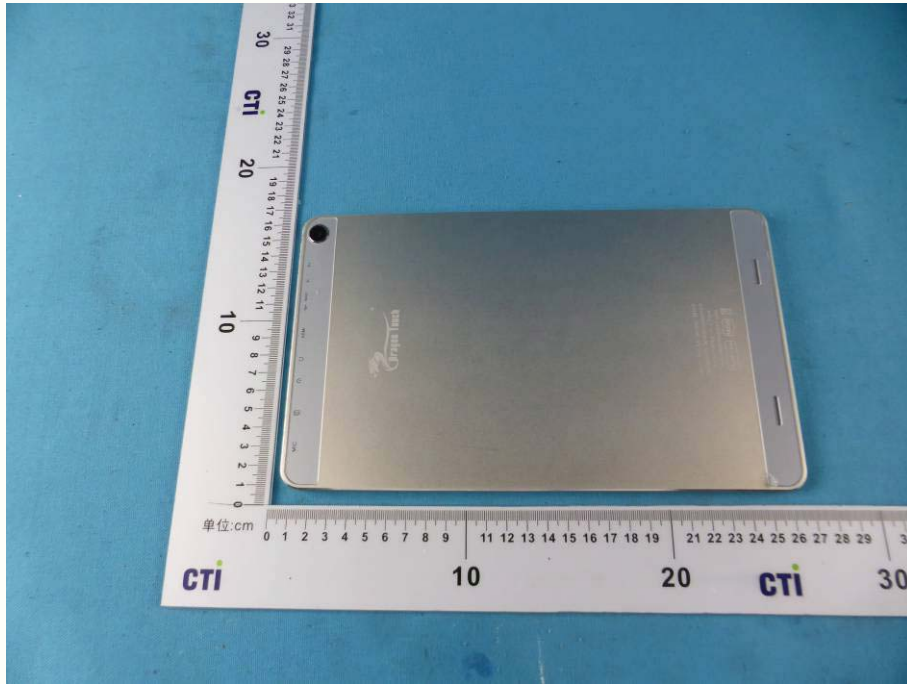


View of External Product-6




View of Internal Product-1

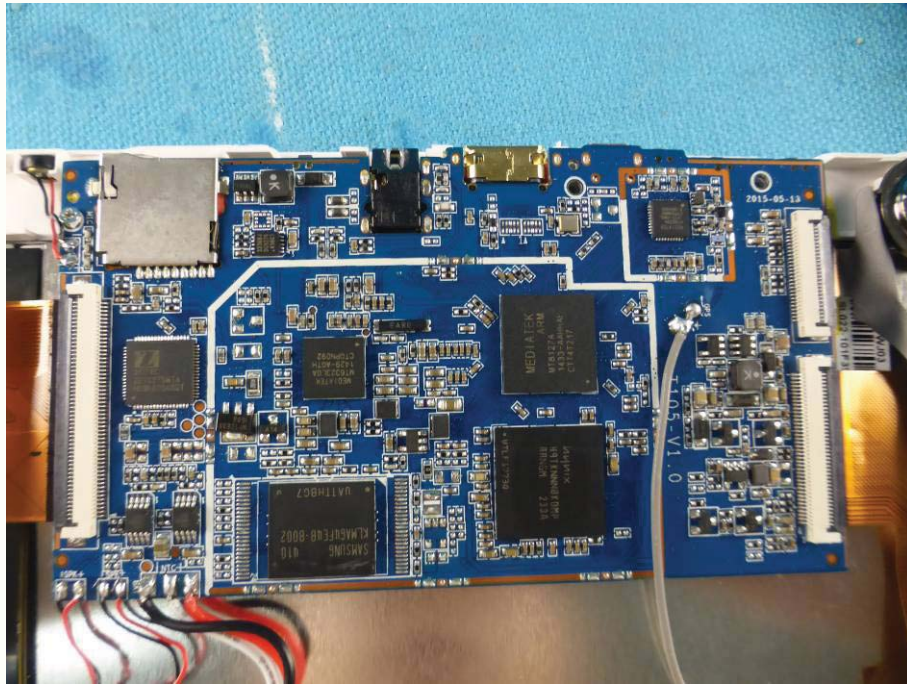


View of Internal Product-2

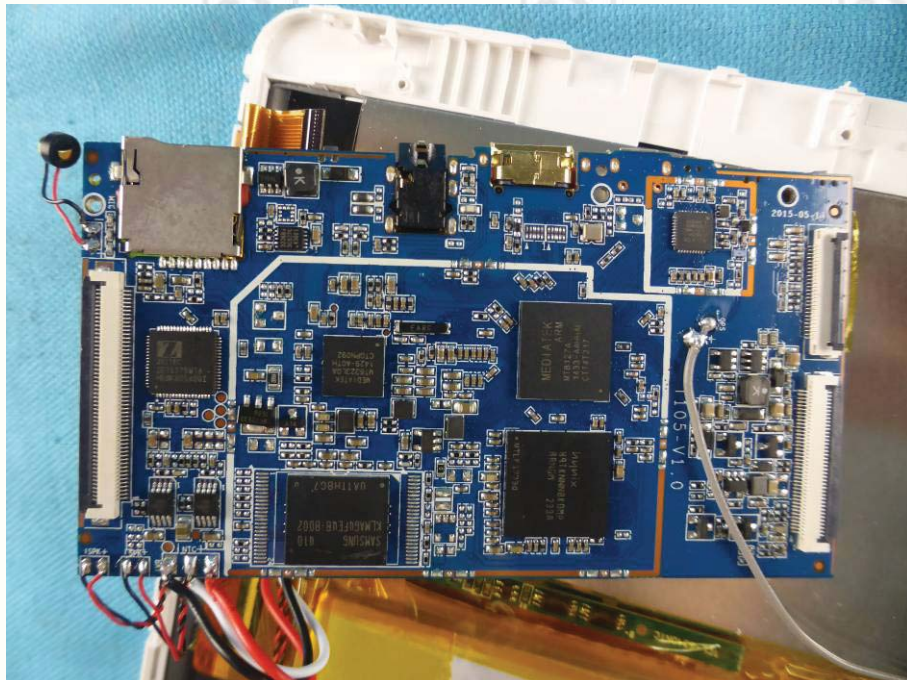

View of Internal Product-3

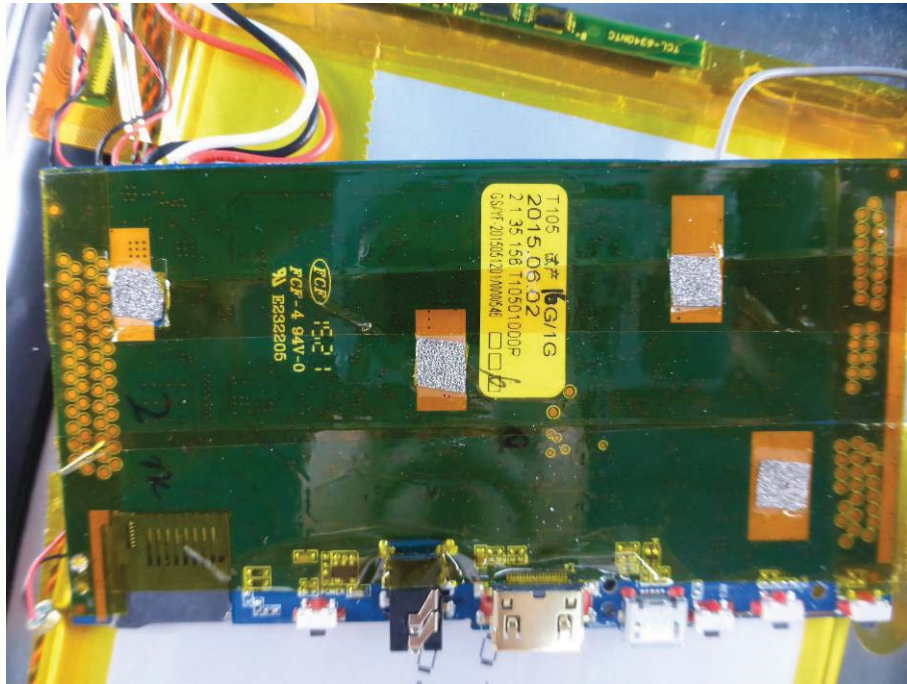

View of Internal Product-4

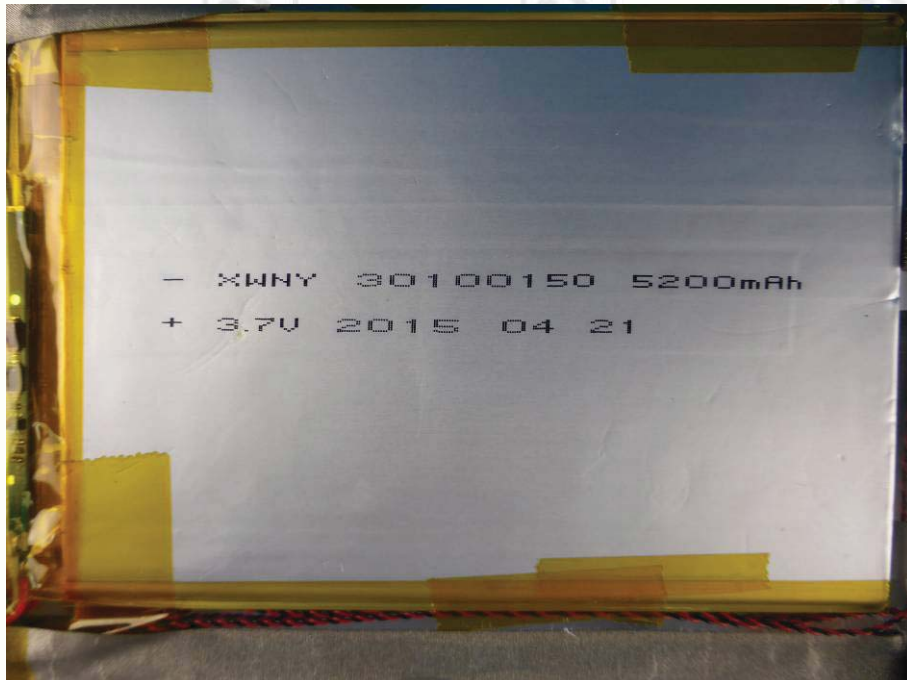

View of Internal Product-9

*** End of Report ***

The test report is effective only with both signature and specialized stamp. The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CTI, this report can't be reproduced except in full.