

TEST REPORT

Product : 7" Tablet PC
Trade mark : KINGPAD, Dragon Touch
Model/Type reference : K77, K77X, K77 PLUS, K77 PRO,
K77X PLUS, K77X PRO
Serial Number : N/A
Report Number : EED32H000943-2
FCC ID : S5V-D107K2
Date of Issue : Aug. 24, 2015
Test Standards : 47 CFR Part 15 Subpart C (2014)
Test result : PASS

Prepared for:

Proexpress Distributor LLC

11011 GREENWOOD AVE.N APT 5, SEATTLE, WA 98103, United States

Prepared by:

Centre Testing International (Shenzhen) Corporation

**Building C, Scientific Innovation Park, Tiegang Reservoir, Xixiang, Baoan
District, Shenzhen, China**

TEL: +86-755-3368 3668

FAX: +86-755-3368 3385

Tested by:

Ware Xin

Reviewed by:

Kevin Lan

Approved by:

Sheek Luo

Date:

Aug. 24, 2015

Sheek Luo

Lab supervisor

Check No.: 2212824360



2 Version

Version No.	Date	Description
00	Aug. 24, 2015	Original

3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10-2013	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013	PASS
Power Spectral Density	47 CFR Part 15, Subpart C Section 15.247 (e)	ANSI C63.10-2013	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10-2013	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10-2013	PASS
Radiated Spurious Emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

Remark:

All models are same except model name and brand name. Model K77 was selected for test.


4 Content

1 COVER PAGE	1
2 VERSION	2
3 TEST SUMMARY	3
4 CONTENT	4
5 TEST REQUIREMENT	5
5.1 TEST SETUP.....	5
5.1.1 For Conducted test setup.....	5
5.1.2 For Radiated Emissions test setup.....	5
5.1.3 For Conducted Emissions test setup.....	6
5.2 TEST ENVIRONMENT.....	6
5.3 TEST CONDITION.....	6
6 GENERAL INFORMATION	8
6.1 CLIENT INFORMATION.....	8
6.2 GENERAL DESCRIPTION OF EUT.....	8
6.3 <i>PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD</i>	8
6.4 DESCRIPTION OF SUPPORT UNITS.....	9
6.5 TEST LOCATION.....	9
6.6 TEST FACILITY.....	9
6.7 DEVIATION FROM STANDARDS.....	10
6.8 ABNORMALITIES FROM STANDARD CONDITIONS.....	10
6.9 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	10
6.10 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2).....	11
7 EQUIPMENT LIST	12
8 RADIO TECHNICAL REQUIREMENTS SPECIFICATION	15
<i>Appendix A): Conducted Peak Output Power</i>	16
<i>Appendix B): 6dB Occupied Bandwidth</i>	21
<i>Appendix C): Band-edge for RF Conducted Emissions</i>	26
<i>Appendix D): RF Conducted Spurious Emissions</i>	29
<i>Appendix E): Power Spectral Density</i>	37
<i>Appendix F) Antenna Requirement</i>	42
<i>Appendix G) AC Power Line Conducted Emission</i>	43
<i>Appendix H) Restricted bands around fundamental frequency /Radiated Spurious Emissions</i>	46
PHOTOGRAPHS OF TEST SETUP	53
PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	55

5 Test Requirement

5.1 Test setup

5.1.1 For Conducted test setup

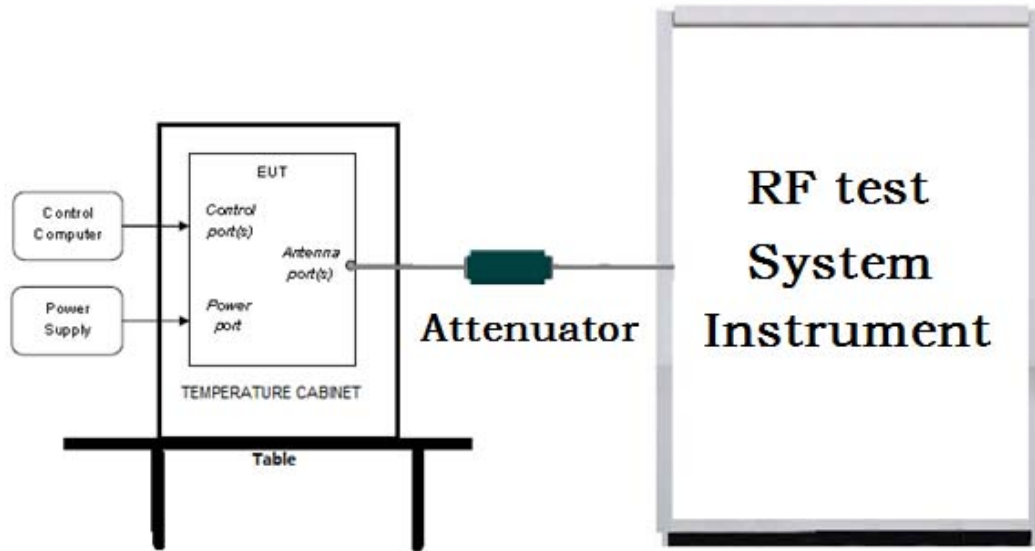

5.1.2 For Radiated Emissions test setup

Radiated Emissions setup:

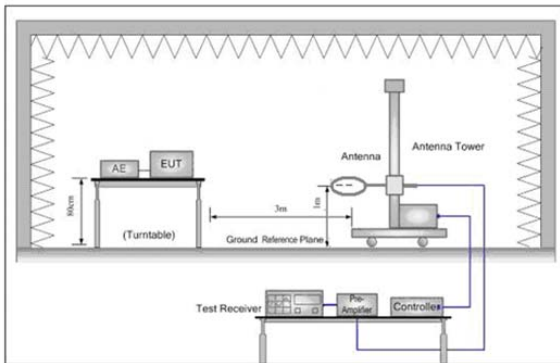


Figure 1. Below 30MHz

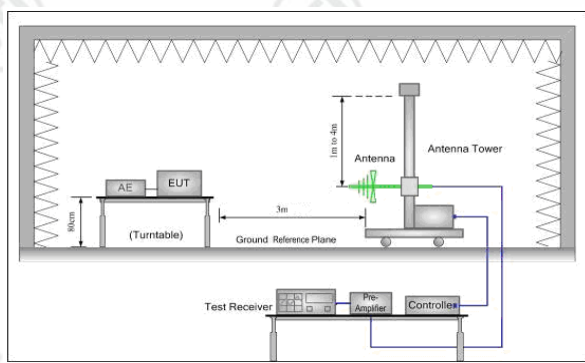


Figure 2. 30MHz to 1GHz


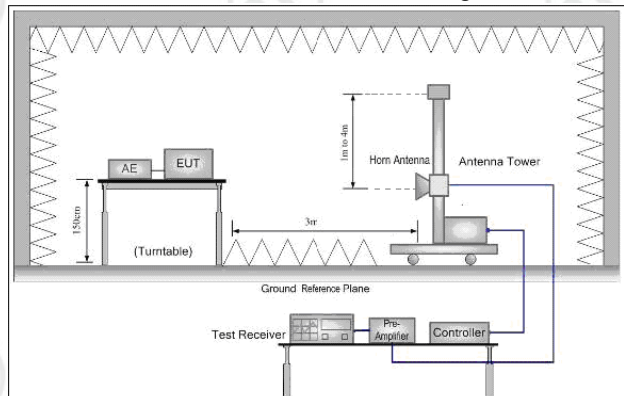


Figure 3. Above 1GHz

5.1.3 For Conducted Emissions test setup

Conducted Emissions setup

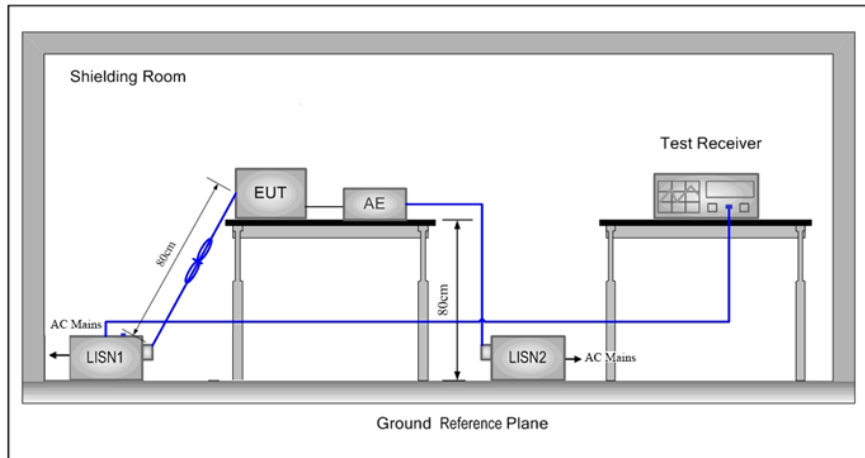

5.2 Test Environment

Operating Environment:	
Temperature:	25.0 °C
Humidity:	53 % RH
Atmospheric Pressure:	995mbar

5.3 Test Condition

Test channel:

Test Mode	Tx/Rx	RF Channel		
		Low(L)	Middle(M)	High(H)
802.11b/g/n(HT20)	2412MHz ~2462 MHz	Channel 1	Channel 6	Channel11
		2412MHz	2437MHz	2462MHz
802.11n(HT40)	2422MHz ~2452 MHz	Channel 1	Channel 4	Channel7
		2422MHz	2437MHz	2452MHz
Transmitting mode:	1. Keep the EUT in transmitting mode with all kind of modulation and all kind of data rate. 2. Duty cycle > 98%			

Test mode:

Pre-scan under all rate at lowest channel 1

Mode	802.11b								
Data Rate	1Mbps	2Mbps	5.5Mbps	11Mbps					
EIRP(dBm)	7.34	7.78	8.34	8.60					
Mode	802.11g								
Data Rate	6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps	
EIRP(dBm)	8.82	7.78	7.65	7.43	6.98	6.67	6.34	5.94	
Mode	802.11n (HT20)								
Data Rate	6.5Mbps	13Mbps	19.5Mbps	26Mbps	39Mbps	52Mbps	58.5Mbps	65Mbps	
EIRP(dBm)	8.76	8.45	8.23	7.98	6.45	6.23	6.12	6.10	
Mode	802.11n (HT40)								
Data Rate	13.5Mbps	27Mbps	40.5Mbps	54Mbps	81Mbps	108Mbps	121.5Mbps	135Mbps	
EIRP(dBm)	8.15	7.89	7.56	6.87	6.78	6.66	5.91	5.71	


Through Pre-scan, 11Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n (HT20); 13.5Mbps of rate is the worst case of 802.11n (HT40).

6 General Information

6.1 Client Information

Applicant:	Proexpress Distributor LLC
Address of Applicant:	11011 GREENWOOD AVE.N APT 5, SEATTLE, WA 98103, United States
Manufacturer:	Proexpress Distributor LLC
Address of Manufacturer:	11011 GREENWOOD AVE.N APT 5, SEATTLE, WA 98103, United States

6.2 General Description of EUT

Product Name:	7" Tablet PC
Model No.(EUT):	K77, K77X, K77 PLUS, K77 PRO, K77X PLUS, K77X PRO
Trade mark:	KINGPAD, Dragon Touch
EUT Supports Radios application:	IEEE 802.11b/g/n
Power Supply:	Input: 5V  2A
Sample Received Date:	Jun. 29, 2015
Sample tested Date:	Jun. 29, 2015 to Aug. 24, 2015

6.3 Product Specification subjective to this standard

Operation Frequency:	IEEE 802.11b/g/n(HT20): 2412MHz to 2462MHz IEEE 802.11n(HT40): 2422MHz to 2452MHz
Channel Numbers:	IEEE 802.11b/g, IEEE 802.11n HT20: 11 Channels IEEE 802.11n HT40: 7 Channels
Channel Separation:	5MHz
Type of Modulation:	IEEE for 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE for 802.11g : OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE for 802.11n(HT20 and HT40) : OFDM (64QAM, 16QAM, QPSK,BPSK)
Sample Type:	Portable production
Antenna Type and Gain:	Type: Integral antenna Gain: 0dBi
Test Voltage:	DC 3.7V

Operation Frequency each of channel(802.11b/g/n HT20)

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

Operation Frequency each of channel(802.11n HT40)					
Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2422MHz	4	2437MHz	7	2452MHz
2	2427MHz	5	2442MHz		
3	2432MHz	6	2447MHz		

6.4 Description of Support Units

The EUT has been tested with associated equipment below:

Device Type	Brand	Model	Data Cable	Remark
--	--	--	--	--
--	--	--	--	--

6.5 Test Location

All tests were performed at:

Centre Testing International (Shenzhen) Corporation

Building C, Scientific Innovation Park, Tiegang Reservoir, Xixiang, Baoan District, Shenzhen, China

Telephone: +86 (0) 755 3368 3668 Fax: +86 (0) 755 3368 3385

No tests were sub-contracted.

6.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L1910

Centre Testing International Group Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories..

A2LA-Lab Cert. No. 3061.01

Centre Testing International Group Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 565659

Centre Testing International (Shenzhen) Corporation EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 565659.

IC-Registration No.: 7408A

The 3m Alternate Test Site of Centre Testing International Group Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 7408A .

IC-Registration No.: 7408B

The 10m Alternate Test Site of Centre Testing International Group Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 7408B.

NEMKO-Aut. No.: ELA503

Centre Testing International Group Co., Ltd. has been assessed the quality assurance system, the testing facilities, qualifications and testing practices of the relevant parts of the organization. The quality assurance system of the Laboratory has been validated against ISO/IEC 17025 or equivalent. The laboratory also fulfils the conditions described in Nemko Document NLA-10.

VCCI

The Radiation 3 &10 meters site of Centre Testing International Group Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-4096.

Main Ports Conducted Interference Measurement of Centre Testing International Group Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: C-4563.

Telecommunication Ports Conducted Disturbance Measurement of Centre Testing International Group Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: T-2146.

The Radiation 3 meters site of Centre Testing International Group Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-758

6.7 Deviation from Standards

None.

6.8 Abnormalities from Standard Conditions

None.

6.9 Other Information Requested by the Customer

None.

6.10 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	7.9×10^{-8}
2	RF power, conducted	0.31dB (30MHz-1GHz)
		0.57dB (1GHz-18GHz)
3	Radiated Spurious emission test	4.5dB (30MHz-1GHz)
		4.8dB (1GHz-12.75GHz)
4	Conduction emission	3.6dB (9kHz to 150kHz)
		3.2dB (150kHz to 30MHz)
5	Temperature test	0.64°C
6	Humidity test	2.8%
7	DC power voltages	0.025%

7 Equipment List

RF test system					
Equipment	Manufacturer	Mode No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Signal Generator	Keysight	E8257D	MY53401106	04-14-2015	04-13-2016
Communication test set test set	Agilent	N4010A	MY47230124	04-02-2015	04-01-2016
Spectrum Analyzer	Keysight	N9010A	MY54510339	04-01-2015	03-31-2016
Attenuator	HuaXiang	SHX370	15040701	04-01-2015	03-31-2016
Signal Generator	Keysight	N5182B	MY53051549	03-31-2015	03-30-2016
High-pass filter(3-18GHz)	Sinoscite	FL3CX03WG18 NM12-0398-002	---	01-13-2015	01-12-2016
High-pass filter(5-18GHz)	MICRO-TRONICS	SPA-F-63029-4	---	01-13-2015	01-12-2016
band rejection filter (GSM900)	Sinoscite	FL5CX01CA09C L12-0395-001	---	01-13-2015	01-12-2016
band rejection filter (GSM850)	Sinoscite	FL5CX01CA08C L12-0393-001	---	01-13-2015	01-12-2016
band rejection filter (GSM1800)	Sinoscite	FL5CX02CA04C L12-0396-002	---	01-13-2015	01-12-2016
band rejection filter (GSM1900)	Sinoscite	FL5CX02CA03C L12-0394-001	---	01-13-2015	01-12-2016
DC Power	Keysight	E3642A	MY54436035	03-31-2015	03-30-2016
PC-1	Lenovo	R4960d	---	04-01-2015	03-31-2016
BT&WI-FI Automatic control	R&S	OSPB157	101374	04-01-2015	03-31-2016
RF control unit	JS Tonscend	JS0806-2	2015860006	04-01-2015	03-31-2016
BT&WI-FI Automatic test software	JS Tonscend	JSTS1120-2	---	04-01-2015	03-31-2016

Shielding Room No. 1 – Conduction Emission Test					
Equipment	Manufacturer	Mode No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Receiver	R&S	ESCI	100009	07-09-2014	07-08-2015
Receiver	R&S	ESCI	100009	07-09-2015	07-08-2016
Receiver	R&S	ESCI	100009	07-09-2014	07-08-2015
Receiver	R&S	ESCI	100009	07-09-2015	07-08-2016
LISN	R&S	ENV216	100098	11-12-2014	11-13-2015

3M Semi/full-anechoic Chamber					
Equipment	Manufacturer	Mode No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
3M Chamber	TDK	SAC-3	---	06-02-2015	06-01-2016
TRILOG Broadband Antenna	schwarzbeck	VULB9163	9163-617	07-14-2014	07-13-2015
TRILOG Broadband Antenna	schwarzbeck	VULB9163	9163-617	07-14-2015	07-13-2016
TRILOG Broadband Antenna	schwarzbeck	VULB9163	9163-617	07-14-2014	07-13-2015
TRILOG Broadband Antenna	schwarzbeck	VULB9163	9163-617	07-14-2015	07-13-2016
Microwave Preamplifier	Agilent	8449B	3008A02425	02-05-2015	02-04-2016
Horn Antenna	ETS-LINDGREN	3117	00057410	07-08-2014	07-07-2015
Horn Antenna	ETS-LINDGREN	3117	00057410	07-08-2015	07-07-2016
Horn Antenna	ETS-LINDGREN	3117	00057410	07-08-2014	07-07-2015
Horn Antenna	ETS-LINDGREN	3117	00057410	07-08-2015	07-07-2016
Loop Antenna	ETS	6502	00071730	07-23-2014	07-22-2015
Loop Antenna	ETS	6502	00071730	07-23-2015	07-22-2016
Loop Antenna	ETS	6502	00071730	07-23-2014	07-22-2015
Loop Antenna	ETS	6502	00071730	07-23-2015	07-22-2016
Spectrum Analyzer	R&S	FSP40	100416	07-09-2014	07-08-2015
Spectrum Analyzer	R&S	FSP40	100416	07-09-2015	07-08-2016
Spectrum Analyzer	R&S	FSP40	100416	07-09-2014	07-08-2015
Spectrum Analyzer	R&S	FSP40	100416	07-09-2015	07-08-2016
Receiver	R&S	ESCI	100435	07-09-2014	07-08-2015
Receiver	R&S	ESCI	100435	07-09-2015	07-08-2016
Receiver	R&S	ESCI	100435	07-09-2014	07-08-2015
Receiver	R&S	ESCI	100435	07-09-2015	07-08-2016
Multi device Controller	matur	NCD/070/10711112	---	01-13-2015	01-12-2016
LISN	schwarzbeck	NNBM8125	81251547	07-09-2014	07-08-2015
LISN	schwarzbeck	NNBM8125	81251547	07-09-2015	07-08-2016
LISN	schwarzbeck	NNBM8125	81251547	07-09-2014	07-08-2015
LISN	schwarzbeck	NNBM8125	81251547	07-09-2015	07-08-2016
LISN	schwarzbeck	NNBM8125	81251546	07-09-2014	07-08-2015
LISN	schwarzbeck	NNBM8125	81251546	07-09-2015	07-08-2016
LISN	schwarzbeck	NNBM8125	81251546	07-09-2014	07-08-2015
LISN	schwarzbeck	NNBM8125	81251546	07-09-2015	07-08-2016
Signal Generator	Agilent	E4438C	MY45095744	04-19-2015	04-18-2016
Signal Generator	Keysight	E8257D	MY53401106	04-14-2015	04-13-2016
Temperature/Humidity Indicator	TAYLOR	1451	5190	07-10-2014	07-09-2015
Temperature/Humidity Indicator	TAYLOR	1451	5190	07-10-2015	07-09-2016
Temperature/Humidity Indicator	TAYLOR	1451	5190	07-10-2014	07-09-2015
Temperature/Humidity Indicator	TAYLOR	1451	5190	07-10-2015	07-09-2016
Communication test set	Agilent	E5515C	GB47050533	01-13-2015	01-12-2016
Cable line	Fulai(7M)	SF106	5219/6A	01-13-2015	01-12-2016
Cable line	Fulai(6M)	SF106	5220/6A	01-13-2015	01-12-2016
Cable line	Fulai(3M)	SF106	5216/6A	01-13-2015	01-12-2016
Cable line	Fulai(3M)	SF106	5217/6A	01-13-2015	01-12-2016
Communication test set	R&S	CMW500	152394	04-19-2015	04-18-2016
High-pass filter(3-18GHz)	Sinoscite	FL3CX03WG18NM 12-0398-002	---	01-13-2015	01-12-2016

High-pass filter(5-18GHz)	MICRO-TRONICS	SPA-F-63029-4	---	01-13-2015	01-12-2016
band rejection filter	Sinoscite	FL5CX01CA09CL1 2-0395-001	---	01-13-2015	01-12-2016
band rejection filter	Sinoscite	FL5CX01CA08CL1 2-0393-001	---	01-13-2015	01-12-2016
band rejection filter	Sinoscite	FL5CX02CA04CL1 2-0396-002	---	01-13-2015	01-12-2016
band rejection filter	Sinoscite	FL5CX02CA03CL1 2-0394-001	---	01-13-2015	01-12-2016

8 Radio Technical Requirements Specification

Reference documents for testing:

No.	Identity	Document Title
1	FCC Part15C (2014)	Subpart C-Intentional Radiators
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

Test Results List:

Test Requirement	Test method	Test item	Verdict	Note
Part15C Section 15.247 (b)(3)	ANSI C63.10	Conducted Peak Output Power	PASS	Appendix A)
Part15C Section 15.247 (a)(2)	ANSI C63.10	6dB Occupied Bandwidth	PASS	Appendix B)
Part15C Section 15.247(d)	ANSI C63.10	Band-edge for RF Conducted Emissions	PASS	Appendix C)
Part15C Section 15.247(d)	ANSI C63.10	RF Conducted Spurious Emissions	PASS	Appendix D)
Part15C Section 15.247 (e)	ANSI C63.10	Power Spectral Density	PASS	Appendix E)
Part15C Section 15.203/15.247 (c)	ANSI C63.10	Antenna Requirement	PASS	Appendix F)
Part15C Section 15.207	ANSI C63.10	AC Power Line Conducted Emission	PASS	Appendix G)
Part15C Section 15.205/15.209	ANSI C63.10	Restricted bands around fundamental frequency (Radiated Emission)	PASS	Appendix H)
Part15C Section 15.205/15.209	ANSI C63.10	Radiated Spurious Emissions	PASS	Appendix H)


Appendix A): Conducted Peak Output Power




Result Table




Mode	Channel	Conducted Peak Output Power [dBm]	Verdict
11B	LCH	8.55	PASS
11B	MCH	8.6	PASS
11B	HCH	8.45	PASS
11G	LCH	8.38	PASS
11G	MCH	8.07	PASS
11G	HCH	8.82	PASS
11N20SISO	LCH	8.47	PASS
11N20SISO	MCH	8.13	PASS
11N20SISO	HCH	8.76	PASS
11N40SISO	LCH	7.07	PASS
11N40SISO	MCH	7.73	PASS
11N40SISO	HCH	8.15	PASS




Remark: Peak detector is used.

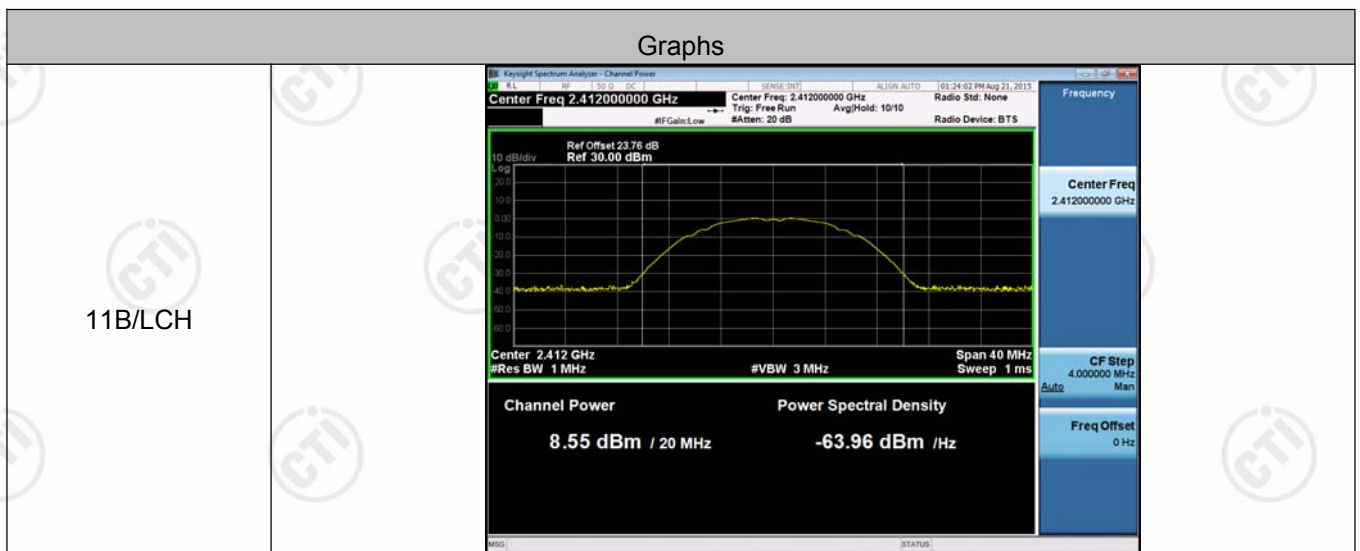
Test Graph

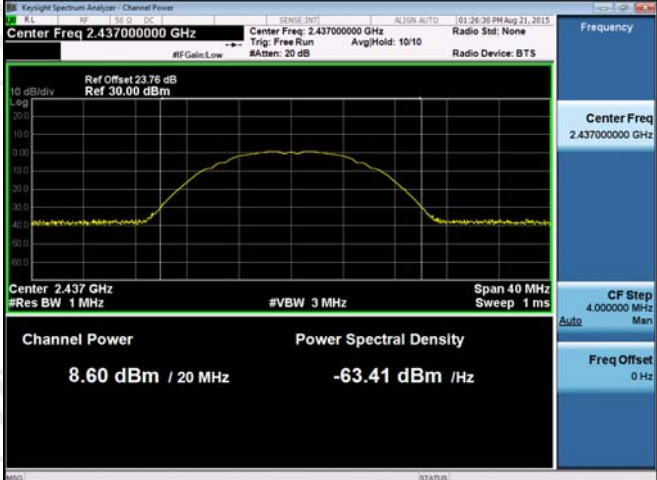

<p>11B/MCH</p>	 <p>Keysight Spectrum Analyzer - Channel Power</p> <p>Center Freq: 2.437000000 GHz</p> <p>Channel Power: 8.60 dBm / 20 MHz</p> <p>Power Spectral Density: -63.41 dBm / Hz</p>
<p>11B/HCH</p>	 <p>Keysight Spectrum Analyzer - Channel Power</p> <p>Center Freq: 2.462000000 GHz</p> <p>Channel Power: 8.45 dBm / 20 MHz</p> <p>Power Spectral Density: -63.56 dBm / Hz</p>
<p>11G/LCH</p>	 <p>Keysight Spectrum Analyzer - Channel Power</p> <p>Center Freq: 2.412000000 GHz</p> <p>Channel Power: 8.38 dBm / 20 MHz</p> <p>Power Spectral Density: -64.63 dBm / Hz</p>
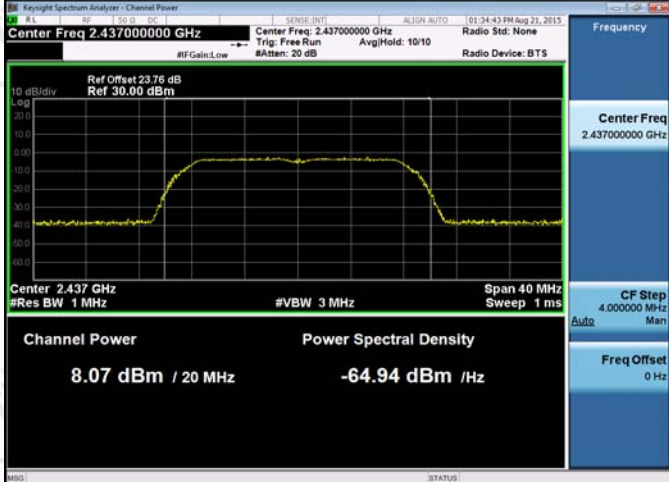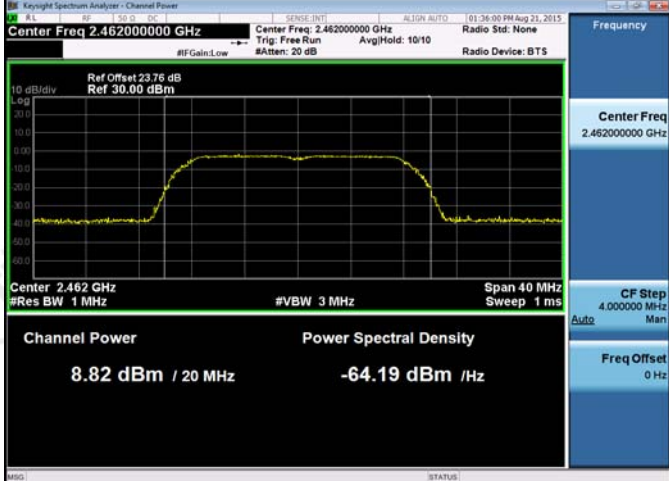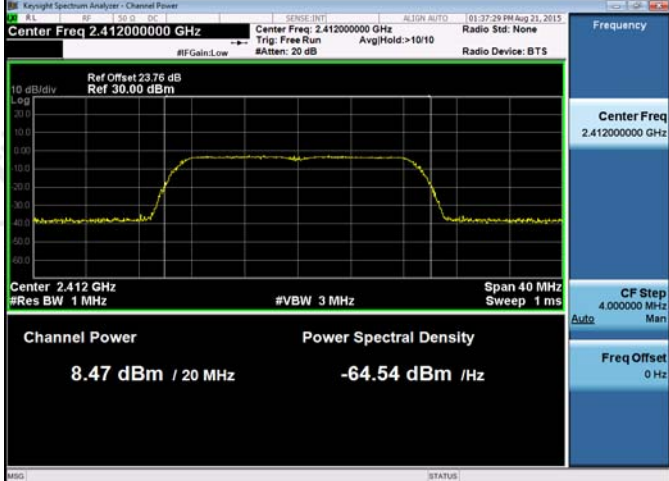
<p>11G/MCH</p>	 <p>Center Freq 2.437000000 GHz</p> <p>Channel Power: 8.07 dBm / 20 MHz</p> <p>Power Spectral Density: -64.94 dBm /Hz</p>
<p>11G/HCH</p>	 <p>Center Freq 2.462000000 GHz</p> <p>Channel Power: 8.82 dBm / 20 MHz</p> <p>Power Spectral Density: -64.19 dBm /Hz</p>
<p>11N20SISO/LCH</p>	 <p>Center Freq 2.412000000 GHz</p> <p>Channel Power: 8.47 dBm / 20 MHz</p> <p>Power Spectral Density: -64.54 dBm /Hz</p>
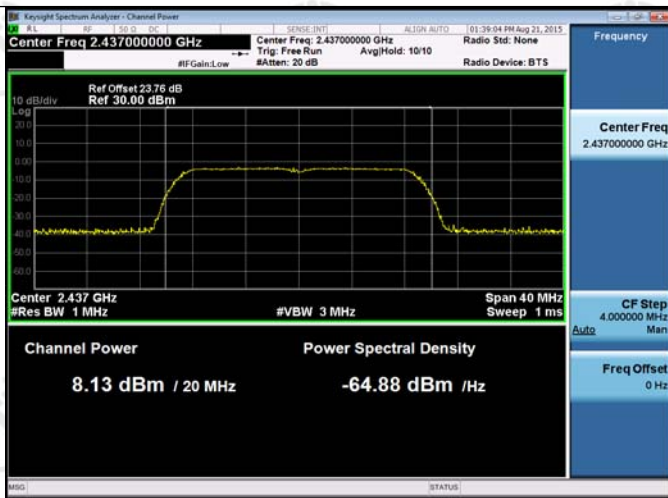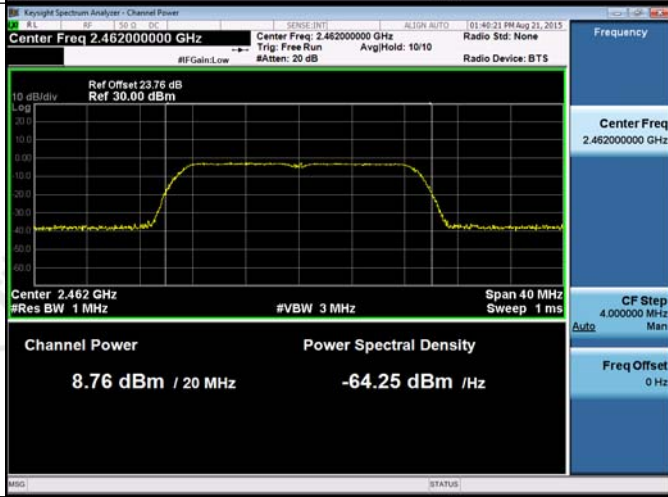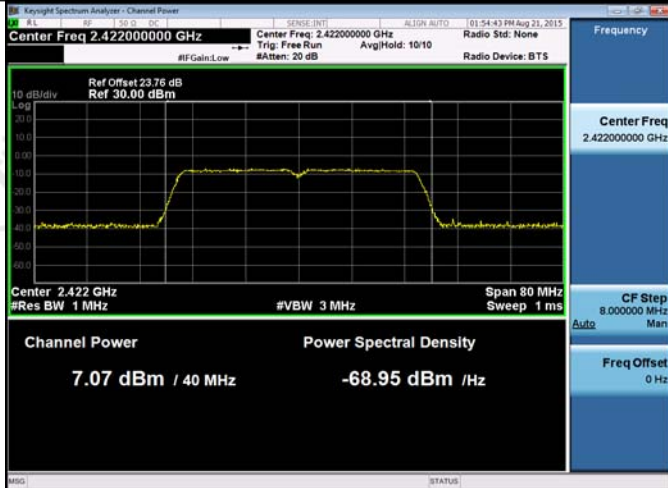
<p>11N20SISO/MCH</p>	 <p>Keyight Spectrum Analyzer - Channel Power</p> <p>Center Freq 2.437000000 GHz</p> <p>Ref Offset 23.76 dB Ref 30.00 dBm</p> <p>Channel Power: 8.13 dBm / 20 MHz</p> <p>Power Spectral Density: -64.88 dBm / Hz</p>
<p>11N20SISO/HCH</p>	 <p>Keyight Spectrum Analyzer - Channel Power</p> <p>Center Freq 2.462000000 GHz</p> <p>Ref Offset 23.76 dB Ref 30.00 dBm</p> <p>Channel Power: 8.76 dBm / 20 MHz</p> <p>Power Spectral Density: -64.25 dBm / Hz</p>
<p>11N40SISO/LCH</p>	 <p>Keyight Spectrum Analyzer - Channel Power</p> <p>Center Freq 2.422000000 GHz</p> <p>Ref Offset 23.76 dB Ref 30.00 dBm</p> <p>Channel Power: 7.07 dBm / 40 MHz</p> <p>Power Spectral Density: -68.95 dBm / Hz</p>

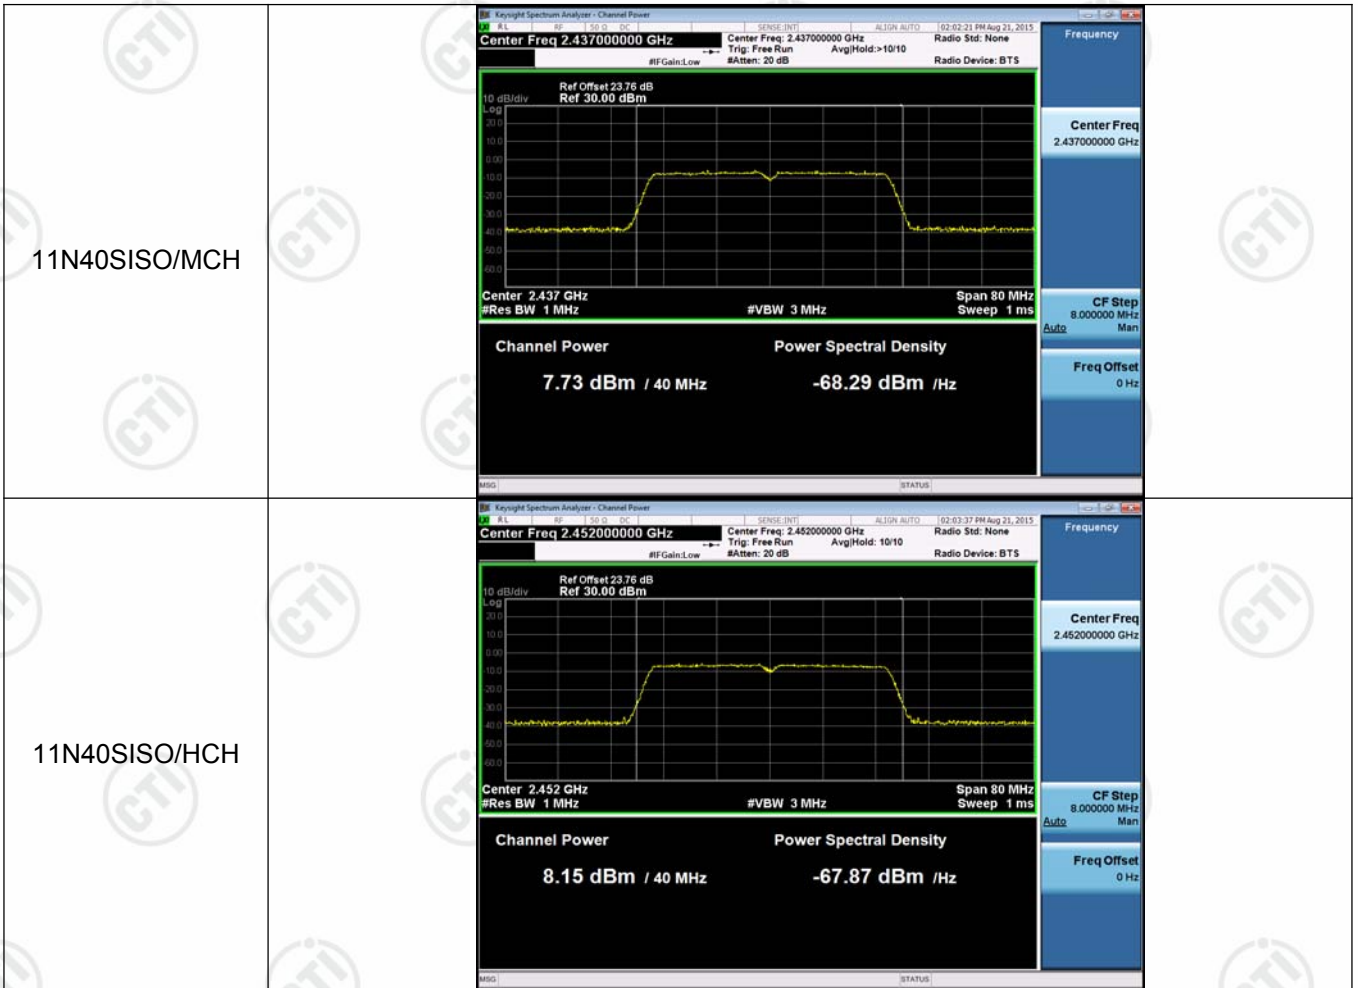


Appendix B): 6dB Occupied Bandwidth




Result Table

Mode	Channel	6dB Bandwidth [MHz]	99% OBW [MHz]	Verdict
11B	LCH	10.07	14.402	PASS
11B	MCH	10.04	14.406	PASS
11B	HCH	10.07	14.360	PASS
11G	LCH	16.36	16.641	PASS
11G	MCH	16.35	16.700	PASS
11G	HCH	16.36	16.756	PASS
11N20SISO	LCH	17.59	17.813	PASS
11N20SISO	MCH	17.58	17.815	PASS
11N20SISO	HCH	17.60	17.796	PASS
11N40SISO	LCH	36.29	44.694	PASS
11N40SISO	MCH	36.06	40.115	PASS
11N40SISO	HCH	35.70	37.670	PASS

Remark: Peak detector is used.

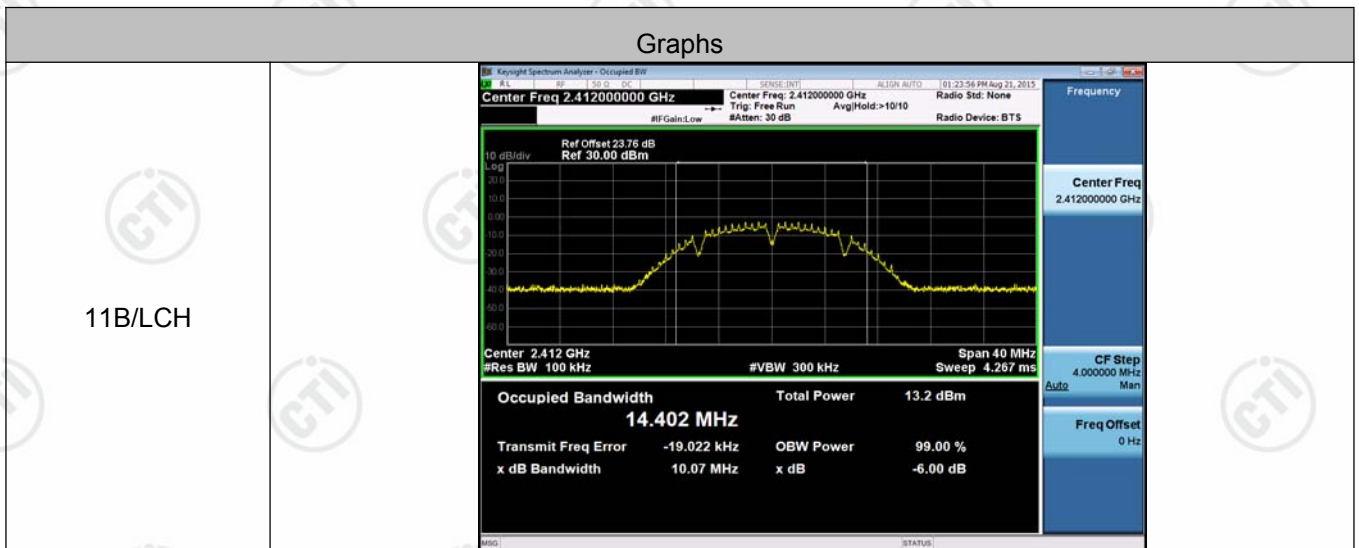
Test Graph

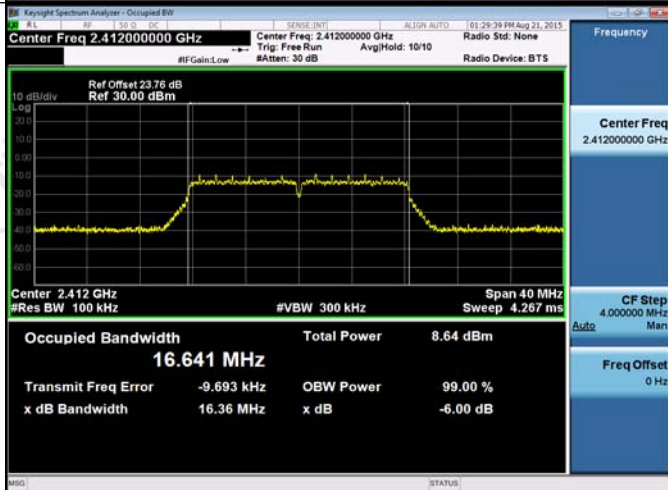

<p>11B/MCH</p>	 <p>Center Freq: 2.437000000 GHz</p> <p>Occupied Bandwidth: 14.406 MHz</p> <p>Total Power: 13.7 dBm</p> <p>Transmit Freq Error: 13.437 kHz</p> <p>x dB Bandwidth: 10.04 MHz</p>
<p>11B/HCH</p>	 <p>Center Freq: 2.462000000 GHz</p> <p>Occupied Bandwidth: 14.360 MHz</p> <p>Total Power: 14.5 dBm</p> <p>Transmit Freq Error: -9.911 kHz</p> <p>x dB Bandwidth: 10.07 MHz</p>
<p>11G/LCH</p>	 <p>Center Freq: 2.412000000 GHz</p> <p>Occupied Bandwidth: 16.641 MHz</p> <p>Total Power: 8.64 dBm</p> <p>Transmit Freq Error: -9.693 kHz</p> <p>x dB Bandwidth: 16.36 MHz</p>


<p>11G/MCH</p>	<p>Center Freq: 2.437000000 GHz</p> <p>Occupied Bandwidth: 16.700 MHz</p> <p>Total Power: 7.60 dBm</p> <p>Transmit Freq Error: 19.035 kHz</p> <p>x dB Bandwidth: 16.35 MHz</p>
<p>11G/HCH</p>	<p>Center Freq: 2.462000000 GHz</p> <p>Occupied Bandwidth: 16.756 MHz</p> <p>Total Power: 7.38 dBm</p> <p>Transmit Freq Error: -11.767 kHz</p> <p>x dB Bandwidth: 16.36 MHz</p>
<p>11N20SISO/LCH</p>	<p>Center Freq: 2.412000000 GHz</p> <p>Occupied Bandwidth: 17.813 MHz</p> <p>Total Power: 6.83 dBm</p> <p>Transmit Freq Error: 548 Hz</p> <p>x dB Bandwidth: 17.59 MHz</p>




<p>11N20SISO/MCH</p>	<p>Center Freq 2.437000000 GHz</p> <p>Occupied Bandwidth 17.815 MHz</p> <p>Total Power 6.74 dBm</p> <p>Transmit Freq Error 14.703 kHz</p> <p>x dB Bandwidth 17.58 MHz</p>
<p>11N20SISO/HCH</p>	<p>Center Freq 2.462000000 GHz</p> <p>Occupied Bandwidth 17.796 MHz</p> <p>Total Power 7.38 dBm</p> <p>Transmit Freq Error -1.740 kHz</p> <p>x dB Bandwidth 17.60 MHz</p>
<p>11N40SISO/LCH</p>	<p>Center Freq 2.422000000 GHz</p> <p>Occupied Bandwidth 44.694 MHz</p> <p>Total Power 5.65 dBm</p> <p>Transmit Freq Error 366.48 kHz</p> <p>x dB Bandwidth 36.29 MHz</p>

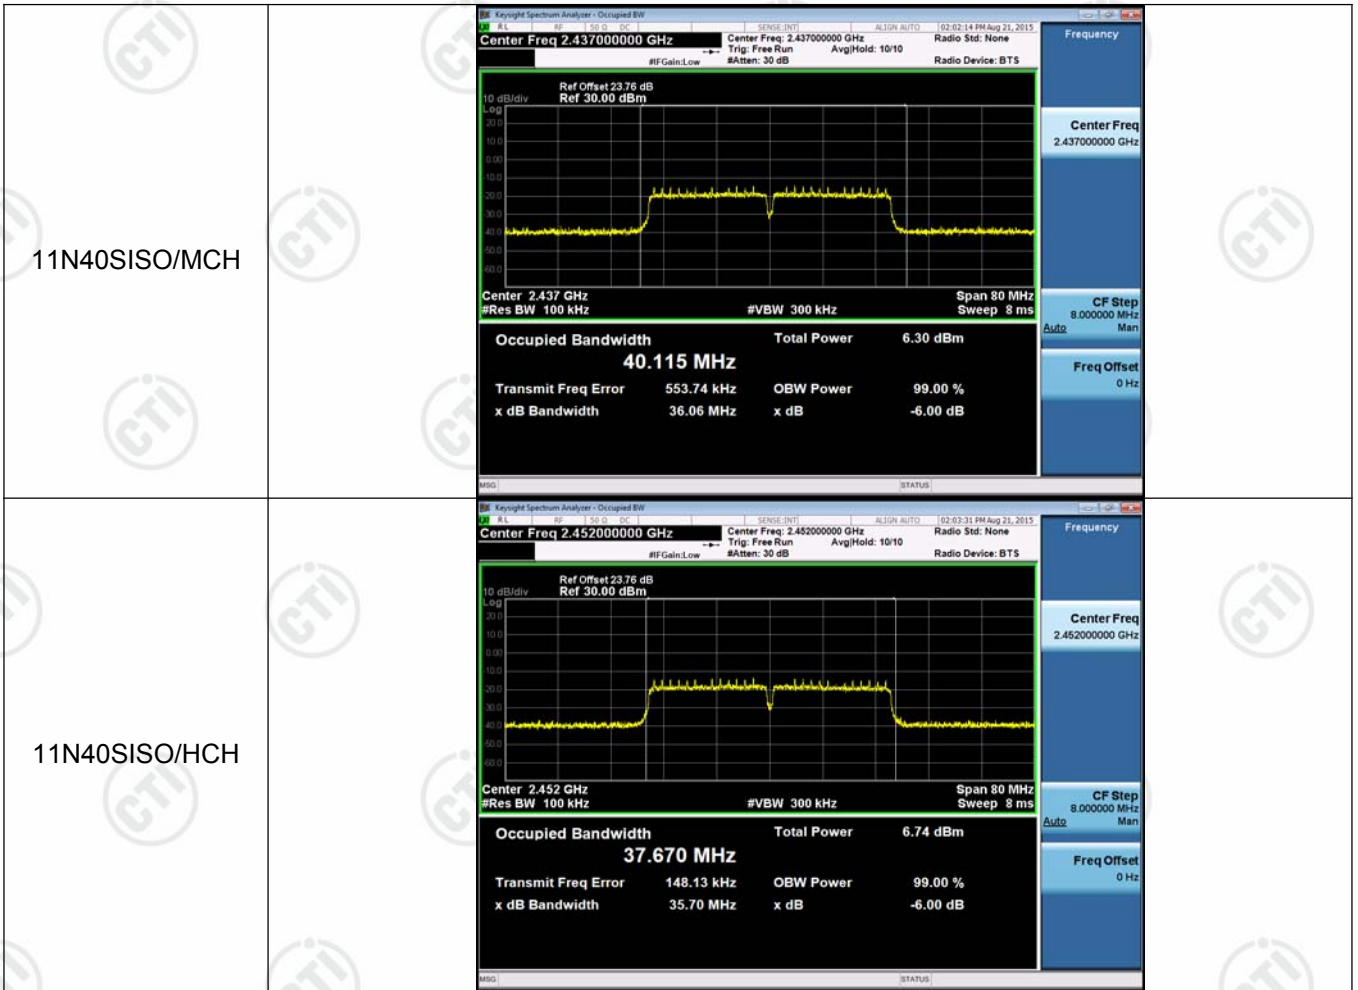


Appendix C): Band-edge for RF Conducted Emissions

Test Graph


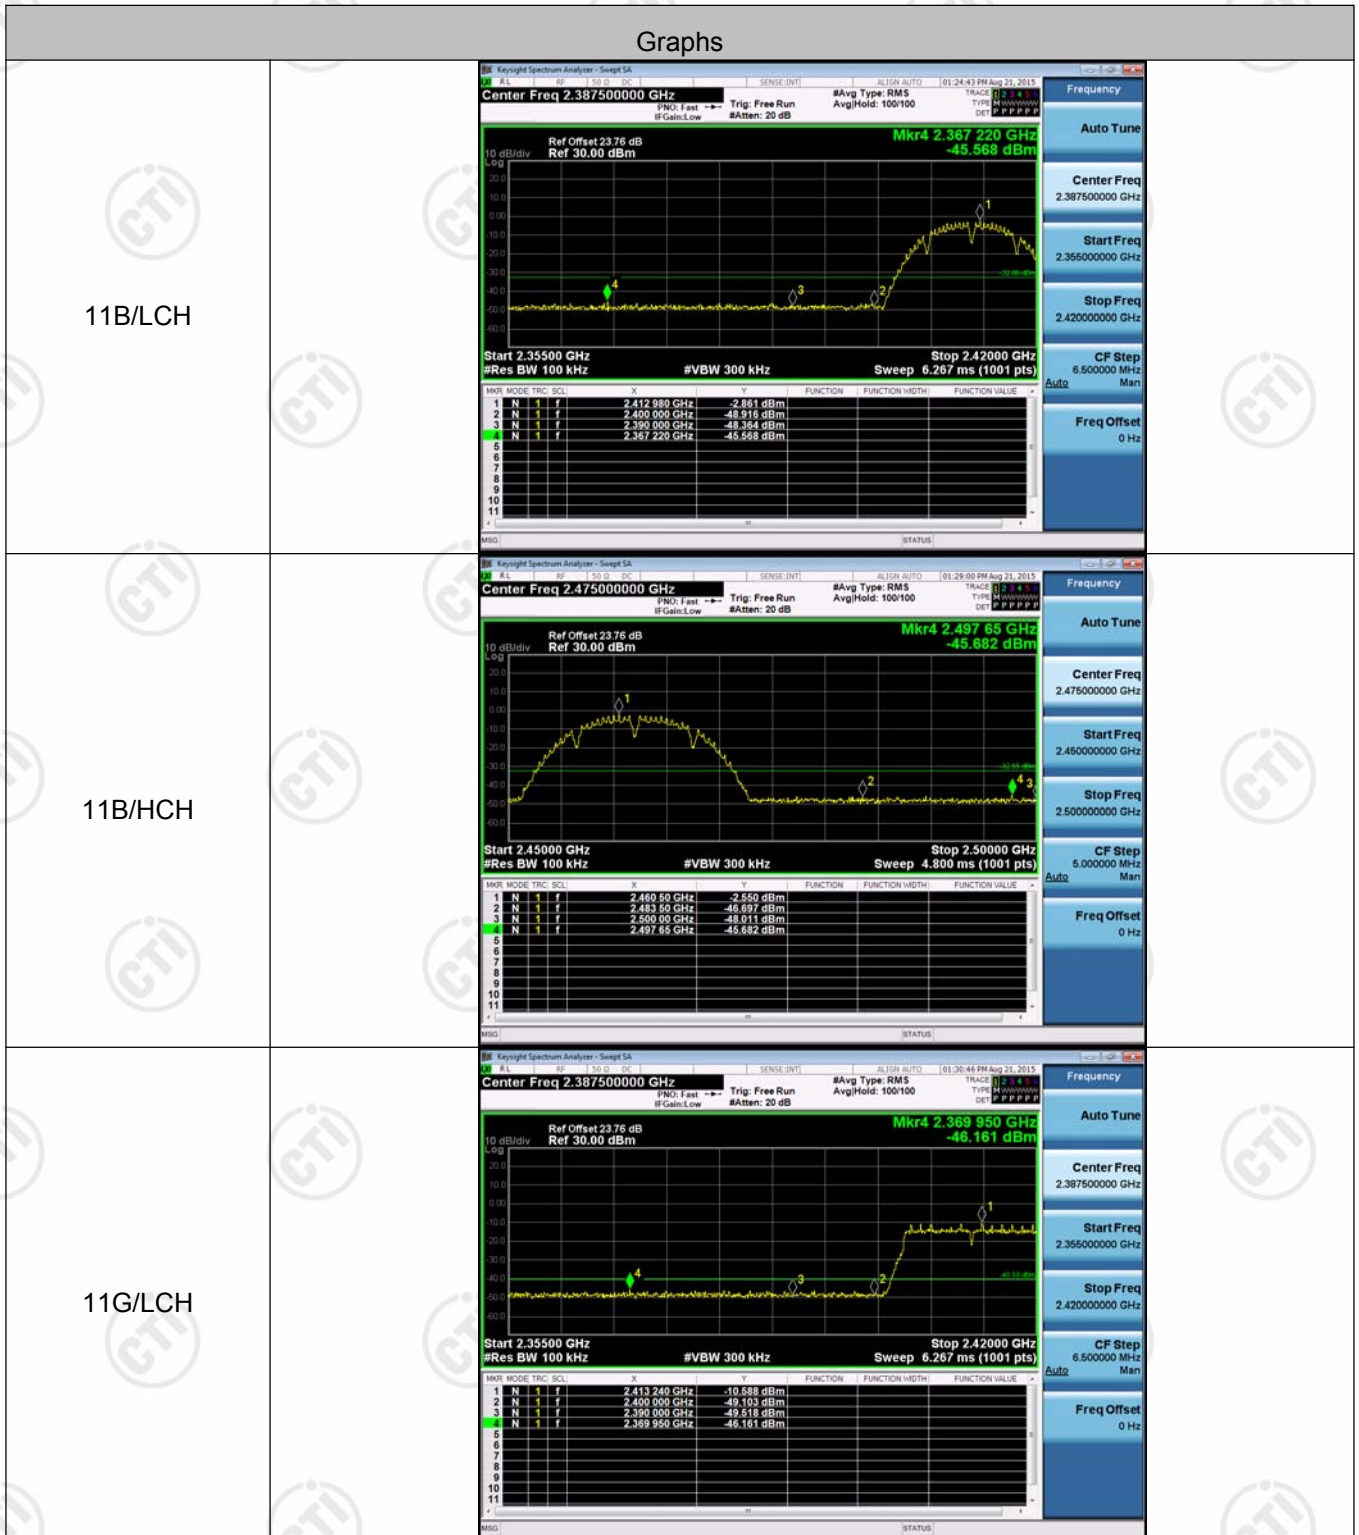


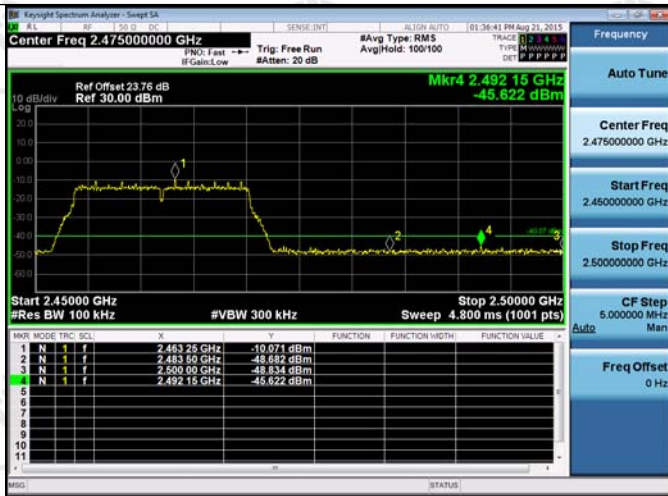
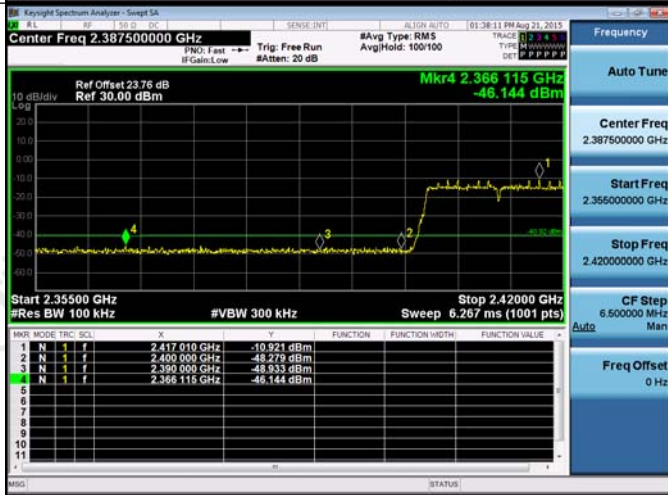
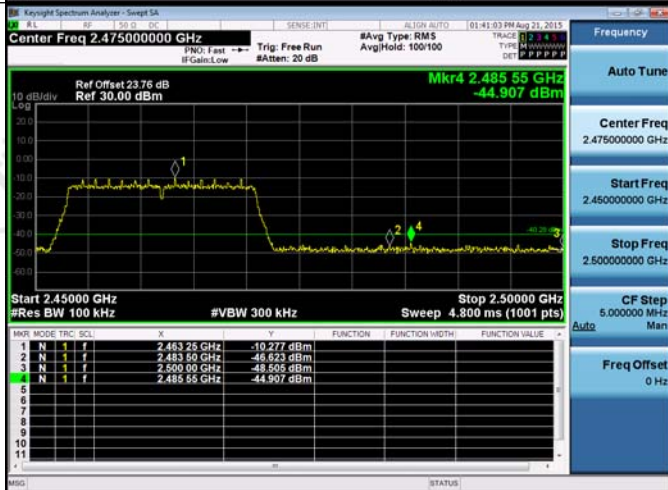
<p>11G/HCH</p>	
<p>11N20SISO/LCH</p>	
<p>11N20SISO/HCH</p>	


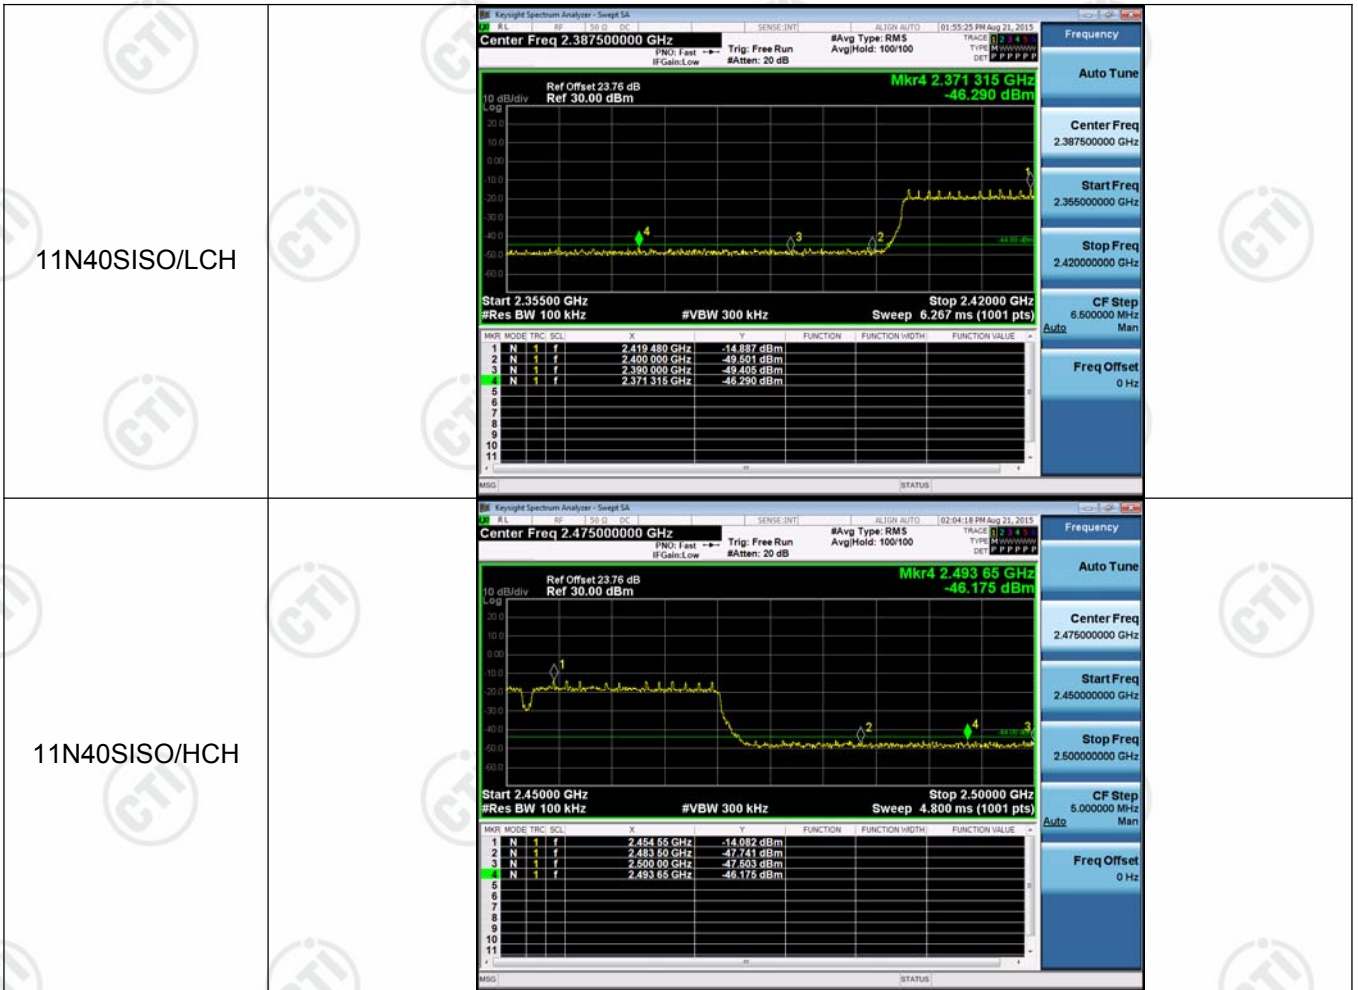



Appendix D): RF Conducted Spurious Emissions

Test Graph

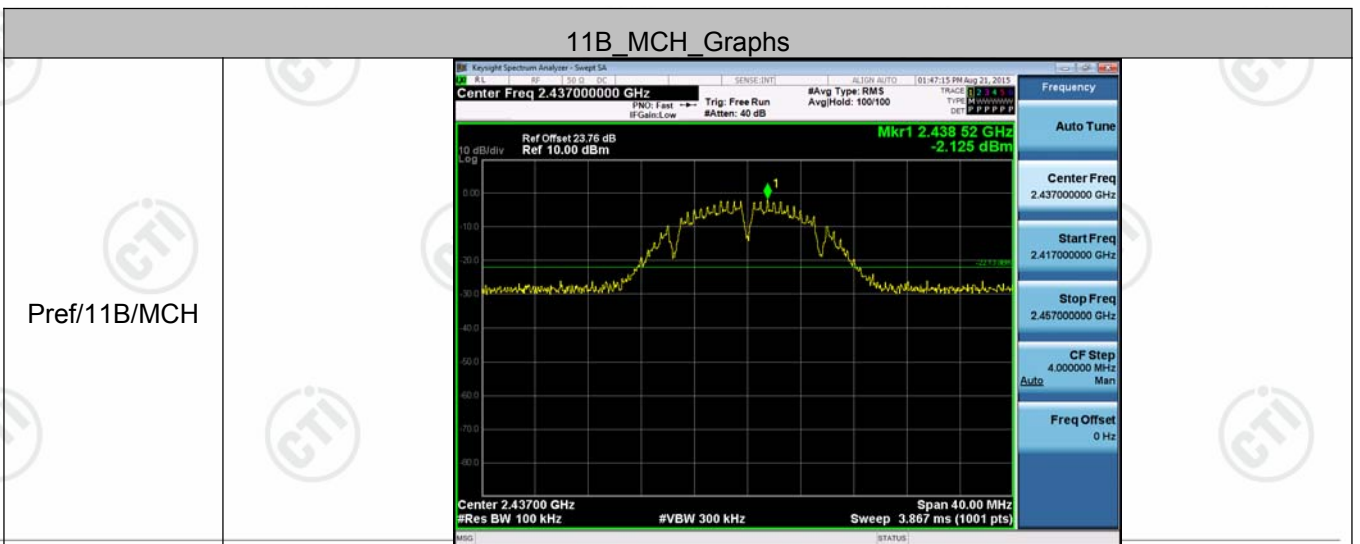
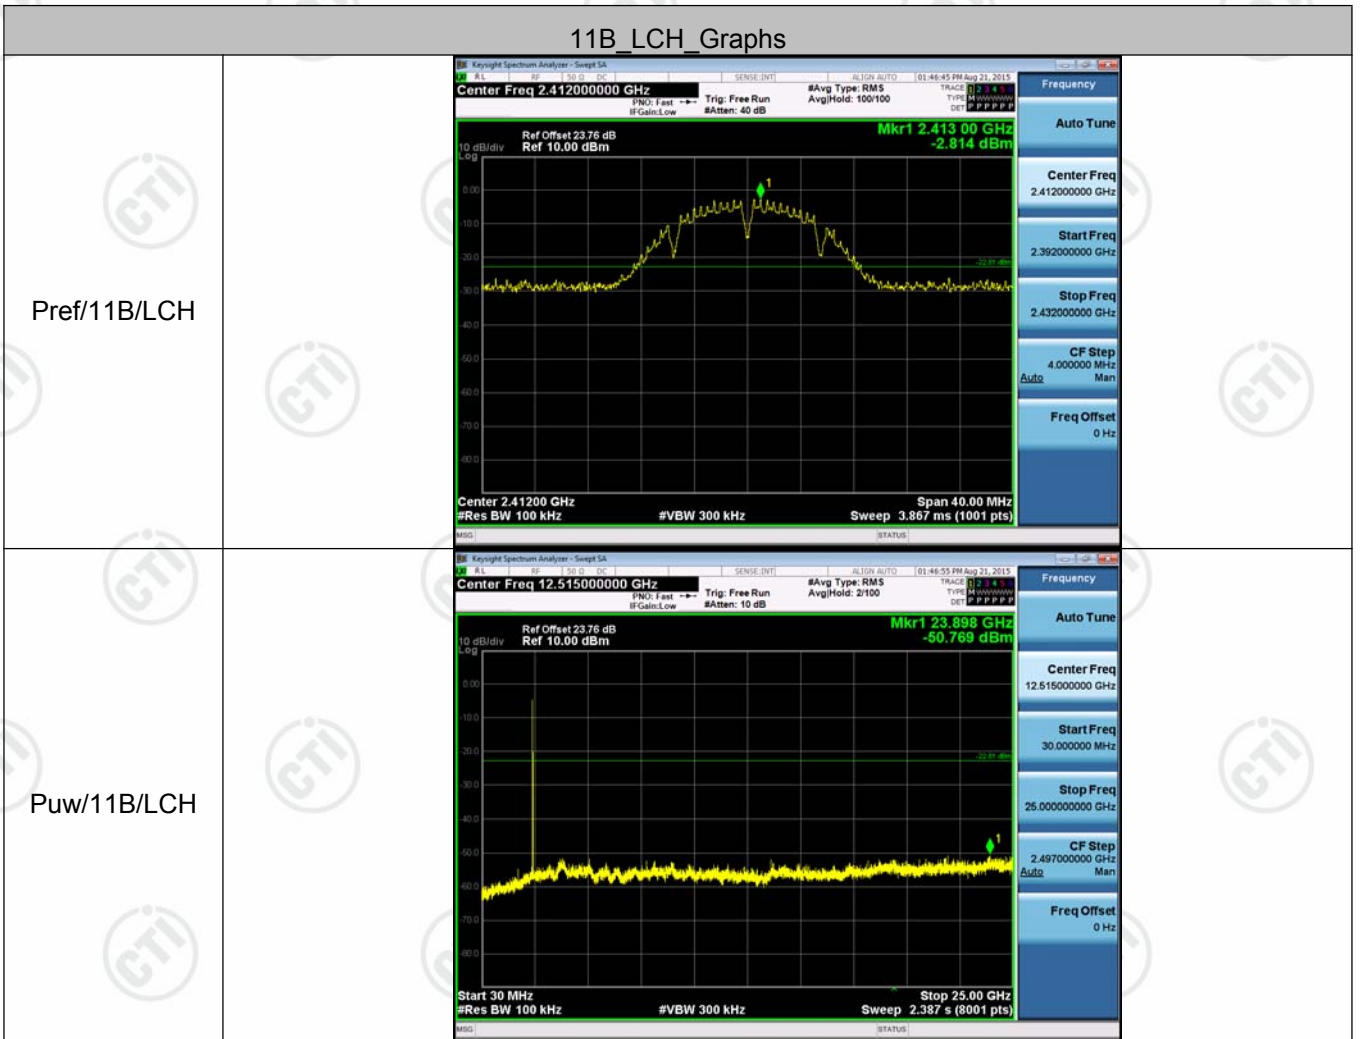


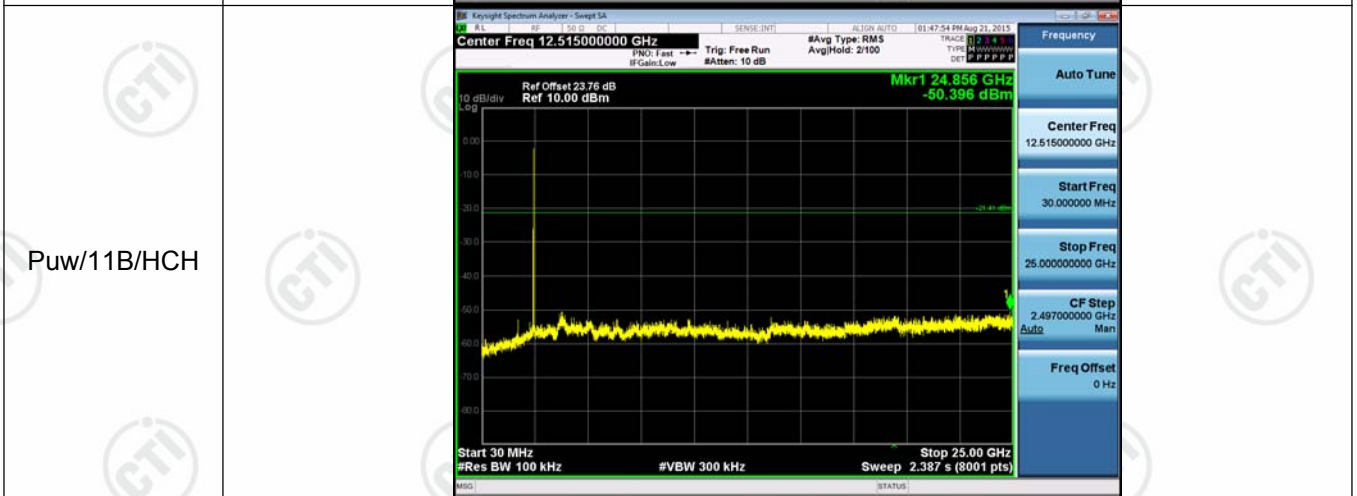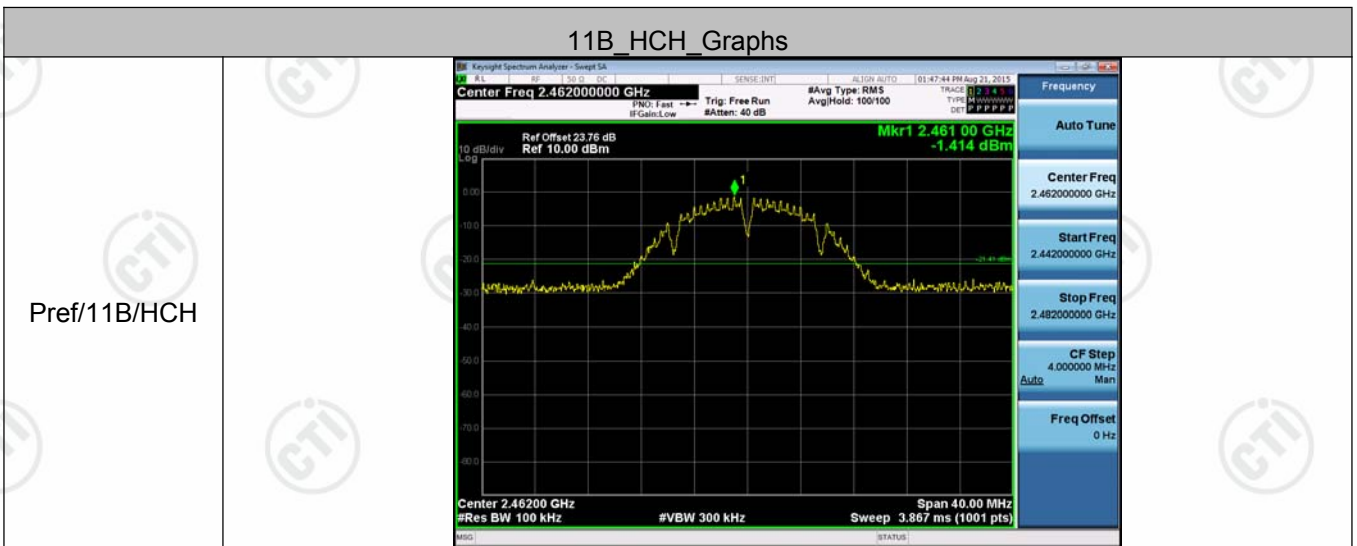
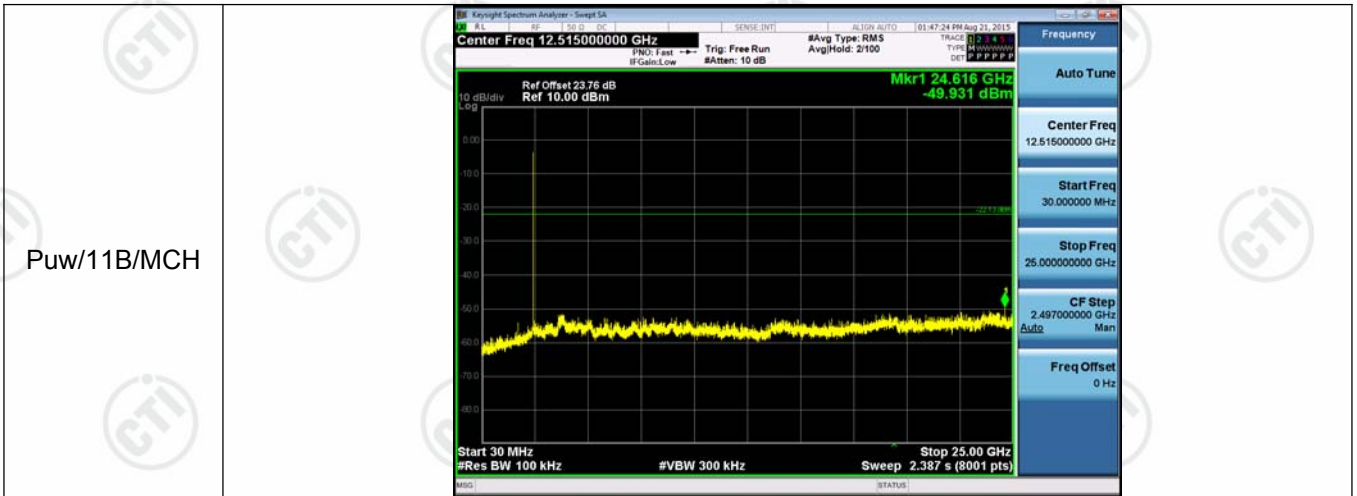



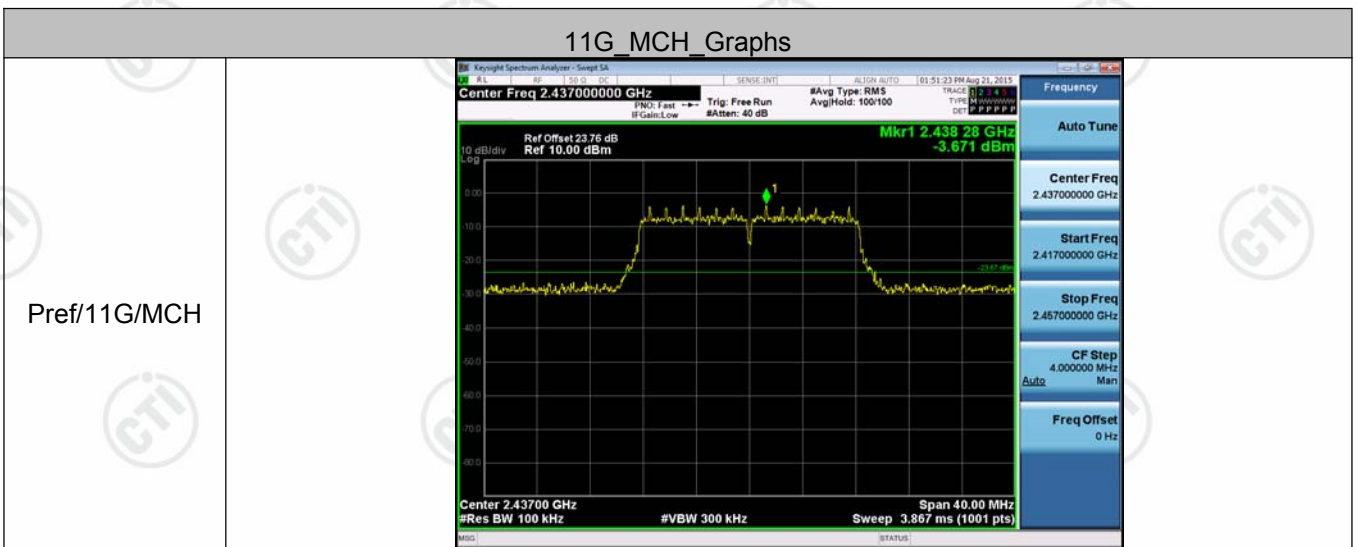
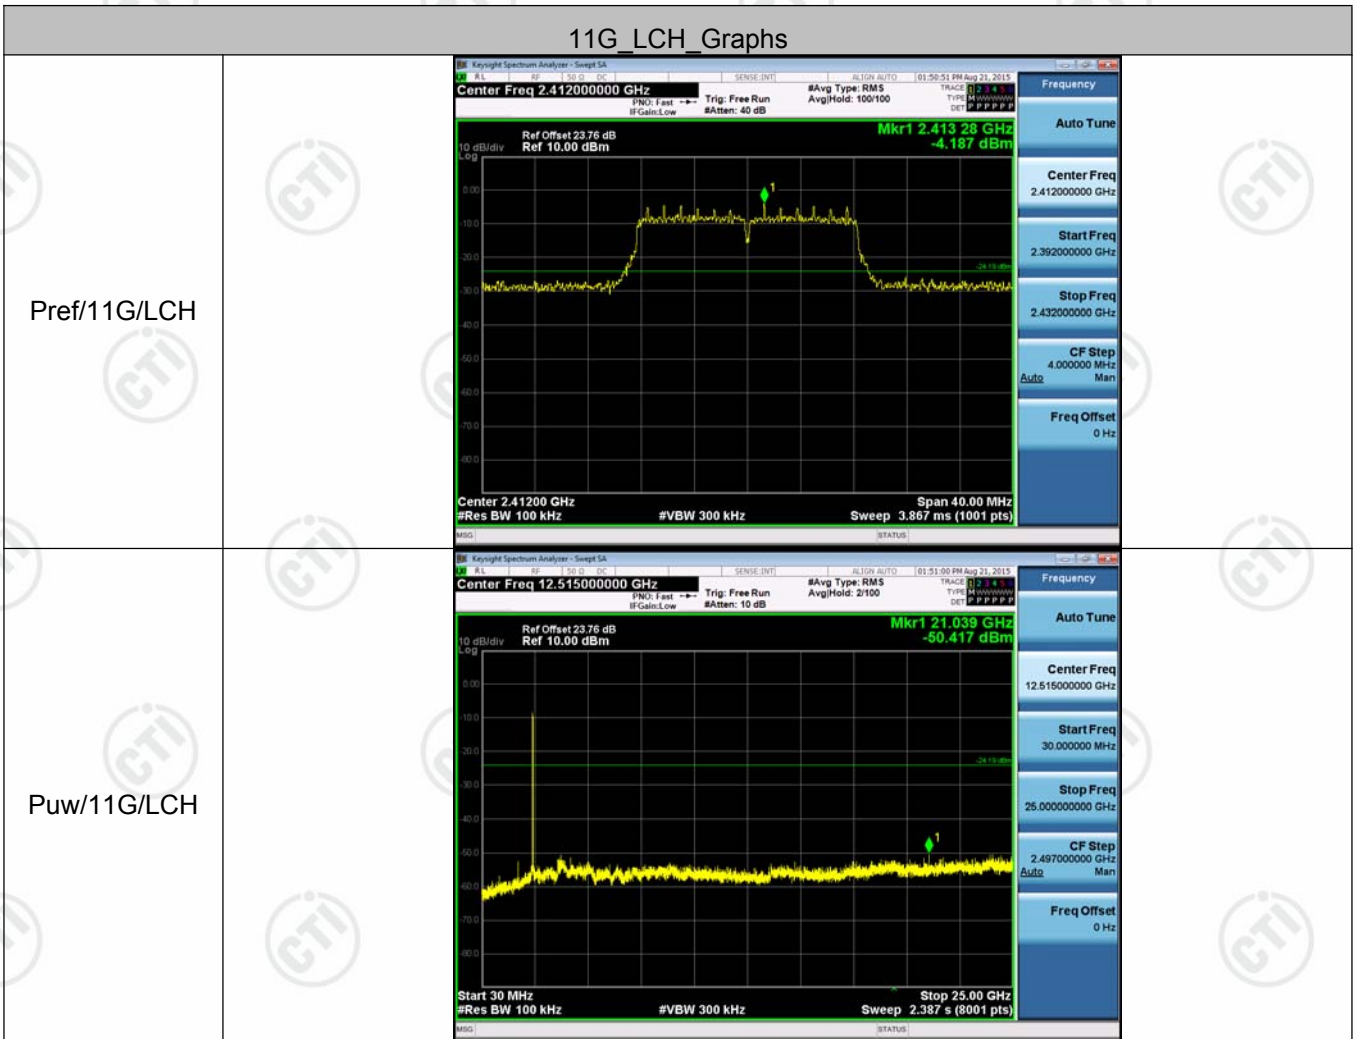



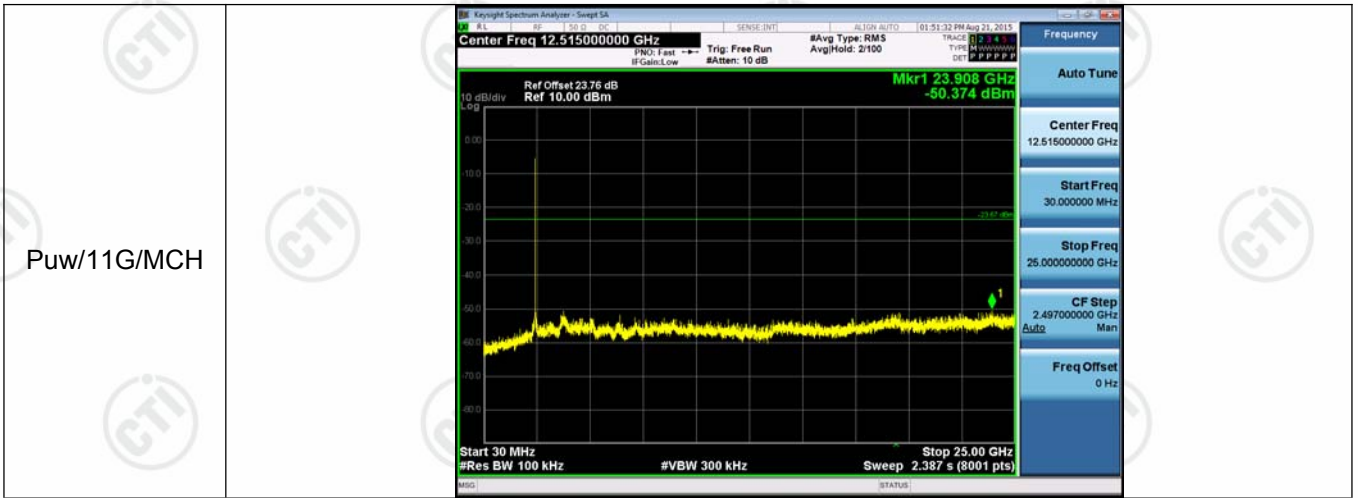





11G_HCH_Graphs

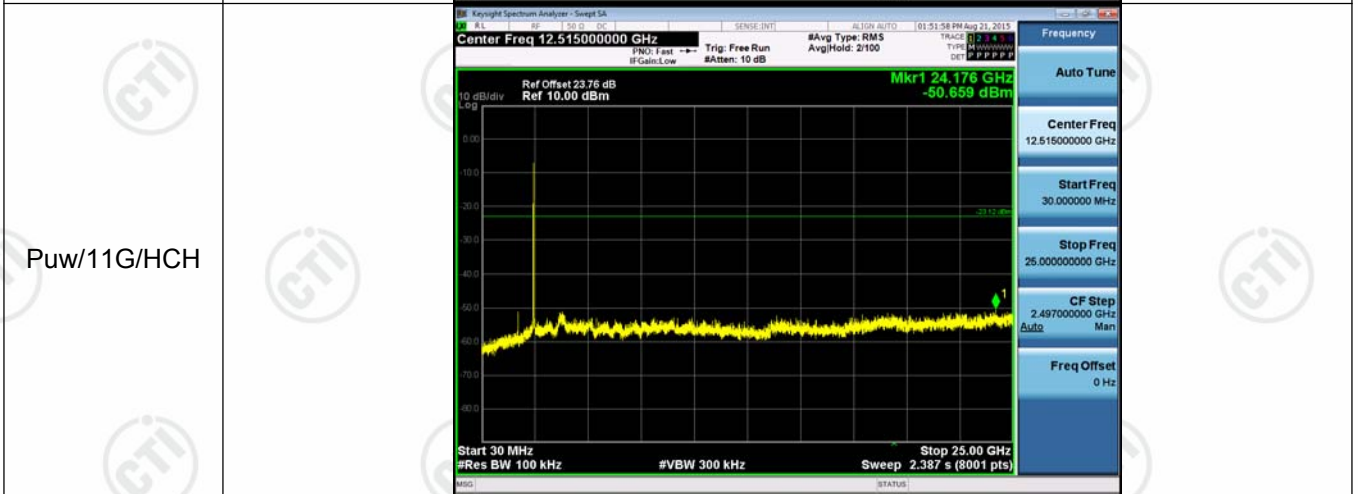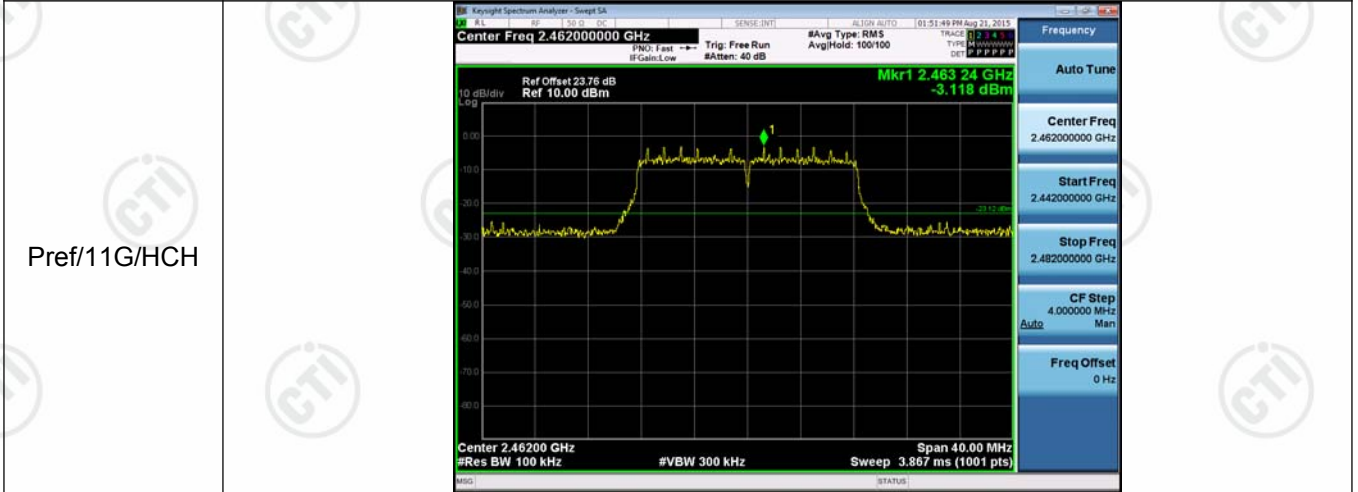

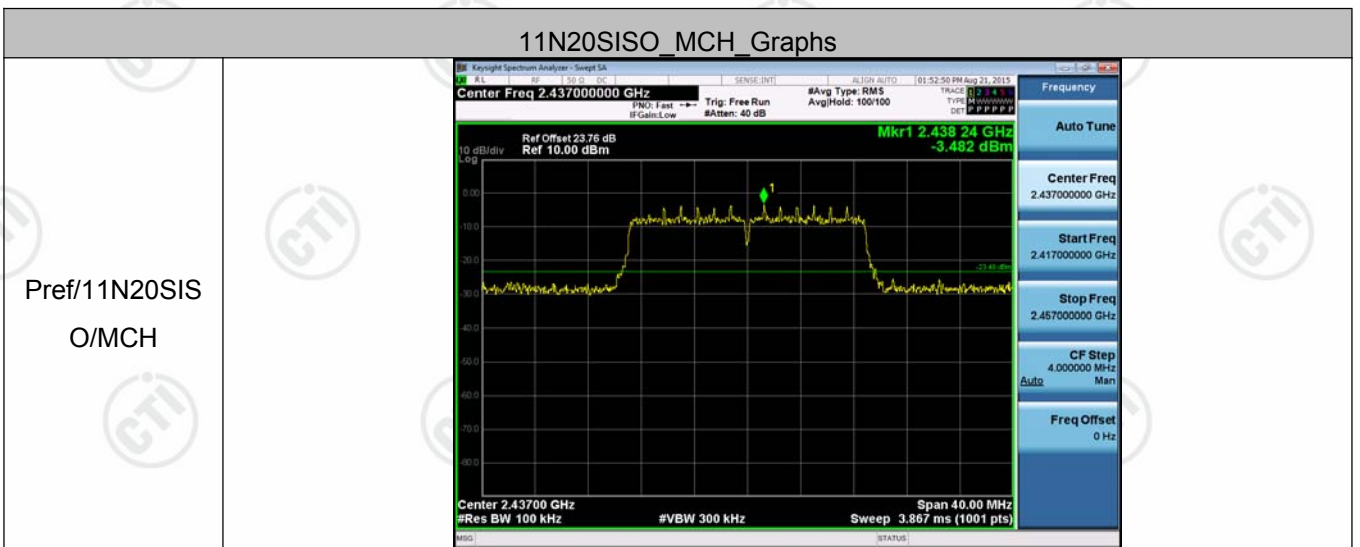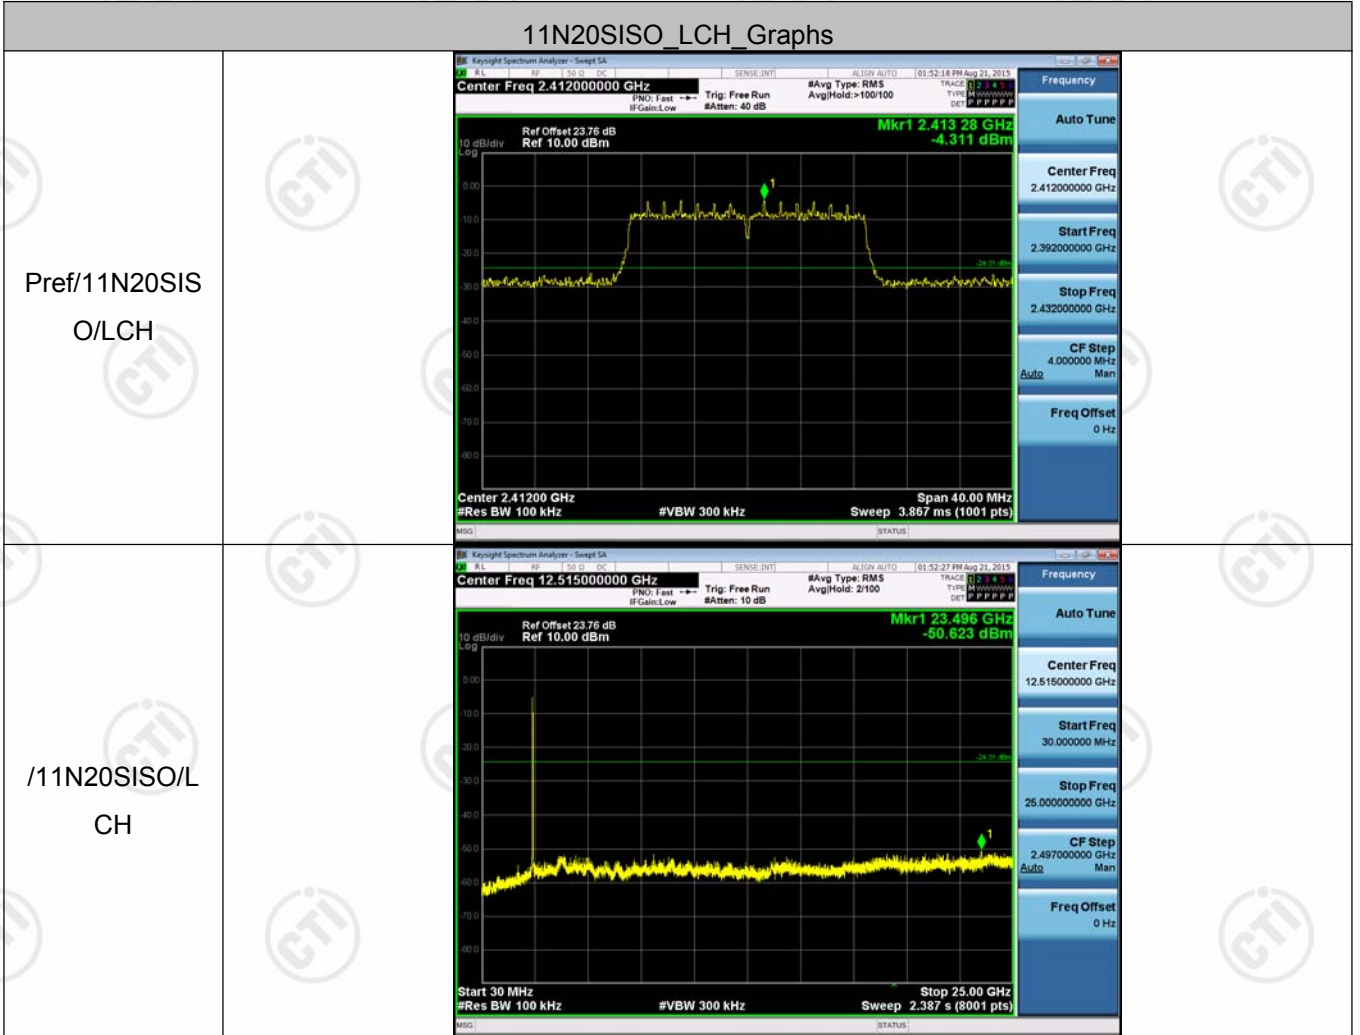

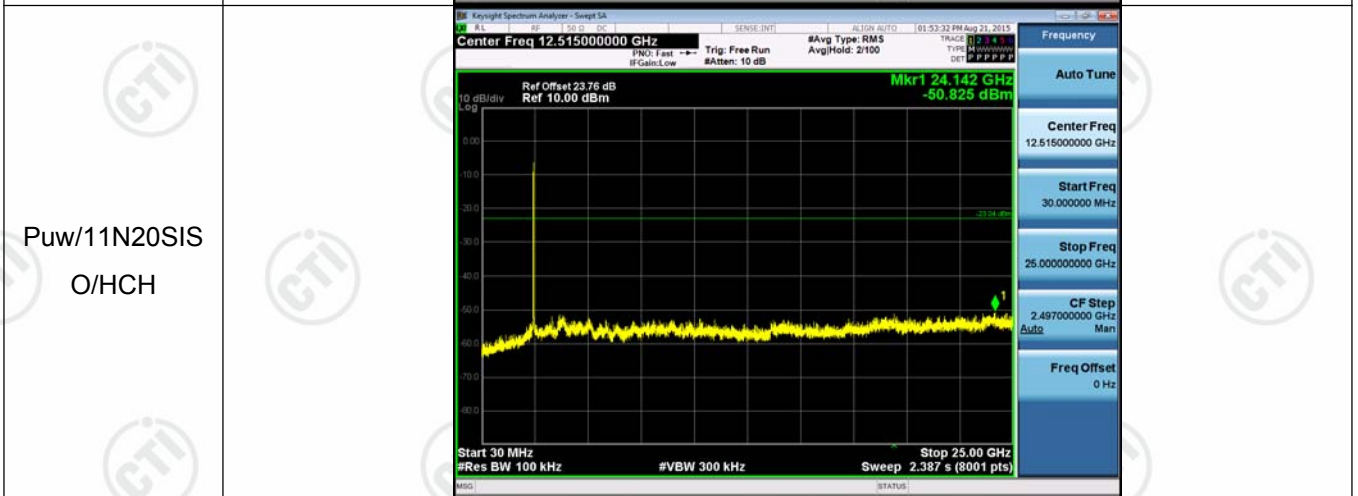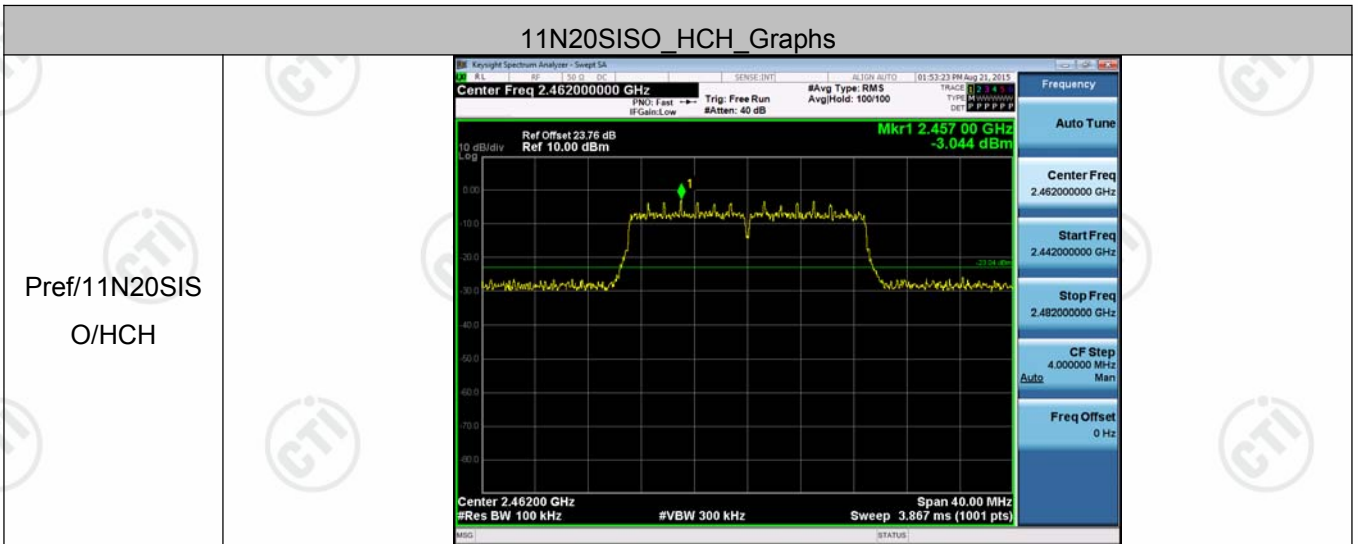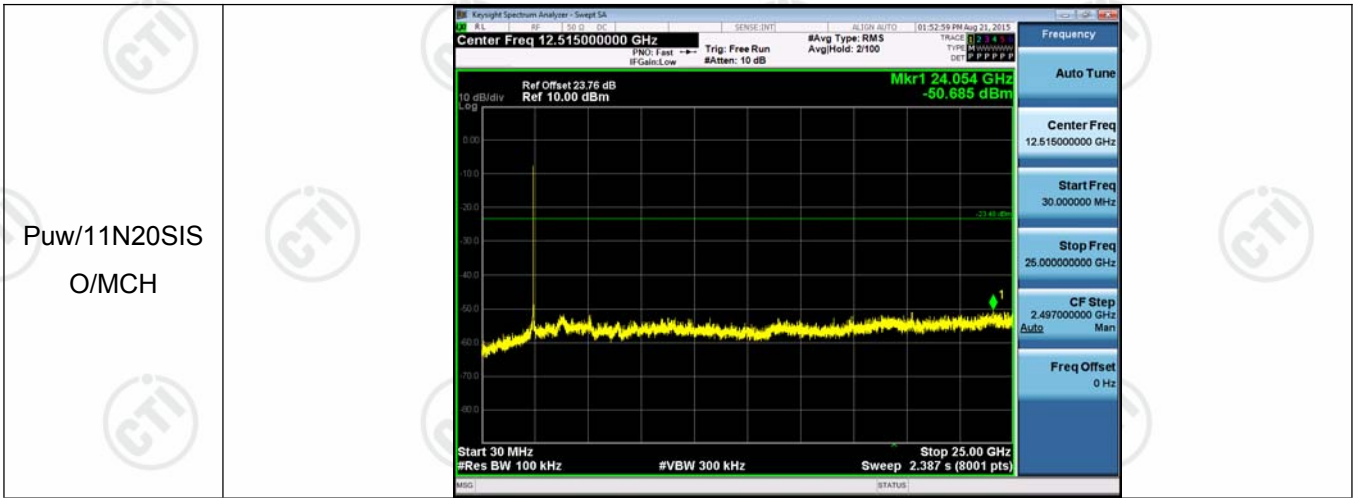

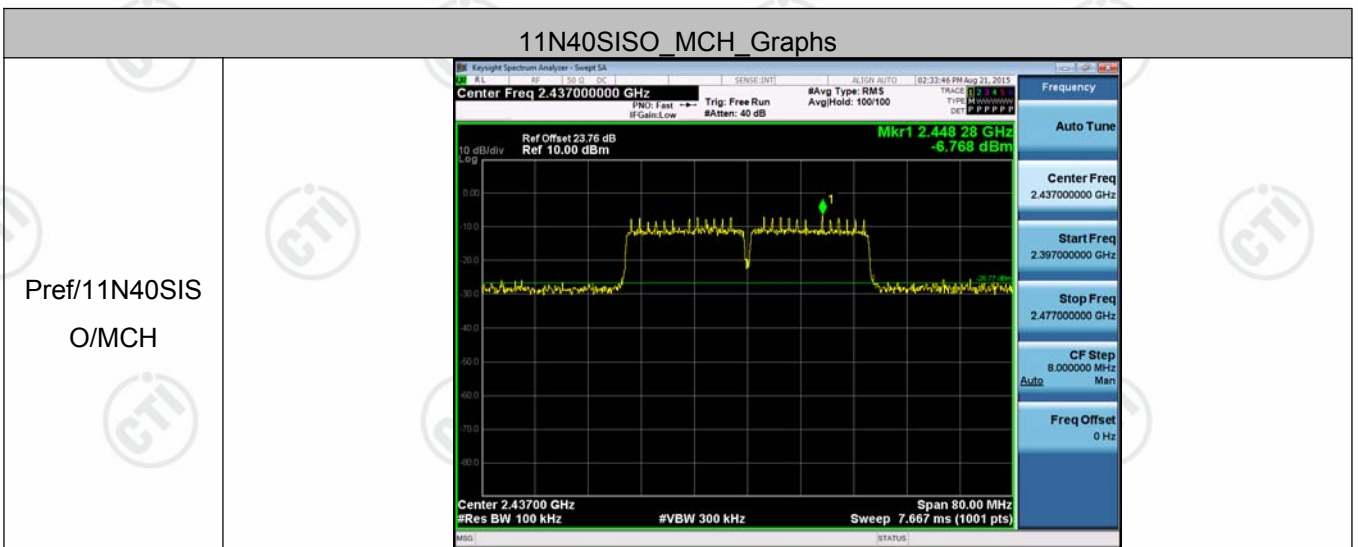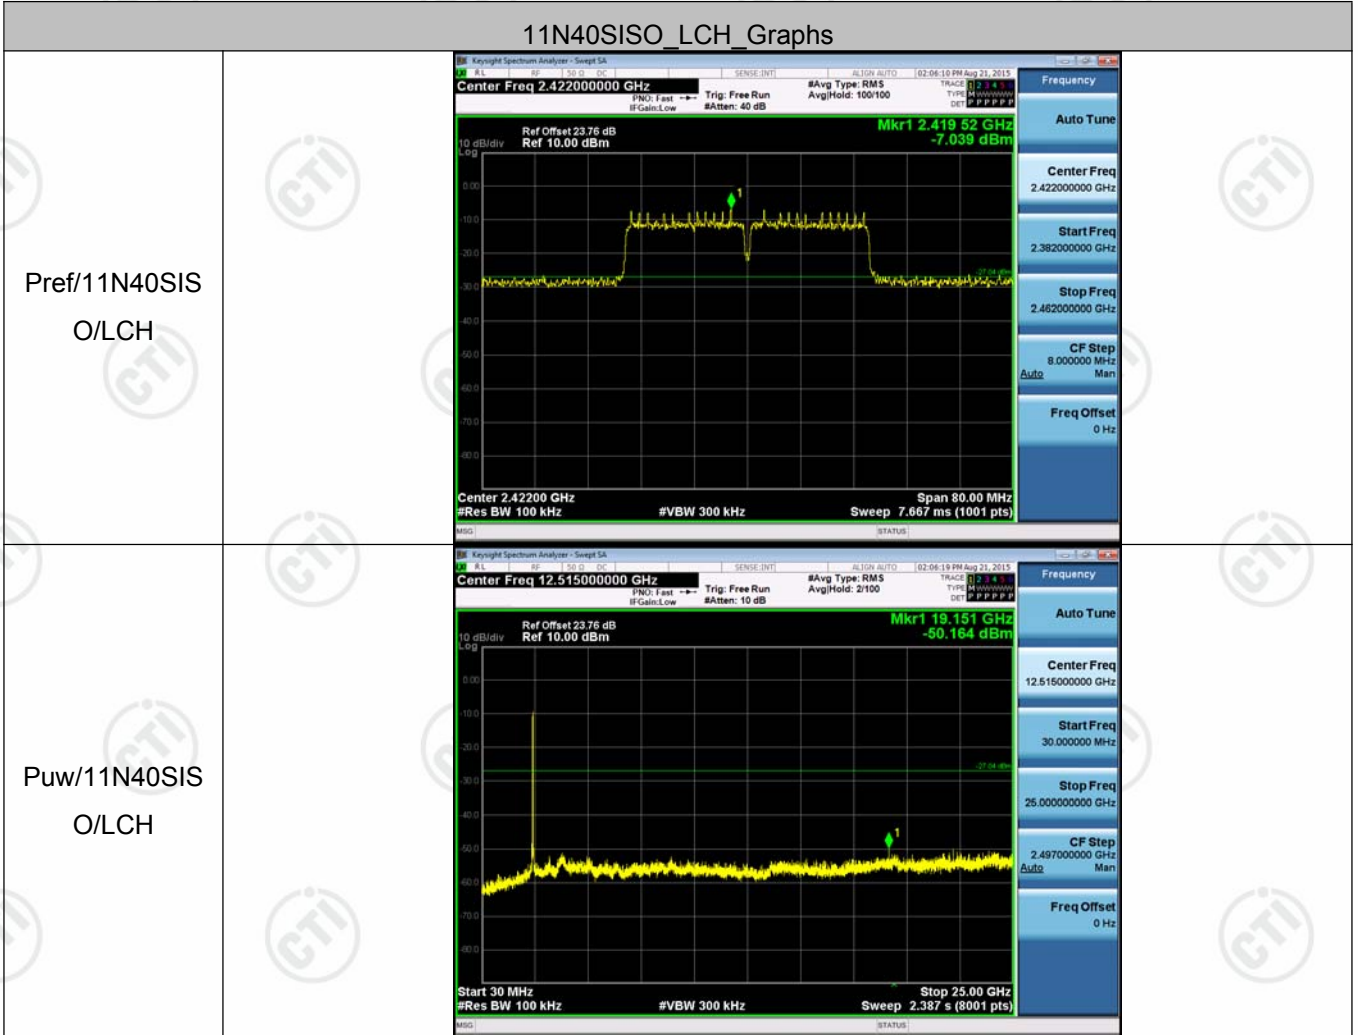

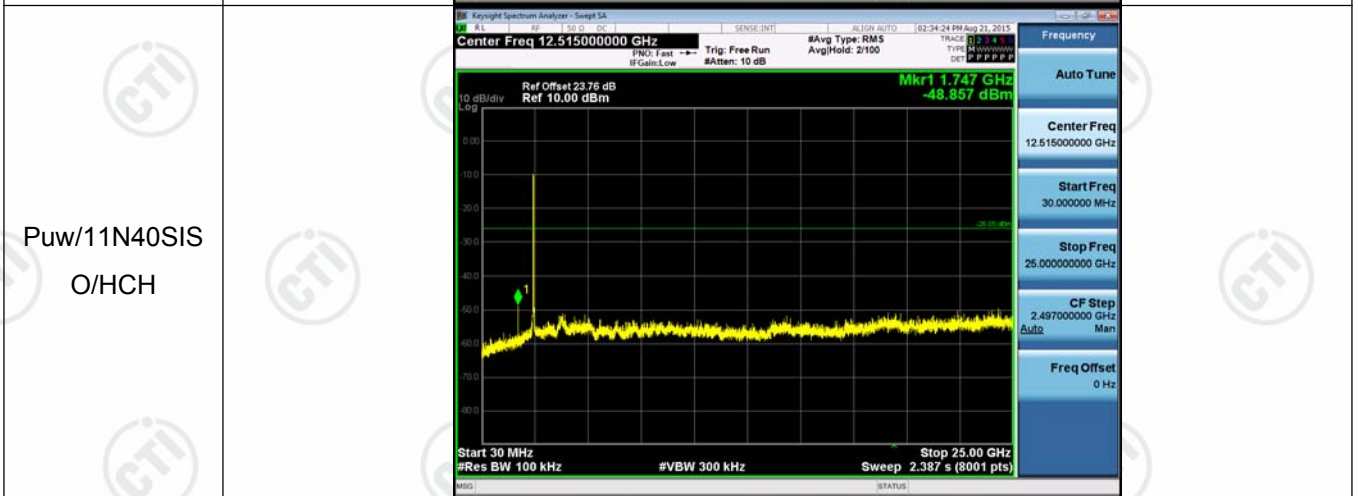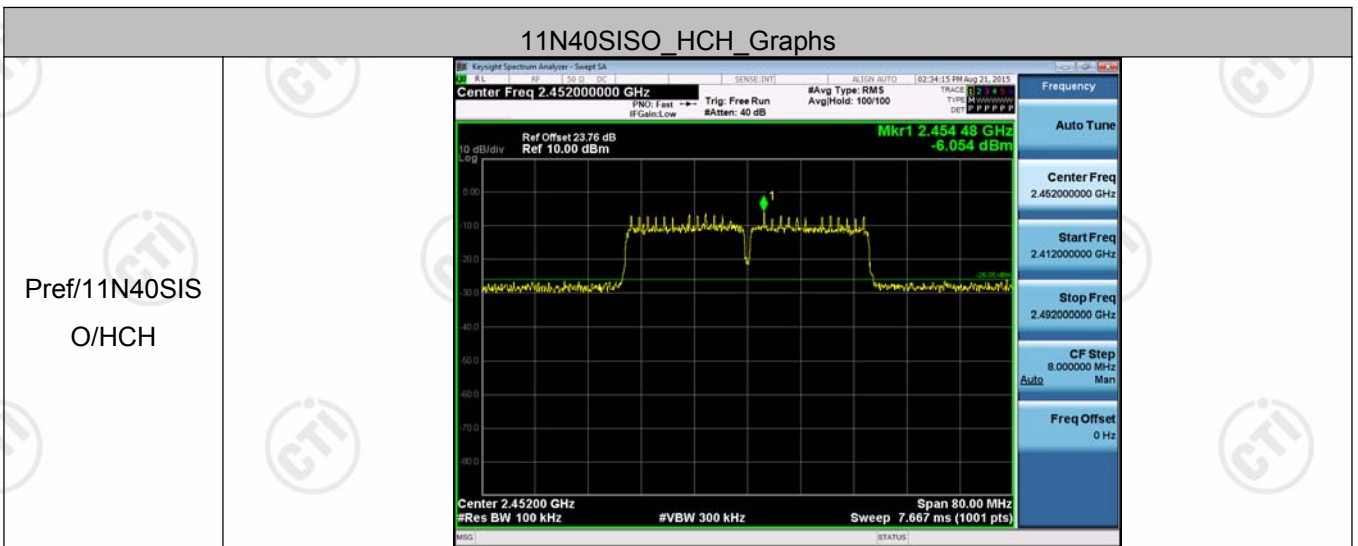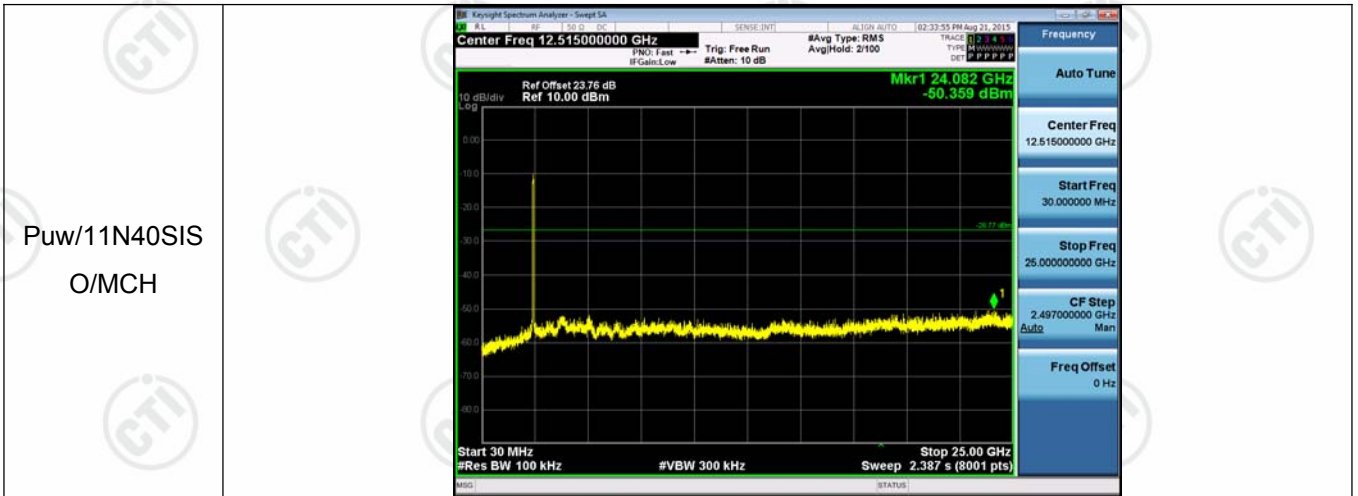





Appendix E): Power Spectral Density

Result Table




Mode	Channel	Power Spectral Density [dBm]	Verdict
11B	LCH	-16.678	PASS
11B	MCH	-16.146	PASS
11B	HCH	-15.795	PASS
11G	LCH	-24.630	PASS
11G	MCH	-24.612	PASS
11G	HCH	-24.264	PASS
11N20SISO	LCH	-24.753	PASS
11N20SISO	MCH	-24.797	PASS
11N20SISO	HCH	-24.586	PASS
11N40SISO	LCH	-29.569	PASS
11N40SISO	MCH	-27.960	PASS
11N40SISO	HCH	-28.174	PASS

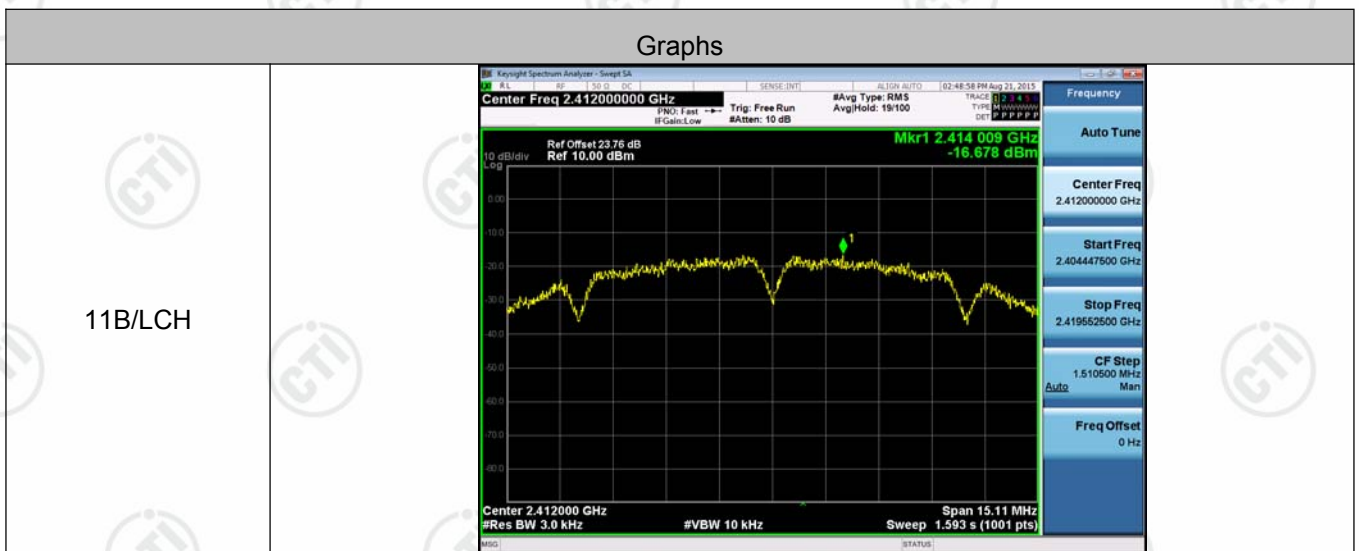
Test Graph



<p>11B/MCH</p>	
<p>11B/HCH</p>	
<p>11G/LCH</p>	

<p>11G/MCH</p>		<p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.424737500 GHz</p> <p>Stop Freq 2.449262500 GHz</p> <p>CF Step 2.452500 MHz</p> <p>Freq Offset 0 Hz</p>
<p>11G/HCH</p>		<p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.449730000 GHz</p> <p>Stop Freq 2.474270000 GHz</p> <p>CF Step 2.454000 MHz</p> <p>Freq Offset 0 Hz</p>
<p>11N20SISO/LCH</p>		<p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.396807500 GHz</p> <p>Stop Freq 2.425192500 GHz</p> <p>CF Step 2.638500 MHz</p> <p>Freq Offset 0 Hz</p>
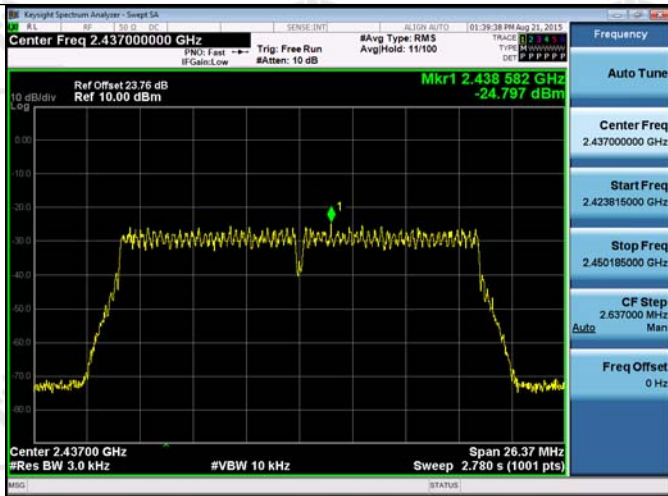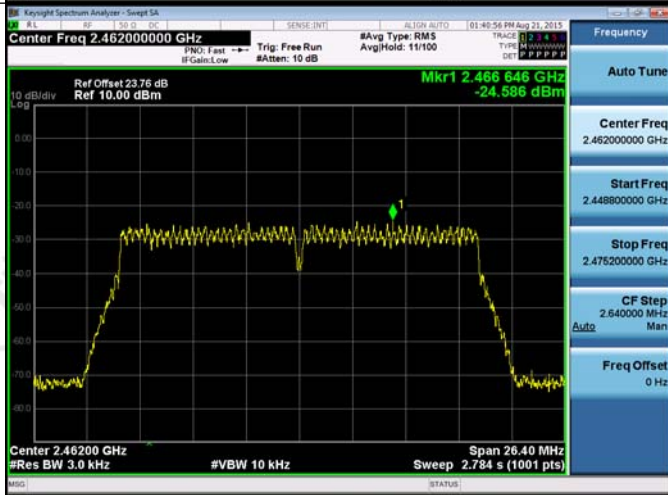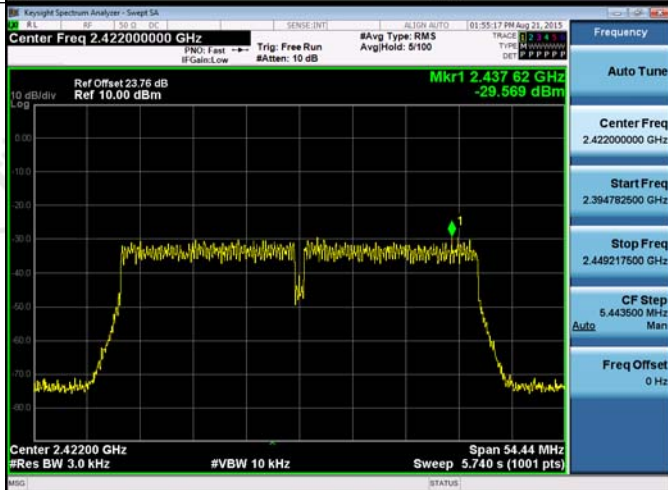
<p>11N20SISO/MCH</p>	 <p>Center Freq 2.43700000 GHz</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.423815000 GHz</p> <p>Stop Freq 2.450185000 GHz</p> <p>CF Step 2.637000 MHz</p> <p>Freq Offset 0 Hz</p> <p>Center 2.43700 GHz</p> <p>#Res BW 3.0 kHz</p> <p>#VBW 10 kHz</p> <p>Span 26.37 MHz</p> <p>Sweep 2.780 s (1001 pts)</p> <p>Mkr1 2.436582 GHz</p> <p>-24.797 dBm</p>
<p>11N20SISO/HCH</p>	 <p>Center Freq 2.46200000 GHz</p> <p>Center Freq 2.462000000 GHz</p> <p>Start Freq 2.448800000 GHz</p> <p>Stop Freq 2.475200000 GHz</p> <p>CF Step 2.640000 MHz</p> <p>Freq Offset 0 Hz</p> <p>Center 2.46200 GHz</p> <p>#Res BW 3.0 kHz</p> <p>#VBW 10 kHz</p> <p>Span 26.40 MHz</p> <p>Sweep 2.784 s (1001 pts)</p> <p>Mkr1 2.466546 GHz</p> <p>-24.586 dBm</p>
<p>11N40SISO/LCH</p>	 <p>Center Freq 2.42200000 GHz</p> <p>Center Freq 2.422000000 GHz</p> <p>Start Freq 2.394782500 GHz</p> <p>Stop Freq 2.449217500 GHz</p> <p>CF Step 5.443500 MHz</p> <p>Freq Offset 0 Hz</p> <p>Center 2.42200 GHz</p> <p>#Res BW 3.0 kHz</p> <p>#VBW 10 kHz</p> <p>Span 54.44 MHz</p> <p>Sweep 5.740 s (1001 pts)</p> <p>Mkr1 2.43762 GHz</p> <p>-29.569 dBm</p>

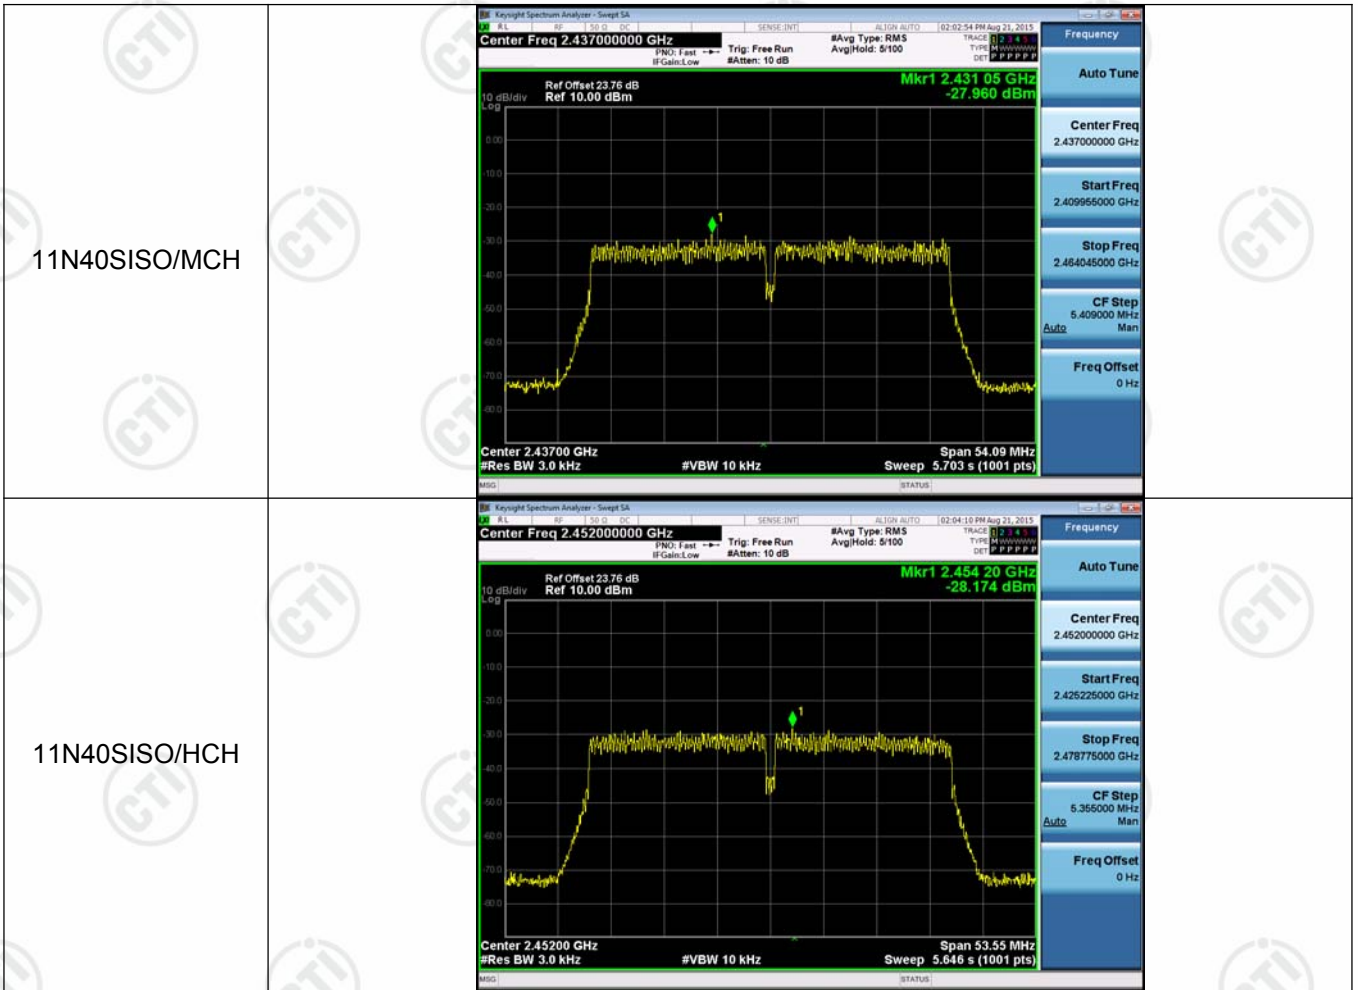

Appendix F) Antenna Requirement

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:	
---------------------	--

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 0dBi.	
---	--

Appendix G) AC Power Line Conducted Emission

<p>Test Procedure:</p>	<p>Test frequency range :150KHz-30MHz</p> <ol style="list-style-type: none"> 1) The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement. 																
<p>Limit:</p>	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50		
Frequency range (MHz)	Limit (dBuV)																
	Quasi-peak	Average															
0.15-0.5	66 to 56*	56 to 46*															
0.5-5	56	46															
5-30	60	50															
<p>* The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.</p> <p>NOTE : The lower limit is applicable at the transition frequency</p>																	


Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.


Live line:

80.0 dBuV

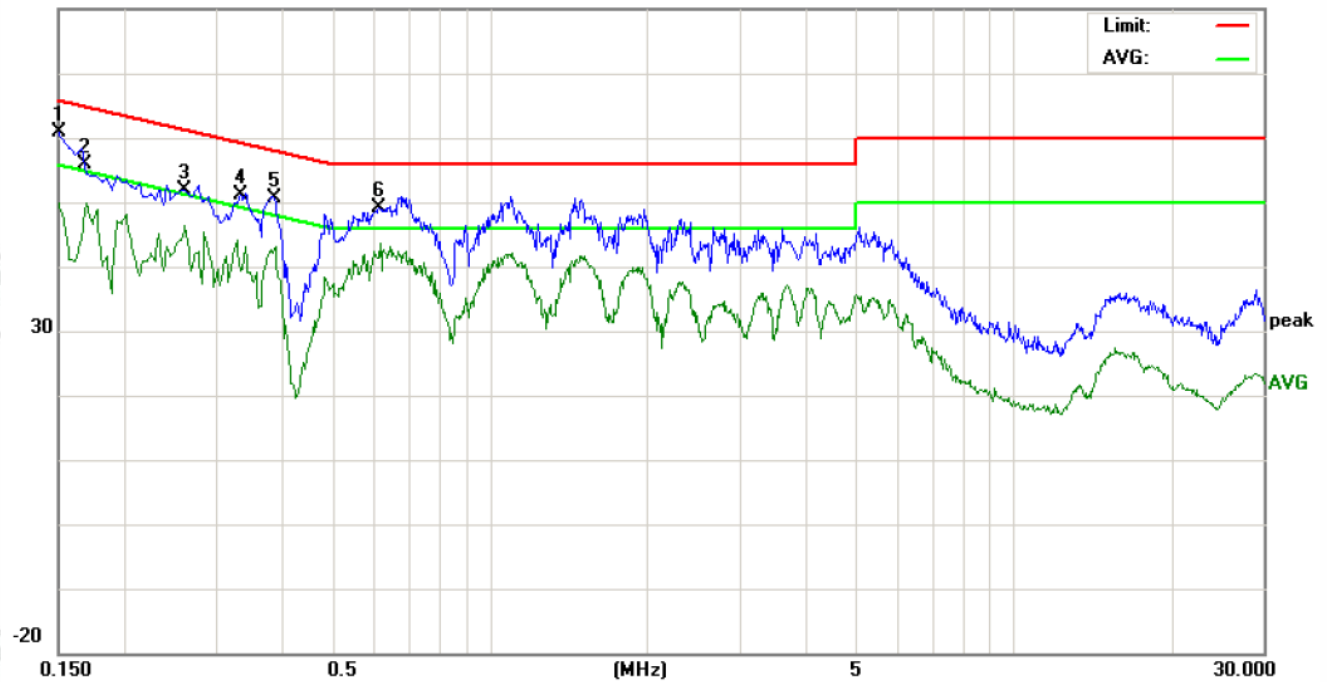

No.	Freq. MHz	Reading_Level (dBuV)			Correct Factor dB	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1500	50.91		40.08	9.90	60.81	49.98	65.99	55.99	-5.18	-6.01	P		
2	0.1700	44.48		39.89	9.90	54.38	49.79	64.96	54.96	-10.58	-5.17	P		
3	0.2620	41.87		36.42	9.90	51.77	46.32	61.36	51.36	-9.59	-5.04	P		
4	0.3300	40.00		34.14	9.90	49.90	44.04	59.45	49.45	-9.55	-5.41	P		
5	0.3899	40.14		33.22	9.90	50.04	43.12	58.06	48.06	-8.02	-4.94	P		
6	0.6180	38.89	37.61	31.41	9.90	48.79	47.51	56.00	46.00	-8.49	-4.69	P		

Neutral line:
80.0 dBuV

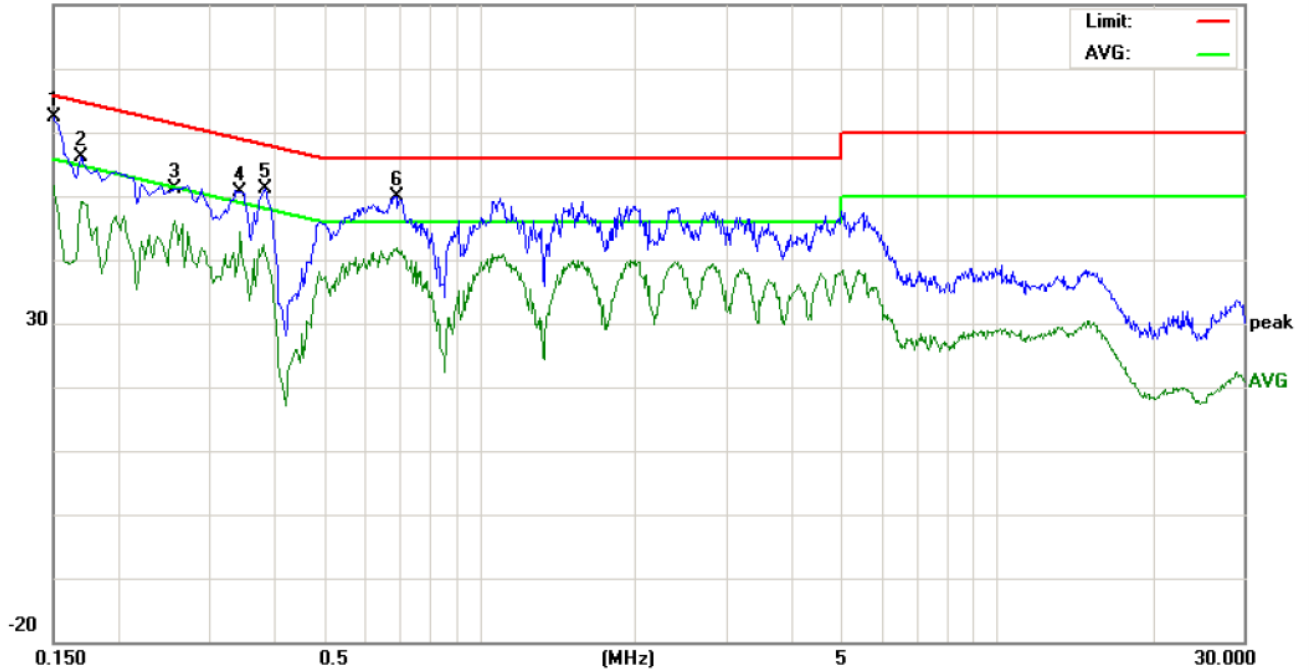

No.	Freq. MHz	Reading_Level (dBuV)			Correct Factor dB	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1500	52.41	50.67	42.06	9.90	62.31	60.57	51.96	65.99	55.99	-5.42	-4.03	P	
2	0.1700	46.15		39.27	9.90	56.05		49.17	64.96	54.96	-8.91	-5.79	P	
3	0.2580	41.24		36.13	9.90	51.14		46.03	61.49	51.49	-10.35	-5.46	P	
4	0.3460	40.73		34.45	9.90	50.63		44.35	59.06	49.06	-8.43	-4.71	P	
5	0.3820	41.04		32.48	9.90	50.94		42.38	58.23	48.23	-7.29	-5.85	P	
6	0.6940	38.30		31.90	9.90	48.20		41.80	56.00	46.00	-7.80	-4.20	P	

Notes:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.

Appendix H) Restricted bands around fundamental frequency /Radiated Spurious Emissions

Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Test Procedure:					

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter)..
- h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case.
- j. Repeat above procedures until all frequencies measured was complete.

Limit:	Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

Radiated Spurious Emissions test Data:

All the modes of operation (X, Y, Z) were investigated and the worst-case emissions are reported.

A. Below 30MHz:


No emissions were found higher than the background below 30MHz and background is lower than the limit, so it deems to compliance with the limit without recorded.

B. 30MHz ~ 1GHz:

The test data of low channel, middle channel and high channel are almost same in frequency bands 30MHz to 1GHz, and the data of IEEE 802.11b are chosen as representative in below:


The all low channel, middle channel and high channel are tested, the worst-case IEEE 802.11b is reported.

H:

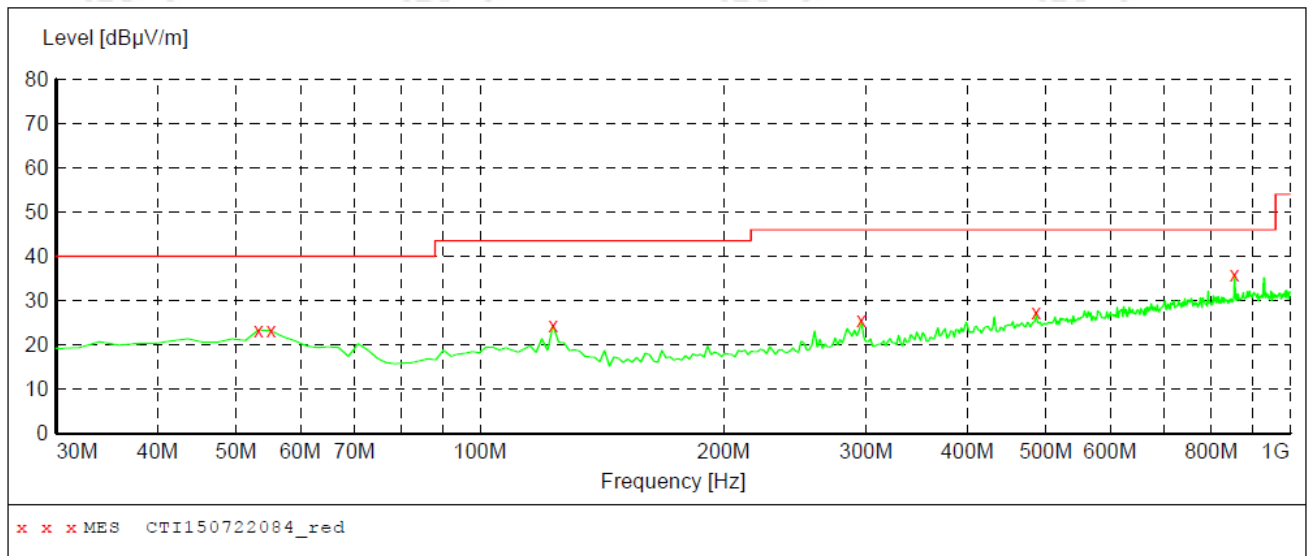

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
53.280000	23.40	16.1	40.0	16.6	---	100.0	106.00	HORIZONTAL
55.220000	23.20	15.8	40.0	16.8	---	100.0	10.00	HORIZONTAL
123.120000	24.40	13.0	43.5	19.1	---	100.0	10.00	HORIZONTAL
295.780000	25.50	15.8	46.0	20.5	---	100.0	42.00	HORIZONTAL
485.900000	27.30	21.1	46.0	18.7	---	100.0	162.00	HORIZONTAL
854.500000	35.90	26.1	46.0	10.1	---	100.0	29.00	HORIZONTAL

V:

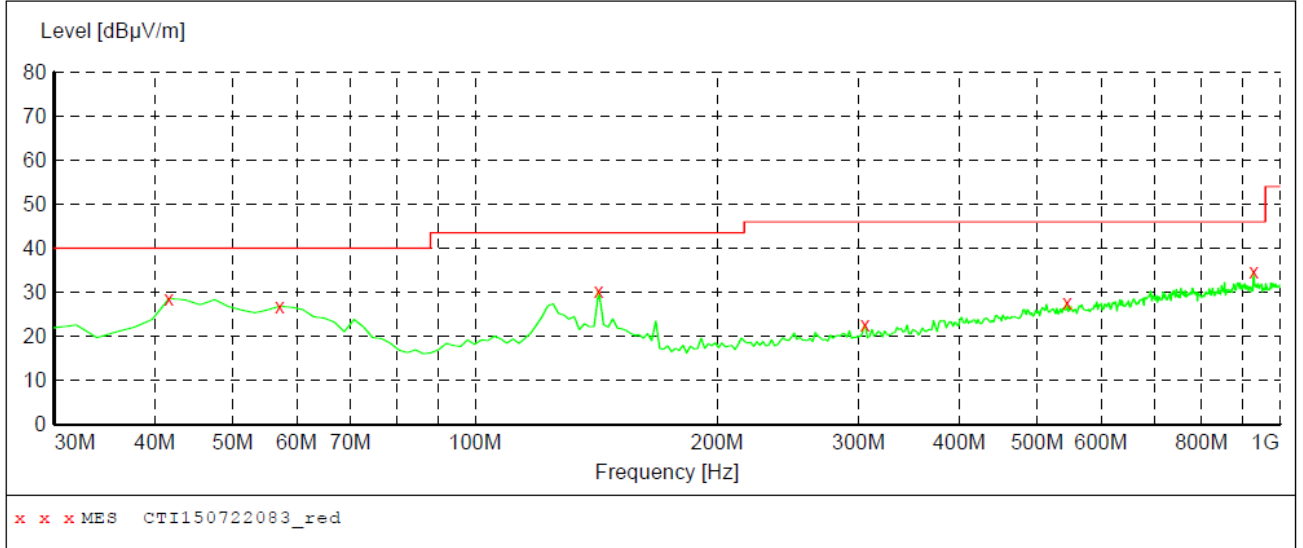

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
41.640000	28.60	15.9	40.0	11.4	---	100.0	308.00	VERTICAL
57.160000	26.80	15.6	40.0	13.2	---	100.0	107.00	VERTICAL
142.520000	30.40	11.7	43.5	13.1	---	100.0	95.00	VERTICAL
305.480000	22.70	16.1	46.0	23.3	---	100.0	283.00	VERTICAL
544.100000	27.50	21.8	46.0	18.5	---	100.0	255.00	VERTICAL
928.220000	34.80	26.7	46.0	11.2	---	100.0	215.00	VERTICAL

C. Above 1GHz:

IEEE 802.11b, 11Mbps:

Frequency (MHz)	Measurement (dBuV/m)	Limit (dBuV/m)	Detector Type	Antenna (H/V)	Result (P/F)
Low channel (2412MHz)					
2390.0	36.22	74	PK	H	P
2400.0	51.65	74	PK	H	P
4824.0	46.34	74	PK	H	P
2390.0	36.64	74	PK	V	P
2400.0	51.03	74	PK	V	P
4824.0	47.27	74	PK	V	P
Middle channel (2437MHz)					
4874.0	46.26	74	PK	H	P
4874.0	46.87	74	PK	V	P
High channel (2462MHz)					
2483.5	44.84	74	PK	H	P
4924.0	46.26	74	PK	H	P
2483.5	46.91	74	PK	V	P
4924.0	46.74	74	PK	V	P

IEEE 802.11g, 6Mbps:

Frequency (MHz)	Measurement (dBuV/m)	Limit (dBuV/m)	Detector Type	Antenna (H/V)	Result (P/F)
Low channel (2412MHz)					
2390.0	36.71	74	PK	H	P
2400.0	50.72	74	PK	H	P
4824.0	45.84	74	PK	H	P
2390.0	36.57	74	PK	V	P
2400.0	51.31	74	PK	V	P
4824.0	46.82	74	PK	V	P
Middle channel (2437MHz)					
4874.0	46.81	74	PK	H	P
4874.0	45.94	74	PK	V	P
High channel (2462MHz)					
2483.5	45.97	74	PK	H	P
4924.0	46.65	74	PK	H	P
2483.5	46.41	74	PK	V	P
4924.0	46.55	74	PK	V	P

IEEE 802.11n HT20, 6.5Mbps:

Frequency (MHz)	Measurement (dBuV/m)	Limit (dBuV/m)	Detector Type	Antenna (H/V)	Result (P/F)
Low channel (2412MHz)					
2390.0	36.71	74	PK	H	P
2400.0	50.73	74	PK	H	P
4824.0	45.84	74	PK	H	P
2390.0	36.64	74	PK	V	P
2400.0	50.71	74	PK	V	P
4824.0	47.94	74	PK	V	P
Middle channel (2437MHz)					
4874.0	46.81	74	PK	H	P
4874.0	46.54	74	PK	V	P
High channel (2462MHz)					
2483.5	46.21	74	PK	H	P
4924.0	47.96	74	PK	H	P
2483.5	46.61	74	PK	V	P
4924.0	47.52	74	PK	V	P

IEEE 802.11n HT40, 13.5Mbps:

Frequency (MHz)	Measurement (dBuV/m)	Limit (dBuV/m)	Detector Type	Antenna (H/V)	Result (P/F)
Low channel (2422MHz)					
2390.0	36.41	74	PK	H	P
2400.0	51.63	74	PK	H	P
4844.0	47.32	74	PK	H	P
2390.0	36.51	74	PK	V	P
2400.0	51.62	74	PK	V	P
4844.0	48.94	74	PK	V	P
Middle channel (2437MHz)					
4874.0	48.84	74	PK	H	P
4874.0	47.81	74	PK	V	P
High channel (2452MHz)					
2483.5	47.09	74	PK	H	P
4904.0	49.58	74	PK	H	P
2483.5	45.71	74	PK	V	P
4904.0	47.82	74	PK	V	P

Note:

1) Through Pre-scan transmitting mode with all kind of modulation and data rate, find the 11Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40), and then Only the worst case is recorded in the report.


2) *The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:*

Final Test Level = Receiver Reading - Correct Factor


Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor

3) *Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.*

PHOTOGRAPHS OF TEST SETUP

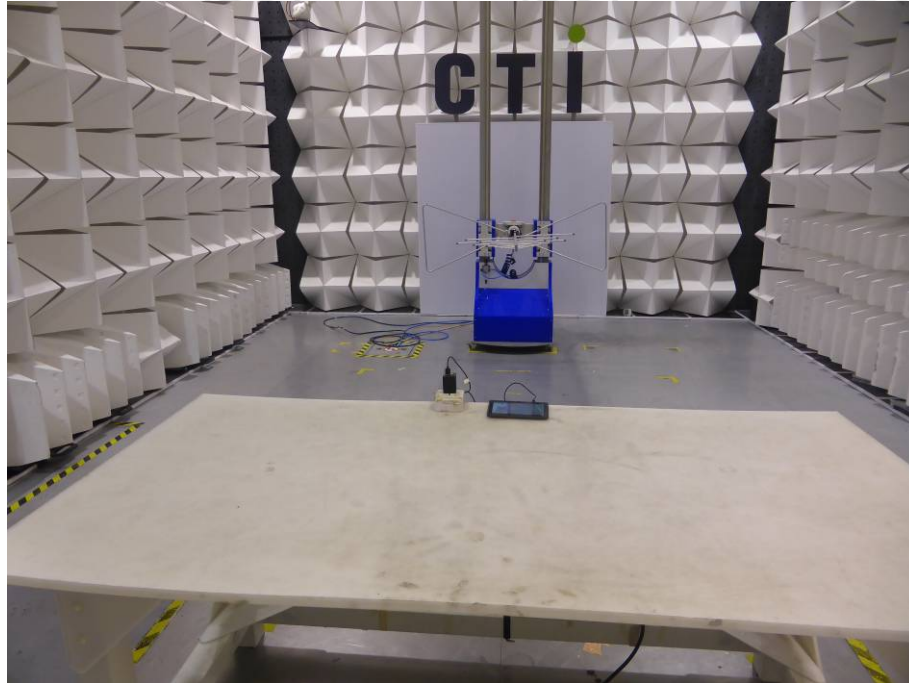

Radiated spurious emission Test Setup-1(Below 1GHz)

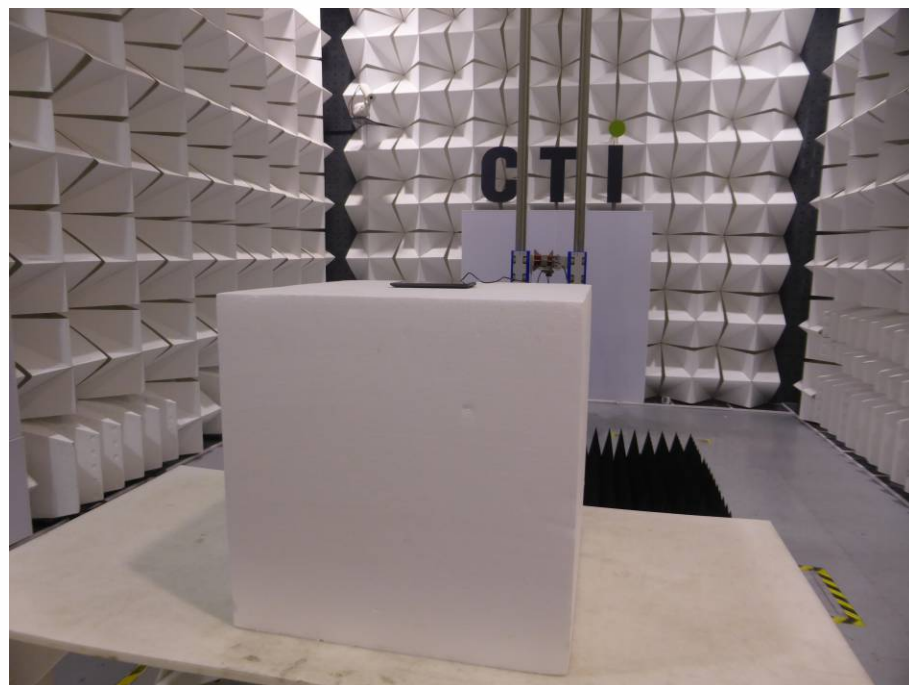

Radiated spurious emission Test Setup-2(Above 1GHz)



Conducted emission Test Setup


PHOTOGRAPHS OF EUT Constructional Details




View of General Product-1




View of External Product-1

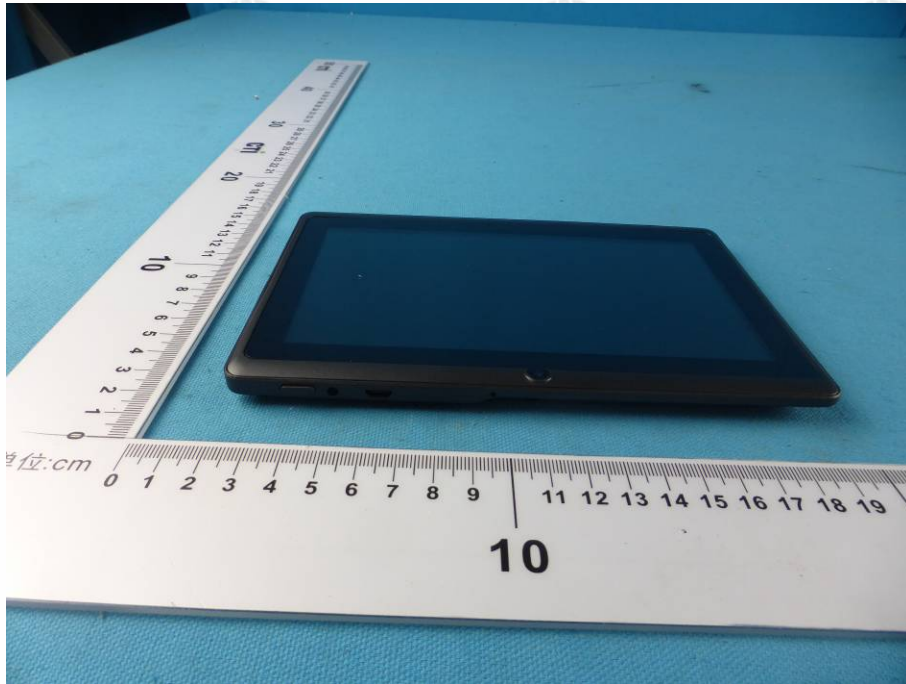


View of External Product-2

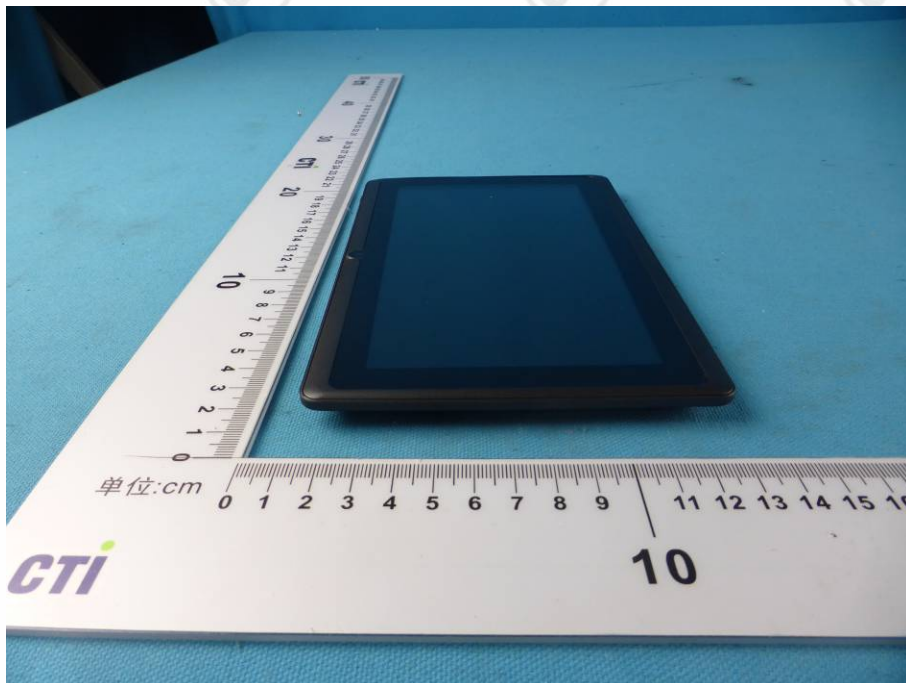


View of External Product-3

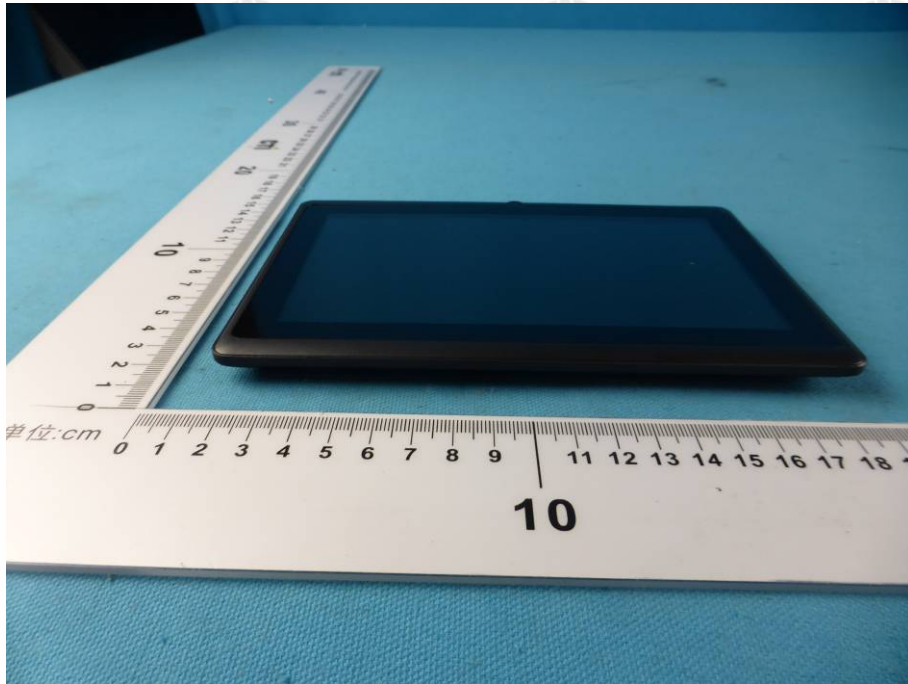


View of External Product-4

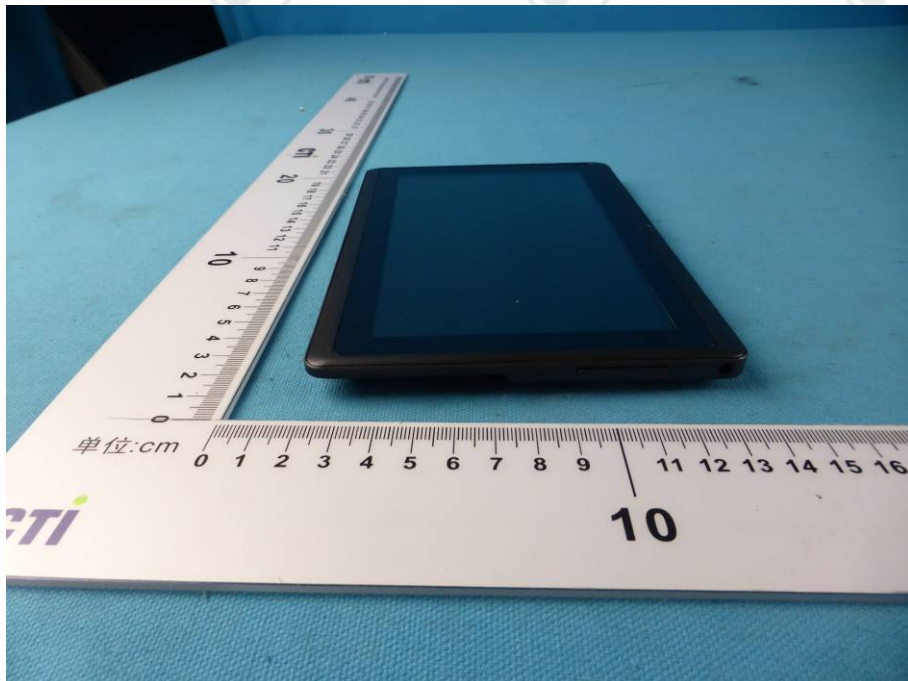


View of External Product-5

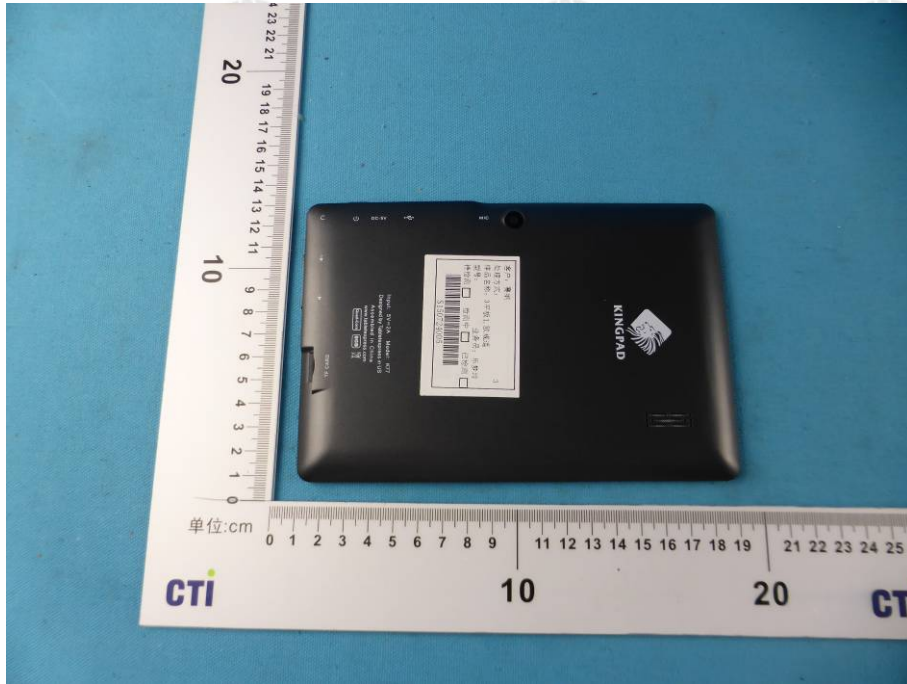


View of External Product-6

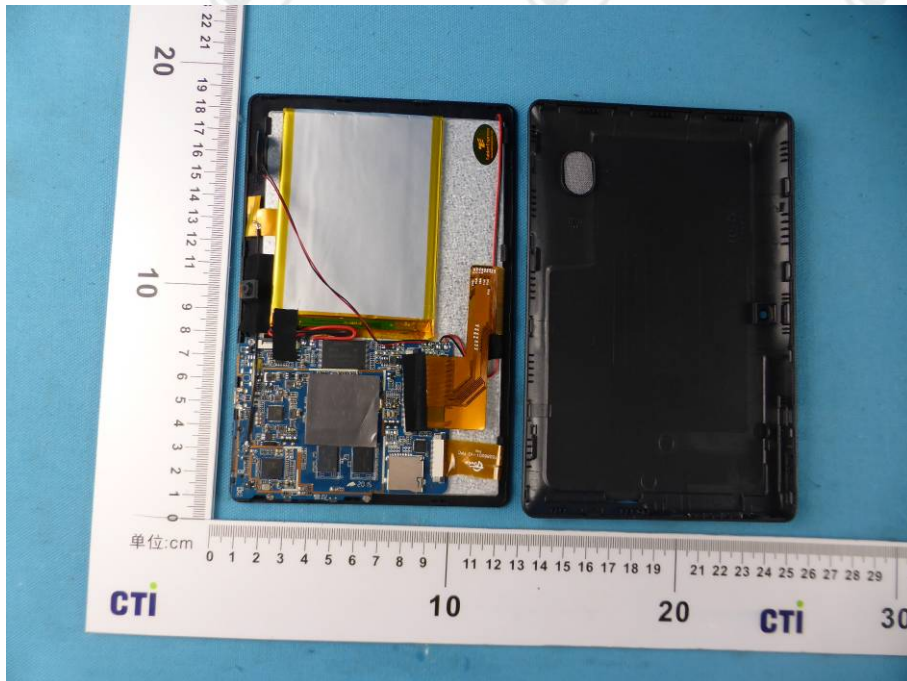


View of Internal Product-1

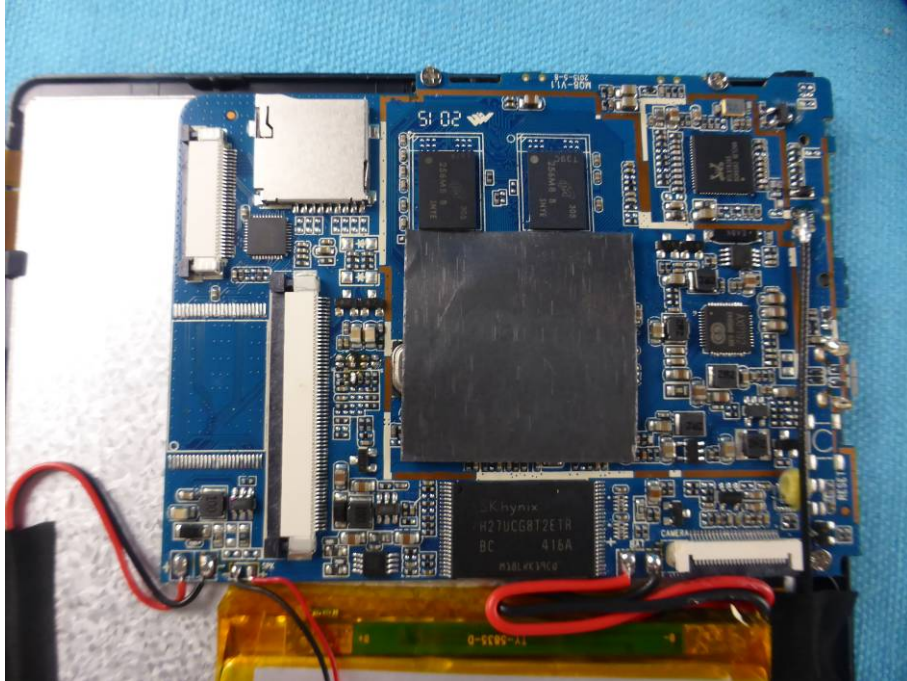

View of Internal Product-2

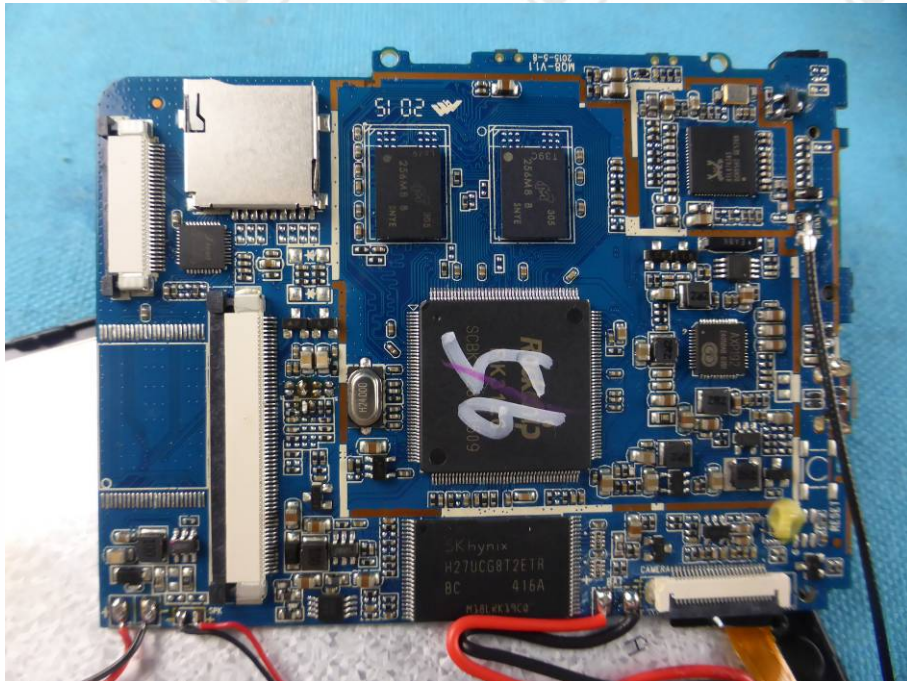

View of Internal Product-3

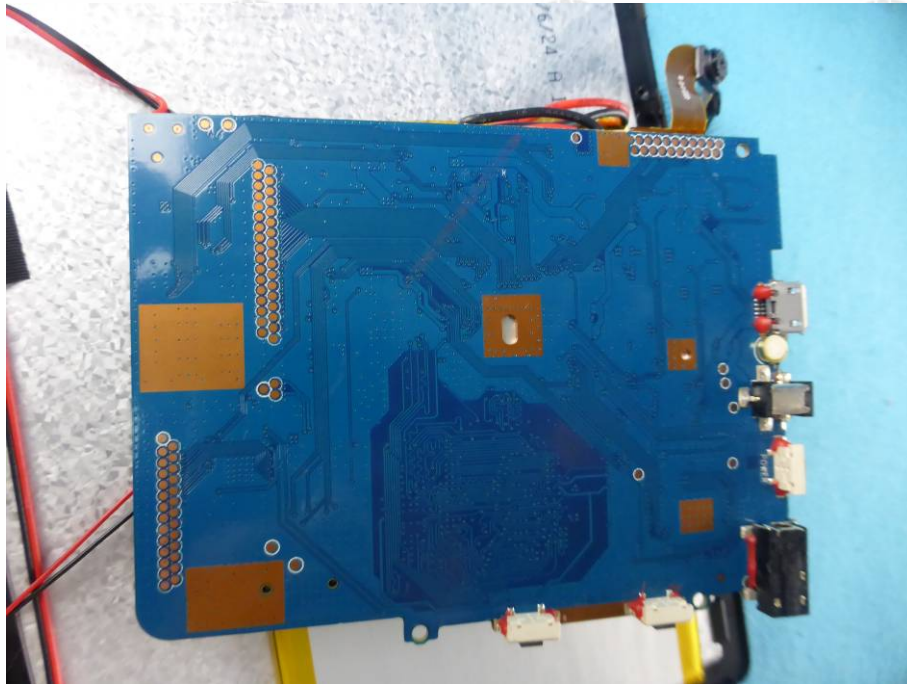

View of Internal Product-4



View of Internal Product-5

*** End of Report ***

The test report is effective only with both signature and specialized stamp. The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CTI, this report can't be reproduced except in full.