

## TEST REPORT

**Product** : 10.6" Tablet PC  
**Trade mark** : Dragon Touch, KINGPAD, KINGSLIM, AKASO  
**Model/Type reference** : X10, X10s, X10 pro, X10 plus, X10 hybrid, X10 mix  
**Serial Number** : N/A  
**Report Number** : EED32H000941-1  
**FCC ID** : S5V-D10X10  
**Date of Issue** : Aug. 24, 2015  
**Test Standards** : 47 CFR Part 15 Subpart C (2014)  
**Test result** : PASS

Prepared for:

**Proexpress Distributor LLC**

**11011 GREENWOOD AVE.N APT 5, SEATTLE, WA 98103, United States**

Prepared by:

**Centre Testing International (Shenzhen) Corporation**

**Building C, Scientific Innovation Park, Tiegang Reservoir, Xixiang, Baoan**

**District, Shenzhen, China**

**TEL: +86-755-3368 3668**

**FAX: +86-755-3368 3385**

Tested by:

*Ware Xin*

Reviewed by:

*Kevin Lan*

Approved by:

*Sheek Luo*

Date:

Aug. 24, 2015

Sheek Luo

Lab supervisor

Check No.: 2212824360



## 2 Version

Version No.	Date	Description
00	Aug. 24, 2015	Original

### 3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (c)	ANSI C63.10-2013	PASS
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(1)	ANSI C63.10-2013	PASS
20dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Carrier Frequencies Separation	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Hopping Channel Number	47 CFR Part 15 Subpart C Section 15.247 (b)	ANSI C63.10-2013	PASS
Dwell Time	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15 Subpart C Section 15.247(b)(4)&TCB Exclusion List (7 July 2002)	ANSI C63.10-2013	PASS
RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

Remark:

All models are same except model name and brand name. Model X10 was selected for test.


## 4 Content

<b>1 COVER PAGE</b> .....	<b>1</b>
<b>2 VERSION</b> .....	<b>2</b>
<b>3 TEST SUMMARY</b> .....	<b>3</b>
<b>4 CONTENT</b> .....	<b>4</b>
<b>5 TEST REQUIREMENT</b> .....	<b>5</b>
5.1 TEST SETUP.....	5
5.1.1 For Conducted test setup.....	5
5.1.2 For Radiated Emissions test setup.....	5
5.1.3 For Conducted Emissions test setup.....	6
5.2 TEST ENVIRONMENT.....	6
5.3 TEST CONDITION.....	6
<b>6 GENERAL INFORMATION</b> .....	<b>7</b>
6.1 CLIENT INFORMATION.....	7
6.2 GENERAL DESCRIPTION OF EUT.....	7
6.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD.....	7
6.4 DESCRIPTION OF SUPPORT UNITS.....	8
6.5 TEST LOCATION.....	8
6.6 TEST FACILITY.....	8
6.7 DEVIATION FROM STANDARDS.....	9
6.8 ABNORMALITIES FROM STANDARD CONDITIONS.....	9
6.9 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	9
6.10 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2).....	10
<b>7 EQUIPMENT LIST</b> .....	<b>11</b>
<b>8 RADIO TECHNICAL REQUIREMENTS SPECIFICATION</b> .....	<b>14</b>
Appendix A): 20dB Occupied Bandwidth.....	15
Appendix B): Carrier Frequency Separation.....	19
Appendix C): Dwell Time.....	23
Appendix D): Hopping Channel Number.....	27
Appendix E): Conducted Peak Output Power.....	29
Appendix F): Band-edge for RF Conducted Emissions.....	33
Appendix G): RF Conducted Spurious Emissions.....	37
Appendix I) Antenna Requirement.....	44
Appendix J) AC Power Line Conducted Emission.....	45
Appendix K) Restricted bands around fundamental frequency (Radiated)/Radiated Spurious Emissions.....	48
<b>PHOTOGRAPHS OF TEST SETUP</b> .....	<b>52</b>
<b>PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS</b> .....	<b>54</b>

## 5 Test Requirement

### 5.1 Test setup

#### 5.1.1 For Conducted test setup

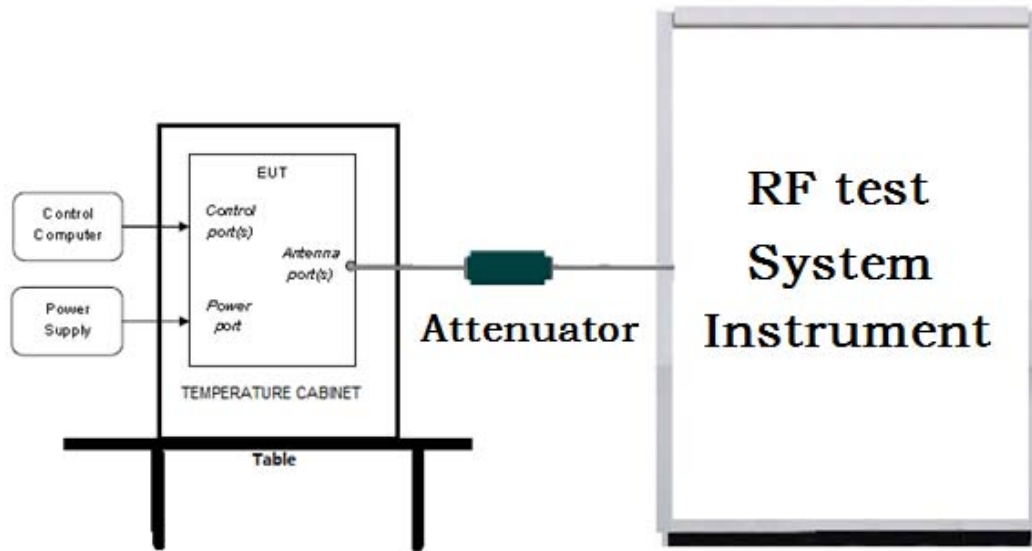

#### 5.1.2 For Radiated Emissions test setup

##### Radiated Emissions setup:

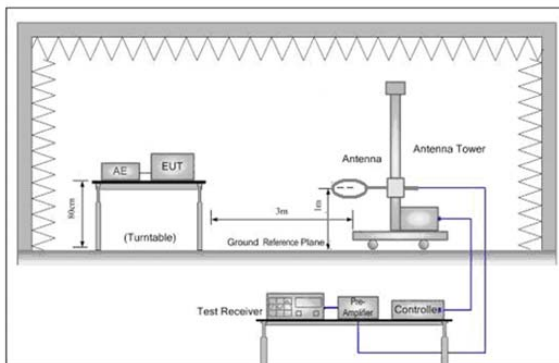


Figure 1. Below 30MHz

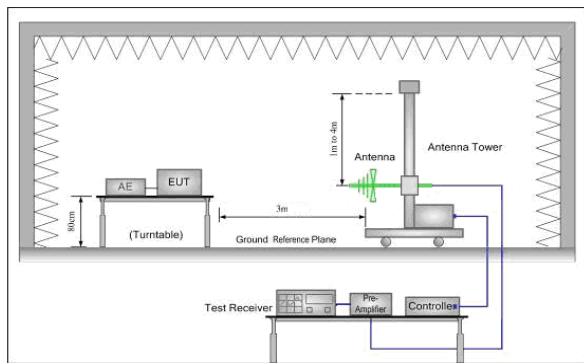


Figure 2. 30MHz to 1GHz


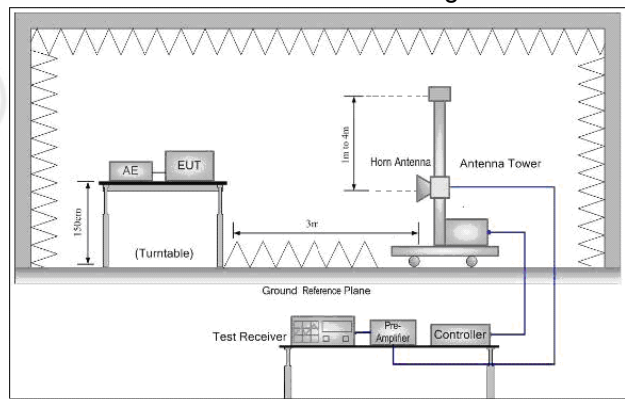


Figure 3. Above 1GHz

**5.1.3 For Conducted Emissions test setup**  
**Conducted Emissions setup**

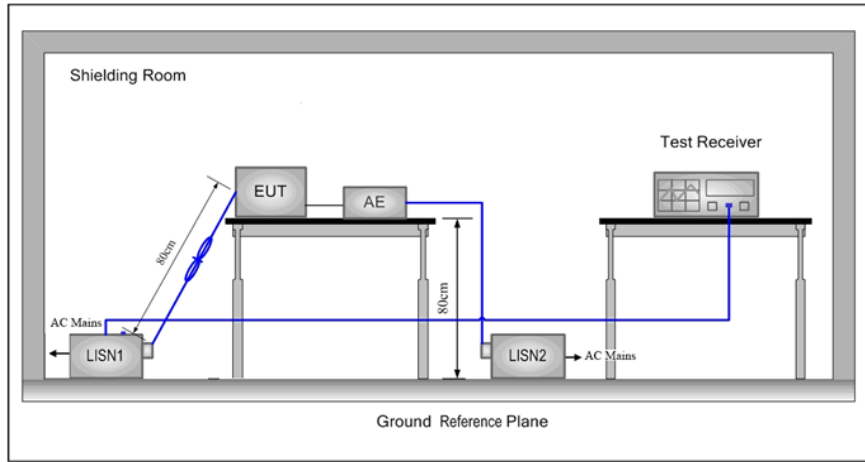

**5.2 Test Environment**

<b>Operating Environment:</b>	
Temperature:	24 °C
Humidity:	53 % RH
Atmospheric Pressure:	1010mbar

**5.3 Test Condition**

Test Mode	Tx/Rx	RF Channel		
		Low(L)	Middle(M)	High(H)
GFSK/π/4DQPSK/ 8DPSK(DH1,DH3,DH5)	2402MHz ~2480 MHz	Channel 1	Channel 40	Channel79
		2402MHz	2441MHz	2480MHz

## 6 General Information

### 6.1 Client Information

Applicant:	Proexpress Distributor LLC
Address of Applicant:	11011 GREENWOOD AVE.N APT 5, SEATTLE, WA 98103, United States
Manufacturer:	Proexpress Distributor LLC
Address of Manufacturer:	11011 GREENWOOD AVE.N APT 5, SEATTLE, WA 98103, United States

### 6.2 General Description of EUT

Product Name:	10.6" Tablet PC
Model No.(EUT):	X10, X10s, X10 pro, X10 plus, X10 hybrid, X10 mix
Trade mark:	Dragon Touch, KINGPAD, KINGSLIM, AKASO
EUT Supports Radios application:	Bluetooth V3.0+EDR
Power Supply:	Input: 5V $\overline{\text{---}}$ 2A
Sample Received Date:	Jun. 29, 2015
Sample tested Date:	Jun. 29, 2015 to Aug. 24, 2015

### 6.3 Product Specification subjective to this standard

Operation Frequency:	2402MHz~2480MHz
Bluetooth Version:	3.0+EDR
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)
Modulation Type:	GFSK, $\pi/4$ DQPSK, 8DPSK
Number of Channel:	79
Sample Type:	Portable production
Antenna Type:	Integral
Antenna Gain:	0dBi
Test Voltage:	DC 3.7V

#### Operation Frequency each of channel

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz

12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

#### 6.4 Description of Support Units

The EUT has been tested with associated equipment below:

Device Type	Brand	Model	Data Cable	Remark
--	--	--	--	--
--	--	--	--	--

#### 6.5 Test Location

All tests were performed at:

Centre Testing International (Shenzhen) Corporation  
 Building C, Scientific Innovation Park, Tiegang Reservoir, Xixiang, Baoan District, Shenzhen, China  
 Telephone: +86 (0) 755 3368 3668 Fax: +86 (0) 755 3368 3385  
 No tests were sub-contracted.

#### 6.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

##### CNAS-Lab Code: L1910

Centre Testing International Group Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories..

##### A2LA-Lab Cert. No. 3061.01

Centre Testing International Group Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

##### FCC-Registration No.: 565659

Centre Testing International (Shenzhen) Corporation EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 565659.



**IC-Registration No.: 7408A**

The 3m Alternate Test Site of Centre Testing International Group Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 7408A .

**IC-Registration No.: 7408B**

The 10m Alternate Test Site of Centre Testing International Group Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 7408B.

**NEMKO-Aut. No.: ELA503**

Centre Testing International Group Co., Ltd. has been assessed the quality assurance system, the testing facilities, qualifications and testing practices of the relevant parts of the organization. The quality assurance system of the Laboratory has been validated against ISO/IEC 17025 or equivalent. The laboratory also fulfils the conditions described in Nemko Document NLA-10.

**VCCI**

The Radiation 3 &10 meters site of Centre Testing International Group Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-4096.

Main Ports Conducted Interference Measurement of Centre Testing International Group Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: C-4563.

Telecommunication Ports Conducted Disturbance Measurement of Centre Testing International Group Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: T-2146.

The Radiation 3 meters site of Centre Testing International Group Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-758

## **6.7 Deviation from Standards**

None.

## **6.8 Abnormalities from Standard Conditions**

None.

## **6.9 Other Information Requested by the Customer**

None.

**6.10 Measurement Uncertainty (95% confidence levels, k=2)**

No.	Item	Measurement Uncertainty
1	Radio Frequency	7.9 x 10 <sup>-8</sup>
2	RF power, conducted	0.31dB (30MHz-1GHz)
		0.57dB (1GHz-18GHz)
3	Radiated Spurious emission test	4.5dB (30MHz-1GHz)
		4.8dB (1GHz-12.75GHz)
4	Conduction emission	3.6dB (9kHz to 150kHz)
		3.2dB (150kHz to 30MHz)
5	Temperature test	0.64°C
6	Humidity test	2.8%
7	DC power voltages	0.025%

## 7 Equipment List

RF test system					
Equipment	Manufacturer	Mode No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Signal Generator	Keysight	E8257D	MY53401106	04-14-2015	04-13-2016
Communication test set test set	Agilent	N4010A	MY47230124	04-02-2015	04-01-2016
Spectrum Analyzer	Keysight	N9010A	MY54510339	04-01-2015	03-31-2016
Attenuator	HuaXiang	SHX370	15040701	04-01-2015	03-31-2016
Signal Generator	Keysight	N5182B	MY53051549	03-31-2015	03-30-2016
High-pass filter(3-18GHz)	Sinoscite	FL3CX03WG18 NM12-0398-002	---	01-13-2015	01-12-2016
High-pass filter(5-18GHz)	MICRO-TRONICS	SPA-F-63029-4	---	01-13-2015	01-12-2016
band rejection filter (GSM900)	Sinoscite	FL5CX01CA09C L12-0395-001	---	01-13-2015	01-12-2016
band rejection filter (GSM850)	Sinoscite	FL5CX01CA08C L12-0393-001	---	01-13-2015	01-12-2016
band rejection filter (GSM1800)	Sinoscite	FL5CX02CA04C L12-0396-002	---	01-13-2015	01-12-2016
band rejection filter (GSM1900)	Sinoscite	FL5CX02CA03C L12-0394-001	---	01-13-2015	01-12-2016
DC Power	Keysight	E3642A	MY54436035	03-31-2015	03-30-2016
PC-1	Lenovo	R4960d	---	04-01-2015	03-31-2016
BT&WI-FI Automatic control	R&S	OSPB157	101374	04-01-2015	03-31-2016
RF control unit	JS Tonscend	JS0806-2	2015860006	04-01-2015	03-31-2016
BT&WI-FI Automatic test software	JS Tonscend	JSTS1120-2	---	04-01-2015	03-31-2016

Shielding Room No. 1 – Conduction Emission Test					
Equipment	Manufacturer	Mode No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Receiver	R&S	ESCI	100009	07-09-2014	07-08-2015
Receiver	R&S	ESCI	100009	07-09-2015	07-08-2016
Receiver	R&S	ESCI	100009	07-09-2014	07-08-2015
Receiver	R&S	ESCI	100009	07-09-2015	07-08-2016
LISN	R&S	ENV216	100098	11-12-2014	11-13-2015

3M Semi/full-anechoic Chamber					
Equipment	Manufacturer	Mode No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
3M Chamber	TDK	SAC-3	---	06-02-2015	06-01-2016
TRILOG Broadband Antenna	schwarzbeck	VULB9163	9163-617	07-14-2014	07-13-2015
TRILOG Broadband Antenna	schwarzbeck	VULB9163	9163-617	07-14-2015	07-13-2016
TRILOG Broadband Antenna	schwarzbeck	VULB9163	9163-617	07-14-2014	07-13-2015
TRILOG Broadband Antenna	schwarzbeck	VULB9163	9163-617	07-14-2015	07-13-2016
Microwave Preamplifier	Agilent	8449B	3008A02425	02-05-2015	02-04-2016
Horn Antenna	ETS-LINDGREN	3117	00057410	07-08-2014	07-07-2015
Horn Antenna	ETS-LINDGREN	3117	00057410	07-08-2015	07-07-2016
Horn Antenna	ETS-LINDGREN	3117	00057410	07-08-2014	07-07-2015
Horn Antenna	ETS-LINDGREN	3117	00057410	07-08-2015	07-07-2016
Loop Antenna	ETS	6502	00071730	07-23-2014	07-22-2015
Loop Antenna	ETS	6502	00071730	07-23-2015	07-22-2016
Loop Antenna	ETS	6502	00071730	07-23-2014	07-22-2015
Loop Antenna	ETS	6502	00071730	07-23-2015	07-22-2016
Spectrum Analyzer	R&S	FSP40	100416	07-09-2014	07-08-2015
Spectrum Analyzer	R&S	FSP40	100416	07-09-2015	07-08-2016
Spectrum Analyzer	R&S	FSP40	100416	07-09-2014	07-08-2015
Spectrum Analyzer	R&S	FSP40	100416	07-09-2015	07-08-2016
Receiver	R&S	ESCI	100435	07-09-2014	07-08-2015
Receiver	R&S	ESCI	100435	07-09-2015	07-08-2016
Receiver	R&S	ESCI	100435	07-09-2014	07-08-2015
Receiver	R&S	ESCI	100435	07-09-2015	07-08-2016
Multi device Controller	matturo	NCD/070/10711112	---	01-13-2015	01-12-2016
LISN	schwarzbeck	NNBM8125	81251547	07-09-2014	07-08-2015
LISN	schwarzbeck	NNBM8125	81251547	07-09-2015	07-08-2016
LISN	schwarzbeck	NNBM8125	81251547	07-09-2014	07-08-2015
LISN	schwarzbeck	NNBM8125	81251547	07-09-2015	07-08-2016
LISN	schwarzbeck	NNBM8125	81251546	07-09-2014	07-08-2015
LISN	schwarzbeck	NNBM8125	81251546	07-09-2015	07-08-2016
LISN	schwarzbeck	NNBM8125	81251546	07-09-2014	07-08-2015
LISN	schwarzbeck	NNBM8125	81251546	07-09-2015	07-08-2016
Signal Generator	Agilent	E4438C	MY45095744	04-19-2015	04-18-2016
Signal Generator	Keysight	E8257D	MY53401106	04-14-2015	04-13-2016
Temperature/Humidity Indicator	TAYLOR	1451	5190	07-10-2014	07-09-2015
Temperature/Humidity Indicator	TAYLOR	1451	5190	07-10-2015	07-09-2016
Temperature/Humidity Indicator	TAYLOR	1451	5190	07-10-2014	07-09-2015
Temperature/Humidity Indicator	TAYLOR	1451	5190	07-10-2015	07-09-2016
Communication test set	Agilent	E5515C	GB47050533	01-13-2015	01-12-2016
Cable line	Fulai(7M)	SF106	5219/6A	01-13-2015	01-12-2016
Cable line	Fulai(6M)	SF106	5220/6A	01-13-2015	01-12-2016
Cable line	Fulai(3M)	SF106	5216/6A	01-13-2015	01-12-2016
Cable line	Fulai(3M)	SF106	5217/6A	01-13-2015	01-12-2016
Communication test set	R&S	CMW500	152394	04-19-2015	04-18-2016
High-pass filter(3-18GHz)	Sinoscite	FL3CX03WG18NM 12-0398-002	---	01-13-2015	01-12-2016
High-pass filter(5-	MICRO-	SPA-F-63029-4	---	01-13-2015	01-12-2016

18GHz)	TRONICS				
band rejection filter	Sinoscite	FL5CX01CA09CL1 2-0395-001	---	01-13-2015	01-12-2016
band rejection filter	Sinoscite	FL5CX01CA08CL1 2-0393-001	---	01-13-2015	01-12-2016
band rejection filter	Sinoscite	FL5CX02CA04CL1 2-0396-002	---	01-13-2015	01-12-2016
band rejection filter	Sinoscite	FL5CX02CA03CL1 2-0394-001	---	01-13-2015	01-12-2016

## 8 Radio Technical Requirements Specification

### Reference documents for testing:

No.	Identity	Document Title
1	FCC Part15C (2014)	Subpart C-Intentional Radiators
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

### Test Results List:

Test requirement	Test method	Test item	Verdict	Note
Part15C Section 15.247 (a)(1)	ANSI 63.10	20dB Occupied Bandwidth	PASS	Appendix A)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Carrier Frequencies Separation	PASS	Appendix B)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Dwell Time	PASS	Appendix C)
Part15C Section 15.247 (b)	ANSI 63.10	Hopping Channel Number	PASS	Appendix D)
Part15C Section 15.247 (b)(1)	ANSI 63.10	Conducted Peak Output Power	PASS	Appendix E)
Part15C Section 15.247(d)	ANSI 63.10	Band-edge for RF Conducted Emissions	PASS	Appendix F)
Part15C Section 15.247(d)	ANSI 63.10	RF Conducted Spurious Emissions	PASS	Appendix G)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Pseudorandom Frequency Hopping Sequence	PASS	Appendix H)
Part15C Section 15.203/15.247 (c)	ANSI 63.10	Antenna Requirement	PASS	Appendix I)
Part15C Section 15.207	ANSI 63.10	AC Power Line Conducted Emission	PASS	Appendix J)
Part15C Section 15.205/15.209	ANSI 63.10	Restricted bands around fundamental frequency (Radiated Emission)	PASS	Appendix K)
Part15C Section 15.205/15.209	ANSI 63.10	Radiated Spurious Emissions	PASS	Appendix K)


## Appendix A): 20dB Occupied Bandwidth

### Test Result

Mode	Channel.	20dB Bandwidth [MHz]	99% OBW [MHz]	Verdict
GFSK	LCH	0.9451	0.86335	PASS
GFSK	MCH	0.9435	0.85679	PASS
GFSK	HCH	0.9422	0.85673	PASS
$\pi/4$ DQPSK	LCH	1.261	1.1686	PASS
$\pi/4$ DQPSK	MCH	1.230	1.1691	PASS
$\pi/4$ DQPSK	HCH	1.230	1.1685	PASS
8DPSK	LCH	1.266	1.1577	PASS
8DPSK	MCH	1.263	1.1614	PASS
8DPSK	HCH	1.261	1.1619	PASS

Remark: Peak detector is used


### Test Graph

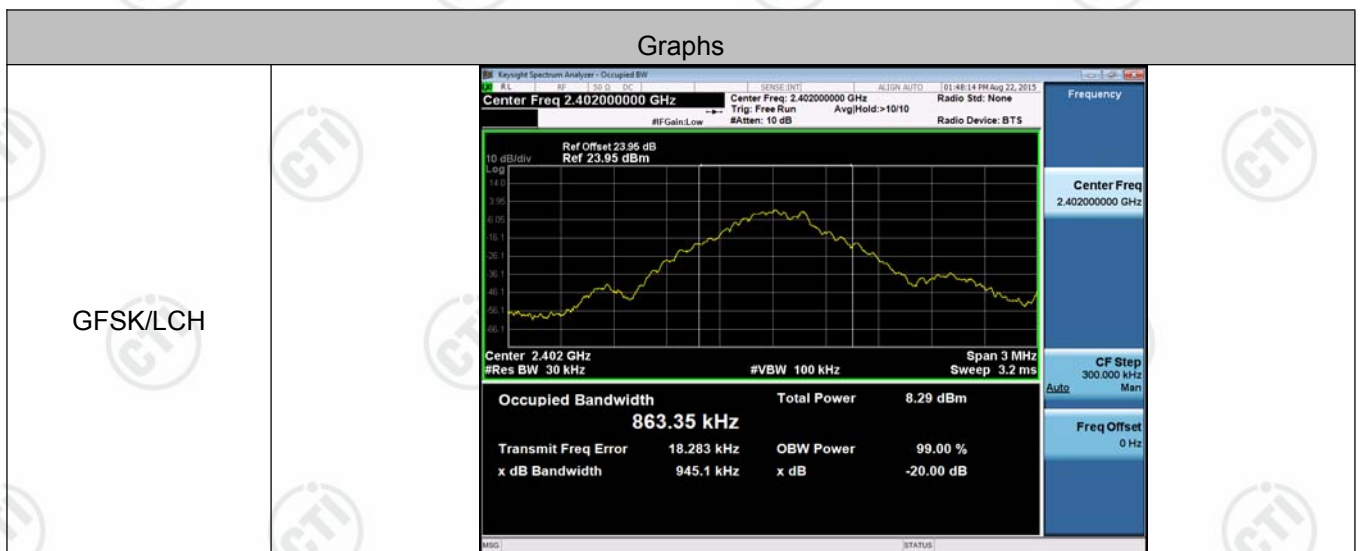

<p>GFSK/MCH</p>	<p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.441000000 GHz</p> <p>Ref Offset 23.76 dB Ref 23.76 dBm</p> <p>Center 2.441 GHz #Res BW 30 kHz</p> <p>Occupied Bandwidth <b>856.79 kHz</b></p> <p>Total Power 10.9 dBm</p> <p>Transmit Freq Error -1.191 kHz</p> <p>x dB Bandwidth 943.5 kHz</p>
<p>GFSK/HCH</p>	<p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.480000000 GHz</p> <p>Ref Offset 23.76 dB Ref 23.76 dBm</p> <p>Center 2.48 GHz #Res BW 30 kHz</p> <p>Occupied Bandwidth <b>856.73 kHz</b></p> <p>Total Power 10.9 dBm</p> <p>Transmit Freq Error -578 Hz</p> <p>x dB Bandwidth 942.2 kHz</p>
<p><math>\pi/4</math>DQPSK/LCH</p>	<p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.402000000 GHz</p> <p>Ref Offset 23.96 dB Ref 23.95 dBm</p> <p>Center 2.402 GHz #Res BW 30 kHz</p> <p>Occupied Bandwidth <b>1.1686 MHz</b></p> <p>Total Power 6.20 dBm</p> <p>Transmit Freq Error 10.605 kHz</p> <p>x dB Bandwidth 1.261 MHz</p>



<p><math>\pi/4</math>DQPSK/MCH</p>	<p>Center Freq 2.441000000 GHz</p> <p>Ref Offset 23.76 dB Ref 23.76 dBm</p> <p>Center 2.441 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 1.1691 MHz Total Power 8.82 dBm</p> <p>Transmit Freq Error -19 Hz OBW Power 99.00 %</p> <p>x dB Bandwidth 1.230 MHz x dB -20.00 dB</p>
<p><math>\pi/4</math>DQPSK/HCH</p>	<p>Center Freq 2.480000000 GHz</p> <p>Ref Offset 23.76 dB Ref 23.76 dBm</p> <p>Center 2.48 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 1.1685 MHz Total Power 8.89 dBm</p> <p>Transmit Freq Error 377 Hz OBW Power 99.00 %</p> <p>x dB Bandwidth 1.230 MHz x dB -20.00 dB</p>
<p>8DPSK/LCH</p>	<p>Center Freq 2.402000000 GHz</p> <p>Ref Offset 23.96 dB Ref 23.95 dBm</p> <p>Center 2.402 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 1.1577 MHz Total Power 6.86 dBm</p> <p>Transmit Freq Error 13.136 kHz OBW Power 99.00 %</p> <p>x dB Bandwidth 1.266 MHz x dB -20.00 dB</p>

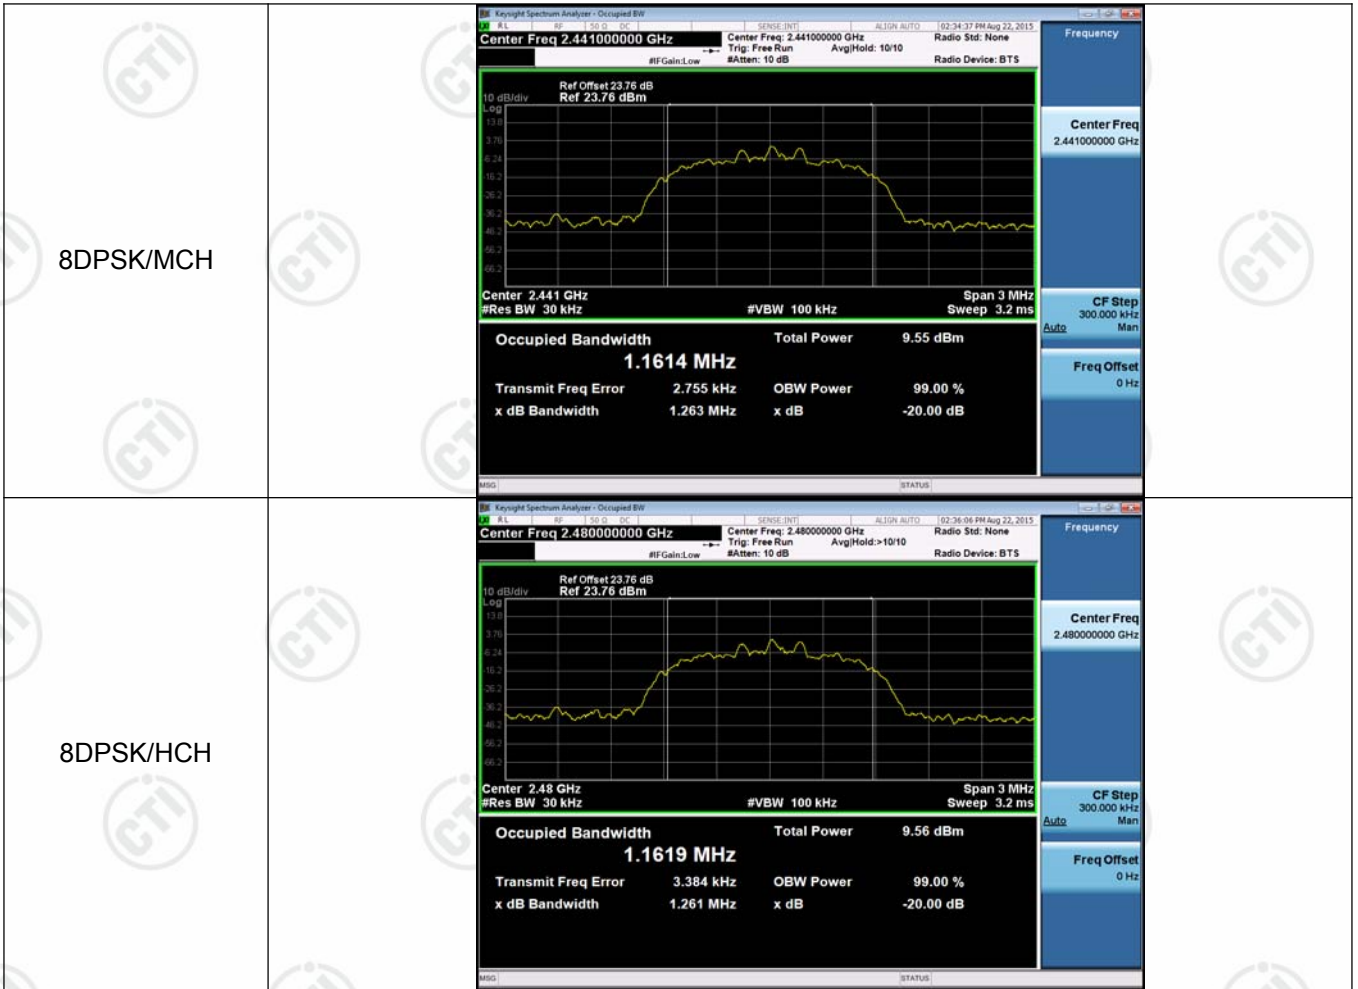



## Appendix B): Carrier Frequency Separation


Result Table


Mode	Channel.	Carrier Frequency Separation [MHz]	Verdict
GFSK	LCH	1.154	PASS
GFSK	MCH	0.978	PASS
GFSK	HCH	1.188	PASS
$\pi/4$ DQPSK	LCH	0.988	PASS
$\pi/4$ DQPSK	MCH	1.002	PASS
$\pi/4$ DQPSK	HCH	0.990	PASS
8DPSK	LCH	1.016	PASS
8DPSK	MCH	1.154	PASS
8DPSK	HCH	1.006	PASS

Test Graph

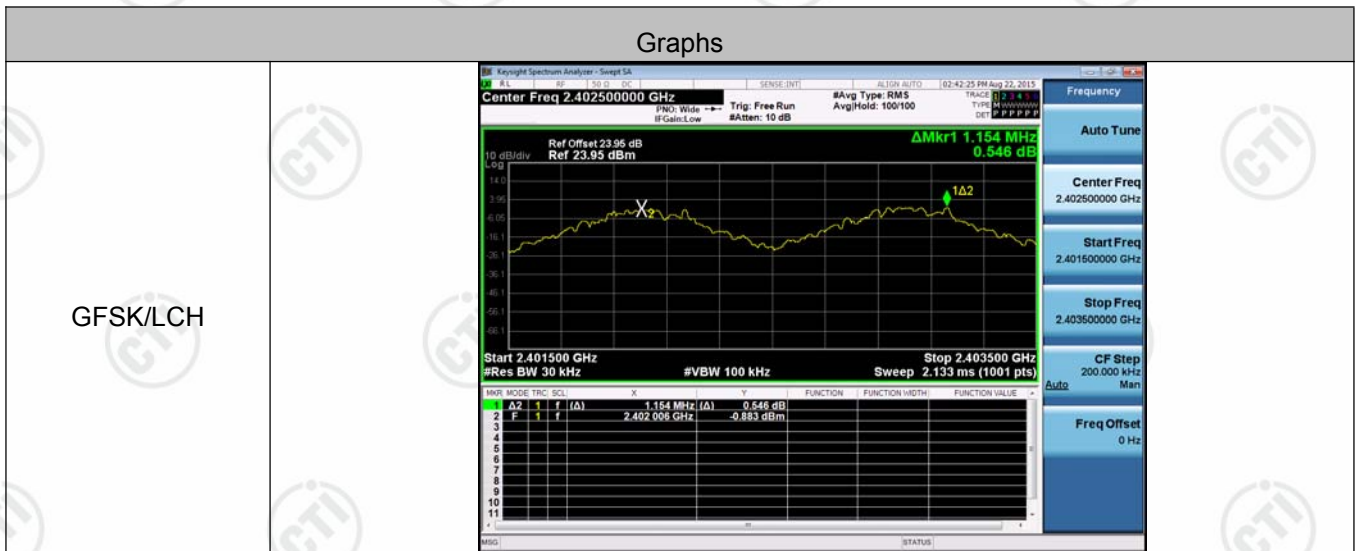

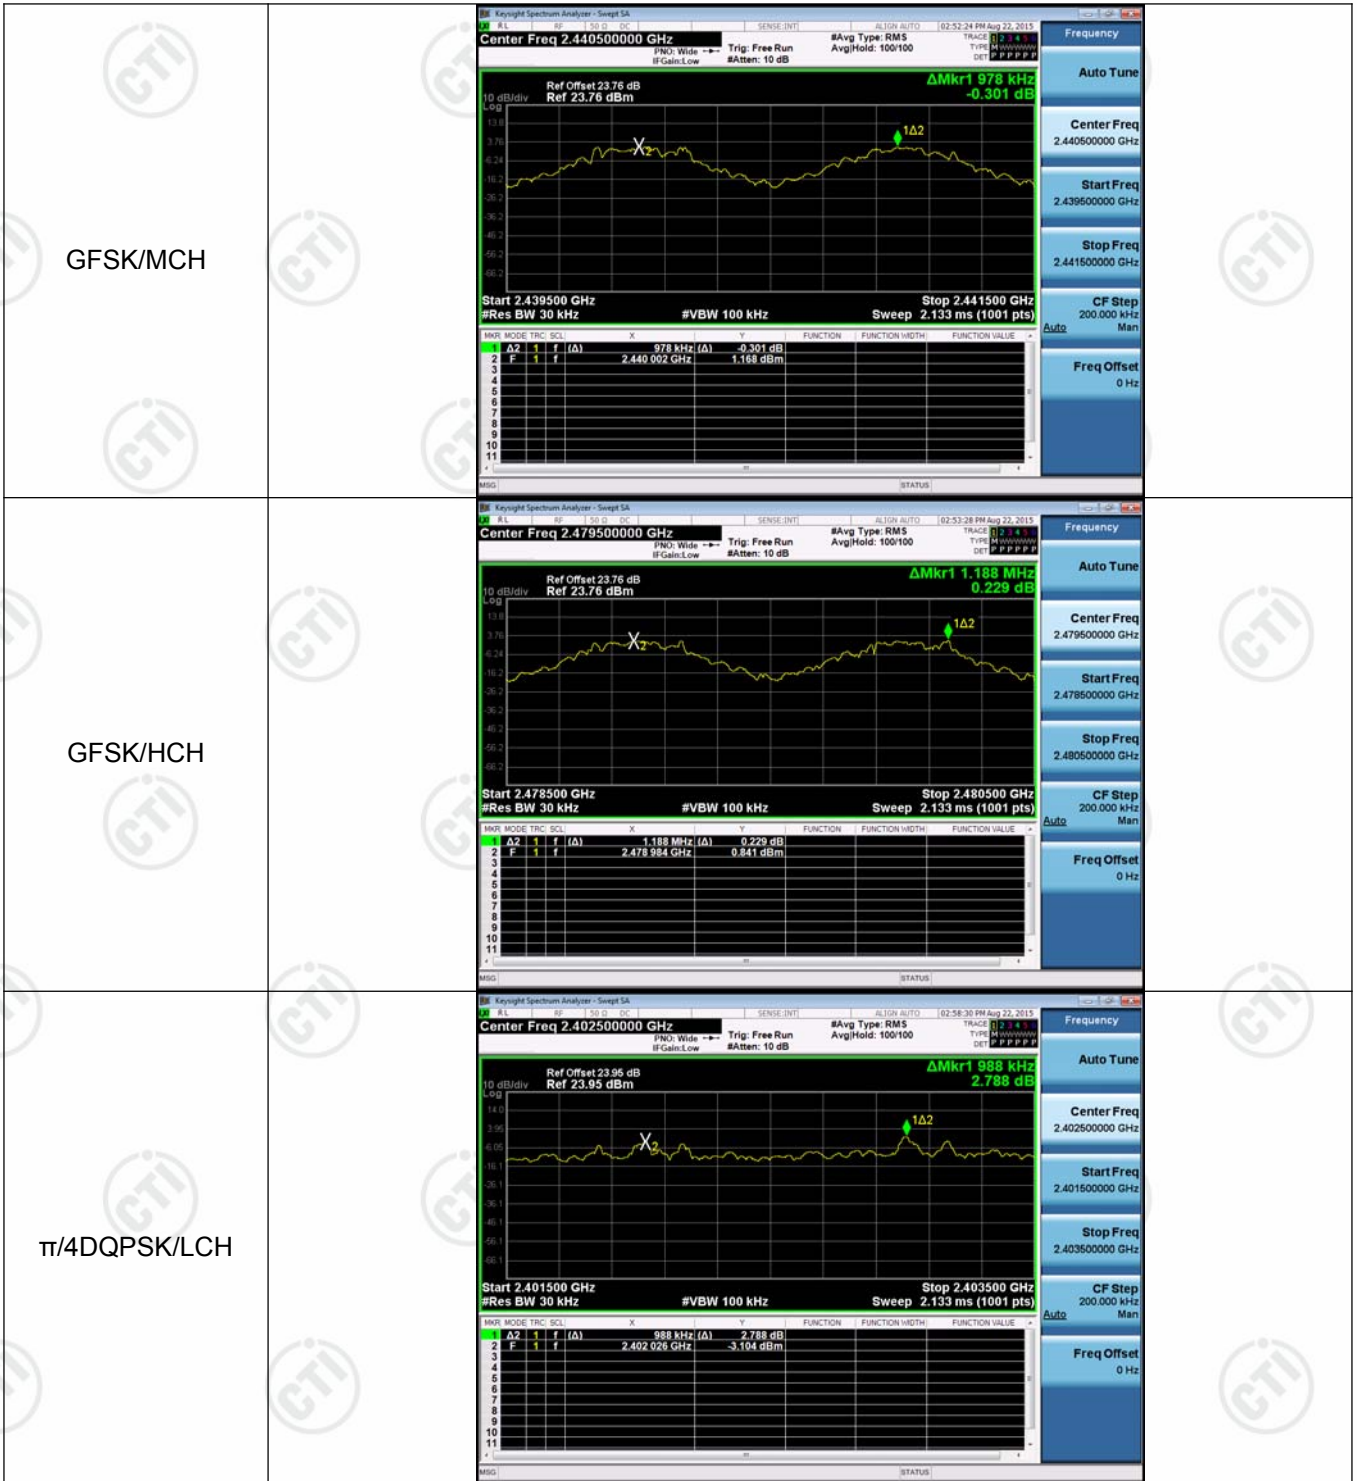

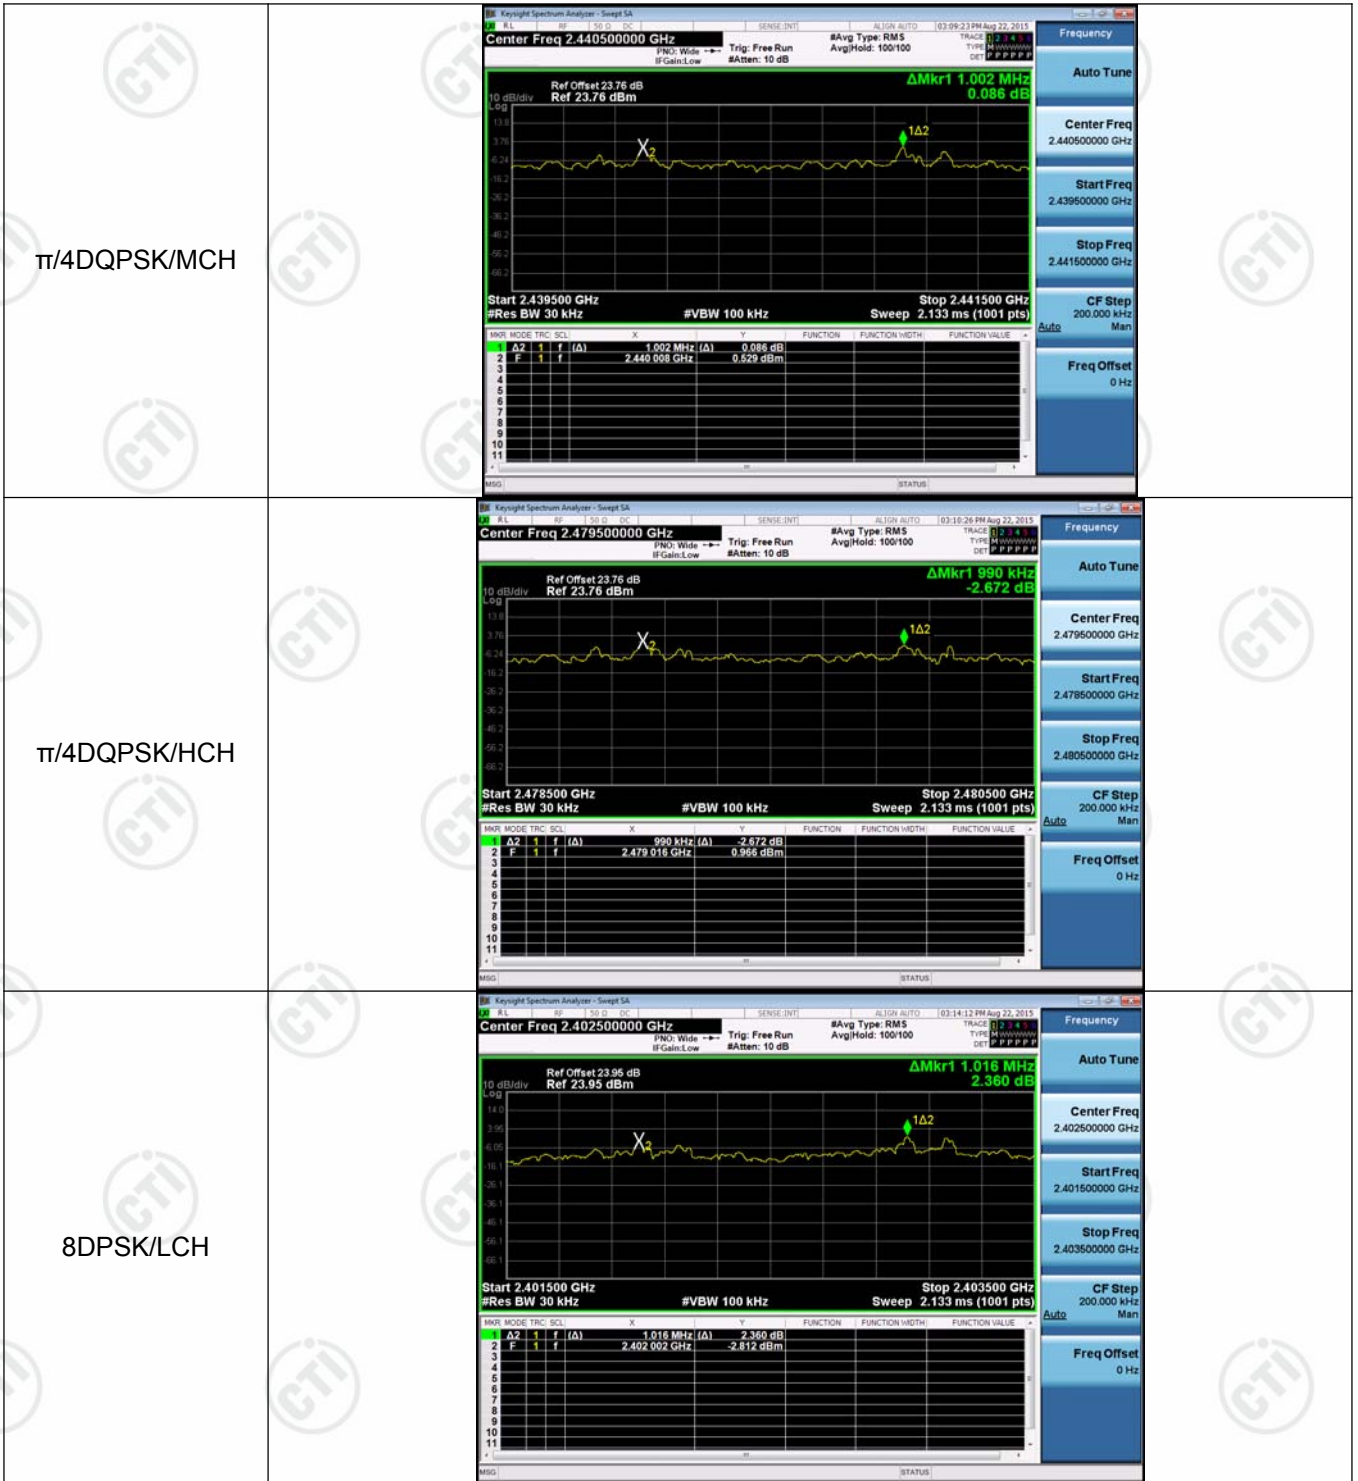

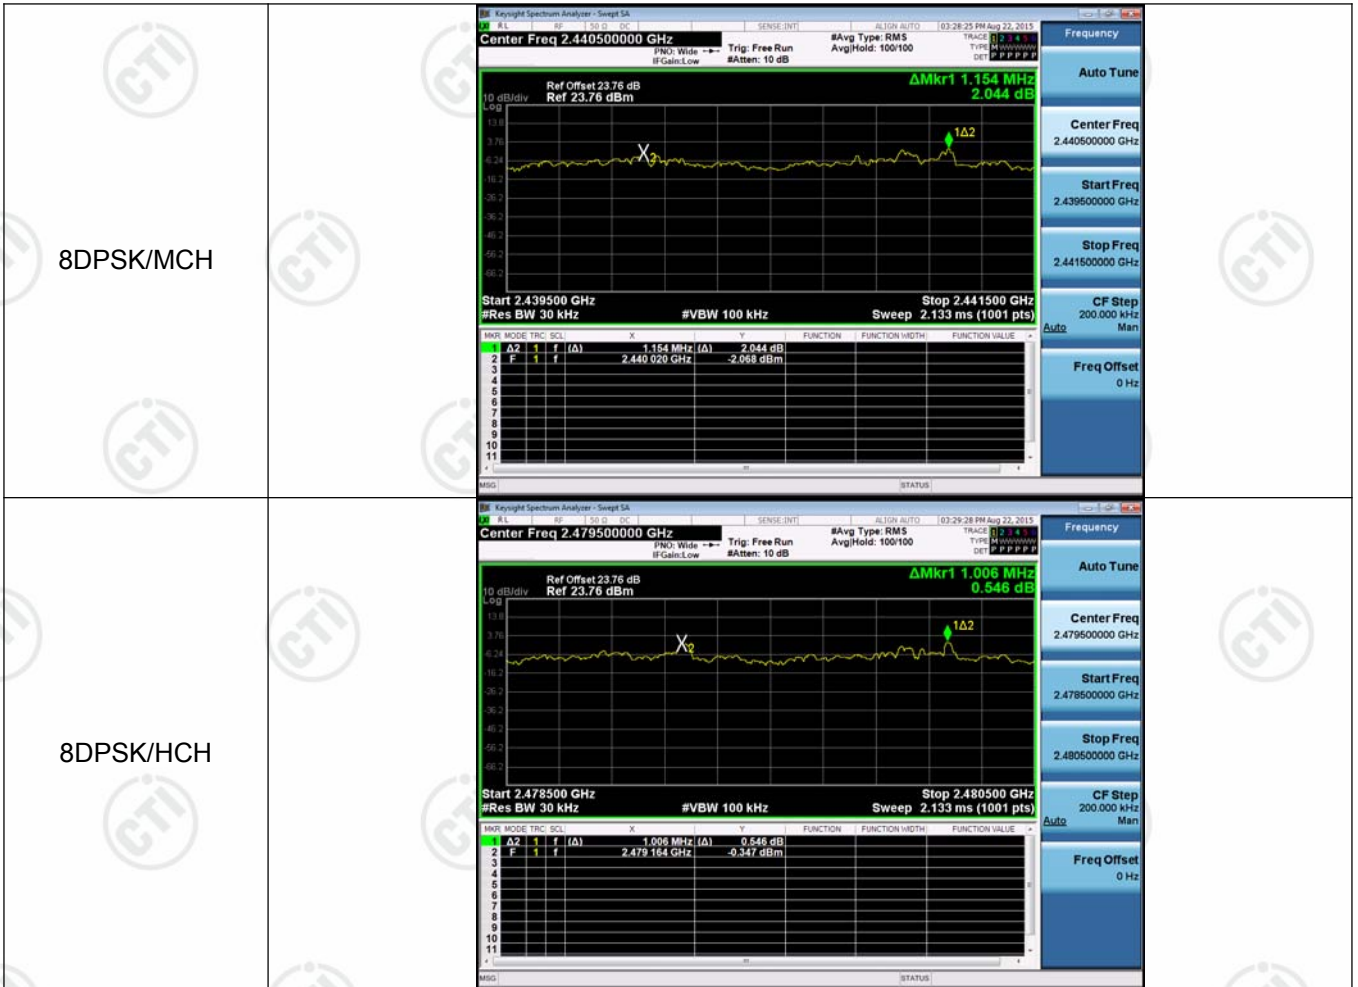


## Appendix C): Dwell Time




Result Table

Mode	Packet	Channel	Burst Width [ms/hop/ch]	Total Hops[hop*ch]	Dwell Time[s]	Verdict
GFSK	DH1	LCH	0.408	320	0.131	PASS
GFSK	DH1	MCH	0.408	320	0.131	PASS
GFSK	DH1	HCH	0.408	320	0.131	PASS
GFSK	DH3	LCH	1.663	160	0.266	PASS
GFSK	DH3	MCH	1.663	160	0.266	PASS
GFSK	DH3	HCH	1.664	160	0.266	PASS
GFSK	DH5	LCH	2.911	106.7	0.311	PASS
GFSK	DH5	MCH	2.912	106.7	0.311	PASS
GFSK	DH5	HCH	2.912	106.7	0.311	PASS


Remark: Only worse case GFSK is reported.


### Test Graph

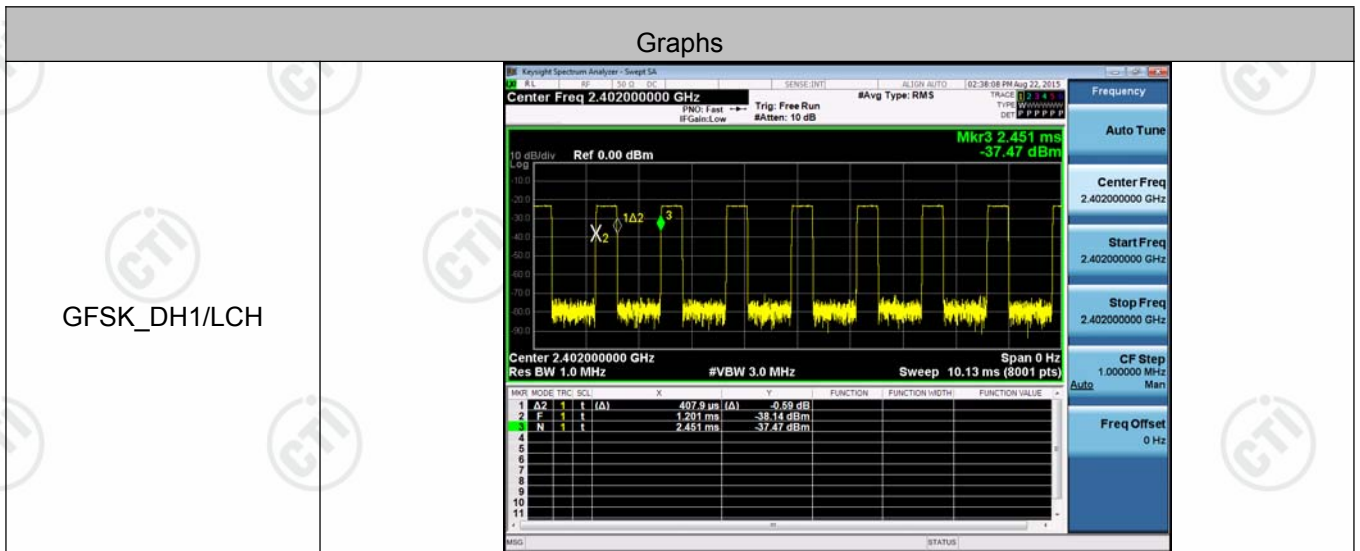
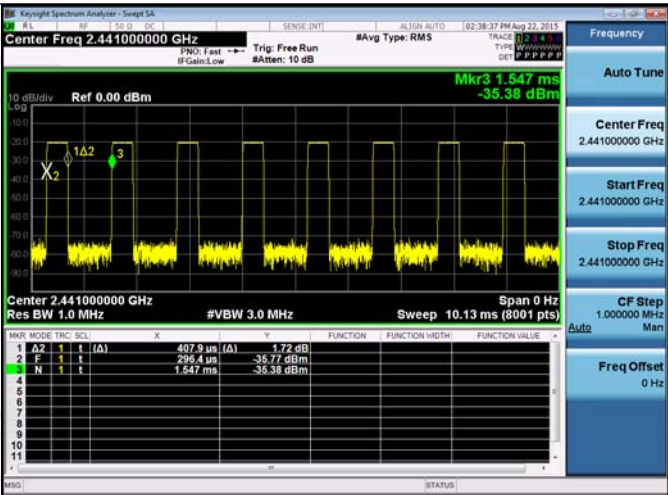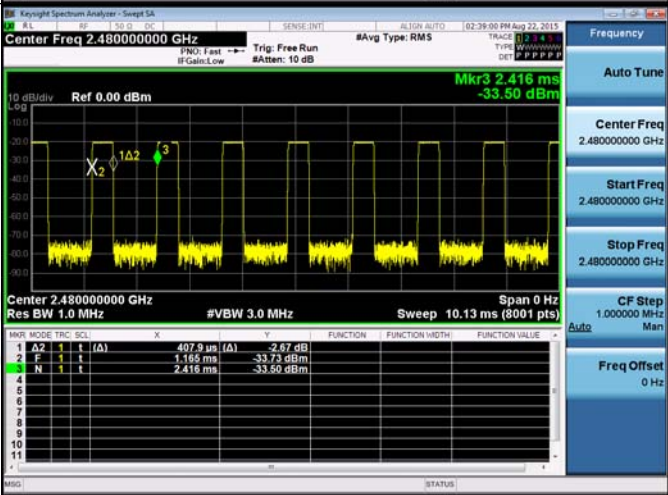
<p>GFSK_DH1/MCH</p>	 <p>Center Freq 2.441000000 GHz</p> <p>Mkr3 1.547 ms -35.38 dBm</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCAL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>t</td> <td>(A)</td> <td>407.9 us</td> <td>(A)</td> <td></td> <td>-1.72 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>t</td> <td></td> <td>209.4 us</td> <td></td> <td></td> <td>-35.77 dBm</td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>t</td> <td></td> <td>1.547 ms</td> <td></td> <td></td> <td>-35.38 dBm</td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCAL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	t	(A)	407.9 us	(A)		-1.72 dB	2	F	1	t		209.4 us			-35.77 dBm	3	N	1	t		1.547 ms			-35.38 dBm	<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.441000000 GHz</p> <p>Start Freq 2.441000000 GHz</p> <p>Stop Freq 2.441000000 GHz</p> <p>CF Step 1.000000 MHz</p> <p>Freq Offset 0 Hz</p>
MKR	MODE	TRIG	SCAL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																														
1	A2	1	t	(A)	407.9 us	(A)		-1.72 dB																														
2	F	1	t		209.4 us			-35.77 dBm																														
3	N	1	t		1.547 ms			-35.38 dBm																														
<p>GFSK_DH1/HCH</p>	 <p>Center Freq 2.480000000 GHz</p> <p>Mkr3 2.416 ms -33.50 dBm</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCAL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>t</td> <td>(A)</td> <td>407.9 us</td> <td>(A)</td> <td></td> <td>-2.97 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>t</td> <td></td> <td>1.165 ms</td> <td></td> <td></td> <td>-33.73 dBm</td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>t</td> <td></td> <td>2.416 ms</td> <td></td> <td></td> <td>-33.50 dBm</td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCAL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	t	(A)	407.9 us	(A)		-2.97 dB	2	F	1	t		1.165 ms			-33.73 dBm	3	N	1	t		2.416 ms			-33.50 dBm	<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.480000000 GHz</p> <p>Start Freq 2.480000000 GHz</p> <p>Stop Freq 2.480000000 GHz</p> <p>CF Step 1.000000 MHz</p> <p>Freq Offset 0 Hz</p>
MKR	MODE	TRIG	SCAL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																														
1	A2	1	t	(A)	407.9 us	(A)		-2.97 dB																														
2	F	1	t		1.165 ms			-33.73 dBm																														
3	N	1	t		2.416 ms			-33.50 dBm																														
<p>GFSK_DH3/LCH</p>	 <p>Center Freq 2.402000000 GHz</p> <p>Mkr3 2.771 ms -36.49 dBm</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCAL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>t</td> <td>(A)</td> <td>1.663 ms</td> <td>(A)</td> <td></td> <td>-2.17 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>t</td> <td></td> <td>271.1 us</td> <td></td> <td></td> <td>-37.17 dBm</td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>t</td> <td></td> <td>2.771 ms</td> <td></td> <td></td> <td>-36.49 dBm</td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCAL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	t	(A)	1.663 ms	(A)		-2.17 dB	2	F	1	t		271.1 us			-37.17 dBm	3	N	1	t		2.771 ms			-36.49 dBm	<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.402000000 GHz</p> <p>Start Freq 2.402000000 GHz</p> <p>Stop Freq 2.402000000 GHz</p> <p>CF Step 1.000000 MHz</p> <p>Freq Offset 0 Hz</p>
MKR	MODE	TRIG	SCAL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																														
1	A2	1	t	(A)	1.663 ms	(A)		-2.17 dB																														
2	F	1	t		271.1 us			-37.17 dBm																														
3	N	1	t		2.771 ms			-36.49 dBm																														

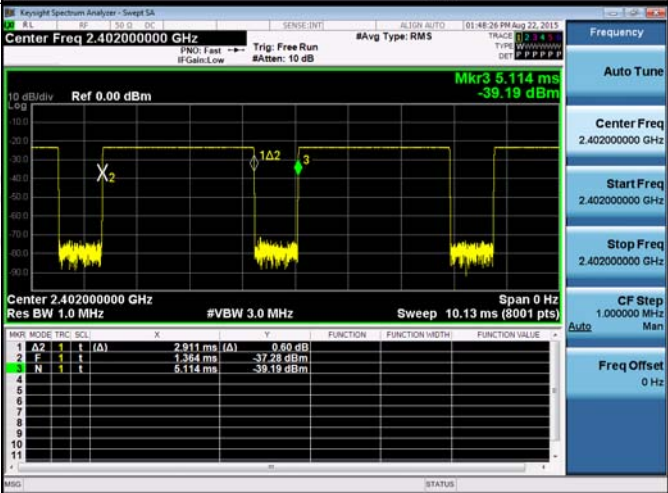

<p>GFSK_DH3/MCH</p>	
<p>GFSK_DH3/HCH</p>	
<p>GFSK_DH5/LCH</p>	

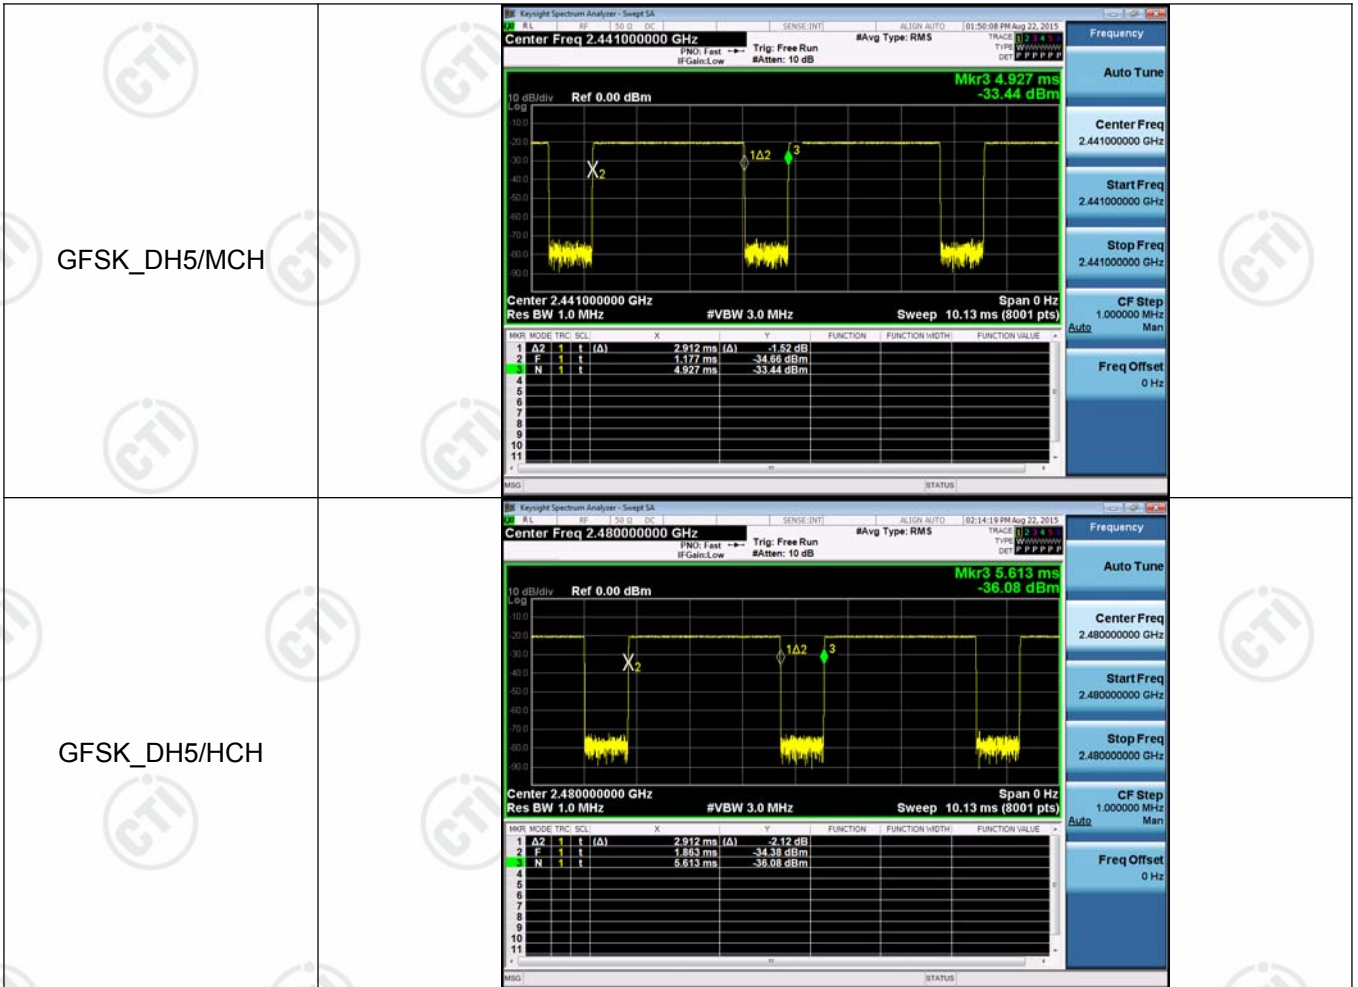



## Appendix D): Hopping Channel Number

### Result Table

Mode	Channel.	Number of Hopping Channel	Verdict
GFSK	Hop	79	PASS
$\pi/4$ DQPSK	Hop	79	PASS
8DPSK	Hop	79	PASS

### Test Graph

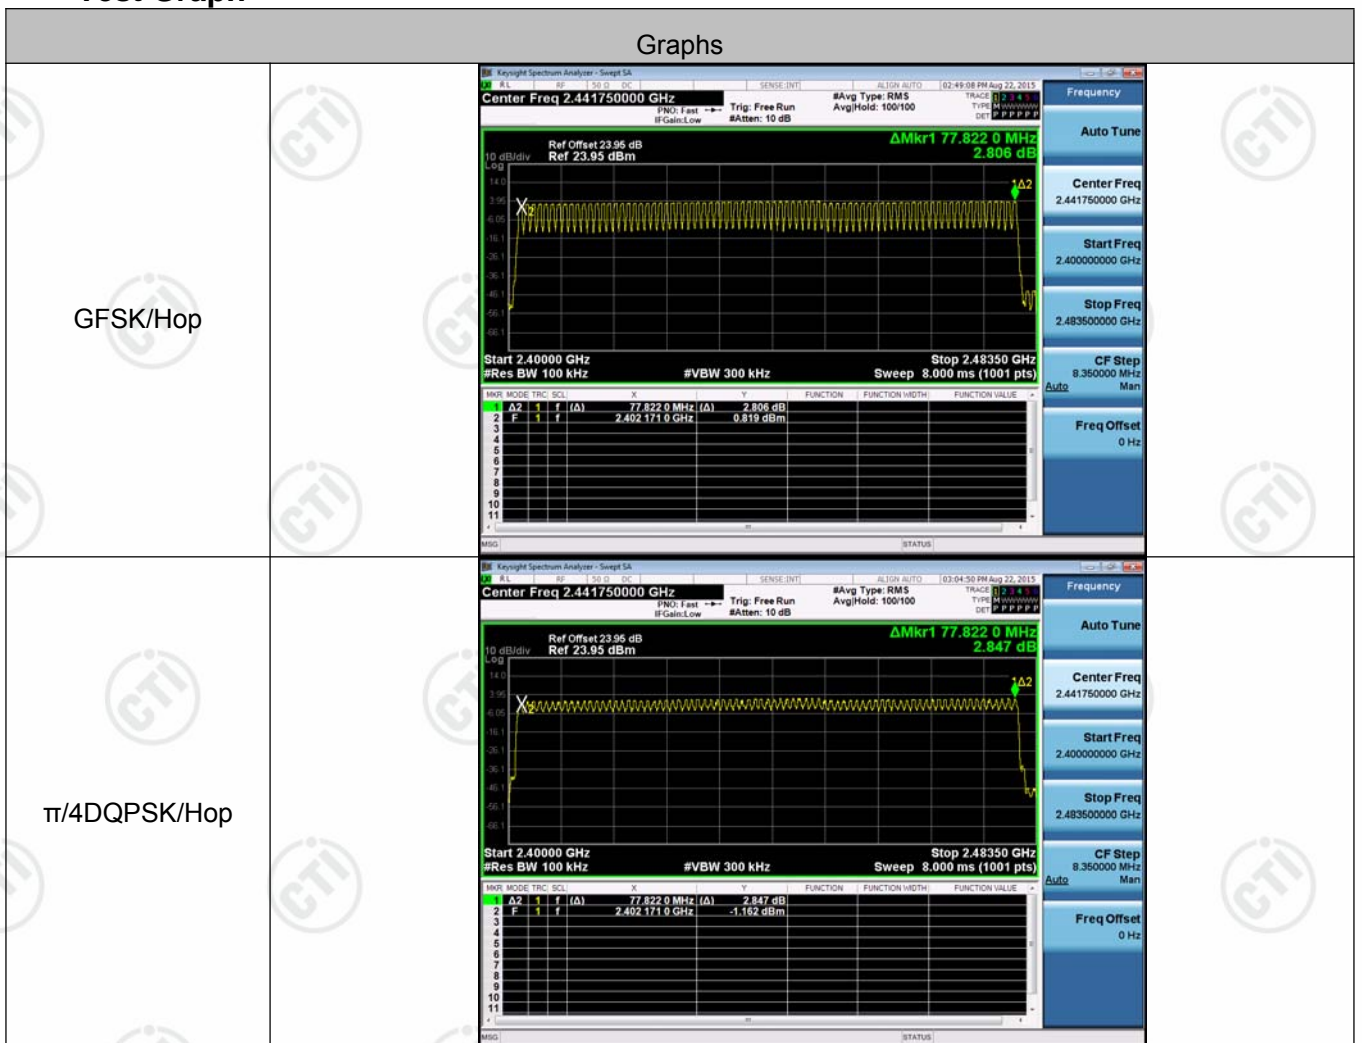

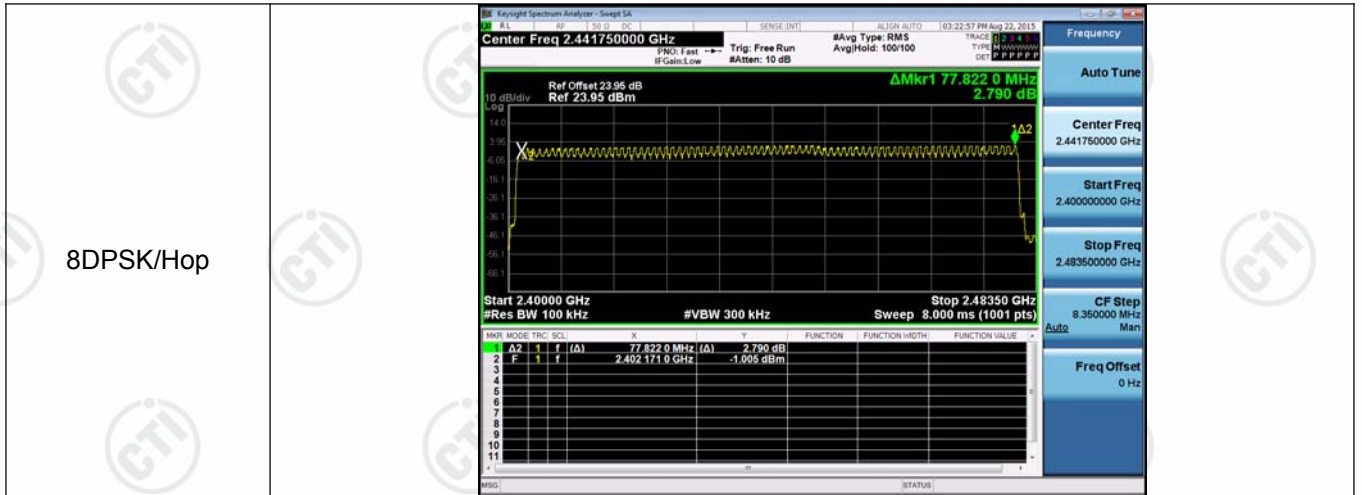





## Appendix E): Conducted Peak Output Power




Result Table

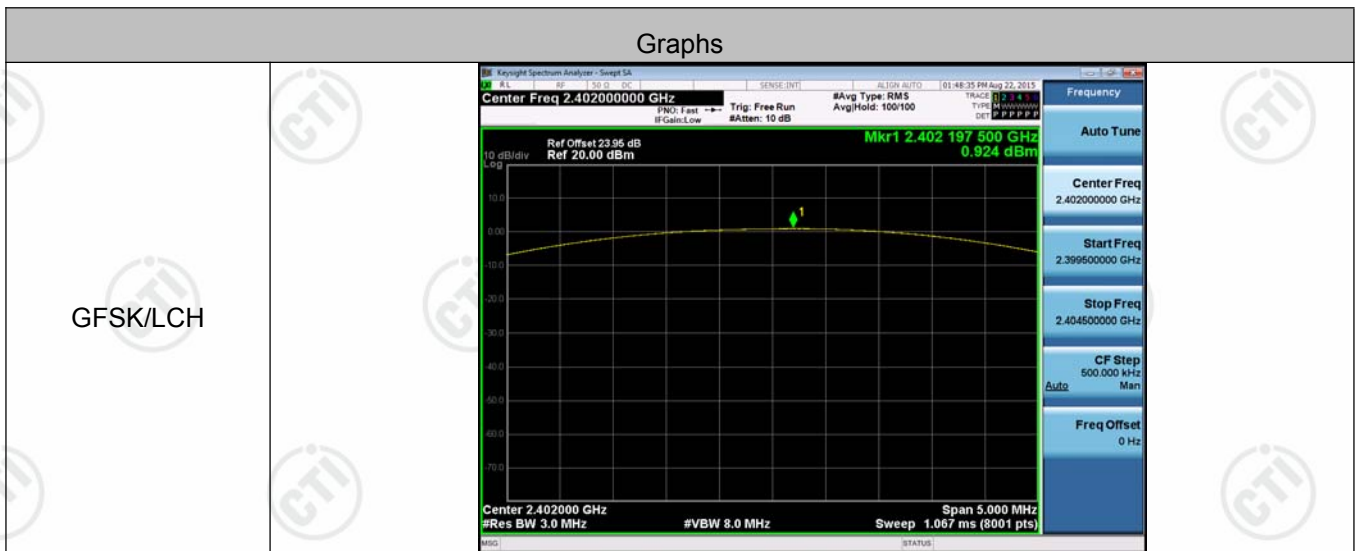
Mode	Channel.	Maximum Peak Output Power [dBm]	Verdict
GFSK	LCH	0.924	PASS
GFSK	MCH	3.502	PASS
GFSK	HCH	3.494	PASS
$\pi/4$ DQPSK	LCH	0.257	PASS
$\pi/4$ DQPSK	MCH	2.860	PASS
$\pi/4$ DQPSK	HCH	2.859	PASS
8DPSK	LCH	0.659	PASS
8DPSK	MCH	3.174	PASS
8DPSK	HCH	3.180	PASS

Test Graph

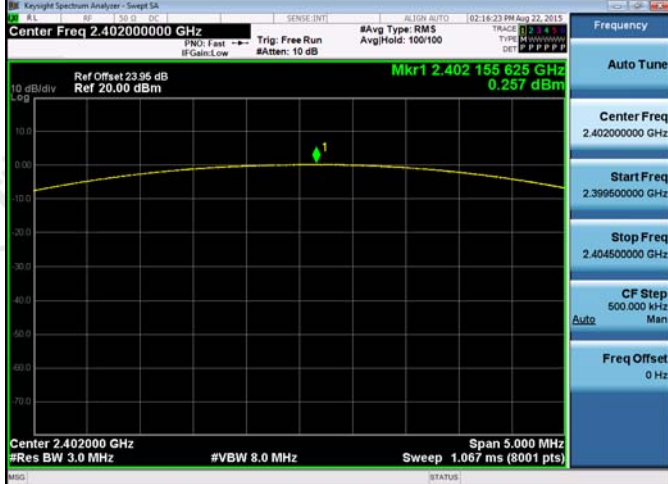
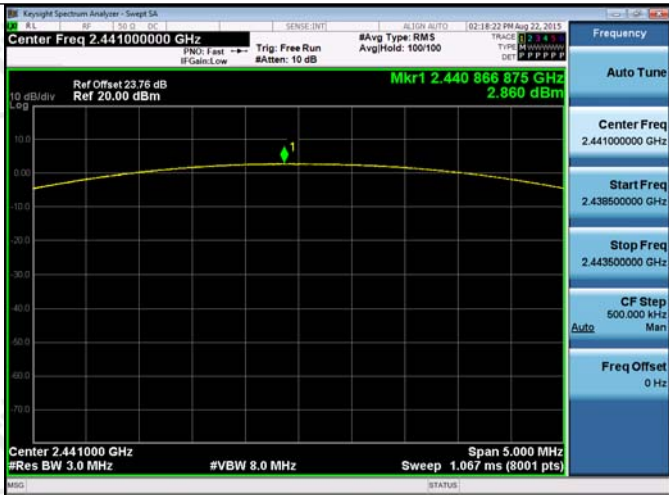
<p>GFSK/MCH</p>	 <p>Center Freq 2.44100000 GHz</p> <p>Mkr1 2.440 811 250 GHz 3.502 dBm</p> <p>Center 2.441000 GHz #Res BW 3.0 MHz #VBW 8.0 MHz Span 5.000 MHz Sweep 1.067 ms (8001 pts)</p>
<p>GFSK/HCH</p>	 <p>Center Freq 2.48000000 GHz</p> <p>Mkr1 2.479 878 750 GHz 3.494 dBm</p> <p>Center 2.480000 GHz #Res BW 3.0 MHz #VBW 8.0 MHz Span 5.000 MHz Sweep 1.067 ms (8001 pts)</p>
<p><math>\pi/4</math>DQPSK/LCH</p>	 <p>Center Freq 2.40200000 GHz</p> <p>Mkr1 2.402 155 625 GHz 0.257 dBm</p> <p>Center 2.402000 GHz #Res BW 3.0 MHz #VBW 8.0 MHz Span 5.000 MHz Sweep 1.067 ms (8001 pts)</p>


<p><math>\pi/4</math>DQPSK/MCH</p>	
<p><math>\pi/4</math>DQPSK/HCH</p>	
<p>8DPSK/LCH</p>	



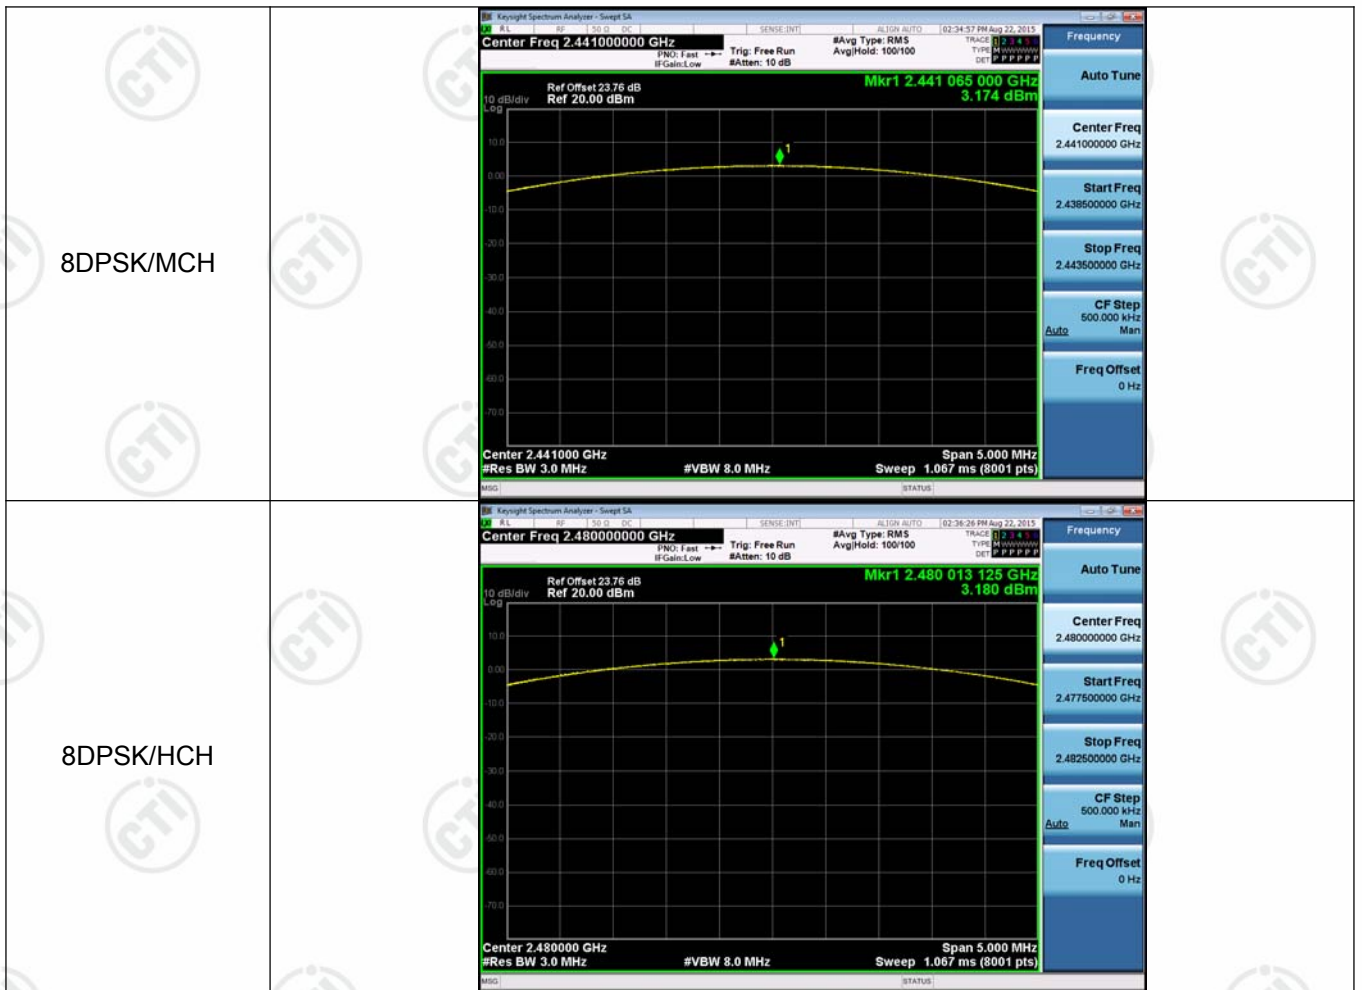







## Appendix F): Band-edge for RF Conducted Emissions

### Test Graph

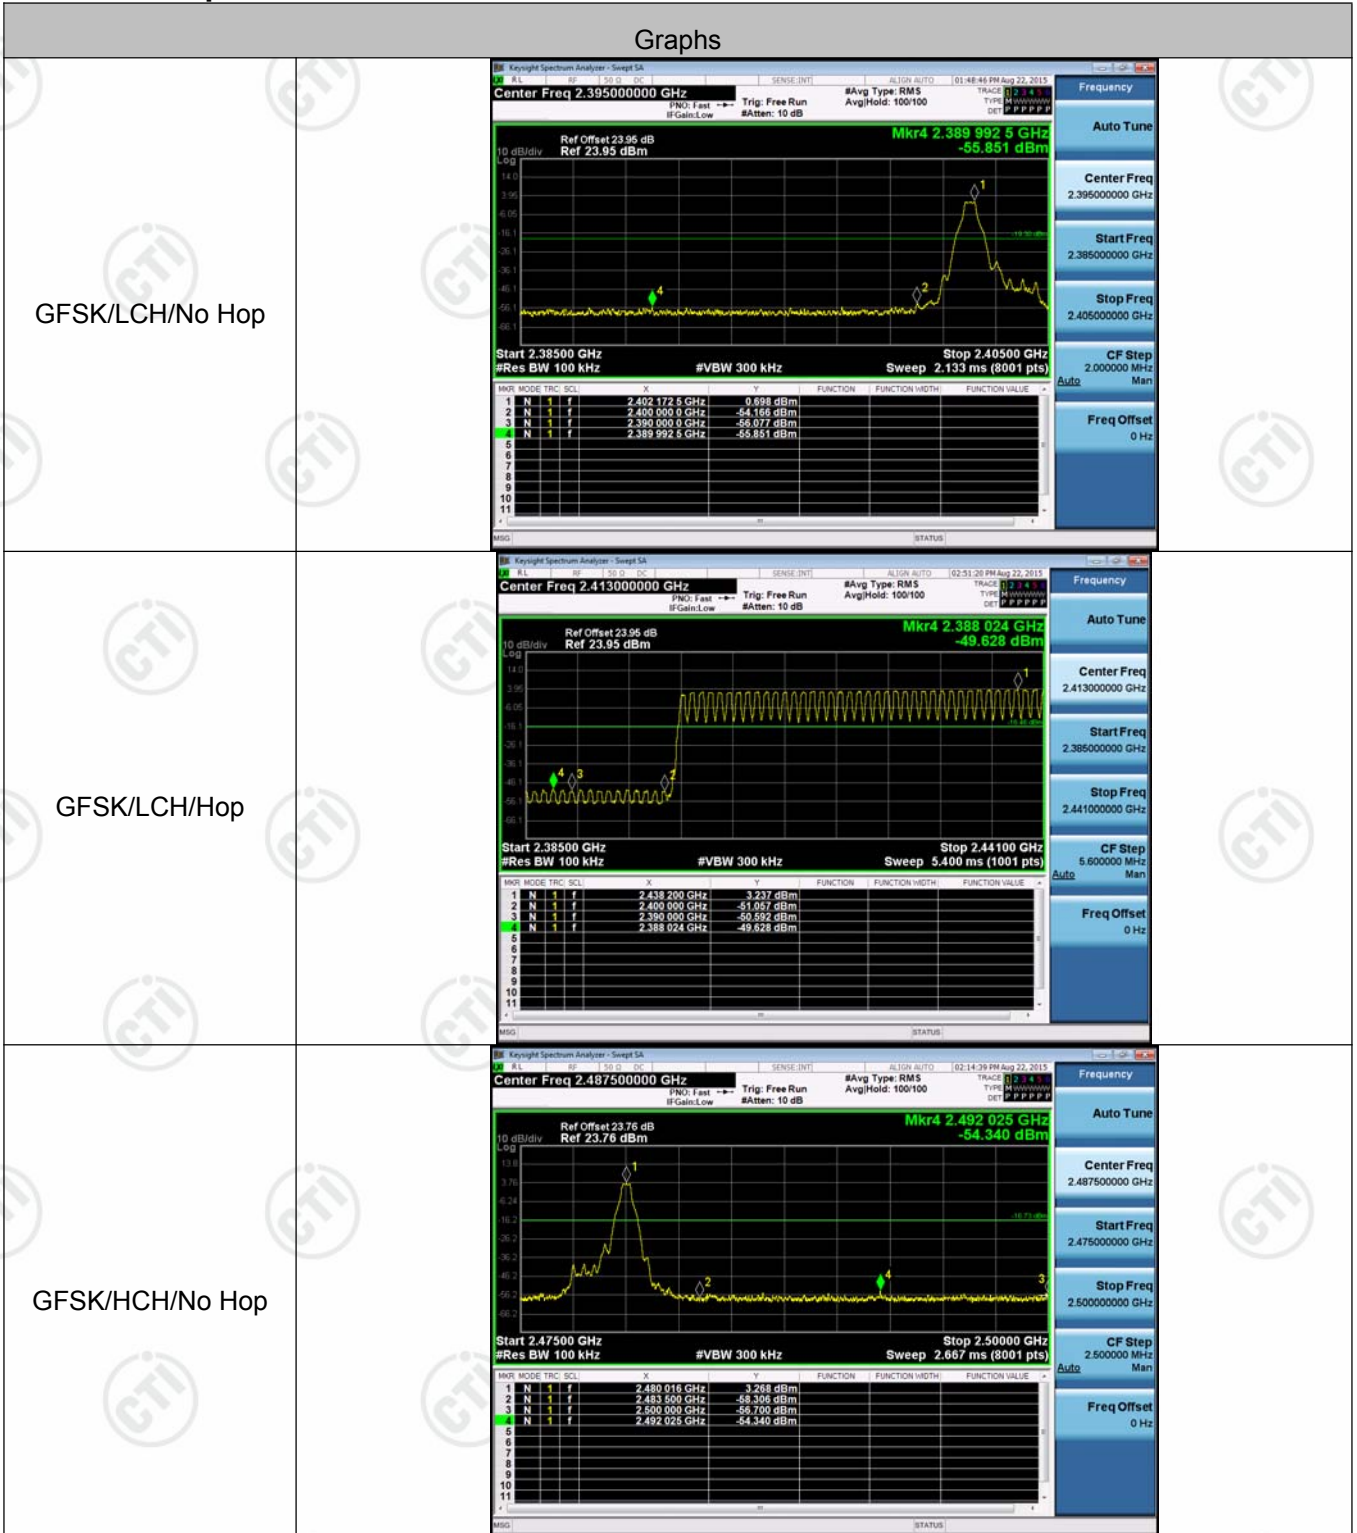
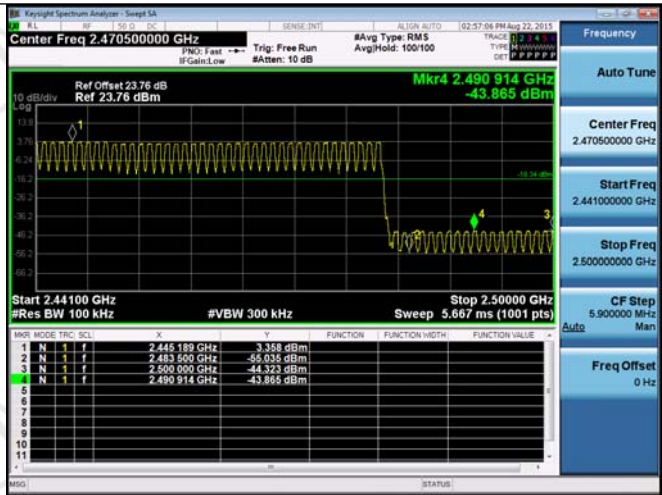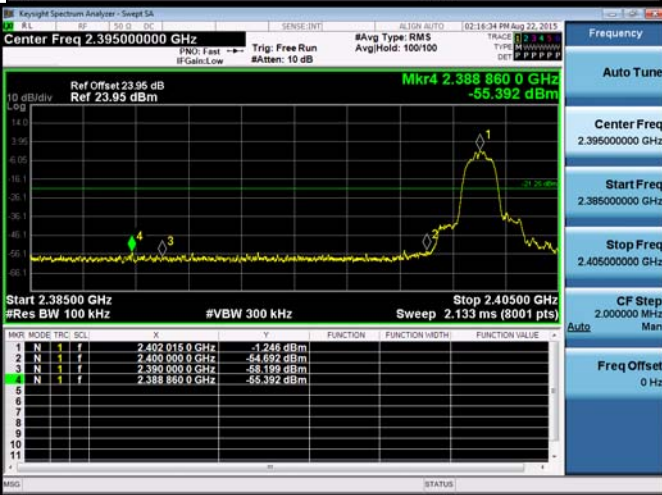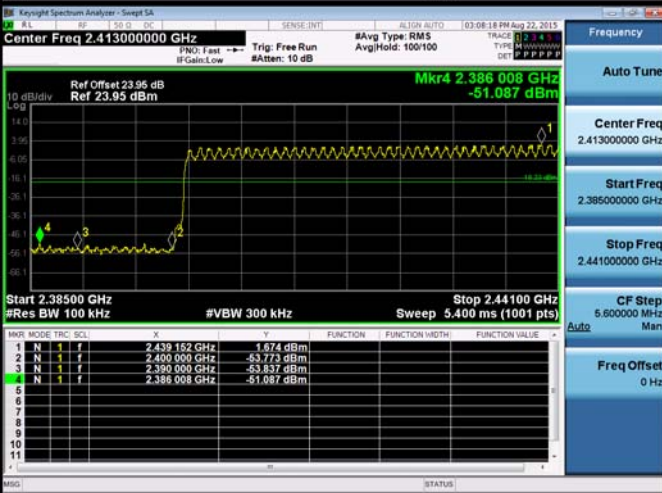
<p>GFSK/HCH/Hop</p>	
<p><math>\pi/4</math>DQPSK/LCH/No Hop</p>	
<p><math>\pi/4</math>DQPSK/LCH/Hop</p>	

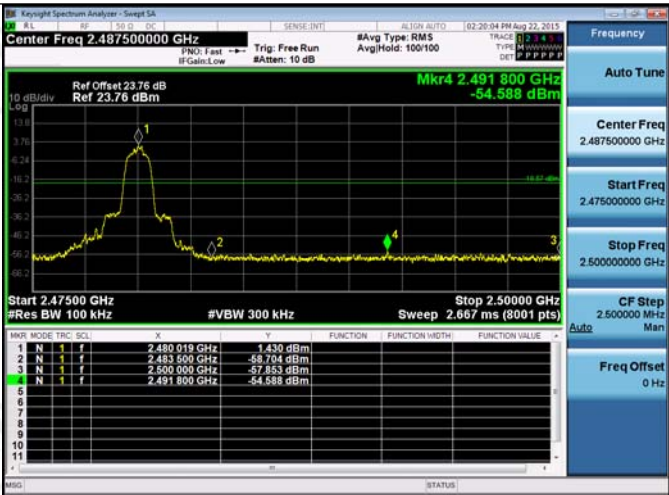
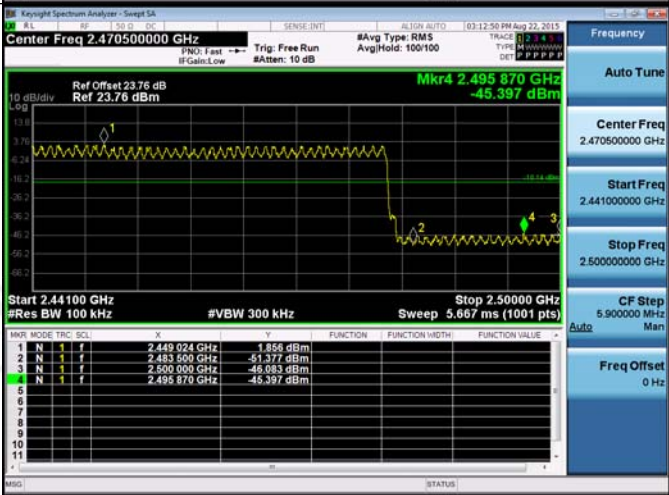
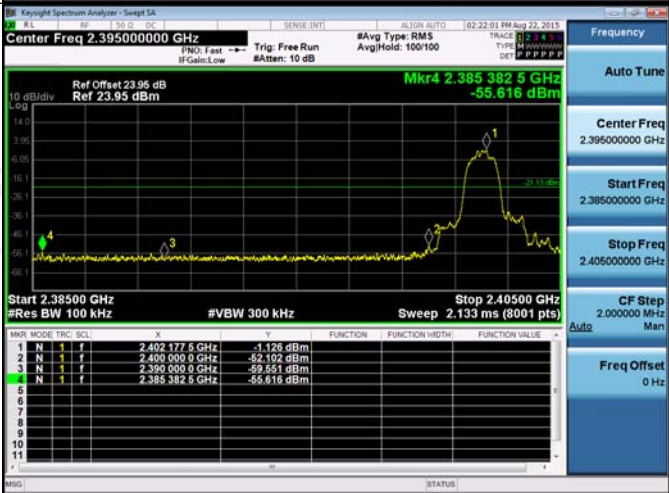
<p><math>\pi/4</math>DQPSK/HCH/No Hop</p>		
<p><math>\pi/4</math>DQPSK/HCH/Hop</p>		
<p>8DPSK/LCH/No Hop</p>		



<p>8DPSK/LCH/Hop</p>	<p>Key Screenshot Data:</p> <ul style="list-style-type: none"> <li>Center Freq: 2.41300000 GHz</li> <li>Mkr4: 2.387184 GHz, -50.888 dBm</li> <li>Start Freq: 2.38500000 GHz</li> <li>Stop Freq: 2.44100000 GHz</li> <li>Sweep: 5.400 ms (1001 pts)</li> </ul>	<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.41300000 GHz</p> <p>Start Freq 2.38500000 GHz</p> <p>Stop Freq 2.44100000 GHz</p> <p>CF Step 5.600000 MHz</p> <p>Freq Offset 0 Hz</p>
<p>8DPSK/HCH/No Hop</p>	<p>Key Screenshot Data:</p> <ul style="list-style-type: none"> <li>Center Freq: 2.48750000 GHz</li> <li>Mkr4: 2.484834 GHz, -55.607 dBm</li> <li>Start Freq: 2.47500000 GHz</li> <li>Stop Freq: 2.50000000 GHz</li> <li>Sweep: 2.667 ms (8001 pts)</li> </ul>	<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.48750000 GHz</p> <p>Start Freq 2.47500000 GHz</p> <p>Stop Freq 2.50000000 GHz</p> <p>CF Step 2.500000 MHz</p> <p>Freq Offset 0 Hz</p>
<p>8DPSK/HCH/Hop</p>	<p>Key Screenshot Data:</p> <ul style="list-style-type: none"> <li>Center Freq: 2.47050000 GHz</li> <li>Mkr4: 2.496991 GHz, -45.162 dBm</li> <li>Start Freq: 2.44100000 GHz</li> <li>Stop Freq: 2.50000000 GHz</li> <li>Sweep: 5.667 ms (1001 pts)</li> </ul>	<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.47050000 GHz</p> <p>Start Freq 2.44100000 GHz</p> <p>Stop Freq 2.50000000 GHz</p> <p>CF Step 5.900000 MHz</p> <p>Freq Offset 0 Hz</p>




## Appendix G): RF Conducted Spurious Emissions

### Test Graph




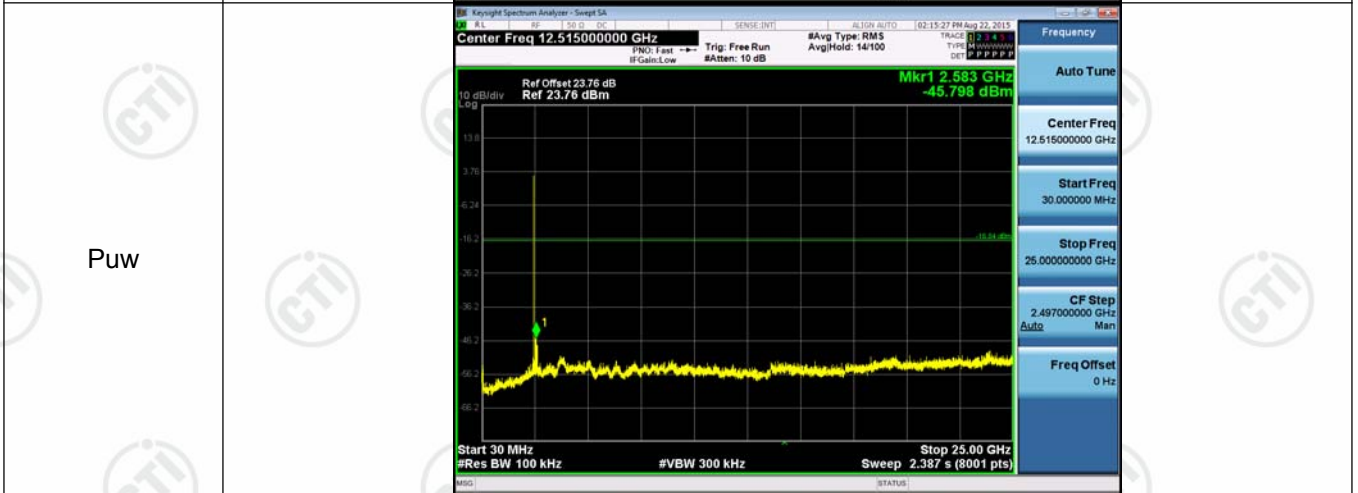
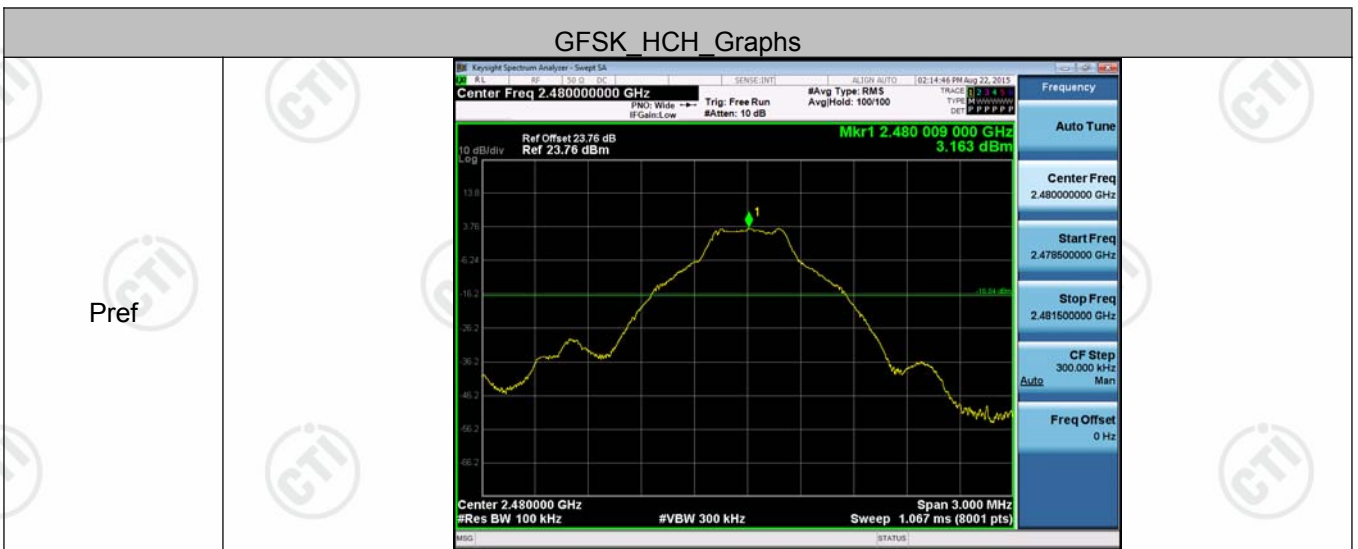
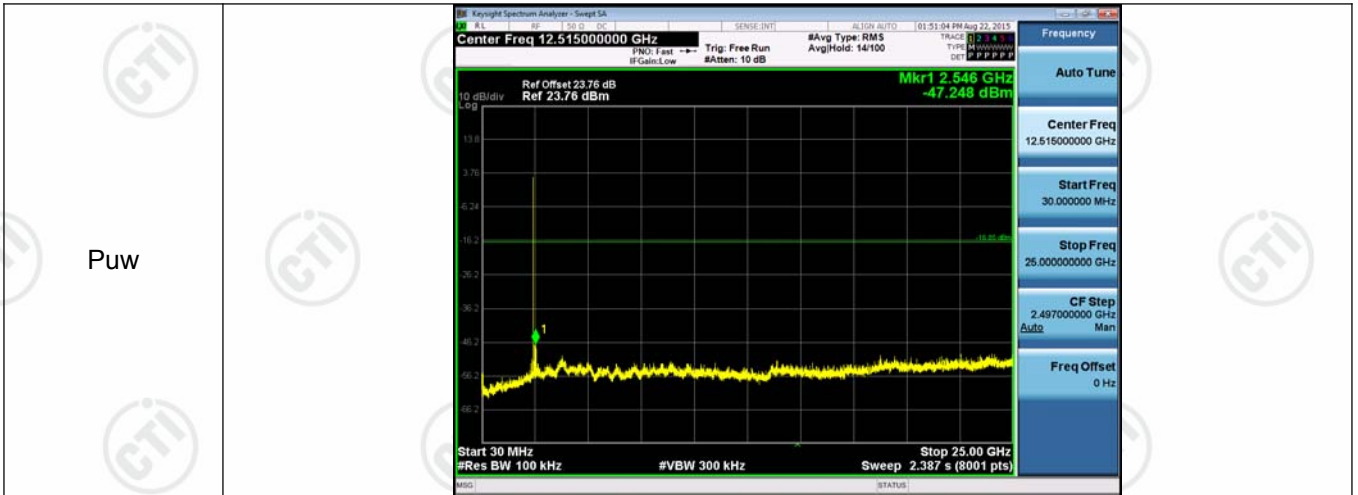


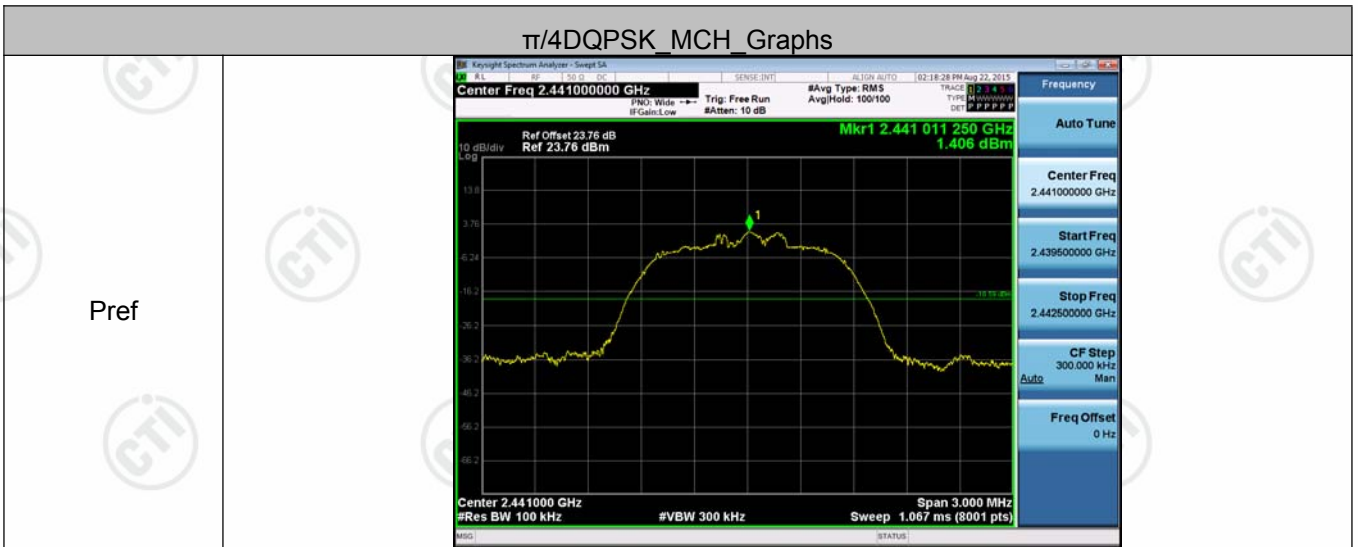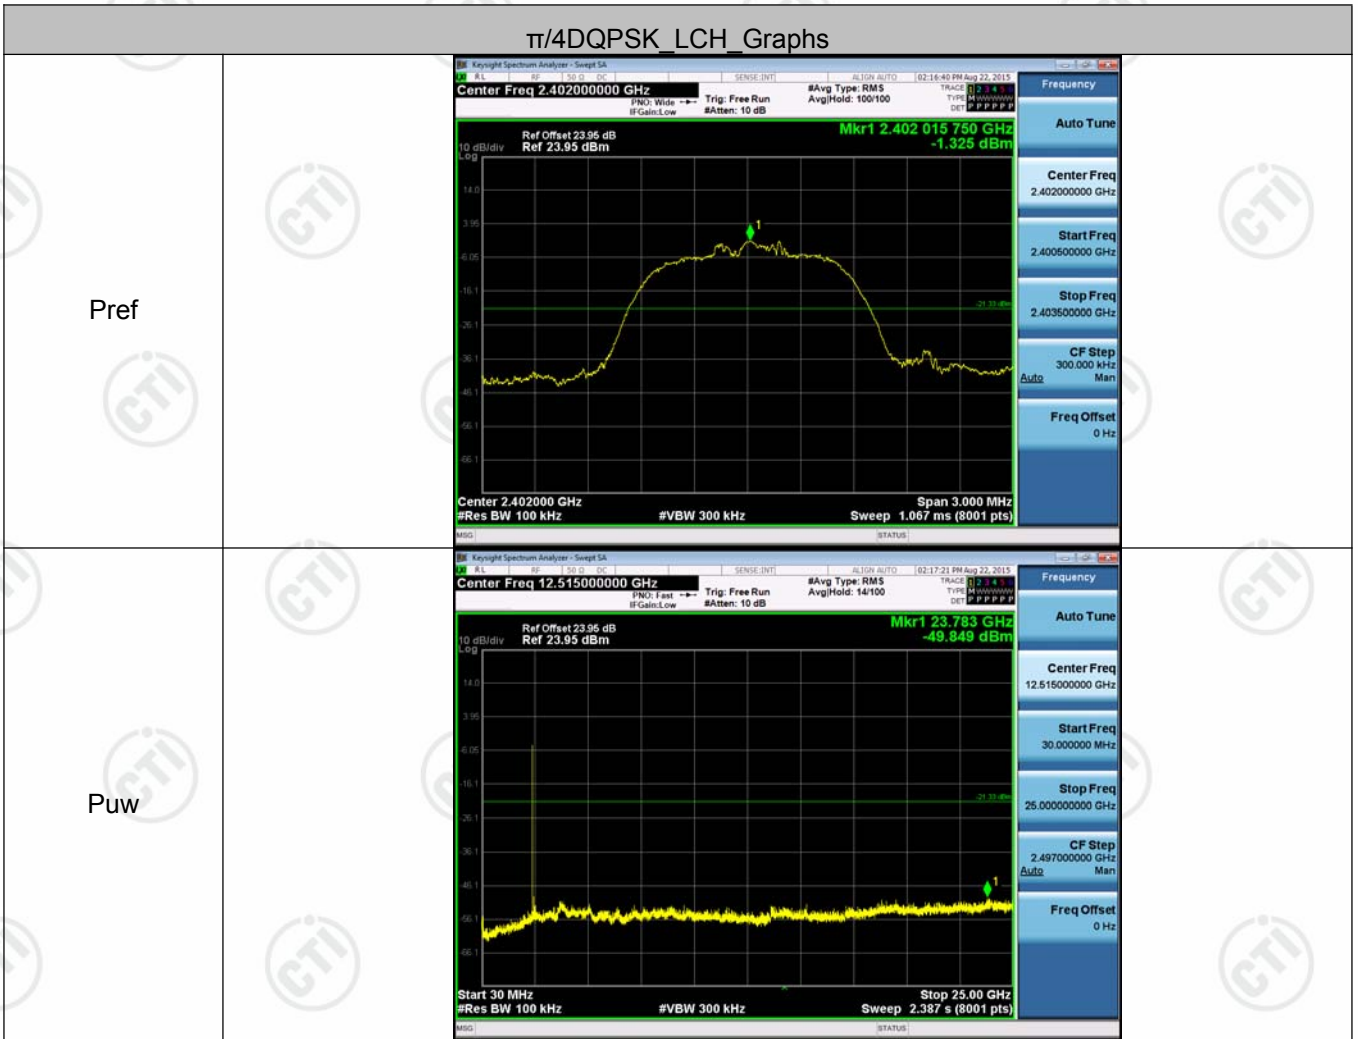

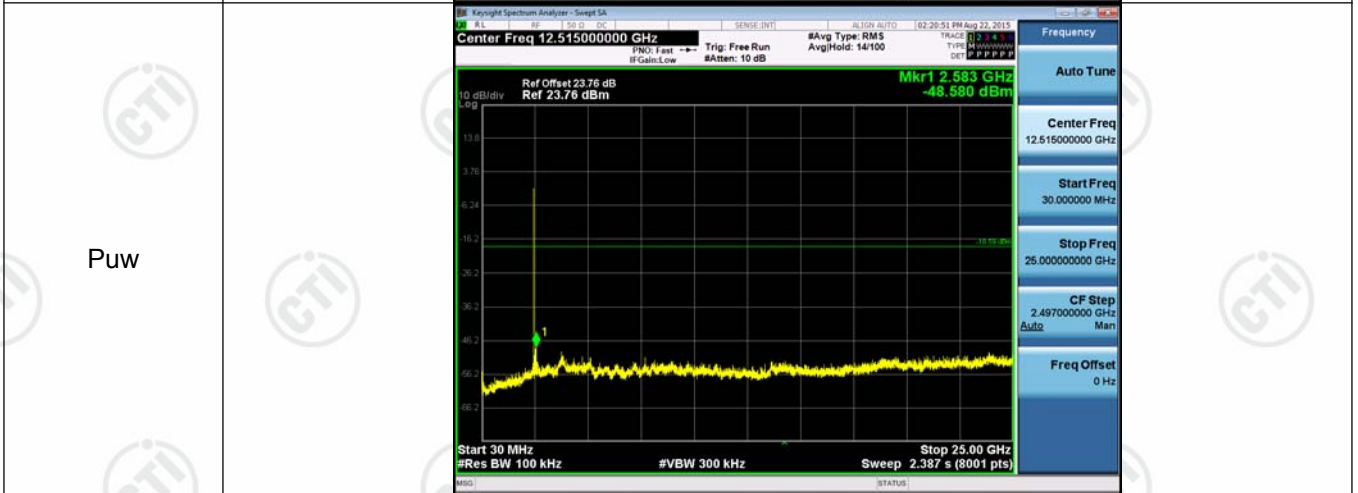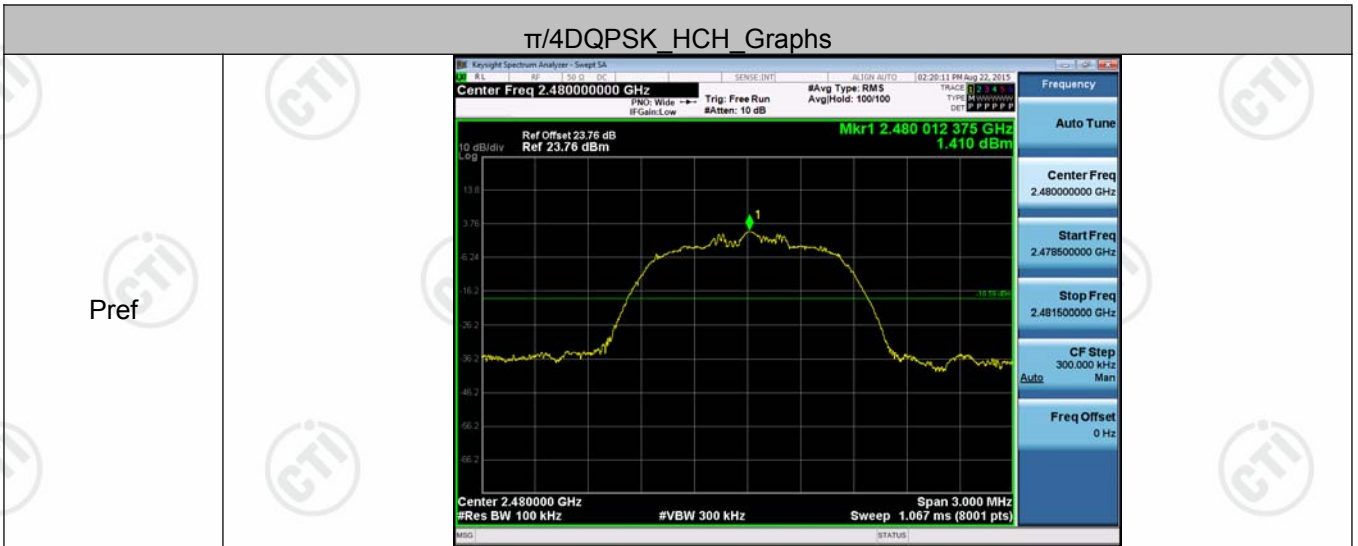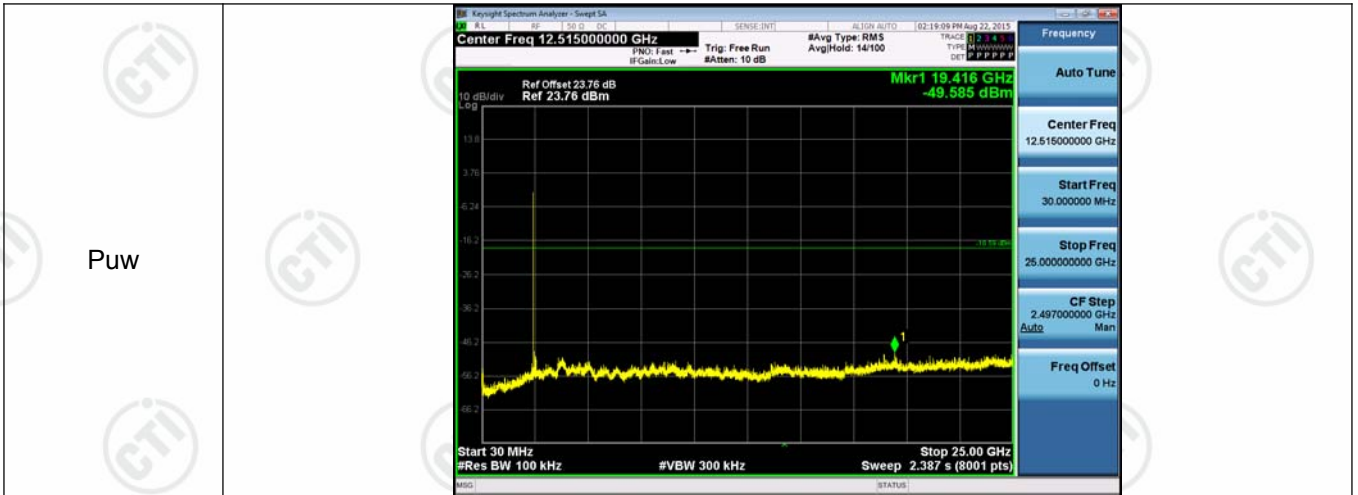



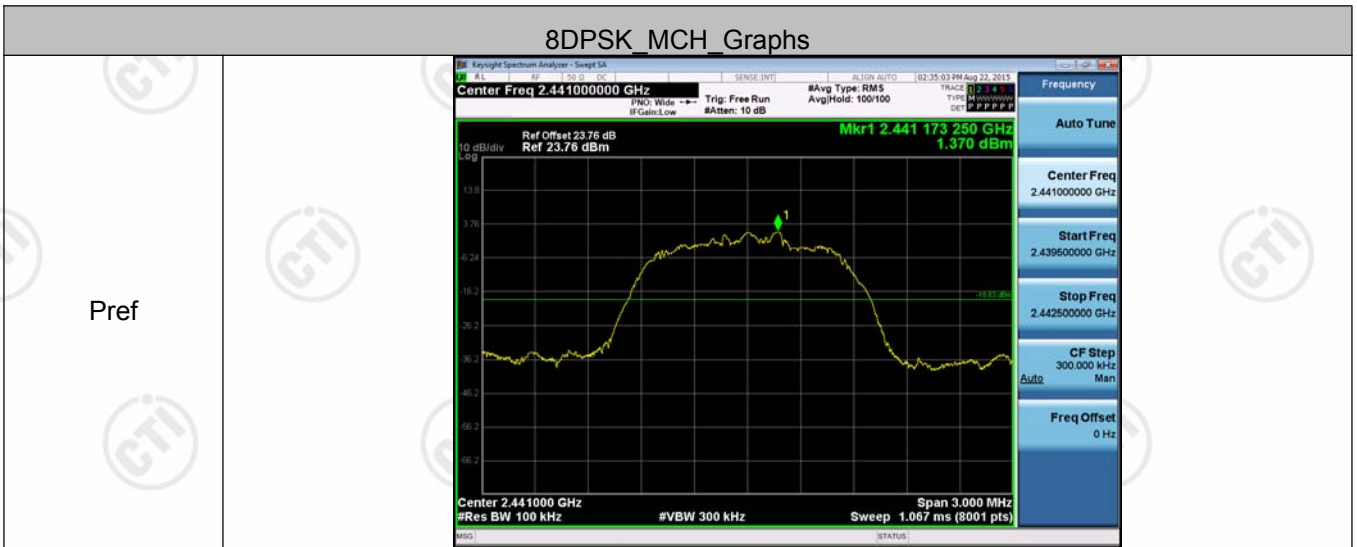

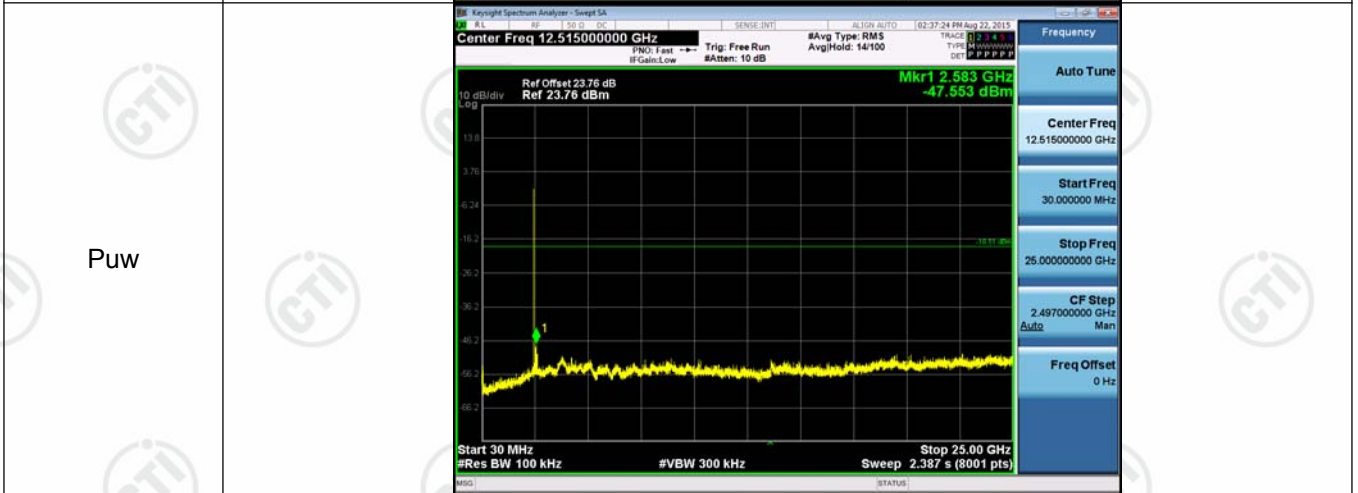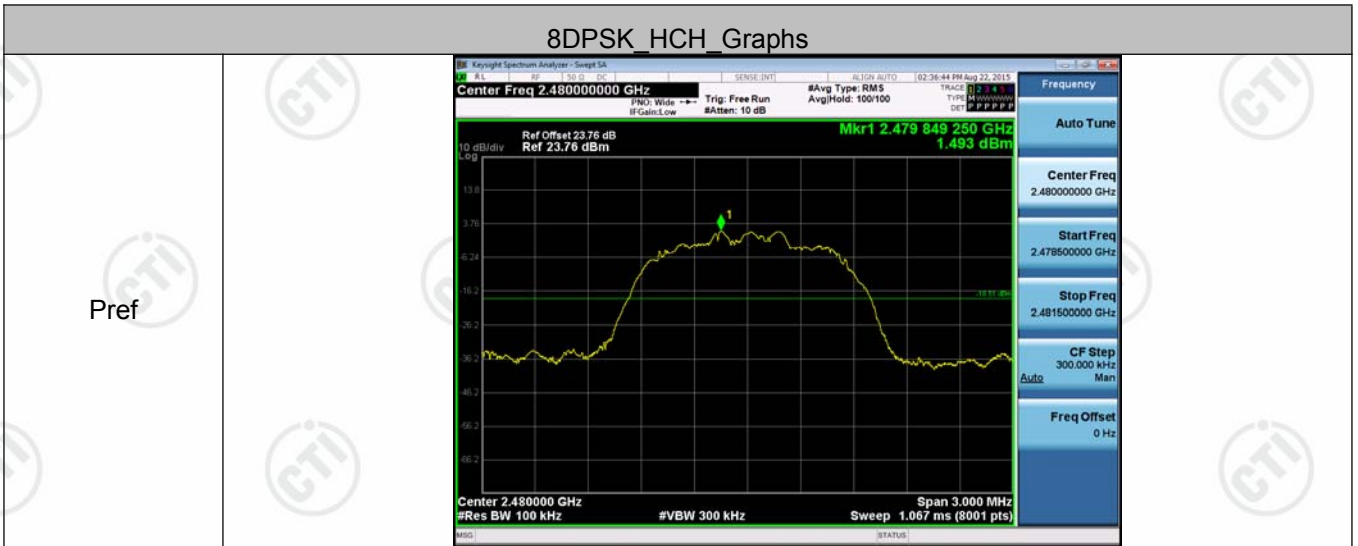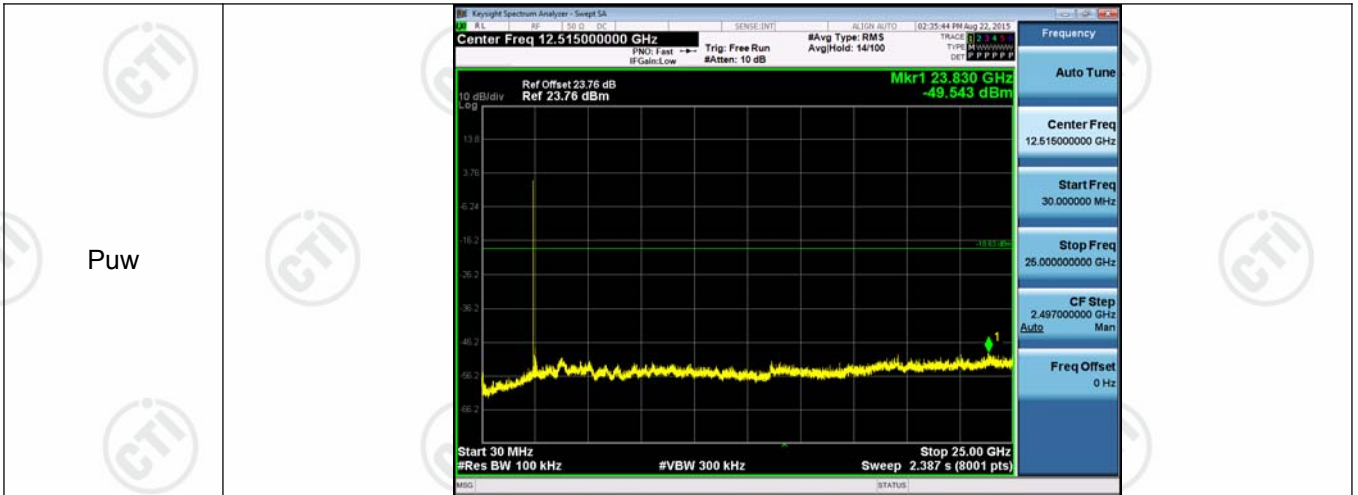

## Appendix H) Pseudorandom Frequency Hopping Sequence

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1) requirement:
<p>Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.</p> <p>Alternatively, Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.</p>	
EUT Pseudorandom Frequency Hopping Sequence	
<p>The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones.</p> <ul style="list-style-type: none"> <li>• Number of shift register stages: 9</li> <li>• Length of pseudo-random sequence: <math>2^9 - 1 = 511</math> bits</li> <li>• Longest sequence of zeros: 8 (non-inverted signal)</li> </ul> <div data-bbox="317 952 1370 1099" style="text-align: center;"> </div> <p style="text-align: center;"><i>Linear Feedback Shift Register for Generation of the PRBS sequence</i></p> <p>An example of Pseudorandom Frequency Hopping Sequence as follow:</p> <div data-bbox="288 1198 1273 1346" style="text-align: center;"> </div> <p>Each frequency used equally on the average by each transmitter. The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals.</p>	
<p>The device does not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.</p>	

## Appendix I) Antenna Requirement

<p>15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p>	
<b>EUT Antenna:</b>	
<p>The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 0dBi.</p>	

## Appendix J) AC Power Line Conducted Emission


<p>Test Procedure:</p>	<p>Test frequency range :150KHz-30MHz</p> <ol style="list-style-type: none"> <li>1) The mains terminal disturbance voltage test was conducted in a shielded room.</li> <li>2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a <math>50\Omega/50\mu\text{H} + 5\Omega</math> linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.</li> <li>3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,</li> <li>4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.</li> <li>5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.</li> </ol>																
<p>Limit:</p>	<table border="1" data-bbox="497 1205 1369 1422"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table> <p>* The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.</p> <p>NOTE : The lower limit is applicable at the transition frequency</p>			Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)																
	Quasi-peak	Average															
0.15-0.5	66 to 56*	56 to 46*															
0.5-5	56	46															
5-30	60	50															

**Measurement Data**

An initial pre-scan was performed on the live and neutral lines with peak detector.


Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Live line:

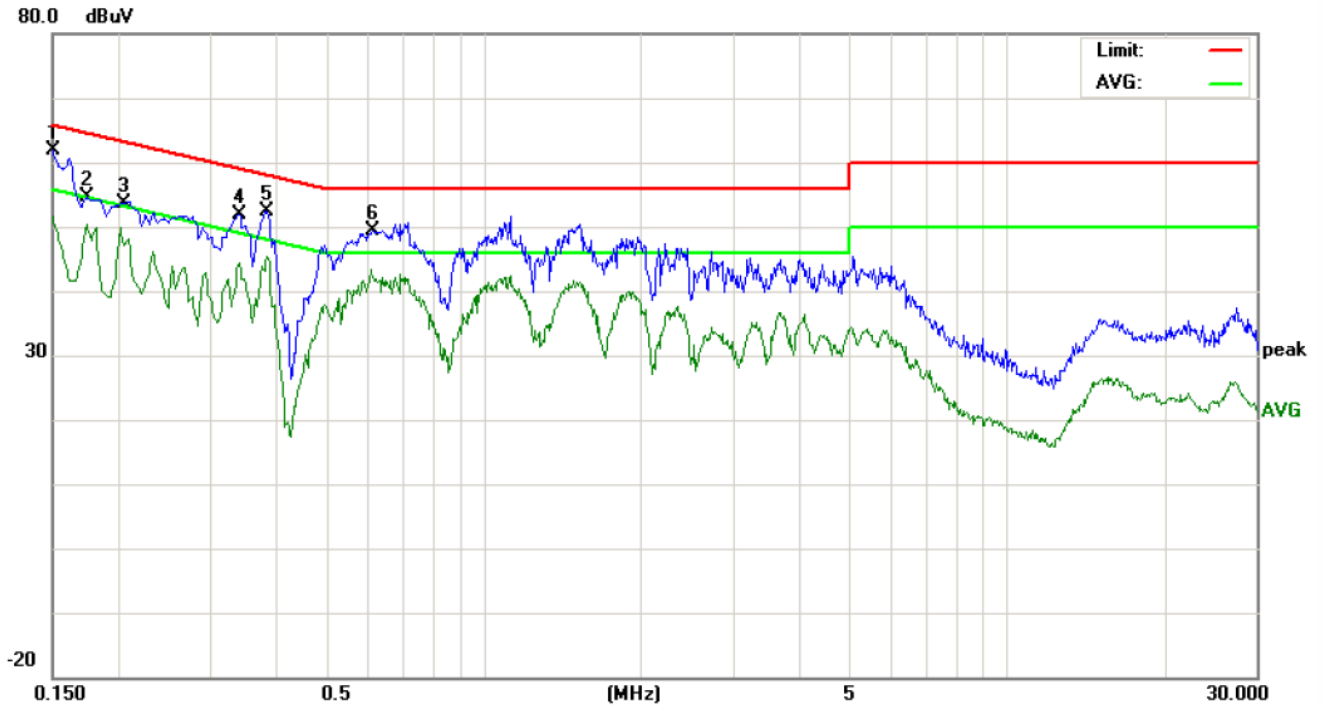

No.	Freq. MHz	Reading_Level (dBuV)			Correct Factor dB	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1500	51.91		41.65	9.90	61.81	51.55	65.99	55.99	-4.18	-4.44	P		
2	0.1740	44.74		40.56	9.90	54.64	50.46	64.76	54.76	-10.12	-4.30	P		
3	0.2020	43.65	42.52	37.73	9.90	53.55	52.42	47.63	63.52	53.52	-11.10	-5.89	P	
4	0.3420	42.07		34.41	9.90	51.97	44.31	59.15	49.15	-7.18	-4.84	P		
5	0.3860	42.43	40.58	34.59	9.90	52.33	50.48	44.49	58.15	48.15	-7.67	-3.66	P	
6	0.6100	38.87	37.58	31.45	9.90	48.77	47.48	41.35	56.00	46.00	-8.52	-4.65	P	

Neutral line:

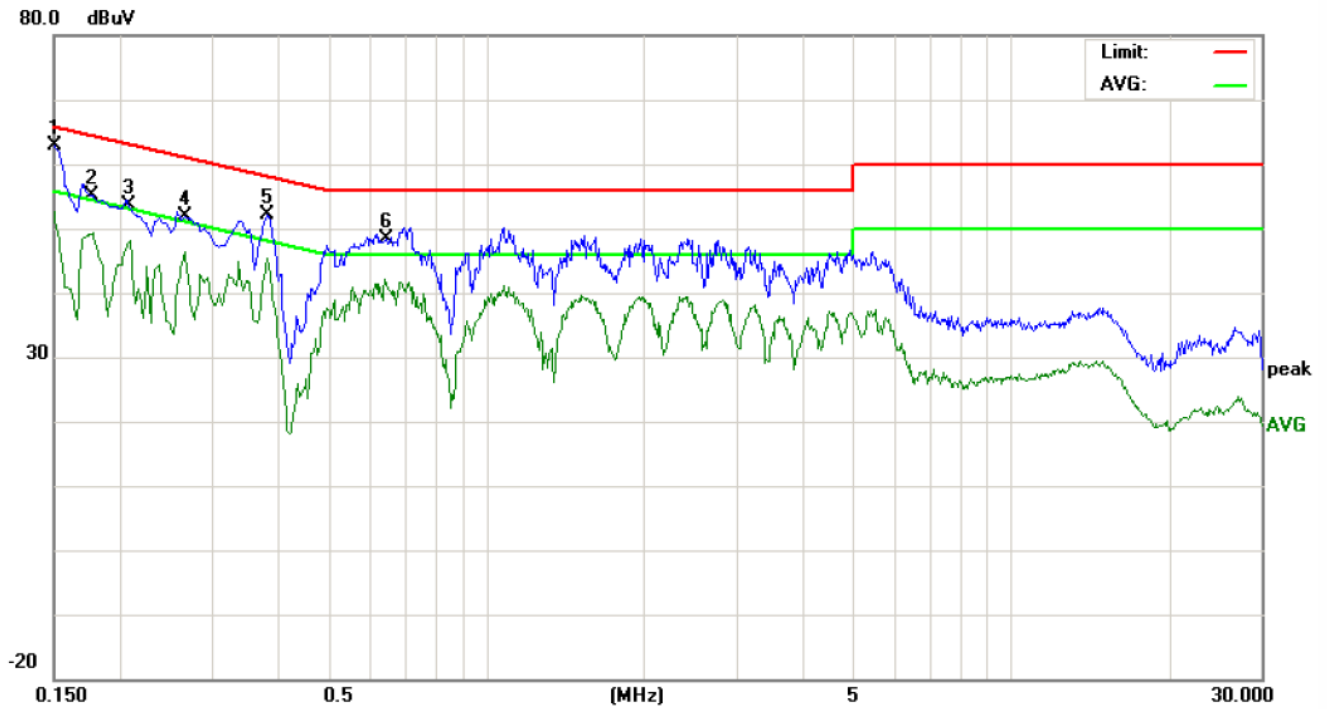

No.	Freq. MHz	Reading_Level (dBuV)			Correct Factor dB	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1500	53.03	51.05	43.20	9.90	62.93	60.95	53.10	65.99	55.99	-5.04	-2.89	P	
2	0.1780	45.17		39.42	9.90	55.07		49.32	64.57	54.57	-9.50	-5.25	P	
3	0.2100	43.19		38.27	9.90	53.09		48.17	63.20	53.20	-10.11	-5.03	P	
4	0.2660	41.96		36.54	9.90	51.86		46.44	61.24	51.24	-9.38	-4.80	P	
5	0.3820	42.23	40.39	34.61	9.90	52.13	50.29	44.51	58.23	48.23	-7.94	-3.72	P	
6	0.6419	38.19	36.82	30.91	9.90	48.09	46.72	40.81	56.00	46.00	-9.28	-5.19	P	

Notes:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.

## Appendix K) Restricted bands around fundamental frequency (Radiated)/Radiated Spurious Emissions

<b>Receiver Setup:</b>	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average	
<b>Test Procedure:</b>					
<b>Below 1GHz test procedure as below:</b>					
<p>a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</p> <p>b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</p> <p>c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</p> <p>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p>					
<b>Above 1GHz test procedure as below:</b>					
<p>g. Test the EUT in the lowest channel ,the middle channel ,the Highest channel</p> <p>h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case.</p> <p>i. Repeat above procedures until all frequencies measured was complete.</p>					
<b>Limit:</b>	Frequency	Field strength (microvolt/meter)	Limit (dBµV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
<p>Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.</p>					



### Radiated Spurious Emissions test Data:

All the modes of operation (X, Y, Z) were investigated and the worst-case emissions are reported.


#### A. Below 30MHz:

No emissions were found higher than the background below 30MHz and background is lower than the limit, so it deems to compliance with the limit without recorded.

#### B. 30MHz ~ 1GHz:


The test data of low channel, middle channel and high channel are almost same in frequency bands 30MHz to 1GHz, and the data of middle channel (GFSK mode) are chosen as representative in below:

H:

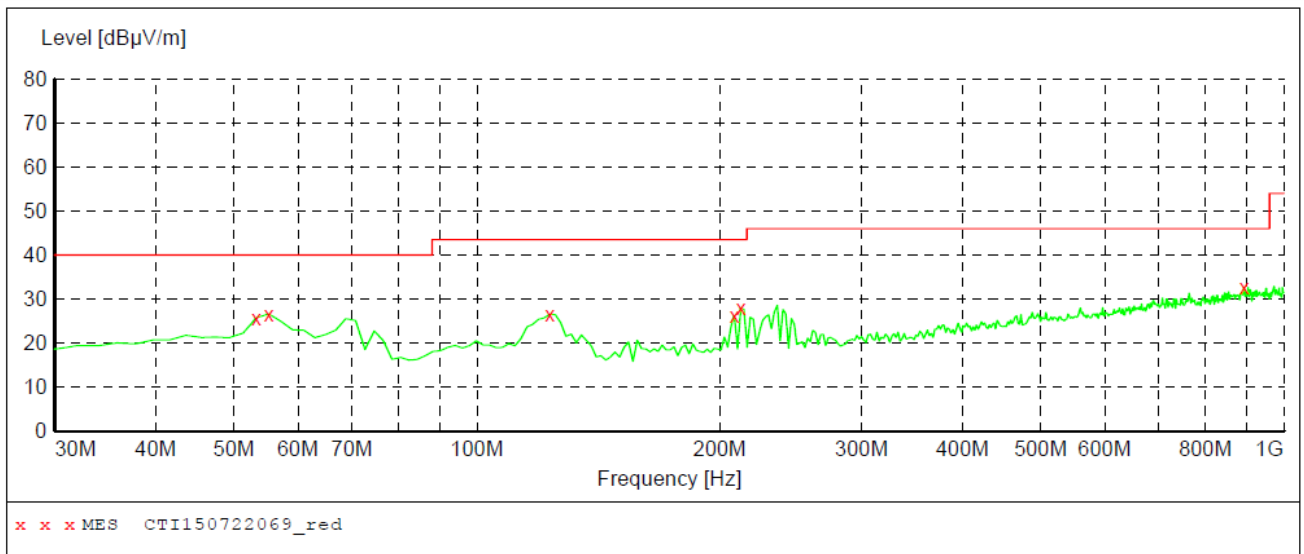

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
53.280000	25.70	16.1	40.0	14.3	---	100.0	310.00	HORIZONTAL
55.220000	26.60	15.8	40.0	13.4	---	100.0	349.00	HORIZONTAL
123.120000	26.50	13.0	43.5	17.0	---	100.0	10.00	HORIZONTAL
208.480000	26.20	14.0	43.5	17.3	---	100.0	10.00	HORIZONTAL
212.360000	28.00	14.1	43.5	15.5	---	100.0	349.00	HORIZONTAL
893.300000	32.70	26.7	46.0	13.3	---	100.0	101.00	HORIZONTAL

V:

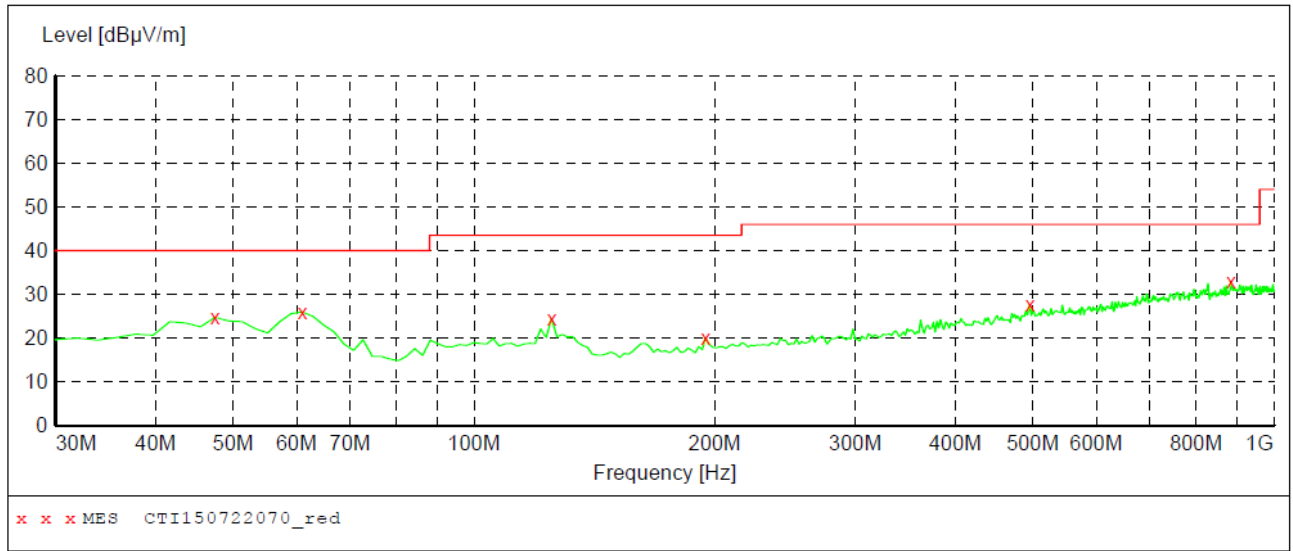

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
47.460000	24.70	16.3	40.0	15.3	---	100.0	334.00	VERTICAL
61.040000	26.00	14.9	40.0	14.0	---	100.0	266.00	VERTICAL
125.060000	24.40	12.8	43.5	19.1	---	100.0	53.00	VERTICAL
194.900000	20.10	13.6	43.5	23.4	---	100.0	10.00	VERTICAL
495.600000	27.50	21.4	46.0	18.5	---	100.0	213.00	VERTICAL
883.600000	33.00	26.5	46.0	13.0	---	100.0	17.00	VERTICAL

**C. Above 1GHz:**
**Test Results-(Measurement Distance: 3m)\_ Channel low\_2402MHz\_GFSK mode:**

Frequency (MHz)	Measurement (dBuV/m)	Limit (dBuV/m)	Detector Type	Antenna (H/V)	Result (P/F)
2390.0	36.26	74	PK	H	P
2400.0	45.06	74	PK	H	P
2402.0*	83.97	---	PK	H	P
4804.0	41.35	74	PK	H	P
2390.0	36.11	74	PK	V	P
2400.0	43.27	74	PK	V	P
2402.0*	85.59	---	PK	V	P
4804.0	42.98	74	PK	V	P

\*: fundamental frequency

**Test Results-(Measurement Distance: 3m)\_ Channel middle\_2441MHz\_GFSK mode:**

Frequency (MHz)	Measurement (dBuV/m)	Limit (dBuV/m)	Detector Type	Antenna (H/V)	Result (P/F)
2441.0*	86.52	---	PK	H	P
4882.0	43.99	74	PK	H	P
2441.0*	87.32	---	PK	V	P
4882.0	44.58	74	PK	V	P

\*: fundamental frequency

**Test Results-(Measurement Distance: 3m)\_ Channel high\_2480MHz\_GFSK mode:**


Frequency (MHz)	Measurement (dBuV/m)	Limit (dBuV/m)	Detector Type	Antenna (H/V)	Result (P/F)
2480.0*	85.81	---	PK	H	P
2483.5	42.58	74	PK	H	P
4960.0	41.19	74	PK	H	P
2480.0*	87.33	---	PK	V	P
2483.5	42.11	74	PK	V	P
4960.0	43.25	74	PK	V	P

\*: fundamental frequency

**Remark:**

- The above tables show that the frequencies peak data are all below the average limit, so the average data of these frequencies are deemed to fulfill the average limits and not reported.
- All the modes of GFSK,  $\pi/4$ -DQPSK and 8DPSK have been tested. The worst case is GFSK mode, and the worst data of GFSK mode are chosen as above.
- No emission found from 18GHz to 25GHz.
- All outside of operating frequency band and restricted band specified are below 15.209.

### PHOTOGRAPHS OF TEST SETUP

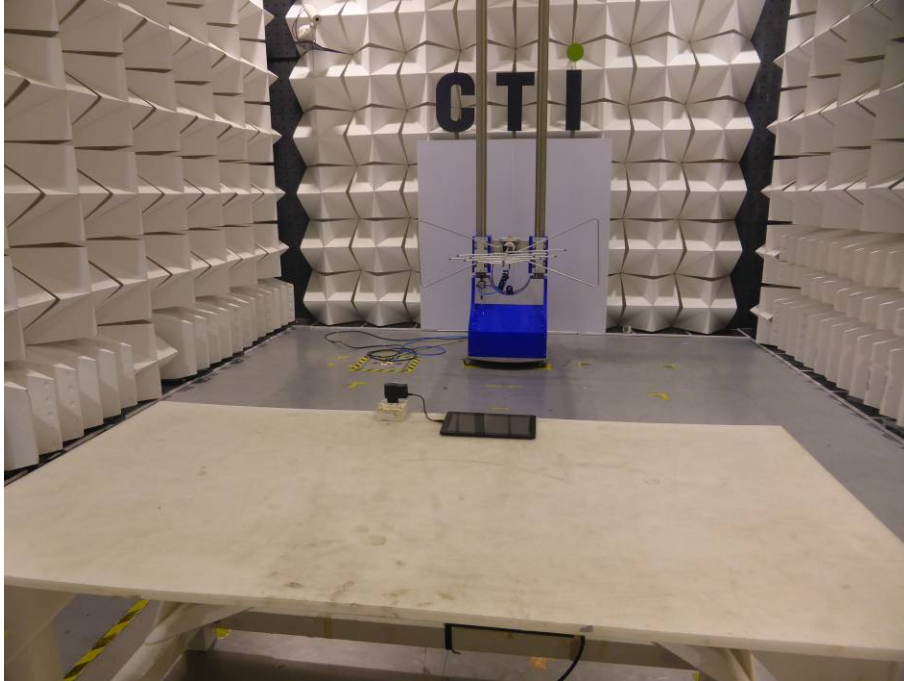

**Radiated spurious emission Test Setup-1(Below 1GHz)**



**Radiated spurious emission Test Setup-2(Above 1GHz)**



**Conducted emission Test Setup**

### PHOTOGRAPHS OF EUT Constructional Details



View of External Product-1




View of External Product-2



View of External Product-3



View of External Product-4

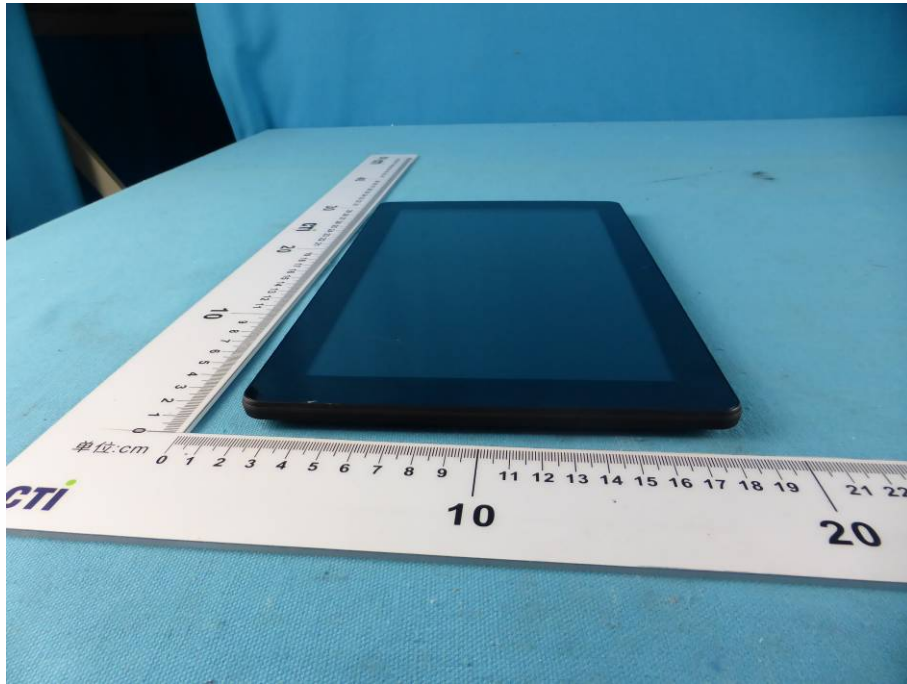

View of External Product-5




View of External Product-6






View of Internal Product-1

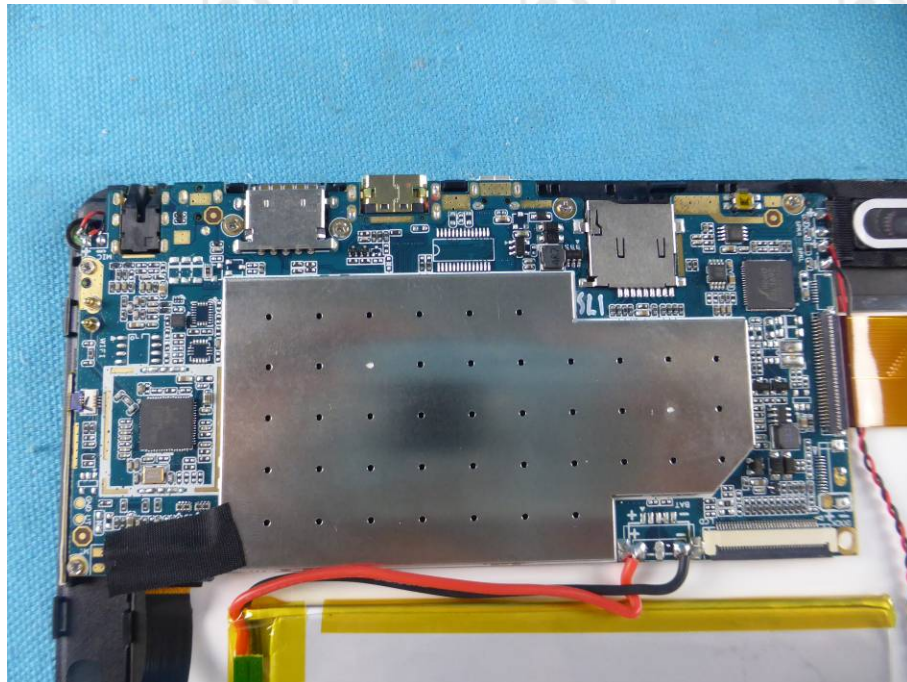


View of Internal Product-2

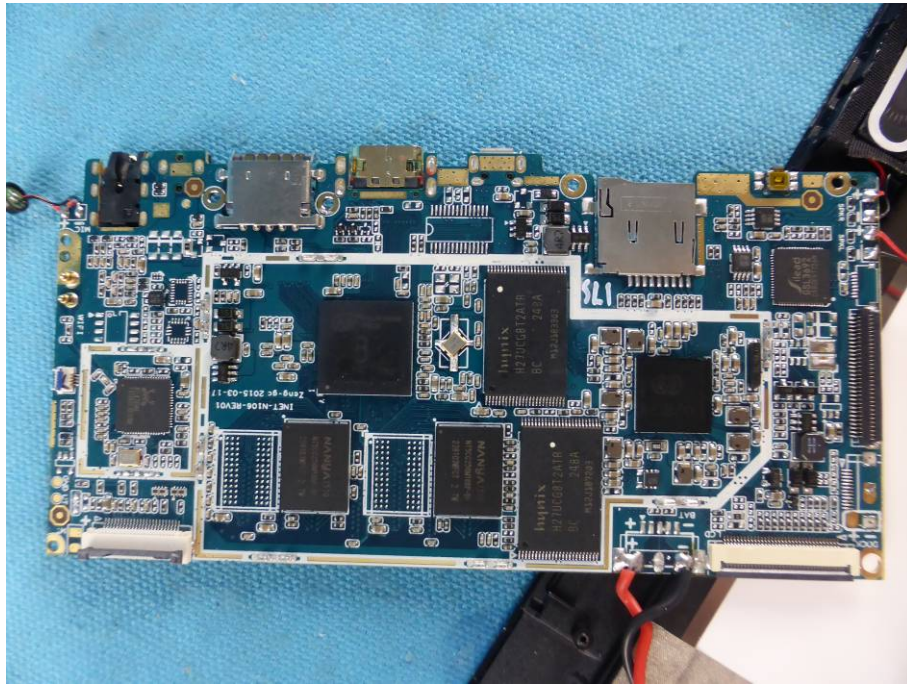

View of Internal Product-3



View of Internal Product-4

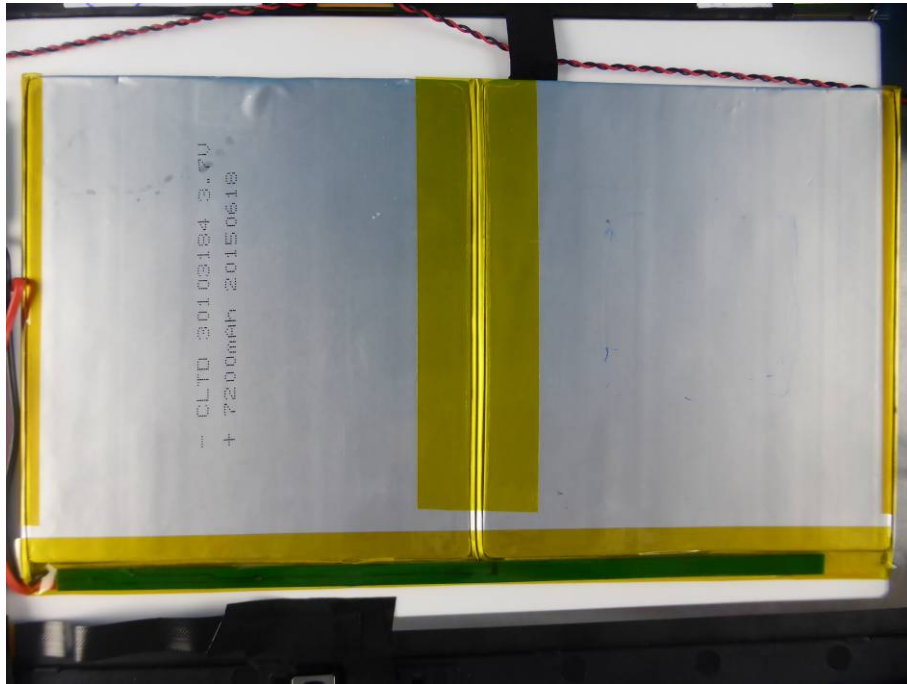

View of Internal Product-5

\*\*\* End of Report \*\*\*

The test report is effective only with both signature and specialized stamp. The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CTI, this report can't be reproduced except in full.