

FCC Test Report

Part 15 subpart C

Client Information:

Applicant: Proexpress Distributor LLC
Applicant add.: 11011 GREENWOOD AVE.N APT 5,SEATTLE,WA 98103

Product Information:

Product Name: Remote-control planes
Model No.: K88
Derivative model No.: U818, KS818, K88 BUNDLE, K88 PRO
Brand Name: AKASO/KINGSLIM
FCC ID: S5V-D847015088

Standards: FCC PART 15 Subpart C: 2013 section 15.249

Test procedure used: ANSI C63.10-2009

Prepared By:

Dongguan Yaxu (AiT) Technology Limited

Add. : No.22, Jinqianling Third Street, Jitigang, Huangjiang,Dongguan, Guangdong, China

Date of Receipt: Dec.02, 2015

Date of Test: Dec.02~ Dec.15, 2015

Date of Issue: Dec.15, 2015

Test Result: Pass

This device described above has been tested by Dongguan Yaxu (AiT) Technology Limited, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

*This test report must not be used by the client to claim product endorsement by any agency of the U.S. government.

Reviewed by: Seal-Cheer

Approved by: 

1 Contents

	Page
COVER PAGE	
1 CONTENTS	2
2 TEST SUMMARY	3
2.1 COMPLIANCE WITH FCC PART 15 SUBPART C	3
2.2 MEASUREMENT UNCERTAINTY	3
2.3 TEST LOCATION	3
3 TEST FACILITY	4
3.1 DEVIATION FROM STANDARD	4
3.2 ABNORMALITIES FROM STANDARD CONDITIONS	4
4 GENERAL INFORMATION	5
4.1 GENERAL DESCRIPTION OF EUT	5
5 DESCRIPTION OF TEST CONDITIONS	7
5.1 E.U.T. OPERATION.....	7
5.2 EUT PERIPHERAL LIST	8
5.3 TEST PERIPHERAL LIST	8
6 EQUIPMENTS LIST FOR ALL TEST ITEMS	9
7 TEST RESULT	10
ANTENNA REQUIREMENT	10
7.1 FIELD STRENGTH OF FUNDAMENTAL& FIELD STRENGTH OF UNWANTED EMISSIONS& BAND EDGE	11
7.2 OCCUPIED BANDWIDTH.....	25
7.3 CONDUCTED EMISSIONS AT MAINS TERMINALS 150 KHZ TO 30 MHZ	27
8 PHOTOGRAPHS	29
8.1 RADIATED EMISSION TEST SETUP	29
9 EUT CONSTRUCTIONAL DETAILS	30

2 Test Summary

2.1 Compliance with FCC Part 15 subpart C

Test	Test Requirement	Standard Paragraph	Result
Field Strength of Fundamental	FCC Part 15 C:2013	section 15.249 (a)	PASS
Field Strength of Unwanted Emissions	FCC Part 15 C:2013	section 15.249 (a) section 15.249 (d)	PASS
Band Edges	FCC Part 15 C:2013	section 15.249 (d)	PASS
Occupied Bandwidth	FCC Part 15 C:2013	section 15.215(c)	PASS
Conducted Emissions at Mains Terminals	FCC Part 15 C:2013	section 15.207	N/A

Remark:

EUT: In this whole report EUT means Equipment Under Test.

Tx: In this whole report Tx (or tx) means Transmitter.

Rx: In this whole report Rx (or rx) means Receiver.

RF: In this whole report RF means Radio Frequency.

2.2 Measurement Uncertainty

All measurements involve certain levels of uncertainties, The following measurements maximum value of the uncertainty as below

No.	Item	Uncertainty
1	Conducted Emission Test	1.20dB
2	Radiated Emission Test	3.30dB

2.3 Test Location

All tests were performed at:

Dongguan Yaxu (AiT) Technology Limited
 No.22, Jinqianling Third Street, Jitigang, Huangjiang, Dongguan, Guangdong, China
 Tel.: +86.769.82020499 Fax.: +86.769.82020495

3 Test Facility

The test facility is recognized, certified or accredited by the following organizations:

.CNAS- Registration No: L6177

Dongguan Yaxu (AiT) technology Limited is accredited to ISO/IEC 17025:2005 general Requirements for the competence of testing and calibration laboratories (CNAS-CL01 Accreditation Criteria for the competence of testing and calibration laboratories) on Apr. 18, 2013

.FCC- Registration No: 248337

The 3m Semi-Anechoic Chamber, 3m/10m Open Area Test Site and Shielding Room of Dongguan Yaxu (AiT) Technology Limited have been registered by Federal Communications Commission (FCC) on Aug.29, 2014.

.Industry Canada(IC)-Registration No: IC6819A-1

The 3m Semi-Anechoic Chamber and 3m of Dongguan Yaxu (AiT) Technology Limited have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing on Oct. 01, 2014.

.VCCI- Registration No: 2705

The 3m/10m Open Area Test Site, Shielding Room and 3m Chamber of Dongguan Yaxu (AiT) Technology Limited have been registered by Voluntary Control Council for Interference on Nov. 21, 2012. The Telecommunication Ports Conducted Disturbance Measurement of Dongguan Yaxu (AiT) Technology Limited have been registered by Voluntary Control Council for Interference on May. 13, 2013.

.TUV NORD

Dongguan Yaxu (AiT) Technology Limited has been assessed on Jun. 13, 2013 that it can carry out EMC tests by order and under supervision of TUV NORD.

.ITS- Registration No: TMPSHA031

Dongguan Yaxu (AiT) Technology Limited has been assessed and included in Intertek Shanghai TMP Program regarding Laboratory facilities and test equipment on Jul.22, 2012.

3.1 Deviation from standard

None

3.2 Abnormalities from standard conditions

None

4 General Information

4.1 General Description of EUT

Manufacturer:	Proexpress Distributor LLC
Manufacturer Address:	11011 GREENWOOD AVE.N APT 5,SEATTLE,WA 98103
EUT Name:	Remote-control planes
Model No.:	K88
Derivative model No.:	U818, KS818, K88 BUNDLE, K88 PRO
Operation frequency:	2402 MHz to 2480 MHz
Number of channel:	28 channels
Modulation Type and Antenna Type:	GFSK Coaxial antenna
H/W No.:	REV.B
S/W No.:	01
Antenna Gain:	3 dBi
Brand Name:	AKASO/KINGSLIM
Serial No:	N/A
Power Supply Range:	DC 9.0V(6*1.5V AA battery)
Power Supply:	The same as above.
Power Cord:	N/A
Signal Cable:	N/A
Model description:	According to the declaration from the applicant, the electrical circuit design, layout, components used and internal wiring were identical for all models, with only difference being the exterior, model name and brand name. Therefore only one model K88 was tested in this report.

Description of Channel:					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2402	11	2431	21	2461
02	2405	12	2434	22	2464
03	2408	13	2437	23	2467
04	2411	14	2440	24	2470
05	2414	15	2443	25	2473
06	2417	16	2446	26	2476
07	2420	17	2449	27	2478
08	2423	18	2452	28	2480
09	2425	19	2455		
10	2428	20	2458		

5 Description of Test conditions

5.1 E.U.T. Operation

Test Voltage:	DC 9.0V from battery(use new batteries)
Temperature:	20.0 -25.0 °C
Humidity:	38-50 % RH
Atmospheric Pressure:	1000 -1010 mbar

Test frequencies and frequency range: According to the 15.31(m) Measurements on intentional radiators or receivers, other than TV broadcast receivers, shall be performed and, if required, reported for each band in which the device can be operated with the device operating at the number of frequencies in each band specified in the following table:

According to the 15.33 (a) For an intentional radiator, the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to at least the frequency shown in the following table:

Number of fundamental frequencies to be tested in EUT transmit band

Frequency range in which device operates	Number of frequencies	Location in frequency range of operation
1 MHz or less	1	Middle
1 MHz to 10 MHz	2	1 near top and 1 near bottom
More than 10 MHz	3	1 near top, 1 near middle and 1 near bottom

Frequency range of radiated emission measurements

Lowest frequency generated in the device	Upper frequency range of measurement
9 kHz to below 10 GHz	10th harmonic of highest fundamental frequency or to 40 GHz, whichever is lower
At or above 10 GHz to below 30 GHz	5th harmonic of highest fundamental frequency or to 100 GHz, whichever is lower
At or above 30 GHz	5th harmonic of highest fundamental frequency or to 200 GHz, whichever is lower, unless otherwise specified

5.2 EUT Peripheral List

No.	Equipment	Manufacturer	Model No.	Serial No.	Power cord	signal cable
1	N/A	N/A	N/A	N/A	N/A	N/A

5.3 Test Peripheral List

No.	Equipment	Manufacturer	EMC Compliance	Model No.	Serial No.	Power cord	signal cable
1	N/A	N/A	N/A	N/A	N/A	N/A	N/A

6 Equipments List for All Test Items

No	Test Equipment	Manufacturer	Model No	Serial No	Cal. Date	Cal. Due Date
1	Spectrum Analyzer	ADVANTEST	R3182	150900201	2015.06.29	2016.06.28
2	EMI Measuring Receiver	R&S	ESR	101660	2015.06.29	2016.06.28
3	Low Noise Pre Amplifier	Tsj	MLA-10K01-B01-27	1205323	2015.06.29	2016.06.28
4	Low Noise Pre Amplifier	Tsj	MLA-0120-A02-34	2648A04738	2015.06.29	2016.06.28
5	TRILOG Super Broadband test Antenna	SCHWARZBECK	VULB9160	9160-3206	2015.06.29	2016.06.28
6	Broadband Horn Antenna	SCHWARZBECK	BBHA9120D	452	2015.06.29	2016.06.28
8	50Ω Coaxial Switch	Anritsu	MP59B	6200264416	2015.06.29	2016.06.28
9	SHF-EHF Horn	SCHWARZBECK	BBHA9170	BBHA9170367	2015.06.29	2016.06.28
10	Loop Antenna	ETS	6512	00165355	2015.06.29	2016.06.28
11	Radiated Cable 1# (30MHz-1GHz)	FUJIKURA	5D-2W	01	2015.01.04	2016.01.03
12	Radiated Cable 2# (1GHz -25GHz)	FUJIKURA	10D2W	02	2014.12.25	2015.12.24
13	SMA Antenna connector	Dosin	Dosin-SMA	N/A	N/A	N/A

Note: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.


7 Test Result

Antenna Requirement

Standard requirement

EUT Antenna

The antenna is non-removable antenna and no consideration of replacement. The maximum gain of the antenna is 3 dBi.

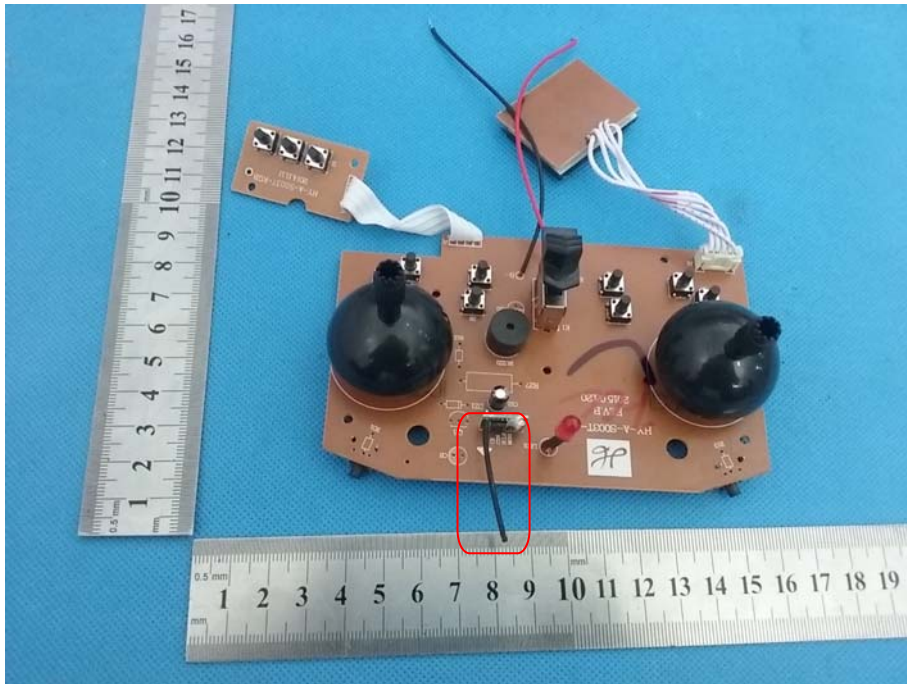

Test result: The unit does meet the FCC requirements.

7.1 Field Strength of Fundamental & Field Strength of Unwanted Emissions &

Band Edge

Test Requirement: FCC Part 15 C section 15.249

(a) Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental (dB μ V/m @ 3m)	Field Strength of Harmonics (dB μ V/m @ 3m)
902 to 928	94.0	54.0
2400 to 2483.5	94.0	54.0
5725 to 5875	94.0	54.0
24000 to 24250	108.0	68.0

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

Limits: The fundamental frequency range is in the frequency band of the EUT is 2402 MHz ~ 2480 MHz.

The limit for AVG field strength dB μ V/m for the fundamental frequency = 94.0 dB μ V/m.

No fundamental is allowed in the restricted bands.

The limit for AVG field strength dB μ V/m for the harmonics and other above 1G frequencies = 54.0 dB μ V/m.

The limit for Peak field strength dB μ V/m for the harmonics and other above 1G frequencies = 74.0 dB μ V/m.

Test Method: ANSI C63.10: Clause 6.4, 6.6 and 6.7 for Field Strength of Fundamental & Field Strength of Unwanted Emissions
 ANSI C63.10: Clause 6.9.2 for Band Edge

Status: Pre-test the EUT in continuous transmitting mode with setup as stand-alone in X, Y, Z three axes, found the worst case is X axes and report the data.

Measurement Distance: 3m (Semi-Anechoic Chamber)

Frequency range: 9 kHz – 25 GHz for transmitting mode.

Test instrumentation resolution bandwidth

9 kHz (9 kHz - 30 MHz), 120 kHz (30 MHz - 1000 MHz), 1 MHz (1000 MHz – 25 GHz)

Detector:

For PK and QP value:

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

For AV value:

RBW = 1 MHz for $f \geq 1$ GHz,

VBW = 10 Hz

Sweep = auto

Detector function = peak

Trace = max hold

And according 15.35(a)


15.35(a) On any frequency or frequencies below or equal to 1000 MHz, the limits shown are based on measuring equipment employing a CISPR quasi-peak detector function and related measurement bandwidths, unless otherwise specified. The specifications for the measuring instrument using the CISPR quasi-peak detector can be found in Publication 16 of the International Special Committee on Radio Interference (CISPR) of the International Electrotechnical Commission. As an alternative to CISPR quasi-peak measurements, the responsible party, at its option, may demonstrate compliance with the emission limits using measuring equipment employing a peak detector function, properly adjusted for such factors as pulse desensitization, as long as the same bandwidths as indicated for CISPR quasi-peak measurements are employed.

Note: For pulse modulated devices with a pulse-repetition frequency of 20 Hz or less and for which CISPR quasi-peak measurements are specified, compliance with the regulations shall be demonstrated using measuring equipment employing a peak detector function, properly adjusted for such factors as pulse desensitization, using the same measurement bandwidths that are indicated for CISPR quasi-peak measurements.

According to 15.35 (b) Unless otherwise specified, on any frequency or frequencies above 1000 MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. Unless otherwise specified, measurements above 1000 MHz shall be performed using a minimum resolution bandwidth of 1 MHz. When average radiated emission measurements are specified in this part, including average emission measurements below 1000 MHz, there also is a limit on the peak level of the radio frequency emissions. Unless otherwise specified, e.g., see §§ 15.250, 15.252, 15.255, and 15.509-15.519 of this part, the limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device, e.g., the total peak power level. Note that the use of a pulse desensitization correction factor may be needed to determine the total peak emission level. The instruction manual or application note for the measurement instrument should be consulted for determining pulse desensitization factors, as necessary.

The average correction factor is computed by analyzing the on time in 100ms over one complete pulse train. Analysis of the remote transmitter on time in one complete pulse train, therefore the average value of fundamental frequency is: Average = Peak value + 20log (Duty cycle), where the duty factor is calculated from following formula:

$$20\log (\text{Duty cycle}) = 20\log(1) = 0 \text{ dB}$$

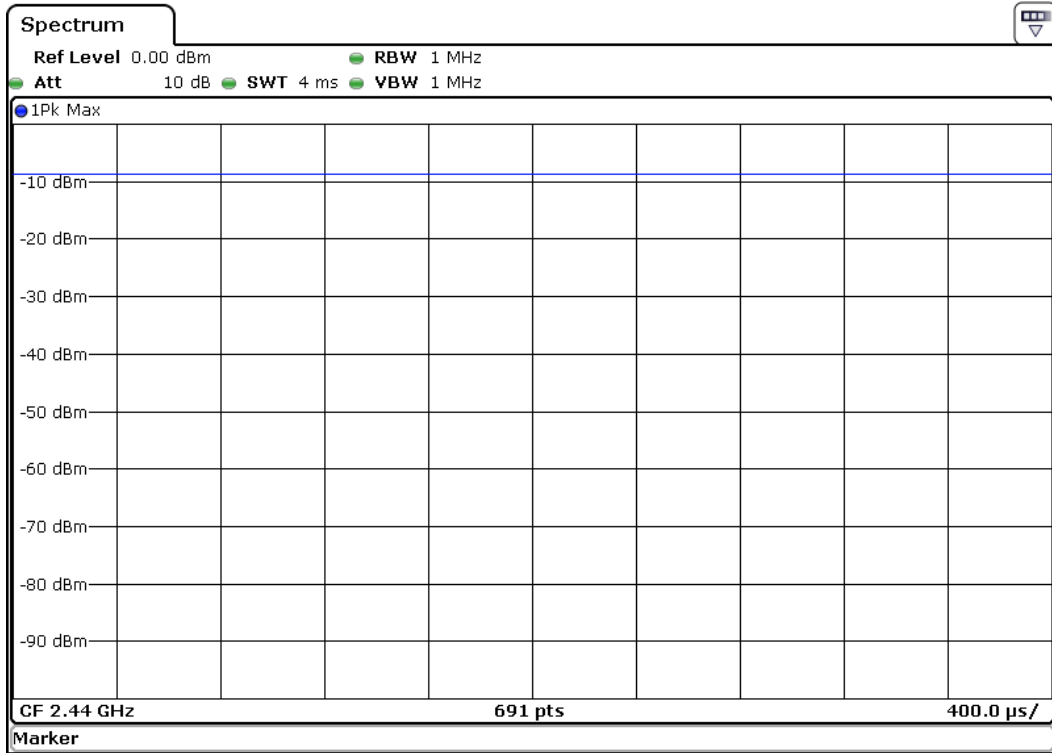

Test Procedure:

1)9 kHz to 30 MHz emissions:

For testing performed with the loop antenna, testing was performed in accordance to ANSI C63.10. The centre of the loop was positioned 1 m above the ground and positioned with its plane vertical at the specified distance from the EUT, During testing the loop was rotated about its vertical axis for maximum response at each azimuth and also investigated with the loop positioned in the horizontal plane.

2)30 MHz to 1 GHz emissions:

For testing performed with the bi-log type antenna, testing was performed in accordance to ANSI C63.10. The measurement is performed with the EUT rotated 360°, the antenna height scanned between 1m and 4m, and the antenna rotated to repeat the measurement for both the horizontal and vertical antenna polarizations.

3)1 GHz to 25 GHz emissions:

Test site with RF absorbing material covering the ground plane that met the site validation criterion called out in CISPR 16-1-4:2007 was used to perform radiated emission test above 1 GHz.


For testing performed with the horn antenna, testing was performed in accordance to ANSI C63.10. The measurement is performed with the EUT rotated 360°, the antenna height scan between 1m and 4m, and the antenna rotated to repeat the measurement for both the horizontal and vertical antenna polarizations.

For the radiated emission test above 1GHz:


Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

Test Configuration:


- 1) 9 kHz to 30 MHz emissions:

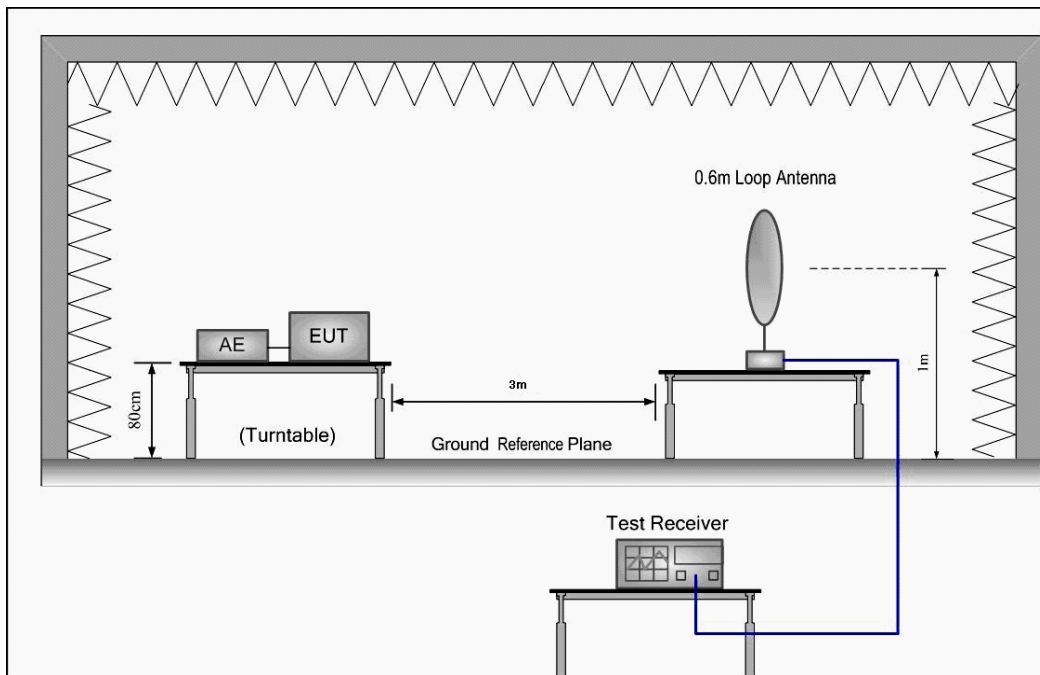

- 2) 30 MHz to 1 GHz emissions:

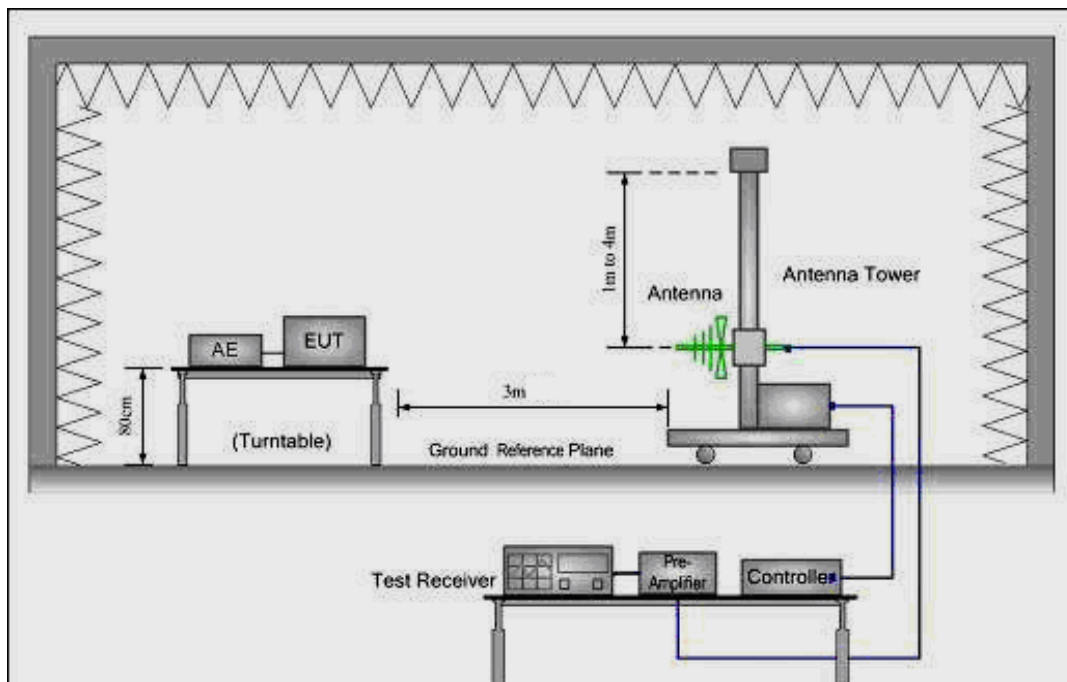

3) 1 GHz to 25 GHz emissions:

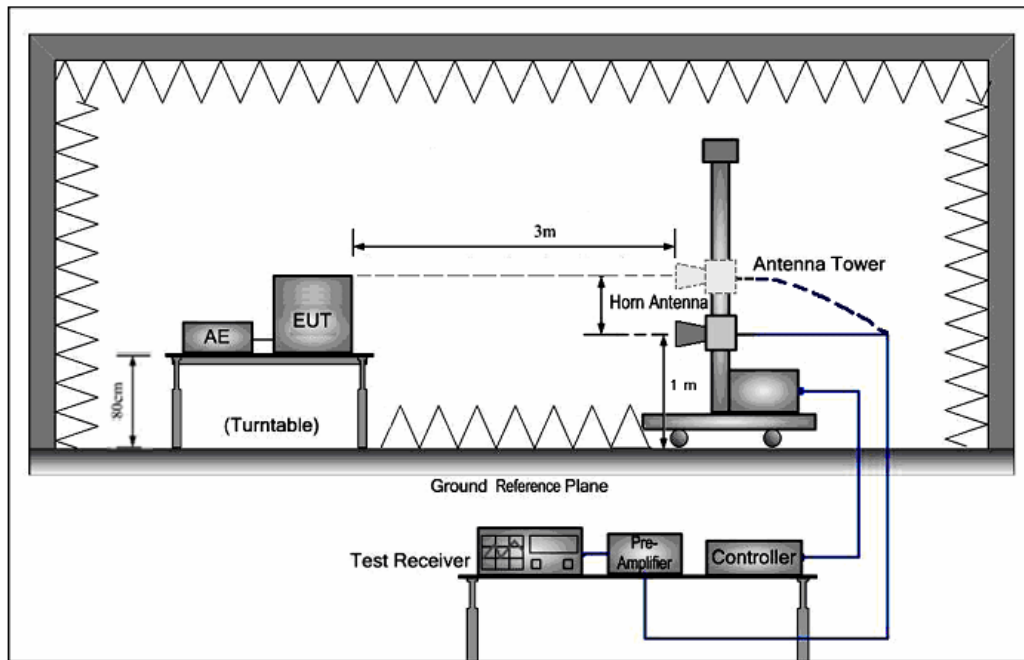

The field strength is calculated by adding the Antenna Factor, Cable Loss & Pre-amplifier. The basic equation with a sample calculation is as follows:

$$\text{Final Test Level} = \text{Receiver Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Pre-amplifier Factor}$$

Fundamental field strength measurement:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type	Antenna polarization
2402.000	93.41	-5.68	87.73	94.00	-6.27	AVG	V
2402.000	92.76	-5.68	87.08	94.00	-6.92	AVG	H
2440.000	88.15	-5.36	82.79	94.00	-11.21	AVG	V
2440.000	91.42	-5.36	86.06	94.00	-7.94	AVG	H
2480.000	87.94	-5.03	82.91	94.00	-11.09	AVG	V
2480.000	88.17	-5.03	83.14	94.00	-10.86	AVG	H

9 kHz~30 MHz Field Strength of Unwanted Emissions. Quasi-Peak Measurement

The measurements with active loop antenna were greater than 20dB below the limit, so the test data were not recorded in the test report.

30 MHz~1 GHz Field Strength of Unwanted Emissions. Quasi-Peak Measurement

EUT:	Remote-control planes	Model Name :	K88
Temperature:	25 °C	Test Data	2015-12-14
Pressure:	1010 hPa	Relative Humidity:	60%
Test Mode :	TX mode(2402-worst case)	Test Voltage :	DC 9.0V from battery
Measurement Distance	3 m	Frenqucy Range	30MHz to 1GHz
RBW/VBW	100KHz / 300KHz for spectrum, RBW=120KHz for receiver.		

(a) Antenna polarization: Horizontal

Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Type
34.5172	31.03	-16.87	14.16	40.00	-25.84	QUASIPeAK
103.4419	31.49	-13.69	17.80	43.50	-25.70	QUASIPeAK
162.6106	30.96	-14.78	16.18	43.50	-27.32	QUASIPeAK
251.1803	30.70	-11.07	19.63	46.00	-26.37	QUASIPeAK
400.4318	30.05	-5.93	24.12	46.00	-21.88	QUASIPeAK
*801.7862	29.68	3.30	32.98	46.00	-13.02	QUASIPeAK

(b) Antenna polarization: vertical

Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Type
38.4808	29.39	-14.48	14.91	40.00	-25.09	QUASIPeAK
49.8813	29.61	-14.19	15.42	40.00	-24.58	QUASIPeAK
183.2005	30.97	-10.48	20.49	43.50	-23.01	QUASIPeAK
280.0237	30.99	-10.26	20.73	46.00	-25.27	QUASIPeAK
510.0436	28.95	-4.96	23.99	46.00	-22.01	QUASIPeAK
*821.7103	30.39	0.68	31.07	46.00	-14.93	QUASIPeAK

Note: '*' means the worst case

Measurement Level = Reading Level + Factor

Factor=Ant Factor + Cable Loss- Pre-amplifier.

Radiated Emissions Test Data Above 1GHz

EUT:	Remote-control planes	Model Name :	K88
Temperature:	25 °C	Test Data	2015-12-14
Pressure:	1010 hPa	Relative Humidity:	60%
Test Mode :	TX mode	Test Voltage :	DC 9.0V from battery
Measurement Distance	3 m	Frenqucy Range	1GHz to 25GHz
RBW/VBW	1MHz/1MHz for Peak, 1MHz/10Hz for Average.		

(a) Antenna polarization: Horizontal

Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Type
4804.000	52.64	5.06	57.70	74.00	-16.30	PEAK
*4804.000	41.59	5.06	46.65	54.00	-7.35	AVERAGE
7206.000	47.16	7.03	54.19	74.00	-19.81	PEAK
7206.000	36.43	7.03	43.46	54.00	-10.54	AVERAGE
9608.000	42.17	10.63	52.80	74.00	-21.20	PEAK
9608.000	31.66	10.63	42.29	54.00	-11.71	AVERAGE

(b) Antenna polarization: Vertical

Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Type
4804.000	52.24	5.06	57.30	74.00	-16.70	PEAK
*4804.000	39.35	5.06	44.41	54.00	-9.59	AVERAGE
7206.000	45.87	7.03	52.90	74.00	-21.10	PEAK
7206.000	33.26	7.03	40.29	54.00	-13.71	AVERAGE
9608.000	41.76	10.63	52.39	74.00	-21.61	PEAK
9608.000	30.89	10.63	41.52	54.00	-12.48	AVERAGE

Note: '*' means the worst case

10~25GHz at least have 20dB margin. No recording in the test report.

Measurement Level = Reading Level + Factor

Factor=Ant Factor + Cable Loss– Pre-amplifier.

Low Channel: 2402 MHz

(a) Antenna polarization: Horizontal

Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Type
4880.000	51.61	5.14	56.75	74.00	-17.25	PEAK
*4880.000	39.92	5.14	45.06	54.00	-8.94	AVERAGE
7320.000	45.45	7.52	52.97	74.00	-21.03	PEAK
7320.000	34.87	7.52	42.39	54.00	-11.61	AVERAGE
9760.000	41.53	11.36	52.89	74.00	-21.11	PEAK
9760.000	29.74	11.36	41.10	54.00	-12.90	AVERAGE

(b) Antenna polarization: Vertical

Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Type
4880.000	52.97	5.14	58.11	74.00	-15.89	PEAK
*4880.000	39.33	5.14	44.47	54.00	-9.53	AVERAGE
7320.000	45.26	7.52	52.78	74.00	-21.22	PEAK
7320.000	33.19	7.52	40.71	54.00	-13.29	AVERAGE
9760.000	40.12	11.36	51.48	74.00	-22.52	PEAK
9760.000	29.56	11.36	40.92	54.00	-13.08	AVERAGE

Note: '*' means the worst case

10~25GHz at least have 20dB margin. No recording in the test report.

Measurement Level = Reading Level + Factor

Factor=Ant Factor + Cable Loss

Middle Channel: 2440 MHz

(a) Antenna polarization: Horizontal

Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Type
4960.000	52.37	5.21	57.58	74.00	-16.42	PEAK
*4960.000	39.86	5.21	45.07	54.00	-8.93	AVERAGE
7440.000	46.48	8.03	54.51	74.00	-19.49	PEAK
7440.000	32.15	8.03	40.18	54.00	-13.82	AVERAGE
9920.000	41.25	12.07	53.32	74.00	-20.68	PEAK
9920.000	30.86	12.07	42.93	54.00	-11.07	AVERAGE

(b) Antenna polarization: Vertical

Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Type
4960.000	52.23	5.21	57.44	74.00	-16.56	PEAK
*4960.000	39.46	5.21	44.67	54.00	-9.33	AVERAGE
7440.000	45.38	8.03	53.41	74.00	-20.59	PEAK
7440.000	34.27	8.03	42.30	54.00	-11.70	AVERAGE
9920.000	42.67	12.07	54.74	74.00	-19.26	PEAK
9920.000	30.88	12.07	42.95	54.00	-11.05	AVERAGE

Note: '*' means the worst case

10~25GHz at least have 20dB margin. No recording in the test report.


Measurement Level = Reading Level + Factor

Factor=Ant Factor + Cable Loss


Highest Channel : 2480 MHz

Band Edge Measurement:

Low channel:

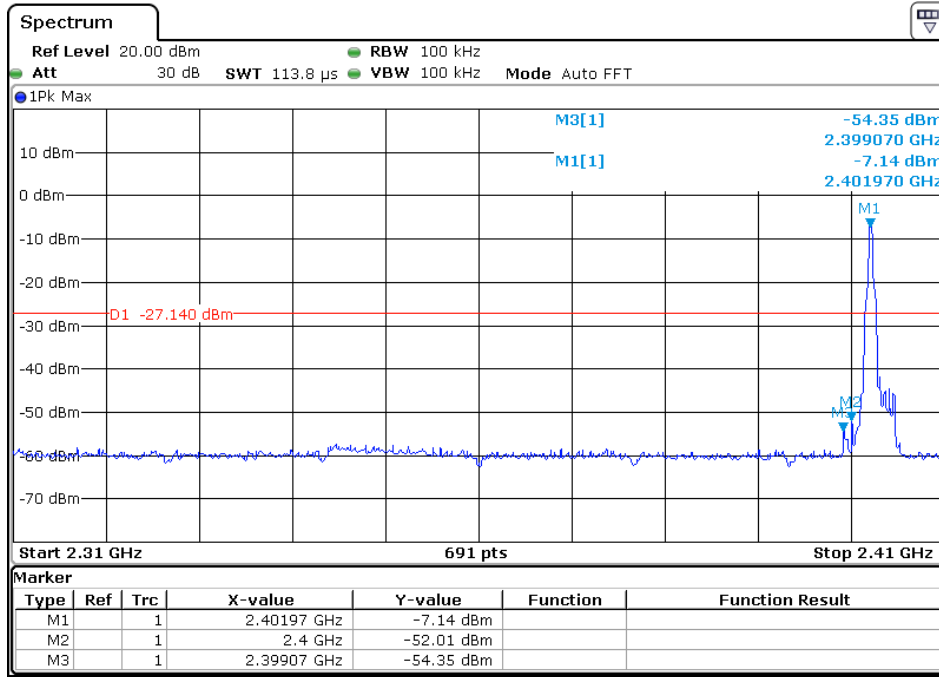

Highest Channel:

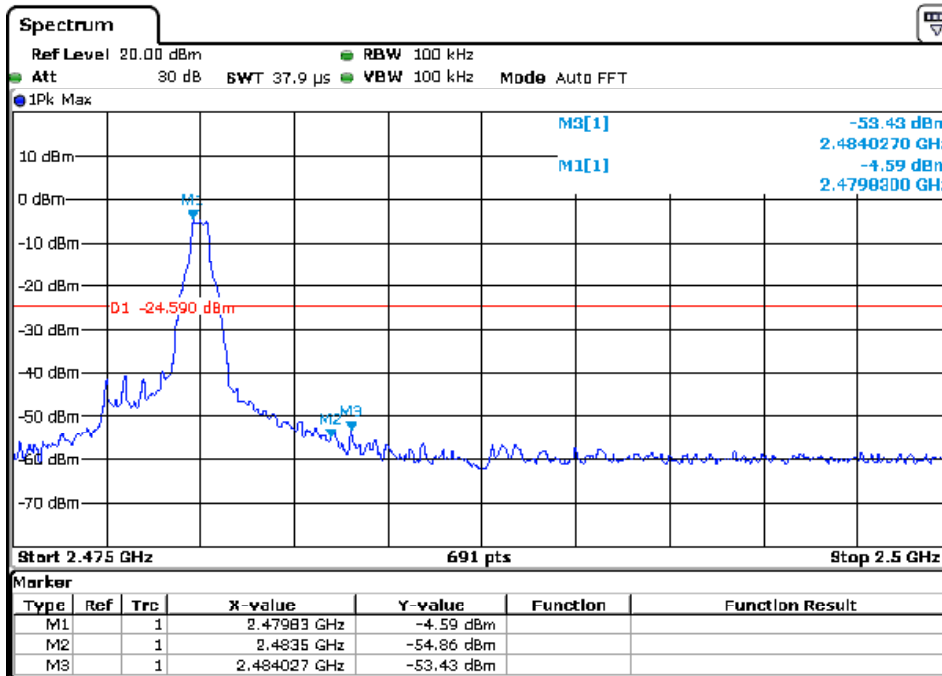

Test result: The unit does meet the FCC requirements.

EUT:	Remote-control planes	Model Name :	K88
Temperature:	25 °C	Test Data	2015-12-14
Pressure:	1010 hPa	Relative Humidity:	60%
Test Mode :	TX mode	Test Voltage :	DC 9.0V from battery
Note:	1. The transmitter was setup to transmit at the lowest channel. Then the field strength was measured at 2310-2390 MHz. 2. The transmitter was setup to transmit at the highest channel. Then the field strength was measured at 2483.5-2500 MHz. 3. The data of 2390MHz and 2483.5MHz was the worst.		

Ant.Pol. H/V	Freq. (MHz)	Reading		Ant/CF CF(dB)	Act		Limit	
		Peak (dBuv)	AV (dBuv)		Peak (dBuv/m)	AV (dBuv/m)	Peak (dBuv/m)	AV (dBuv/m)
V	2390.00	43.27	31.45	-5.79	37.48	25.66	74.00	54.00
H	2390.00	44.68	32.78	-5.79	38.89	26.99	74.00	54.00
V	2483.50	43.72	31.65	-4.98	38.74	26.67	74.00	54.00
H	2483.50	44.61	32.34	-4.98	39.63	27.36	74.00	54.00

Remark:

- (1) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode.
- (2) During the measurements above 1 GHz it is taken care of that the EUT is always within the 3 dB cone of radiation BW of the used antenna
- (3) Corr.Factor = Antenna Factor + Cable Loss – Pre-amplifier.

7.2 Occupied Bandwidth

Test Requirement: FCC Part 15 C section 15.215


(c) Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

Test Method: ANSI C63.10: Clause 6.9.1


Operation within the band 2402 MHz to 2480 MHz

Method of measurement: A small sample of the transmitter output was fed into the Spectrum Analyzer and the attached plot was taken.


Test in the frequency 2402MHz (20 dB bandwidth)

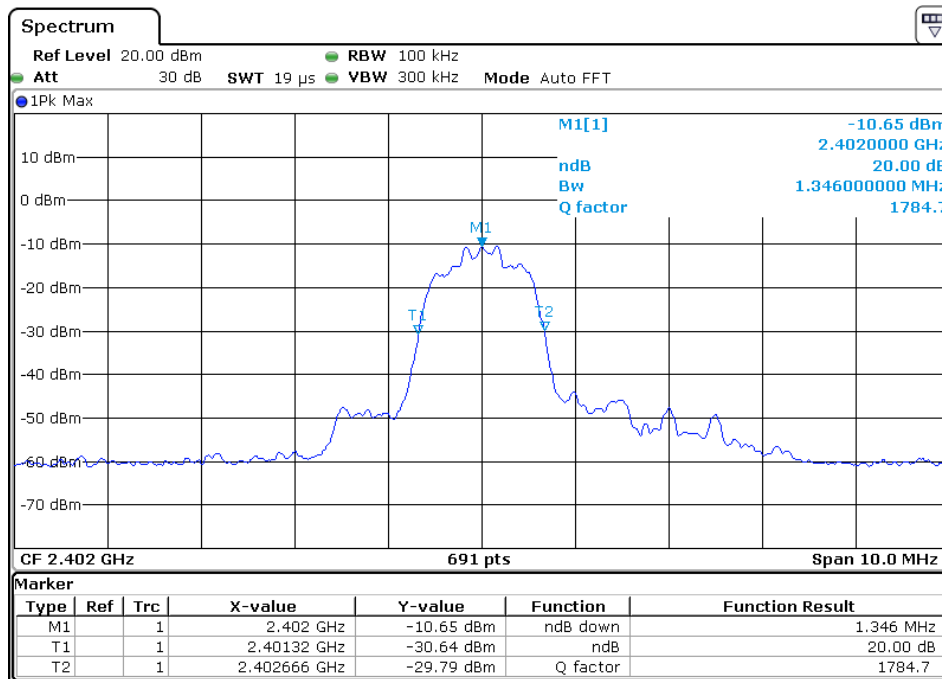

Test in the frequency 2440MHz (20 dB bandwidth)

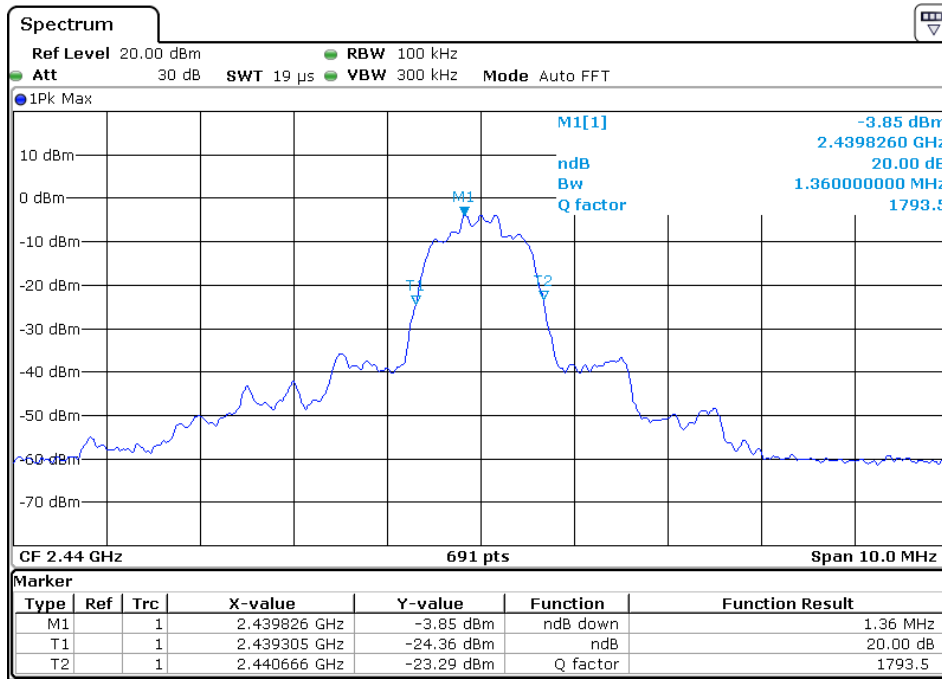

Test in the frequency 2480MHz (20 dB bandwidth)

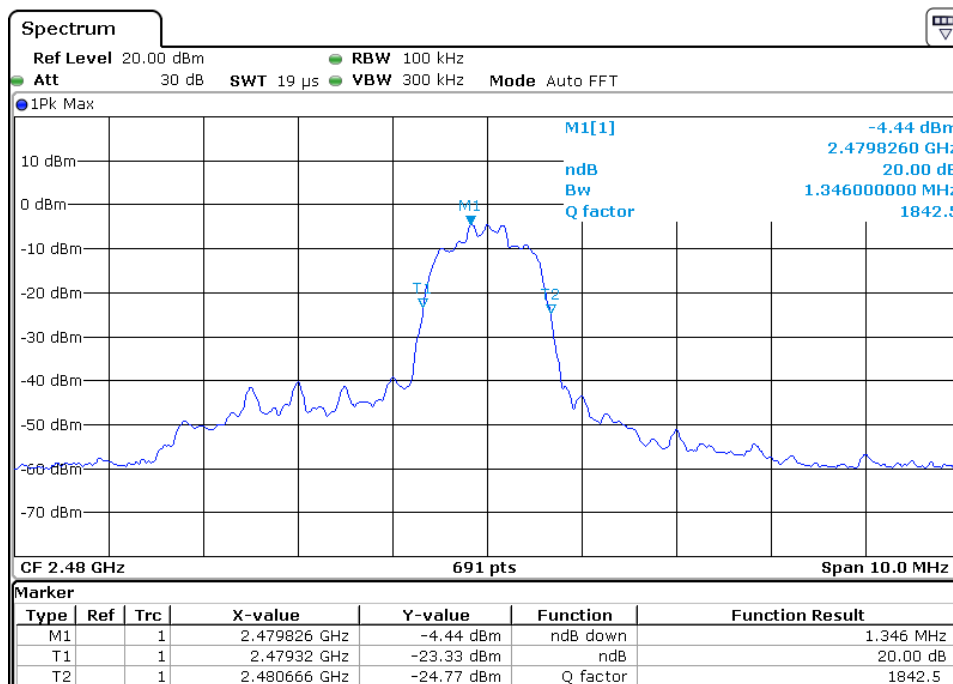

7.3 Conducted Emissions at Mains Terminals 150 kHz to 30 MHz

Test Requirement: FCC Part 15 C section 15.207
Test Method: ANSI C63.10: Clause 6.2
Frequency Range: 150 kHz to 30 MHz
Detector: Peak for pre-scan (9 kHz Resolution Bandwidth)
Test Limit

Limits for conducted disturbance at the mains ports of class B


Frequency Range (MHz)	Class B Limit dB(μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

NOTE 1 The limit decreases linearly with the logarithm of the frequency in the range 0,15 MHz to 0,50 MHz.

EUT Operation: Test in normal operating mode. For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage.

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Test Configuration:

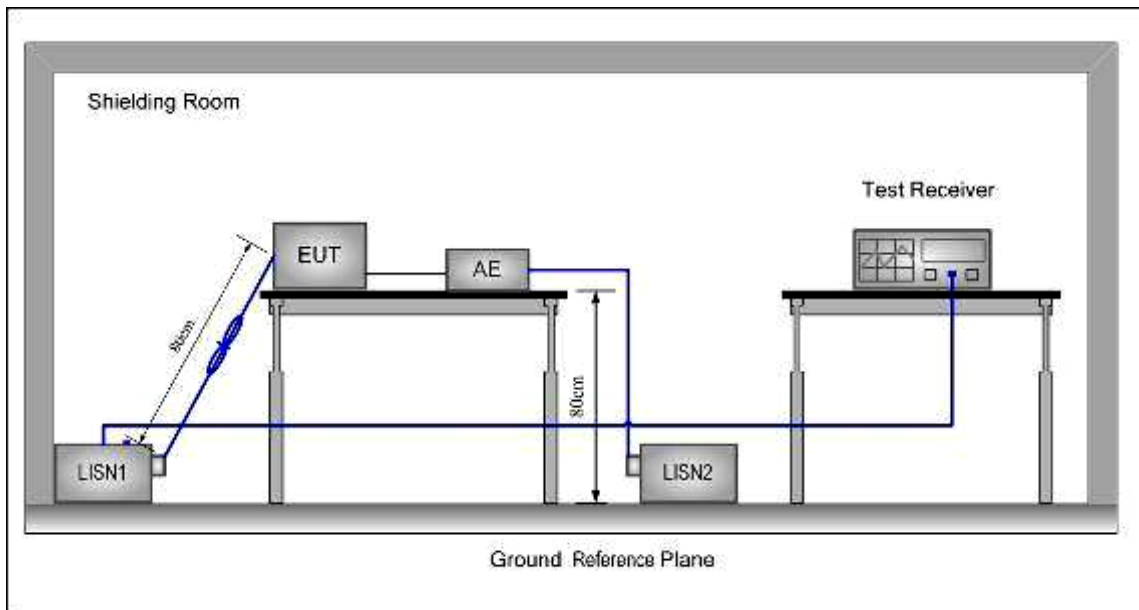

Test procedure:

1. The mains terminal disturbance voltage test was conducted in a shielded room.
2. The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
3. The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, but separated from metallic contact with the ground reference plane by 0.1m of insulation.
4. The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.


Measurement Data

Remark: Because the EUT employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Measurements to demonstrate compliance with the conducted limits are not required for devices.


8 Photographs

8.1 Radiated Emission Test Setup

Below 1G

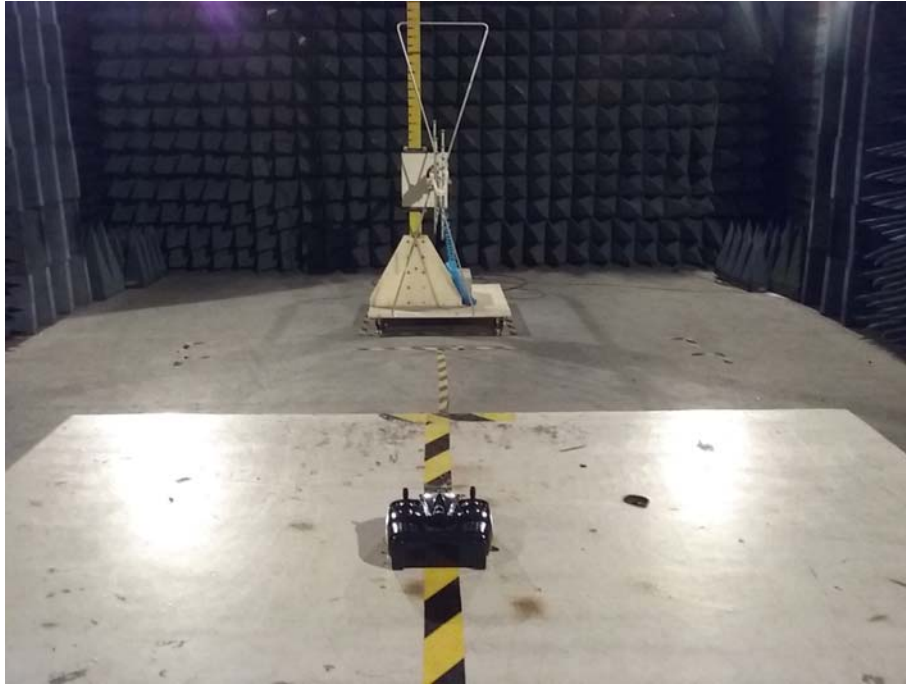

Above 1G:

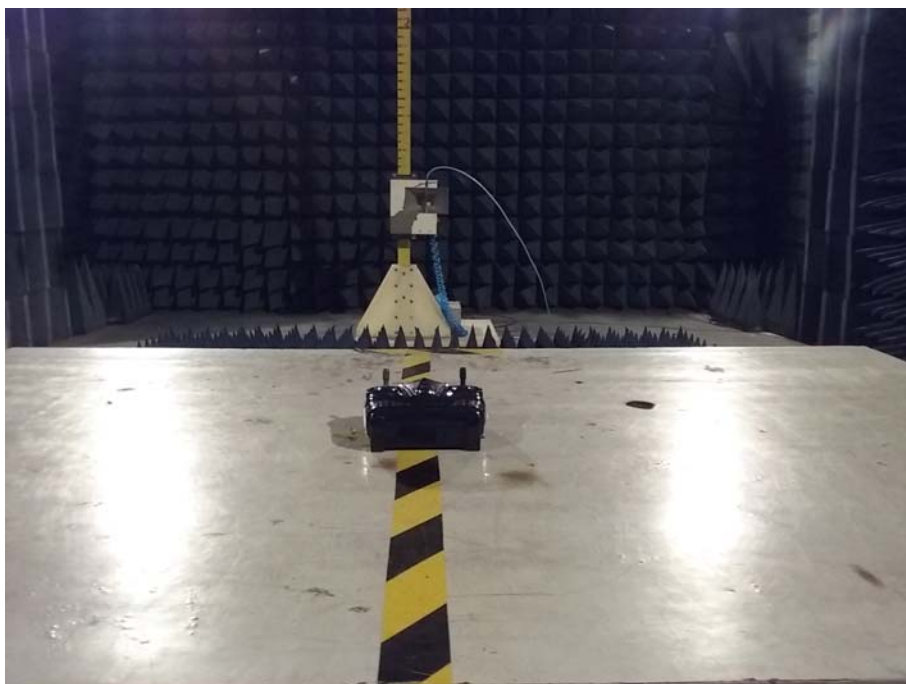




9 EUT Constructional Details












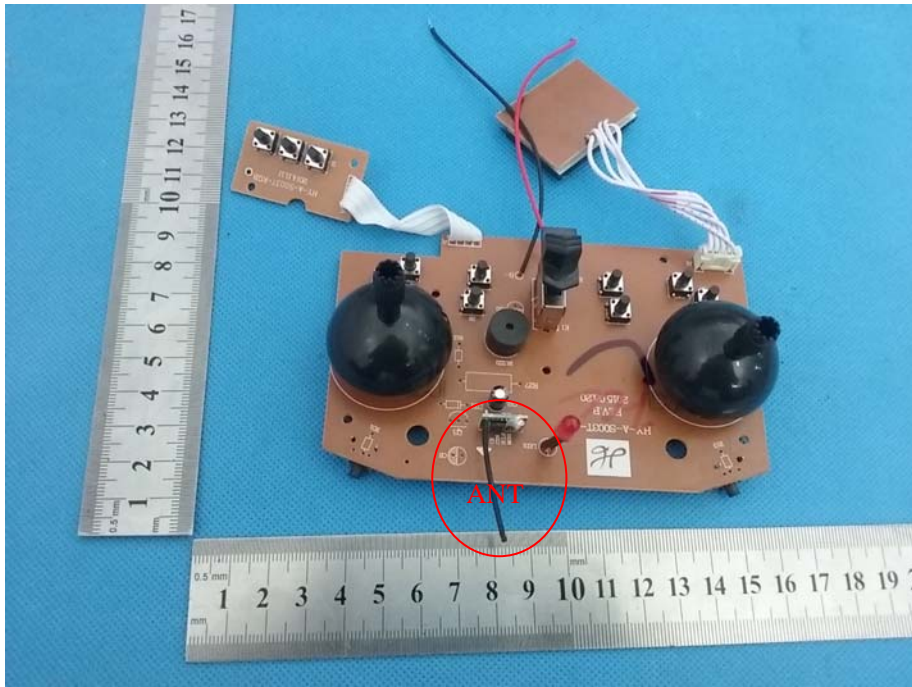

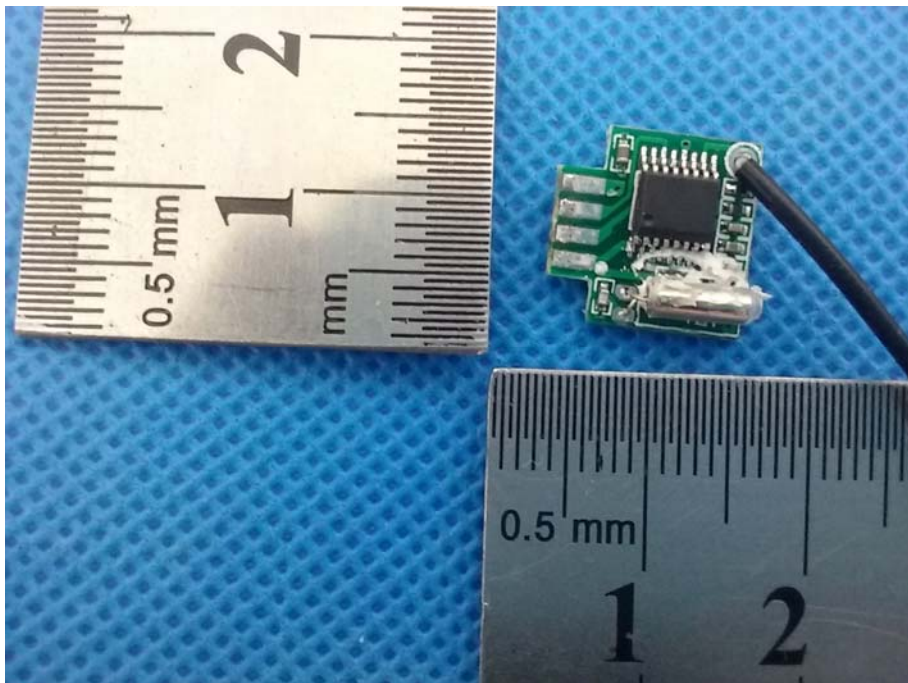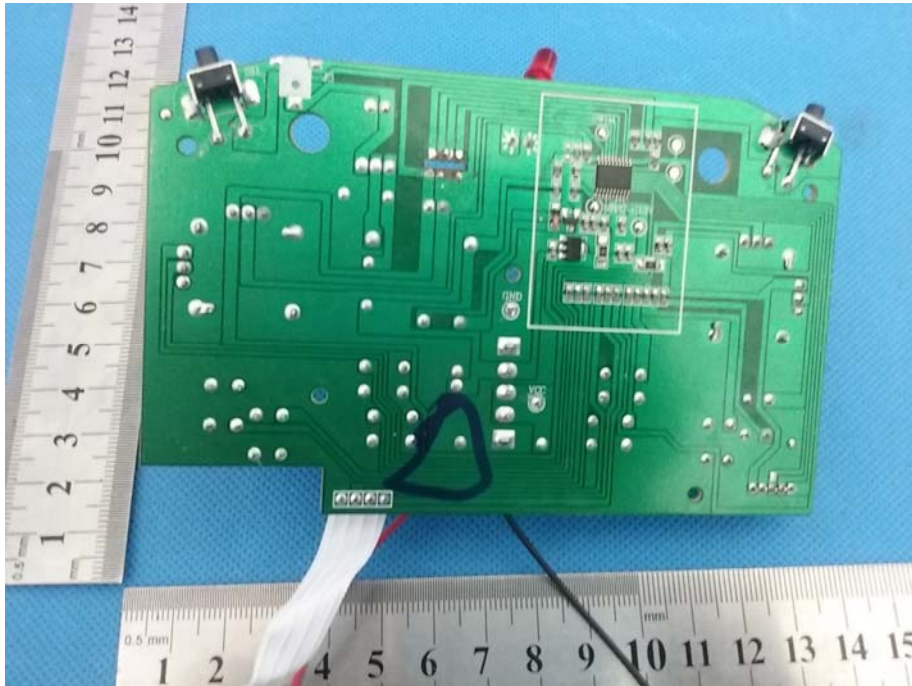

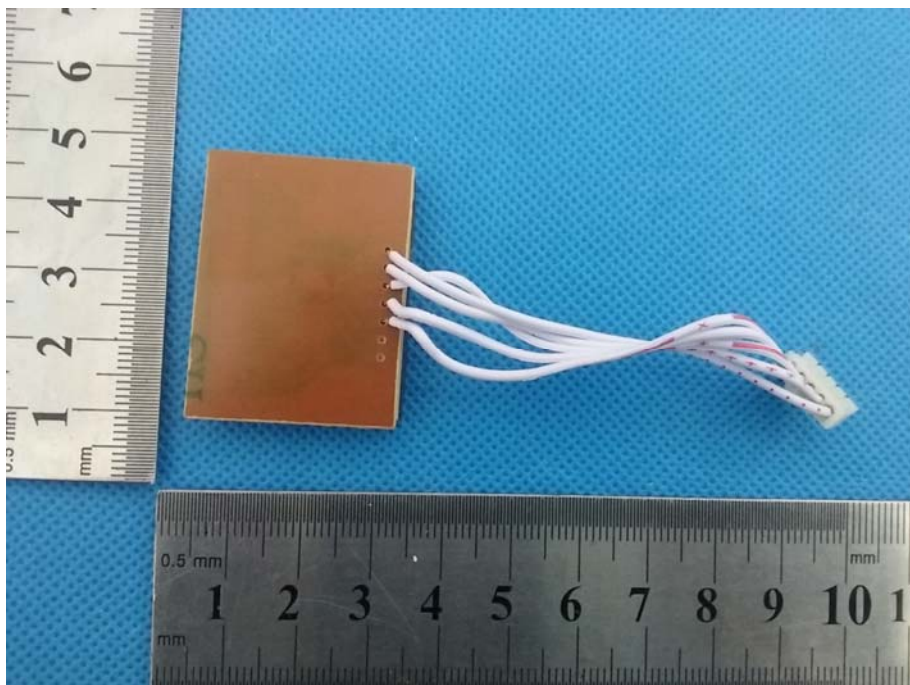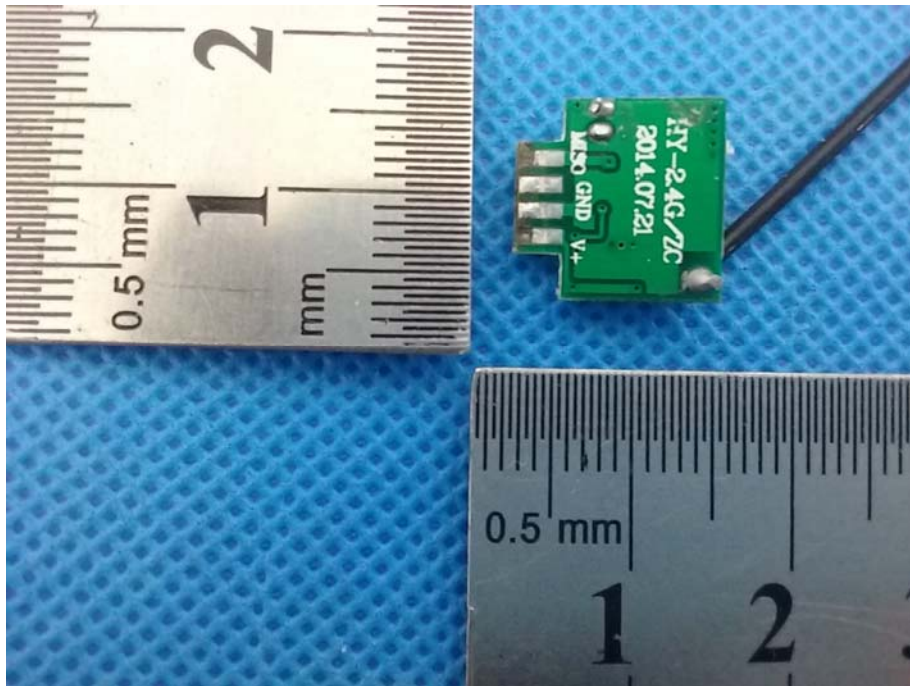

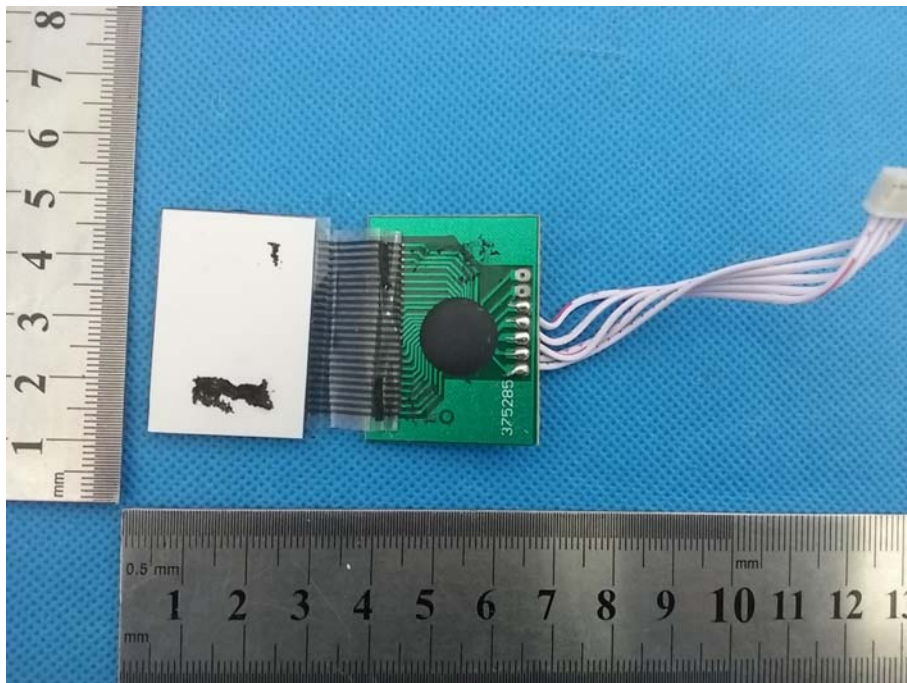

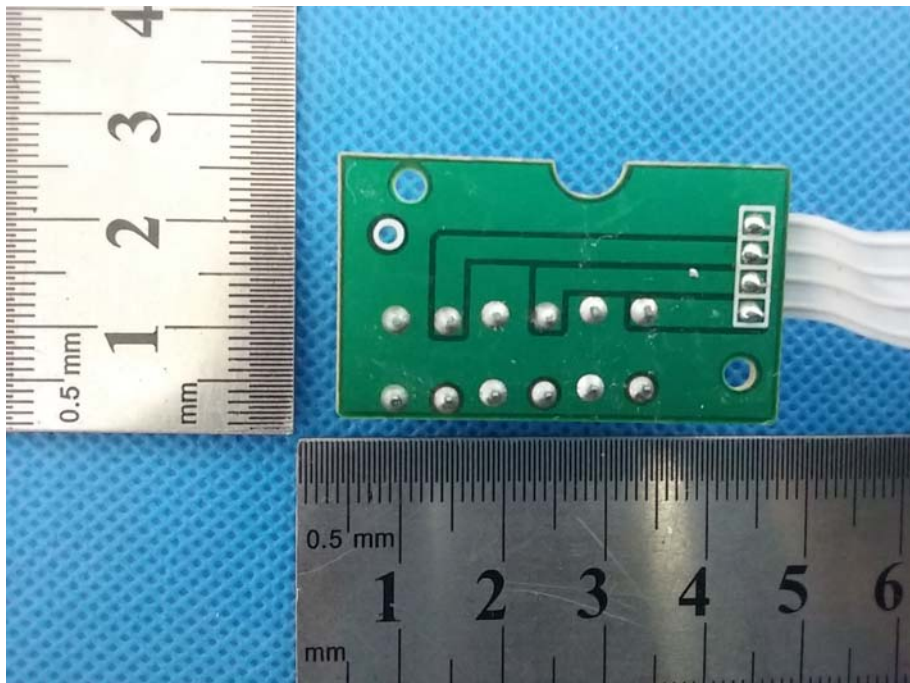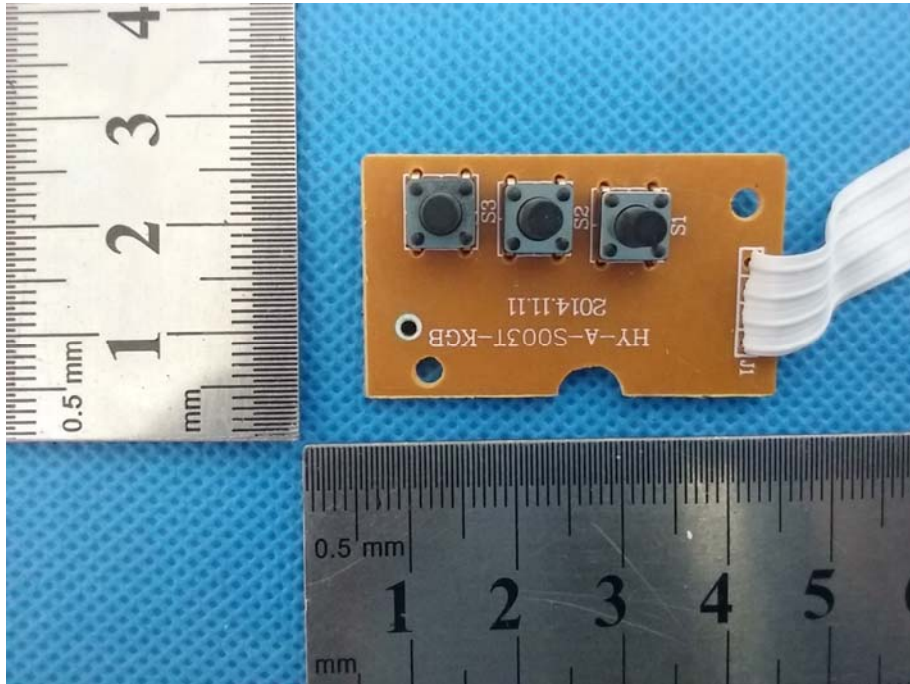

****End of report****