

Test Report

Prepared for: Sierzega Elektronik GmbH

Model: SR7

Serial Number: 35042

Project No: p2440002

Test Results: Pass

To

Host Integration KDB 996369
FCC Part 15.209
and
RSS-Gen: Issue 5 April 2018)

Date of Issue: June 5, 2024

On the behalf of the applicant:

Sierzega Elektronik GmbH
Valentinstr. 11
Thening, 4062, Austria

Attention of:

Robert Sierzega, CEO
Ph: +43 7221 64114 0
E-Mail: Robert.Sierzega@sierzega.com

Prepared By:

Compliance Testing, LLC
Mesa, AZ 85204
(480) 926-3100 phone / (480) 926-3598 fax
www.compliancetesting.com
ANAB Cert#: AT-2901
FCC Site Reg. #US2901
ISED Site Reg. #2044A-2

Reviewed / Authorized By:



Jeremiah Darden, Principal Engineer

This report may not be reproduced, except in full, without written permission from Compliance Testing. All results contained herein relate only to the sample tested. All samples were selected by the customer.

Test Results Summary

Test Date Range: May 23 – 31, 2024

Specification		Test Name	Pass, Fail, N/A	Comments
FCC	RSS			
15.209(a), 15.205	Section 5.5 / RSS-GEN Section 8.9	Radiated Spurious Emissions	Pass	Host integration per KDB 996369
15.207	RSS-GEN Section 8.8	Powerline Conducted Emissions	Pass	Only DC power applicable

Statements of conformity are reported as:

- Pass - the measured value is below the acceptance limit, *acceptance limit = test limit*.
- Fail - the measured value is above the acceptance limit, *acceptance limit = test limit*.

References/Methods	Description
ANSI C63.4-2014	Method and Measurements of Radio-Noise Emissions from low-Voltage Electrical and Electronic Equipment in the range 9kHz to 40GHz.
ANSI C63.10:2020	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
558074 D01 15.247 Meas Guidance v05r02	Guidance for Compliance Measurements on DTS, FHSS, and Hybrid System Devices Operating Under Section 15.247 of the FCC Rules
ISO/IEC 17025:2017	General requirements for the Competence of Testing and Calibrations Laboratories



Table of Contents

<u>Description</u>	<u>Page</u>
Test Results Summary	2
Test Report Revision History	4
EUT Description	5
Notifications	6
Test and Measurement Data.....	7
Test Setup and Modes of Operation	8
Powerline Conducted Emissions.....	9
Radiated Emissions.....	13
Test Equipment Utilized	22
Measurement Uncertainty	22

Test Report Revision History

Revision	Date	Revised By	Reason for Revision
1.0	June 5, 2024	Jeremiah Darden	Original Document

Current revision of the test report replaces any prior versions. Only the current version of the test report is valid.

EUT Description

Model:	SR7
Serial:	35042
Firmware:	V1.0
Software:	N/A
Description:	Vehicle Traffic Counter
Additional Information:	<p>Highest Frequency Generated: Non Radio Frequency <1250 MHz</p> <p>Radar 24GHz: FCC ID: S6P-SR7 IC: 5792A-SR7</p> <p>Co-Located Radio: Contains FCC ID's: BLE: QOQ-GM220P Cellular: XMR201910BG95M3</p> <p>Usage: Mounted near roads and streets</p>
Receipt of Sample(s):	May 16, 2024
EUT Condition:	<p>Visual Damage No</p> <p>State of Development Production/Production Equivalent</p>

EUT PHOTO



Notifications

The applicant has been cautioned as to the following.

15.21 - Information to User

The user's manual or instruction manual for an intentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

15.27(a) - Special Accessories

Equipment marked to a consumer must be capable of complying with the necessary regulations in the configuration in which the equipment is marketed. Where special accessories, such as shielded cables and/or special connectors are required to enable an unintentional or intentional radiator to comply with the emission limits in this part, the equipment must be marketed with, i.e. shipped and sold with, those special accessories. However, in lieu of shipping or packaging the special accessories with the unintentional or intentional radiator, the responsible party may employ other methods of ensuring that the special accessories are provided to the consumer without an additional charge.

Information detailing any alternative method used to supply the special accessories for a grant of equipment authorization or retained in the verification records, as appropriate. The party responsible for the equipment, as detailed in § 2.909 of this chapter, shall ensure that these special accessories are provided with the equipment. The instruction manual for such devices shall include appropriate instructions on the first page of text concerned with the installation of the device that these special accessories must be used with the device. It is the responsibility of the user to use the needed special accessories supplied with the equipment.

47 CFR 1.1307(b)(3)(ii) - For multiple RF sources

Equipment implementing multiple radios into the same host should check for co-located RF exposure conditions per FCC 1.1310 as it relates to 47 CFR 1.1307(b)(3)(ii), by using the certified radio RF Exposure reports and performing the summation calculations to confirm exemption.

Authorization Requirements

Intentional Radios may require authorization covered under the following rule parts or standards:

-47 CFR Part 2 Subpart J

-RSS-Gen — General Requirements for Compliance of Radio Apparatus



Test and Measurement Data

Subpart 2.1033(b)

All tests and measurement data shown were performed based on guidance within FCC document KDB 996369 and the standards listed within the test results summary page within this report.

Standard Engineering Practices

Unless otherwise indicated, the procedures contained in ANSI C63.10 and ANSI C63.4 were observed during testing.

Prior to testing, the EUT was tuned up in accordance with the manufacturer's alignment procedures. All external gain controls were maintained at the position of maximum and/or optimum gain throughout the testing. Measurement results, unless otherwise noted, are worst case measurement.

Standard Test Conditions and Engineering Practices

Unless otherwise indicated in the specific measurement results, the ambient temperature was maintained within the range of 10° to 40°C (50° to 104°F) and the relative humidity levels were in the range of 10% to 90%.

Environmental Conditions		
Temperature (°C)	Humidity (%)	Barometric Pressure (mbar)
25.72 – 28.39	22.5 – 25.7	965.2 – 966.4

Test Setup and Modes of Operation

EUT Operation during Tests

EUT was connected to power and operated with the installed firmware for typical operation along with all co located and integrated radios turned on. 24GHz, Bluetooth LE and Cellular (1850.2 - 1909.8 band) were operating at their highest power setting. EUT was powered by a 12VDC.

EUT:

Qty	Description	Manufacturer	Model	S/N
1	Traffic Counter	Sierzega	SR7	35042

Accessories: N/A

Cables:

Qty	Description	Length (M)	Ferrites (Y/N)	Shielding Y/N	Shielded Hood Y/N	Termination / Connection
1	Power Cable	1.8	N	N	N	EUT to 12VDC

Software/Firmware:

Name	Description	Version	Installation Info
SR7	System firmware	V1.0	Installed on EUT

Modifications to EUT(s) (Y/N): N

Powerline Conducted Emissions


Engineer: Jeremiah Darden

Test Date: May 31, 2024


Test Procedure

The EUT power cable was connected to a LISN and the monitored output of the LISN was connected to a transient limiter, which then connected directly to a spectrum analyzer. The conducted emissions from 150 kHz to 30 MHz were measured and compared to the specification limits.


Basic Test Setup

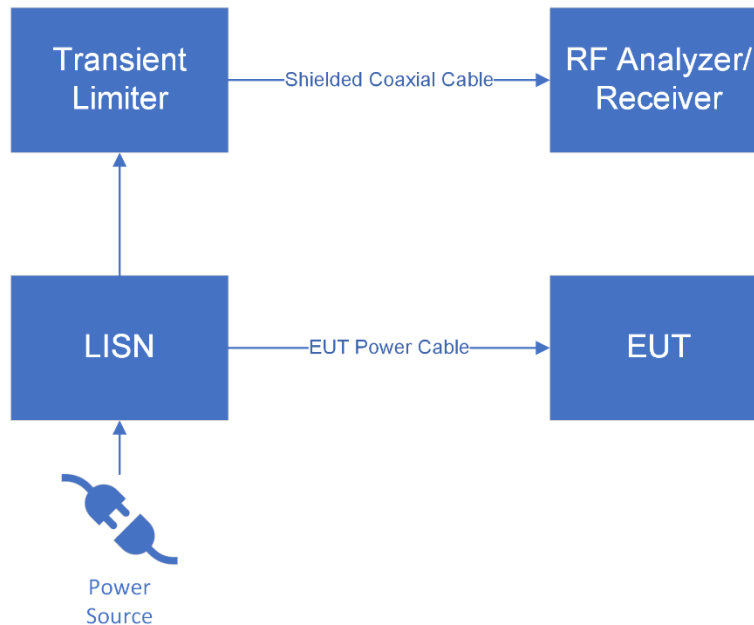

DC Powerline Conducted Emissions. (12VDC)


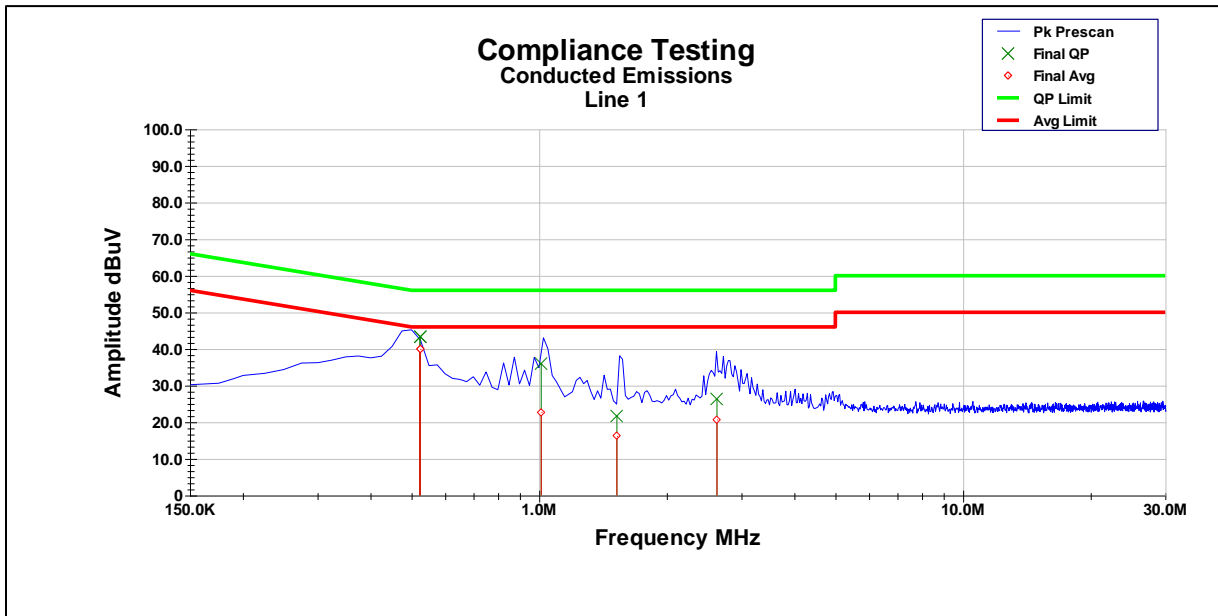


Frequency	Raw QP	Raw Avg	Path Loss	Final QP	Final Avg	QP Limit	QP Margin	Avg Limit	Avg Margin
-	dBuV	dBuV	dB	dBuV	dBuV	dBuV	dB	dBuV	dB
523.13 KHz	33.10	29.90	10.10	43.20	40.00	56.00	-12.80	46.00	-6.00
524.38 KHz	33.30	29.90	10.10	43.30	40.00	56.00	-12.70	46.00	-6.00
1.0118 MHz	25.90	12.70	10.10	36.00	22.80	56.00	-20.00	46.00	-23.20
1.526 MHz	11.70	6.10	10.10	21.80	16.20	56.00	-34.20	46.00	-29.80
2.6281 MHz	16.20	10.60	10.10	26.30	20.80	56.00	-29.70	46.00	-25.20
Final = Raw + Path Loss									
Margin = Final - Limit									

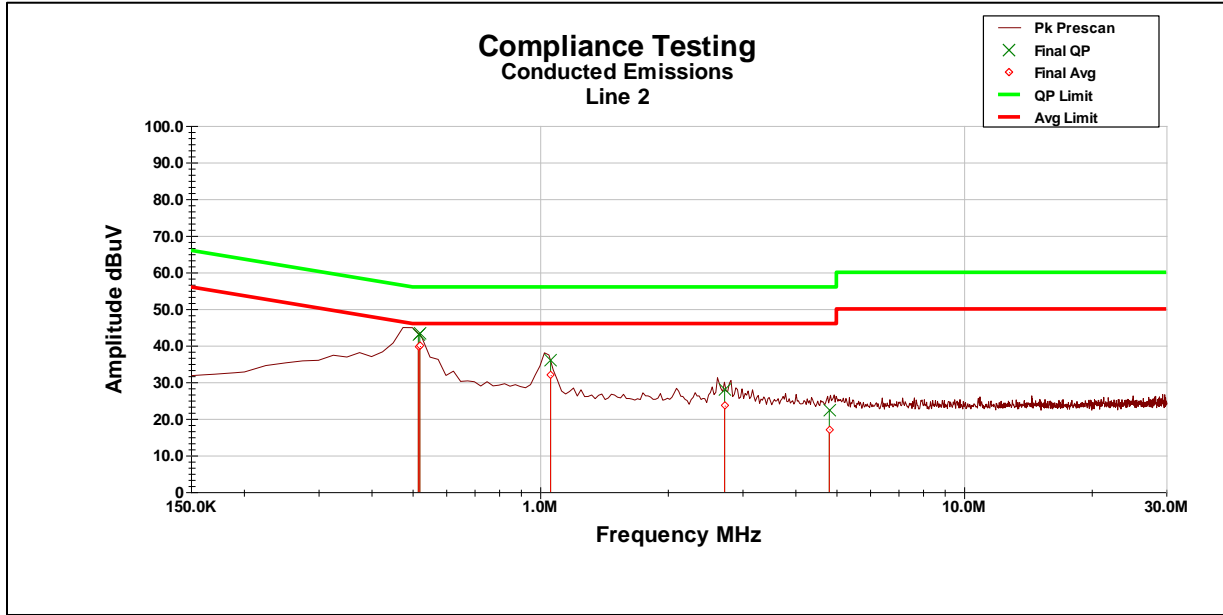

Frequency	Raw QP	Raw Avg	Path Loss	Final QP	Final Avg	QP Limit	QP Margin	Avg Limit	Avg Margin
-	dBuV	dBuV	dB	dBuV	dBuV	dBuV	dB	dBuV	dB
516.13 KHz	32.86	29.50	10.00	42.90	39.60	56.00	-13.10	46.00	-6.40
520.38 KHz	33.14	29.80	10.00	43.20	39.90	56.00	-12.80	46.00	-6.10
1.0586 MHz	25.86	21.90	10.10	35.90	31.90	56.00	-20.10	46.00	-14.10
2.7244 MHz	17.75	13.50	10.10	27.80	23.60	56.00	-28.20	46.00	-22.40
4.8119 MHz	12.34	7.00	10.10	22.50	17.10	56.00	-33.50	46.00	-28.90
Final = Raw + Path Loss									
Margin = Final - Limit									

Conducted Emissions Test Setup Photo

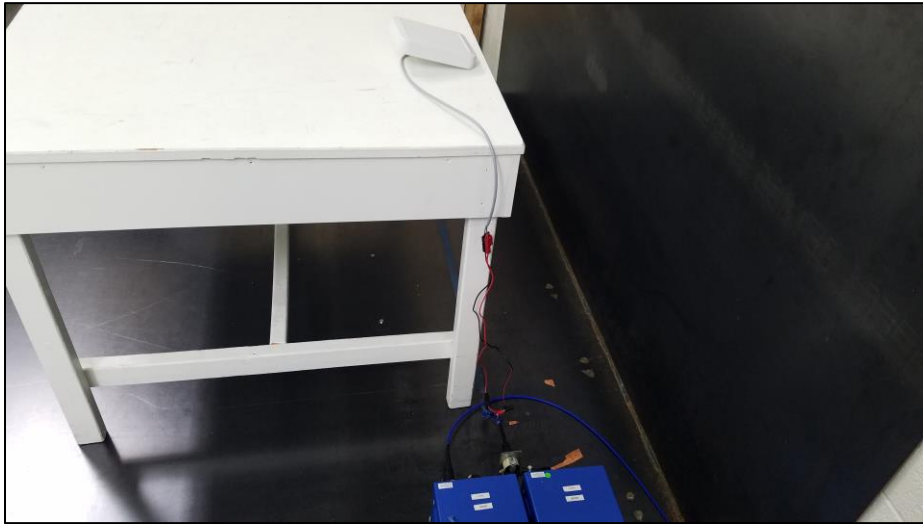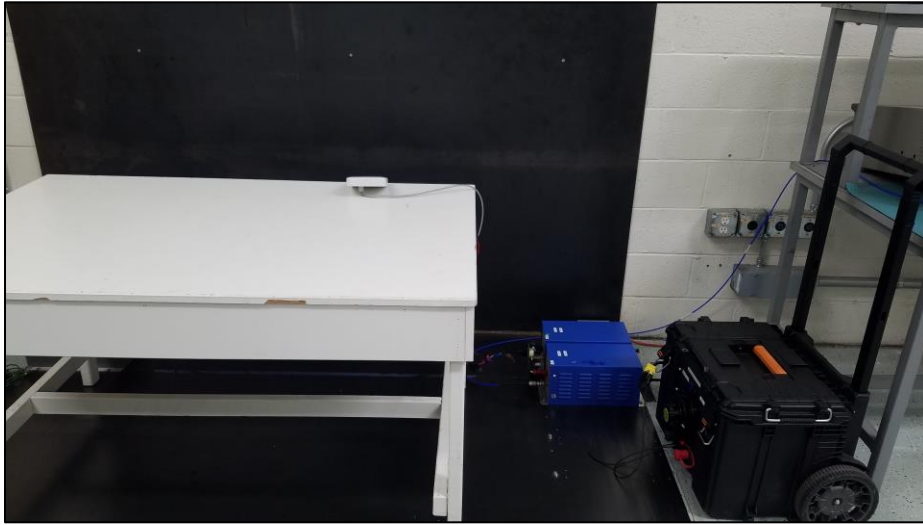

Radiated Emissions


Engineer: Jeremiah Darden

Test Date: May 23, 2024

Test Procedure

The EUT was tested in a semi-anechoic chamber with the turntable set 3m from the receiving antenna. A spectrum analyzer was used to verify that the EUT met the requirements for Radiated Emissions. The EUT was tested by rotating it 360 degrees with the antennas in both the vertical and horizontal orientation while raised from 1 to 4 meters to ensure the signal levels were maximized. All emissions from 30 MHz to 26 GHz were examined.

Basic Test Setup

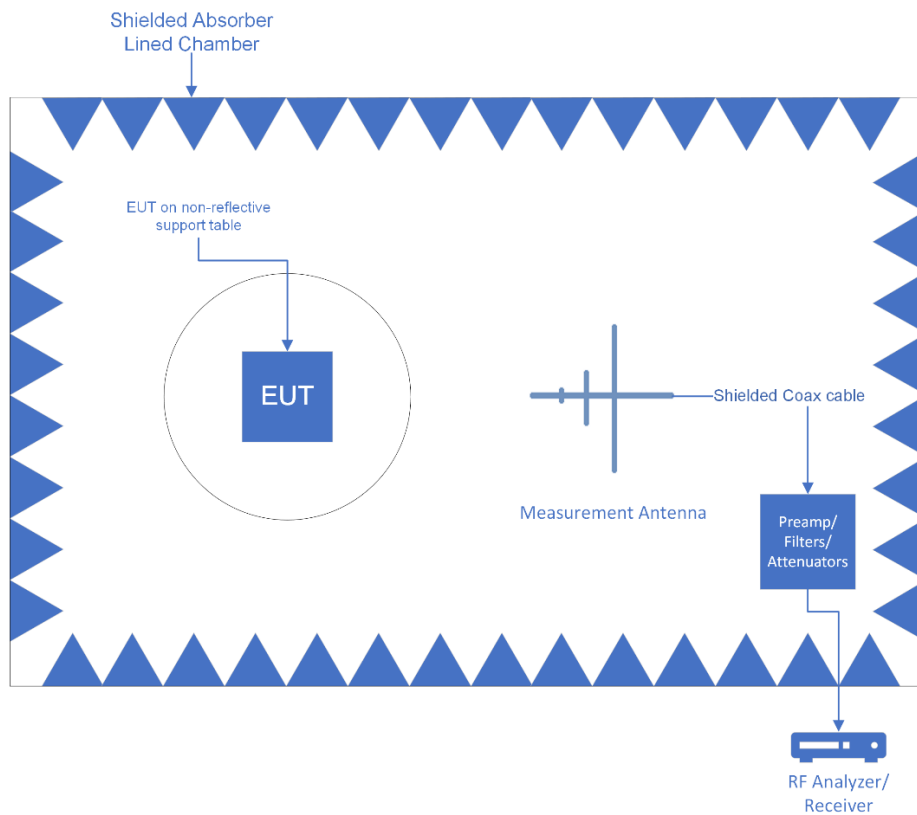


	Settings Below 1GHz	Settings Above 1GHz
RBW	120 kHz	1 MHz
VBW	300 kHz	3 MHz
Detector	Quasi Peak	Peak / Average

Sample Calculations


Corrected Value = Measured Value + Correction factor

Correction factor = Antenna Correction Factor + Cable loss + Preamp/Attenuator Factor

Radiated Emissions 30-1000MHz

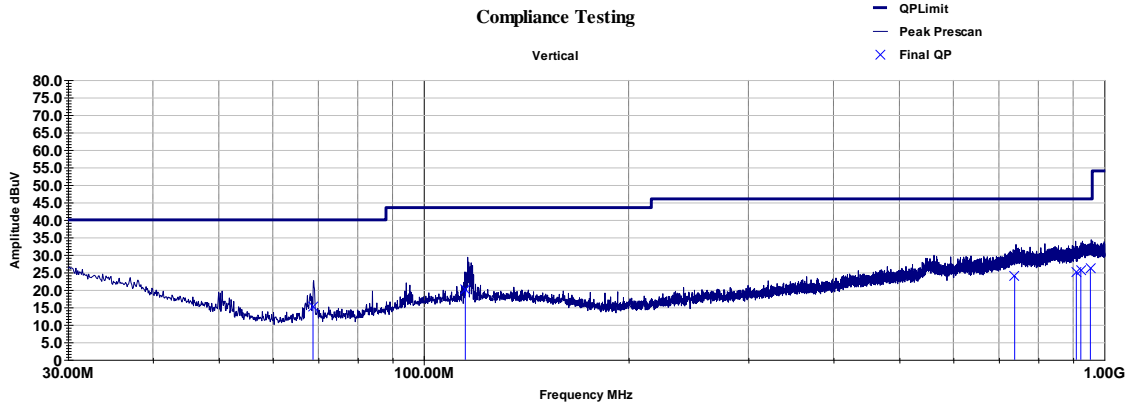

Frequency	Azimuth	Height	Raw QP	Correction	Final QP	Limit	QP Margin
MHz	deg	cm	dBuV	dB	dBuV/m	dBuV/m	dB
68.748	5.00	100.00	43.70	-28.45	15.30	40.00	-24.70
115.122	164.00	121.00	42.99	-22.80	20.20	43.50	-23.30
738.397	316.00	151.00	33.61	-9.66	23.90	46.00	-22.10
909.746	352.00	196.00	33.41	-8.34	25.10	46.00	-20.90
923.494	253.00	359.00	33.42	-7.79	25.60	46.00	-20.40
953.923	124.00	364.00	33.34	-7.17	26.20	46.00	-19.80
Final = Raw + Path Loss							
Margin = Final - Limit							


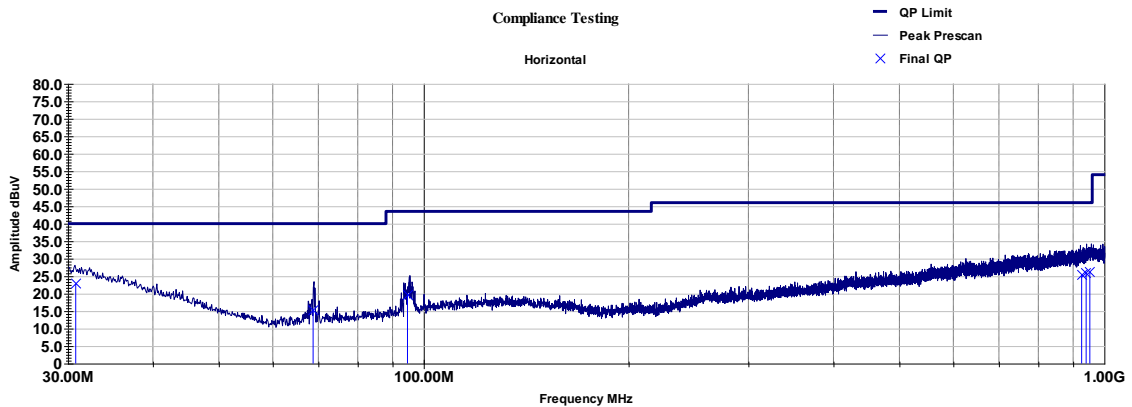


Frequency	Azimuth	Height	Raw QP	Correction	Final QP	Limit	QP Margin
MHz	deg	cm	dBuV	dB	dBuV/m	dBuV/m	dB
30.807	330.00	325.00	38.47	-15.65	22.80	40.00	-17.20
68.781	260.00	400.00	43.70	-28.52	15.20	40.00	-24.80
94.657	115.00	245.00	44.92	-25.24	19.70	43.50	-23.80
926.183	308.00	326.00	33.44	-8.05	25.40	46.00	-20.60
940.325	143.00	325.00	33.47	-7.47	26.00	46.00	-20.00
952.246	344.00	247.00	33.30	-7.17	26.10	46.00	-19.90
Final = Raw + Path Loss							
Margin = Final - Limit							


Radiated Emissions Above 1000MHz

Radio Host Integration/Co-Location 1-3.7GHz


Fundamental of BLE and Cellular

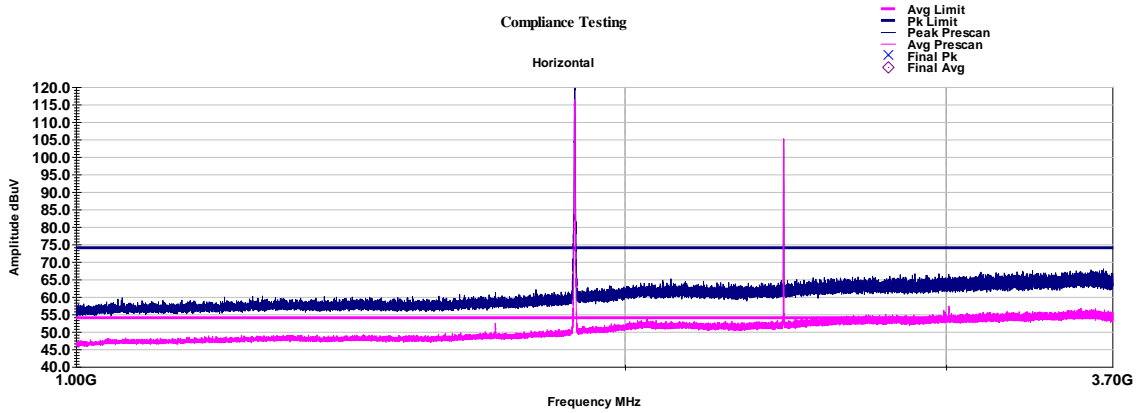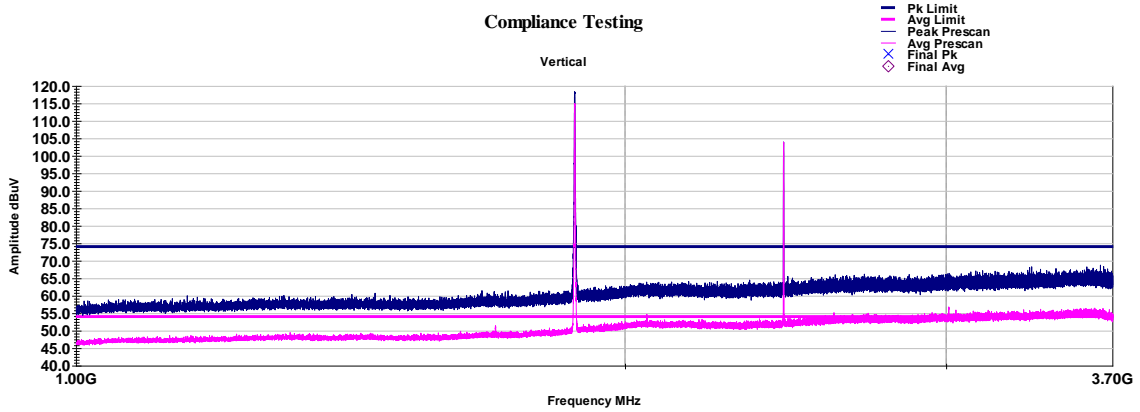

Radio Host Integration/Co-Location 3.7 – 18GHz
 Harmonics of BLE and Cellular

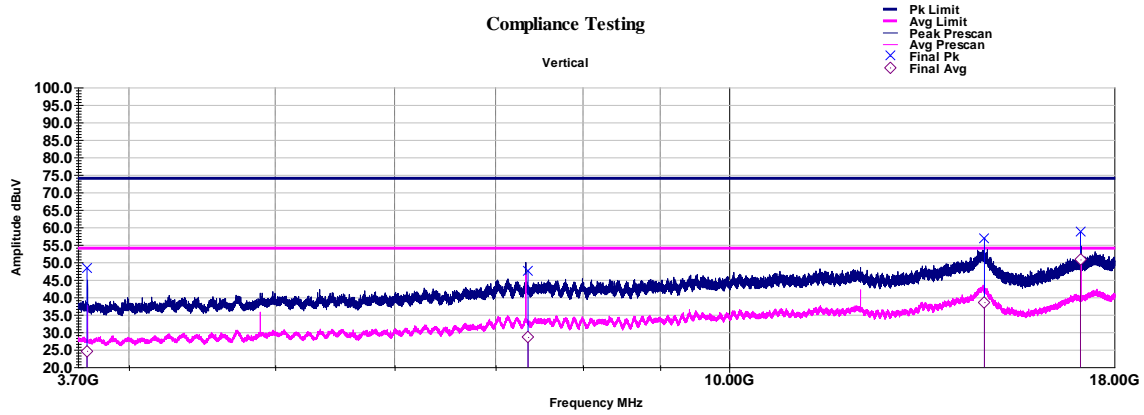


Frequency	Azimuth	Height	Raw Pk	Raw Avg	Correction	Final Pk	Pk Limit	Pk Margin	Final Avg	Avg Limit	Avg Margin
GHz	deg	cm	dBuV	dBuV	dB	dBuV/m	dBuV/m	dB	dBuV/m	dBuV/m	dB
3.75196725	169.00	392.00	57.67	34.08	-9.43	48.24	74.00	-25.77	24.65	54	-29.35
7.3559335	252.00	157.00	48.27	29.33	-0.73	47.54	74.00	-26.46	28.60	54	-25.40
14.76437575	78.00	325.00	50.62	32.36	6.23	56.85	74.00	-17.15	38.59	54	-15.41
17.09403	212.00	113.00	52.37	44.44	6.35	58.72	74.00	-15.28	50.80	54	-3.20
Final = Raw + Path Loss											
Margin = Final - Limit											

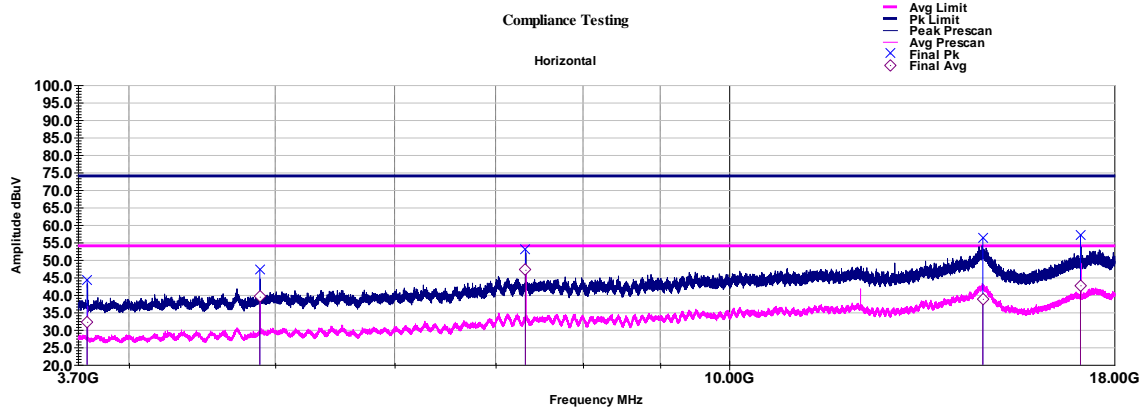


Frequency	Azimuth	Height	Raw Pk	Raw Avg	Correction	Final Pk	Pk Limit	Pk Margin	Final Avg	Avg Limit	Avg Margin
GHz	deg	cm	dBuV	dBuV	dB	dBuV/m	dBuV/m	dB	dBuV/m	dBuV/m	dB
3.75246725	189.00	399.00	53.63	41.69	-9.43	44.20	74.00	-29.80	32.26	54	-21.74
4.884077	128.00	163.00	54.43	46.55	-7.09	47.34	74.00	-26.66	39.46	54	-14.54
7.32600375	283.00	394.00	53.48	47.71	-0.56	52.92	74.00	-21.08	47.15	54	-6.85
14.726466	47.00	204.00	49.80	32.35	6.49	56.29	74.00	-17.71	38.84	54	-15.16
17.09402475	165.00	158.00	50.80	36.38	6.35	57.15	74.00	-16.85	42.73	54	-11.27
Final = Raw + Path Loss											
Margin = Final - Limit											

Radio Host Integration/Co-Location 18-26GHz

Harmonics from BLE and Cellular, Fundamental of 24GHz Radar

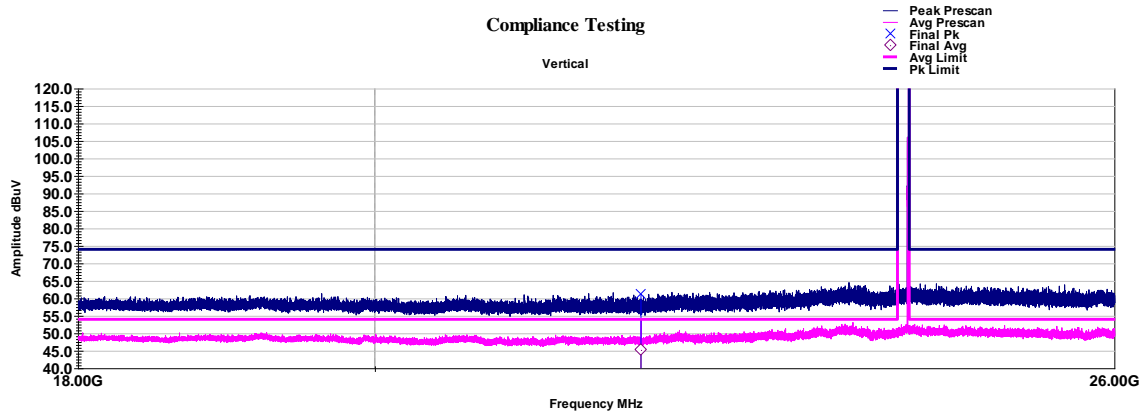

Frequency	Azimuth	Height	Raw Pk	Raw Avg	Correction	Final Pk	Pk Limit	Pk Margin	Final Avg	Avg Limit	Avg Margin
GHz	deg	cm	dBuV	dBuV	dB	dBuV/m	dBuV/m	dB	dBuV/m	dBuV/m	dB
21.980813	127.00	136.00	41.56	25.61	19.62	61.17	73.98	-12.81	45.22	53.98	-8.76
Final = Raw + Path Loss											
Margin = Final - Limit											

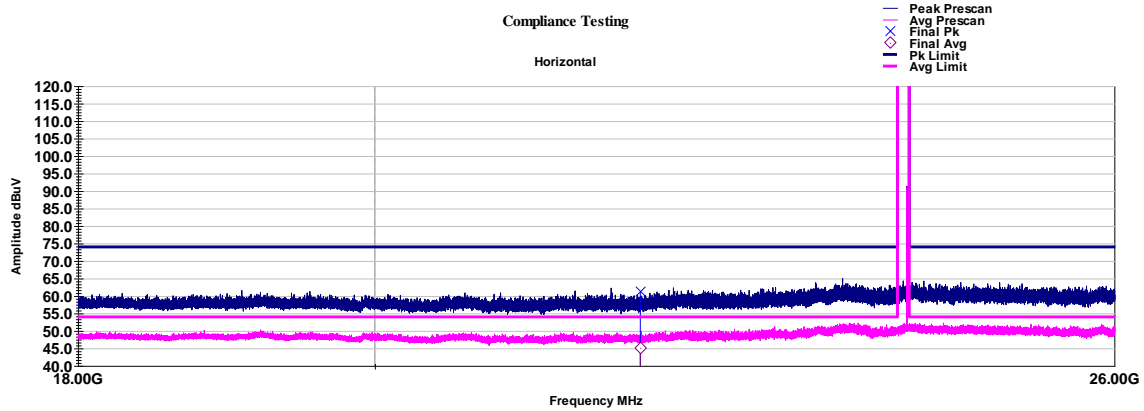


Frequency	Azimuth	Height	Raw Pk	Raw Avg	Correction	Final Pk	Pk Limit	Pk Margin	Final Avg	Avg Limit	Avg Margin
GHz	deg	cm	dBuV	dBuV	dB	dBuV/m	dBuV/m	dB	dBuV/m	dBuV/m	dB
21.975276	253.00	166.00	41.58	25.52	19.60	61.18	73.98	-12.80	45.12	53.98	-8.86
Final = Raw + Path Loss											
Margin = Final - Limit											


Radiated Emissions Test Setup Photos
30-1000MHz




30-1000MHz

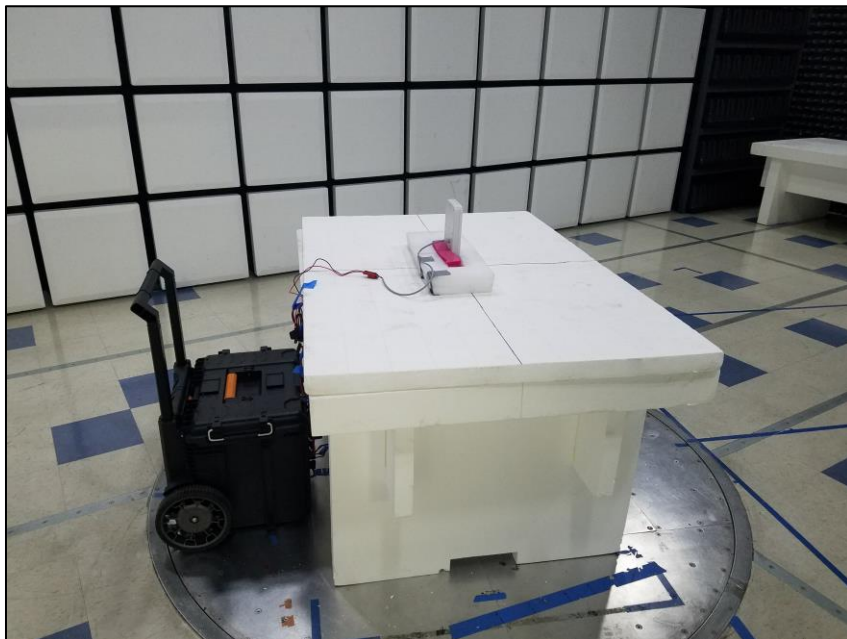

Radiated Emissions Test Setup Photos >1GHz

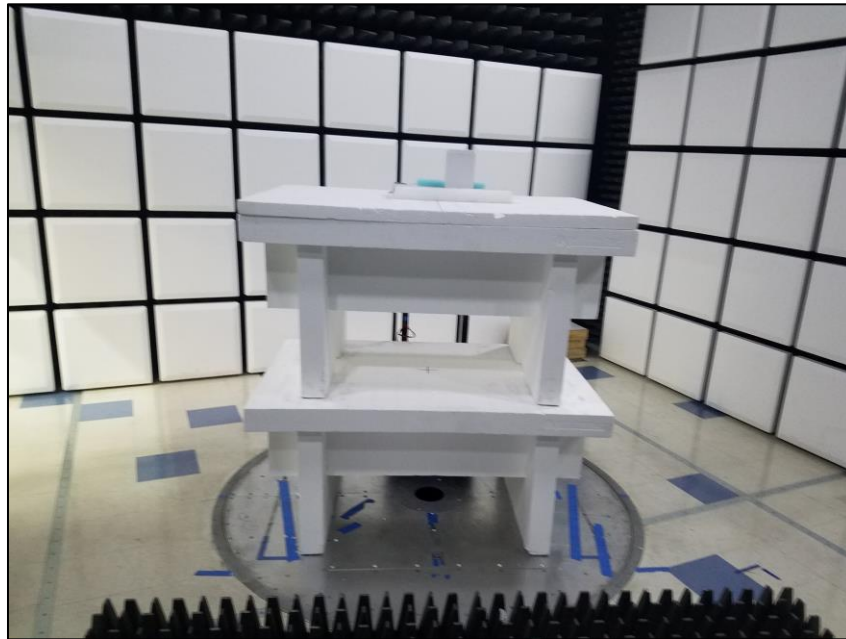

>1GHz

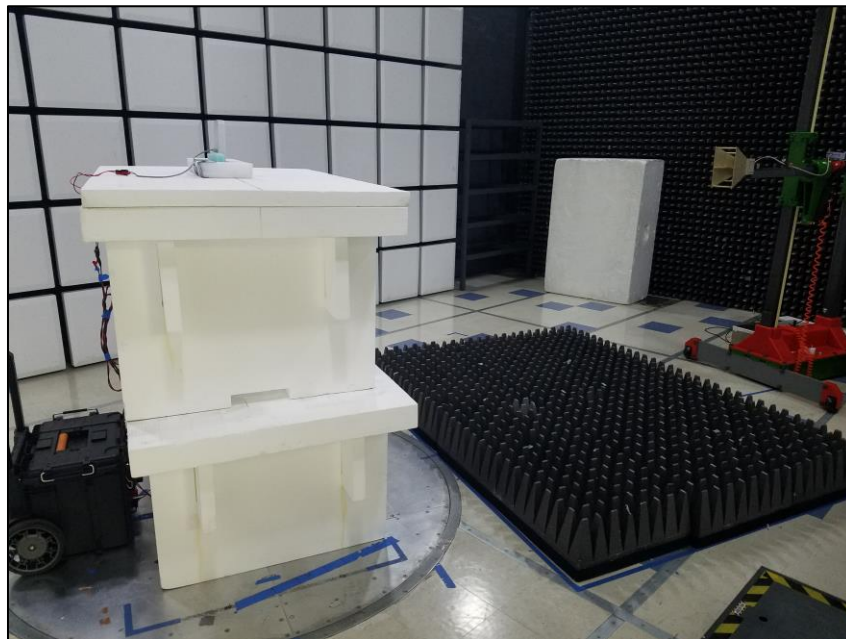

Test Equipment Utilized

Description	Manufacturer	Model #	CT Asset #	Last Cal Date	Cal Due Date
Bilog Antenna 0.030-1.0GHz	Schaffner	CBL6111C	i00349	02/07/23	02/06/25
ultra wideband LNA 10MHz-45GHz	RF-Lambda USA	RLNA00M45GA	i00555	02/19/24	02/19/25
9kHz-44GHz CISPR comp. receiver	Keysight	N9038A	i00552	03/01/24	03/01/25
temperature/humidity/pressure probe	Omega Engineering, Inc.	iBTHX-W-5	i00629	01/25/23	01/24/25
temperature/humidity/pressure probe	Omega Engineering, Inc.	iBTHX-W	i00686	01/25/23	01/24/25
EMI Receiver	Hewlett Packard	85462A	i00033	6/21/23	6/21/24
Transient Limiter	Com-Power	LIT-153	i00123	Verified on: 4/30/24	
Voltmeter	Fluke	87-iii	i00319	5/8/23	5/8/24
AC Power Source	Behlman	BL 6000	i00362	N/A	
LISN	COM-Power	LI-125A	i00446	3/18/24	3/18/26
LISN	COM-Power	LI-125A	i00448	3/18/24	3/18/26
RF Amplifier 10MHz-50GHz, 40dB gain amp.	Eravant	SBB-0115034019-2F2F-E3	i00722	02/7/24	02/7/25
1-18GHz Horn Antenna	Antenna Research Assoc	DRG-118/A	i00271	08/11/22	08/10/24
Antenna, Horn 18-40GHz	EMCO	3116	I00085	03/14/23	03/13/25
Network analyzer	HP	8753D	i00505	11/03/23	11/02/24
Spectrum Analyzer 3Hz-13.2GHz	Agilent	E4445A	I00471	01/05/24	01/05/25

In addition to the above listed equipment standard RF connectors and cables were utilized in the testing of the described equipment. Prior to testing these components were tested to verify proper operation.

Measurement Uncertainty

Measurement Uncertainty for Compliance Testing is listed in the table below.

Measurement	U_{lab}
Radio Frequency	$\pm 3.3 \times 10^{-8}$
RF Power, conducted	± 1.5 dB
RF Power Density, conducted	± 1.0 dB
Conducted Emissions	± 1.8 dB

Measurement	U_{lab}
Radiated Emissions 9kHz-30MHz	± 3.6 dB
Radiated Emissions 30MHz-1000MHz	± 4.25 dB
Radiated Emissions – 1GHz-18GHz	± 4.5 dB
Temperature	± 1.5 deg C
Humidity	± 4.3 %
DC voltage	± 0.20 VDC
AC Voltage	± 1.2 VAC

The reported expanded uncertainty $\pm U_{lab}$ (dB) has been estimated at a 95% confidence level ($k=2$) U_{lab} is less than or equal to U_{EMC} therefore;

- Compliance is deemed to occur if no measured disturbance exceeds the disturbance limit.
- Non-Compliance is deemed to occur if any measured disturbance exceeds the disturbance limit.

END OF TEST REPORT