

EMC TEST REPORT for Intentional Radiator

No. 150500091SHA-001

Applicant : Cixi City Yidong Electronic Co., Ltd.
Guanhaiwei Industrial West Zone, Cixi City, Ningbo
315315, China

Manufacturer : Cixi City Yidong Electronic Co., Ltd.
Guanhaiwei Industrial West Zone, Cixi City, Ningbo
315315, China

Product Name : Wi-Fi Smart Adaptor

Type/Model : WFU-1

SUMMARY

The equipment complies with the requirements according to the following standard(s):

47CFR Part 15 (2014): Radio Frequency Devices (Subpart C)

ANSI C63.10 (2009): American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

Date of issue: June 8, 2015

Prepared by:



Nemo Li (*Project Engineer*)

Reviewed by:



Daniel Zhao (*Reviewer*)



FCC ID: S72-WFU1
IC: 10931A-WFU1

Description of Test Facility

Name: Intertek Testing Services Limited Shanghai
Address: Building 86, No. 1198 Qinzhou Rd., North, Shanghai 200233, P.R. China

FCC Registration Number: 236597
IC Assigned Code: 2042B-1

Name of contact: Jonny Jing
Tel: +86 21 61278271
Fax: +86 21 54262353

Content

SUMMARY.....	1
DESCRIPTION OF TEST FACILITY.....	2
1. GENERAL INFORMATION	4
1.1 Applicant Information.....	4
1.2 Identification of the EUT	4
1.3 Technical specification	5
2. TEST SPECIFICATION	6
2.1 Instrument list	6
2.2 Test Standard	7
2.3 Mode of operation during the test / Test peripherals used.....	8
2.4 Test Summary	10
3. MINIMUM 6dB BANDWIDTH	11
3.1 Limit.....	11
3.2 Test Configuration	11
3.3 Test Procedure and test setup.....	11
4. MAXIMUM PEAK OUTPUT POWER	20
4.1 Test limit	20
4.2 Test Configuration	20
4.3 Test procedure and test setup	20
4.4 Test protocol	21
5. POWER SPECTRUM DENSITY	22
5.1 Test limit	22
5.2 Test Configuration	22
5.3 Test procedure and test setup	22
5.4 Test Protocol	23
6. RADIATED EMISSION IN THE RESTRICTED BANDS	31
6.1 Test limit	31
6.2 Test Configuration	31
6.3 Test procedure and test setup	32
6.4 Test protocol	33
7. EMISSION OUTSIDE THE FREQUENCY BAND	37
7.1 Limit.....	37
7.2 Test Configuration	37
7.3 Test procedure and test setup	37
7.4 Test protocol	39
8. POWER LINE CONDUCTED EMISSION	45
8.1 Limit.....	45
8.2 Test configuration	45
8.3 Test procedure and test set up	46
8.4 Test protocol	47



FCC ID: S72-WFU1
IC: 10931A-WFU1

1. General Information

1.1 Applicant Information

Applicant : Cixi City Yidong Electronic Co., Ltd.
Guanhaiwei Industrial West Zone, Cixi City, Ningbo 315315,
China
Name of contact : Shen Mengjie
Tel : 86 574 63630755
Fax : 86 574 63630188
Manufacturer : Cixi City Yidong Electronic Co., Ltd.
Guanhaiwei Industrial West Zone, Cixi City, Ningbo 315315,
China

1.2 Identification of the EUT

Product Name : Wi-Fi Smart Adaptor
Type/model : WFU-1
FCC ID : S72-WFU1
IC : 10931A-WFU1

1.3 Technical specification

Operation Frequency : 2400~2483.5 MHz;

Band

Type of Modulation : CCK,BPSK,QPSK,DSSS,OFDM

EUT Modes of : 802.11b/g;

Modulation 802.11n HT20, 802.11n HT40;

Channel Number : 11Channel for 2412MHz~2462MHz for 11b,11g,11n HT20;
7 Channel for 2422MHz~2452MHz for 11n HT40;

Description of EUT : The EUT is an adaptor containing Wi-Fi module and has only one model.

Port identification : power ports

Antenna : Chip antenna, 3.45dBi

Rating : 125V~ 60Hz

Category of EUT : Class B

EUT type : ☒ Table top ☐ Floor standing

Sample received date : May 5, 2015

Sample Identification : /
No

Date of test : May 5, 2015 – May 30, 2015

2. Test Specification

2.1 Instrument list

Equipment	Type	Manu.	Internal no.	Cal. Date	Due date
Test Receiver	ESCS 30	R&S	EC 2107	2014-10-21	2015-10-20
Test Receiver	ESIB 26	R&S	EC 3045	2014-10-20	2015-10-19
Test Receiver	ESCI 7	R&S	EC4501	2014-12-29	2015-12-28
Spectrum Analyzer	N9010	Agilent	EC4890	2014-10-21	2015-10-20
Spectrum Analyzer	E4446	Agilent	/	2014-10-21	2015-10-20
Power meter	ML 2495A	Anritsu	EC 4895	2014-10-21	2015-10-20
A.M.N.	ESH2-Z5	R&S	EC 3119	2015-1-9	2016-1-8
Bilog Antenna	CBL 6112D	TESEQ	EC 4206	2015-5-15	2016-5-14
Horn antenna	HF 906	R&S	EC 3049	2015-5-12	2016-5-11
Pre-amplifier	Pre-amp 18	R&S	EC 3222	2015-4-11	2016-4-10
Pre-amplifier	Tpa0118-40	R&S	EC 4792-2	2015-4-11	2016-4-10
Log-period antenna	AT 1080	AR	EC 3044-7	2015-5-21	2016-5-20
Biconical antenna	3109PX	ETS	EC3564	2014-8-25	2015-8-24
Semi-anechoic chamber	-	Albatross project	EC 3048	2015-5-20	2016-5-19
Shielded room	-	Zhongyu	EC 2838	2015-1-12	2016-1-11
Shielded room	-	Zhongyu	EC 2839	2015-1-12	2016-1-11
High Pass Filter	WHKX 1.0/15G-10SS	Wainwright	EC4297-1	2015-2-1	2016-1-31
High Pass Filter	WHKX 2.8/18G-12SS	Wainwright	EC4297-2	2015-2-1	2016-1-31
High Pass Filter	WHKX 7.0/1.8G-8SS	Wainwright	EC4297-3	2015-2-1	2016-1-31
Band Reject Filter	WRCGV 2400/2483-2390/2493-35/10SS	Wainwright	EC4297-4	2015-2-1	2016-1-31
MXG Analog Signal Generator	N5181A	KEYSIGHT	EC5338-2	2014-11-7	2015-11-6
MXG Vector Signal Generator	N51812B	KEYSIGHT	EC5175	2014-12-30	2015-12-29
Power sensor	U2021XA	KEYSIGHT	EC5338-1	2014-10-2	2015-10-1
PXA Signal Analyzer	N9030A	KEYSIGHT	EC5338	2014-11-18	2015-11-17



FCC ID: S72-WFU1
IC: 10931A-WFU1

2.2 Test Standard

47CFR Part 15 (2014)
ANSI C63.10 (2009)
KDB 558074 (V03R03)

2.3 Mode of operation during the test / Test peripherals used

While testing transmitting mode of EUT, the engineering mode was applied and continuously transmission was applied.

The lowest, middle and highest channel were tested as representatives.

Freq. Band	Modulation	Lowest(MHz)	Middle(MHz)	Highest(MHz)
2400-2483.5 MHz	802.11b	2412	2437	2462
	802.11g	2412	2437	2462
	802.11n HT20	2412	2437	2462
	802.11n HT40	2422	2437	2452

Test software setting:

The power level setting for 802.11b/g/n is used with ART software offered by the manufactory.

Mode 1	Frequency (MHz)	ART Gain Setting	Note
802.11b	2412	98	-
	2437	98	-
	2462	98	-
802.11g	2412	100	-
	2437	100	-
	2462	100	-
802.11n20	2412	98	-
	2437	98	-
	2462	98	-
802.11n40	2422	97	-
	2437	97	-
	2452	97	-

Data rate VS Power

The pre-scan for the conducted power with all rates in each modulation and bands was used, and the worst case was found and used in all test cases.

After this pre-scan, we choose the following table of the data rate as the worst case.

Freq. Band	Modulation	Worst case data rate
2400-2483.5MHz	802.11b	1Mbps
	802.11g	6Mbps
	802.11n HT20	MCS0
	802.11n HT40	MCS0

Duty cycle:

Duty cycle	Duty cycle(x)	Duty cycle factor (dB)
802.11b	1.00	0.00
802.11g	1.00	0.00
802.11n20	1.00	0.00
802.11n40	1.00	0.00

Test peripherals used:

Item No	Name	Band and Model	Description	S/No
1	Laptop computer	HP ProBook 6470b	100-240V AC, 50/60Hz	NA

2.4 Test Summary

This report applies to tested sample only. This report shall not be reproduced in part without written approval of Intertek Testing Service Shanghai Limited.

TEST ITEM	FCC REFERENCE	RESULT
Minimum 6dB Bandwidth & Occupied bandwidth	15.247(a)(2)	Pass
Maximum peak output power	15.247(b)	Pass
Power spectrum density	15.247(e)	Pass
Radiated emission	15.205 & 15.209	Pass
Emission outside the frequency band	15.247(d)	Pass
Power line conducted emission	15.207	Pass


3. Minimum 6dB Bandwidth

Test result: PASS

3.1 Limit

For systems using digital modulation techniques that may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz and 5725 - 5850 MHz bands, the minimum 6 dB bandwidth shall be at least 500 kHz.

3.2 Test Configuration

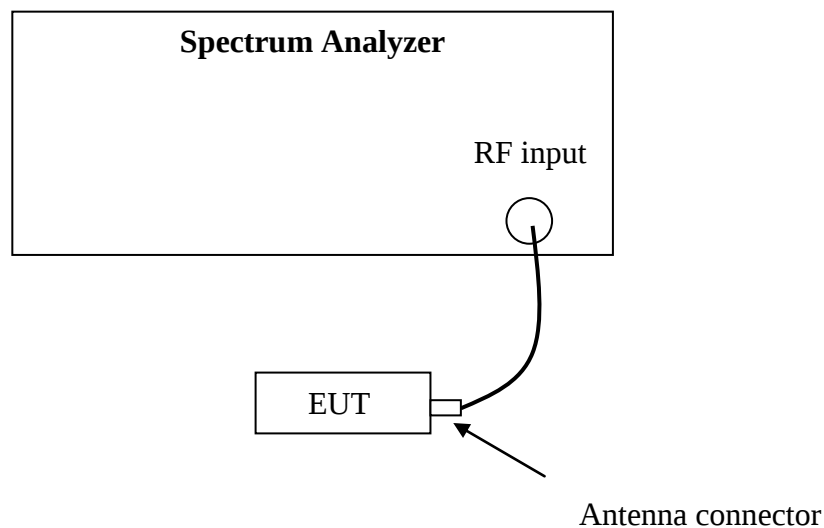

3.3 Test Procedure and test setup

The minimum 6dB bandwidth per FCC §15.247(a)(2) is measured using the Spectrum Analyzer according to DTS test procedure of “KDB558074 D01 DTS Meas Guidance v03r03” for compliance to FCC 47CFR 15.247 requirements(clause 8.2).


- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

3.4 Test Protocol


Temperature : 25°C
Relative Humidity : 55%

Mode	Channel	6dB Bandwidth (MHz)	Limit (MHz)
802.11b	L	10.12	≥0.5
	M	10.08	
	H	10.04	


Channel L – 6dB Bandwidth

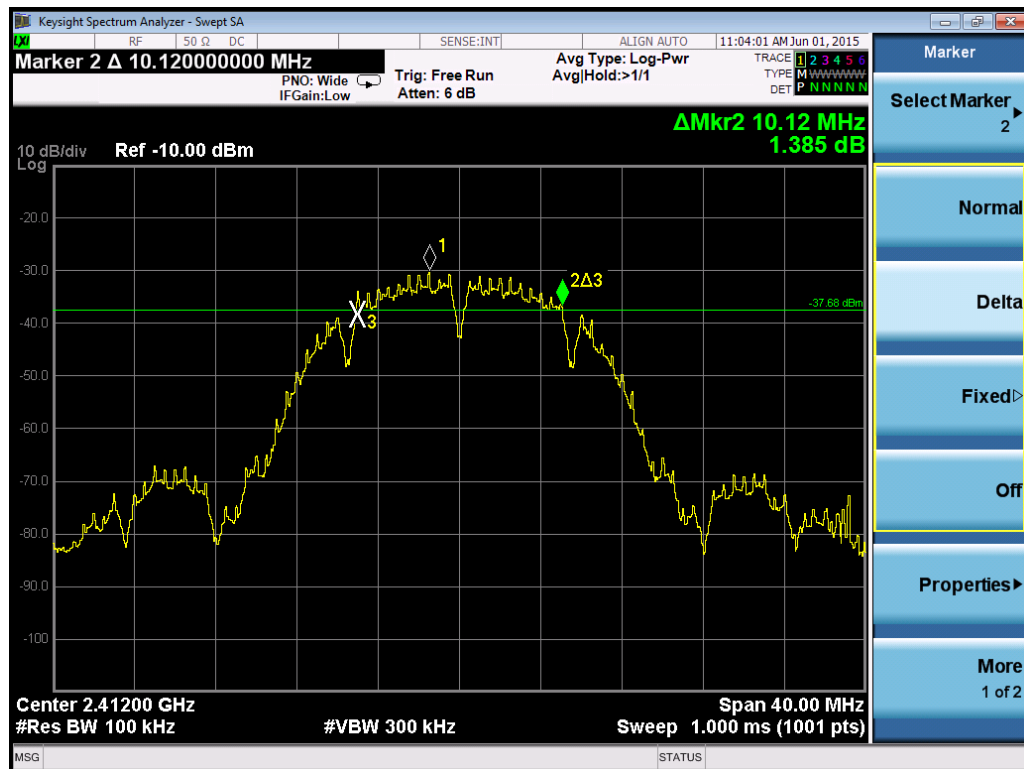

Channel M – 6dB Bandwidth

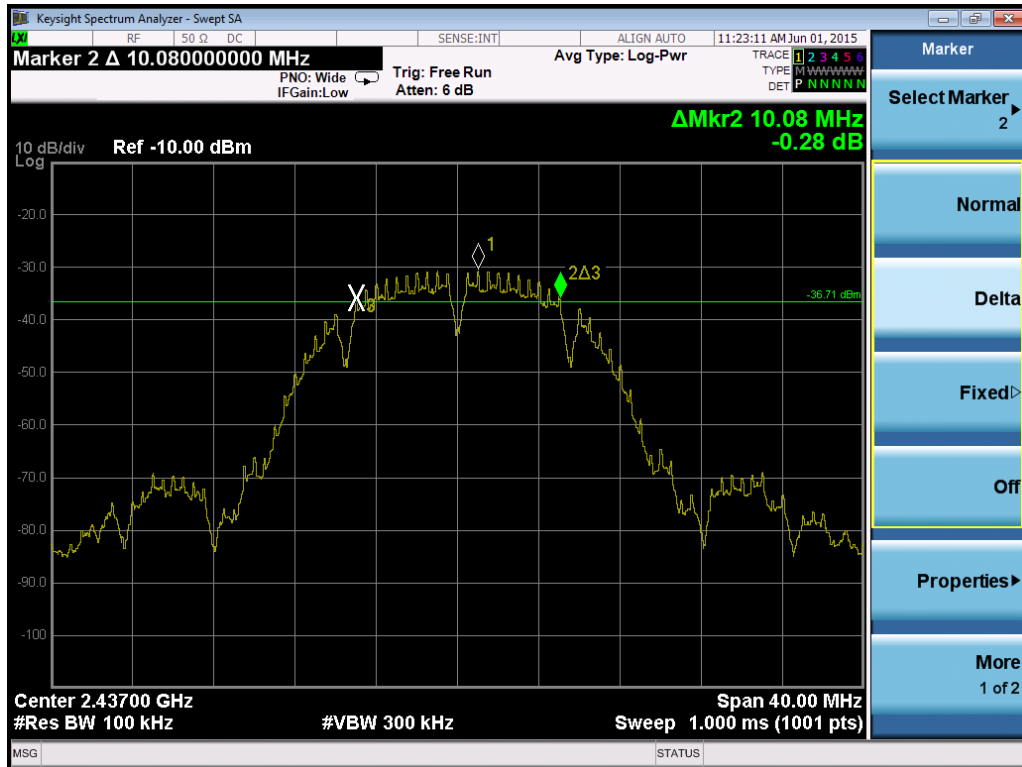


Channel H – 6dB Bandwidth

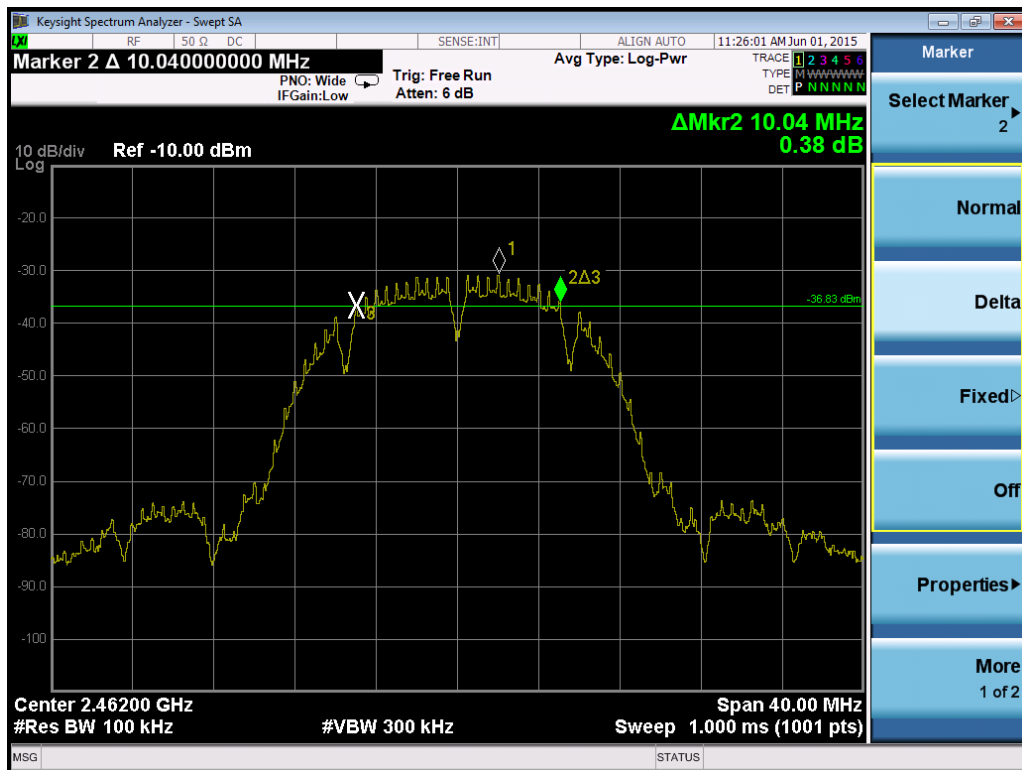


Mode	Channel	6dB Bandwidth (MHz)	Limit (MHz)
802.11g	L	16.60	≥ 0.5
	M	16.52	
	H	16.56	


Channel L – 6dB Bandwidth

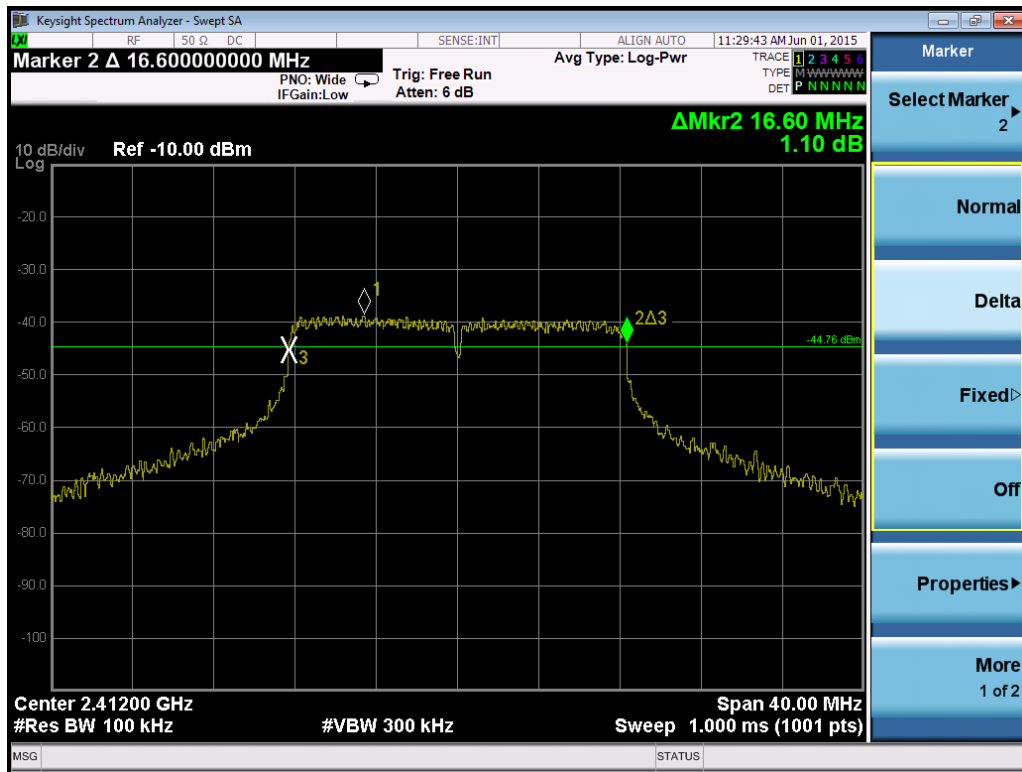

Channel M – 6dB Bandwidth

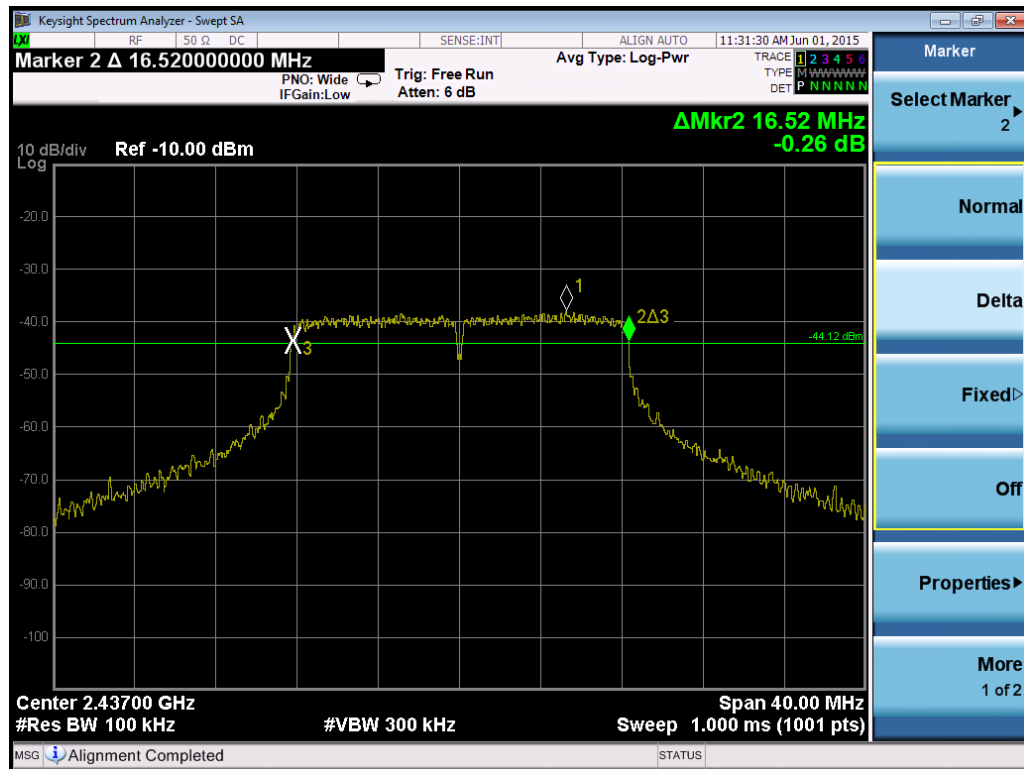


Channel H – 6dB Bandwidth

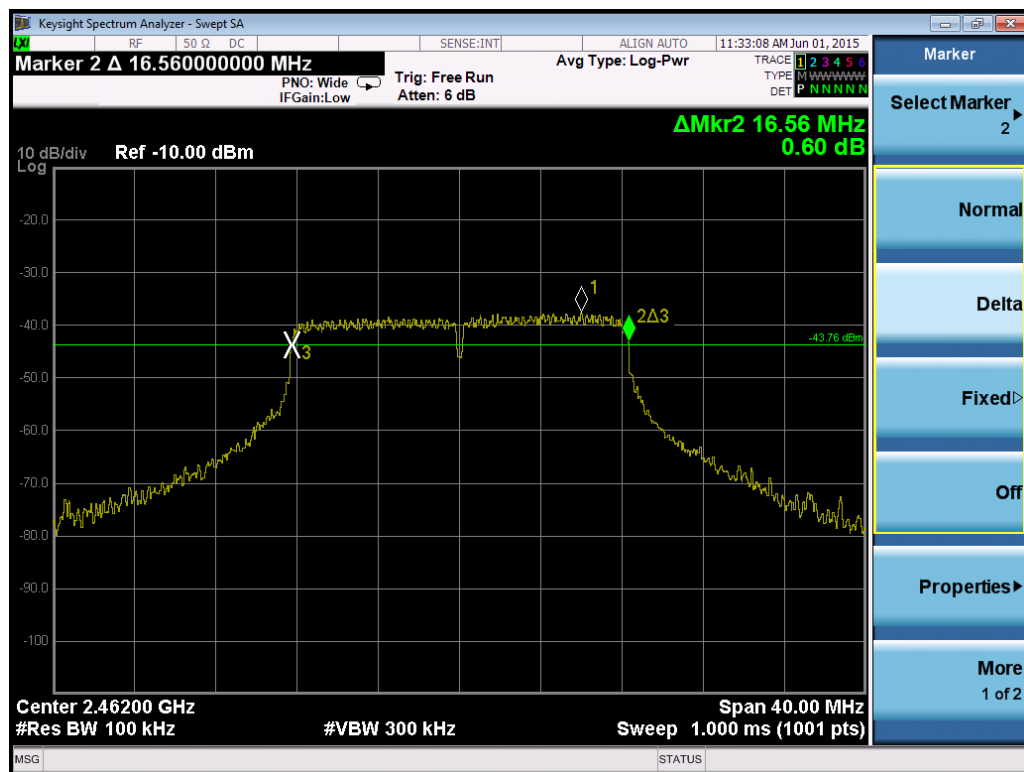


Mode	CH	6dB Bandwidth (MHz)	Limit (MHz)
802.11n20	L	17.80	≥ 0.5
	M	17.72	
	H	17.80	


Channel L – 6dB Bandwidth

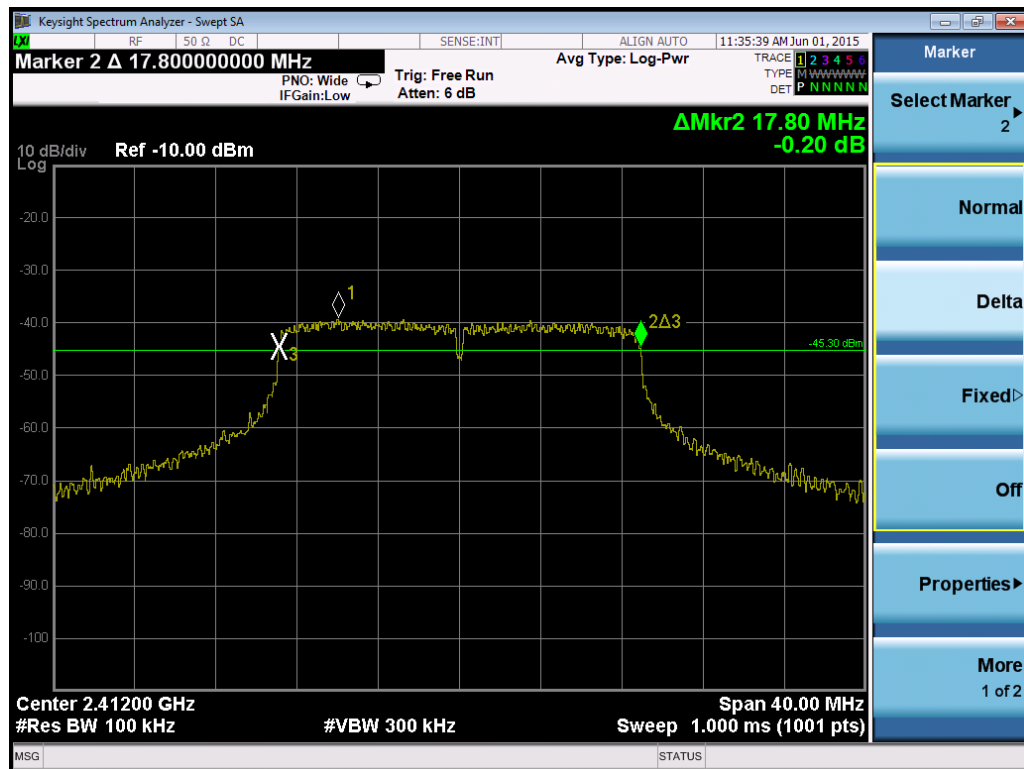

Channel M – 6dB Bandwidth

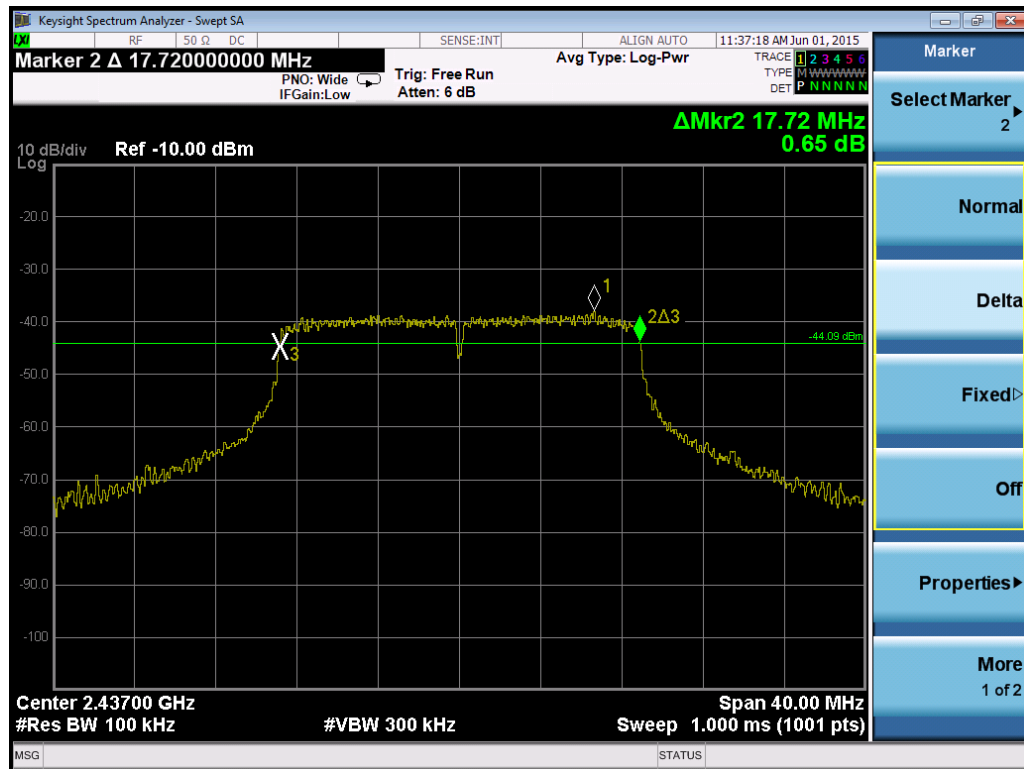


Channel H – 6dB Bandwidth

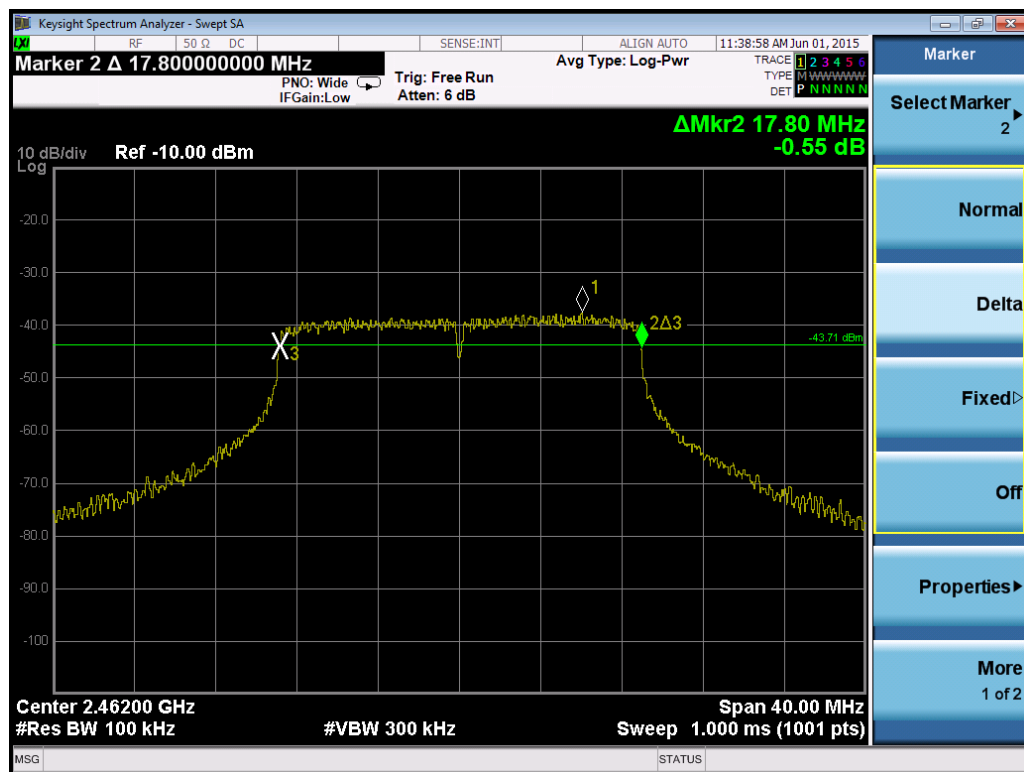


Mode	CH	6dB Bandwidth (MHz)	Limit (MHz)
802.11n40	L	36.56	≥ 0.5
	M	36.56	
	H	36.56	


Channel L – 6dB Bandwidth

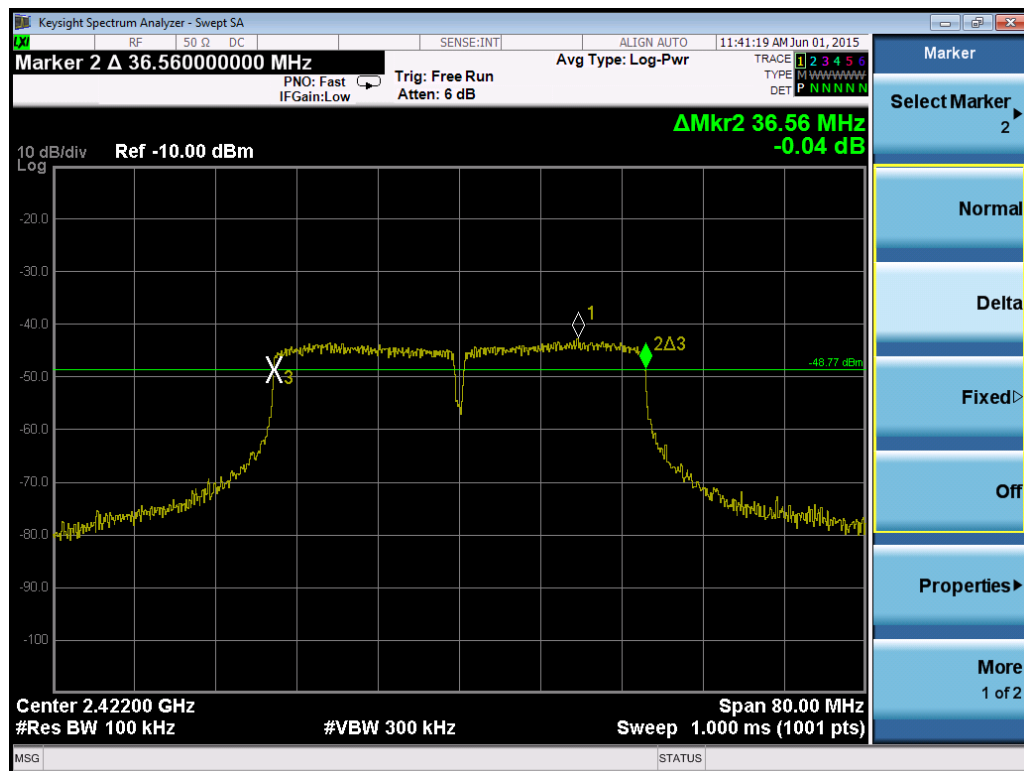

Channel M – 6dB Bandwidth

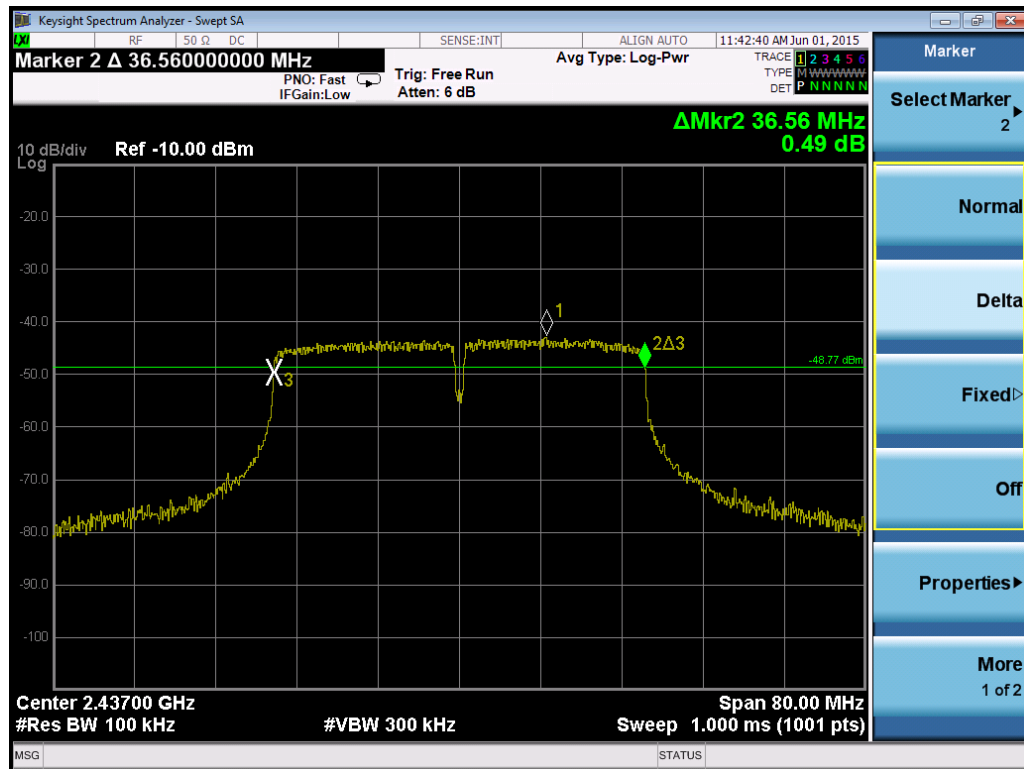

Channel H – 6dB Bandwidth

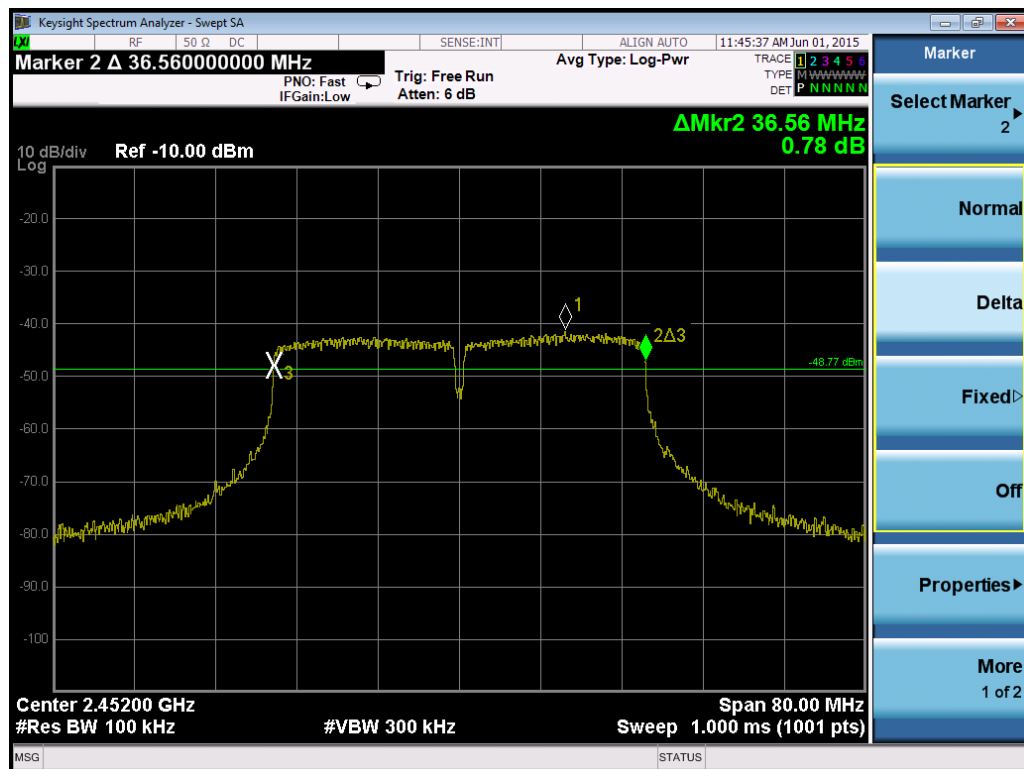

4. Maximum peak output power


Test result: Pass

4.1 Test limit

- ☐ For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt
- ☐ For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts
- ☒ For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt

If the transmitting antenna of directional gain greater than 6dBi is used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.2 Test Configuration

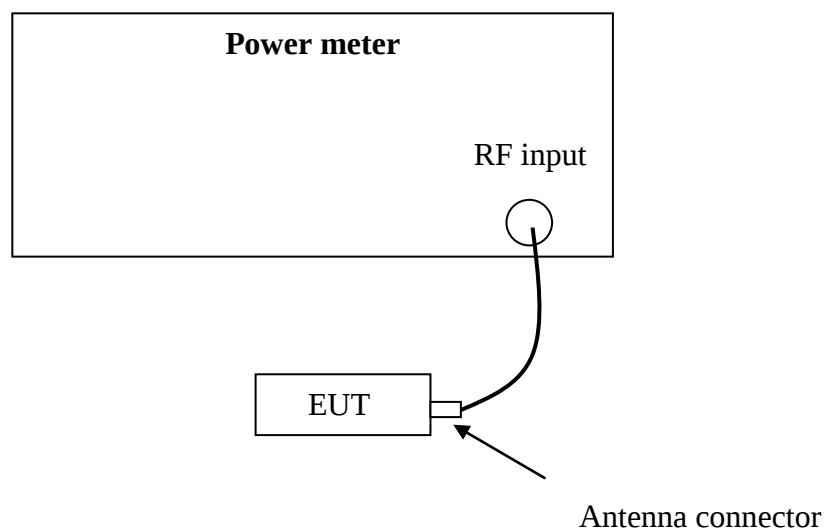

4.3 Test procedure and test setup

The EUT was tested according to DTS test procedure of “KDB558074 D01 DTS Meas Guidance v03r03” for compliance to FCC 47CFR 15.247 requirements (clause 9.1.2).

4.4 Test protocol

Temperature : 25°C
 Relative Humidity : 55%

Mode	Channel	Cable loss	Peak power (dBm)	Limit (dBm)
802.11b	L	1.50	9.35	30.00
	M	1.50	8.95	30.00
	H	1.50	8.35	30.00
802.11g	L	1.50	12.7	30.00
	M	1.50	12.3	30.00
	H	1.50	11.69	30.00
802.11n20	L	1.50	11.75	30.00
	M	1.50	11.25	30.00
	H	1.50	10.75	30.00
802.11n40	L	1.50	10.75	30.00
	M	1.50	10.57	30.00
	H	1.50	10.75	30.00


5. Power spectrum density

Test result: Pass

5.1 Test limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

5.2 Test Configuration

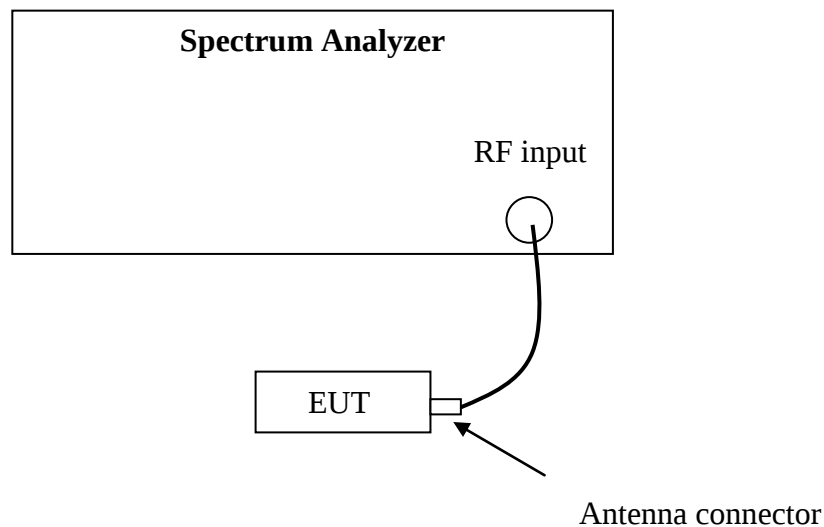

5.3 Test procedure and test setup

The power output per FCC §15.247(e) was tested according to DTS test procedure of “KDB558074 D01 DTS Meas Guidance v03r03” (clause 10.2) for compliance to FCC 47CFR 15.247 requirements.


- Set analyzer center frequency to DTS channel center frequency.
- Set the span to 1.5 times the *DTS bandwidth*.
- Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set the VBW $\geq 3 \times \text{RBW}$.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.
- If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

5.4 Test Protocol


Temperature : 25°C
Relative Humidity : 55%

Mode	Channel	Factor	PSD (dBm/100kHz)	Limit (dBm/3kHz)
802.11b	L	33.6	0.774	≤8.00
	M	33.6	0.805	
	H	33.6	0.754	


Channel L

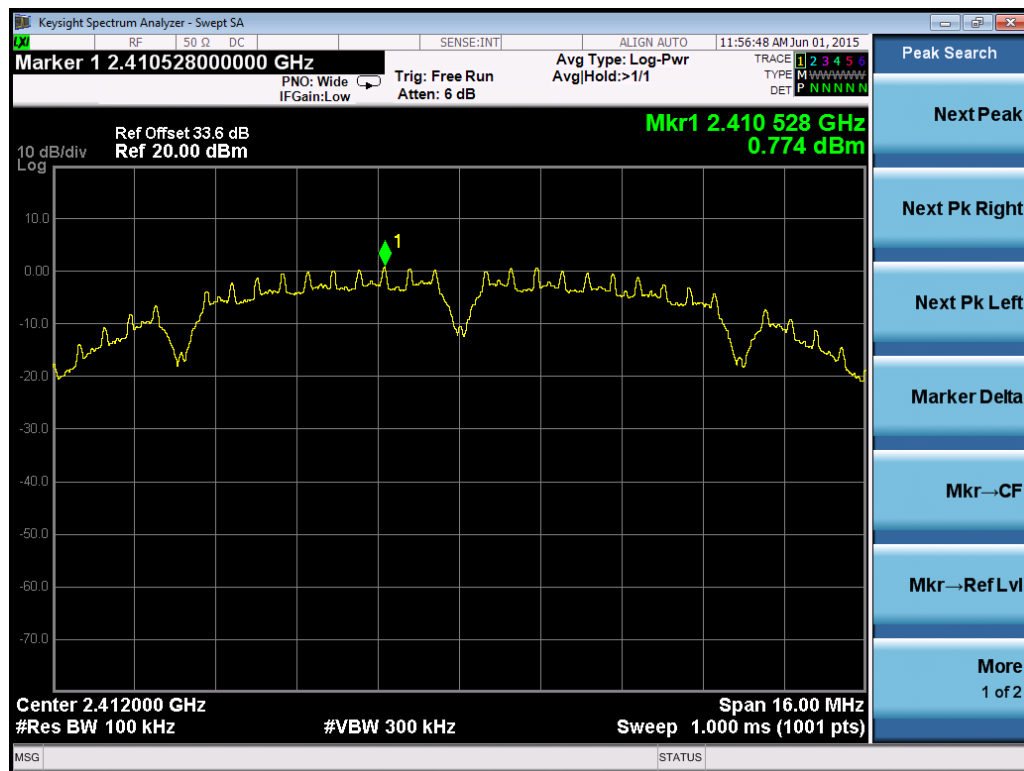

Channel M

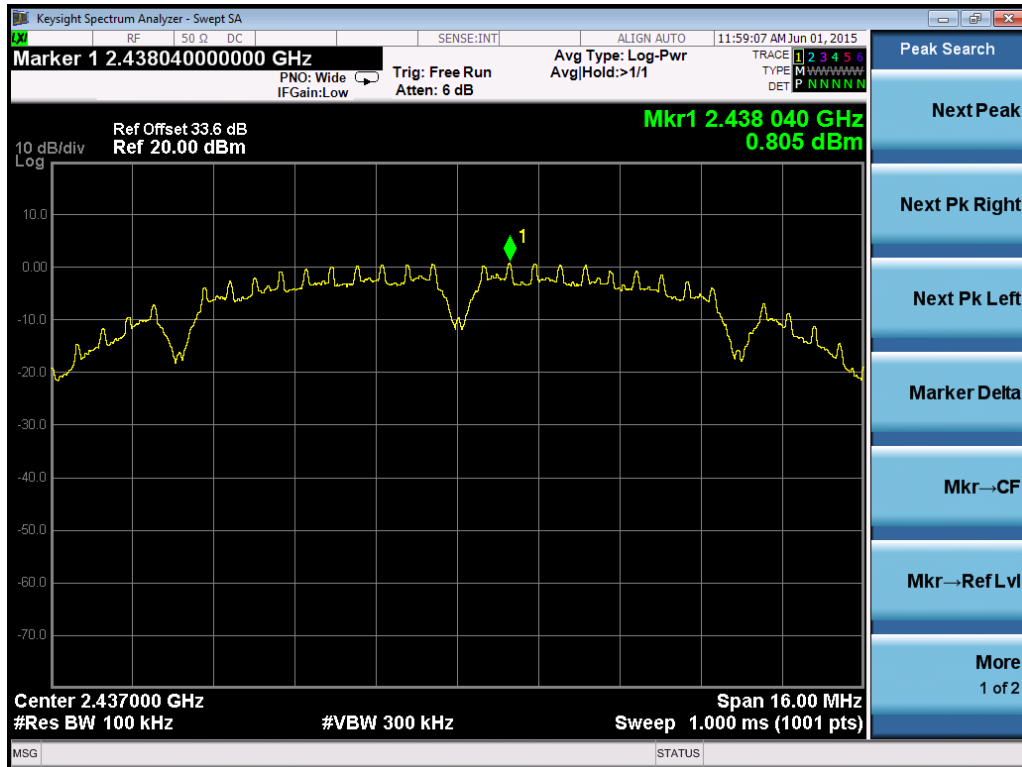


Channel H

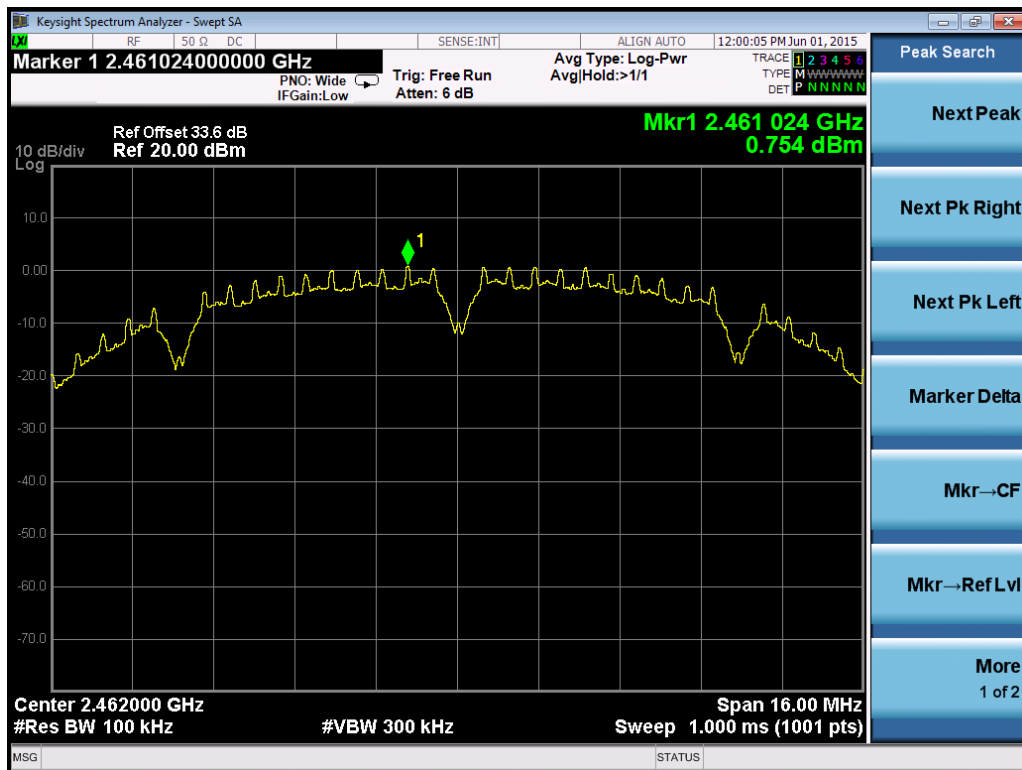


Mode	Channel	Factor	PSD (dBm/100kHz)	Limit (dBm/3kHz)
802.11g	L	31.2	-5.534	≤ 8.00
	M	31.2	-5.416	
	H	31.2	-5.861	


Channel L

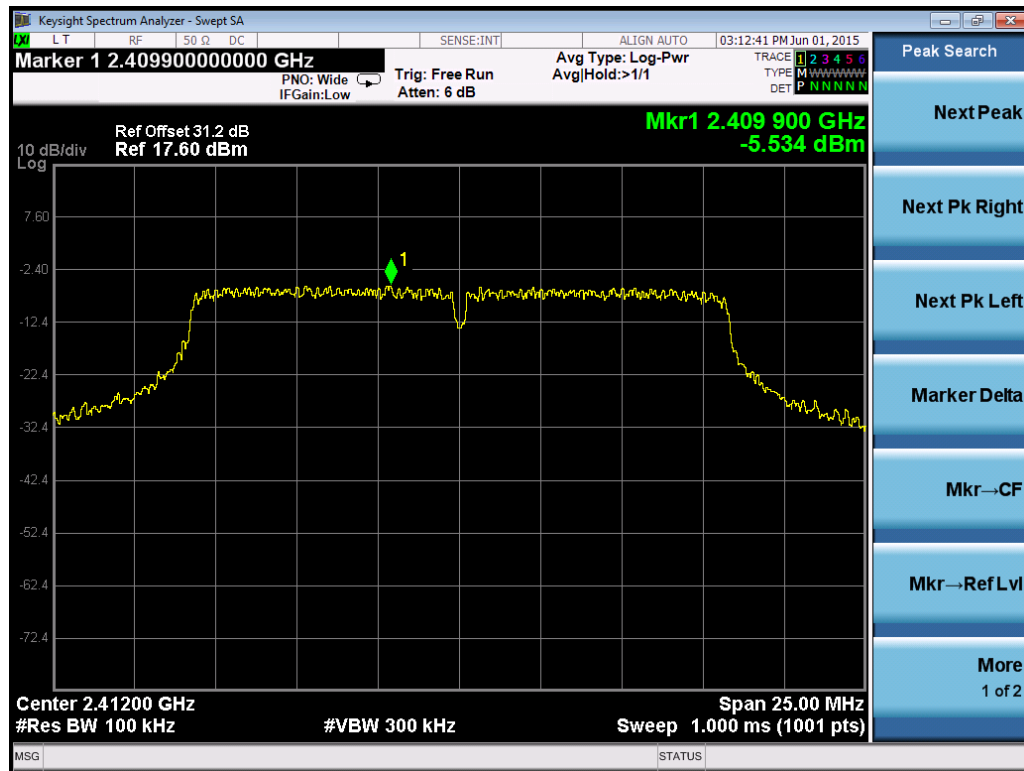

Channel M

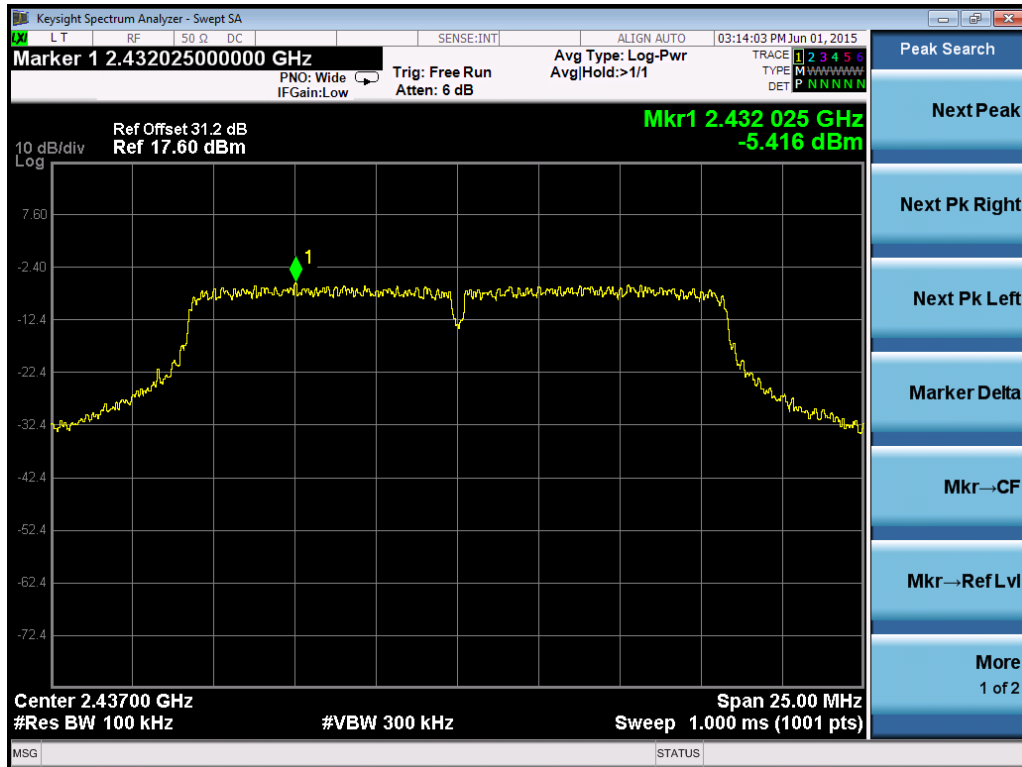


Channel H

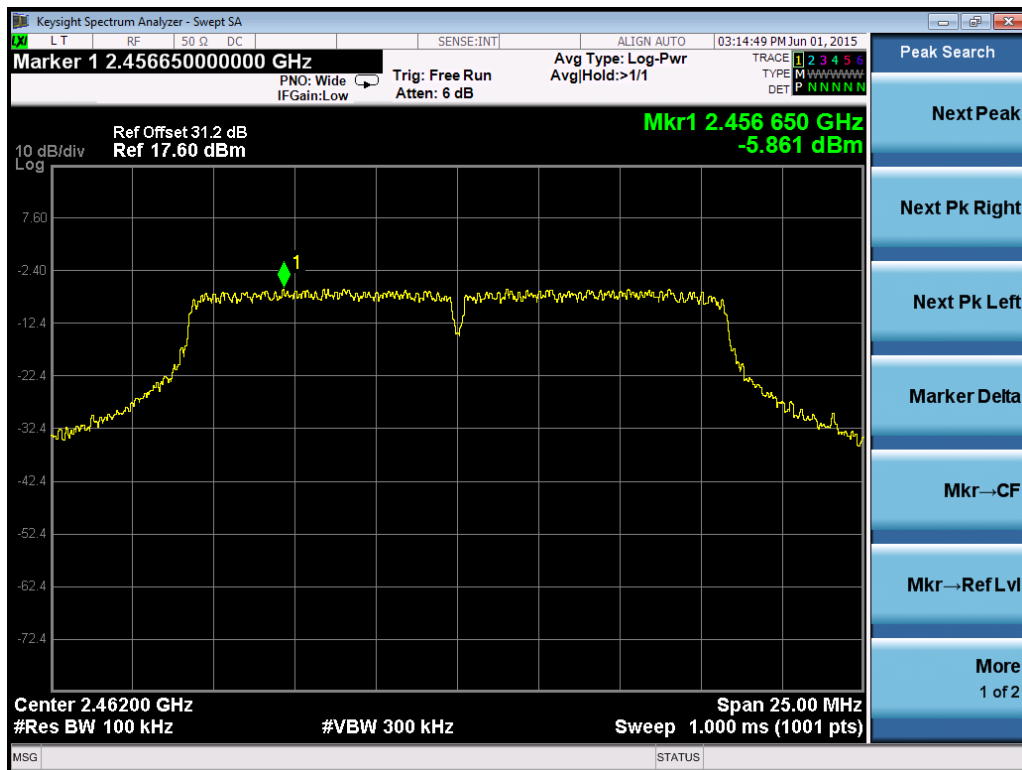


Mode	Channel	Factor	PSD (dBm/100kHz)	Limit (dBm/3kHz)
802.11n20	L	31.2	-6.390	≤ 8.00
	M	31.2	-6.755	
	H	31.2	-6.833	


Channel L

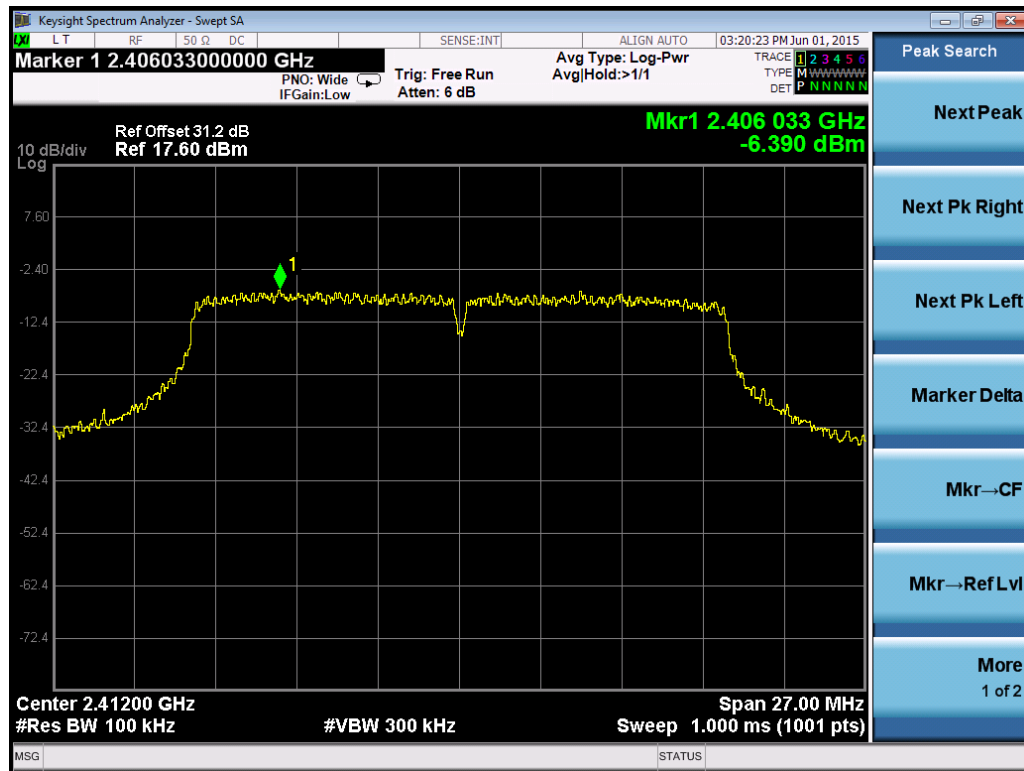

Channel M

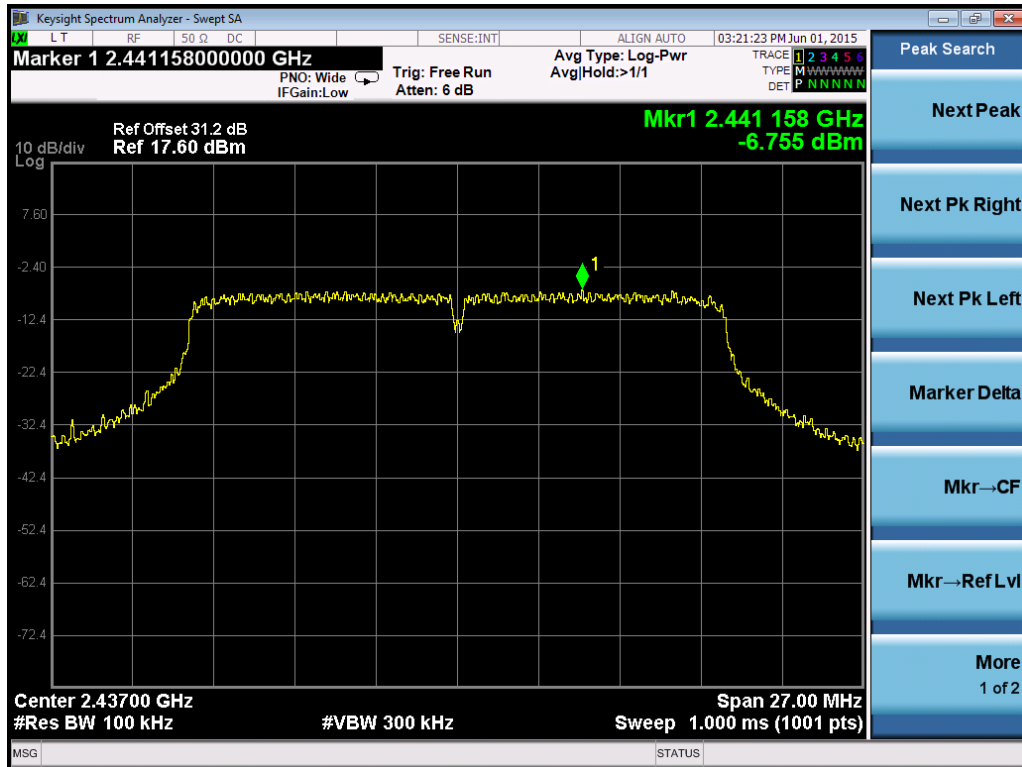


Channel H

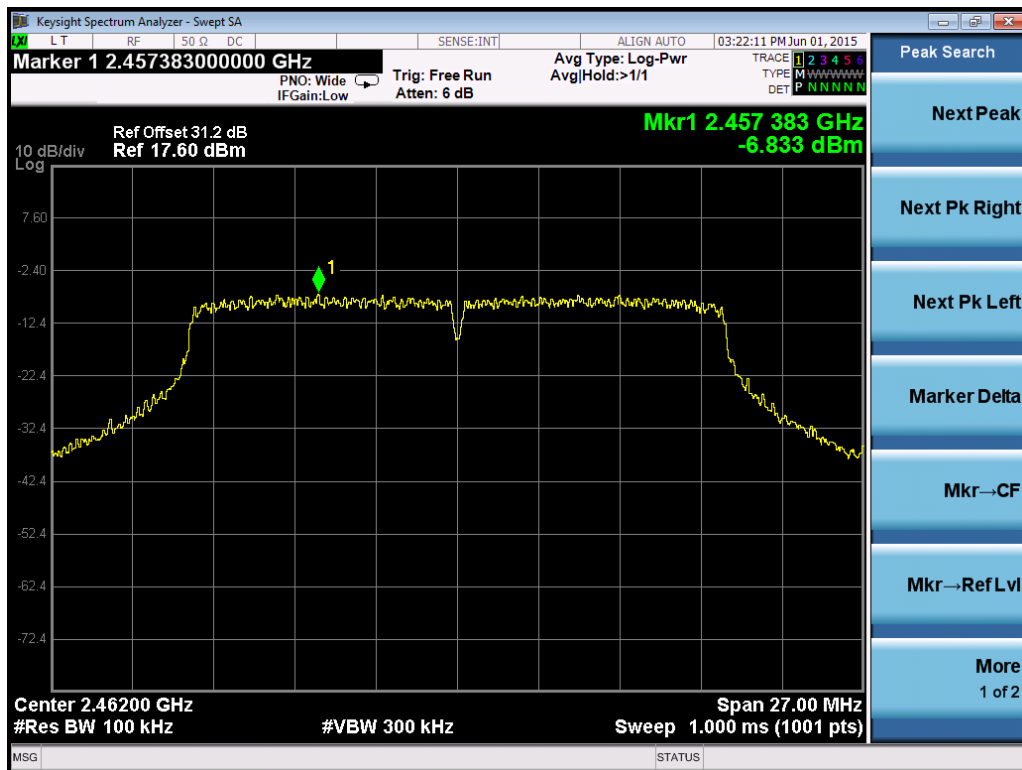


Mode	Channel	Factor	PSD (dBm/100kHz)	Limit (dBm/3kHz)
802.11n40	L	31.2	-10.367	≤ 8.00
	M	31.2	-10.207	
	H	31.2	-10.503	


Channel L

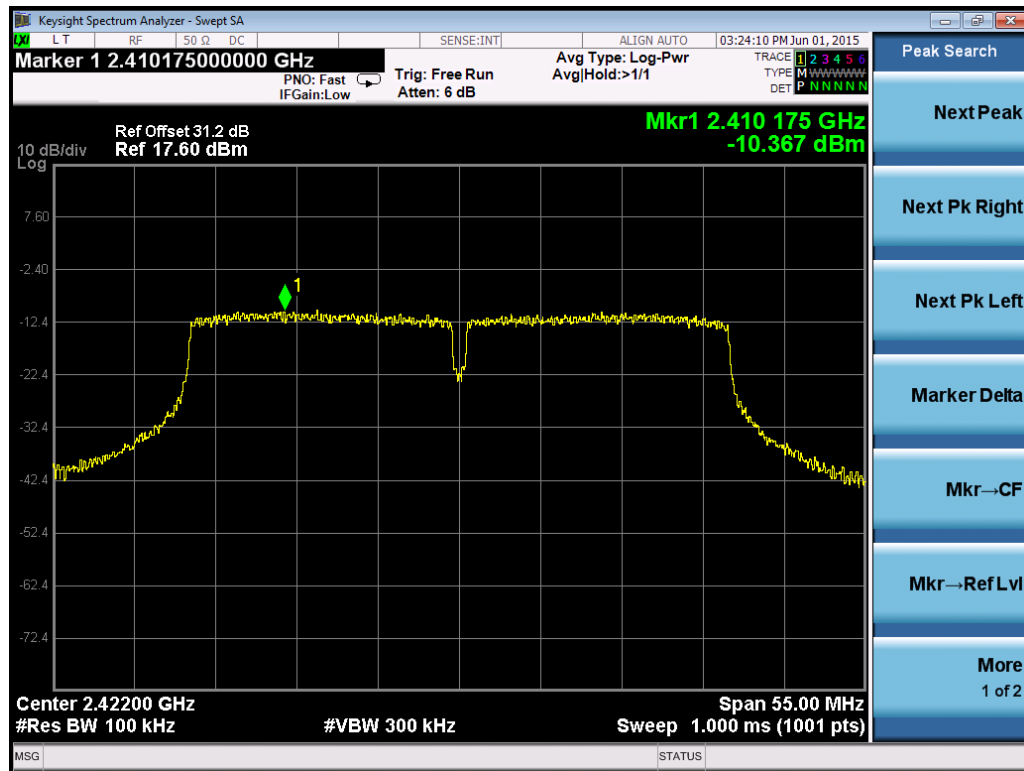

Channel M

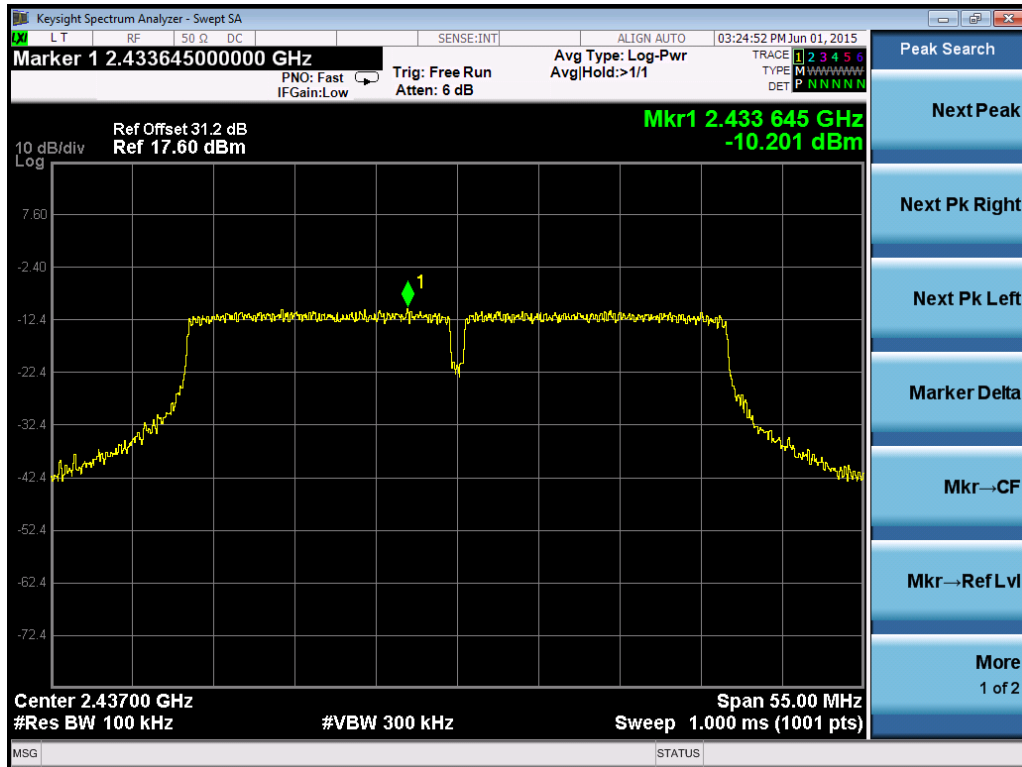

Channel H

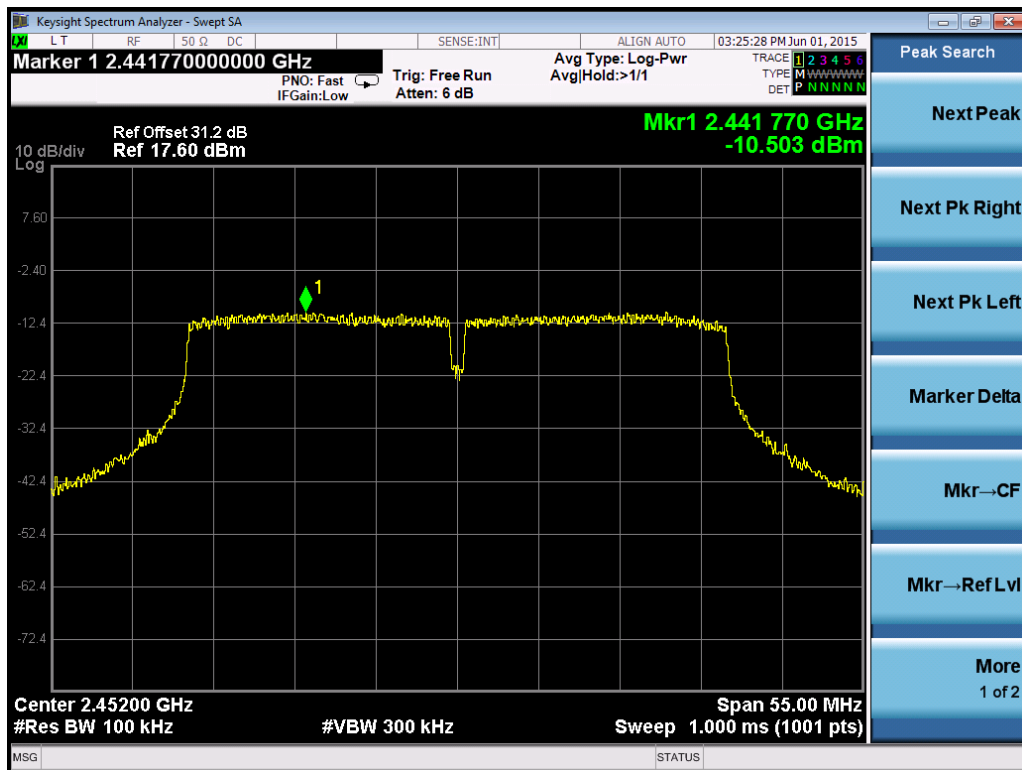

6. Radiated emission in the restricted bands


Test result: **PASS**

6.1 Test limit

The radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) showed as below:

Frequency (MHz)	Field Strength (dBuV/m)	Measurement Distance (m)
30 - 88	40.0	3
88 - 216	43.5	3
216 - 960	46.0	3
Above 960	54.0	3

6.2 Test Configuration

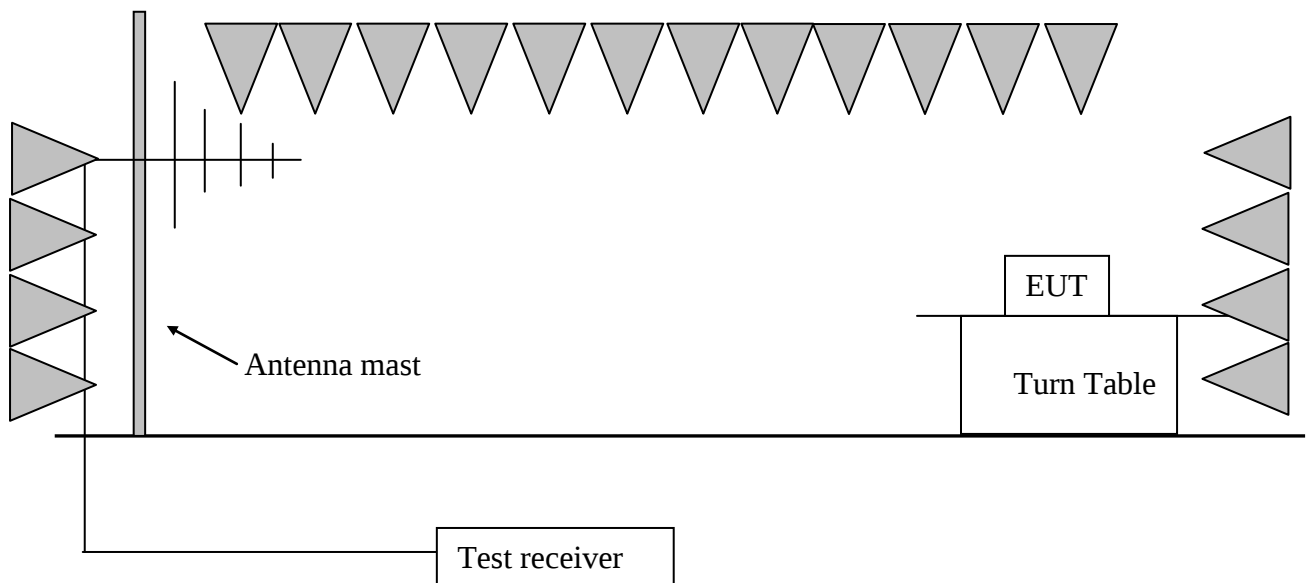

6.3 Test procedure and test setup

The measurement was applied in a semi-anechoic chamber. While testing for spurious emission higher than 1GHz, if applied, the pre-amplifier would be equipped just at the output terminal of the antenna.

The EUT and simulators were placed on a 0.8m high wooden turntable above the horizontal metal ground plane. The turn table rotated 360 degrees to determine the position of the maximum emission level. The EUT was set 3 meters away from the receiving antenna which was mounted on an antenna mast. The antenna moved up and down between from 1meter to 4 meters to find out the maximum emission level.

The EUT was tested according to DTS test procedure of KDB558074 D01 DTS “Meas Guidance v03r03” (clause 12) for compliance to FCC 47CFR 15.247 requirements.

6.4 Test protocol

Temperature : 25°C
Relative Humidity : 55%

Test data:

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

802.11b

CH	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	2412.60	101.00	34.10	Fundamental	/	PK
	H	263.27	29.30	14.40	46.00	16.70	PK
	V	35.83	33.00	18.00	40.00	7.00	PK
	V	527.64	35.70	21.10	46.00	10.30	PK
	V	2388.18	62.93	34.20	74.00	11.07	PK
	V	2388.18	45.54	34.20	54.00	8.46	AV
	V	4824.07	54.09	-3.60	74.00	19.91	PK
	V	4824.07	52.36	-3.60	54.00	1.64	AV
M	H	2437.55	100.40	34.20	Fundamental	/	PK
	H	263.27	29.30	14.40	46.00	16.70	PK
	V	35.83	33.00	18.00	40.00	7.00	PK
	V	527.64	35.70	21.10	46.00	10.30	PK
H	H	2462.90	93.20	34.40	Fundamental	/	PK
	H	263.27	29.30	14.40	46.00	16.70	PK
	V	35.83	33.00	18.00	40.00	7.00	PK
	V	527.64	35.70	21.10	46.00	10.30	PK
	V	2483.56	52.40	34.80	74.00	21.60	PK
	V	4924.07	52.50	-3.30	74.00	21.50	PK

802.11g

CH	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	2412.60	101.95	34.10	Fundamental	/	PK
	H	263.27	29.30	14.40	46.00	16.70	PK
	V	35.83	33.00	18.00	40.00	7.00	PK
	V	527.64	35.70	21.10	46.00	10.30	PK
	V	2389.90	70.67	34.20	74.00	3.33	PK
	V	2389.90	49.14	34.20	54.00	4.86	AV
	V	4824.07	49.93	-3.60	74.00	24.07	PK
M	H	2437.55	101.55	34.20	Fundamental	/	PK
	H	263.27	29.30	14.40	46.00	16.70	PK
	V	35.83	33.00	18.00	40.00	7.00	PK
	V	527.64	35.70	21.10	46.00	10.30	PK
H	H	2462.90	100.95	34.40	Fundamental	/	PK
	H	263.27	29.30	14.40	46.00	16.70	PK
	V	35.83	33.00	18.00	40.00	7.00	PK
	V	527.64	35.70	21.10	46.00	10.30	PK
	V	2483.51	64.45	34.80	74.00	9.55	PK
	V	2483.51	43.67	34.80	54.00	10.33	AV
	V	4923.85	49.00	-3.30	74.00	25.00	PK

802.11n20

CH	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	2412.40	101.10	34.10	Fundamental	/	PK
	H	263.27	29.30	14.40	46.00	16.70	PK
	V	35.83	33.00	18.00	40.00	7.00	PK
	V	527.64	35.70	21.10	46.00	10.30	PK
	V	2389.99	71.65	34.20	74.00	2.35	PK
	V	2389.99	47.24	34.20	54.00	6.76	AV
	V	4824.21	50.07	-3.60	74.00	23.93	PK
M	H	2437.45	100.60	34.20	Fundamental	/	PK
	H	263.27	29.30	14.40	46.00	16.70	PK
	V	35.83	33.00	18.00	40.00	7.00	PK
	V	527.64	35.70	21.10	46.00	10.30	PK
H	H	2462.50	100.10	34.40	Fundamental	/	PK
	H	263.27	29.30	14.40	46.00	16.70	PK
	V	35.83	33.00	18.00	40.00	7.00	PK
	V	527.64	35.70	21.10	46.00	10.30	PK
	V	2483.50	65.39	34.80	74.00	8.61	PK
	V	2483.50	43.15	34.80	54.00	10.85	AV
	V	4924.62	49.24	-3.30	74.00	24.76	PK

802.11n40

CH	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	2422.35	97.10	34.10	Fundamental	/	PK
	H	263.27	29.30	14.40	46.00	16.70	PK
	V	35.83	33.00	18.00	40.00	7.00	PK
	V	527.64	35.70	21.10	46.00	10.30	PK
	V	2389.20	71.50	34.20	74.00	2.50	PK
	V	2389.20	49.73	34.20	54.00	4.27	AV
	V	4844.25	45.27	-3.60	74.00	28.73	PK
M	H	2437.68	96.90	34.20	Fundamental	/	PK
	H	263.27	29.30	14.40	46.00	16.70	PK
	V	35.83	33.00	18.00	40.00	7.00	PK
	V	527.64	35.70	21.10	46.00	10.30	PK
H	H	2452.80	97.10	34.30	Fundamental	/	PK
	H	263.27	29.30	14.40	46.00	16.70	PK
	V	35.83	33.00	18.00	40.00	7.00	PK
	V	527.64	35.70	21.10	46.00	10.30	PK
	V	2483.50	62.96	34.80	74.00	11.04	PK
	V	2483.50	46.55	34.80	54.00	7.45	AV
	V	4904.28	43.53	-3.30	74.00	30.47	PK

Remark:

1. Factor= Antenna Factor + Cable Loss (-Amplifier, is employed)
2. Measure level= Reading level + Factor
3. Over Limit = Limit – Measure level
4. If the PK measured level is lower than AV limit, the AV test can be elided.

Example:

Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB,
Gain of Preamplifier = 32.00dB, Original Receiver Reading level = 10dBuV.
Then Factor = 30.20 + 2.00 – 32.00 = 0.20dB/m;
Measure level = 10dBuV + 0.20dB/m = 10.20dBuV/m
Assuming limit = 54dBuV/m, Measure level = 10.20dBuV/m,
then Over Limit = 10.20 - 54= -43.80dBuV/m


7. Emission outside the frequency Band

Test result: PASS

7.1 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

7.2 Test Configuration

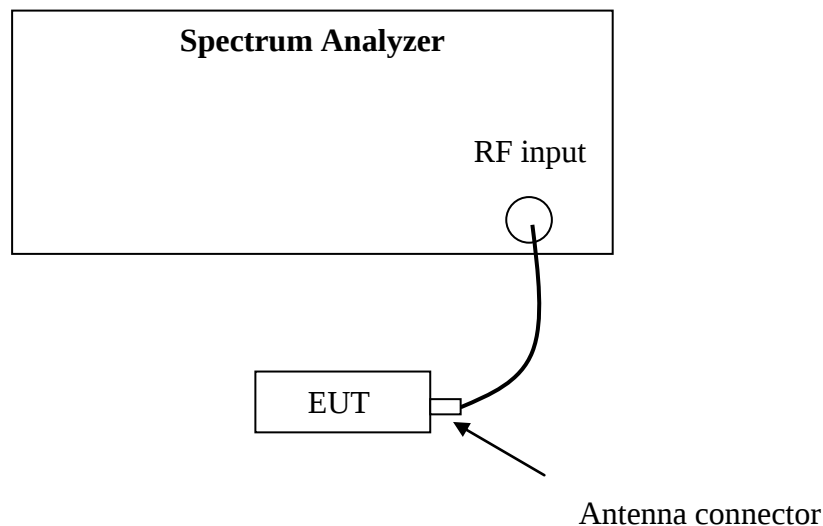

7.3 Test procedure and test setup

The EUT was tested according to DTS test procedure of “KDB558074 D01 DTS Meas Guidance v03r03” (clause 11.0) for compliance to FCC 47CFR 15.247 requirements.

Reference level measurement

Establish a reference level by using the following procedure:

- Set instrument center frequency to DTS channel center frequency.
- Set the span to ≥ 1.5 times the *DTS bandwidth*.
- Set the RBW = 100 kHz.
- Set the VBW $\geq 3 \times$ RBW.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.

- i) Use the peak marker function to determine the maximum PSD level.
Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

Emission level measurement

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW $\geq 3 \times$ RBW.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.
Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in 11.1 a) or 11.1 b). Report the three highest emissions relative to the limit.


7.4 Test protocol

Temperature : 25 °C
Relative Humidity : 55 %

Mode	Channel	Max PSD among band (dBm)	The most restrict Attenuation outside band (dB)	Limit (dB)
802.11b	L	0.774	36.083	≥20
	M	0.805	50.023	
	H	0.754	51.451	

Note: The test was performed from 9kHz to 26GHz and the graph of band edge emission is listed as below.

Channel L

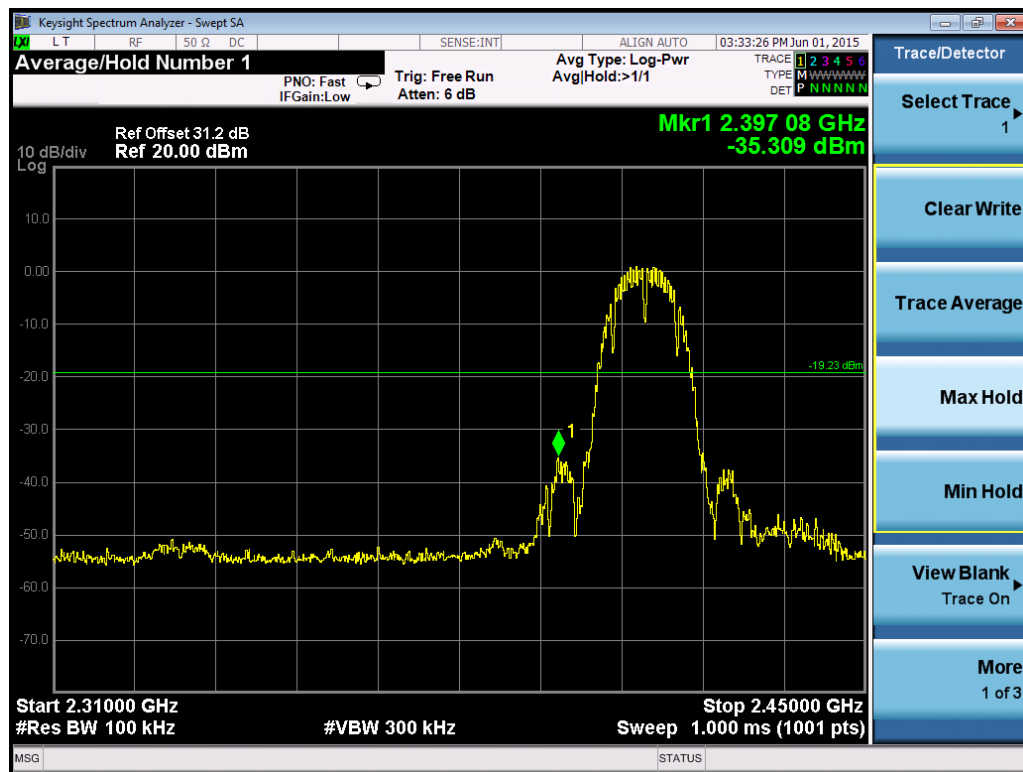


Channel H



Mode	Channel	Max PSD among band (dBm)	The most restrict Attenuation outside band (dB)	Limit (dB)
802.11g	L	-5.534	24.273	≥20
	M	-5.416	41.157	
	H	-5.861	42.394	

Note: The test was performed from 9kHz to 26GHz and the graph of band edge emission is listed as below.

Channel L

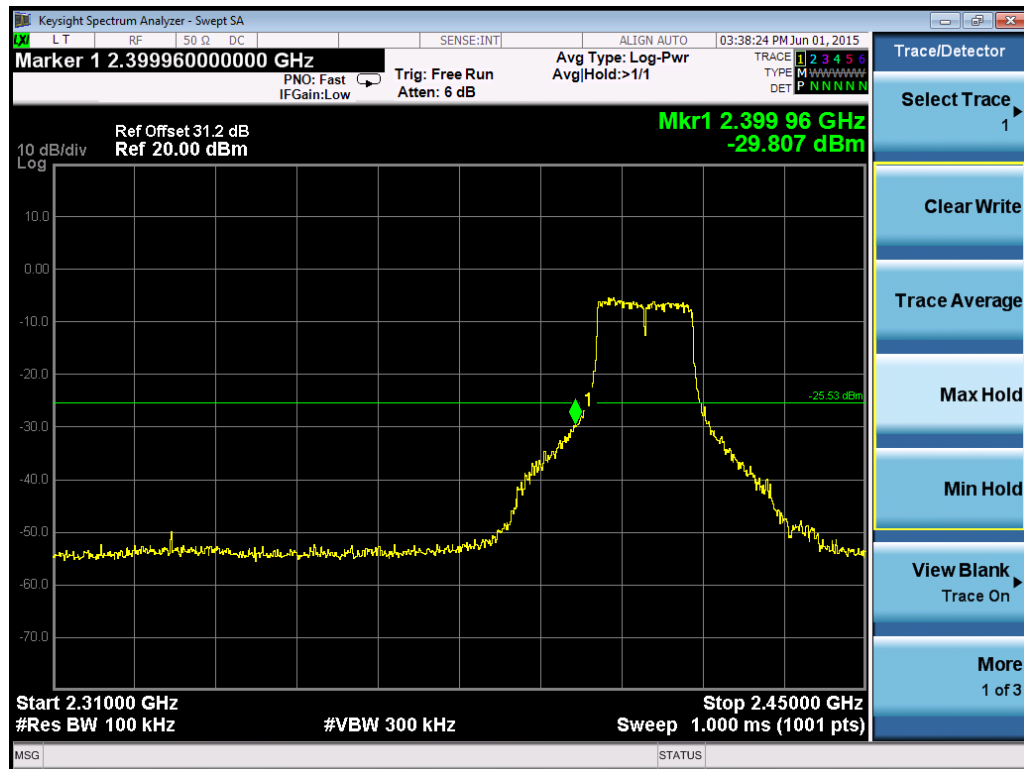


Channel H




Mode	Channel	Max PSD among band (dBm)	The most restrict Attenuation outside band (dB)	Limit (dB)
802.11n20	L	-6.390	25.485	≥ 20
	M	-6.755	40.256	
	H	-6.833	41.150	

Note: The test was performed from 9kHz to 26GHz and the graph of band edge emission is listed as below.

Channel L

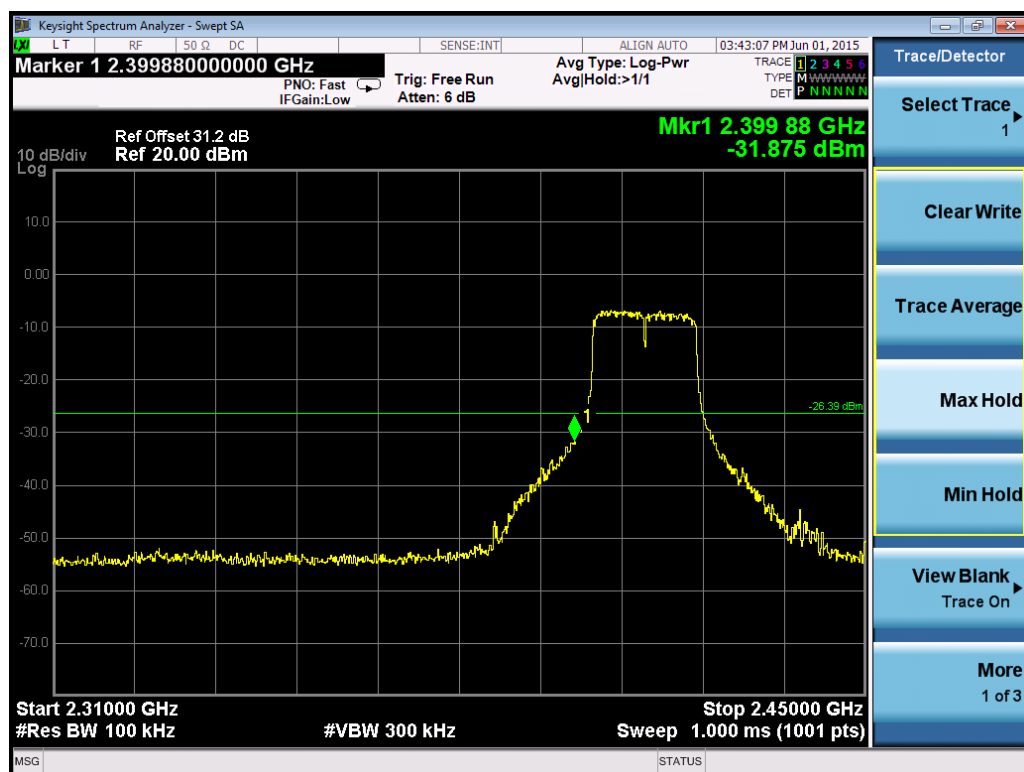


Channel H

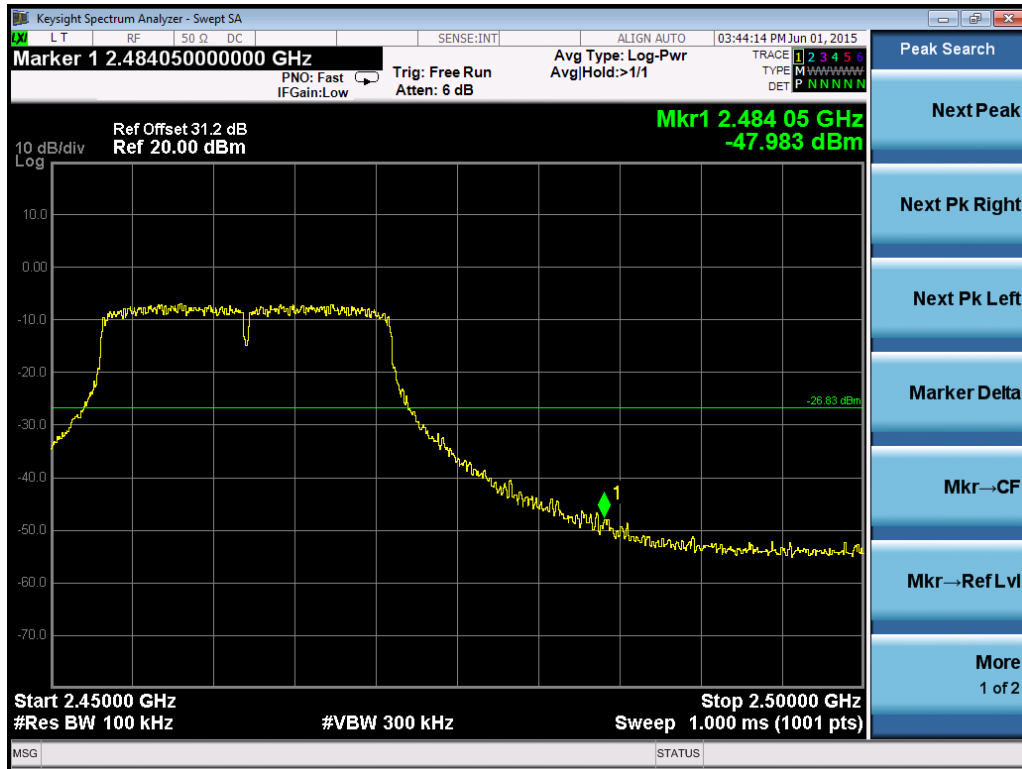

Mode	Channel	Max PSD among band (dBm)	The most restrict Attenuation outside band (dB)	Limit (dB)
802.11n40	L	-10.367	24.194	≥20
	M	-10.207	32.593	
	H	-10.503	34.510	

Note: The test was performed from 9kHz to 26GHz and the graph of band edge emission is listed as below.

Channel L

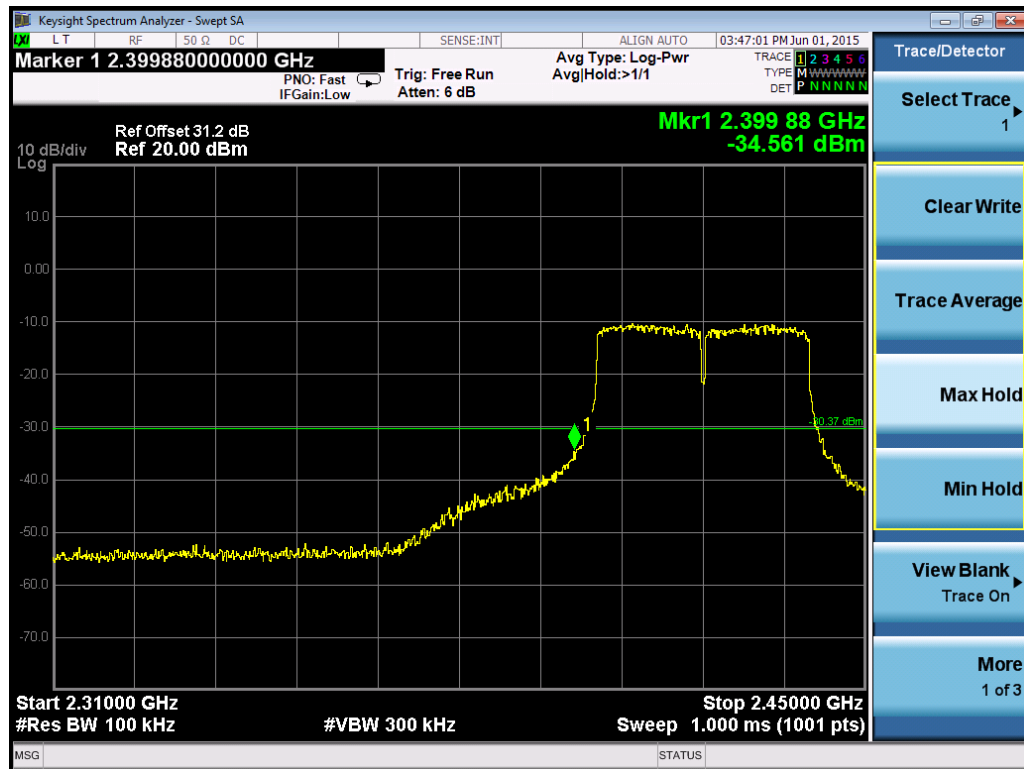

Channel H




8. Power line conducted emission

Test result: Pass

8.1 Limit

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	QP	AV
0.15-0.5	66 to 56*	56 to 46 *
0.5-5	56	46
5-30	60	50
* Decreases with the logarithm of the frequency.		

8.2 Test configuration

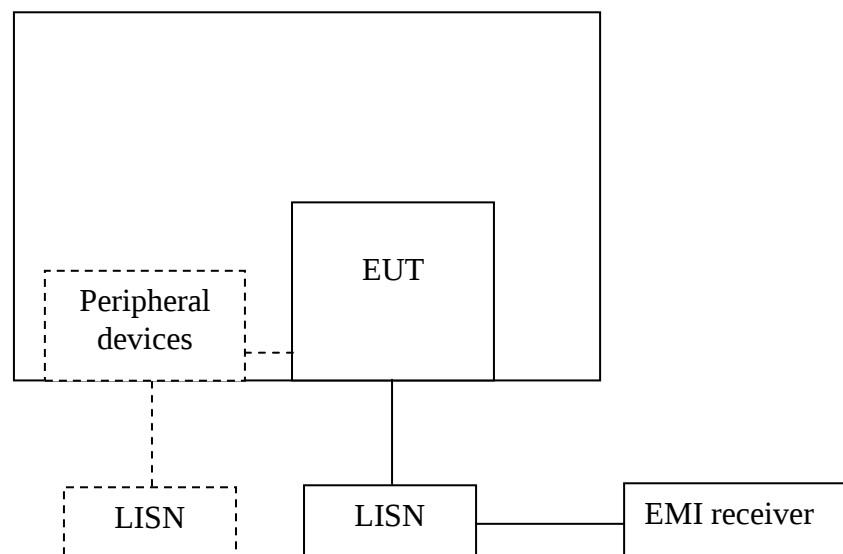

☒ For table top equipment, wooden support is 0.8m height table

☐ For floor standing equipment, wooden support is 0.1m height rack.

8.3 Test procedure and test set up


The EUT are connected to the main power through a line impedance stabilization network (LISN). This provides a $50\Omega/50\mu\text{H}$ coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a $50\Omega/50\mu\text{H}$ coupling impedance with 50Ω termination.

Both sides (Line and Neutral) of AC line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4 on conducted measurement. The bandwidth of the test receiver is set at 9 kHz.

8.4 Test protocol

Temperature : 25°C
Relative Humidity : 55%


L Line

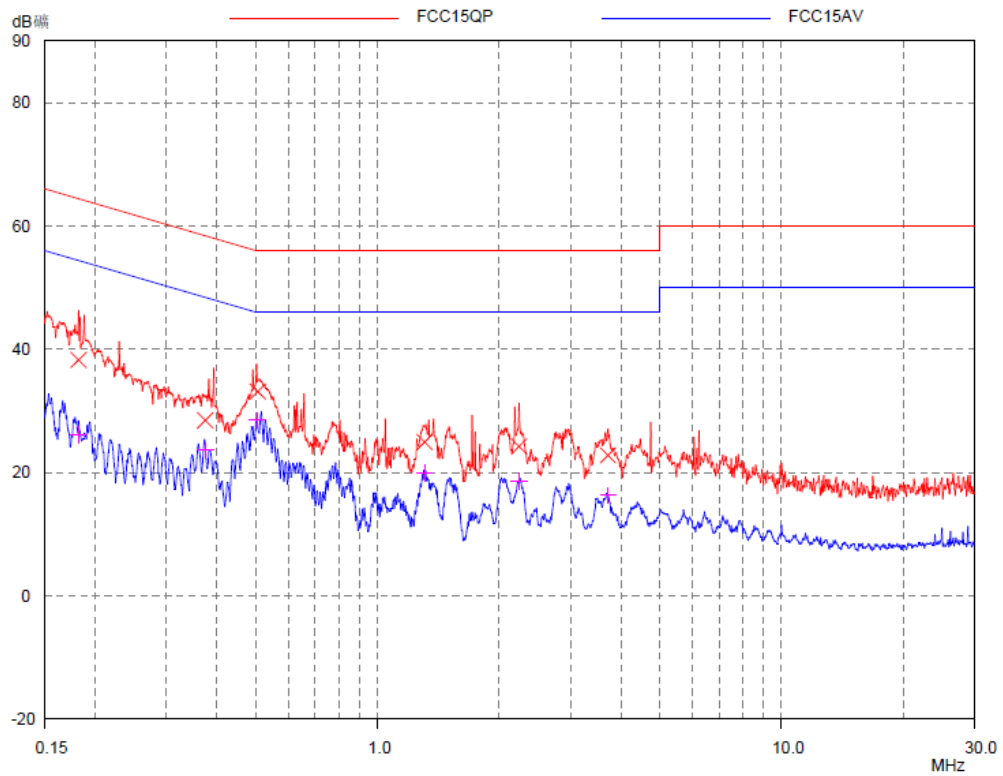

Test Data:

Frequency (MHz)	Quasi-peak			Average		
	level dB(μV)	Limit dB(μV)	Margin (dB)	level dB(μV)	limit dB(μV)	Margin (dB)
0.182	38.26	64.41	26.15	26.12	54.41	28.29
0.374	28.47	58.41	29.94	23.62	48.41	24.79
0.505	33.15	56.00	22.85	28.49	46.00	17.51
1.305	24.95	56.00	31.05	19.92	46.00	26.08
2.238	24.25	56.00	31.75	18.60	46.00	27.40
3.715	22.80	56.00	33.20	16.34	46.00	29.66

N Line

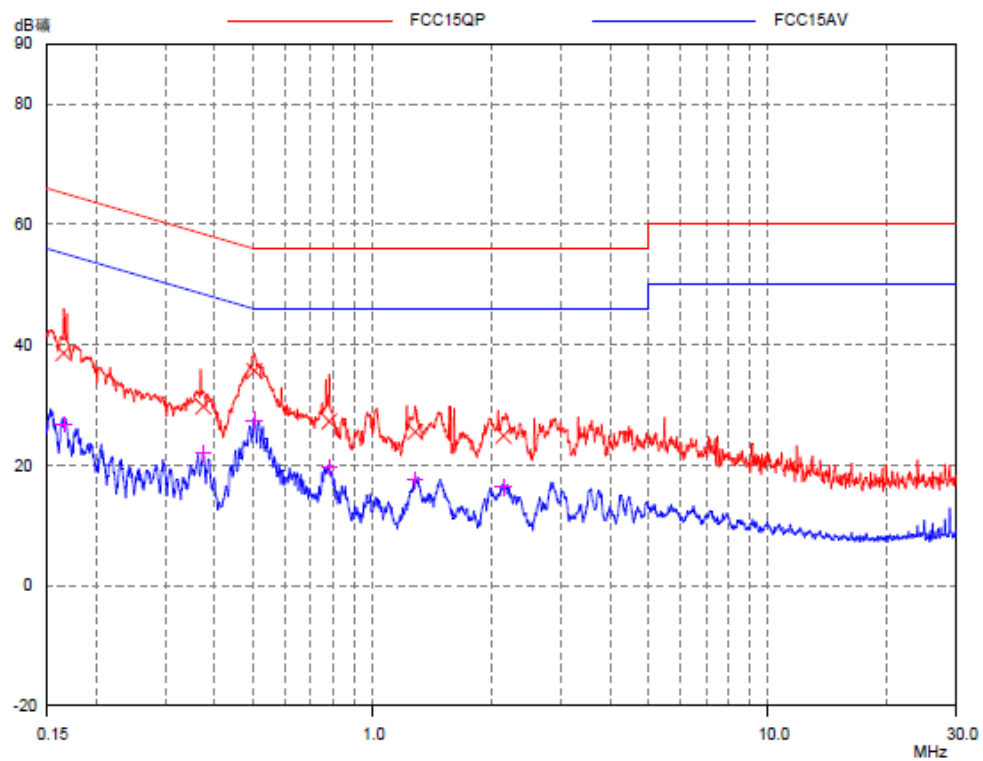

Test Data:

Frequency (MHz)	Quasi-peak			Average		
	level dB(μV)	Limit dB(μV)	Margin (dB)	level dB(μV)	limit dB(μV)	Margin (dB)
0.166	38.58	65.17	26.59	26.78	55.17	28.39
0.374	29.74	58.41	28.67	21.92	48.41	26.49
0.505	35.67	56.00	20.33	27.49	46.00	18.51
0.780	37.26	56.00	28.74	19.64	46.00	26.36
1.285	25.49	56.00	30.51	17.52	46.00	28.48
2.150	24.88	56.00	31.12	16.32	46.00	29.68