



FCC Part 15C Test Report

FCC ID: S74-W6

| | |
|------------------|--|
| Product Name: | Compute Stick |
| Trademark: | N/A |
| Model Name : | W6, W5. |
| Prepared For : | Fortune Joint Industry Co., Ltd |
| Address : | Flat Rm 704, 7 F, Bright Way Tower, 33 Mong Kok Road, Mong Kok, KL, Hong Kong |
| Prepared By : | Shenzhen BCTC Technology Co., Ltd. |
| Address : | No.101, Yousong Road, Longhua New District, Shenzhen, China |
| Test Date: | Jan. 06 - Jan. 14, 2017 |
| Date of Report : | Jan. 14, 2017 |
| Report No.: | BCTC-FY161207052E |



CERTIFICATION

Applicant's name : Fortune Joint Industry Co., Ltd
Address : Flat Rm 704, 7 F, Bright Way Tower, 33 Mong Kok Road, Mong Kok, KL, Hong Kong

Manufacture's Name : Fortune Joint Industry Co., Ltd
Address : No# 28 Tongchuang New Building, Pinghu Town, Longgang District, Shenzhen City, China

Product description

Product name : Compute Stick
Trademark..... : N/A
Model and/or type reference : W6

Standards..... : FCC Part15.247
ANSI C63.10:2013
KDB 558074 D01 DTS Meas Guidance v03r03

This device described above has been tested by BCTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of BCTC, this document may be altered or revised by BCTC, personal only, and shall be noted in the revision of the document.

Testing Engineer : Eric Yang
Eric Yang

Reviewer (Supervisor) : Jade Yang
Jade Yang

Approved & Authorized Signer(Manager) : Carson Zhang


**Table of Contents**

| | Page |
|---|-------------|
| 1 . SUMMARY OF TEST RESULTS | 5 |
| 1.1 TEST FACILITY | 6 |
| 1.2 MEASUREMENT UNCERTAINTY | 6 |
| 2 . GENERAL INFORMATION | 7 |
| 2.1 GENERAL DESCRIPTION OF EUT | 7 |
| 2.2 DESCRIPTION OF TEST MODES | 8 |
| 2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED | 9 |
| 2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE) | 9 |
| 2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS | 10 |
| 3 . EMC EMISSION TEST | 11 |
| 3.1 CONDUCTED EMISSION MEASUREMENT | 11 |
| 3.1.1 POWER LINE CONDUCTED EMISSION LIMITS | 11 |
| 3.1.2 TEST PROCEDURE | 11 |
| 3.1.3 DEVIATION FROM TEST STANDARD | 11 |
| 3.1.4 TEST SETUP | 12 |
| 3.1.5 EUT OPERATING CONDITIONS | 12 |
| 3.1.6 TEST RESULTS | 12 |
| 3.2 RADIATED EMISSION MEASUREMENT | 17 |
| 3.2.1 RADIATED EMISSION LIMITS | 17 |
| 3.2.2 TEST PROCEDURE | 18 |
| 3.2.3 DEVIATION FROM TEST STANDARD | 18 |
| 3.2.4 TEST SETUP | 18 |
| 3.2.5 EUT OPERATING CONDITIONS | 19 |
| 3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ) | 20 |
| 3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ) | 21 |
| 3.3 RADIATED BAND EMISSION MEASUREMENT | 30 |
| 3.3.1 TEST REQUIREMENT: | 30 |
| 3.3.2 TEST PROCEDURE | 30 |
| 3.3.3 DEVIATION FROM TEST STANDARD | 31 |
| 3.3.4 TEST SETUP | 31 |
| 3.3.5 EUT OPERATING CONDITIONS | 31 |
| 4 . POWER SPECTRAL DENSITY TEST | 37 |
| 4.1 APPLIED PROCEDURES / LIMIT | 37 |
| 4.1.1 TEST PROCEDURE | 37 |
| 4.1.2 DEVIATION FROM STANDARD | 37 |



| Table of Contents | Page |
|---|-------------|
| 4.1.3 TEST SETUP | 37 |
| 4.1.4 EUT OPERATION CONDITIONS | 37 |
| 4.1.5 TEST RESULTS | 38 |
| 5 . BANDWIDTH TEST | 48 |
| 5.1 APPLIED PROCEDURES / LIMIT | 48 |
| 5.1.1 TEST PROCEDURE | 48 |
| 5.1.2 DEVIATION FROM STANDARD | 48 |
| 5.1.3 TEST SETUP | 48 |
| 5.1.4 EUT OPERATION CONDITIONS | 48 |
| 5.1.5 TEST RESULTS | 49 |
| 6 . PEAK OUTPUT POWER TEST | 59 |
| 6.1 APPLIED PROCEDURES / LIMIT | 59 |
| 6.1.1 TEST PROCEDURE | 59 |
| 6.1.2 DEVIATION FROM STANDARD | 59 |
| 6.1.3 TEST SETUP | 59 |
| 6.1.4 EUT OPERATION CONDITIONS | 59 |
| 6.1.5 TEST RESULTS | 60 |
| 7 . 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE | 61 |
| 7.1 APPLICABLE STANDARD | 61 |
| 7.2 TEST PROCEDURE | 61 |
| 7.3 DEVIATION FROM STANDARD | 61 |
| 7.4 TEST SETUP | 61 |
| 7.5 EUT OPERATION CONDITIONS | 61 |
| 7.1 TEST RESULTS | 61 |
| 8 . DUTY CYCLE OF TEST SIGNAL | 67 |
| 8.1 STANDARD REQUIREMENT | 67 |
| 8.2 FORMULA: | 67 |
| 9 . ANTENNA REQUIREMENT | 71 |
| 9.1 STANDARD REQUIREMENT | 71 |
| 9.2 EUT ANTENNA | 71 |
| 10 . EUT TEST PHOTO | 72 |
| 11 . EUT PHOTO | 75 |
| APPENDIX-PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS | |



1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

| FCC Part15 (15.247) , Subpart C | | | |
|--|----------------------------|----------|--------|
| Standard Section | Test Item | Judgment | Remark |
| 15.207 RSS-GEN 8.8 RSS-247 3.1 | Conducted Emission | PASS | |
| 15.247 (a)(2) RSS-247 5.2 (1) | 6dB Bandwidth | PASS | |
| 15.247 (b) RSS-247 5.4 (3) | Peak Output Power | PASS | |
| 15.247 (c) RSS-247 5.5 | Radiated Spurious Emission | PASS | |
| 15.247 (d) RSS-247 5.2 (2) | Power Spectral Density | PASS | |
| 15.205 RSS-247 5.5 | Band Edge Emission | PASS | |
| 15.247 KDB 558074)6)b) | Duty Cycle | PASS | |
| 15.203 RSS-247 5.4 | Antenna Requirement | PASS | |

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report



1.1 TEST FACILITY

Shenzhen BCTC Technology Co., Ltd.

Add. : No.101, Yousong Road, Longhua New District, Shenzhen, China

FCC Registered No.: 187086

IC Registered No.: 12655A

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.

| No. | Item | Uncertainty |
|-----|-------------------------------|-------------------------|
| 1 | Conducted Emission Test | $\pm 1.38\text{dB}$ |
| 2 | RF power, conducted | $\pm 0.16\text{dB}$ |
| 3 | Spurious emissions, conducted | $\pm 0.21\text{dB}$ |
| 4 | All emissions, radiated (<1G) | $\pm 4.68\text{dB}$ |
| 5 | All emissions, radiated (>1G) | $\pm 4.89\text{dB}$ |
| 6 | Temperature | $\pm 0.5^\circ\text{C}$ |
| 7 | Humidity | $\pm 2\%$ |



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

| | | |
|------------------------|--|--|
| Equipment | Compute Stick | |
| Trade Name | N/A | |
| Model Name | W6 | |
| Serial Model | W5 | |
| Model Difference | All the models are the same circuit and RF module, except the model names and outlook color. | |
| Product Description | The EUT is a Compute Stick | |
| | Operation Frequency: | 802.11b/g/n20MHz:2412~2462 MHz 802.11n40MHz:2422~2452 MHz BT:2402~2480MHz |
| | Modulation Type: | WIFI: OFDM/DSSS BT:GFSK |
| | Bit Rate of Transmitter | 802.11b:11/5.5/2/1 Mbps 802.11g:54/48/36/24/18/12/9/6Mbps 802.11n Up to 150Mbps BT:2MHz |
| | Number Of Channel | 802.11b/g/n20MHz:11 CH 802.11n40MHz: 7 CH BT:40 CH |
| | Antenna Designation: | Please see Note 3. |
| | Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual. | |
| Channel List | Please refer to the Note 2. | |
| Power Source | DC 5V | |
| Adapter | Model: GEO101U-050200U I/P:AC 100-240V 50/60Hz 0.3A O/P: DC 5V 2A | |
| hardware version | -- | |
| Software version | -- | |
| Serial number | -- | |
| Connecting I/O Port(s) | Please refer to the User's Manual | |

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



2.

| Channel List for 802.11b/g/n(20) | | | | | | | |
|----------------------------------|-----------------|---------|-----------------|---------|-----------------|---------|-----------------|
| Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 01 | 2412 | 04 | 2427 | 07 | 2442 | 10 | 2457 |
| 02 | 2417 | 05 | 2432 | 08 | 2447 | 11 | 2462 |
| 03 | 2422 | 06 | 2437 | 09 | 2452 | | |

| Channel List for 802.11n(40) | | | | | | | |
|------------------------------|-----------------|---------|-----------------|---------|-----------------|---------|-----------------|
| Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 03 | 2422 | 05 | 2432 | 07 | 2442 | 09 | 2452 |
| 04 | 2427 | 06 | 2437 | 08 | 2447 | | |

| Channel List for BT | | | | | |
|---------------------|-----------------|---------|-----------------|---------|-----------------|
| Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 01 | 2402 | 10 | 2420 | 39 | 2478 |
| 02 | 2404 | ~ | ~ | 40 | 2480 |
| ~ | ~ | 20 | 2440 | | |
| 9 | 2418 | 21 | 2442 | | |

3. Table for Filed Antenna

| Ant. | Brand | Model Name | Antenna Type | Gain (dBi) | NOTE |
|------|-------|------------|------------------|------------|------|
| 1 | N/A | N/A | Internal antenna | 1.0dBi | |

2.2 DESCRIPTION OF TEST MODES

| Pretest Mode | Description |
|--------------|----------------------------|
| Mode 1 | 802.11b CH01/ CH06/ CH11 |
| Mode 2 | 802.11g CH01/ CH06/ CH11 |
| Mode 3 | 802.11n20 CH01/ CH06/ CH11 |
| Mode 4 | 802.11n40 CH03/ CH06/ CH09 |
| Mode 5 | BT CH01/CH20/CH40 |
| Mode 6 | Link Mode |

| Conducted Emission | |
|--------------------|-------------|
| Final Test Mode | Description |
| Mode 6 | Link Mode |


| For Radiated Emission | |
|-----------------------|----------------------------|
| Final Test Mode | Description |
| Mode 1 | 802.11b CH01/ CH06/ CH11 |
| Mode 2 | 802.11g CH01/ CH06/ CH11 |
| Mode 3 | 802.11n20 CH01/ CH06/ CH11 |
| Mode 4 | 802.11n40 CH03/ CH06/ CH09 |
| Mode 5 | BT CH01/CH20/CH40 |

Note:

(1) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.

2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Conducted/ Radiated Spurious Emission Test

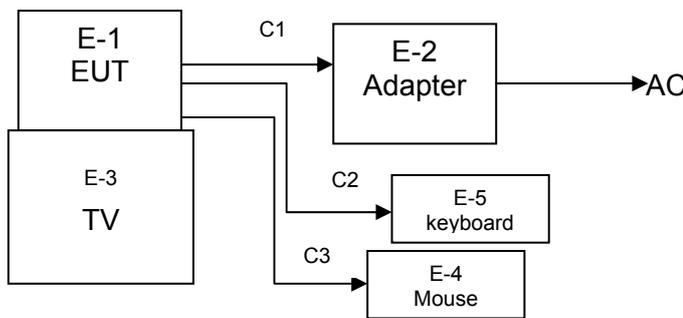

2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| Item | Equipment | Mfr/Brand | Model/Type No. | Series No. | Note |
|------|---------------|-----------|-----------------|----------------|------------------------------|
| E-1 | Compute Stick | N/A | W6 | N/A | EUT |
| E-2 | Adapter | N/A | GEO101U-050200U | | |
| E-3 | TV | PHILIPS | 24PFL3543/T3 | WJ3C1528000141 | AC100-240V 50/60Hz 36W |
| E-4 | Mouse | Minggaun | MG-020 | N/A | 1.5M |
| E-5 | keyboard | Minggaun | MG-K50 | N/A | 1.5M |

| Item | Shielded Type | Ferrite Core | Length | Note |
|------|---------------|--------------|--------|----------------------|
| C1 | NO | NO | 1.0M | USB cable unshielded |
| C2 | NO | NO | 1.5M | USB cable unshielded |
| C3 | NO | NO | 1.5M | USB cable unshielded |

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

| Item | Kind of Equipment | Manufacturer | Type No. | Serial No. | Last calibration | Calibrated until |
|------|--------------------|--------------|-----------|---------------|------------------|------------------|
| 1 | Spectrum Analyzer | Agilent | E4407B | MY45109572 | 2016.08.27 | 2017.08.26 |
| 2 | Test Receiver | R&S | ESPI | 101396 | 2016.08.27 | 2017.08.26 |
| 3 | Bilog Antenna | SCHWARZBECK | VULB9160 | VULB9160-3369 | 2016.08.27 | 2017.08.26 |
| 4 | 50Ω Coaxial Switch | Anritsu | MP59B | 6200264416 | 2016.08.27 | 2017.08.26 |
| 5 | Spectrum Analyzer | Agilent | N9020A | MY5051041 | 2016.08.27 | 2017.08.26 |
| 6 | Horn Antenna | SCHWARZBECK | 9120D | 9120D-1275 | 2016.08.27 | 2017.08.26 |
| 7 | Horn Ant | Schwarzbeck | BBHA 9170 | 9170-181 | 2016.08.25 | 2017.08.24 |
| 8 | Amplifier | SCHWARZBECK | BBV9718 | 9718-270 | 2016.08.25 | 2017.08.24 |
| 9 | Amplifier | SCHWARZBECK | BBV9743 | 9743-119 | 2016.08.25 | 2017.08.24 |
| 10 | Loop Antenna | ARA | PLW630/B | 1029 | 2016.08.25 | 2017.08.24 |
| 11 | Power Meter | R&S | NRVS | 100696 | 2016.08.27 | 2017.08.26 |
| 12 | Power Sensor | R&S | URV5-Z4 | 0395.1619.05 | 2016.08.27 | 2017.08.26 |
| 13 | RF cables | R&S | N/A | N/A | 2016.08.27 | 2017.08.26 |

Conduction Test equipment

| Item | Kind of Equipment | Manufacturer | Type No. | Serial No. | Last calibration | Calibrated until |
|------|--------------------|--------------|----------|------------------------|------------------|------------------|
| 1 | Test Receiver | R&S | ESCI | 1166.5950K03-101165-ha | 2016.08.27 | 2017.08.26 |
| 2 | LISN | R&S | NSLK8126 | 8126466 | 2016.08.27 | 2017.08.26 |
| 3 | LISN | R&S | NSLK8126 | 8126487 | 2016.08.27 | 2017.08.26 |
| 4 | 50Ω Coaxial Switch | Anritsu | MP59B | 6200264417 | 2016.08.27 | 2017.08.26 |
| 5 | RF cables | R&S | R204 | R20X | 2016.08.27 | 2017.08.26 |



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

| FREQUENCY (MHz) | Limit(dBuV) | | Standard |
|-----------------|-------------|-----------|----------|
| | Quasi-peak | Average | |
| 0.15 -0.5 | 66 - 56 * | 56 - 46 * | FCC |
| 0.50 -5.0 | 56.00 | 46.00 | FCC |
| 5.0 -30.0 | 60.00 | 50.00 | FCC |

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

| Receiver Parameters | Setting |
|---------------------|----------|
| Attenuation | 10 dB |
| Start Frequency | 0.15 MHz |
| Stop Frequency | 30 MHz |
| IF Bandwidth | 9 kHz |


3.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

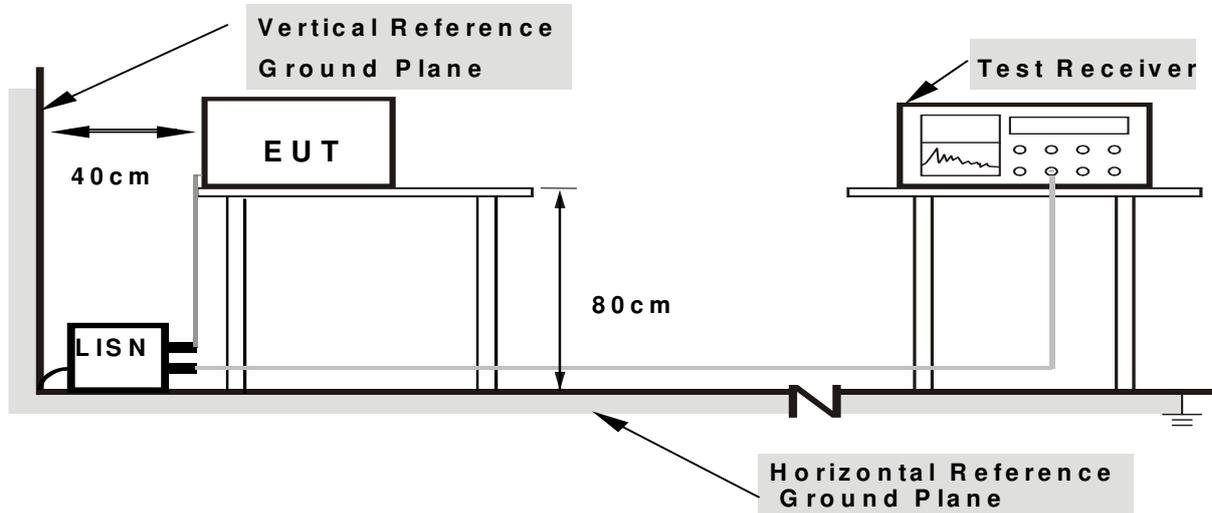

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.1.5 EUT OPERATING CONDITIONS


The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

We pretest AC 120V and AC 240V, the worst voltage was AC 120V and the data recording in the report.

3.1.6 TEST RESULTS



| | | | |
|----------------|--------------|---------------------|-------------|
| Temperature : | 25 °C | Relative Humidity : | 54% |
| Pressure : | 1010hPa | Phase : | L |
| Test Voltage : | AC 120V/60Hz | Test Mode : | WIFI Mode 6 |

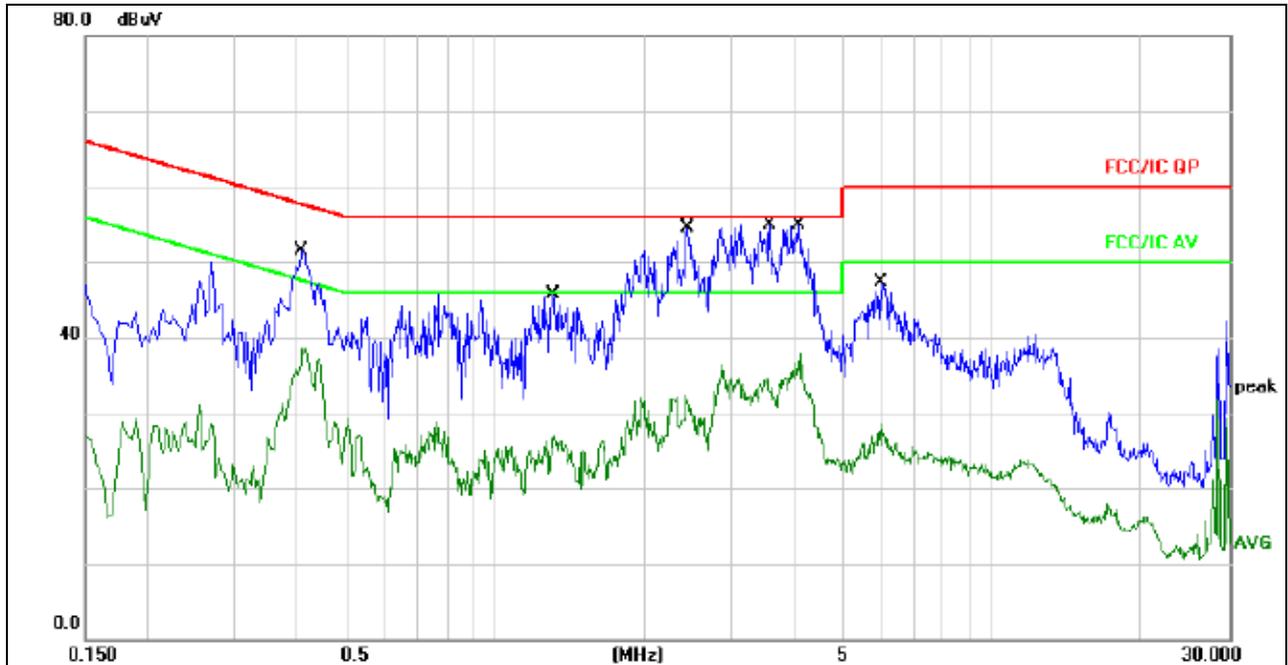


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV | Limit dBuV | Over dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|------------|----------|---------|
| 1 | | 0.4105 | 41.76 | 9.67 | 51.43 | 57.64 | -6.21 | QP | |
| 2 | | 0.4105 | 28.88 | 9.67 | 38.55 | 47.64 | -9.09 | AVG | |
| 3 | | 1.3099 | 36.10 | 9.70 | 45.80 | 56.00 | -10.20 | QP | |
| 4 | | 1.3099 | 17.21 | 9.70 | 26.91 | 46.00 | -19.09 | AVG | |
| 5 | | 2.4460 | 44.76 | 9.72 | 54.48 | 56.00 | -1.52 | QP | |
| 6 | | 2.4460 | 22.67 | 9.72 | 32.39 | 46.00 | -13.61 | AVG | |
| 7 | | 3.5700 | 45.10 | 9.73 | 54.83 | 56.00 | -1.17 | QP | |
| 8 | | 3.5700 | 24.75 | 9.73 | 34.48 | 46.00 | -11.52 | AVG | |
| 9 | * | 4.0820 | 45.19 | 9.73 | 54.92 | 56.00 | -1.08 | QP | |
| 10 | | 4.0820 | 28.18 | 9.73 | 37.91 | 46.00 | -8.09 | AVG | |
| 11 | | 5.9860 | 37.60 | 9.76 | 47.36 | 60.00 | -12.64 | QP | |
| 12 | | 5.9860 | 18.76 | 9.76 | 28.52 | 50.00 | -21.48 | AVG | |



| | | | |
|----------------|--------------|---------------------|-------------|
| Temperature : | 25 °C | Relative Humidity : | 54% |
| Pressure : | 1010hPa | Phase : | N |
| Test Voltage : | AC 120V/60Hz | Test Mode : | WIFI Mode 6 |

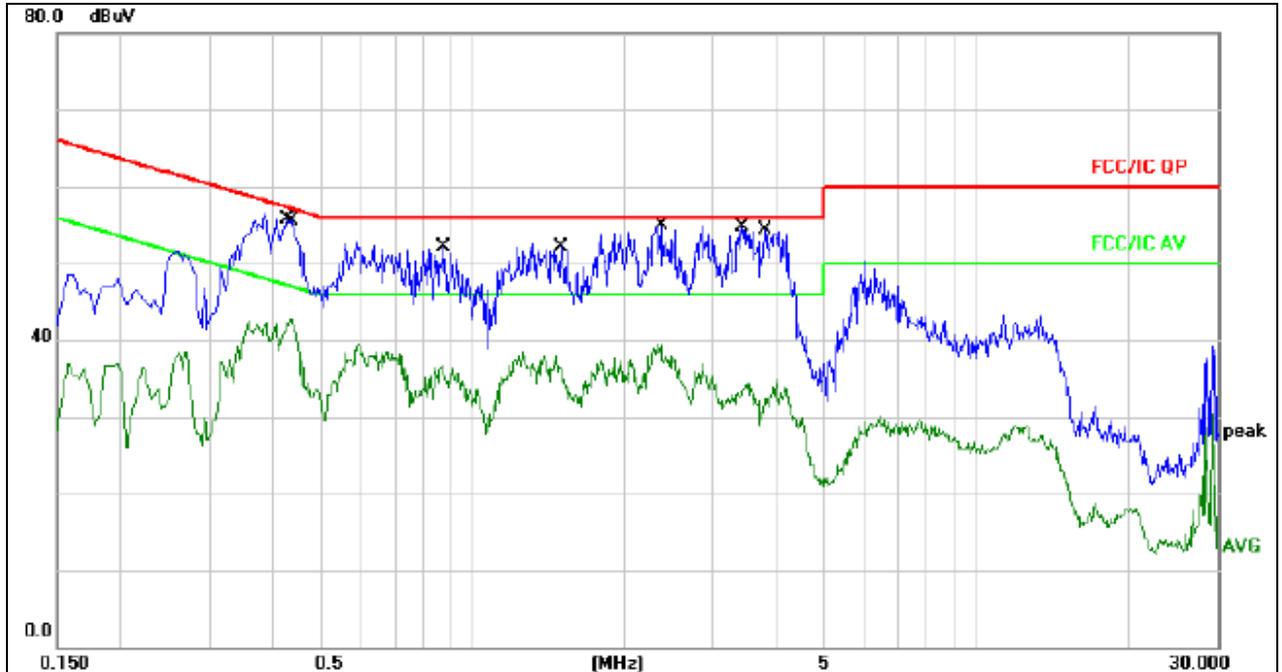


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV | Limit dBuV | Over dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|------------|----------|---------|
| 1 | | 0.4300 | 45.94 | 9.67 | 55.61 | 57.25 | -1.64 | QP | |
| 2 | | 0.4380 | 33.06 | 9.67 | 42.73 | 47.10 | -4.37 | AVG | |
| 3 | | 0.8740 | 42.43 | 9.70 | 52.13 | 56.00 | -3.87 | QP | |
| 4 | | 0.8740 | 27.04 | 9.70 | 36.74 | 46.00 | -9.26 | AVG | |
| 5 | | 1.5020 | 42.49 | 9.71 | 52.20 | 56.00 | -3.80 | QP | |
| 6 | | 1.5020 | 28.17 | 9.71 | 37.88 | 46.00 | -8.12 | AVG | |
| 7 | * | 2.3699 | 45.27 | 9.72 | 54.99 | 56.00 | -1.01 | QP | |
| 8 | | 2.3699 | 29.85 | 9.72 | 39.57 | 46.00 | -6.43 | AVG | |
| 9 | | 3.4260 | 44.95 | 9.73 | 54.68 | 56.00 | -1.32 | QP | |
| 10 | | 3.4260 | 24.79 | 9.73 | 34.52 | 46.00 | -11.48 | AVG | |
| 11 | | 3.8180 | 44.57 | 9.73 | 54.30 | 56.00 | -1.70 | QP | |
| 12 | | 3.8180 | 25.14 | 9.73 | 34.87 | 46.00 | -11.13 | AVG | |



| | | | |
|----------------|--------------|---------------------|-----------|
| Temperature : | 25 °C | Relative Humidity : | 54% |
| Pressure : | 1010hPa | Phase : | L |
| Test Voltage : | AC 120V/60Hz | Test Mode : | BT Mode 6 |

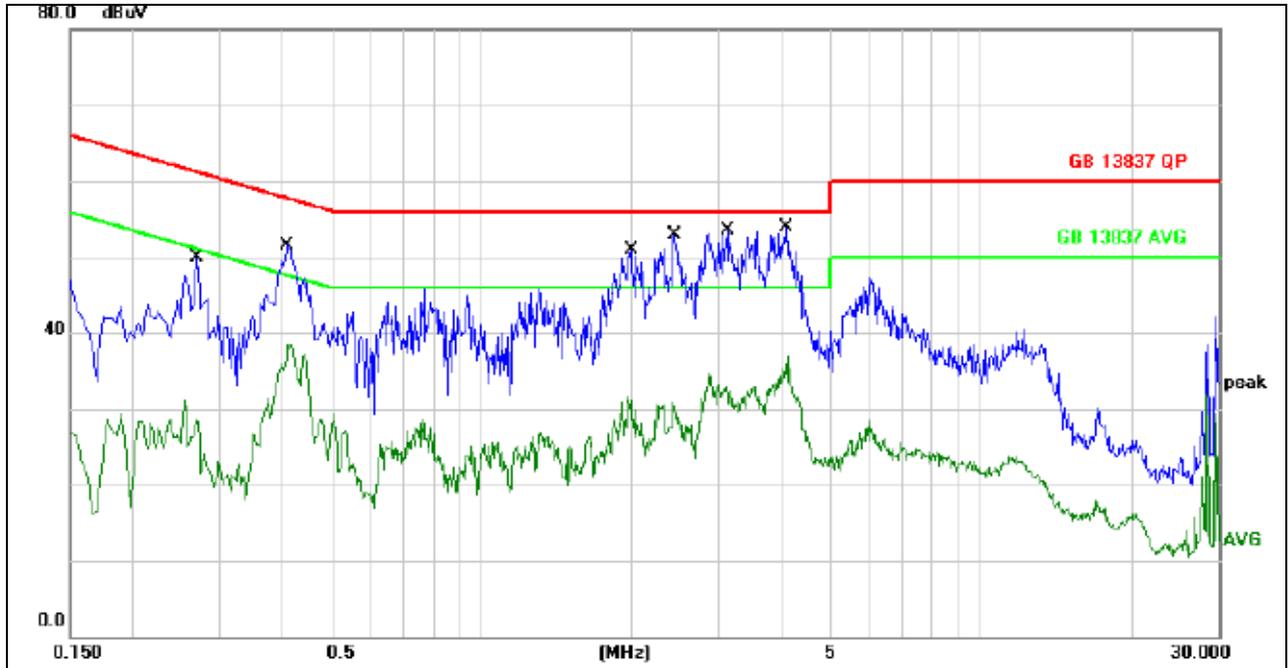

Remark:


1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV | Limit dBuV | Over dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|------------|----------|---------|
| 1 | | 0.2686 | 40.18 | 9.66 | 49.84 | 61.16 | -11.32 | QP | |
| 2 | | 0.2686 | 21.44 | 9.66 | 31.10 | 51.16 | -20.06 | AVG | |
| 3 | | 0.4083 | 41.89 | 9.67 | 51.56 | 57.68 | -6.12 | QP | |
| 4 | | 0.4083 | 28.88 | 9.67 | 38.55 | 47.68 | -9.13 | AVG | |
| 5 | | 1.9906 | 41.24 | 9.71 | 50.95 | 56.00 | -5.05 | QP | |
| 6 | | 1.9906 | 21.92 | 9.71 | 31.63 | 46.00 | -14.37 | AVG | |
| 7 | | 2.4346 | 43.26 | 9.72 | 52.98 | 56.00 | -3.02 | QP | |
| 8 | | 2.4346 | 25.03 | 9.72 | 34.75 | 46.00 | -11.25 | AVG | |
| 9 | | 3.1066 | 43.69 | 9.72 | 53.41 | 56.00 | -2.59 | QP | |
| 10 | | 3.1066 | 24.08 | 9.72 | 33.80 | 46.00 | -12.20 | AVG | |
| 11 | * | 4.0704 | 44.19 | 9.73 | 53.92 | 56.00 | -2.08 | QP | |
| 12 | | 4.0704 | 27.18 | 9.73 | 36.91 | 46.00 | -9.09 | AVG | |

| | | | |
|---------------|-------|---------------------|-----|
| Temperature : | 25 °C | Relative Humidity : | 54% |
|---------------|-------|---------------------|-----|



| | | | |
|----------------|--------------|-------------|-----------|
| Pressure : | 1010hPa | Phase : | N |
| Test Voltage : | AC 120V/60Hz | Test Mode : | BT Mode 6 |

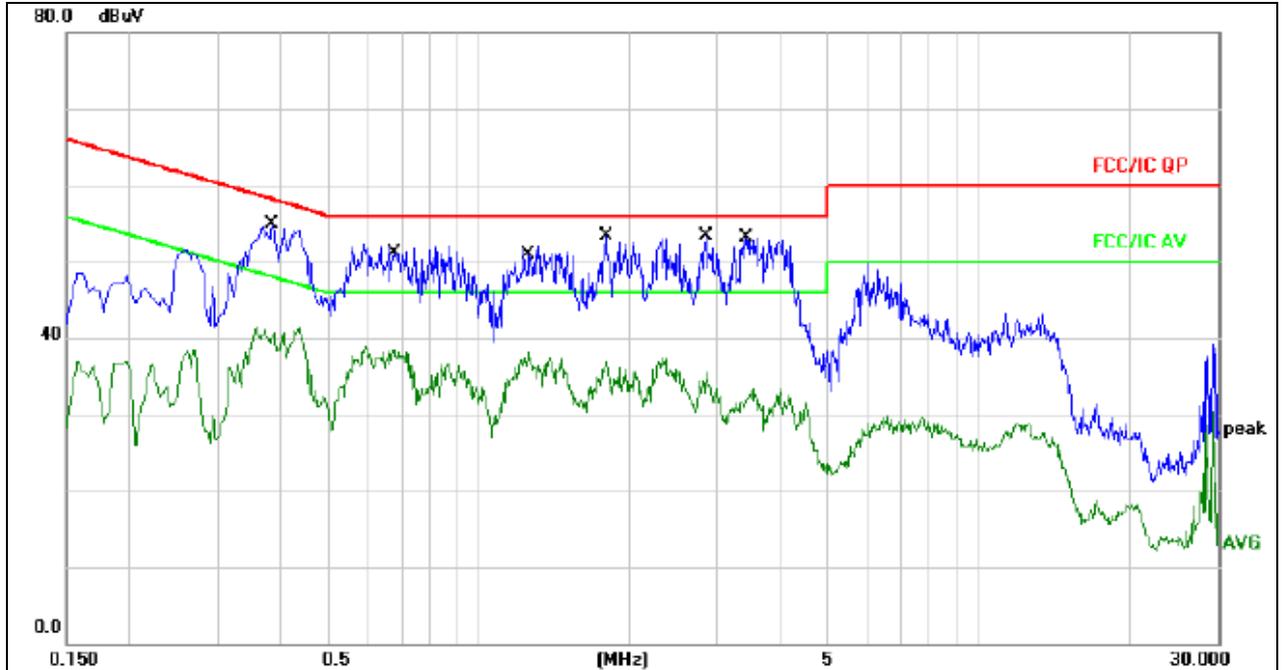

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV | Limit dBuV | Over dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|------------|----------|---------|
| 1 | | 0.3860 | 45.24 | 9.66 | 54.90 | 58.15 | -3.25 | QP | |
| 2 | | 0.3860 | 31.74 | 9.66 | 41.40 | 48.15 | -6.75 | AVG | |
| 3 | | 0.6820 | 42.46 | 9.67 | 52.13 | 56.00 | -3.87 | QP | |
| 4 | | 0.6820 | 28.93 | 9.67 | 38.60 | 46.00 | -7.40 | AVG | |
| 5 | | 1.2579 | 42.39 | 9.71 | 52.10 | 56.00 | -3.90 | QP | |
| 6 | | 1.2579 | 28.35 | 9.71 | 38.06 | 46.00 | -7.94 | AVG | |
| 7 | | 1.7980 | 43.49 | 9.71 | 53.20 | 56.00 | -2.80 | QP | |
| 8 | | 1.7980 | 27.86 | 9.71 | 37.57 | 46.00 | -8.43 | AVG | |
| 9 | * | 2.8420 | 43.63 | 9.72 | 53.35 | 56.00 | -2.65 | QP | |
| 10 | | 2.8420 | 25.74 | 9.72 | 35.46 | 46.00 | -10.54 | AVG | |
| 11 | | 3.4260 | 43.45 | 9.73 | 53.18 | 56.00 | -2.82 | QP | |
| 12 | | 3.4260 | 23.64 | 9.73 | 33.37 | 46.00 | -12.63 | AVG | |



3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

| Frequencies (MHz) | Field Strength (microrvolts/meter) | Measurement Distance (meters) |
|-------------------|------------------------------------|-------------------------------|
| 0.009~0.490 | 2400/F(KHz) | 300 |
| 0.490~1.705 | 24000/F(KHz) | 30 |
| 1.705~30.0 | 30 | 30 |
| 30~88 | 100 | 3 |
| 88~216 | 150 | 3 |
| 216~960 | 200 | 3 |
| Above 960 | 500 | 3 |

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

| FREQUENCY (MHz) | Limit(dBuV) (at 3M) | |
|-----------------|---------------------|---------|
| | PEAK | AVERAGE |
| Above 1000 | 74 | 54 |

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

| Spectrum Parameter | Setting |
|---------------------------------------|--|
| Attenuation | Auto |
| Start Frequency | 1000 MHz |
| Stop Frequency | 25GHz |
| RB / VB (emission in restricted band) | 1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average |

| Receiver Parameter | Setting |
|------------------------|----------------------------------|
| Attenuation | Auto |
| Start ~ Stop Frequency | 9kHz~150kHz / RB 200Hz for QP |
| Start ~ Stop Frequency | 150kHz~30MHz / RB 9kHz for QP |
| Start ~ Stop Frequency | 30MHz~1000MHz / RB 120kHz for QP |

3.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre(Above 18GHz the distance is 1 meter and table is 1.5 metre).
- h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

3.2.3 DEVIATION FROM TEST STANDARD


No deviation

3.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

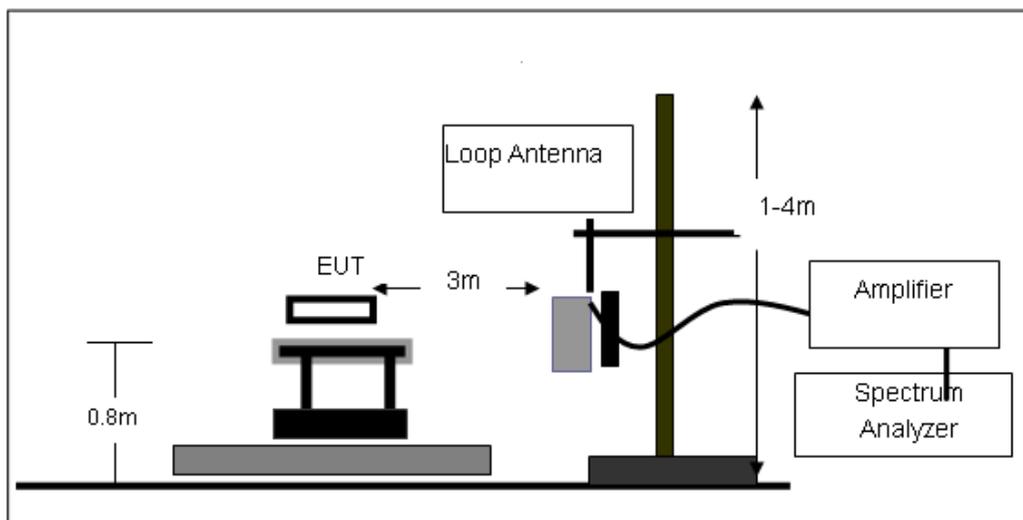

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

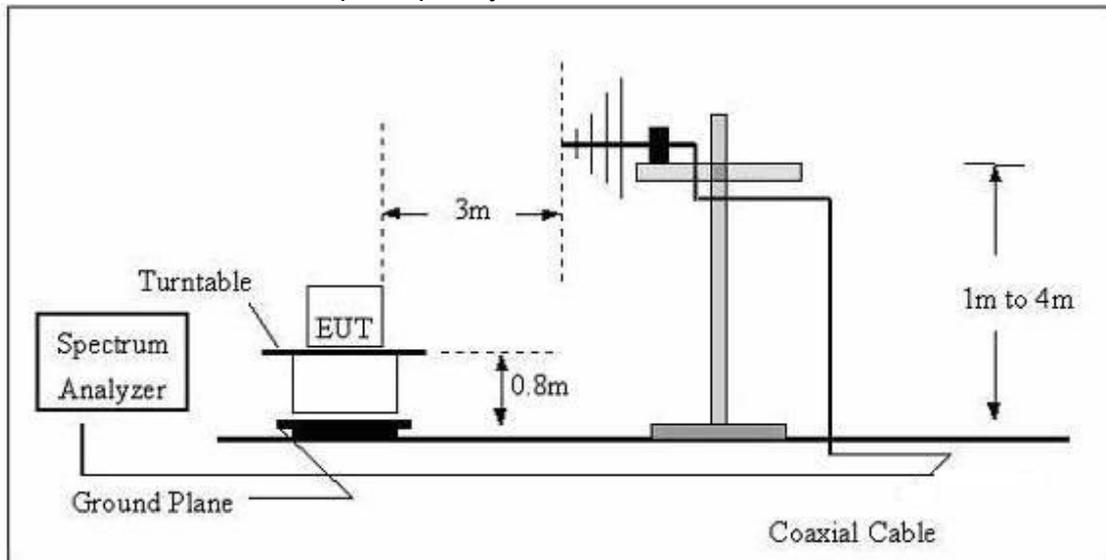

(C) Radiated Emission Test-Up Frequency Above 1GHz

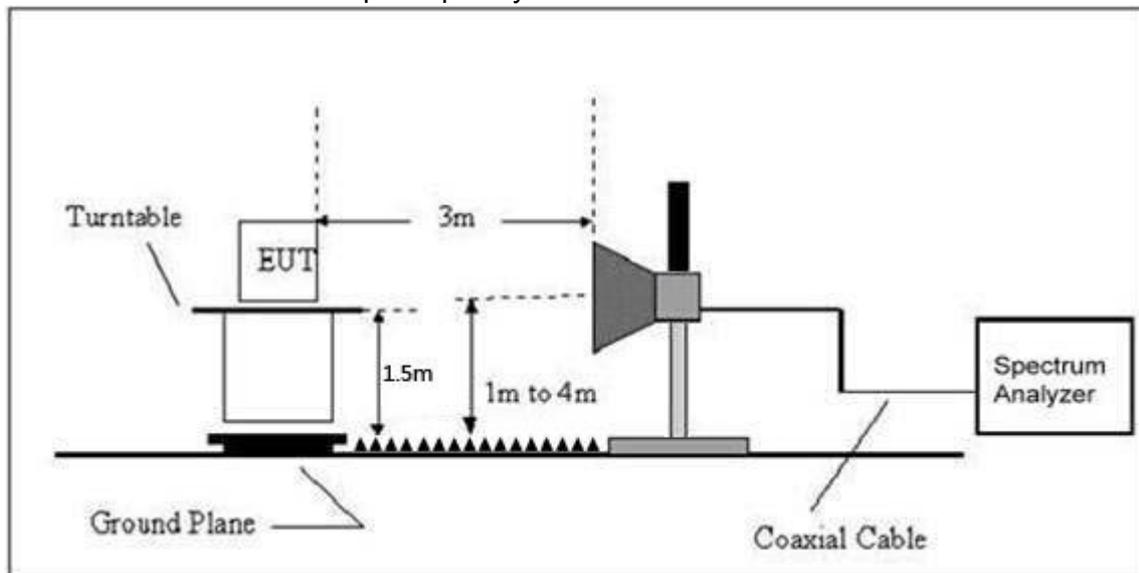

3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

**3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)**

| | | | |
|--------------|----------|--------------------|-------|
| Temperature: | 20℃ | Relative Humidity: | 48% |
| Pressure: | 1010 hPa | Test Voltage : | DC 5V |
| Test Mode : | Mode 6 | Polarization : | -- |

| Freq. (MHz) | Reading (dBuV/m) | Limit (dBuV/m) | Margin (dB) | State P/F |
|----------------|---------------------|-------------------|----------------|--------------|
| -- | -- | -- | -- | PASS |
| -- | -- | -- | -- | PASS |

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log(\text{specific distance}/\text{test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.



3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)

| | | | |
|----------------|-------------|---------------------|------------|
| Temperature : | 26°C | Relative Humidity : | 54% |
| Pressure : | 1010 hPa | Polarization : | Horizontal |
| Test Voltage : | DC 5V | | |
| Test Mode : | WIFI Mode 6 | | |

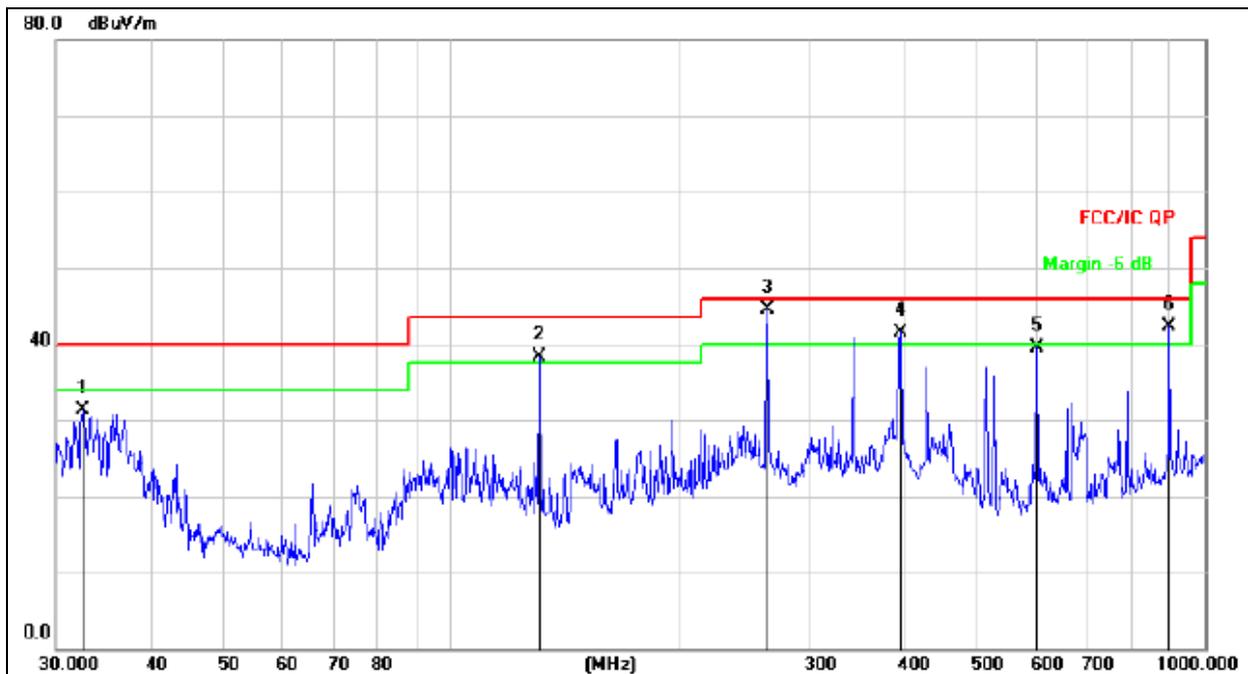


Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dB/m | Over dB | Detector |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|---------------|------------|----------|
| 1 | | 32.5197 | 49.32 | -17.96 | 31.36 | 40.00 | -8.64 | QP |
| 2 | ! | 131.2965 | 57.91 | -19.60 | 38.31 | 43.50 | -5.19 | QP |
| 3 | * | 262.8955 | 57.83 | -13.30 | 44.53 | 46.00 | -1.47 | QP |
| 4 | ! | 394.8544 | 51.13 | -9.59 | 41.54 | 46.00 | -4.46 | QP |
| 5 | | 599.3212 | 44.04 | -4.50 | 39.54 | 46.00 | -6.46 | QP |
| 6 | ! | 896.9964 | 41.61 | 0.64 | 42.25 | 46.00 | -3.75 | QP |



| | | | |
|----------------|-------------|---------------------|----------|
| Temperature : | 26°C | Relative Humidity : | 54% |
| Pressure : | 1010 hPa | Polarization : | Vertical |
| Test Voltage : | DC 5V | | |
| Test Mode : | WIFI Mode 6 | | |

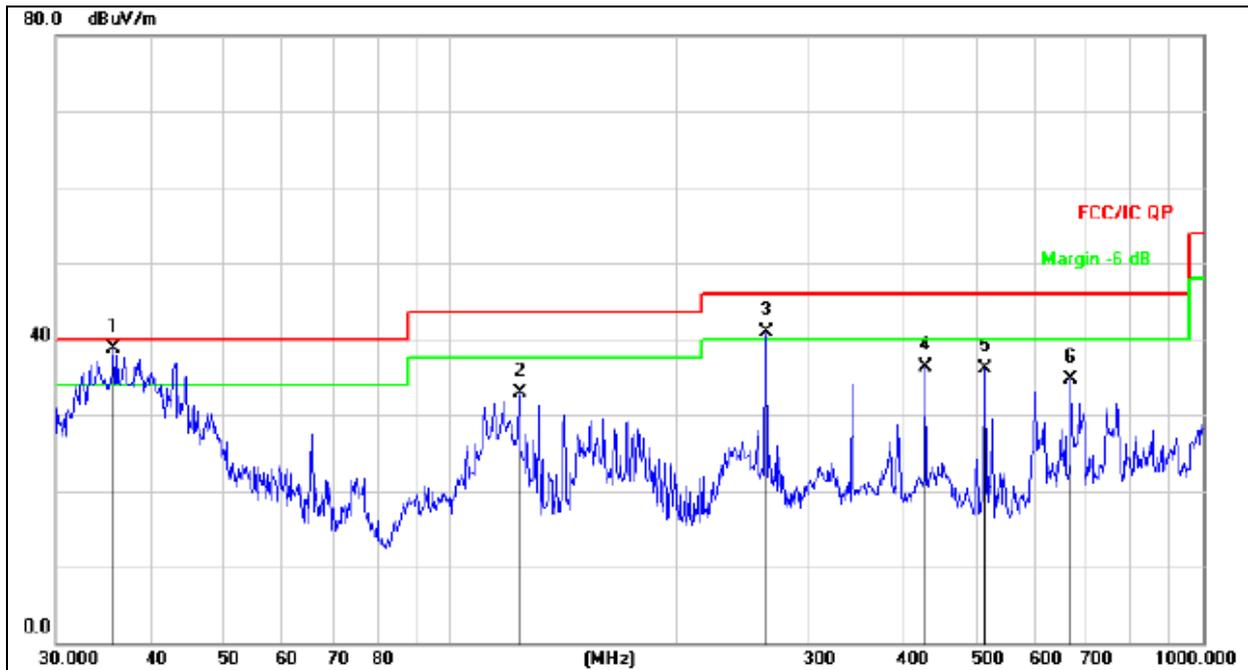


Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

| No. | Mk. | Freq. | Reading Level | Correct Factor | Measurement | Limit | Over | Detector |
|-----|-----|----------|---------------|----------------|-------------|-------|--------|----------|
| | | MHz | dBuV | dB | dBuV/m | dB/m | dB | |
| 1 | * | 35.7490 | 55.86 | -17.19 | 38.67 | 40.00 | -1.33 | QP |
| 2 | | 123.6985 | 51.72 | -18.87 | 32.85 | 43.50 | -10.65 | QP |
| 3 | ! | 262.8955 | 54.23 | -13.30 | 40.93 | 46.00 | -5.07 | QP |
| 4 | | 428.0193 | 44.92 | -8.70 | 36.22 | 46.00 | -9.78 | QP |
| 5 | | 513.6331 | 42.90 | -6.85 | 36.05 | 46.00 | -9.95 | QP |
| 6 | | 668.1423 | 38.24 | -3.50 | 34.74 | 46.00 | -11.26 | QP |



| | | | |
|----------------|-----------|---------------------|------------|
| Temperature : | 26°C | Relative Humidity : | 54% |
| Pressure : | 1010 hPa | Polarization : | Horizontal |
| Test Voltage : | DC 5V | | |
| Test Mode : | BT Mode 6 | | |

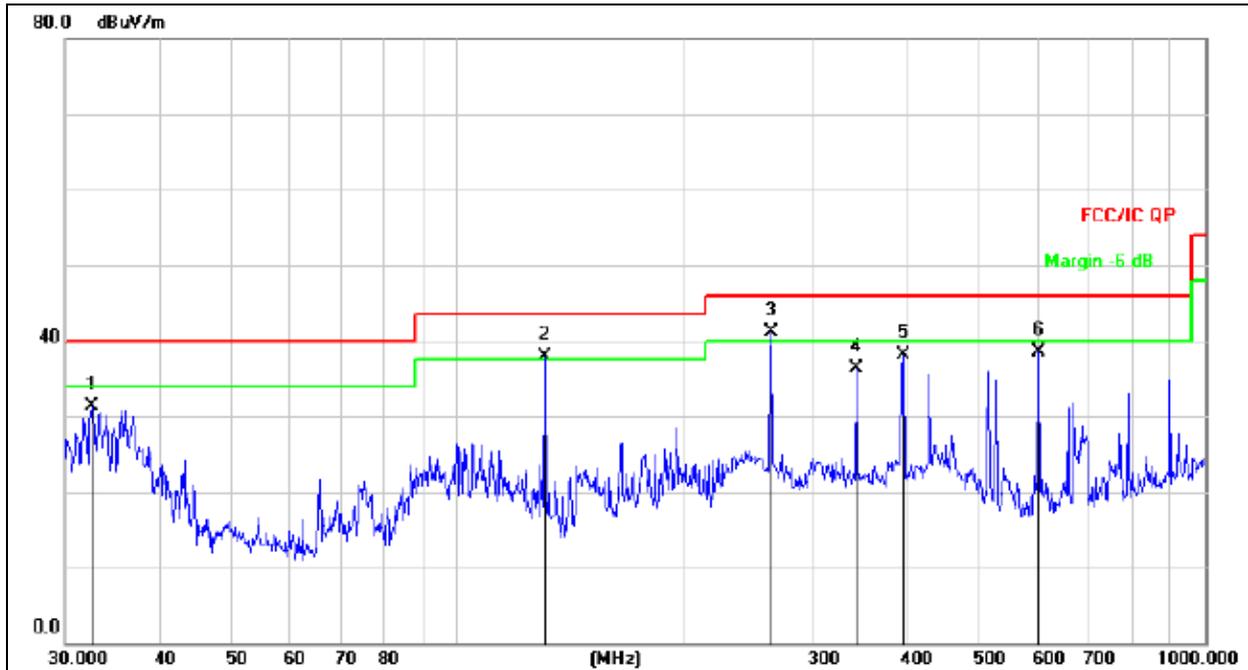


Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dB/m | Over dB | Detector |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|---------------|------------|----------|
| 1 | | 32.5197 | 49.32 | -17.96 | 31.36 | 40.00 | -8.64 | QP |
| 2 | ! | 131.2965 | 57.41 | -19.60 | 37.81 | 43.50 | -5.69 | QP |
| 3 | * | 262.8955 | 54.33 | -13.30 | 41.03 | 46.00 | -4.97 | QP |
| 4 | | 341.9786 | 47.05 | -10.67 | 36.38 | 46.00 | -9.62 | QP |
| 5 | | 394.8543 | 47.63 | -9.59 | 38.04 | 46.00 | -7.96 | QP |
| 6 | | 599.3211 | 43.04 | -4.50 | 38.54 | 46.00 | -7.46 | QP |



| | | | |
|----------------|-----------|---------------------|----------|
| Temperature : | 26°C | Relative Humidity : | 54% |
| Pressure : | 1010 hPa | Polarization : | Vertical |
| Test Voltage : | DC 5V | | |
| Test Mode : | BT Mode 6 | | |

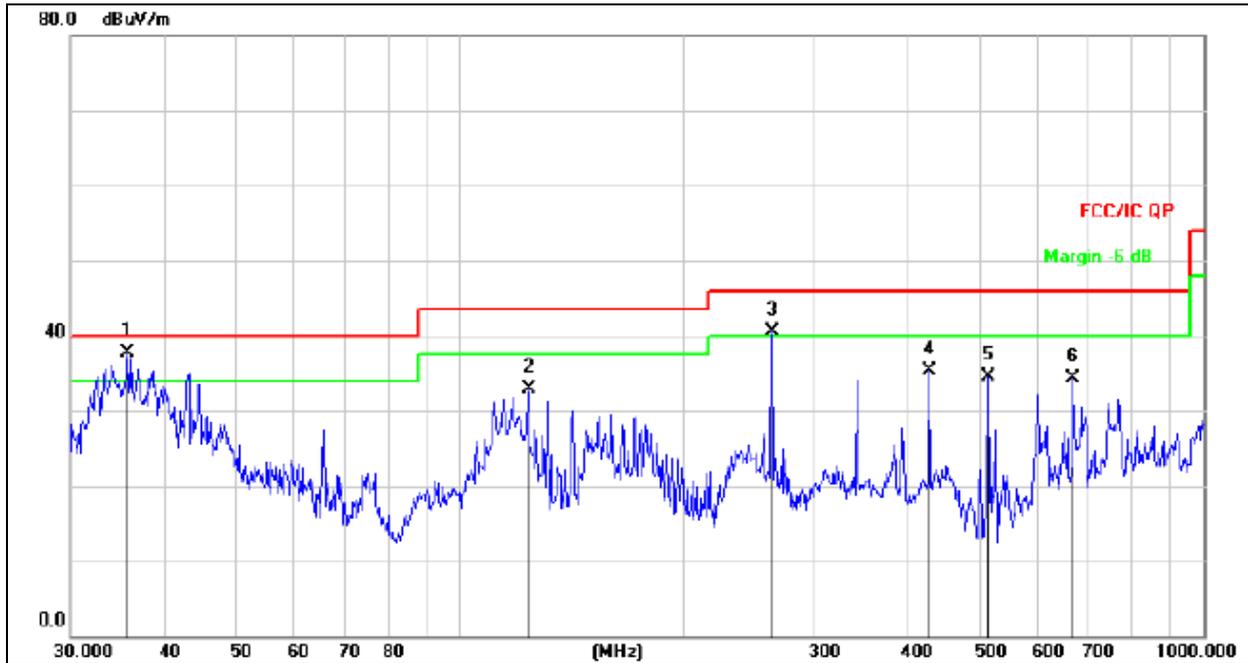

Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dB/m | Over dB | Detector |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|---------------|------------|----------|
| 1 | * | 35.7490 | 54.86 | -17.19 | 37.67 | 40.00 | -2.33 | QP |
| 2 | | 123.6984 | 51.72 | -18.87 | 32.85 | 43.50 | -10.65 | QP |
| 3 | ! | 262.8955 | 53.73 | -13.30 | 40.43 | 46.00 | -5.57 | QP |
| 4 | | 428.0192 | 43.92 | -8.70 | 35.22 | 46.00 | -10.78 | QP |
| 5 | | 513.6331 | 41.40 | -6.85 | 34.55 | 46.00 | -11.45 | QP |
| 6 | | 668.1422 | 37.74 | -3.50 | 34.24 | 46.00 | -11.76 | QP |

3.2.8 TEST RESULTS (1GHz~25GHz)



802.11b

| Polar (H/V) | Frequency | Meter Reading | Pre-amplifier | Cable Loss | Antenna Factor | Emission Level | Limits | Margin | Detector Type |
|---------------------------------|-----------|---------------|---------------|------------|----------------|----------------|----------|--------|---------------|
| | (MHz) | (dBuV) | (dB) | (dB) | (dB/m) | (dBuV/m) | (dBuV/m) | (dB) | |
| operation frequency:2412 | | | | | | | | | |
| V | 4824.00 | 66.94 | 39.55 | 7.85 | 25.66 | 60.90 | 74 | -13.10 | PK |
| V | 4824.00 | 48.75 | 39.55 | 7.85 | 25.66 | 42.71 | 54 | -11.29 | AV |
| V | 7236.00 | 68.01 | 38.33 | 7.52 | 24.55 | 61.75 | 74 | -12.25 | PK |
| V | 7236.00 | 48.24 | 38.33 | 7.52 | 24.55 | 41.98 | 54 | -12.02 | AV |
| V | 15450.00 | 51.32 | 35.23 | 6.75 | 26.59 | 49.43 | 74 | -24.57 | PK |
| H | 4824.00 | 68.47 | 39.55 | 7.85 | 25.66 | 62.43 | 74 | -11.57 | PK |
| H | 4824.00 | 49.22 | 39.55 | 7.85 | 25.66 | 43.18 | 54 | -10.82 | AV |
| H | 7236.00 | 69.21 | 38.33 | 7.52 | 23.55 | 61.95 | 74 | -12.05 | PK |
| H | 7236.00 | 52.51 | 38.33 | 7.52 | 23.22 | 44.92 | 54 | -9.08 | AV |
| H | 15450.00 | 47.56 | 35.45 | 6.75 | 27.88 | 46.74 | 74 | -27.26 | PK |
| operation frequency:2437 | | | | | | | | | |
| V | 4874.00 | 65.26 | 38.89 | 7.57 | 25.45 | 59.39 | 74 | -14.61 | PK |
| V | 4874.00 | 48.42 | 38.89 | 7.57 | 25.45 | 42.55 | 54 | -11.45 | AV |
| V | 7311.00 | 66.37 | 38.78 | 7.35 | 24.78 | 59.72 | 74 | -14.28 | PK |
| V | 7311.00 | 48.02 | 38.78 | 7.35 | 24.78 | 41.37 | 54 | -12.63 | AV |
| V | 15450.00 | 52.12 | 35.89 | 6.42 | 26.47 | 49.12 | 74 | -24.88 | PK |
| H | 4874.00 | 64.59 | 38.89 | 7.57 | 25.45 | 58.72 | 74 | -15.28 | PK |
| H | 4874.00 | 49.31 | 38.89 | 7.57 | 25.45 | 43.44 | 54 | -10.56 | AV |
| H | 7311.00 | 70.03 | 38.78 | 7.35 | 24.78 | 63.38 | 74 | -10.62 | PK |
| H | 7311.00 | 48.58 | 38.78 | 7.35 | 24.78 | 41.93 | 54 | -12.07 | AV |
| H | 15450.00 | 48.46 | 36.68 | 6.45 | 26.65 | 44.88 | 74 | -29.12 | PK |
| operation frequency:2462 | | | | | | | | | |
| V | 4924.00 | 68.05 | 38.75 | 7.46 | 25.45 | 62.21 | 74 | -11.79 | PK |
| V | 4924.00 | 50.55 | 38.75 | 7.46 | 25.45 | 44.71 | 54 | -9.29 | AV |
| V | 7386.00 | 67.43 | 38.65 | 7.22 | 24.78 | 60.78 | 74 | -13.22 | PK |
| V | 7386.00 | 49.12 | 38.65 | 7.22 | 24.78 | 42.47 | 54 | -11.53 | AV |
| V | 15450.00 | 53.37 | 35.58 | 6.35 | 26.47 | 50.61 | 74 | -23.39 | PK |
| H | 4924.00 | 65.91 | 38.75 | 7.46 | 25.45 | 60.07 | 74 | -13.93 | PK |
| H | 4924.00 | 50.15 | 38.75 | 7.46 | 25.45 | 44.31 | 54 | -9.69 | AV |
| H | 7386.00 | 69.37 | 38.65 | 7.22 | 24.78 | 62.72 | 74 | -11.28 | PK |
| H | 7386.00 | 48.01 | 38.65 | 7.22 | 24.78 | 41.36 | 54 | -12.64 | AV |
| H | 15450.00 | 50.25 | 36.42 | 6.32 | 26.65 | 46.80 | 74 | -27.20 | PK |

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11g

| Polar (H/V) | Frequency | Meter Reading | Pre-amplifier | Cable Loss | Antenna Factor | Emission Level | Limits | Margin | Detector Type |
|---------------------------------|-----------|---------------|---------------|------------|----------------|----------------|----------|--------|---------------|
| | (MHz) | (dBuV) | (dB) | (dB) | (dB/m) | (dBuV/m) | (dBuV/m) | (dB) | |
| operation frequency:2412 | | | | | | | | | |
| V | 4824.00 | 65.78 | 39.55 | 7.85 | 25.66 | 59.74 | 74 | -14.26 | PK |
| V | 4824.00 | 49.24 | 39.55 | 7.85 | 25.66 | 43.20 | 54 | -10.80 | AV |
| V | 7236.00 | 65.94 | 38.33 | 7.52 | 24.55 | 59.68 | 74 | -14.32 | PK |
| V | 7236.00 | 47.35 | 38.33 | 7.52 | 24.55 | 41.09 | 54 | -12.91 | AV |
| V | 15450.00 | 50.61 | 35.23 | 6.75 | 26.59 | 48.72 | 74 | -25.28 | PK |
| H | 4824.00 | 62.83 | 39.55 | 7.85 | 25.66 | 56.79 | 74 | -17.21 | PK |
| H | 4824.00 | 49.15 | 39.55 | 7.85 | 25.66 | 43.11 | 54 | -10.89 | AV |
| H | 7236.00 | 68.89 | 38.33 | 7.52 | 23.55 | 61.63 | 74 | -12.37 | PK |
| H | 7236.00 | 50.14 | 38.33 | 7.52 | 23.22 | 42.55 | 54 | -11.45 | AV |
| H | 15450.00 | 45.48 | 35.45 | 6.75 | 27.88 | 44.66 | 74 | -29.34 | PK |
| operation frequency:2437 | | | | | | | | | |
| V | 4874.00 | 66.22 | 38.89 | 7.57 | 25.45 | 60.35 | 74 | -13.65 | PK |
| V | 4874.00 | 48.92 | 38.89 | 7.57 | 25.45 | 43.05 | 54 | -10.95 | AV |
| V | 7311.00 | 67.08 | 38.78 | 7.35 | 24.78 | 60.43 | 74 | -13.57 | PK |
| V | 7311.00 | 47.43 | 38.78 | 7.35 | 24.78 | 40.78 | 54 | -13.22 | AV |
| V | 15450.00 | 52.49 | 35.89 | 6.42 | 26.47 | 49.49 | 74 | -24.51 | PK |
| H | 4874.00 | 64.90 | 38.89 | 7.57 | 25.45 | 59.03 | 74 | -14.97 | PK |
| H | 4874.00 | 49.15 | 38.89 | 7.57 | 25.45 | 43.28 | 54 | -10.72 | AV |
| H | 7311.00 | 68.86 | 38.78 | 7.35 | 24.78 | 62.21 | 74 | -11.79 | PK |
| H | 7311.00 | 47.95 | 38.78 | 7.35 | 24.78 | 41.30 | 54 | -12.70 | AV |
| H | 15450.00 | 49.03 | 36.68 | 6.42 | 26.65 | 45.42 | 74 | -28.58 | PK |
| operation frequency:2462 | | | | | | | | | |
| V | 4924.00 | 67.43 | 38.75 | 7.46 | 25.45 | 61.59 | 74 | -12.41 | PK |
| V | 4924.00 | 48.12 | 38.75 | 7.46 | 25.45 | 42.28 | 54 | -11.72 | AV |
| V | 7386.00 | 68.11 | 38.65 | 7.22 | 24.78 | 61.46 | 74 | -12.54 | PK |
| V | 7386.00 | 49.44 | 38.65 | 7.22 | 24.78 | 42.79 | 54 | -11.21 | AV |
| V | 15450.00 | 53.30 | 35.58 | 6.35 | 26.47 | 50.54 | 74 | -23.46 | PK |
| H | 4924.00 | 66.10 | 38.75 | 7.46 | 25.45 | 60.26 | 74 | -13.74 | PK |
| H | 4924.00 | 50.11 | 38.75 | 7.46 | 25.45 | 44.27 | 54 | -9.73 | AV |
| H | 7386.00 | 68.91 | 38.65 | 7.22 | 24.78 | 62.26 | 74 | -11.74 | PK |
| H | 7386.00 | 48.55 | 38.65 | 7.22 | 24.78 | 41.90 | 54 | -12.10 | AV |
| H | 15450.00 | 49.40 | 36.42 | 6.32 | 26.65 | 45.95 | 74 | -28.05 | PK |

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n(20MHz)

| Polar (H/V) | Frequency | Meter Reading | Pre-amplifier | Cable Loss | Antenna Factor | Emission Level | Limits | Margin | Detector Type |
|---------------------------------|-----------|---------------|---------------|------------|----------------|----------------|----------|--------|---------------|
| | (MHz) | (dBuV) | (dB) | (dB) | (dB/m) | (dBuV/m) | (dBuV/m) | (dB) | |
| operation frequency:2412 | | | | | | | | | |
| V | 4824.00 | 67.45 | 39.55 | 7.85 | 25.66 | 61.41 | 74 | -12.59 | PK |
| V | 4824.00 | 48.45 | 39.55 | 7.85 | 25.66 | 42.41 | 54 | -11.59 | AV |
| V | 7236.00 | 68.15 | 38.33 | 7.52 | 24.55 | 61.89 | 74 | -12.11 | PK |
| V | 7236.00 | 48.32 | 38.33 | 7.52 | 24.55 | 42.06 | 54 | -11.94 | AV |
| V | 15450.00 | 51.55 | 35.23 | 6.75 | 26.59 | 49.66 | 74 | -24.34 | PK |
| H | 4824.00 | 68.04 | 39.55 | 7.85 | 25.66 | 62.00 | 74 | -12.00 | PK |
| H | 4824.00 | 49.41 | 39.55 | 7.85 | 25.66 | 43.37 | 54 | -10.63 | AV |
| H | 7236.00 | 69.05 | 38.33 | 7.52 | 23.55 | 61.79 | 74 | -12.21 | PK |
| H | 7236.00 | 52.24 | 38.33 | 7.52 | 23.22 | 44.65 | 54 | -9.35 | AV |
| H | 15450.00 | 47.63 | 35.45 | 6.75 | 27.88 | 46.81 | 74 | -27.19 | PK |
| operation frequency:2437 | | | | | | | | | |
| V | 4874.00 | 66.41 | 38.89 | 7.57 | 25.45 | 60.54 | 74 | -13.46 | PK |
| V | 4874.00 | 49.41 | 38.89 | 7.57 | 25.45 | 43.54 | 54 | -10.46 | AV |
| V | 7311.00 | 67.06 | 38.78 | 7.35 | 24.78 | 60.41 | 74 | -13.59 | PK |
| V | 7311.00 | 47.23 | 38.78 | 7.35 | 24.78 | 40.58 | 54 | -13.42 | AV |
| V | 15450.00 | 52.12 | 35.89 | 6.42 | 26.47 | 49.12 | 74 | -24.88 | PK |
| H | 4874.00 | 65.29 | 38.89 | 7.57 | 25.45 | 59.42 | 74 | -14.58 | PK |
| H | 4874.00 | 49.43 | 38.89 | 7.57 | 25.45 | 43.56 | 54 | -10.44 | AV |
| H | 7311.00 | 69.44 | 38.78 | 7.35 | 24.78 | 62.79 | 74 | -11.21 | PK |
| H | 7311.00 | 48.59 | 38.78 | 7.35 | 24.78 | 41.94 | 54 | -12.06 | AV |
| H | 15450.00 | 49.40 | 36.68 | 6.42 | 26.65 | 45.79 | 74 | -28.21 | PK |
| operation frequency:2462 | | | | | | | | | |
| V | 4924.00 | 68.46 | 38.75 | 7.46 | 25.45 | 62.62 | 74 | -11.38 | PK |
| V | 4924.00 | 50.15 | 38.75 | 7.46 | 25.45 | 44.31 | 54 | -9.69 | AV |
| V | 7386.00 | 67.45 | 38.65 | 7.22 | 24.78 | 60.80 | 74 | -13.20 | PK |
| V | 7386.00 | 49.34 | 38.65 | 7.22 | 24.78 | 42.69 | 54 | -11.31 | AV |
| V | 15450.00 | 53.14 | 35.58 | 6.35 | 26.47 | 50.38 | 74 | -23.62 | PK |
| H | 4924.00 | 66.47 | 38.75 | 7.46 | 25.45 | 60.63 | 74 | -13.37 | PK |
| H | 4924.00 | 50.29 | 38.75 | 7.46 | 25.45 | 44.45 | 54 | -9.55 | AV |
| H | 7386.00 | 68.97 | 38.65 | 7.22 | 24.78 | 62.32 | 74 | -11.68 | PK |
| H | 7386.00 | 48.15 | 38.65 | 7.22 | 24.78 | 41.50 | 54 | -12.50 | AV |
| H | 15450.00 | 49.93 | 36.42 | 6.32 | 26.65 | 46.48 | 74 | -27.52 | PK |

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n(40MHz)

| Polar (H/V) | Frequency | Meter Reading | Pre-amplifier | Cable Loss | Antenna Factor | Emission Level | Limits | Margin | Detector Type |
|---------------------------------|-----------|---------------|---------------|------------|----------------|----------------|----------|--------|---------------|
| | (MHz) | (dBuV) | (dB) | (dB) | (dB/m) | (dBuV/m) | (dBuV/m) | (dB) | |
| operation frequency:2422 | | | | | | | | | |
| V | 4844.000 | 68.83 | 39.55 | 7.77 | 25.66 | 62.71 | 74 | -11.29 | PK |
| V | 4844.000 | 48.84 | 39.55 | 7.77 | 25.66 | 42.72 | 54 | -11.28 | AV |
| V | 7266.000 | 67.81 | 38.33 | 7.30 | 24.55 | 61.33 | 74 | -12.67 | PK |
| V | 7266.000 | 48.55 | 38.33 | 7.30 | 24.55 | 42.07 | 54 | -11.93 | AV |
| V | 15450.00 | 51.95 | 35.23 | 6.60 | 26.59 | 49.91 | 74 | -24.09 | PK |
| H | 4844.000 | 69.04 | 39.55 | 7.77 | 25.66 | 62.92 | 74 | -11.08 | PK |
| H | 4844.000 | 49.57 | 39.55 | 7.77 | 25.66 | 43.45 | 54 | -10.55 | AV |
| H | 7266.000 | 70.02 | 38.33 | 7.30 | 23.55 | 62.54 | 74 | -11.46 | PK |
| H | 7266.000 | 52.75 | 38.33 | 7.30 | 23.22 | 44.94 | 54 | -9.06 | AV |
| H | 15450.00 | 48.62 | 35.45 | 6.60 | 27.88 | 47.65 | 74 | -26.35 | PK |
| operation frequency:2437 | | | | | | | | | |
| V | 4874.00 | 67.01 | 38.89 | 7.57 | 25.45 | 61.14 | 74 | -12.86 | PK |
| V | 4874.00 | 49.86 | 38.89 | 7.57 | 25.45 | 43.99 | 54 | -10.01 | AV |
| V | 7311.00 | 67.92 | 38.78 | 7.35 | 24.78 | 61.27 | 74 | -12.73 | PK |
| V | 7311.00 | 47.93 | 38.78 | 7.35 | 24.78 | 41.28 | 54 | -12.72 | AV |
| V | 15450.00 | 52.56 | 35.89 | 6.42 | 26.47 | 49.56 | 74 | -24.44 | PK |
| H | 4874.00 | 65.47 | 38.89 | 7.57 | 25.45 | 59.60 | 74 | -14.40 | PK |
| H | 4874.00 | 49.86 | 38.89 | 7.57 | 25.45 | 43.99 | 54 | -10.01 | AV |
| H | 7311.00 | 70.23 | 38.78 | 7.35 | 24.78 | 63.58 | 74 | -10.42 | PK |
| H | 7311.00 | 48.42 | 38.78 | 7.35 | 24.78 | 41.77 | 54 | -12.23 | AV |
| H | 15450.00 | 49.65 | 36.68 | 6.42 | 26.65 | 46.04 | 74 | -27.96 | PK |
| operation frequency:2452 | | | | | | | | | |
| V | 4904.00 | 68.84 | 38.75 | 7.38 | 25.45 | 62.92 | 74 | -11.08 | PK |
| V | 4904.00 | 50.55 | 38.75 | 7.38 | 25.45 | 44.63 | 54 | -9.37 | AV |
| V | 7356.00 | 67.90 | 38.65 | 7.15 | 24.78 | 61.18 | 74 | -12.82 | PK |
| V | 7356.00 | 50.14 | 38.65 | 7.15 | 24.78 | 43.42 | 54 | -10.58 | AV |
| V | 15450.00 | 53.65 | 35.58 | 6.25 | 26.47 | 50.79 | 74 | -23.21 | PK |
| H | 4904.00 | 66.97 | 38.75 | 7.38 | 25.45 | 61.05 | 74 | -12.95 | PK |
| H | 4904.00 | 51.14 | 38.75 | 7.38 | 25.45 | 45.22 | 54 | -8.78 | AV |
| H | 7356.00 | 70.03 | 38.65 | 7.15 | 24.78 | 63.31 | 74 | -10.69 | PK |
| H | 7356.00 | 48.75 | 38.65 | 7.15 | 24.78 | 42.03 | 54 | -11.97 | AV |
| H | 15450.00 | 50.57 | 36.42 | 6.25 | 26.65 | 47.05 | 74 | -26.95 | PK |

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



BT

| Polar (H/V) | Frequency | Meter Reading | Pre-amplifier | Cable Loss | Antenna Factor | Emission Level | Limits | Margin | Detector Type |
|---------------------------------|-----------|---------------|---------------|------------|----------------|----------------|----------|--------|---------------|
| | (MHz) | (dBuV) | (dB) | (dB) | (dB/m) | (dBuV/m) | (dBuV/m) | (dB) | |
| operation frequency:2402 | | | | | | | | | |
| V | 4804.00 | 59.39 | 38.53 | 7.78 | 23.25 | 51.89 | 74 | -22.11 | PK |
| V | 4804.00 | 45.76 | 38.53 | 7.78 | 23.25 | 38.26 | 54 | -15.74 | AV |
| V | 7206.00 | 67.89 | 38.33 | 7.52 | 24.55 | 61.63 | 74 | -12.37 | PK |
| V | 7206.00 | 48.15 | 38.33 | 7.52 | 24.55 | 41.89 | 54 | -12.11 | AV |
| V | 16132.00 | 49.96 | 38.75 | 10.36 | 26.57 | 48.14 | 74 | -25.86 | PK |
| H | 4804.00 | 60.22 | 38.53 | 7.78 | 23.25 | 52.72 | 74 | -21.28 | PK |
| H | 4804.00 | 45.64 | 38.53 | 7.78 | 23.25 | 38.14 | 54 | -15.86 | AV |
| H | 7206.00 | 68.93 | 38.33 | 7.52 | 23.55 | 61.67 | 74 | -12.33 | PK |
| H | 7206.00 | 52.15 | 38.33 | 7.52 | 23.22 | 44.56 | 54 | -9.44 | AV |
| H | 16132.00 | 49.70 | 38.75 | 10.36 | 26.57 | 47.88 | 74 | -26.12 | PK |
| operation frequency:2440 | | | | | | | | | |
| V | 4880.00 | 60.32 | 38.65 | 7.78 | 23.61 | 53.06 | 74 | -20.94 | PK |
| V | 4880.00 | 45.80 | 38.65 | 7.78 | 23.61 | 38.54 | 54 | -15.46 | AV |
| V | 7320.00 | 66.94 | 38.78 | 7.35 | 24.78 | 60.29 | 74 | -13.71 | PK |
| V | 7320.00 | 47.15 | 38.78 | 7.35 | 24.78 | 40.50 | 54 | -13.50 | AV |
| V | 16132.00 | 48.21 | 38.75 | 10.36 | 26.57 | 46.39 | 74 | -27.61 | PK |
| H | 4880.00 | 61.38 | 38.65 | 7.78 | 23.61 | 54.12 | 74 | -19.88 | PK |
| H | 4880.00 | 46.52 | 38.65 | 7.78 | 23.61 | 39.26 | 54 | -14.74 | AV |
| H | 7320.00 | 69.32 | 38.78 | 7.35 | 24.78 | 62.67 | 74 | -11.33 | PK |
| H | 7320.00 | 48.50 | 38.78 | 7.35 | 24.78 | 41.85 | 54 | -12.15 | AV |
| H | 16132.00 | 49.87 | 38.75 | 10.36 | 26.57 | 48.05 | 74 | -25.95 | PK |
| operation frequency:2480 | | | | | | | | | |
| V | 4960.00 | 61.23 | 38.69 | 7.78 | 23.83 | 54.15 | 74 | -19.85 | PK |
| V | 4960.00 | 46.16 | 38.69 | 7.78 | 23.83 | 39.08 | 54 | -14.92 | AV |
| V | 7440.00 | 67.44 | 38.65 | 7.22 | 24.78 | 60.79 | 74 | -13.21 | PK |
| V | 7440.00 | 49.33 | 38.65 | 7.22 | 24.78 | 42.68 | 54 | -11.32 | AV |
| V | 16132.00 | 50.20 | 38.75 | 10.36 | 26.57 | 48.38 | 74 | -25.62 | PK |
| H | 4960.00 | 61.43 | 38.69 | 7.78 | 23.83 | 54.35 | 74 | -19.65 | PK |
| H | 4960.00 | 46.19 | 38.69 | 7.78 | 23.83 | 39.11 | 54 | -14.89 | AV |
| H | 7440.00 | 68.97 | 38.65 | 7.22 | 24.78 | 62.32 | 74 | -11.68 | PK |
| H | 7440.00 | 48.14 | 38.65 | 7.22 | 24.78 | 41.49 | 54 | -12.51 | AV |
| H | 16132.00 | 50.52 | 38.75 | 10.36 | 26.57 | 48.70 | 74 | -25.30 | PK |

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



3.3 RADIATED BAND EMISSION MEASUREMENT

3.3.1 TEST REQUIREMENT:

FCC Part15 C Section 15.209 and 15.205

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

| FREQUENCY (MHz) | Limit(dBuV) (at 3M) | |
|-----------------|---------------------|---------|
| | PEAK | AVERAGE |
| Above 1000 | 74 | 54 |

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

| Spectrum Parameter | Setting |
|---------------------------------------|--|
| Attenuation | Auto |
| Start Frequency | 2300MHz |
| Stop Frequency | 2520 |
| RB / VB (emission in restricted band) | 1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average |

3.3.2 TEST PROCEDURE

Above 1GHz test procedure as below:

- a. 1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

3.3.3 DEVIATION FROM TEST STANDARD

No deviation

3.3.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

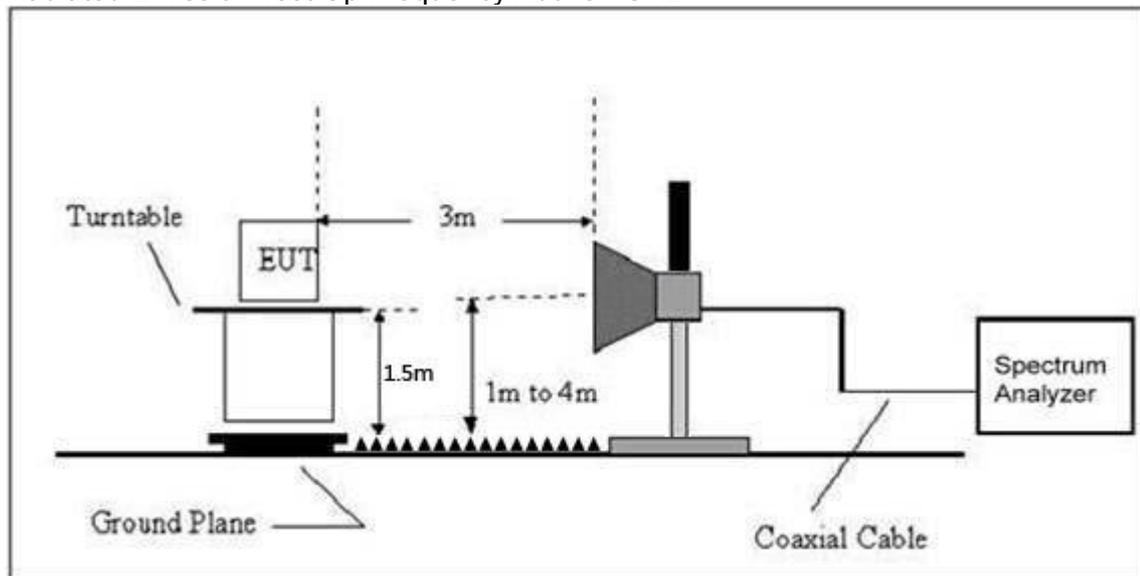

3.3.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.



3.3.6 TEST RESULT

802.11b

| Polar (H/V) | Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detec or Type |
|---------------------------------|-----------|---------------|--------|----------------|----------|--------|---------------|
| | (MHz) | (dBuV) | (dB) | (dBuV/m) | (dBuV/m) | (dB) | |
| operation frequency:2412 | | | | | | | |
| V | 2390.00 | 37.42 | 13.83 | 51.25 | 74.00 | -22.75 | PK |
| V | 2390.00 | 26.00 | 13.83 | 39.83 | 54.00 | -14.17 | AV |
| V | 2400.00 | 37.63 | 13.85 | 51.48 | 74.00 | -22.52 | PK |
| V | 2400.00 | 25.58 | 13.85 | 39.43 | 54.00 | -14.57 | AV |
| H | 2390.00 | 37.72 | 13.83 | 51.55 | 74.00 | -22.45 | PK |
| H | 2390.00 | 26.03 | 13.83 | 39.86 | 54.00 | -14.14 | AV |
| H | 2400.00 | 37.58 | 13.85 | 51.43 | 74.00 | -22.57 | PK |
| H | 2400.00 | 25.97 | 13.85 | 39.82 | 54.00 | -14.18 | AV |

| Polar (H/V) | Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|---------------------------------|-----------|---------------|--------|----------------|----------|--------|---------------|
| | (MHz) | (dBuV) | (dB) | (dBuV/m) | (dBuV/m) | (dB) | |
| operation frequency:2462 | | | | | | | |
| V | 2483.50 | 37.63 | 14.02 | 51.65 | 74.00 | -22.35 | PK |
| V | 2483.50 | 26.24 | 14.02 | 40.26 | 54.00 | -13.74 | AV |
| V | 2500.00 | 37.57 | 14.06 | 51.63 | 74.00 | -22.37 | PK |
| V | 2500.00 | 25.69 | 14.06 | 39.75 | 54.00 | -14.25 | AV |
| H | 2483.50 | 37.76 | 14.02 | 51.78 | 74.00 | -22.22 | PK |
| H | 2483.50 | 26.28 | 14.02 | 40.30 | 54.00 | -13.70 | AV |
| H | 2500.00 | 37.37 | 14.06 | 51.43 | 74.00 | -22.57 | PK |
| H | 2500.00 | 26.53 | 14.06 | 40.59 | 54.00 | -13.41 | AV |

Remark:

1. Emission Level = Meter Reading + Factor, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11g

| Polar (H/V) | Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|---------------------------------|-----------|---------------|--------|----------------|----------|--------|---------------|
| | (MHz) | (dBuV) | (dB) | (dBuV/m) | (dBuV/m) | (dB) | |
| operation frequency:2412 | | | | | | | |
| V | 2390.00 | 37.12 | 13.83 | 50.95 | 74.00 | -23.05 | PK |
| V | 2390.00 | 25.79 | 13.83 | 39.62 | 54.00 | -14.38 | AV |
| V | 2400.00 | 37.32 | 13.85 | 51.17 | 74.00 | -22.83 | PK |
| V | 2400.00 | 25.37 | 13.85 | 39.22 | 54.00 | -14.78 | AV |
| H | 2390.00 | 37.41 | 13.83 | 51.24 | 74.00 | -22.76 | PK |
| H | 2390.00 | 25.82 | 13.83 | 39.65 | 54.00 | -14.35 | AV |
| H | 2400.00 | 37.27 | 13.85 | 51.12 | 74.00 | -22.88 | PK |
| H | 2400.00 | 25.76 | 13.85 | 39.61 | 54.00 | -14.39 | AV |

| Polar (H/V) | Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|---------------------------------|-----------|---------------|--------|----------------|----------|--------|---------------|
| | (MHz) | (dBuV) | (dB) | (dBuV/m) | (dBuV/m) | (dB) | |
| operation frequency:2462 | | | | | | | |
| V | 2483.50 | 37.32 | 14.02 | 51.34 | 74.00 | -22.66 | PK |
| V | 2483.50 | 26.03 | 14.02 | 40.05 | 54.00 | -13.95 | AV |
| V | 2500.00 | 37.26 | 14.06 | 51.32 | 74.00 | -22.68 | PK |
| V | 2500.00 | 25.48 | 14.06 | 39.54 | 54.00 | -14.46 | AV |
| H | 2483.50 | 37.45 | 14.02 | 51.47 | 74.00 | -22.53 | PK |
| H | 2483.50 | 26.07 | 14.02 | 40.09 | 54.00 | -13.91 | AV |
| H | 2500.00 | 37.07 | 14.06 | 51.13 | 74.00 | -22.87 | PK |
| H | 2500.00 | 26.32 | 14.06 | 40.38 | 54.00 | -13.62 | AV |

Remark:

1. Emission Level = Meter Reading + Factor, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n(20MHz)

| Polar (H/V) | Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|---------------------------------|-----------|---------------|--------|----------------|----------|--------|---------------|
| | (MHz) | (dBuV) | (dB) | (dBuV/m) | (dBuV/m) | (dB) | |
| operation frequency:2412 | | | | | | | |
| V | 2390.00 | 37.22 | 13.83 | 51.05 | 74.00 | -22.95 | PK |
| V | 2390.00 | 25.87 | 13.83 | 39.70 | 54.00 | -14.30 | AV |
| V | 2400.00 | 37.43 | 13.85 | 51.28 | 74.00 | -22.72 | PK |
| V | 2400.00 | 25.44 | 13.85 | 39.29 | 54.00 | -14.71 | AV |
| H | 2390.00 | 37.52 | 13.83 | 51.35 | 74.00 | -22.65 | PK |
| H | 2390.00 | 25.90 | 13.83 | 39.73 | 54.00 | -14.27 | AV |
| H | 2400.00 | 37.38 | 13.85 | 51.23 | 74.00 | -22.77 | PK |
| H | 2400.00 | 25.84 | 13.85 | 39.69 | 54.00 | -14.31 | AV |

| Polar (H/V) | Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|---------------------------------|-----------|---------------|--------|----------------|----------|--------|---------------|
| | (MHz) | (dBuV) | (dB) | (dBuV/m) | (dBuV/m) | (dB) | |
| operation frequency:2462 | | | | | | | |
| V | 2483.50 | 37.43 | 14.02 | 51.45 | 74.00 | -22.55 | PK |
| V | 2483.50 | 26.10 | 14.02 | 40.12 | 54.00 | -13.88 | AV |
| V | 2500.00 | 37.37 | 14.06 | 51.43 | 74.00 | -22.57 | PK |
| V | 2500.00 | 25.55 | 14.06 | 39.61 | 54.00 | -14.39 | AV |
| H | 2483.50 | 37.56 | 14.02 | 51.58 | 74.00 | -22.42 | PK |
| H | 2483.50 | 26.14 | 14.02 | 40.16 | 54.00 | -13.84 | AV |
| H | 2500.00 | 37.17 | 14.06 | 51.23 | 74.00 | -22.77 | PK |
| H | 2500.00 | 26.39 | 14.06 | 40.45 | 54.00 | -13.55 | AV |

Remark:

1. Emission Level = Meter Reading + Factor, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n(40MHz)

| Polar (H/V) | Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|---------------------------------|-----------|---------------|--------|----------------|----------|--------|---------------|
| | (MHz) | (dBuV) | (dB) | (dBuV/m) | (dBuV/m) | (dB) | |
| operation frequency:2422 | | | | | | | |
| V | 2390.00 | 37.54 | 13.83 | 51.37 | 74.00 | -22.63 | PK |
| V | 2390.00 | 26.08 | 13.83 | 39.91 | 54.00 | -14.09 | AV |
| V | 2400.00 | 37.75 | 13.85 | 51.60 | 74.00 | -22.40 | PK |
| V | 2400.00 | 25.66 | 13.85 | 39.51 | 54.00 | -14.49 | AV |
| H | 2390.00 | 37.84 | 13.83 | 51.67 | 74.00 | -22.33 | PK |
| H | 2390.00 | 26.10 | 13.83 | 39.93 | 54.00 | -14.07 | AV |
| H | 2400.00 | 37.70 | 13.85 | 51.55 | 74.00 | -22.45 | PK |
| H | 2400.00 | 26.05 | 13.85 | 39.90 | 54.00 | -14.10 | AV |

| Polar (H/V) | Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|---------------------------------|-----------|---------------|--------|----------------|----------|--------|---------------|
| | (MHz) | (dBuV) | (dB) | (dBuV/m) | (dBuV/m) | (dB) | |
| operation frequency:2452 | | | | | | | |
| V | 2483.50 | 37.75 | 14.02 | 51.77 | 74.00 | -22.23 | PK |
| V | 2483.50 | 26.32 | 14.02 | 40.34 | 54.00 | -13.66 | AV |
| V | 2500.00 | 37.69 | 14.06 | 51.75 | 74.00 | -22.25 | PK |
| V | 2500.00 | 25.76 | 14.06 | 39.82 | 54.00 | -14.18 | AV |
| H | 2483.50 | 37.88 | 14.02 | 51.90 | 74.00 | -22.10 | PK |
| H | 2483.50 | 26.36 | 14.02 | 40.38 | 54.00 | -13.62 | AV |
| H | 2500.00 | 37.49 | 14.06 | 51.55 | 74.00 | -22.45 | PK |
| H | 2500.00 | 26.61 | 14.06 | 40.67 | 54.00 | -13.33 | AV |

Remark:

1. Emission Level = Meter Reading + Factor, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



BT

| Polar (H/V) | Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|---------------------------------|-----------|---------------|--------|----------------|----------|--------|---------------|
| | (MHz) | (dBuV) | (dB) | (dBuV/m) | (dBuV/m) | (dB) | |
| operation frequency:2402 | | | | | | | |
| V | 2390.00 | 37.58 | 13.83 | 51.41 | 74.00 | -22.59 | PK |
| V | 2390.00 | 26.11 | 13.83 | 39.94 | 54.00 | -14.06 | AV |
| V | 2400.00 | 37.79 | 13.85 | 51.64 | 74.00 | -22.36 | PK |
| V | 2400.00 | 25.69 | 13.85 | 39.54 | 54.00 | -14.46 | AV |
| H | 2390.00 | 37.88 | 13.83 | 51.71 | 74.00 | -22.29 | PK |
| H | 2390.00 | 26.13 | 13.83 | 39.96 | 54.00 | -14.04 | AV |
| H | 2400.00 | 37.74 | 13.85 | 51.59 | 74.00 | -22.41 | PK |
| H | 2400.00 | 26.08 | 13.85 | 39.93 | 54.00 | -14.07 | AV |

| Polar (H/V) | Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|---------------------------------|-----------|---------------|--------|----------------|----------|--------|---------------|
| | (MHz) | (dBuV) | (dB) | (dBuV/m) | (dBuV/m) | (dB) | |
| operation frequency:2480 | | | | | | | |
| V | 2483.50 | 37.79 | 14.02 | 51.81 | 74.00 | -22.19 | PK |
| V | 2483.50 | 26.35 | 14.02 | 40.37 | 54.00 | -13.63 | AV |
| V | 2500.00 | 37.73 | 14.06 | 51.79 | 74.00 | -22.21 | PK |
| V | 2500.00 | 25.79 | 14.06 | 39.85 | 54.00 | -14.15 | AV |
| H | 2483.50 | 37.92 | 14.02 | 51.94 | 74.00 | -22.06 | PK |
| H | 2483.50 | 26.39 | 14.02 | 40.41 | 54.00 | -13.59 | AV |
| H | 2500.00 | 37.53 | 14.06 | 51.59 | 74.00 | -22.41 | PK |
| H | 2500.00 | 26.64 | 14.06 | 40.70 | 54.00 | -13.30 | AV |

Remark:

1. Emission Level = Meter Reading + Factor, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



4. POWER SPECTRAL DENSITY TEST

4.1 APPLIED PROCEDURES / LIMIT

| FCC Part15 (15.247) , Subpart C | | | | |
|---------------------------------|------------------------|---------------------|-----------------------|--------|
| Section | Test Item | Limit | Frequency Range (MHz) | Result |
| 15.247 | Power Spectral Density | 8 dBm (in any 3KHz) | 2400-2483.5 | PASS |

4.1.1 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

4.1.2 DEVIATION FROM STANDARD

No deviation.

4.1.3 TEST SETUP



4.1.4 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.





4.1.5 TEST RESULTS

| | | | |
|---------------|-----------|---------------------|-------|
| Temperature : | 25°C | Relative Humidity : | 60% |
| Pressure : | 1015 hPa | Test Voltage : | DC 5V |
| Test Mode : | TX b Mode | | |

| Frequency | Power Spectral Density(dBm) | Limit (dBm) | Result |
|-----------|-----------------------------|-------------|--------|
| 2412 MHz | -9.61 | 8 | PASS |
| 2437 MHz | -10.97 | 8 | PASS |
| 2462 MHz | -10.29 | 8 | PASS |

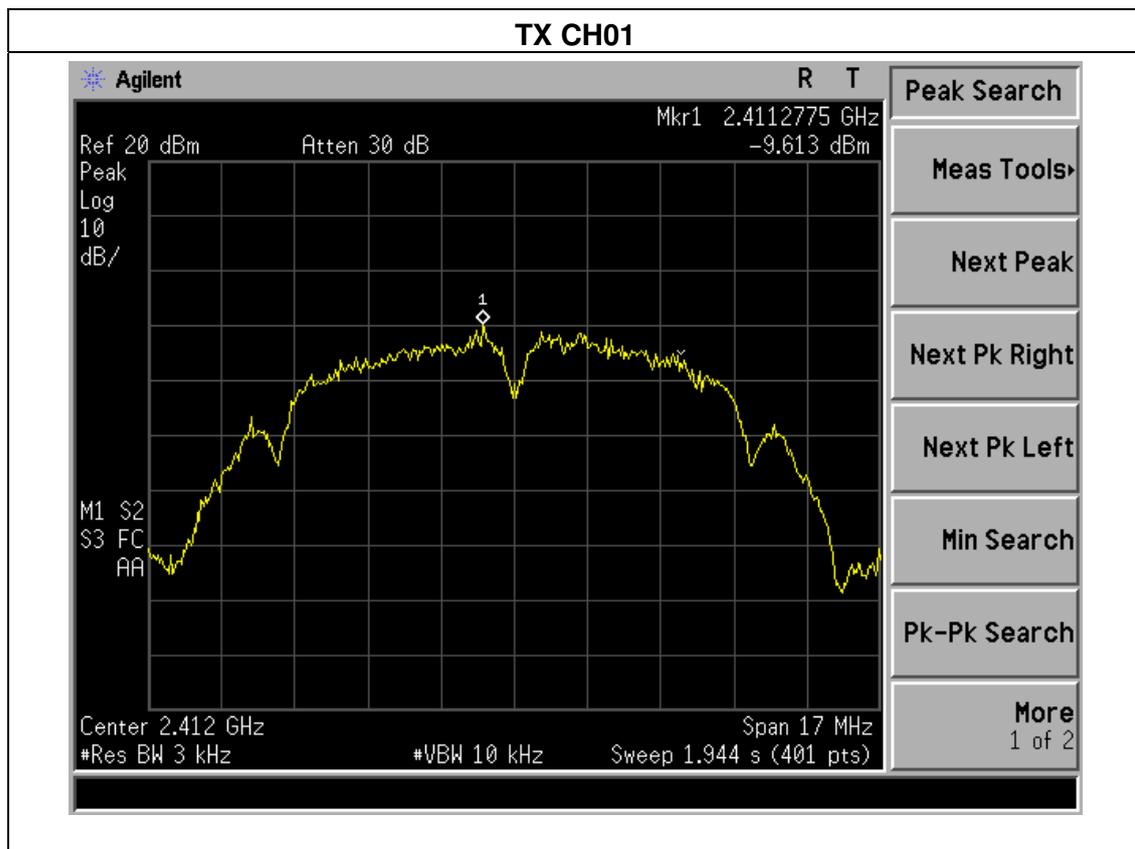


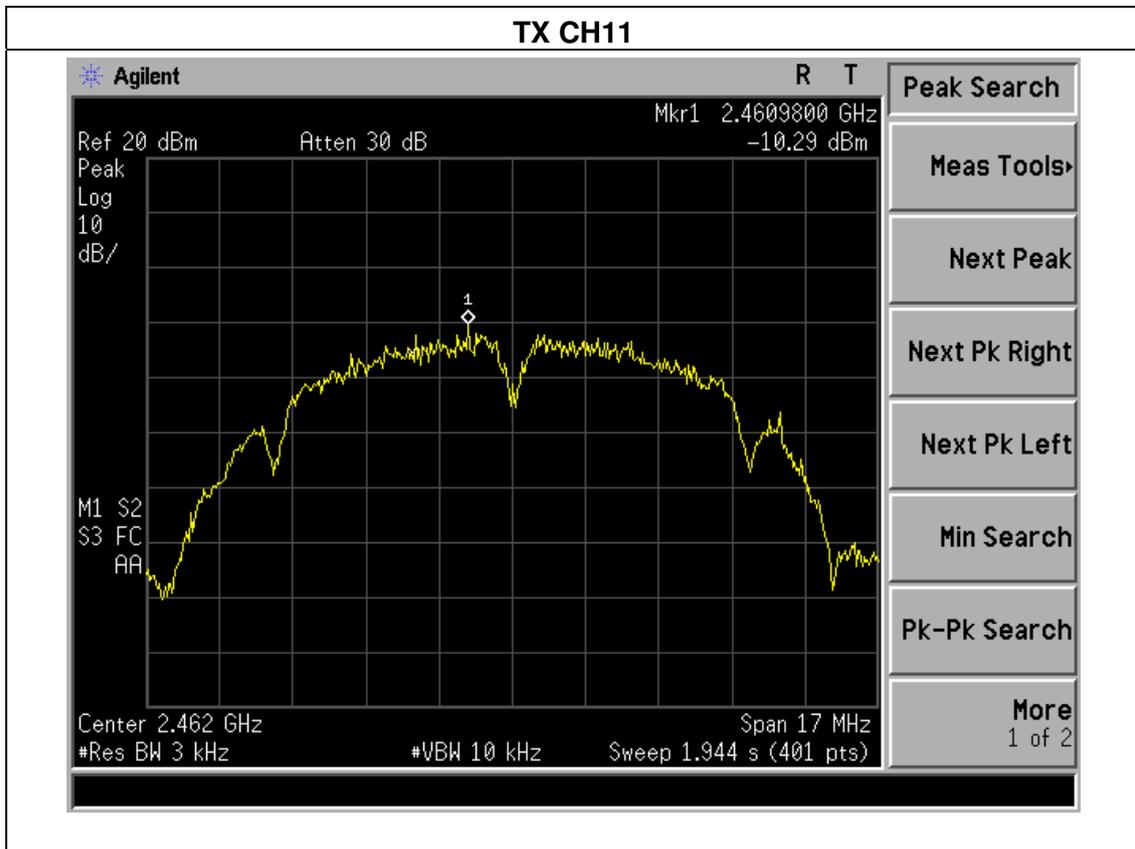
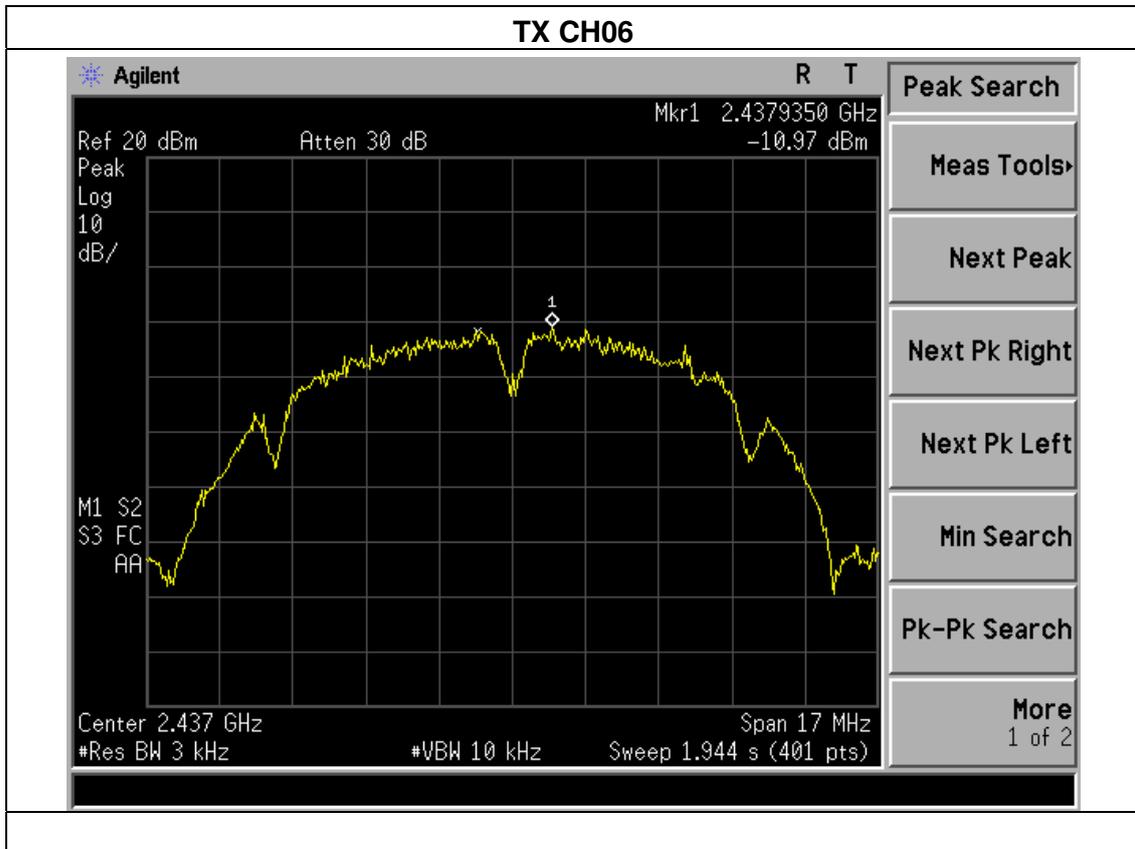




| | | | |
|---------------|-----------|---------------------|-------|
| Temperature : | 25°C | Relative Humidity : | 60% |
| Pressure : | 1015 hPa | Test Voltage : | DC 5V |
| Test Mode : | TX g Mode | | |

| Frequency | Power Spectral Density(dBm) | Limit (dBm) | Result |
|-----------|-----------------------------|-------------|--------|
| 2412 MHz | -13.03 | 8 | PASS |
| 2437 MHz | -14.24 | 8 | PASS |
| 2462 MHz | -17.22 | 8 | PASS |

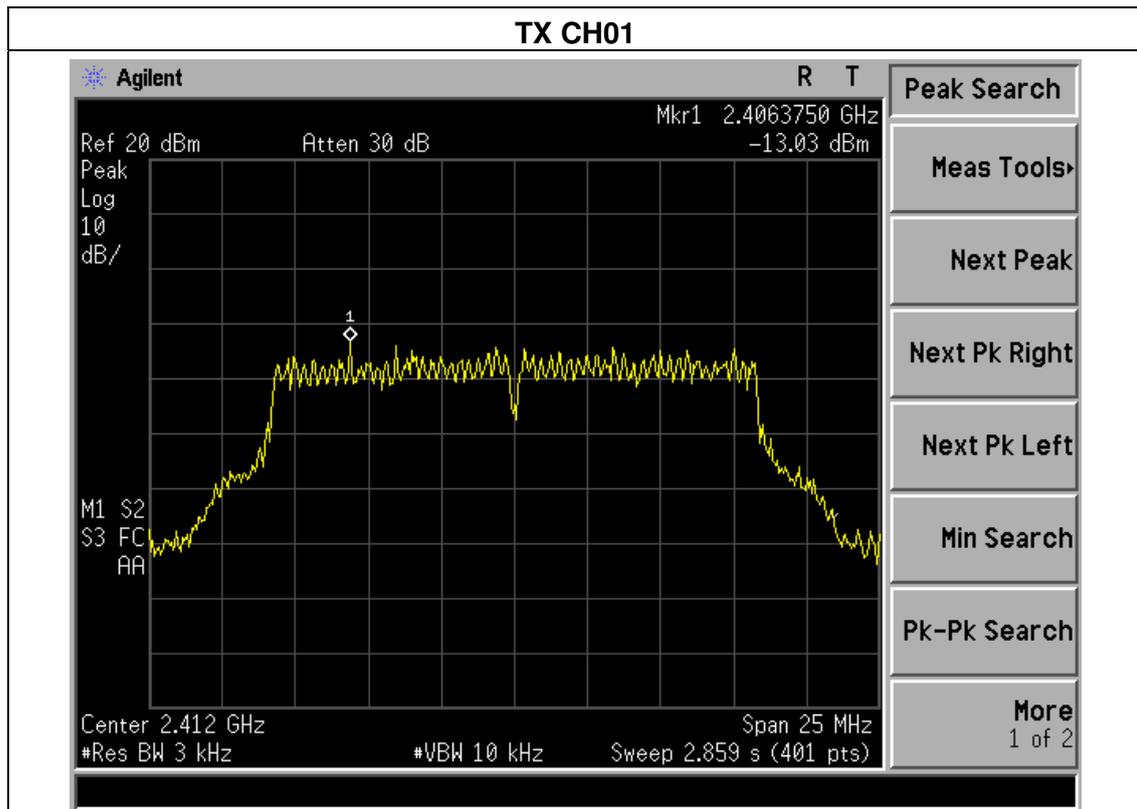


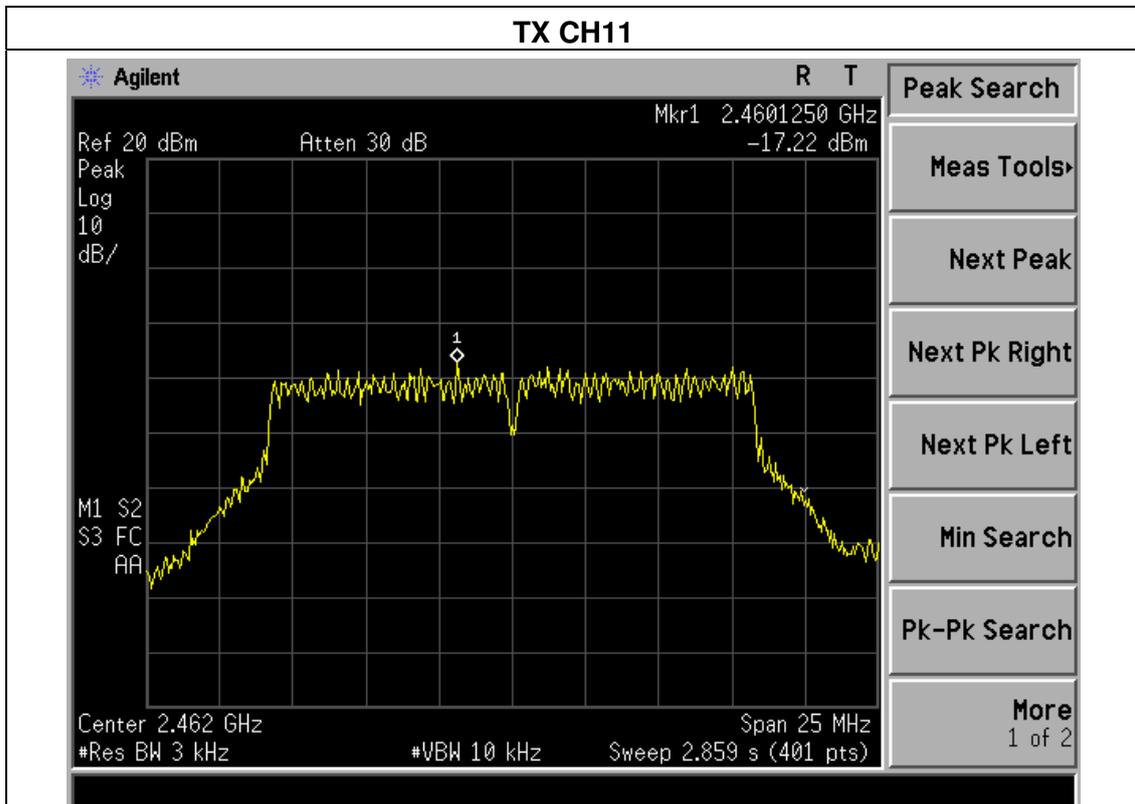
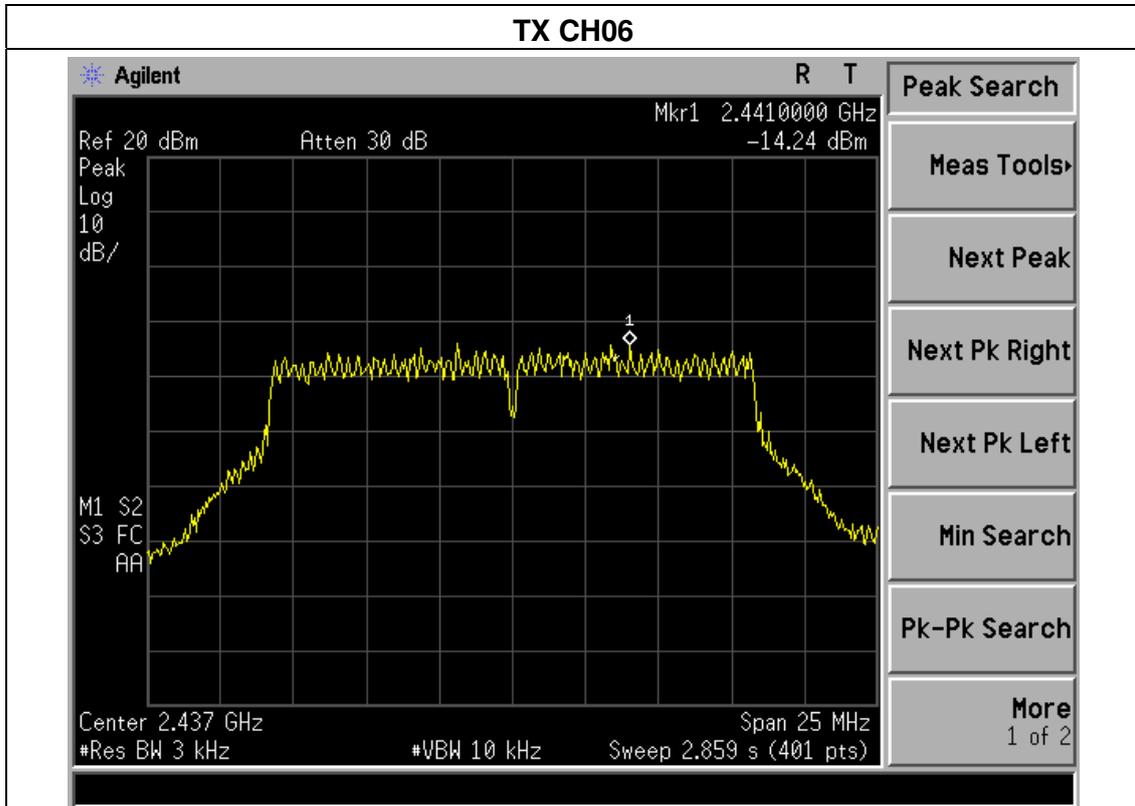




| | | | |
|---------------|----------------|---------------------|-------|
| Temperature : | 25°C | Relative Humidity : | 60% |
| Pressure : | 1015 hPa | Test Voltage : | DC 5V |
| Test Mode : | TX n Mode(20M) | | |

| Frequency | Power Spectral Density(dBm) | Limit (dBm) | Result |
|-----------|-----------------------------|-------------|--------|
| 2412 MHz | -16.09 | 8 | PASS |
| 2437 MHz | -14.85 | 8 | PASS |
| 2462 MHz | -16.03 | 8 | PASS |

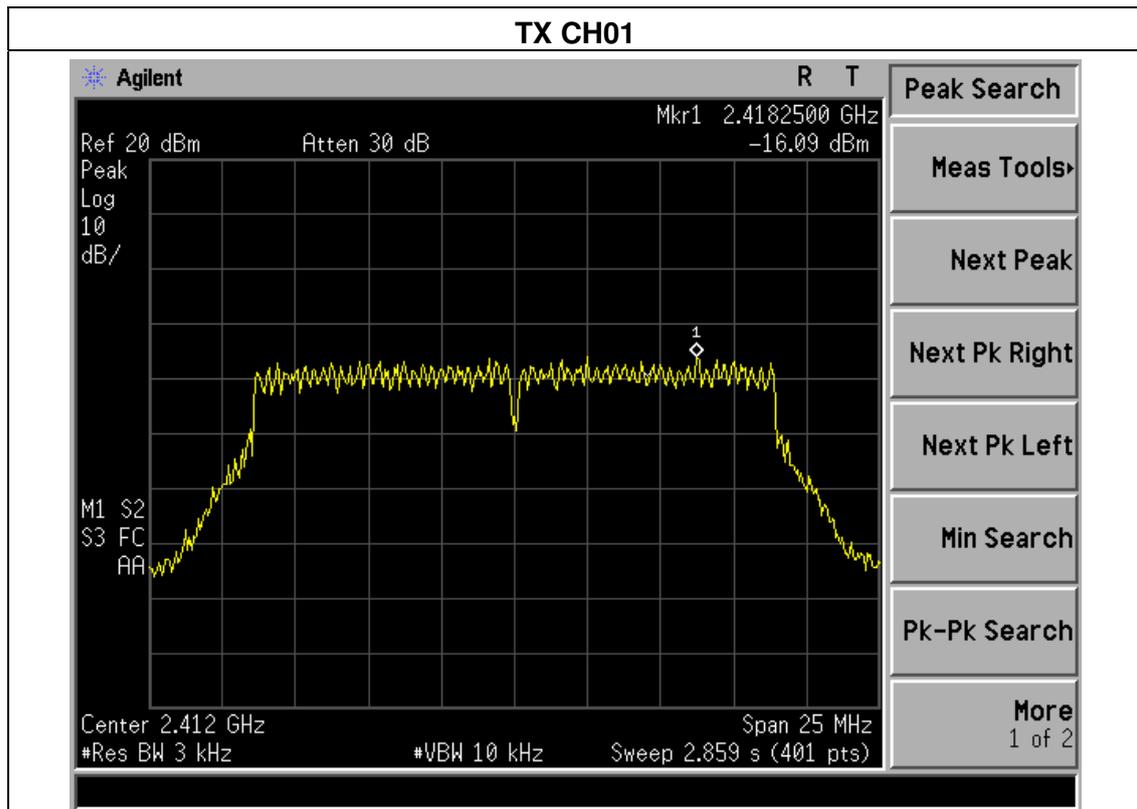


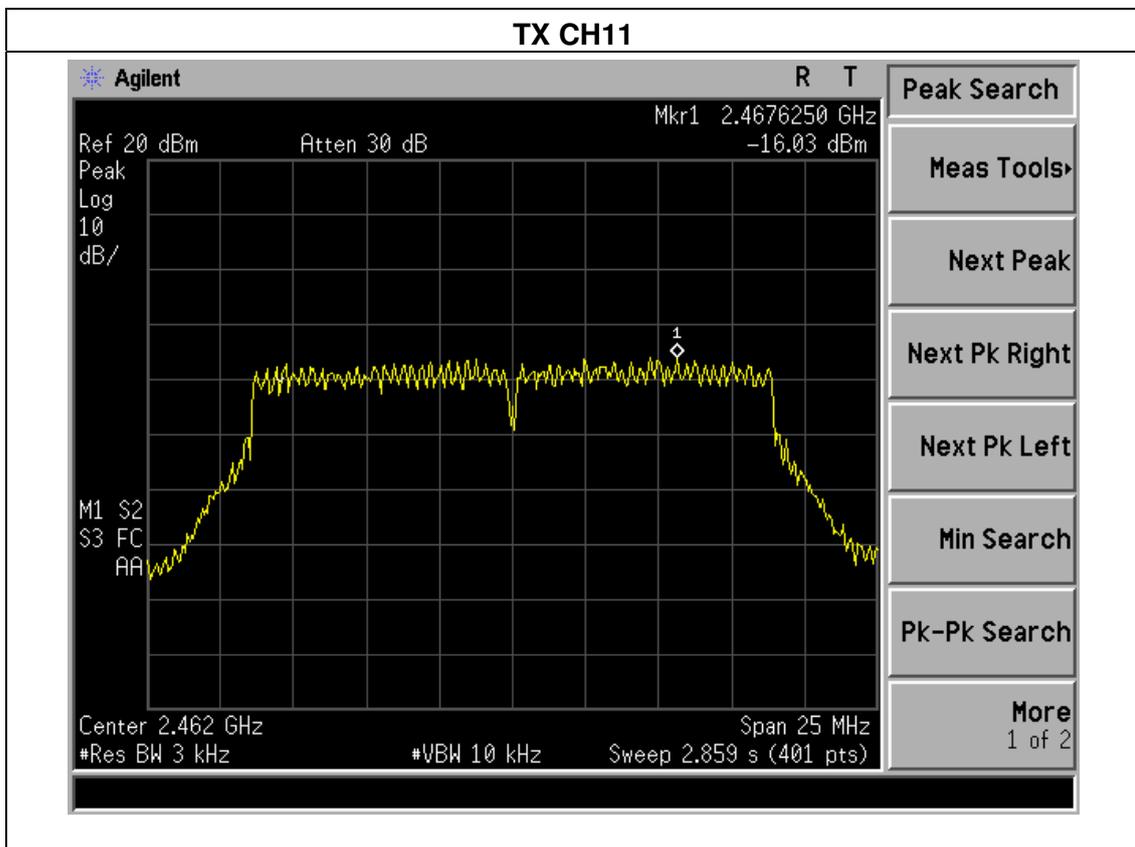
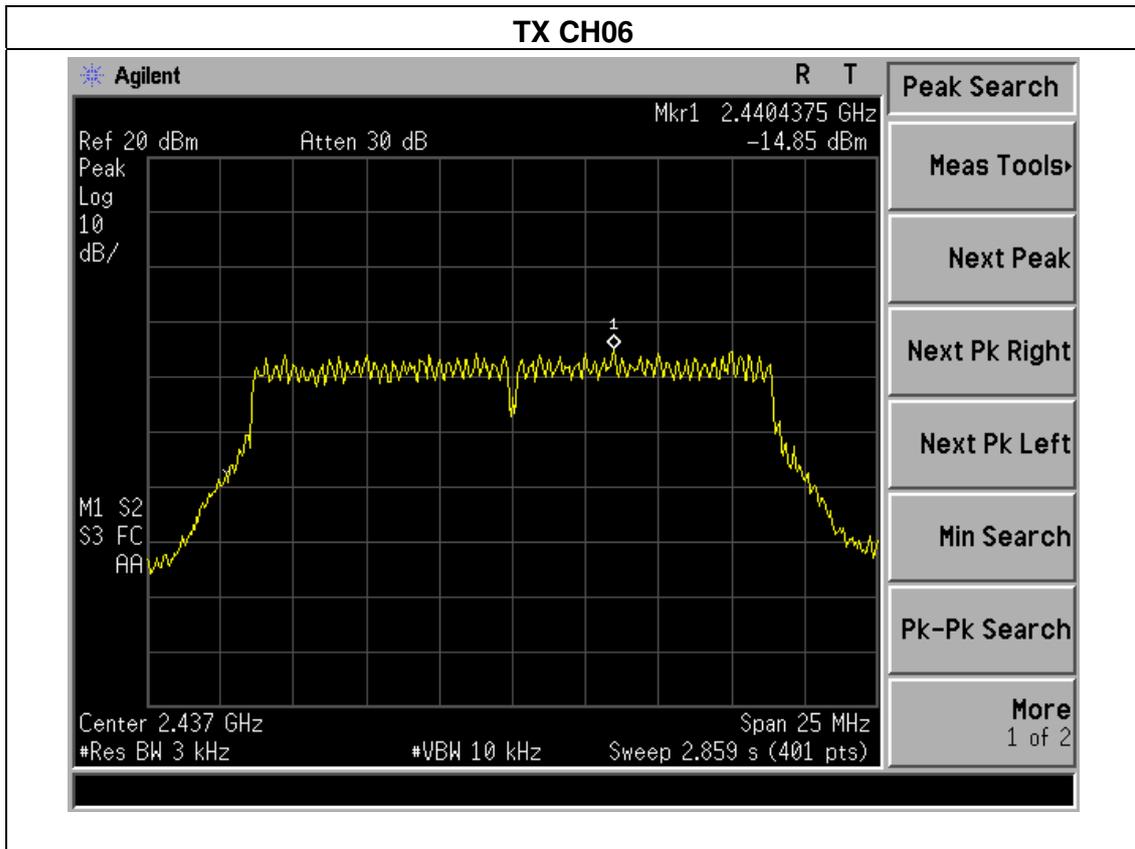




| | | | |
|---------------|----------------|---------------------|-------|
| Temperature : | 25°C | Relative Humidity : | 60% |
| Pressure : | 1015 hPa | Test Voltage : | DC 5V |
| Test Mode : | TX n Mode(40M) | | |

| Frequency | Power Spectral Density(dBm) | Limit (dBm) | Result |
|-----------|-----------------------------|-------------|--------|
| 2422 MHz | -19.06 | 8 | PASS |
| 2437 MHz | -19.41 | 8 | PASS |
| 2452 MHz | -21.67 | 8 | PASS |

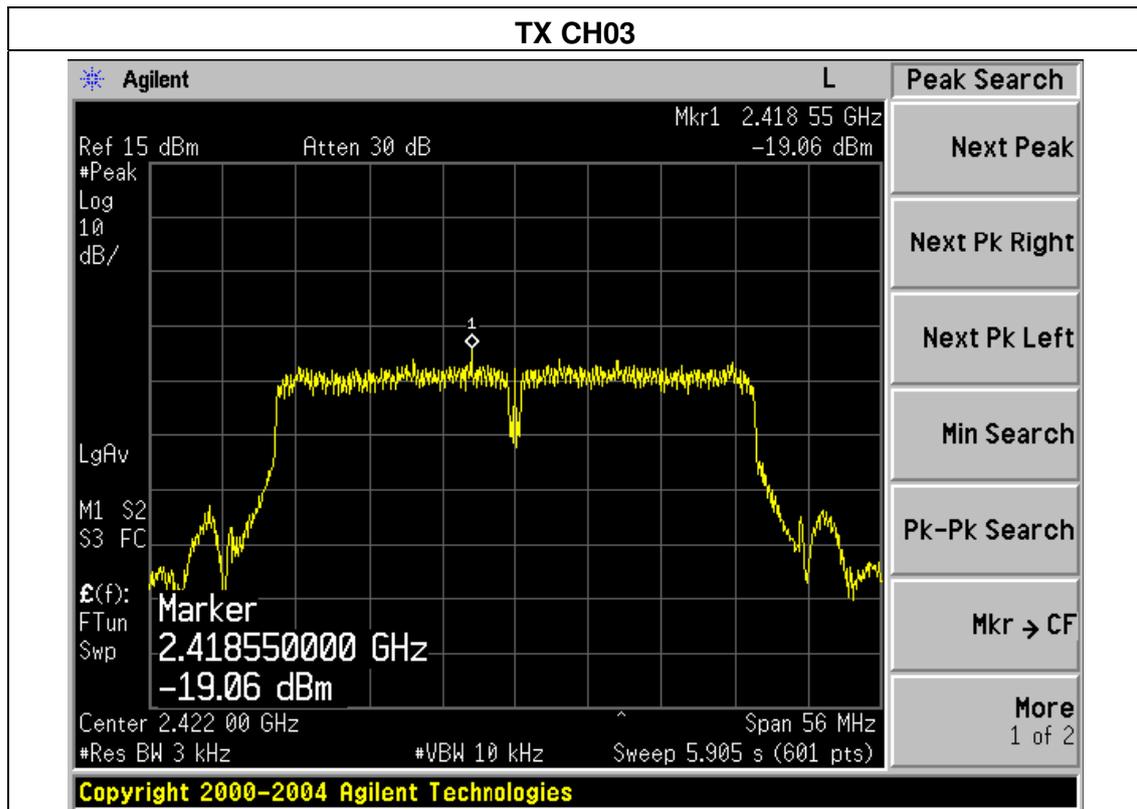


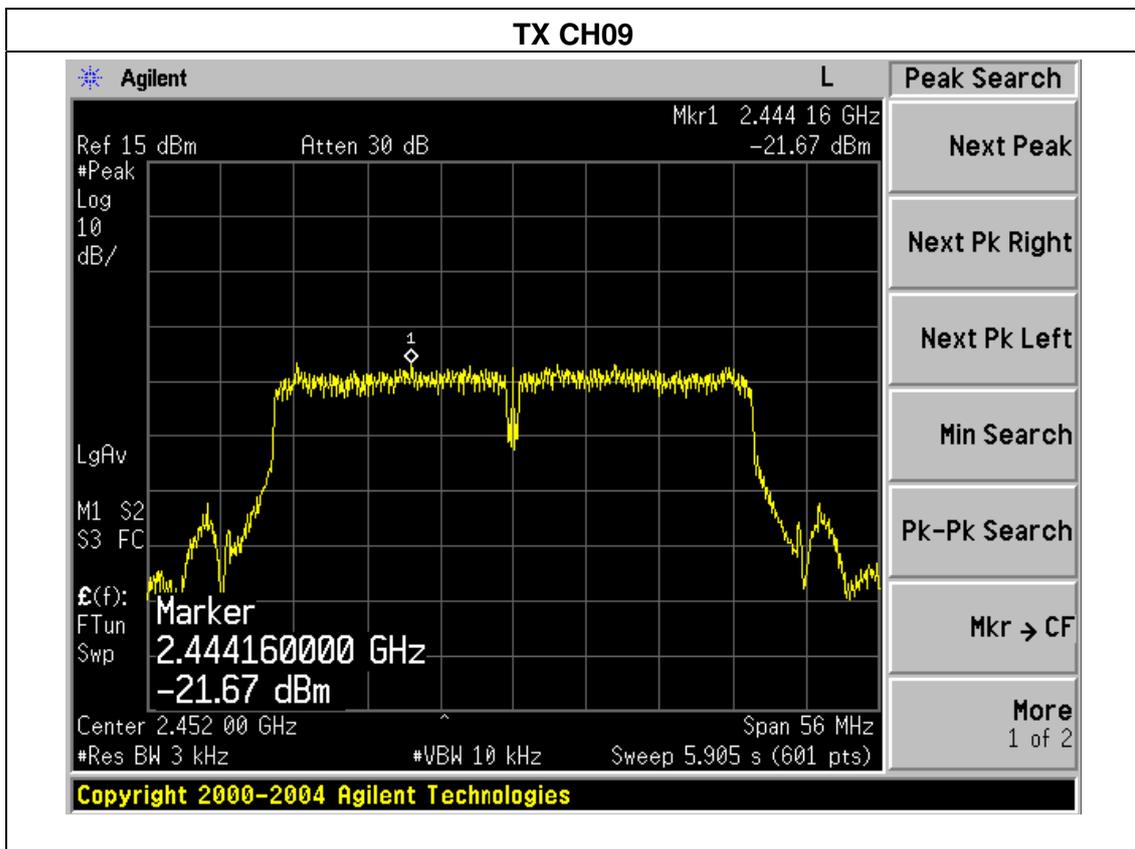
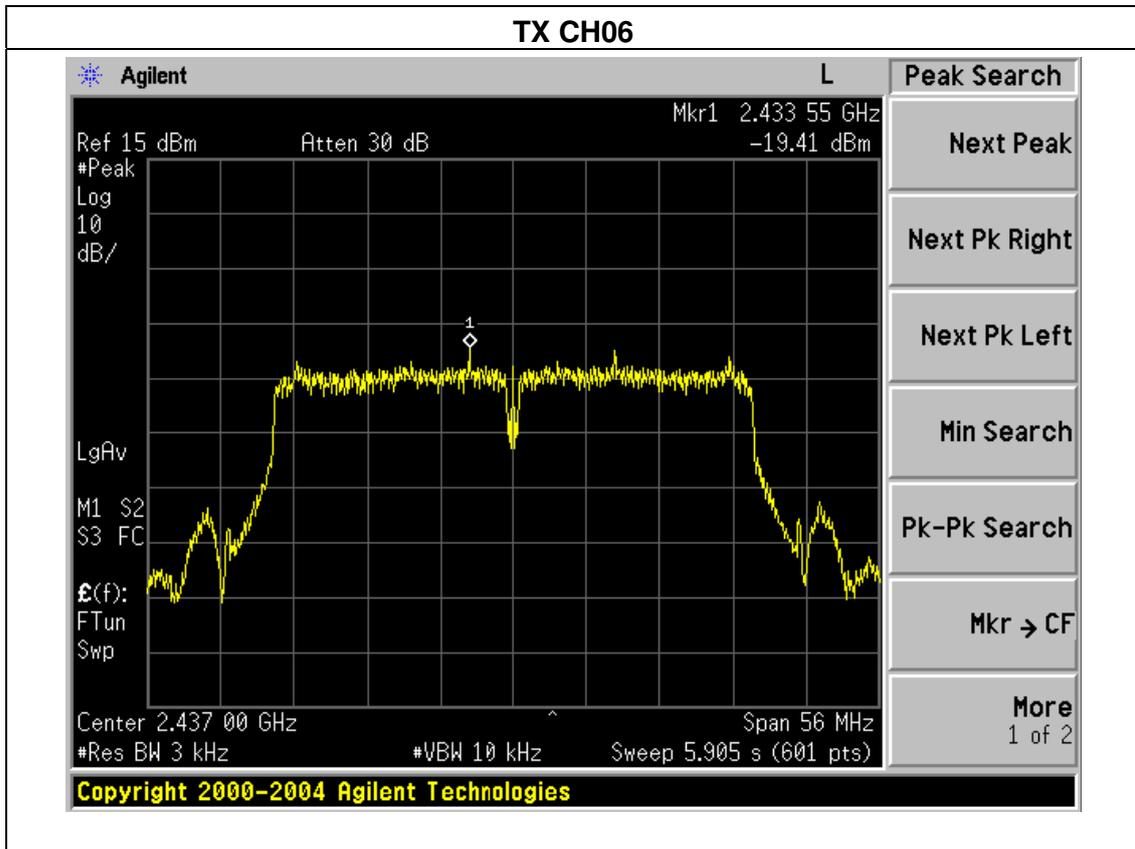




| | | | |
|---------------|----------|---------------------|-------|
| Temperature : | 25°C | Relative Humidity : | 60% |
| Pressure : | 1015 hPa | Test Voltage : | DC 5V |
| Test Mode : | BT | | |

| Frequency | Power Spectral Density(dBm) | Limit (dBm) | Result |
|-----------|-----------------------------|-------------|--------|
| 2402 MHz | -17.49 | 8 | PASS |
| 2440 MHz | -16.79 | 8 | PASS |
| 2480 MHz | -18.80 | 8 | PASS |

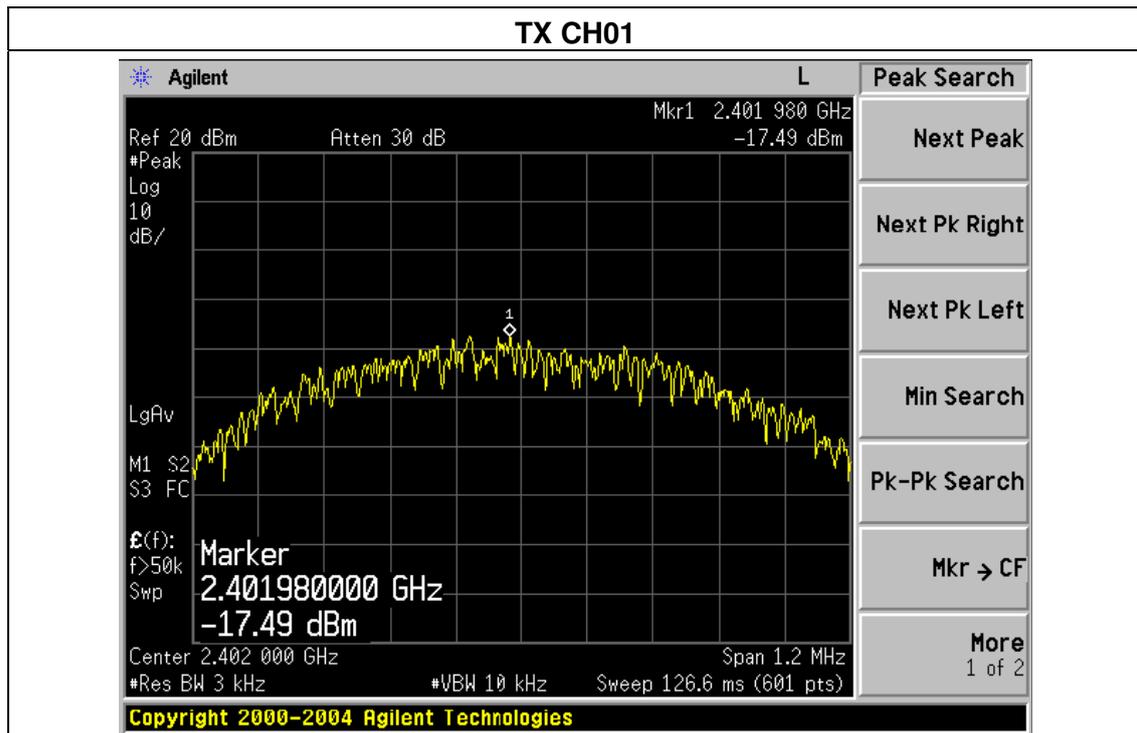

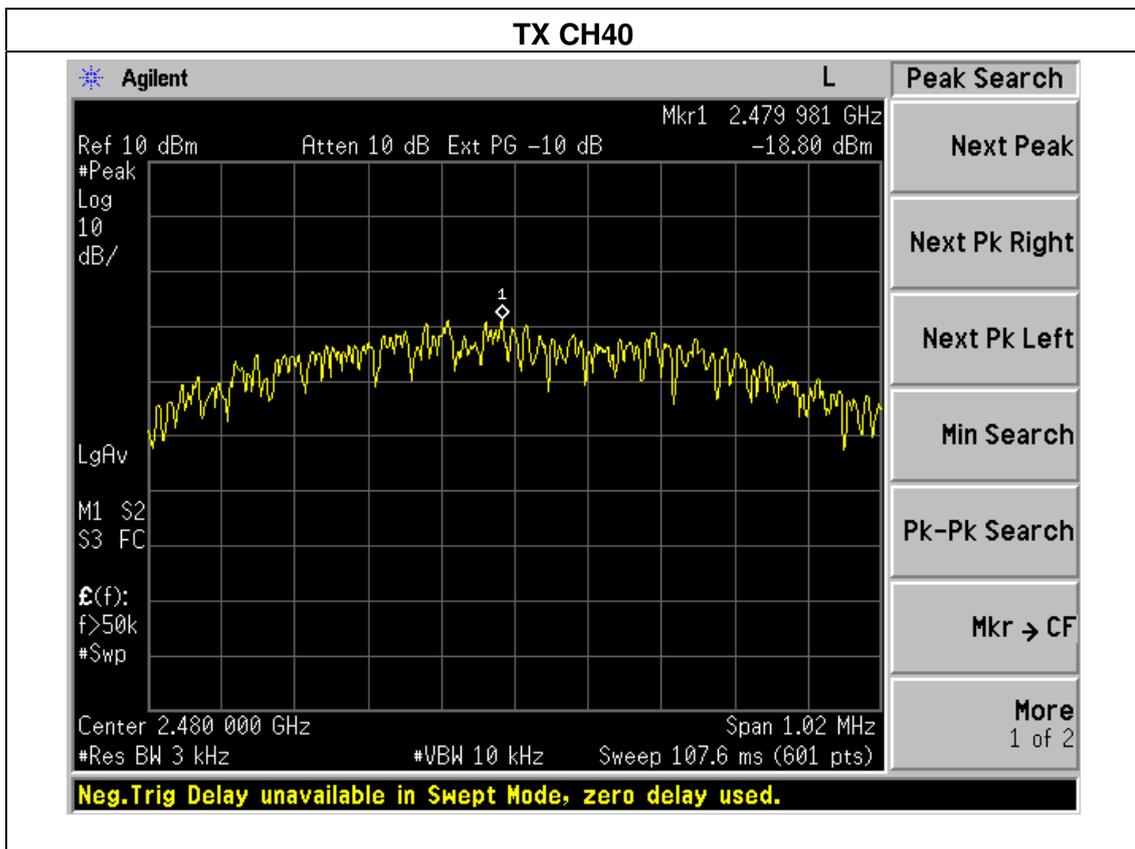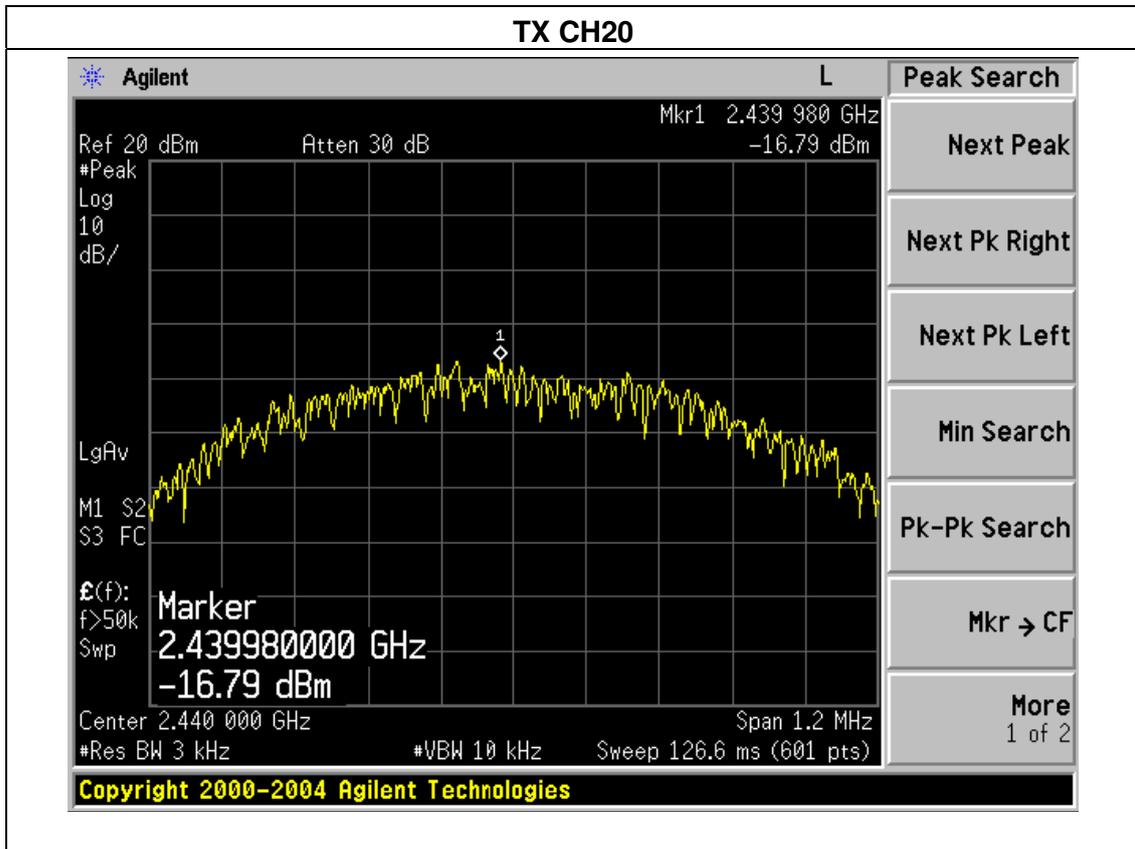

5. BANDWIDTH TEST

5.1 APPLIED PROCEDURES / LIMIT

| FCC Part15 (15.247) , Subpart C | | | | |
|---------------------------------|-----------|---|-----------------------|--------|
| Section | Test Item | Limit | Frequency Range (MHz) | Result |
| 15.247(a)(2) | Bandwidth | $\geq 500\text{KHz}$ (6dB bandwidth) | 2400-2483.5 | PASS |

5.1.1 TEST PROCEDURE

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP



5.1.4 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.





5.1.5 TEST RESULTS

| | | | |
|---------------|-----------|---------------------|-------|
| Temperature : | 25°C | Relative Humidity : | 60% |
| Pressure : | 1012 hPa | Test Voltage : | DC 5V |
| Test Mode : | TX b Mode | | |

| Frequency (MHz) | 6dB bandwidth (MHz) | Limit (kHz) | Result |
|-----------------|---------------------|-------------|--------|
| 2412 | 9.042 | 500 | Pass |
| 2437 | 10.053 | 500 | Pass |
| 2462 | 9.504 | 500 | Pass |

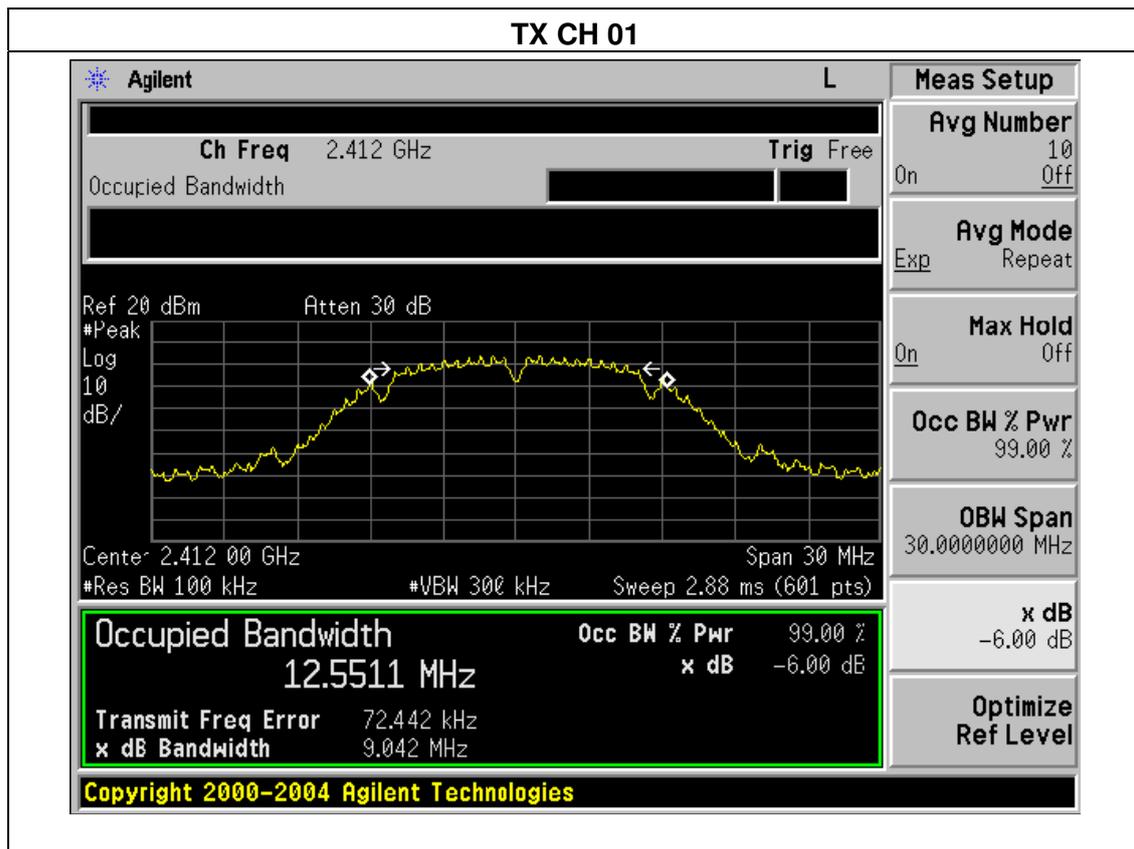


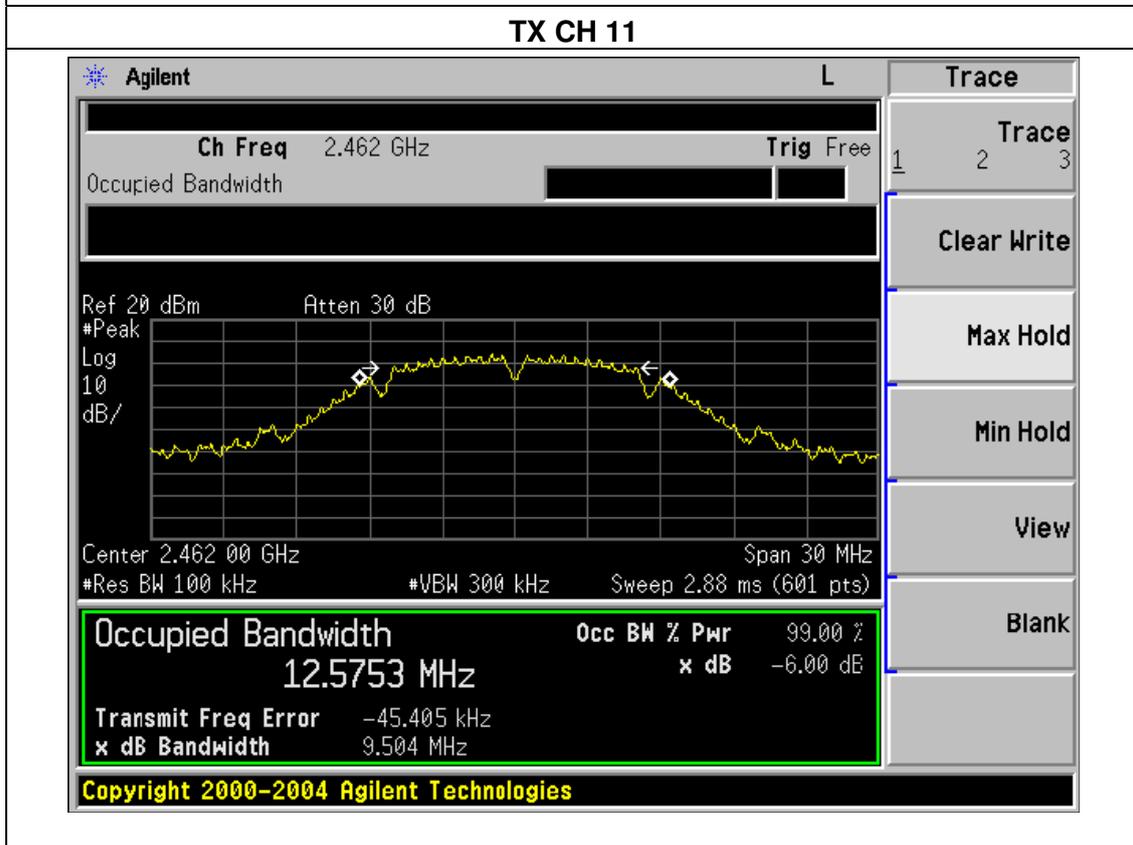
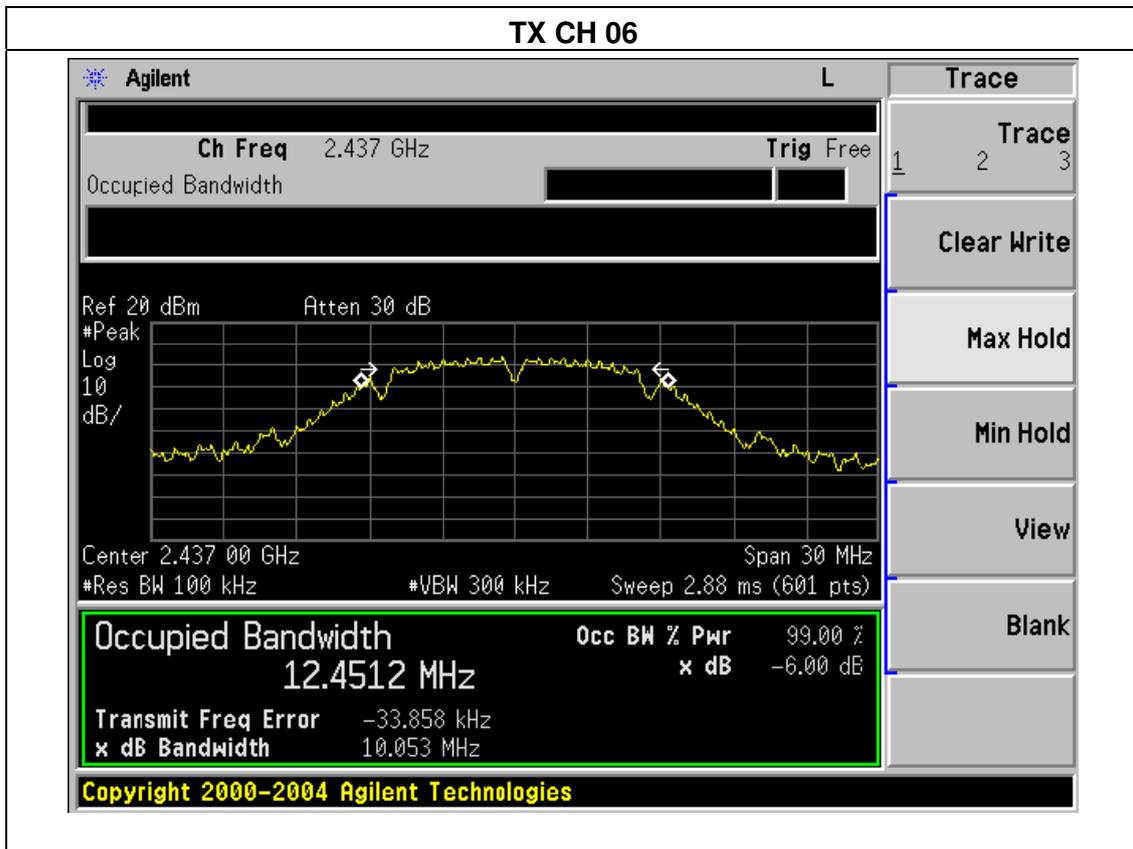




| | | | |
|---------------|-----------|---------------------|-------|
| Temperature : | 25°C | Relative Humidity : | 60% |
| Pressure : | 1012 hPa | Test Voltage : | DC 5V |
| Test Mode : | TX g Mode | | |

| Frequency (MHz) | 6dB bandwidth (MHz) | Limit (kHz) | Result |
|-----------------|---------------------|-------------|--------|
| 2412 | 16.443 | 500 | Pass |
| 2437 | 16.416 | 500 | Pass |
| 2462 | 16.417 | 500 | Pass |

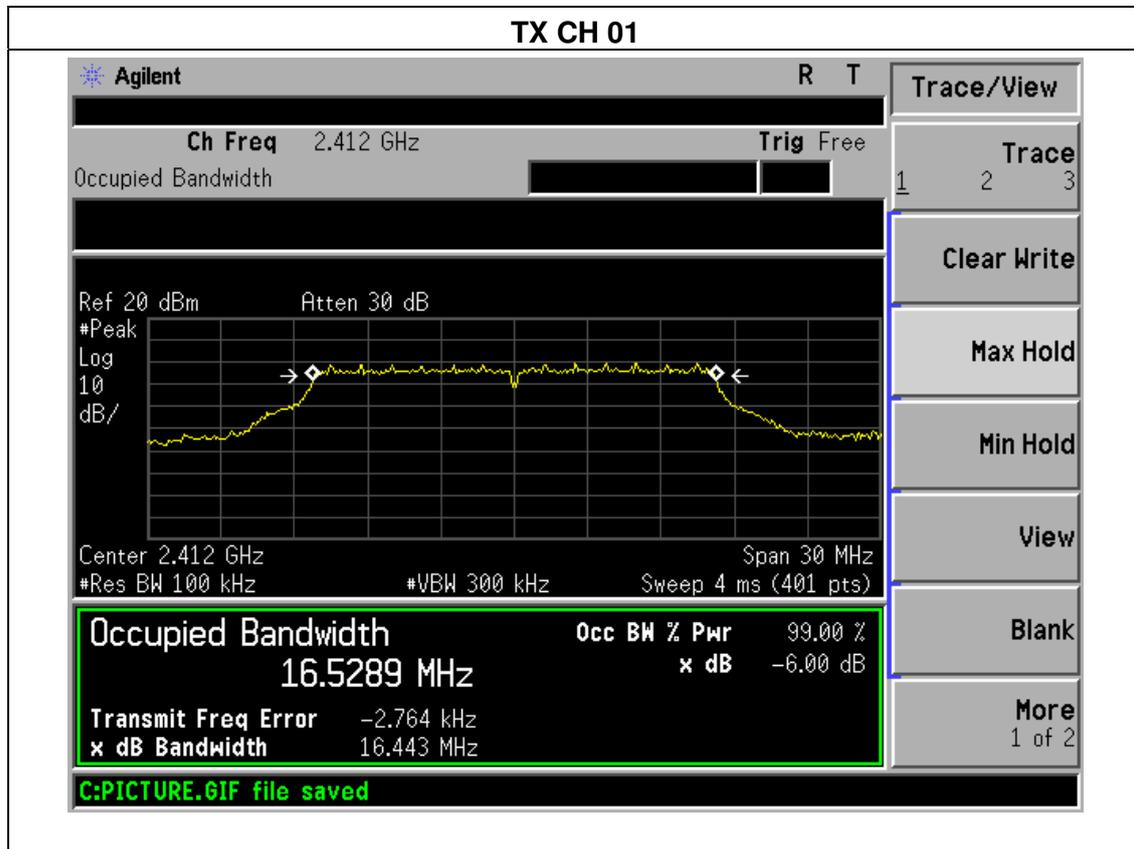


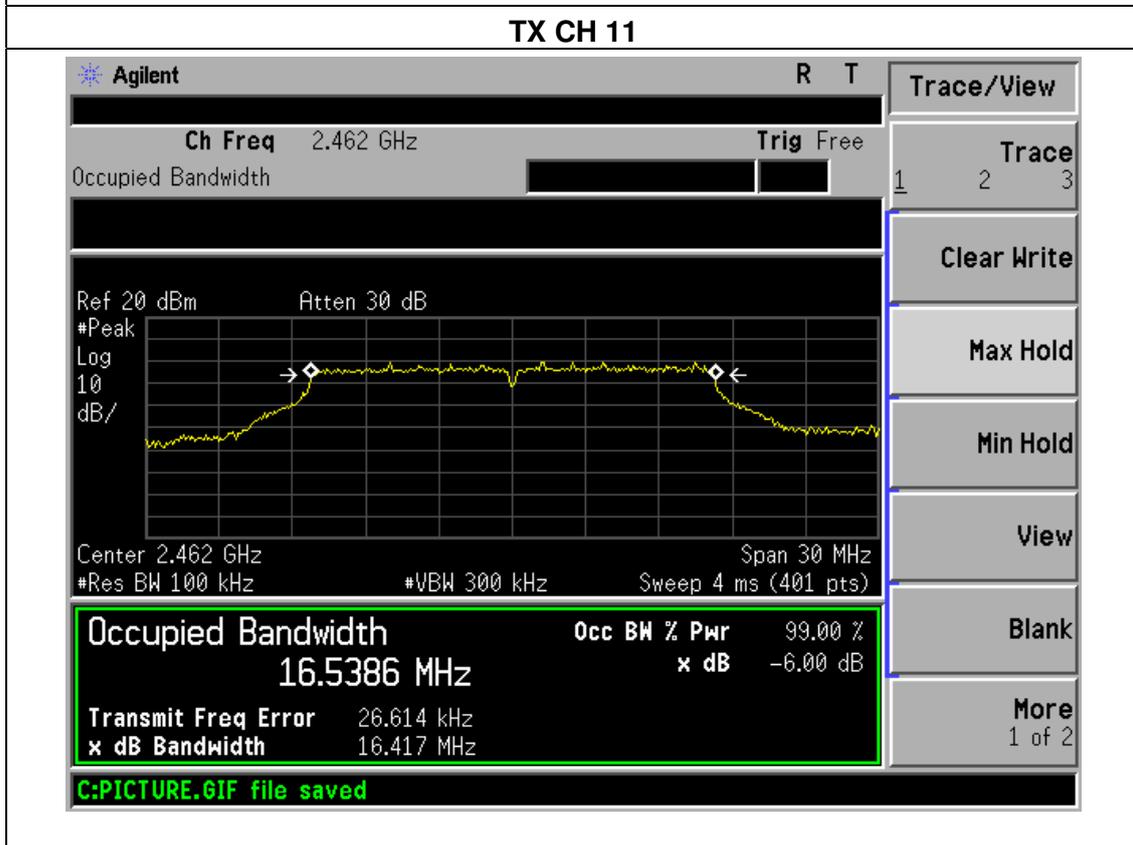
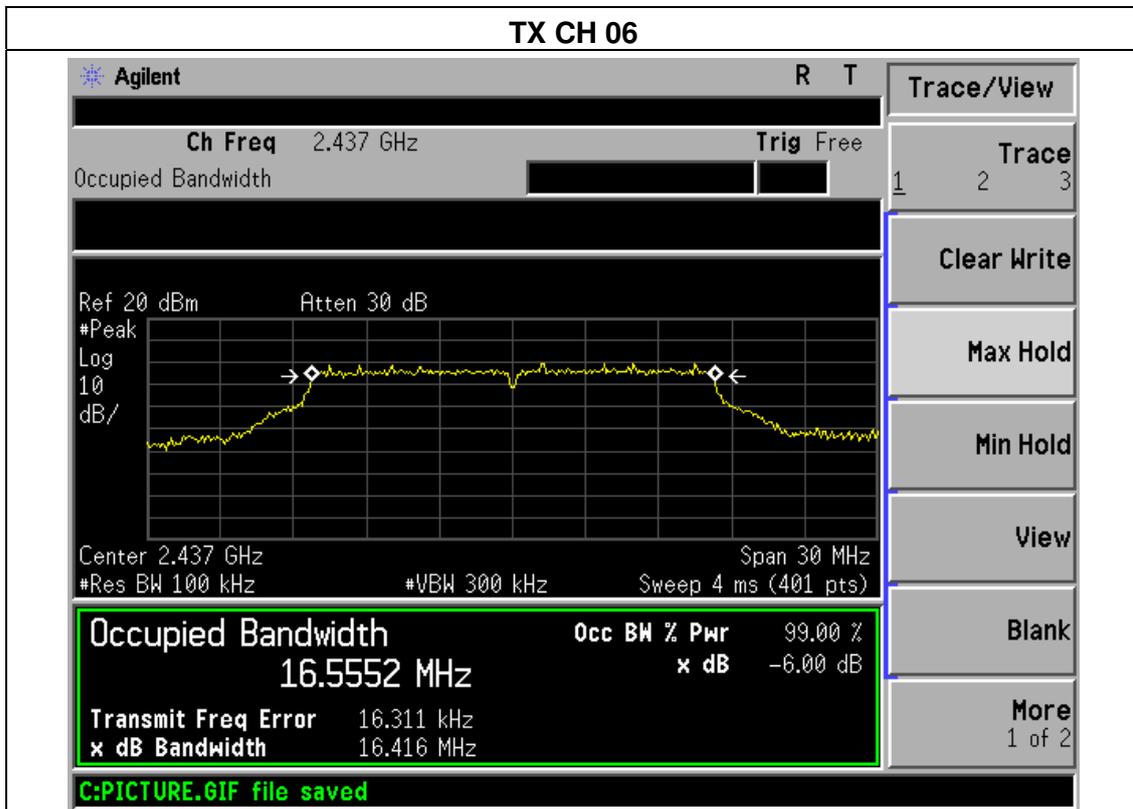




| | | | |
|---------------|----------------|---------------------|-------|
| Temperature : | 25°C | Relative Humidity : | 60% |
| Pressure : | 1012 hPa | Test Voltage : | DC 5V |
| Test Mode : | TX n Mode(20M) | | |

| Frequency (MHz) | 6dB bandwidth (MHz) | Limit (kHz) | Result |
|-----------------|---------------------|-------------|--------|
| 2412 | 17.834 | 500 | Pass |
| 2437 | 17.651 | 500 | Pass |
| 2462 | 17.639 | 500 | Pass |

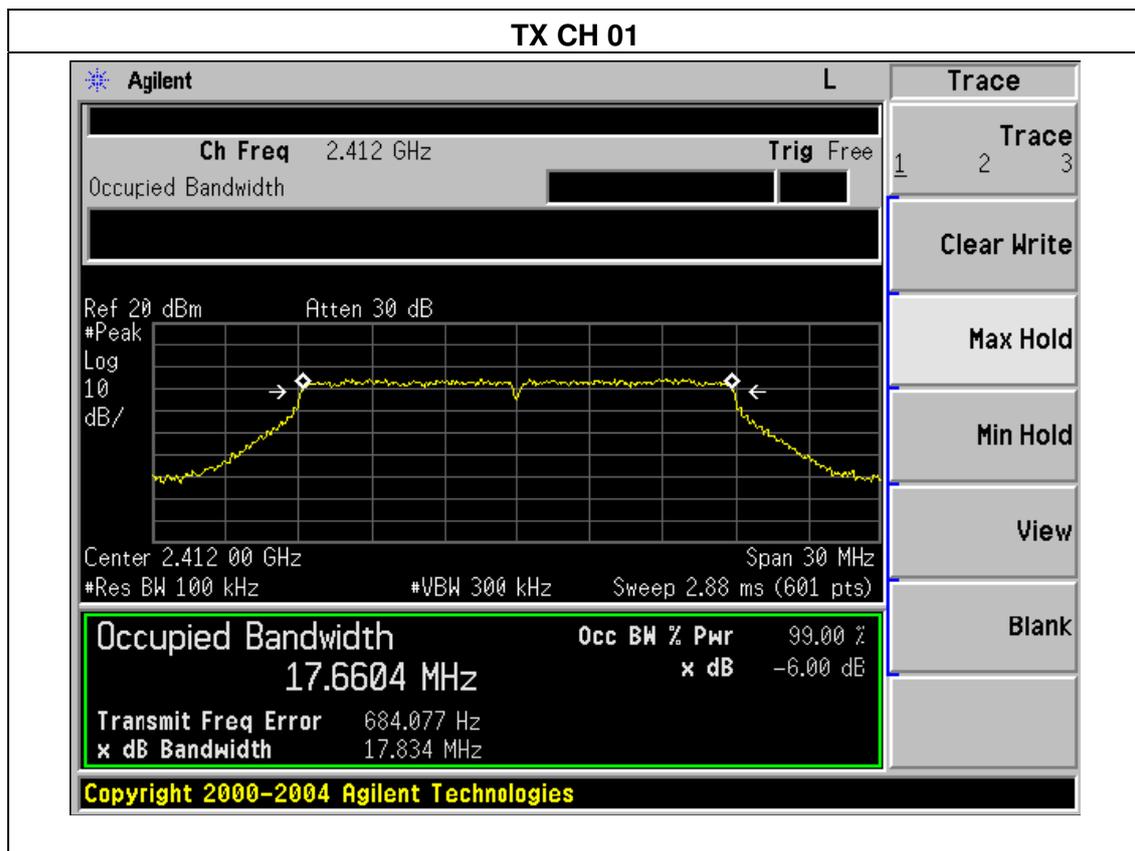


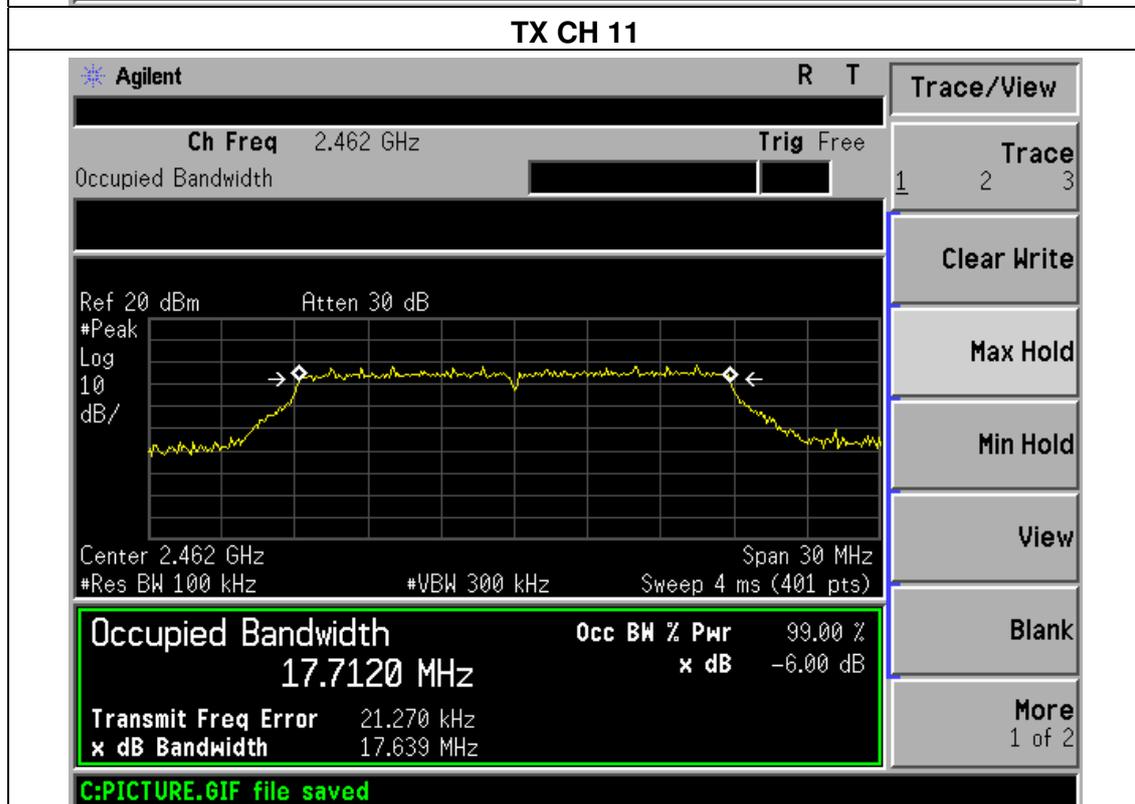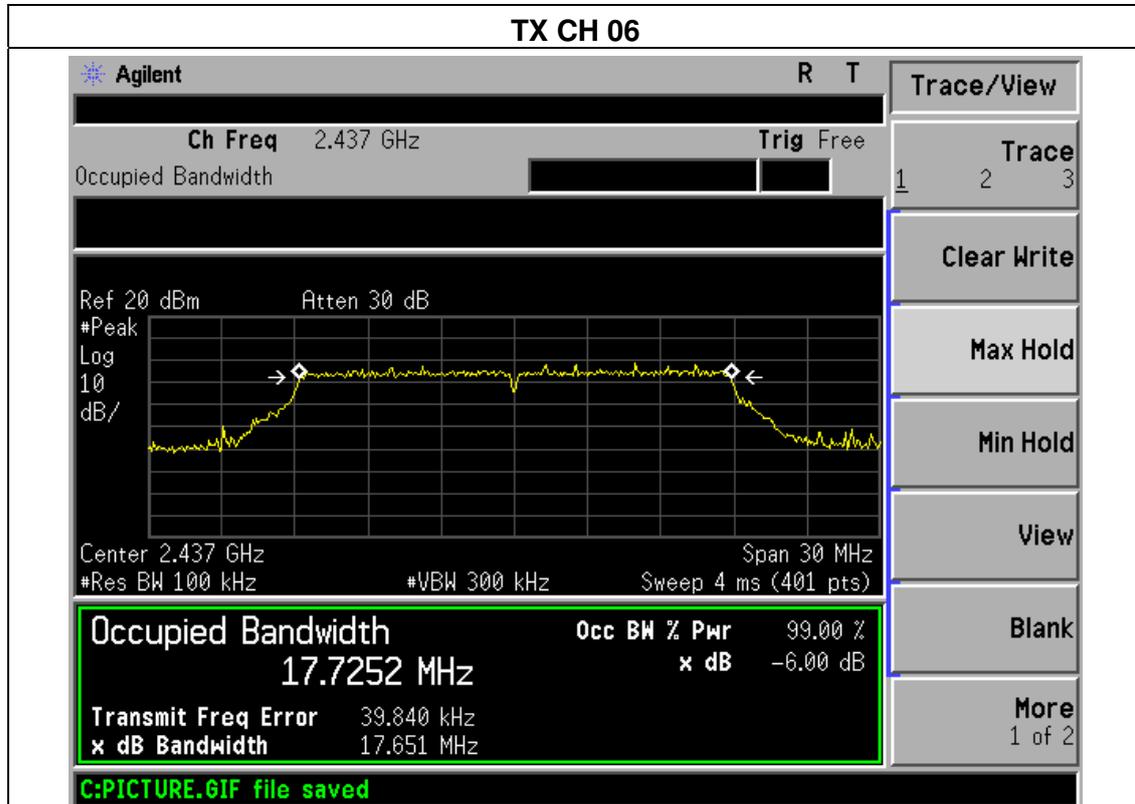




| | | | |
|---------------|----------------|---------------------|-------|
| Temperature : | 25°C | Relative Humidity : | 60% |
| Pressure : | 1012 hPa | Test Voltage : | DC 5V |
| Test Mode : | TX n Mode(40M) | | |

| Frequency (MHz) | 6dB bandwidth (MHz) | Limit (kHz) | Result |
|-----------------|---------------------|-------------|--------|
| 2422 | 35.368 | 500 | Pass |
| 2437 | 35.486 | 500 | Pass |
| 2452 | 35.203 | 500 | Pass |

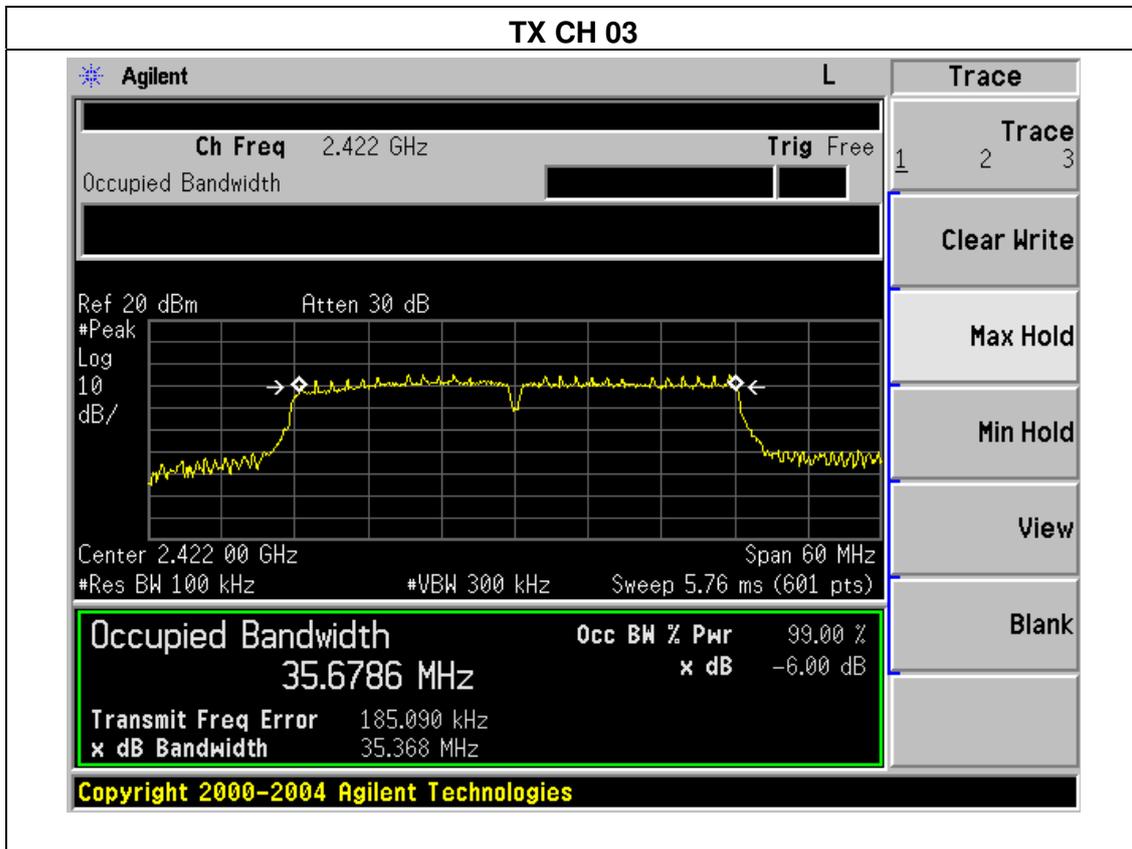


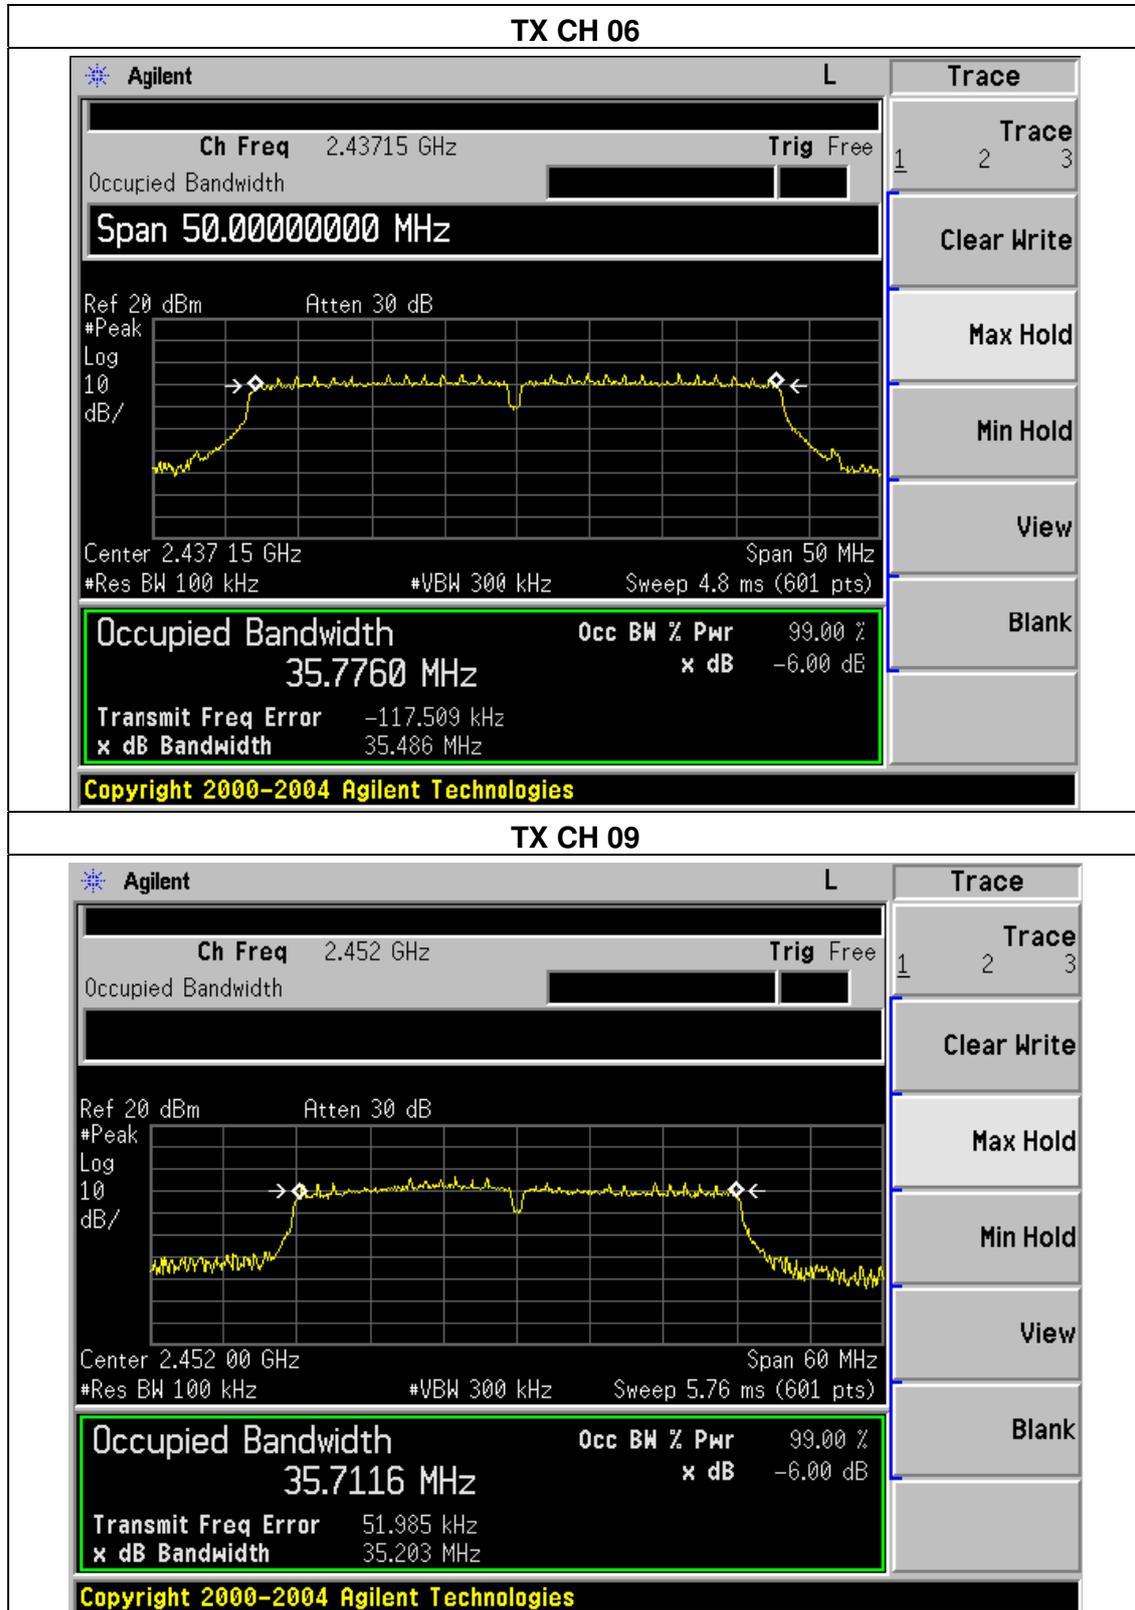



| | | | |
|---------------|----------|---------------------|-------|
| Temperature : | 25°C | Relative Humidity : | 60% |
| Pressure : | 1012 hPa | Test Voltage : | DC 5V |
| Test Mode : | BT | | |

| Frequency (MHz) | 6dB bandwidth (MHz) | Limit (kHz) | Result |
|-----------------|---------------------|-------------|--------|
| 2402 | 0.702 | 500 | Pass |
| 2440 | 0.684 | 500 | Pass |
| 2480 | 0.701 | 500 | Pass |

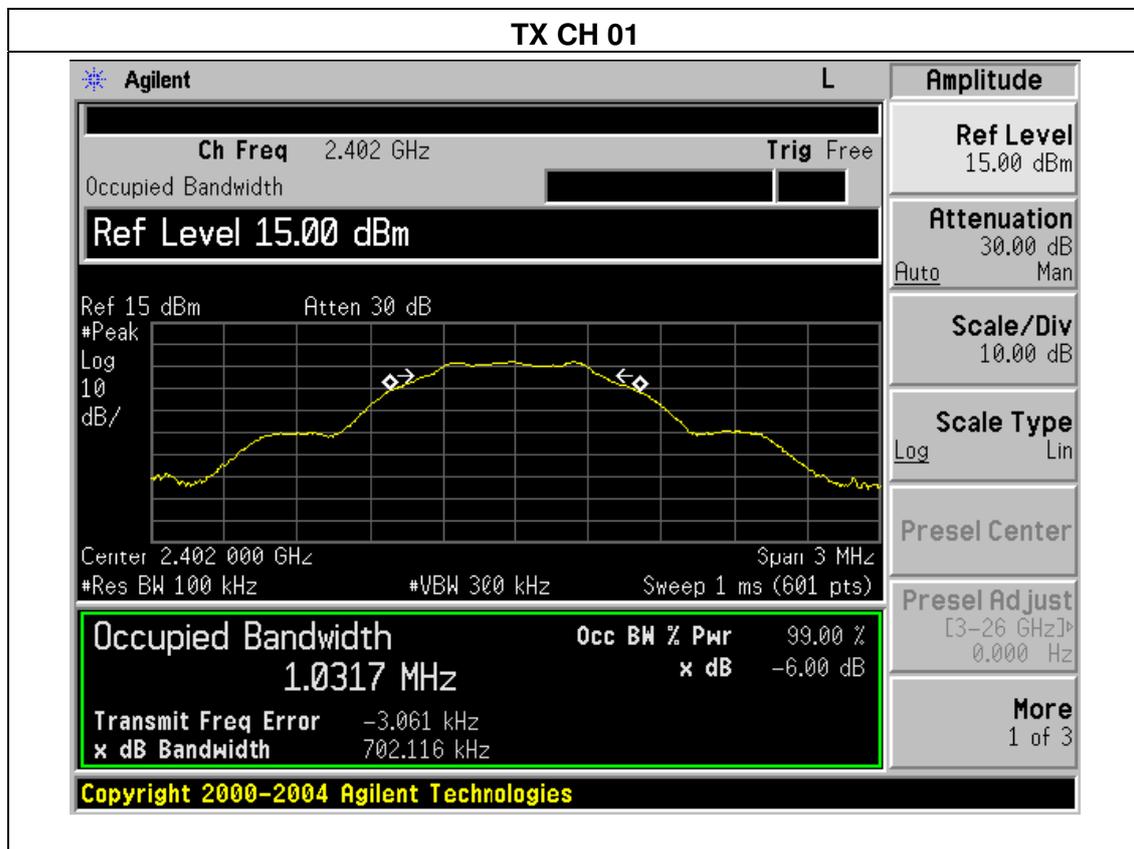

**TX CH 40**

| | |
|---|--|
| <div style="display: flex; justify-content: space-between; border-bottom: 1px solid black;"> Agilent L </div> <div style="padding: 5px;"> <p style="text-align: center;">Ch Freq 2.48 GHz Trig Free</p> <p>Occupied Bandwidth █</p> <p style="text-align: center; font-size: 1.2em;">Center 2.480000000 GHz</p> <p>Ref 15 dBm Atten 30 dB</p> <p style="font-size: 0.8em;">#Peak Log 10 dB/ Offst 10 dB</p> <p style="font-size: 0.8em;">Center 2.480 000 GHz Span 3 MHz</p> <p style="font-size: 0.8em;">#Res BW 100 kHz #VBW 300 kHz Sweep 1 ms (601 pts)</p> <div style="border: 2px solid green; padding: 5px; margin-top: 5px;"> <p style="font-size: 1.1em; margin: 0;">Occupied Bandwidth</p> <p style="font-size: 1.2em; margin: 0;">1.0338 MHz</p> <p style="font-size: 0.8em; margin: 0;">Transmit Freq Error -2.900 kHz</p> <p style="font-size: 0.8em; margin: 0;">x dB Bandwidth 700.961 kHz</p> </div> <p style="font-size: 0.8em; margin-top: 5px;">Copyright 2000-2004 Agilent Technologies</p> </div> | <div style="border-bottom: 1px solid black; text-align: center;">Freq/Channel</div> <div style="text-align: center;"> <p>Center Freq 2.48000000 GHz</p> <p>Start Freq 2.47850000 GHz</p> <p>Stop Freq 2.48150000 GHz</p> <p>CF Step 300.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> </div> |
|---|--|

6. PEAK OUTPUT POWER TEST

6.1 APPLIED PROCEDURES / LIMIT

| FCC Part15 (15.247) , Subpart C | | | | |
|---------------------------------|-------------------|-----------------|-----------------------|--------|
| Section | Test Item | Limit | Frequency Range (MHz) | Result |
| 15.247(b)(3) | Peak Output Power | 1 watt or 30dBm | 2400-2483.5 | PASS |

6.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the Power meter

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP



6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



6.1.5 TEST RESULTS

| | | | |
|---------------|----------|---------------------|-------|
| Temperature : | 25°C | Relative Humidity : | 60% |
| Pressure : | 1012 hPa | Test Voltage : | DC 5V |

| | Frequency | Maximum Conducted Output Power(PK) | LIMIT |
|-----------|-----------|------------------------------------|-------|
| | (MHz) | (dBm) | dBm |
| 802.11b | 2412 | 12.56 | 30 |
| | 2437 | 12.68 | 30 |
| | 2462 | 12.45 | 30 |
| 802.11g | 2412 | 10.68 | 30 |
| | 2437 | 10.35 | 30 |
| | 2462 | 10.47 | 30 |
| 802.11n20 | 2412 | 9.58 | 30 |
| | 2437 | 9.42 | 30 |
| | 2462 | 9.79 | 30 |
| 802.11n40 | 2422 | 8.76 | 30 |
| | 2437 | 8.73 | 30 |
| | 2452 | 8.75 | 30 |
| BT | 2402 | 0.86 | 30 |
| | 2440 | 0.59 | 30 |
| | 2480 | 0.65 | 30 |

7. 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE

7.1 APPLICABLE STANDARD

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

7.2 TEST PROCEDURE

- a) Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b) Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- c) Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- d) Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- e) Repeat above procedures until all measured frequencies were complete.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP




7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.


7.1 TEST RESULTS



802.11b: Band Edge, Left Side

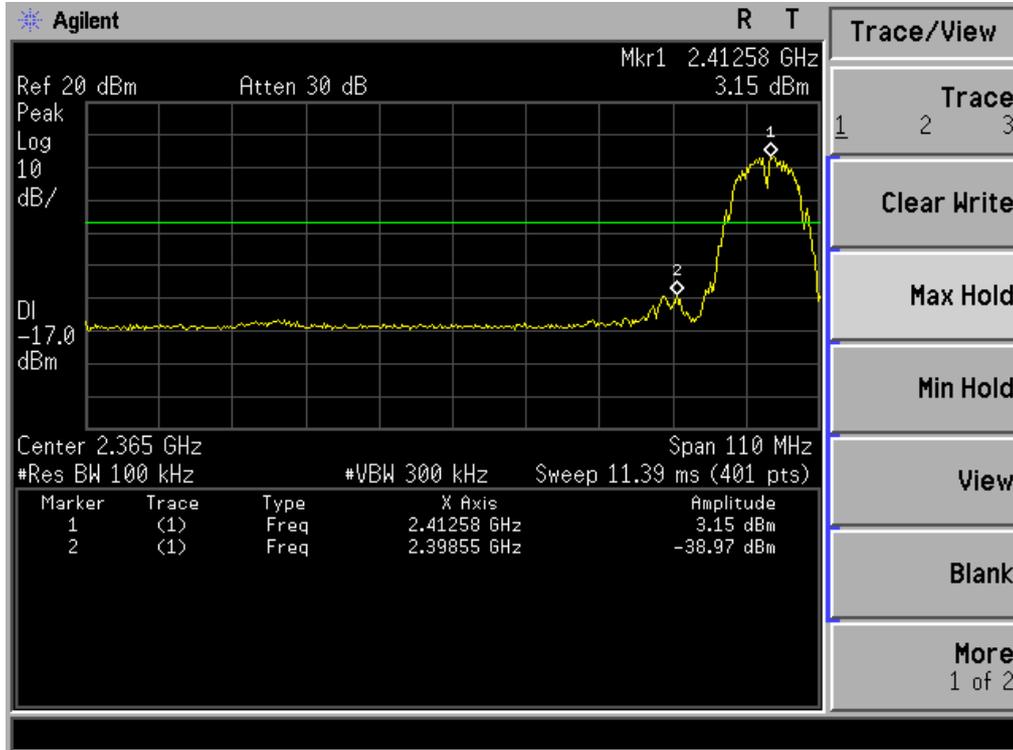


802.11b: Band Edge, Right Side

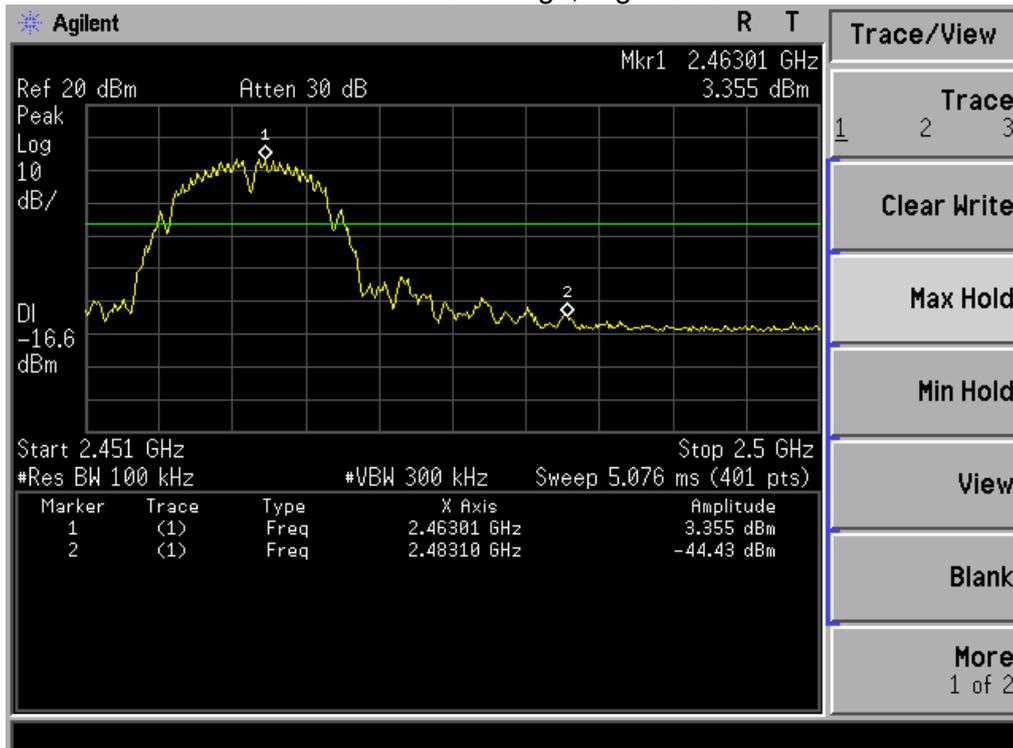




802.11g: Band Edge, Left Side

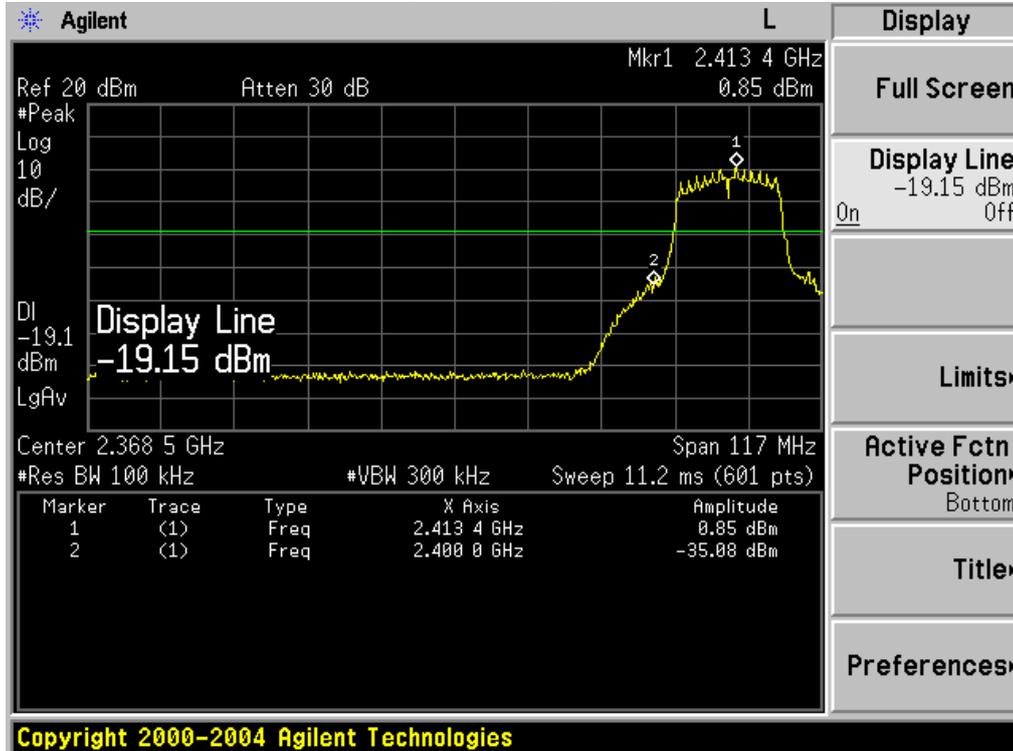


802.11g: Band Edge, Right Side

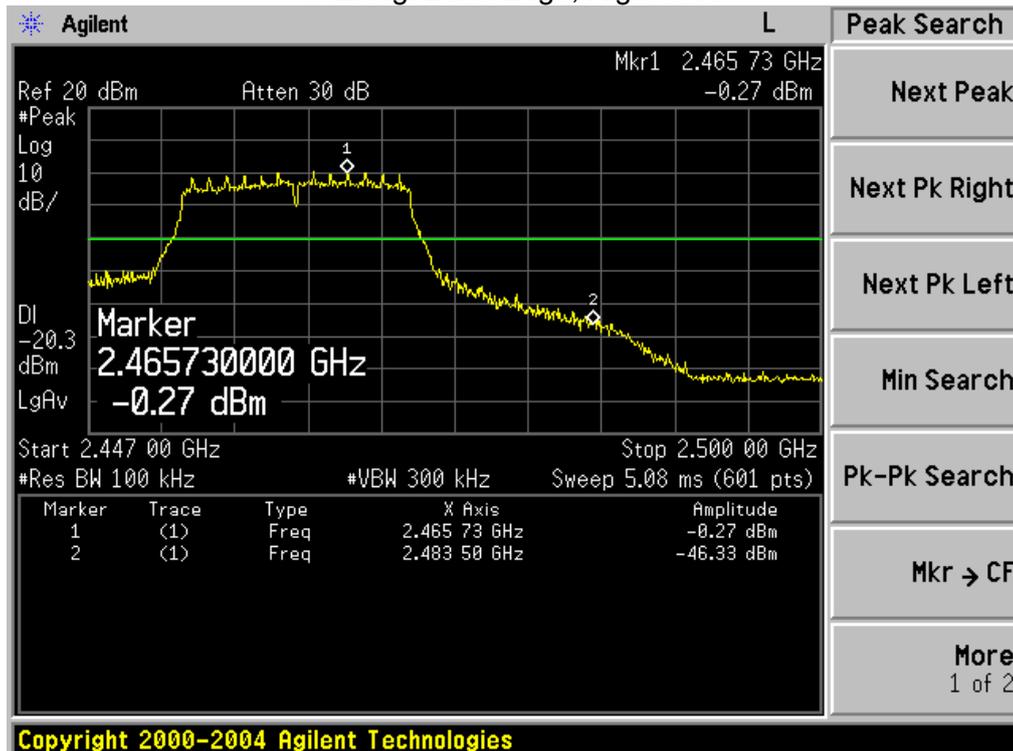




802.11n-HT20: Band Edge, Left Side

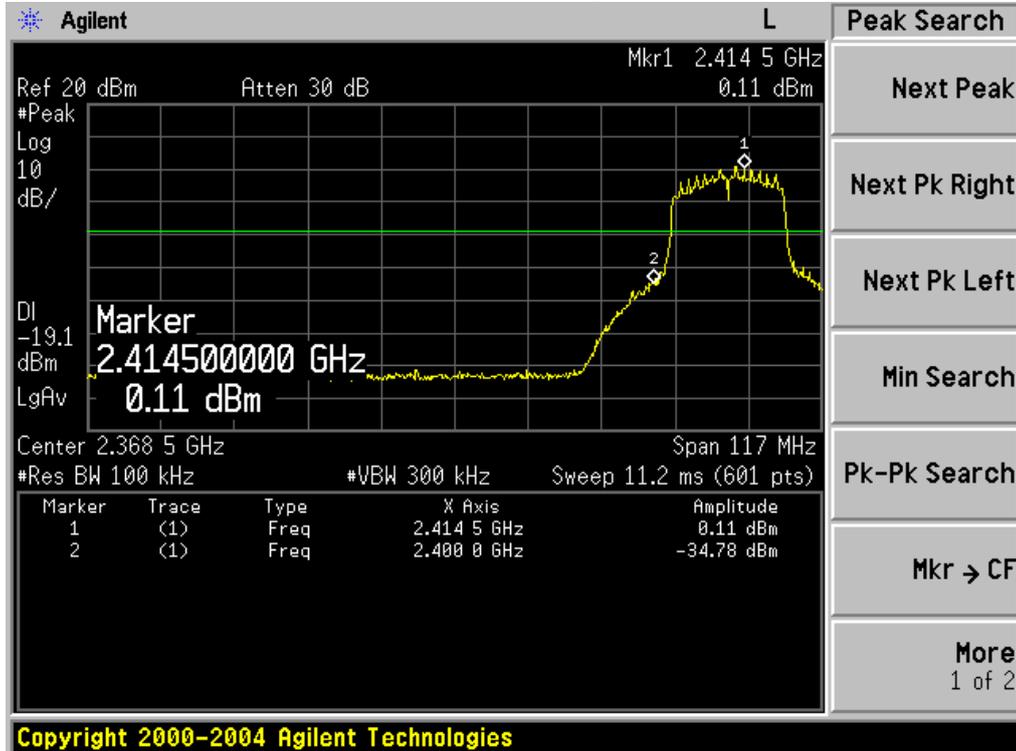


802.11n-HT20: Band Edge, Right Side

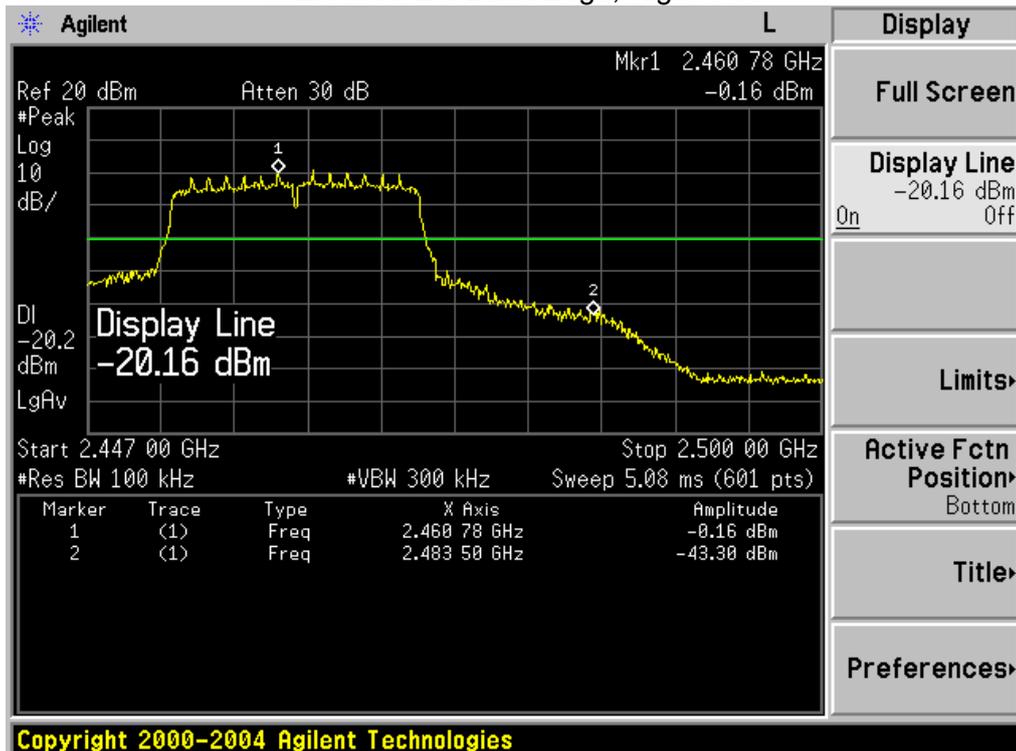




802.11n-HT40: Band Edge, Left Side

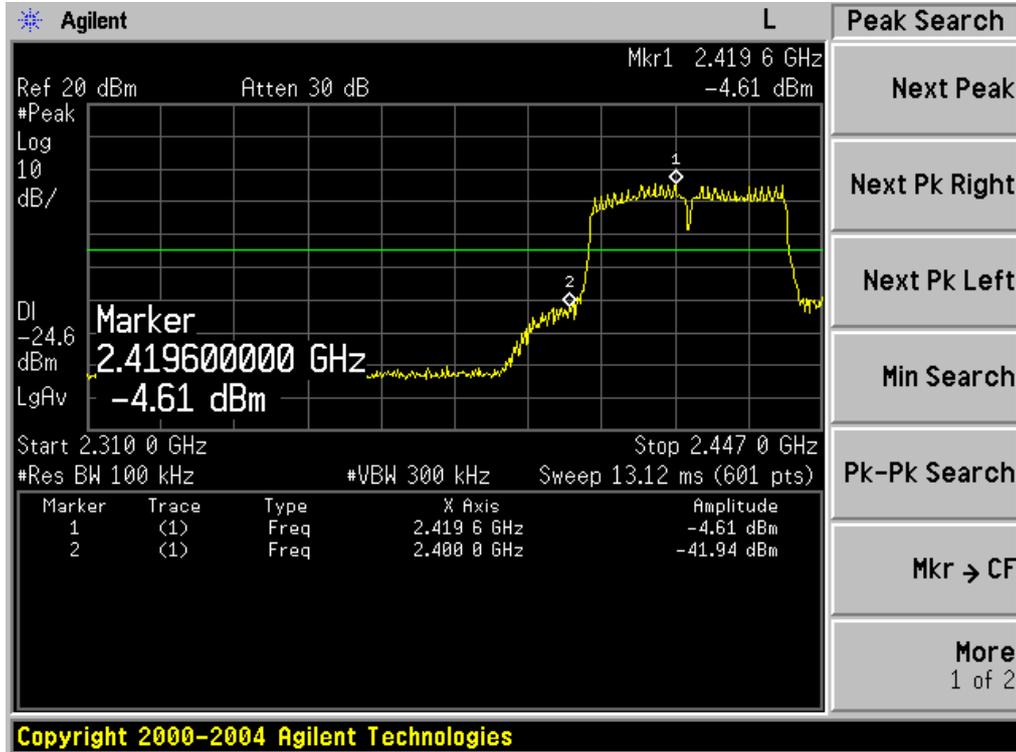


802.11n-HT40: Band Edge, Right Side

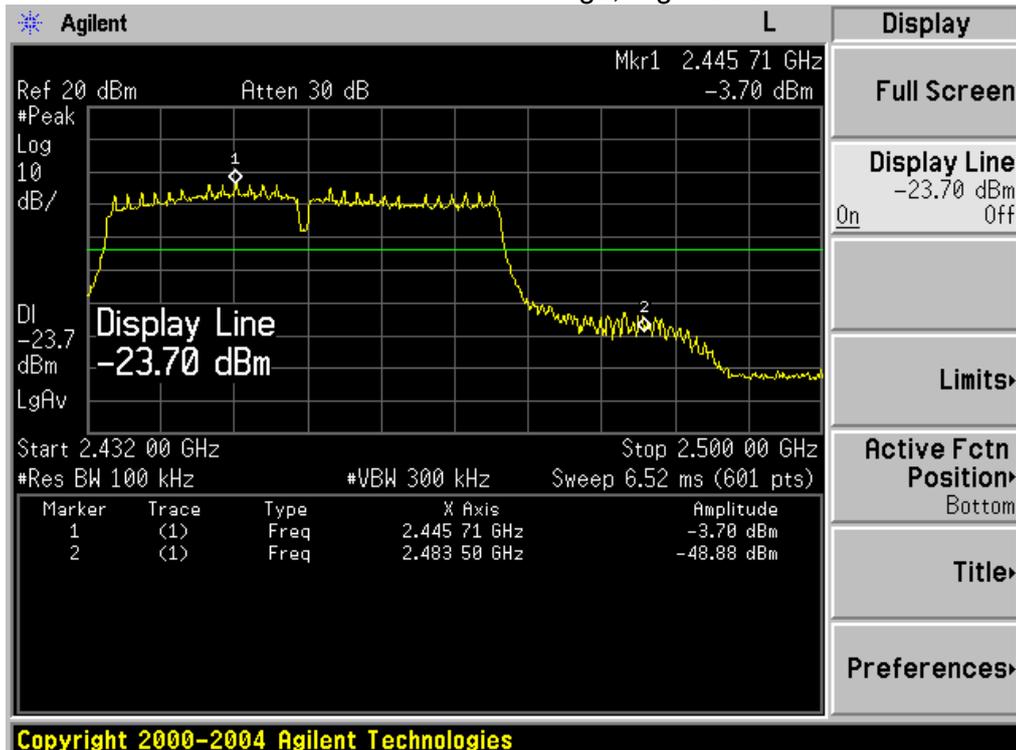




BT: Band Edge, Left Side

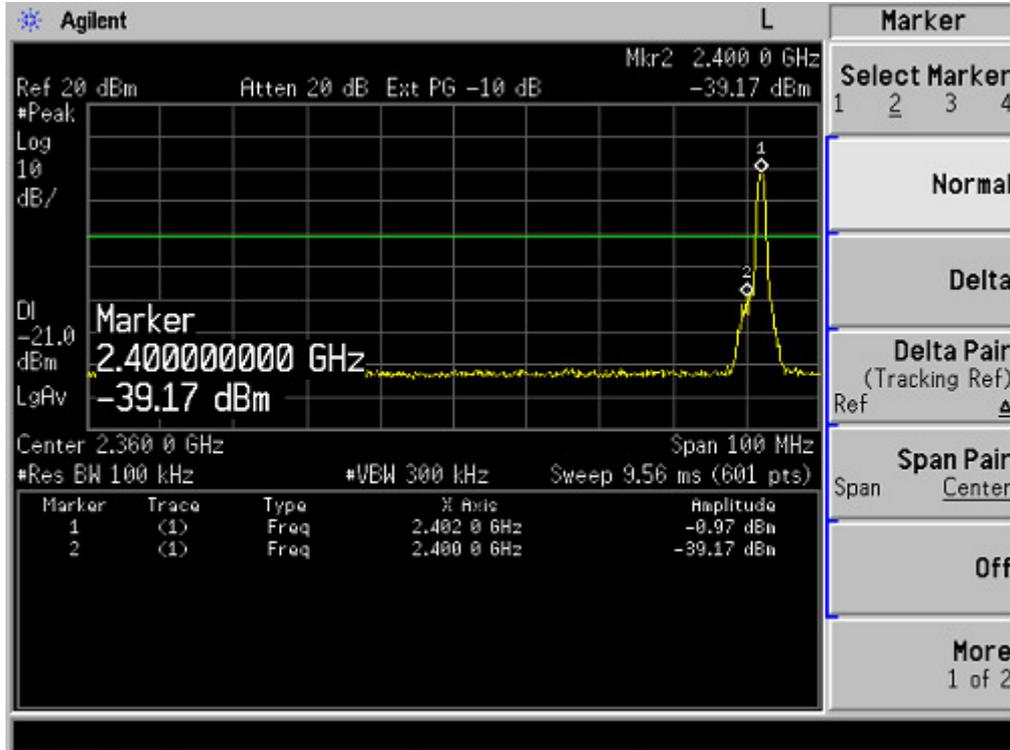

BT: Band Edge, Right Side

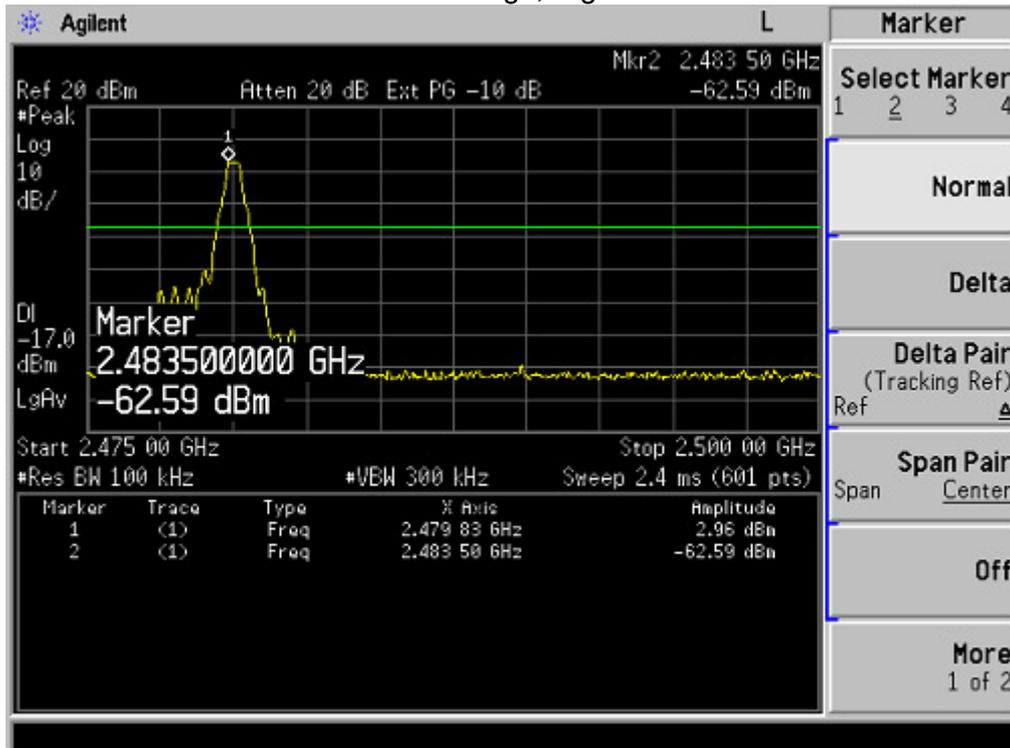



8. DUTY CYCLE OF TEST SIGNAL

8.1 STANDARD REQUIREMENT

Pre-analysis Check: While conducting average power measurement, duty cycle of each mode shall be checked to ensure its duty cycle in order to compensate for the loss due to insufficient ratio of duty cycle.

All duty cycle is pre-scanned, and result as obtained below shows only the most representative ones where duty cycle is conducted as the given transmission with given virtual operation that expresses the percentage.

8.2 FORMULA:

Duty Cycle = $T_{on} / (T_{on} + T_{off})$

Measurement Procedure:

1. Set span = Zero
2. RBW = 8MHz
3. VBW = 8MHz,
4. Detector = Peak


Duty Cycle:

| WIFI | Duty Cycle | Duty Fator (dB) |
|---------------|------------|-----------------|
| 802.11b | 100% | 0 |
| 802.11g | 100% | 0 |
| 802.11n(HT20) | 100% | 0 |
| 802.11n(HT40) | 100% | 0 |


| BT | Duty Cycle | Duty Fator (dB) |
|-----|------------|-----------------|
| BLE | 100% | 0 |



802.11b

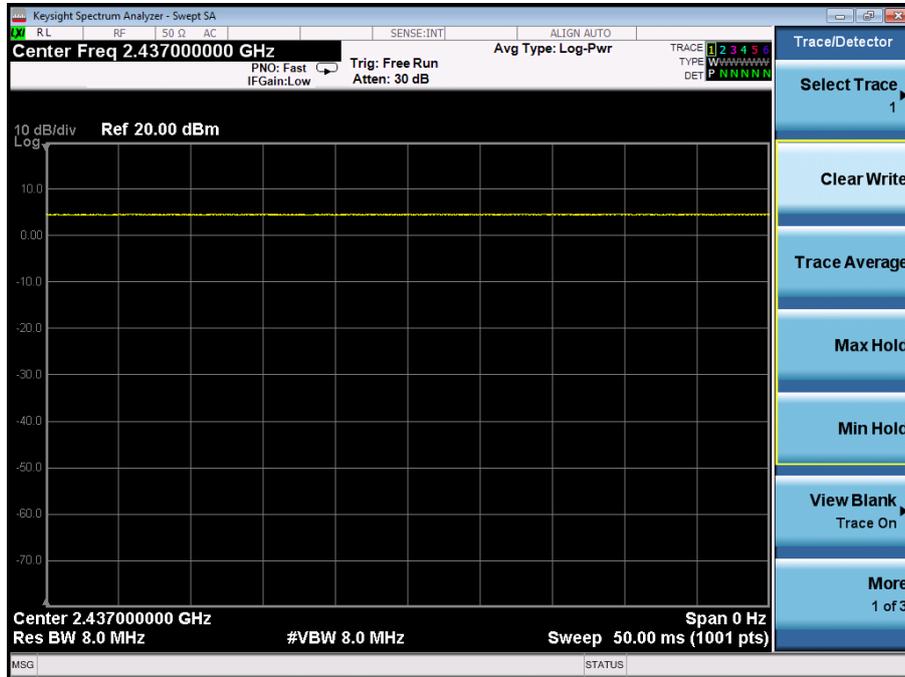


802.11g

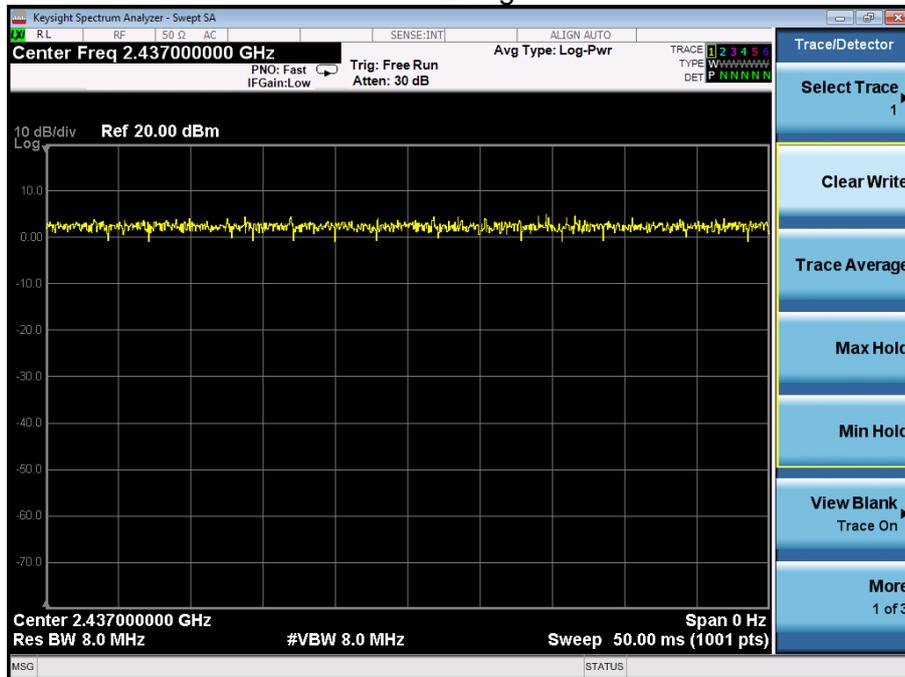




802.11n20

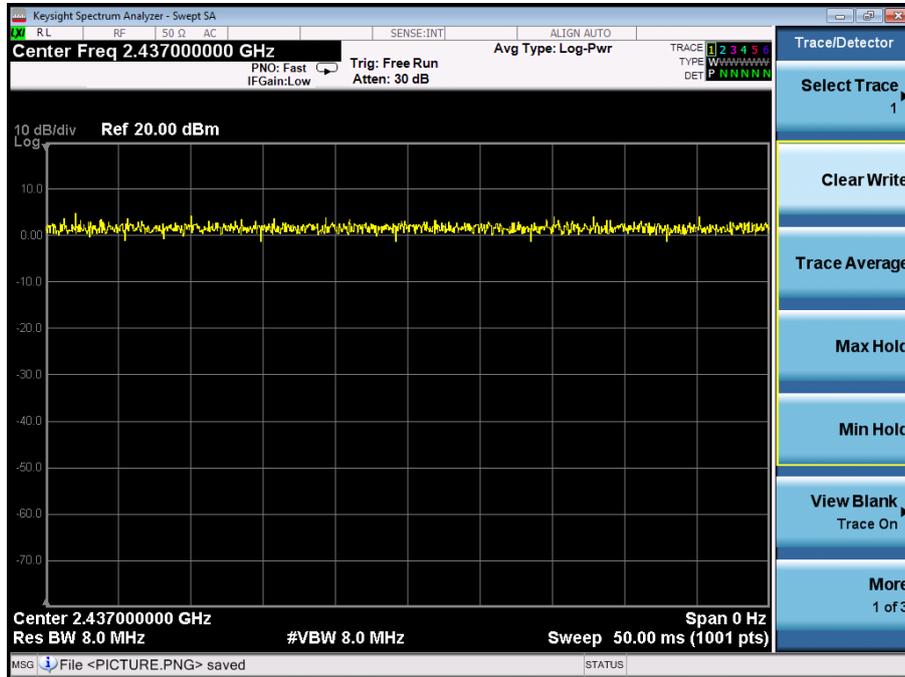


802.11n40

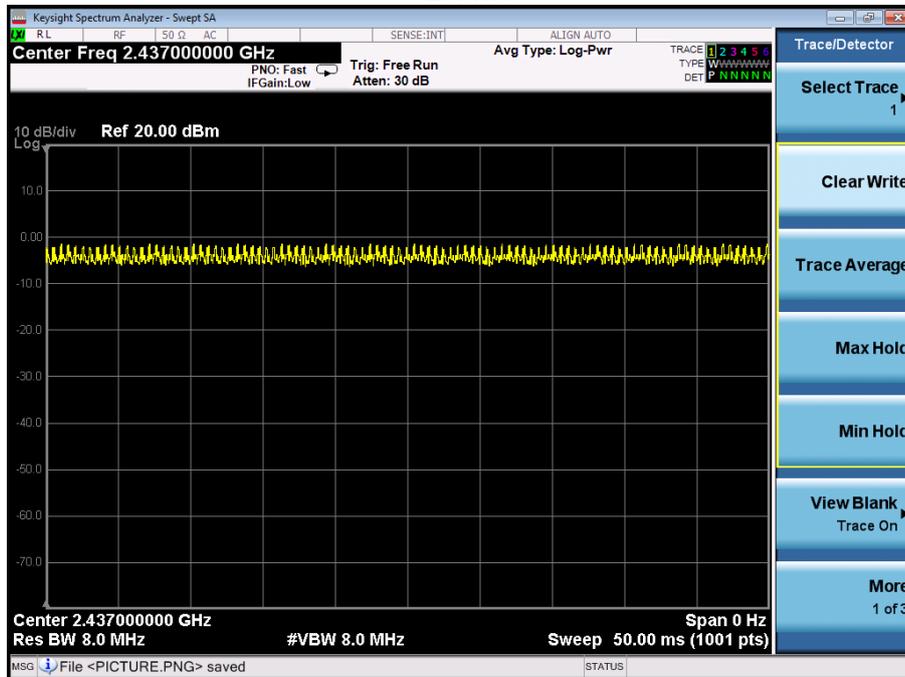



BT

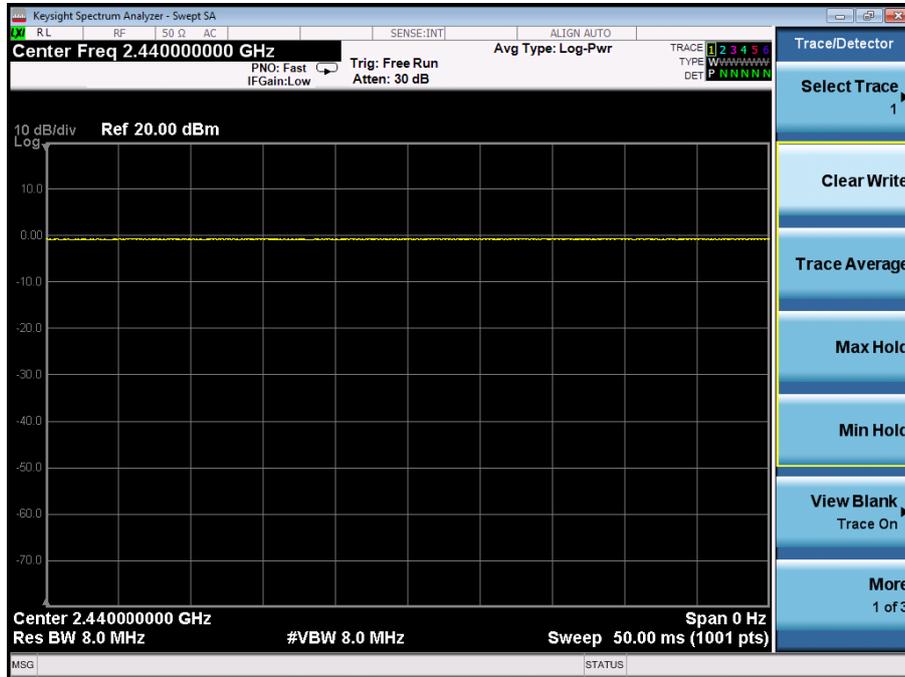



9. ANTENNA REQUIREMENT

9.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

9.2 EUT ANTENNA


The EUT antenna is internal antenna, It comply with the standard requirement.

10. EUT TEST PHOTO

Conducted Emission



Radiated Measurement Photos

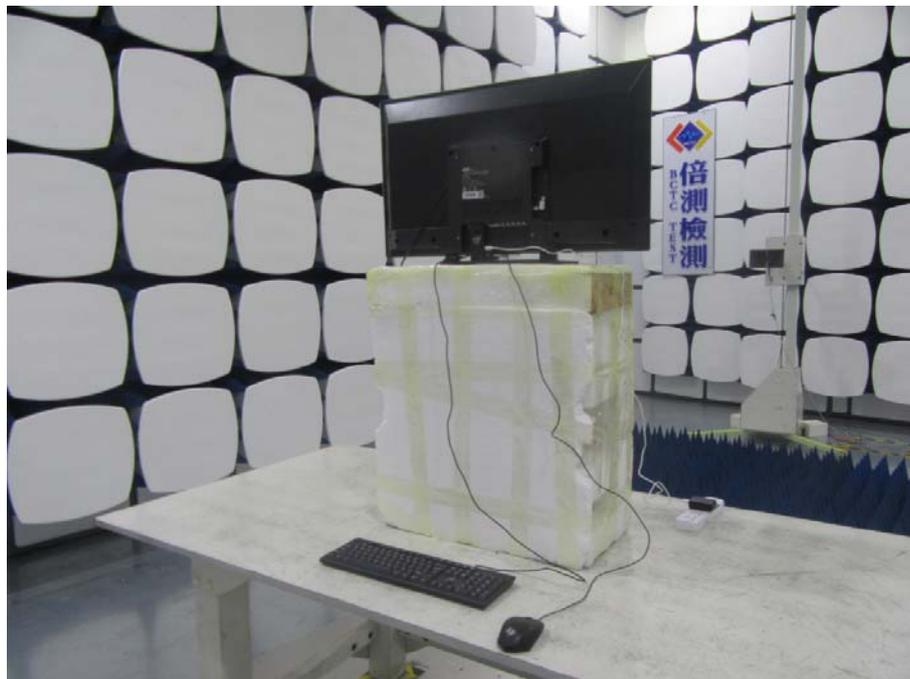



11. EUT PHOTO



***** END OF REPORT *****