

# RF TEST REPORT

Test item : Wristband Remote  
Model No. : SC-WR-01  
Order No. : DTNC1506-02746  
Date of receipt : 2015-06-03  
Test duration : 2015-06-18 ~ 2015-06-22  
Date of issue : 2015-07-01  
Use of report : FCC Original Grant

Applicant : Sena Technologies, Inc.  
210 Yangjae-dong Seocho-gu, Seoul, South Korea 137-130

Test laboratory : DT&C Co., Ltd.  
42, Yurim-ro, 154beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea 449-935

Test specification : FCC Part 15 Subpart C 247  
Test environment : See appended test report  
Test result :  Pass  Fail

The test results presented in this test report are limited only to the sample supplied by applicant and the use of this test report is inhibited other than its purpose. This test report shall not be reproduced except in full, without the written approval of DT&C Co., Ltd.

Tested by :



---

Engineer  
InHee Bae

Reviewed by :



---

Technical Manager  
GeunKi Son

## Test Report Version

Test Report No.	Date	Description
DRTFCC1507-0149	Jul. 01, 2015	Initial issue

# Table of Contents

<b>1. GENERAL INFORMATION .....</b>	<b>4</b>
<b>2. EUT DESCRIPTION .....</b>	<b>4</b>
2.1 Support equipments.....	4
<b>3. SUMMARY OF TESTS .....</b>	<b>5</b>
<b>4. TEST METHODOLOGY .....</b>	<b>6</b>
4.1 EUT CONFIGURATION .....	6
4.2 EUT EXERCISE .....	6
4.3 GENERAL TEST PROCEDURES .....	6
4.4 DESCRIPTION OF TEST MODES.....	6
<b>5. INSTRUMENT CALIBRATION .....</b>	<b>7</b>
<b>6. FACILITIES AND ACCREDITATIONS.....</b>	<b>7</b>
6.1 FACILITIES .....	7
6.2 EQUIPMENT .....	7
<b>7. ANTENNA REQUIREMENTS.....</b>	<b>7</b>
<b>8. TEST RESULT .....</b>	<b>8</b>
8.1 6 dB Bandwidth Measurement.....	8
8.2 Maximum Peak Conducted Output Power .....	11
8.3 Maximum Power Spectral Density.....	14
8.4 Out of Band Emissions at the Band Edge / Conducted Spurious Emissions.....	17
8.5 Radiated Measurement. ....	26
8.5.1 Radiated Spurious Emissions.....	26
8.6 POWERLINE CONDUCTED EMISSIONS.....	29
<b>9. LIST OF TEST EQUIPMENT .....</b>	<b>32</b>
<b>APPENDIX I .....</b>	<b>33</b>
<b>APPENDIX II .....</b>	<b>34</b>

## 1. GENERAL INFORMATION

**Applicant** : Sena Technologies,Inc.  
**Address** : 210 Yangjae-dong Seocho-gu, Seoul, South Korea 137-130  
**FCC ID** : S7A-SP24  
**EUT** : Wristband Remote  
**Model** : SC-WR-01  
**Additional Model(s)** : NA  
**Data of Test** : 2015-06-18 ~ 2015-06-22  
**Contact person** : Seunghyun KIM

## 2. EUT DESCRIPTION

<b>Product</b>	Wristband Remote
<b>Model Name</b>	SC-WR-01
<b>Add Model Name</b>	NA
<b>Serial Number</b>	Identical prototype
<b>Hardware version</b>	SW : 1.0 HW : 1.0
<b>Software version</b>	SW : 1.0 HW : 1.0
<b>Power Supply</b>	DC 3.7 V
<b>Frequency Range</b>	2402 ~ 2480 MHz (40 channels)
<b>Max. RF Output Power</b>	8.04 dBm
<b>Modulation Type</b>	GFSK
<b>Antenna Specification</b>	Antenna Type : Internal Antenna Gain : 0.932 dBi (PK)

### 2.1 Support equipments

Equipment	Model No.	Serial No.	Manufacturer	Note
-	-	-	-	-

**3. SUMMARY OF TESTS**

FCC Part Section(s)	Parameter	Limit	Test Condition	Status Note 1
<b>I. Transmitter Mode (TX)</b>				
15.247(a)	6 dB Bandwidth	> 500 kHz	Conducted	<b>C</b>
15.247(b)	Transmitter Output Power	< 1 Watt		<b>C</b>
15.247(d)	Out of Band Emissions / Band Edge	20 dBc in any 100 kHz BW		<b>C</b>
15.247(e)	Transmitter Power Spectral Density	< 8 dBm/3kHz		<b>C</b>
15.205 15.209	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	FCC 15.209 limits	Radiated	<b>C</b> <sup>Note 2,3</sup>
15.207	AC Conducted Emissions	FCC 15.207 limits	AC Line Conducted	<b>C</b>
15.203	Antenna Requirements	FCC 15.203	-	<b>C</b>
<p>Note 1 : <b>C</b>=Comply    <b>NC</b>=Not Comply    <b>NT</b>=Not Tested    <b>NA</b>=Not Applicable</p> <p>Note 2 : This test item was performed in each axis and the worst case data was reported.</p> <p>Note 3 : For emission measurements at or below 1 GHz, the table height is 80 cm.  For emission measurements above 1 GHz, the table height is 1.5 m.  (Instead of 0.8m EUT height above 1GHz for FCC, 1.5m EUT height was used as allowed by FCC December 2014 TCB conference call.)</p>				

## 4. TEST METHODOLOGY

Generally the tests were performed according to the KDB558074 v03r03. And ANSI C63.10-2009 was used to reference appropriate EUT setup and maximizing procedures of radiated spurious emission and AC line conducted emission testing.

### 4.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

### 4.2 EUT EXERCISE

The EUT was operated in the test mode to fix the TX frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

### 4.3 GENERAL TEST PROCEDURES

#### Conducted Emissions

According to the requirements in Section 6.2 of ANSI C63.10, the EUT is placed on the wooden table, which is 0.8 m above ground plane and the conducted emissions from the EUT are measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-peak and Average detector.

#### Radiated Emissions

The EUT is placed on a non-conductive table. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the highest emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.3 of ANSI C63.10

### 4.4 DESCRIPTION OF TEST MODES

The EUT has been tested with the operating condition for maximizing the emission characteristics. A test program is used to control the EUT for staying in continuous transmitting. The Bluetooth low energy mode and below low, middle and high channels were tested and reported.

Test Mode	Channel	Frequency [MHz]
BT LE	0	2402
	19	2440
	39	2480

## 5. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipments, which is traceable to recognized national standards.

## 6. FACILITIES AND ACCREDITATIONS

### 6.1 FACILITIES

The open area test site(OATS) or semi anechoic chamber and conducted measurement facility used to collect the radiated and conducted test data are located at the 42, Yurim-ro, 154beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea 449-935. The site is constructed in conformance with the requirements.

**- Semi anechoic chamber registration Number : 165783 (FCC)**

### 6.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized Antennas : tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and peak, quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

## 7. ANTENNA REQUIREMENTS

**According to FCC 47 CFR §15.203 :**

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

**The antenna of this EUT is permanently attached on the board. Please refer to the internal photo. Therefore this E.U.T Complies with the requirement of §15.203**

## 8. TEST RESULT

### 8.1 6 dB Bandwidth Measurement

#### Test Requirements and limit, §15.247(a)

The bandwidth at 6 dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the receive antenna while the EUT is operating in transmission mode at the appropriate frequencies.

**The minimum permissible 6 dB bandwidth is 500 kHz.**

#### ■ TEST CONFIGURATION

Refer to the APPENDIX I.

#### ■ TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer and used following test procedure of **KDB558074**.

1. Set resolution bandwidth (RBW) = 100 KHz
2. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.  
**(RBW : 100 kHz / VBW : 300 KHz)**
3. Detector = **Peak**.
4. Trace mode = **max hold**.
5. Sweep = **auto couple**.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

#### ■ TEST RESULTS : **Comply**


Test Mode	Frequency [MHz]	Test Results [kHz]
LE	2402	682.5
	2440	677.3
	2480	684.3



TEST PLOTS


6 dB Bandwidth

Test Frequency : 2402 MHz

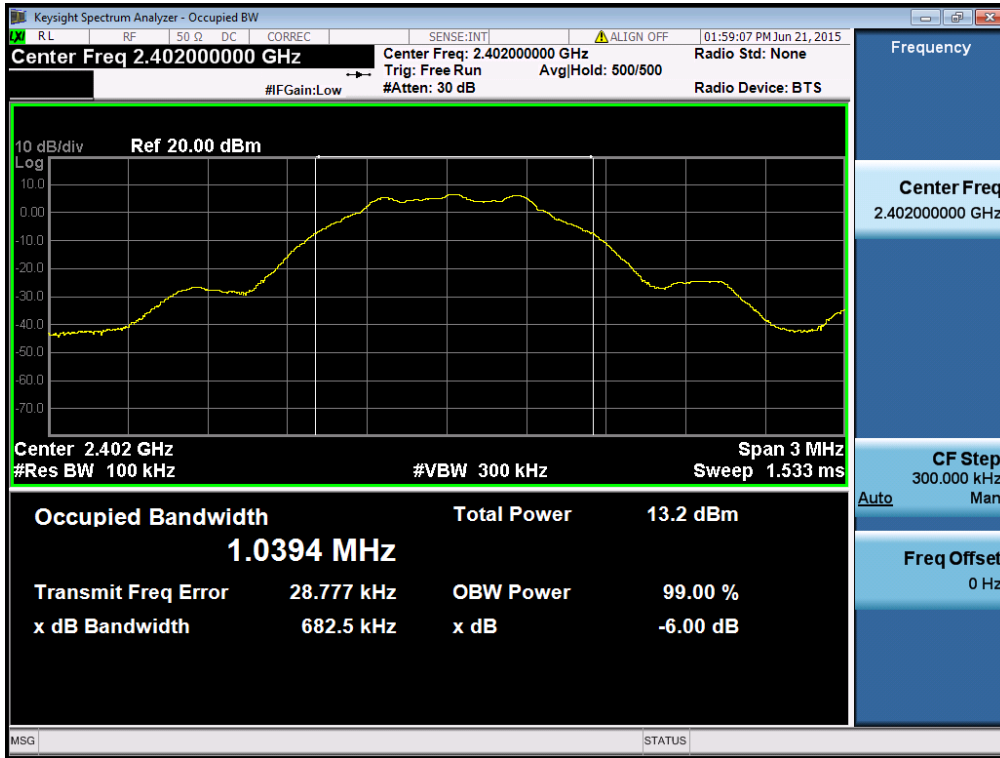


6 dB Bandwidth

Test Frequency : 2440 MHz

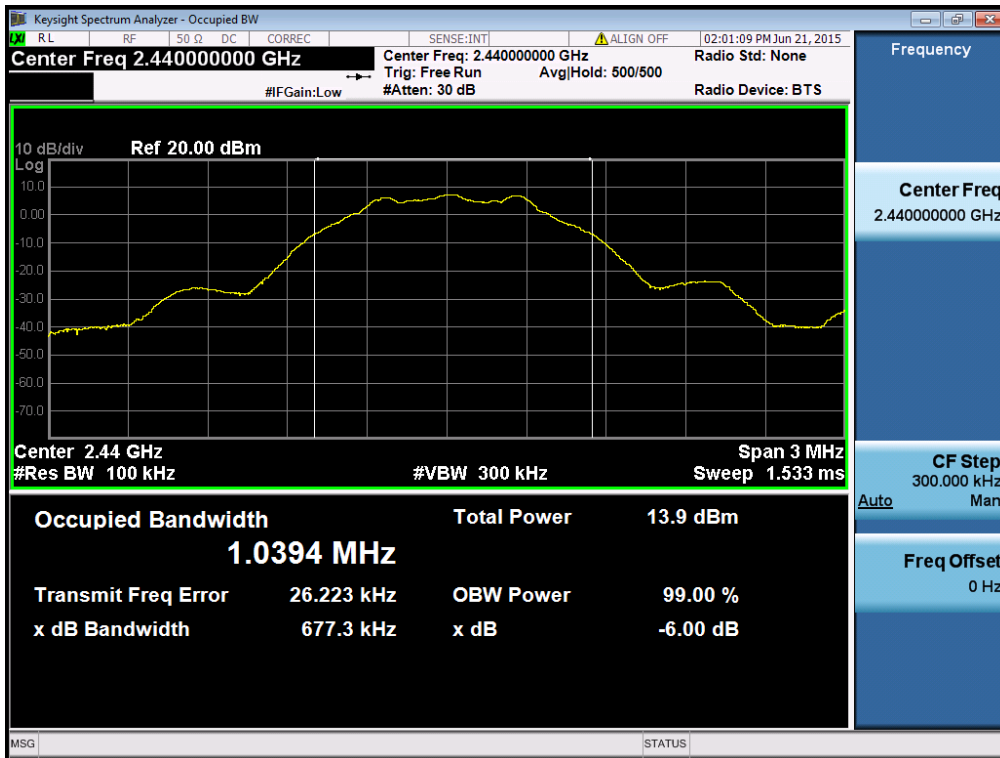

**6 dB Bandwidth**

Test Frequency : 2480 MHz

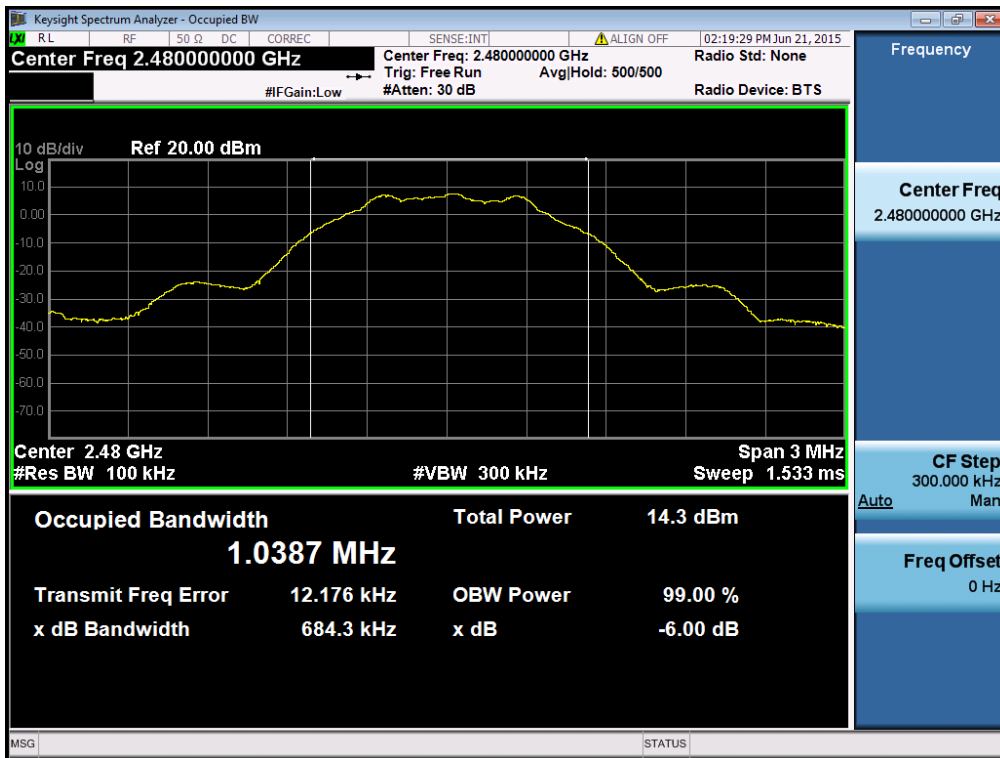

## 8.2 Maximum Peak Conducted Output Power

### Test Requirements and limit, §15.247(b)

A transmitter antenna terminal of EUT is connected to the input of a spectrum analyzer.

Measurement is made while the EUT is operating in transmission mode at the appropriate frequencies.

**The maximum permissible conducted output power is 1 Watt.**

#### ■ TEST CONFIGURATION

Refer to the APPENDIX I.

#### ■ TEST CONFIGURATION :

Maximum Peak Conducted Output Power is measured using Measurement Procedure Option1 of KDB558074.

1. Set the RBW  $\geq$  DTS bandwidth. **Actual RBW = 2 MHz**
2. Set VBW  $\geq$  3 x RBW. **Actual VBW = 6 MHz**
3. Set span  $\geq$  3 x RBW.
4. Sweep time = **auto couple**
5. Detector = **peak**
6. Trace mode = **max hold**
7. Allow trace to fully stabilize
8. Use peak marker function to determine the peak amplitude level.

#### ■ TEST RESULTS : **Comply**

Test Mode	Frequency [MHz]	Average Output Power		Peak Output Power	
		dBm	mW	dBm	mW
LE	2402	3.84	0.0024	6.98	0.0050
	2440	4.49	0.0028	7.60	0.0058
	2480	<b>4.80</b>	<b>0.0030</b>	<b>8.04</b>	<b>0.0064</b>


Note 1: Average output power was tested by power meter

Note 2: See next pages for actual measured spectrum plots.

■ TEST PLOTS


Peak Output Power

Test Frequency : 2402 MHz

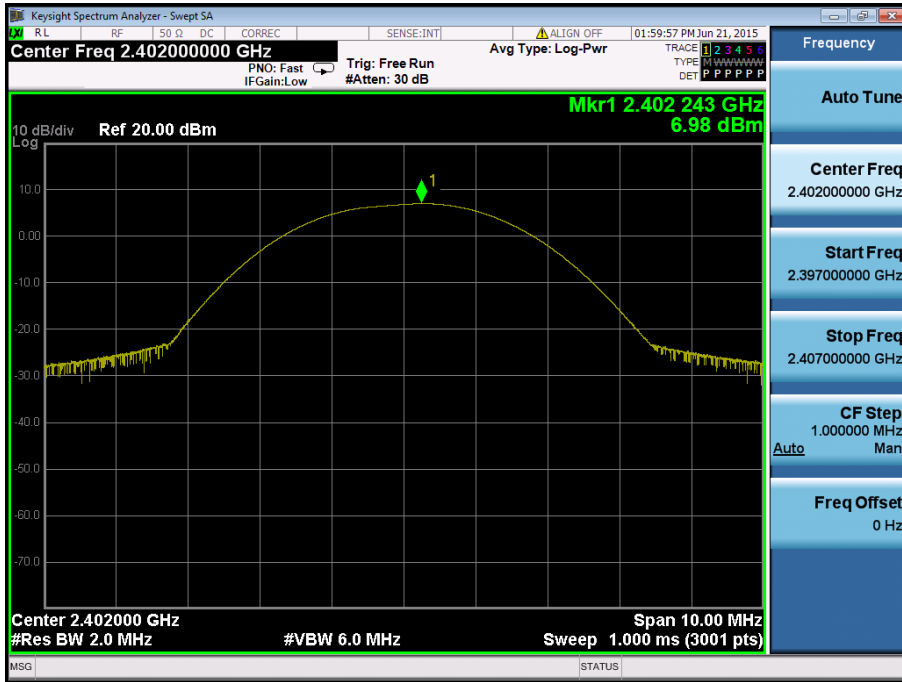


Peak Output Power

Test Frequency : 2440 MHz

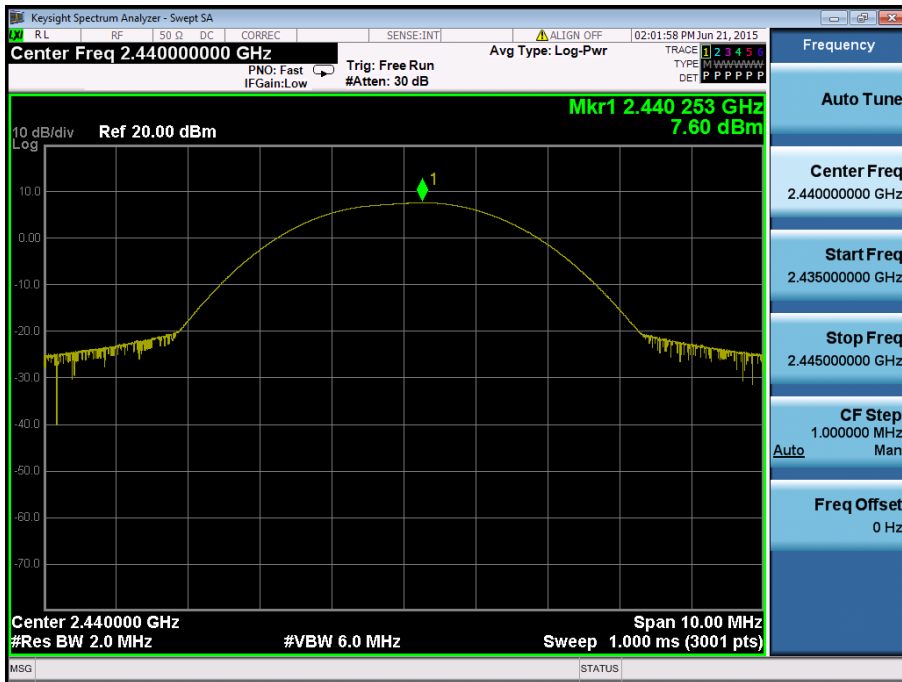

### Peak Output Power

Test Frequency : 2480 MHz

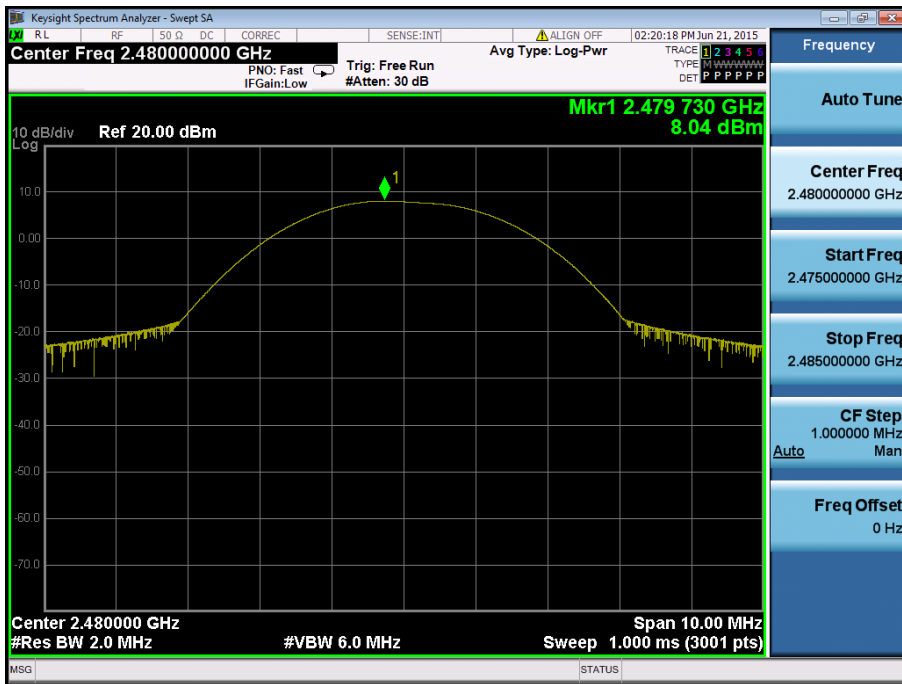

### 8.3 Maximum Power Spectral Density.

#### Test requirements and limit, §15.247(e)

The peak power density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies.

**Minimum Standard – specifies a conducted power spectral density (PSD) limit of 8 dBm in any 3 kHz Band segment within the fundamental EBW during any time interval of continuous transmission.**

#### ■ TEST CONFIGURATION

Refer to the APPENDIX I.

#### ■ TEST PROCEDURE :

**Method PKPSD of KDB558074** is used.

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to **1.5 times** the DTS bandwidth.
3. Set the RBW to : **3 kHz ≤ RBW ≤ 100 kHz**.
4. Set the VBW ≥ **3 x RBW**.
5. Detector = **peak**.
6. Sweep time = **auto couple**.
7. Trace mode = **max hold**.
8. Allow trace to fully stabilize.
9. Use the **peak marker function** to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.


#### ■ TEST RESULTS : **Comply**

Test Mode	Frequency [MHz]	PKPSD [dBm]
LE	2402	-8.89
	2440	-6.49
	2480	-7.55

TEST PLOTS


Maximum PKPSD

Test Frequency : 2402 MHz

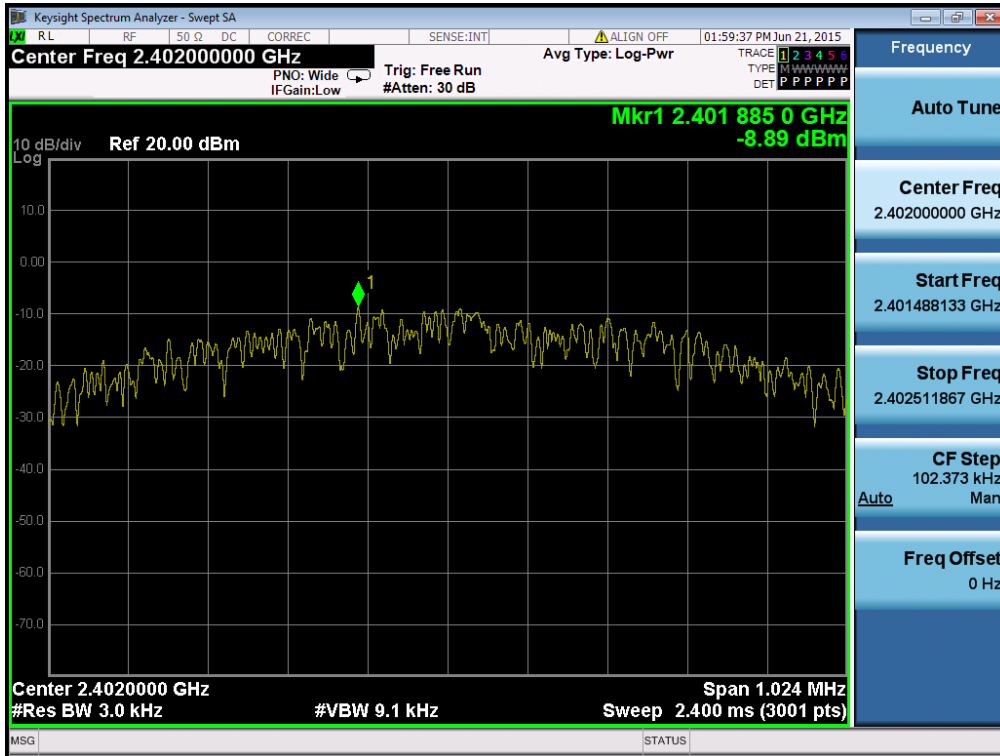


Maximum PKPSD

Test Frequency : 2440 MHz

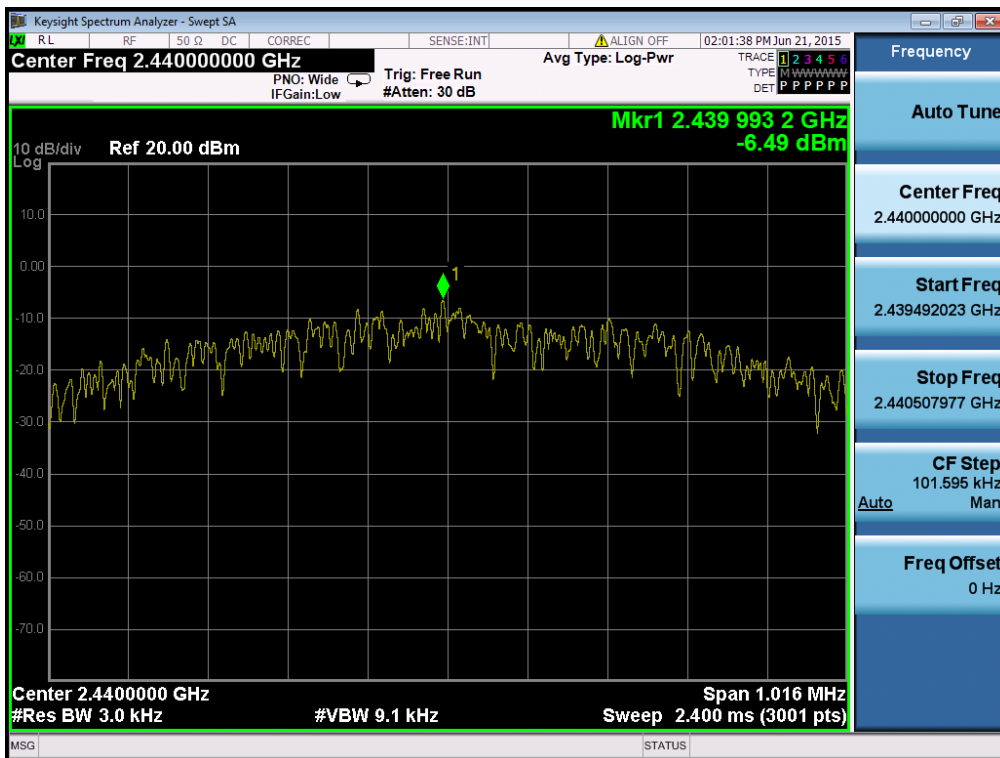

Maximum PKPSD

Test Frequency : 2480 MHz

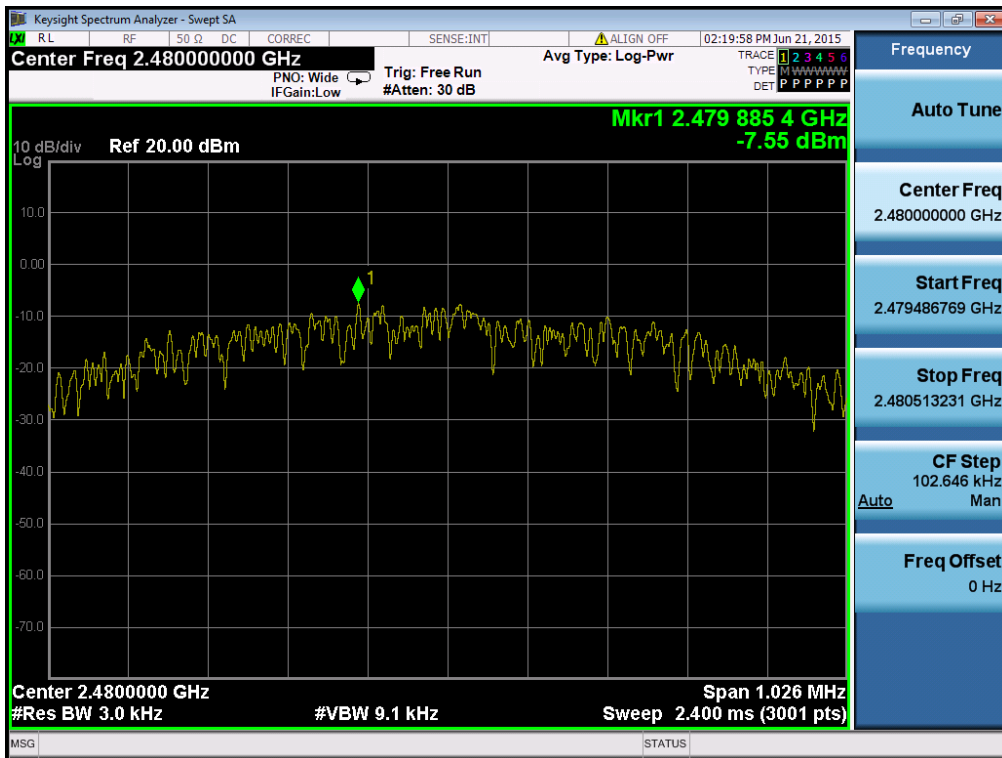



## 8.4 Out of Band Emissions at the Band Edge / Conducted Spurious Emissions

### Test requirements and limit, §15.247(d)

§15.247(d) specifies that in any 100 kHz bandwidth outside of the authorized frequency band, the power shall be attenuated according to the following conditions :

If **the peak output power procedure** is used to measure the fundamental emission power to demonstrate compliance to **15.247(b)(3)** requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated **by at least 20 dB** relative to the maximum measured in-band peak PSD level.

If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to **15.247(b)(3)** requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured inband average PSD level.

In either case, attenuation to levels below the general emission limits specified in **§15.209(a)** is not required.

### ■ TEST CONFIGURATION

Refer to the APPENDIX I.

### ■ TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer.

#### - Measurement Procedure 1 – Reference Level

1. Set instrument center frequency to DTS channel center frequency.
2. Set the span to  $\geq 1.5$  times the DTS bandwidth.
3. Set the RBW = 100 kHz.
4. Set the VBW  $\geq 3 \times$  RBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum PSD level

#### - Measurement Procedure 2 - Unwanted Emissions

1. Set the center frequency and span to encompass frequency range to be measured.
2. Set the RBW = **100 kHz.(Actual 1 MHz , See below note)**
3. Set the VBW  $\geq 3 \times$  RBW.(Actual 3 MHz, See below note)
4. Detector = **peak**.
5. Ensure that the number of measurement points  $\geq$  span/RBW
6. Sweep time = **auto couple**.
7. Trace mode = **max hold**.
8. **Allow the trace to stabilize** (this may take some time, depending on the extent of the span).
9. Use the peak marker function to determine the maximum amplitude level.

**Note :** The conducted spurious emission was tested with below settings.

**Frequency range : 9 kHz ~ 30 MHz**

**RBW = 100 kHz, VBW = 300 kHz, SWEEP TIME = AUTO, DETECTOR = PEAK, TRACE = MAX HOLD, SWEEP POINT : 40001**

**Frequency range : 30 MHz ~ 10 GHz, 10 GHz ~ 25 GHz**

**RBW = 1 MHz, VBW = 3 MHz, SWEEP TIME = AUTO, DETECTOR = PEAK, TRACE = MAX HOLD, SWEEP POINT: 40001**


**LIMIT LINE = 20 dB below of the reference level of above measurement procedure Step 2. (RBW = 100 kHz, VBW = 300 kHz)**

If the emission level with above setting was close to the limit (ie, less than 3 dB margin) then zoom scan is required using RBW = 100 kHz, VBW = 300 kHz, SPAN = 100 MHz and BINS = 2001 to get accurate emission level within 100 kHz BW.


Also the path loss for conducted measurement setup was used as described on the Appendix I of this test report.

TEST RESULTS: **Comply**


Reference (Test Frequency : 2402 MHz)

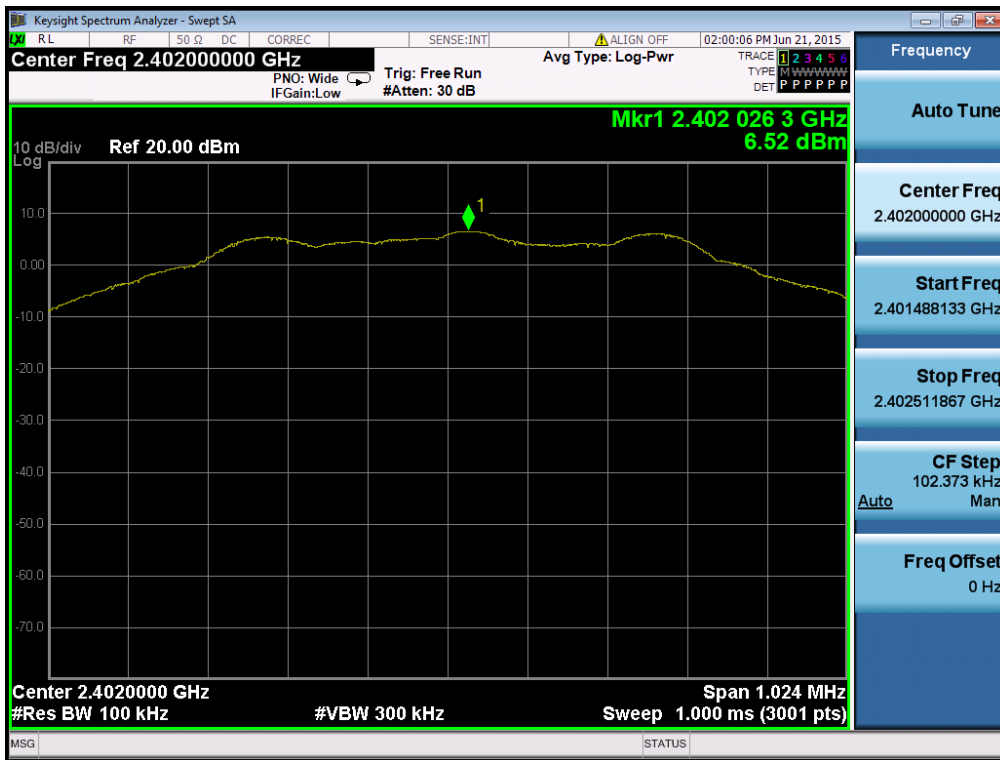


Low Band-edge (Test Frequency : 2402 MHz)

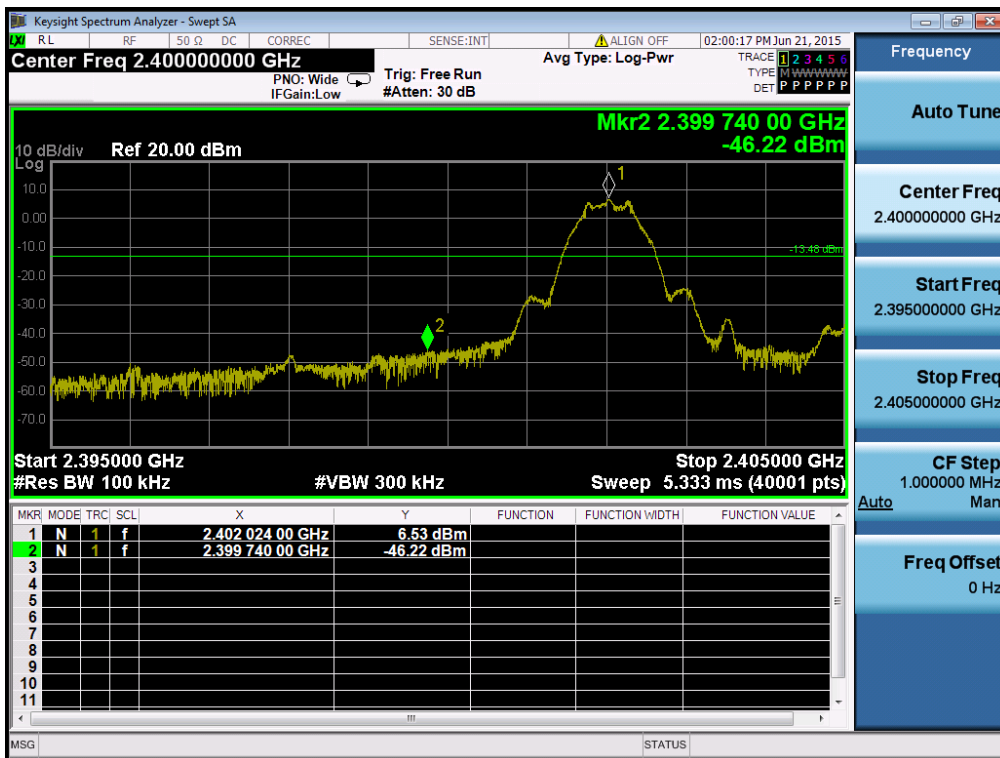


### Conducted Spurious Emissions 1 (Test Frequency : 2402 MHz)

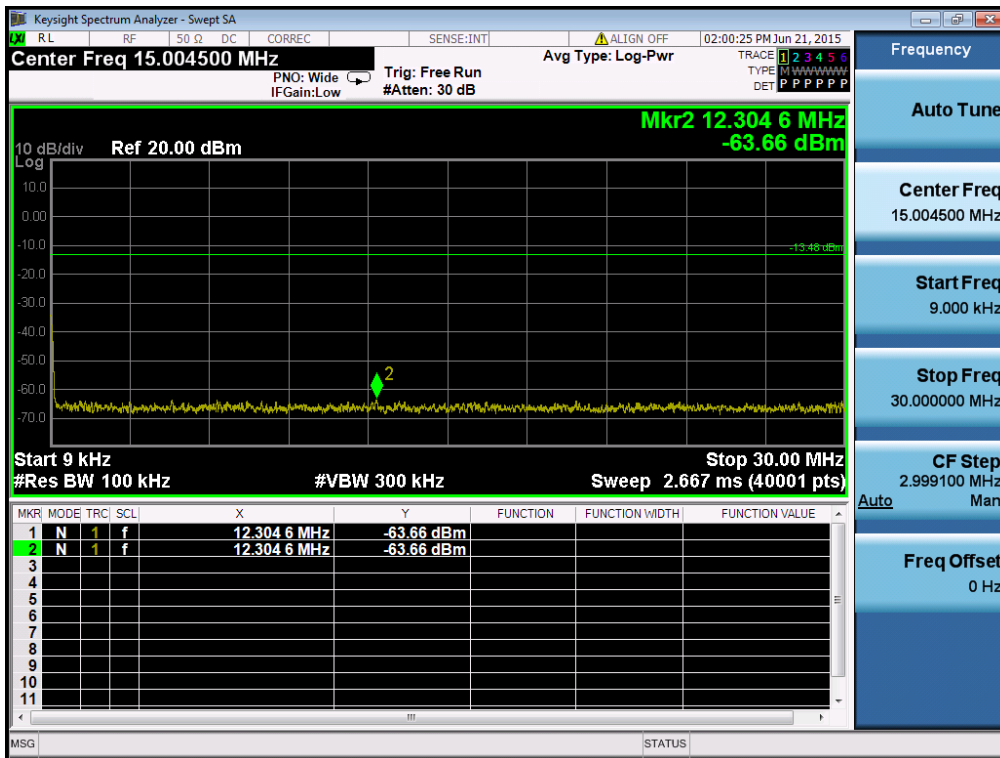

### Conducted Spurious Emissions 2 (Test Frequency : 2402 MHz)

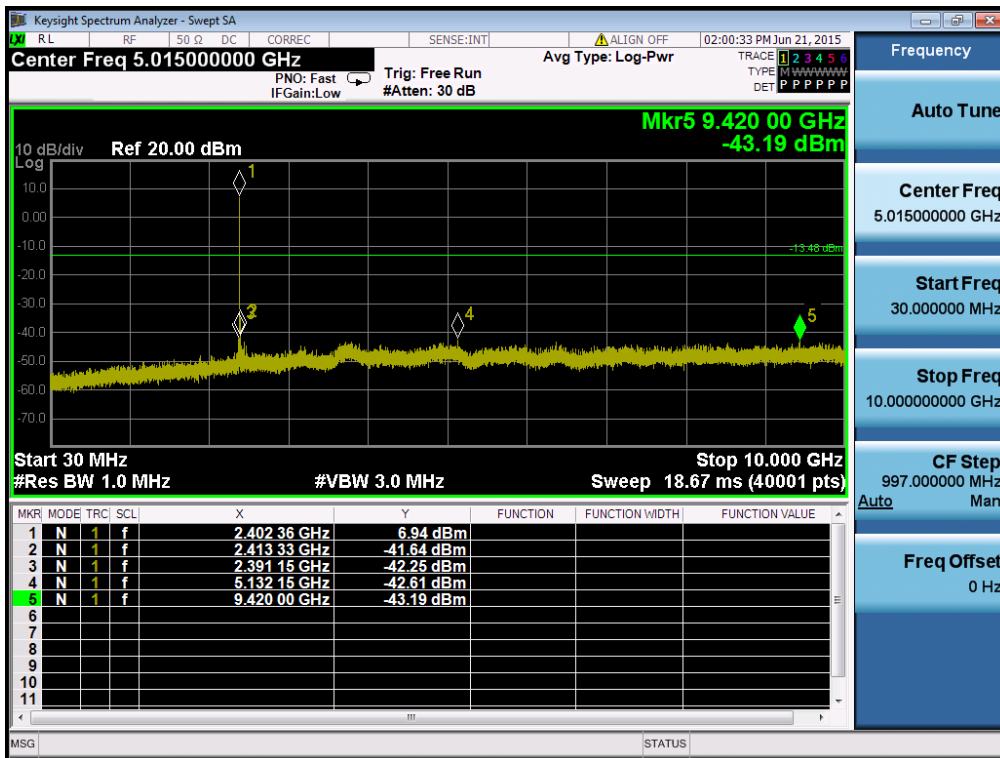


Conducted Spurious Emissions 3 (Test Frequency : 2402 MHz)

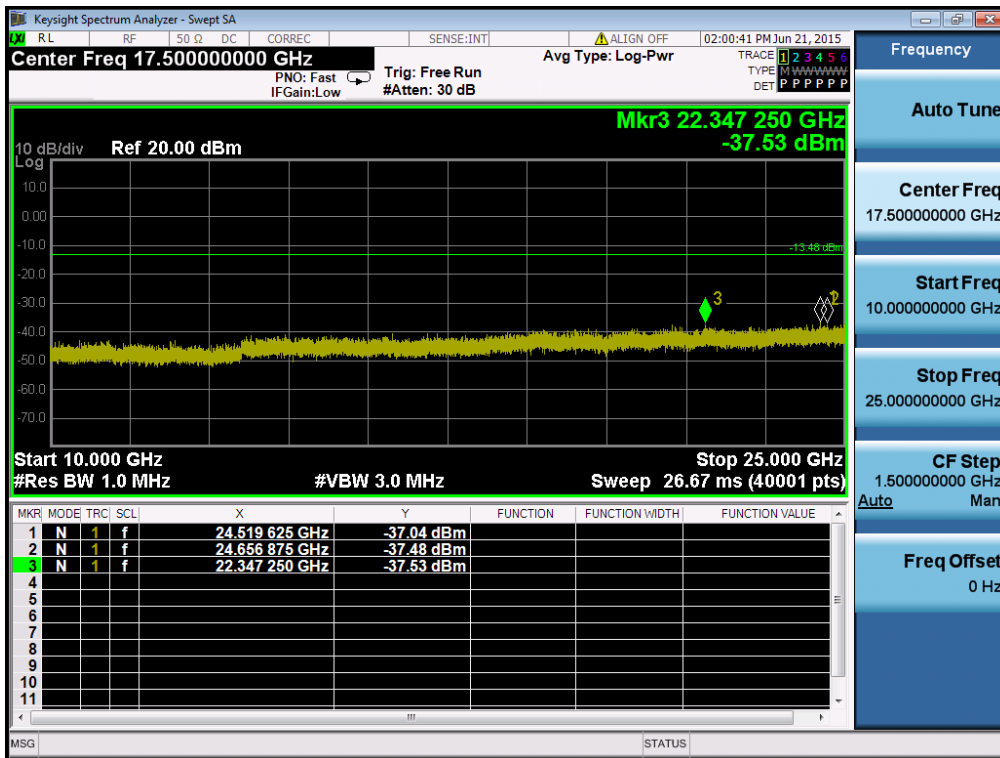


Reference (Test Frequency : 2440 MHz)




Conducted Spurious Emissions 1 (Test Frequency : 2440 MHz)

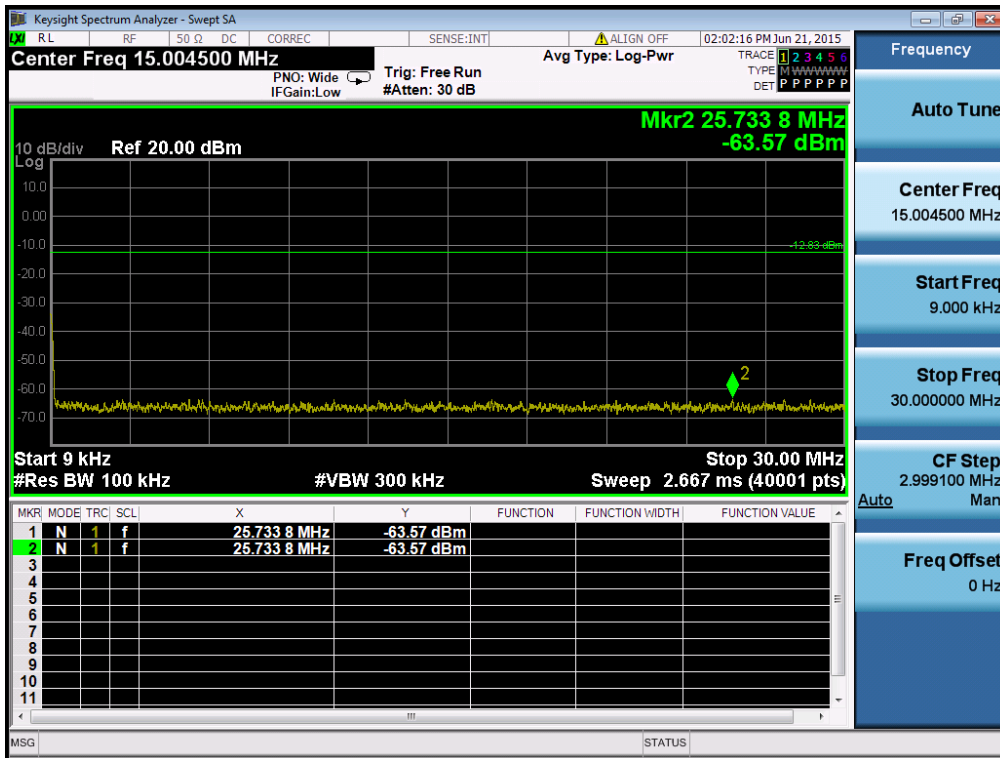


Conducted Spurious Emissions 2 (Test Frequency : 2440 MHz)

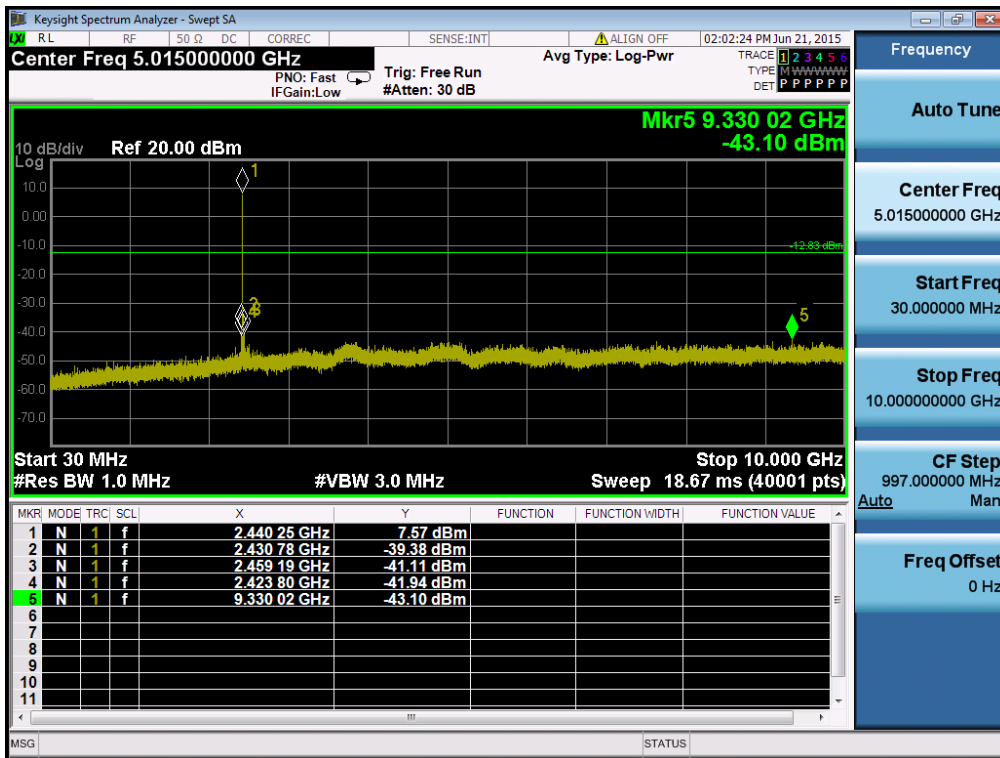

Conducted Spurious Emissions 3 (Test Frequency : 2440 MHz)

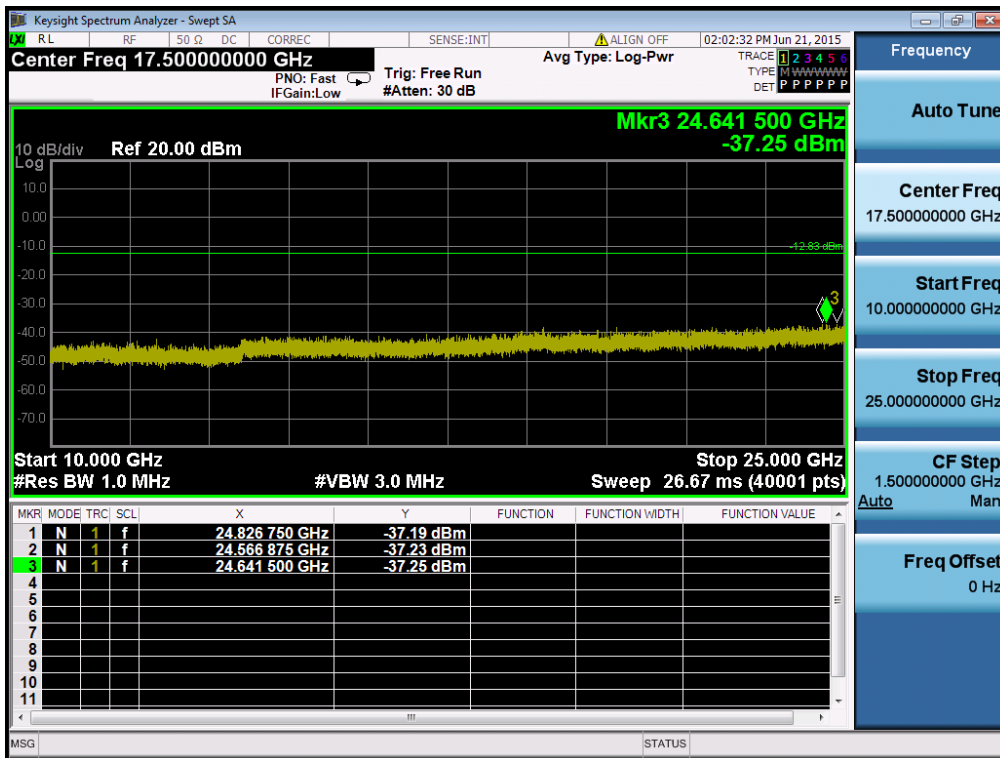


Reference (Test Frequency : 2480 MHz)

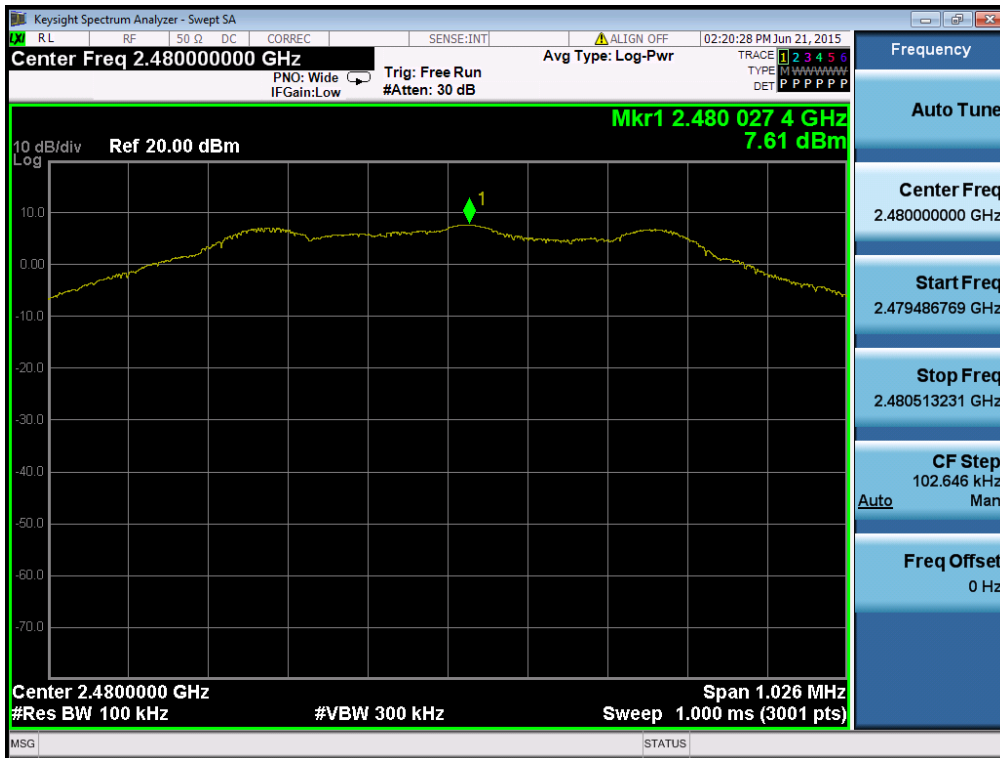


High Band-edge (Test Frequency : 2480 MHz)



Conducted Spurious Emissions 1 (Test Frequency : 2480 MHz)

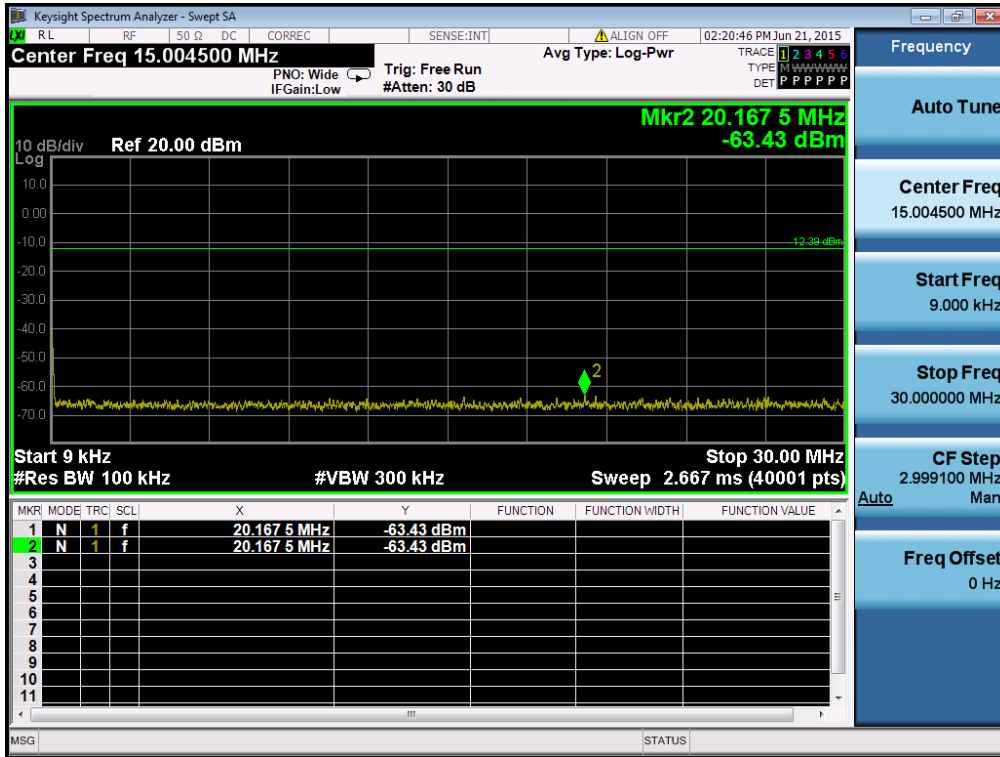


Conducted Spurious Emissions 2 (Test Frequency : 2480 MHz)

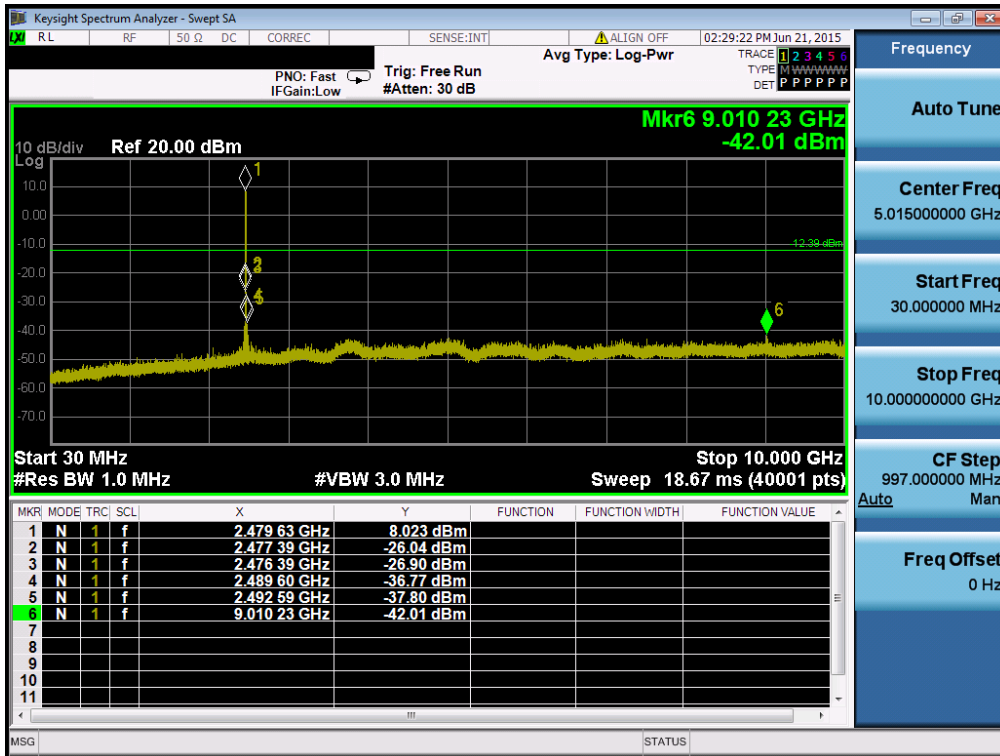



Conducted Spurious Emissions 3 (Test Frequency : 2480 MHz)

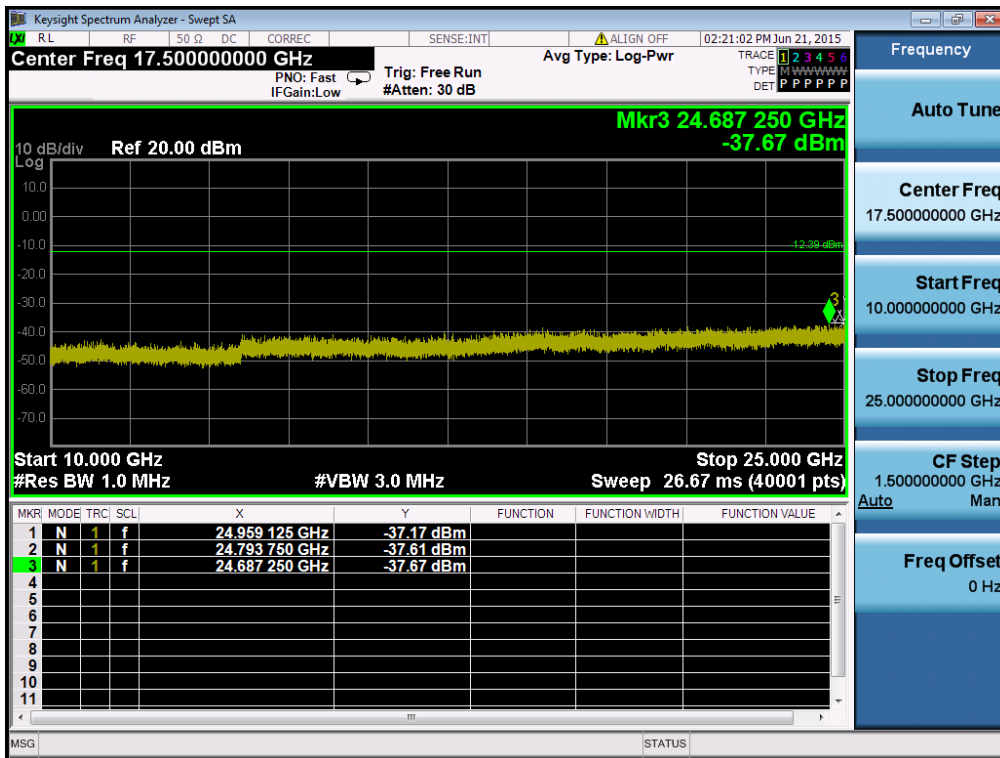

## 8.5 Radiated Measurement.

### 8.5.1 Radiated Spurious Emissions.

#### Test Requirements and limit,

#### §15.247(d), §15.205, §15.209

In any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a) and (b), then the 15.209(a) limit in the table below has to be followed

#### ▪ FCC Part 15.209(a) and (b)

Frequency (MHz)	Limit (uV/m)	Measurement Distance (meter)
0.009 – 0.490	2400/F (KHz)	300
0.490 – 1.705	24000/F (KHz)	30
1.705 – 30.0	30	30
30 ~ 88	100 **	3
88 ~ 216	150 **	3
216 ~ 960	200 **	3
Above 960	500	3


\*\* Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

#### ▪ FCC Part 15.205(a) : Only spurious emissions are permitted in any of the frequency bands listed below :

MHz	MHz	MHz	MHz	GHz	GHz
0.009 ~ 0.110	8.41425 ~ 8.41475	108 ~ 121.94	1300 ~ 1427	4.5 ~ 5.15	14.47 ~ 14.5
0.495 ~ 0.505	12.29 ~ 12.293	123 ~ 138	1435 ~ 1626.5	5.35 ~ 5.46	15.35 ~ 16.2
2.1735 ~ 2.1905	12.51975 ~	149.9 ~ 150.05	1645.5 ~ 1646.5	7.25 ~ 7.75	17.7 ~ 21.4
4.125 ~ 4.128	12.52025	156.52475 ~	1660 ~ 1710	8.025 ~ 8.5	22.01 ~ 23.12
4.17725 ~ 4.17775	12.57675 ~	156.52525	1718.8 ~ 1722.2	9.0 ~ 9.2	23.6 ~ 24.0
4.20725 ~ 4.20775	12.57725	156.7 ~ 156.9	2200 ~ 2300	9.3 ~ 9.5	31.2 ~ 31.8
6.215 ~ 6.218	13.36 ~ 13.41	162.0125 ~ 167.17	2310 ~ 2390	10.6 ~ 12.7	36.43 ~ 36.5
6.26775 ~ 6.26825	16.42 ~ 16.423	167.72 ~ 173.2	2483.5 ~ 2500	13.25 ~ 13.4	Above 38.6
6.31175 ~ 6.31225	16.69475 ~	240 ~ 285	2655 ~ 2900		
8.291 ~ 8.294	16.69525	322 ~ 335.4	3260 ~ 3267		
8.362 ~ 8.366	16.80425 ~	399.90 ~ 410	3332 ~ 3339		
8.37625 ~ 8.38675	16.80475	608 ~ 614	3345.8 ~ 3358		
	25.5 ~ 25.67	960 ~ 1240	3600 ~ 4400		
	37.5 ~ 38.25				
	73 ~ 74.6				
	74.8 ~ 75.2				

▪ **FCC Part 15.205(b)** : The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

**Test Configuration**

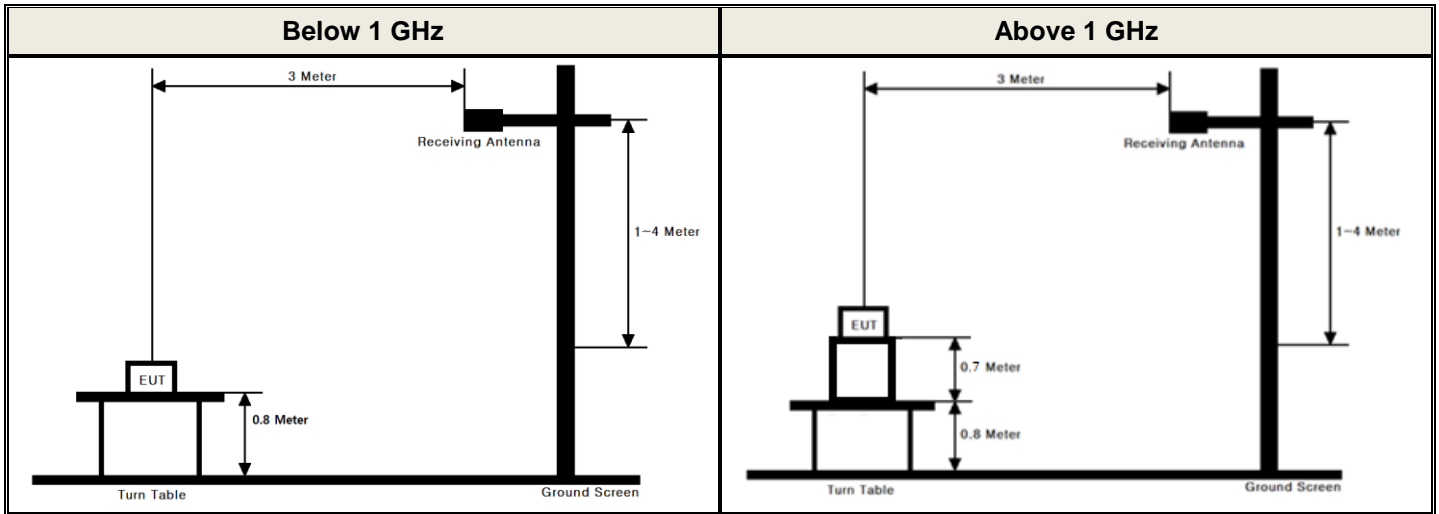

**TEST PROCEDURE**

1. The EUT is placed on a non-conductive table. For emission measurements at or below 1 GHz, the table height is 80 cm. For emission measurements above 1 GHz, the table height is 1.5 m. *(Instead of 0.8 m EUT height above 1GHz for FCC, 1.5 m EUT height was used as allowed by FCC December 2014 TCB conference call.)*
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.

**Note: Measurement Instrument Setting for Radiated Emission Measurements.**

**1. Frequency Range Below 1 GHz**

RBW = 100 or 120 kHz, VBW = 3 x RBW, Detector = Peak or Quasi Peak

**2. Frequency Range > 1 GHz**

**Peak Measurement > 1 GHz**

RBW = 1 MHz, VBW = 3 MHz, Detector = Peak, Sweep time = Auto, Trace mode = Max Hold until the trace stabilizes

**Average Measurement > 1GHz**

1. RBW = 1 MHz (unless otherwise specified).
2. VBW ≥ 3 x RBW.
3. Detector = RMS (Number of points ≥ 2 x Span / RBW)
4. Averaging type = power (i.e., RMS).
5. Sweep time = auto.
6. Perform a trace average of at least 100 traces.
7. A correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle. The correction factor is computed as follows:
  - 1) If power averaging (RMS) mode was used in step 4, then the applicable correction factor is  $10 \log(1/x)$ , where x is the duty cycle.
  - 2) If linear voltage averaging mode was used in step 4, then the applicable correction factor is  $20 \log(1/x)$ , where x is the duty cycle.
  - 3) If a specific emission is demonstrated to be continuous (≥ 98 percent duty cycle) rather than turning on and off with the transmit cycle, then no duty cycle correction is required for that emission.

Test Mode	Duty Cycle (%)	T <sub>on</sub> (ms)	T <sub>on</sub> + T <sub>off</sub> (ms)	DCF = 10log(1/Duty) (dB)
BT(LE)	64.00	0.400	0.625	1.94

Note : Refer to appendix II for duty cycle measurement procedure and plots

**9 kHz ~ 25 GHz Data (Modulation : GFSK)**

## ▪ Lowest Channel

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	D.C.F (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2389.32	V	X	PK	45.62	4.90	N/A	50.52	74.00	23.48
2389.37	V	X	AV	34.83	4.90	1.94	41.67	54.00	12.33
4803.96	H	Z	PK	45.52	10.36	N/A	55.88	74.00	18.12
4803.98	H	Z	AV	36.25	10.36	1.94	48.55	54.00	5.45

## ▪ Middle Channel

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	D.C.F (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4880.54	H	Z	PK	44.83	10.96	N/A	55.79	74.00	18.21
4880.06	H	Z	AV	34.95	10.96	1.94	47.85	54.00	6.15

## ▪ Highest Channel

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	D.C.F (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2483.56	V	X	PK	48.56	4.65	N/A	53.21	74.00	20.79
2483.51	V	X	AV	38.33	4.65	1.94	44.92	54.00	9.08
4959.70	H	Z	PK	46.38	10.68	N/A	57.06	74.00	16.94
4959.96	H	Z	AV	36.87	10.68	1.94	49.49	54.00	4.51

▪ **Note.**

- No other spurious and harmonic emissions were found greater than listed emissions on above table.
- Sample Calculation.  
Margin = Limit – Result / Result = Reading + T.F + D.C.F. / T.F = AF + CL – AG  
Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,  
DCF = Duty Cycle Correction Factor.

## 8.6 POWERLINE CONDUCTED EMISSIONS

### Test Requirements and limit, §15.207

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50

\* Decreases with the logarithm of the frequency

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

### Test Configuration

See test photographs for the actual connections between EUT and support equipment.

### TEST PROCEDURE

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below :
4. Detectors – Quasi Peak and Average Detector.

■ **TEST RESULTS : Comply** (Refer to next page.)

■ TEST PLOTS

AC Line Conducted Emissions (Graph)

Test Mode : LE & 2440 MHz



Results of Conducted Emission

DTNC : Date : 2015-06-22

Order No. :	SC-WR-01	Reference No. :	
Model No. :	Identical prototype	Power Supply :	120V / 60Hz
Serial No. :	LE	Temp/Humi. :	22 °C / 42 % R.H.
Test Condition :	LE	Operator :	I.H.Bae

Memo :

LIMIT : CISPR22\_B QP  
CISPR22\_B AV

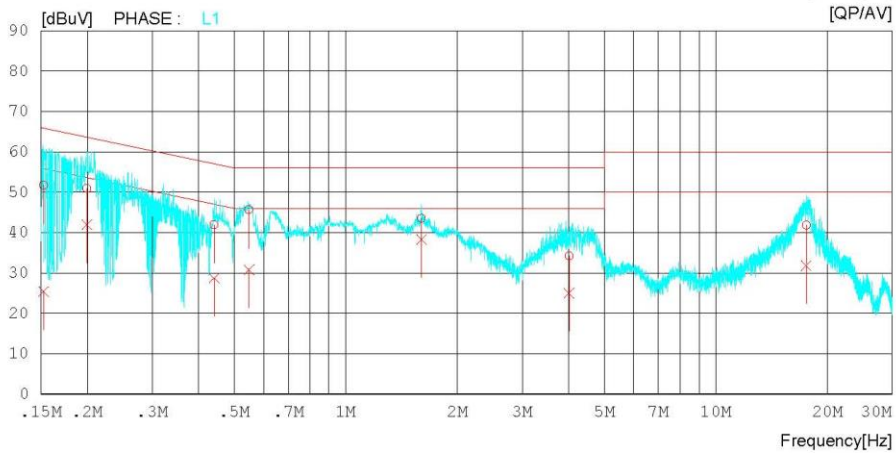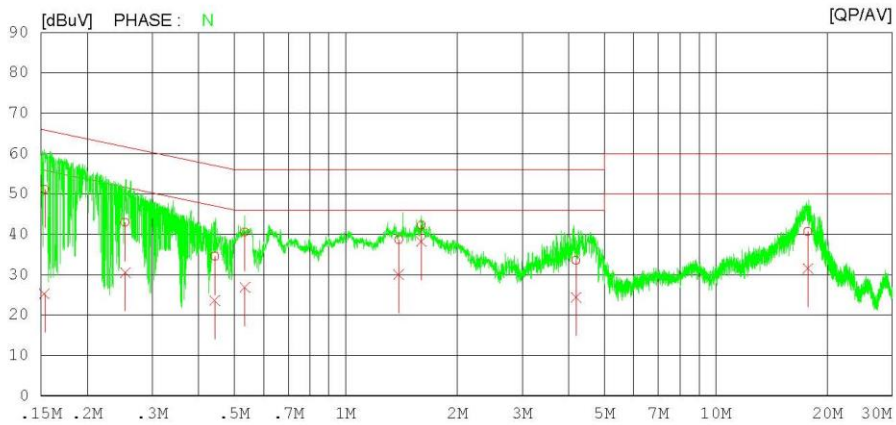

**AC Line Conducted Emissions (List)**

Test Mode : LE &amp; 2440 MHz

**Results of Conducted Emission**

DTNC : Date : 2015-06-29

Order No. : Reference No. :  
 Model No. : SC-WR-01 Power Supply : 120V / 60Hz  
 Serial No. : Identical prototype Temp/Humi. : 22 °C / 42 % R.H.  
 Test Condition : LE Operator : I.H.Bae

Memo :

LIMIT : CISPR22\_B QP  
CISPR22\_B AV

NO	FREQ [MHz]	READING		C.FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.15329	41.1	15.2	10.0	51.1	25.2	65.8	55.8	14.7	30.6	N
2	0.25330	33.0	20.6	9.9	42.9	30.5	61.6	51.6	18.7	21.1	N
3	0.44220	24.5	13.5	10.0	34.5	23.5	57.0	47.0	22.5	23.5	N
4	0.53369	30.5	16.8	10.0	40.5	26.8	56.0	46.0	15.5	19.2	N
5	1.39120	28.6	20.0	10.0	38.6	30.0	56.0	46.0	17.4	16.0	N
6	1.59920	32.2	28.3	10.0	42.2	38.3	56.0	46.0	13.8	7.7	N
7	4.19540	23.7	14.5	9.9	33.6	24.4	56.0	46.0	22.4	21.6	N
8	17.75080	30.5	21.3	10.2	40.7	31.5	60.0	50.0	19.3	18.5	N
9	0.15252	41.7	15.4	10.0	51.7	25.4	65.9	55.9	14.2	30.5	L1
10	0.19977	40.9	31.9	10.0	50.9	41.9	63.6	53.6	12.7	11.7	L1
11	0.44035	32.0	18.8	9.9	41.9	28.7	57.1	47.1	15.2	18.4	L1
12	0.54721	35.7	20.9	9.9	45.6	30.8	56.0	46.0	10.4	15.2	L1
13	1.60200	33.5	28.3	10.0	43.5	38.3	56.0	46.0	12.5	7.7	L1
14	4.01160	24.0	14.9	10.1	34.1	25.0	56.0	46.0	21.9	21.0	L1
15	17.57560	31.2	21.4	10.5	41.7	31.9	60.0	50.0	18.3	18.1	L1

**9. LIST OF TEST EQUIPMENT**


Type	Manufacturer	Model	Cal.Date (yy/mm/dd)	Next.Cal.Date (yy/mm/dd)	S/N
Spectrum Analyzer	Agilent Technologies	N9020A	14/10/21	15/10/21	MY53310140
Dynamic Measurement DC Source	Agilent Technologies	66332A	14/09/11	15/09/11	MY43000211
Power Meter	Anritsu	ML2495A	15/03/26	16/03/26	1306007
		MA2490A			1249001
2W 3dB Attenuator	SMAJK	SMAJK-2-3	14/10/21	15/10/21	3
Thermohygrometer	BODYCOM	BJ5478	15/02/26	16/02/26	1209
Multimeter	Agilent Technologies	34401A	15/01/06	16/01/06	MY41037027
Signal Generator	R&S	SMF100A	14/07/01	15/07/01	102341
Vector Signal Generator	R&S	SMBV100A	15/01/06	16/01/06	255571
High-pass filter	Wainwright	WHKX12-2580-3000-18000-80SS	14/09/11	15/09/11	3
Amplifier	Agilent Technologies	8449B	15/02/26	16/02/26	3008A00370
Low Noise Pre Amplifier	TSJ	MLA-010K01-B01-27	15/04/09	16/04/09	1844538
Loop Antenna	Schwarzbeck	FMZB1513	14/04/29	16/04/29	1513-128
TRILOG Broadband Test-Antenna	SCHWARZBECK	VULB 9160	14/04/04	16/04/04	3357
HORN ANT	ETS	3115	15/02/09	17/02/09	24797
HORN ANT	A.H.Systems	SAS-574	15/04/30	17/04/30	154
EMI TEST RECEIVER	R&S	ESR7	14/10/21	15/10/21	101109
EMI TEST RECEIVER	R&S	ESCI	15/02/25	16/02/25	100364
FREQUENCY CONVERTER	Taejin Electronic	CVCF	14/09/11	15/09/11	ZU0033
ARTIFICIAL MAINS NETWORK	Narda S.T.S. / PMM	PMM L2-16B	14/06/26	15/06/26	000WX20305



## APPENDIX I

### Conducted Test set up Diagram & Path loss Information

#### ▪ Conducted Measurement

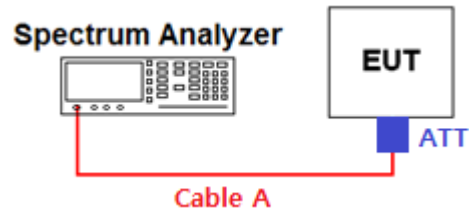

#### Path loss information

Frequency (GHz)	Path Loss (dB)	Frequency (GHz)	Path Loss (dB)
0.03	3.48	15	8.48
1	4.52	20	9.18
2402 & 2440 & 2480	4.99	25	9.89
5	6.02	-	-
10	6.89	-	-

Note. 1 : The path loss from EUT to Spectrum analyzer was measured and used for test.  
 Path loss (S/A's correction factor)  
 = Cable A (Attenuator, Applied only when it was used externally)

## APPENDIX II

### Duty cycle plots

■ **TEST PROCEDURE**

**Duty Cycle** measured using **section 6.0 b) of KDB558074:**

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal.

Set the center frequency of the instrument to the center frequency of the transmission. Set RBW  $\geq$  OBW if possible; otherwise, set RBW to the largest available value. Set VBW  $\geq$  RBW. Set detector = peak or average.

The zero-span measurement method shall not be used unless both RBW and VBW are  $> 50/T$  and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if  $T \leq 16.7$  microseconds.)

### Duty Cycle

Test Frequency : 2440 MHz

