


7.4.2. Conducted Spurious Emissions

Low Band-edge

Lowest Channel & Modulation : GFSK


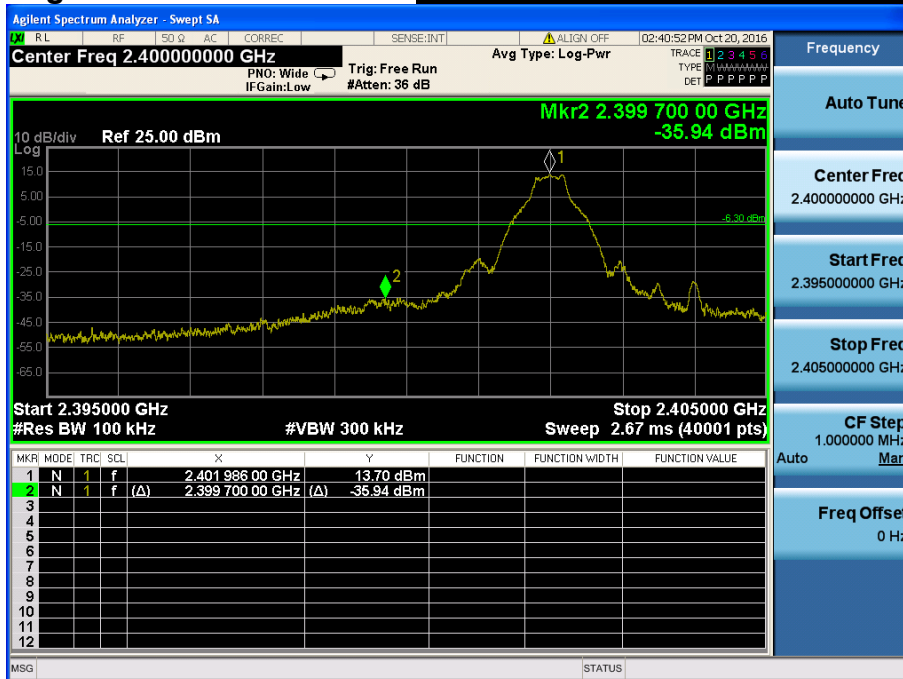


Low Band-edge


Hopping mode & Modulation : GFSK



Conducted Spurious Emissions Lowest Channel & Modulation : GFSK

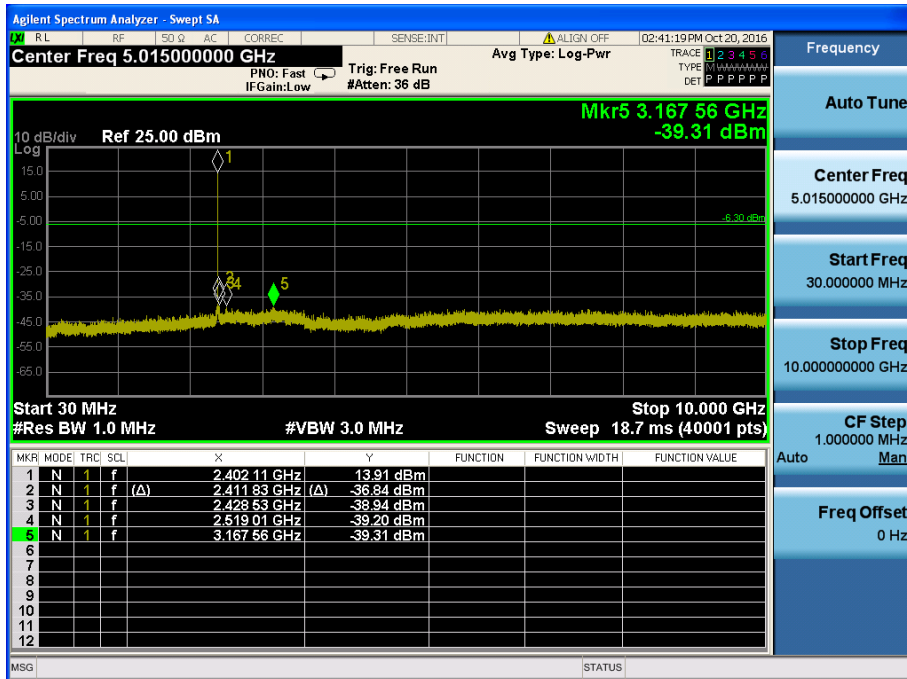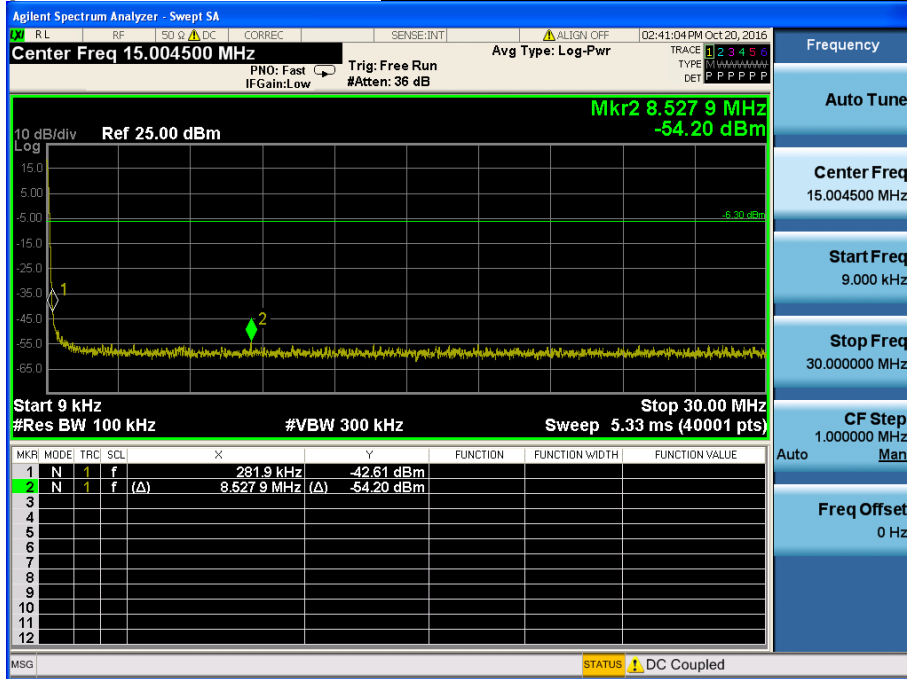


Conducted Spurious Emissions *Lowest Channel & Modulation : GFSK*

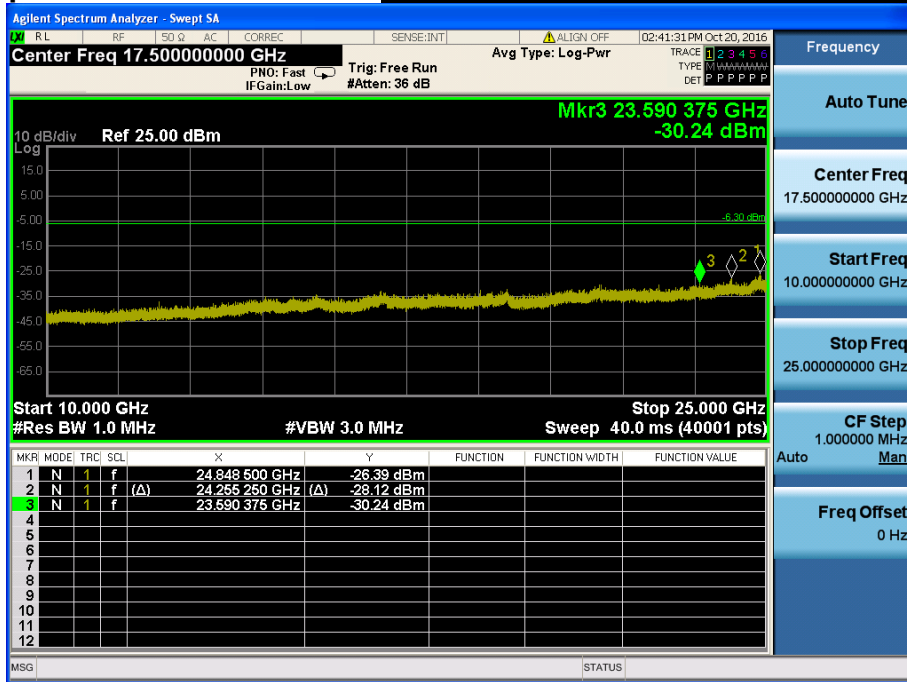


Reference for limit

Middle Channel & Modulation : GFSK


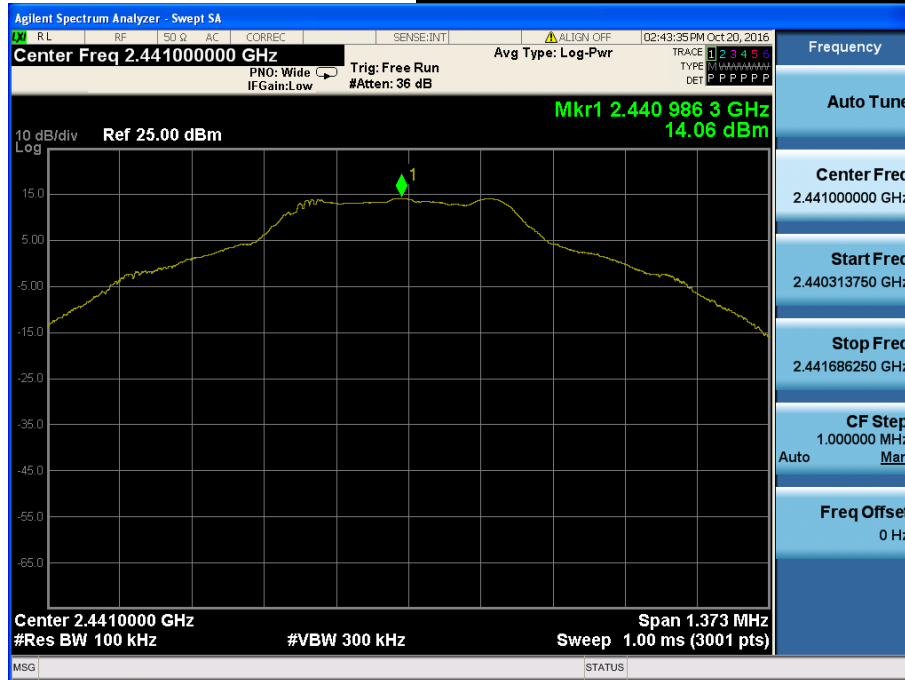


Conducted Spurious Emissions

Middle Channel & Modulation : GFSK

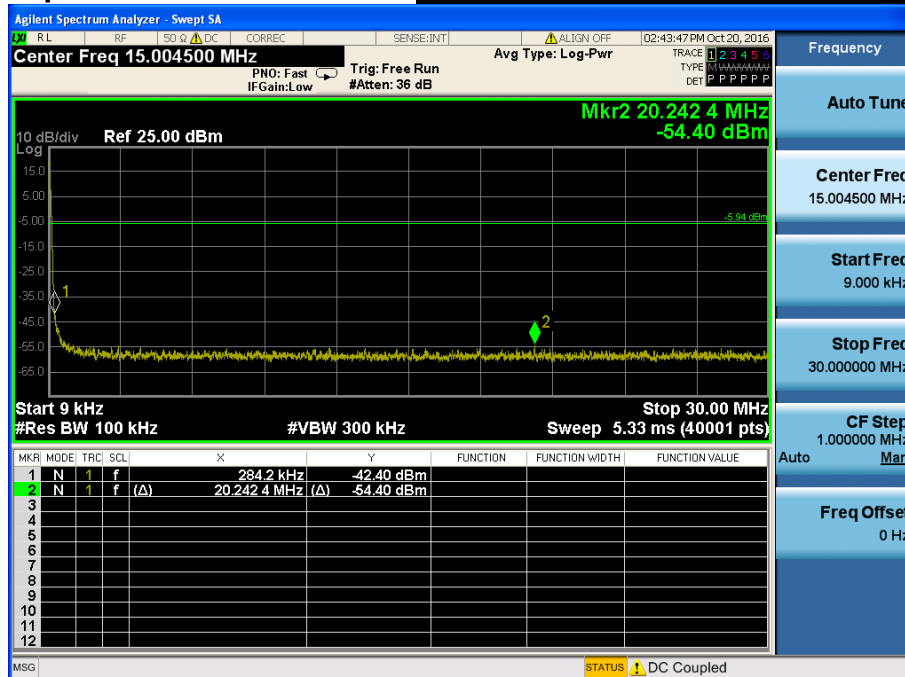


Conducted Spurious Emissions **Middle Channel & Modulation : GFSK**

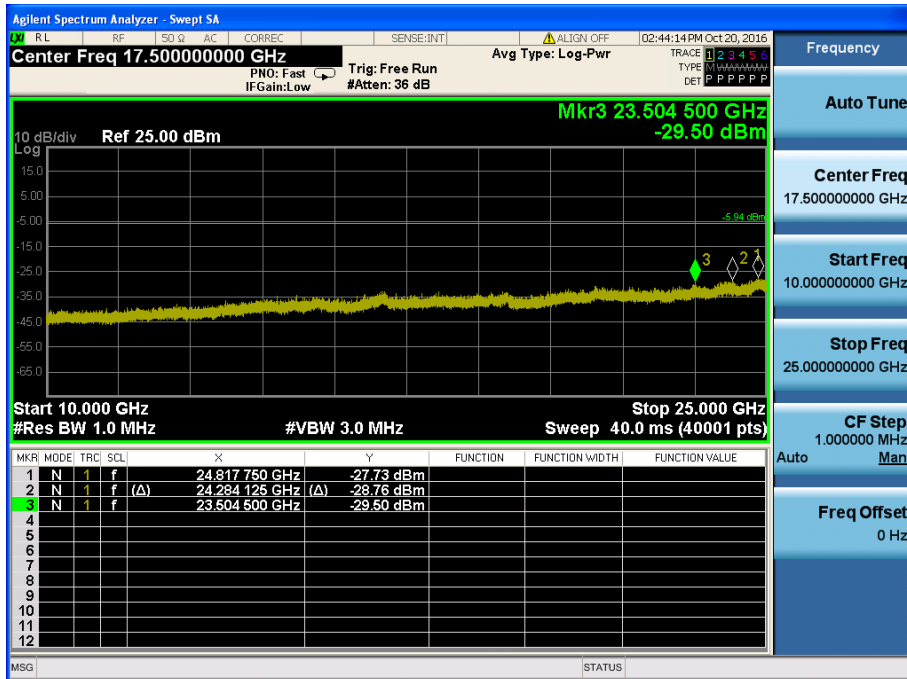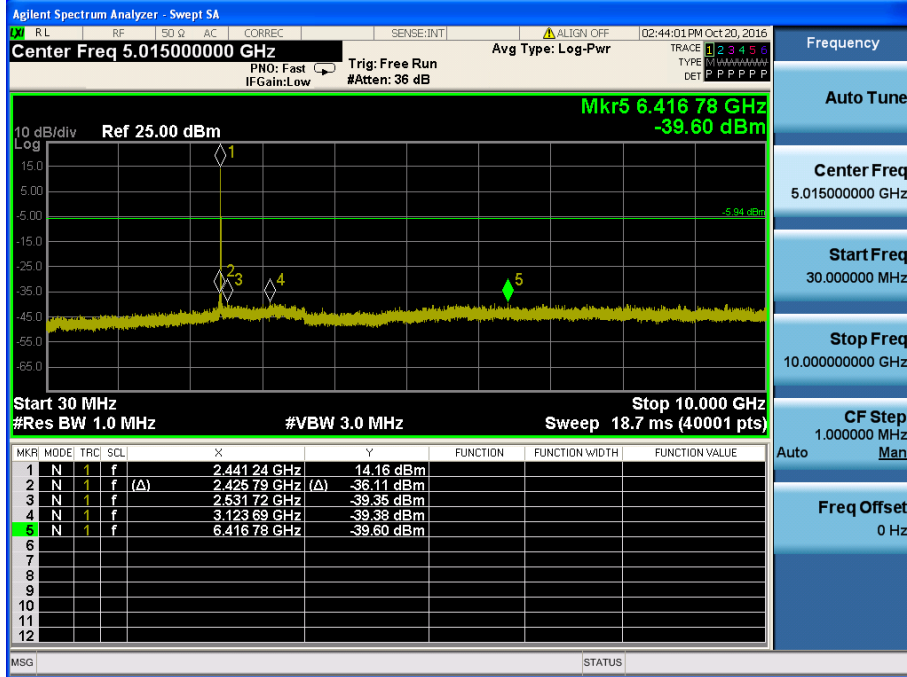

High Band-edge

Highest Channel & Modulation : GFSK


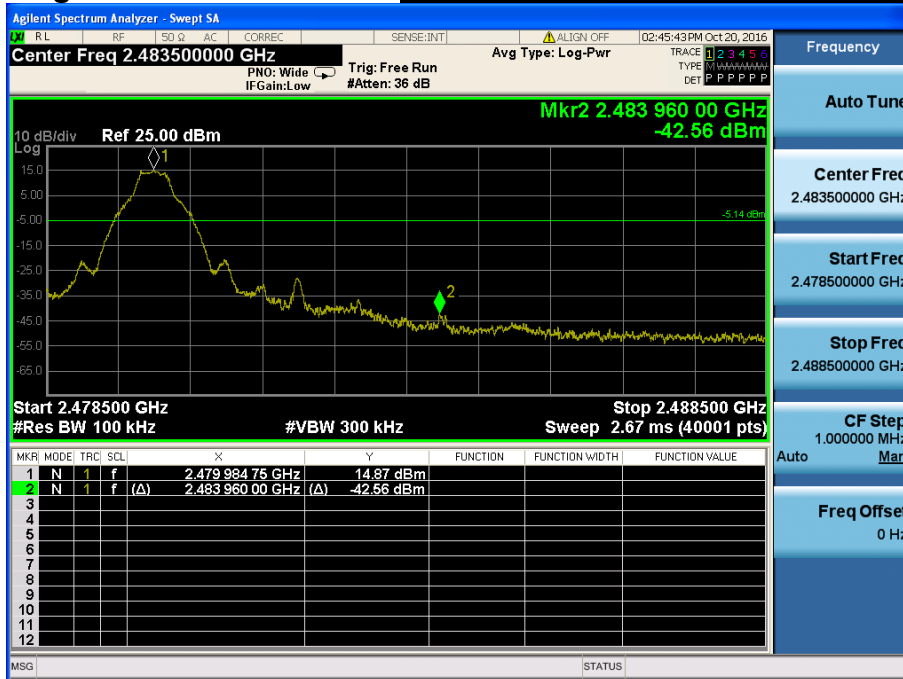


High Band-edge


Hopping mode & Modulation : GFSK



Conducted Spurious Emissions **Highest Channel & Modulation : GFSK**

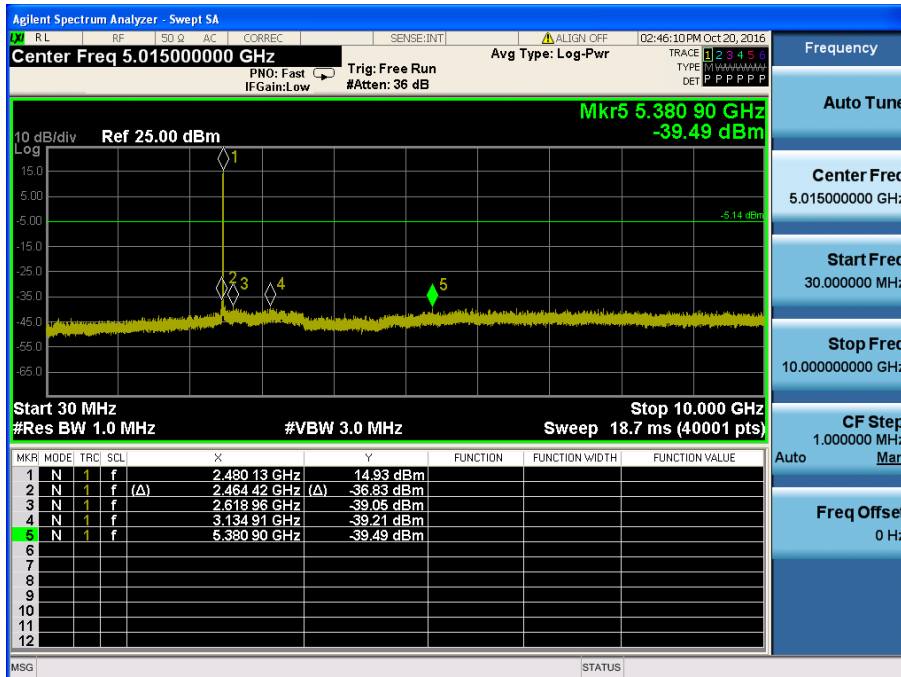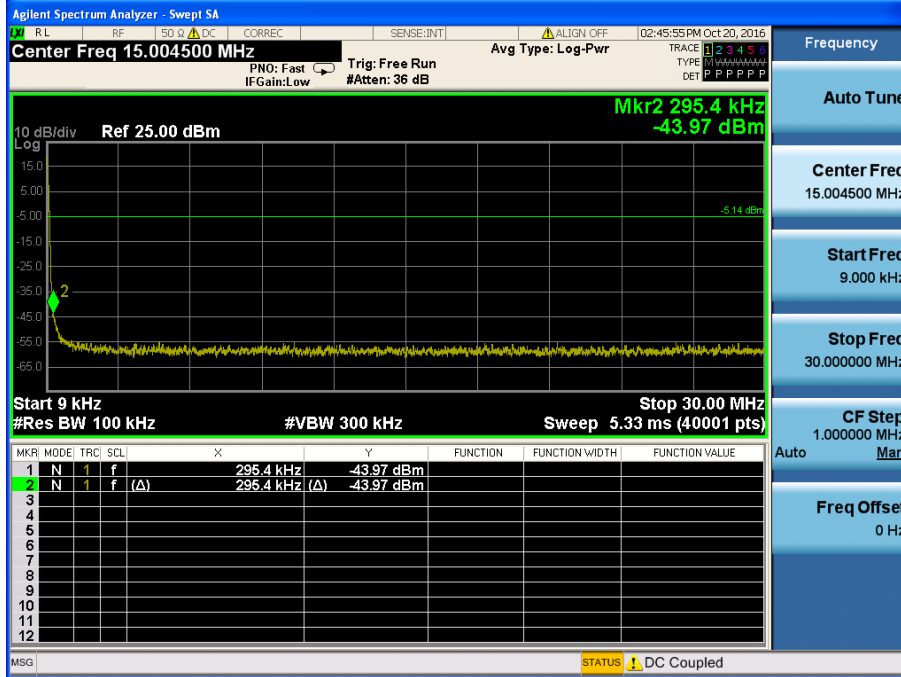

Conducted Spurious Emissions **Highest Channel & Modulation : GFSK**

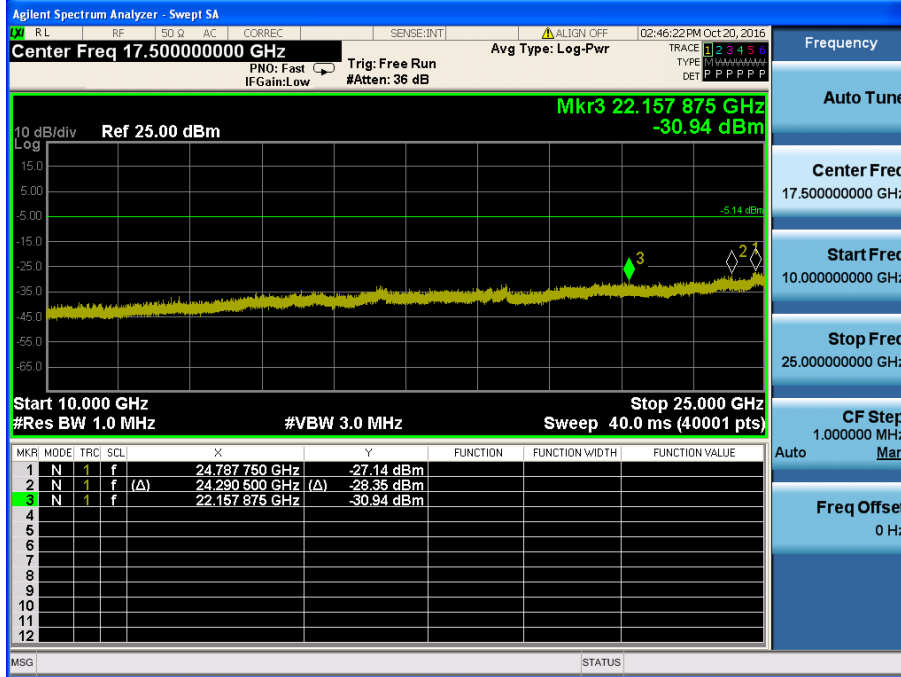


Low Band-edge

Lowest Channel & Modulation : $\pi/4$ DQPSK





Low Band-edge


Hopping mode & Modulation : $\pi/4$ DQPSK

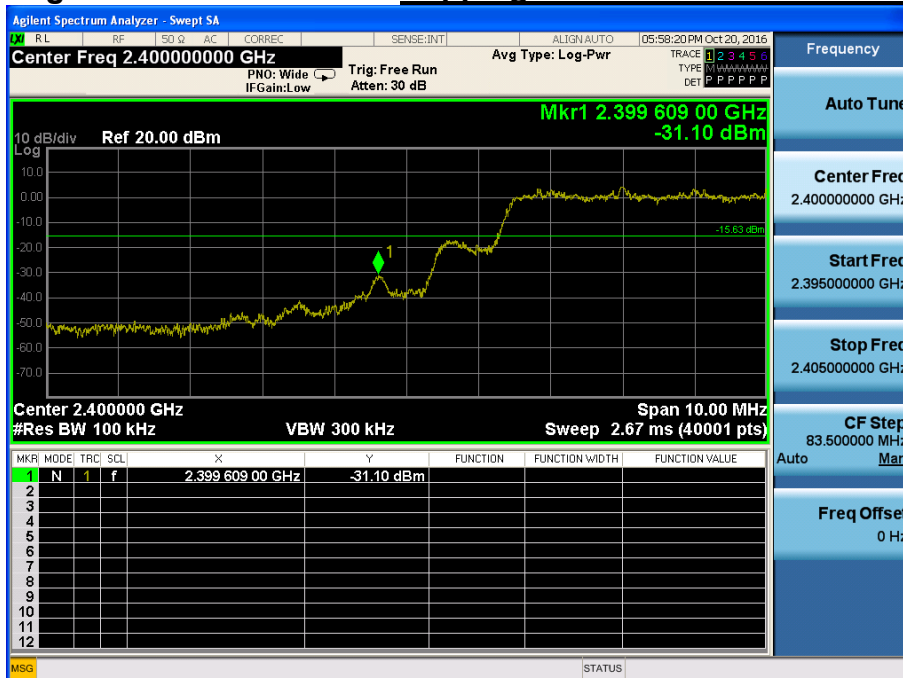

Conducted Spurious Emissions **Lowest Channel & Modulation : $\pi/4$ DQPSK**

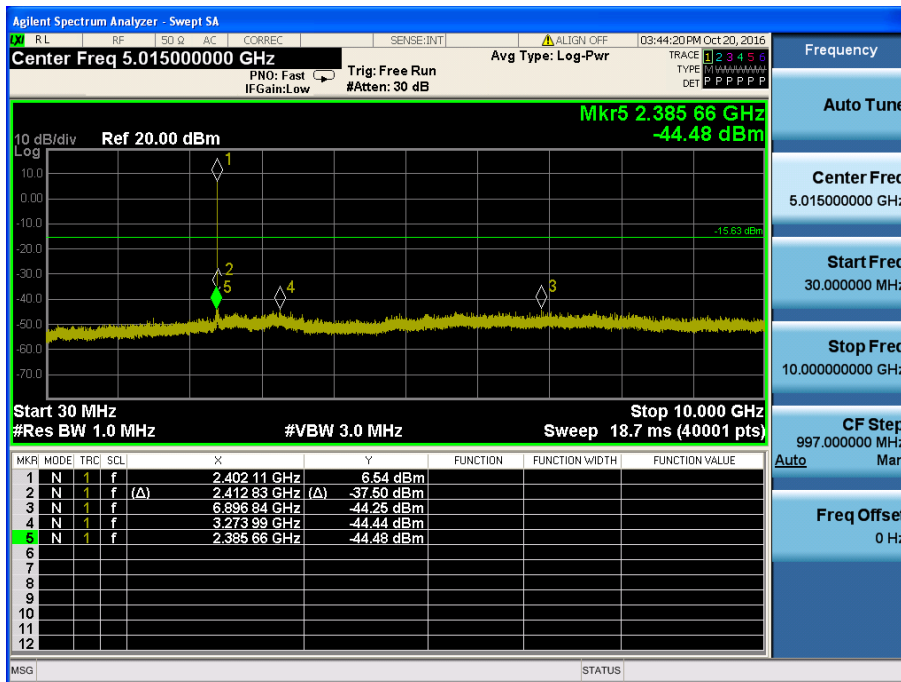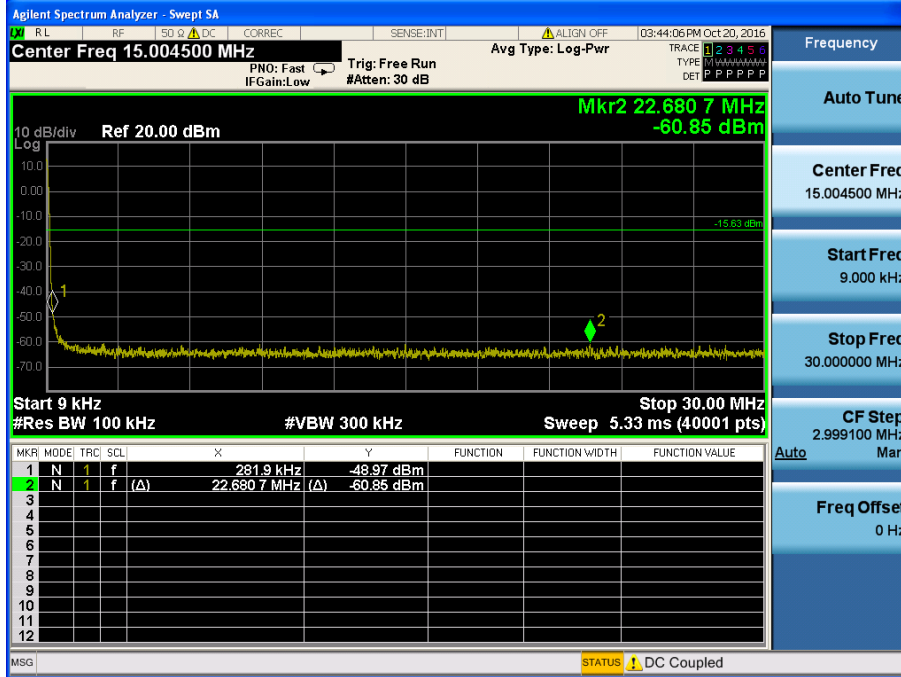


Conducted Spurious Emissions Lowest Channel & Modulation : $\pi/4$ DQPSK

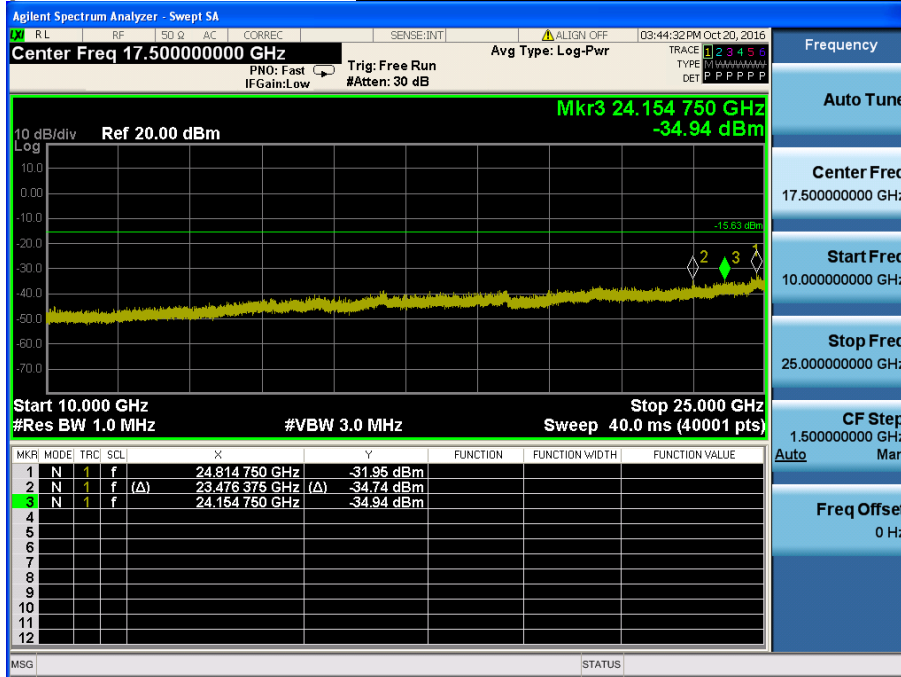


Reference for limit

Middle Channel & Modulation : $\pi/4$ DQPSK


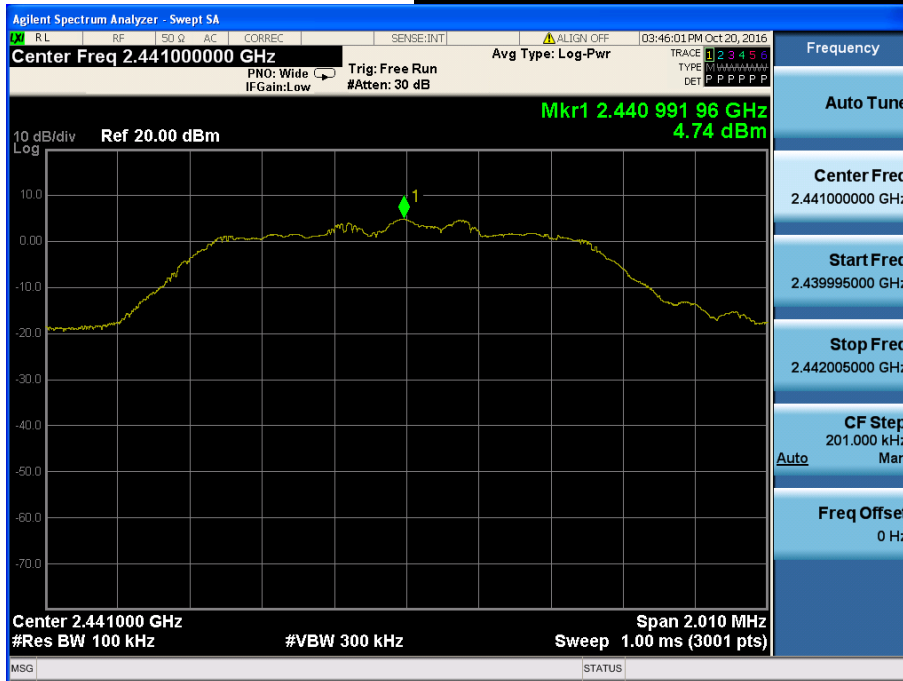


Conducted Spurious Emissions

Middle Channel & Modulation : $\pi/4$ DQPSK

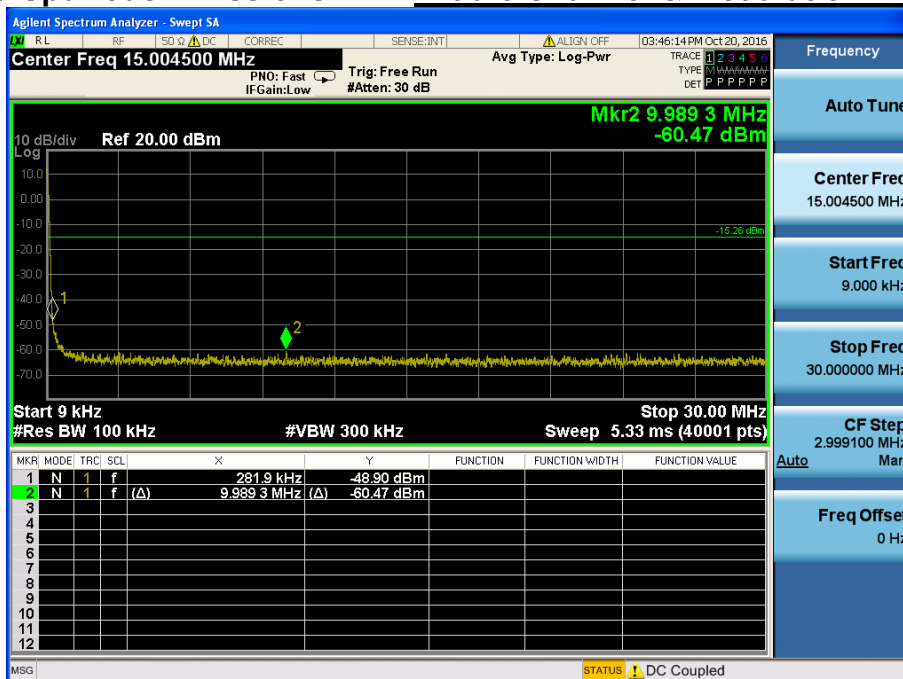


Conducted Spurious Emissions ***Middle Channel & Modulation : $\pi/4$ DQPSK***

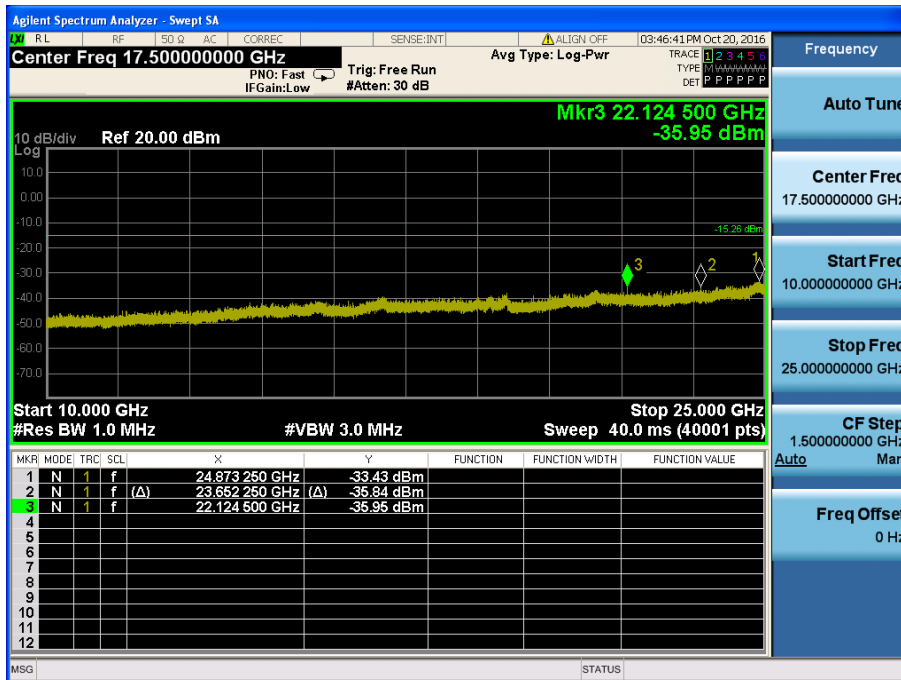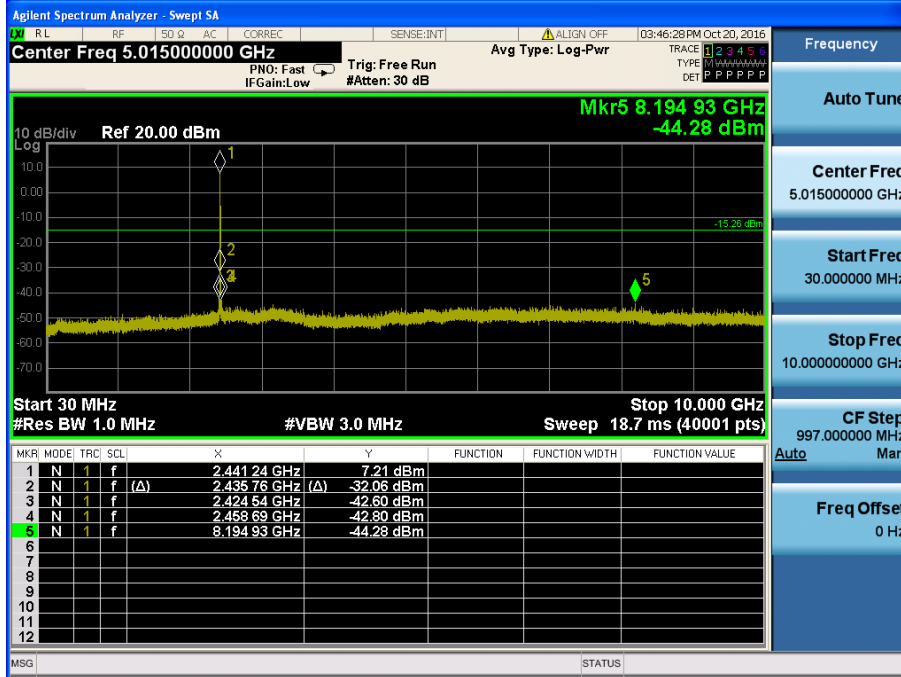


High Band-edge

Highest Channel & Modulation : $\pi/4$ DQPSK

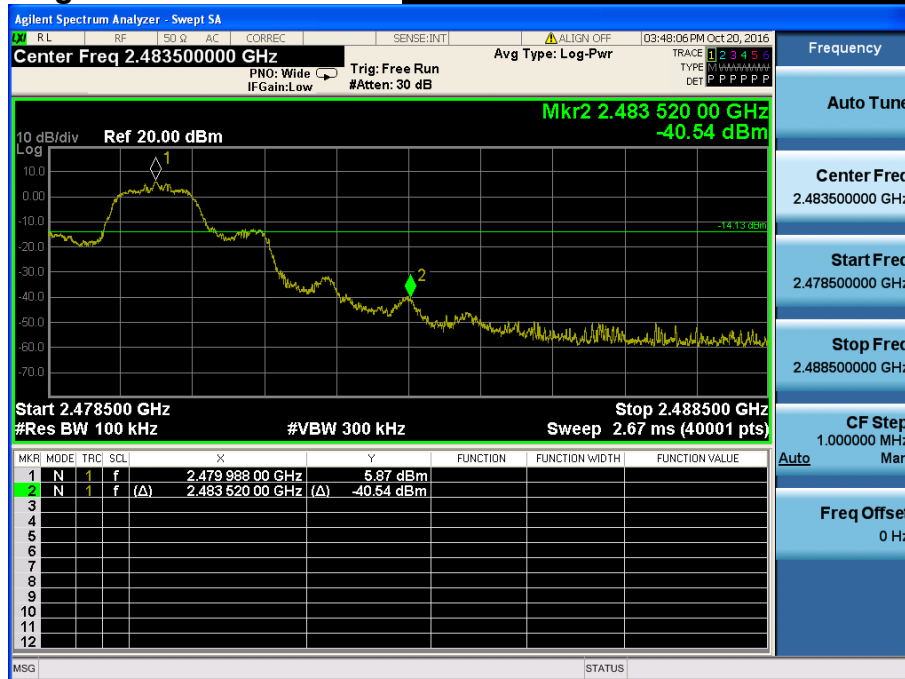



High Band-edge

Hopping mode & Modulation : $\pi/4$ DQPSK

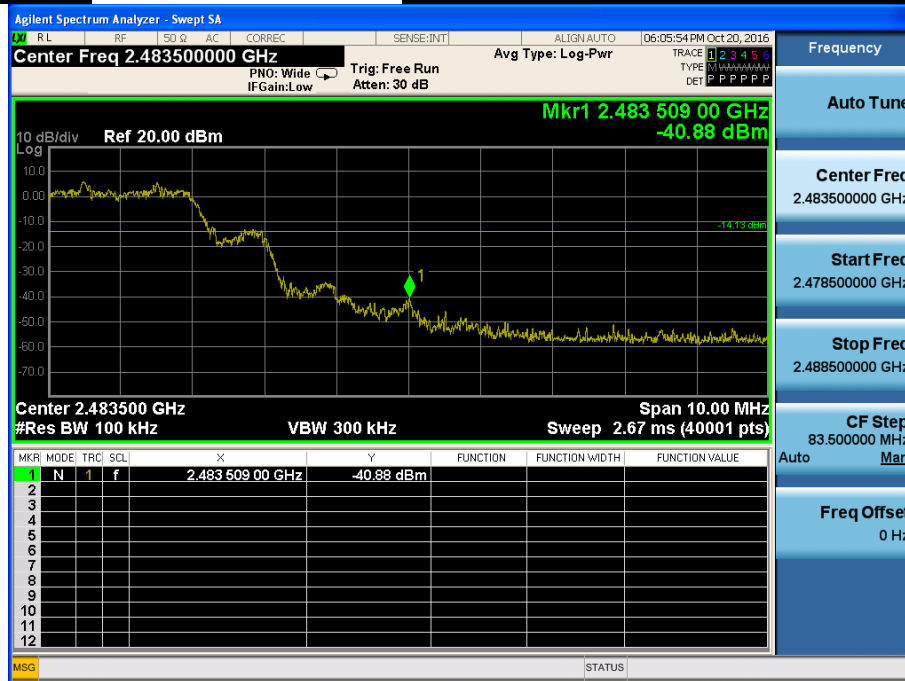


Conducted Spurious Emissions

Highest Channel & Modulation : $\pi/4$ DQPSK

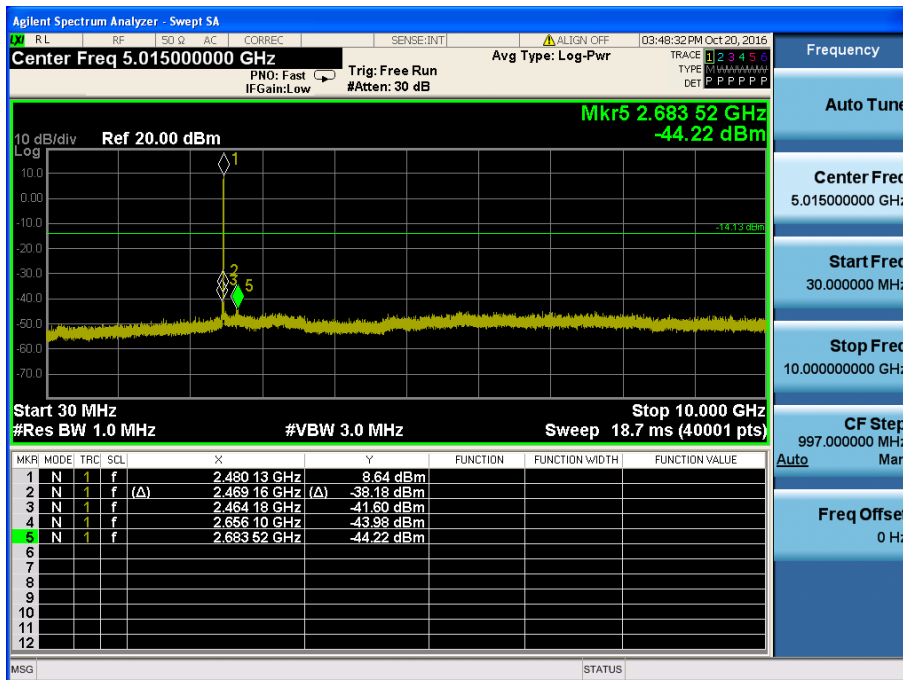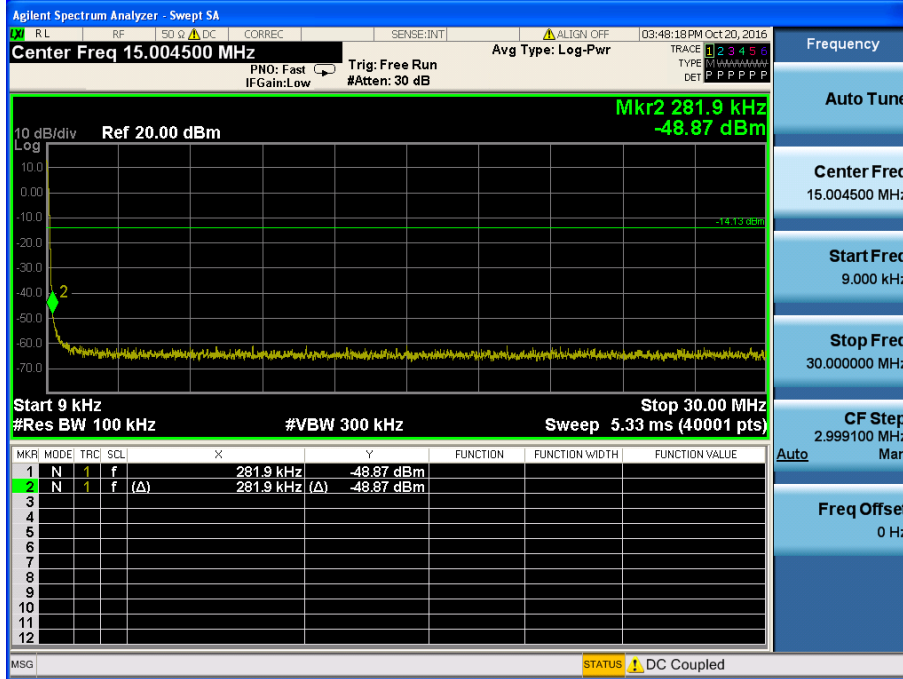


Conducted Spurious Emissions

Highest Channel & Modulation : $\pi/4$ DQPSK

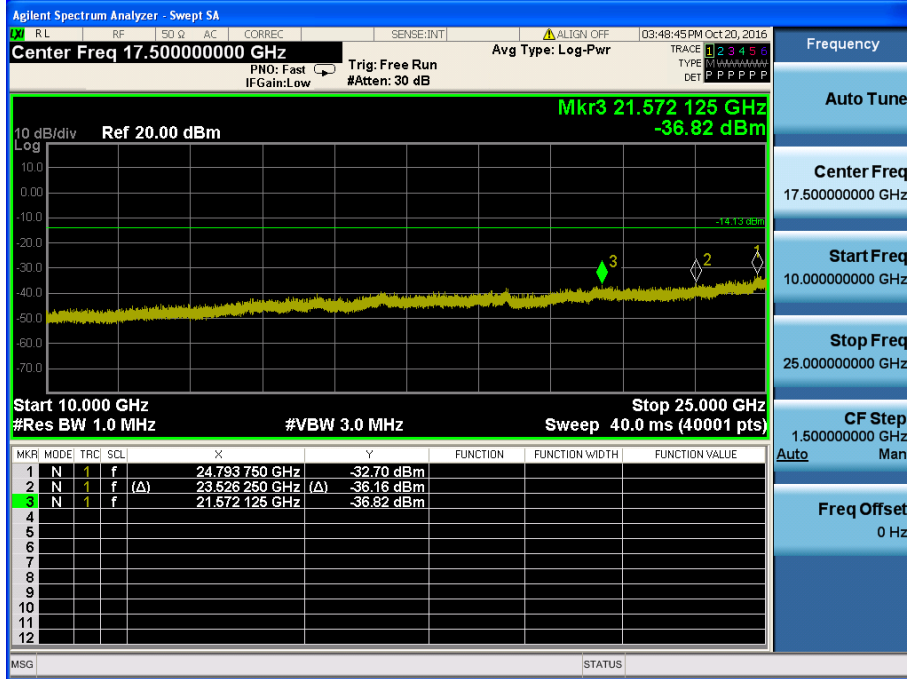

Low Band-edge

Lowest Channel & Modulation : 8DPSK


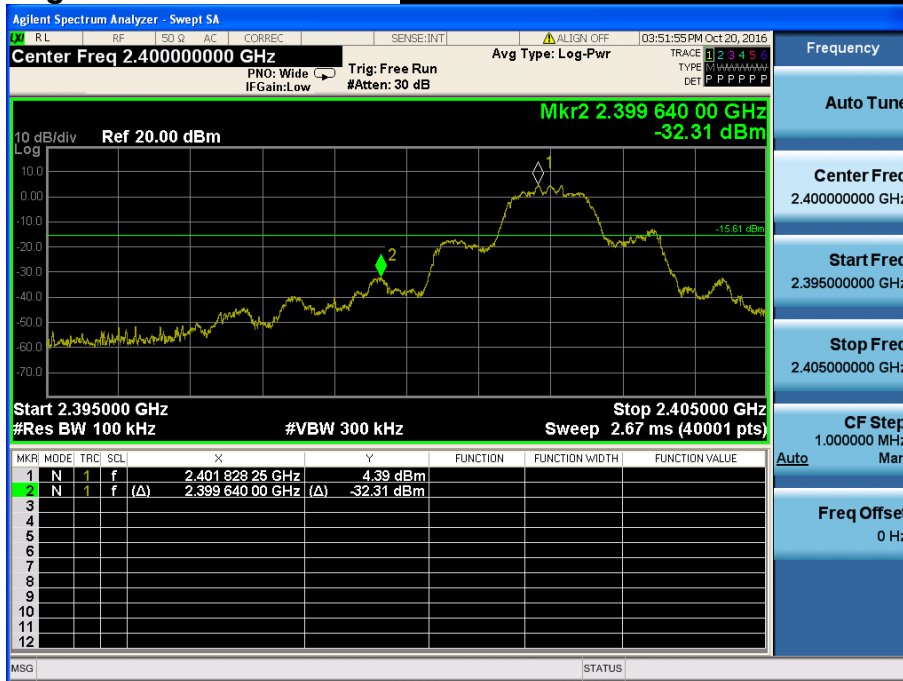


Low Band-edge


Hopping mode & Modulation : 8DPSK



Conducted Spurious Emissions **Lowest Channel & Modulation : 8DPSK**

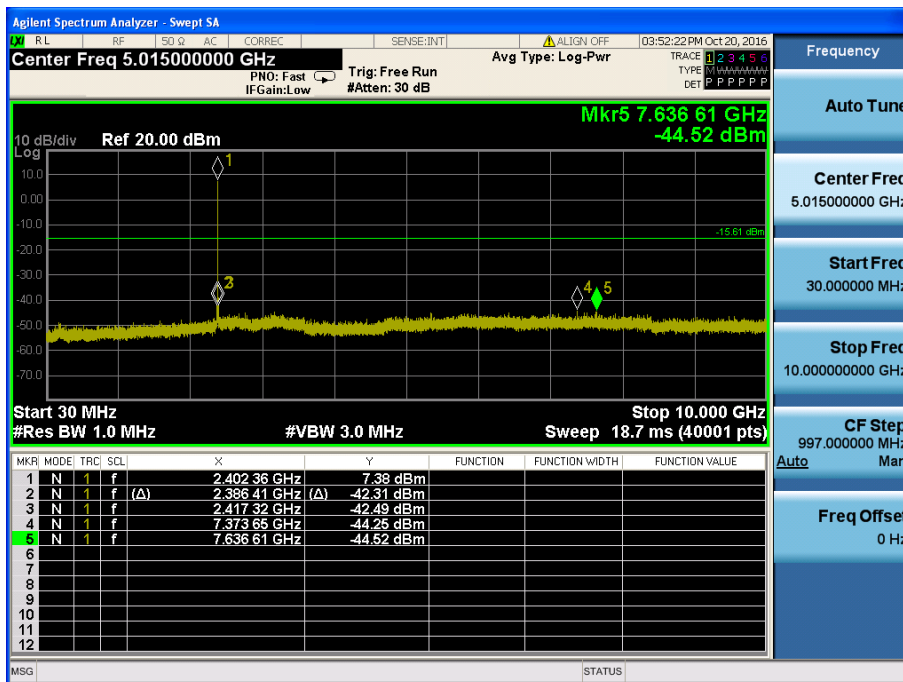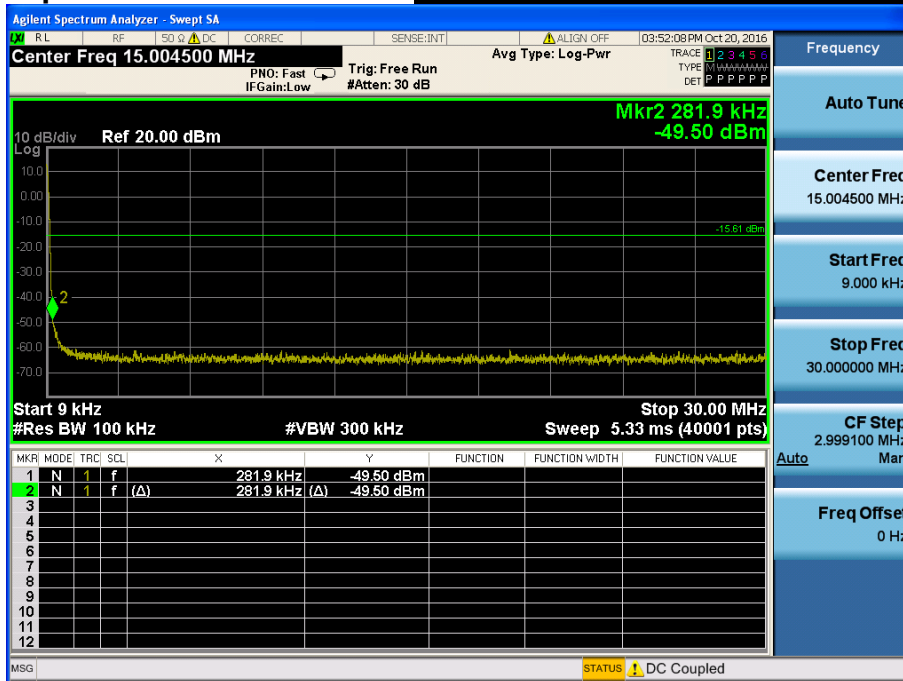


Conducted Spurious Emissions Lowest Channel & Modulation : 8DPSK

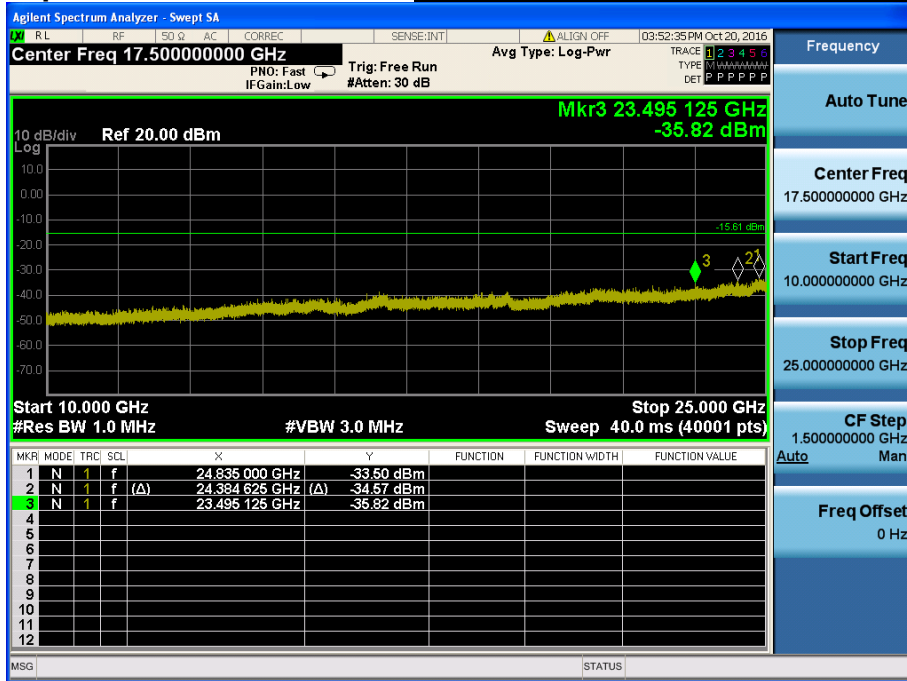


Reference for limit

Middle Channel & Modulation : 8DPSK


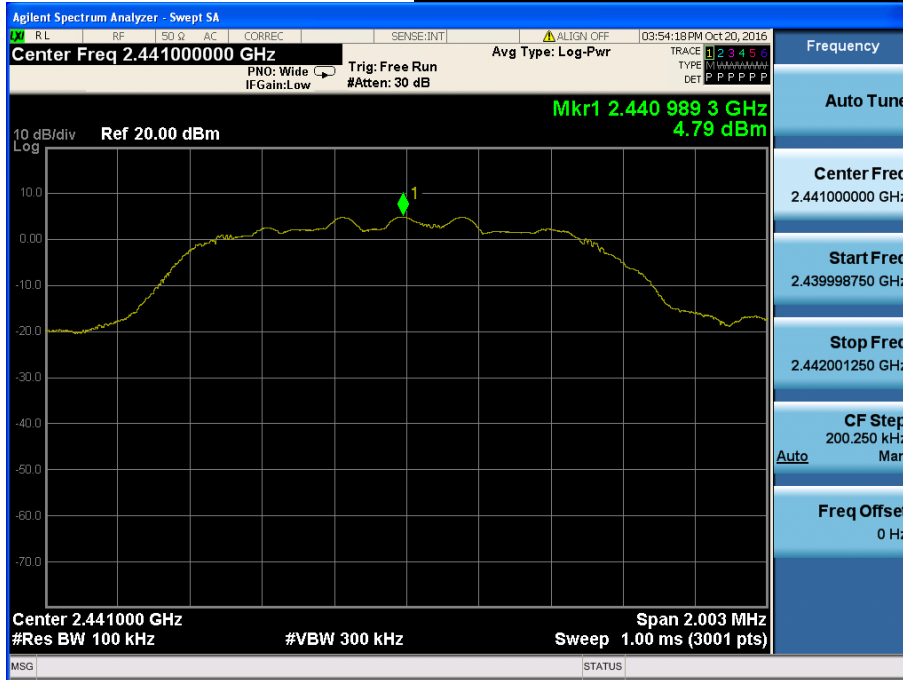


Conducted Spurious Emissions

Middle Channel & Modulation : 8DPSK

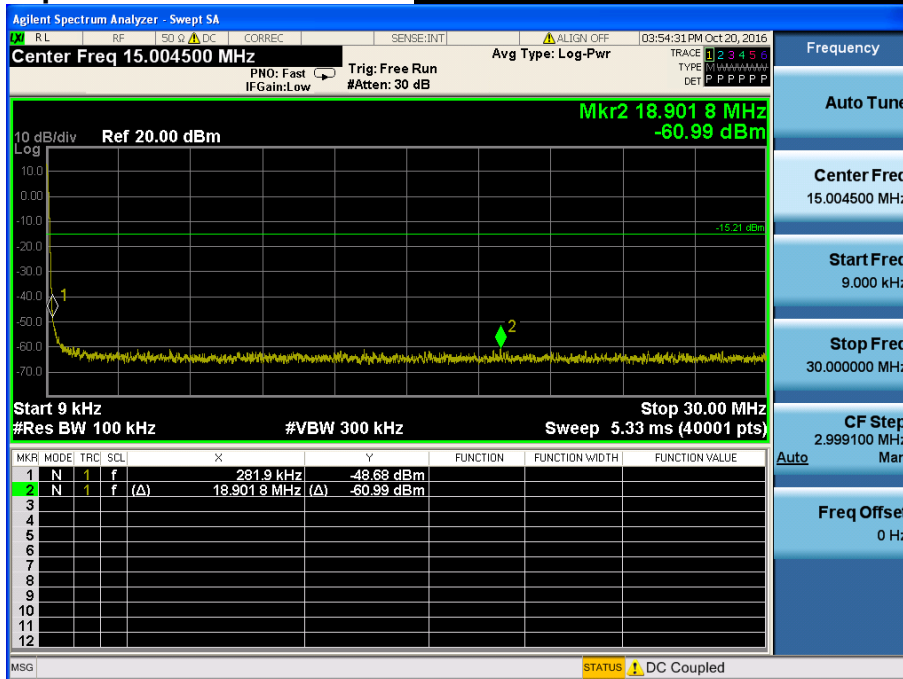


Conducted Spurious Emissions **Middle Channel & Modulation : 8DPSK**

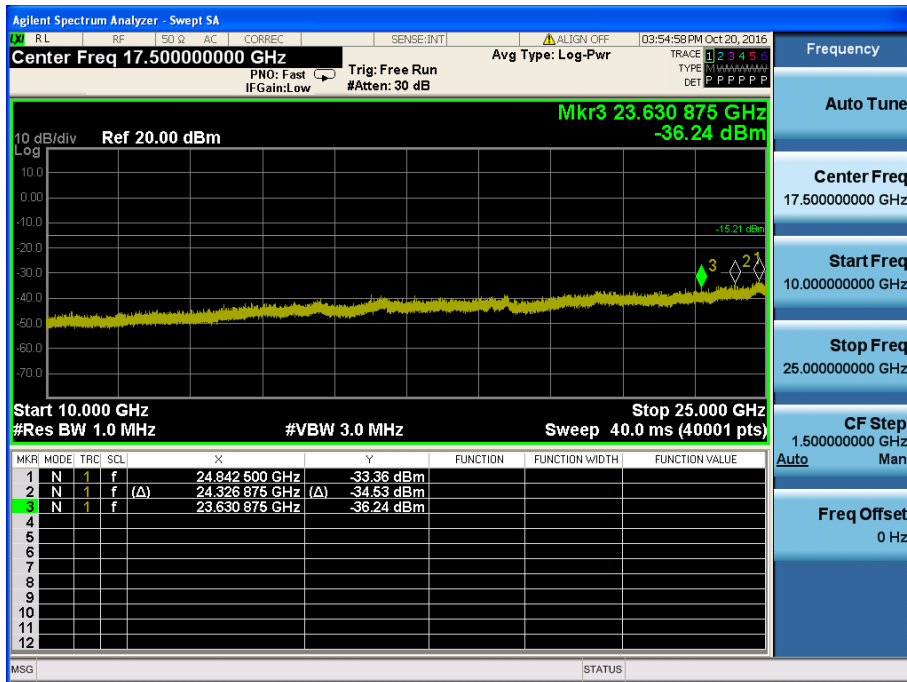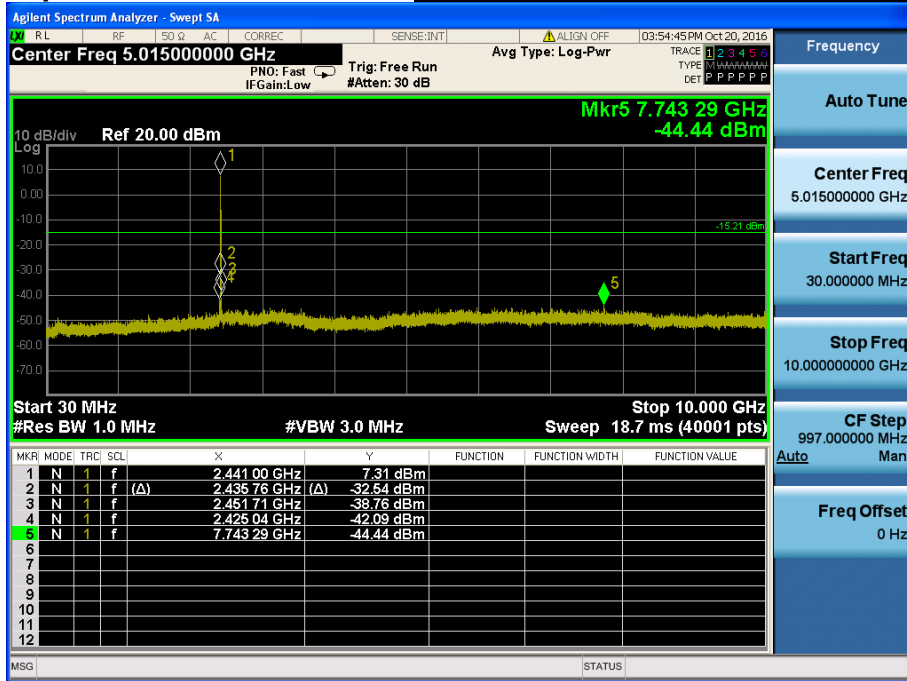

High Band-edge

Highest Channel & Modulation : 8DPSK


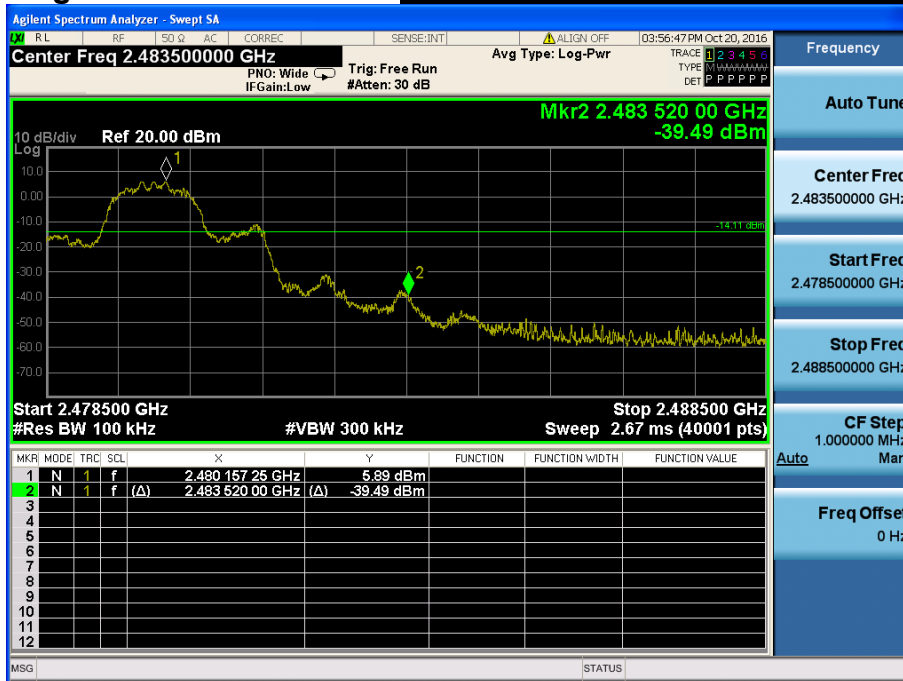


High Band-edge


Hopping mode & Modulation : 8DPSK



Conducted Spurious Emissions **Highest Channel & Modulation : 8DPSK**

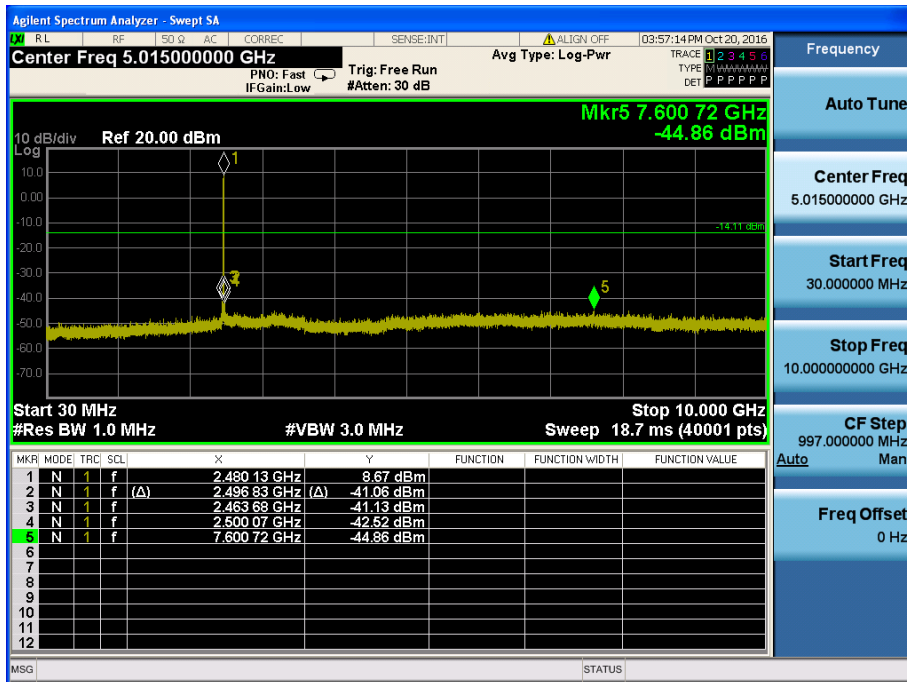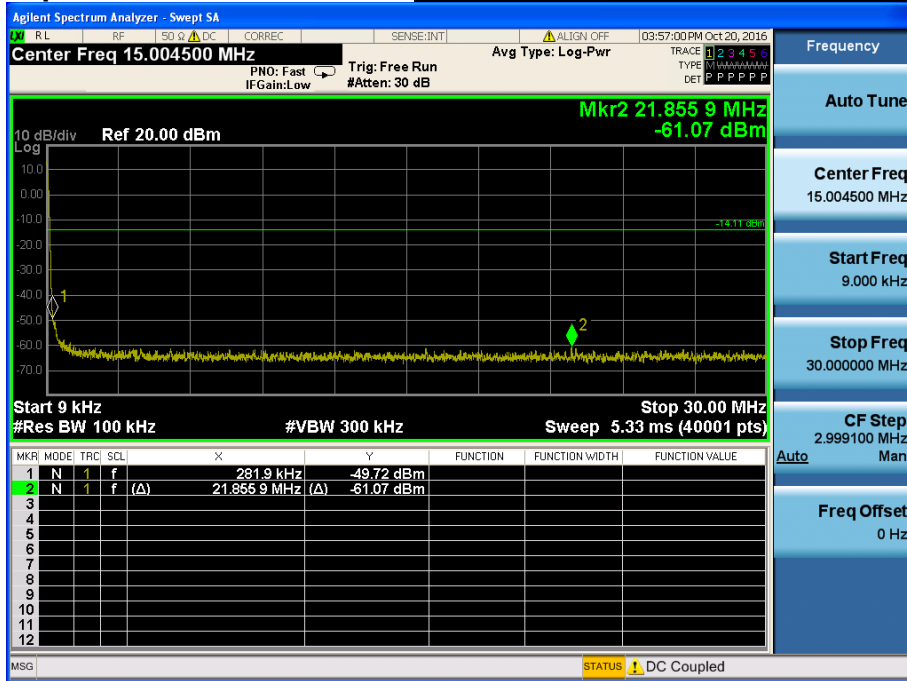

Conducted Spurious Emissions **Highest Channel & Modulation : 8DPSK**

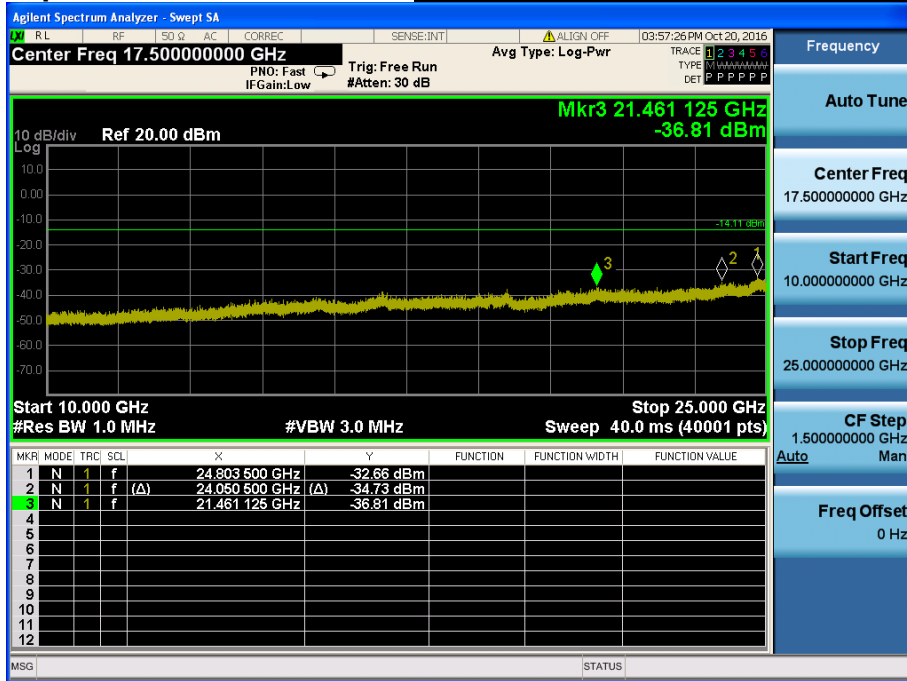

8. Transmitter AC Power Line Conducted Emission

8.1 Test Setup

Refer to test setup photo.

8.2 Limit

According to §15.207(a) for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 uH/50 ohm line impedance stabilization network (LISN).

Compliance with the provision of this paragraph shall on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50

* Decreases with the logarithm of the frequency

8.3 Test Procedures

Conducted emissions from the EUT were measured according to the ANSI C63.10.



1. The test procedure is performed in a 6.5 m × 3.5 m × 3.5 m (L × W × H) shielded room. The EUT along with its peripherals were placed on a 1.0 m (W) × 1.5 m (L) and 0.8 m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane.
2. The EUT was connected to power mains through a line impedance stabilization network (LISN) which provides 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room.
3. All peripherals were connected to the second LISN and the chassis ground also bounded to the horizontal ground plane of shielded room.
4. The excess power cable between the EUT and the LISN was bundled. The power cables of peripherals were unbundled. All connecting cables of EUT and peripherals were moved to find the maximum emission.

8.4. Test Results

AC Line Conducted Emissions (Graph) = Modulation : GFSK

Results of Conducted Emission

DT&C		Date : 2016-10-23	
Model	: SP31	Temp/Humi.	: 23 °C 48 %
Function	: BT	Power Supply	: AC 120 V 60 Hz
Mode	: 1Mbps	Operator	: J.J.LEE
Test condition	: Hopping		
Memo	:		
LIMIT : FCC P15.207 QP			
FCC P15.207 AV			

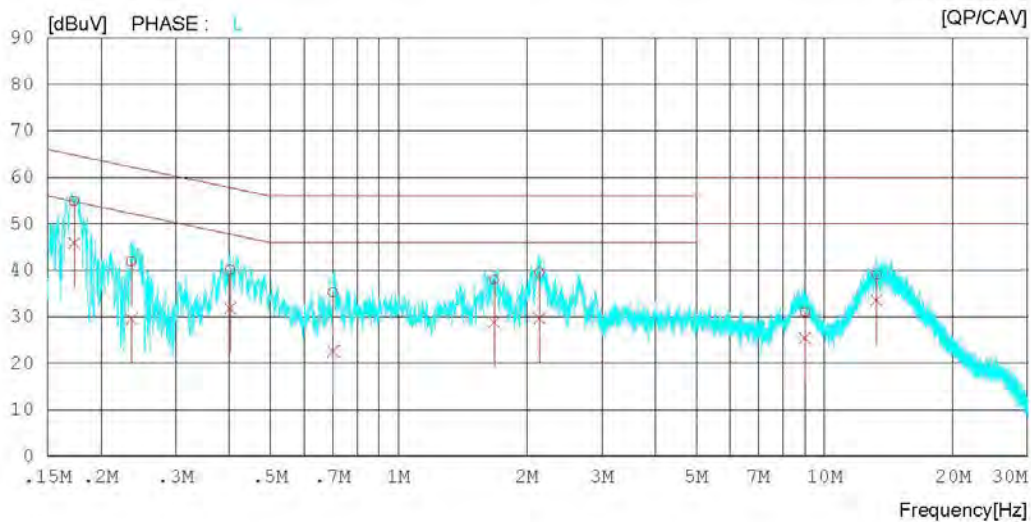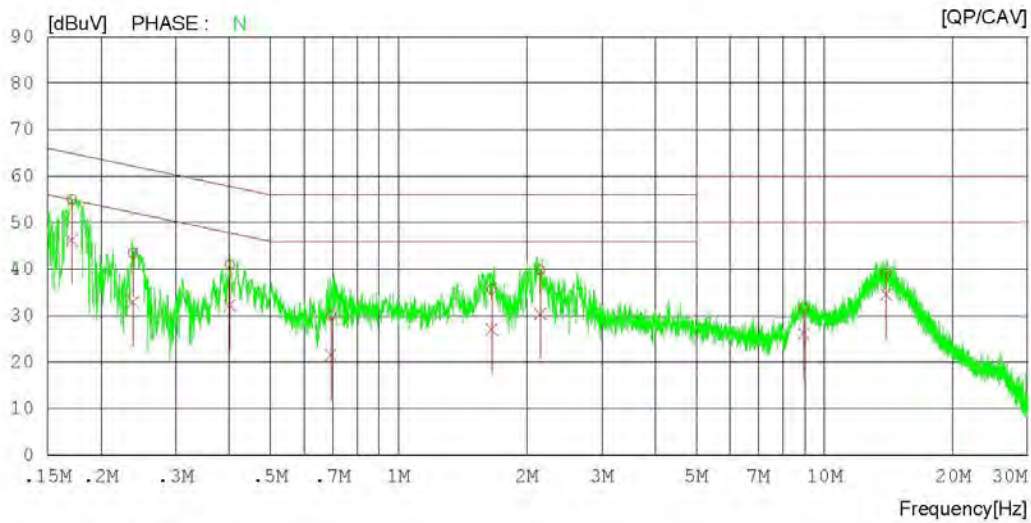

AC Line Conducted Emissions (List) = Modulation : GFSK

Results of Conducted Emission

DT&C

Date : 2016-10-23

 Model : SP31
 Function : BT
 Mode : 1Mbps
 Test condition : Hopping

 Temp/Humi. : 23 'C 48 %
 Power Supply : AC 120 V 60 Hz
 Operator : J.J.LEE

Memo :

 LIMIT : FCC P15.207 QP
 FCC P15.207 AV

NO	FREQ [MHz]	READING		C. FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	CAV [dBuV]		QP [dBuV]	CAV [dBuV]	QP [dBuV]	CAV [dBuV]	QP [dBuV]	CAV [dBuV]	
1	0.17086	52.32	43.59	2.64	54.96	46.23	64.92	54.92	9.96	8.69	N
2	0.23799	41.87	31.27	1.64	43.51	32.91	62.17	52.17	18.66	19.26	N
3	0.40129	40.12	31.37	0.87	40.99	32.24	57.83	47.83	16.84	15.59	N
4	0.69350	29.63	21.04	0.51	30.14	21.55	56.00	46.00	25.86	24.45	N
5	1.65520	35.33	26.78	0.34	35.67	27.12	56.00	46.00	20.33	18.88	N
6	2.14880	39.50	30.05	0.33	39.83	30.38	56.00	46.00	16.17	15.62	N
7	8.93920	31.18	25.82	0.38	31.56	26.20	60.00	50.00	28.44	23.80	N
8	13.96880	38.62	34.17	0.47	39.09	34.64	60.00	50.00	20.91	15.36	N
9	0.17321	52.23	43.24	2.63	54.86	45.87	64.81	54.81	9.95	8.94	L
10	0.23570	40.16	27.89	1.69	41.85	29.58	62.25	52.25	20.40	22.67	L
11	0.40258	39.20	30.91	0.90	40.10	31.81	57.80	47.80	17.70	15.99	L
12	0.70226	34.71	22.14	0.53	35.24	22.67	56.00	46.00	20.76	23.33	L
13	1.67840	37.58	28.41	0.37	37.95	28.78	56.00	46.00	18.05	17.22	L
14	2.14480	39.16	29.28	0.36	39.52	29.64	56.00	46.00	16.48	16.36	L
15	8.99660	30.51	25.00	0.42	30.93	25.42	60.00	50.00	29.07	24.58	L
16	13.23800	38.44	33.13	0.46	38.90	33.59	60.00	50.00	21.10	16.41	L

9. Antenna Requirement

Describe how the EUT complies with the requirement that either its antenna is permanently attached, or that it employs a unique antenna connector, for every antenna proposed for use with the EUT.

Conclusion: Comply

The External antenna employs a unique antenna connector.

- Minimum Standard :

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions.

10. Occupied Bandwidth (99 %)

10.1 Test Setup

Refer to the APPENDIX I.

10.2 Limit

Limit : Not Applicable

10.3 Test Procedure

The 99 % power bandwidth was measured with a calibrated spectrum analyzer.

The resolution bandwidth (RBW) shall be in the range of 1 % to 5 % of the occupied bandwidth (OBW) and video bandwidth (VBW) shall be approximately $3 \times$ RBW.


Spectrum analyzer plots are included on the following pages.

10.4 Test Results

Test Mode	Tested Channel	Test Results (MHz)
<u>GFSK</u>	Lowest	0.879
	Middle	0.876
	Highest	0.872
<u>$\pi/4$DQPSK</u>	Lowest	2.111
	Middle	2.237
	Highest	2.220
<u>8DPSK</u>	Lowest	2.025
	Middle	2.196
	Highest	2.167


Occupied Bandwidth (99 %)

Lowest Channel & GFSK

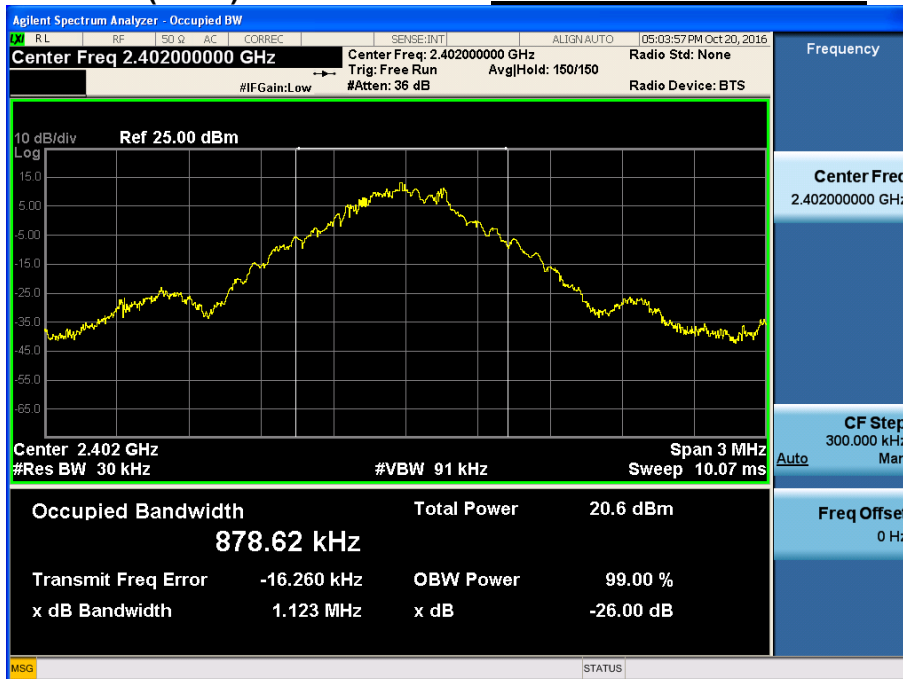


Occupied Bandwidth (99 %)

Middle Channel & GFSK

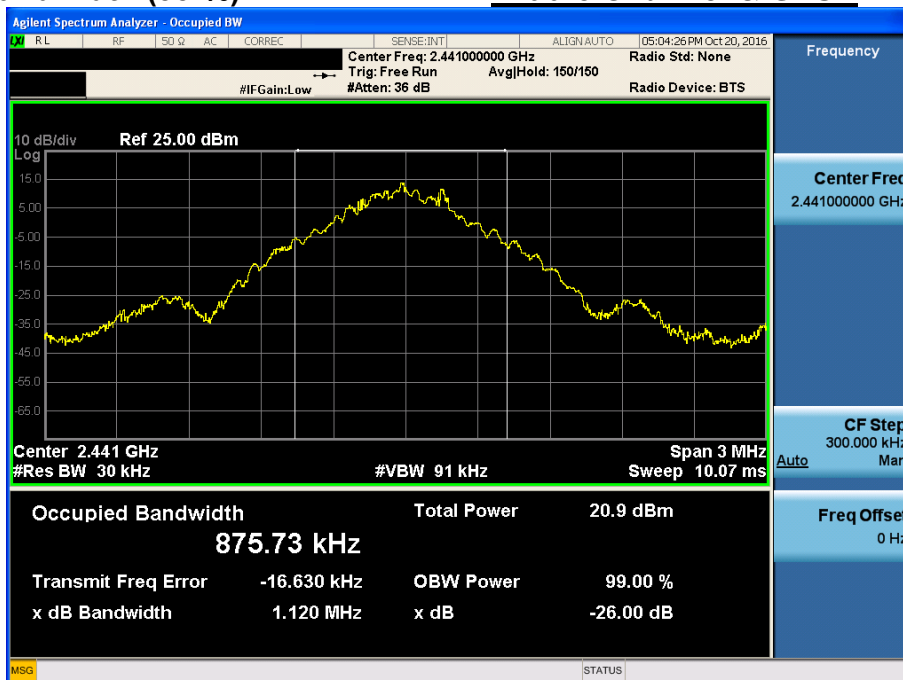


Occupied Bandwidth (99 %)

Highest Channel & GFSK

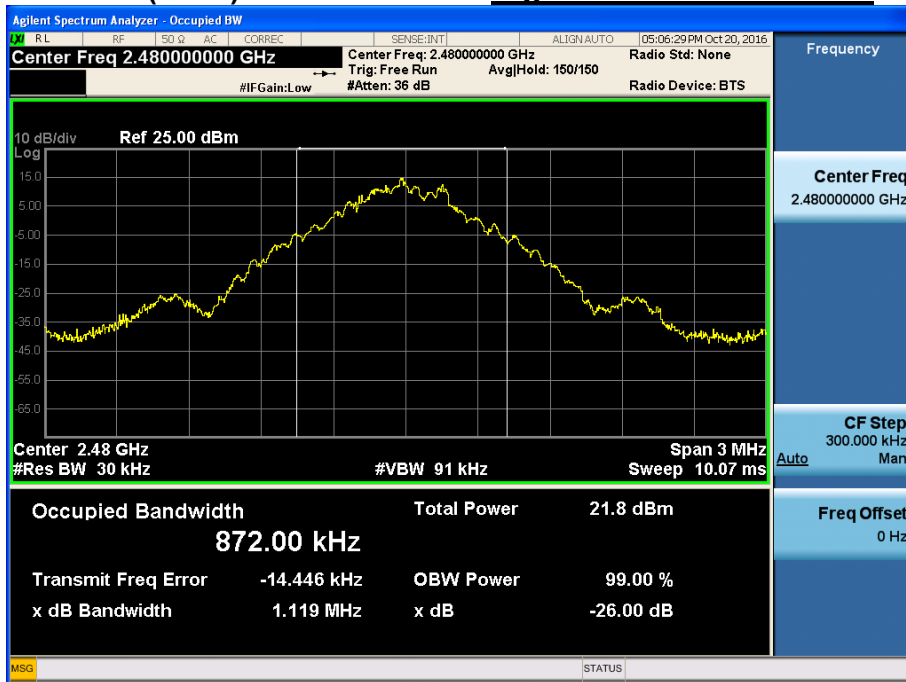


Occupied Bandwidth (99 %)

Lowest Channel & $\pi/4$ QPSK

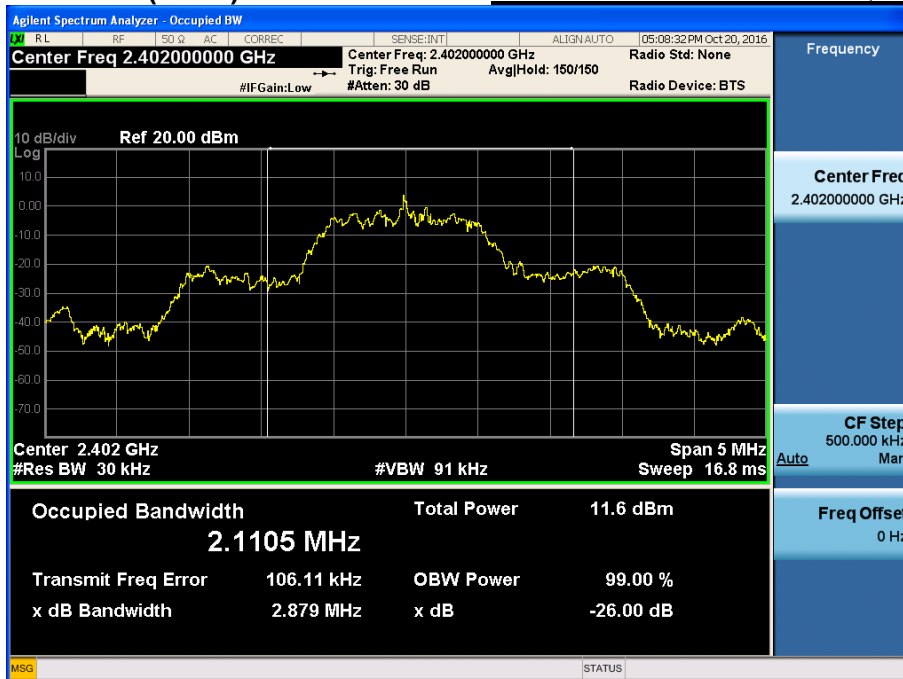


Occupied Bandwidth (99 %)

Middle Channel & $\pi/4$ QPSK

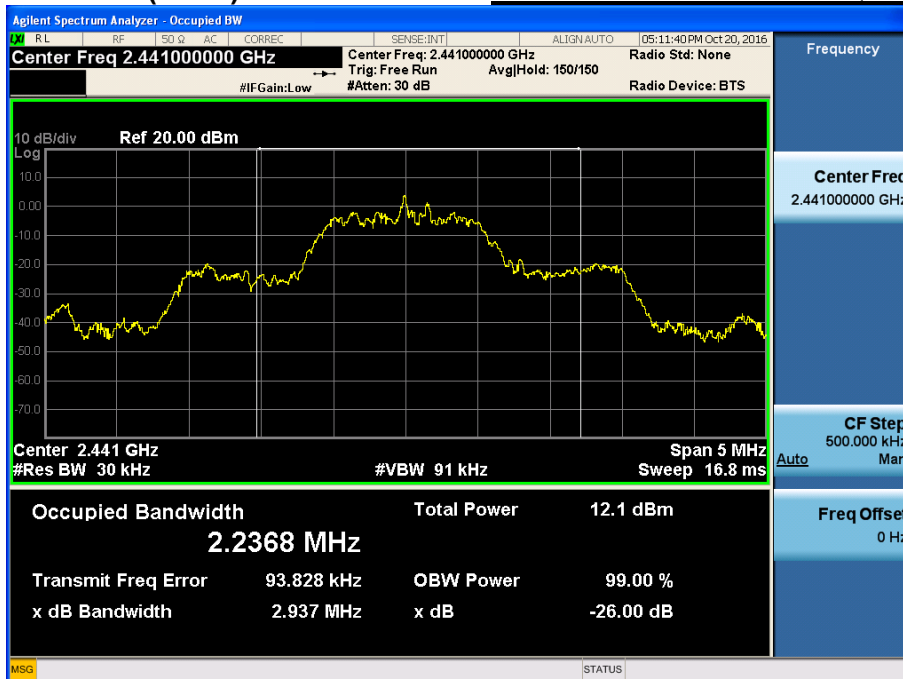


Occupied Bandwidth (99 %)

Highest Channel & $\pi/4$ DQPSK

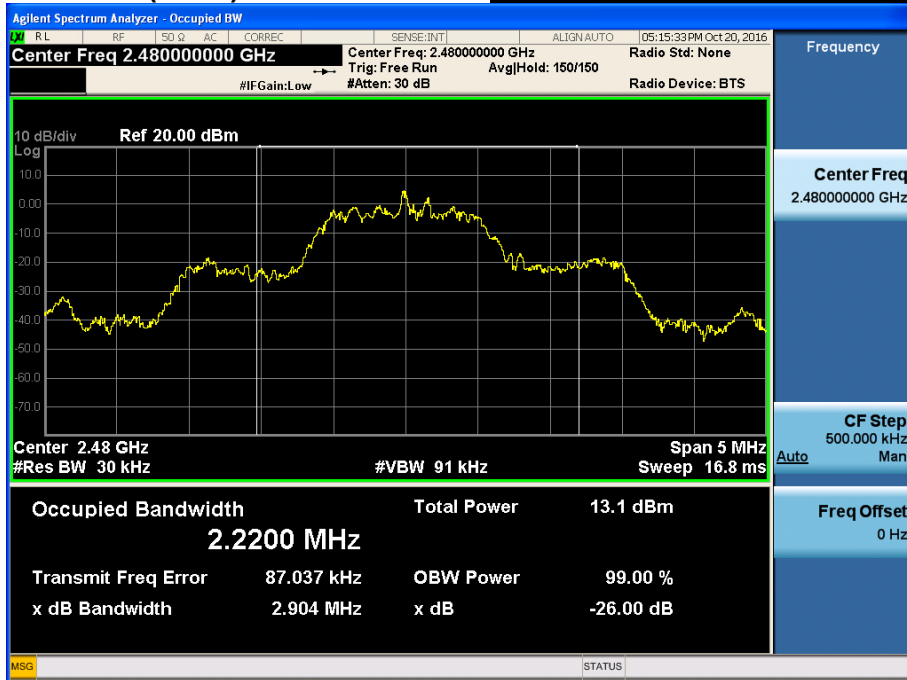


Occupied Bandwidth (99 %)

Lowest Channel & 8DPSK

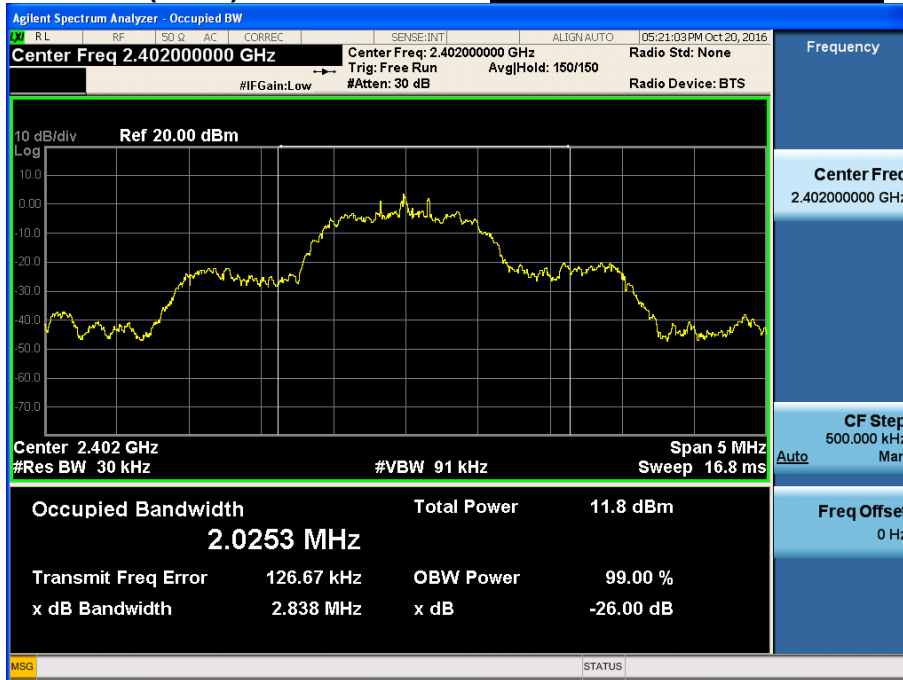


Occupied Bandwidth (99 %)

Middle Channel & 8DPSK

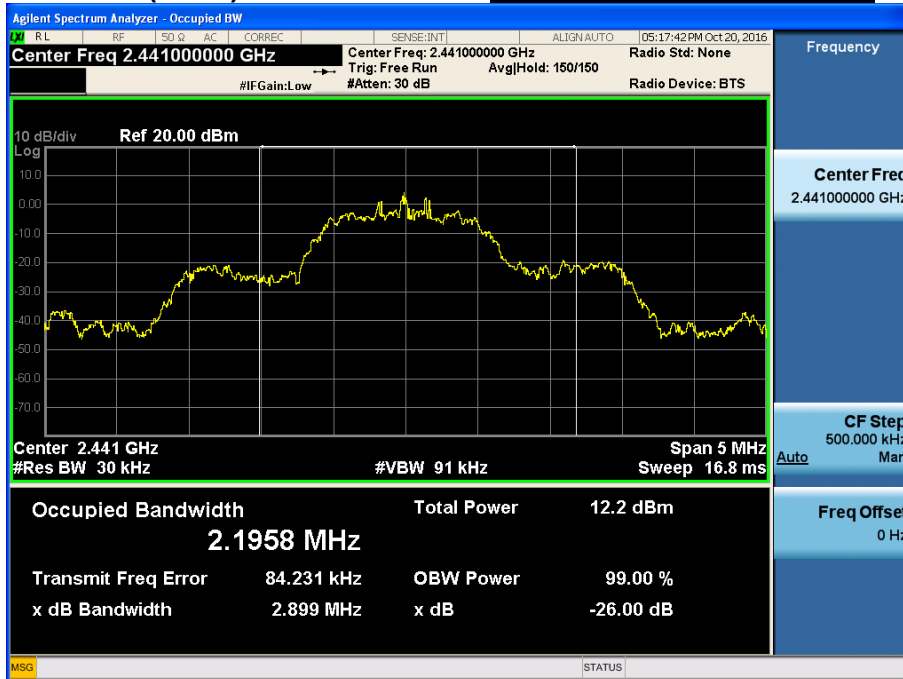

Occupied Bandwidth (99 %)


Highest Channel & 8DPSK

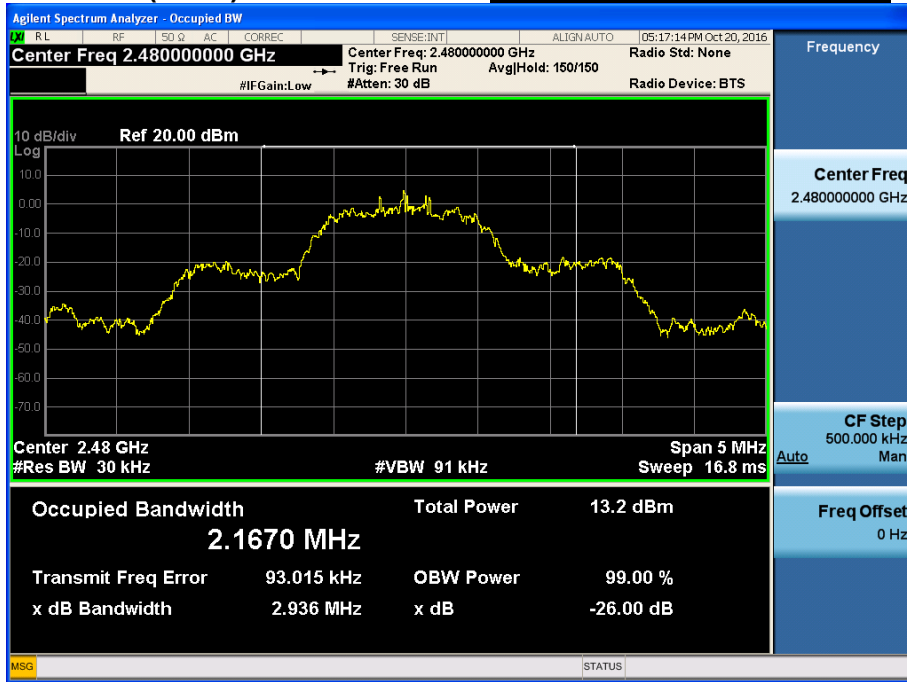


APPENDIX I

Test set up diagrams

▪ Radiated Measurement

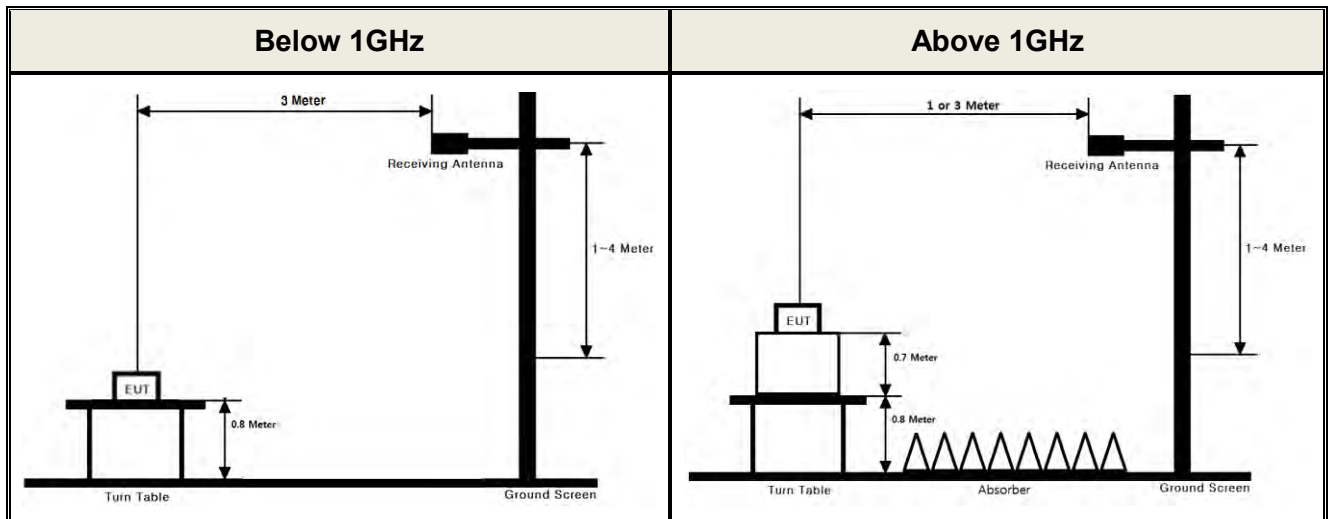

▪ Conducted Measurement

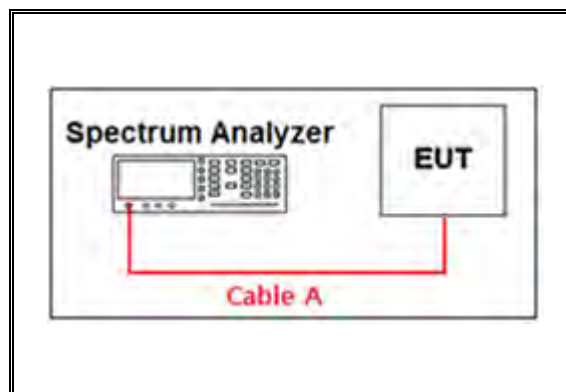

Path loss information

Frequency (GHz)	Path Loss (dB)	Frequency (GHz)	Path Loss (dB)
0.03	0.21	15	4.15
1	0.97	20	4.99
2.402 & 2.440 & 2.480	1.54	25	5.53
5	2.10	-	-
10	2.87	-	-

Note 1 : The path loss from EUT to Spectrum analyzer were measured and used for test.


Path loss (S/A's Correction factor) = Cable A

APPENDIX II

Unwanted Emissions (Radiated) Test Plot


GFSK & Lowest Channel & X & Hor

Detector Mode : PK

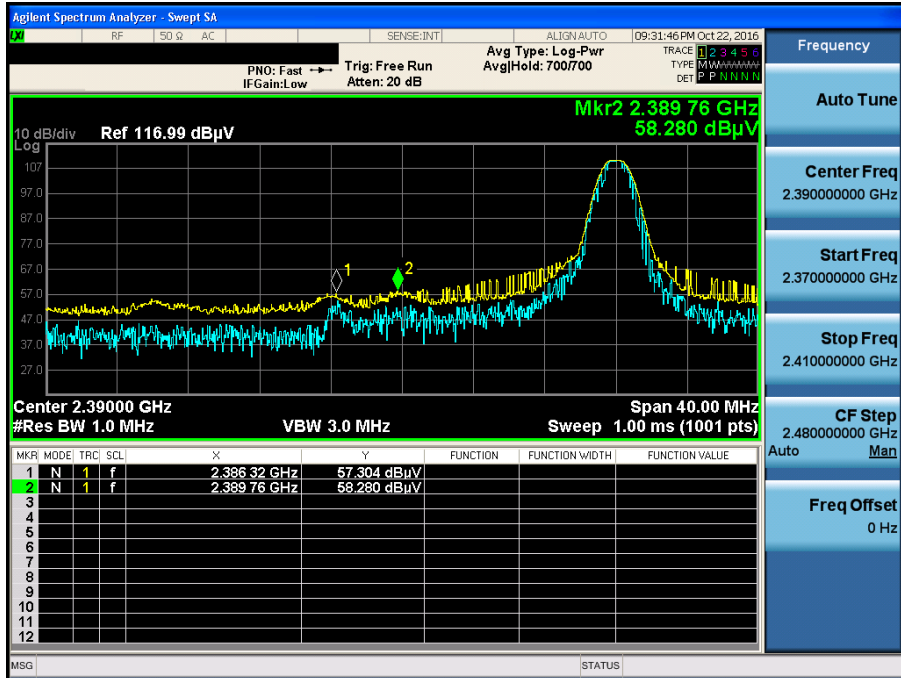


GFSK & Lowest Channel & X & Hor

Detector Mode : AV

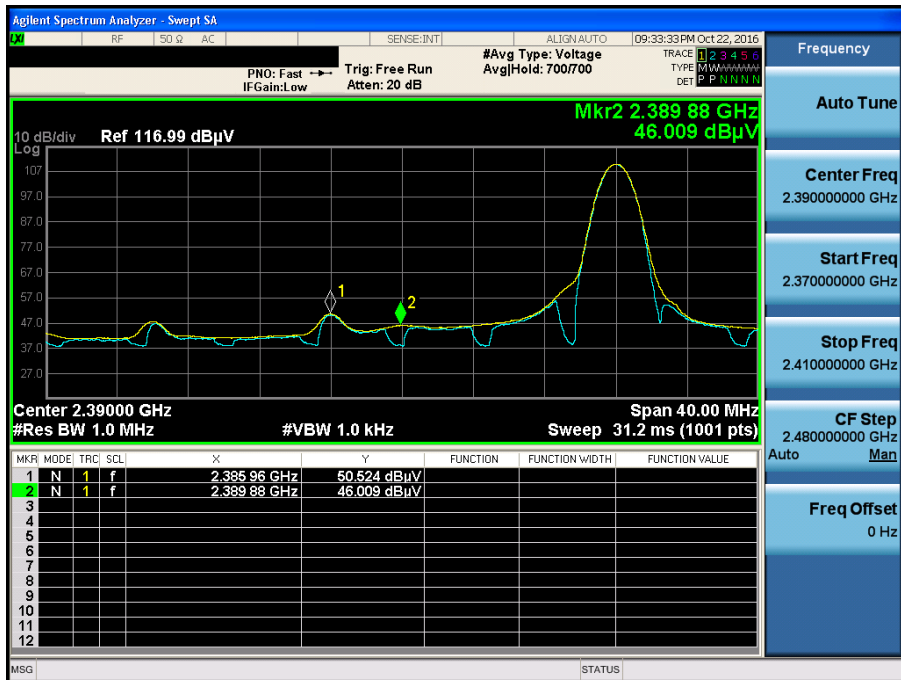


GFSK & Highest Channel & X & Hor

Detector Mode : PK

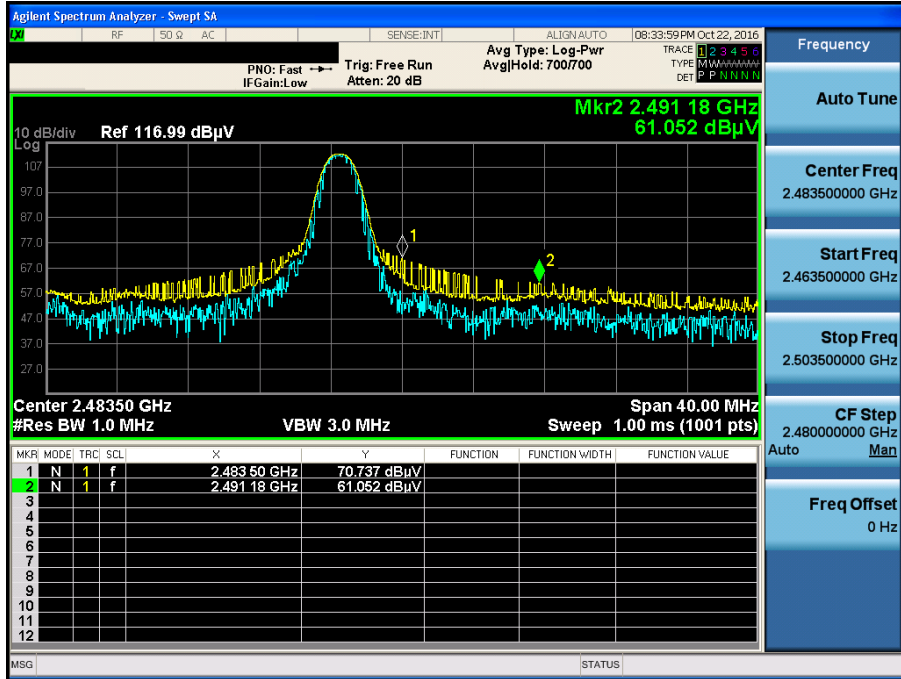


GFSK & Highest Channel & X & Hor

Detector Mode : AV

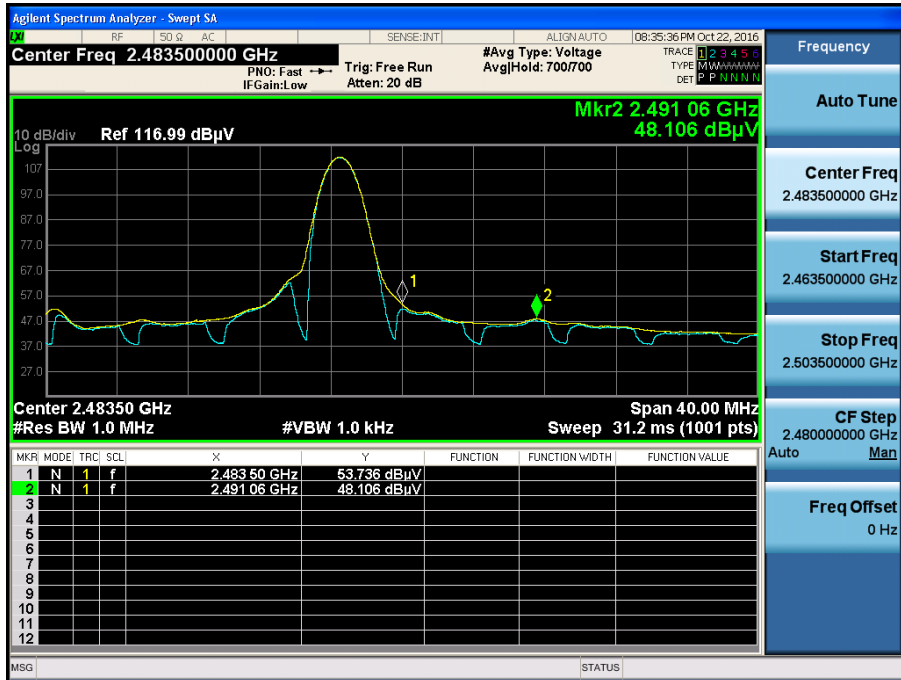


π /4DQPSK & Lowest Channel & X & Hor

Detector Mode : PK

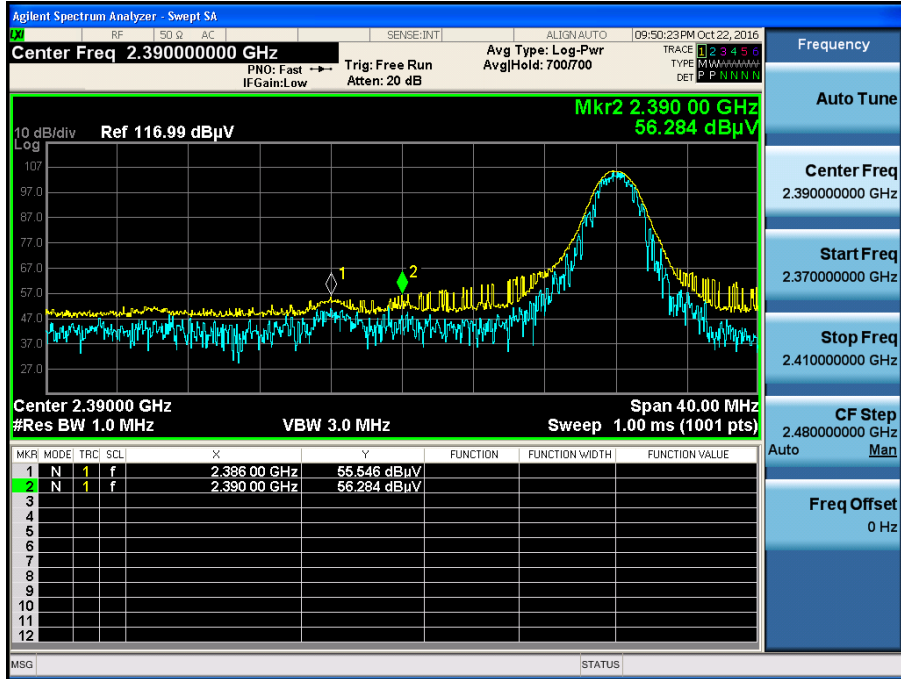


π /4DQPSK & Lowest Channel & X & Hor

Detector Mode : AV

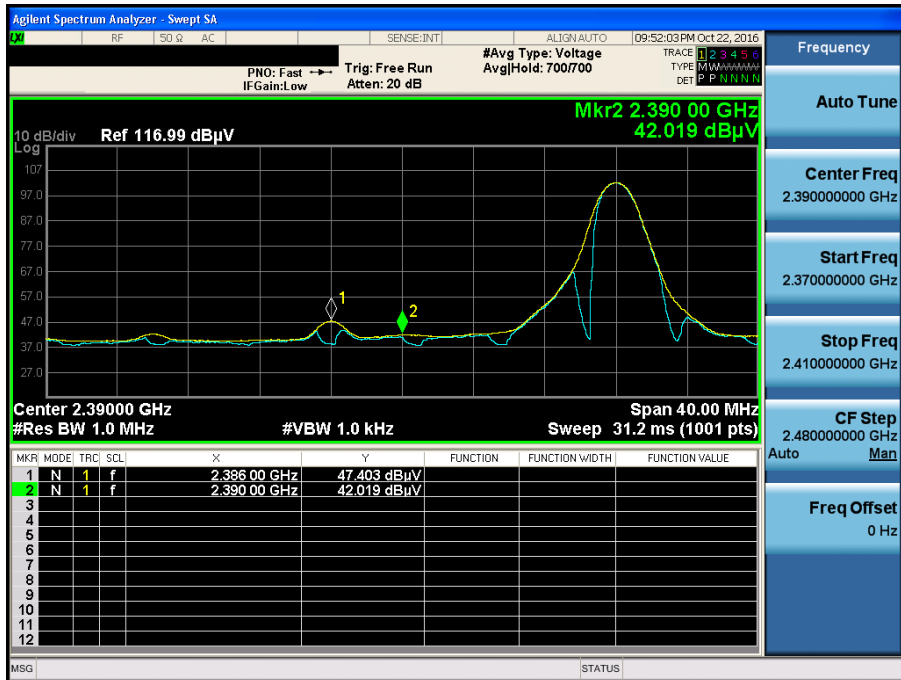


π /4DQPSK & Highest Channel & X & Hor

Detector Mode : PK

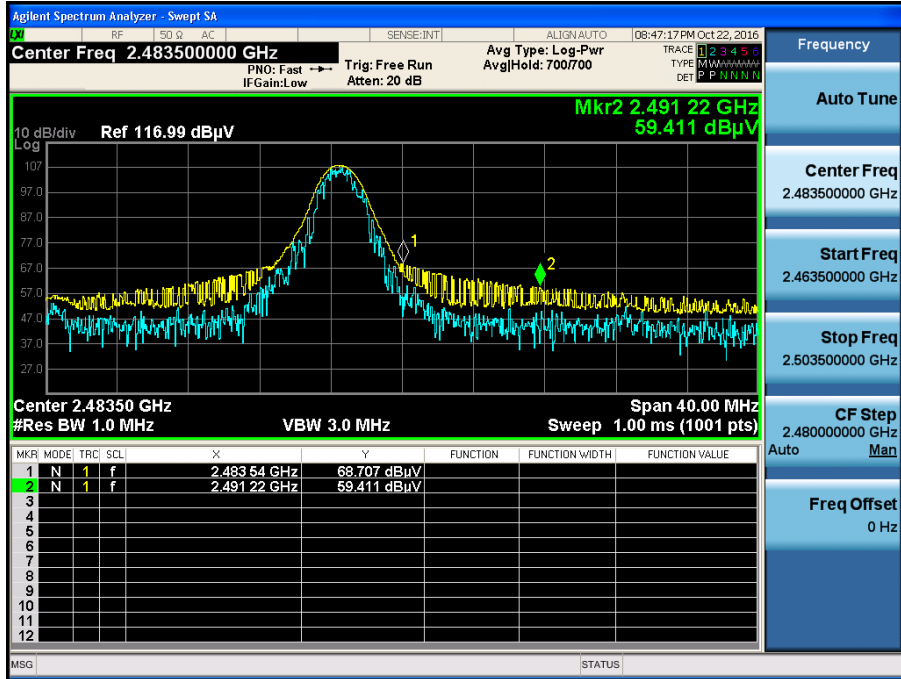


π /4DQPSK & Highest Channel & X & Hor

Detector Mode : AV

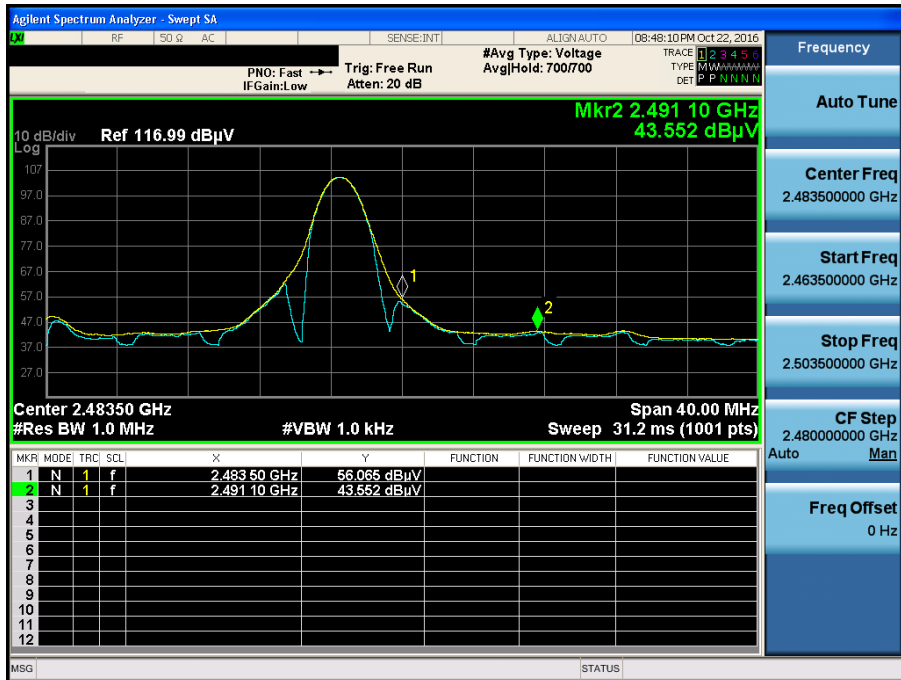


8DPSK & Lowest Channel & X & Hor

Detector Mode : PK

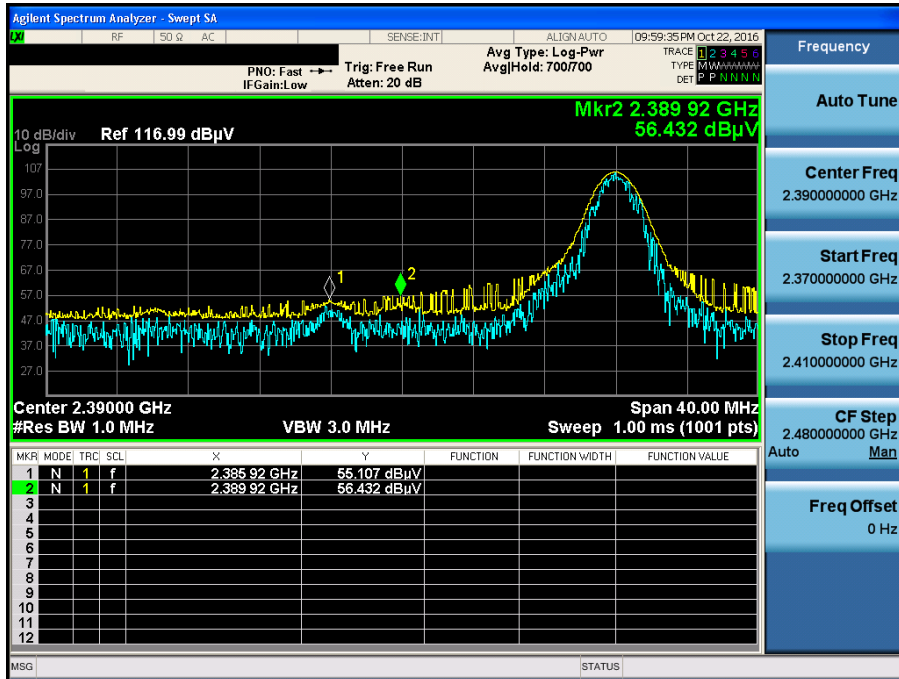


8DPSK & Lowest Channel & X & Hor

Detector Mode : AV

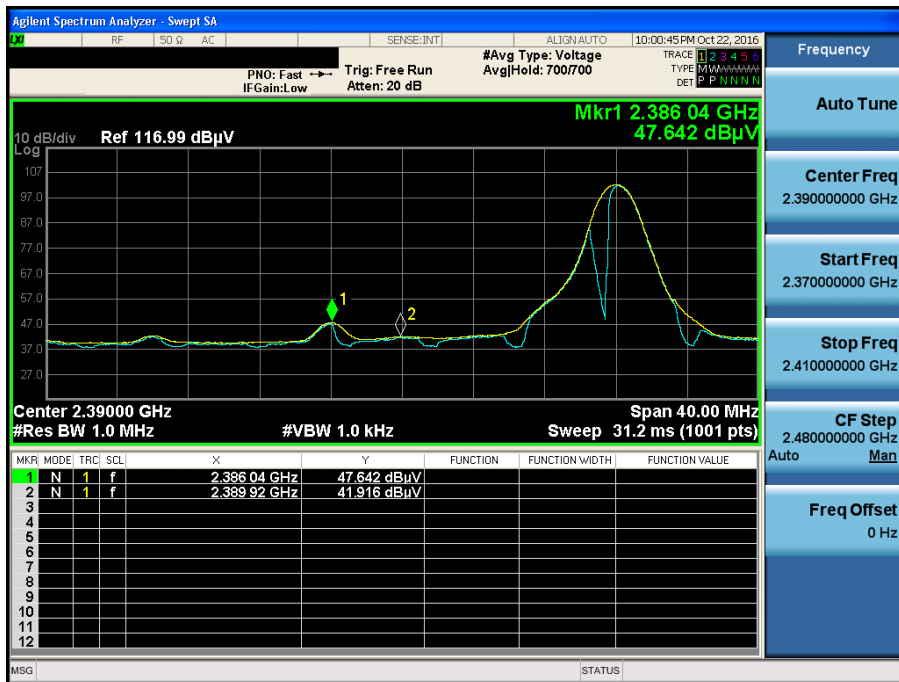


8DPSK & Highest Channel & X & Hor

Detector Mode : PK

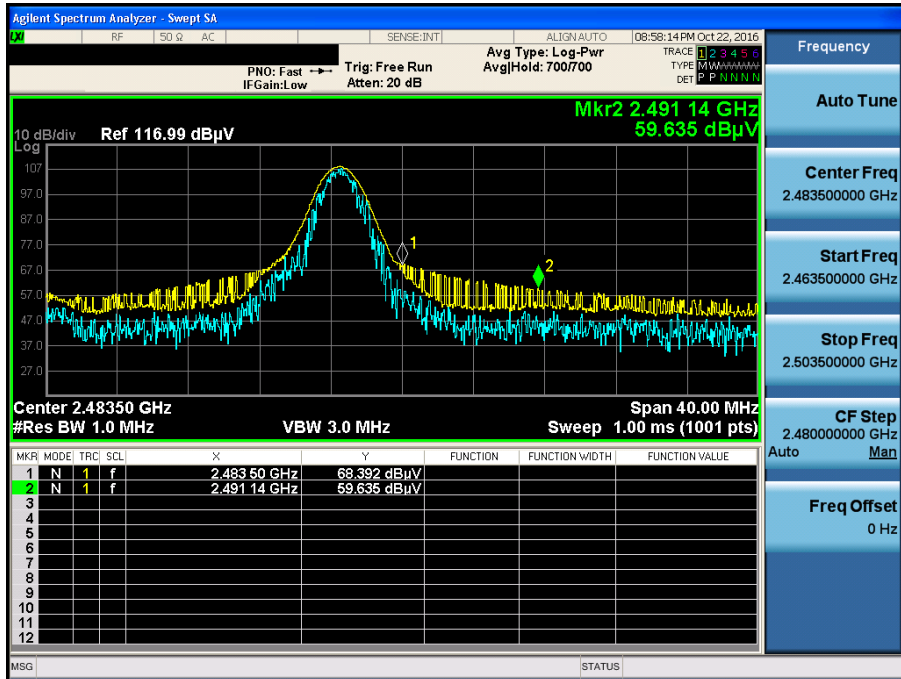


8DPSK & Highest Channel & X & Hor

Detector Mode : AV

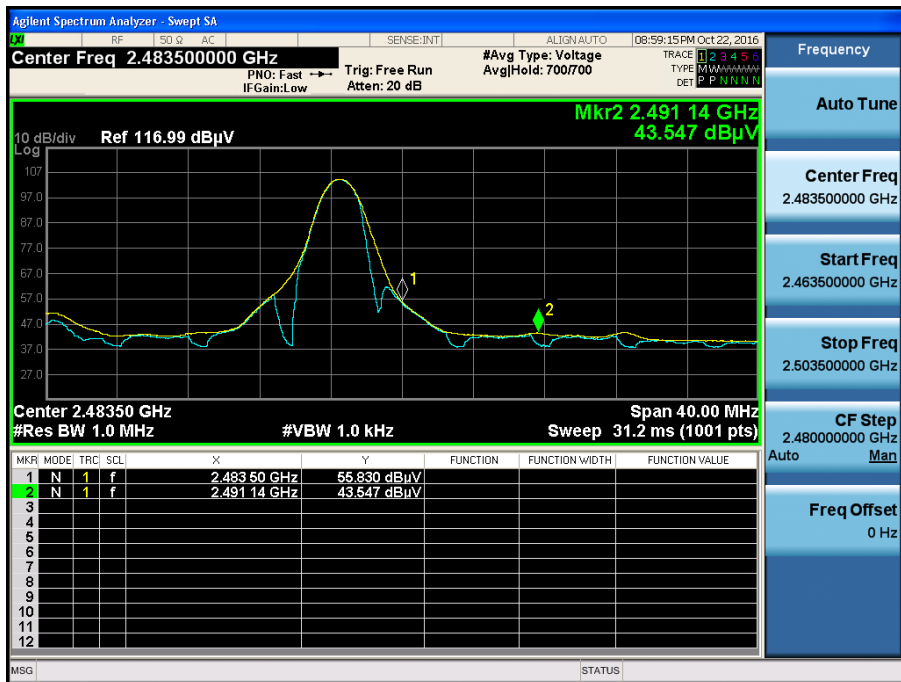


GFSK & Middle Channel & Z & Ver

Detector Mode : PK

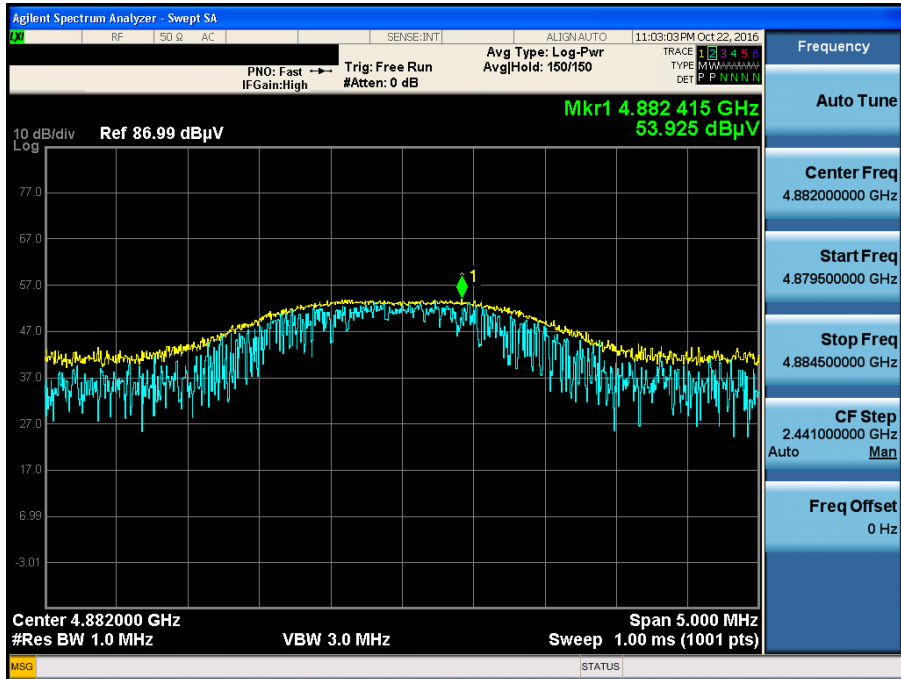


$\pi/4$ DQPSK & Middle Channel & Z & Ver

Detector Mode : PK

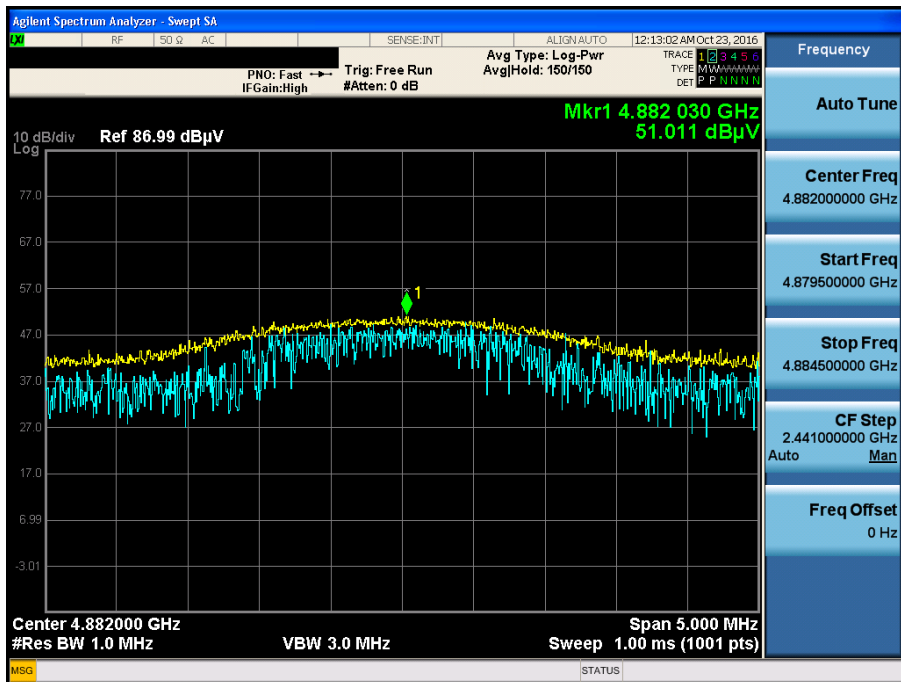


8DPSK & Middle Channel & Z & Ver

Detector Mode : PK

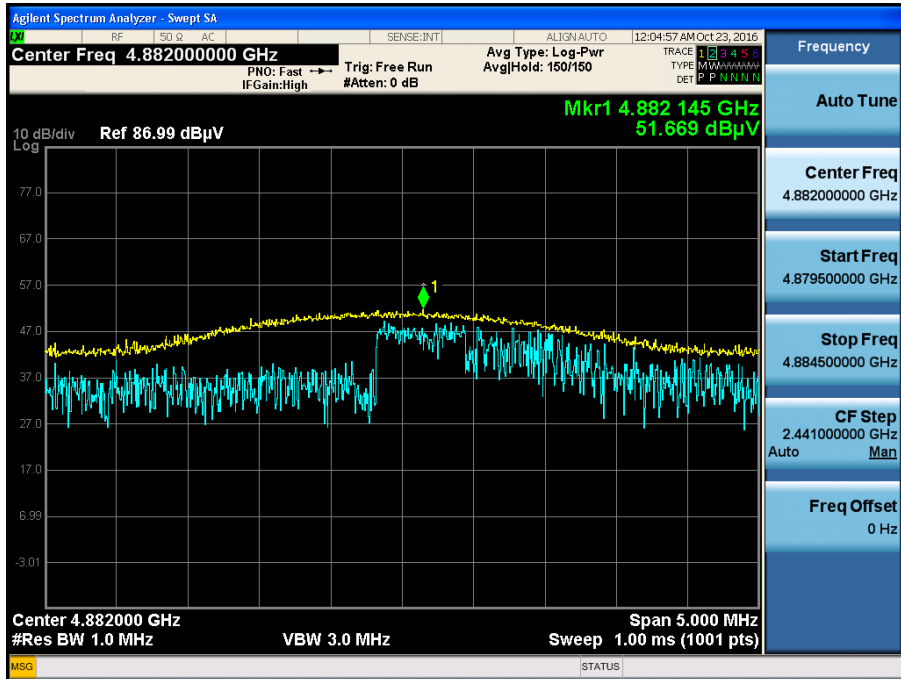


GFSK & Hopping mode & X & Hor

Detector Mode : PK

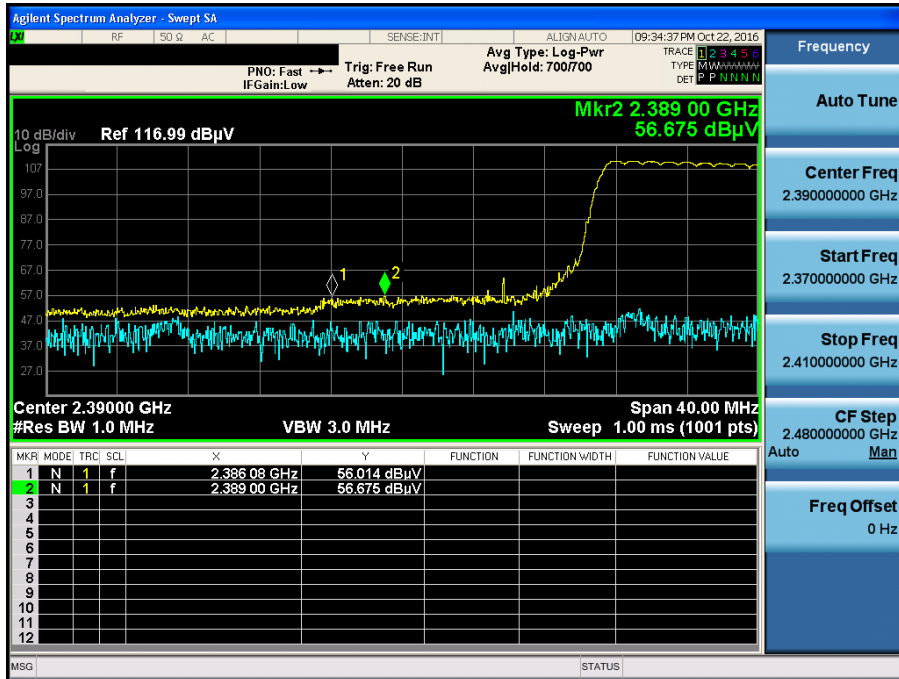


GFSK & Hopping mode & X & Hor

Detector Mode : AV

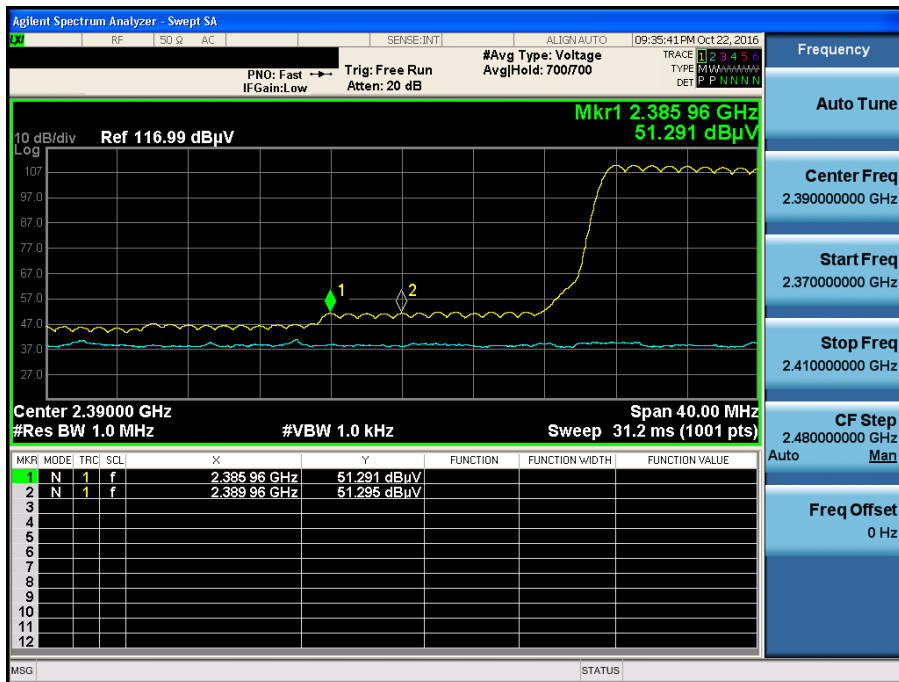


GFSK & Hopping mode & X & Hor

Detector Mode : PK

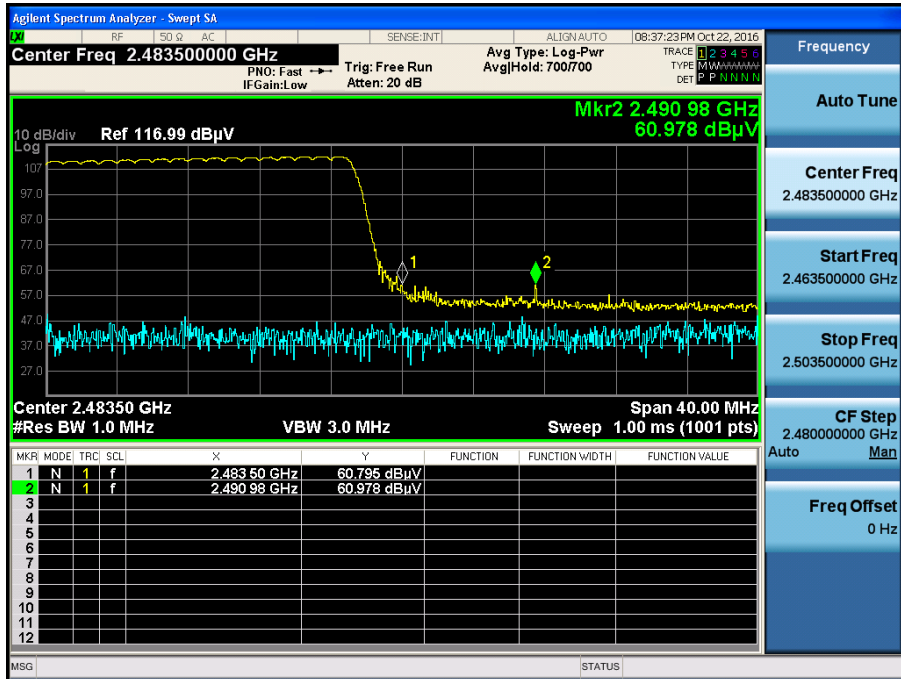


GFSK & Hopping mode & X & Hor

Detector Mode : AV

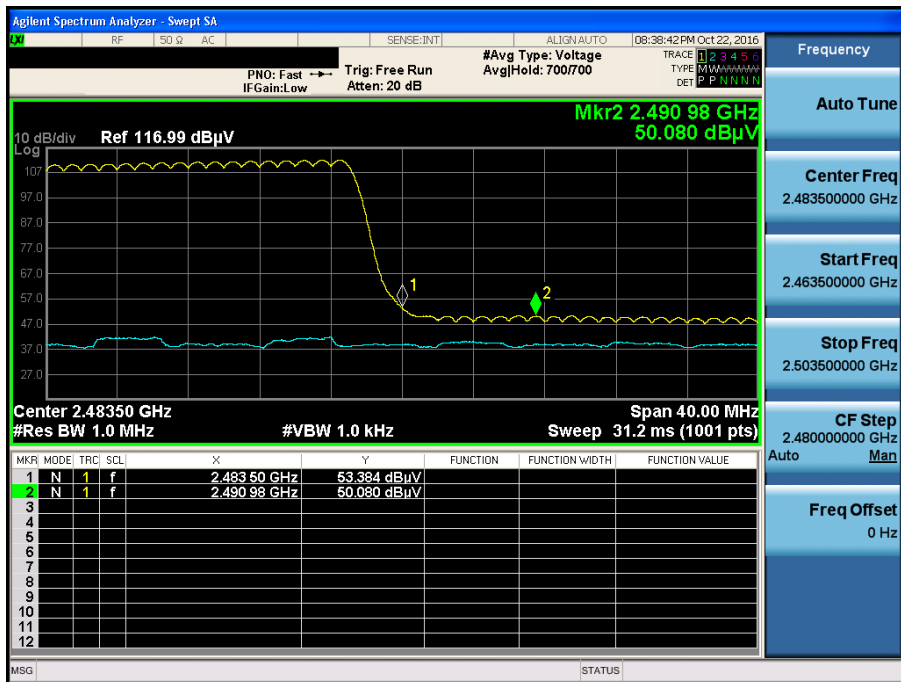


π /4DQPSK & Hopping mode & X & Hor

Detector Mode : PK

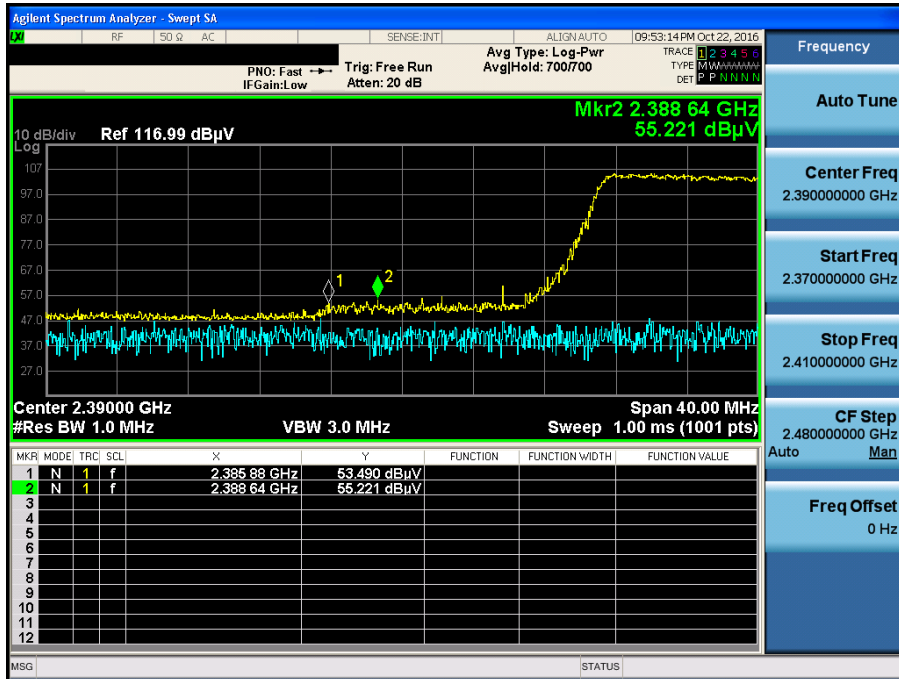


π /4DQPSK & Hopping mode & X & Hor

Detector Mode : AV

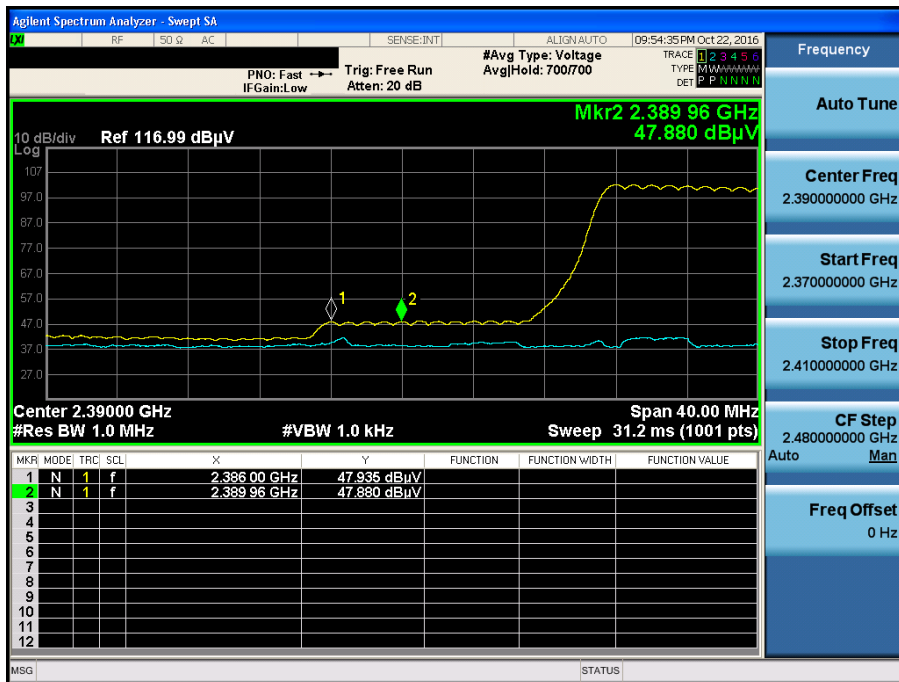


π /4DQPSK & Hopping mode & X & Hor

Detector Mode : PK

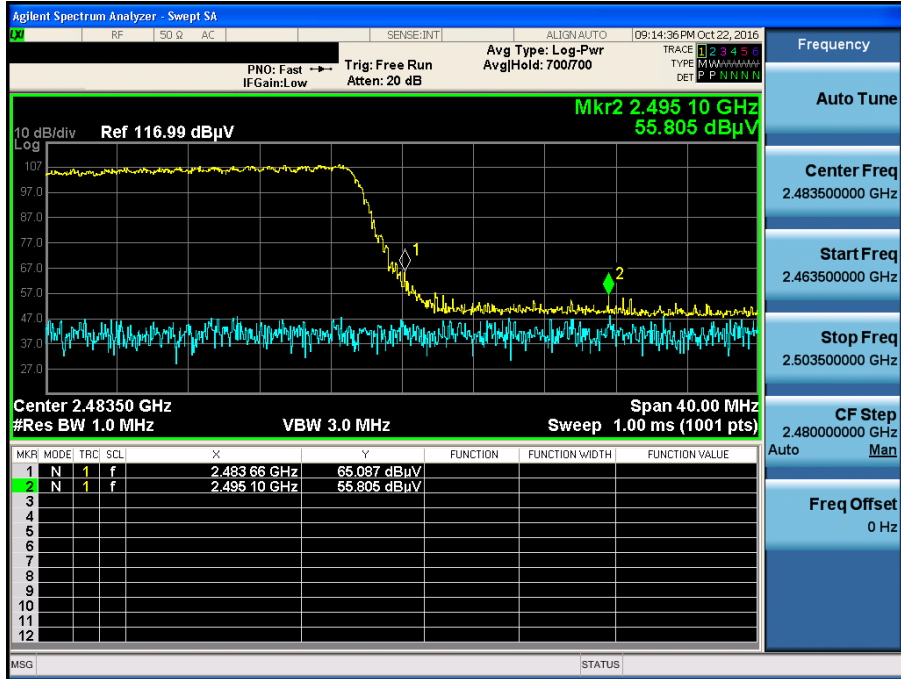


π /4DQPSK & Hopping mode & X & Hor

Detector Mode : AV

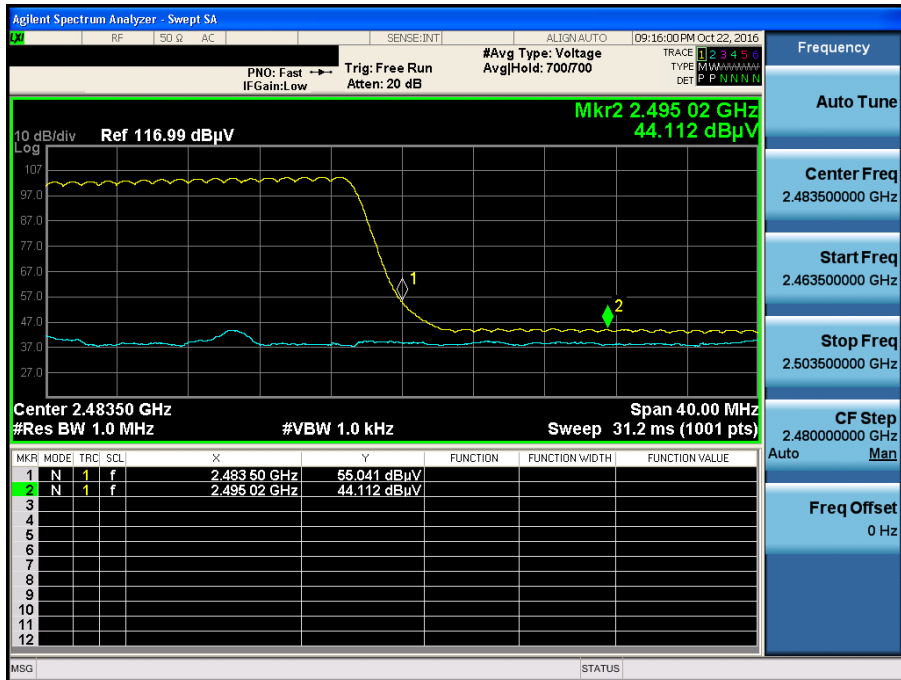


8DPSK & Hopping mode & X & Hor

Detector Mode : PK

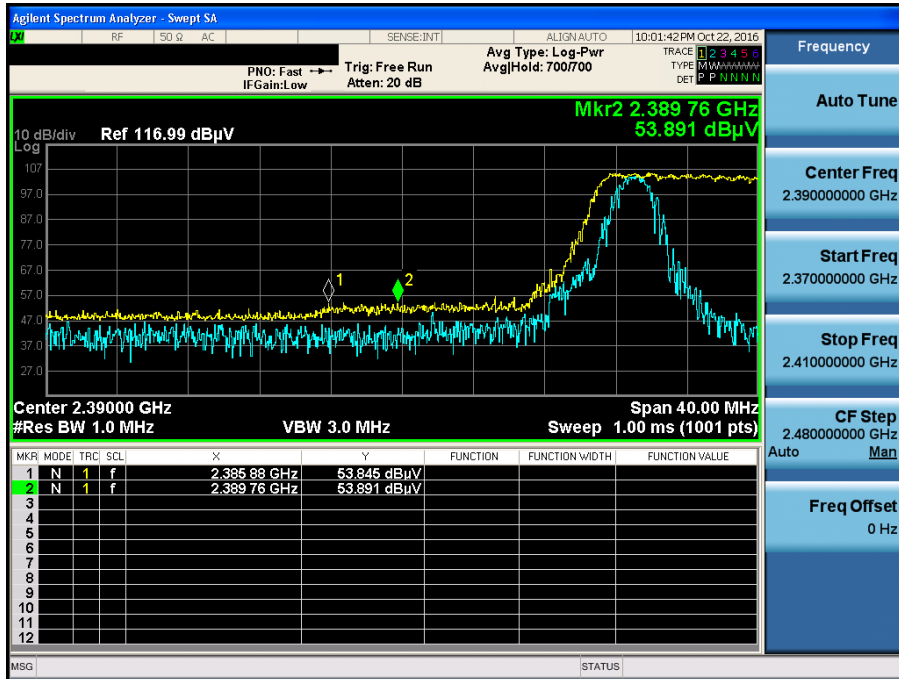


8DPSK & Hopping mode & X & Hor

Detector Mode : AV

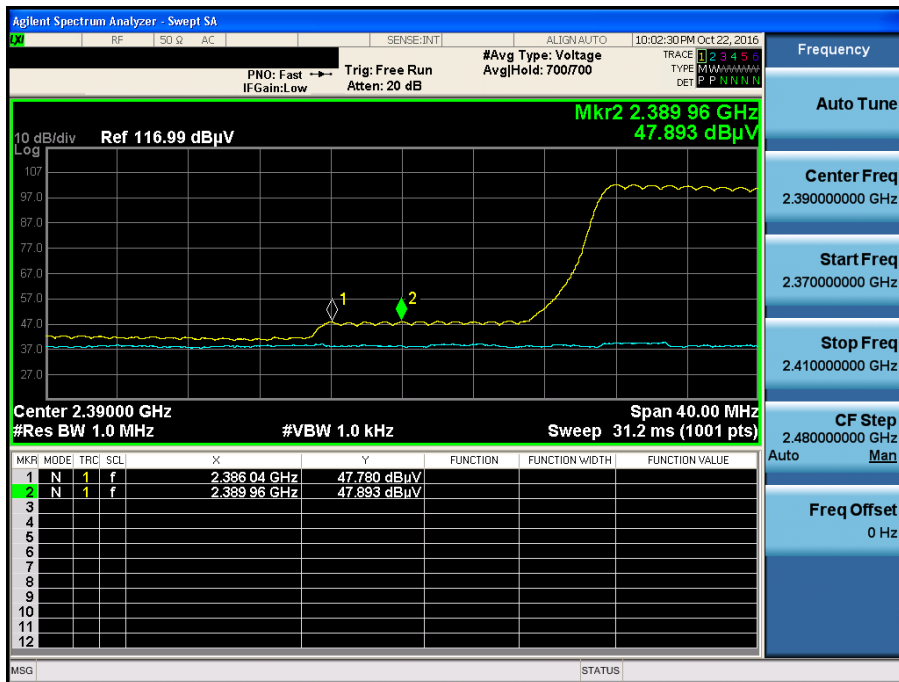

8DPSK & Hopping mode & X & Hor

Detector Mode : PK

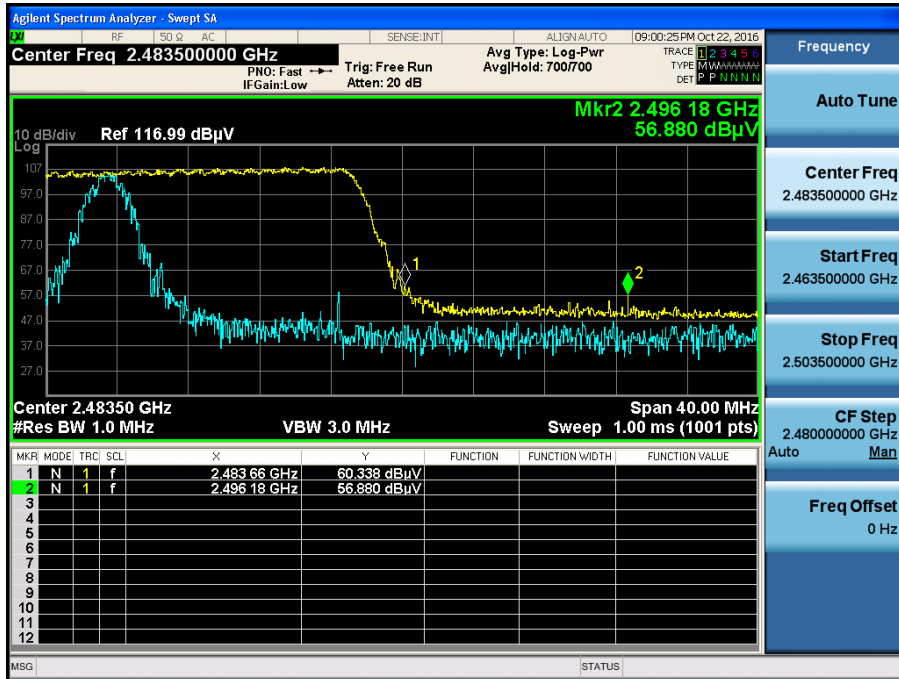

8DPSK & Hopping mode & X & Hor

Detector Mode : AV

