


#### Reference for limit

## Middle Channel & Modulation : π/4DQPSK




## Conducted Spurious Emissions <u>Middle Channel & Modulation : π/4DQPSK</u>

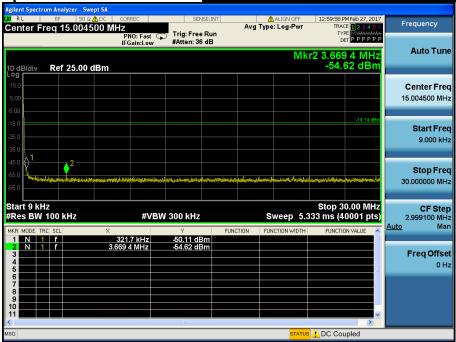



## Conducted Spurious Emissions <u>Middle Channel & Modulation : π/4DQPSK</u>

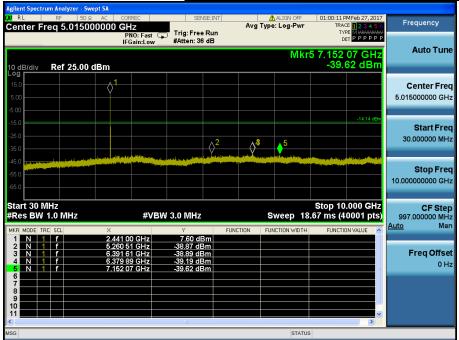







#### Highest Channel & Modulation : π/4DQPSK




## High Band-edge


## Hopping mode & Modulation : π/4DQPSK






Conducted Spurious Emissions <u>Highest Channel & Modulation : π/4DQPSK</u>

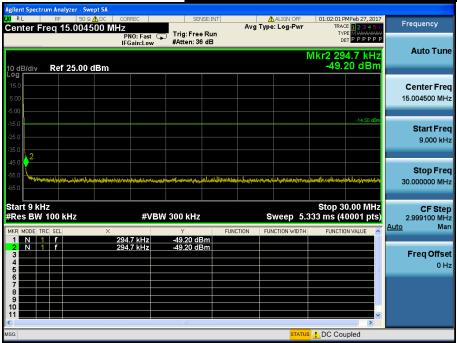

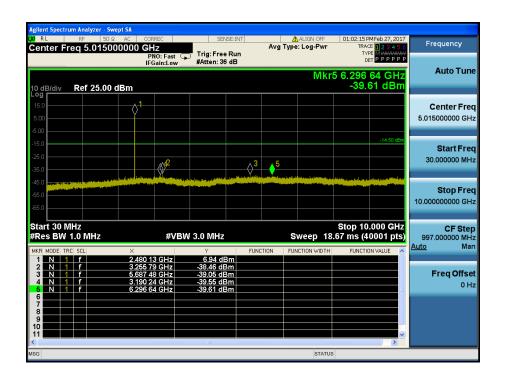

Report No.: DRTFCC1703-0029(1)

## Conducted Spurious Emissions <u>Highest Channel & Modulation : π/4DQPSK</u>

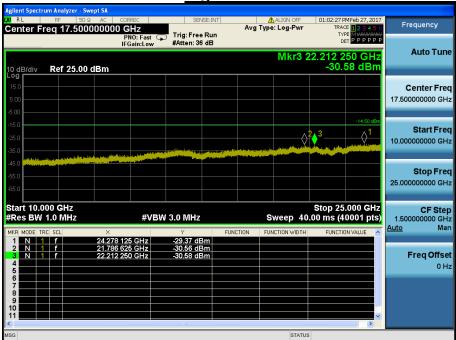



#### Low Band-edge

## **Lowest Channel & Modulation: 8DPSK**




## Low Band-edge


#### Hopping mode & Modulation: 8DPSK





## Conducted Spurious Emissions <u>Lowest Channel & Modulation : 8DPSK</u>

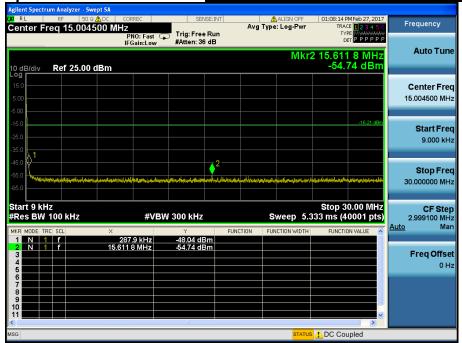

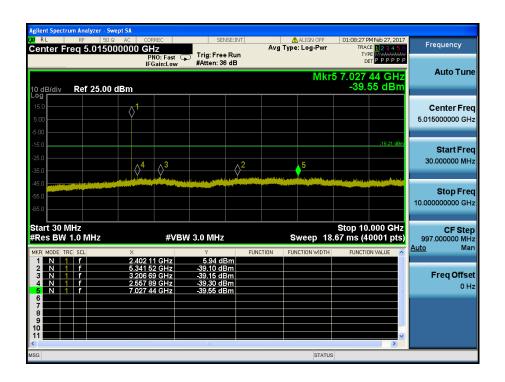








Reference for limit

#### Middle Channel & Modulation: 8DPSK





Conducted Spurious Emissions <u>Middle Channel & Modulation : 8DPSK</u>

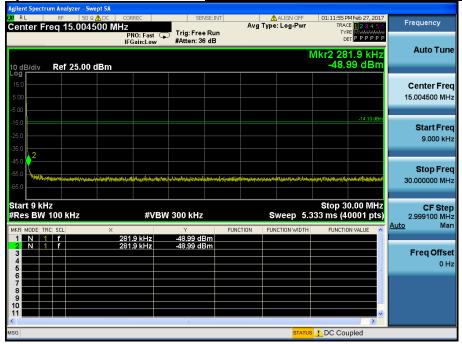





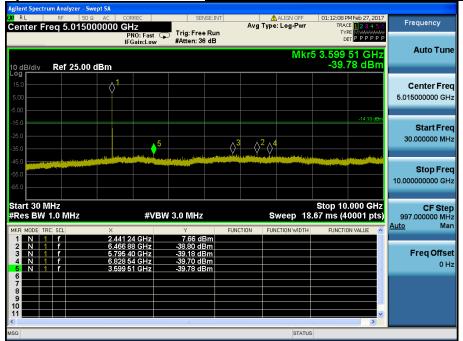

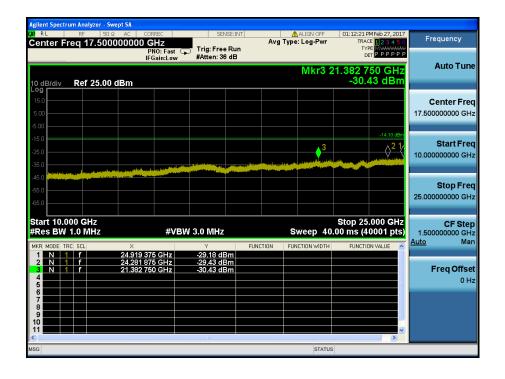





## Highest Channel & Modulation: 8DPSK




## **High Band-edge**


## Hopping mode & Modulation: 8DPSK








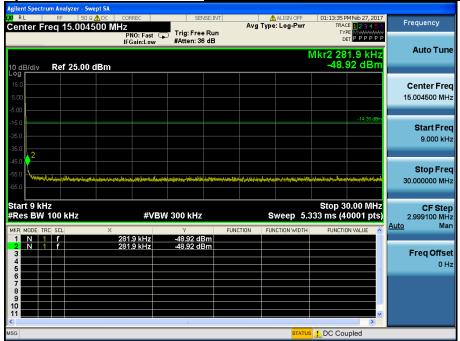

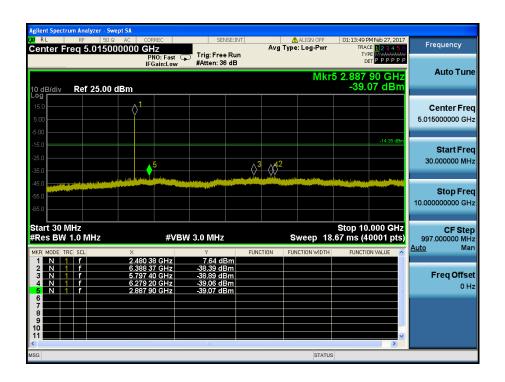






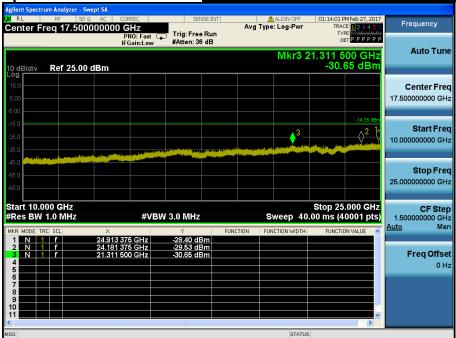




#### 7.4.3.2. Conducted Spurious Emissions\_Module 1

Low Band-edge <u>Lowest Channel & Modulation : GFSK</u>

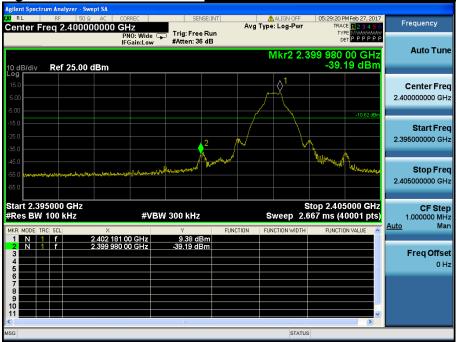





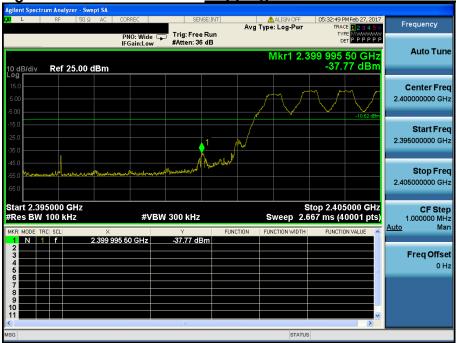

Conducted Spurious Emissions <u>Lowest Channel & Modulation : GFSK</u>

Report No.: DRTFCC1703-0029(1)

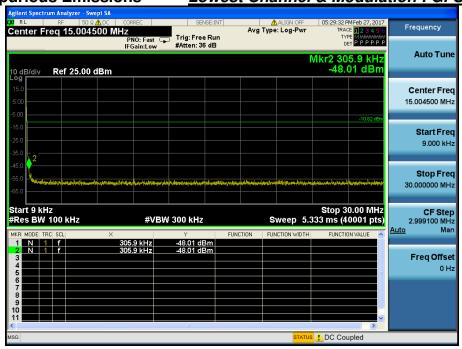

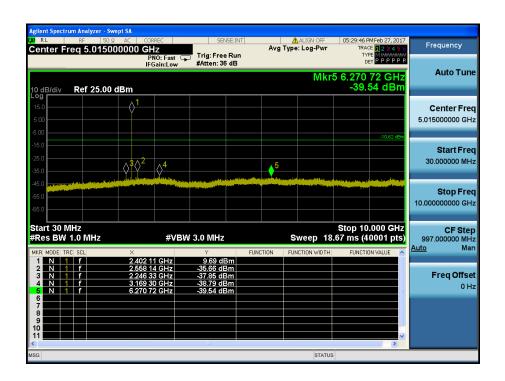












## Middle Channel & Modulation: GFSK





## Conducted Spurious Emissions <u>Middle Channel & Modulation : GFSK</u>

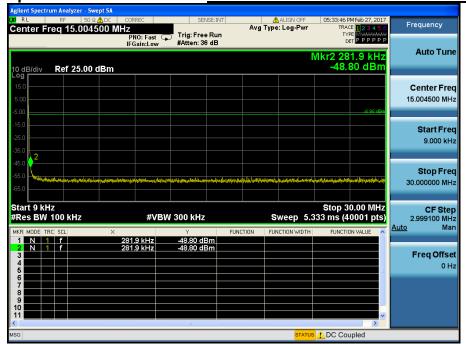





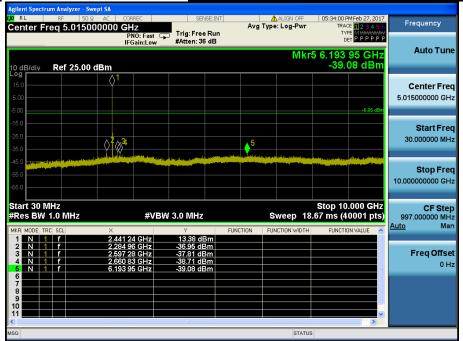

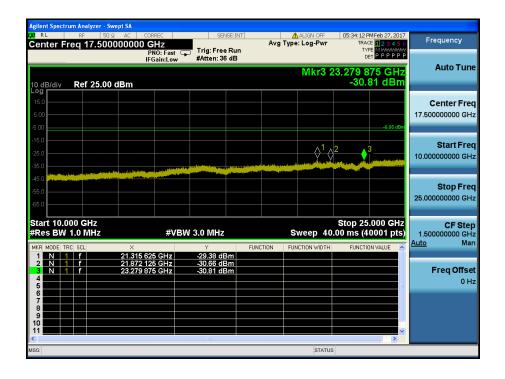





## Highest Channel & Modulation : GFSK




## **High Band-edge**


## Hopping mode & Modulation : GFSK








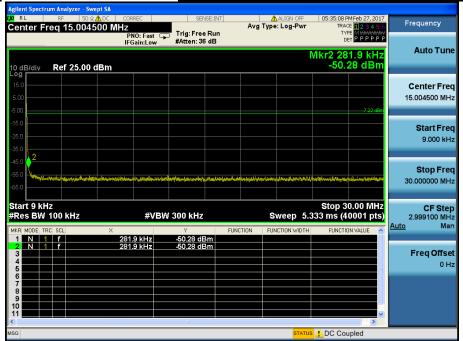

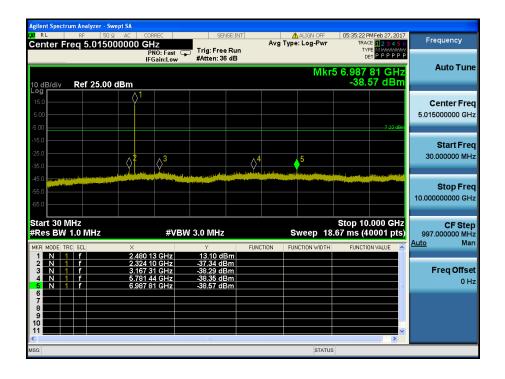





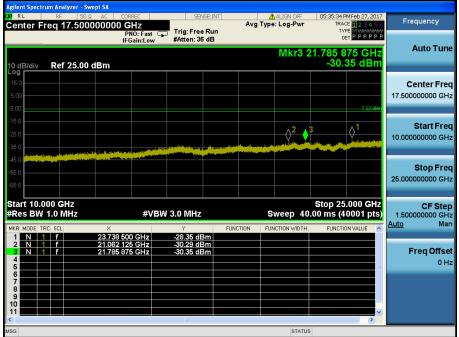





## Lowest Channel & Modulation : π/4DQPSK




## Low Band-edge


## Hopping mode & Modulation : π/4DQPSK






## Conducted Spurious Emissions <u>Lowest Channel & Modulation : π/4DQPSK</u>

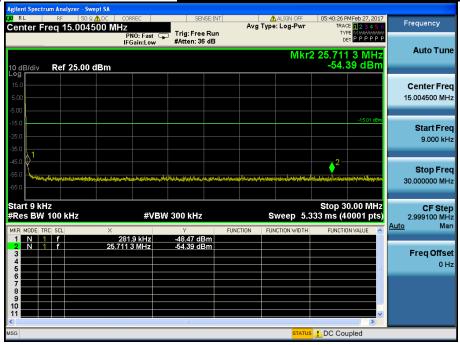

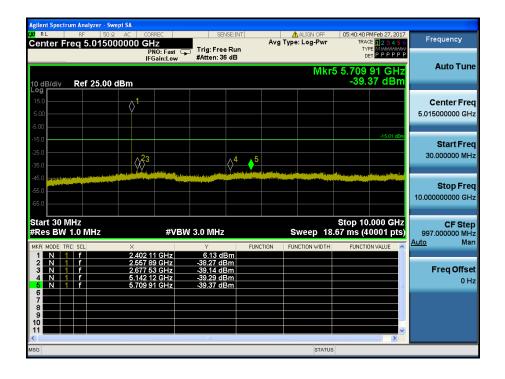





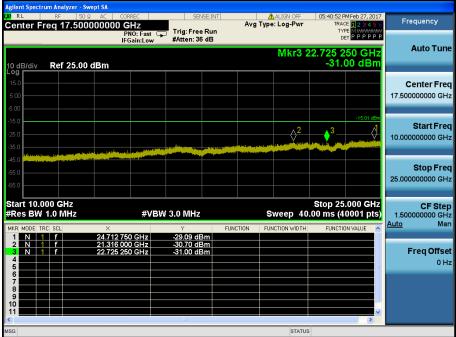






## Middle Channel & Modulation : π/4DQPSK




## Conducted Spurious Emissions <u>Middle Channel & Modulation : π/4DQPSK</u>

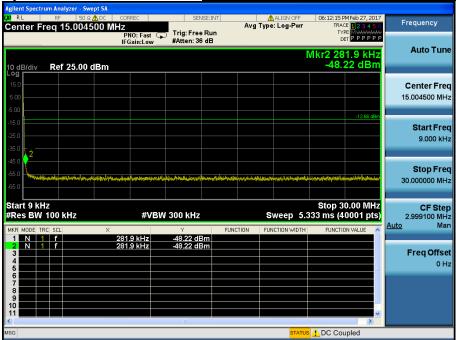



## Conducted Spurious Emissions <u>Middle Channel & Modulation : π/4DQPSK</u>

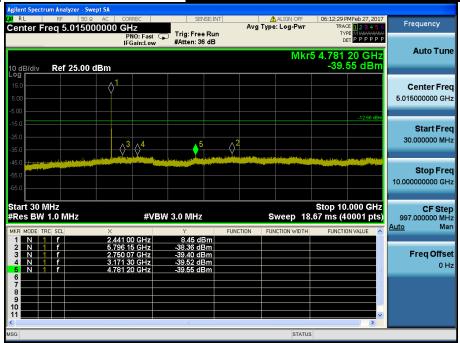







#### Highest Channel & Modulation : π/4DQPSK




## High Band-edge


## Hopping mode & Modulation : π/4DQPSK





## Conducted Spurious Emissions <u>Highest Channel & Modulation : π/4DQPSK</u>

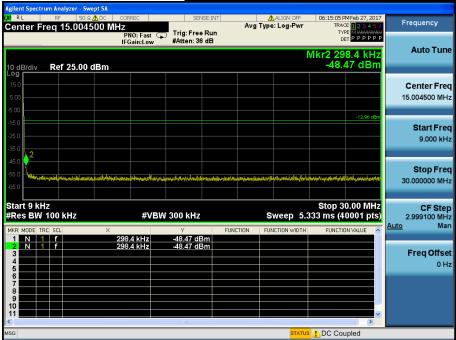

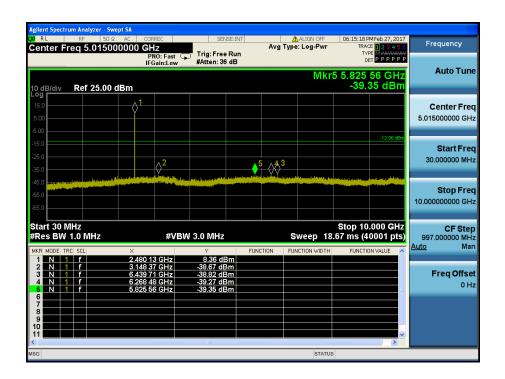











## Lowest Channel & Modulation: 8DPSK




## Low Band-edge


#### Hopping mode & Modulation: 8DPSK






## Conducted Spurious Emissions <u>Lowest Channel & Modulation : 8DPSK</u>

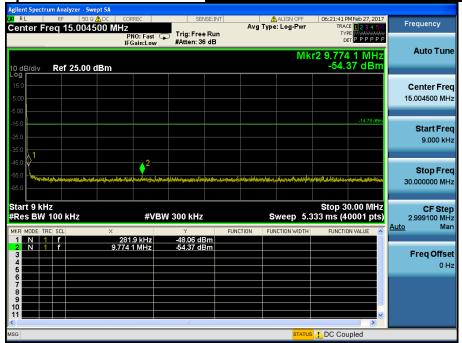

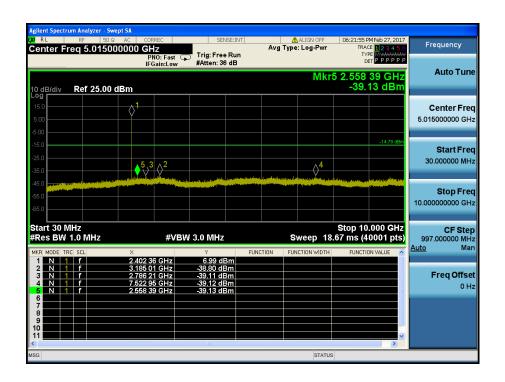





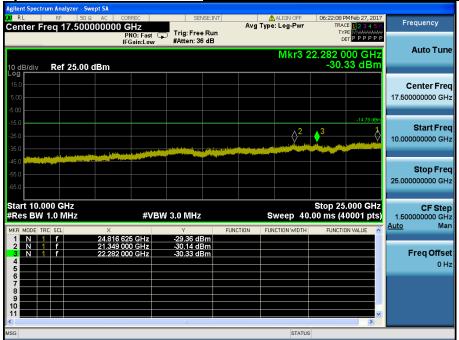






### Middle Channel & Modulation: 8DPSK





## Conducted Spurious Emissions <u>Middle Channel & Modulation : 8DPSK</u>

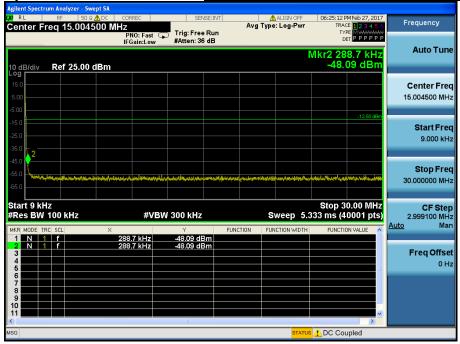



## Conducted Spurious Emissions <u>Middle Channel & Modulation : 8DPSK</u>

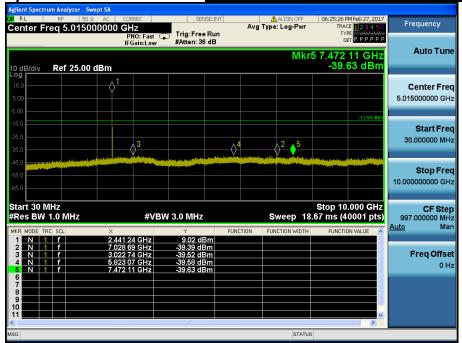

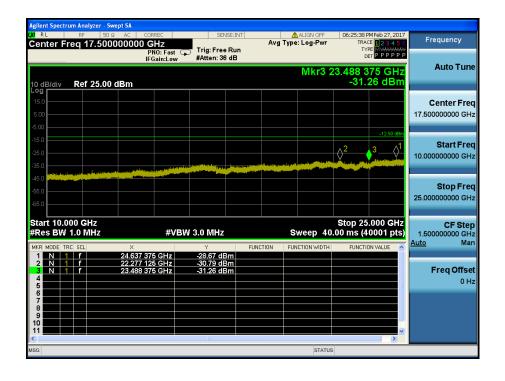





## Highest Channel & Modulation: 8DPSK




## **High Band-edge**


#### Hopping mode & Modulation: 8DPSK





## Conducted Spurious Emissions <u>Highest Channel & Modulation : 8DPSK</u>

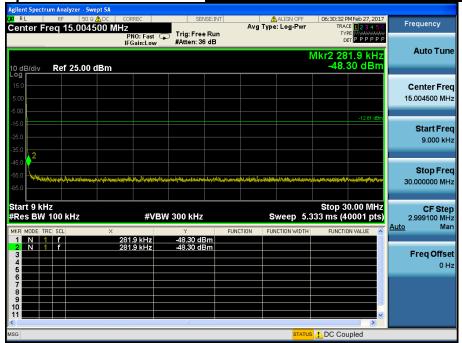

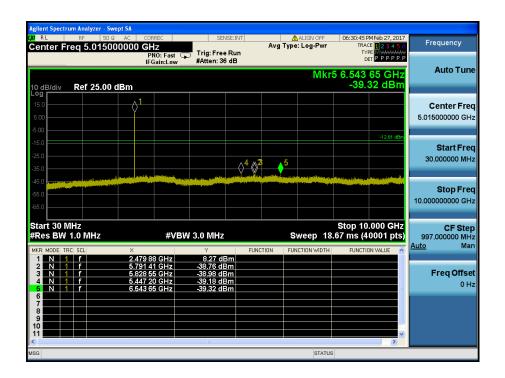







### 8. Transmitter AC Power Line Conducted Emission

#### 8.1 Test Setup

See test photographs for the actual connections between EUT and support equipment.

#### 8.2 Limit

According to §15.207(a) for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 uH/50 ohm line impedance stabilization network (LISN).

Report No.: DRTFCC1703-0029(1)

Compliance with the provision of this paragraph shall on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50

<sup>\*</sup> Decreases with the logarithm of the frequency

#### 8.3 Test Procedures

Conducted emissions from the EUT were measured according to the ANSI C63.10.

- 1. The test procedure is performed in a 6.5 m  $\times$  3.5 m  $\times$  3.5 m (L  $\times$  W  $\times$  H) shielded room. The EUT along with its peripherals were placed on a 1.0 m (W)  $\times$  1.5 m (L) and 0.8 m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane.
- 2. The EUT was connected to power mains through a line impedance stabilization network (LISN) which provides 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room.
- 3. All peripherals were connected to the second LISN and the chassis ground also bounded to the horizontal ground plane of shielded room.
- 4. The excess power cable between the EUT and the LISN was bundled. The power cables of peripherals were unbundled. All connecting cables of EUT and peripherals were moved to find the maximum emission.

#### 8.4 Test Results

NA

Report No.: DRTFCC1703-0029(1)

## 9. Antenna Requirement

Describe how the EUT complies with the requirement that either its antenna is permanently attached, or that it employs a unique antenna connector, for every antenna proposed for use with the EUT.

**Conclusion: Comply** 

The antenna is printed to the internal PCB (Refer to Internal Photo file.)

#### - Minimum Standard:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions.



# 10. Occupied Bandwidth (99 %)

## 10.1 Test Setup

Refer to the APPENDIX I.

#### **10.2 Limit**

Limit: Not Applicable

#### 10.3 Test Procedure

The 99 % power bandwidth was measured with a calibrated spectrum analyzer.

The resolution bandwidth (RBW) shall be in the range of 1 % to 5 % of the occupied bandwidth (OBW) and video bandwidth (VBW) shall be approximately 3 × RBW.

Report No.: DRTFCC1703-0029(1)

Spectrum analyzer plots are included on the following pages.

#### **10.4 Test Results**

#### <Module 0>

Modulation	Tested Channel	Test Results (MHz)
<u>GFSK</u>	Lowest	0.867
	Middle	0.872
	Highest	0.872
π/4DQPSK	Lowest	1.182
	Middle	1.195
	Highest	1.191
<u>8DPSK</u>	Lowest	1.163
	Middle	1.173
	Highest	1.168

<Module 1>

Modulation	Tested Channel	Test Results (MHz)
<u>GFSK</u>	Lowest	0.870
	Middle	0.876
	Highest	0.871
π/4DQPSK	Lowest	1.173
	Middle	1.181
	Highest	1.183
<u>8DPSK</u>	Lowest	1.157
	Middle	1.163
	Highest	1.165

Report No.: DRTFCC1703-0029(1)