

SENA

Dates of Tests: September 15~20, 2010
Test Report S/N: LR500191009A
Test Site : LTA CO., LTD.

CERTIFICATION OF COMPLIANCE

FCC
IC
APPLICANT

S7APARANISD200
8154A-PARANISD200
Sena Technologies, Inc.

Equipment Class	:	Part 15 Spread Spectrum Transmitter (DSS)
Manufacturing Description	:	Bluetooth Serial Adapter
Manufacturer	:	Sena Technologies, Inc.
Model name	:	Parani-SD200
Test Device Serial No.:	:	Identical prototype
Rule Part(s)	:	FCC Part 15.247 Subpart C; ANSI C-63.4-2003 RSS-210 and ISSUE No.: 7 Date: 2007
Frequency Range	:	2402 ~ 2480MHz
RF power	:	Max 4.51dBm - Conducted
Data of issue	:	September 20, 2010

This test report is issued under the authority of:



Kyung-Taek LEE, Technical Manager

The test was supervised by:



Hyun-Chae You, Test Engineer

This test result only responds to the tested sample. It is not allowed to copy this report even partly without the allowance of the test laboratory. This report must not be used by the applicant to claim product endorsement by any agency.



NVLAP LAB Code.: 200723-0

TABLE OF CONTENTS

1. GENERAL INFORMATION'S ----- 3

2. INFORMATION'S ABOUT TEST ITEM ----- 4

3. TEST REPORT ----- 5

 3.1 SUMMARY OF TESTS ----- 5

 3.2 TECHNICAL CHARACTERISTICS TEST ----- 6

 3.2.1 20 dB BANDWIDTH ----- 6

 3.2.2 FIELD STRENGTH OF HARMONICS -Transmitter ----- 9

 3.2.3 FIELD STRENGTH OF HARMONICS -Receiver ----- 11

APPENDIX

 APPENDIX TEST EQUIPMENT USED FOR TESTS ----- 13

1. General information's

1-1 Test Performed

Company name : LTA Co., Ltd.
 Address : 243, Jubug-ri, Yangji-Myeon, Youngin-Si, Kyunggi-Do, Korea. 449-822
 Web site : <http://www.ltalab.com>
 E-mail : chahn@ltalab.com
 Telephone : +82-31-323-6008
 Facsimile : +82-31-323-6010

Quality control in the testing laboratory is implemented as per ISO/IEC 17025 which is the “General requirements for the competents of calibration and testing laboratory”.

1-2 Accredited agencies

LTA Co., Ltd. is approved to perform EMC testing by the following agencies:

Agency	Country	Accreditation No.	Validity	Reference
NVLAP	U.S.A	200723-0	2011-09-30	ECT accredited Lab.
RRL	KOREA	KR0049	2011-06-20	EMC accredited Lab.
FCC	U.S.A	610755	2011-04-22	FCC filing
VCCI	JAPAN	R2133, C2307	2011-06-21	VCCI registration
IC	CANADA	IC5799	2012-05-14	IC filing

3. Test Report

3.1 Summary of tests

FCC Part Section(s)	Parameter	Limit	Test Condition	Status (note 1)
15.249 / 15.209	Field Strength of Harmonics	< 54 dBuV (at 3m)	Radiated	C
15.109	Field Strength	-		C
15.203	Antenna requirement	-	-	C

Note 1: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable

Note 2: The data in this test report are traceable to the national or international standards.

Note 3: This device is only operated by DC

Note 1: Antenna Requirement

→ The Sena Technologies, Inc. FCC ID: S7AS7APARANISD200 unit complies with the requirement of §15.203.

The antenna connector is the reverse screw SMA connector.

Note 2: The sample was tested according to the following specification:
RSS-210 and ISSUE No.: 7 Date: 2007

3.2 Transmitter requirements

3.2.1 20 dB Bandwidth

Procedure:

The bandwidth at 20 dB below the highest inband spectral density was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels..

After the trace being stable, Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

Span = 3 MHz (approximately 2 or 3 times of the 20 dB bandwidth)

RBW = 30 kHz

Sweep = auto

VBW = 30 kHz (VBW \geq RBW)

Detector function = peak

Trace = max hold

Measurement Data: Basic Mode

Frequency (MHz)	Channel No.	Test Results(MHz)
		99% Bandwidth
2402	0	0.864
2441	39	0.860
2480	78	0.860

- See next pages for actual measured spectrum plots.


Minimum Standard:

N/A


Measurement Setup

Same as the Chapter 3.2.1 (Figure 1)

Channel 1 99% Bandwidth

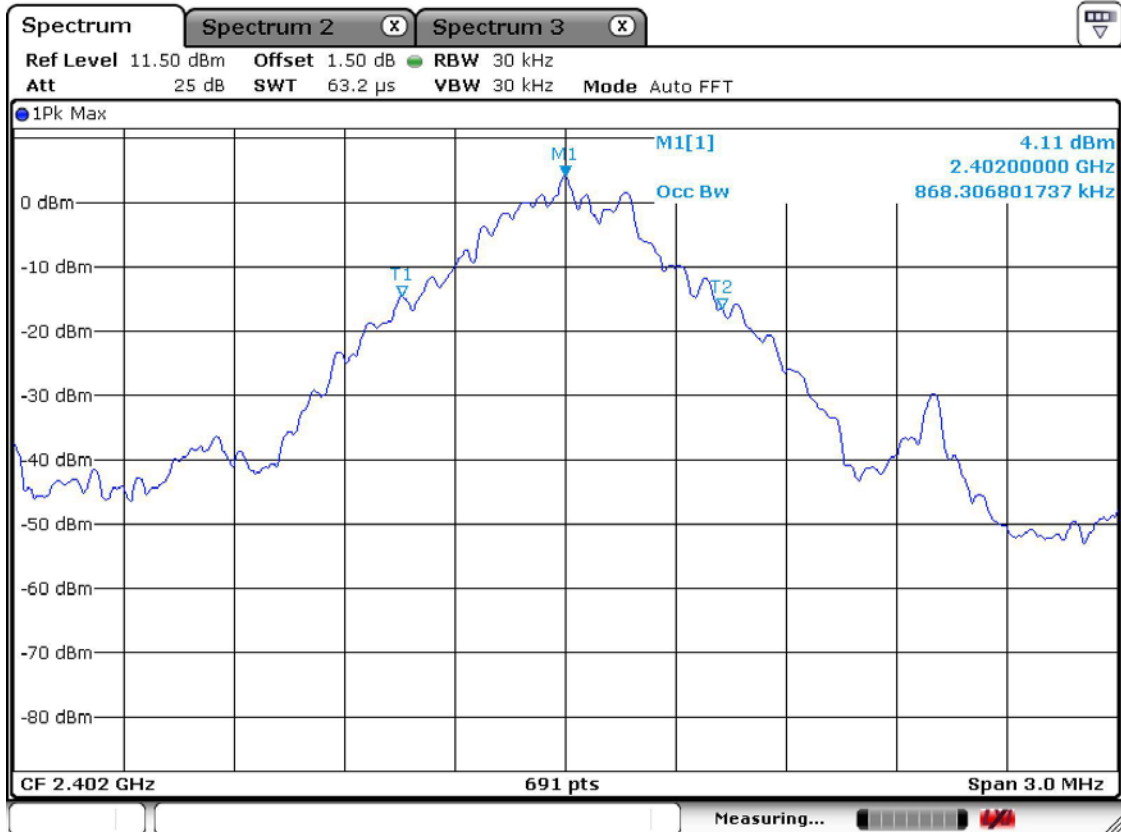


Channel 2 99% Bandwidth

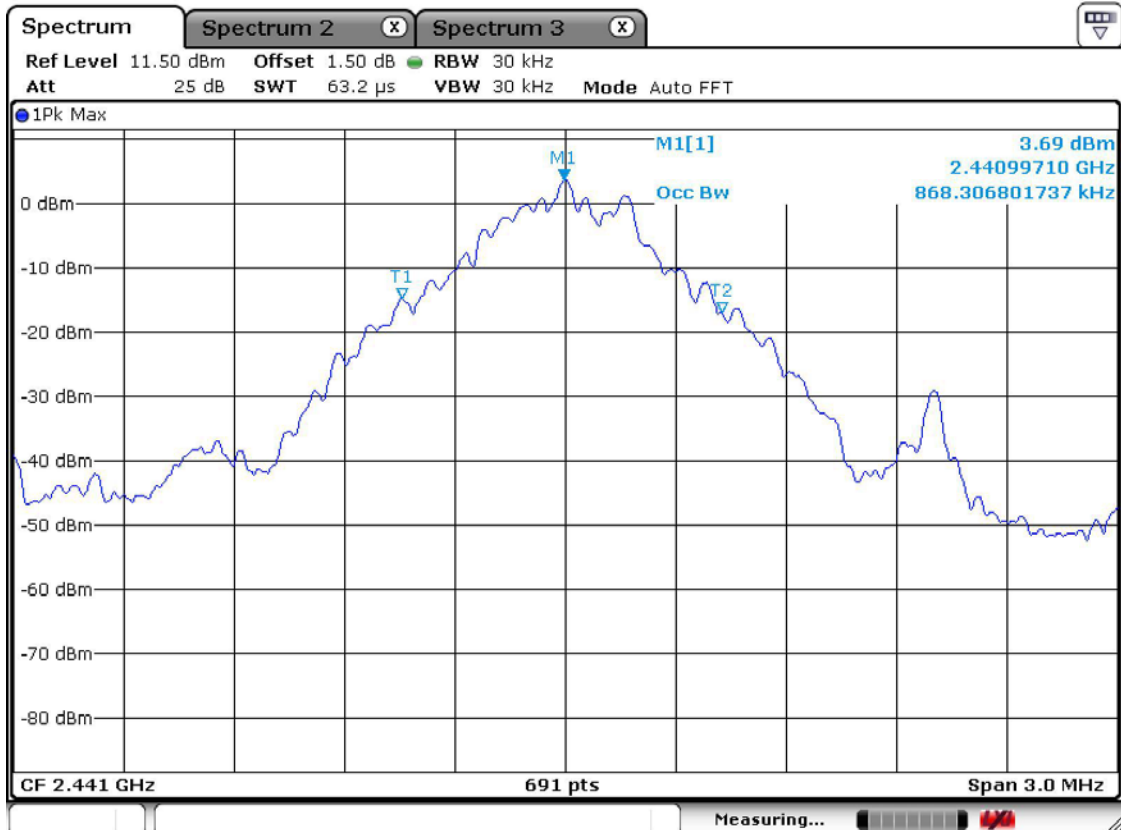

Channel 3

99% Bandwidth

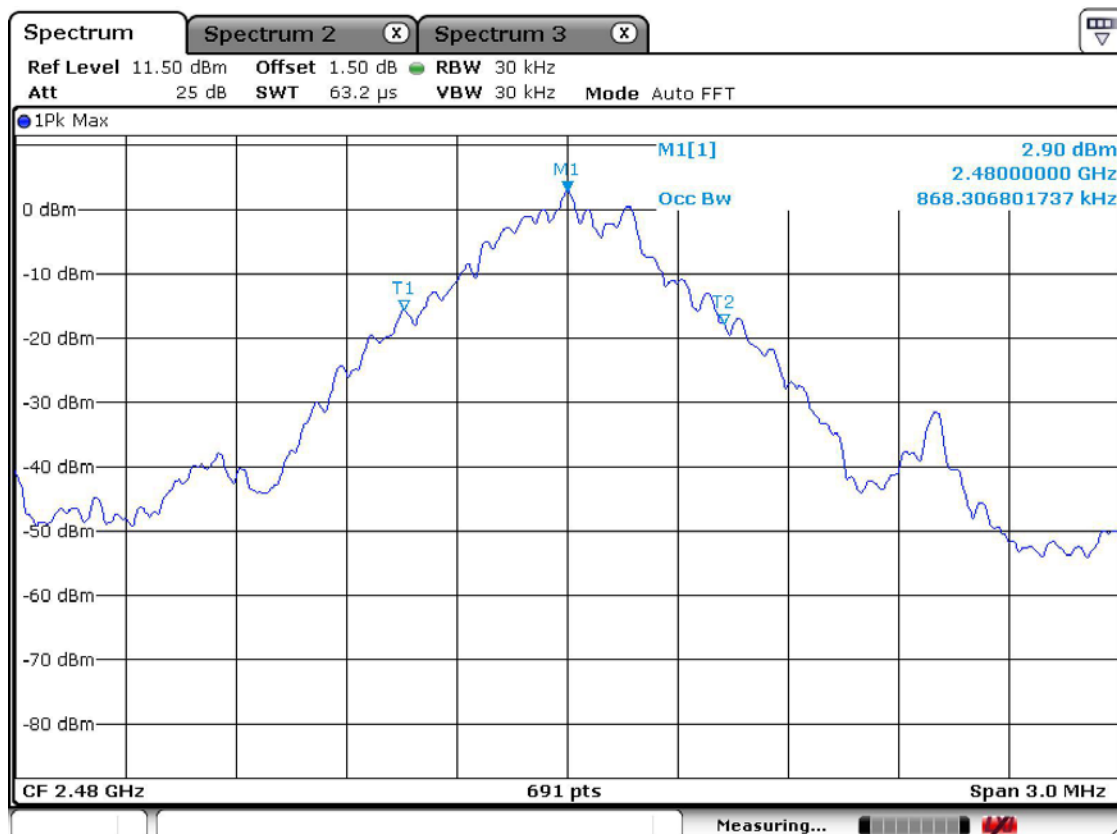

3.2.2 Field Strength of Harmonics - Transmitter

Procedure:

The EUT was placed on a 0.8m high wooden table inside a shielded enclosure. An antenna was placed near the EUT and measurements of frequencies and amplitudes of field strengths were recorded for reference during final measurements. For final radiated testing, measurements were performed in OATS. Measurements were performed with the EUT oriented in 3 orthogonal axis and rotated 360 degrees to determine worst-case orientation for maximum emissions.

The spectrum analyzer is set to:

Center frequency = the worst channel

Frequency Range = 30 MHz ~ 10th harmonic.

RBW = 100 kHz (30MHz ~ 1 GHz)

= 1 MHz (1 GHz ~ 10th harmonic)

Span = 100 MHz

Trace = max hold

Peak:VBW \geq RBW

Average:VBW=10Hz

Detector function = Peak and Average

Sweep = auto

Measurement Data: Complies

- Refer to the next page.
- No other emissions were detected at a level greater than 20dB below limit.
- The three antennas were used with this EUT during the Testing.
- The used antenna is "R-AN2400-1901RS" and it gave the worse case emissions.

Minimum Standard: FCC Part 15.209(a)

Frequency (MHz)	Limit (uV/m) @ 3m
30 ~ 88	100 **
88 ~ 216	150 **
216 ~ 960	200 **
Above 960	500

** Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88MHz, 174-216MHz or 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

Measurement Data:

Frequency [MHz]	Reading [dBuV/m]		Pol.	Correction Factor			Limits [dBuV/m]		Result [dBuV/m]		Margin [dB]	
	AV / Peak			Antenna	Amp.Gain	Cable	AV / Peak		AV / Peak		AV / Peak	
2385.3	36.5	52.1	V	26.0	36.0	8.2	54.0	74.0	34.7	50.3	19.3	23.7
4804.0	34.8	47.5	V	31.4	34.6	8.7	54.0	74.0	40.3	53.0	13.8	21.1
-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-
Frequency [MHz]	Reading [dBuV/m]		Pol.	Correction Factor			Limits [dBuV/m]		Result [dBuV/m]		Margin [dB]	
	AV / Peak			Antenna	Amp.Gain	Cable	AV / Peak		AV / Peak		AV / Peak	
4882.0	37.8	48.2	V	31.4	34.6	8.7	54.0	74.0	43.3	53.7	10.8	20.4
-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-
Frequency [MHz]	Reading [dBuV/m]		Pol.	Correction Factor			Limits [dBuV/m]		Result [dBuV/m]		Margin [dB]	
	AV / Peak			Antenna	Amp.Gain	Cable	AV / Peak		AV / Peak		AV / Peak	
2491.8	36.5	52.1	V	26.0	36.0	8.2	54.0	74.0	34.7	50.3	19.3	23.7
4960.0	37.5	52.1	V	31.4	34.6	8.7	54.0	74.0	43.0	57.6	11.1	16.5
-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-

No other emissions were detected at a level greater than 20dB below limit.

3.2.3 Field Strength of Harmonics -Receiver

Definition:

The field strength of emissions from intentional radiators was measured.

Test method	: FCC Part 15.209
Frequency Range	: 30 MHz ~ 10 th harmonic.
Bandwidth	: 120 kHz (F < 1GHz) 1 MHz (F > 1GHz)
Distance of antenna	: 3 meters
Test mode	: Rx mode
Result	: Complies

Measurement Data:

- No other emissions were detected at a level greater than 20dB below limit.
- Refer to the next page.
- The used antenna is "R-AN2400-1901RS" and it gave the worse case emissions.

Field Strength Limit

Part 15.209 LIMIT:

Frequency (MHz)	Limit (uV/m) @ 3m
30 ~ 88	100**
88 ~ 216	150**
216 ~ 960	200**
Above 960	500

** Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88MHz, 174-216MHz or 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

Measurement Data:

Frequency [MHz]	Reading [dBuV/m]		Pol.	Correction Factor			Limits [dBuV/m]		Result [dBuV/m]		Margin [dB]	
	AV / Peak			Antenna	Amp.Gain	Cable	AV / Peak		AV / Peak		AV / Peak	
	2404.3	34.8		36.2	V	26.0	36.0	8.2	54.0	74.0	33.0	34.4
Frequency [MHz]	Reading [dBuV/m]		Pol.	Correction Factor			Limits [dBuV/m]		Result [dBuV/m]		Margin [dB]	
	AV / Peak			Antenna	Amp.Gain	Cable	AV / Peak		AV / Peak		AV / Peak	
	2443.3	35.1		37.5	V	26.0	36.0	8.2	54.0	74.0	33.3	35.7
Frequency [MHz]	Reading [dBuV/m]		Pol.	Correction Factor			Limits [dBuV/m]		Result [dBuV/m]		Margin [dB]	
	AV / Peak			Antenna	Amp.Gain	Cable	AV / Peak		AV / Peak		AV / Peak	
	2482.1	34.2		35.9	V	26.0	36.0	8.2	54.0	74.0	32.4	34.1
-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-

No other emissions were detected at a level greater than 20dB below limit.

APPENDIX

TEST EQUIPMENT USED FOR TESTS

	Description	Model No.	Serial No.	Manufacturer	Next Cal. Date
1	Spectrum Analyzer	FSV-30	100757	R&S	Feb-11
2	Spectrum Analyzer	8563E	3425A02505	HP	Mar-11
3	Spectrum Analyzer	8594E	3710A04074	HP	Oct-10
4	Signal Generator	8648C	3623A02597	HP	Mar-11
5	Signal Generator	83711B	US34490456	HP	Mar-11
6	Attenuator (3dB)	8491A	37822	HP	Oct-10
7	Attenuator (10dB)	8491A	63196	HP	Oct-10
8	Attenuator (30dB)	8498A	1801A06689	HP	Oct-10
9	EMI Test Receiver	ESVD	843748/001	R&S	Mar-11
10	Horn Antenna(18 ~ 40GHz)	SAS-574	154	Schwarzbeck	Nov-10
11	Horn Antenna(18 ~ 40GHz)	SAS-574	155	Schwarzbeck	Nov-10
12	RF Amplifier	8447D	2949A02670	HP	Oct-10
13	RF Amplifier	8449B	3008A02126	HP	Mar-11
14	Test Receiver	ESHS10	828404/009	R&S	Mar-11
15	TRILOG Antenna	VULB 9160	9160-3212	SCHWARZBECK	Apr-11
16	Log.-Per. Antenna	VULP 9118	9118 A 401	SCHWARZBECK	Apr-11
17	Biconical Antenna	BBA 9106	VHA 9103-2315	SCHWARZBECK	Apr-11
18	Horn Antenna	3115	00055005	ETS LINDGREN	Mar-11
19	Horn Antenna	BBHA 9120D	9120D122	SCHWARZBECK	Dec-11
20	Dipole Antenna	VHA9103	2116	SCHWARZBECK	Nov-10
21	Dipole Antenna	VHA9103	2117	SCHWARZBECK	Nov-10
22	Dipole Antenna	VHA9105	2261	SCHWARZBECK	Nov-10
23	Dipole Antenna	VHA9105	2262	SCHWARZBECK	Nov-10
24	Hygro-Thermograph	THB-36	0041557-01	ISUZU	Mar-11
25	Splitter (SMA)	ZFSC-2-2500	SF617800326	Mini-Circuits	-
26	RF Switch	MP59B	6200414971	ANRITSU	-
27	Power Divider	11636A	6243	HP	Oct-10
28	DC Power Supply	6622A	3448A03079	HP	Oct-10
29	Frequency Counter	5342A	2826A12411	HP	Mar-11
30	Power Meter	EPM-441A	GB32481702	HP	Mar-11
31	Power Sensor	8481A	2702A64048	HP	Mar-11
32	Audio Analyzer	8903B	3729A18901	HP	Oct-10
33	Modulation Analyzer	8901B	3749A05878	HP	Oct-10
34	TEMP & HUMIDITY Chamber	YJ-500	LTAS06041	JinYoung Tech	Oct-10
35	LOOP-ANTENNA	FMZB 1516	151602/94	SCHWARZBECK	Mar-11
36	Stop Watch	HS-3	601Q09R	CASIO	Mar-11
37	LISN	ENV216	100408	R&S	Oct-10
38	UNIVERSAL RADIO COMMUNICATION TESTER	CMU200	106243	R&S	May-12