

TEST REPORT

Reference No. : WTD14S0111091E
FCC ID : S7GISBN504W
Applicant : DONG GUAN WANG NIU DUN WELLCOM ELECTRONICS
FACTORY
Address : Xia Wu Lane, WangLian Hamlet, WangNiuDun Town, DongGuan City,
GuangDong Province, China
Manufacturer : DONG GUAN WELLCOM ELECTRONICS COMPANY LIMITED
Address : NANYU INDUSTRIAL PARK, NANCHANG ROAD, WANGNIUDUN
TOWN, DONGGUAN CITY, CHINA
Product Name : Bluetooth speaker
Model No. : ISBN504W, W-338B
Trademark : WELLCOM for W-338B
ILIVE for ISBN504W
Standards : FCC CFR47 Part 15 C Section 15.247:2012
Date of Receipt sample..... : Feb.06, 2014
Date of Test : Feb.07~12, 2014
Date of Issue : Feb.26, 2014
Test Result : **Pass ***

***Remarks:**

The results shown in this test report refer only to the sample(s) tested; this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Services (Shenzhen) Co., Ltd.

Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen,
Guangdong, China

Testing location: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District,
Shenzhen, Guangdong, China

Tel :+86-755-83551033


Fax:+86-755-83552400

Compiled by:



Zero Zhou / Project Engineer

Approved by:



Philo Zhong / Manager

2 Test Summary

Test Items	Test Requirement	Result
Conducted Emissions	15.207	PASS
Spurious Radiated Emissions	15.205(a) 15.209 15.247(d)	PASS
Band edge Emissions	15.247(d)	PASS
20dB Bandwidth	15.215c 15.247(a)(1)	PASS
Maximum Peak Output Power	15.247(b)(1)	PASS
Frequency Separation	15.247(a)(1)	PASS
Number of Hopping Frequency	15.247(a)(1)(iii)	PASS
Dwell time	15.247(a)(1)(iii)	PASS
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	PASS

3 Contents

Page

1	COVER PAGE	1
2	TEST SUMMARY	2
3	CONTENTS	3
4	GENERAL INFORMATION	5
4.1	GENERAL DESCRIPTION OF E.U.T	5
4.2	DETAILS OF E.U.T	5
4.3	CHANNEL LIST	5
4.4	TEST FACILITY	6
4.5	TEST LOCATION	6
4.5.2	Test Mode	6
5	EQUIPMENT USED DURING TEST	7
5.1	EQUIPMENTS LIST	7
5.2	MEASUREMENT UNCERTAINTY	7
5.3	TEST EQUIPMENT CALIBRATION	7
6	CONDUCTED EMISSION TEST	8
6.1	E.U.T. TEST CONDITION	8
6.2	EUT SETUP	8
6.3	CONDUCTED EMISSION TEST RESULT	9
7	SPURIOUS RADIATED EMISSIONS	11
7.1	EUT OPERATION :	11
7.2	TEST SETUP	12
7.3	SPECTRUM ANALYSER SETUP	13
7.4	TEST PROCEDURE	14
7.5	CORRECTED AMPLITUDE & MARGIN CALCULATION	14
7.6	SUMMARY OF TEST RESULTS	15
8	BAND EDGE EMISSIONS	18
8.1	TEST PROCEDURE	18
8.2	TEST RESULT	18
9	20 DB BANDWIDTH MEASUREMENT	22
9.1	TEST PROCEDURE:	22
9.2	TEST RESULT:	22
10	MAXIMUM PEAK OUTPUT POWER	28
10.1	TEST PROCEDURE:	28
10.2	TEST RESULT:	28
11	HOPPING CHANNEL SEPARATION	34
11.1	TEST PROCEDURE:	34
11.2	TEST RESULT:	34
12	NUMBER OF HOPPING FREQUENCY	40
12.1	TEST PROCEDURE:	40
12.2	TEST RESULT:	40
13	DWELL TIME	42
13.1	TEST PROCEDURE:	42
13.2	TEST RESULT:	42

14	ANTENNA REQUIREMENT.....	58
15	RF EXPOSURE	59
15.1	REQUIREMENTS:	59
15.2	THE PROCEDURES / LIMIT	59
15.3	MPE CALCULATION METHOD.....	60
16	PHOTOGRAPHS – TEST SETUP	61
16.1	PHOTOGRAPH –POWER LINE CONDUCTED EMISSION TEST SETUP	61
16.2	PHOTOGRAPH – RADIATED EMISSION TEST SETUP	61
17	PHOTOGRAPHS - CONSTRUCTIONAL DETAILS.....	63
17.1	EUT – APPEARANCE VIEW.....	63
17.2	EUT – INTERNAL VIEW.....	68
17.3	EUT – RF MODULE VIEW	73

4 General Information

4.1 General Description of E.U.T.

Product Name	: Bluetooth speaker
Model No.	: ISBN504W, W-338B
Model Description	: Only the model name and trademark are different. The ISBN504W is customer model, the W-338B is factory model.
Operation Frequency	: 2402 ~ 2480MHz, 79 channels in total
Type of Modulation	: GFSK, Pi/4DQPSK, 8DPSK
Lowest OSC Frequency	: 16MHz
Antenna installation	: PCB Printed Antenna
Antenna Gain	: 0dBi

4.2 Details of E.U.T.

Technical Data	: DC 5V, 2A powered by adapter Adapter input: AC100-240V~ 50/60Hz, 0.3A
Adapter	: Model: CP0520

4.3 Channel List

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2402	2	2403	3	2404	4	2405
5	2406	6	2407	7	2408	8	2409
9	2410	10	2411	11	2412	12	2413
13	2414	14	2415	15	2416	16	2417
17	2418	18	2419	19	2420	20	2421
21	2422	22	2423	23	2424	24	2425
25	2426	26	2427	27	2428	28	2429
29	2430	30	2431	31	2432	32	2433
33	2434	34	2435	35	2436	36	2437
37	2438	38	2439	39	2440	40	2441
41	2442	42	2443	43	2444	44	2445
45	2446	46	2447	47	2448	48	2449
49	2450	50	2451	51	2452	52	2453
53	2454	54	2455	55	2456	56	2457
57	2458	58	2459	59	2460	60	2461
61	2462	62	2463	63	2464	64	2465
65	2466	66	2467	67	2468	68	2469
69	2470	70	2471	71	2472	72	2473
73	2474	74	2475	75	2476	76	2477
77	2478	78	2479	79	2480	-	-

4.4 Test Facility

The test facility has a test site registered with the following organizations:

- **IC – Registration No.: 7760A-1**

Waltek Services (Shenzhen) Co., Ltd. has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files.

Registration 7760A-1, July 12, 2012.

- **FCC – Registration No.: 880581**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 880581, May 26, 2011.

4.5 Test Location

All the tests were performed at:

Waltek Services(Shenzhen) Co., Ltd. at 1/F, Fukangtai Building, West Baima Rd., Songgang Street, Baoan District, Shenzhen, China

4.5.2 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting	2402MHz	2441MHz	2480MHz

5 Equipment Used during Test

5.1 Equipments List

Conducted Emissions at Mains Terminals Disturbance Voltage						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	100947	Sep.18,2013	Sep.17,2014
2.	LISN	R&S	ENV216	101215	Nov. 29,2013	Nov. 28,2014
3.	Cable	Top	TYPE16(3.5M)	-	Sep.18,2013	Sep.17,2014
3m Semi-anechoic Chamber for Radiation Emissions						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMC Analyzer	Agilent	E7405A	MY45114943	Sep.21,2013	Sep.20,2014
2	Active Loop Antenna	Beijing Dazhi	ZN30900A	-	Sep.18,2013	Sep.17,2014
3	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	Apr.20,2013	Apr.19,2014
4	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	Sep.18,2013	Sep.17,2014
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	Apr.20,2013	Apr.19,2014
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	Apr.20,2013	Apr.19,2014
7	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	Apr.07,2013	Apr.06,2014
8	Coaxial Cable (above 1GHz)	Top	1GHz-25GHz	EW02014-7	Apr.20,2013	Apr.19,2014

5.2 Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-6}$
Bandwidth	$\pm 1.5 \times 10^{-6}$
RF Power	± 1.0 dB
RF Power Density	± 2.2 dB
DC Source	$\pm 0.05\%$
Radiated Emissions test	± 5.03 dB (Bilog antenna 30M~1000MHz)
	± 5.47 dB (Horn antenna 1000M~25000MHz)
Conducted Spurious Emissions test	± 3.64 dB (150kHz~30MHz)

5.3 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.

6 Conducted Emission Test

Test Requirement:	FCC Part15 Paragraph 15.207
Test Method:	ANSI C63.4: 2003
Test Result:	PASS
Frequency Range:	150kHz to 30MHz
Class:	Class B
Limit:	66-56 dB μ V between 0.15MHz & 0.5MHz 56 dB μ V between 0.5MHz & 5MHz 60 dB μ V between 5MHz & 30MHz
Detector:	Peak for pre-scan (9kHz Resolution Bandwidth) Quasi-Peak & Average if maximised peak within 6dB of Average Limit

6.1 E.U.T. Test Condition

Operating Environment:

Temperature: 22°C

Humidity: 52.5 % RH

Atmospheric Pressure: 101.1kPa

EUT Operation:


The pre-test was performed in Bluetooth transmitting mode, and the test data were shown as follow.

The EUT was tested according to ANSI C63.4:2003. The frequency spectrum from 150kHz to 30MHz was investigated.

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.


6.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.4:2003.

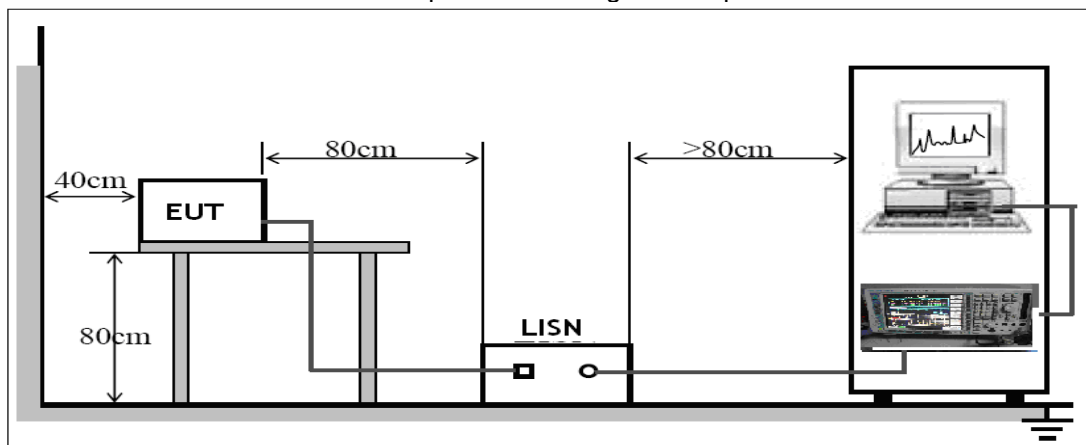


6.3 Conducted Emission Test Result

Live line:

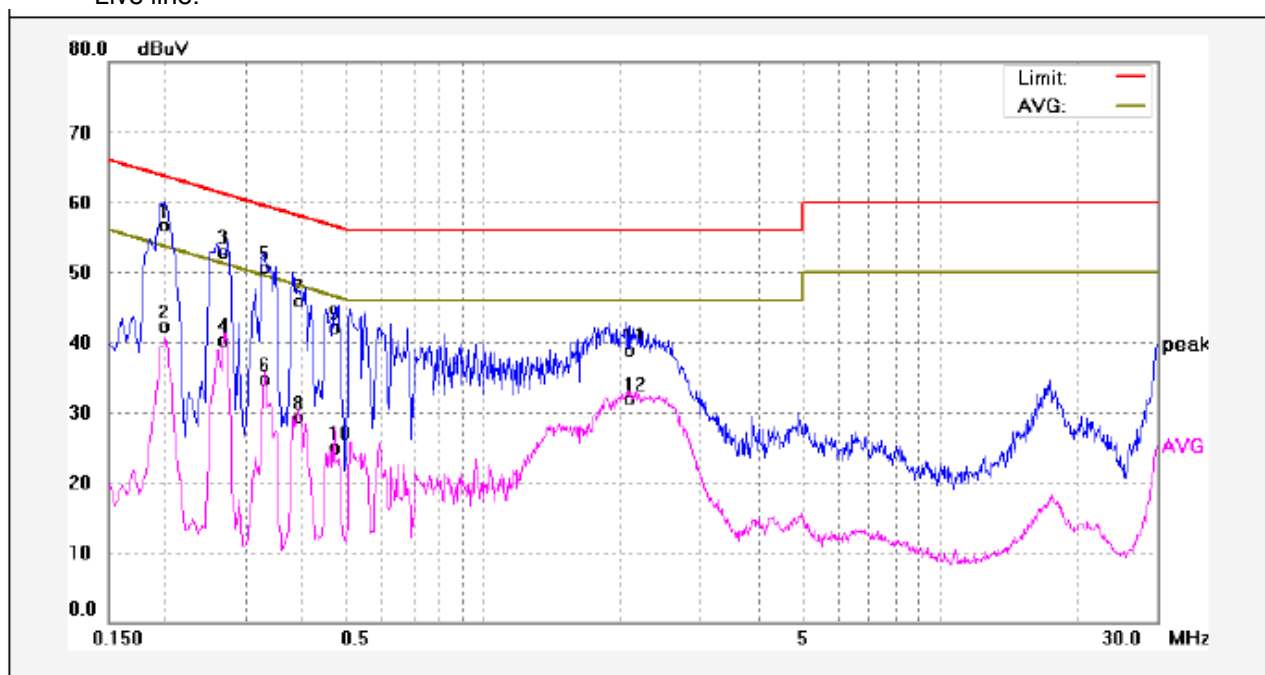

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.2000	46.89	9.84	56.73	63.61	-6.88	QP	
2	0.2000	32.44	9.84	42.28	53.61	-11.33	AVG	
3	0.2700	43.02	9.86	52.88	61.12	-8.24	QP	
4	0.2700	30.41	9.86	40.27	51.12	-10.85	AVG	
5	0.3300	40.79	9.88	50.67	59.45	-8.78	QP	
6	0.3300	24.85	9.88	34.73	49.45	-14.72	AVG	
7	0.3899	35.95	9.90	45.85	58.06	-12.21	QP	
8	0.3899	19.47	9.90	29.37	48.06	-18.69	AVG	
9	0.4700	32.15	9.92	42.07	56.51	-14.44	QP	
10	0.4700	14.96	9.92	24.88	46.51	-21.63	AVG	
11	2.0800	28.94	10.00	38.94	56.00	-17.06	QP	
12	2.0800	21.98	10.00	31.98	46.00	-14.02	AVG	

Neutral line:

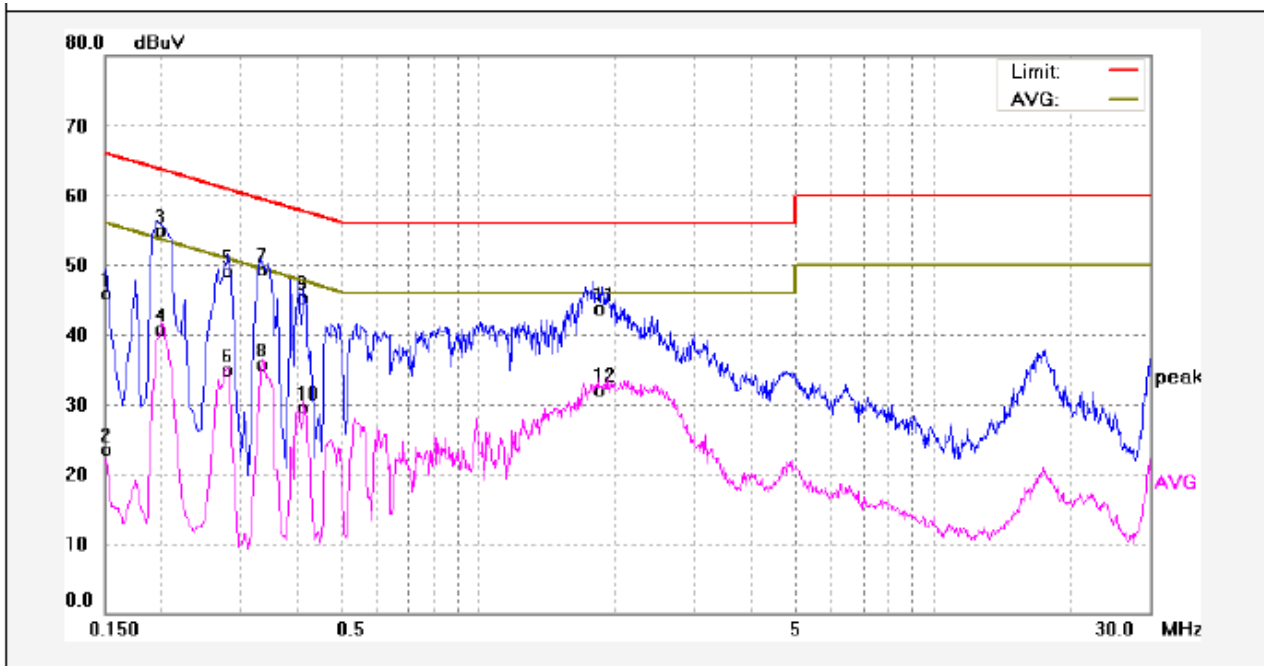

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1500	36.04	9.80	45.84	65.99	-20.15	QP	
2	0.1500	13.75	9.80	23.55	55.99	-32.44	AVG	
3	0.2000	45.05	9.84	54.89	63.61	-8.72	QP	
4	0.2000	30.79	9.84	40.63	53.61	-12.98	AVG	
5	0.2800	39.16	9.86	49.02	60.81	-11.79	QP	
6	0.2800	25.12	9.86	34.98	50.81	-15.83	AVG	
7	0.3350	39.43	9.88	49.31	59.32	-10.01	QP	
8	0.3350	25.92	9.88	35.80	49.32	-13.52	AVG	
9	0.4100	35.34	9.90	45.24	57.65	-12.41	QP	
10	0.4100	19.65	9.90	29.55	47.65	-18.10	AVG	
11	1.8350	33.64	10.00	43.64	56.00	-12.36	QP	
12	1.8350	22.03	10.00	32.03	46.00	-13.97	AVG	

7 Spurious Radiated Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247

Test Method: DA 00-705

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	$20\log^{(2400/F(kHz))} + 80$
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	$20\log^{(24000/F(kHz))} + 40$
1.705 ~ 30	30	30	100 * 30	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

7.1 EUT Operation :

Operating Environment:

Temperature: 23.5 °C

Humidity: 52 % RH

Atmospheric Pressure: 100.8kPa


EUT Operation:

The test was performed in Bluetooth transmitting mode, and the test data is show in the report.


7.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.4: 2003.


The test setup for emission measurement below 30MHz.

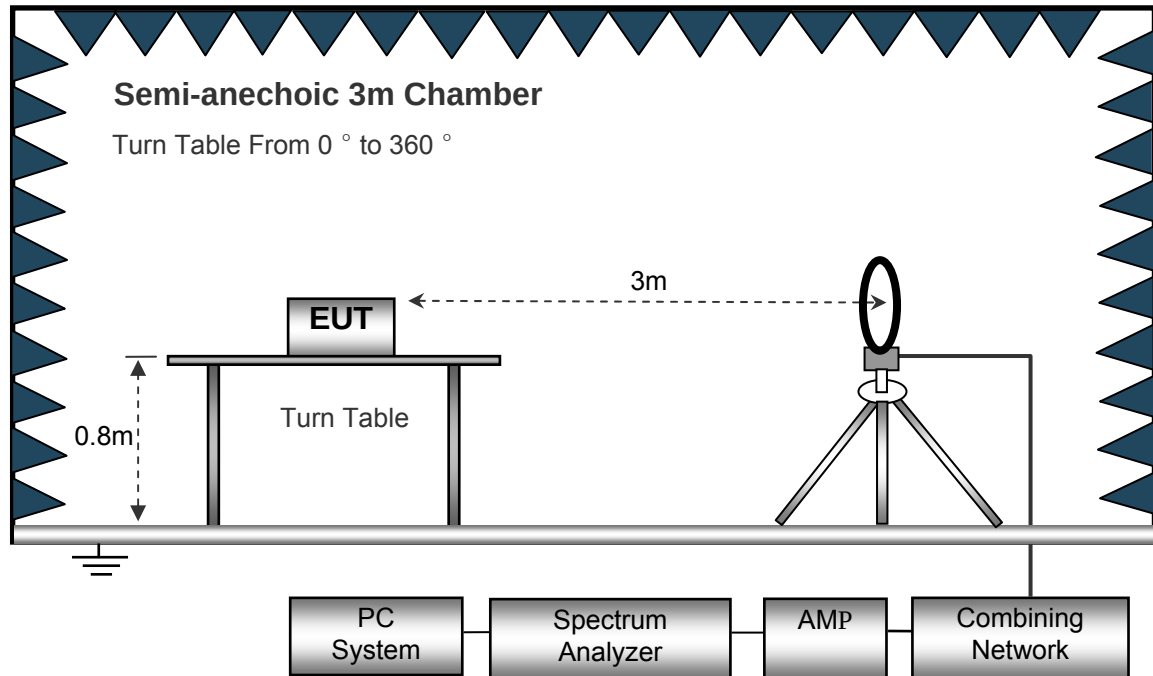

The test setup for emission measurement from 30 MHz to 1 GHz.

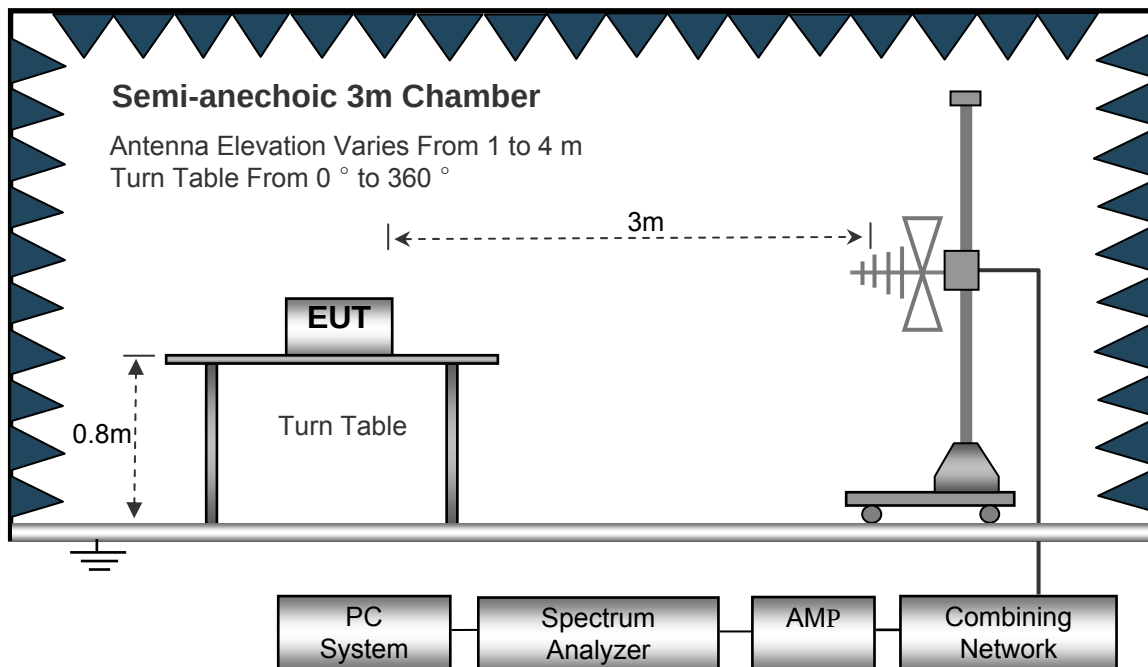

The test setup for emission measurement above 1 GHz.

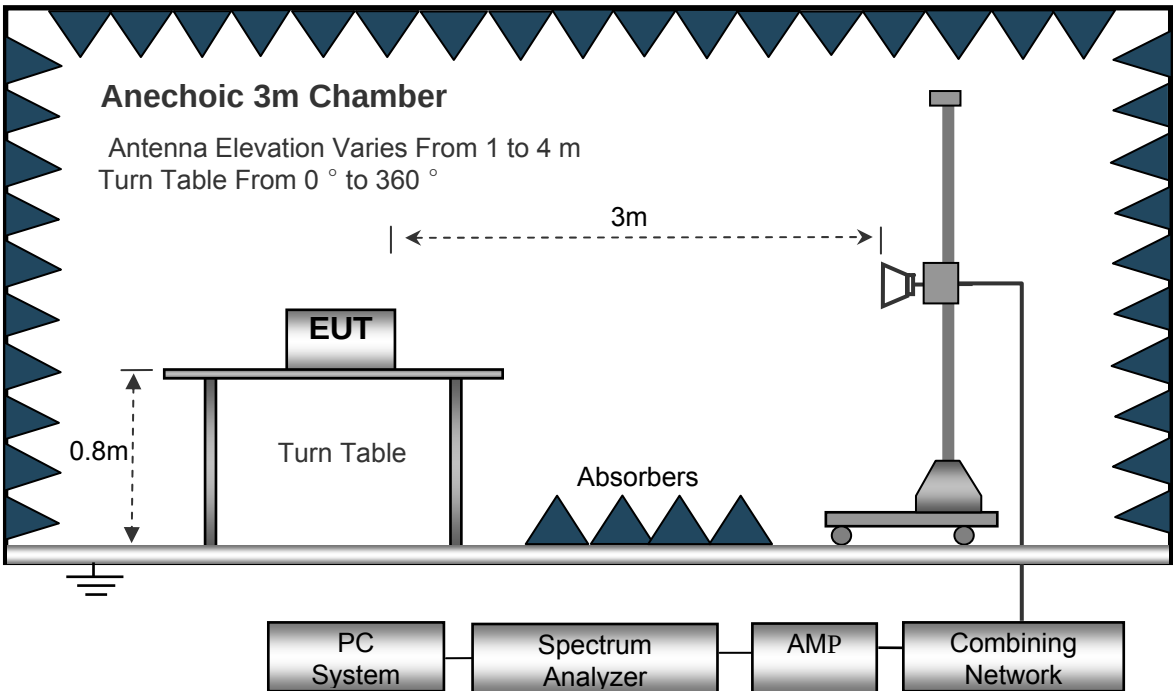

7.3 Spectrum Analyser Setup

According to FCC Part15 Rules, the system was tested 16MHz to 25000MHz.

Below 30MHz

Sweep SpeedAuto
IF Bandwidth10KHz
Resolution Bandwidth10KHz
Video Bandwidth10KHz

30MHz ~ 1GHz

Sweep SpeedAuto
DetectorPK
Resolution Bandwidth100KHz
Video Bandwidth300KHz

Above 1GHz

Sweep SpeedAuto
DetectorPK
Resolution Bandwidth1MHz
Video Bandwidth3MHz
DetectorAve.
Resolution Bandwidth1MHz
Video Bandwidth10Hz

7.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.

7.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Receiver Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

7.6 Summary of Test Results

Test Frequency: Below 30MHz

The measurements were more than 20 dB below the limit and not reported.

Test Frequency: 30MHz ~ 18GHz

Remark: Scan with GFSK, Pi/4DQPSK, 8DPSK, the worst case is GFSK mode.

Test Mode: Bluetooth transmitting

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
GFSK Low Channel 2402MHz									
107.50	24.84	QP	353	1.4	H	14.23	39.07	46.00	-6.93
107.50	22.29	QP	321	1.3	V	14.23	36.52	46.00	-9.48
4816.00	54.20	PK	260	1.6	V	-1.06	53.14	74.00	-20.86
4816.00	47.41	Ave	260	1.6	V	-1.06	46.35	54.00	-7.65
7224.00	52.11	PK	298	1.6	V	1.33	53.44	74.00	-20.56
7224.00	43.04	Ave	298	1.6	V	1.33	44.37	54.00	-9.63
2318.38	45.11	PK	102	1.2	V	-13.19	31.92	74.00	-42.08
2318.38	40.95	Ave	102	1.2	V	-13.19	27.76	54.00	-26.24
2379.64	43.20	PK	175	1.0	V	-13.14	30.06	74.00	-43.94
2379.64	38.03	Ave	175	1.0	V	-13.14	24.89	54.00	-29.11
2494.57	43.95	PK	167	1.1	H	-13.08	30.87	74.00	-43.13
2494.57	39.94	Ave	167	1.1	H	-13.08	26.86	54.00	-27.14

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
GFSK Middle Channel 2441MHz									
107.50	24.39	QP	225	1.4	H	14.23	38.62	46.00	-7.38
107.50	24.34	QP	244	1.9	V	14.23	38.57	46.00	-7.43
4880.00	55.44	PK	94	1.8	V	-0.62	54.82	74.00	-19.18
4880.00	47.32	Ave	94	1.8	V	-0.62	46.70	54.00	-7.30
7320.00	51.11	PK	57	1.3	V	2.21	53.32	74.00	-20.68
7320.00	44.19	Ave	57	1.3	V	2.21	46.40	54.00	-7.60
2310.25	44.03	PK	210	1.1	H	-13.19	30.84	74.00	-43.16
2310.25	38.90	Ave	210	1.1	H	-13.19	25.71	54.00	-28.29
2362.74	46.53	PK	229	1.8	V	-13.14	33.39	74.00	-40.61
2362.74	40.64	Ave	229	1.8	V	-13.14	27.50	54.00	-26.50
2497.78	44.09	PK	247	1.5	V	-13.08	31.01	74.00	-42.99
2497.78	39.77	Ave	247	1.5	V	-13.08	26.69	54.00	-27.31

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
GFSK High Channel 2480MHz									
107.50	25.22	QP	40	1.7	H	14.23	39.45	46.00	-6.55
107.50	22.80	QP	57	1.0	V	14.23	37.03	46.00	-8.97
4936.00	54.85	PK	198	1.9	V	-0.24	54.61	74.00	-19.39
4936.00	46.56	Ave	198	1.9	V	-0.24	46.32	54.00	-7.68
7404.00	51.08	PK	347	1.3	V	2.84	53.92	74.00	-20.08
7404.00	43.67	Ave	347	1.3	V	2.84	46.51	54.00	-7.49
2320.33	43.44	PK	143	1.3	H	-13.19	30.25	74.00	-43.75
2320.33	39.69	Ave	143	1.3	H	-13.19	26.50	54.00	-27.50
2383.99	47.29	PK	143	1.5	V	-13.14	34.15	74.00	-39.85
2383.99	39.35	Ave	143	1.5	V	-13.14	26.21	54.00	-27.79
2499.27	43.19	PK	116	1.6	H	-13.08	30.11	74.00	-43.89
2499.27	38.88	Ave	116	1.6	H	-13.08	25.80	54.00	-28.20

Test Frequency: Above 18GHz

The measurements were more than 20 dB below the limit and not reported.

8 Band edge Emissions

Test Requirement: FCC Part 15.247(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

Test Method: DA 00-705


Test Status: Transmitting mode



8.1 Test Procedure



1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set to span from the lowest frequency generated in the device up to and including the tenth harmonic of the highest fundamental frequency.
3. Set RBW = 100kHz and VBW = 300kHz.Sweep =auto.
4. mark the worst point and record.


8.2 Test Result

Test result plots shown as follows:

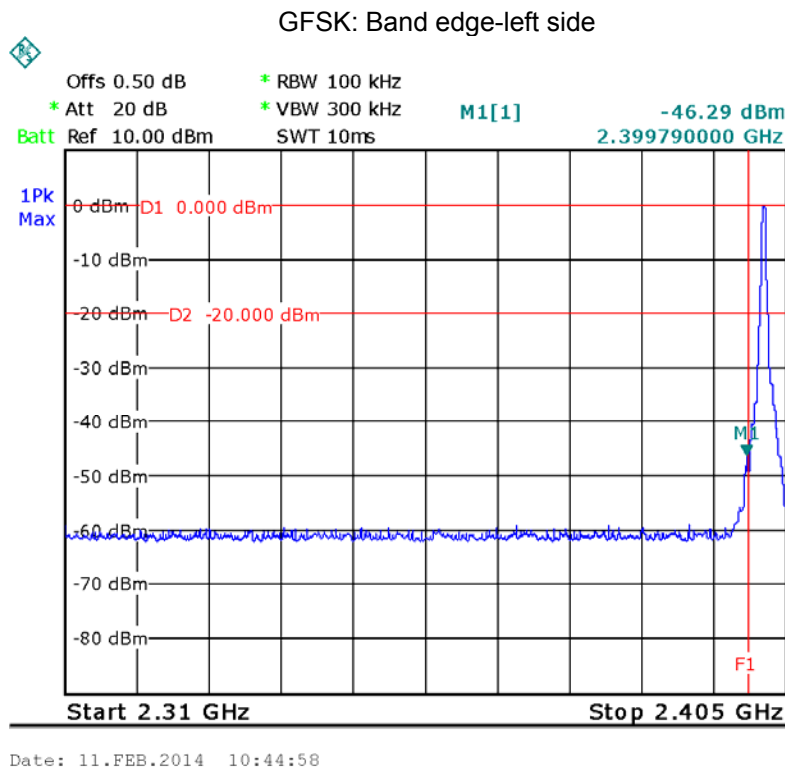

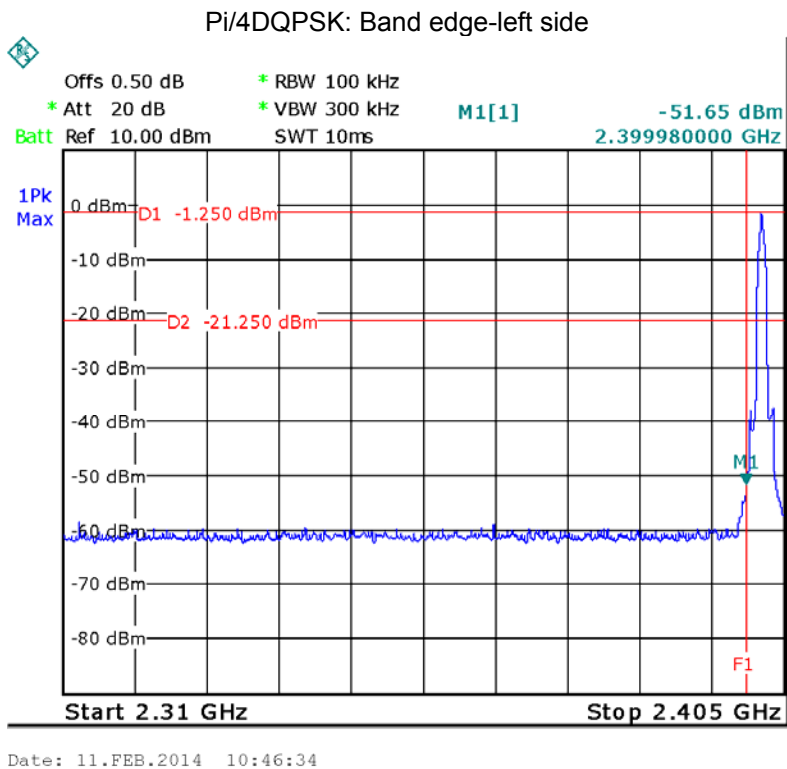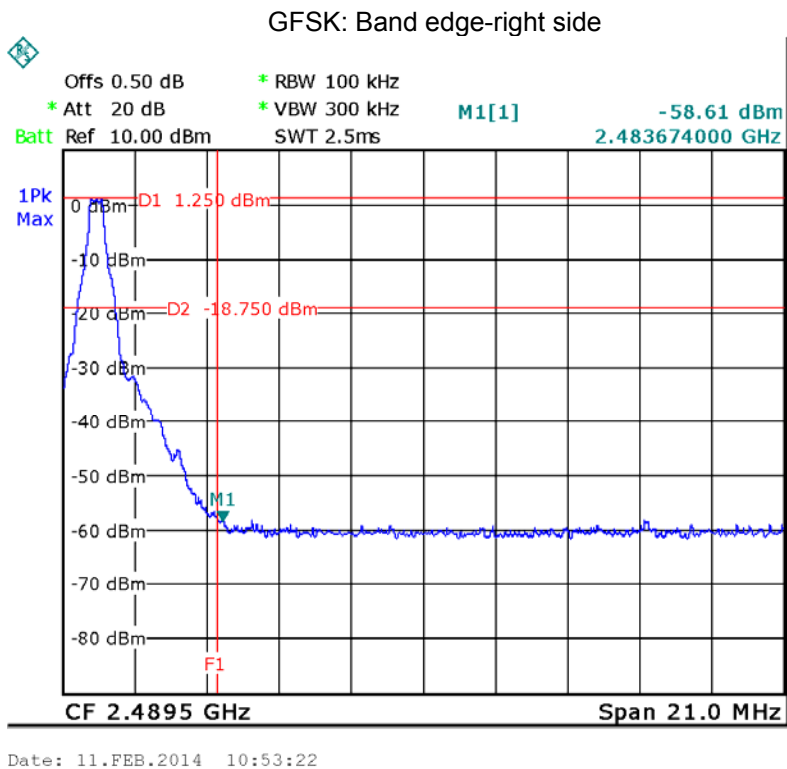

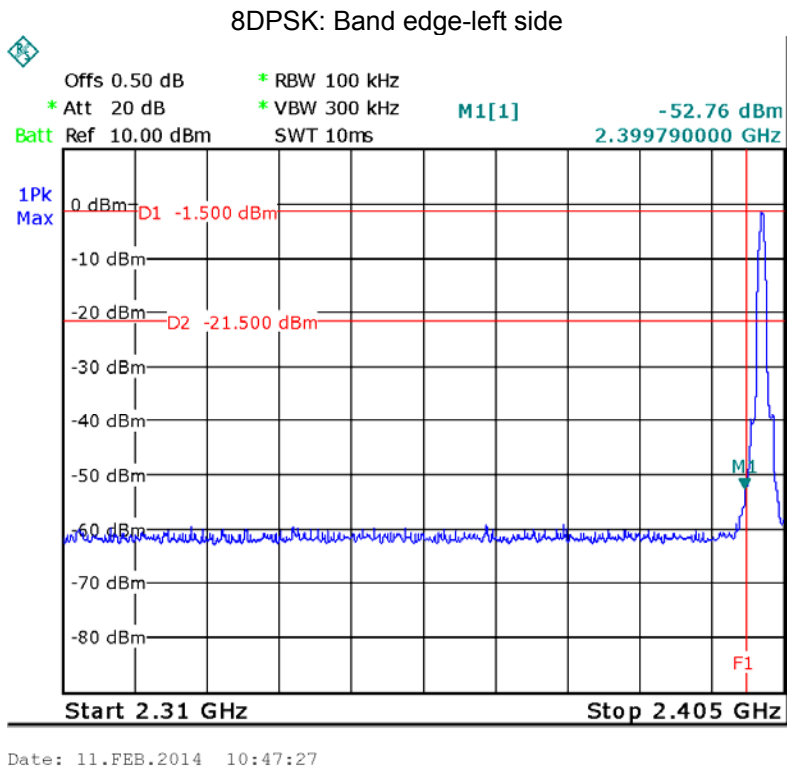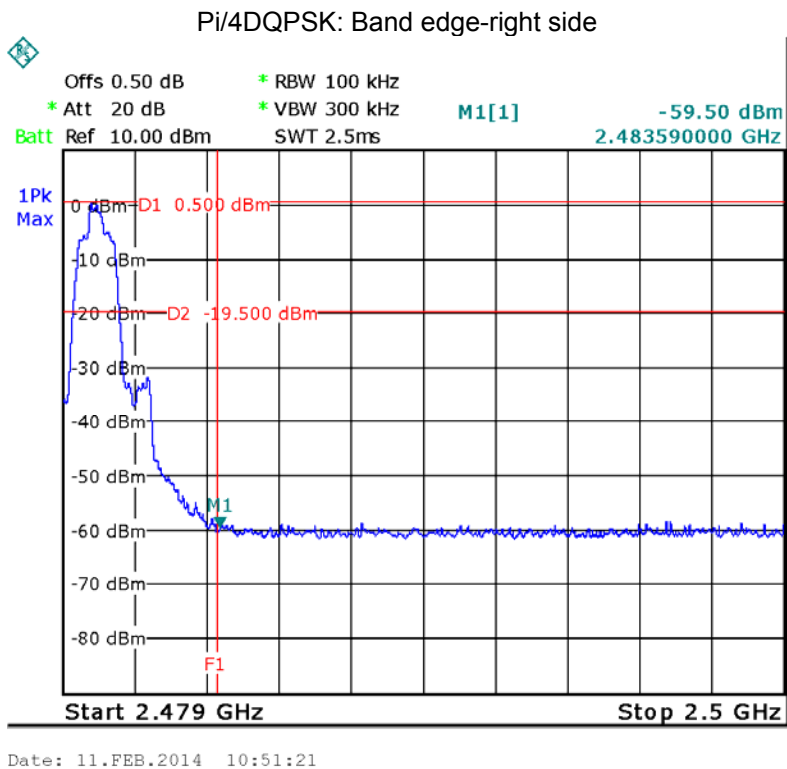

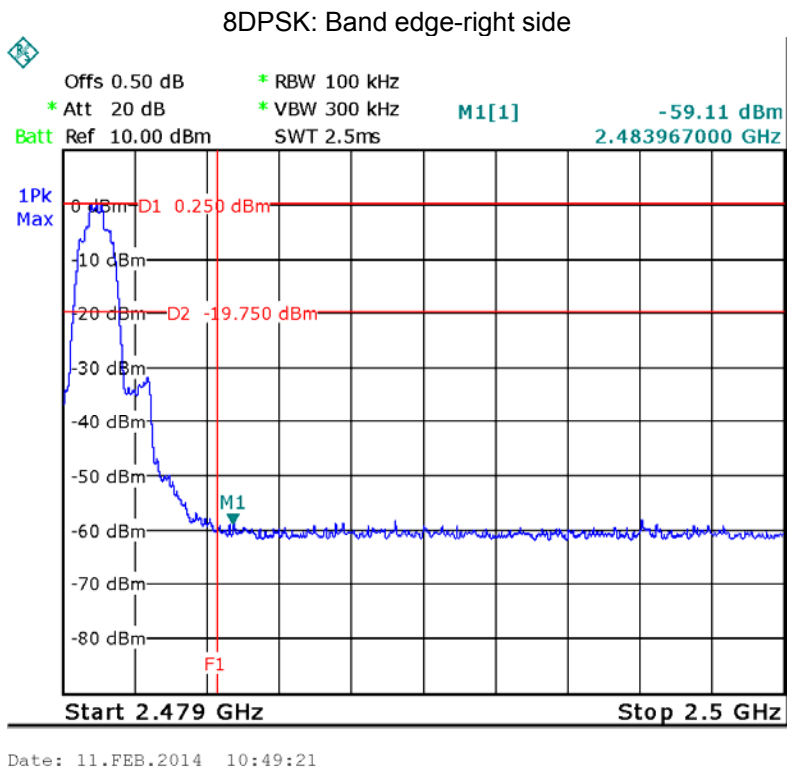

9 20 dB Bandwidth Measurement

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: DA 00-705

Test Mode: Test in fixing operating frequency at low, Middle, high channel.



9.1 Test Procedure:


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyser: RBW = 30 kHz, VBW = 100kHz

9.2 Test Result:


Modulation	Test Channel	Bandwidth(MHz)
GFSK	Low	0.844
	Middle	0.850
	High	0.868
Pi/4-DQPSK	Low	1.234
	Middle	1.240
	High	1.246
8-DPSK	Low	1.204
	Middle	1.222
	High	1.216



Test result plot as follows:

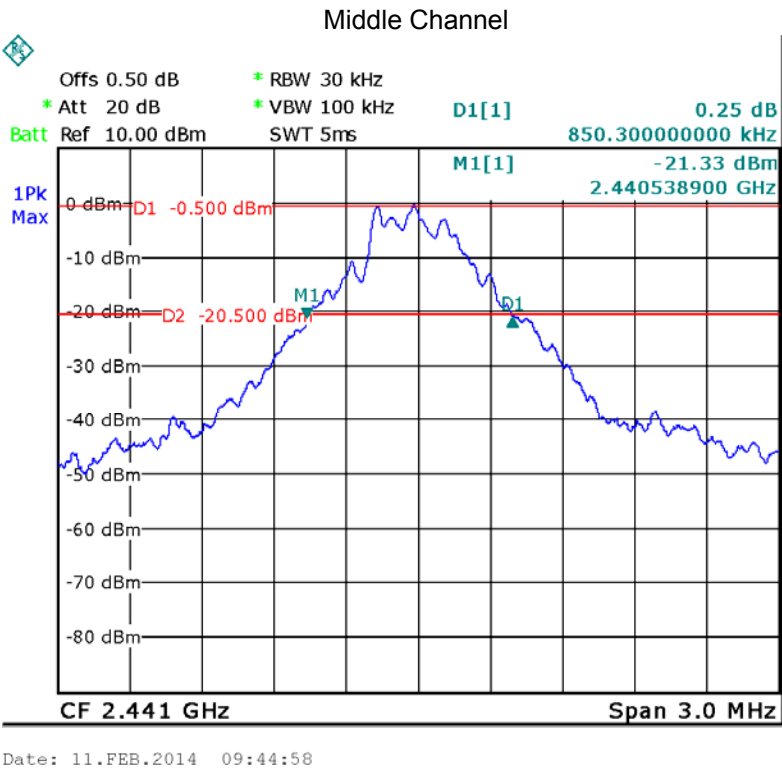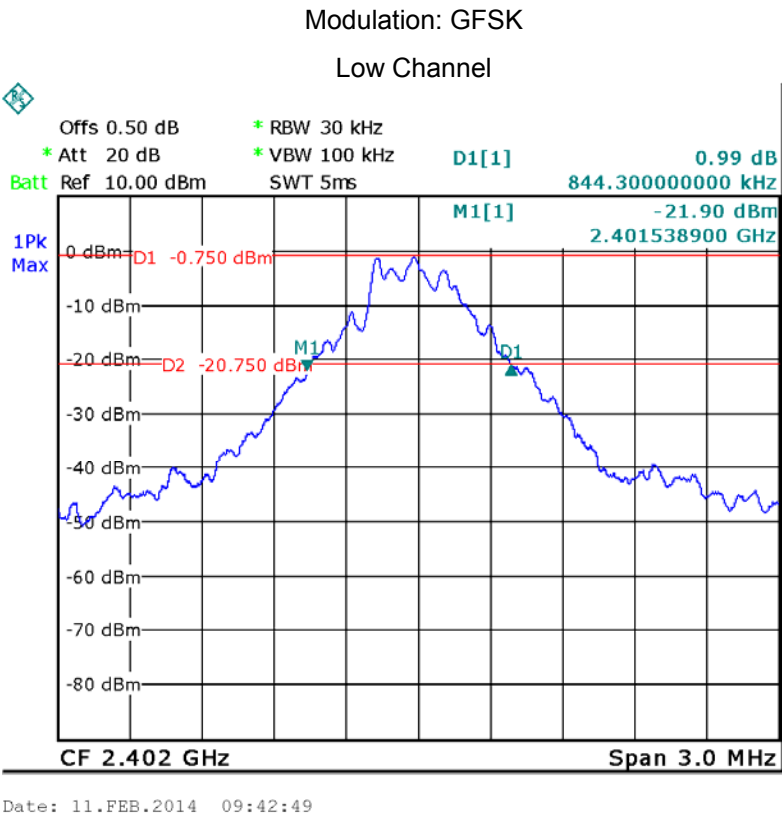

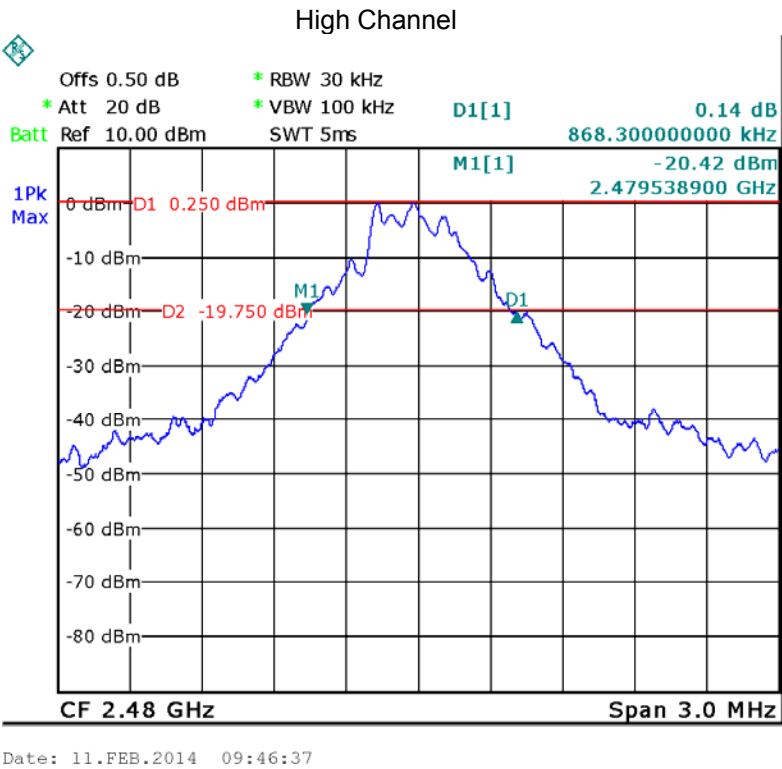


Modulation: Pi/4DQPSK

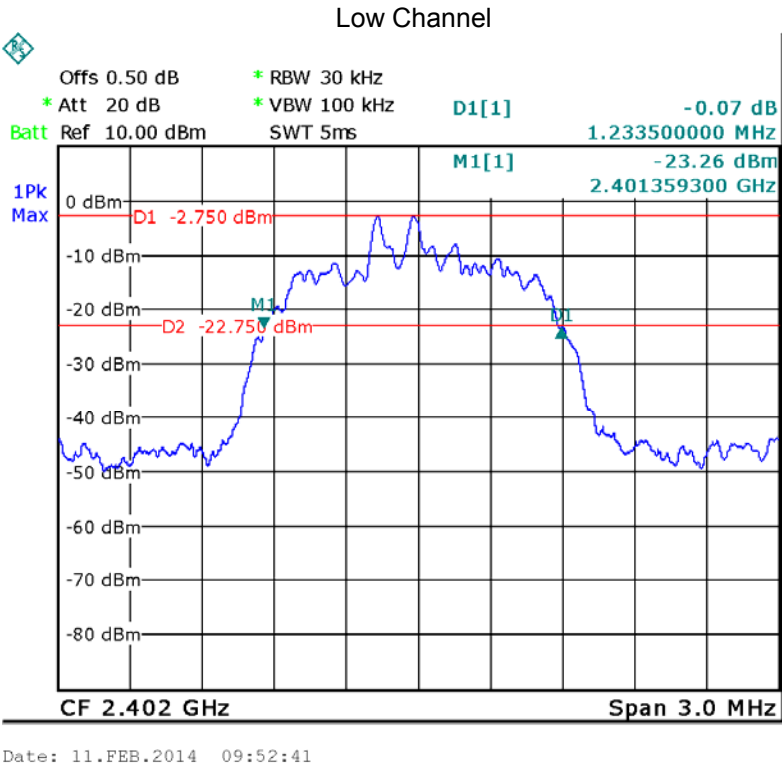

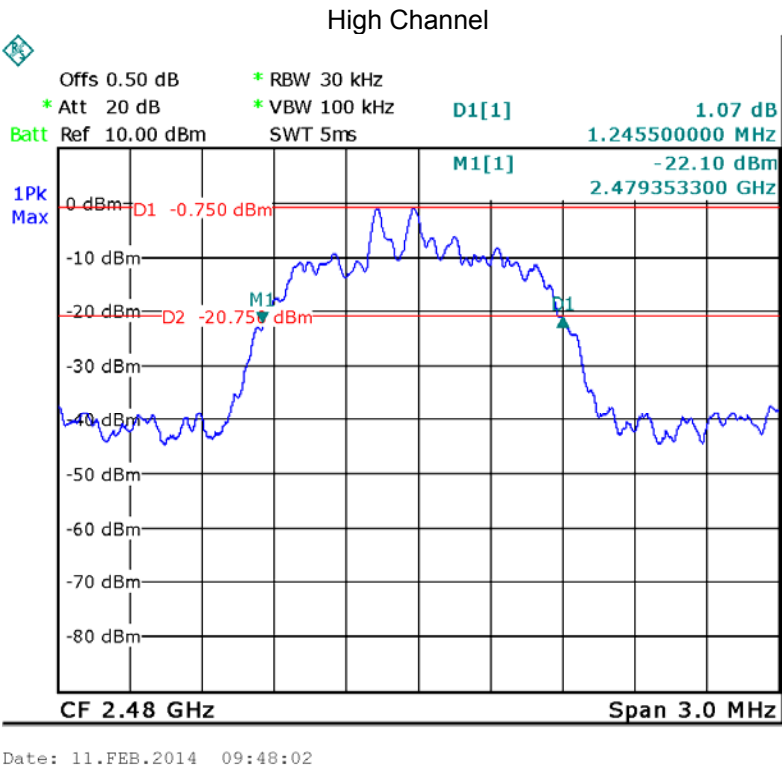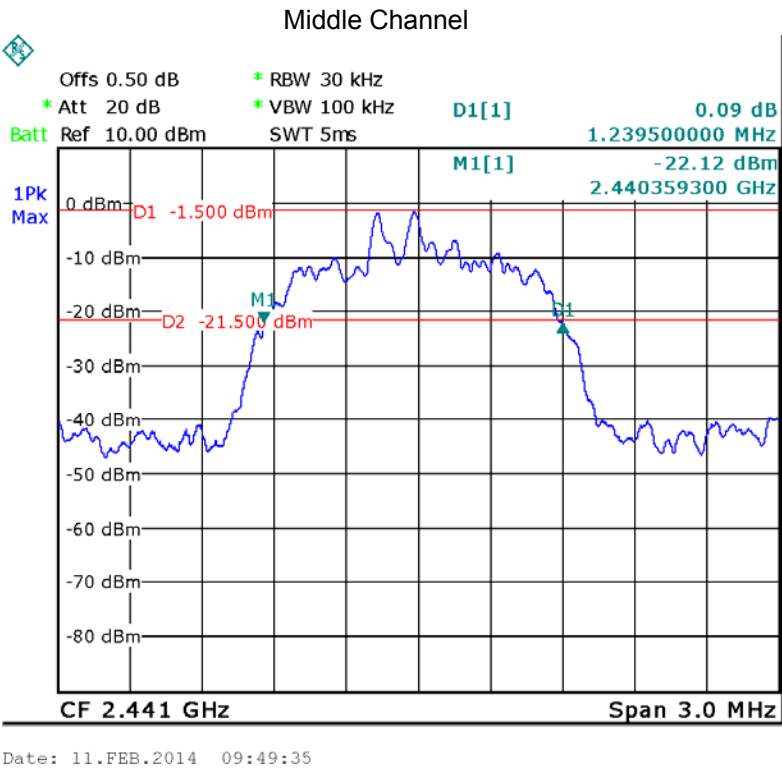


Modulation: 8DPSK

Low Channel

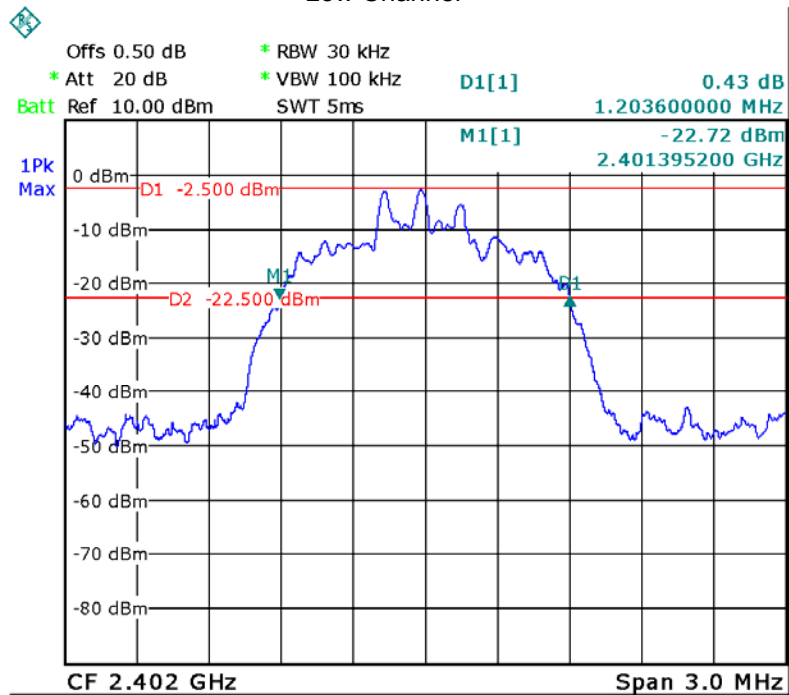


Date: 11.FEB.2014 09:54:41

Middle Channel

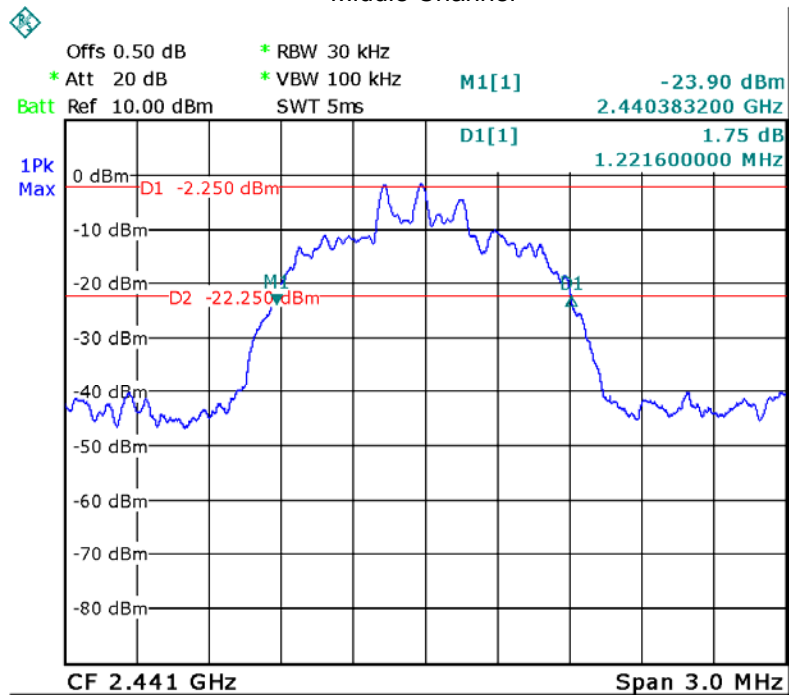

Date: 11.FEB.2014 09:55:45

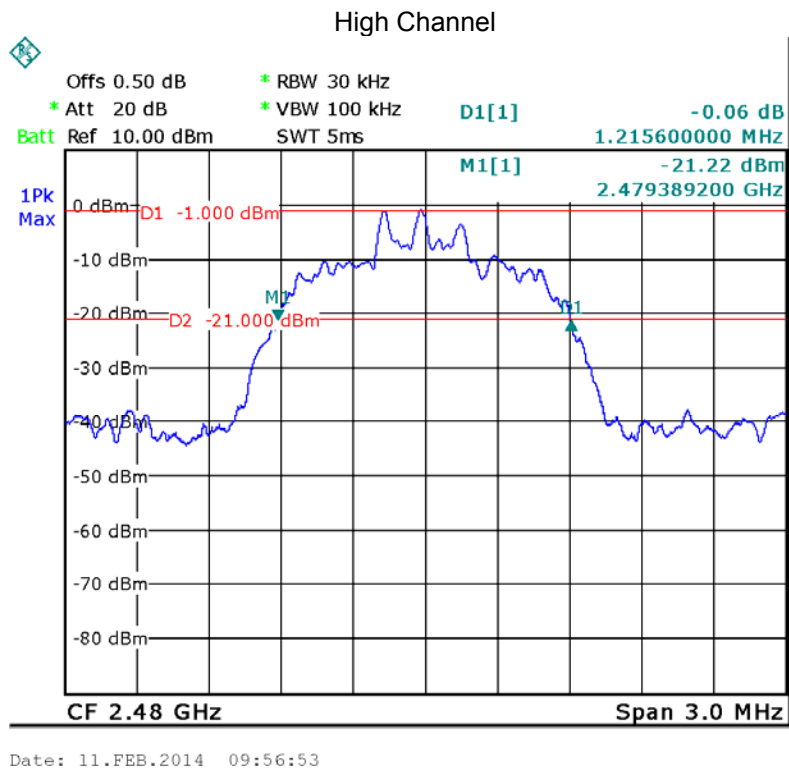

10 Maximum Peak Output Power

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	DA 00-705
Test Limit:	Regulation 15.247 (b)(1), For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts. Refer to the result "Number of Hopping Frequency" of this document. The 1watts (30dBm) limit applies.
Test mode:	Transmitting



10.1 Test Procedure:


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyser: RBW = 3 MHz. VBW =3 MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.

10.2 Test Result:


Modulation	Test Channel	Output Power (dBm)	Limit (dBm)
GFSK	Low	0.27	30
	Middle	0.76	30
	High	1.28	30
Pi/4DQPSK	Low	-1.26	30
	Middle	-0.33	30
	High	0.43	30
8DPSK	Low	-1.08	30
	Middle	-0.19	30
	High	0.52	30



Test result plot as follows:

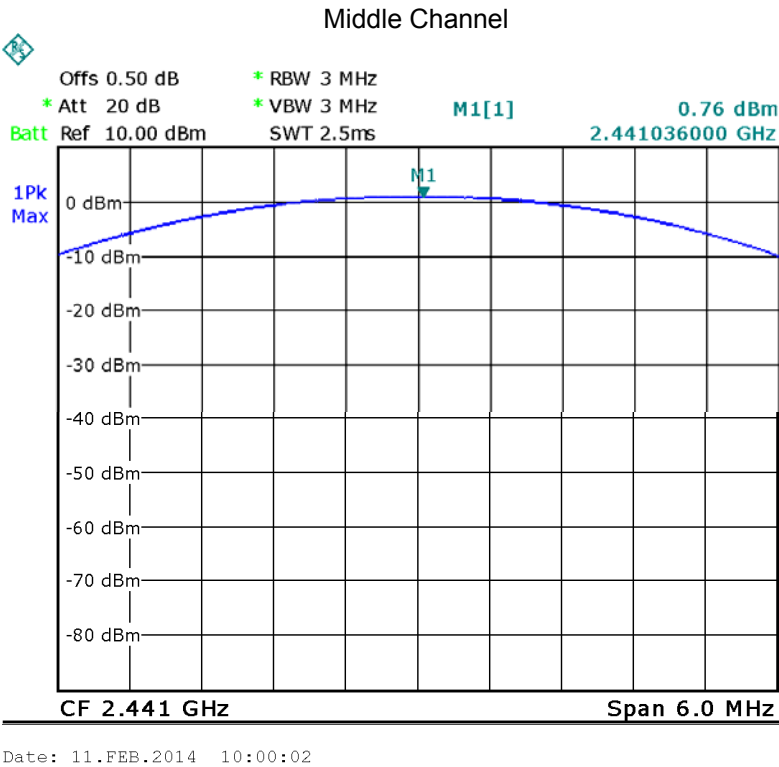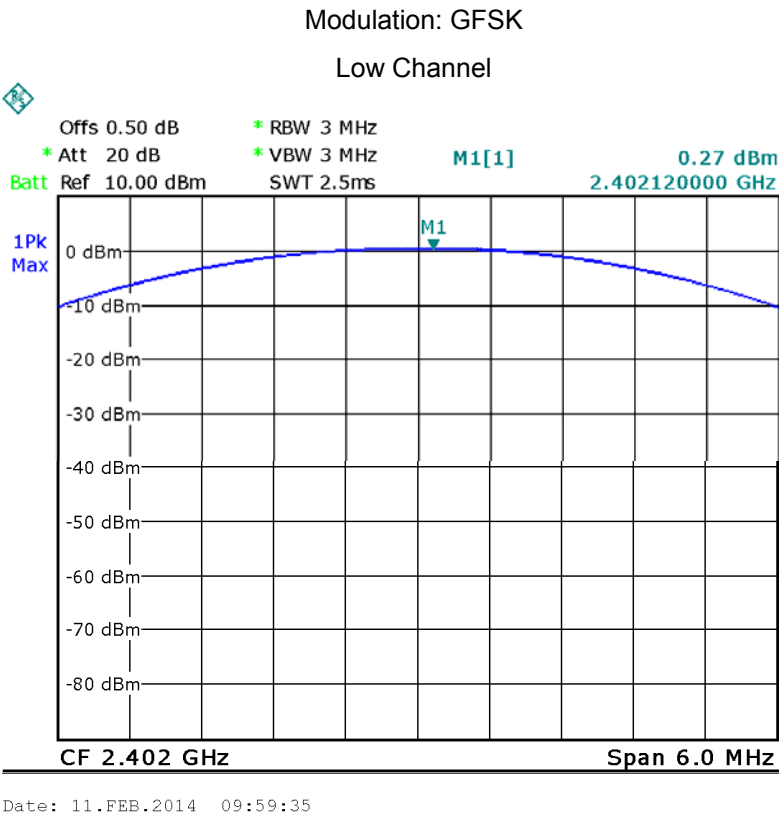

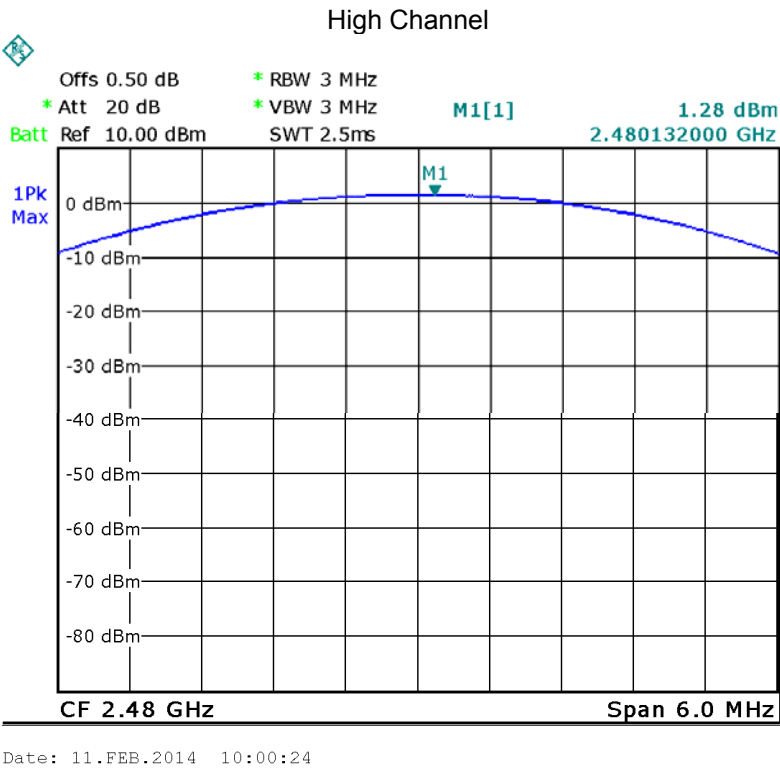


Modulation: Pi/4DQPSK

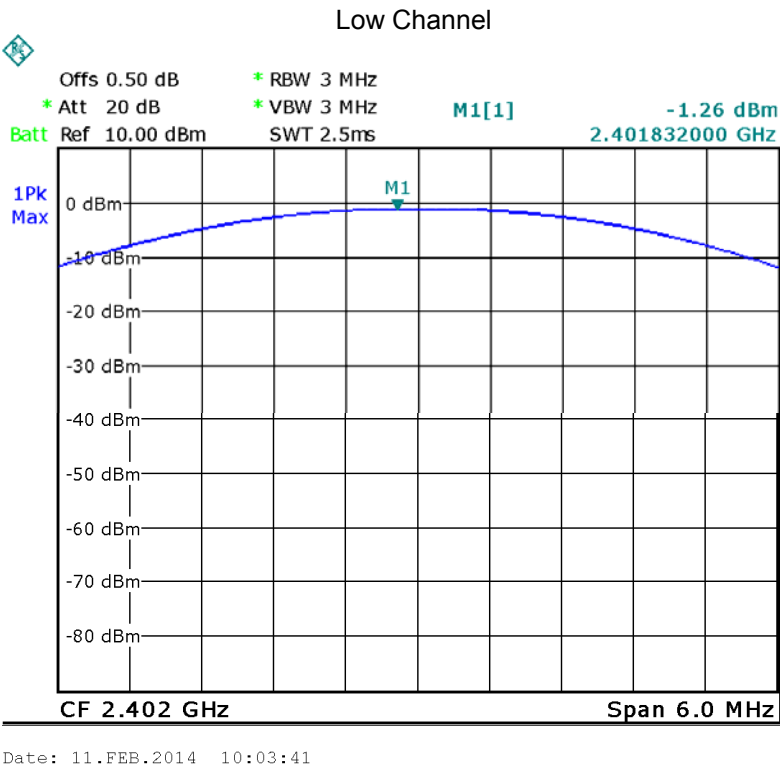

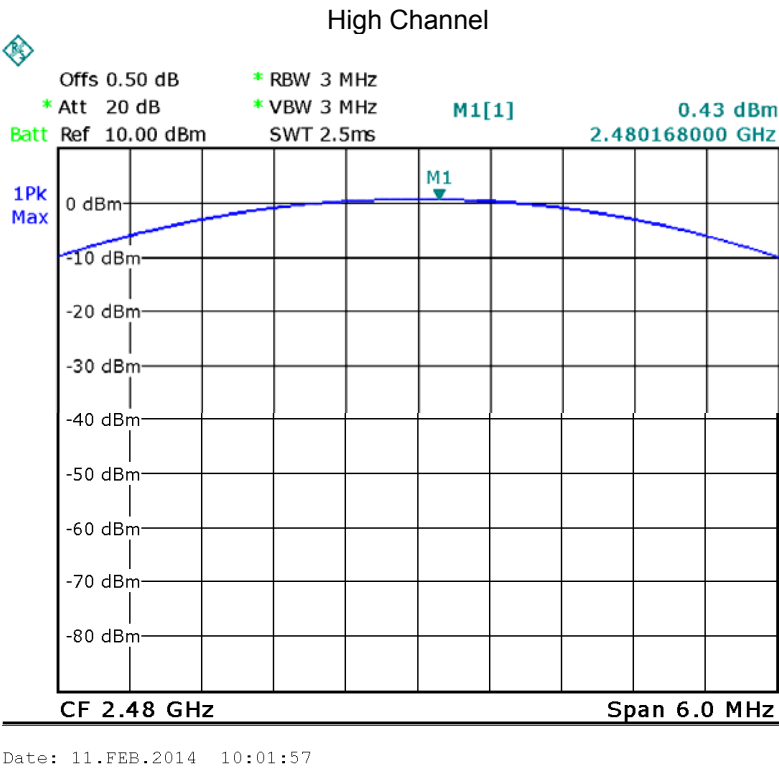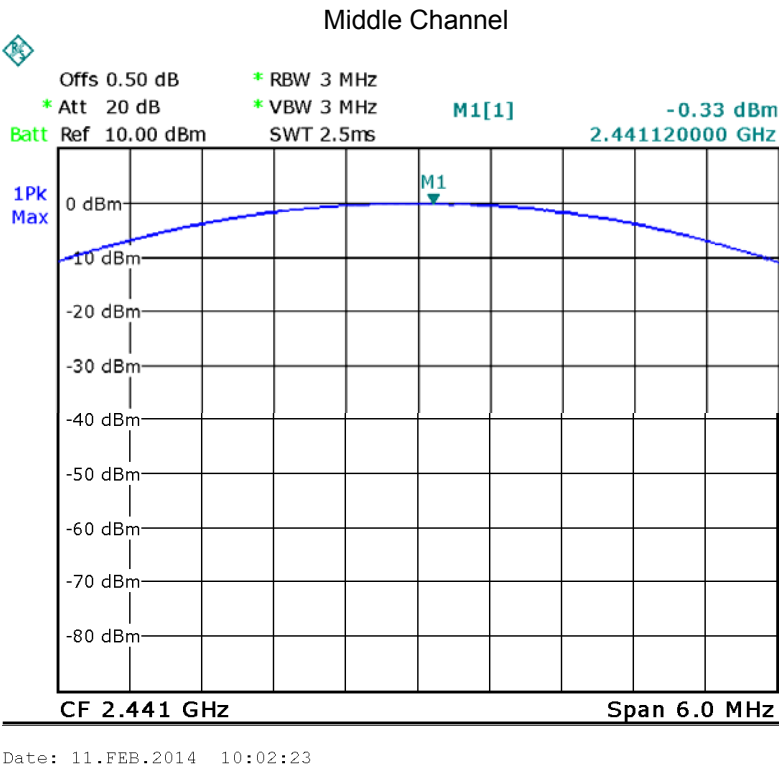


Modulation: 8DPSK

Low Channel

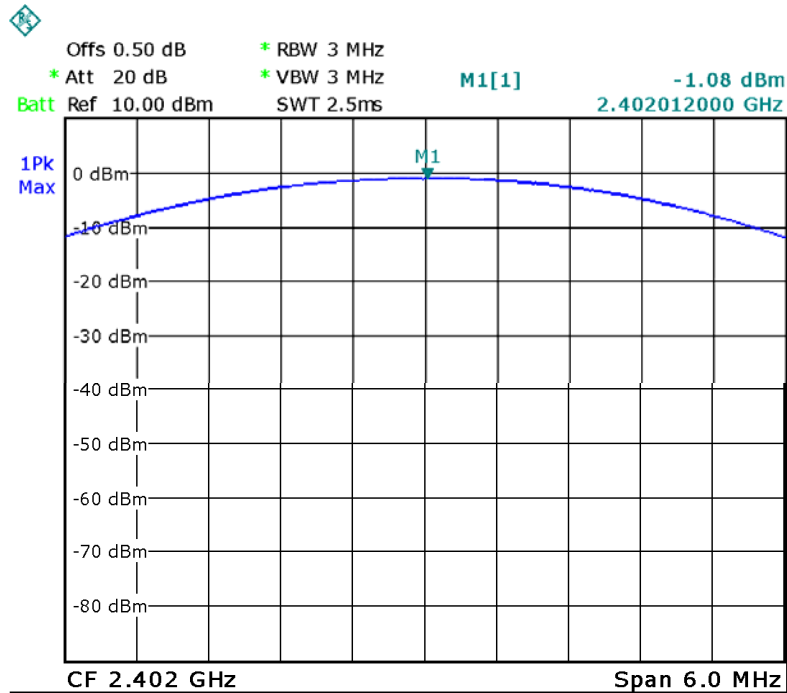


Date: 11.FEB.2014 10:04:16

Middle Channel

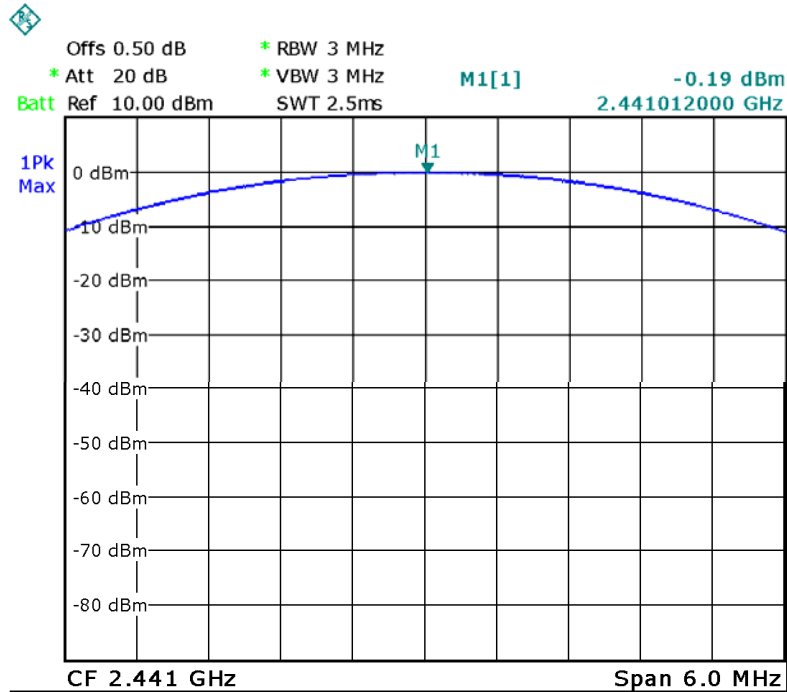

Date: 11.FEB.2014 10:04:42

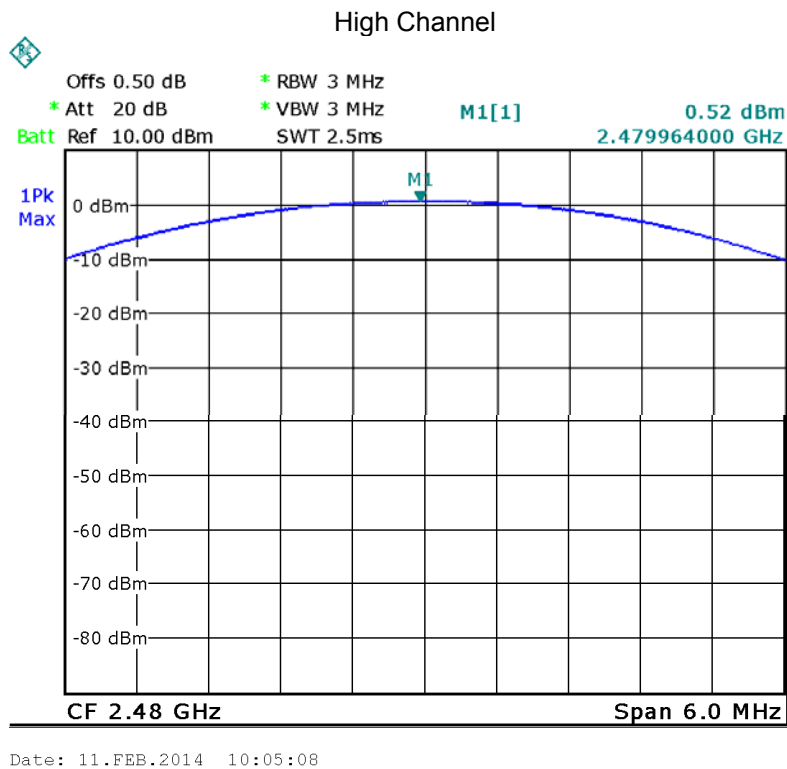

11 Hopping Channel Separation

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	DA 00-705
Test Limit:	Regulation 15.247(a)(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 1W.
Test Mode:	Test in hopping mode.

11.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyser: RBW = 30kHz. VBW = 100kHz, Span = 3.0MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section
Submit this plot.


11.2 Test Result:

Modulation	Test Channel	Separation (MHz)	Limit(MHz)
GFSK	Low	1.000	0.583
	Middle	1.000	0.603
	High	1.000	0.607
Pi/4DQPSK	Low	1.000	0.611
	Middle	1.000	0.823
	High	1.000	0.611
8DPSK	Low	1.000	0.811
	Middle	1.000	0.811
	High	1.000	0.811

Test result plot as follows:


Modulation: GFSK

Low Channel

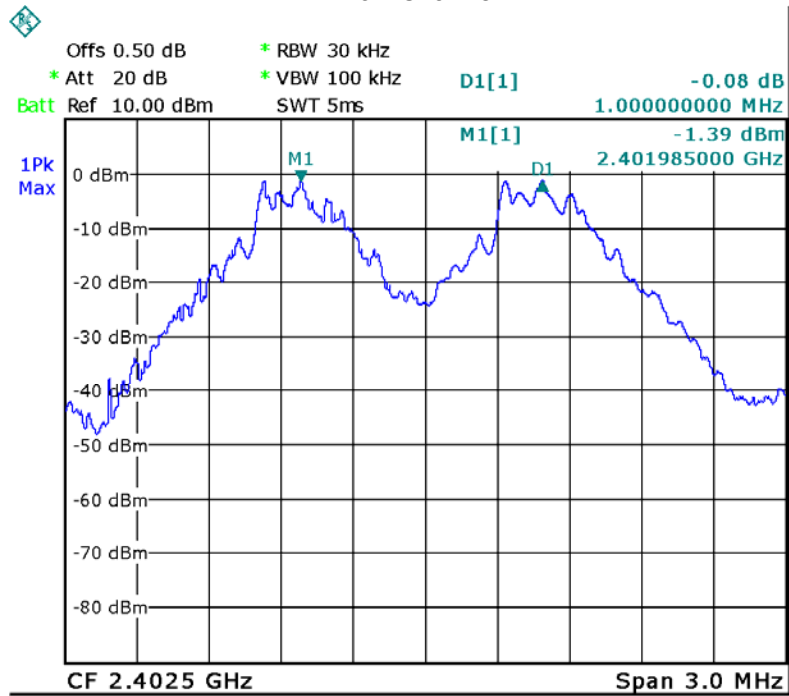


Date: 11.FEB.2014 10:16:13


Middle Channel

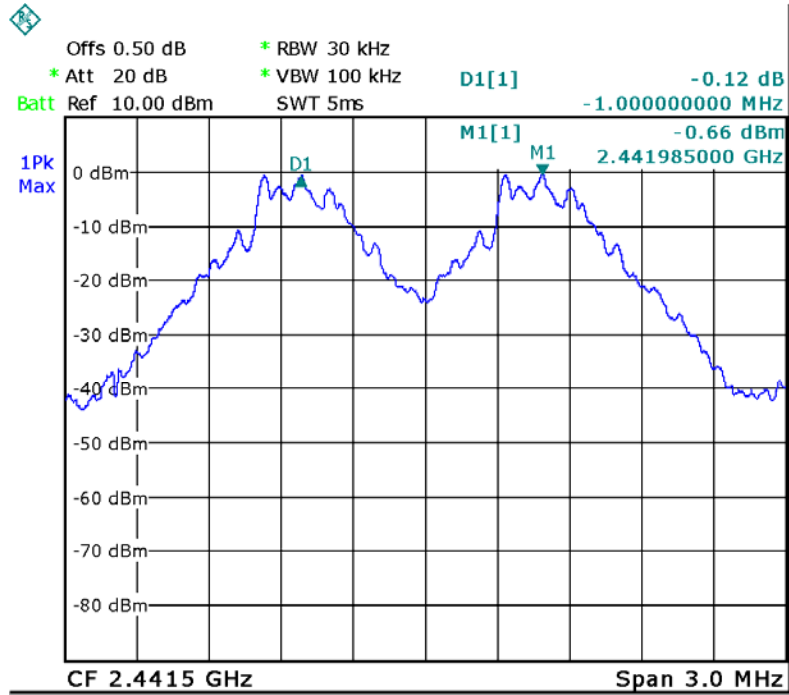


Date: 11.FEB.2014 10:17:01

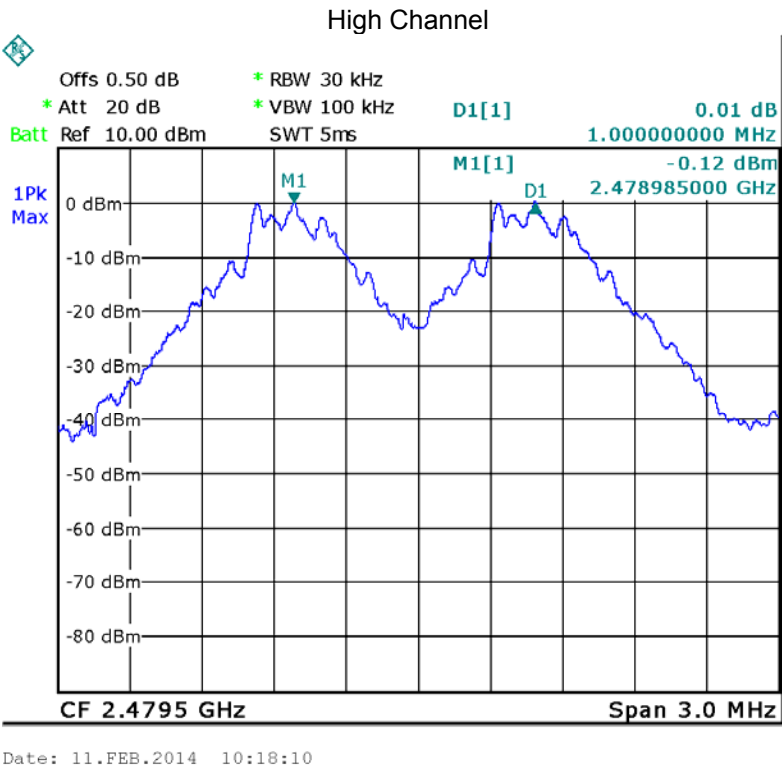


Modulation: Pi/4DQPSK

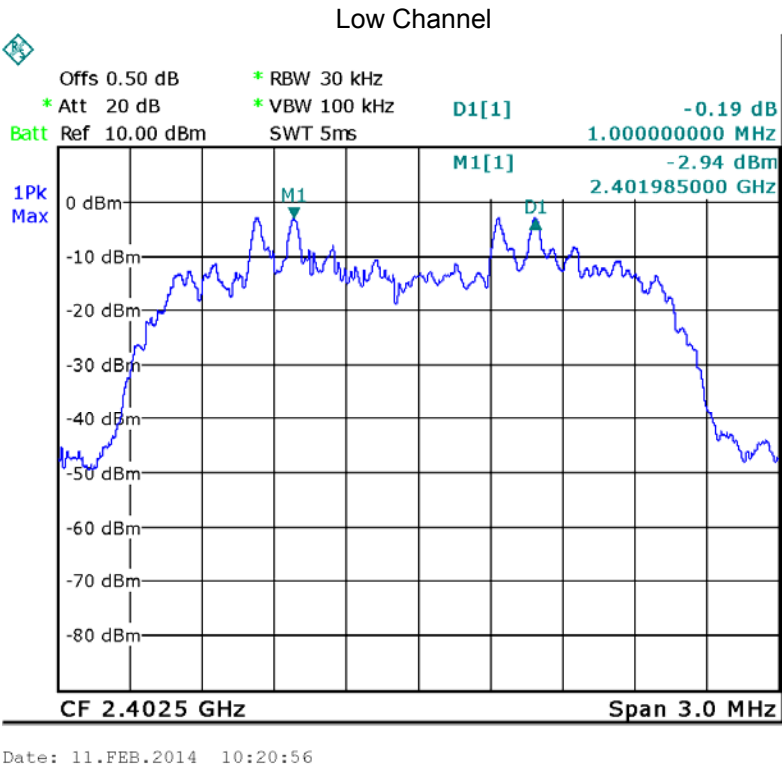

Middle Channel

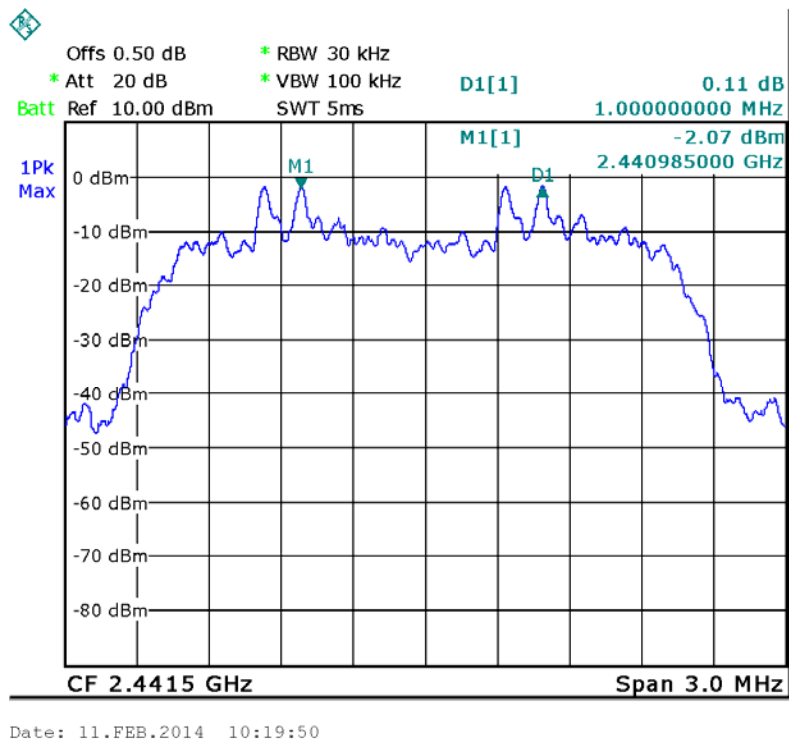


High Channel

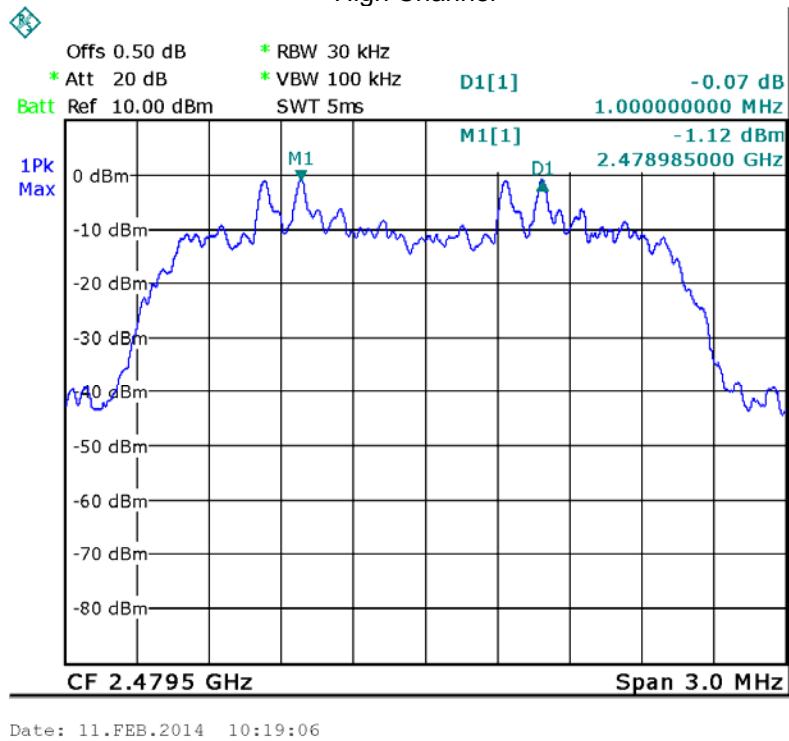


Modulation: 8DPSK

Low Channel

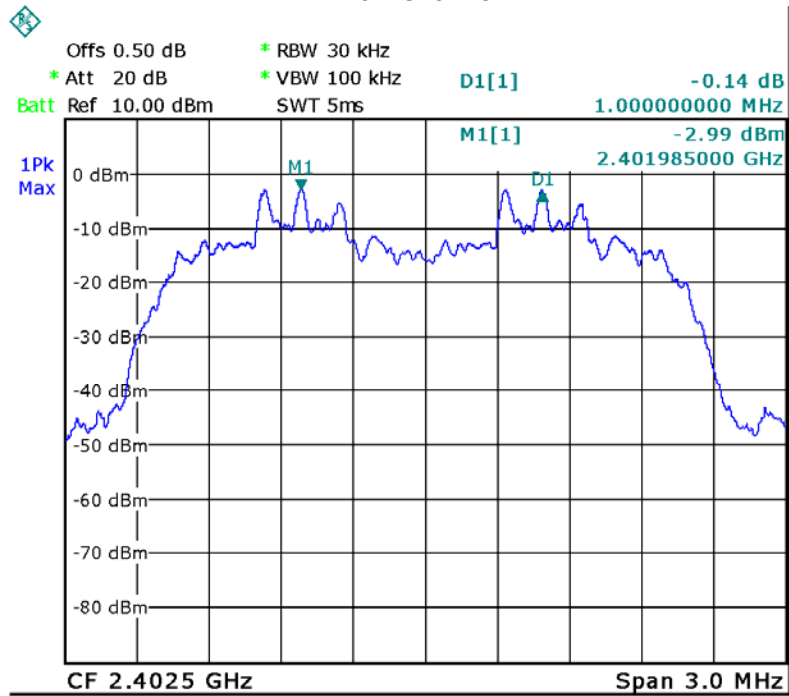


Date: 11.FEB.2014 10:24:27

Middle Channel

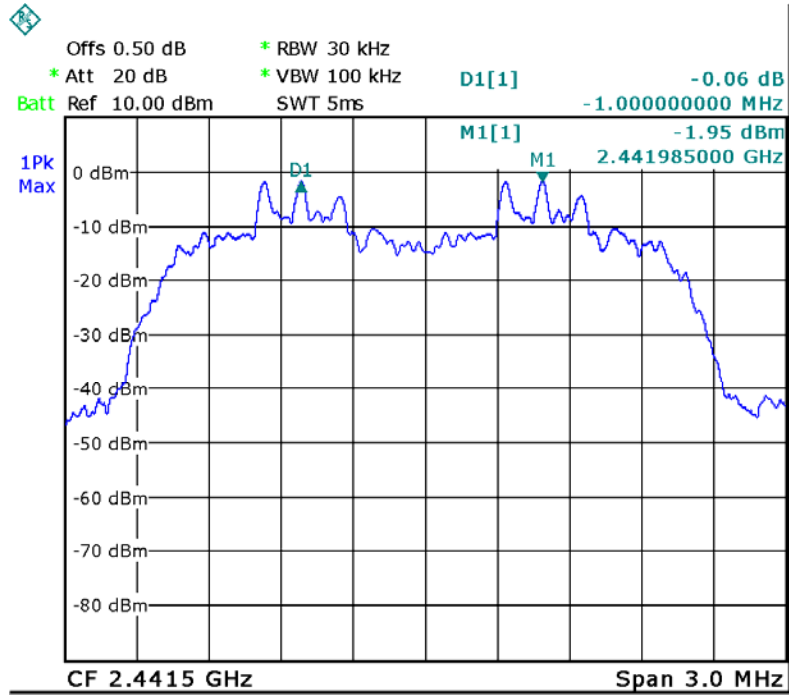

Date: 11.FEB.2014 10:25:48

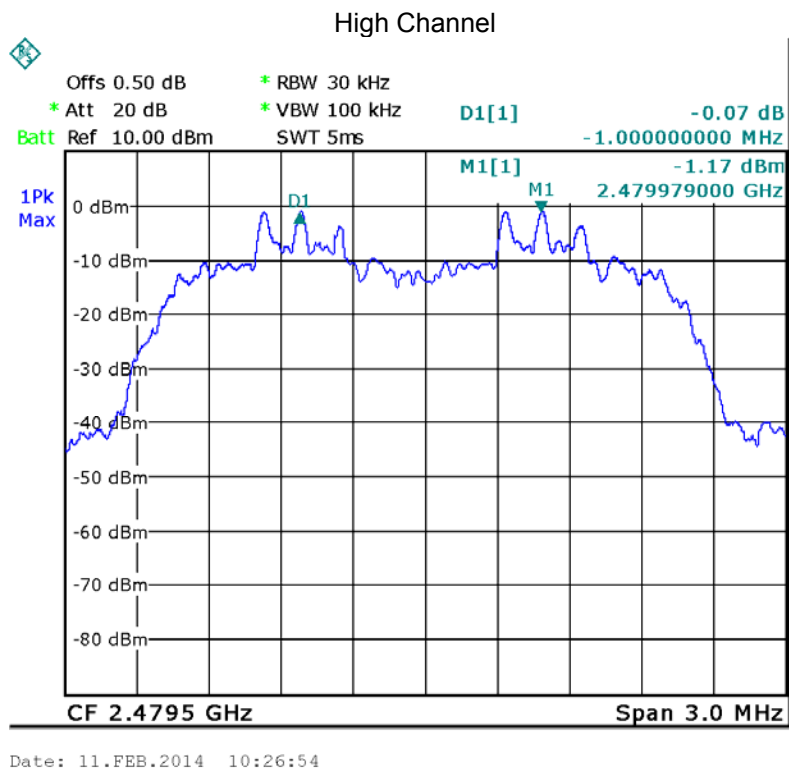

12 Number of Hopping Frequency


Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	DA 00-705
Test Limit:	Regulation 15.247 (a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.
Test Mode:	Test in hopping mode.



12.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyser: RBW = 1MHz. VBW = 1MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyser: Centre Frequency = 2.441GHz, Span = 86MHz. Sweep=auto;

12.2 Test Result:

Total Channels are 79 Channels.

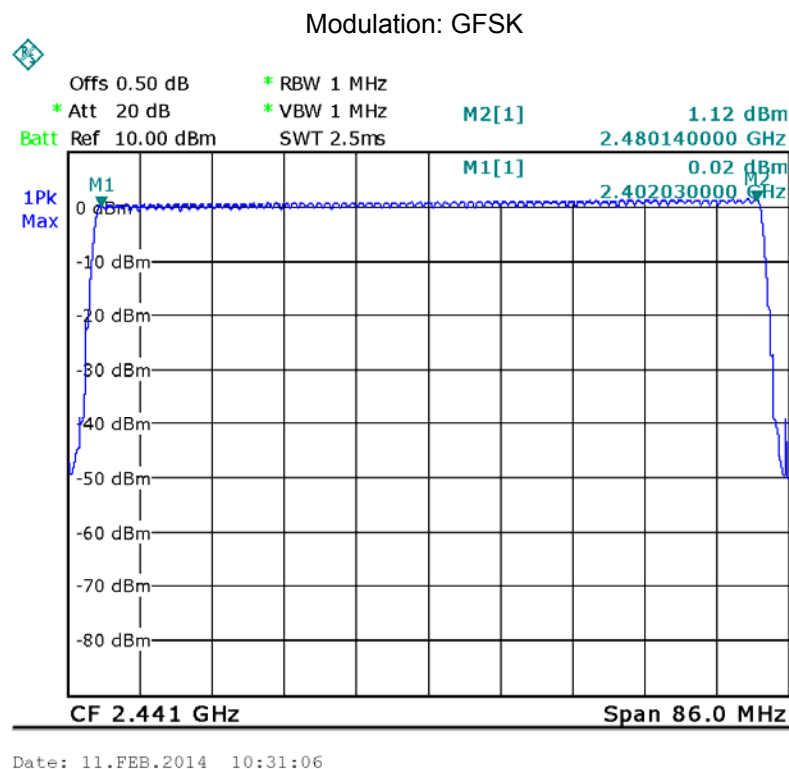

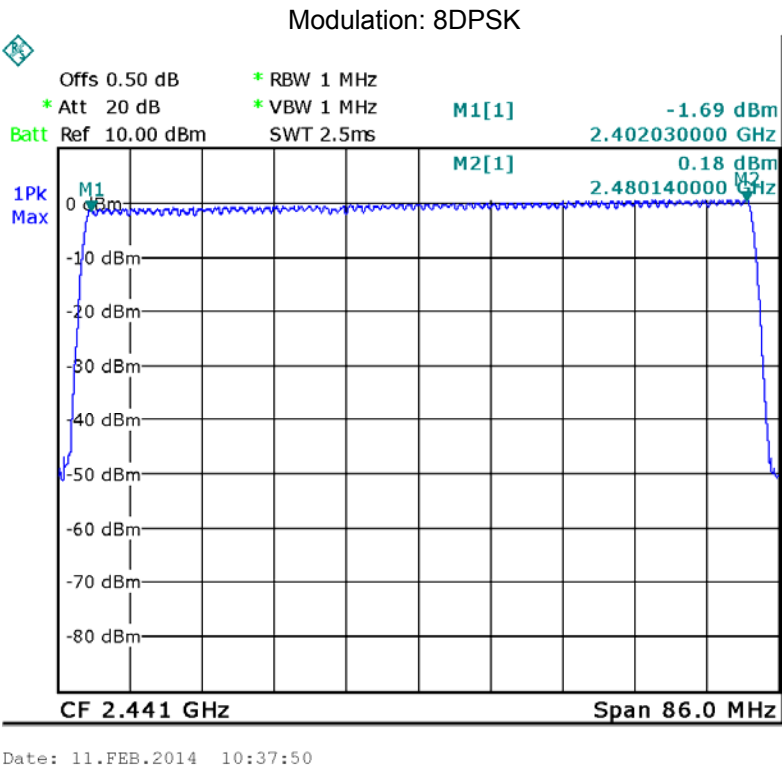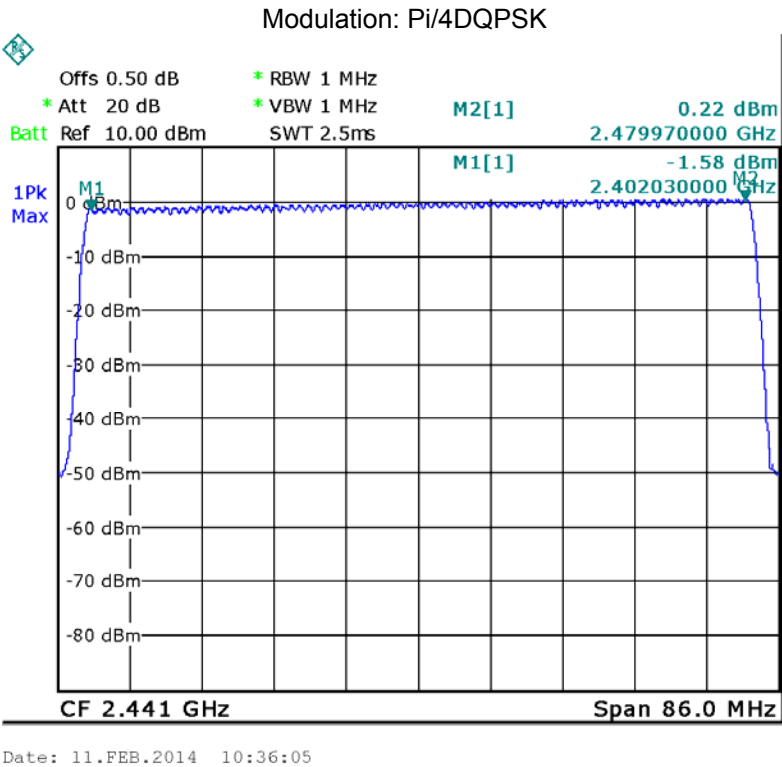

13 Dwell Time

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	DA 00-705
Test Limit:	Regulation 15.247(a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmitting on a particular hopping frequency provided that a minimum of 15 channels are used.
Test Mode:	Test in hopping transmitting operating mode.

13.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0. Centred on a hopping channel;
3. Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

13.2 Test Result:

Dwell time = Pulse wide x (Hopping rate / Number of channels) x Period

The test period: $T = 0.4(s) * 79 = 31.6 (s)$

DH5 Packet permit maximum $1600 / 79 / 6$ hops per second in each channel (5 time slots RX, 1 time slot TX).

DH3 Packet permit maximum $1600 / 79 / 4$ hops per second in each channel (3 time slots RX, 1 time slot TX).


DH1 Packet permit maximum $1600 / 79 / 2$ hops per second in each channel (1 time slot RX, 1 time slot TX). So, the Dwell Time can be calculated as follows:

Data Packet	Dwell Time(s)
DH5	$1600/79/6*31.6*(MkrDelta)/1000$
DH3	$1600/79/4*31.6*(MkrDelta)/1000$
DH1	$1600/79/2*31.6*(MkrDelta)/1000$
Remark	Mkr Delta is single pulse time.

Dwell Time					
Ambient temperature: 22 °C			Relative humidity: 55%		
Modulation	Data Packet	Channel	pulse time(ms)	Dwell Time(s)	Limits(s)
GFSK	DH1	Low	0.412	0.132	0.4
		middle	0.412	0.132	0.4
		High	0.412	0.132	0.4
	DH3	Low	1.678	0.268	0.4
		middle	1.684	0.269	0.4
		High	1.684	0.269	0.4
	DH5	Low	2.930	0.313	0.4
		middle	2.930	0.313	0.4
		High	2.930	0.313	0.4
Pi/4DQPSK	DH1	Low	0.424	0.136	0.4
		middle	0.424	0.136	0.4
		High	0.424	0.136	0.4
	DH3	Low	1.684	0.269	0.4
		middle	1.684	0.269	0.4
		High	1.684	0.269	0.4
	DH5	Low	2.938	0.313	0.4
		middle	2.938	0.313	0.4
		High	2.938	0.313	0.4
8DPSK	DH1	Low	0.424	0.136	0.4
		middle	0.424	0.136	0.4
		High	0.424	0.136	0.4
	DH3	Low	1.684	0.269	0.4
		middle	1.684	0.269	0.4
		High	1.690	0.270	0.4
	DH5	Low	2.938	0.313	0.4
		middle	2.938	0.313	0.4
		High	2.938	0.313	0.4


Modulation: GFSK

Data Packet: DH1, Low channel


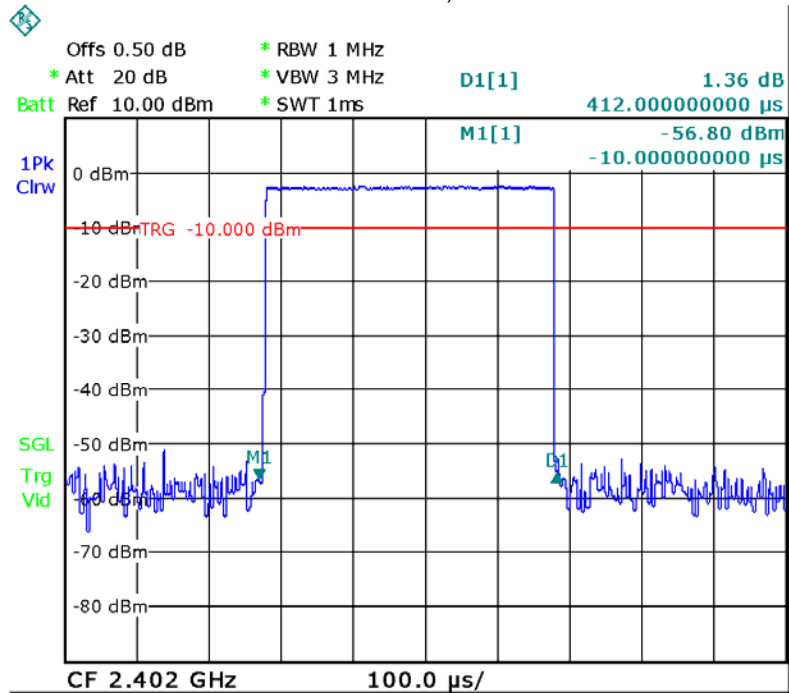




Date: 11.FEB.2014 11:31:14



Data Packet: DH1, Middle channel

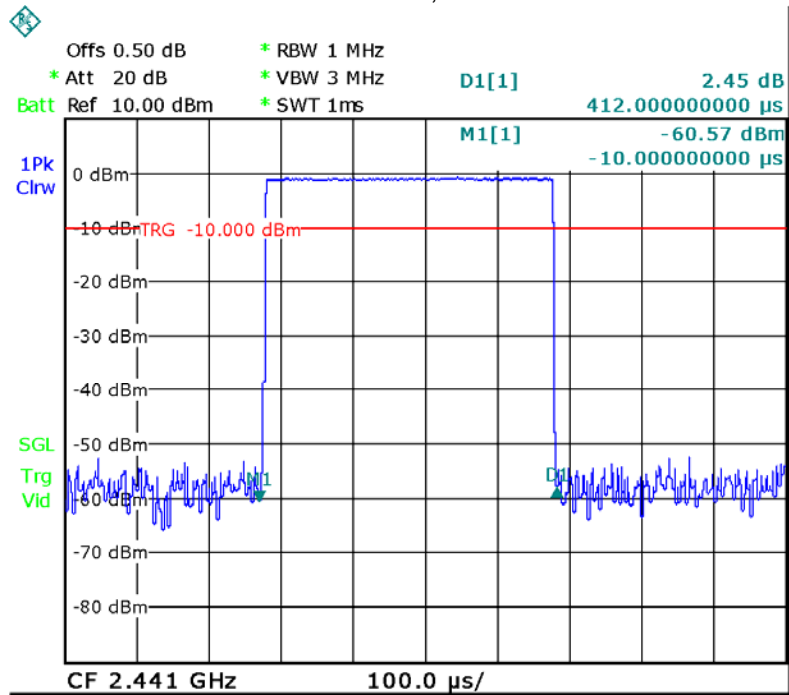

Date: 11.FEB.2014 11:31:43

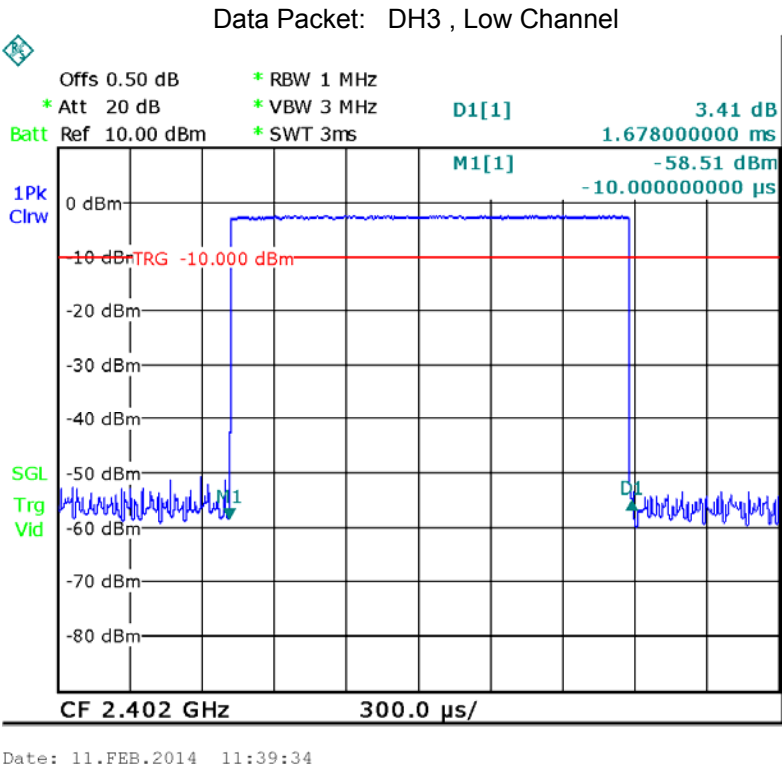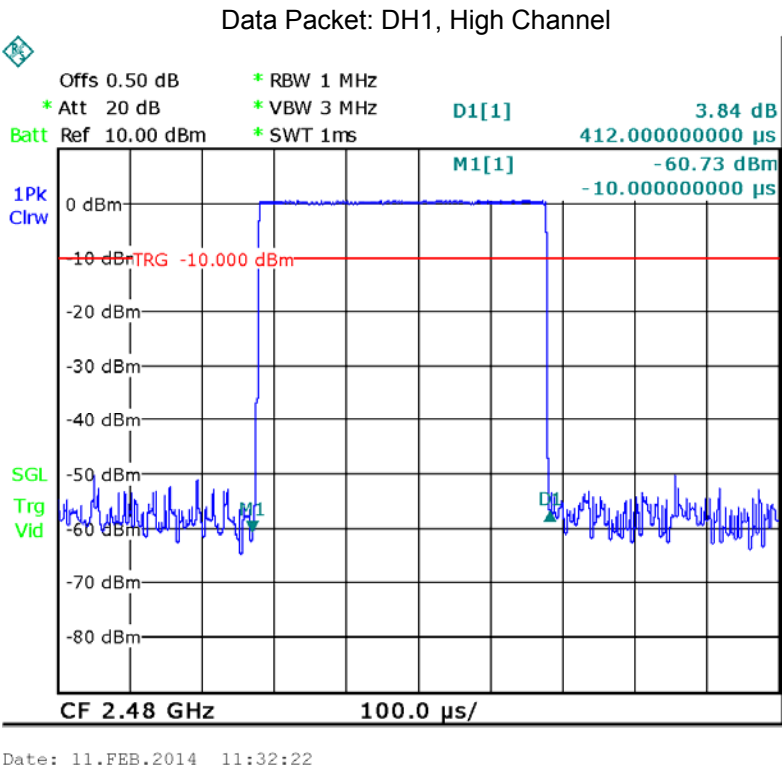


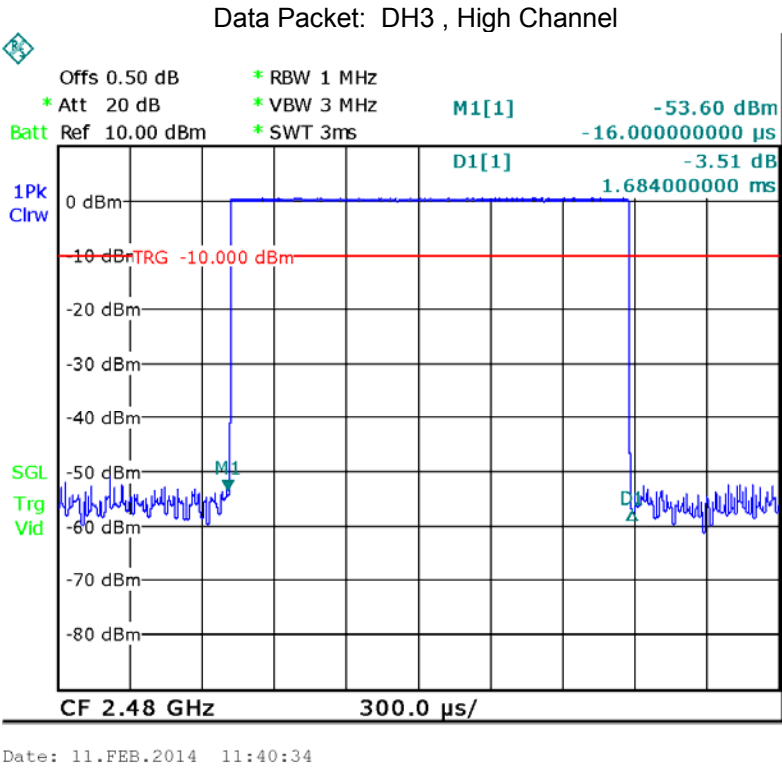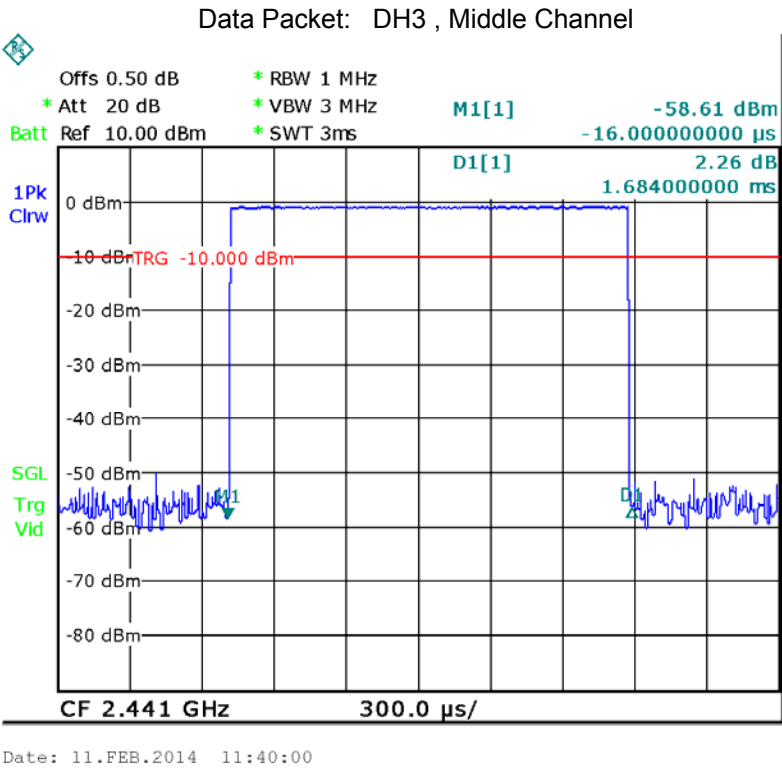

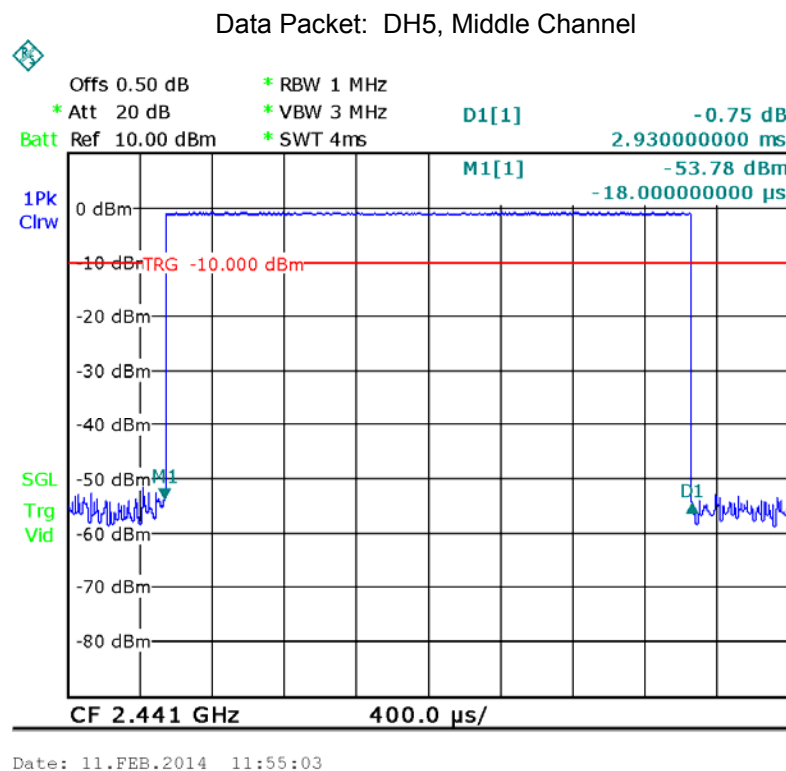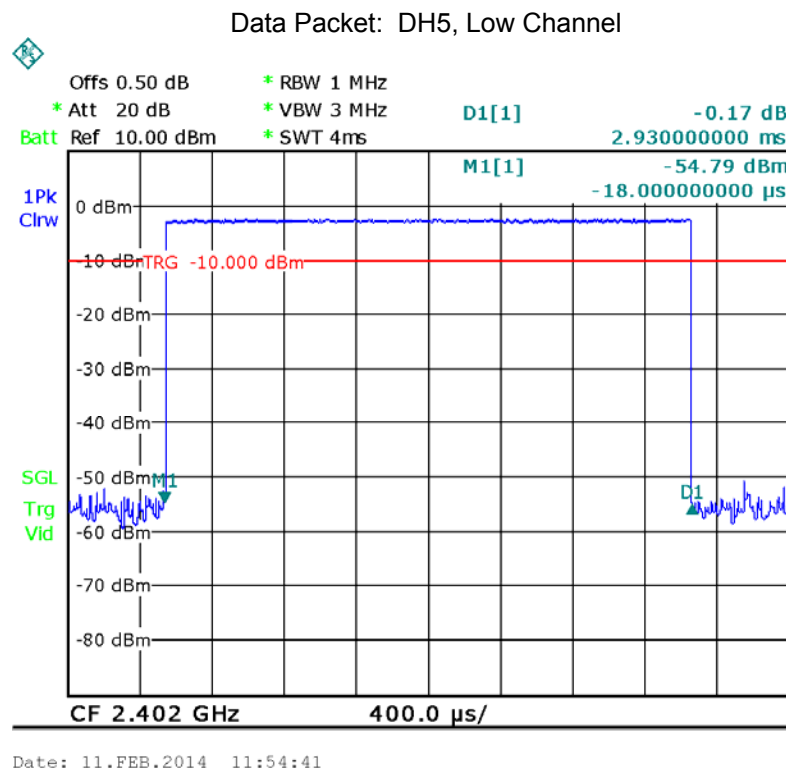




Data Packet:DH1, Middle channel

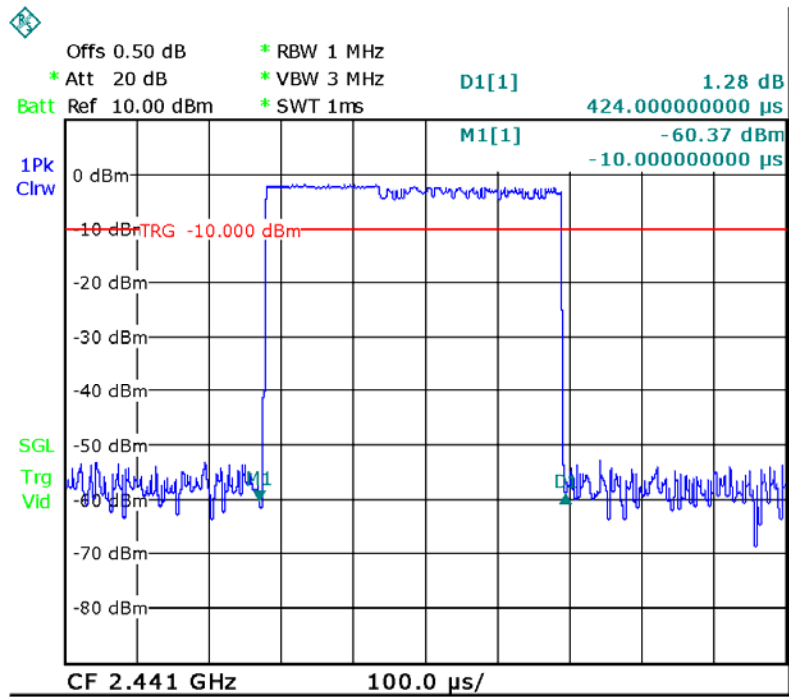


Date: 11.FEB.2014 11:27:42

Data Packet:DH1, High channel

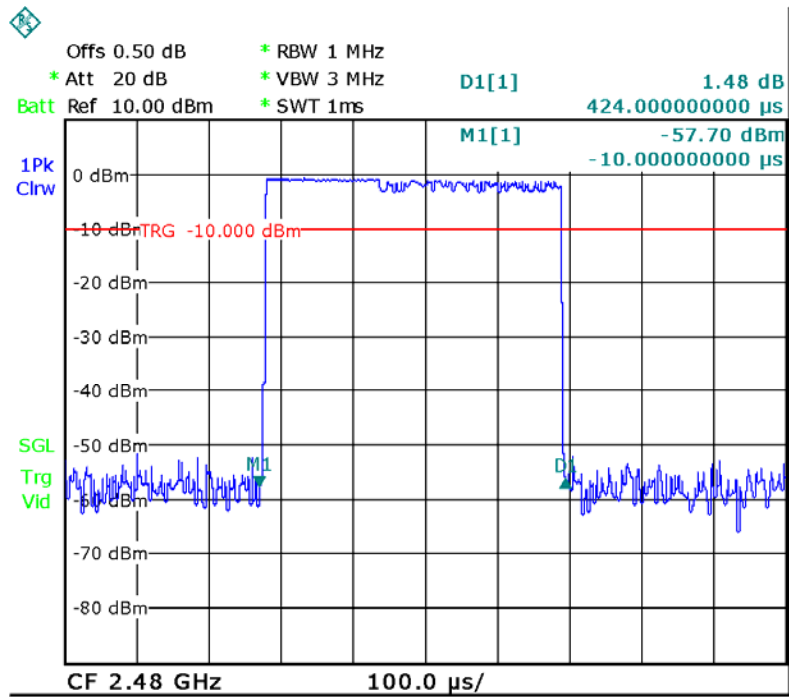


Date: 11.FEB.2014 11:26:31


Data Packet:DH3, Low channel

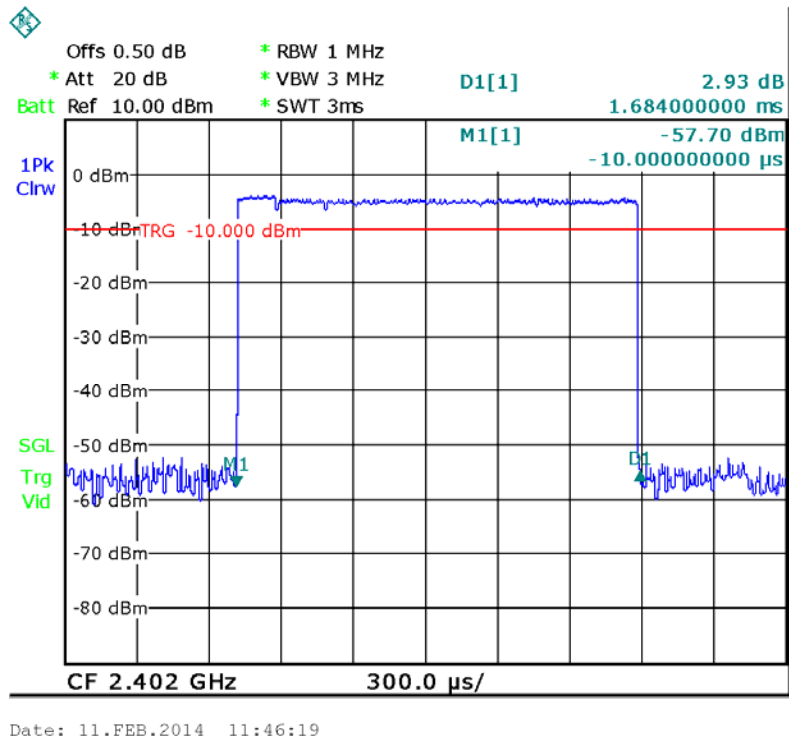

Data Packet:DH3, Middle channel

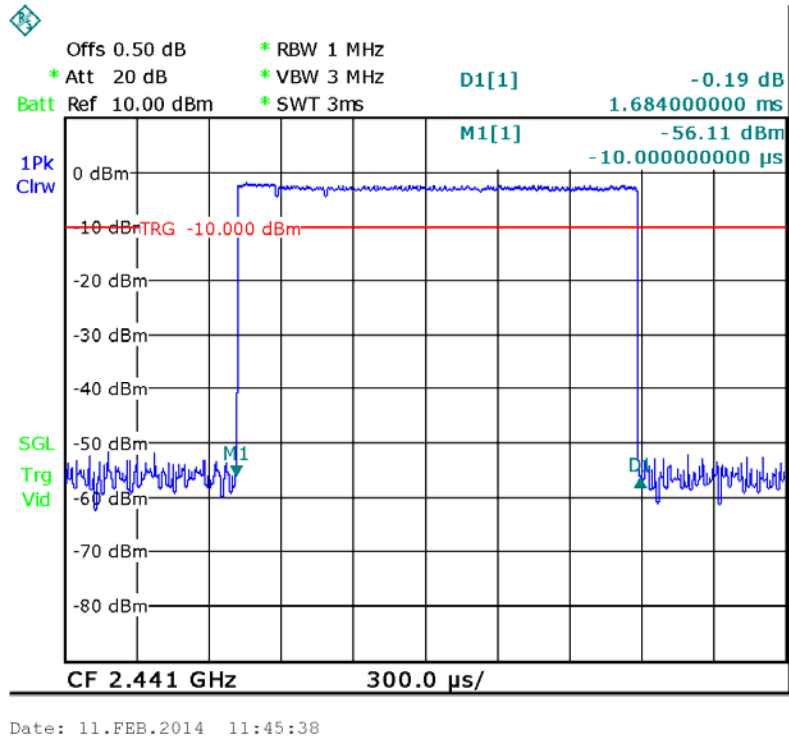


Packet:DH3, High channel

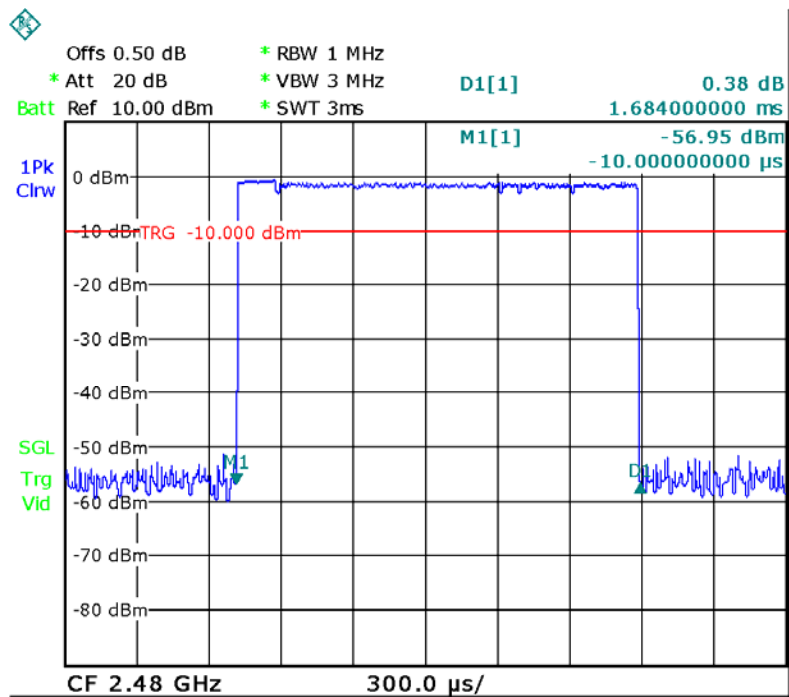


Date: 11.FEB.2014 11:45:09

Data Packet: DH5, Low channel

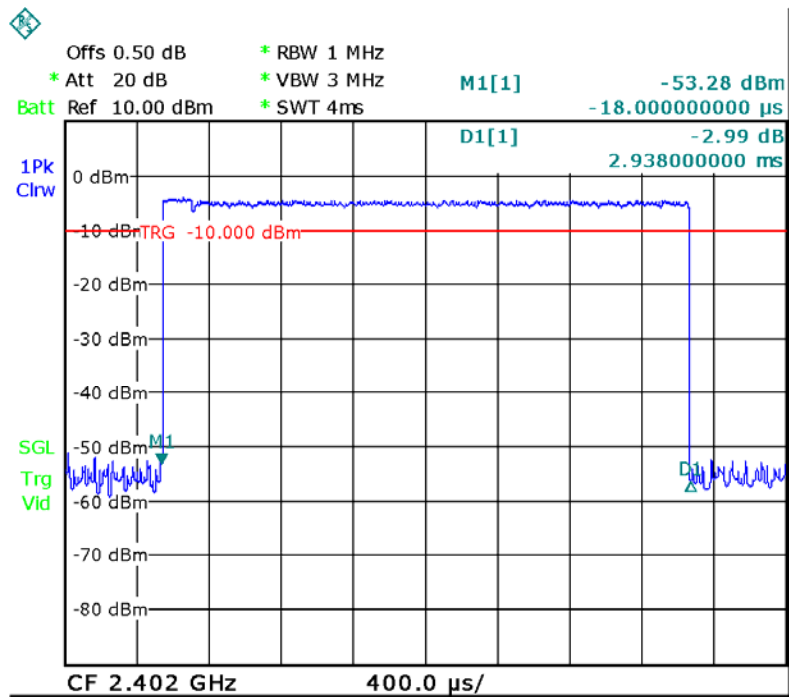


Date: 11.FEB.2014 11:58:31


Data Packet:DH5, Middle channel

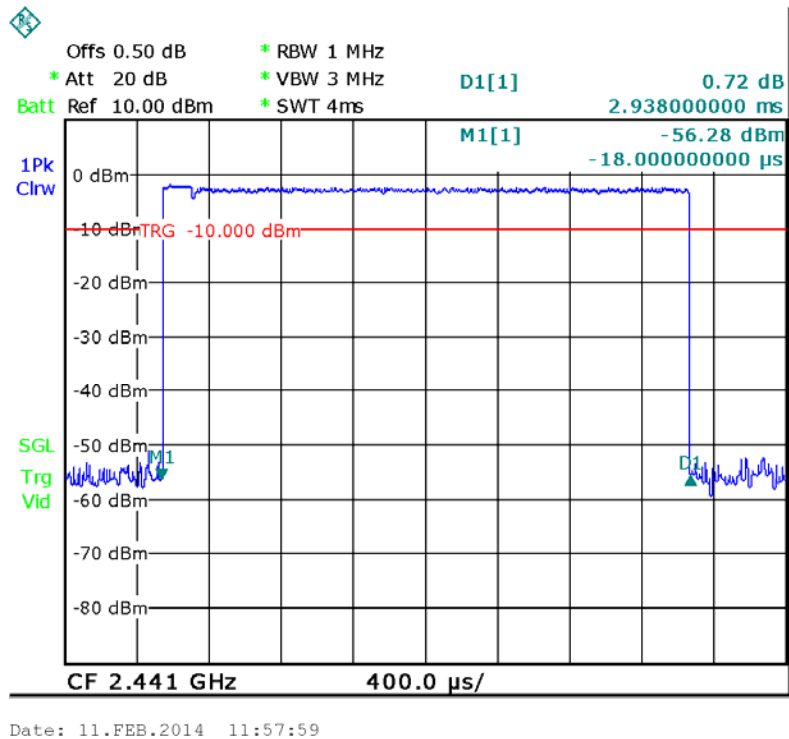

Data Packet: DH5, High channel

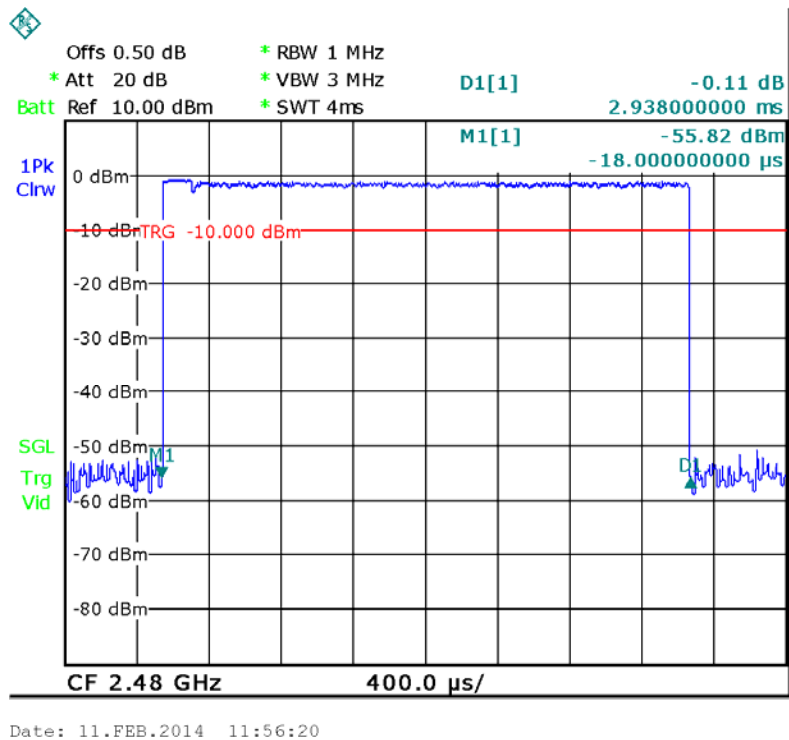


Modulation: 8DPSK
Data Packet: DH1, Low channel

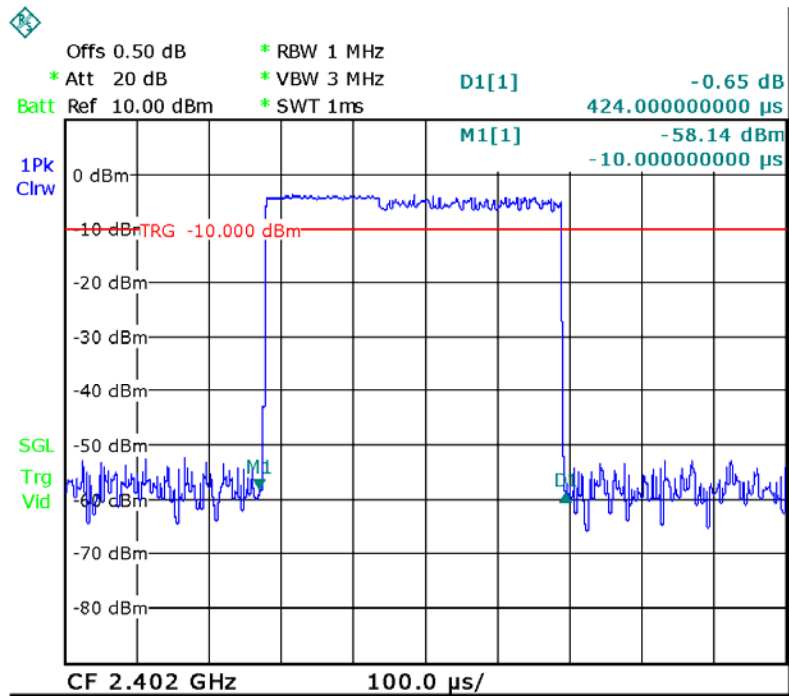


Date: 11.FEB.2014 11:35:25

Data Packet: DH1, Middle channel

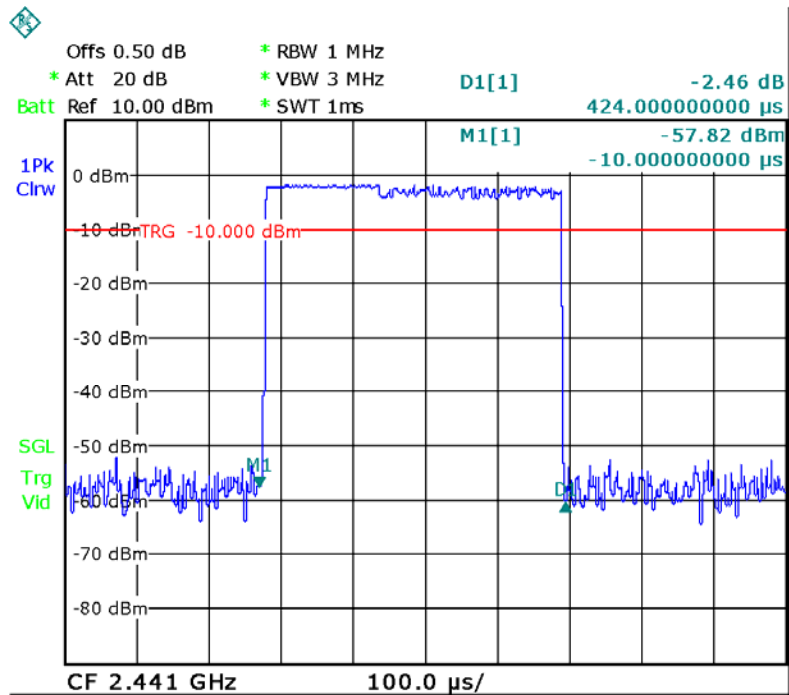


Date: 11.FEB.2014 11:33:22

Data Packet: DH1, High channel

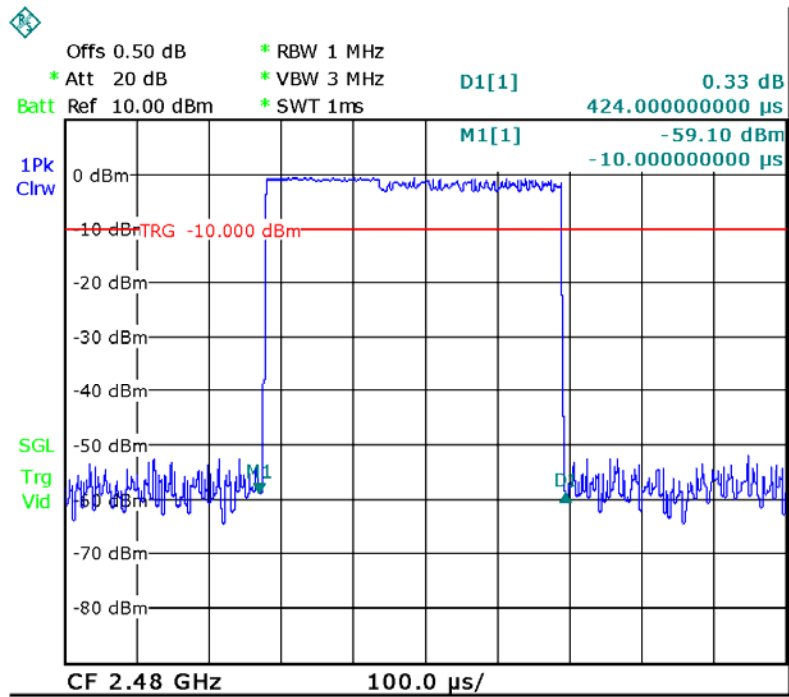


Date: 11.FEB.2014 11:32:55

Data Packet: DH3, Low channel

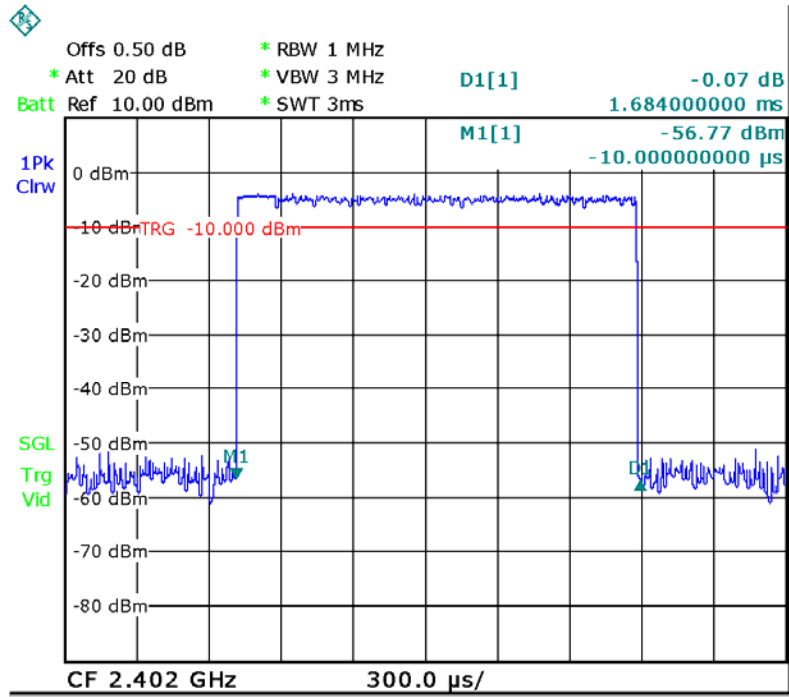


Date: 11.FEB.2014 11:46:44

Data Packet: DH3, Middle channel

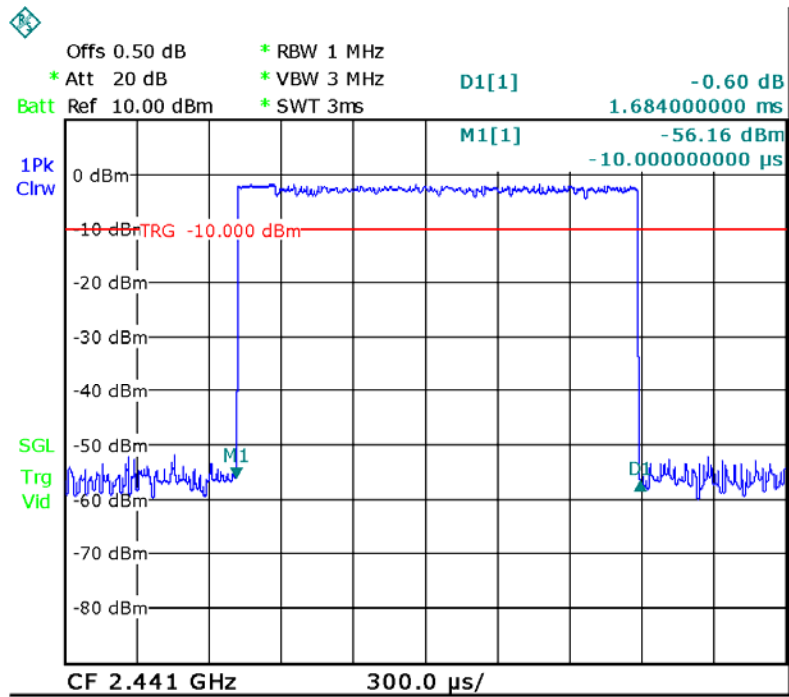


Date: 11.FEB.2014 11:47:16

Data Packet: DH3, High channel

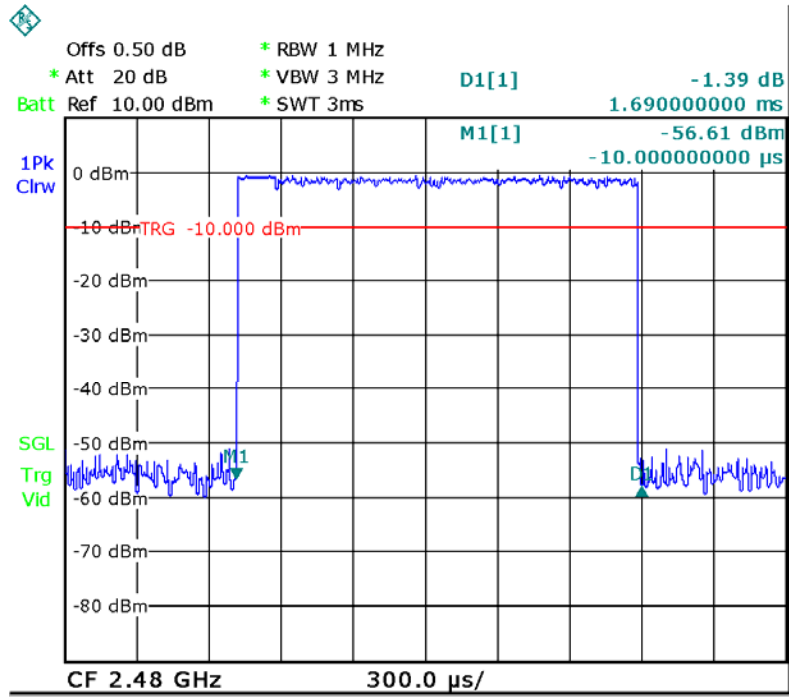


Date: 11.FEB.2014 11:52:48


Data Packet: DH5, Low channel

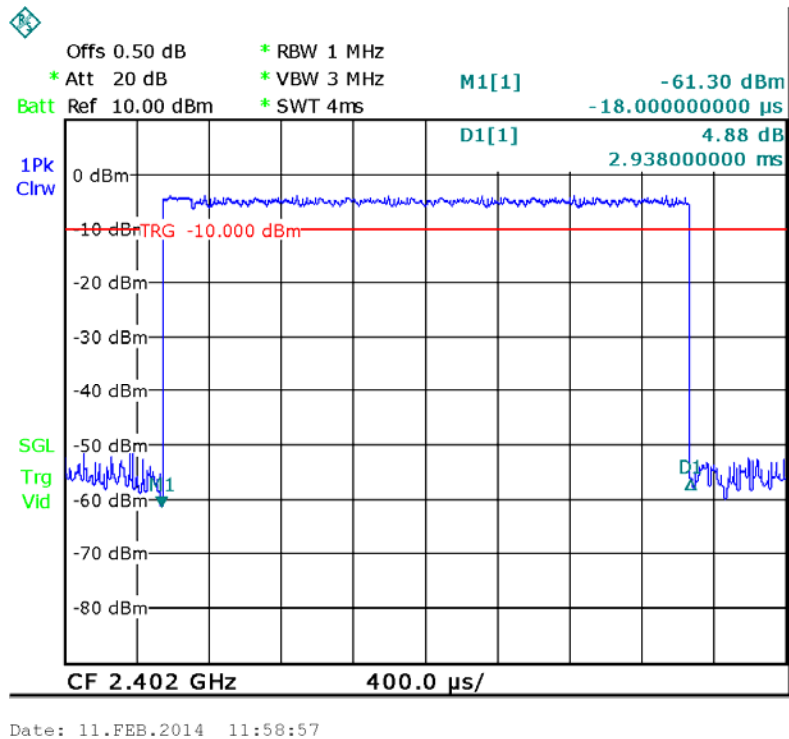

Data Packet: DH5, Middle channel

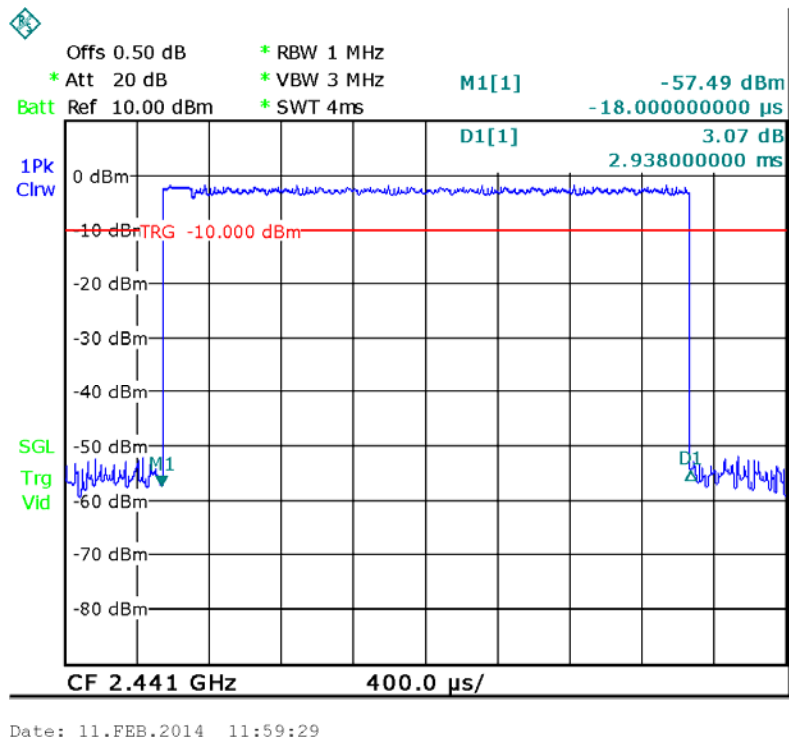

Data Packet: DH5, High channel

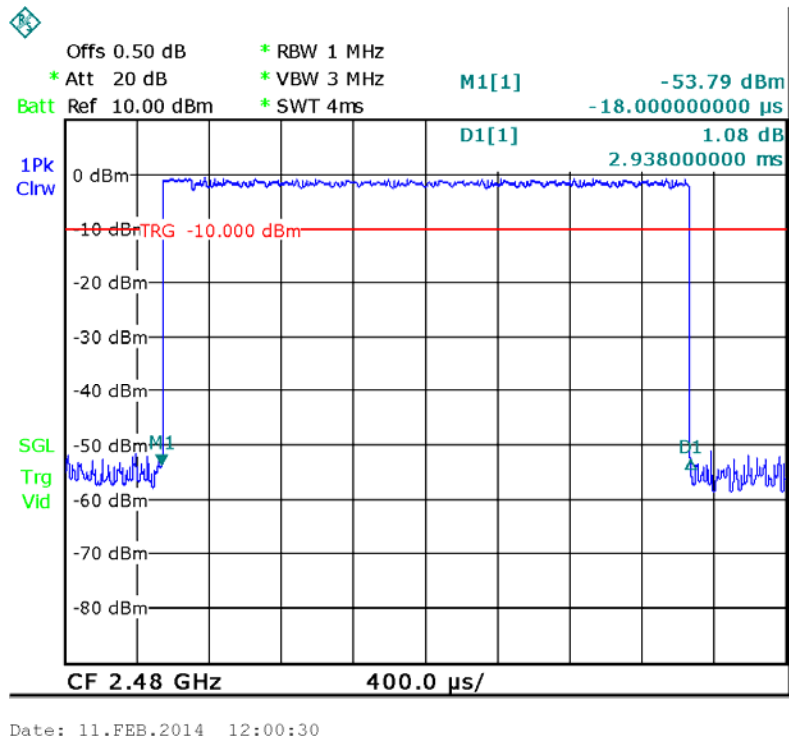

14 Antenna Requirement

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has a PCB printed antenna, fulfil the requirement of this section.

15 RF Exposure

Test Requirement: FCC Part 1.1307

Test Mode: The EUT work in transmitting mode

15.1 Requirements:

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess limit for maximum permissible exposure. In accordance with 47 CFR FCC Part 2 Subpart J, section 2.1091 this device has been defined as a mobile device whereby a distance of 0.2 m normally can be maintained between the user and the device.

15.2 The procedures / limit

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30

Note: f = frequency in MHz ; *Plane-wave equivalent power density

15.3 MPE Calculation Method

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d} \quad \text{Power Density: } Pd \text{ (W/m}^2\text{)} = \frac{E^2}{377}$$

E = Electric field (V/m)

P = Peak RF output power (W)

G = EUT Antenna numeric gain (numeric)

d = Separation distance between radiator and human body (m)

The formula can be changed to

$$Pd = \frac{30 \times P \times G}{377 \times d^2}$$

From the peak EUT RF output power, the minimum mobile separation distance, d=0.2m, as well as the gain of the used antenna, the RF power density can be obtained

Modulation	Antenna Gain (numeric)	Peak Output Power (dBm)	Peak Output Power (mW)	Power Density (mW/cm ²)	Limit of Power Density (mW/cm ²)
GFSK	1.000	1.28	1.34300	0.00027	1.0
Pi/4DQPSK	1.000	0.43	1.10407	0.00022	1.0
8DPSK	1.000	0.52	1.12719	0.00022	1.0


16 Photographs – Test Setup

16.1 Photograph –Power Line Conducted Emission Test Setup




16.2 Photograph – Radiated Emission Test Setup


Below 30MHz

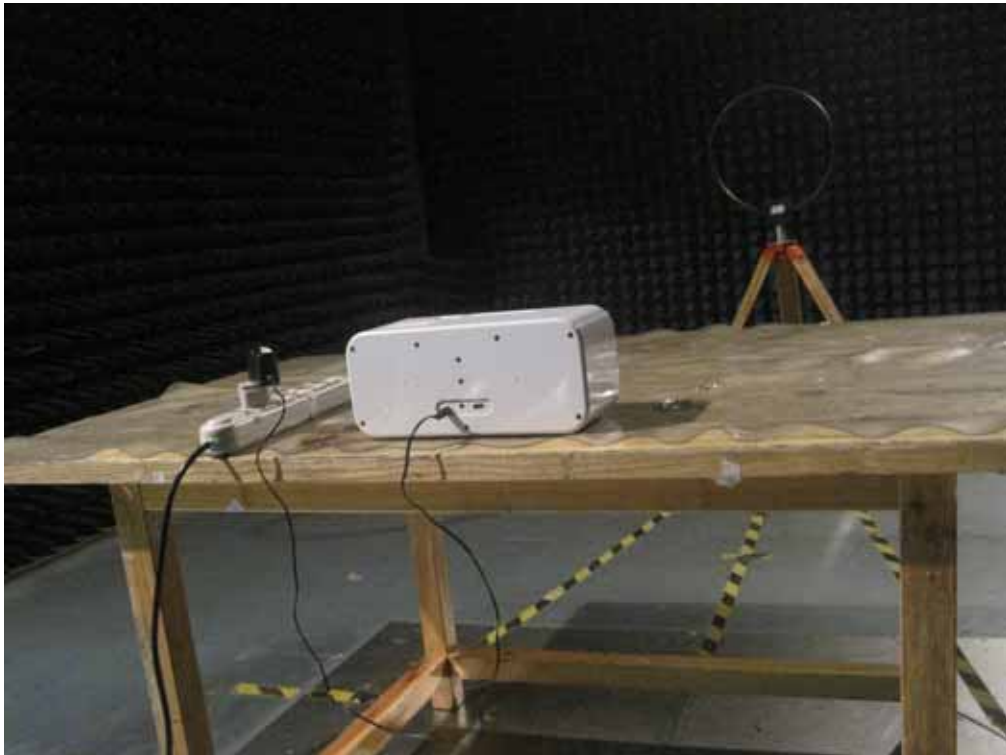

From 30-1000MHz

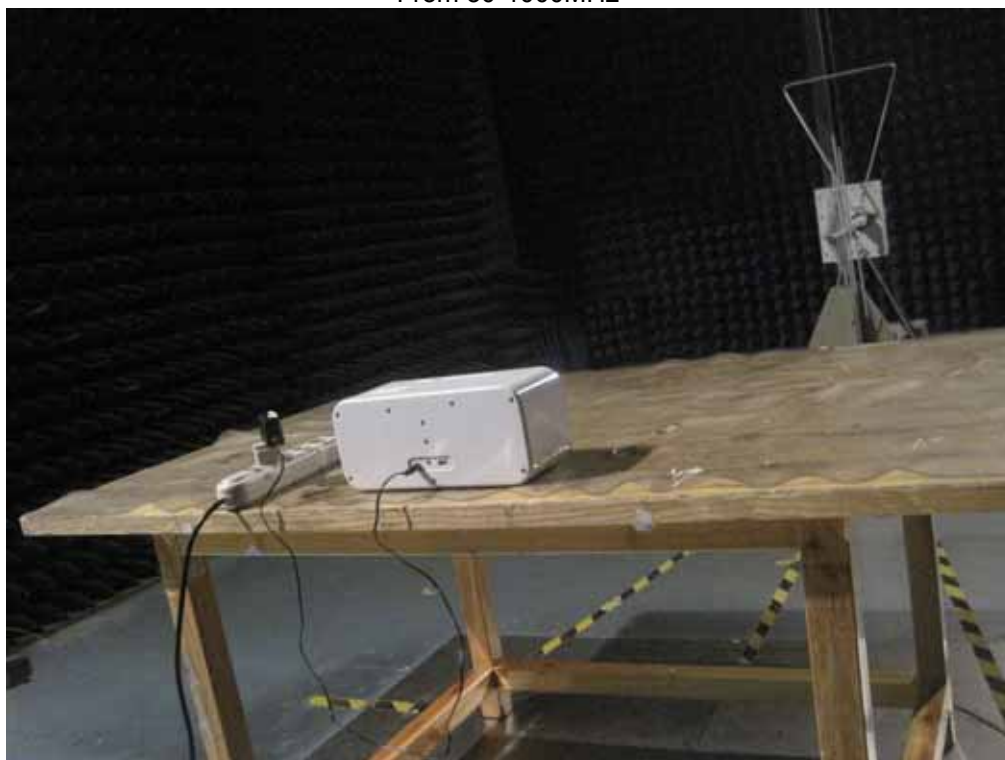

Above 1GHz

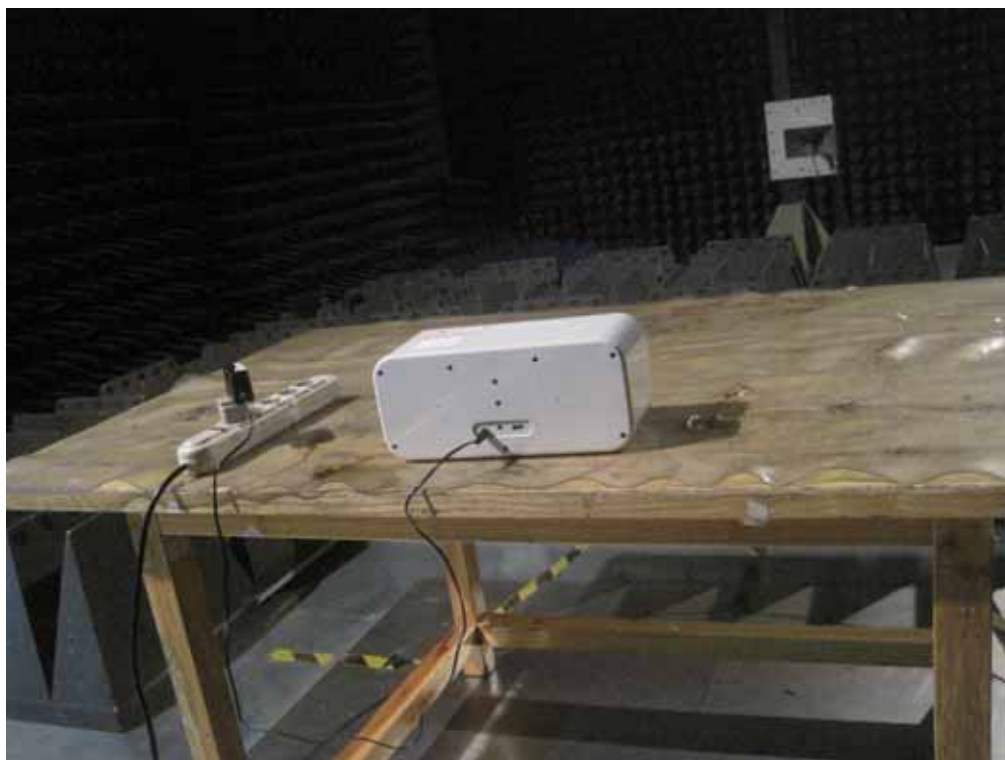


17 Photographs - Constructional Details

17.1 EUT – Appearance View







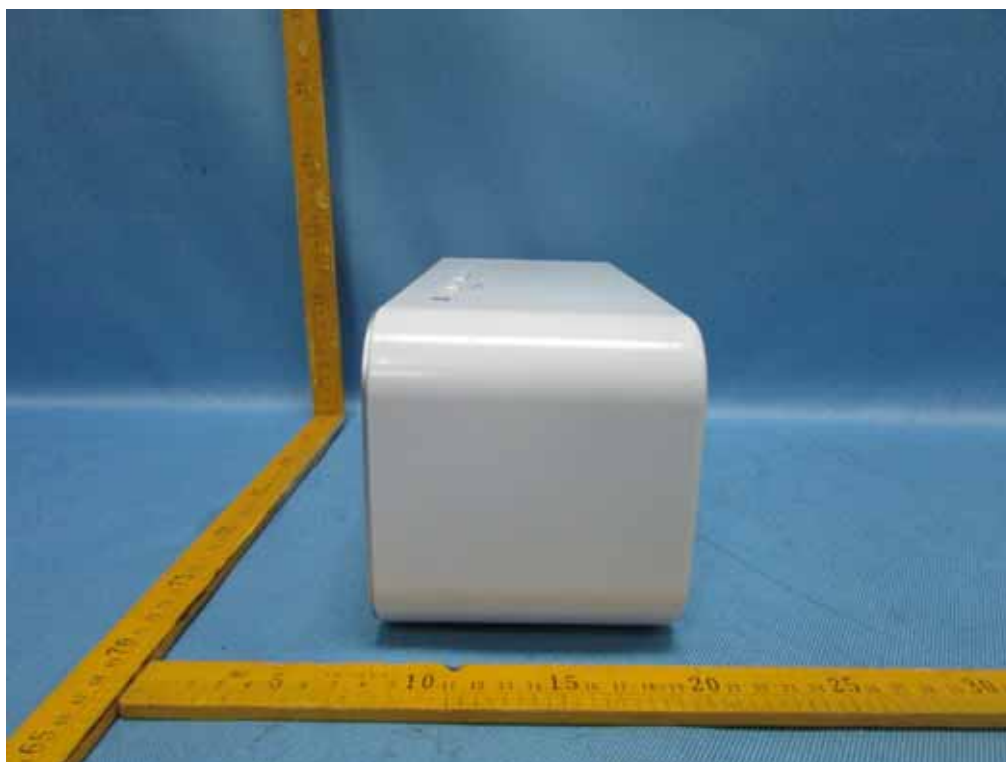










17.2 EUT – Internal View

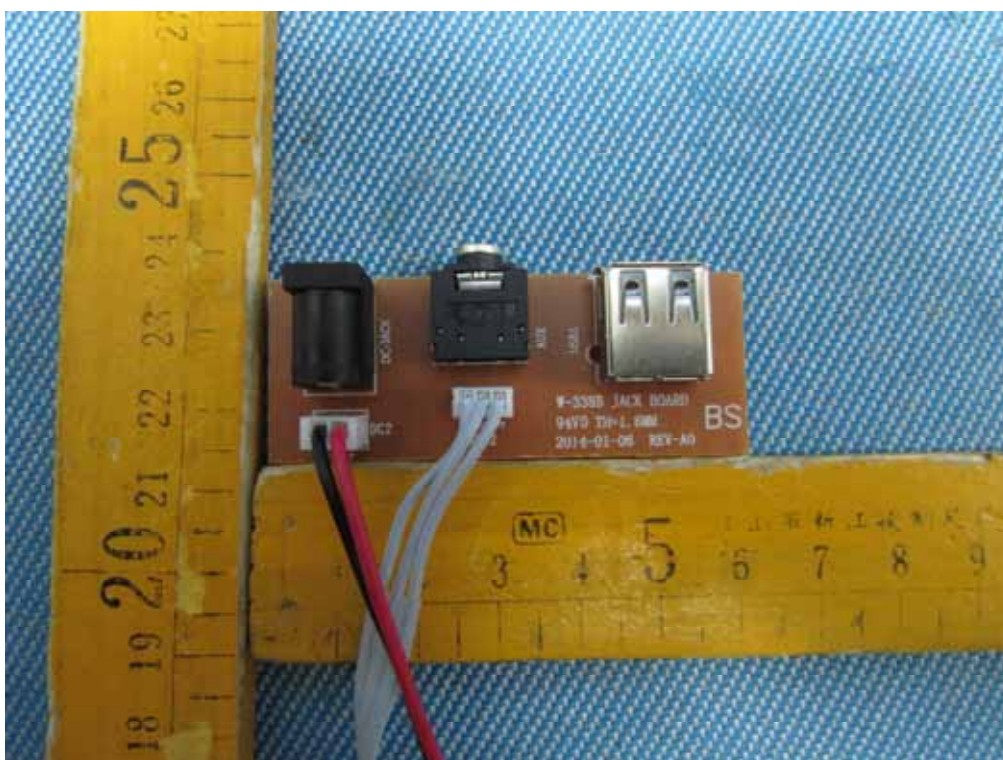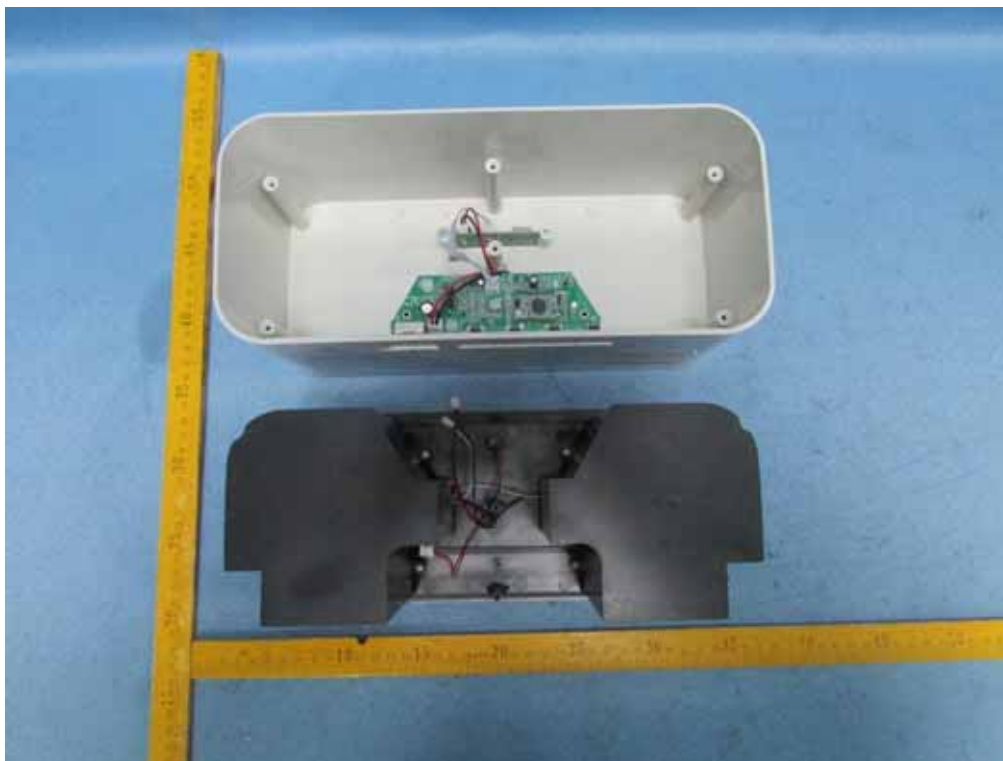

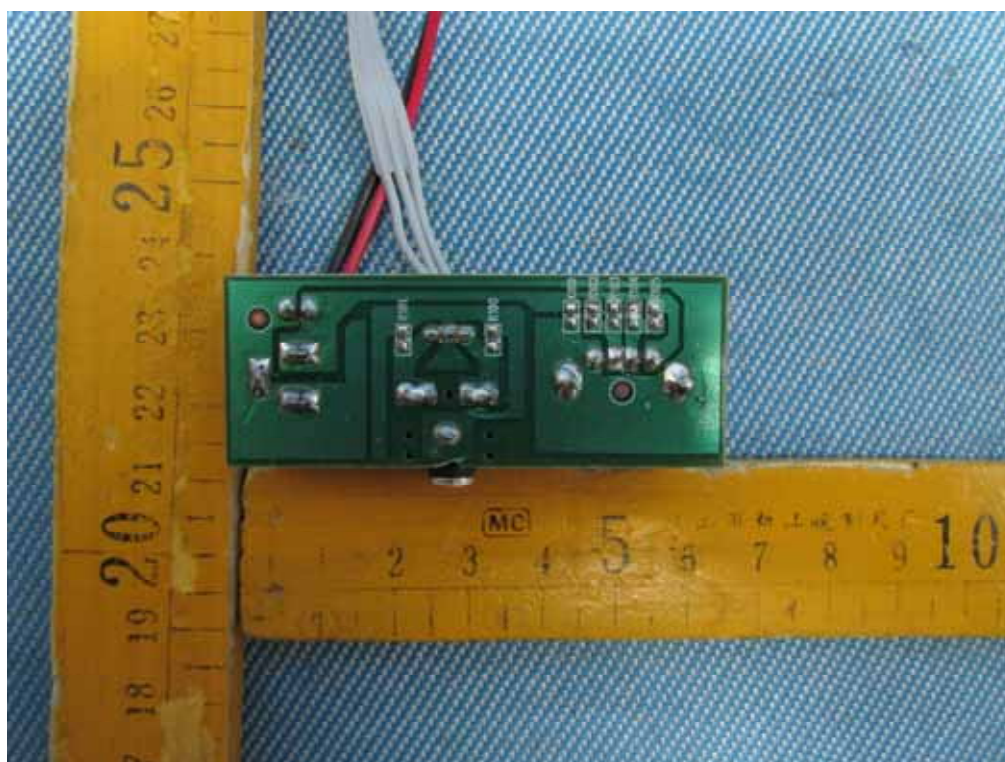


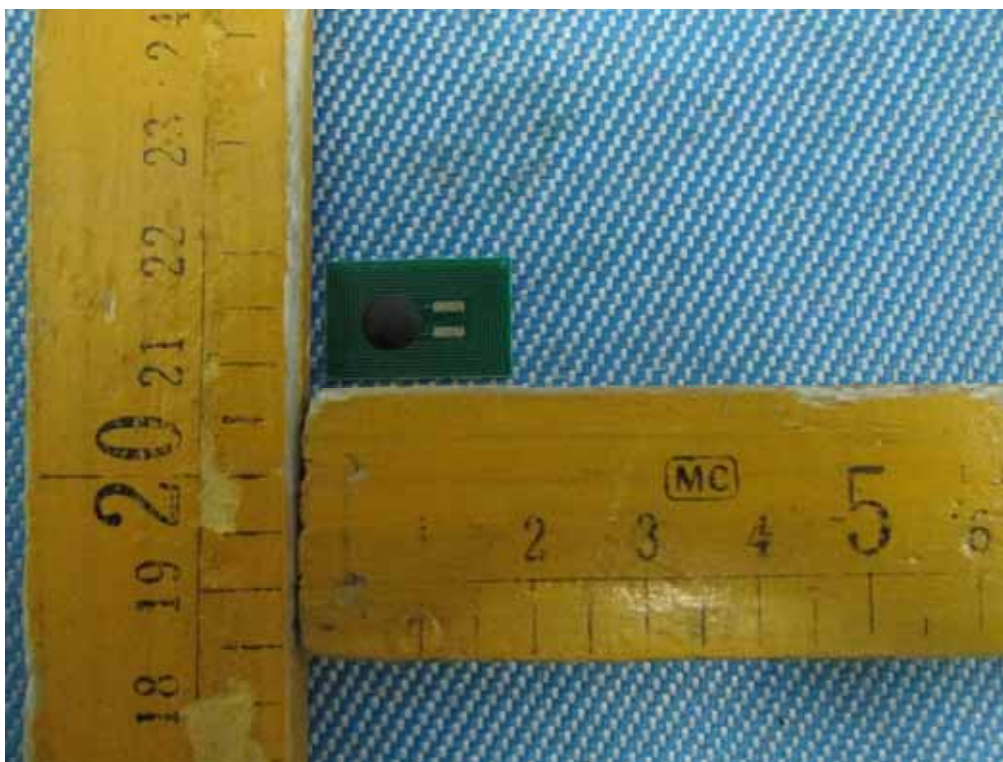


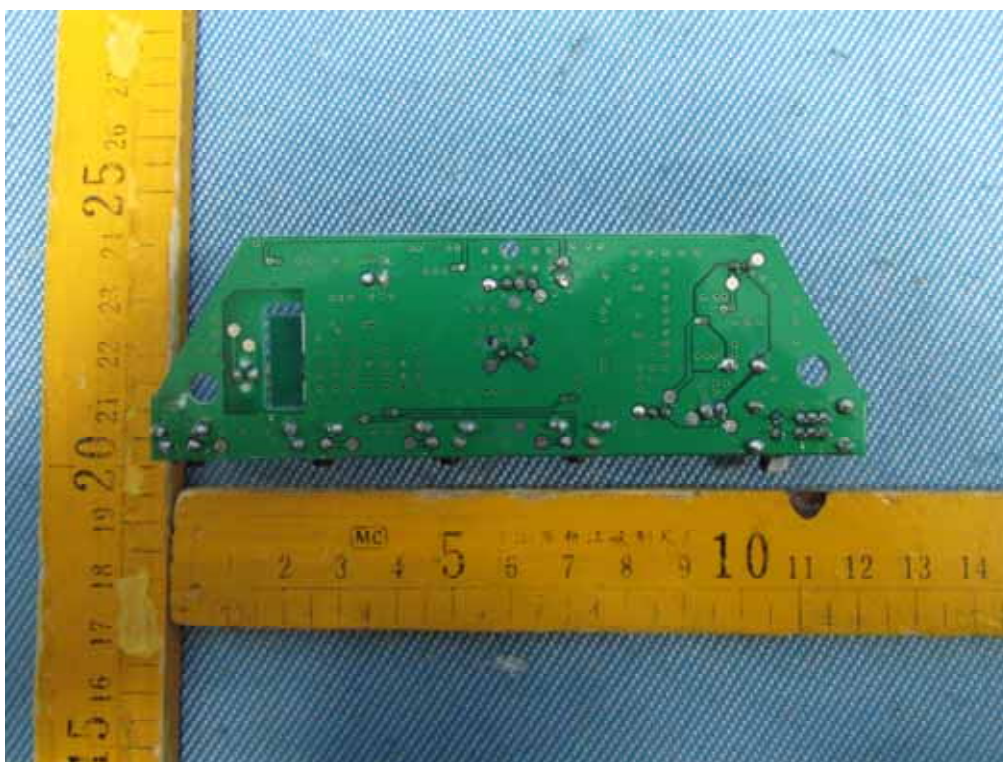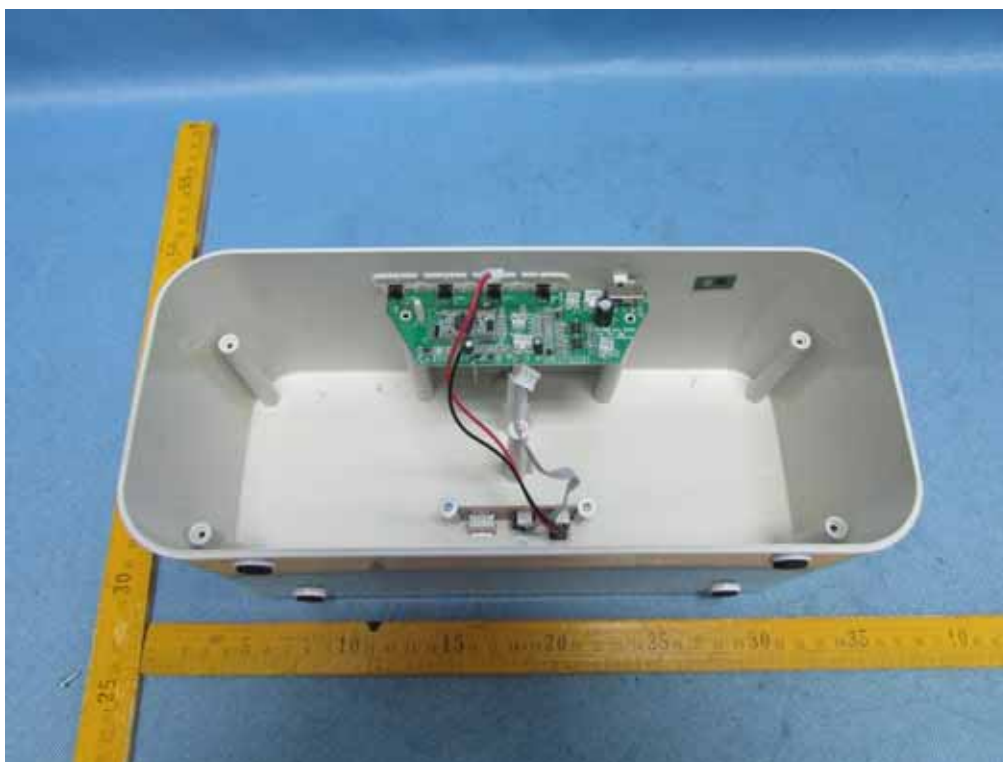

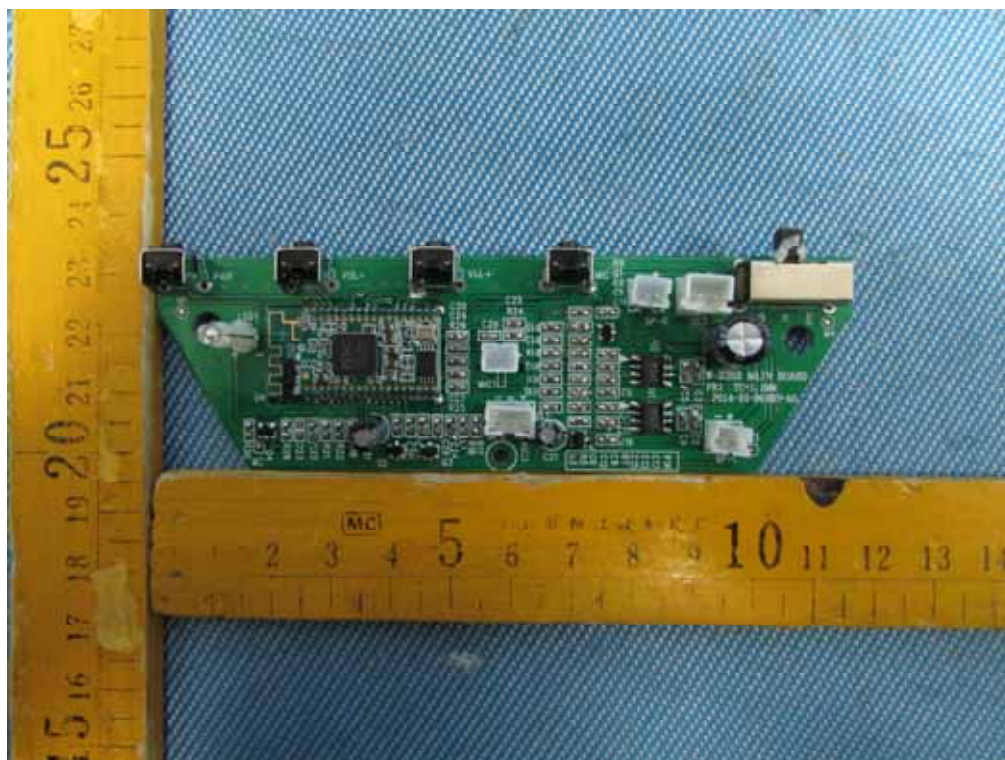

17.3 EUT – RF Module View

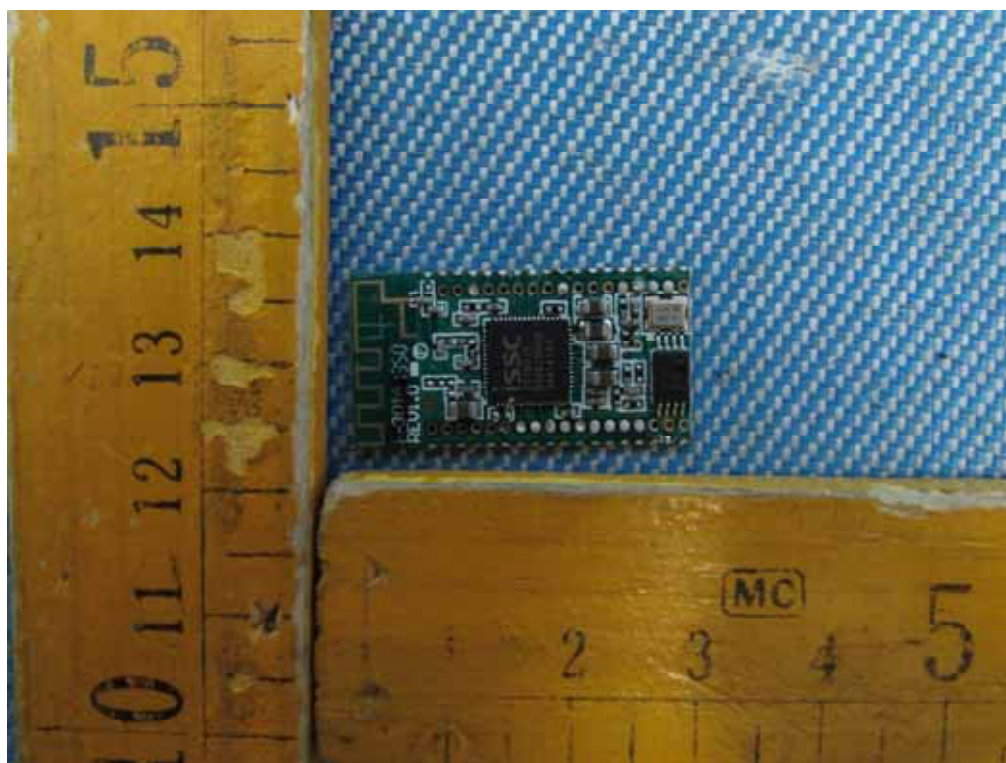

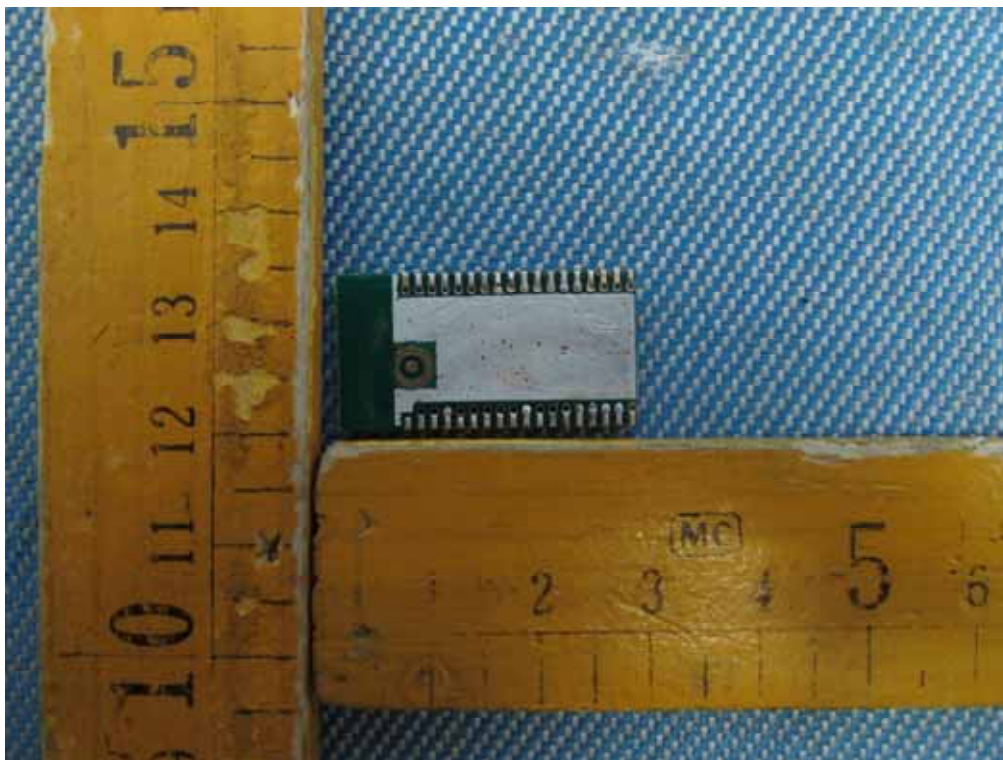

====End of Report====