

**ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT
INTENTIONAL RADIATOR CERTIFICATION TO
FCC PART 15 SUBPART C REQUIREMENT**

OF

Car MP3 Player

MODEL No.: EF200A

FCC ID: S7JEF200A

REPORT NO: E0804086F

ISSUE DATE: April 23, 2008

Prepared for

SHENZHEN YIFANG DIGITAL TECHNOLOGIES CO., LTD.

**5/F, Bldg.H-3, Huaqiaocheng East Industrial Park, Nanshan,
Shenzhen, Guangdong, 518000, China**

Prepared by

SHENZHEN EMTEK CO., LTD

**Bldg 69, Majialong Industry Zone, Nanshan District,
Shenzhen, Guangdong, China**

TEL: 86-755-26954280

FAX: 86-755-26954282

VERIFICATION OF COMPLIANCE

Applicant:	SHENZHEN YIFANG DIGITAL TECHNOLOGIES CO., LTD. 5/F, Bldg.H-3, Huaqiaocheng East Industrial Park, Nanshan, Shenzhen,Guangdong, 518000, China
Product Description:	Car MP3 Player
Brand Name:	N/A
Model Number:	EF200A
Serial Number:	N/A
File Number:	E0804086F
Date of Test:	April 18, 2008 to April 23, 2008

We hereby certify that:

The above equipment was tested by SHENZHEN EMTEK CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2003) and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.239.

The test results of this report relate only to the tested sample identified in this report.

Approved By



David Lee / Q.A. Manager
SHENZHEN EMTEK CO., LTD.

Table of Contents

- 1. GENERAL INFORMATION 4**
 - 1.1 PRODUCT DESCRIPTION..... 4
 - 1.2 RELATED SUBMITTAL(S) / GRANT (S) 4
 - 1.3 TEST METHODOLOGY..... 4
 - 1.4 SPECIAL ACCESSORIES 4
 - 1.5 EQUIPMENT MODIFICATIONS 4
 - 1.6 TEST FACILITY 5
- 2. SYSTEM TEST CONFIGURATION 6**
 - 2.1 EUT CONFIGURATION..... 6
 - 2.2 EUT EXERCISE 6
 - 2.3 TEST PROCEDURE..... 6
 - 2.4 LIMITATION 6
 - 2.5 CONFIGURATION OF TESTED SYSTEM 8
- 3. SUMMARY OF TEST RESULTS 9**
- 4. DESCRIPTION OF TEST MODES 9**
- 5. RADIATED EMISSION TEST 10**
 - 5.1 MEASUREMENT PROCEDURE..... 10
 - 5.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) 11
 - 5.3 MEASUREMENT EQUIPMENT USED: 12
 - 5.4 MEASUREMENT RESULT..... 12
 - 5.5 RADIATION MEASUREMENT PHOTOS 21
- 6. OCCUPIED BANDWIDTH..... 22**
 - 6.1 MEASUREMENT PROCEDURE..... 22
 - 6.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) 22
 - 6.3 MEASUREMENT EQUIPMENT USED: 22
 - 6.4 MEASUREMENT RESULTS:..... 22
 - 6.5 RADIATED EMISSION SETUP PHOTOS..... 23

1. GENERAL INFORMATION

1.1 Product Description

The SHENZHEN YIFANG DIGITAL TECHNOLOGIES CO., LTD. Model: EF200A (referred to as the EUT in this report). The EUT is a car using stereo Car MP3 Player, with a high quality stereo Car MP3 Player IC inside; The actual tuning Controls can be manually adjusted to from 88.1 MHz to 107.9MHz with channel spacing of 100KHz.

A major technical descriptions of EUT is described as following:

- A). Operation Frequency: 88.1MHz~107.9MHz
- B). Antenna Designation: Internal
- C). Power Supply: 1.5V Battery or DC12V
- D). Channel Spacing: 100KHz

1.2 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: S7JEF200A filing to comply with Section 15.239 of the FCC Part 15, Subpart C Rules.

1.3 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.4 (2003). Radiated testing was performed at an antenna to EUT distance 3 meters.

1.4 Special Accessories

Not available for this EUT intended for grant.

1.5 Equipment Modifications

Not available for this EUT intended for grant.

1.6 Test Facility

Site Description
EMC Lab.

: Accredited by CNAS, 2005.11.02
The certificate is valid until 2010.11
The Laboratory has been assessed and proved to be in compliance
with CNAS-CL01: 2006(identical to ISO/IEC17025: 2005)
The Certificate Registration Number is L2291

Accredited by TUV Rheinland Guangzhou, 2008.3
The Laboratory has been assessed according to the requirements
ISO/IEC 17025

Accredited by FCC, July 07, 2005
The Certificate Registration Number is 709623.

Accredited by Industry Canada, August 30, 2005
The Certificate Registration Number is 46405-4480

Name of Firm
Site Location

: SHENZHEN EMTEK CO., LTD
: Bldg 69, Majialong Industry Zone,
Nanshan District, Shenzhen, Guangdong, China

2. System Test Configuration

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The Transmitter was operated in the normal operating mode. The Tx frequency was 88.1MHz~107.9MHz.

2.3 Test Procedure

2.3.1 Conducted Emissions (Not apply in the report)

The EUT is a placed on as turn table which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4-2003. Conducted emissions from the EUT measured in the **frequency range between 0.15 MHz and 30MHz** using **CISPR Quasi-Peak and average detector mode**.

2.3.2 Radiated Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter(EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4-2003.

2.4 Limitation

(1) Radiated Emission

- (b) The field strength of any emissions within the permitted 200kHz band shall not exceed 250 microvolts/meter at 3 meters, The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in section 15.35 for limiting peak emissions apply.
- (c) The field strength of any emissions radiated on any frequency outside of the specified 200Khz band shall not exceed the general radiated emission limits in Section 15.209.

Remark: The limit for average field strength dBuv/m for the fundamental frequency=48.0 dBuv/m.
And the limit for peak field strength dBuv/m for the fundamental frequency=68.0 dBuv/m.

Intentional Radiators general limit).as below.

Frequency (MHz)	Field strength $\mu\text{V/m}$	Distance(m)	Field strength at 3m $\text{dB}\mu\text{V/m}$
1.705-30	30	30	69.54
30-88	100	3	40
88-216	150	3	43.5
216-960	200	3	46
Above 960	500	3	54

(2) Occupied Bandwidth

- (a) Emissions from the intentional radiator shall be confined within a band 200kHz wide centered on the operation frequency; The 200kHz band shall lie wholly within the frequency range of 88.1-107.9MHz.

2.5 Configuration of Tested System

Fig. 2-1 Configuration of Tested System



Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
1.	Car MP3 Player	Yifang	EF200A	S7JEF200A	N/A	EUT
2.	MP3 player	Tongfang	T258	N/A	N/A	

Note:

- (1) Unless otherwise denoted as EUT in 'Remark' column, device(s) used in tested system is a support equipment.

3. Summary Of Test Results

FCC Rules	Description Of Test	Result
§ 15.239	Radiated Emission	Compliant
§ 15.239	Bandwidth Test	Compliant

4. Description of test modes

The EUT (Car MP3 Player) has been tested under normal operating condition.

Three channels of EUT (the lowest channel, the middle channel and the highest channel) have been chosen for testing under Normal Operating condition. In this report, all the measured datum of the three channels have been reported. No software used to control the EUT for staying in continuous transmitting mode for testing.

1. For lowest channel : 88.1MHz
2. For middle channel : 98.0MHz
3. For highest channel: 107.9MHz


5. Radiated Emission Test

5.1 Measurement Procedure


- 1 The EUT was placed on a turn table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measured were complete.

5.2 Test SET-UP (Block Diagram of Configuration)

(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

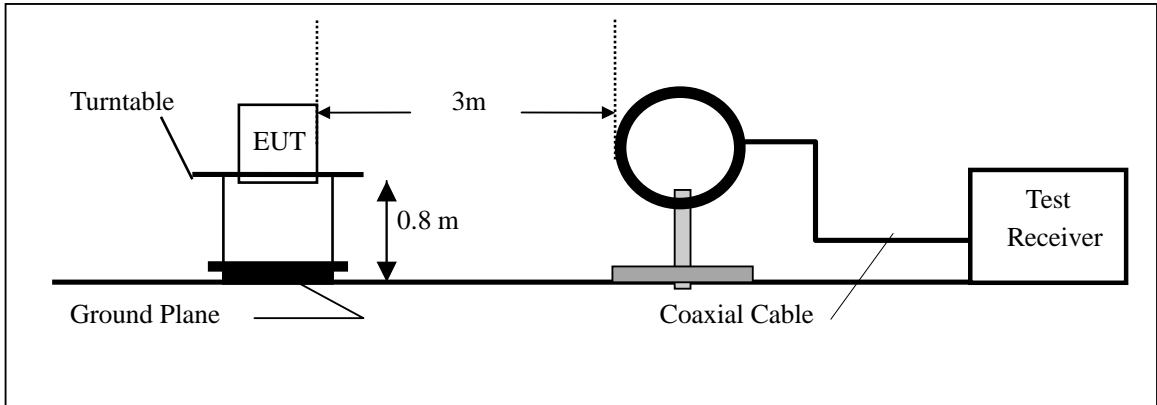

(B) Radiated Emission Test Set-Up, Frequency Below 1000MHz

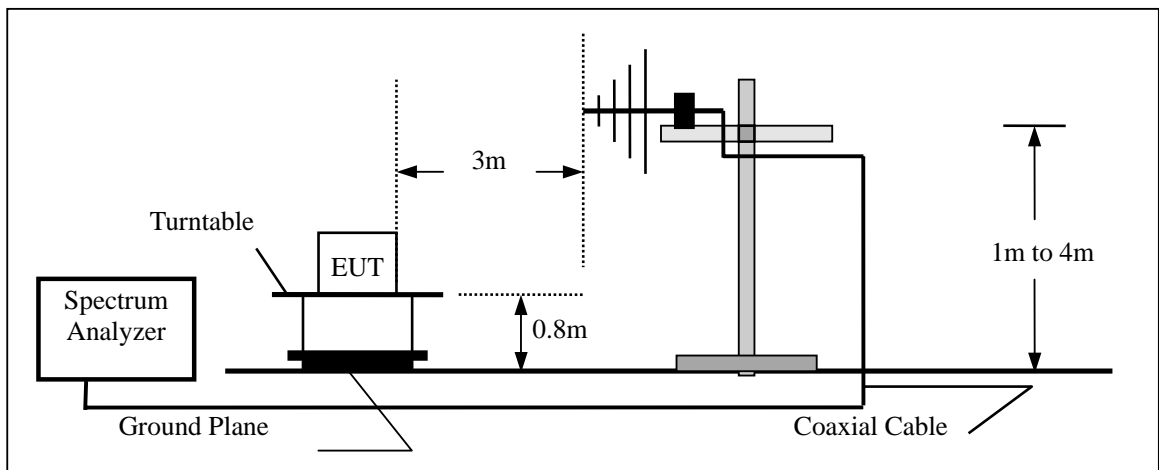

Operation Mode: Transmitting Mode Test Date : April 20, 2008
 Test Item: Fundamental Radiated Emission Data Temperature : 28
 Fundamental Frequency: Middle channel Humidity : 65 %
 Test Result: PASS Test By: Andy

Peak Measurement

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV)	Limit 3m (dBuV/m)	Margin (dB)	Note
98.0	V	47.70	68	-20.30	Peak
98.0	H	37.48	68	-30.52	Peak

Average Measurement

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV)	Limit 3m (dBuV/m)	Margin (dB)	Note
98.0	V	45.28	48.00	-2.72	AV
98.0	H	35.88	48.00	-12.12	AV

Note: (1) All Readings are Peak Value.
 (2) Emission Level= Reading Level+Probe Factor +Cable Loss
 (3) The average measurement was not performed when the peak measured data under the limit of average detection.

Operation Mode: Transmitting Mode Test Date : April 20, 2008
Test Item: Fundamental Radiated Emission Data Temperature : 28
Fundamental Frequency: Highest channel Humidity : 65 %
Test Result: PASS Test By: Andy

Peak Measurement

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV)	Limit 3m (dBuV/m)	Margin (dB)	Note
107.90	V	37.57	68.00	-30.43	Peak
107.90	H	43.56	68.00	-24.44	Peak

Average Measurement

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV)	Limit 3m (dBuV/m)	Margin (dB)	Note
107.90	V	36.32	48.00	-11.68	AV
107.90	H	41.10	48.00	-6.90	AV

Note: (1) All Readings are Peak Value.
(2) Emission Level= Reading Level+Probe Factor +Cable Loss
(3) The average measurement was not performed when the peak measured data under the limit of average detection.

B. General Radiated Emission Data

Power supply: DC 1.5V Battery

Operation Mode:	Transmitting Mode	Test Date :	April 20, 2008
Test Item:	General Radiated Emission Data	Temperature :	28
Fundamental Frequency:	Lowest channel	Humidity :	65 %
Test Result:	PASS	Test By:	Andy

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV)	Limit 3m (dBuV/m)	Margin (dB)	Note
176.175	V	25.62	43.50	-17.88	Peak
264.300	V	27.65	46.00	-18.35	Peak
352.400	V	26.91	46.00	-19.09	Peak
440.400	V	33.73	46.00	-12.27	Peak
528.500	V	38.51	46.00	-7.49	Peak
616.690	V	35.62	46.00	-10.38	Peak
704.825	V	32.57	46.00	-13.43	Peak
792.901	V	28.16	46.00	-17.84	Peak
881.252	V	27.63	46.00	-18.37	Peak
176.200	H	29.85	43.50	-13.65	Peak
264.300	H	28.54	46.00	-17.46	Peak
352.400	H	27.69	46.00	-18.31	Peak
440.400	H	42.40	46.00	-3.60	Peak
528.500	H	43.65	46.00	-2.35	Peak
616.60	H	38.31	46.00	-7.69	Peak
704.825	H	35.62	46.00	-10.38	Peak
792.903	H	32.61	46.00	-13.39	Peak
881.225	H	28.62	46.00	-17.38	Peak

Note: Emission Level= Reading Level+ Probe Factor +Cable Loss

Power supply: DC 12V

Operation Mode:	Transmitting Mode	Test Date :	April 20, 2008
Test Item:	General Radiated Emission Data	Temperature :	28
Fundamental Frequency:	Lowest channel	Humidity :	65 %
Test Result:	PASS	Test By:	Andy

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV)	Limit 3m (dBuV/m)	Margin (dB)	Note
176.1756	V	25.24	43.50	-18.26	Peak
264.300	V	26.34	46.00	-19.66	Peak
352.400	V	27.25	46.00	-18.75	Peak
440.400	V	32.37	46.00	-13.63	Peak
528.500	V	38.24	46.00	-7.76	Peak
616.690	V	35.28	46.00	-10.72	Peak
704.825	V	32.43	46.00	-13.57	Peak
792.901	V	28.27	46.00	-17.73	Peak
881.252	V	27.35	46.00	-18.65	Peak
176.200	H	28.39	43.50	-15.11	Peak
264.300	H	28.95	46.00	-17.05	Peak
352.400	H	27.98	46.00	-18.02	Peak
440.400	H	42.15	46.00	-3.85	Peak
528.500	H	42.35	46.00	-3.65	Peak
616.60	H	38.62	46.00	-7.38	Peak
704.825	H	35.23	46.00	-10.77	Peak
792.903	H	33.41	46.00	-12.59	Peak
881.225	H	27.87	46.00	-18.13	Peak

Note: Emission Level= Reading Level+ Probe Factor +Cable Loss

Power supply : DC1.5V Battery

Operation Mode:	Transmitting Mode	Test Date :	April 20, 2008
Test Item:	General Radiated Emission Data	Temperature :	28
Fundamental Frequency:	Middle channel	Humidity :	65 %
Test Result:	PASS	Test By:	Andy

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV)	Limit 3m (dBuV/m)	Margin (dB)	Note
196.01	v	25.62	43.50	-17.88	Peak
294.00	v	24.95	46.00	-21.05	Peak
392.00	v	30.63	46.00	-15.37	Peak
490.10	v	36.38	46.00	-9.62	Peak
588.12	v	36.15	46.00	-9.85	Peak
686.21	v	41.28	46.00	-4.72	Peak
784.14	v	38.64	46.00	-7.36	Peak
882.05	v	37.15	46.00	-8.85	Peak
980.12	v	36.57	54.00	-17.43	Peak
196.08	H	35.72	43.50	-7.78	Peak
294.10	H	30.51	46.00	-15.49	Peak
392.04	H	42.65	46.00	-3.35	Peak
490.14	H	44.25	46.00	-1.75	Peak
588.21	H	42.62	46.00	-3.38	Peak
686.14	H	38.62	46.00	-7.38	Peak
784.10	H	37.24	46.00	-8.76	Peak
882.05	H	35.91	46.00	-10.09	Peak
980.12	H	34.15	54.00	-19.85	Peak

Note: Emission Level= Reading Level+ Probe Factor +Cable Loss

Power supply: DC12V

Operation Mode:	Transmitting Mode	Test Date :	April 20, 2008
Test Item:	General Radiated Emission Data	Temperature :	28
Fundamental Frequency:	Middle channel	Humidity :	65 %
Test Result:	PASS	Test By:	Andy

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV)	Limit 3m (dBuV/m)	Margin (dB)	Note
196.01	v	25.12	43.50	-18.38	Peak
294.02	v	24.51	46.00	-21.49	Peak
392.10	v	30.23	46.00	-15.77	Peak
490.12	v	36.57	46.00	-9.43	Peak
588.14	v	36.24	46.00	-9.76	Peak
686.06	v	41.54	46.00	-4.46	Peak
784.11	v	38.46	46.00	-7.54	Peak
882.06	v	37.12	46.00	-8.88	Peak
980.11	v	36.45	54.00	-17.55	Peak
196.08	H	35.47	43.50	-8.03	Peak
294.10	H	30.75	46.00	-15.25	Peak
392.04	H	42.75	46.00	-3.25	Peak
490.14	H	44.34	46.00	-1.66	Peak
588.21	H	42.78	46.00	-3.22	Peak
686.14	H	38.35	46.00	-7.65	Peak
784.10	H	37.23	46.00	-8.77	Peak
882.05	H	35.54	46.00	-10.46	Peak
980.12	H	34.54	54.00	-19.46	Peak

Note: Emission Level= Reading Level+ Probe Factor +Cable Loss

Power supply: DC 1.5V Battery

Operation Mode: Transmitting Mode Test Date : April 20, 2008
 Test Item: General Radiated Emission Data Temperature : 28
 Fundamental Frequency: Highest channel Humidity : 65 %
 Test Result: PASS Test By: Andy

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV)	Limit 3m (dBuV/m)	Margin (dB)	Note
215.98	V	25.62	43.50	-17.88	Peak
323.72	V	25.64	46.00	-20.36	Peak
431.57	V	32.63	46.00	-13.37	Peak
539.50	V	39.15	46.00	-6.85	Peak
647.40	V	36.95	46.00	-9.05	Peak
755.30	V	35.24	46.00	-10.76	Peak
863.21	V	33.15	46.00	-12.85	Peak
971.10	V	31.32	46.00	-14.68	Peak
1079.70	V	28.10	54.00	-25.90	Peak
215.80	H	27.52	43.50	-15.98	Peak
323.70	H	29.16	46.00	-16.84	Peak
431.60	H	44.22	46.00	-1.78	Peak
539.50	H	44.68	46.00	-1.32	Peak
647.40	H	41.68	46.00	-4.32	Peak
755.30	H	42.24	46.00	-3.76	Peak
863.21	H	38.45	46.00	-7.55	Peak
971.10	H	37.58	46.00	-8.42	Peak
1079.70	H	34.14	54.00	-19.86	Peak

Note: Emission Level= Reading Level+ Probe Factor +Cable Loss

Power supply: DC 12V

Operation Mode: Transmitting Mode Test Date : April 20, 2008
 Test Item: General Radiated Emission Data Temperature : 28
 Fundamental Frequency: Highest channel Humidity : 65 %
 Test Result: PASS Test By: Andy

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV)	Limit 3m (dBuV/m)	Margin (dB)	Note
215.98	V	25.63	43.50	-17.87	Peak
323.72	V	25.23	46.00	-20.77	Peak
431.57	V	32.21	46.00	-13.79	Peak
539.50	V	39.23	46.00	-6.77	Peak
647.40	V	36.12	46.00	-9.88	Peak
755.30	V	34.94	46.00	-11.06	Peak
863.21	V	33.12	46.00	-12.88	Peak
971.10	V	31.43	46.00	-14.57	Peak
1079.70	V	28.45	54.00	-25.55	Peak
215.80	H	27.15	43.50	-16.35	Peak
323.70	H	29.73	46.00	-16.27	Peak
431.60	H	43.47	46.00	-2.53	Peak
539.50	H	43.71	46.00	-2.29	Peak
647.40	H	41.23	46.00	-4.77	Peak
755.30	H	42.37	46.00	-3.63	Peak
863.21	H	38.98	46.00	-7.02	Peak
971.10	H	35.36	46.00	-10.64	Peak
1079.70	H	34.32	54.00	-19.68	Peak

Note: Emission Level= Reading Level+ Probe Factor +Cable Loss

5.5 Radiation Measurement Photos



6. Occupied Bandwidth

6.1 Measurement Procedure

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Set EUT as normal operation
3. Set SPA Center Frequency = fundamental frequency , RBW = 10KHz, ,VBW= 30KHz
4. Set SPA Max hold. Mark peak.

Note: The EUT can be connected to MP3 Player. The input signal of EUT is controlled by MP3 Player. So the volume control of MP3 Player was set to maximum during the test. It means that the test was performed with the maximum audio input.

6.2 Test SET-UP (Block Diagram of Configuration)

Same as 4.2 Radiated Emission Measurement.

6.3 Measurement Equipment Used:

Same as 4.2 Radiated Emission Measurement.

6.4 Measurement Results:

The field strength of any emissions which appear outside of this band shall not exceed the general radiated emission limits in section 15.209.

Refer to attached data chart.

6.5 Radiated Emission Setup Photos



Band Width Test Data

