

EMT**ELECTRO MAGNETIC TEST, INC.**
1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000*FCC PART 15, SUBPART B*
*CLASS B TEST REPORT**for**the*

SLINGBOX AV

MODEL: SB240-100

Prepared for

SLING MEDIA, INC.
901 MARINERS ISLAND BOULEVARD, SUITE 300
SAN MATEO, CALIFORNIA 94404

Prepared by:


DOUG MOON

Approved by:



KEVIN BOTHMANN

ELECTRO MAGNETIC TEST, INC.
1547 PLYMOUTH STREET
MOUNTAIN VIEW, CALIFORNIA 94043
(650) 965-4000

DATE: SEPTEMBER 1, 2006

	REPORT BODY	APPENDICES		TOTAL
		A	B	
PAGES	16	15	3	34

This report shall not be reproduced except in full, without the written approval of Electro Magnetic Test, Inc.



ELECTRO MAGNETIC TEST, INC.

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

TABLE OF CONTENTS

SECTION	TITLE	PAGE
	GENERAL REPORT SUMMARY	04
	SUMMARY OF TEST RESULTS	05
1.	PURPOSE	06
2.	ADMINISTRATIVE DATA	07
2.1	Location of Testing	07
2.2	Traceability Statement	07
2.3	Cognizant Personnel	07
2.4	Date Test Sample was Received	07
2.5	Disposition of the Test Sample	07
2.6	Abbreviations and Acronyms	07
3.	APPLICABLE DOCUMENTS	08
4.	DESCRIPTION OF TEST CONFIGURATIONS	09
4.1	Description of Test Configuration - EMI	09
4.1.1	Cable Construction and Termination	10
5.	LIST OF EUT, ACCESSORIES AND TEST EQUIPMENT	11
5.1	EUT and Accessory List	11
5.2	EMI Test Equipment	12
6.	TEST SITE DESCRIPTION	13
6.1	Test Facility Description	13
6.2	EUT Mounting, Bonding and Grounding	13
7.	TEST PROCEDURES	14
7.1	RF Emissions	14
7.1.1	Conducted Emissions Test	14
7.1.2	Radiated Emissions Test	15
8.	CONCLUSIONS / COMPLIANCE STATEMENT	16

EMT**ELECTRO MAGNETIC TEST, INC.**

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

LIST OF APPENDICES

APPENDIX	TITLE
A	Radiated and Conducted Emissions Data Sheets
B	Test Setup Diagrams

LIST OF FIGURES

FIGURE	TITLE
1	Conducted Emissions Test Setup
2	Plot Map And Layout of Test Site



ELECTRO MAGNETIC TEST, INC.

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

GENERAL REPORT SUMMARY

This electromagnetic emission test report is generated by Electro Magnetic Test, Inc., which is an independent testing and consulting firm. The test report is based on testing performed Electro Magnetic Test, Inc. personnel according to the measurement procedure described in the test specification given below and in the "Test Procedures" section of this report.

The measurement data and conclusions appearing herein relate only to the sample tested and this report may not be reproduced in any form unless done so in full.

This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Federal Government.

Electro Magnetic Test, Inc. is recognized by the following agencies to perform EMI/EMC testing:

COUNTRY	AGENCY	IDENTIFYING #
USA	Federal Communications Commission (FCC) (EMT's test site is recognized by the FCC)	Registration Number: 90576
USA, Canada, Taiwan, Australia/New Zealand, European Community	National Voluntary Lab Accreditation Program (NVLAP) (EMT is accredited by NVLAP. A copy of the NVLAP Scope Of Accreditation is available upon request.)	Lab Code: 200147-0
Canada	Industry Canada	File No.: IC 2804
Japan	Voluntary Control Council For Interference (VCCI)	See Below
	Open Field Test Site Registration Number	R-589
	Conducted Emissions Test Site Registration Number	C-604
Korea	Ministry of Information and Communication's Radio Research Laboratory (RRL) under the Asia Pacific Economic Cooperation (APEC) Mutual Recognition Arrangement (A copy of the Scope Of Accreditation is available upon request)	US0036
Taiwan	Bureau Of Standards, Metrology and Inspection (BSMI)	Reference Number: SL2-IN-E-1024
Australia / New Zealand	Australian Communications Authority (AUSTEL)	*
European Community	UVV Rheinland (EMC for the European Community)	*

*These agencies do not issue an identifying number to test labs.



ELECTRO MAGNETIC TEST, INC.

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

GENERAL REPORT SUMMARY (CONTINUED)

Device Tested: SlingBox AV
 Model: SB240-100
 S/N: N/A

Product Description: The EUT is a breakthrough consumer electronics device that transforms today's TV viewing experience. It enables consumers to watch their TV programs from wherever they are by turning virtually any laptop or internet connected device into a personal TV. It redirects, or "place shifts" the TV signal from any cable box, satellite receiver, or personal video recorder to a viewer's location and device of choice.

Modifications: The EUT was not modified during the testing.

Manufacturer: Sling Media, Inc.
 901 Mariners Island Boulevard, Suite 300
 San Mateo, California 94404

Test Date(s): August 29, 2006

Test Specifications: EMI requirements
 Limits: CISPR 22: 1997 Class B
 FCC Title 47, Part 15 Subpart B, Class B
 Test Procedure: ANSI C63.4: 2003

Test Deviations: The test procedure was not deviated from during the testing.

SUMMARY OF TEST RESULTS

TEST	DESCRIPTION	RESULTS
1	Conducted RF Emissions, 150 kHz - 30 MHz.	Complies with the Class B limits of CISPR 22: 1997
2	Radiated RF Emissions, 30 MHz - 1000 MHz.	Complies with the Class B limits of CISPR 22: 1997
3	Radiated RF Emissions, 1 GHz - 2 GHz.	Complies with the Class B limits of FCC Title 47, Part 15 Subpart B



ELECTRO MAGNETIC TEST, INC.

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

1. PURPOSE

This document is a qualification test report based on the Electromagnetic Interference (EMI) tests performed on the SlingBox AV, Model: SB240-100. The EMI measurements were performed according to the measurement procedure described in ANSI C63.4: 2003. The tests were performed in order to determine whether the electromagnetic emissions from the equipment under test, referred to as EUT hereafter, are within the Class B specification limits defined by C.I.S.P.R. Publication 22 for Information Technology Equipment from 150 kHz to 1 GHz. Under paragraph G of section 15.109 of the Code of Federal Regulations Title 47, Part 15 of the FCC rules, FCC accepts the international standards set forth in C.I.S.P.R. Publication 22 and if the EUT meets the **Class B** specification limits defined in FCC Title 47, Part 15, Subpart B from 1 GHz to 2 GHz.



ELECTRO MAGNETIC TEST, INC.
1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

2. ADMINISTRATIVE DATA

2.1 Location of Testing

The EMI tests described herein were performed at the test facility of Electro Magnetic Test, Inc., 1547 Plymouth Street, Mountain View, California, 94043.

2.2 Traceability Statement

The calibration certificates of all test equipment used during the test are on file at the location of the test. The measurement results in this report and the calibration of the test equipment are traceable to the National Institute of Standards and Technology (NIST).

2.3 Cognizant Personnel

Sling Media, Inc.

KR Veerappan Director, Hardware

Electro Magnetic Test, Inc.

Alika Hirano Test Technician
Mario Garcia Test Technician
Doug Moon Test Technician
Kevin Bothmann Lab Manager

2.4 Date Test Sample was Received

The test sample was received on August 28, 2006.

2.5 Disposition of the Test Sample

The test sample was returned to Sling Media, Inc. on September 1, 2006.

2.6 Abbreviations and Acronyms

The following abbreviations and acronyms may be used in this document.

RF	Radio Frequency
EMI	Electromagnetic Interference
EUT	Equipment Under Test
P/N	Part Number
S/N	Serial Number
HP	Hewlett Packard
ITE	Information Technology Equipment
CML	Corrected Meter Limit
LISN	Line Impedance Stabilization Network
CISPR	International Special Committee On Radio Interference
FCC	Federal Communications Commission

**ELECTRO MAGNETIC TEST, INC.**

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

3. APPLICABLE DOCUMENTS

The following documents are referenced or used in the preparation of this EMI Test Report.

SPEC	TITLE
FCC Title 47, Part 15, Subpart B	FCC Rules - Radio frequency devices (including digital devices).
ANSI C63.4 2003	Methods of measurement of radio-noise emissions from low-voltage electrical and electronic equipment in the range of 9 kHz to 40 GHz.
CISPR 22: 1997	Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement



4. DESCRIPTION OF TEST CONFIGURATION

4.1 Description of Test Configuration - EMI

The EUT was connected to the DVD player, IR sensors, and remote laptop computer via its audio/video input, S-Video input, IR sensor, and Ethernet ports, respectively. The remote laptop computer was located approximately 10 meters outside the test site. During the testing process, the EUT accepted the audio/video input from the DVD player, decoded it, then transmitted the audio/video content to the remote laptop computer, continuously. The remote laptop computer was running software that displayed the content received from the EUT, continuously.

It was determined that the emissions were at their highest level when the EUT was operating in the above configuration. The cables were moved to maximize the emissions. The final conducted as well as radiated data was taken in this mode of operation. All initial investigations were performed with the EMI receiver in manual mode scanning the frequency range continuously. The cables were bundled and routed as shown in the photographs in Appendix A.



ELECTRO MAGNETIC TEST, INC.

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

4.1.1 **Cable Construction and Termination**

Cable #1

This is a 50 foot foil shielded CAT 5 Ethernet cable connecting the EUT to the remote laptop computer. It has an RJ45 metallic connector at both ends of the cable. The shield of the cable was grounded to the chassis via the connectors.

Cable #2

This is a 6 foot braid shielded S-Video cable connecting the EUT to the DVD player. It has a 4 pin mini DIN metallic connector at both ends of the cable. The cable was bundled to a length of 3 feet. The shield of the cable was grounded to the chassis via the connectors.

Cable #3

This is a 4 foot unshielded audio/video cable connecting the EUT to the DVD player. It has three RCA metallic connectors at both ends of the cable. The cable was bundled to a length of 2.5 feet.

Cable #4

This is a 6 foot unshielded IR cable connecting the EUT to the IR sensors. It has a 1/8 inch stereo metallic connector at the EUT end, and is hardwired into the IR sensors. The cable was bundled to a length of 3 feet.



ELECTRO MAGNETIC TEST, INC.

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT

5.1 EUT and Accessory List

EQUIPMENT TYPE	MANUFACTURER	MODEL	SERIAL NUMBER	FCC ID
SLINGBOX AV (EUT)	SLING MEDIA, INC.	SB240-100	N/A	S7USPB2445
AC POWER ADAPTER (EUT)	HON-KWANG	HK-A112-A06	K0000121	N/A
DVD PLAYER	SONY	DVP-NS75H	2051905	N/A

THE FOLLOWING WERE LOCATED APPROXIMATELY 10 METERS OUTSIDE THE TEST SITE:

REMOTE LAPTOP COMPUTER	DELL COMPUTER CORPORATION	PP11L	CN-0D4571-48643-55B-5713	DoC
REMOTE LAPTOP COMPUTER POWER SUPPLY	DELL COMPUTER CORPORATION	PA-1650-05D	CN-05U092-71615-54A-17DA	N/A



ELECTRO MAGNETIC TEST, INC.

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

5.2

EMI Test Equipment

EQUIPMENT TYPE	MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	CAL. DATE	CAL. CYCLE
Spectrum Analyzer	Hewlett Packard	8566B	3013A07296	October 28, 2005	1 Year
RF Preselector	Hewlett Packard	85685A	3010A01157	October 28, 2005	1 Year
Quasi-Peak Adapter	Hewlett Packard	85650A	2521A00584	October 28, 2005	1 Year
Preamplifier	Com Power	PA-102	1482	March 1, 2006	1 Year
RF Attenuator	Mini-Circuits	CAT-10	Asset #1000	December 8, 2005	1 Year
LISN	Com Power	LI-200	12012	June 17, 2006	1 Year
LISN	Com Power	LI-200	12214	June 17, 2006	1 Year
LISN	Com Power	LI-200	1767	June 17, 2006	1 Year
LISN	Com Power	LI-200	1768	June 17, 2006	1 Year
Biconical Antenna	Com Power	AB-100	01557	November 7, 2005	1 Year
Log Periodic Antenna	Com Power	AL-100	16037	November 7, 2005	1 Year
Horn Antenna	Com Power	AHA-118	711054	N/A	N/A
Antenna Mast	Com Power	AM-400	N/A	N/A	N/A
Turntable	Com Power	TT-100	N/A	N/A	N/A
Computer	Compaq	Series 3284	X637BBS20212	N/A	N/A
Printer	Epson	P930A	3HR1398903	N/A	N/A
Plotter	Hewlett Packard	7470A	2308A96499	N/A	N/A



ELECTRO MAGNETIC TEST, INC.

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

6. TEST SITE DESCRIPTION

6.1 Test Facility Description

Please refer to section 7.1.1 and 7.1.2 of this report for EMI test location.

6.2 EUT Mounting, Bonding and Grounding

The EUT was mounted on a 1.0 by 1.5 meter non-conductive table 0.8 meters above the ground plane.

The EUT was not grounded.



7. TEST PROCEDURES

The following sections describe the test methods and the specifications for the tests.

7.1 RF Emissions

7.1.1 Conducted Emissions Test

The HP 8566B spectrum analyzer was used as a measuring meter along with the HP 85650A quasi-peak adapter. The data was collected with the spectrum analyzer in the peak detect mode with the "Max Hold" feature activated. The quasi-peak detector was used only where indicated in the data sheets. A 10 dB attenuation pad was used for the protection of the spectrum analyzer input stage, and the spectrum analyzer offset was adjusted accordingly to read the actual data measured. The LISN output was read by the HP 8566B spectrum analyzer. The output of the second LISN was terminated by a 50 ohm termination. The effective measurement bandwidth used for the conducted emissions test was 9 kHz.

Please see section 6.2 of this report for mounting, bonding and grounding of the EUT. The EUT was powered through the LISN, which was bonded to the ground plane. The LISN power was filtered and the filter was bonded to the ground plane. The EUT was set up with the minimum distances from any conductive surfaces as specified in ANSI C63.4: 2003. The excess power cord was wrapped in a figure eight pattern to form a bundle not exceeding 0.4 meters in length.

The initial test data was taken in manual mode while scanning the frequency ranges of 0.150 MHz to 0.450 MHz, 0.450 MHz to 1.6 MHz, 1.6 MHz to 5 MHz and 5 MHz to 30 MHz. The conducted emissions from the EUT were maximized for operating mode as well as cable and peripheral placement. Once a predominant frequency (within 12 dB of the limit) was found, it was more closely examined with the spectrum analyzer span adjusted to 1 MHz.

The final data was collected under program control by the HP 85869PC software in several overlapping sweeps by running the spectrum analyzer at a minimum scan rate of 10 seconds per octave.

Associated with the conducted emission test data in this report is a ± 2.6 dB measurement uncertainty.



7.1.2

Radiated Emissions Test

The HP 8566B spectrum analyzer was used as a measuring meter along with the HP 85650A quasi-peak adapter. The Com Power Preamplifier PA-102 was used to increase the sensitivity of the instrument. The spectrum analyzer was used in the peak detect mode with the "Max Hold" feature activated. In this mode, the spectrum analyzer records the highest measured reading over all the sweeps. The HP 85650A quasi-peak adapter was used only for those readings which are marked accordingly on the data sheets. The effective measurement bandwidth used for the radiated emissions test was 120 kHz from 30 MHz to 1 GHz and 1 MHz from 1 GHz to 2 GHz.

Broadband biconical, log periodic and horn antennas were used as transducers during the measurement. The biconical antenna was used from 30 MHz to 300 MHz, the log periodic antenna was used from 300 MHz to 1 GHz, and the horn antenna was used from 1 GHz to 2 GHz. The frequency spans were wide (30 MHz to 88 MHz, 88 MHz to 216 MHz, 216 to 300 MHz, 300 MHz to 1 GHz and 1 GHz to 2 GHz) during preliminary investigations. The final data was taken with a frequency span of 1 MHz. Furthermore, the frequency span was reduced during the preliminary investigations as deemed necessary.

The open field test site of Electro Magnetic Test, Inc. was used for radiated emission testing. This test site is set up according to ANSI C63.4: 2003. Please see section 6.2 of this report for mounting, bonding and grounding of the EUT. The turntable supporting the EUT is remote controlled using a motor. The turntable permits EUT rotation of 360 degrees in order to maximize emissions. Also, the antenna mast allows height variation of the antenna from 1 meter to 4 meters. Data was collected in the worst case (highest emission) configuration of the EUT. At each reading, the EUT was rotated 360 degrees and the antenna height was varied from 1 to 4 meters (for E field radiated field strength).

The presence of ambient signals was verified by turning the EUT off. In case an ambient signal was detected, the measurement bandwidth was reduced temporarily and verification was made that an additional adjacent peak did not exist. This ensures that the ambient signal does not hide any emissions from the EUT. The EUT was tested at a 10 meter test distance from 30 MHz to 1 GHz and at a distance of 3 meters from 1 GHz to 2 GHz to obtain final test data.

Calculation Of Radiated Emission Test Data:

Amplitude - Gain + Antenna Factor + Cable Loss = Corrected Amplitude

Corrected Amplitude - Limit = Margin

Associated with the radiated emission test data in this report is a $\pm 4.5\text{dB}$ measurement uncertainty.



ELECTRO MAGNETIC TEST, INC.

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

8.

CONCLUSIONS / COMPLIANCE STATEMENT

Based upon the results contained in this report, Electro Magnetic Test, Inc. has determined that the SlingBox AV, Model: SB240-100 meets all of the Class B specification limits defined by C.I.S.P.R. Publication 22 for Information Technology Equipment from 150 kHz to 1 GHz. Under paragraph G of section 15.109 of the Code of Federal Regulations Title 47, Part 15 of the FCC rules, FCC accepts the international standards set forth in C.I.S.P.R. Publication 22. The EUT also meets the **Class B** specification limits defined in FCC Title 47, Part 15, Subpart B from 1 GHz to 2 GHz.

EMT

ELECTRO MAGNETIC TEST, INC.

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

APPENDIX A

***RADIATED AND CONDUCTED EMISSIONS
DATA SHEETS***

Electro Magnetic Test, Inc.
1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

Radiated Emissions Test Data

Purpose of Test: QUALIFICATION ENGINEERING MANUFACTURING AUDIT
CISPR 22 Class B Test Date: 08-29-06
Company Name: SLING MEDIA, INC.
EUT Model Number: SB240-100
EUT Serial Number: N/A
EUT Description: SLINGBOX AV

Test Setup Configuration


EUT Clock Speeds: 8 MHz, 16 MHz, 24.576 MHz, 56.65 MHz, 133 MHz

EUT Power Cords: SHIELDED NOT SHIELDED
EUT tested at: LOW SPEED HIGH SPEED
EUT is: IN COMPLIANCE OUT OF COMPLIANCE with CISPR 22 Class B.

EUT Modifications during this test:
 MODIFIED NOT MODIFIED

Modifications: _____

NOTE: A formal report on passing data will be generated when required.
Design, debug and consultation services are available at all times.

Test Engineer:  (ALIKA HIRANO)

Electro Magnetic Test, Inc.
 1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

CISPR 22 Class B Test Date: 08-29-06
 Company Name: SLING MEDIA, INC.
 EUT Model Number: SB240-100
 EUT Description: SLINGBOX AV

RADIATED EMISSION TEST RESULTS

Freq MHz	Ampl dBuV	M ---	P ---	A ---	Ht m	Dist m	Ori deg	Gain dB	ACor dBuV/m	CCor dB	DCor dB	CorAmp dBuV/m	Limit dBuV/m	Margin dB	Flags FH---
VERTICAL POLARIZATION															
45.082	35.1	P	V	B	1.0	10.0	180	21.0	10.9	1.4	0.0	26.4	30.0	-3.6	-----
45.083	32.5	Q	V	B	1.0	10.0	180	21.0	10.9	1.4	0.0	23.8	30.0	-6.2	-----
56.604	31.8	P	V	B	2.5	10.0	0	21.0	11.1	1.6	0.0	23.5	30.0	-6.5	-----
132.349	29.7	P	V	B	1.0	10.0	270	21.0	11.6	2.4	0.0	22.7	30.0	-7.3	-----
189.013	27.4	P	V	B	1.0	10.0	0	21.0	15.2	2.8	0.0	24.4	30.0	-5.6	-----
240.015	27.4	P	V	B	3.0	10.0	180	21.2	18.0	3.1	0.0	27.3	37.0	-9.7	-----
265.539	27.2	P	V	B	1.0	10.0	180	21.3	19.8	3.3	0.0	29.0	37.0	-8.0	-----
324.008	28.9	P	V	L	1.0	10.0	180	21.3	15.6	3.7	0.0	26.9	37.0	-10.1	-----
344.066	28.9	P	V	L	1.5	10.0	180	21.4	15.8	3.9	0.0	27.2	37.0	-9.8	-----
360.017	32.9	P	V	L	1.0	10.0	315	21.4	15.9	3.9	0.0	31.3	37.0	-5.7	-----
377.999	31.5	P	V	L	1.0	10.0	315	21.5	16.0	4.0	0.0	30.0	37.0	-7.0	-----
397.379	33.0	P	V	L	1.0	10.0	225	21.5	16.2	4.1	0.0	31.8	37.0	-5.2	-----
466.669	26.0	P	V	L	3.0	10.0	180	21.4	18.0	4.5	0.0	27.1	37.0	-9.9	-----
662.783	32.2	P	V	L	1.0	10.0	180	21.5	21.3	5.5	0.0	37.5	37.0	0.5	F----
662.787	28.4	Q	V	L	1.0	10.0	180	21.5	21.3	5.5	0.0	33.7	37.0	-3.3	-----
798.007	20.1	P	V	L	1.0	10.0	0	21.4	23.6	6.1	0.0	28.4	37.0	-8.6	-----
931.009	13.3	P	V	L	1.0	10.0	180	21.0	23.8	6.7	0.0	22.8	37.0	-14.2	-----
HORIZONTAL POLARIZATION															
45.065	31.0	P	H	B	2.0	10.0	225	21.0	10.9	1.4	0.0	22.3	30.0	-7.7	-----
56.633	33.2	P	H	B	2.0	10.0	180	21.0	11.1	1.6	0.0	24.9	30.0	-5.1	-----
132.328	31.5	P	H	B	4.0	10.0	45	21.0	11.6	2.4	0.0	24.5	30.0	-5.5	-----
189.011	26.8	P	H	B	1.0	10.0	0	21.0	15.2	2.8	0.0	23.8	30.0	-6.2	-----
240.002	28.5	P	H	B	1.0	10.0	45	21.2	18.0	3.1	0.0	28.4	37.0	-8.6	-----
265.542	27.9	P	H	B	3.0	10.0	180	21.3	19.8	3.3	0.0	29.7	37.0	-7.3	-----
323.990	29.3	P	H	L	4.0	10.0	225	21.3	15.6	3.7	0.0	27.3	37.0	-9.7	-----
344.082	32.7	P	H	L	3.0	10.0	180	21.4	15.8	3.9	0.0	31.0	37.0	-6.0	-----
360.022	29.7	P	H	L	2.0	10.0	225	21.4	15.9	3.9	0.0	28.1	37.0	-8.9	-----
378.002	34.5	P	H	L	4.0	10.0	270	21.5	16.0	4.0	0.0	33.0	37.0	-4.0	-----
397.330	33.6	P	H	L	3.5	10.0	135	21.5	16.2	4.1	0.0	32.4	37.0	-4.6	-----
466.662	27.2	P	H	L	1.0	10.0	225	21.4	18.0	4.5	0.0	28.3	37.0	-8.7	-----
662.828	33.8	P	H	L	4.0	10.0	0	21.5	21.3	5.5	0.0	39.1	37.0	2.1	F----
662.830	29.0	Q	H	L	4.0	10.0	0	21.5	21.3	5.5	0.0	34.3	37.0	-2.7	-----
798.006	18.9	P	H	L	1.0	10.0	0	21.4	23.6	6.1	0.0	27.2	37.0	-9.8	-----
931.007	14.4	P	H	L	1.0	10.0	180	21.0	23.8	6.7	0.0	23.9	37.0	-13.1	-----

Electro Magnetic Test, Inc.
1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

Radiated Emissions Test Data

Purpose of Test: QUALIFICATION ENGINEERING MANUFACTURING AUDIT
FCC Class B Test Date: 08-29-06
Company Name: SLING MEDIA, INC.
EUT Model Number: SB240-100
EUT Serial Number: N/A
EUT Description: SLINGBOX AV

Test Setup Configuration

EUT Clock Speeds: 8 MHz, 16 MHz, 24.576 MHz, 56.65 MHz, 133 MHz

EUT Power Cords: SHIELDED NOT SHIELDED
EUT tested at: LOW SPEED HIGH SPEED
EUT is: IN COMPLIANCE OUT OF COMPLIANCE with FCC Class B.

EUT Modifications during this test:
 MODIFIED NOT MODIFIED

Modifications: _____

NOTE: A formal report on passing data will be generated when required.
Design, debug and consultation services are available at all times.

Test Engineer: Alika Hirano (ALIKA HIRANO)

Electro Magnetic Test, Inc.
 1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

FCC Class B Test Date: 08-29-06
 Company Name: SLING MEDIA, INC.
 EUT Model Number: SB240-100
 EUT Description: SLINGBOX AV

RADIATED EMISSION TEST RESULTS

Freq MHz	Ampl dBuV	M ---	P ---	A ---	Ht m	Dist m	Ori deg	Gain dB	ACor dBuV/m	CCor dB	DCor dB	CorAmp dBuV/m	Limit dBuV/m	Margin dB	Flags FH---
VERTICAL POLARIZATION															
1019.742	27.3	P	V	H	1.0	3.0	180	0.0	-1.2	4.5	0.0	30.6	54.0	-23.4	-----
1056.355	28.7	P	V	H	1.0	3.0	180	0.0	-1.0	4.6	0.0	32.3	54.0	-21.7	-----
1454.125	27.6	P	V	H	1.0	3.0	135	0.0	0.6	5.3	0.0	33.5	54.0	-20.5	-----
1633.025	19.7	P	V	H	1.0	3.0	0	0.0	1.2	5.7	0.0	26.6	54.0	-27.4	-----
1750.025	18.2	P	V	H	1.0	3.0	180	0.0	1.6	5.9	0.0	25.7	54.0	-28.3	-----
2000.005	18.5	P	V	H	1.0	3.0	90	0.0	2.5	6.4	0.0	27.4	54.0	-26.6	-----
HORIZONTAL POLARIZATION															
1019.749	28.2	P	H	H	1.0	3.0	180	0.0	-1.2	4.5	0.0	31.5	54.0	-22.5	-----
1056.385	30.4	P	H	H	1.0	3.0	135	0.0	-1.0	4.6	0.0	34.0	54.0	-20.0	-----
1454.364	26.3	P	H	H	1.5	3.0	225	0.0	0.6	5.3	0.0	32.2	54.0	-21.8	-----
1633.035	19.5	P	H	H	1.0	3.0	0	0.0	1.2	5.7	0.0	26.4	54.0	-27.6	-----
1750.065	18.6	P	H	H	1.0	3.0	180	0.0	1.6	5.9	0.0	26.1	54.0	-27.9	-----
2000.045	19.0	P	H	H	1.0	3.0	270	0.0	2.5	6.4	0.0	27.9	54.0	-26.1	-----

EMT**ELECTRO MAGNETIC TEST, INC.**

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

**FRONT VIEW**

SLING MEDIA, INC.
SLINGBOX AV
MODEL: SB240-100

CISPR 22/FCC CLASS B - RADIATED EMISSIONS - 8-29-06

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**

EMT**ELECTRO MAGNETIC TEST, INC.**


1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

**REAR VIEW**

SLING MEDIA, INC.
SLINGBOX AV
MODEL: SB240-100

CISPR 22/FCC CLASS B - RADIATED EMISSIONS - 8-29-06

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**

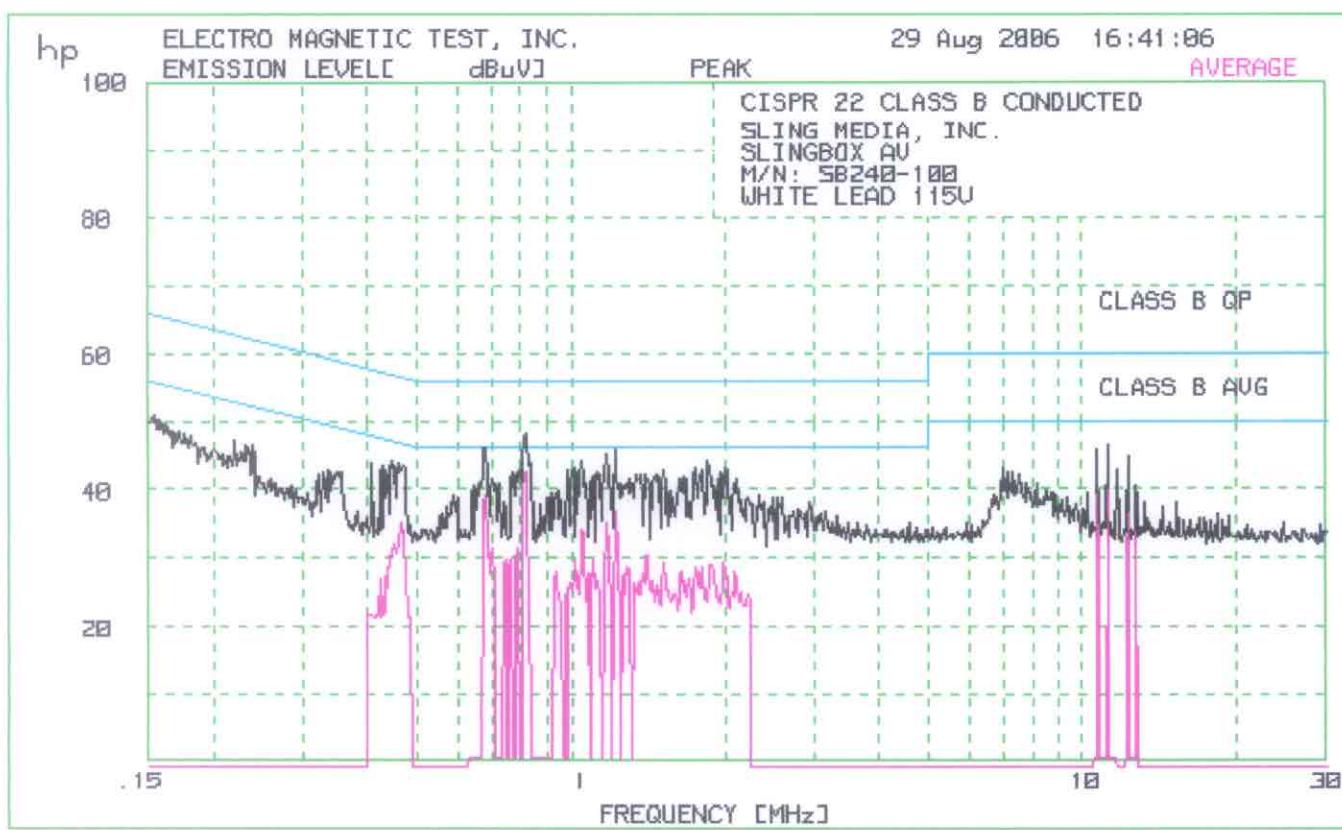

ELECTRO MAGNETIC TEST, INC. 29 Aug 2006 16:41:06

1. CONDUCTED WITH PRESELECTOR
1.2 CISPR 22 CLASS B CONDUCTED


60 highest Peaks above -50 dB of Limit Line #2
peak criteria = .1 dB

PEAK#	FREQ (MHz)	(dBuV)	DELTA
1	.816	48.2	2.2
2	.6852	46.2	.2
3	.678	46.1	.1
4	1.22	45.8	-.2
5	1.169	45.2	-.8
6	1.853	44.2	-1.8
7	1.046	44	-2.0
8	.8379	43.7	-2.3
9	1.873	43.4	-2.6
10	.4487	44.1	-2.7
11	.4607	43.9	-2.7
12	1.014	43.1	-2.9
13	1.749	43.1	-2.9
14	2.007	43	-3.0
15	.9873	42.9	-3.1
16	1.815	42.9	-3.1
17	.4706	43.3	-3.2
18	.7947	42.7	-3.3
19	1.524	42.7	-3.3
20	11.21	46.6	-3.4
21	.4439	43.4	-3.5
22	1.025	42.5	-3.5
23	1.133	42.5	-3.5
24	.7698	42.4	-3.6
25	1.965	42.3	-3.7
26	.7822	42.2	-3.8
27	1.121	42.2	-3.8
28	1.371	42.2	-3.8
29	.4278	43.4	-3.8
30	.4101	43.7	-3.9
31	1.476	42.1	-3.9
32	1.342	42	-4.0
33	1.393	42	-4.0
34	1.786	42	-4.0
35	1.986	42	-4.0
36	1.492	41.9	-4.1
37	1.453	41.8	-4.2
38	1.109	41.7	-4.3
39	1.658	41.7	-4.3
40	10.69	45.7	-4.3
41	.4324	42.9	-4.3
42	.7036	41.6	-4.4
43	1.641	41.5	-4.5
44	1.676	41.5	-4.5
45	1.934	41.5	-4.5
46	2.105	41.5	-4.5
47	1.415	41.4	-4.6
48	1.3	41.3	-4.7
49	.1532	51	-4.8
50	.4393	42.1	-4.9
51	1.098	41.1	-4.9
52	1.438	41	-5.0
53	1.075	40.9	-5.1
54	.6638	40.8	-5.2
55	.7225	40.8	-5.2
56	1.246	40.8	-5.2
57	12.26	44.8	-5.2
58	1.286	40.7	-5.3
59	1.321	40.7	-5.3
60	.1565	50.3	-5.3

ELECTRO MAGNETIC TEST, INC. 29 Aug 2006 16:41:06

1. CONDUCTED WITH PRESELECTOR
1.2 CISPR 22 CLASS B CONDUCTEDAvg Peaks above -50 dB of Limit Line #2
peak criteria = .1 dB

PEAK#	FREQ (MHz)	(dBuV)	DELTA
1	.8117	42.6	-3.4
2	.6852	39.1	-6.9
3	1.227	36.9	-9.1
4	11.21	39.6	-10.4
5	10.69	39.1	-10.9
6	1.176	34.9	-11.1
7	.4681	35.1	-11.4
8	1.052	33.9	-12.1
9	12.26	36.4	-13.6
10	.6999	31.3	-14.7
11	.7863	31.2	-14.8
12	.4511	31.9	-14.9
13	1.4	30.5	-15.5
14	12.73	33.7	-16.3
15	.7458	29.7	-16.3
16	.7617	29.6	-16.4
17	1.019	29.6	-16.4
18	1.103	29.6	-16.4
19	1.516	29.5	-16.5
20	1.986	29.4	-16.6
21	1.873	29.1	-16.9
22	.8291	28.8	-17.2
23	1.758	28.8	-17.2
24	1.805	28.8	-17.2
25	1.286	28.6	-17.4
26	1.307	28.2	-17.8
27	.9364	28.1	-17.9
28	1.641	28	-18.0
29	2.093	28	-18.0
30	1.378	27.8	-18.2
31	.437	28.8	-18.3
32	1.121	27.6	-18.4
33	1.086	27.5	-18.5
34	1.266	27.4	-18.6
35	1.703	26.9	-19.1
36	1.133	26.8	-19.2
37	1.667	26.6	-19.4
38	1.445	26.5	-19.5
39	1.328	26.3	-19.7
40	.9978	26.2	-19.8
41	1.349	26.2	-19.8
42	1.476	26.1	-19.9
43	.4324	27.2	-20.0
44	.4233	27	-20.3
45	2.15	25.1	-20.9
46	2.06	24.9	-21.1
47	1.59	24.7	-21.3
48	2.219	24.7	-21.3
49	.9769	24.6	-21.4
50	1.944	24.3	-21.7
51	.4188	22.3	-25.1
52	.4278	21.8	-25.4
53	.4057	21.7	-26.0

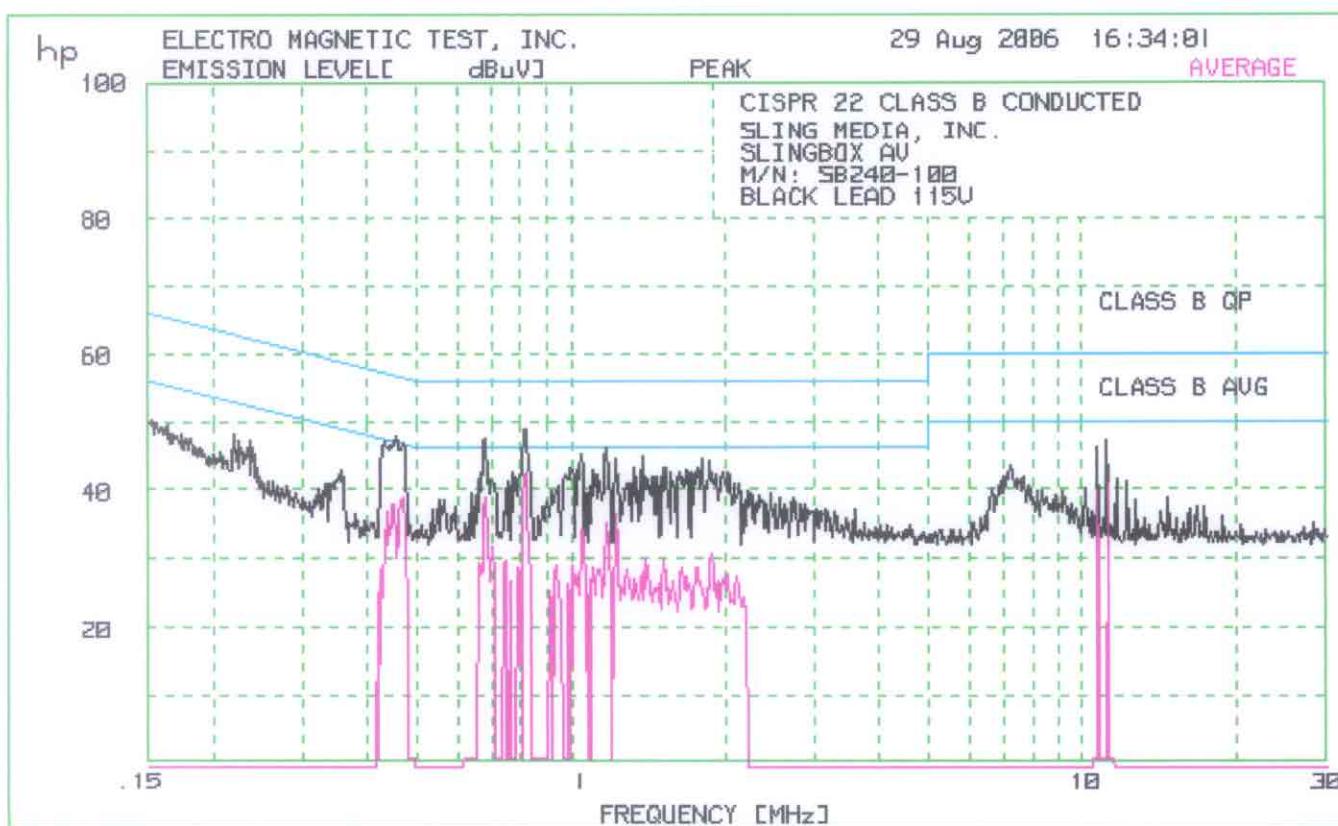

ELECTRO MAGNETIC TEST, INC. 29 Aug 2006 16:34:01

1. CONDUCTED WITH PRESELECTOR
1.2 CISPR 22 CLASS B CONDUCTED60 highest Peaks above -50 dB of Limit Line #2
peak criteria = .1 dB

PEAK#	FREQ (MHz)	(dBuV)	DELTA
1	.8117	49	3.0
2	.6816	47.4	1.4
3	.4583	47.8	1.1
4	.4706	46.7	.2
5	1.169	46.2	.2
6	.4324	47.1	-.1
7	1.052	45.1	-.9
8	1.378	44.7	-1.3
9	1.227	44.6	-1.4
10	1.815	44.4	-1.6
11	1.873	44	-2.0
12	.8291	43.9	-2.1
13	.9978	43.2	-2.8
14	1.188	43.2	-2.8
15	1.777	43.2	-2.8
16	1.524	43.1	-2.9
17	1.335	43	-3.0
18	11.15	47	-3.0
19	1.03	42.9	-3.1
20	1.103	42.9	-3.1
21	1.685	42.9	-3.1
22	1.008	42.8	-3.2
23	1.573	42.5	-3.5
24	1.624	42.5	-3.5
25	1.975	42.5	-3.5
26	.6673	42.4	-3.6
27	.7739	42.3	-3.7
28	1.712	42.3	-3.7
29	2.028	42.3	-3.7
30	.7947	42.2	-3.8
31	1.73	42.2	-3.8
32	1.913	42.2	-3.8
33	.9717	42.1	-3.9
34	1.121	42.1	-3.9
35	1.133	42.1	-3.9
36	10.69	46.1	-3.9
37	1.4	41.9	-4.1
38	1.476	41.9	-4.1
39	.7822	41.8	-4.2
40	.9873	41.8	-4.2
41	1.445	41.8	-4.2
42	1.641	41.8	-4.2
43	1.461	41.7	-4.3
44	1.508	41.7	-4.3
45	.6962	41.5	-4.5
46	1.667	41.4	-4.6
47	.2196	48.1	-4.7
48	.6603	41.3	-4.7
49	1.24	41.3	-4.7
50	.7577	41.1	-4.9
51	2.082	40.9	-5.1
52	.2365	47	-5.2
53	1.293	40.7	-5.3
54	1.321	40.7	-5.3
55	2.138	40.7	-5.3
56	.2255	47.3	-5.3
57	.9463	40.5	-5.5
58	1.492	40.5	-5.5
59	1.59	40.5	-5.5
60	.1557	50	-5.6

ELECTRO MAGNETIC TEST, INC. 29 Aug 2006 16:34:01

1. CONDUCTED WITH PRESELECTOR
1.2 CISPR 22 CLASS B CONDUCTEDAvg Peaks above -50 dB of Limit Line #2
peak criteria = .1 dB

PEAK#	FREQ (MHz)	(dBuV)	DELTA
1	.816	42.3	-3.7
2	.6816	38.8	-7.2
3	.4706	38.9	-7.6
4	.4487	37.9	-8.9
5	11.21	40.9	-9.1
6	1.227	36.4	-9.6
7	10.69	39.9	-10.1
8	.4393	36.8	-10.2
9	1.176	35	-11.0
10	1.058	34.2	-11.8
11	.4324	34	-13.2
12	.7036	31.6	-14.4
13	1.883	30.7	-15.3
14	1.4	30	-16.0
15	1.516	29.8	-16.2
16	.7458	29.7	-16.3
17	.6638	29.2	-16.8
18	.6709	29	-17.0
19	.9364	28.9	-17.1
20	1.008	28.9	-17.1
21	1.103	28.8	-17.2
22	1.65	28.8	-17.2
23	1.758	28.8	-17.2
24	.7905	28.6	-17.4
25	1.139	28.5	-17.5
26	1.127	28.4	-17.6
27	1.286	28.3	-17.7
28	1.378	28	-18.0
29	2.017	27.8	-18.2
30	2.116	27.4	-18.6
31	1.03	27.2	-18.8
32	1.685	27.2	-18.8
33	1.996	27.2	-18.8
34	.4233	28.3	-19.0
35	1.335	27	-19.0
36	1.581	26.8	-19.2
37	.7617	26.7	-19.3
38	1.944	26.6	-19.4
39	.9873	26.4	-19.6
40	1.484	26.3	-19.7
41	1.923	26.2	-19.8
42	.4278	27.2	-20.0
43	1.266	25.8	-20.2
44	1.453	25.6	-20.4
45	1.548	25.6	-20.4
46	.9119	25.2	-20.8
47	1.086	24.8	-21.2
48	2.172	24.4	-21.6
49	1.207	24	-22.0
50	2.071	24	-22.0
51	.4188	24.9	-22.5

EMT

ELECTRO MAGNETIC TEST, INC.

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000



FRONT VIEW

SLING MEDIA, INC.
SLINGBOX AV
MODEL: SB240-100

CISPR 22 CLASS **B - CONDUCTED EMISSIONS - 8-29-06**

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**

EMT

ELECTRO MAGNETIC TEST, INC.

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000



REAR VIEW

SLING MEDIA, INC.
SLINGBOX AV
MODEL: SB240-100

CISPR 22 CLASS B - CONDUCTED EMISSIONS - 8-29-06

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**

EMT

ELECTRO MAGNETIC TEST, INC.

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000


APPENDIX B

TEST SETUP DIAGRAMS

EMT

ELECTRO MAGNETIC TEST, INC.

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

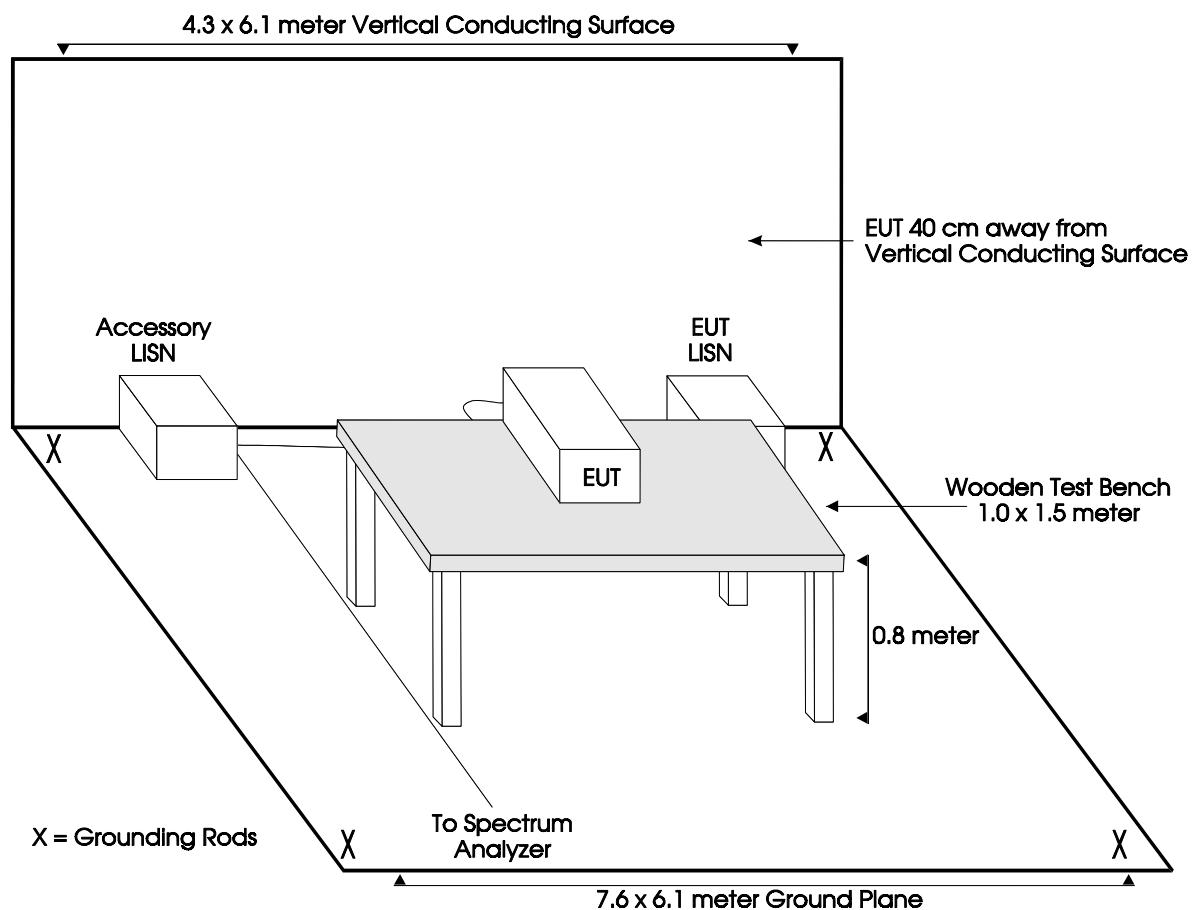**FIGURE 1**

CONDUCTED EMISSIONS TEST SETUP – SITE “A”

EMT

ELECTRO MAGNETIC TEST, INC.

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

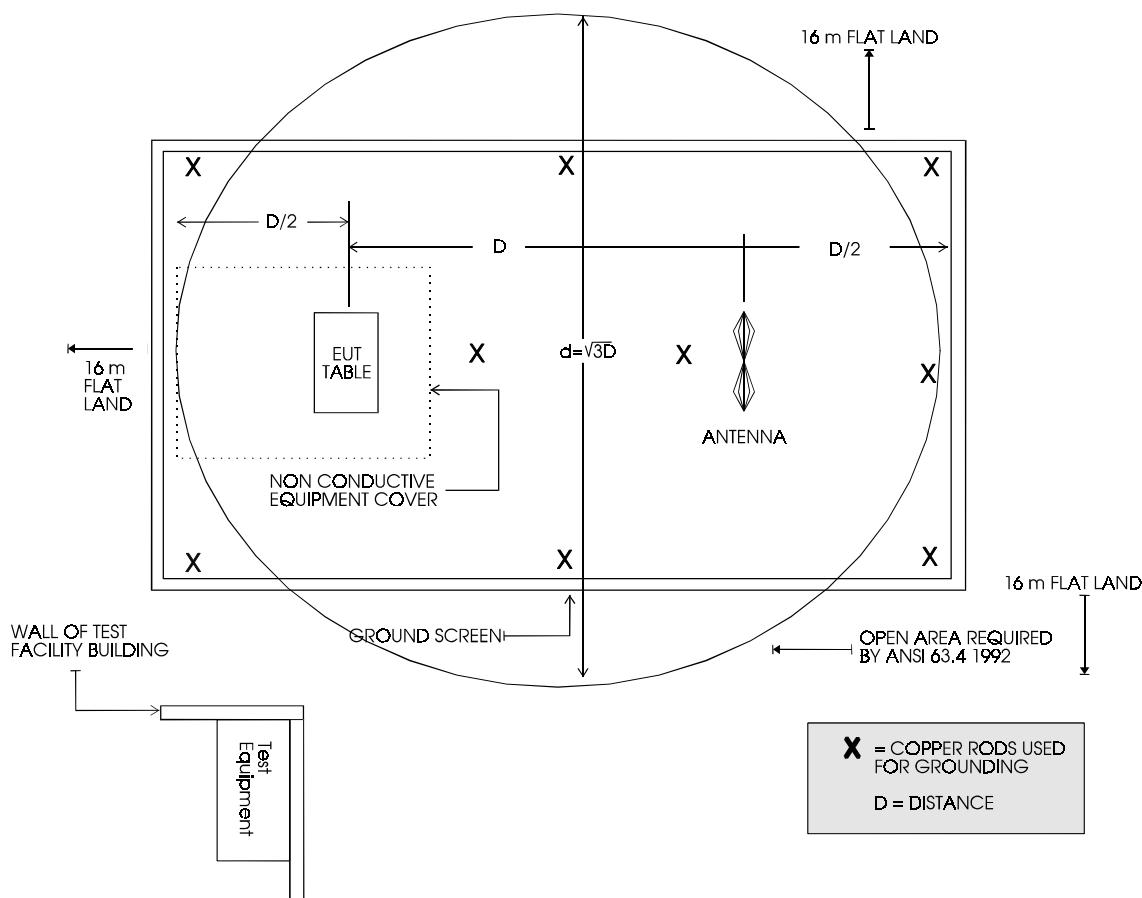


FIGURE 2

PLOT MAP AND LAYOUT OF TEST SITE “A”