



FCC RADIO TEST REPORT

Applicant : Shuttle Inc.

Address : No. 30, Lane 76, Rui Guang Rd. Nei-Hu Dist.,
Taipei, Taiwan

Equipment : XPC nano

Model No. : NS02 V2

Trade Name : Shuttle

FCC ID : S8CNS02V2

I HEREBY CERTIFY THAT :

The sample was received on Nov. 18, 2020 and the testing was completed on Feb. 24, 2021 at Cerpass Technology Corp. The test result refers exclusively to the test presented test model / sample. Without written approval of Cerpass Technology Corp., the test report shall not be reproduced except in full.

Approved by:

Mark Liao / Supervisor

Laboratory Accreditation:

Cerpass Technology Corporation Test Laboratory





CONTENTS

1. Summary of Test Procedure and Test Results.....	5
1.1 Applicable Standards	5
2. Test Configuration of Equipment under Test	6
2.1 Feature of Equipment under Test.....	6
2.2 Carrier Frequency of Channes.....	7
2.3 Test Mode & Test Software	8
2.4 Description of Test System.....	9
2.5 General Information of Test.....	10
2.6 Measurement Uncertainty	10
3. Test Equipment and Ancillaries Used for Tests	11
4. Antenna Requirements.....	13
4.1 Standard Applicable	13
4.2 Antenna Construction and Directional Gain.....	13
5. Test of AC Power Line Conducted Emission	14
5.1 Test Limit	14
5.2 Test Procedures	14
5.3 Typical Test Setup	15
5.4 Test Result and Data	16
5.5 Test Photographs	18
6. Test of Radiated Spurious Emission.....	19
6.1 Test Limit	19
6.2 Test Procedures.....	19
6.3 Typical Test Setup	20
6.4 Test Result and Data (9kHz ~ 30MHz).....	21
6.5 Test Result and Data (30MHz ~ 1GHz).....	21
6.6 Test Result and Data (1GHz ~ 25GHz).....	23
6.7 Restricted Bands of Operation	35
6.8 Test Photographs (30MHz ~ 1GHz)	36
6.9 Test Photographs (1GHz ~ 25GHz)	37
7. Test of Conducted Spurious Emission	39
7.1 Test Limit	39
7.2 Test Procedure	39
7.3 Test Setup Layout	39
7.4 Test Result and Data	39
8. 20dB Bandwidth Measurement Data.....	47
8.1 Test Limit	47
8.2 Test Procedures	47
8.3 Test Setup Layout	47
8.4 Test Result and Data	47
9. Frequencies Separation	50
9.1 Test Limit	50
9.2 Test Procedures	50



9.3	Test Setup Layout	50
9.4	Test Result and Data	51
10.	Dwell Time on each channel	54
10.1	Test Limit	54
10.2	Test Procedures	54
10.3	Test Setup Layout	54
10.4	Test Result and Data	55
11.	Number of Hopping Channels	58
11.1	Test Limit	58
11.2	Test Procedures	58
11.3	Test Setup Layout	58
11.4	Test Result and Data	58
12.	Maximum Peak Output Power	60
12.1	Test Limit	60
12.2	Test Procedures	60
12.3	Test Setup Layout	60
12.4	Test Result and Data	61
13.	Radio Frequency Exposure	62
13.1	EUT Specification	62
13.2	Test Results	62
13.3	Calculation	63
13.4	Maximum Permissible Exposure	64



History of this test report

Report No.	Issue Date	Description
TEFB2011199	Mar. 03, 2021	Original



1. Summary of Test Procedure and Test Results

1.1 Applicable Standards

ANSI C63.10:2013

FCC Rules and Regulations Part 15 Subpart C §15.247

FCC Rule	Description of Test	Result
15.203	. Antenna Requirement	PASS
15.207	. AC Power Line Conducted Emission	PASS
15.209 15.205	. Radiated Spurious Emission	PASS
15.247(d)	. Conducted Spurious Emission	PASS
15.247(a)(1)	. Channel Carrier Frequencies Separation	PASS
15.247(a)(1)	. 20dB Bandwidth	PASS
15.247(a)(1)	. Dwell Time	PASS
15.247(b)	. Number of Hopping Channels	PASS
15.247(b)	. Peak Output Power Measurement Data	PASS

* The lab has reduced the uncertainty risk factor from test equipment, environment and staff technicians which according to the standard on contract. Therefore, the test result will only be determined by standard requirement.



2. Test Configuration of Equipment under Test

2.1 Feature of Equipment under Test

Frequency Range	BT / BLE: 2402-2480MHz 802.11b/g/n: 2412-2462MHz 802.11a/n/ac: 5180-5240MHz, 5260-5320MHz, 5500-5700MHz, 5745-5825MHz
Modulation Type	BT: GFSK, $\pi/4$ -DQPSK, 8DPSK BLE: GFSK WLAN: 2.4GHz: 802.11b: CCK, DQPSK, DBPSK 802.11g/n: BPSK, QPSK, 16QAM, 64QAM 5GHz: 802.11n/a: BPSK, QPSK, 16QAM, 64QAM 802.11ac: BPSK, QPSK, 16QAM, 64QAM, 256QAM
Modulation Technology	DSSS, OFDM, FHSS, DTS
Data Rate	BT: GFSK: 1Mbps, $\pi/4$ -DQPSK: 2Mbps, 8DPSK: 3Mbps BLE: GFSK: 1Mbps GFSK: 2 Mbps WLAN: 2.4GHz: 802.11b: 1, 2, 5.5, 11Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54Mbps 802.11n: MCS0 – MCS7, HT20 5GHz: 802.11a: 6, 9, 12, 18, 24, 36, 48, 54Mbps 802.11n: MCS0 – MCS7, HT20/40 802.11ac: MCS0 – MCS9, VHT20/40/80
Antenna Type	PIFA Antenna
Antenna Gain	For BT: 2402-2480MHz: ANT A: 1.11dBi For WLAN: 2412-2462MHz: ANT A: 1.11dBi 5180-5240MHz: ANT A: 3.20dBi 5260-5320MHz: ANT A: 3.20dBi 5500-5700MHz: ANT A: 2.47dBi 5745-5825MHz: ANT A: 2.69dBi
Adapter	Brand: APD Model:WA-24Q12FU
Firmware Number	NS02V2_Series8_STD_1.0.2_20200910
Serial Number	NS02V20201K42F00014

Note:

- 1.EUT support TPC Function.
- 2.EUT support Client Mode without radar detection.
- 3.For more details, please refer to the User's manual of the EUT.



2.2 Carrier Frequency of Channes

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
*00	2402	20	2422	40	2442	60	2462
01	2403	21	2423	41	2443	61	2463
02	2404	22	2424	42	2444	62	2464
03	2405	23	2425	43	2445	63	2465
04	2406	24	2426	44	2446	64	2466
05	2407	25	2427	45	2447	65	2467
06	2408	26	2428	46	2448	66	2468
07	2409	27	2429	47	2449	67	2469
08	2410	28	2430	48	2450	68	2470
09	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	*78	2480
19	2421	*39	2441	59	2461	---	---

Note: Channels remarked * are selected to perform test.



2.3 Test Mode & Test Software

- During testing, the interface cables and equipment positions were varied according to ANSI C63.10
- The complete test system included Notebook and EUT for RF test.
- An executive program, " Ampak RFTestTool ver.7.0" under Android system was executed to transmit and receive data via Bluetooth.
- The following test modes were performed for the test:

Conducted Emissions from the AC mains power ports	
Test Mode	Operating Description
1	GFSK (1Mbps)
2	$\pi/4$ -DQPSK (2Mbps)
3	8DPSK (3Mbps)
caused "Test Mode 1" generated the worst case, it was reported as the final data.	
Radiation Emissions (30MHz ~ 1GHz)	
Test Mode	Operating Description
1	GFSK (1Mbps)
2	$\pi/4$ -DQPSK (2Mbps)
3	8DPSK (3Mbps)
caused "Test Mode 1" generated the worst case, it was reported as the final data.	
Radiation Emissions (1GHz ~ 25GHz)	
Test Mode	Operating Description
1	GFSK (1Mbps)
2	$\pi/4$ -DQPSK (2Mbps)
3	8DPSK (3Mbps)
caused "Test Mode 1, 3" generated the worst case, they were reported as the final data.	

Modulation Type	TX CONFIGURATION
GFSK	1TX
$\pi/4$ -DQPSK	1TX
8DPSK	1TX



2.4 Description of Test System

RF Conducted				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Notebook	ASUS	P2430U	N/A	Adapter / 1.8m / NS
KeyBoard	DELL	SK-8115	2.0m / NS	N/A
Mouse	DELL	MS111-P	1.7m / NS	N/A
Mointor	AOPEN	27MX1	NA	N/A
RJ45 Cable	TE CONNECTIVITY	CAT5E	1.8m / NS	N/A
HDMI Cable	N/A	H1	1.7m / NS	N/A
Power Cord	N/A	P1	2.3m / NS	N/A
Radiated Emissions				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Notebook	ASUS	P2430U	N/A	Adapter / 1.8m / NS
RJ45 Cable	TE CONNECTIVITY	CAT5E	15m / NS	N/A
KeyBoard	DELL	SK-8115	2.0m / NS	N/A
Mouse	DELL	MS111-P	1.7m / NS	N/A
Mointor	AOPEN	27MX1	NA	N/A
Dongle	Transcend	16GB	N/A	N/A
Dongle	Transcend	16GB	N/A	N/A
Earphone	Apple	Earpods	1.2m / NS	N/A
MicroSDHC	ADATA	8GB	N/A	N/A
HDMI Cable	N/A	H1	1.7m / NS	N/A
Power Cord	N/A	P1	2.3m / NS	N/A
AC Power Line Conducted Emission				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Notebook	ASUS	P2430U	N/A	Adapter / 1.8m / NS
RJ45 Cable	TE CONNECTIVITY	CAT5E	15m / NS	N/A
KeyBoard	DELL	SK-8115	2.0m / NS	N/A
Mouse	DELL	MS111-P	1.7m / NS	N/A
Mointor	AOPEN	27MX1	NA	N/A
Dongle	Transcend	16GB	N/A	N/A
Dongle	Transcend	16GB	N/A	N/A
Earphone	Apple	Earpods	1.2m / NS	N/A
MicroSDHC	ADATA	8GB	N/A	N/A
HDMI Cable	N/A	H1	1.7m / NS	N/A
Power Cord	N/A	P1	2.3m / NS	N/A



2.5 General Information of Test

Test Site	Cerpass Technology Corporation Test Laboratory Address: No.10, Ln. 2, Lianfu St., Luzhu Dist., Taoyuan City 33848, Taiwan (R.O.C.) Tel:+886-3-3226-888 Fax:+886-3-3226-881	
	FCC	TW1439, TW1079
	IC	4934E-1, 4934E-2
	VCCI	T-2205 for Telecommunication test C-4663 for Conducted emission test R-4218 for Radiated emission test G-10812, G-10813 for radiated disturbance above 1GHz
Frequency Range Investigated:	Conducted: from 150kHz to 30 MHz Radiation: from 30 MHz to 40,000MHz	
Test Distance:	The test distance of radiated emission from antenna to EUT is 3 M.	

Test Item	Test Site	Test period	Environmental Conditions	Tested By
RF Conducted	RFCON01-NK	2021/2/18~2021/02/24	23~24℃ / 38~50%	Nick Guan
Radiated Emissions	3M02-NK	2021/02/02~2021/02/05	21~23℃ / 47~52%	Leon Huang
AC Power Line Conducted Emission	CON01-NK	2021/02/06	22℃ / 43%	Leon Huang

2.6 Measurement Uncertainty

Measurement Item	Uncertainty
AC Power Line Conduction(150K~30MHz)	±3.63dB
Radiated Spurious Emission(9KHz~30MHz)	±3.404dB
Radiated Spurious Emission(30MHz~1GHz)	±5.686dB
Radiated Spurious Emission(1GHz~25GHz)	±6.597dB
Conducted Spurious Emission	±2.022dB
6dB Bandwidth	±4.482%
20dB Bandwidth	±4.40%
Occupied Bandwidth	±4.40%
Peak Output Power(Conducted Power Meter)	±1.02dB
Dwell Time	±3.49%
Power Spectral Density	±1.963dB
Duty Cycle	±3.47%



3. Test Equipment and Ancillaries Used for Tests

Test Item	Radiated Emissions				
Test Site	Semi Anechoic Room(3M02-NK)				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
Bilog Antenna	Schwarzbeck	VULB9168	369	2020/04/10	2021/04/09
Active Loop Antenna	EMCO	6507	40855	2020/05/21	2021/05/20
Horn Antenna	EMCO	3115	31601	2020/10/16	2021/10/15
Horn Antenna	EMCO	3116	31970	2020/03/26	2021/03/25
EMI Receiver	ROHDE & SCHWARZ	ESCI	101423	2020/06/23	2021/06/22
Spectrum Analyzer	ROHDE & SCHWARZ	FSV 40-N	102151	2020/08/03	2021/08/02
Preamplifier	EM Electronics corp.	EM330	60660	2020/03/16	2021/03/15
Preamplifier	Agilent	8449B	3008A01954	2020/03/16	2021/03/15
Preamplifier	EMC INSTRUMENTS	EMC184045	980065	2020/11/06	2021/11/05
Bluetooth Tester	ROHDE & SCHWARZ	CBT	101133	2020/04/07	2021/04/06
Cable-3in1(30M-1G)	HARBOUR INDUSTRIES	LL142	CCE1315	2020/04/09	2021/04/08
Cable-0.5m(1G-18G)	HUBER SUHNER	SUCOFLEX 100	805443/4	2020/05/27	2021/05/26
Cable-3m(1G-18G)	HUBER SUHNER	SUCOFLEX 100	805796/4	2020/05/27	2021/05/26
Cable-8m(1G-18G)	HUBER SUHNER	SUCOFLEX 100	805795/4	2020/05/27	2021/05/26
Cable-0.5m(30M-40G)	HUBER SUHNER	SUCOFLEX 102	28420/2	2020/04/01	2021/03/31
Cable-3m(30M-40G)	HUBER SUHNER	SUCOFLEX 102	MY2608/2	2020/04/01	2021/03/31
Cable-0.5m(1G-40G)	Rapidtek	40GHZ 50CM	38MS-38MS50314	2020/04/09	2021/04/08
Cable-6m(9k~300M)	NA	EMC5D-BM-BM-6	130605	2020/09/18	2021/09/17
E3	AUDIX	v8.2014-8-6	RK-000529	NA	NA

Test Item	RF Conducted				
Test Site	RFCON01-NK				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
Spectrum Analyzer	ROHDE & SCHWARZ	FSV 40-N	101329	2020/07/07	2021/07/06
Bluetooth Tester	ROHDE & SCHWARZ	CBT	101133	2020/04/07	2021/04/06
CAX Signal Analyzer	KEYSIGHT	N9000B	MY57100339	2020/12/25	2021/12/24
Attenuator	KEYSIGHT	8491B	MY39250703	2020/04/17	2021/04/16
TEMP & HUMI CHAMBER	T-MACHINE	TMJ-9712	T-12-040111	2020/08/25	2021/08/24
Power Meter	Anritsu	ML2495A	1224005	2020/04/17	2021/04/16
Power Sensor	Anritsu	MA2411B	1207295	2020/04/17	2021/04/16
Spectrum Analyzer	ROHDE & SCHWARZ	FSV 40-N	101329	2020/07/07	2021/07/06



Test Item	AC Power Line Conducted Emission				
Test Site	CON01-NK				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
EMI Receiver	ROHDE & SCHWARZ	ESCI	100443	2020/05/25	2021/05/24
Line Impedance Stabilization Network	Schwarzbeck	NSLK 8127	8127-568	2020/03/12	2021/03/11
Pulse Limiter	ROHDE & SCHWARZ	ESH3-Z2	101934	2020/03/11	2021/03/10
Cable-6m(9k~300M)	NA	CFD300-NL	NA	2020/03/11	2021/03/10
E3	AUDIX	v8.2014-8-6	RK-000531	NA	NA



4. Antenna Requirements

4.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.2 Antenna Construction and Directional Gain

Antenna Type	PIFA Antenna
Antenna Gain	1.11 dBi



5. Test of AC Power Line Conducted Emission

5.1 Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz, according to the methods defined in ANSI C63.4-2014. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

Frequency (MHz)	Quasi Peak (dB μ V)	Average (dB μ V)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50


*Decreases with the logarithm of the frequency.

5.2 Test Procedures

- The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- Connect EUT to the power mains through a line impedance stabilization network (LISN).
- All the support units are connecting to the other LISN.
- The LISN provides 50 ohm coupling impedance for the measuring instrument.
- The FCC states that a 50 ohm, 50 micro-Henry LISN should be used.
- Both sides of AC line were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched.
- Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.




5.3 Typical Test Setup

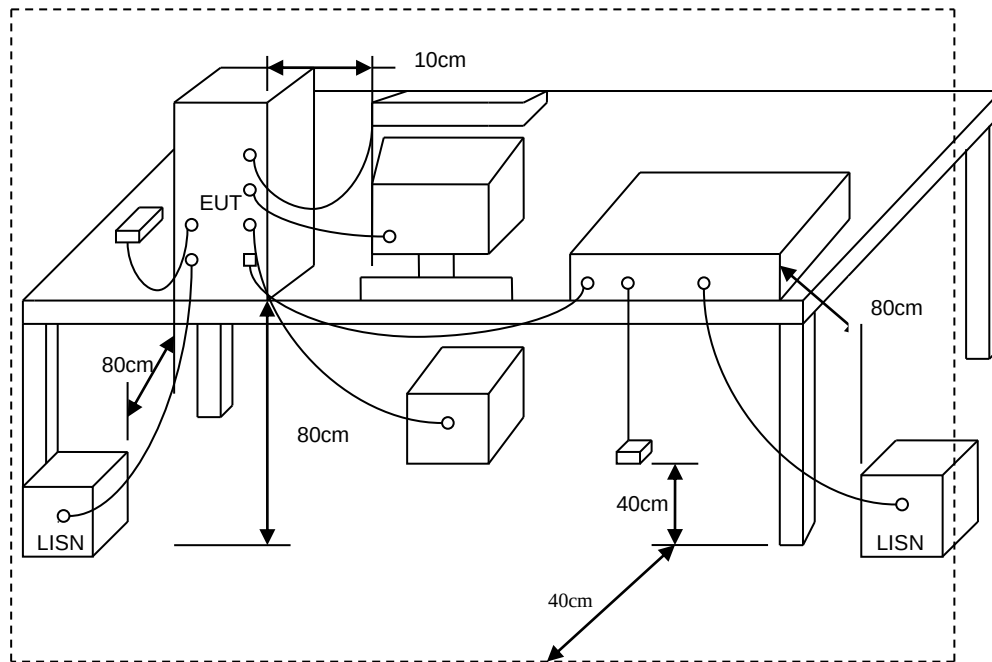



5.4 Test Result and Data

Power	: AC 120V / 60HZ	Pol/Phase	: LINE
Test Mode	: Mode 1		

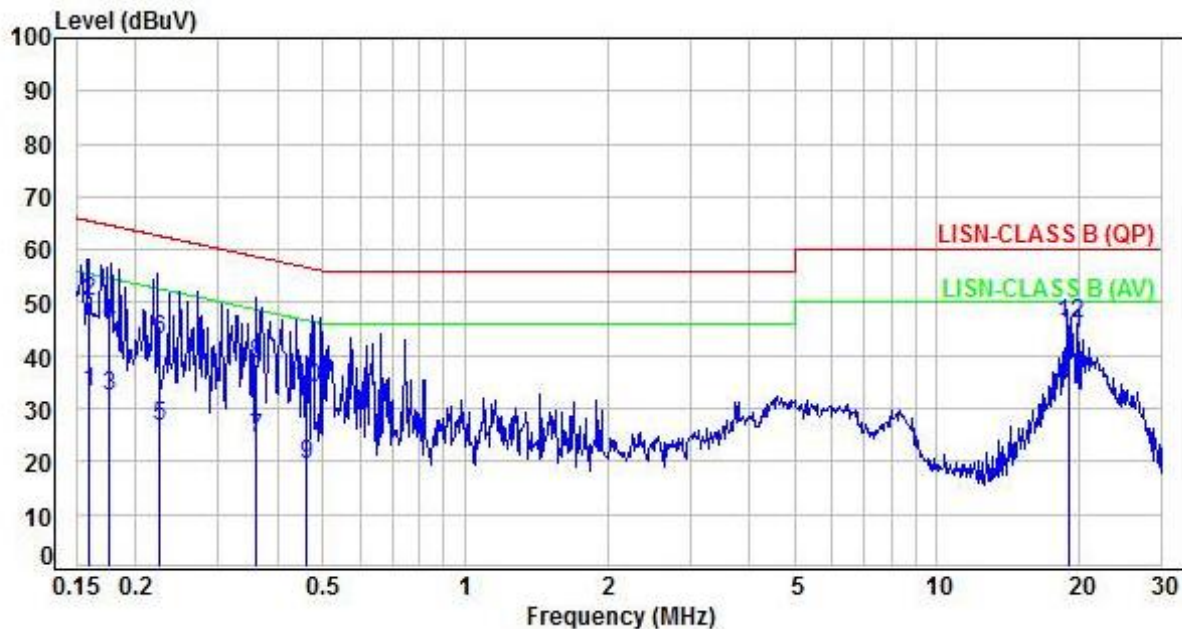

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.16	10.03	23.22	33.25	55.48	-22.23	Average	P
2	0.16	10.03	40.34	50.37	65.48	-15.11	QP	P
3	0.18	10.03	22.28	32.31	54.66	-22.35	Average	P
4	0.18	10.03	35.94	45.97	64.66	-18.69	QP	P
5	0.23	10.03	16.67	26.70	52.63	-25.93	Average	P
6	0.23	10.03	33.12	43.15	62.63	-19.48	QP	P
7	0.36	10.04	14.41	24.45	48.72	-24.27	Average	P
8	0.36	10.04	28.18	38.22	58.72	-20.50	QP	P
9	0.46	10.05	9.35	19.40	46.67	-27.27	Average	P
10	0.46	10.05	23.90	33.95	56.67	-22.72	QP	P
11	19.11	10.71	33.23	43.94	50.00	-6.06	Average	P
12	19.11	10.71	35.41	46.12	60.00	-13.88	QP	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=(LISN or ISN or Current Probe)Factor + Cable Loss



Power	: AC 120V / 60HZ	Pol/Phase	: NEUTRAL
Test Mode	: Mode 1		:

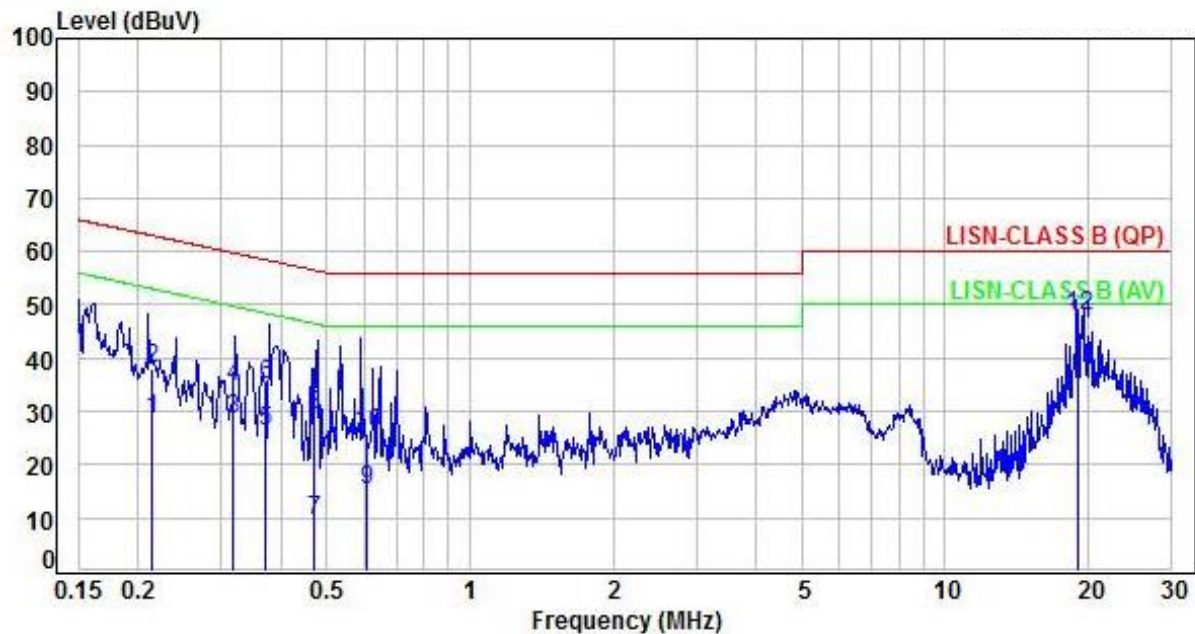

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.21	10.00	18.46	28.46	53.05	-24.59	Average	P
2	0.21	10.00	27.84	37.84	63.05	-25.21	QP	P
3	0.32	10.01	18.59	28.60	49.75	-21.15	Average	P
4	0.32	10.01	24.45	34.46	59.75	-25.29	QP	P
5	0.37	10.01	16.09	26.10	48.46	-22.36	Average	P
6	0.37	10.01	24.81	34.82	58.46	-23.64	QP	P
7	0.47	10.02	-0.53	9.49	46.53	-37.04	Average	P
8	0.47	10.02	19.42	29.44	56.53	-27.09	QP	P
9	0.61	10.04	5.06	15.10	46.00	-30.90	Average	P
10	0.61	10.04	15.70	25.74	56.00	-30.26	QP	P
11	19.10	10.71	35.77	46.48	50.00	-3.52	Average	P
12	19.10	10.71	37.26	47.97	60.00	-12.03	QP	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=(LISN or ISN or Current Probe)Factor + Cable Loss



6. Test of Radiated Spurious Emission

6.1 Test Limit

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter measurement is based on the maximum conducted output power, the attenuation required under this paragraph shall be 30dB instead of 20dB. In addition, radiated emissions which fall in section 15.205(a) the restricted bands must also comply with the radiated emission limit specified in section 15.209(a).

Frequency (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

6.2 Test Procedures


- The EUT was placed on a rotatable table top 0.8 meter above ground.
- The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- The table was rotated 360 degrees to determine the position of the highest radiation.
- The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
- For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- "Cone of radiation" has been considered to be 3dB bandwidth of the measurement antenna.

Note: The supporting fixture shall permit orientation of the EUT in each of three orthogonal axis positions such that emissions from the EUT are maximized.




6.3 Typical Test Setup


Below 30MHz test setup

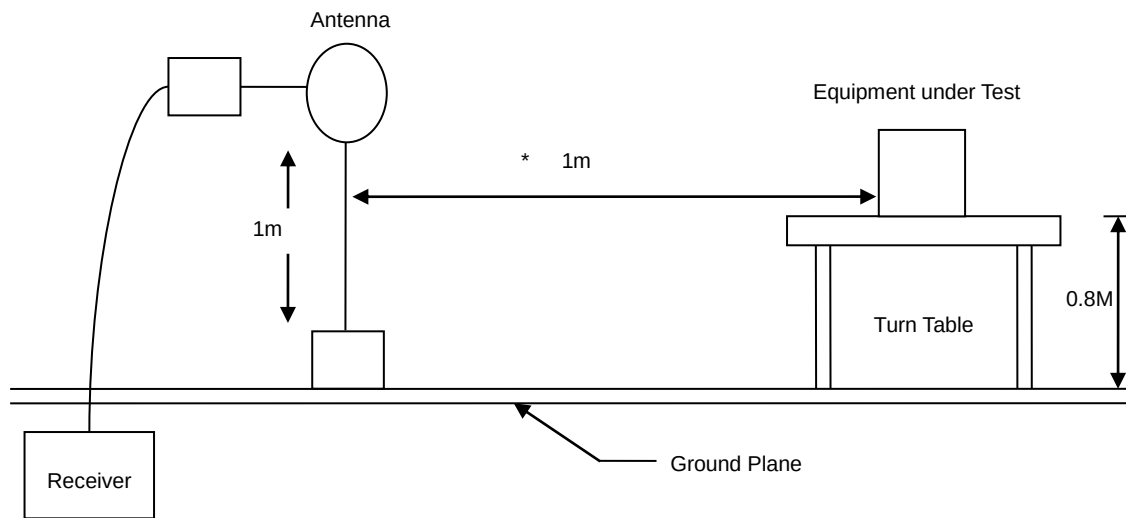

30MHz- 1GHz Test Setup

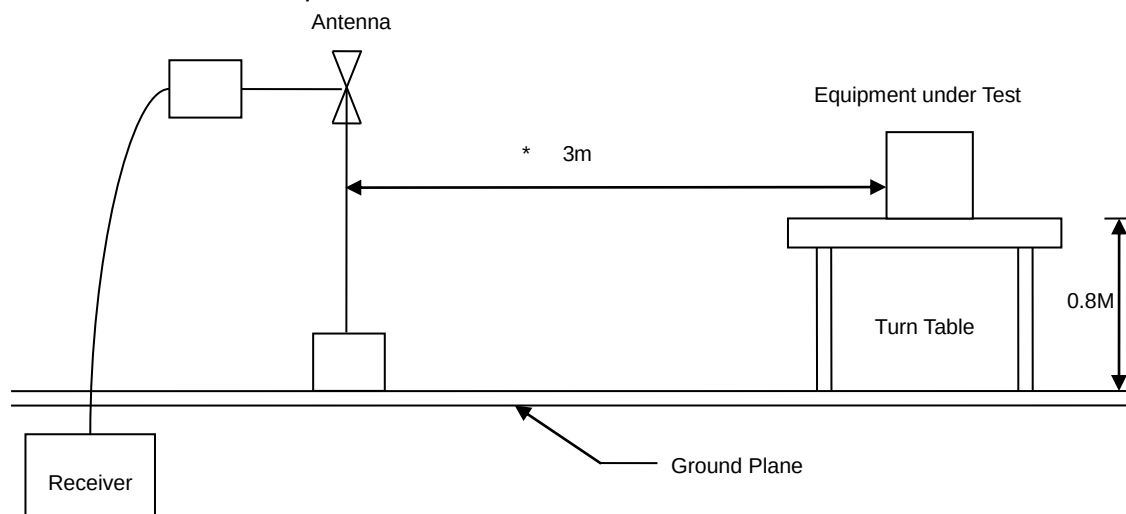

Above 1GHz Test Setup

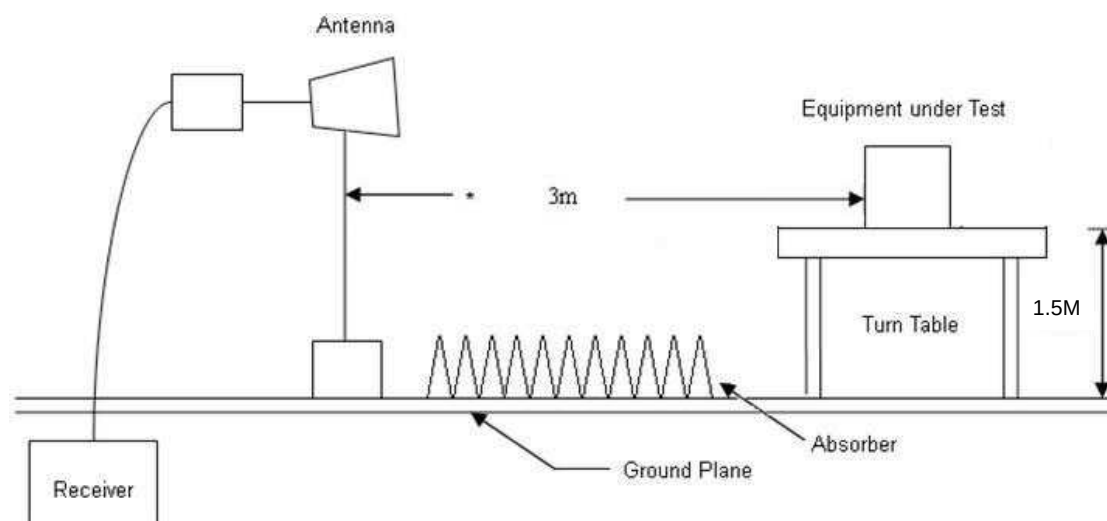




6.4 Test Result and Data (9kHz ~ 30MHz)

The 9kHz-30MHz spurious emission is under limit 20dB more.

6.5 Test Result and Data (30MHz ~ 1GHz)

Power	: AC 120V / 60HZ	Pol/Phase	: VERTICAL
Test Mode	: Mode 1		

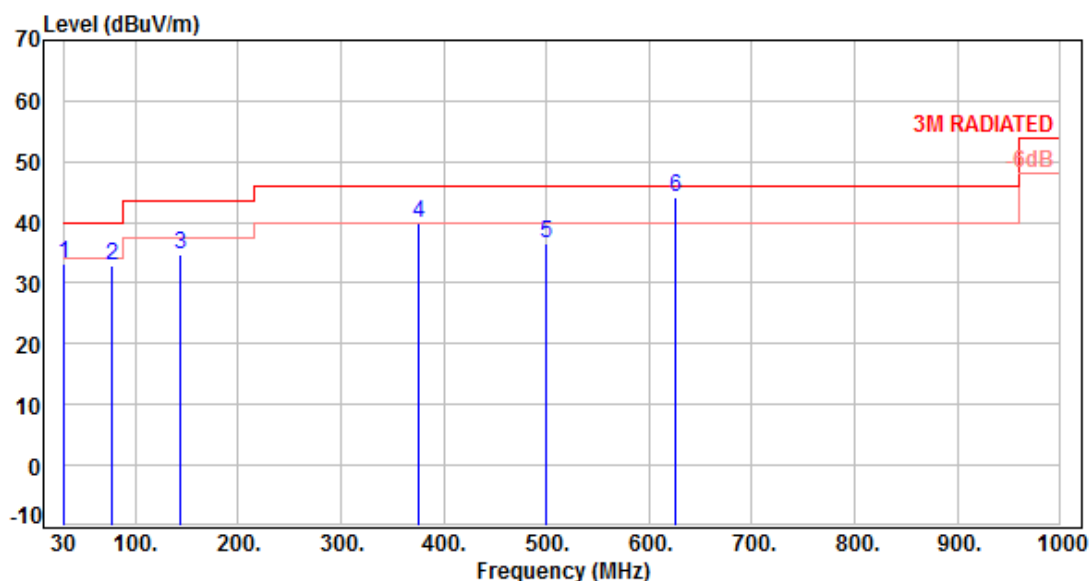

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	30.00	-10.42	43.56	33.14	40.00	-6.86	Peak	400	0	P
2	77.28	-13.75	46.71	32.96	40.00	-7.04	Peak	400	0	P
3	143.35	-9.50	44.36	34.86	43.50	-8.64	Peak	400	0	P
4	375.41	-6.37	46.28	39.91	46.00	-6.09	Peak	400	0	P
5	500.22	-3.72	40.36	36.64	46.00	-9.36	Peak	400	0	P
6	625.43	-1.02	45.27	44.25	46.00	-1.75	QP	165	250	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60HZ	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1		:

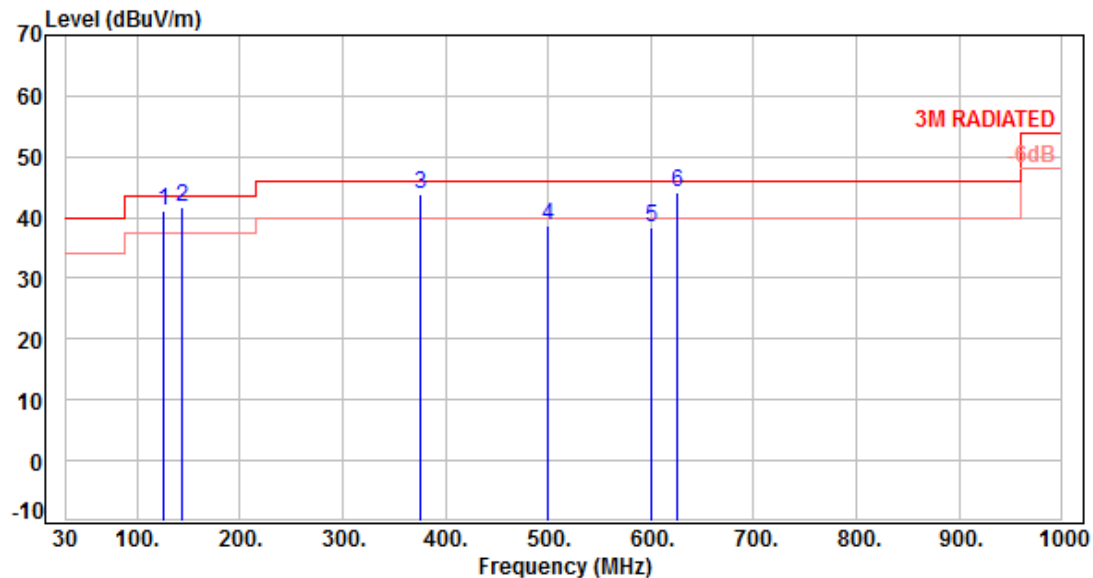

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	125.34	-11.27	52.31	41.04	43.50	-2.46	QP	150	252	P
2	143.06	-9.53	51.14	41.61	43.50	-1.89	QP	195	205	P
3	374.89	-6.39	50.18	43.79	46.00	-2.21	QP	200	233	P
4	500.33	-3.71	42.45	38.74	46.00	-7.26	Peak	100	0	P
5	600.51	-1.20	39.47	38.27	46.00	-7.73	Peak	100	0	P
6	625.43	-1.02	45.26	44.24	46.00	-1.76	QP	153	205	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



6.6 Test Result and Data (1GHz ~ 25GHz)

Power	:	AC 120V / 60HZ	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 1, CH00		:	

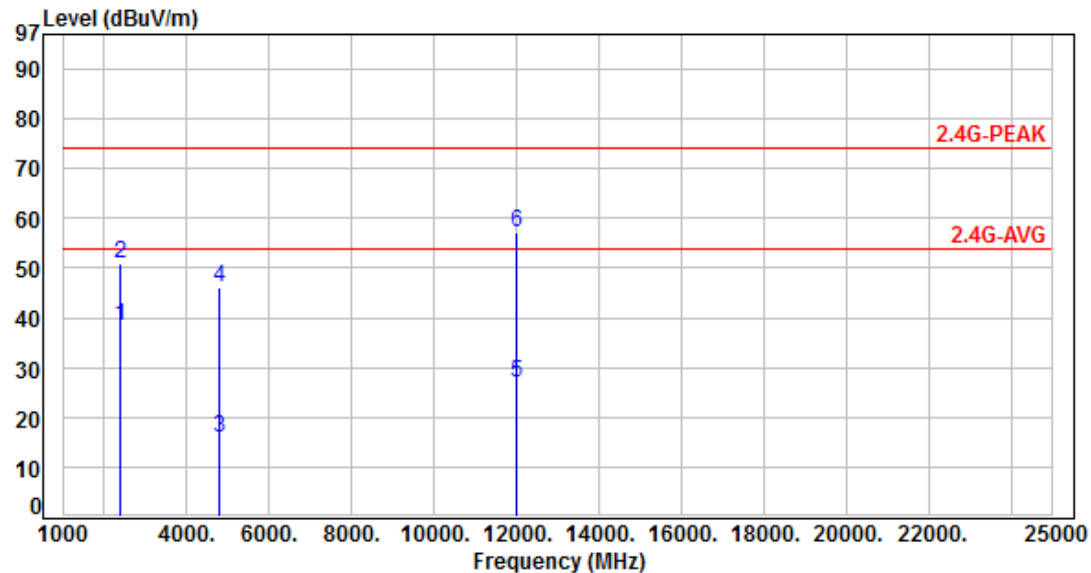

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.89	41.42	38.53	54.00	-15.47	Average	100	130	P
2	2390.00	-2.89	53.79	50.90	74.00	-23.10	Peak	100	130	P
3	4804.00	4.67	11.24	15.91	54.00	-38.09	Average	120	155	P
4	4804.00	4.67	41.34	46.01	74.00	-27.99	Peak	120	155	P
5	12010.00	14.75	12.32	27.07	54.00	-26.93	Average	100	75	P
6	12010.00	14.75	42.42	57.17	74.00	-16.83	Peak	100	75	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60HZ	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, CH00		:

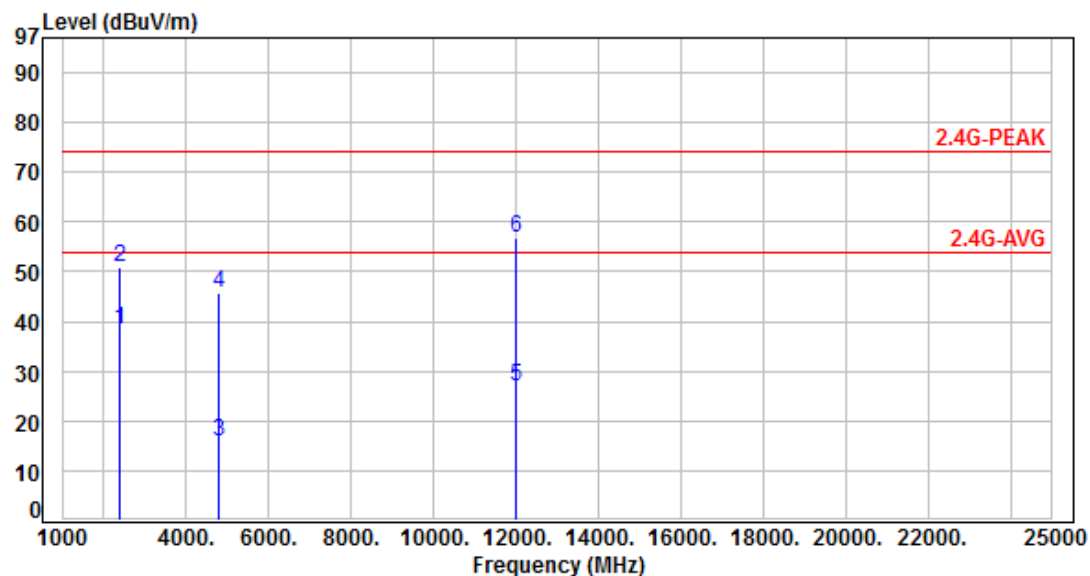

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.89	41.22	38.33	54.00	-15.67	Average	100	235	P
2	2390.00	-2.89	53.61	50.72	74.00	-23.28	Peak	100	235	P
3	4804.00	4.67	11.06	15.73	54.00	-38.27	Average	100	20	P
4	4804.00	4.67	41.16	45.83	74.00	-28.17	Peak	100	20	P
5	12010.00	14.75	12.03	26.78	54.00	-27.22	Average	100	200	P
6	12010.00	14.75	42.13	56.88	74.00	-17.12	Peak	100	200	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60HZ	Pol/Phase	: VERTICAL
Test Mode	: Mode 1, CH39		:

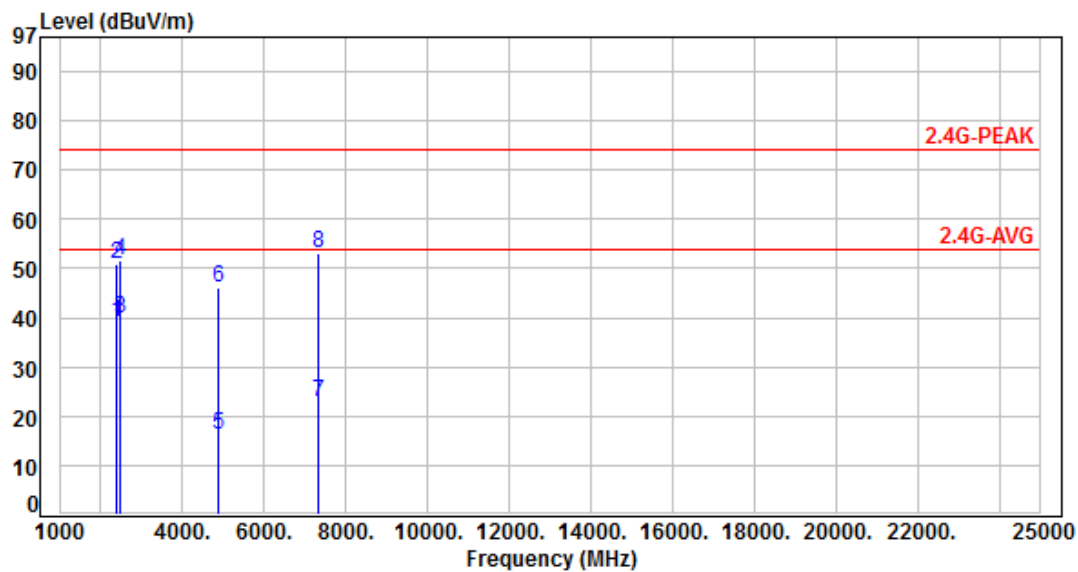

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.89	42.04	39.15	54.00	-14.85	Average	100	135	P
2	2390.00	-2.89	53.88	50.99	74.00	-23.01	Peak	100	135	P
3	2483.50	-2.66	42.59	39.93	54.00	-14.07	Average	100	135	P
4	2483.50	-2.66	54.38	51.72	74.00	-22.28	Peak	100	135	P
5	4882.00	4.91	11.18	16.09	54.00	-37.91	Average	100	153	P
6	4882.00	4.91	41.28	46.19	74.00	-27.81	Peak	100	153	P
7	7323.00	9.85	12.98	22.83	54.00	-31.17	Average	100	166	P
8	7323.00	9.85	43.08	52.93	74.00	-21.07	Peak	100	166	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60HZ	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, CH39		

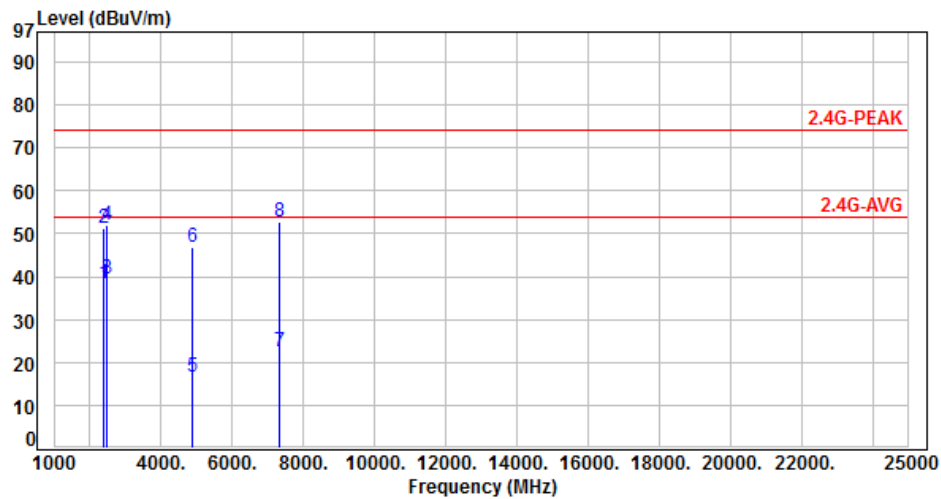

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.89	41.40	38.51	54.00	-15.49	Average	100	235	P
2	2390.00	-2.89	54.29	51.40	74.00	-22.60	Peak	100	235	P
3	2483.50	-2.66	42.22	39.56	54.00	-14.44	Average	100	235	P
4	2483.50	-2.66	54.57	51.91	74.00	-22.09	Peak	100	235	P
5	4882.00	4.91	11.78	16.69	54.00	-37.31	Average	100	18	P
6	4882.00	4.91	41.88	46.79	74.00	-27.21	Peak	100	18	P
7	7323.00	9.85	12.68	22.53	54.00	-31.47	Average	100	215	P
8	7323.00	9.85	42.78	52.63	74.00	-21.37	Peak	100	215	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60HZ	Pol/Phase	: VERTICAL
Test Mode	: Mode 1, CH78		:

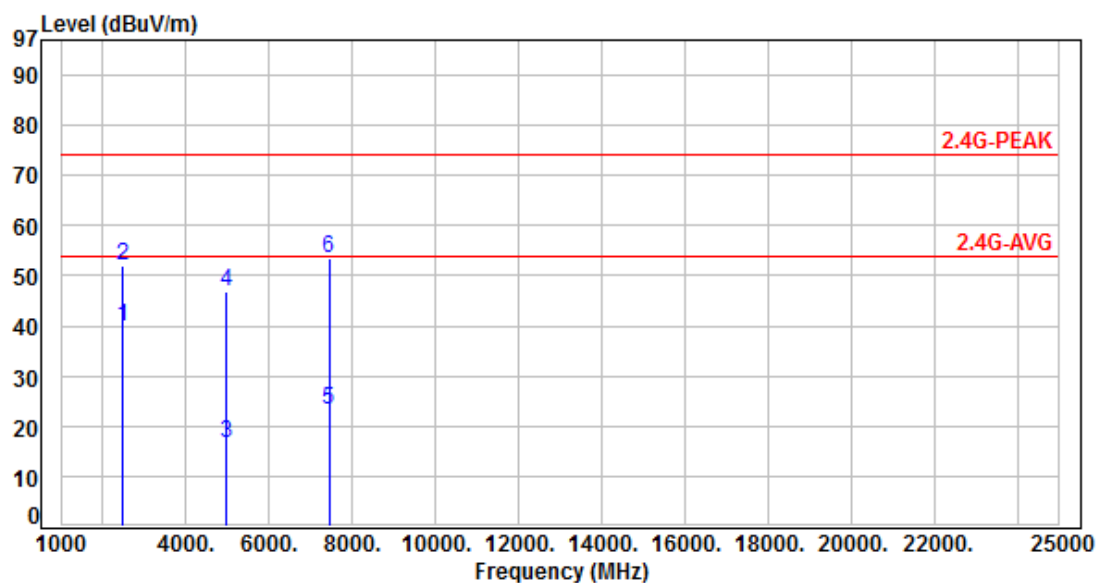

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.50	-2.66	42.60	39.94	54.00	-14.06	Average	100	138	P
2	2483.50	-2.66	54.82	52.16	74.00	-21.84	Peak	100	138	P
3	4960.00	5.26	11.35	16.61	54.00	-37.39	Average	100	149	P
4	4960.00	5.26	41.45	46.71	74.00	-27.29	Peak	100	149	P
5	7440.00	9.96	13.33	23.29	54.00	-30.71	Average	100	159	P
6	7440.00	9.96	43.43	53.39	74.00	-20.61	Peak	100	159	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60HZ	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, CH78		:

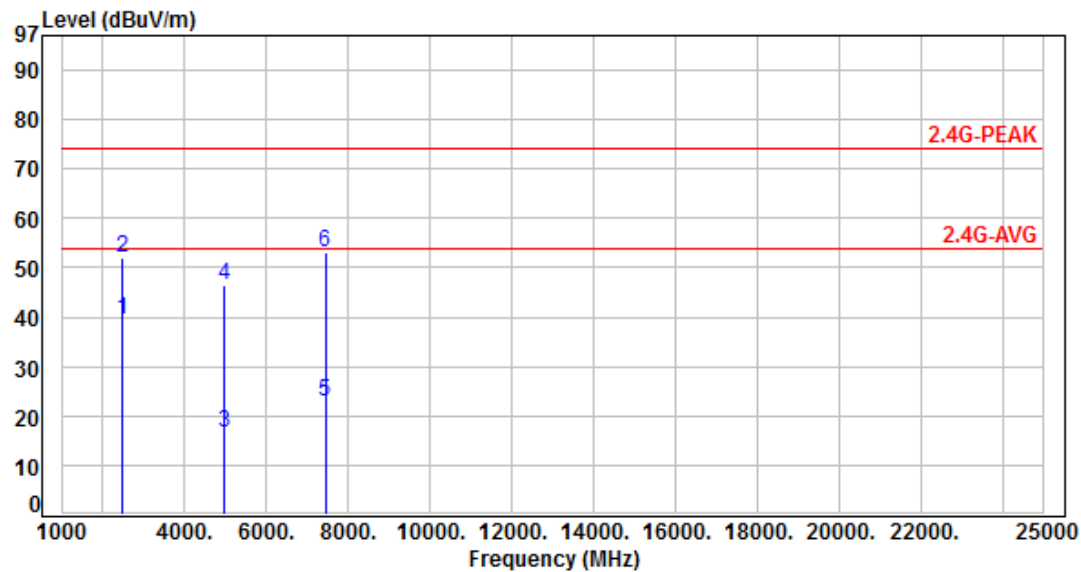

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.50	-2.66	42.07	39.41	54.00	-14.59	Average	100	233	P
2	2483.50	-2.66	54.49	51.83	74.00	-22.17	Peak	100	233	P
3	4960.00	5.26	11.28	16.54	54.00	-37.46	Average	100	23	P
4	4960.00	5.26	41.38	46.64	74.00	-27.36	Peak	100	23	P
5	7440.00	9.96	13.00	22.96	54.00	-31.04	Average	100	220	P
6	7440.00	9.96	43.10	53.06	74.00	-20.94	Peak	100	220	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60HZ	Pol/Phase	: VERTICAL
Test Mode	: Mode 3, CH00		:

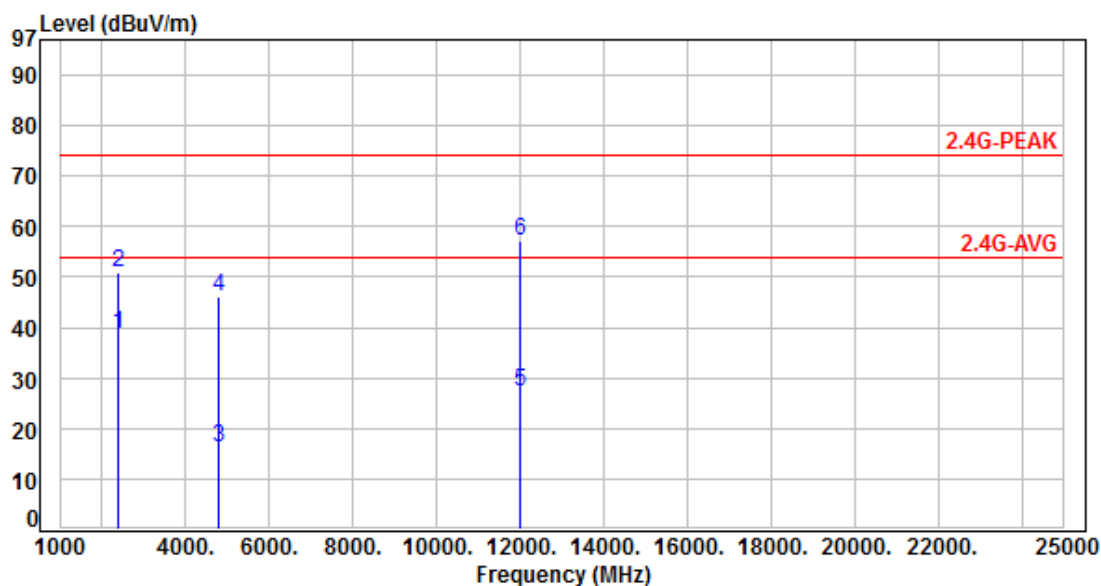

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.89	41.53	38.64	54.00	-15.36	Average	100	132	P
2	2390.00	-2.89	53.61	50.72	74.00	-23.28	Peak	100	132	P
3	4804.00	4.67	11.38	16.05	54.00	-37.95	Average	100	157	P
4	4804.00	4.67	41.48	46.15	74.00	-27.85	Peak	100	157	P
5	12010.00	14.75	12.43	27.18	54.00	-26.82	Average	100	70	P
6	12010.00	14.75	42.53	57.28	74.00	-16.72	Peak	100	70	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60HZ	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 3, CH00		

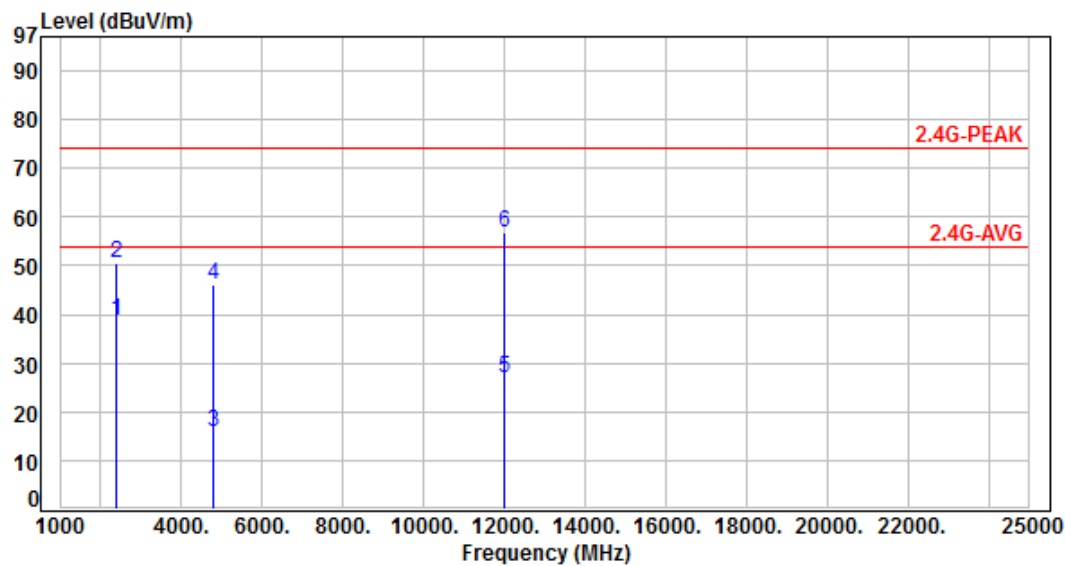

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.89	41.44	38.55	54.00	-15.45	Average	120	232	P
2	2390.00	-2.89	53.58	50.69	74.00	-23.31	Peak	120	232	P
3	4804.00	4.67	11.20	15.87	54.00	-38.13	Average	100	21	P
4	4804.00	4.67	41.30	45.97	74.00	-28.03	Peak	100	21	P
5	12010.00	14.75	12.06	26.81	54.00	-27.19	Average	100	205	P
6	12010.00	14.75	42.16	56.91	74.00	-17.09	Peak	100	205	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60HZ	Pol/Phase	: VERTICAL
Test Mode	: Mode 3, CH39		:

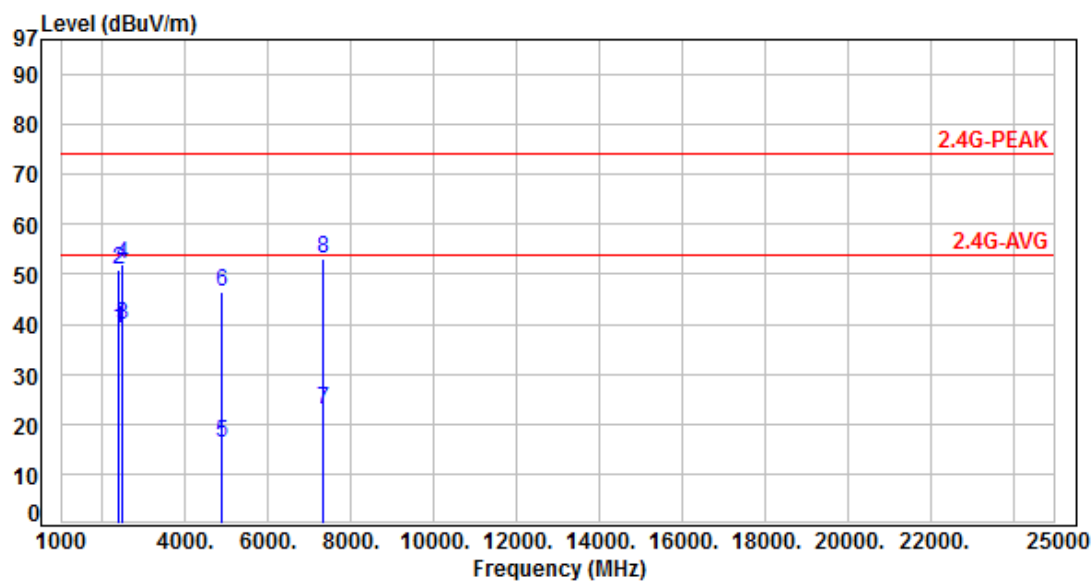

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.89	41.84	38.95	54.00	-15.05	Average	110	130	P
2	2390.00	-2.89	53.63	50.74	74.00	-23.26	Peak	110	130	P
3	2483.50	-2.66	42.36	39.70	54.00	-14.30	Average	110	130	P
4	2483.50	-2.66	54.51	51.85	74.00	-22.15	Peak	110	130	P
5	4882.00	4.91	11.31	16.22	54.00	-37.78	Average	100	150	P
6	4882.00	4.91	41.41	46.32	74.00	-27.68	Peak	100	150	P
7	7323.00	9.85	13.16	23.01	54.00	-30.99	Average	100	167	P
8	7323.00	9.85	43.26	53.11	74.00	-20.89	Peak	100	167	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60HZ	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 3, CH39		

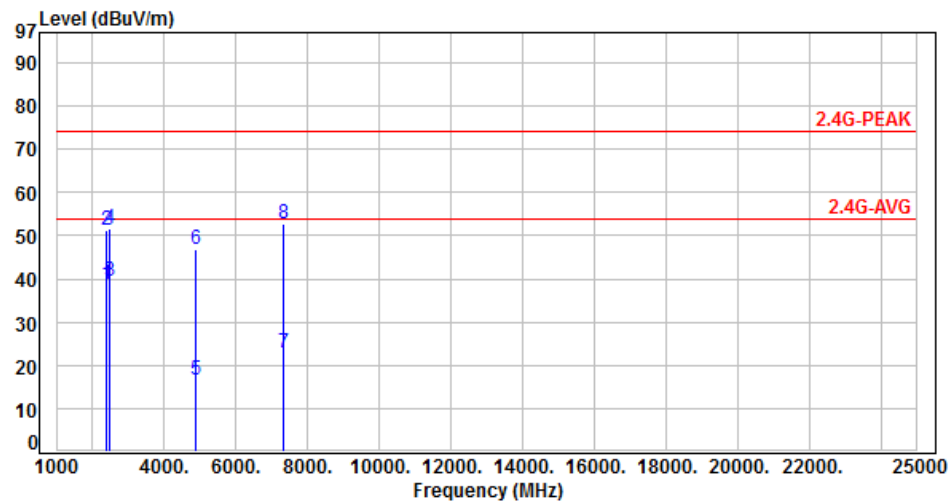

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.89	41.62	38.73	54.00	-15.27	Average	100	230	P
2	2390.00	-2.89	54.33	51.44	74.00	-22.56	Peak	100	230	P
3	2483.50	-2.66	42.13	39.47	54.00	-14.53	Average	100	230	P
4	2483.50	-2.66	54.42	51.76	74.00	-22.24	Peak	100	230	P
5	4882.00	4.91	11.70	16.61	54.00	-37.39	Average	100	25	P
6	4882.00	4.91	41.80	46.71	74.00	-27.29	Peak	100	25	P
7	7323.00	9.85	12.89	22.74	54.00	-31.26	Average	100	211	P
8	7323.00	9.85	42.99	52.84	74.00	-21.16	Peak	100	211	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60HZ	Pol/Phase	: VERTICAL
Test Mode	: Mode 3, CH78		:

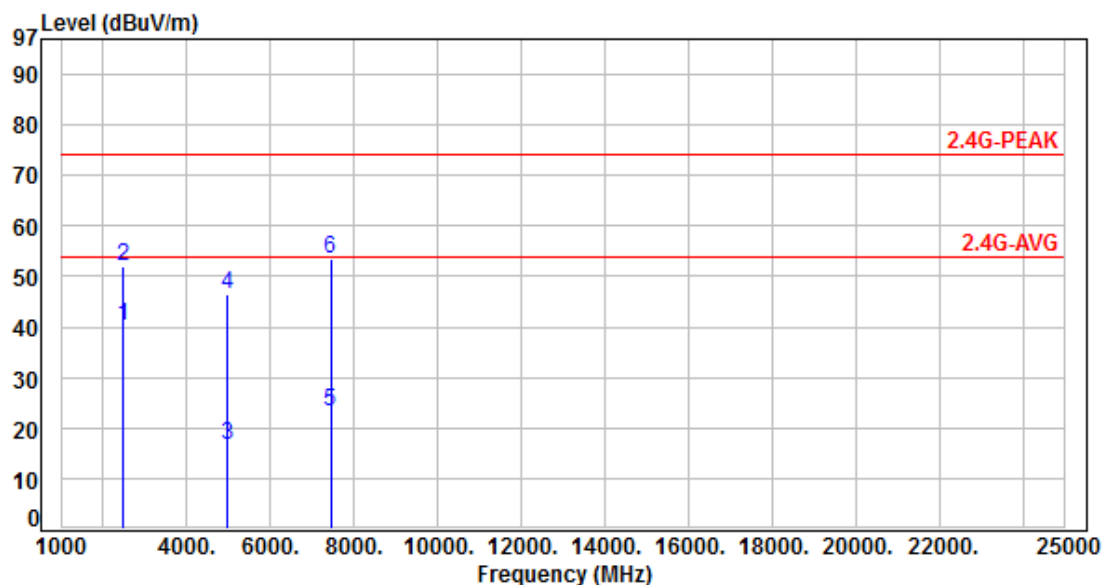

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.50	-2.66	42.78	40.12	54.00	-13.88	Average	100	141	P
2	2483.50	-2.66	54.63	51.97	74.00	-22.03	Peak	100	141	P
3	4960.00	5.26	11.22	16.48	54.00	-37.52	Average	100	154	P
4	4960.00	5.26	41.32	46.58	74.00	-27.42	Peak	100	154	P
5	7440.00	9.96	13.27	23.23	54.00	-30.77	Average	100	165	P
6	7440.00	9.96	43.37	53.33	74.00	-20.67	Peak	100	165	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60HZ	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 3, CH78		:

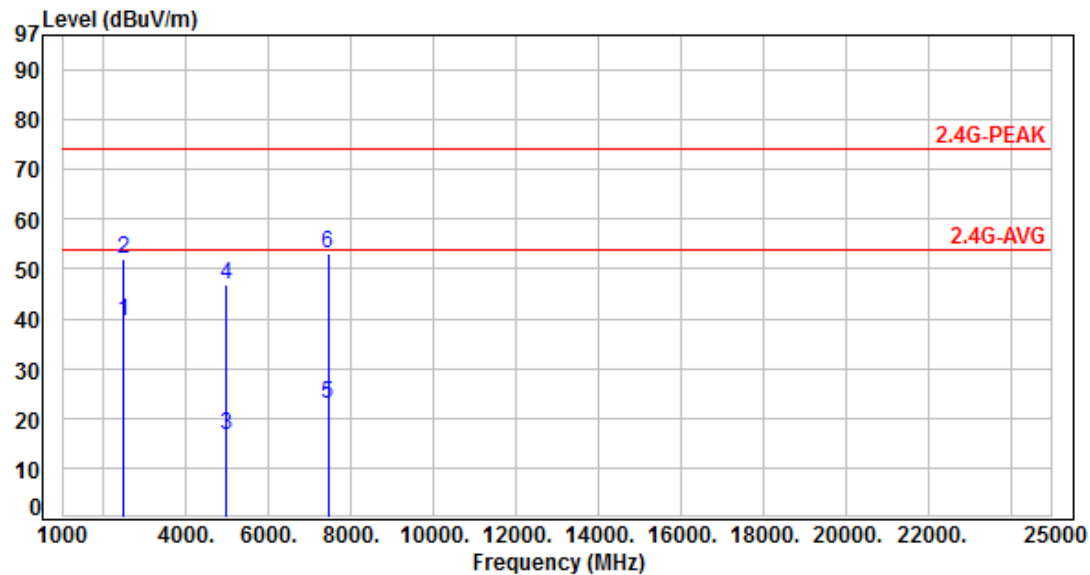

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.50	-2.66	41.96	39.30	54.00	-14.70	Average	100	231	P
2	2483.50	-2.66	54.62	51.96	74.00	-22.04	Peak	100	231	P
3	4960.00	5.26	11.43	16.69	54.00	-37.31	Average	100	20	P
4	4960.00	5.26	41.53	46.79	74.00	-27.21	Peak	100	20	P
5	7440.00	9.96	12.94	22.90	54.00	-31.10	Average	100	217	P
6	7440.00	9.96	43.04	53.00	74.00	-21.00	Peak	100	217	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



6.7 Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.09000 – 0.11000	16.42000 – 16.42300	399.9 – 410.0	4.500 – 5.250
0.49500 – 0.505**	16.69475 – 16.69525	608.0 – 614.0	5.350 – 5.460
2.17350 – 2.19050	16.80425 – 16.80475	960.0 – 1240.0	7.250 – 7.750
4.12500 – 4.12800	25.50000 – 25.67000	1300.0 – 1427.0	8.025 – 8.500
4.17725 – 4.17775	37.50000 – 38.25000	1435.0 – 1626.5	9.000 – 9.200
4.20725 – 4.20775	73.00000 – 74.60000	1645.5 – 1646.5	9.300 – 9.500
6.21500 – 6.21800	74.80000 – 75.20000	1660.0 – 1710.0	10.600 – 12.700
6.26775 – 6.26825	108.00000 – 121.94000	1718.8 – 1722.2	13.250 – 13.400
6.31175 – 6.31225	123.00000 – 138.00000	2200.0 – 2300.0	14.470 – 14.500
8.29100 – 8.29400	149.90000 – 150.05000	2310.0 – 2390.0	15.350 – 16.200
8.36200 – 8.36600	156.52475 – 156.52525	2483.5 – 2500.0	17.700 – 21.400
8.37625 – 8.38675	156.70000 – 156.90000	2655.0 – 2900.0	22.010 – 23.120
8.41425 – 8.41475	162.01250 – 167.17000	3260.0 – 3267.0	23.600 – 24.000
12.29000 – 12.29300	167.72000 – 173.20000	3332.0 – 3339.0	31.200 – 31.800
12.51975 – 12.52025	240.00000 – 285.00000	3345.8 – 3358.0	36.430 – 36.500
12.57675 – 12.57725	322.00000 – 335.40000	3600.0 – 4400.0	Above 38.6
13.36000 – 13.41000			

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz



7. Test of Conducted Spurious Emission


7.1 Test Limit

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

7.2 Test Procedure

- The transmitter output was connected to the spectrum analyzer via a low loss cable.
- Set RBW of spectrum analyzer to 100 KHz and VBW of spectrum analyzer to 300 KHz with convenient frequency span including 100 KHz bandwidth from band edge.
- The band edges was measured and recorded.

7.3 Test Setup Layout




7.4 Test Result and Data



Note: Test plots refer to the following pages.



Modulation Type: GFSK (1Mbps)
Channel: 00

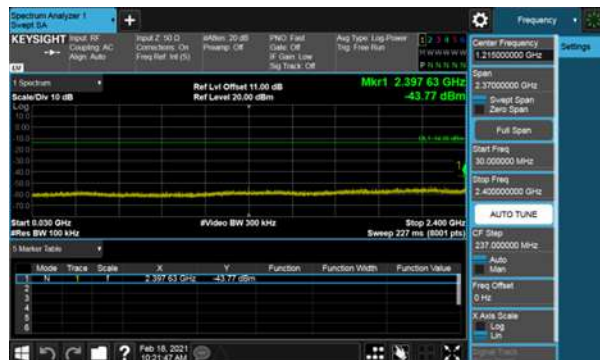

Modulation Type: GFSK (1Mbps)
Channel: 39

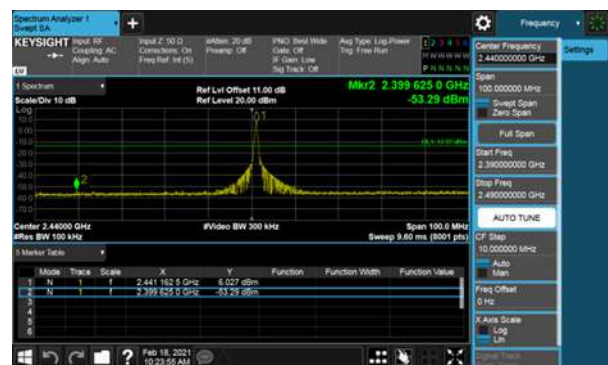
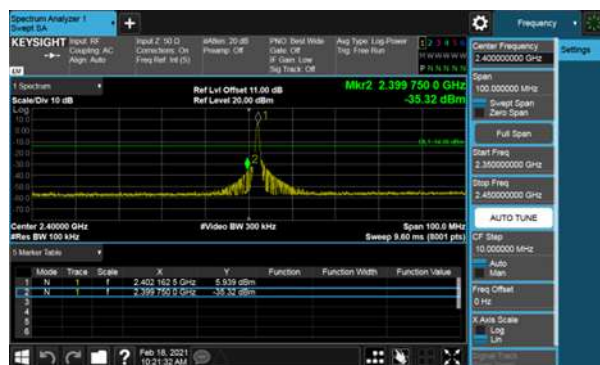




Modulation Type: GFSK (1Mbps)
Channel: 78



Modulation Type: $\pi/4$ -DQPSK (2Mbps)
Channel: 00

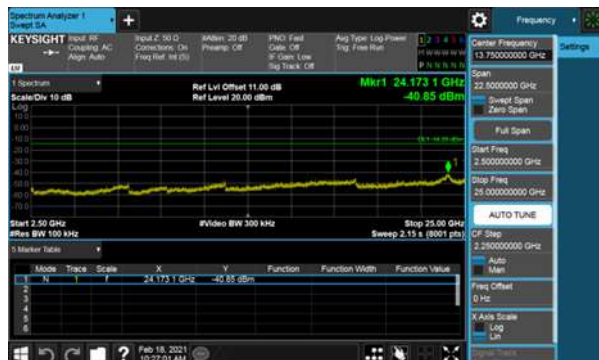
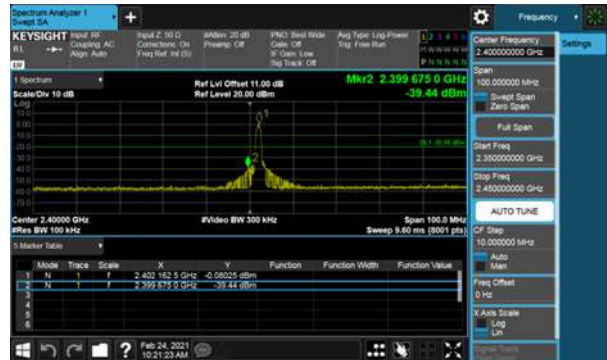




Modulation Type: $\pi/4$ -DQPSK (2Mbps)
Channel: 39



Modulation Type: $\pi/4$ -DQPSK (2Mbps)
Channel: 78

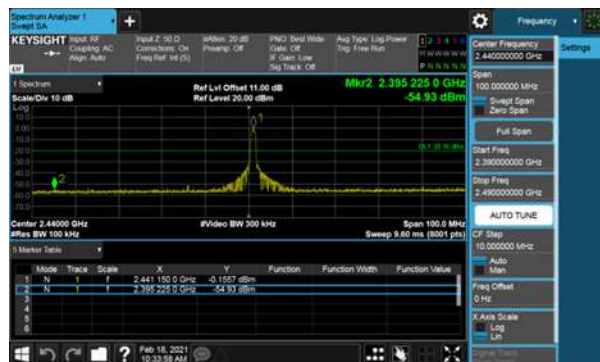
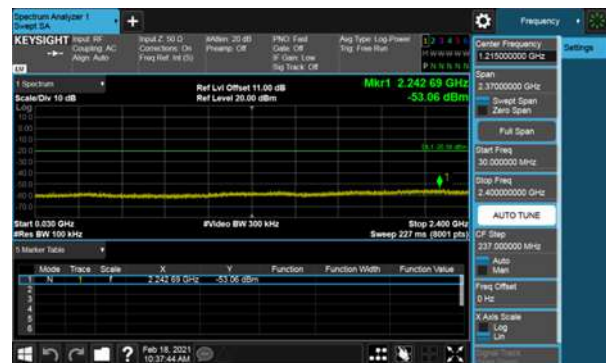




Modulation Type: 8DPSK (3Mbps)
Channel: 00




Modulation Type: 8DPSK (3Mbps)
Channel: 39

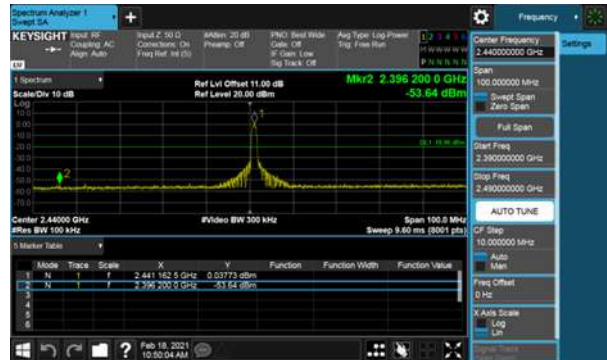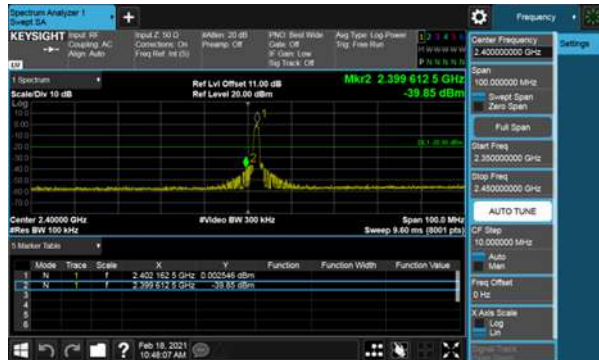




Modulation Type: 8DPSK (3Mbps)
Channel: 78

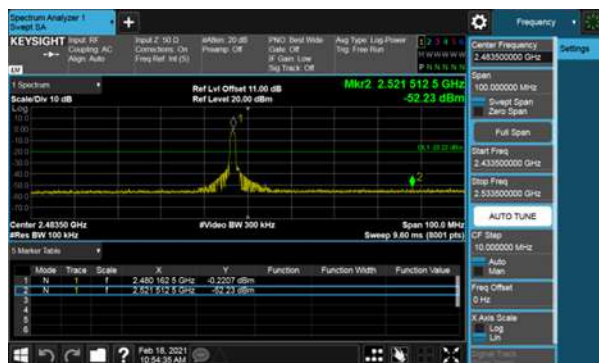



Hopping Mode:

Modulation Type: GFSK

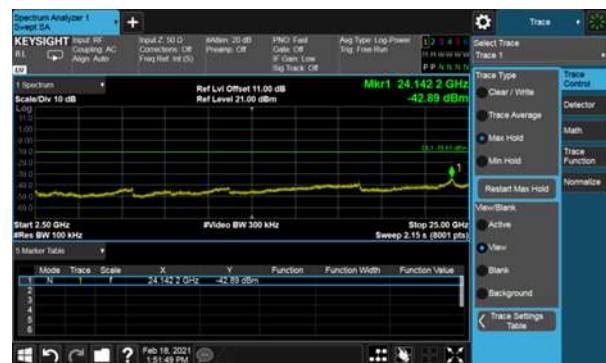Modulation Type: $\pi/4$ -DQPSK



Modulation Type: 8DPSK





8. 20dB Bandwidth Measurement Data


8.1 Test Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

8.2 Test Procedures

- The transmitter output was connected to the spectrum analyzer.
- Set RBW of spectrum analyzer to 30 KHz and VBW to 100 KHz.
- The 20 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20 dB.

8.3 Test Setup Layout



8.4 Test Result and Data

Modulation Type	Channel	Frequency (MHz)	20dB Bandwidth (MHz)	2/3 20dB Bandwidth (MHz)
GFSK	0	2402	0.980	0.653
	39	2441	0.980	0.653
	78	2480	0.980	0.653
$\pi/4$ -DQPSK	0	2402	1.365	0.910
	39	2441	1.360	0.907
	78	2480	1.365	0.910
8DPSK	0	2402	1.320	0.880
	39	2441	1.320	0.880
	78	2480	1.325	0.883



Modulation Type: GFSK (1Mbps)
Channel: 00



Modulation Type: $\pi/4$ -DQPSK (2Mbps)
Channel: 00



CH39



CH39



CH78



CH78





Modulation Type: 8DPSK (3Mbps)
Channel: 00



CH39



CH78





9. Frequencies Separation


9.1 Test Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

9.2 Test Procedures

- The transmitter output was connected to the spectrum analyzer.
- Set RBW of spectrum analyzer to 100 KHz and VBW to 300 KHz.
- By using the MaxHold function record the separation of two adjacent channels.
- Measure the frequency difference of these two adjacent channels.

9.3 Test Setup Layout



**9.4 Test Result and Data**

Modulation Type	Channel	Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)
GFSK	0	2402	1.002	0.653
	39	2441	1.002	0.653
	78	2480	1.002	0.653
$\pi/4$ -DQPSK	0	2402	1.002	0.910
	39	2441	1.002	0.907
	78	2480	1.002	0.910
8DPSK	0	2402	1.002	0.880
	39	2441	1.002	0.880
	78	2480	1.002	0.883



Modulation Type: GFSK (1Mbps)
Channel: 00



Modulation Type: $\pi/4$ -DQPSK (2Mbps)
Channel: 00



CH39



CH39



CH78



CH78







Modulation Type: 8DPSK (3Mbps)
Channel: 00



CH39

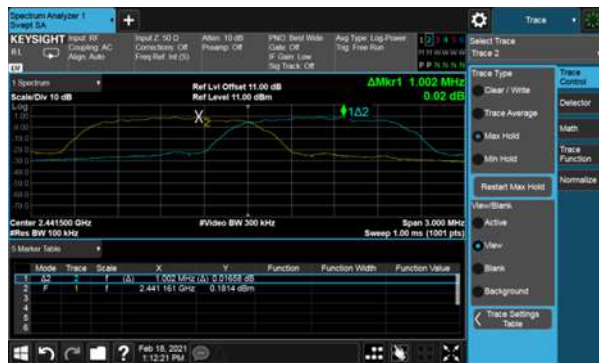

CH78

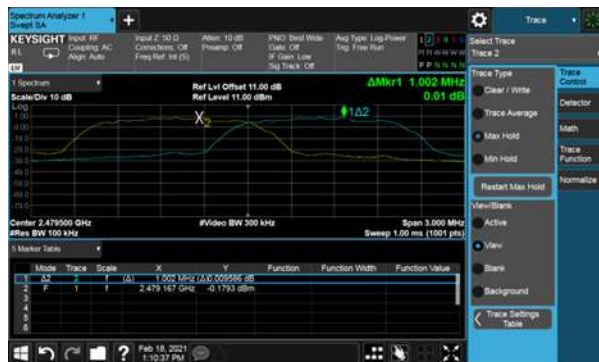



10. Dwell Time on each channel


10.1 Test Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

10.2 Test Procedures

1. The transmitter output was connected to the spectrum analyzer.
2. Adjust the center frequency to measure frequency, then set zero span mode.
2. Set RBW of spectrum analyzer to 1 MHz and VBW to 1 MHz.
4. Measure the time duration of one transmission on the measured frequency.

10.3 Test Setup Layout






10.4 Test Result and Data

Channel	Frequency (MHz)	Length of transmission time (ms)	Number of transmission in a 31.6 (79 Hopping*0.4)	Dwell Time (ms)	Limit (ms)
GFSK-DH1	2402	0.390	320.00	124.80	400
GFSK-DH3	2402	1.650	160.00	264.00	400
GFSK-DH5	2402	2.904	106.67	309.76	400
$\pi/4$ -DQPSK-DH1	2402	0.393	320.00	125.76	400
$\pi/4$ -DQPSK-DH3	2402	1.650	160.00	264.00	400
$\pi/4$ -DQPSK-DH5	2402	2.900	106.67	309.33	400
8DPSK-DH1	2402	0.396	320.00	126.72	400
8DPSK-DH3	2402	1.650	160.00	264.00	400
8DPSK-DH5	2402	2.908	106.67	310.19	400

Channel	Frequency (MHz)	Length of transmission time (ms)	Number of transmission in a 8 (20 Hopping*0.4)	Dwell Time (ms)	Limit (ms)
AFH-DH1	2402-2421	0.390	160.00	62.40	400
AFH-DH3	2402-2421	1.650	80.00	132.00	400
AFH-DH5	2402-2421	2.904	53.33	154.87	400



Modulation Type: GFSK-DH1
Channel: 00

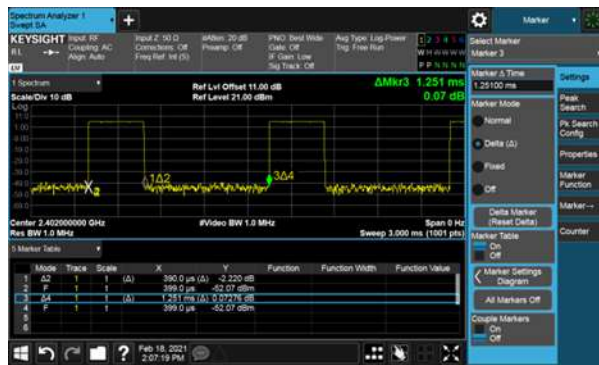

Modulation Type: $\pi/4$ -DQPSK-DH1
Channel: 00



GFSK-DH3



$\pi/4$ -DQPSK-DH3



GFSK-DH5



$\pi/4$ -DQPSK-DH5





Modulation Type: 8DPSK-DH1
Channel: 00



Modulation Type: AFH (DH1)



8DPSK-DH3



Modulation Type: AFH (DH3)



8DPSK-DH5



Modulation Type: AFH (DH5)





11. Number of Hopping Channels


11.1 Test Limit

Frequency hopping systems in the 2400 ~ 2483.5 MHz band shall use at least 15 channels.

11.2 Test Procedures

- a. The transmitter output was connected to the spectrum analyzer.
- b. 2. Set RBW of spectrum analyzer to 100 KHz and VBW to 300 KHz.
- c. 3. Set the MaxHold function, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been record.

11.3 Test Setup Layout




11.4 Test Result and Data

Modulation Type	Hopping Channels
GFSK	79
$\pi/4$ -DQPSK	79
8DPSK	79



Modulation Type: GFSK (1Mbps)

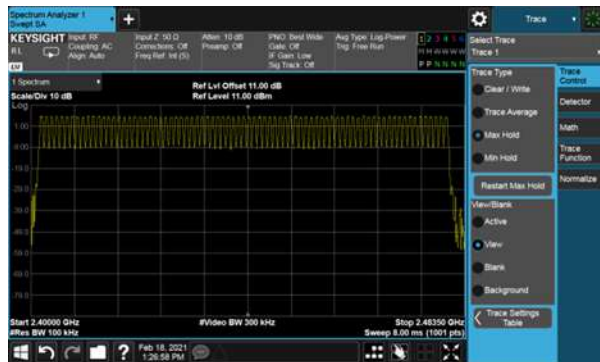

Modulation Type: $\pi/4$ -DQPSK (2Mbps)



Modulation Type: 8DPSK (3Mbps)





12. Maximum Peak Output Power


12.1 Test Limit

The Maximum Peak Output Power Measurement is 30dBm.

12.2 Test Procedures

The antenna port(RF output)of the EUT was connected to the input(RF input)of a power meter. Power was read directly from the meter and cable loss connection was added to the reading to obtain power at the EUT antenna terminal. The EUT Output Power was set to maximum to produce the worse case test result.

12.3 Test Setup Layout





12.4 Test Result and Data

Modulation Type	Setting	Channel	Frequency (MHz)	PK Output Power (dBm)	PK Output Power (mW)
GFSK	Default	0	2402	5.72	3.733
	Default	39	2441	5.51	3.556
	Default	78	2480	5.55	3.589
$\pi/4$ -DQPSK	Default	0	2402	2.42	1.746
	Default	39	2441	2.20	1.660
	Default	78	2480	1.83	1.524
8DPSK	Default	0	2402	2.69	1.858
	Default	39	2441	2.37	1.726
	Default	78	2480	2.17	1.648

Modulation Type	Setting	Channel	Frequency (MHz)	AV Output Power (dBm)	AV Output Power (mW)
GFSK	Default	0	2402	5.64	3.664
	Default	39	2441	5.42	3.483
	Default	78	2480	5.45	3.508
$\pi/4$ -DQPSK	Default	0	2402	0.07	1.016
	Default	39	2441	-0.21	0.953
	Default	78	2480	-0.48	0.895
8DPSK	Default	0	2402	0.13	1.030
	Default	39	2441	-0.27	0.940
	Default	78	2480	-0.42	0.908

*Note: Average power is for reference only.

AFH Mode

Modulation Type	Setting	Channel	Frequency (MHz)	PK Output Power (dBm)	PK Output Power (mW)
GFSK	Default	0-19	2402-2421	5.70	3.715
$\pi/4$ -DQPSK	Default	0-19	2402-2421	2.41	1.742
8DPSK	Default	0-19	2402-2421	2.67	1.849

AFH Mode

Modulation Type	Setting	Channel	Frequency (MHz)	AV Output Power (dBm)	AV Output Power (mW)
GFSK	Default	0-19	2402-2421	5.63	3.656
$\pi/4$ -DQPSK	Default	0-19	2402-2421	0.05	1.012
8DPSK	Default	0-19	2402-2421	0.12	1.028

*Note: Average power is for reference only.