

**ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT  
INTENTIONAL RADIATOR CERTIFICATION TO  
FCC PART 15 SUBPART C REQUIREMENT**

*OF*

**Bluetooth 150Mbps Wireless N USB Module**

**Model No.: BL-R8723RB1**

**FCC ID: S8J-R8723RB1**

**Trademark: LB-LINK**

**Report No.: KAD150528148E3**

**Issue Date: July 14, 2015**

*Prepared for*

**Shenzhen Bilian Electronic Co., Ltd.  
Building B1, Zhongxing Industrial Zone, Juling Jutang Community,  
Guanlan street, Bao'an, Shenzhen China**

*Prepared by*

**DONGGUAN EMTEK CO., LTD.  
No.281, Guantai Road, Nancheng District,  
Dongguan, Guangdong, China  
TEL: 86-769-22807078  
FAX: 86-769-22807079**

**This report shall not be reproduced, except in full, without the written approval of  
DONGGUAN EMTEK CO., LTD.**

**VERIFICATION OF COMPLIANCE**


Applicant:	Shenzhen Bilian Electronic Co., Ltd. Building B1, Zhongxing Industrial Zone, Juling Jutang Community, Guanlan street, Bao'an, Shenzhen China
Manufacturer:	Shenzhen Bilian Electronic Co., Ltd. Building B1, Zhongxing Industrial Zone, Juling Jutang Community, Guanlan street, Bao'an, Shenzhen China
Product Description:	Bluetooth 150Mbps Wireless N USB Module
Trade Mark:	LB-LINK
Model Number:	BL-R8723RB1

**We hereby certify that:**

The above equipment was tested by DONGGUAN EMTEK CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10-2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.247(2014).

Date of Test : May 28, 2015 to June 27, 2015

Prepared by :   
Ivy Huang/Editor

Reviewer :   
Hong Yang/Supervisor

Approved & Authorized  
Signer :   
Sam Lv/Manager

### Modified Information

Version	Summary	Revision Date	Report No.
Ver.1.0	Original Report	/	KAD150525148E3

## Table of Contents

<b>1. GENERAL INFORMATION .....</b>	<b>6</b>
1.1 PRODUCT DESCRIPTION .....	6
1.2 RELATED SUBMITTAL(S) / GRANT(S) .....	7
1.3 TEST METHODOLOGY .....	7
1.4 SPECIAL ACCESSORIES.....	7
1.5 EQUIPMENT MODIFICATIONS.....	7
1.6 TEST FACILITY.....	7
<b>2. SYSTEM TEST CONFIGURATION .....</b>	<b>8</b>
2.1 EUT CONFIGURATION.....	8
2.2 EUT EXERCISE .....	8
2.3 TEST PROCEDURE.....	8
2.4 CONFIGURATION OF TESTED SYSTEM .....	9
<b>3. DESCRIPTION OF TEST MODES.....</b>	<b>10</b>
<b>4. SUMMARY OF TEST RESULTS.....</b>	<b>11</b>
<b>5. CONDUCTED EMISSIONS TEST .....</b>	<b>12</b>
5.1 MEASUREMENT PROCEDURE .....	12
5.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) .....	12
5.3 MEASUREMENT EQUIPMENT USED .....	12
5.4 CONDUCTED EMISSION LIMIT .....	12
5.5 MEASUREMENT RESULT.....	13
<b>6. RADIATED EMISSION TEST.....</b>	<b>15</b>
6.1 MEASUREMENT PROCEDURE .....	15
6.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) .....	16
6.3 MEASUREMENT EQUIPMENT USED .....	17
6.4 RADIATED EMISSION LIMIT .....	18
6.5 MEASUREMENT RESULT.....	19
<b>7. 6DB BANDWIDTH TEST .....</b>	<b>28</b>
7.1 MEASUREMENT PROCEDURE .....	28
7.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) .....	28
7.3 MEASUREMENT EQUIPMENT USED .....	28
7.4 MEASUREMENT RESULTS.....	28
<b>8. MAXIMUM PEAK OUTPUT POWER TEST .....</b>	<b>37</b>
8.1 MEASUREMENT PROCEDURE .....	37
8.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) .....	37
8.3 MEASUREMENT EQUIPMENT USED .....	37
8.4 PEAK POWER OUTPUT LIMIT .....	37
8.5 MEASUREMENT RESULTS.....	37
<b>9. BAND EDGE TEST.....</b>	<b>38</b>
9.1 MEASUREMENT PROCEDURE .....	38
9.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) .....	39
9.3 MEASUREMENT EQUIPMENT USED .....	39
9.4 MEASUREMENT RESULTS.....	39
<b>10. POWER DENSITY.....</b>	<b>51</b>
10.1 TEST EQUIPMENT .....	51
10.2 MEASURING INSTRUMENTS AND SETTING.....	51
10.3 TEST PROCEDURES.....	51

10.4	BLOCK DIAGRAM OF TEST SETUP .....	51
10.5	LIMIT.....	51
10.6	TEST RESULT .....	52
<b>11.</b>	<b>ANTENNA PORT EMISSION.....</b>	<b>60</b>
11.1	TEST EQUIPMENT .....	60
11.2	MEASURING INSTRUMENTS AND SETTING.....	60
11.3	TEST PROCEDURES.....	60
11.4	BLOCK DIAGRAM OF TEST SETUP .....	60
11.5	TEST RESULT .....	60
<b>12.</b>	<b>ANTENNA APPLICATION .....</b>	<b>67</b>
12.1	ANTENNA REQUIREMENT .....	67
12.2	RESULT.....	67

APPENDIX I (PHOTOS OF EUT)(3PAGES)

## 1. General Information

### 1.1 Product Description

Product Name	Bluetooth 150Mbps Wireless N USB Module		
Model number	BL-R8723RB1		
Power Supply	DC From PC		
Technical Description			
Kind of Device	Bluetooth 4.0	Bluetooth 3.0+EDR	WiFi
Operation Frequency	2402-2480MHz		2412-2462MHz for 802.11b/g/n(HT20) ; 2422-2452MHz for 802.11n(HT40)
Modulation	GFSK	GFSK, $\pi/4$ -DQPSK, 8DPSK	OFDM with BPSK/QPSK/16QAM/64QAM for 802.11g/n, DSSS with DBPSK/DQPSK/CCK for 802.11b;
Number of Channel	40	79	11 Channels for 802.11b/g/n(HT20) 7 Channels for 802.11n(HT40)
Channel space	2MHz	1MHz	5MHz
Max RF Output Power	2.02dBm	4.43dBm	14.10dBm
Antenna Type	Internal PCB antenna		External Antenna
Antenna Gain	2 dBi		

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	5	2432	9	2452
2	2417	6	2437	10	2457
3	2422	7	2442	11	2462
4	2427	8	2447		

Note:

1. This device is included 802.11b, 802.11g and 802.11n(HT20), 802.11n(HT40) 2.4GHz transceiver function.
2. Channel 1-11 for 802.11b, 802.11g, 802.11n(HT20); Channel 3-9 for 802.11n(HT40)
3. Test of channel was included the lowest middle and highest frequency in lowest data rate and to perform the test, then record on this report.

## 1.2 Related Submittal(s) / Grant(s)

This submittal(s) (test report) is intended for filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules. The composite system is compliance with Subpart B is authorized under a DOC procedure.

## 1.3 Test Methodology

All the test program has follow FCC new test procedure KDB558074 D01 v03r02, Both conducted and radiated testing was performed according to the procedures in ANSI C63.10-2013. Radiated testing was performed at an antenna to EUT distance 3 meters.

## 1.4 Special Accessories

Not available for this EUT intended for grant.

## 1.5 Equipment Modifications

Not available for this EUT intended for grant.

## 1.6 Test Facility

### Site Description

EMC Lab :

Accredited by FCC, June 18, 2014  
The Certificate Number is 247565

Accredited by Industry Canada, February 19, 2014  
The Certificate Number is 9444A

Name of Firm : DONGGUAN EMTEK CO., LTD.  
Site Location : No.281, Guantai Road, Nancheng District,  
Dongguan, Guangdong, China

## **2. System Test Configuration**

### **2.1 EUT Configuration**

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

### **2.2 EUT Exercise**

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

### **2.3 Test Procedure**

#### **2.3.1 Conducted Emissions**

The EUT is a placed on as turn table which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.


#### **2.3.2 Radiated Emissions**

The EUT is a placed on as turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. Emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013.



## 2.4 Configuration of Tested System

**Fig. 2-1 Configuration of Tested System**



**Table 2-1 Equipment Used in Tested System**

Item	Equipment	Trade Mark	Model No.	FCC ID	Note
1.	Bluetooth 150Mbps Wireless N USB Module	LB-LINK	BL-R8723RB1	S8J-R8723RB1	EUT
2	Notebook	Dell	14R-N4110	N/A	Support Equipment

**Note:**

- (1) Unless otherwise denoted as EUT in 『Remark』 column, device(s) used in tested system is a support equipment.

### 3. Description of Test Modes

These is Digital Transmission system (DTS) and have modulation OFDM, DSSS, DBPSK, DQPSK, CCK, 16QAM, 64QAM. According exploratory test, EUT will have maximum output power in those data rate (802.11b: 1 Mbps; 802.11g: 6 Mbps; 802.11n : MCS0), so those data rate were used for all test.

For 802.11b/g/n(HT20) :

1. For lowest channel : 2412MHz (Channel 1)
2. For middle channel : 2437MHz (Channel 6)
3. For highest channel: 2462MHz (Channel 11)

For 802.11n(HT40):

1. For lowest channel : 2422MHz (Channel 3)
2. For middle channel : 2437MHz (Channel 6)
3. For highest channel: 2452MHz (Channel 9)

#### 4. Summary of Test Results


<b>FCC Rules</b>	<b>Description Of Test</b>	<b>Result</b>
§15.247(a)(2)	6dB bandwidth	Pass
§15.247(b)(3)	Max Peak output Power test	Pass
§15.247(e)	Power density	Pass
§15.247(d)	Band edge test	Pass
§15.207	AC Power Conducted Emission	Pass
§15.247(d), §15.209	Radiated Emission	Pass
§15.247(d)	Antenna Port Emission	Pass
§15.247(b)&§15.203	Antenna Application	Pass

## 5. Conducted Emissions Test

### 5.1 Measurement Procedure

1. The EUT was placed on a table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

### 5.2 Test SET-UP (Block Diagram of Configuration)

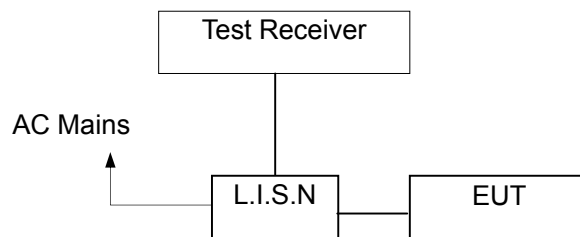

### 5.3 Measurement Equipment Used


Conducted Emission Test Site					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	Last Cal.	Due date
Test Receiver	Rohde & Schwarz	ESCS30	100018	03/16/2015	03/15/2016
L.I.S.N	Rohde & Schwarz	ENV216	100017	03/16/2015	03/15/2016
RF Switching Unit	CDS	RSU-M2	38401	03/16/2015	03/15/2016
Coaxial Cable	CDS	79254	46107086	03/16/2015	03/15/2016

### 5.4 Conducted Emission Limit

Conducted Emission Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

- Note:** 1. The lower limit shall apply at the transition frequencies  
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.


### 5.5 Measurement Result

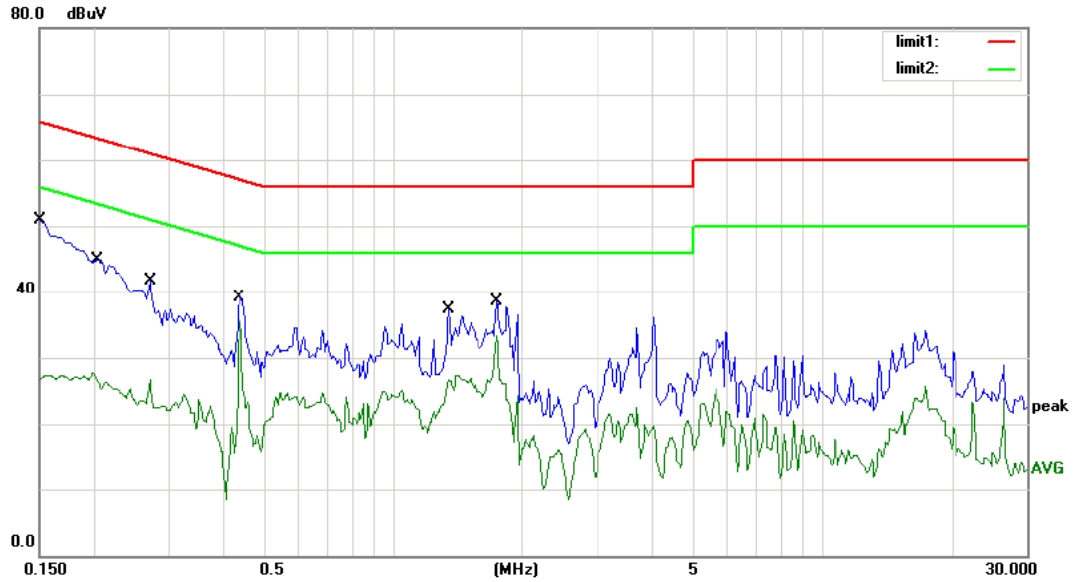

Site site #1 Phase: **L1** Temperature: 24  
 Limit: (CE)FCC PART 15 class B\_QP Power: DC 5V Humidity: 55 %  
 Mode: TX(2412)  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1500	48.54	0.00	48.54	66.00	-17.46	QP	
2		0.1500	27.35	0.00	27.35	56.00	-28.65	AVG	
3		0.2040	41.24	0.00	41.24	63.45	-22.21	QP	
4		0.2040	27.72	0.00	27.72	53.45	-25.73	AVG	
5		0.2742	36.54	0.00	36.54	60.99	-24.45	QP	
6		0.2742	26.63	0.00	26.63	50.99	-24.36	AVG	
7		0.4380	36.45	0.00	36.45	57.10	-20.65	QP	
8	*	0.4380	35.74	0.00	35.74	47.10	-11.36	AVG	
9		1.3470	35.24	0.00	35.24	56.00	-20.76	QP	
10		1.3470	27.32	0.00	27.32	46.00	-18.68	AVG	
11		1.7475	36.74	0.00	36.74	56.00	-19.26	QP	
12		1.7475	33.31	0.00	33.31	46.00	-12.69	AVG	

\*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver.

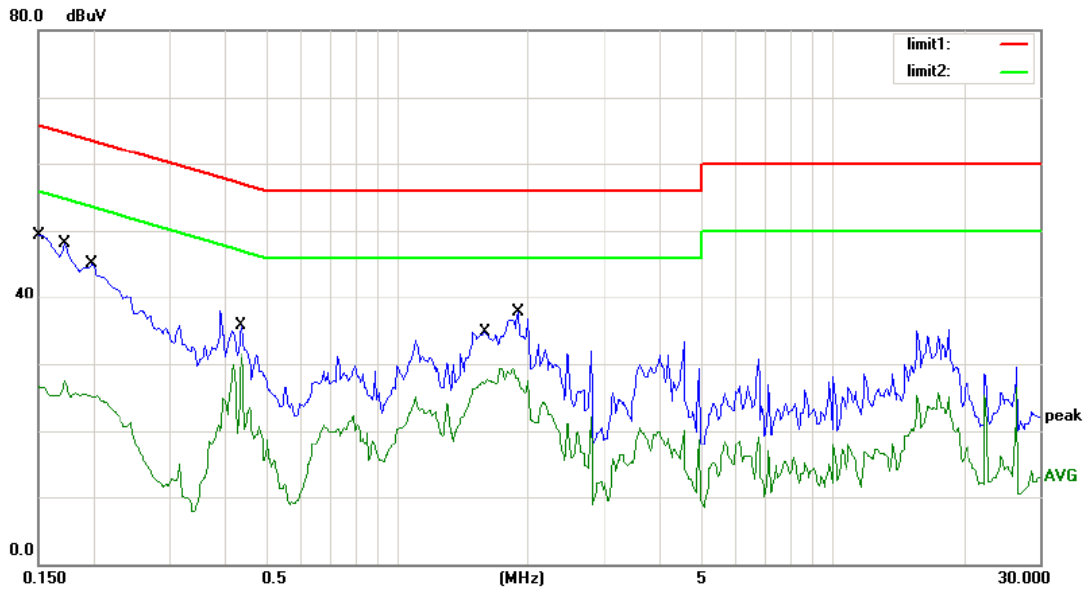

Site site #1 Phase: **N** Temperature: 24  
 Limit: (CE)FCC PART 15 class B\_QP Power: DC 5V Humidity: 55 %  
 Mode: TX(2412)  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1500	47.51	0.00	47.51	66.00	-18.49	QP	
2		0.1500	26.61	0.00	26.61	56.00	-29.39	AVG	
3		0.1725	46.25	0.00	46.25	64.84	-18.59	QP	
4		0.1725	27.47	0.00	27.47	54.84	-27.37	AVG	
5		0.1995	43.21	0.00	43.21	63.63	-20.42	QP	
6		0.1995	25.23	0.00	25.23	53.63	-28.40	AVG	
7		0.4380	32.14	0.00	32.14	57.10	-24.96	QP	
8	*	0.4380	31.43	0.00	31.43	47.10	-15.67	AVG	
9		1.5945	32.74	0.00	32.74	56.00	-23.26	QP	
10		1.5945	27.71	0.00	27.71	46.00	-18.29	AVG	
11		1.9005	35.14	0.00	35.14	56.00	-20.86	QP	
12		1.9005	27.87	0.00	27.87	46.00	-18.13	AVG	

\*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver.

## 6. Radiated Emission Test

### 6.1 Measurement Procedure

1. Below 1000MHz, The EUT was placed on a turn table which is 0.8m above ground plane, And above 1000MHz, The EUT was placed on a styrofoam table which is 1.5m above ground plane
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measured was complete.

When spectrum scanned from 30MHz to 1GHz setting resolution bandwidth 120KHz and video bandwidth 300KHz:

EMI Test Receiver	Setting
Attenuation	Auto
RB	120KHz
VB	300KHz
Detector	QP
Trace	Max hold

When spectrum scanned above 1GHz setting resolution bandwidth 1MHz, video bandwidth 3MHz:


EMI Test Receiver	Setting
Attenuation	Auto
RB	1MHz
VB	3MHz
Detector	Peak
Trace	Max hold

When spectrum scanned above 1GHz setting resolution bandwidth 1MHz, video bandwidth 10Hz:


EMI Test Receiver	Setting
Attenuation	Auto
RB	1MHz
VB	10Hz
Detector	Peak
Trace	Max hold

**6.2 Test SET-UP (Block Diagram of Configuration)**

(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

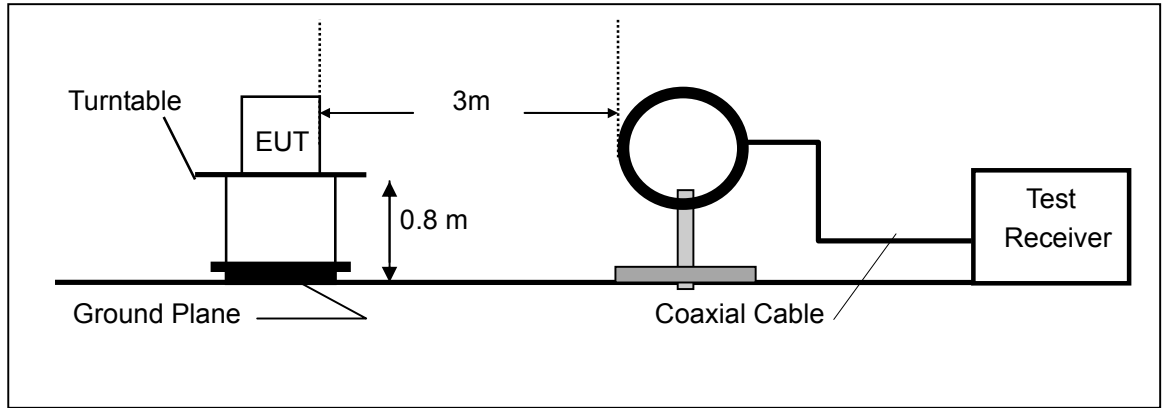


(B) Radiated Emission Test Set-Up, Frequency Below 1000MHz

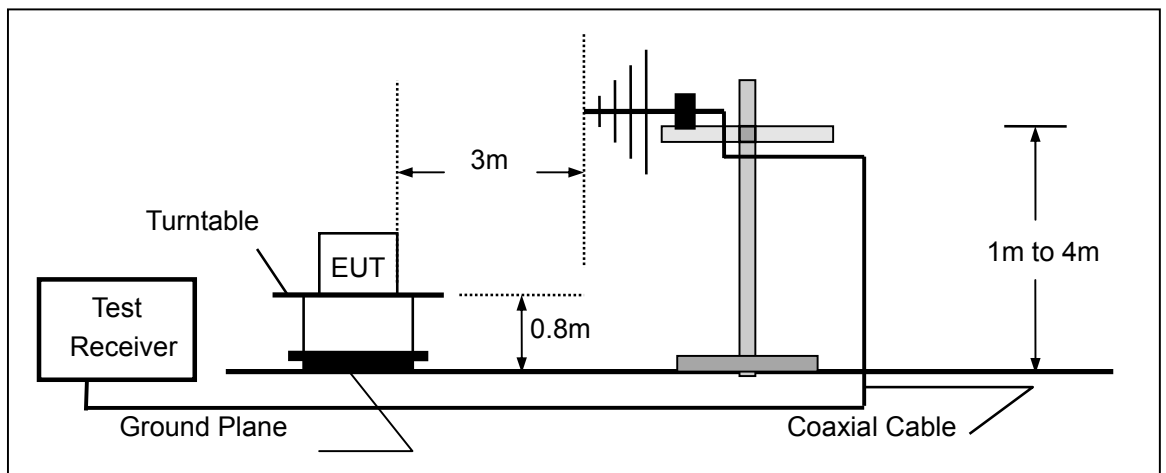



(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

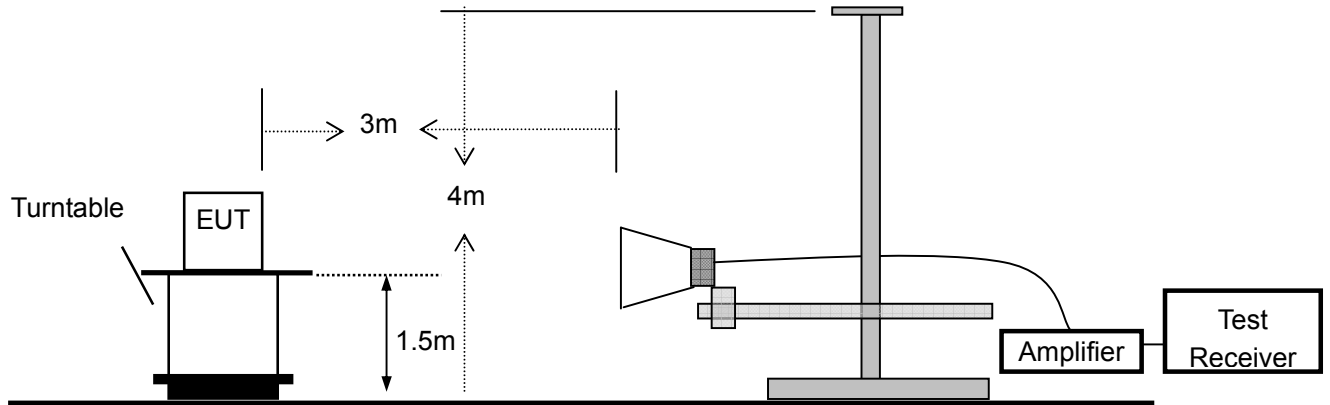

**6.3 Measurement Equipment Used**

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESCI	1166.5950.03	03/16/2015	1 Year
2.	Bilog Antenna	Schwarzbeck	VULB9163	000141	03/16/2015	1 Year
3.	Power Amplifier	CDS	RSU-M352	818	03/16/2015	1 Year
4.	Power Amplifier	HP	8447F	OPT H64	03/16/2015	1 Year
5.	Color Monitor	SUNSP0	SP-140A	N/A	03/16/2015	1 Year
6.	Single Line Filter	JIANLI	XL-3	N/A	03/16/2015	1 Year
7.	Single Phase Power Line Filter	JIANLI	DL-2X100B	N/A	03/16/2015	1 Year
8.	3 Phase Power Line Filter	JIANLI	DL-4X100B	N/A	03/16/2015	1 Year
9.	DC Power Filter	JIANLI	DL-2X50B	N/A	03/16/2015	1 Year
10.	Cable	Schwarzbeck	PLF-100	549489	03/16/2015	1 Year
11.	Cable	Rosenberger	CIL02	A0783566	03/16/2015	1 Year
12.	Cable	Rosenberger	RG 233/U	525178	03/16/2015	1 Year
13.	Signal Analyzer	Rohde & Schwarz	FSV30	103040	12/29/2014	1 Year
14.	Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1272	12/29/2014	1 Year
15.	Power Amplifier	LUNAR EM	LNA1G18-40	J10100000081	12/29/2014	1 Year
16.	Cable	H+S	CBL-26	N/A	12/29/2014	1 Year
17.	Cable	H+S	CBL-26	N/A	12/29/2014	1 Year
18.	Cable	H+S	CBL-26	N/A	12/29/2014	1 Year

#### 6.4 Radiated Emission Limit

The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table 15.209(a):

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

#### Restricted bands of operation

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )

Remark 1. Emission level in dBuV/m=20 log (uV/m)

- :
2. Measurement was performed at an antenna to the closed point of EUT distance of meters.
  3. Only spurious frequency is permitted to locate within the Restricted Bands specified in provision of § 15.205, and the emissions located in restricted bands also comply with 15.209 limit.

## 6.5 Measurement Result

### Below 30MHz:

All the modulation modes were tested the data of the test mode are recorded in the following pages.

Operation Mode:	TX Mode	Test Date :	June 12, 2015
Frequency Range:	9KHz~30MHz	Temperature :	28°C
Test Result:	PASS	Humidity :	60 %
Measured Distance:	3m	Test By:	WOLF

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV/m)	Limit 3m (dBuV/m)	Over (dB)
--	--	--	--	--

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor =  $40 \log(\text{Specific distance} / \text{test distance})$  (dB);


Limit line = Specific limits (dBuV) + distance extrapolation factor.

### Below 1000MHz:

All the modulation modes were tested the data of the worst mode (TX 802.11g) are recorded in the following pages and the others modulation methods do not exceed the limits.

Please refer to the following test plots:



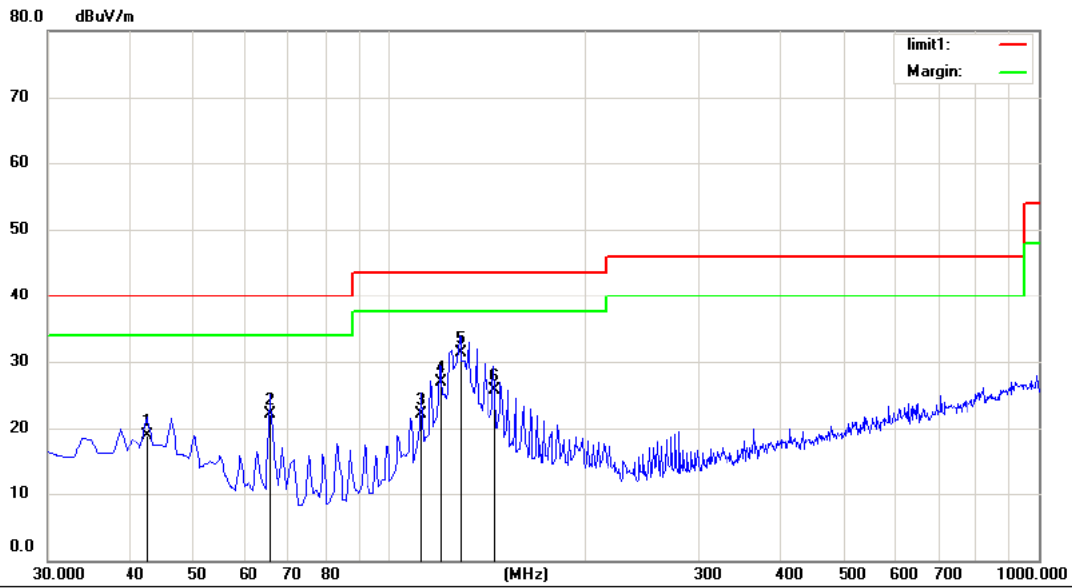


Site Chamber #1 Polarization: **Vertical** Temperature: 24  
 Limit: (RE)FCC PART 15 class B 3m Power: DC 5V(PC Input) Humidity: 55 %  
 Mode: TX 2412  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		42.6100	32.44	-13.49	18.95	40.00	-21.05	QP		
2		65.8900	43.23	-21.07	22.16	40.00	-17.84	QP		
3		112.4500	39.61	-17.43	22.18	43.50	-21.32	QP		
4		120.2100	43.87	-16.93	26.94	43.50	-16.56	QP		
5	*	128.9400	47.65	-16.35	31.30	43.50	-12.20	QP		
6		145.4300	43.21	-17.42	25.79	43.50	-17.71	QP		

\*:Maximum data x:Over limit !:over margin

Operator: Snake



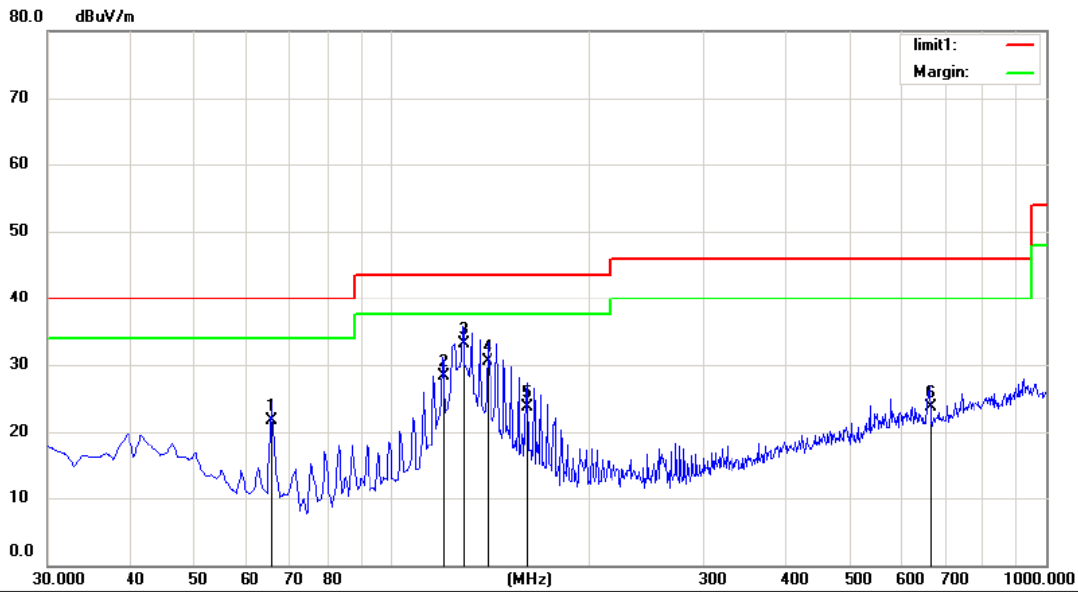


Site: Chamber #1      Polarization: **Vertical**      Temperature: 24  
 Limit: (RE)FCC PART 15 class B 3m      Power: DC 5V(PC Input)      Humidity: 55 %  
 Mode: TX 2437  
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		65.8900	42.81	-21.07	21.74	40.00	-18.26	QP		
2		120.2100	45.22	-16.93	28.29	43.50	-15.21	QP		
3	*	128.9400	49.37	-16.27	33.10	43.50	-10.40	QP		
4		140.5800	47.66	-17.09	30.57	43.50	-12.93	QP		
5		161.9200	42.18	-18.41	23.77	43.50	-19.73	QP		
6		665.3500	31.52	-7.75	23.77	46.00	-22.23	QP		

\*:Maximum data    x:Over limit    !:over margin

Operator: Snake

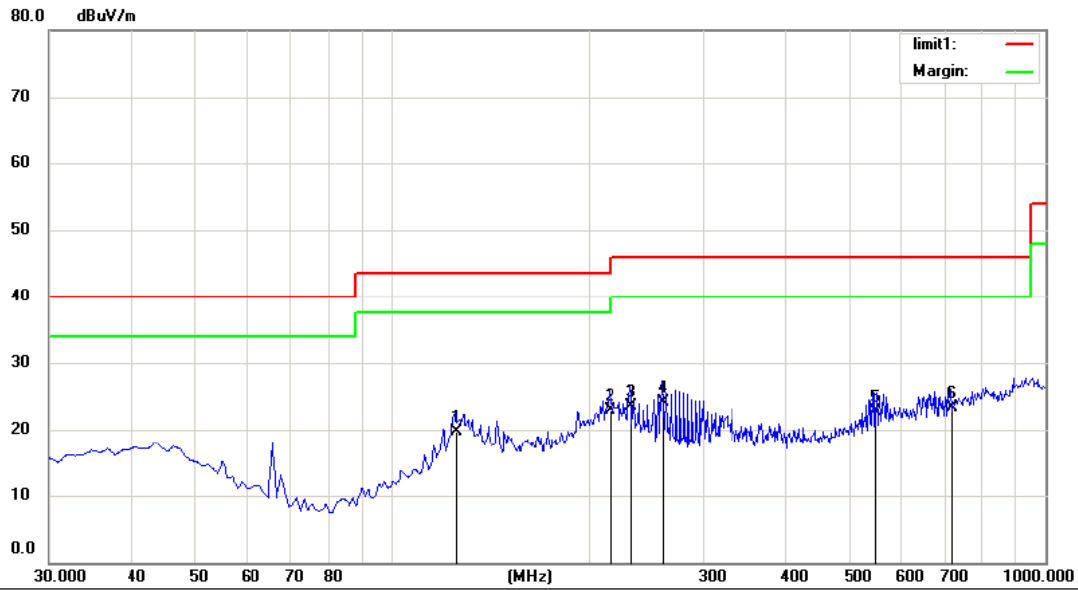

Site: Chamber #1      Polarization: **Horizontal**      Temperature: 24  
 Limit: (RE)FCC PART 15 class B 3m      Power: DC 5V(PC Input)      Humidity: 55 %  
 Mode: TX 2462  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		125.0600	36.02	-16.40	19.62	43.50	-23.88			QP
2	*	215.2700	39.28	-16.46	22.82	43.50	-20.68			QP
3		231.7600	39.50	-15.93	23.57	46.00	-22.43			QP
4		259.8900	39.42	-15.38	24.04	46.00	-21.96			QP
5		550.8900	31.75	-8.97	22.78	46.00	-23.22			QP
6		718.7000	30.03	-6.67	23.36	46.00	-22.64			QP

\*:Maximum data    x:Over limit    !:over margin

Operator: Snake





**Above 1000MHz:**

Operation Mode: 802.11g Lowest Test Date : June 12, 2015

Freq. (MHz)	Ant. Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4824	V	64.15	46.35	74	54	-9.85	-7.65
7236	V	63.05	45.15	74	54	-10.95	-8.85
9648	V	62.82	44.15	74	54	-11.18	-9.85
12060	V	61.71	43.25	74	54	-12.29	-10.75
14472	V	60.25	41.82	74	54	-13.75	-12.18
16884	V	59.35	40.35	74	54	-14.65	-13.65
4824	H	65.34	45.82	74	54	-8.66	-8.18
7236	H	64.05	44.15	74	54	-9.95	-9.85
9648	H	63.15	43.62	74	54	-10.85	-10.38
12060	H	62.05	42.15	74	54	-11.95	-11.85
14472	H	61.72	41.05	74	54	-12.28	-12.95
16884	H	60.35	40.38	74	54	-13.65	-13.62

Operation Mode: 802.11g Middle Test Date : June 12, 2015

Freq. (MHz)	Ant. Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4874	V	65.3	45.38	74	54	-8.7	-8.62
7311	V	64.15	44.15	74	54	-9.85	-9.85
9688	V	63.2	43.62	74	54	-10.8	-10.38
12185	V	62.48	42.72	74	54	-11.52	-11.28
14622	V	61.92	41.05	74	54	-12.08	-12.95
17059	V	60.35	39.25	74	54	-13.65	-14.75
4874	H	64.82	45.3	74	54	-9.18	-8.7
7311	H	63.72	44.15	74	54	-10.28	-9.85
9688	H	62.15	43.62	74	54	-11.85	-10.38
12185	H	61.82	42.08	74	54	-12.18	-11.92
14622	H	60.38	41	74	54	-13.62	-13
17059	H	59.72	40.85	74	54	-14.28	-13.15

Operation Mode: 802.11g Highest

Test Date : June 12, 2015

Freq. (MHz)	Ant. Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4924	V	65.72	44.15	74	54	-8.28	-9.85
7386	V	64.35	43.62	74	54	-9.65	-10.38
9848	V	63.15	42.05	74	54	-10.85	-11.95
12310	V	62	41.82	74	54	-12	-12.18
14772	V	61.82	40.74	74	54	-12.18	-13.26
17234	V	60.48	39.55	74	54	-13.52	-14.45
4924	H	64.82	45.15	74	54	-9.18	-8.85
7386	H	63.62	44.36	74	54	-10.38	-9.64
9848	H	62.18	43.62	74	54	-11.82	-10.38
12310	H	61.74	41.82	74	54	-12.26	-12.18
14772	H	60.25	40.72	74	54	-13.75	-13.28
17234	H	59.82	39.25	74	54	-14.18	-14.75

**All emissions not reported were more than 20dB below the specified limit or in the noise floor.**

- Note:**
- (1) All Readings are Peak Value and AV.
  - (2) Emission Level= Reading Level+Probe Factor +Cable Loss.
  - (3) Data of measurement within this frequency range shown “ – ” in the table above means the reading of emissions are attenuated more than 20Db below the permissible limits or the field strength is too small to be measured.


## 7. 6dB Bandwidth Test

### 7.1 Measurement Procedure

The EUT was operating in IEEE 802.11b, 802.11g, 802.11n(HT20), 802.11n(HT40) mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

1. Set resolution bandwidth (RBW) = 100 kHz.
2. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequency) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### 7.2 Test SET-UP (Block Diagram of Configuration)



### 7.3 Measurement Equipment Used


EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Agilent	FSV30	1321.3008K	03/16/2015	03/15/2016



### 7.4 Measurement Results

6 Bandwidth Test Data Chart:


Refer to attached data chart.



IEEE 802.11b			
Channel frequency (MHz)	Measurement level (KHz)	Required Limit (KHz)	Result
2412	10030	>500	Pass
2437	10050	>500	
2462	10050	>500	

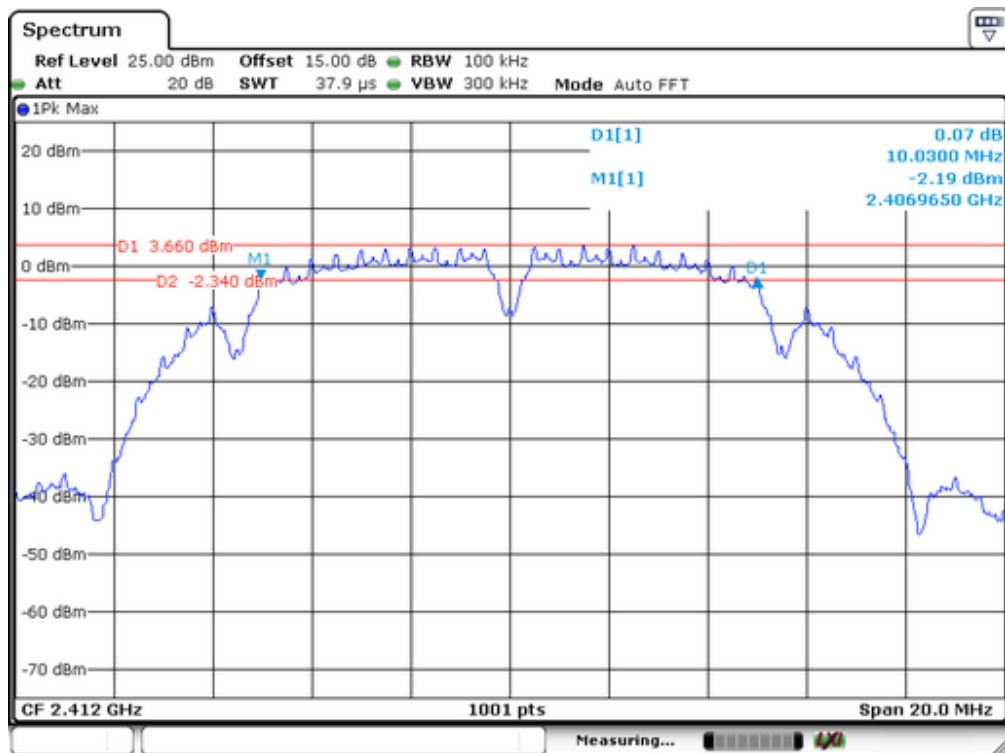

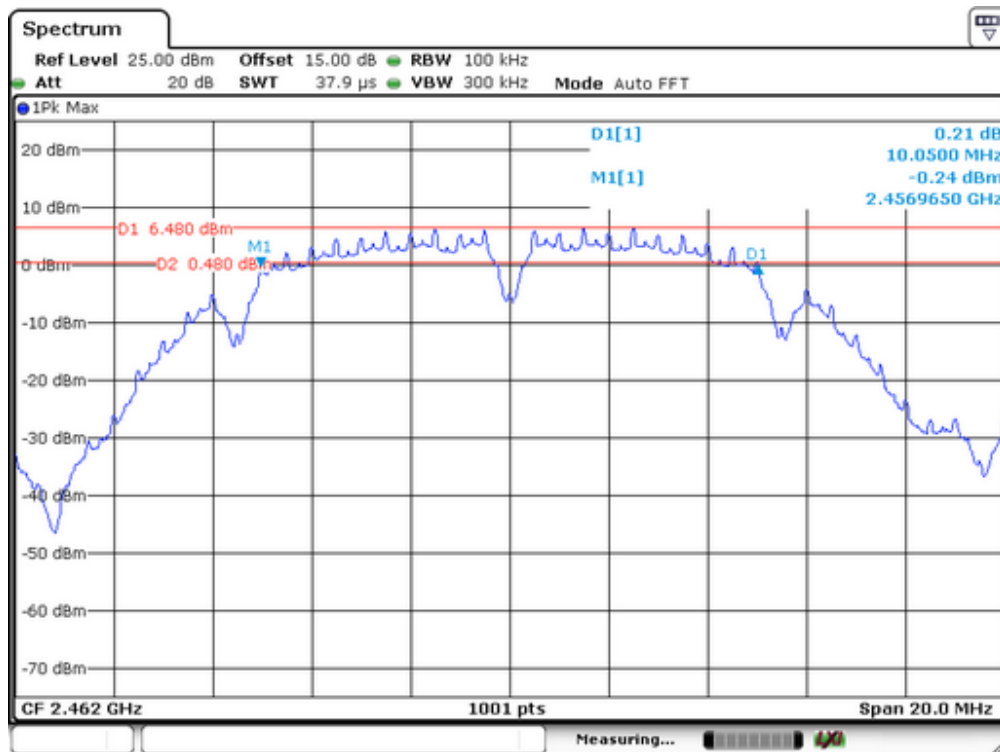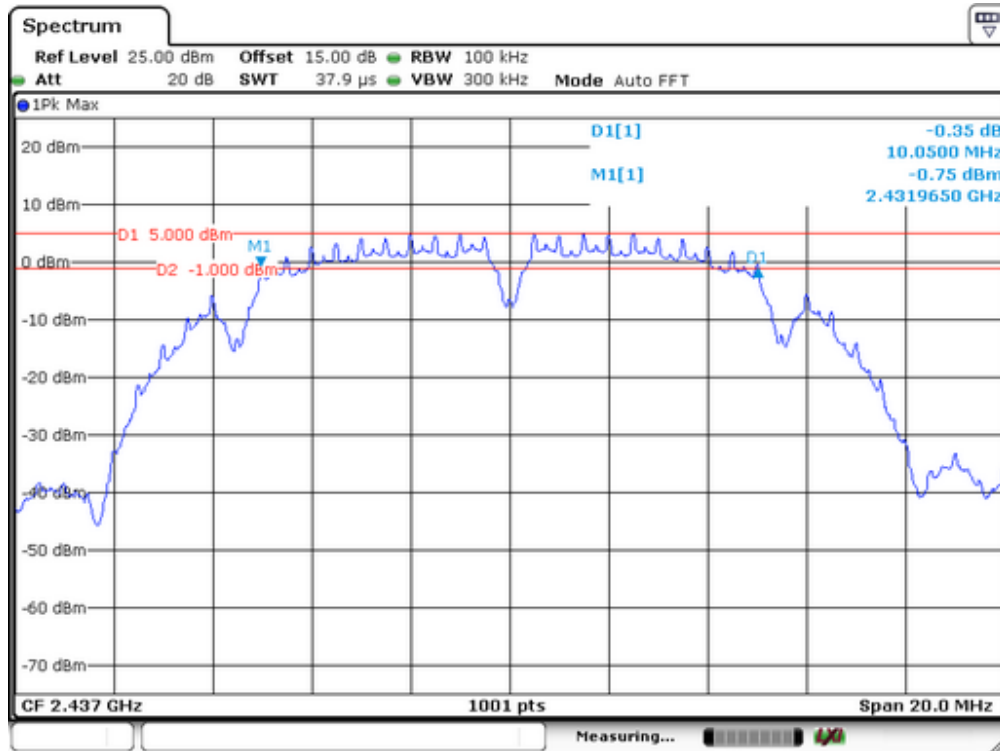



IEEE 802.11g			
Channel frequency (MHz)	Measurement level (KHz)	Required Limit (KHz)	Result
2412	16344	>500	Pass
2437	16324	>500	
2462	16324	>500	

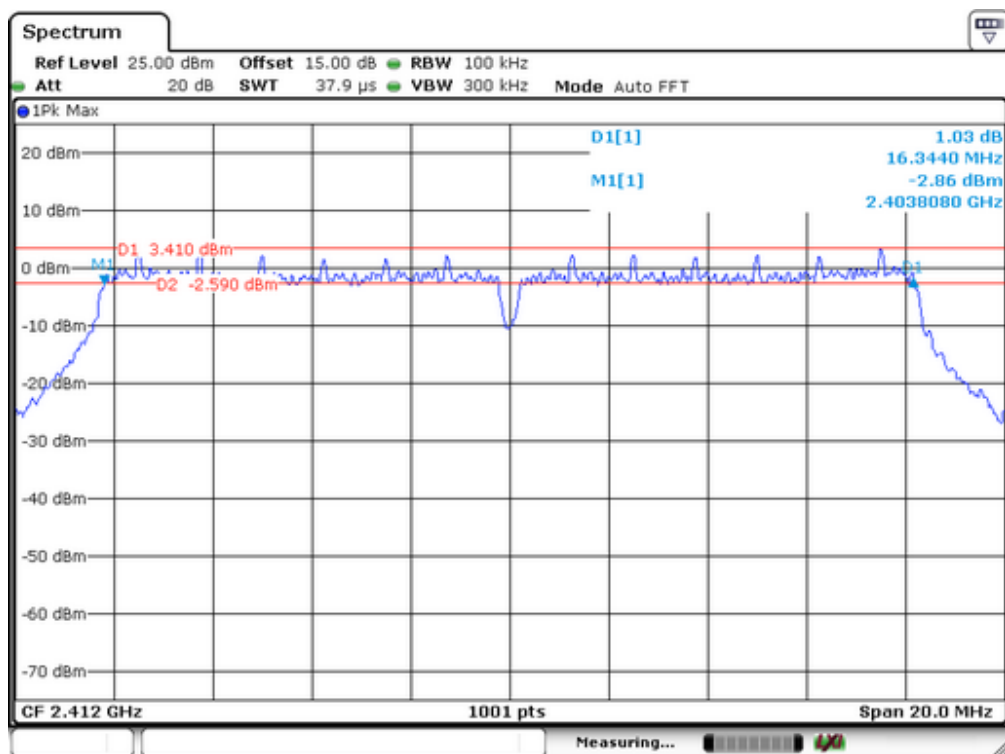

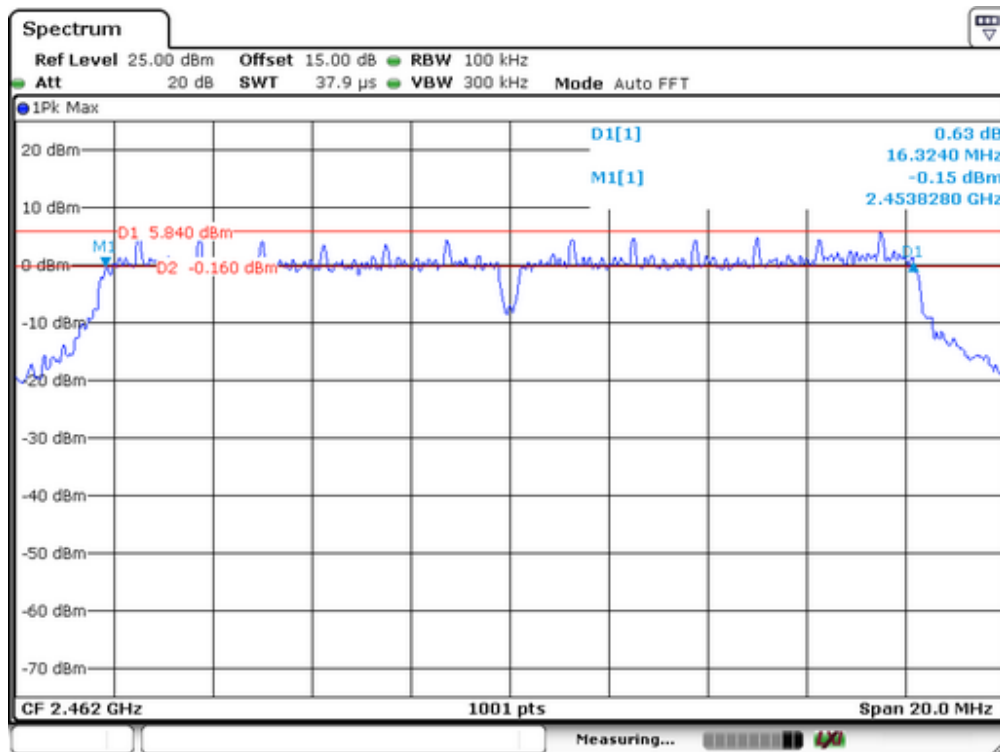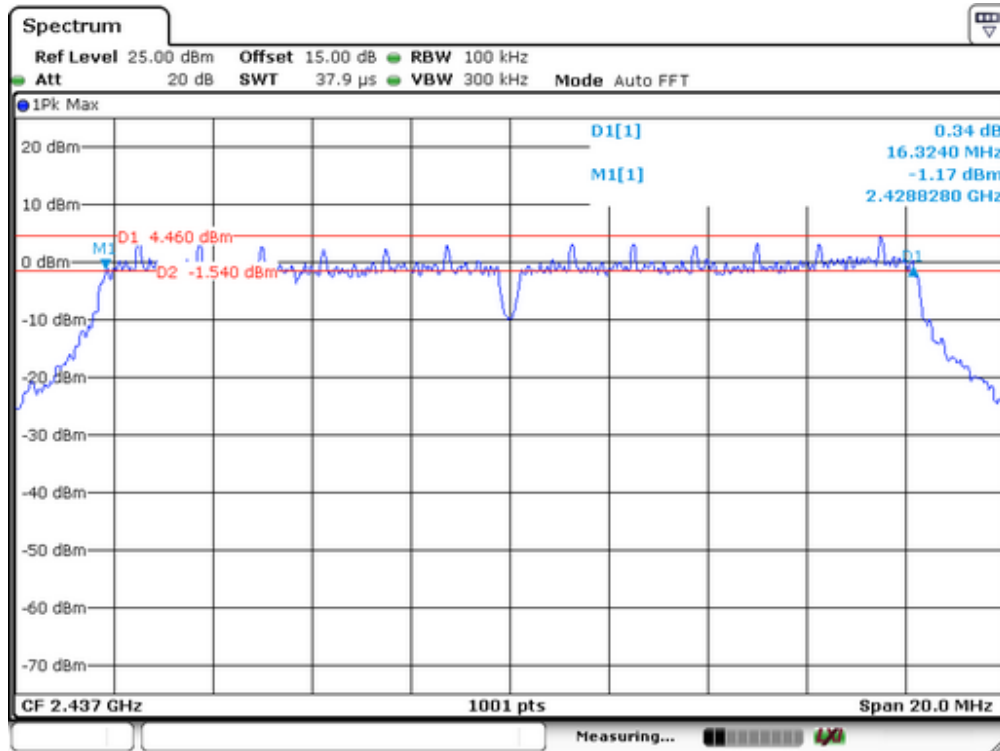








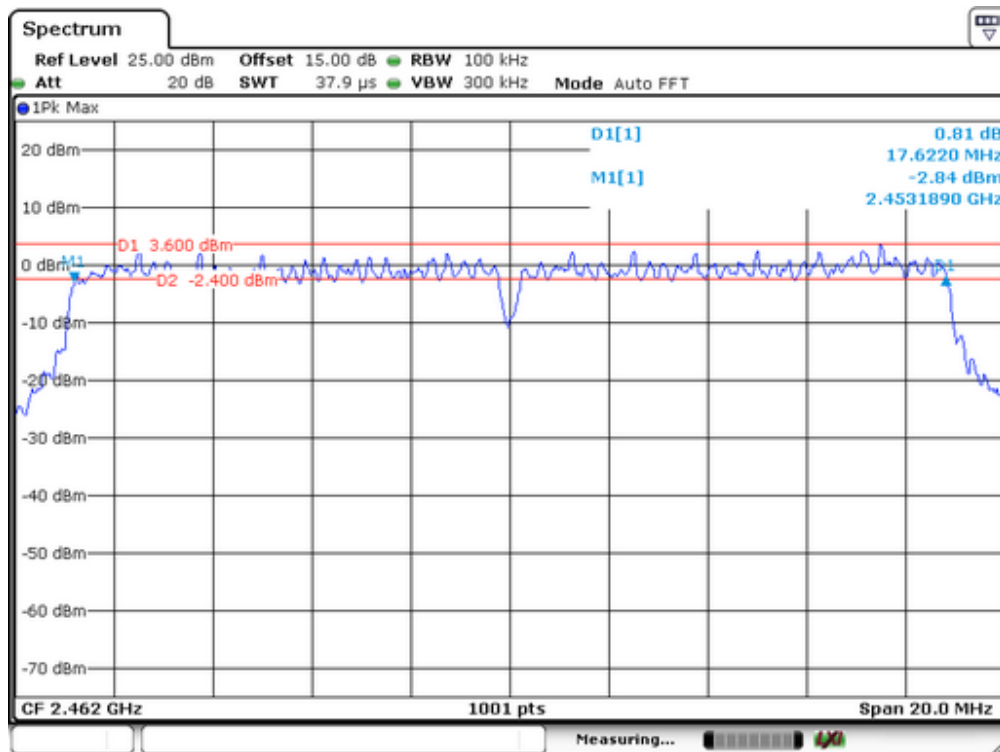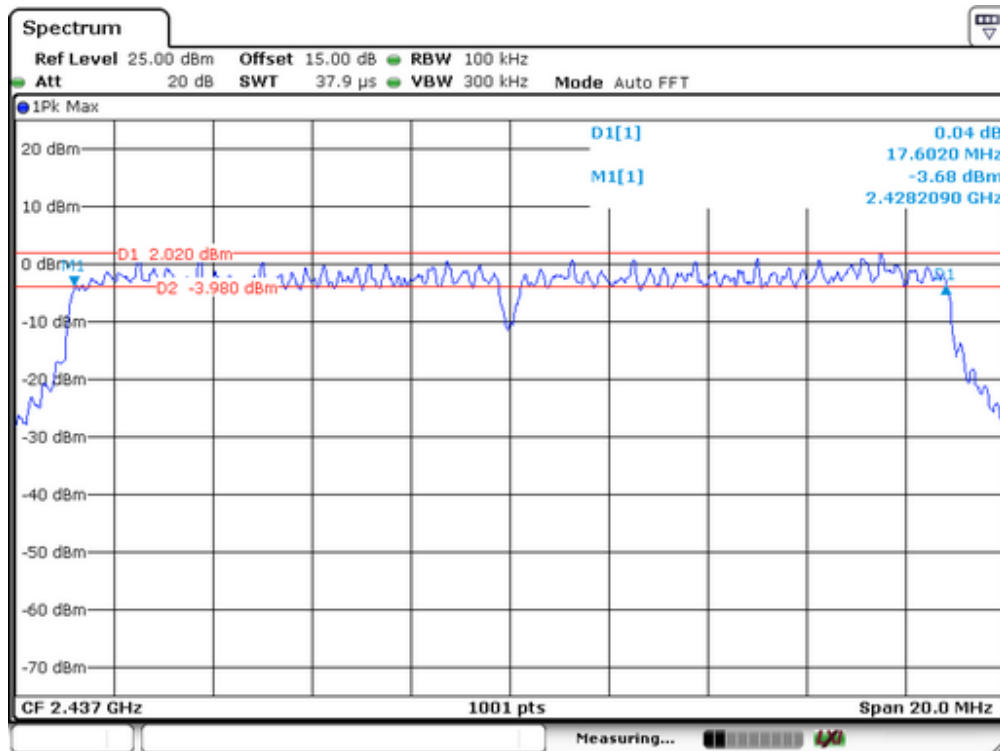

IEEE 802.11n(HT40)			
Channel frequency (MHz)	Measurement level (KHz)	Required Limit (KHz)	Result
2422	36444	>500	Pass
2437	36404	>500	
2452	36424	>500	

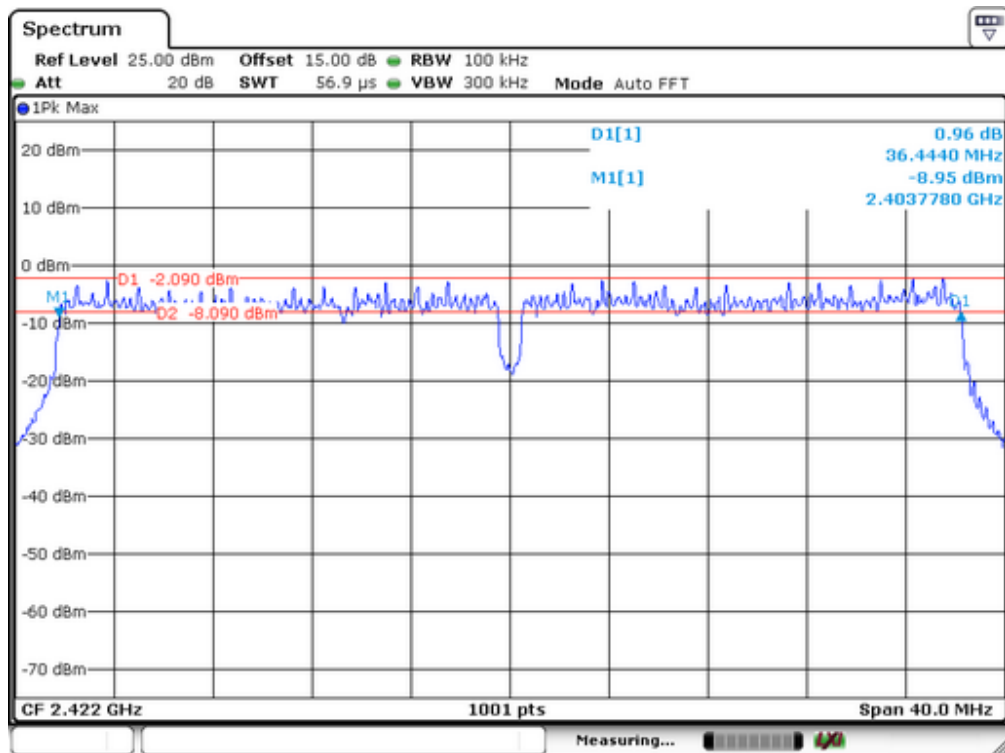

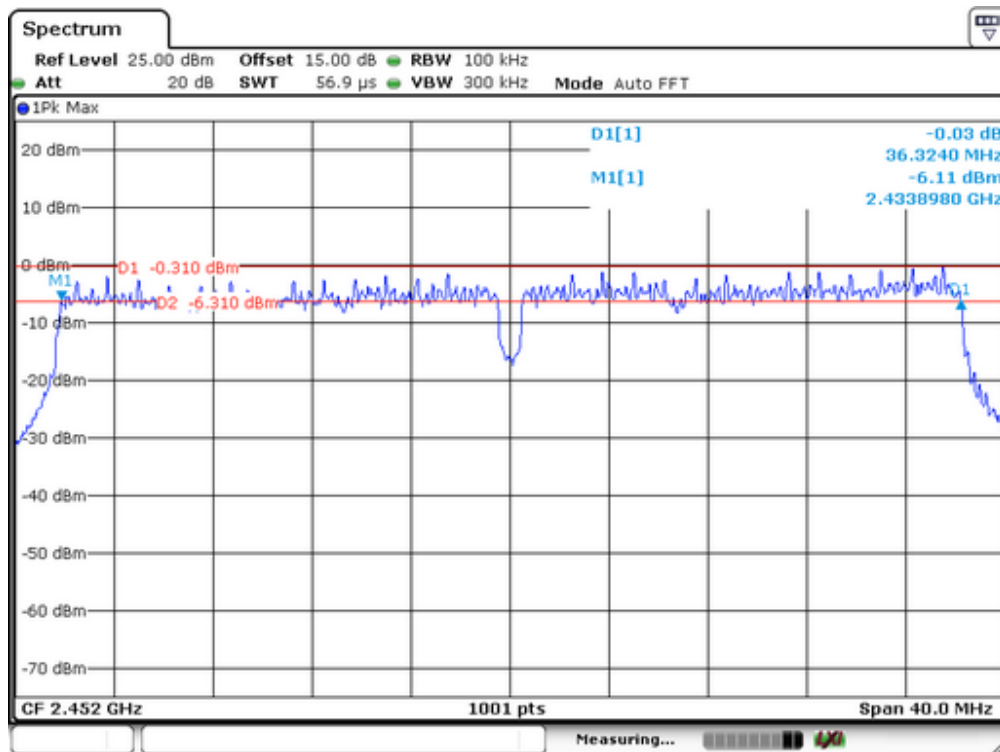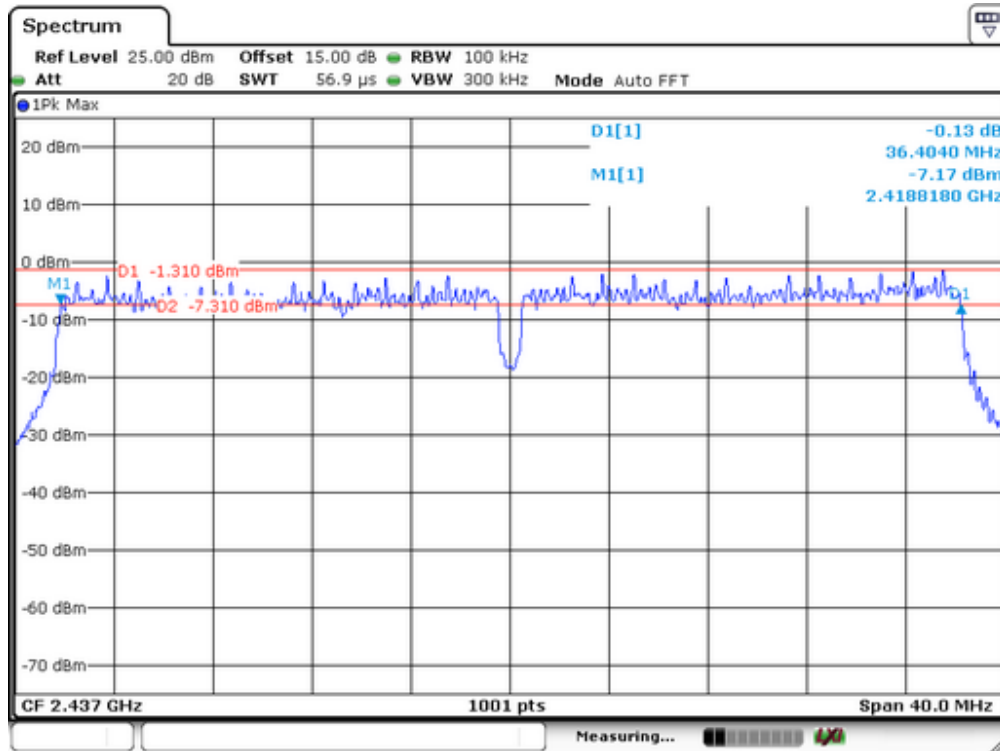

## 8. Maximum Peak Output Power Test

### 8.1 Measurement Procedure

The maximum peak conducted output power can be measured using a broadband peak RF power meter. The power meter must have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast, average-responding diode type sensor.

- The Transmitter output (antenna port) was connected to the power meter.
- Turn on the EUT and power meter and then record the peak power value.
- Repeat above procedures on all channels needed to be tested.

### 8.2 Test SET-UP (Block Diagram of Configuration)



### 8.3 Measurement Equipment Used

EQUIPMENT TYPE	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Power meter	ML2495A	0824006	03/16/2015	03/15/2016
Power sensor	MA2411B	0738172	03/16/2015	03/15/2016

### 8.4 Peak Power output limit

The maximum peak power shall be less 1Watt.

### 8.5 Measurement Results

Spectrum Detector:	PK	Test Date :	June 12, 2015
Test By:	Jack	Temperature :	28°C
Test Result:	PASS	Humidity :	60%

Test Channel	Max Output Power (dBm)				Limit(dBm)	Result
	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)		
Lowest	14.10	11.81	10.73	10.25	30	Pass
Middle	13.90	11.90	10.19	9.92		
Highest	13.25	11.38	9.90	9.59		

## 9. Band Edge Test

### 9.1 Measurement Procedure

#### For Conducted Test

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. Measure and record the results in the test report.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

#### For Radiated emission Test

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Repeat above procedures until all frequency measured were complete.

When spectrum scanned above 1GHz setting resolution bandwidth 1MHz, video bandwidth 3MHz.

EMI Test Receiver	Setting
Attenuation	Auto
RB	1MHz
VB	3MHz
Detector	Peak
Trace	Max hold

When spectrum scanned above 1GHz setting resolution bandwidth 1MHz, video bandwidth 10Hz.

EMI Test Receiver	Setting
Attenuation	Auto
RB	1MHz
VB	10Hz
Detector	Peak
Trace	Max hold

## 9.2 Test SET-UP (Block Diagram of Configuration)


As 6.2 Test set up (B) and (C)

## 9.3 Measurement Equipment Used


Same as 6.3 Radiated Emission Measurement.

## 9.4 Measurement Results


### 1. Conducted Test

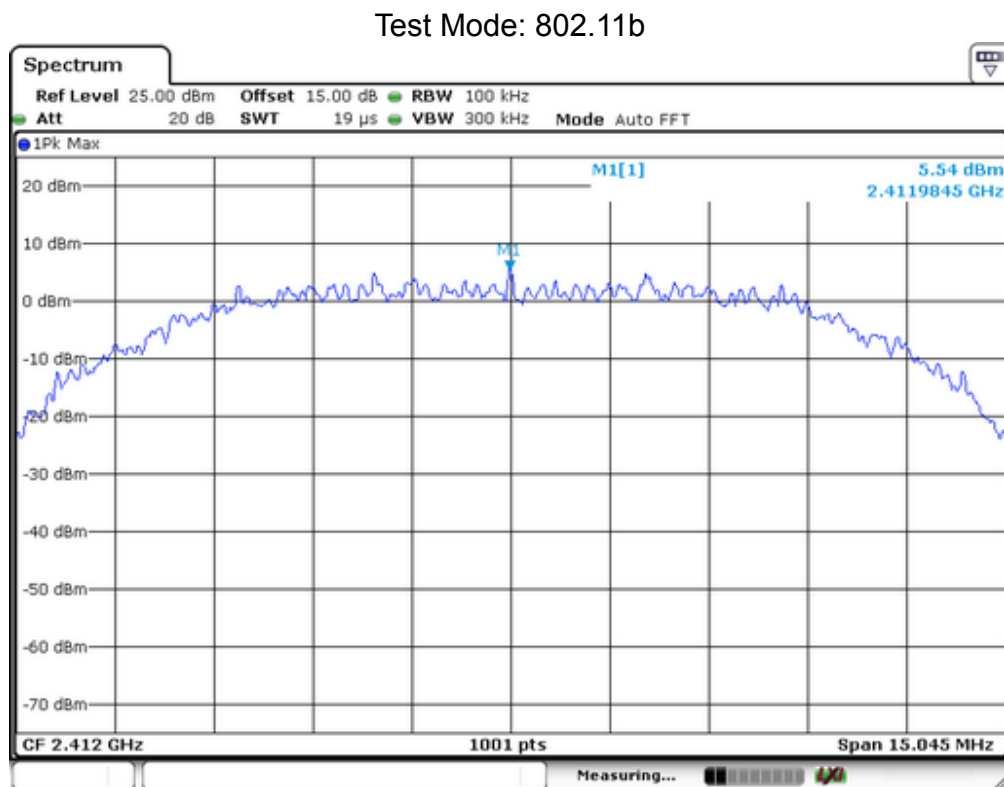

Lowest Channel

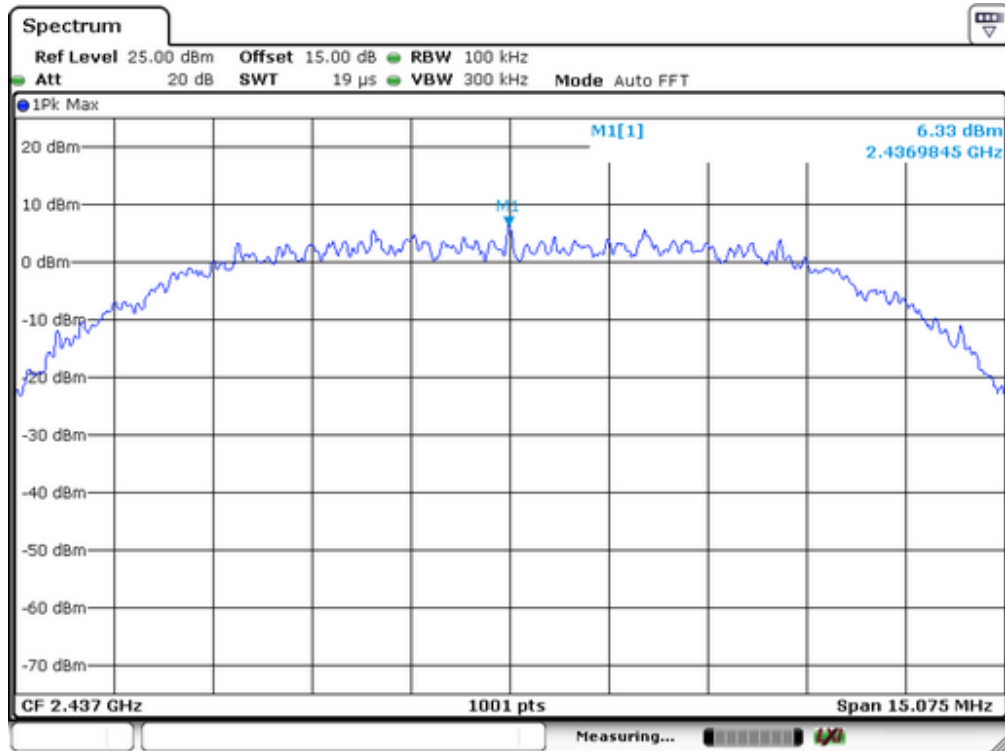


Middel Channel

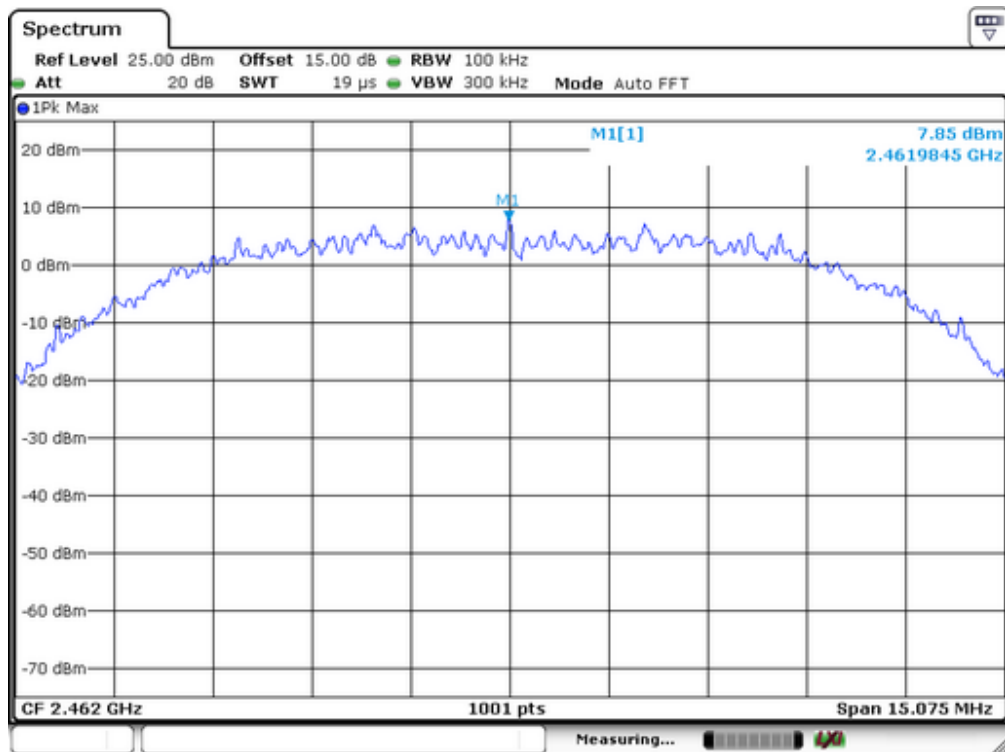


Highest Channel




Test Mode: 802.11g

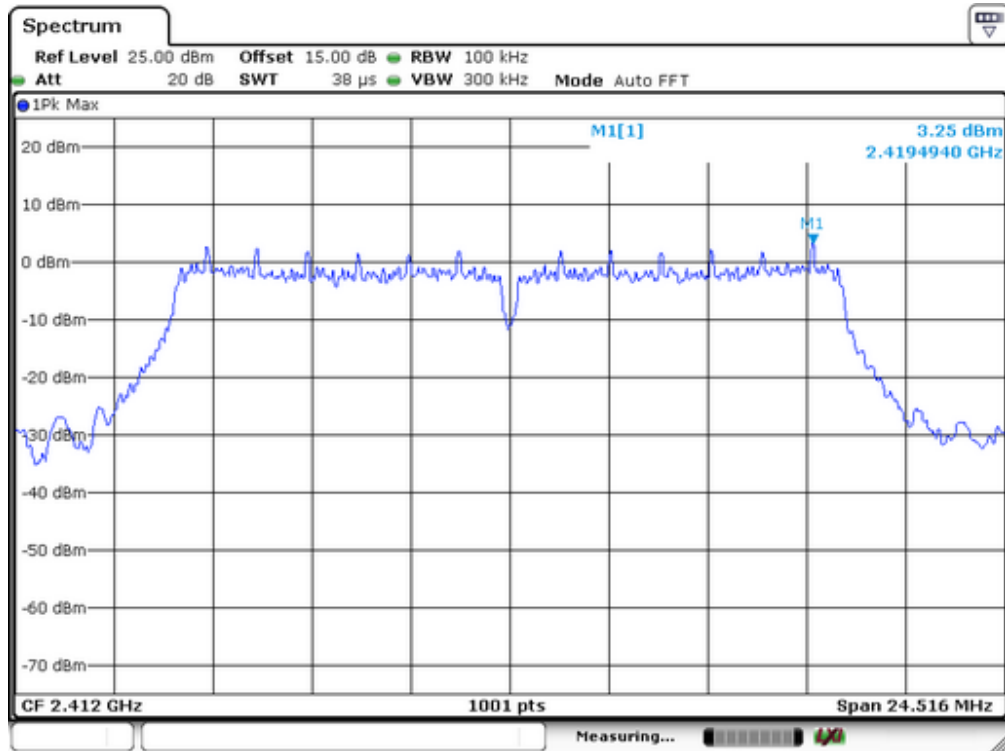

Lowest Channel

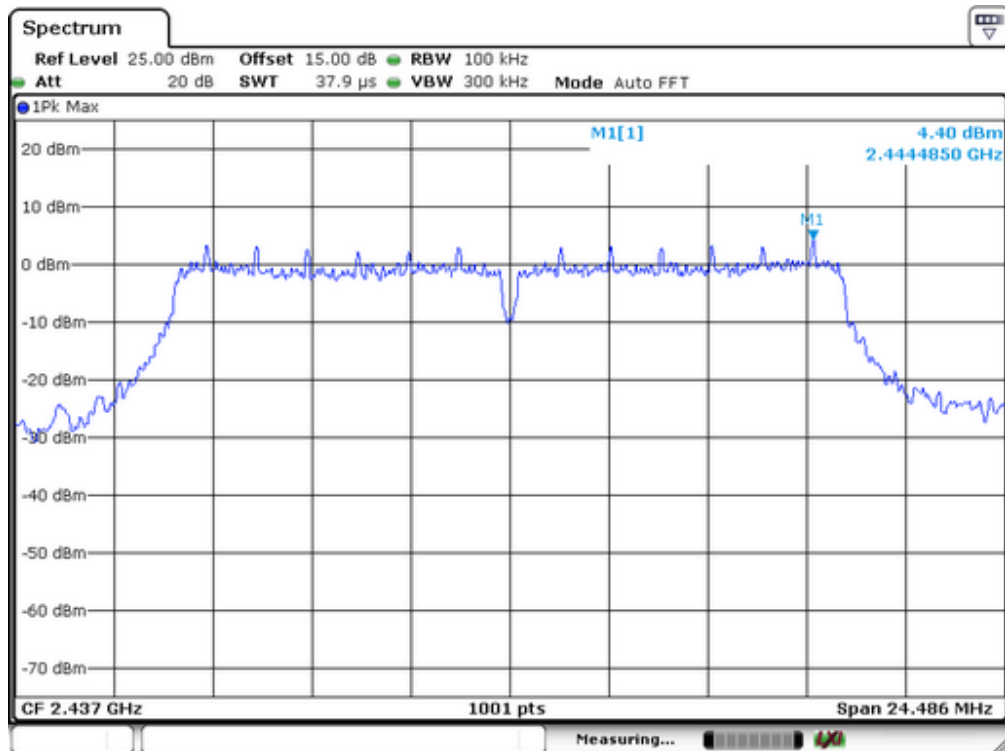


Middle Channel

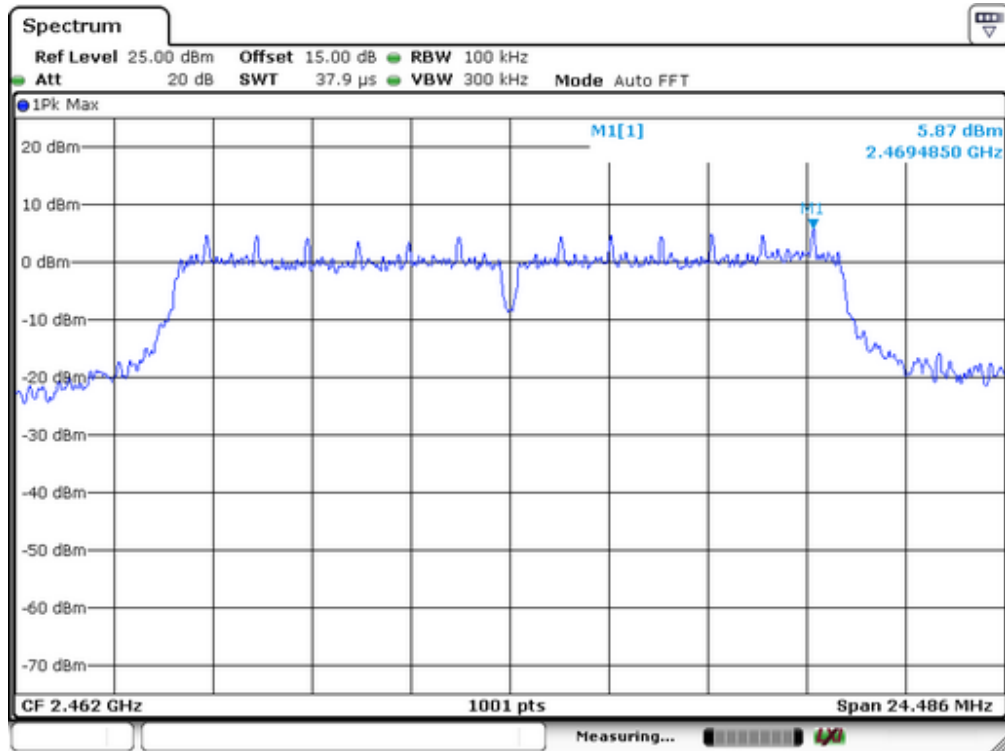


Highest Channel


Test Mode: 802.11n(HT20)

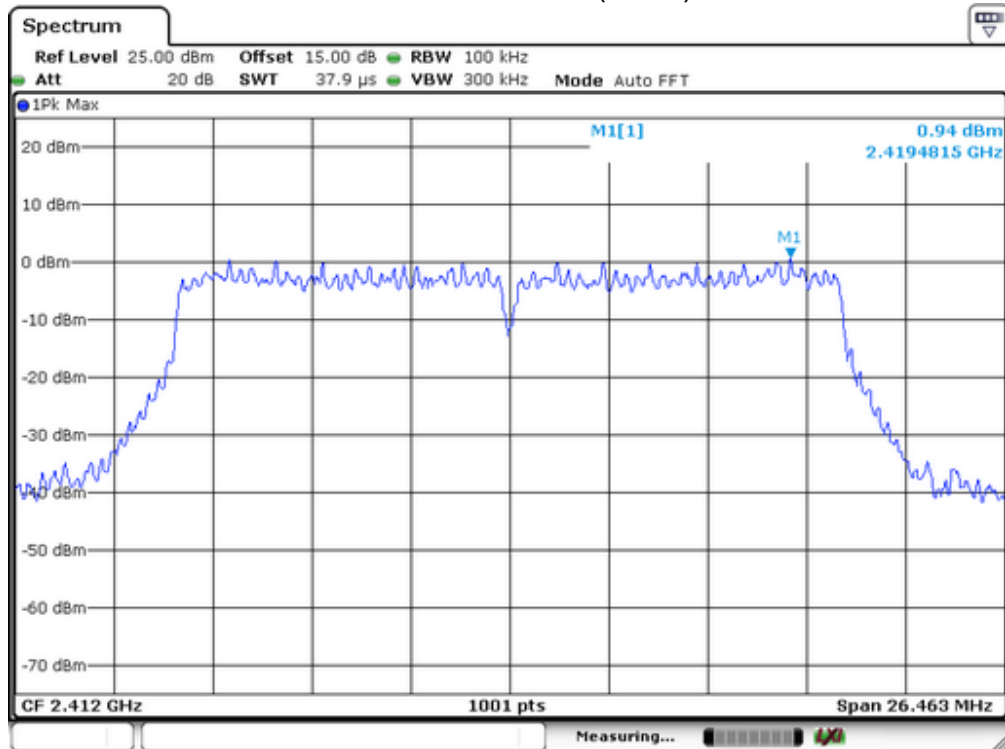

Lowest Channel

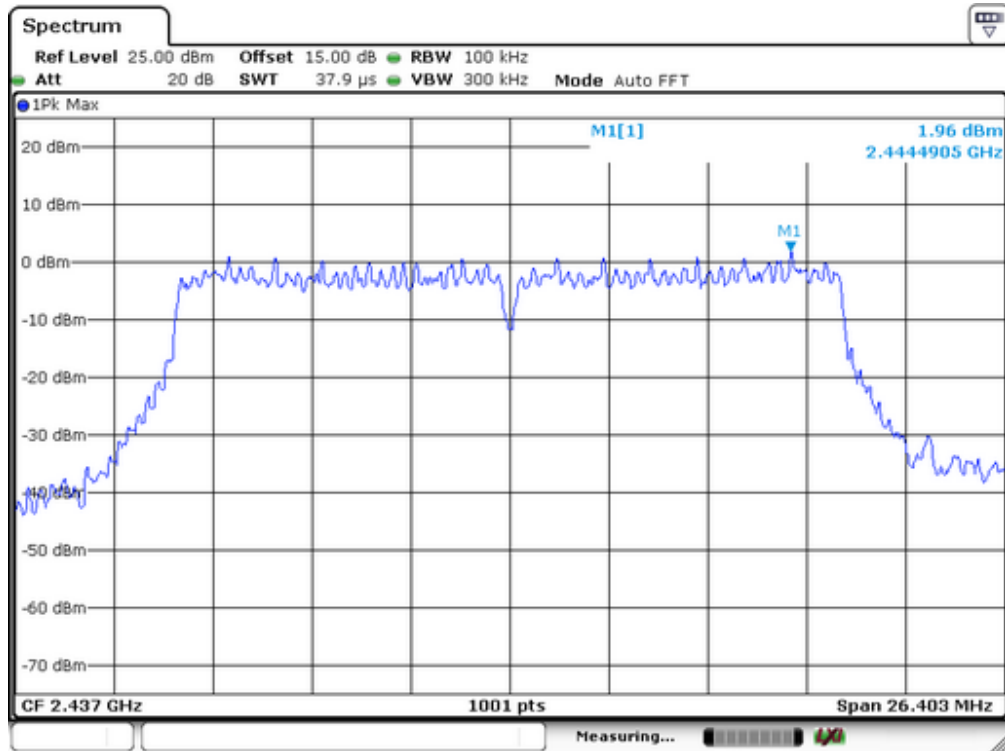


Middle Channel

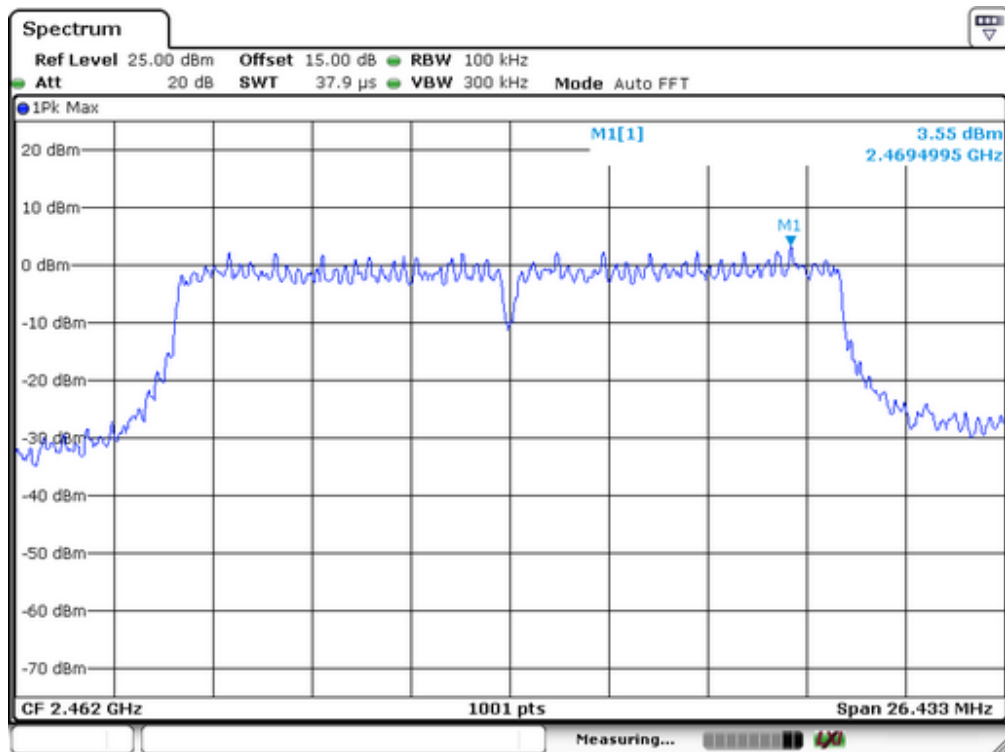


Highest Channel


Test Mode: 802.11n(HT40)

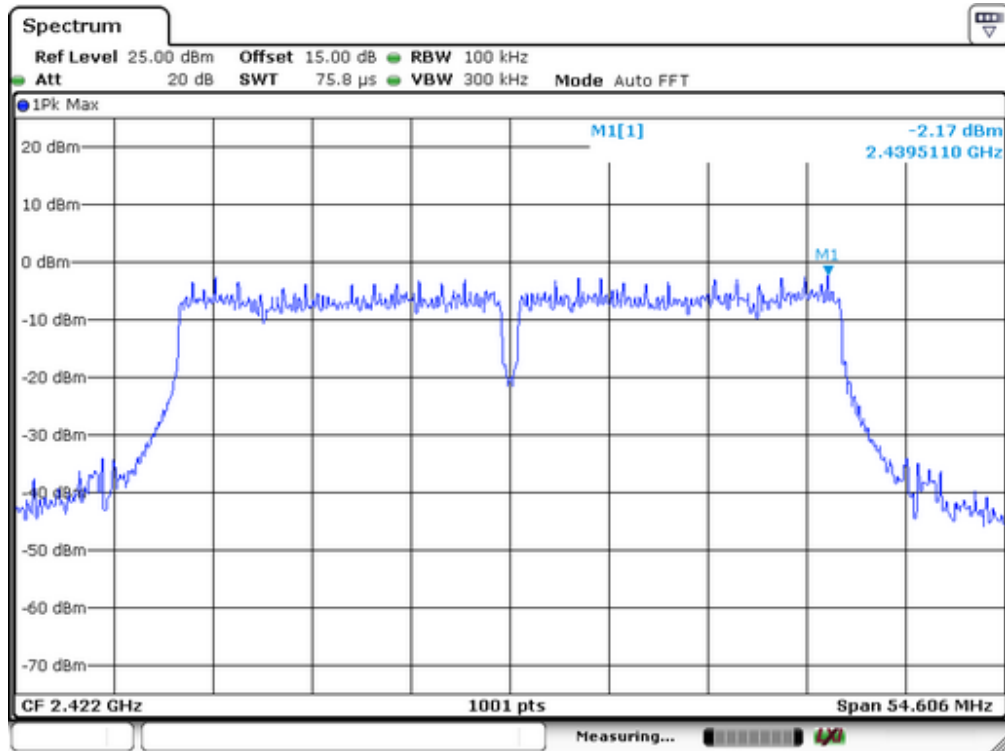

Lowest Channel


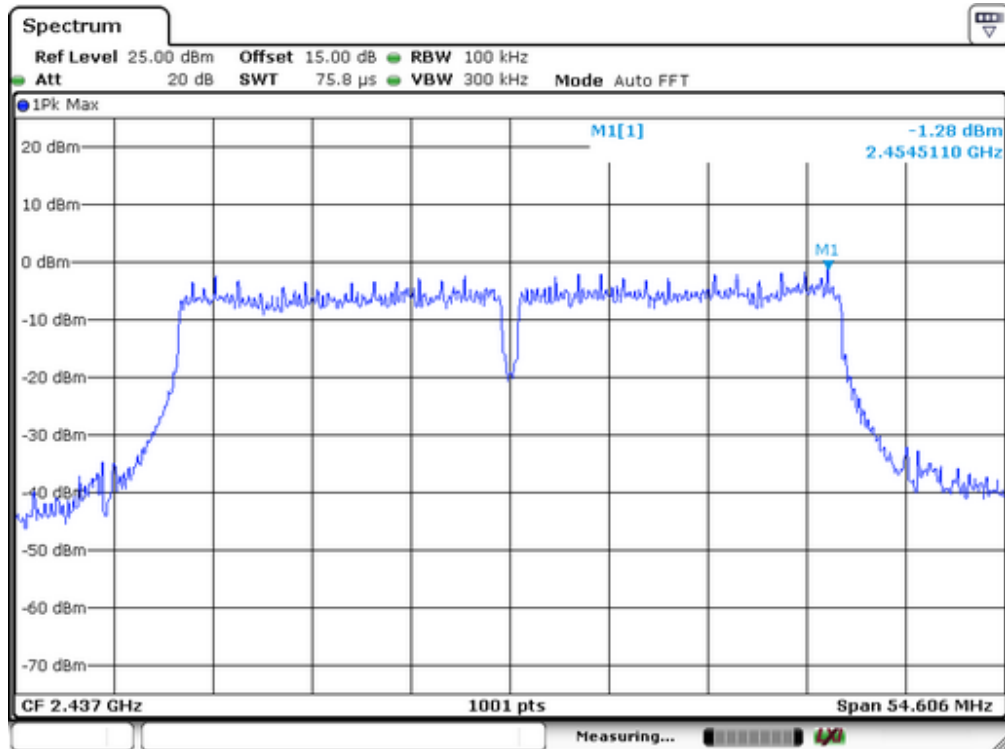


Middle Channel


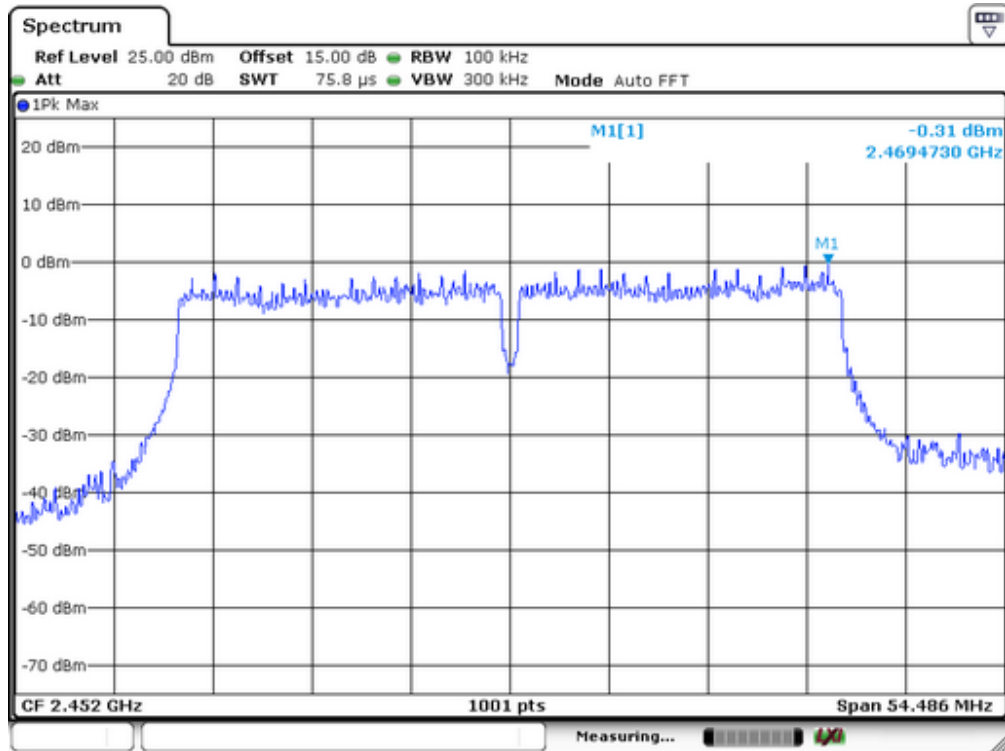


Highest Channel



Test mode: 802.11b

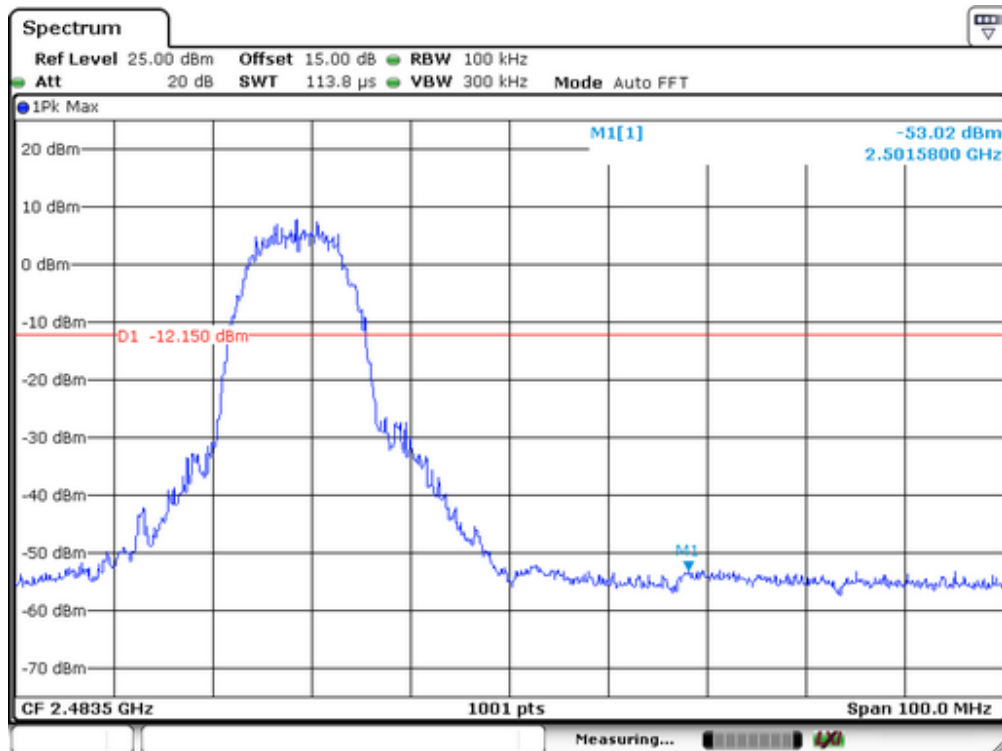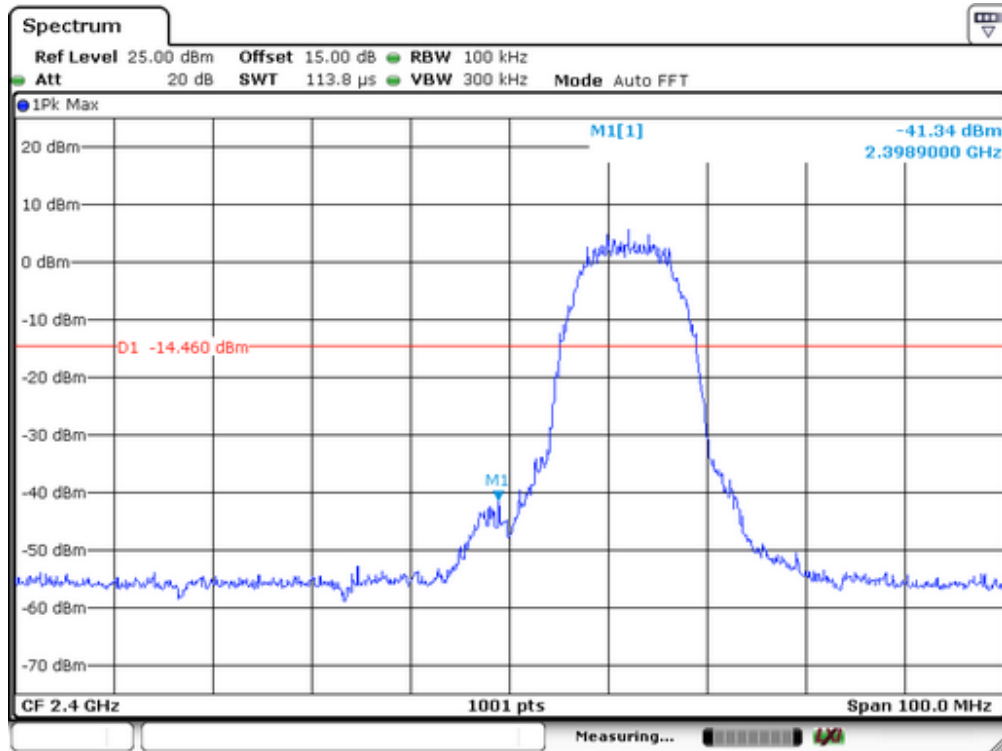

Test mode: 802.11g

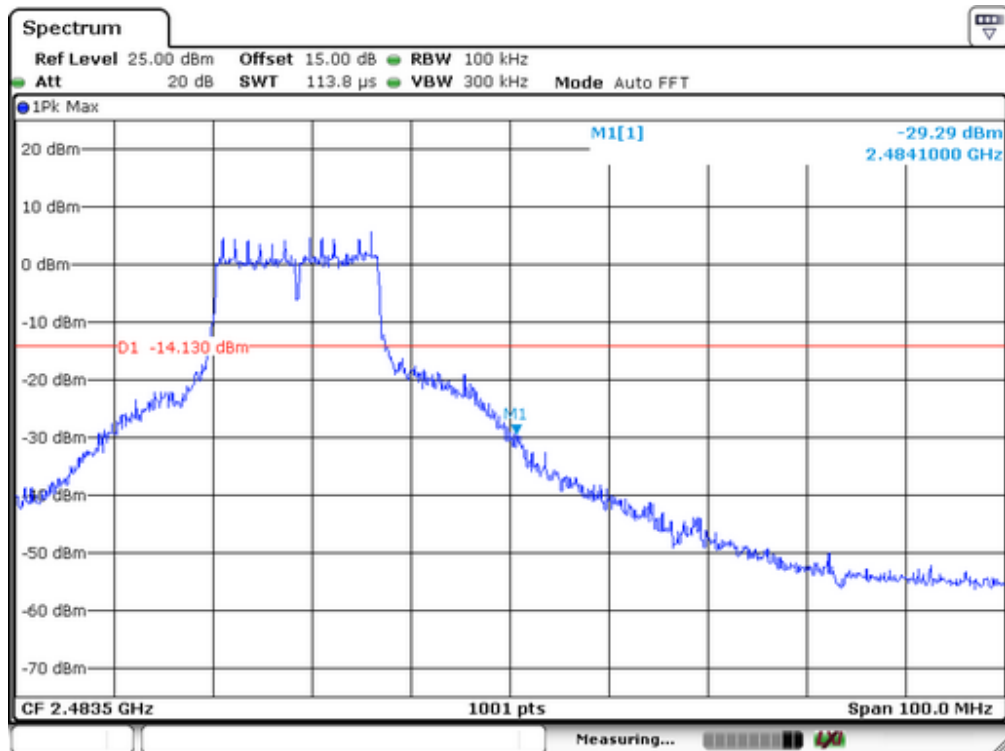
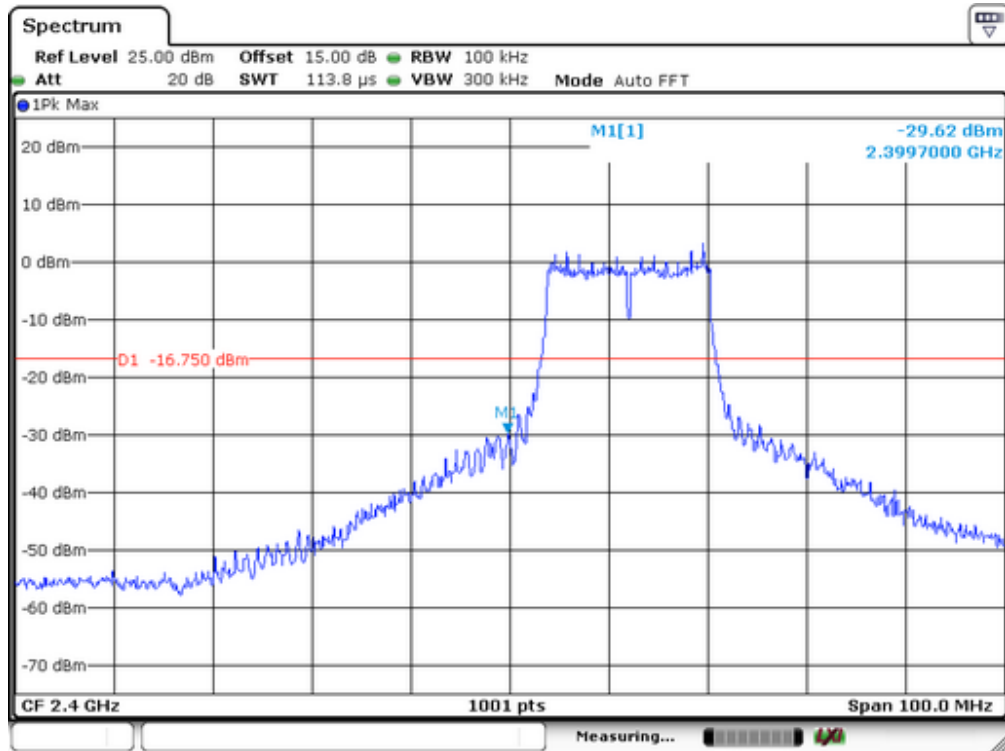


Test mode: 802.11n(HT20)

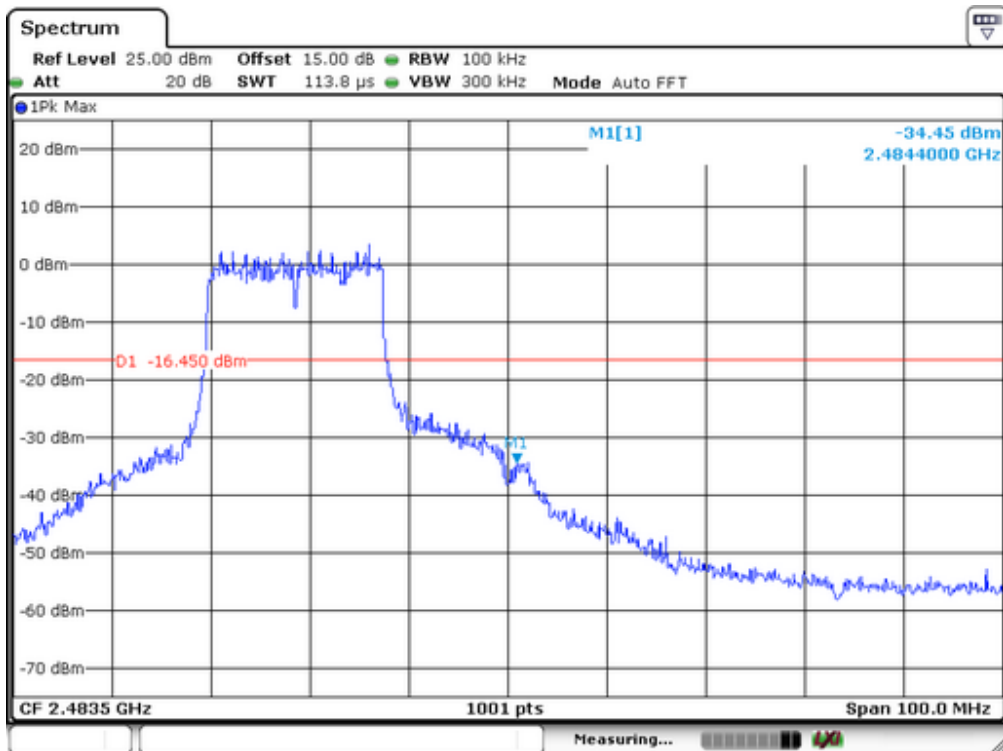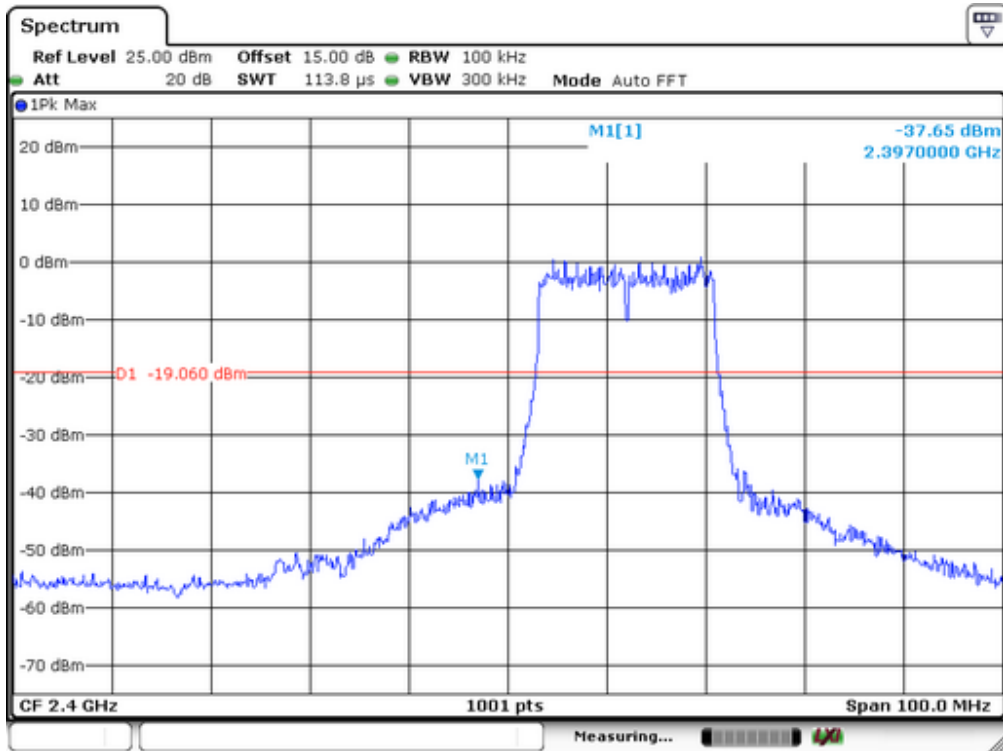



Test mode: 802.11n(HT40)

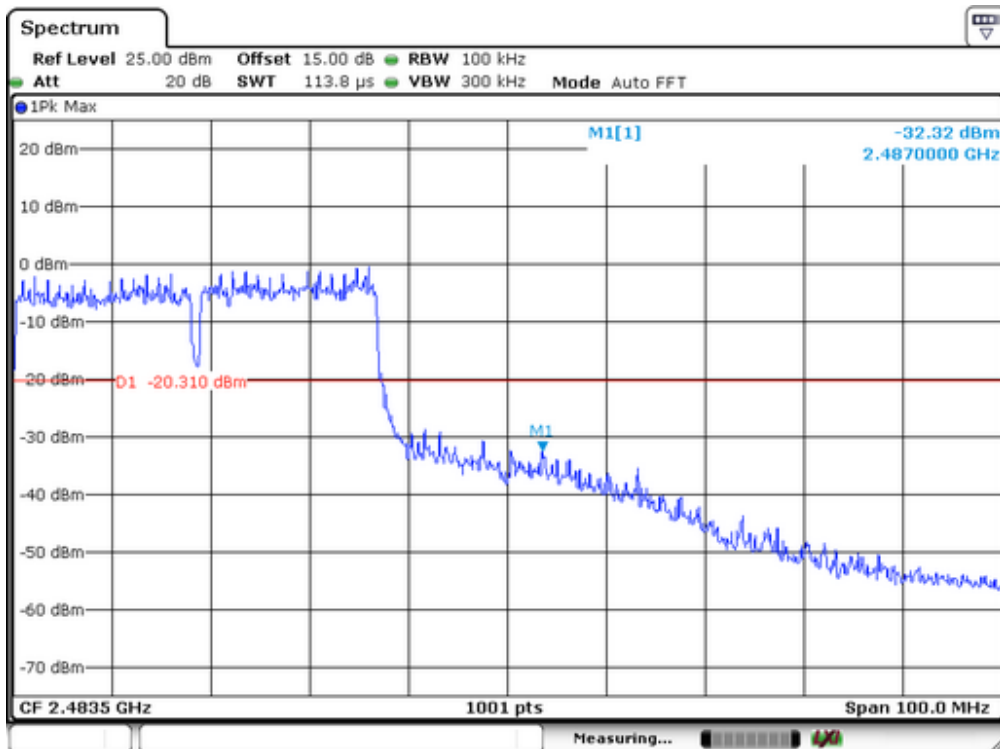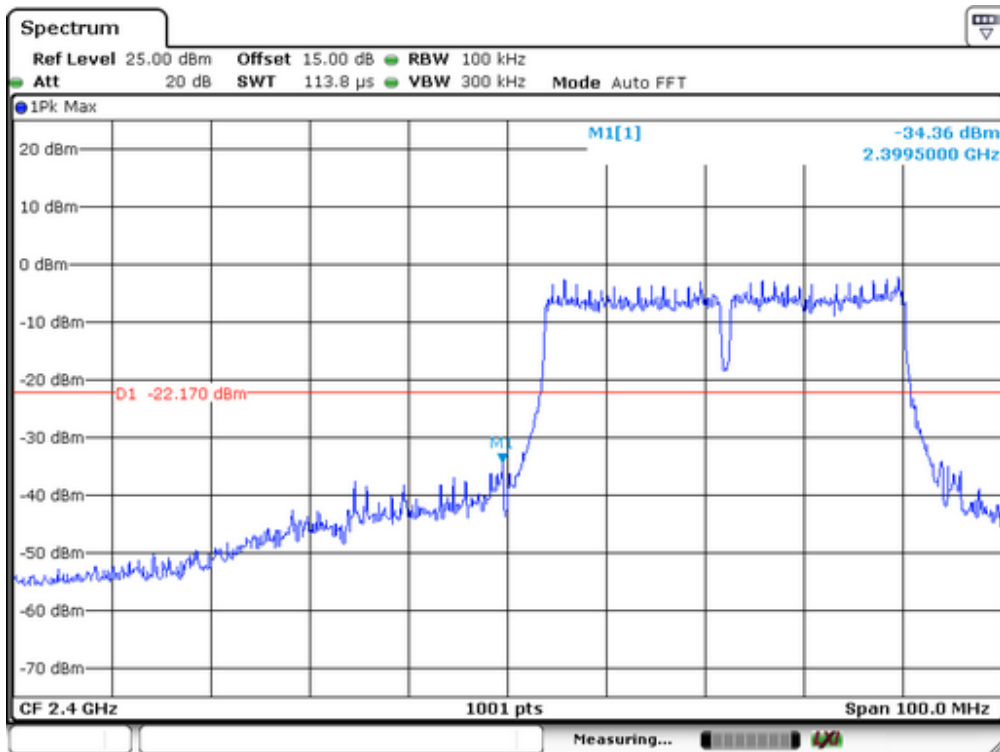

2. Radiated emission Test

Spectrum Detector: PK/AV      Test Date : June 12, 2015  
 Test By: Andy      Temperature : 28 °C  
 Humidity : 65 %

IEEE 802.11b							
Frequency (MHz)	Antenna polarization	Emission (dBuV/m)		Band edge Limit (dBuV/m)		Margin (dB)	
	(H/V)	PK	AV	PK	AV	PK	AV
<2400	H	64.13	44.15	74	54	-9.87	-9.85
<2400	V	60.2	40.24	74	54	-13.8	-13.76
>2483.5	H	65.35	45.38	74	54	-8.65	-8.62
>2483.5	V	59.48	39.15	74	54	-14.52	-14.85

IEEE 802.11g							
Frequency (MHz)	Antenna polarization	Emission (dBuV/m)		Band edge Limit (dBuV/m)		Margin (dB)	
	(H/V)	PK	AV	PK	AV	PK	AV
<2400	H	65.72	44.05	74	54	-8.28	-9.95
<2400	V	60.15	40.15	74	54	-13.85	-13.85
>2483.5	H	64.35	45.35	74	54	-9.65	-8.65
>2483.5	V	59.37	39.5	74	54	-14.63	-14.5

IEEE 802.11n(HT20)							
Frequency (MHz)	Antenna polarization	Emission (dBuV/m)		Band edge Limit (dBuV/m)		Margin (dB)	
	(H/V)	PK	AV	PK	AV	PK	AV
<2400	H	65.15	45.15	74	54	-8.85	-8.85
<2400	V	60.34	40.72	74	54	-13.66	-13.28
>2483.5	H	64.2	46.3	74	54	-9.8	-7.7
>2483.5	V	59.35	41.27	74	54	-14.65	-12.73

IEEE 802.11n(HT40)							
Frequency (MHz)	Antenna polarization	Emission (dBuV/m)		Band edge Limit (dBuV/m)		Margin (dB)	
	(H/V)	PK	AV	PK	AV	PK	AV
<2400	H	64.15	44.18	74	54	-9.85	-9.82
<2400	V	60.24	39.72	74	54	-13.76	-14.28
>2483.5	H	65.35	45.35	74	54	-8.65	-8.65
>2483.5	V	59.71	40.17	74	54	-14.29	-13.83

## 10. Power Density

### 10.1 Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Agilent	FSV30	1321.3008K	03/16/2015	03/15/2016

### 10.2 Measuring Instruments and Setting


The following table is the setting of spectrum analyzer.

Spectrum analyzer	Setting
Attenuation	Auto
Span Frequency	Set the span to 1.5 times the DTS bandwidth.
RB	100KHz
VB	300KHz
Detector	Peak
Trace	Max hold
Sweep Time	Automatic

### 10.3 Test Procedures

- a. The transmitter output (antenna port) was connected to the spectrum analyzer.
- b. Set analyzer center frequency to DTS channel center frequency.
- c. Set the analyzer span to a minimum of 1.5 times the DTS bandwidth.
- d. Set the RBW=100KHz. Set the VBW=300KHz
- e. Detector = peak.
- f. Sweep time = auto couple.
- g. Trace mode = max hold.
- h. Allow trace to fully stabilize.
- i. Use the peak marker function to determine the maximum amplitude level.

### 10.4 Block Diagram of Test Setup




### 10.5 Limit



The transmitted power density averaged over any 1 second interval shall not be greater +8dBm in any 3 kHz bandwidth.

**10.6 Test Result**


Spectrum Detector: PK                      Test Date : June 12, 2015  
 Test By: Andy                                Temperature : 28°C  
    Humidity : 60%



IEEE 802.11b			
Channel frequency (MHz)	Measurement level (dBm)	Limit(dBm)	Result
2412	-8.97	8	Pass
2437	-8.61		
2462	-7.10		

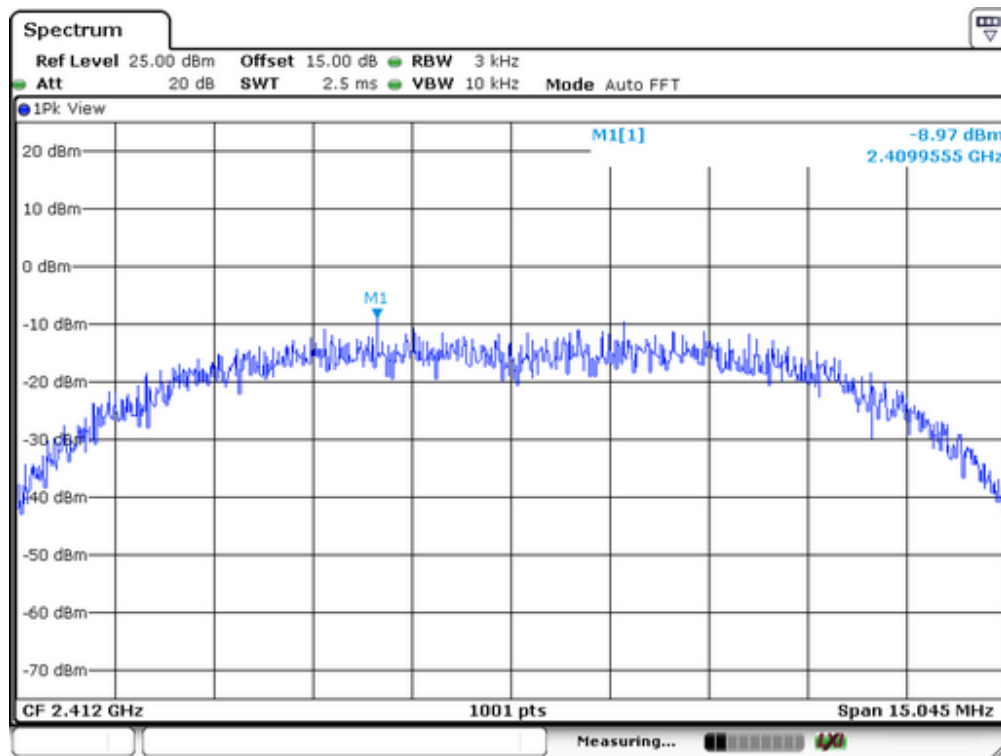

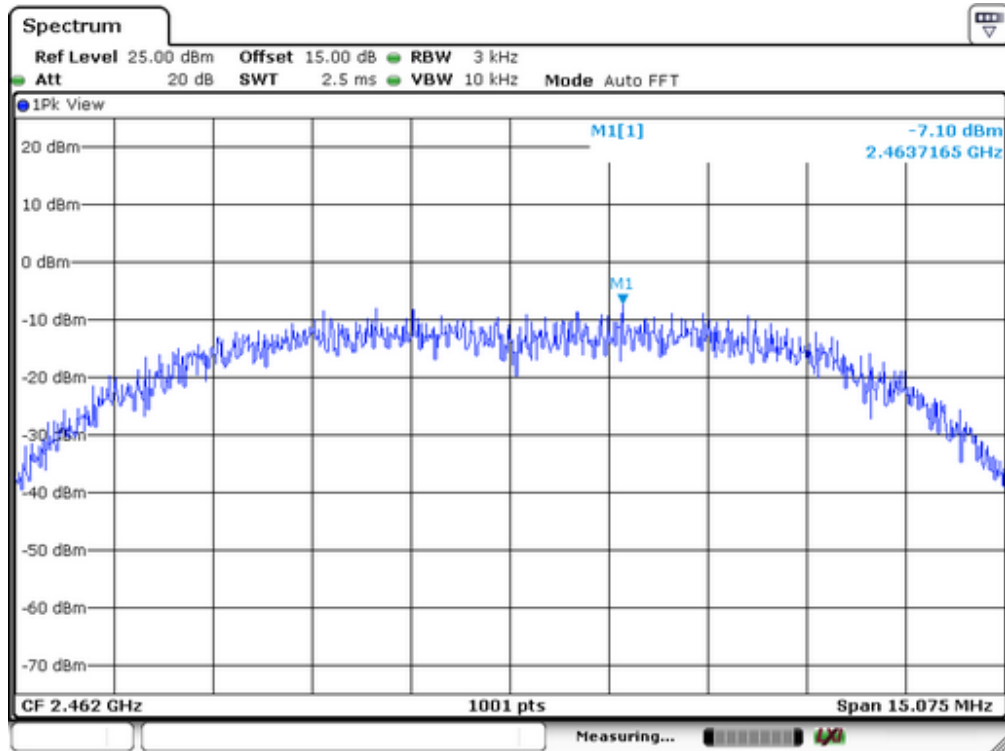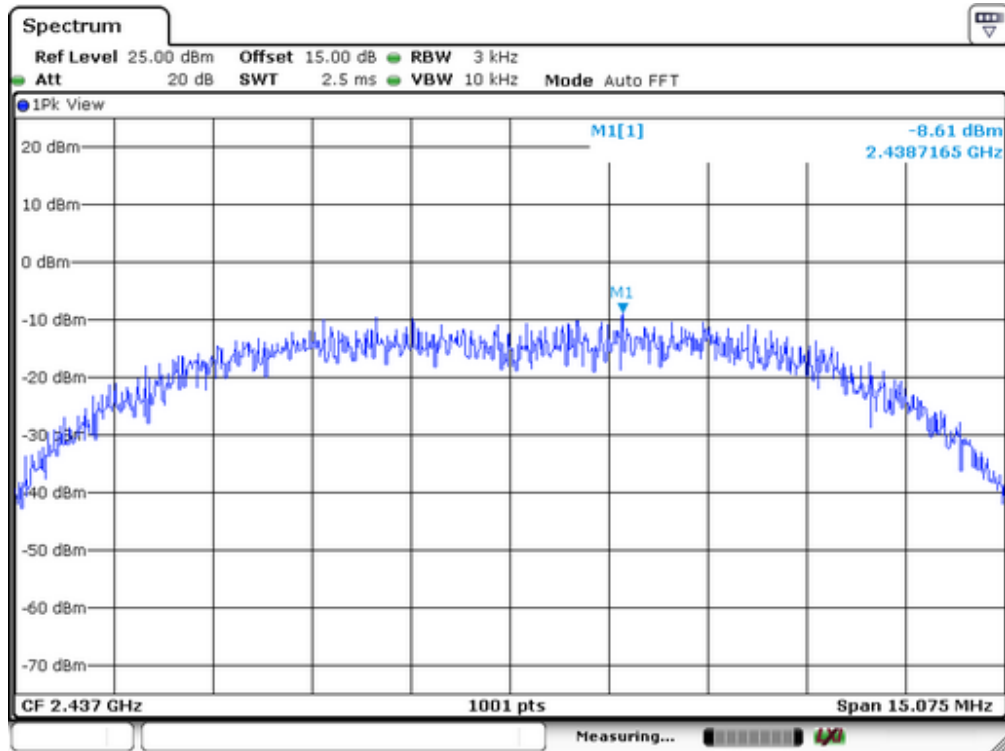


IEEE 802.11g			
Channel frequency (MHz)	Measurement level (dBm)	Limit(dBm)	Result
2412	-11.26	8	Pass
2437	-9.97		
2462	-8.62		


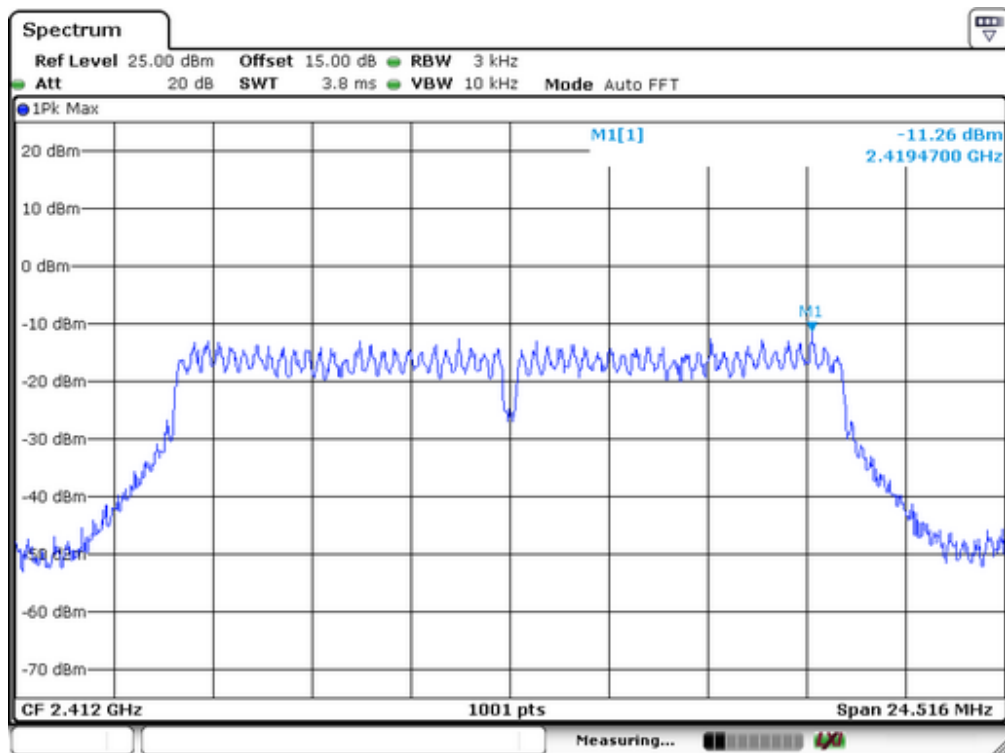


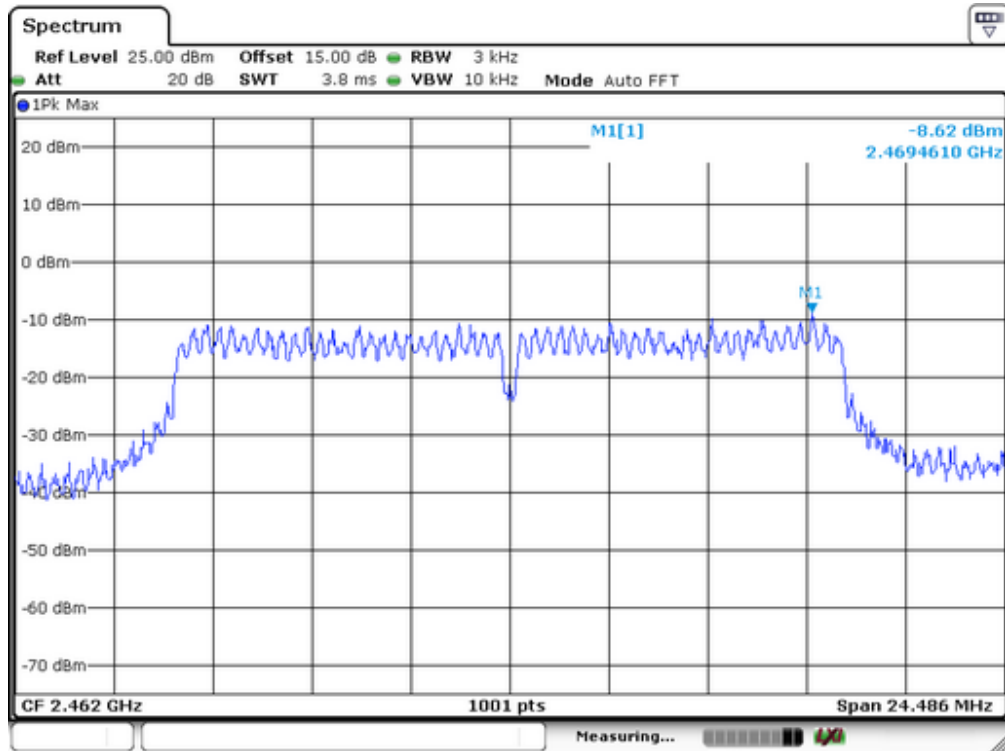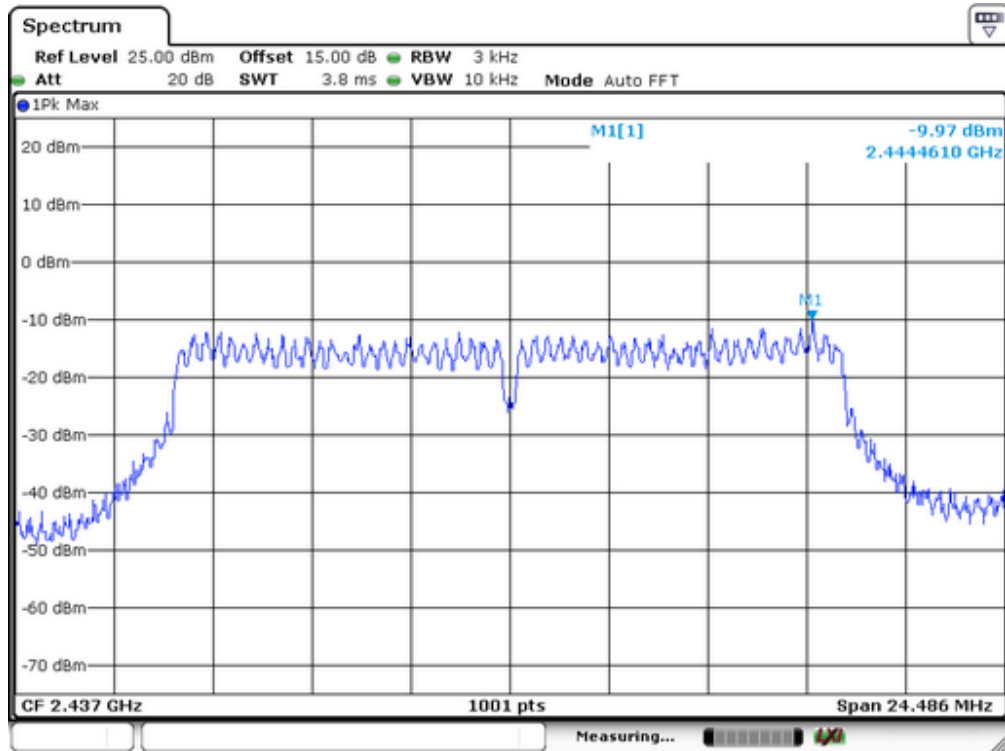


IEEE 802.11n(HT20)			
Channel frequency (MHz)	Measurement level (dBm)	Limit(dBm)	Result
2412	-14.61	8	Pass
2437	-14.11		
2462	-12.58		


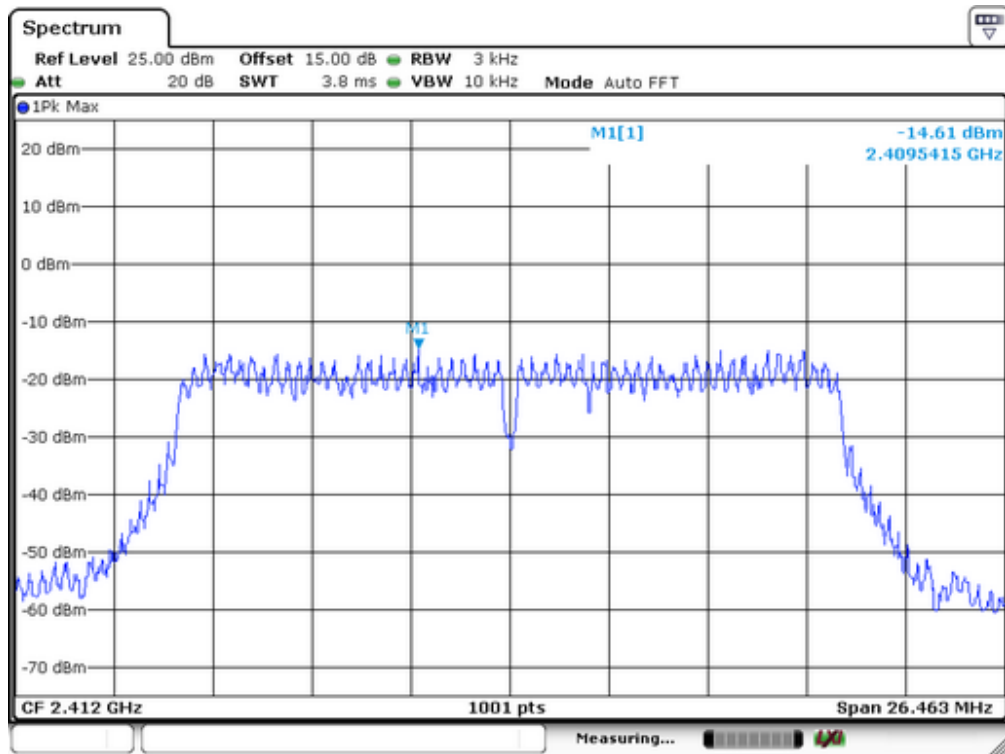




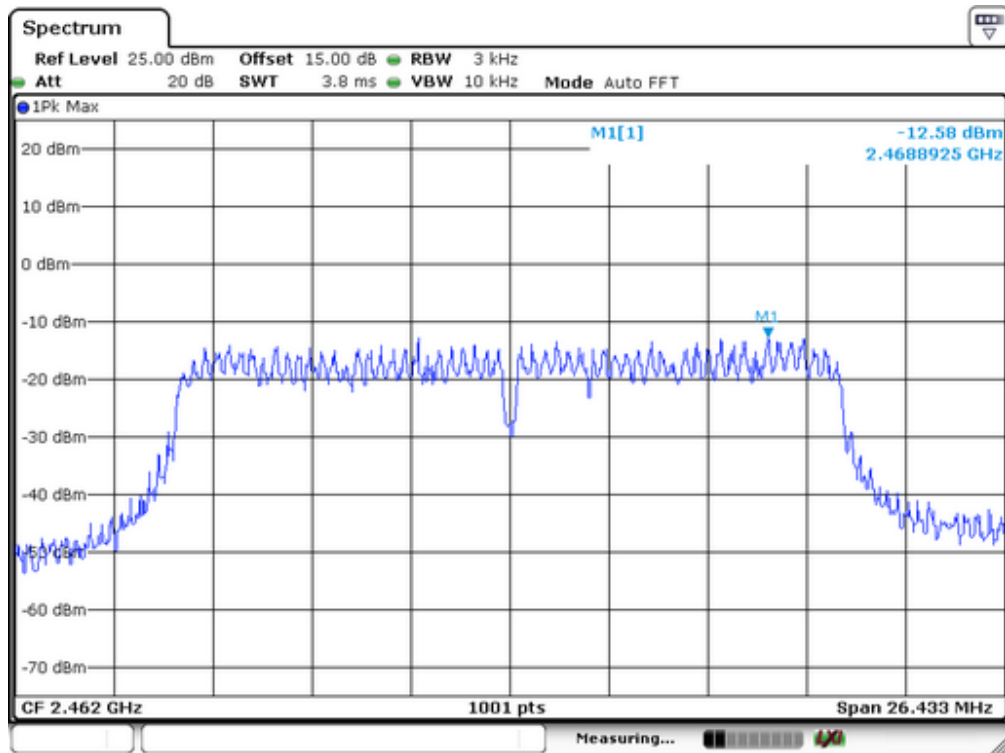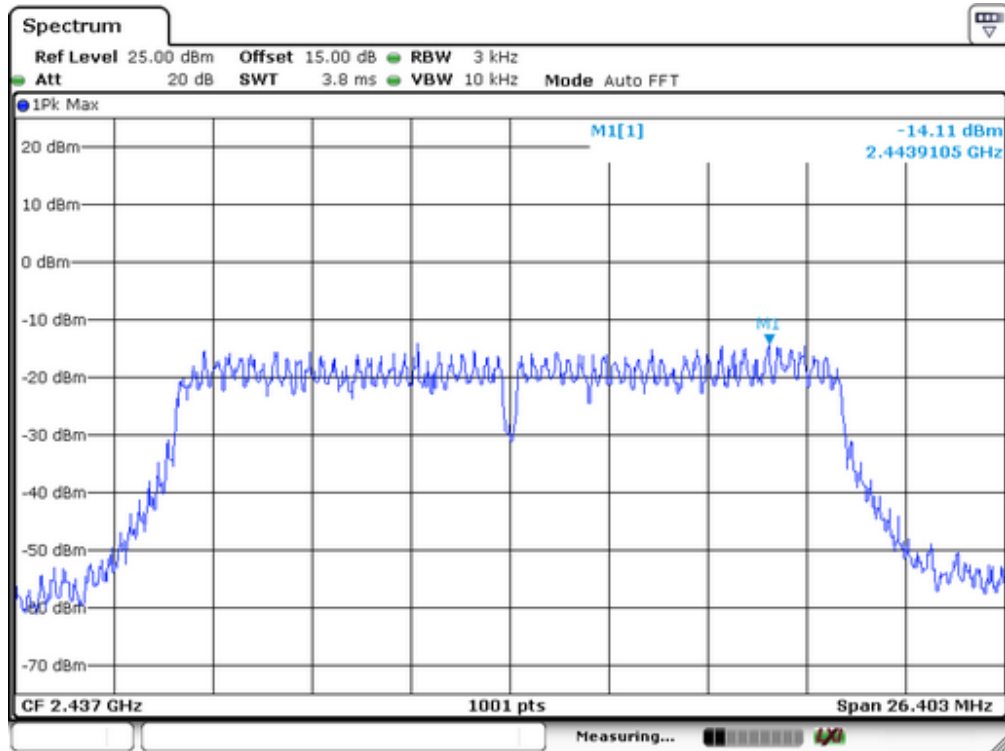

IEEE 802.11n(HT40)			
Channel frequency (MHz)	Measurement level (dBm)	Limit(dBm)	Result
2422	-19.41	8	Pass
2437	-18.52		
2452	-17.78		

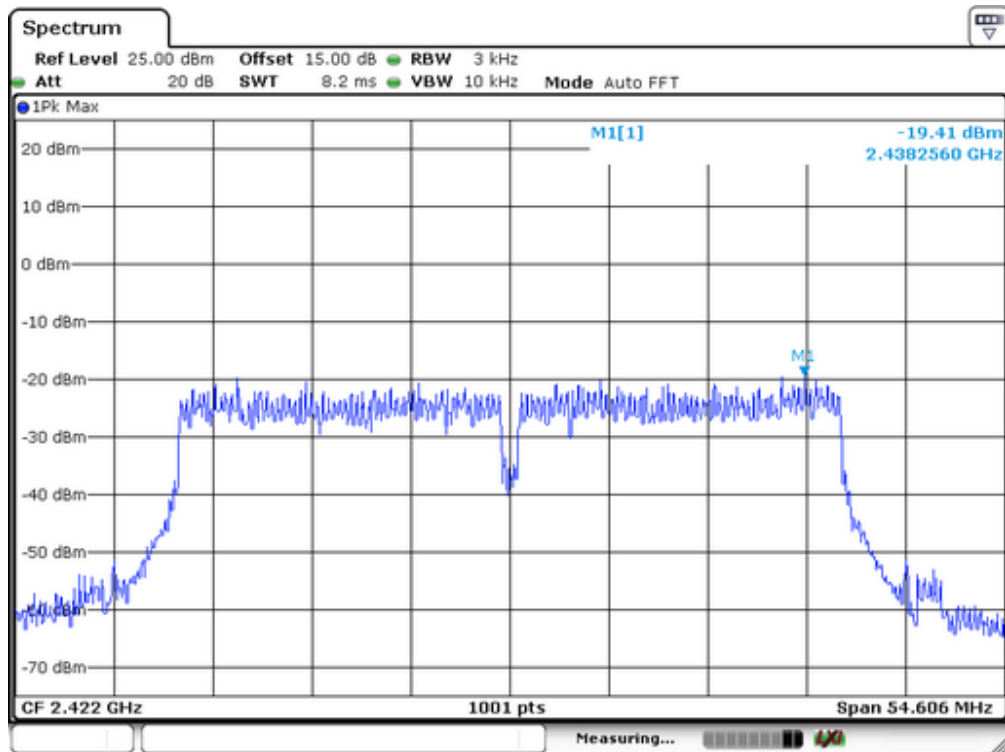

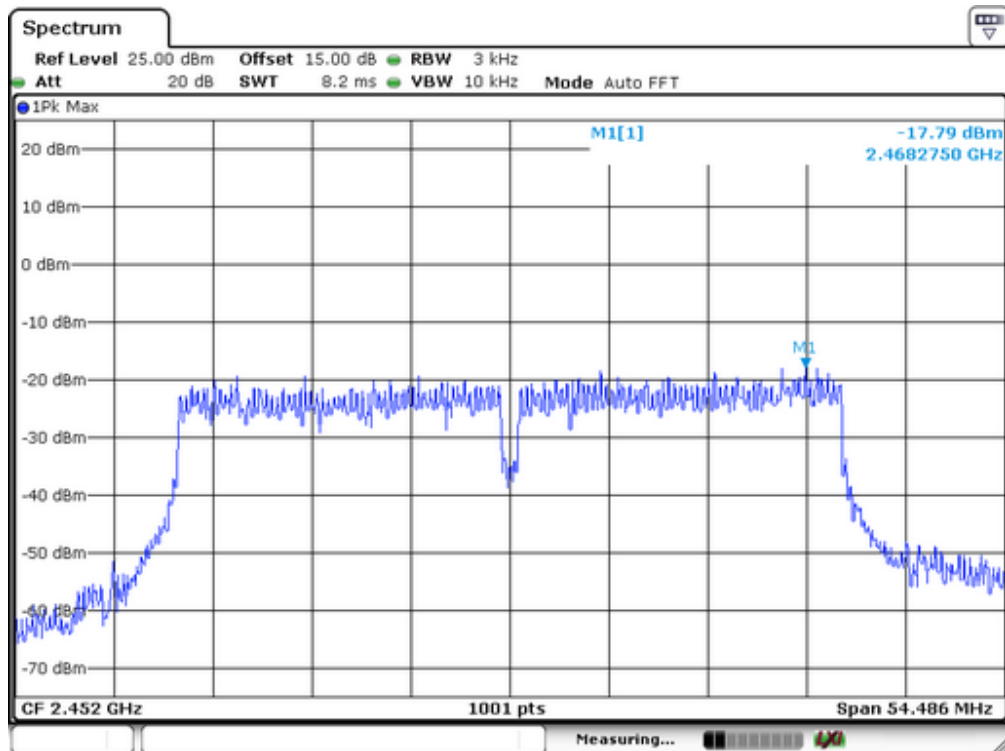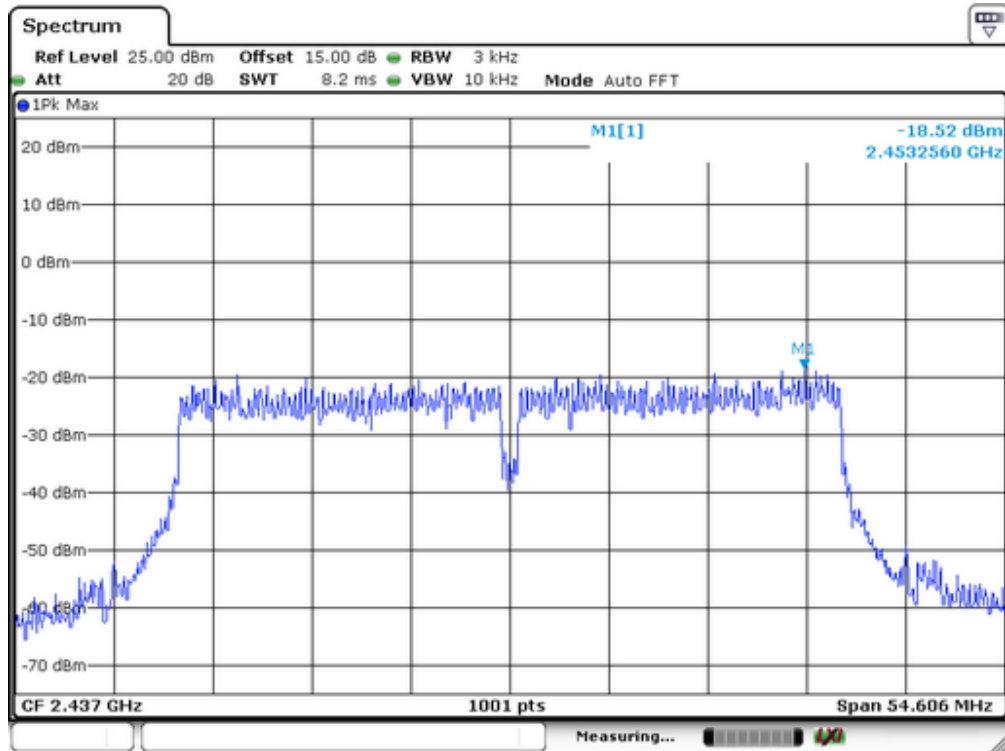

## 11. Antenna Port Emission

### 11.1 Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Agilent	FSV30	1321.3008K	03/16/2015	03/15/2016

### 11.2 Measuring Instruments and Setting


The following table is the setting of spectrum analyzer.

Spectrum analyzer	Setting
Attenuation	Auto
RB	100kHz
VB	300kHz
Detector	Peak
Trace	Max hold

### 11.3 Test Procedures

The conducted spurious emissions were measured conducted using a spectrum analyzer at low, Middle, and high channels, the limit was determined by attenuation 20dB of the RF peak power output.


### 11.4 Block Diagram of Test setup




### 11.5 Test Result

**PASS.**


Test Mode: 802.11b

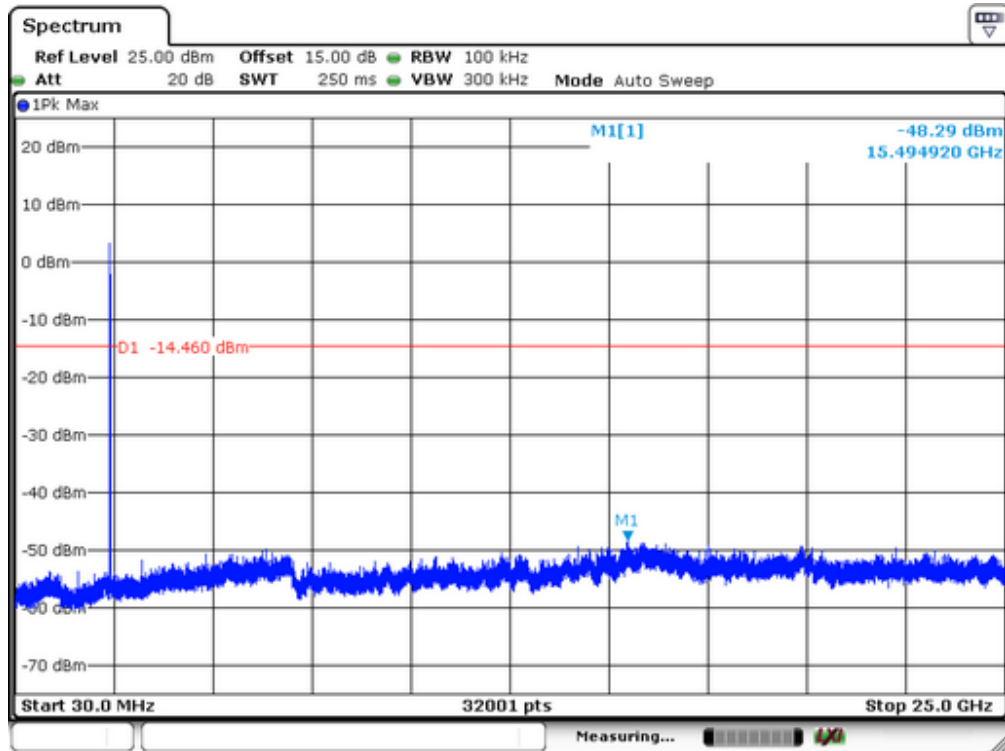

Lowest Channel

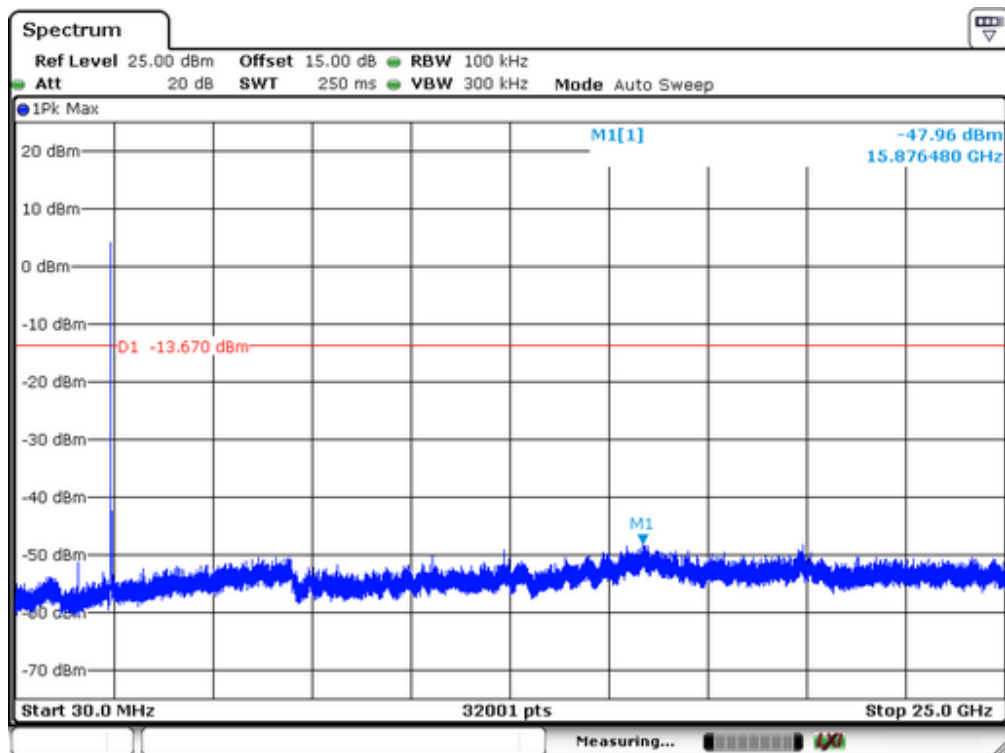


Middle Channel

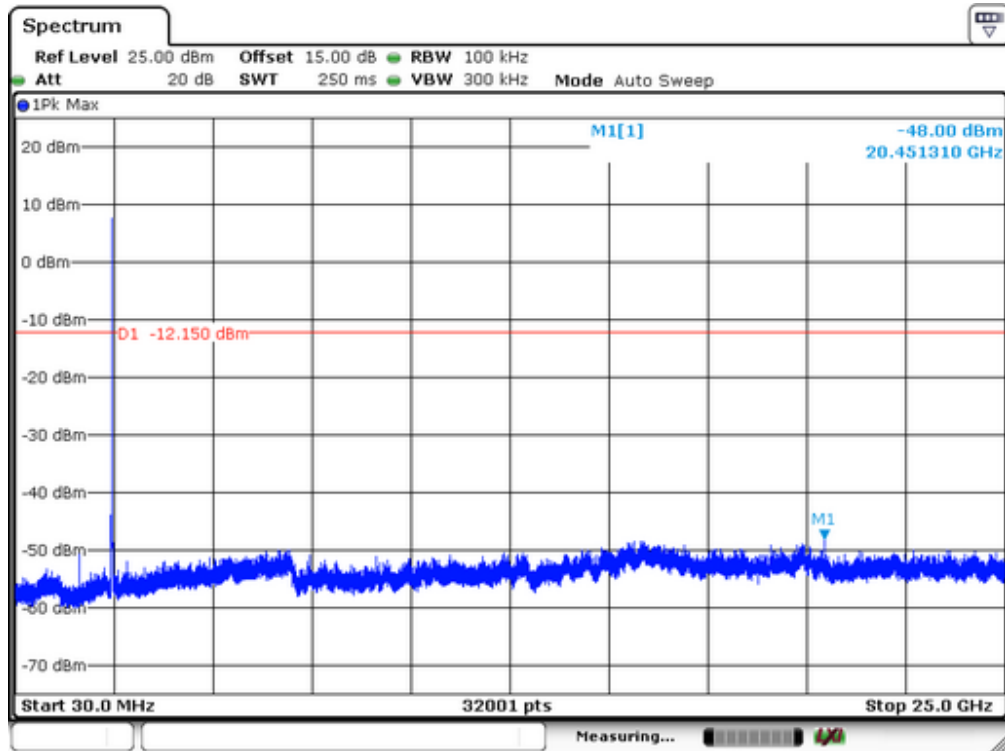


Highest Channel


Test Mode: 802.11g

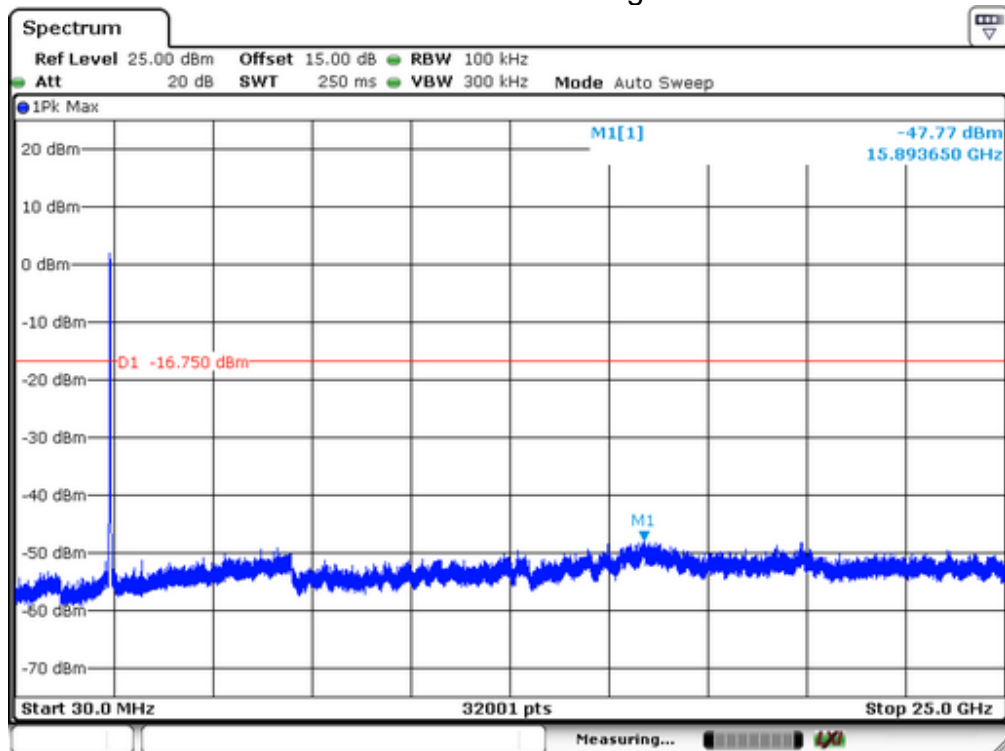

Lowest Channel

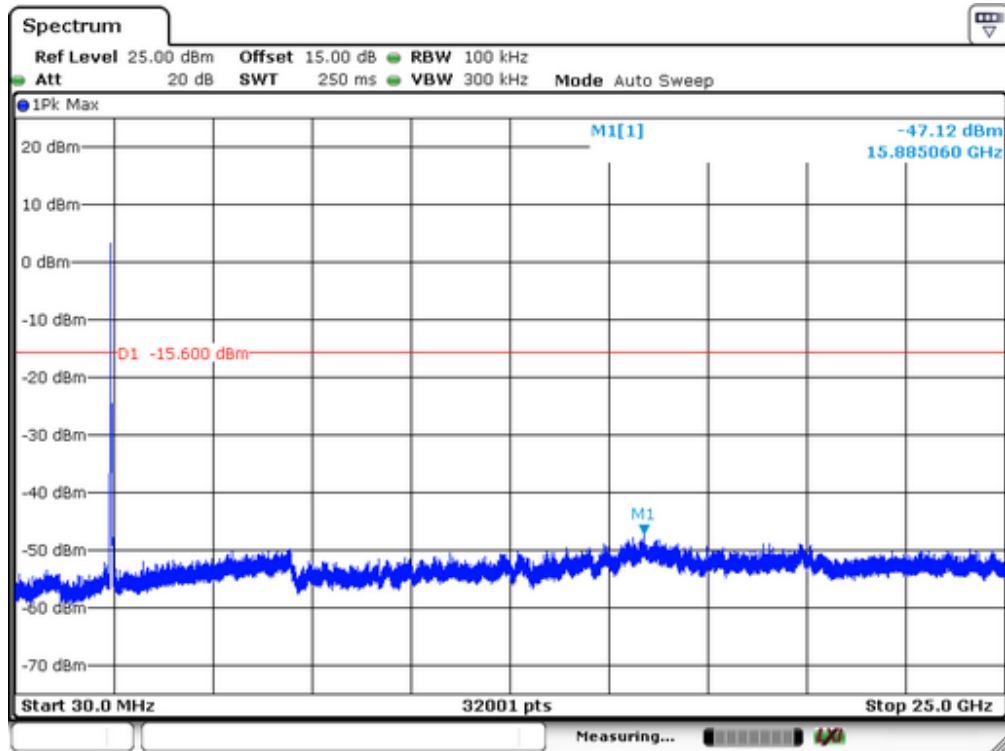


Middle Channel

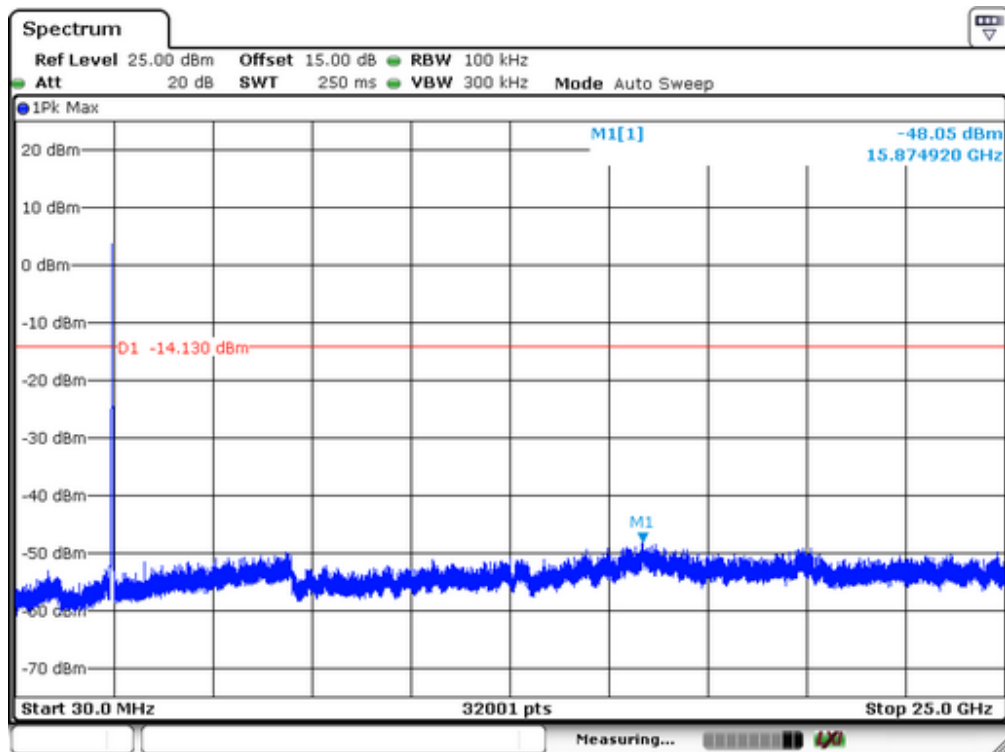


Highest Channel

Test Mode: 802.11n(HT20)

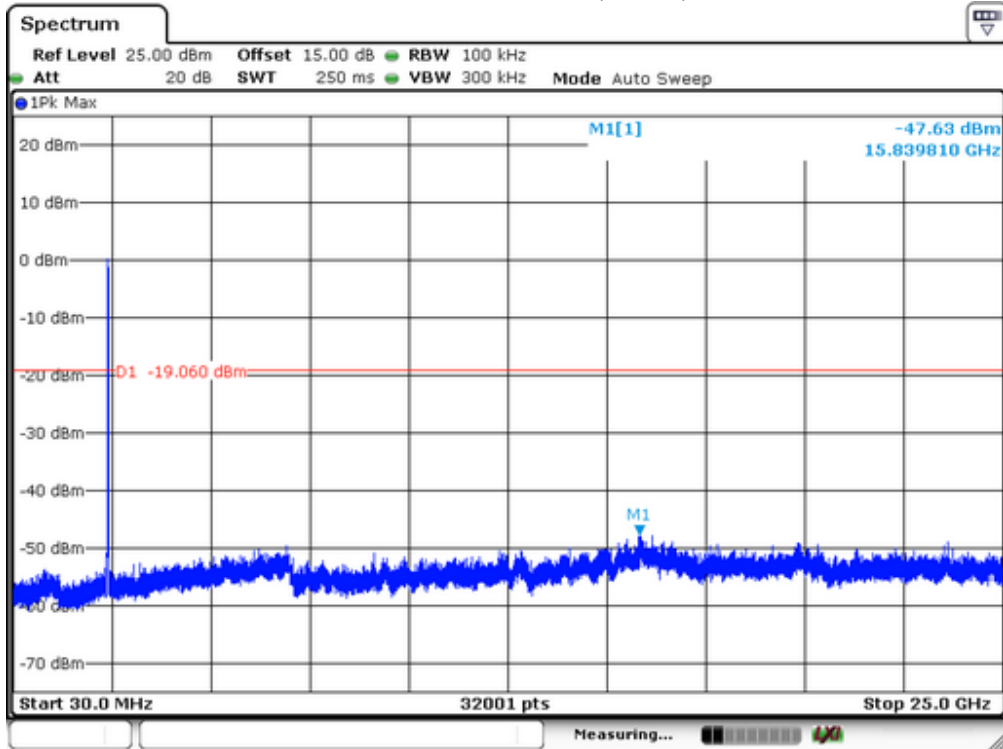


Lowest Channel

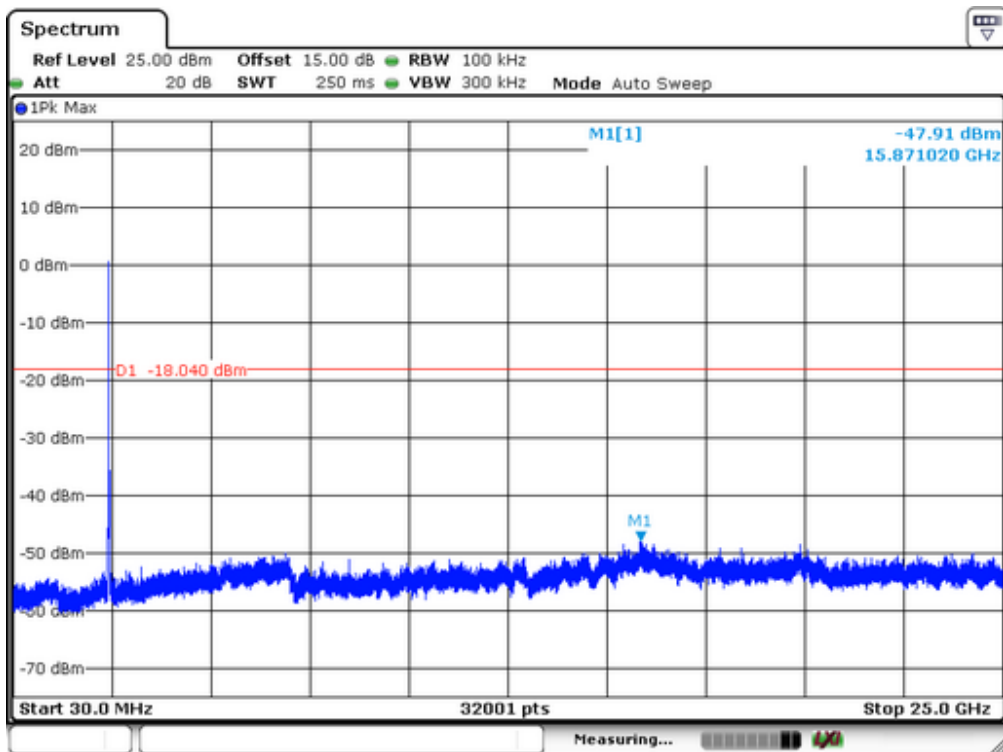


Middle Channel



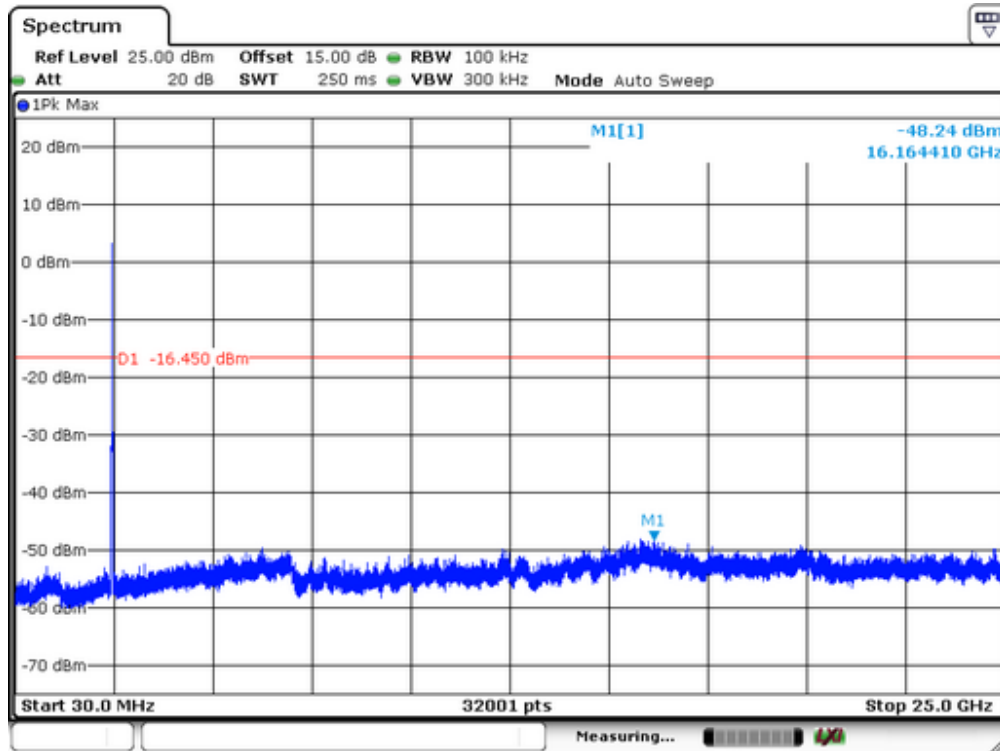


Highest Channel


Test Mode: 802.11n(HT40)

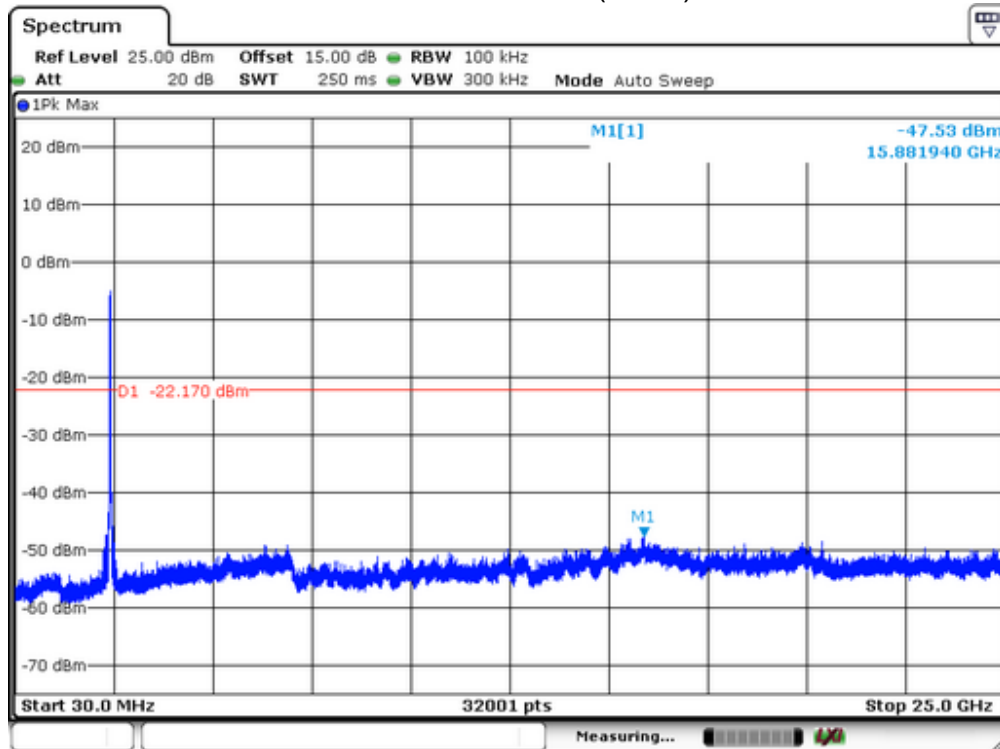

Lowest Channel

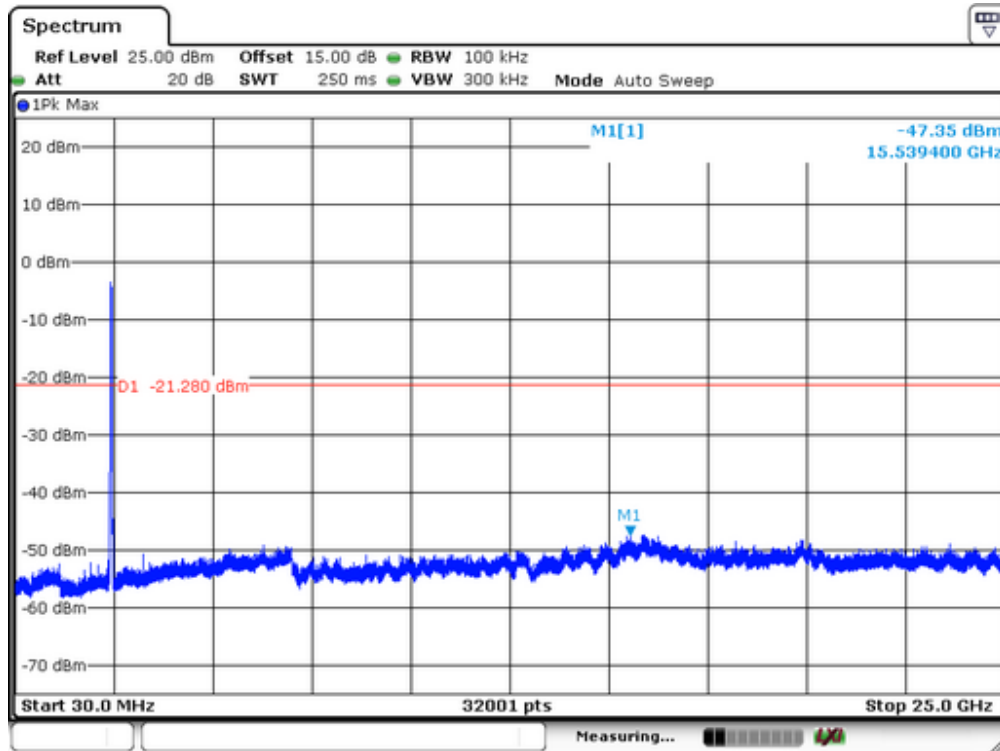

Middle Channel

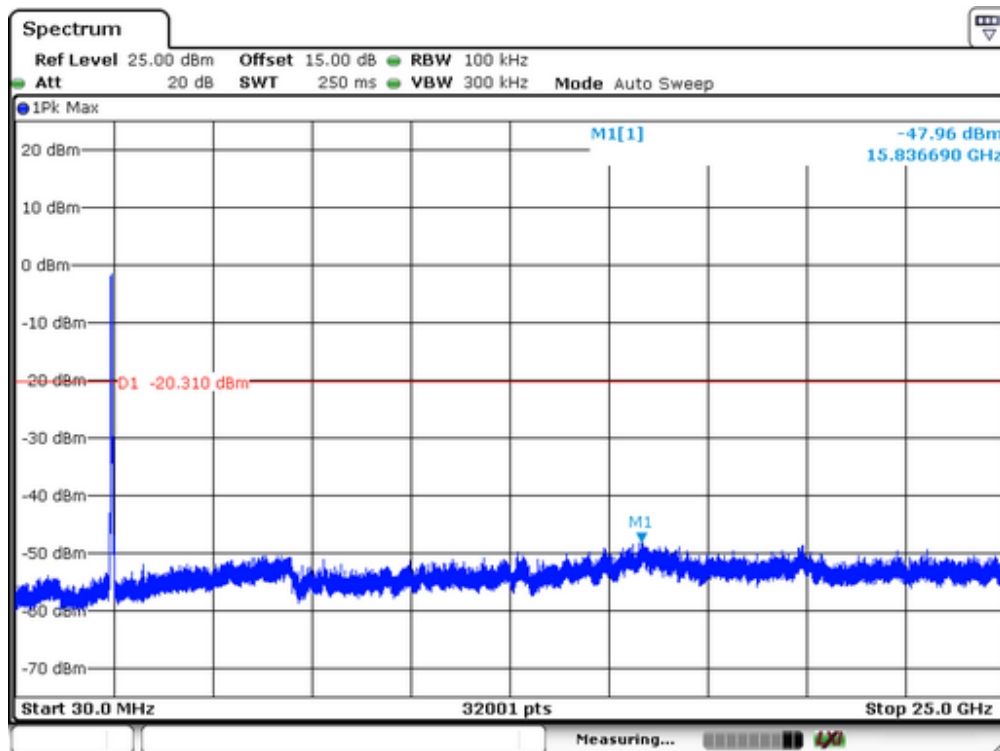

Highest Channel

## **12. Antenna Application**

### **12.1 Antenna Requirement**

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### **12.2 Result**

The EUT'S antenna, permanent attached antenna, is an external antenna. The antenna's gain is 2dBi and meets the requirement.

# APPENDIX I (PHOTOS OF EUT)

