

**ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT
INTENTIONAL RADIATOR CERTIFICATION TO
FCC PART 15 SUBPART C REQUIREMENT**

OF

150Mbps Wireless USB Adapter

Model No.: BL-WN155A

FCC ID: S8J-WN155A

Trademark: LB-LINK

Report No.: KAD141127093E

Issue Date: March 18, 2015

Prepared for

**Shenzhen Bilian Electronic Co., Ltd.
Building B1, Zhongxing Industrial Zone, Juling Jutang Community,
Guanlan street, Bao'an, Shenzhen China**

Prepared by

**DONGGUAN EMTEK CO., LTD.
No.281, Guantai Road, Nancheng District,
Dongguan, Guangdong, China
TEL: 86-769-22807078
FAX: 86-769-22807079**

**This report shall not be reproduced, except in full, without the written approval of
DONGGUAN EMTEK CO., LTD.**

VERIFICATION OF COMPLIANCE

Applicant:	Shenzhen Bilian Electronic Co., Ltd. Building B1, Zhongxing Industrial Zone, Juling Jutang Community, Guanlan street, Bao'an, Shenzhen China
Manufacturer:	Shenzhen Bilian Electronic Co., Ltd. Building B1, Zhongxing Industrial Zone, Juling Jutang Community, Guanlan street, Bao'an, Shenzhen China
Product Description:	150Mbps Wireless USB Adapter
Model Number:	BL-WN155A
Trade Mark:	LB-LINK
Date of Test:	November 27, 2014 to March 15, 2015

We hereby certify that:

The above equipment was tested by DONGGUAN EMTEK CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2014) and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.247(2014).

Approved By



**Sam Lv / Q.A. Manager
DONGGUAN EMTEK CO., LTD.**

Modified Information

Version	Summary	Revision Date	Report No.
Ver. 1.0	Original Report	/	KAD141127093E

Table of Contents

1. GENERAL INFORMATION	6
1.1 PRODUCT DESCRIPTION	6
1.2 RELATED SUBMITTAL(S) / GRANT(S)	6
1.3 TEST METHODOLOGY	7
1.4 SPECIAL ACCESSORIES.....	7
1.5 EQUIPMENT MODIFICATIONS.....	7
1.6 TEST FACILITY.....	7
2. SYSTEM TEST CONFIGURATION	8
2.1 EUT CONFIGURATION.....	8
2.2 EUT EXERCISE	8
2.3 TEST PROCEDURE.....	8
2.4 CONFIGURATION OF TESTED SYSTEM	9
3. DESCRIPTION OF TEST MODES.....	10
4. SUMMARY OF TEST RESULTS.....	11
5. CONDUCTED EMISSIONS TEST	12
5.1 MEASUREMENT PROCEDURE	12
5.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	12
5.3 MEASUREMENT EQUIPMENT USED	12
5.4 CONDUCTED EMISSION LIMIT	12
5.5 MEASUREMENT RESULT.....	13
6. RADIATED EMISSION TEST.....	15
6.1 MEASUREMENT PROCEDURE	15
6.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	16
6.3 MEASUREMENT EQUIPMENT USED	17
6.4 RADIATED EMISSION LIMIT	17
6.5 MEASUREMENT RESULT.....	19
7. 6DB BANDWIDTH TEST	28
7.1 MEASUREMENT PROCEDURE	28
7.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	28
7.3 MEASUREMENT EQUIPMENT USED	28
7.4 MEASUREMENT RESULTS.....	28
8. MAXIMUM PEAK OUTPUT POWER TEST	37
8.1 MEASUREMENT PROCEDURE	37
8.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	37
8.3 MEASUREMENT EQUIPMENT USED	37
8.4 PEAK POWER OUTPUT LIMIT	37
8.5 MEASUREMENT RESULTS.....	37
9. BAND EDGE TEST.....	38
9.1 MEASUREMENT PROCEDURE	38
9.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	39
9.3 MEASUREMENT EQUIPMENT USED	39
9.4 MEASUREMENT RESULTS.....	39
10. POWER DENSITY.....	52
10.1 TEST EQUIPMENT	52
10.2 MEASURING INSTRUMENTS AND SETTING.....	52
10.3 TEST PROCEDURES.....	52

10.4	BLOCK DIAGRAM OF TEST SETUP	52
10.5	LIMIT.....	52
10.6	TEST RESULT	53
11.	ANTENNA PORT EMISSION.....	61
11.1	TEST EQUIPMENT	61
11.2	MEASURING INSTRUMENTS AND SETTING.....	61
11.3	TEST PROCEDURES.....	61
11.4	BLOCK DIAGRAM OF TEST SETUP	61
11.5	TEST RESULT	61
12.	ANTENNA APPLICATION	68
12.1	ANTENNA REQUIREMENT	68
12.2	RESULT.....	68

APPENDIX I (PHOTOS OF EUT)(3PAGES)

1. General Information

1.1 Product Description

A major technical descriptions of EUT is described as following:

- A). Operation Frequency: 2412-2462MHz for 802.11b/g/n(H20) ;
2422-2452MHz for 802.11n(H40)
- B). Modulation: OFDM with BPSK/QPSK/16QAM/64QAM for 802.11g/n,
DSSS with DBPSK/DQPSK/CCK for 802.11b;
- C). Number of Channel: 11 Channels for 802.11b/g/n(H20)
7 Channels for 802.11n(H40)
- D). Antenna Type: External antenna
- E). Antenna Gain: 5dBi
- F). Power Supply: DC from PC

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	5	2432	9	2452
2	2417	6	2437	10	2457
3	2422	7	2442	11	2462
4	2427	8	2447		

Note:

1. This device is included 802.11b, 802.11g and 802.11n(H20), 802.11n(H40) 2.4GHz transceiver function.
2. Channel 1-11 for 802.11b, 802.11g, 802.11n(H20); Channel 3-9 for 802.11n(H40)
3. Test of channel was included the lowest middle and highest frequency in lowest data rate and to perform the test, then record on this report.

1.2 Related Submittal(s) / Grant(s)

This submittal(s) (test report) is intended for filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules. The composite system is compliance with Subpart B is authorized under a DOC procedure.

1.3 Test Methodology

All the test program has follow FCC new test procedure KDB558074 D01 v03r02, Both conducted and radiated testing was performed according to the procedures in ANSI C63.4 (2014). Radiated testing was performed at an antenna to EUT distance 3 meters.

1.4 Special Accessories

Not available for this EUT intended for grant.

1.5 Equipment Modifications

Not available for this EUT intended for grant.

1.6 Test Facility

Site Description

EMC Lab :

Accredited by FCC, June 18, 2014
The Certificate Number is 247565

Accredited by Industry Canada, February 19, 2014
The Certificate Number is 9444A

Name of Firm : DONGGUAN EMTEK CO., LTD.

Site Location : No.281, Guantai Road, Nancheng District,
Dongguan, Guangdong, China

2. System Test Configuration

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

2.3 Test Procedure

2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4-2014 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

2.3.2 Radiated Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. Emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4-2014.

2.4 Configuration of Tested System

Fig. 2-1 Configuration of Tested System

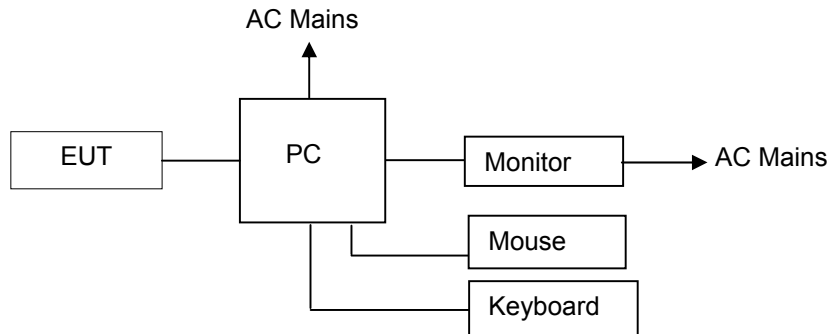


Table 2-1 Equipment Used in Tested System

Item	Equipment	Trademark	Model No.	FCC ID	Note
1.	150Mbps Wireless USB Adapter	LB-LINK	BL-WN155A	S8J-WN155A	EUT
2.	PC	DELL	OPTIRLEX 760	N/A	Support Equipment
3.	LCD Monitor	DELL	E1909WF	N/A	Support Equipment
4.	Mouse	DELL	M-UAR DEL7	N/A	Support Equipment
5.	Keyboard	DELL	L30U	N/A	Support Equipment

Note:

- (1) Unless otherwise denoted as EUT in 『Remark』 column, device(s) used in tested system is a support equipment.

3. Description of Test Modes

The EUT is a LED TV and powered by host equipment; these is Digital Transmission system (DTS) and have modulation OFDM, DSSS, DBPSK, DQPSK, CCK, 16QAM, 64QAM. According exploratory test, EUT will have maximum output power in those data rate (802.11b: 1 Mbps; 802.11g: 6 Mbps; 802.11n : MCS0), so those data rate were used for all test.

For 802.11b/g/n(H20) :

1. For lowest channel : 2412MHz (Channel 1)
2. For middle channel : 2437MHz (Channel 6)
3. For highest channel: 2462MHz (Channel 11)

For 802.11n(H40):

1. For lowest channel : 2422MHz (Channel 3)
2. For middle channel : 2437MHz (Channel 6)
3. For highest channel: 2452MHz (Channel 9)

4. Summary of Test Results


FCC Rules	Description Of Test	Result
§15.247(a)(2)	6dB bandwidth	Pass
§15.247(b)(3)	Max Peak output Power test	Pass
§15.247(e)	Power density	Pass
§15.247(d)	Band edge test	Pass
§15.207	AC Power Conducted Emission	Pass
§15.247(d), §15.209	Radiated Emission	Pass
§15.247(d)	Antenna Port Emission	Pass
§15.247(b)&§15.203	Antenna Application	Pass

5. Conducted Emissions Test

5.1 Measurement Procedure

1. The EUT was placed on a table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

5.2 Test SET-UP (Block Diagram of Configuration)

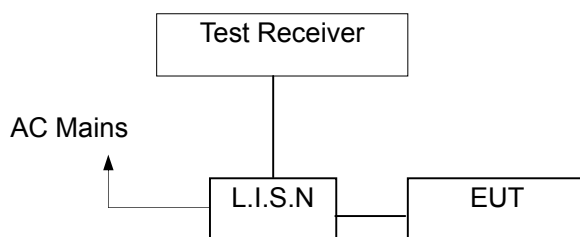

5.3 Measurement Equipment Used


Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde&Schwarz	ESCS30	100018	May 16, 2014	1 Year
2.	L.I.S.N.	Rohde&Schwarz	ENV216	100017	May 16, 2014	1Year
3.	RF Switching Unit	CDS	RSU-M2	38401	May 16, 2014	1Year

5.4 Conducted Emission Limit

Conducted Emission Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

- Note:** 1. The lower limit shall apply at the transition frequencies
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.


5.5 Measurement Result

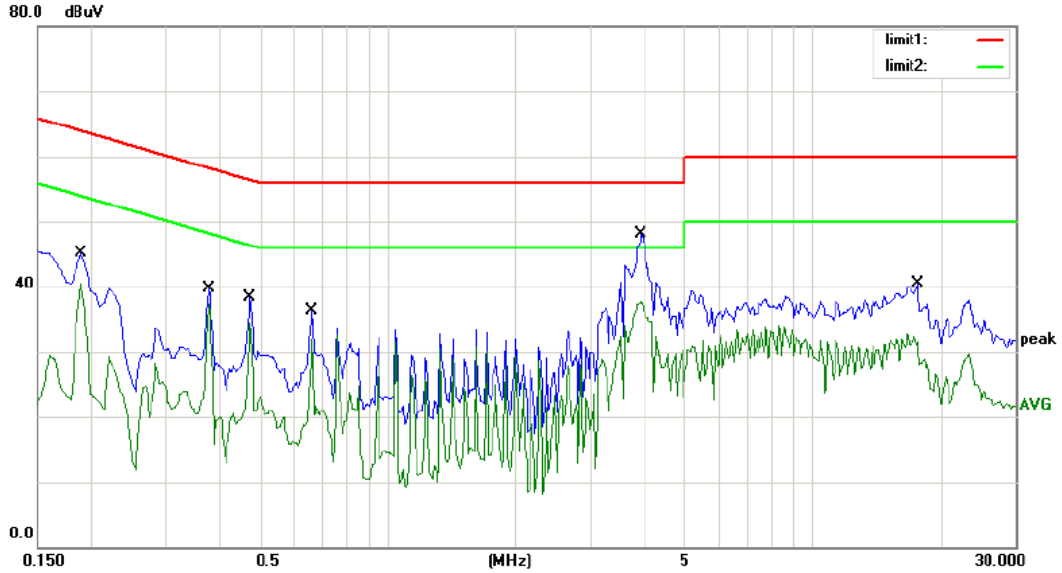

Site site #1 Phase: **L1** Temperature: 24
 Limit: (CE)FCC PART 15 class B_QP Power: AC 120V/60Hz Humidity: 55 %
 Mode: TX
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1900	45.09	0.00	45.09	64.04	-18.95	QP	
2		0.1900	40.47	0.00	40.47	54.04	-13.57	AVG	
3		0.3800	39.72	0.00	39.72	58.28	-18.56	QP	
4		0.3800	37.38	0.00	37.38	48.28	-10.90	AVG	
5		0.4750	38.36	0.00	38.36	56.43	-18.07	QP	
6		0.4750	34.59	0.00	34.59	46.43	-11.84	AVG	
7		0.6650	36.21	0.00	36.21	56.00	-19.79	QP	
8		0.6650	31.81	0.00	31.81	46.00	-14.19	AVG	
9	*	3.9600	48.05	0.00	48.05	56.00	-7.95	QP	
10		3.9600	37.65	0.00	37.65	46.00	-8.35	AVG	
11		17.6750	40.50	0.00	40.50	60.00	-19.50	QP	
12		17.6750	32.35	0.00	32.35	50.00	-17.65	AVG	

*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver.

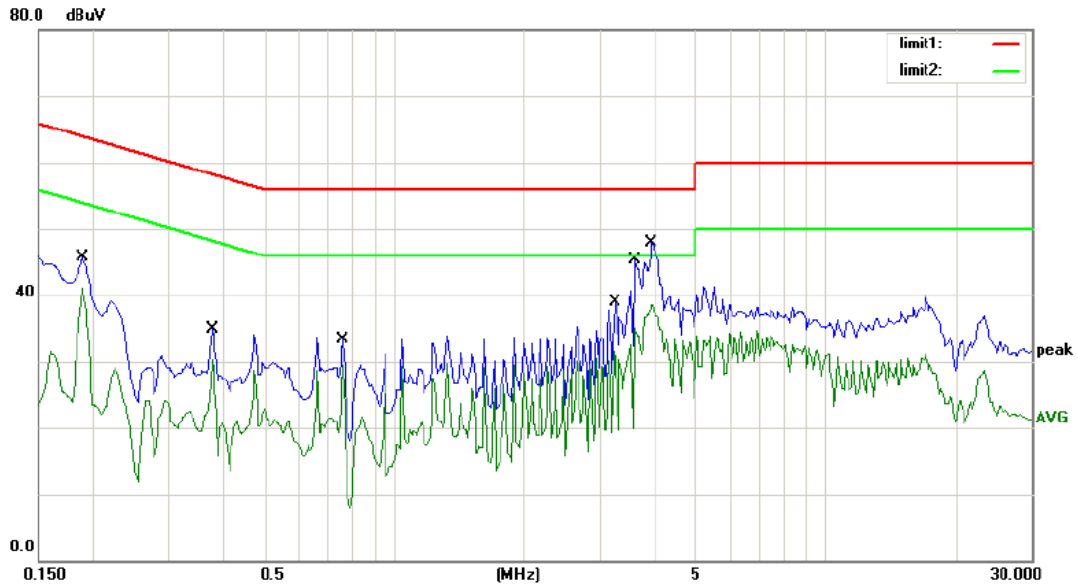

Site site #1 Phase: **N** Temperature: 24
 Limit: (CE)FCC PART 15 class B_QP Power: AC 120V/60Hz Humidity: 55 %
 Mode: TX
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1900	45.70	0.00	45.70	64.04	-18.34	QP	
2		0.1900	41.01	0.00	41.01	54.04	-13.03	AVG	
3		0.3800	34.83	0.00	34.83	58.28	-23.45	QP	
4		0.3800	30.34	0.00	30.34	48.28	-17.94	AVG	
5		0.7600	33.28	0.00	33.28	56.00	-22.72	QP	
6		0.7600	29.43	0.00	29.43	46.00	-16.57	AVG	
7		3.2700	38.82	0.00	38.82	56.00	-17.18	QP	
8		3.2700	31.43	0.00	31.43	46.00	-14.57	AVG	
9		3.6100	45.40	0.00	45.40	56.00	-10.60	QP	
10		3.6100	35.04	0.00	35.04	46.00	-10.96	AVG	
11		3.9600	47.97	0.00	47.97	56.00	-8.03	QP	
12	*	3.9600	38.51	0.00	38.51	46.00	-7.49	AVG	

*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver.

6. Radiated Emission Test

6.1 Measurement Procedure

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measured was complete.
5. The EUT's antenna was pre-tested under the following modes:

Test Mode	Description
Mode A	X-Y axis
Mode B	Y-Z axis
Mode C	X-Z axis

From the above modes, the worst case was found in Mode A. Therefore only the test data of the mode was recorded in this report.

6 When spectrum scanned from 30MHz to 1GHz setting resolution bandwidth 120KHz and video bandwidth 300KHz:

EMI Test Receiver	Setting
Attenuation	Auto
RB	120KHz
VB	300KHz
Detector	QP
Trace	Max hold

When spectrum scanned above 1GHz setting resolution bandwidth 1MHz, video bandwidth 3MHz:


EMI Test Receiver	Setting
Attenuation	Auto
RB	1MHz
VB	3MHz
Detector	Peak
Trace	Max hold

When spectrum scanned above 1GHz setting resolution bandwidth 1MHz, video bandwidth 10Hz:


EMI Test Receiver	Setting
Attenuation	Auto
RB	1MHz
VB	10Hz
Detector	Peak
Trace	Max hold

6.2 Test SET-UP (Block Diagram of Configuration)


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

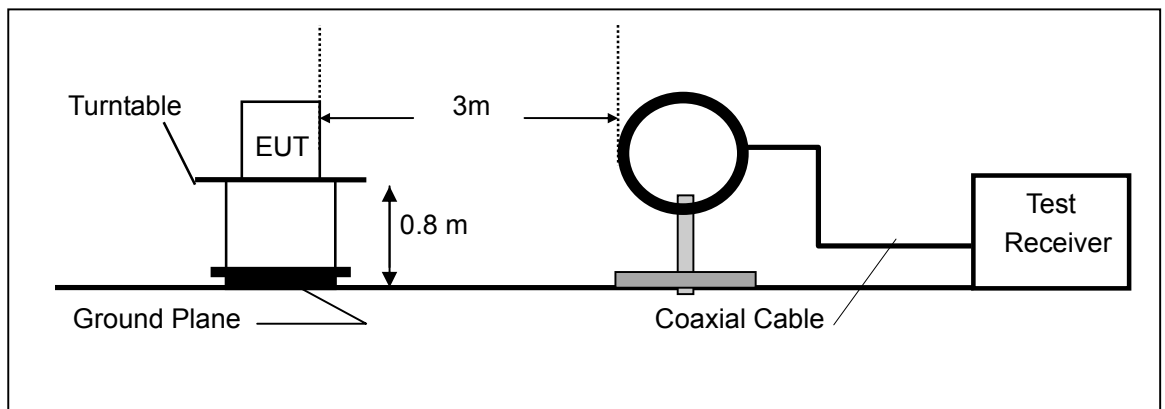

(B) Radiated Emission Test Set-Up, Frequency Below 1000MHz

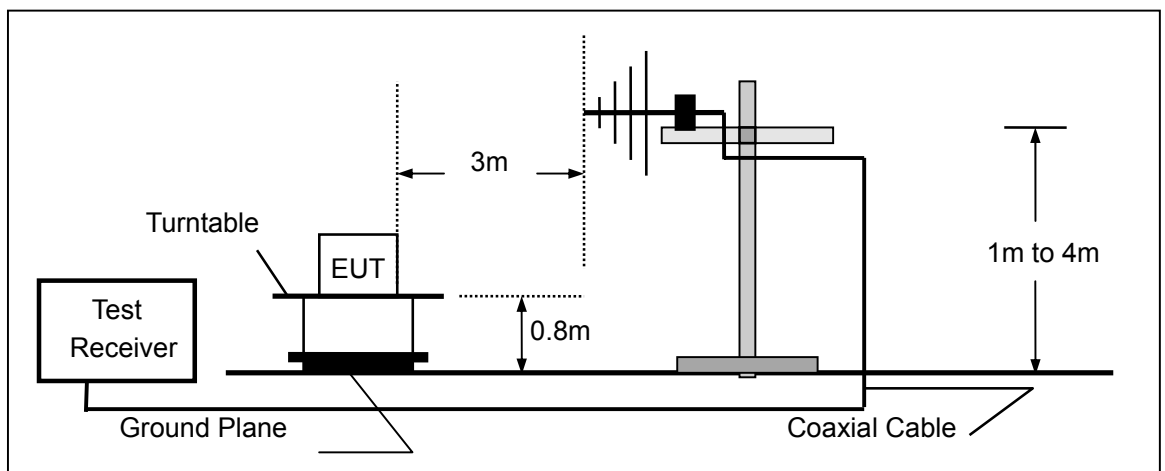

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

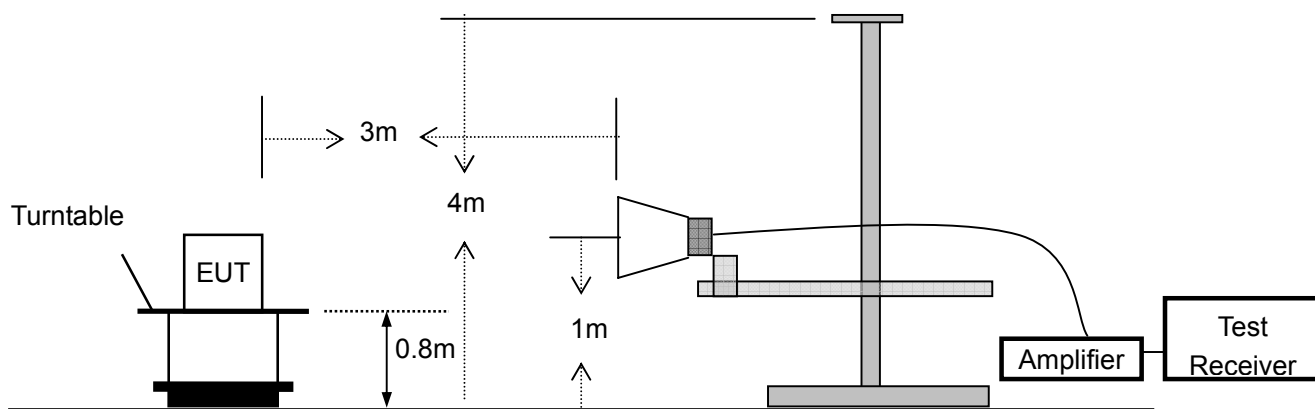

6.3 Measurement Equipment Used

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Rohde & Schwarz	FSV30	1321.3008K	05/16/2014	05/15/2015
Spectrum Analyzer	HP	E4407B	839840481	05/16/2014	05/15/2015
EMI Test Receiver	Rohde & Schwarz	ESU	1302.6005.26	05/16/2014	05/15/2015
Pre-Amplifier	HP	8447D	2944A07999	05/16/2014	05/15/2015
Bilog Antenna	Schwarzbeck	VULB9163	142	05/19/2014	05/18/2015
Loop Antenna	Schwarzbeck	FMZB 1519	012	05/19/2014	05/18/2015
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170399	05/19/2014	05/18/2015
Horn Antenna	Schwarzbeck	BBHA 9120	D143	05/19/2014	05/18/2015
Spectrum Analyzer	Agilent	E4446A	US44300399	05/16/2014	05/15/2015

6.4 Radiated Emission Limit

The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table 15.209(a):

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Restricted bands of operation

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

Remark 1. Emission level in dBuV/m=20 log (uV/m)

- :
2. Measurement was performed at an antenna to the closed point of EUT distance of meters.
 3. Only spurious frequency is permitted to locate within the Restricted Bands specified in provision of § 15.205, and the emissions located in restricted bands also comply with 15.209 limit.

6.5 Measurement Result

Below 30MHz:

All the modulation modes were tested the data of the test mode are recorded in the following pages.

Operation Mode: TX Mode Test Date : November 30, 2014
Frequency Range: 9KHz~30MHz Temperature : 28°C
Test Result: PASS Humidity : 60 %
Measured Distance: 3m Test By: WOLF

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV/m)	Limit 3m (dBuV/m)	Over (dB)
--	--	--	--	--

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.


Distance extrapolation factor = $40\log(\text{Specific distance/ test distance})$ (dB);

Limit line = Specific limits(dBuV) + distance extrapolation factor.

Below 1000MHz:

All the modulation modes were tested the data of the worst mode (TX 802.11g) are recorded in the following pages and the others modulation methods do not exceed the limits.

Please refer to the following test plots:

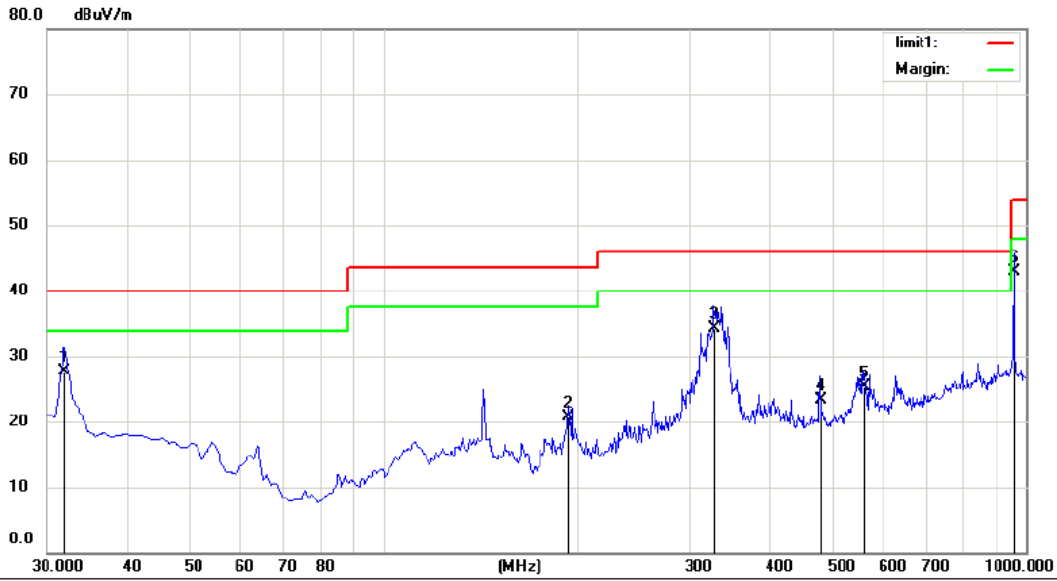


Site Chamber #1 Polarization: **Horizontal** Temperature: 26
 Limit: (RE)FCC PART 15 class B 3m Power: PC INPUT Humidity: 55 %
 Mode: TX2412
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		31.9400	42.30	-14.63	27.67	40.00	-12.33	QP		
2		193.9300	38.60	-17.97	20.63	43.50	-22.87	QP		
3		327.7900	47.50	-13.10	34.40	46.00	-11.60	QP		
4		480.0800	33.90	-10.54	23.36	46.00	-22.64	QP		
5		559.6200	34.20	-8.89	25.31	46.00	-20.69	QP		
6	*	960.2300	45.50	-2.59	42.91	54.00	-11.09	QP		

*:Maximum data x:Over limit !:over margin

Operator: Snake

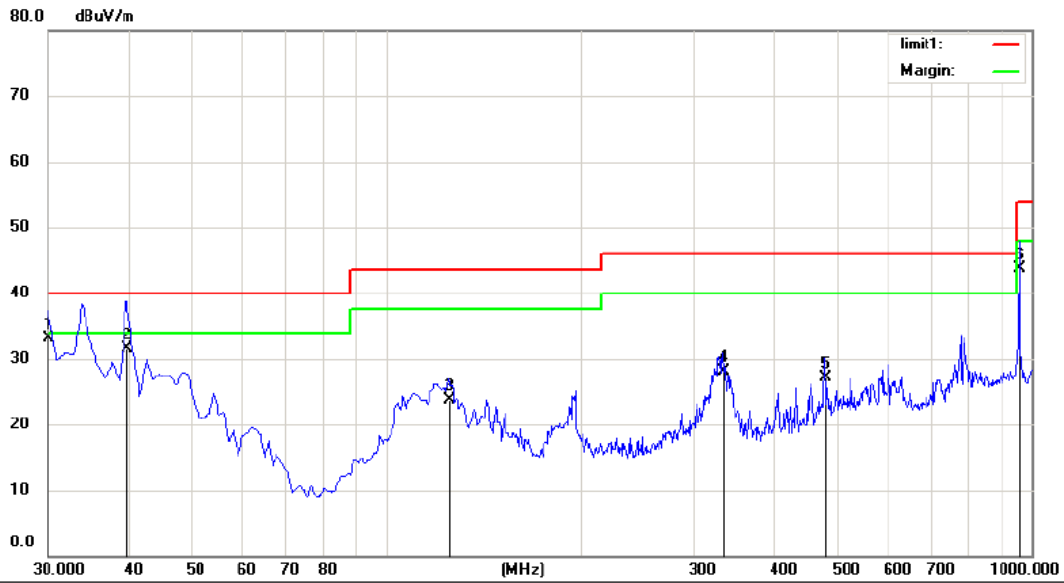


Site Chamber #1 Polarization: **Vertical** Temperature: 26
 Limit: (RE)FCC PART 15 class B 3m Power: PC INPUT Humidity: 55 %
 Mode: TX2412
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	30.0000	48.30	-15.15	33.15	40.00	-6.85	QP		
2		39.7000	45.20	-13.71	31.49	40.00	-8.51	QP		
3		125.0600	40.10	-16.40	23.70	43.50	-19.80	QP		
4		332.6400	41.30	-13.21	28.09	46.00	-17.91	QP		
5		480.0800	37.60	-10.54	27.06	46.00	-18.94	QP		
6		960.2300	46.30	-2.65	43.65	54.00	-10.35	QP		

*:Maximum data x:Over limit !:over margin

Operator: Snake

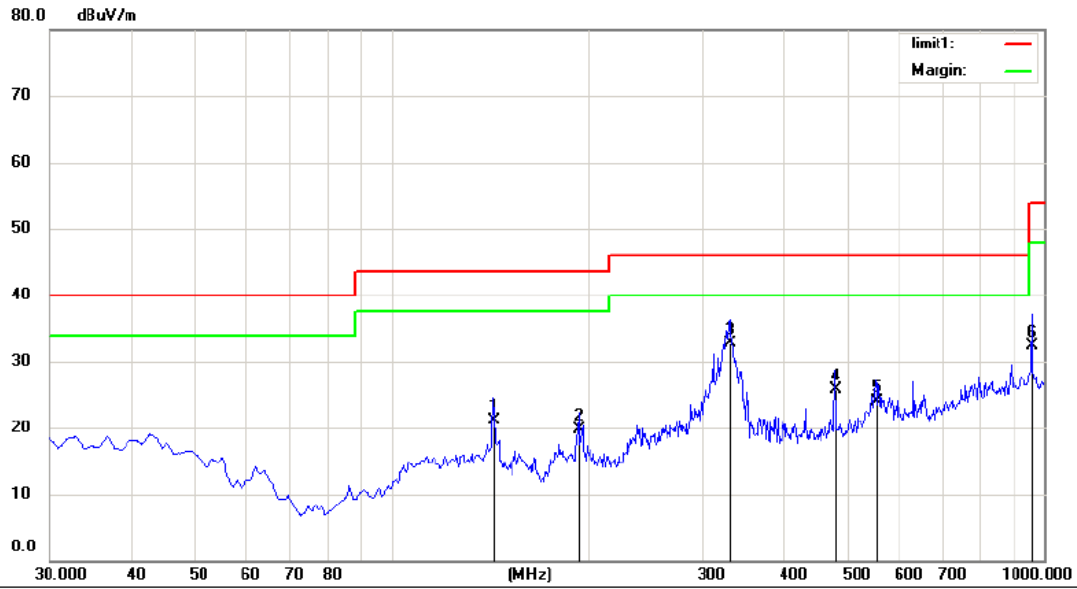


Site Chamber #1 Polarization: **Horizontal** Temperature: 26
 Limit: (RE)FCC PART 15 class B 3m Power: PC INPUT Humidity: 55 %
 Mode: TX2437
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		143.4900	38.30	-17.29	21.01	43.50	-22.49	QP		
2		193.9300	37.60	-17.97	19.63	43.50	-23.87	QP		
3	*	330.7000	45.90	-13.11	32.79	46.00	-13.21	QP		
4		480.0800	36.20	-10.54	25.66	46.00	-20.34	QP		
5		554.7700	32.80	-8.93	23.87	46.00	-22.13	QP		
6		960.2300	34.90	-2.59	32.31	54.00	-21.69	QP		

*:Maximum data x:Over limit !:over margin

Operator: Snake

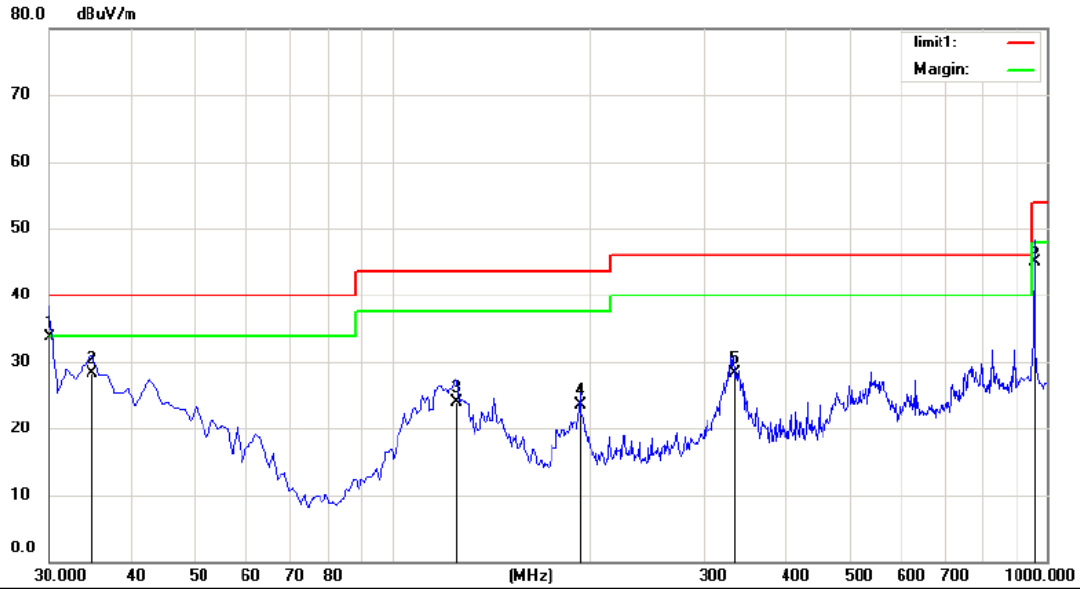


Site Chamber #1 Polarization: **Vertical** Temperature: 26
 Limit: (RE)FCC PART 15 class B 3m Power: PC INPUT Humidity: 55 %
 Mode: TX2437
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	30.0000	48.90	-15.15	33.75	40.00	-6.25	QP		
2		34.8500	42.50	-14.19	28.31	40.00	-11.69	QP		
3		125.0600	40.30	-16.40	23.90	43.50	-19.60	QP		
4		193.9300	41.40	-17.97	23.43	43.50	-20.07	QP		
5		332.6400	41.50	-13.21	28.29	46.00	-17.71	QP		
6		960.2300	47.60	-2.65	44.95	54.00	-9.05	QP		

*:Maximum data x:Over limit !:over margin

Operator: Snake

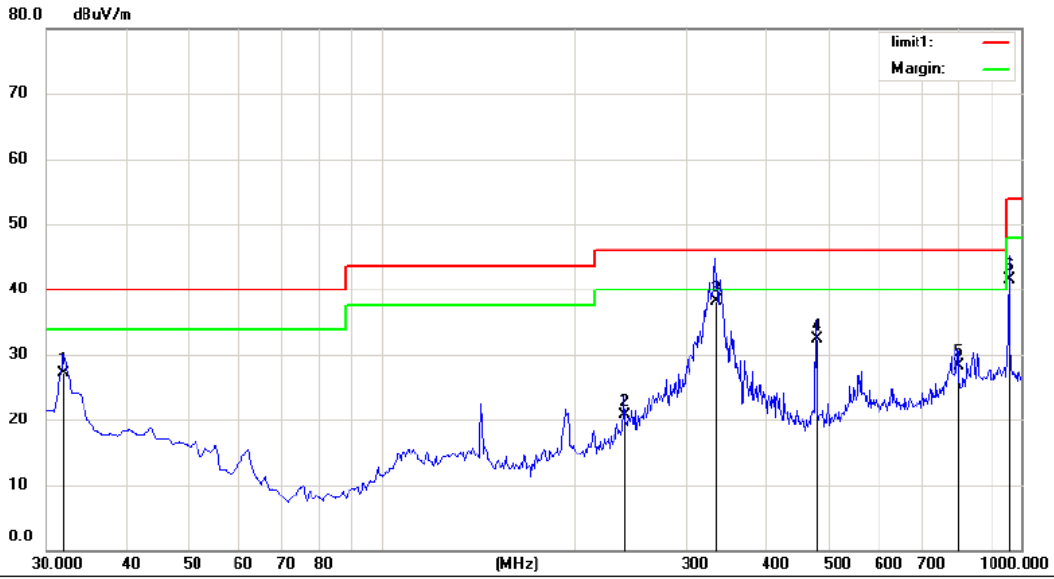


Site Chamber #1 Polarization: **Horizontal** Temperature: 26
 Limit: (RE)FCC PART 15 class B 3m Power: PC INPUT Humidity: 55 %
 Mode: TX2462
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		31.9400	41.70	-14.63	27.07	40.00	-12.93	QP			
2		240.4900	36.30	-15.66	20.64	46.00	-25.36	QP			
3	*	333.6100	51.30	-13.14	38.16	46.00	-7.84	QP			
4		480.0800	42.80	-10.54	32.26	46.00	-13.74	QP			
5		797.2700	33.50	-5.21	28.29	46.00	-17.71	QP			
6		960.2300	44.10	-2.59	41.51	54.00	-12.49	QP			

*:Maximum data x:Over limit !:over margin

Operator: Snake

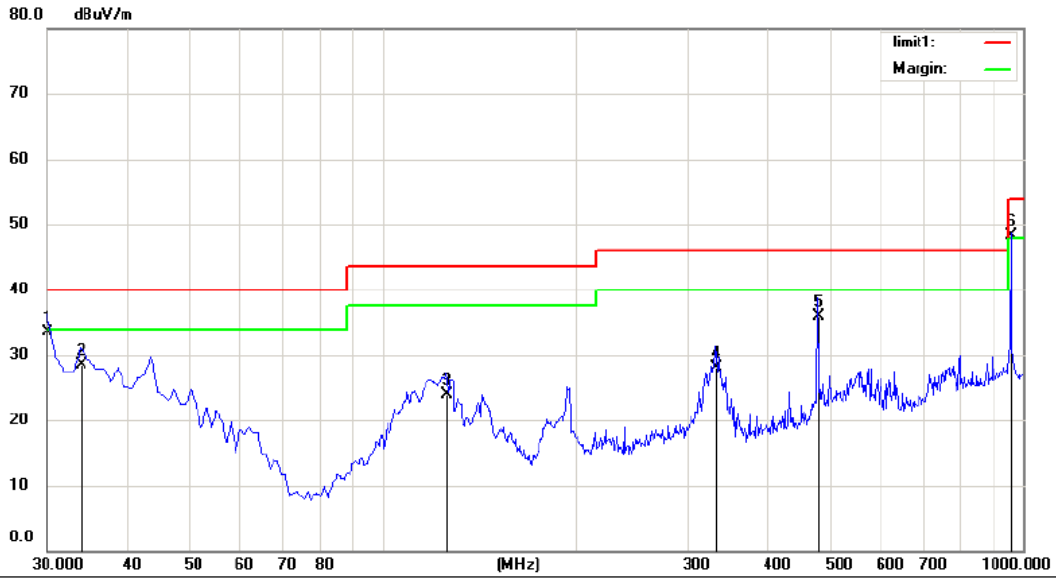

Site Chamber #1 Polarization: **Vertical** Temperature: 26
 Limit: (RE)FCC PART 15 class B 3m Power: PC INPUT Humidity: 55 %
 Mode: TX2462
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		30.0000	48.60	-15.15	33.45	40.00	-6.55			QP
2		33.8800	42.80	-14.31	28.49	40.00	-11.51			QP
3		126.0300	40.20	-16.39	23.81	43.50	-19.69			QP
4		331.6700	41.30	-13.22	28.08	46.00	-17.92			QP
5		480.0800	46.50	-10.54	35.96	46.00	-10.04			QP
6	*	960.2300	50.90	-2.65	48.25	54.00	-5.75			QP

*:Maximum data x:Over limit !:over margin

Operator: Snake

Above 1000MHz:

Operation Mode: 802.11g Lowest Test Date : November 30, 2014

Freq. (MHz)	Ant.Pol H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4824	V	65.33	45.13	74	54	-8.67	-8.87
7236	V	64.05	44.23	74	54	-9.95	-9.77
9648	V	63.95	43.95	74	54	-10.05	-10.05
12060	V	62.71	42.85	74	54	-11.29	-11.15
14472	V	61.13	41.66	74	54	-12.87	-12.34
16884	V	60.85	40.85	74	54	-13.15	-13.15
4824	H	64.33	46.33	74	54	-9.67	-7.67
7236	H	63.95	45.18	74	54	-10.05	-8.82
9648	H	62.19	44.03	74	54	-11.81	-9.97
12060	H	61.04	43.95	74	54	-12.96	-10.05
14472	H	60.55	42.18	74	54	-13.45	-11.82
16884	H	59.72	41.22	74	54	-14.28	-12.78

Operation Mode: 802.11g Middle Test Date : November 30, 2014

Freq. (MHz)	Ant.Pol H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4874	V	64.33	44.22	74	54	-9.67	-9.78
7311	V	63.59	43.69	74	54	-10.41	-10.31
9688	V	62.18	42.18	74	54	-11.82	-11.82
12185	V	61.25	41.08	74	54	-12.75	-12.92
14622	V	60.34	40.28	74	54	-13.66	-13.72
17059	V	58.49	39.55	74	54	-15.51	-14.45
4874	H	65.39	46.39	74	54	-8.61	-7.61
7311	H	64.22	45.28	74	54	-9.78	-8.72
9688	H	63.71	44.15	74	54	-10.29	-9.85
12185	H	62.08	43.23	74	54	-11.92	-10.77
14622	H	61.75	42.18	74	54	-12.25	-11.82
17059	H	60.53	40.85	74	54	-13.47	-13.15

Operation Mode: 802.11g Highest

Test Date : November 30, 2014

Freq. (MHz)	Ant.Pol H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4924	V	68.33	45.22	74	54	-5.67	-8.78
7386	V	67.39	44.13	74	54	-6.61	-9.87
9848	V	66.25	43.95	74	54	-7.75	-10.05
12310	V	65.72	42.08	74	54	-8.28	-11.92
14772	V	64.13	41.72	74	54	-9.87	-12.28
17234	V	63.89	40.59	74	54	-10.11	-13.41
4924	H	67.25	46.38	74	54	-6.75	-7.62
7386	H	66.33	45.18	74	54	-7.67	-8.82
9848	H	65.72	44.05	74	54	-8.28	-9.95
12310	H	64.08	43.95	74	54	-9.92	-10.05
14772	H	63.59	42.07	74	54	-10.41	-11.93
17234	H	61.07	41.59	74	54	-12.93	-12.41

All emissions not reported were more than 20dB below the specified limit or in the noise floor.

- Note:**
- (1) All Readings are Peak Value and AV.
 - (2) Emission Level= Reading Level+Probe Factor +Cable Loss.
 - (3) Data of measurement within this frequency range shown " - " in the table above means the reading of emissions are attenuated more than 20Db below the permissible limits or the field strength is too small to be measured.


7. 6dB Bandwidth Test

7.1 Measurement Procedure

The EUT was operating in IEEE 802.11b, 802.11g, 802.11n(H20), 802.11n(H40) mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

1. Set resolution bandwidth (RBW) = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequency) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.2 Test SET-UP (Block Diagram of Configuration)



7.3 Measurement Equipment Used

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Agilent	FSV30	1321.3008K	05/16/2014	05/15/2015


7.4 Measurement Results



6 Bandwidth Test Data Chart:

Refer to attached data chart.

Spectrum Detector: PK Test Date : November 30, 2014
 Test By: Andy Temperature : 28°C
 Test Mode: 802.11b Humidity : 60%


Channel frequency (MHz)	Measurement level (KHz)	Required Limit (KHz)	Result
2412	10030	>500	Pass
2437	10050	>500	
2462	10050	>500	


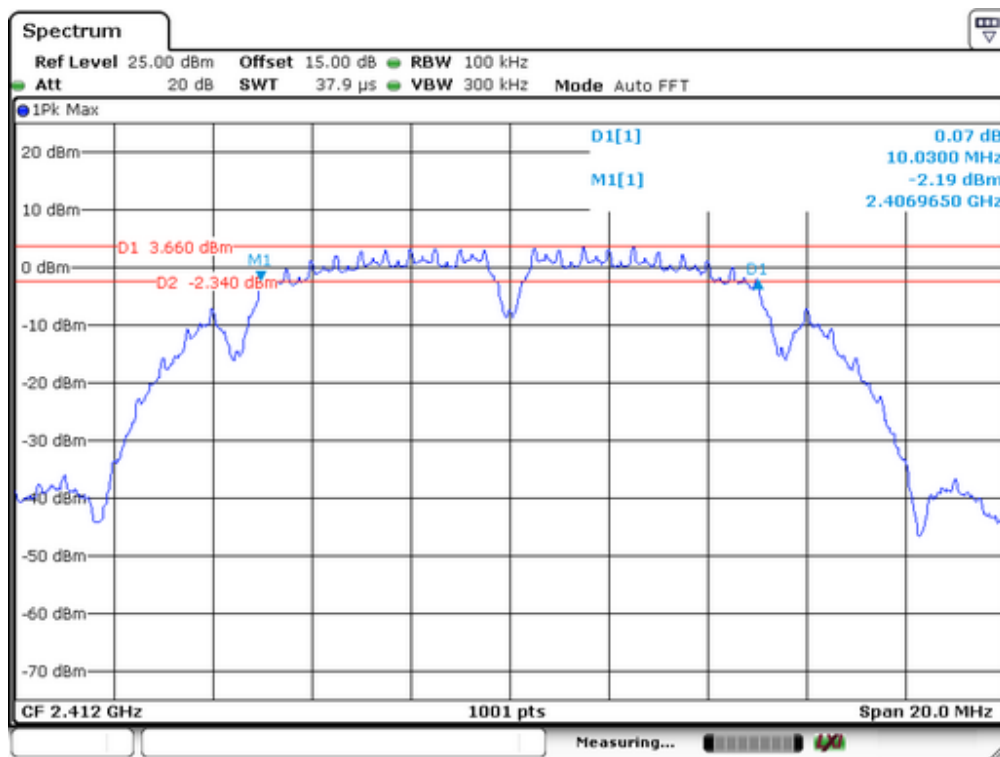


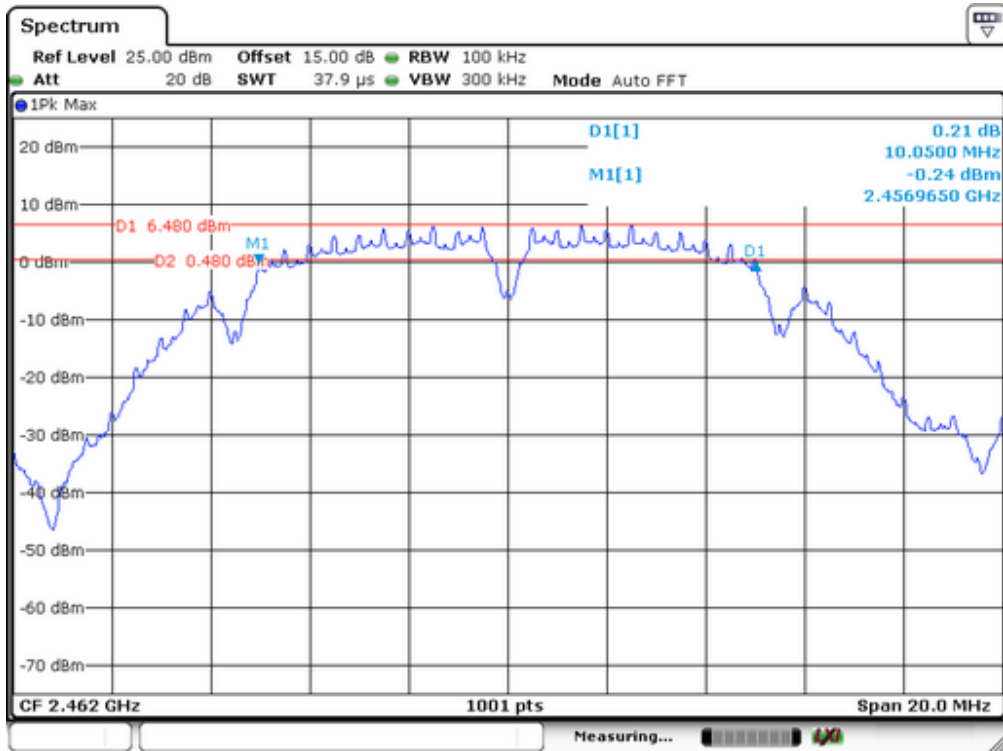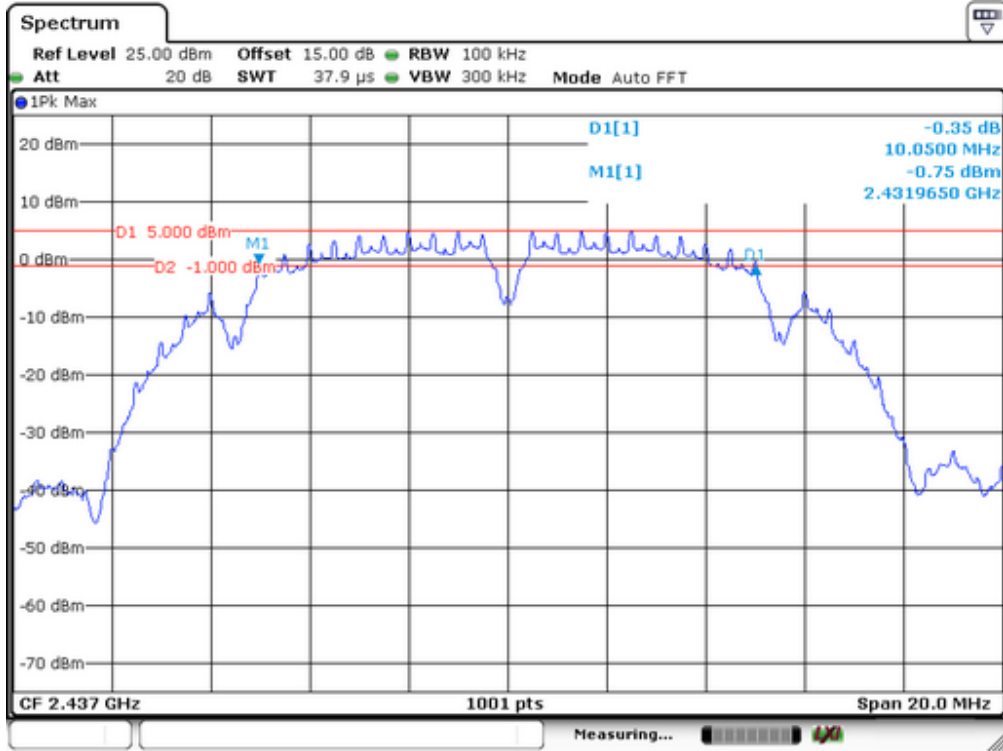

Spectrum Detector: PK Test Date : November 30, 2014
 Test By: Andy Temperature : 28°C
 Test Mode: 802.11g Humidity : 60%


Channel frequency (MHz)	Measurement level (KHz)	Required Limit (KHz)	Result
2412	16344	>500	Pass
2437	16324	>500	
2462	16324	>500	


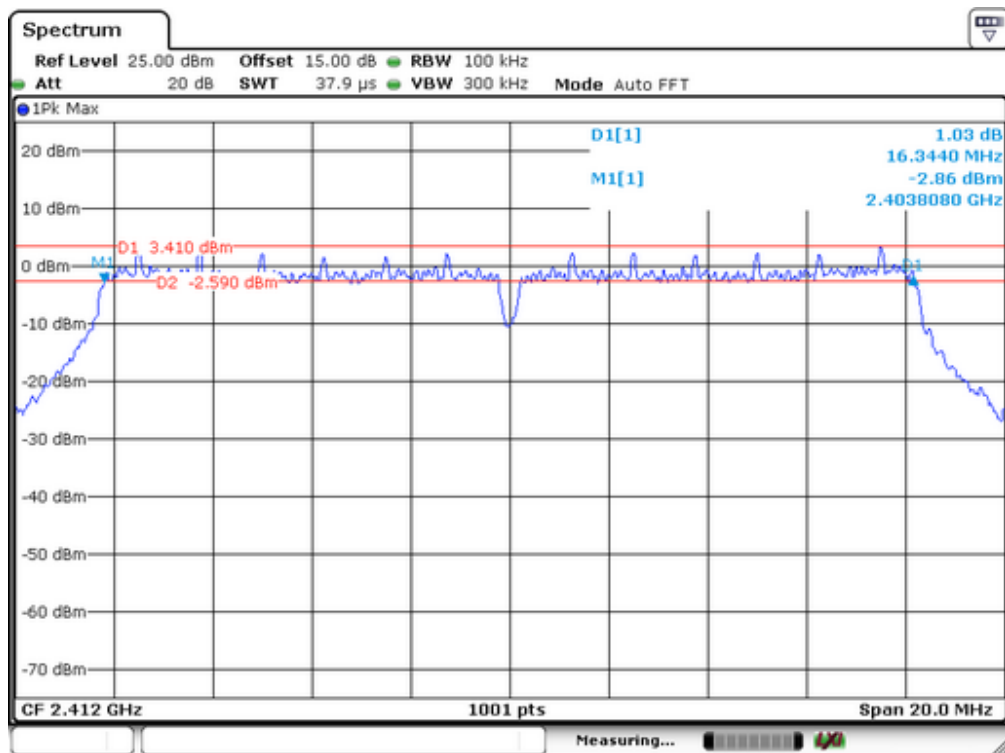


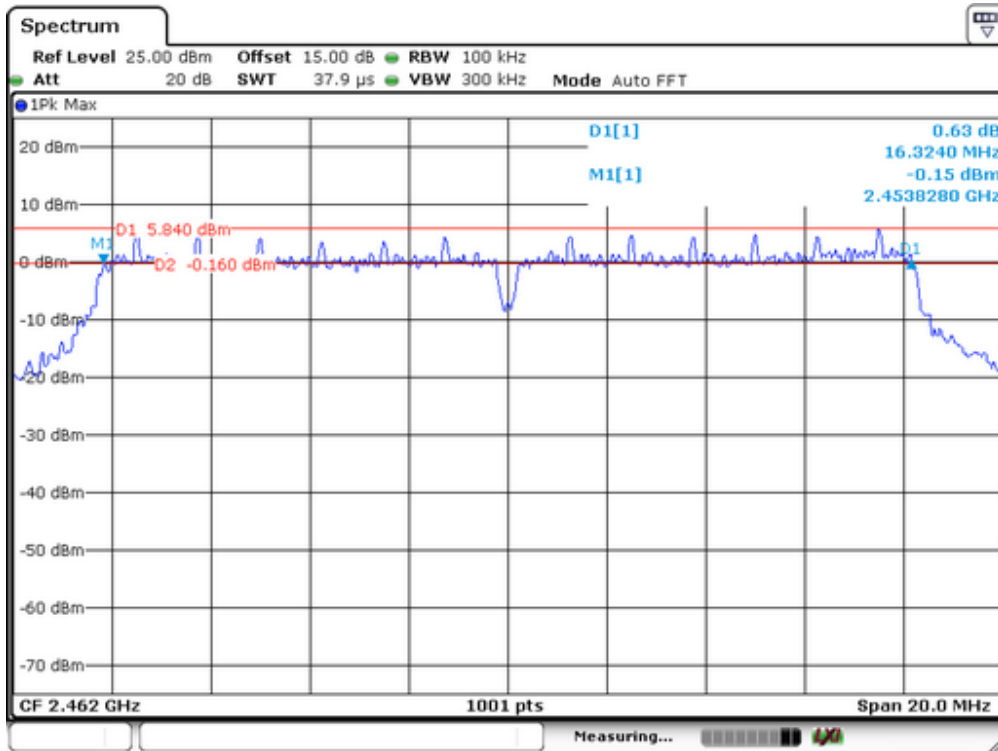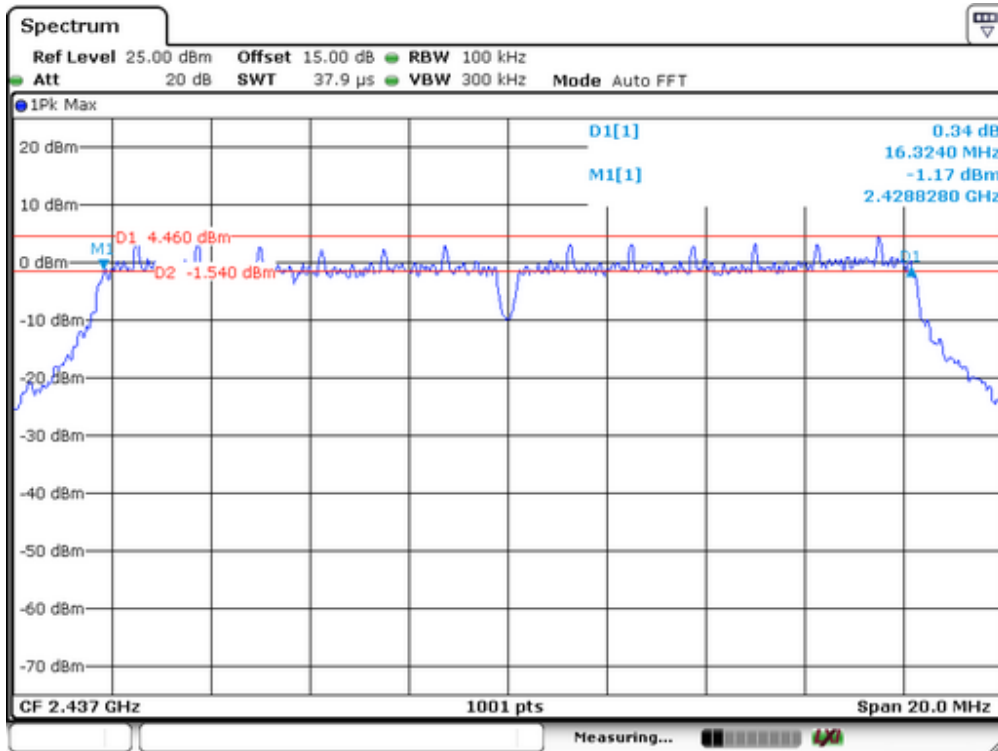

Spectrum Detector: PK Test Date : November 30, 2014
 Test By: Andy Temperature : 28°C
 Test Mode: 802.11n(H20) Humidity : 60%


Channel frequency (MHz)	Measurement level (KHz)	Required Limit (KHz)	Result
2412	17642	>500	Pass
2437	17602	>500	
2462	17622	>500	


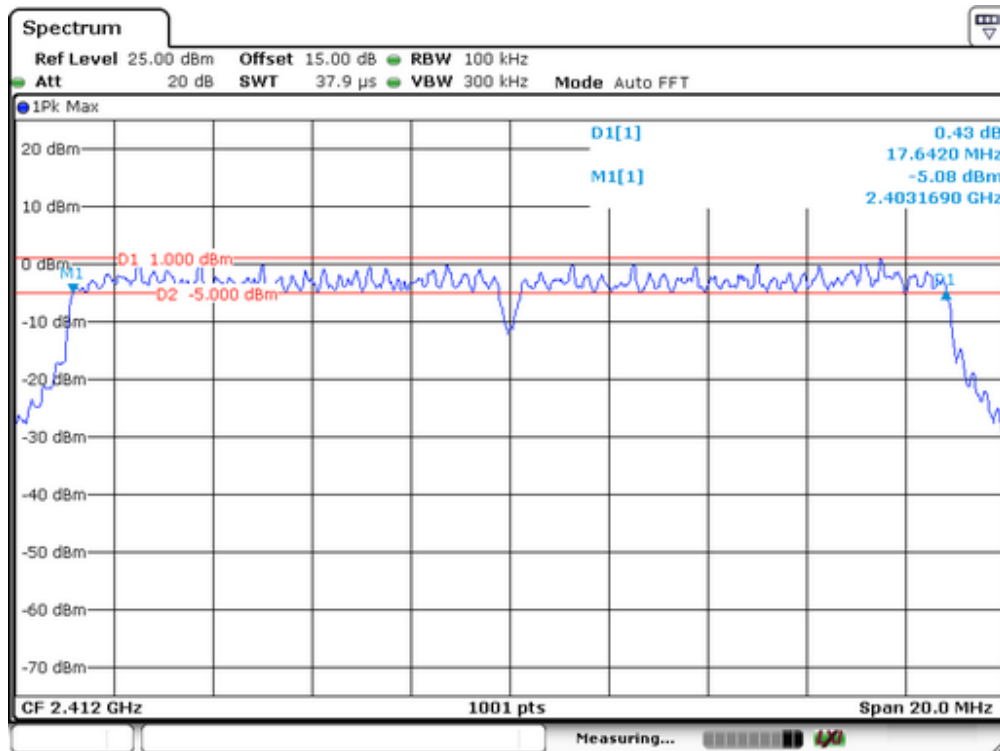


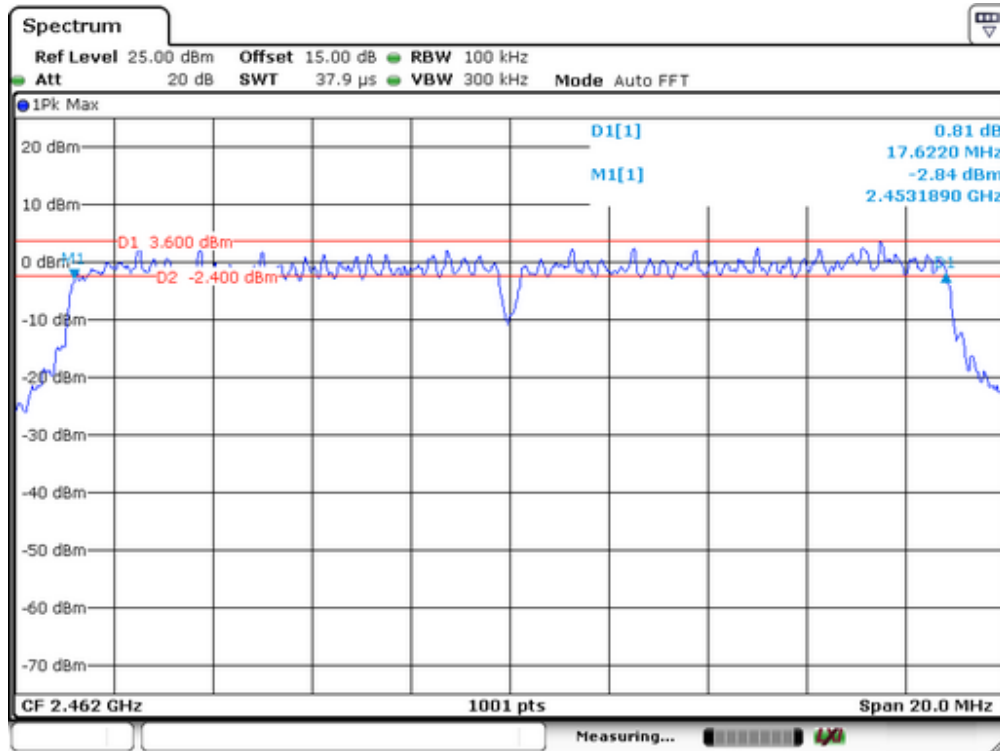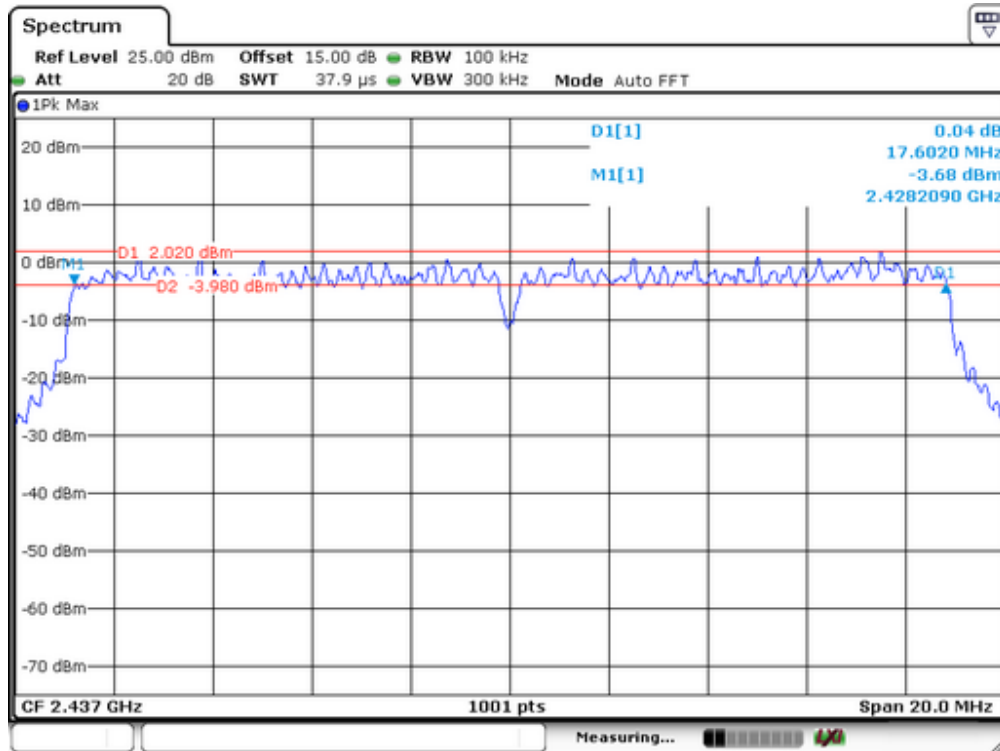

Spectrum Detector: PK Test Date : November 30, 2014
 Test By: Andy Temperature : 28°C
 Test Mode: 802.11n(H40) Humidity : 60%

Channel frequency (MHz)	Measurement level (KHz)	Required Limit (KHz)	Result
2412	36444	>500	Pass
2437	36404	>500	
2452	36324	>500	

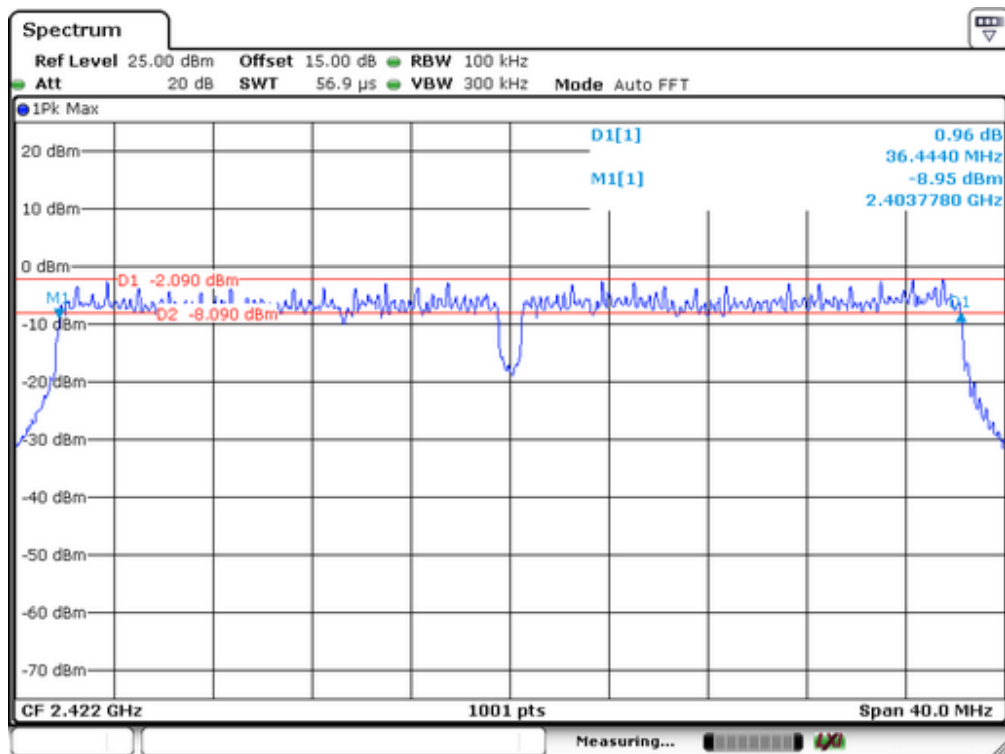

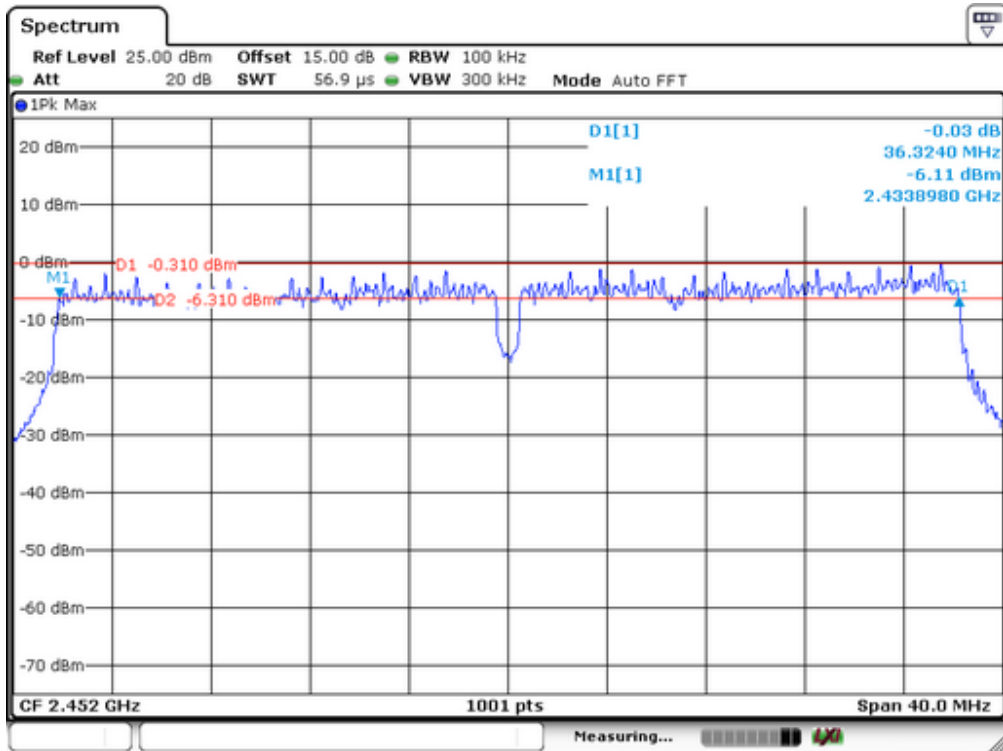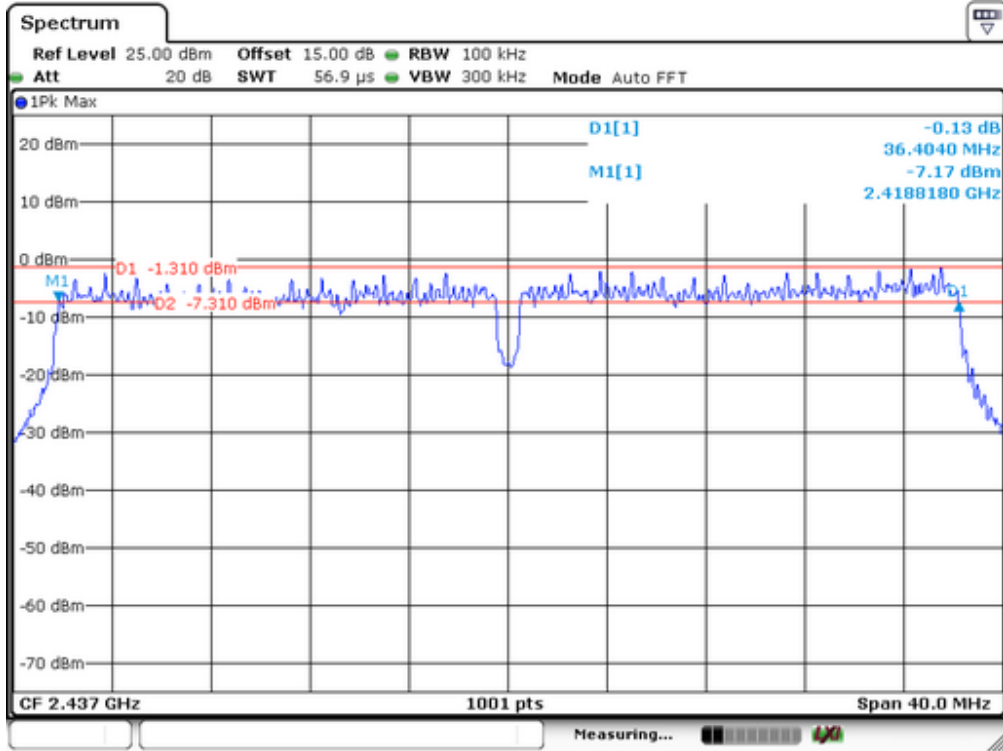

8. Maximum Peak Output Power Test

8.1 Measurement Procedure

The maximum peak conducted output power can be measured using a broadband peak RF power meter. The power meter must have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast, average-responding diode type sensor.

- The Transmitter output (antenna port) was connected to the power meter.
- Turn on the EUT and power meter and then record the peak power value.
- Repeat above procedures on all channels needed to be tested.

8.2 Test SET-UP (Block Diagram of Configuration)



8.3 Measurement Equipment Used

EQUIPMENT TYPE	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Power meter	ML2495A	0824006	05/16/2014	05/15/2015
Power sensor	MA2411B	0738172	05/16/2014	05/15/2015

8.4 Peak Power output limit

The maximum peak power shall be less 1Watt.

8.5 Measurement Results

Spectrum Detector:	PK	Test Date :	November 30, 2014
Test By:	Jack	Temperature :	28°C
Test Result:	PASS	Humidity :	60%

Test Channel	Max Output Power (dBm)				Limit(dBm)	Result
	802.11b	802.11g	802.11n(H20)	802.11n(H40)		
Lowest	18.35	17.02	16.33	15.46	30	Pass
Middle	17.95	15.34	14.72	12.42		
Highest	15.49	14.75	12.02	10.92		

9. Band Edge Test

9.1 Measurement Procedure

For Conducted Test

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. Measure and record the results in the test report.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

For Radiated emission Test

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Repeat above procedures until all frequency measured were complete.

When spectrum scanned above 1GHz setting resolution bandwidth 1MHz, video bandwidth 3MHz.

EMI Test Receiver	Setting
Attenuation	Auto
RB	1MHz
VB	3MHz
Detector	Peak
Trace	Max hold

When spectrum scanned above 1GHz setting resolution bandwidth 1MHz, video bandwidth 10Hz.

EMI Test Receiver	Setting
Attenuation	Auto
RB	1MHz
VB	10Hz
Detector	Peak
Trace	Max hold

9.2 Test SET-UP (Block Diagram of Configuration)

As 6.2 Test set up (B) and (C)


9.3 Measurement Equipment Used

Same as 6.3 Radiated Emission Measurement.


9.4 Measurement Results

1. Conducted Test


Test Mode: 802.11b

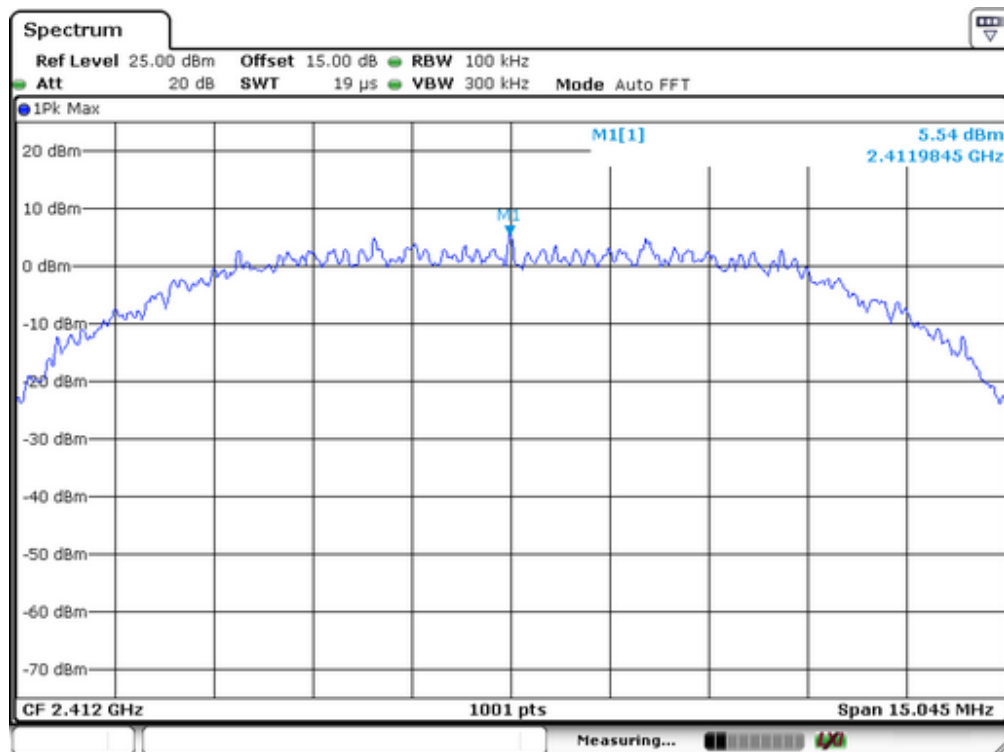

Lowest Channel

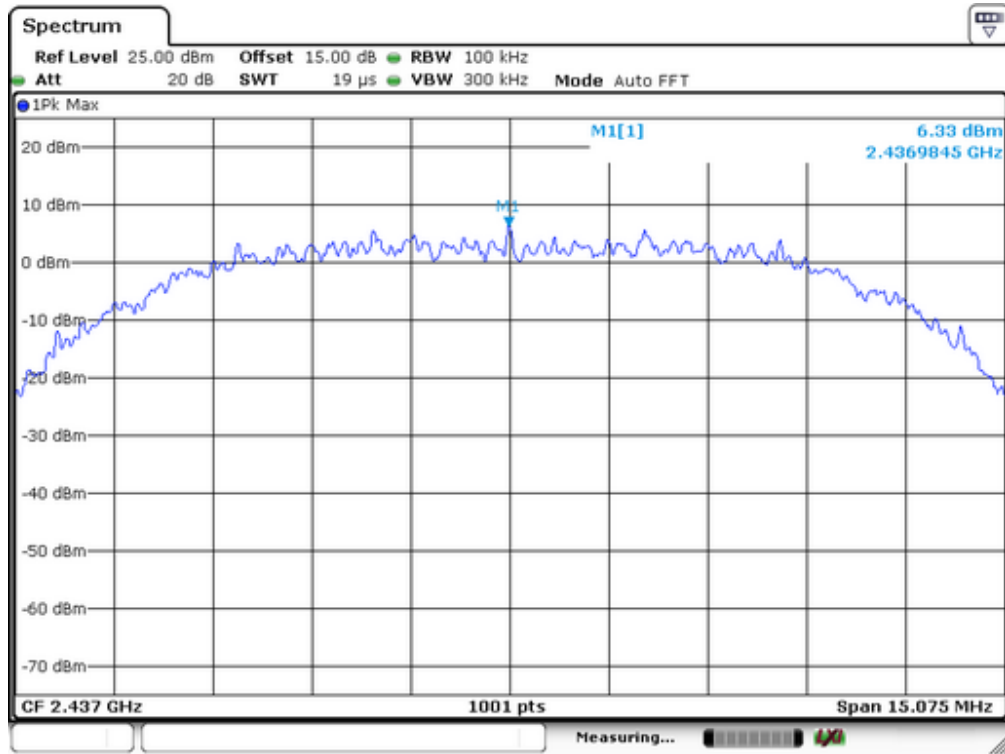


Middle Channel

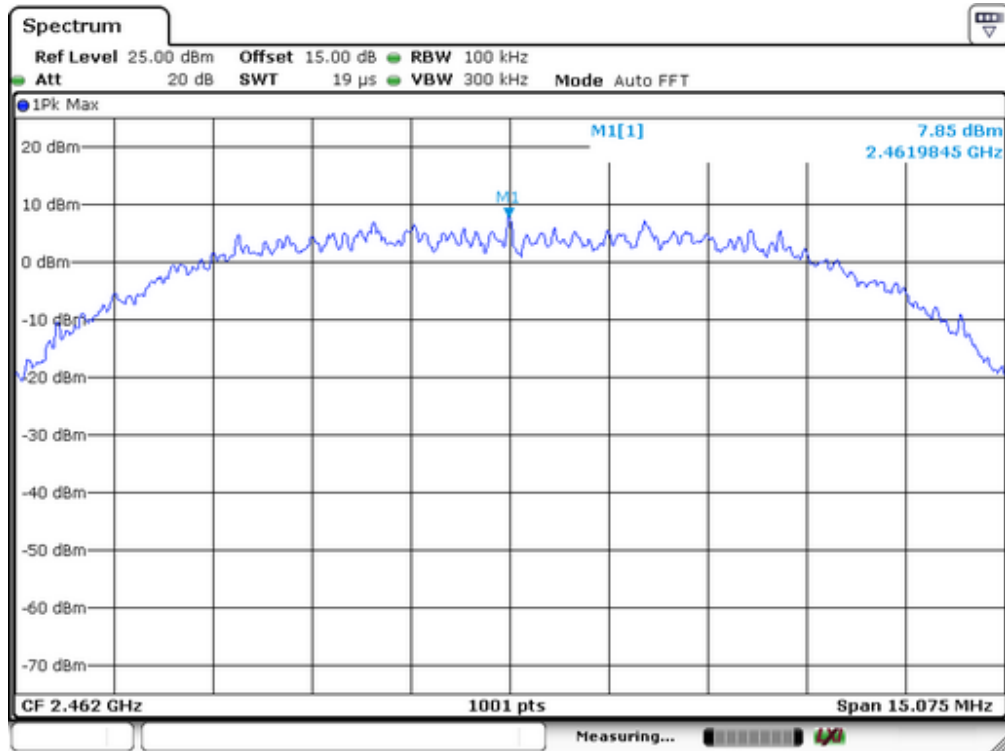


Highest Channel


Test Mode: 802.11g

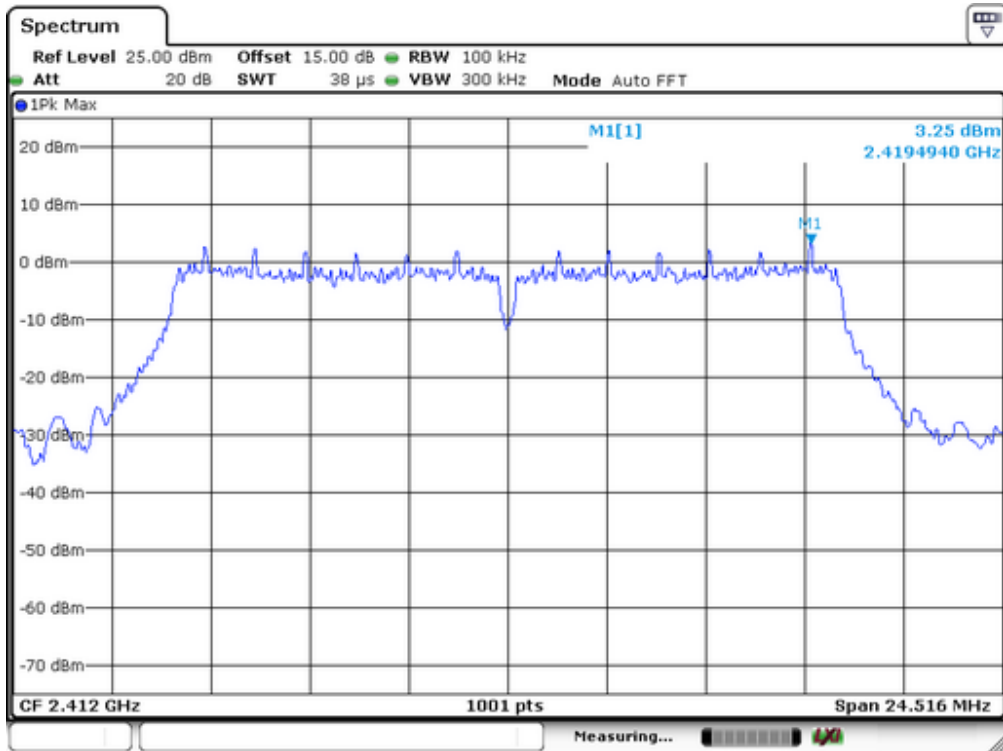

Lowest Channel

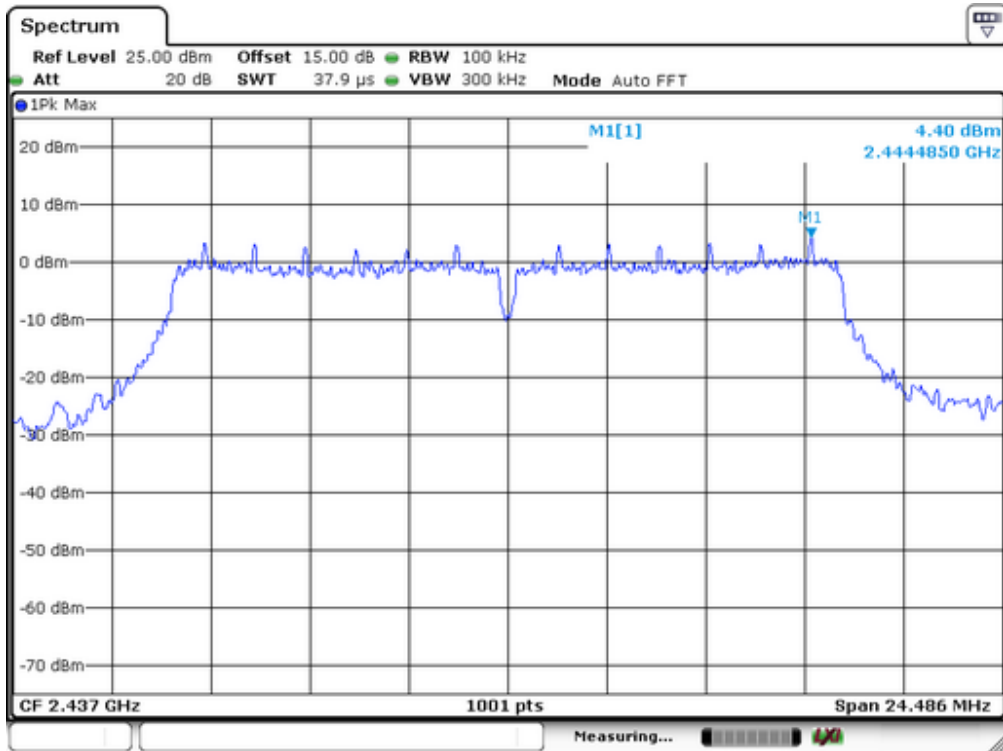


Middle Channel

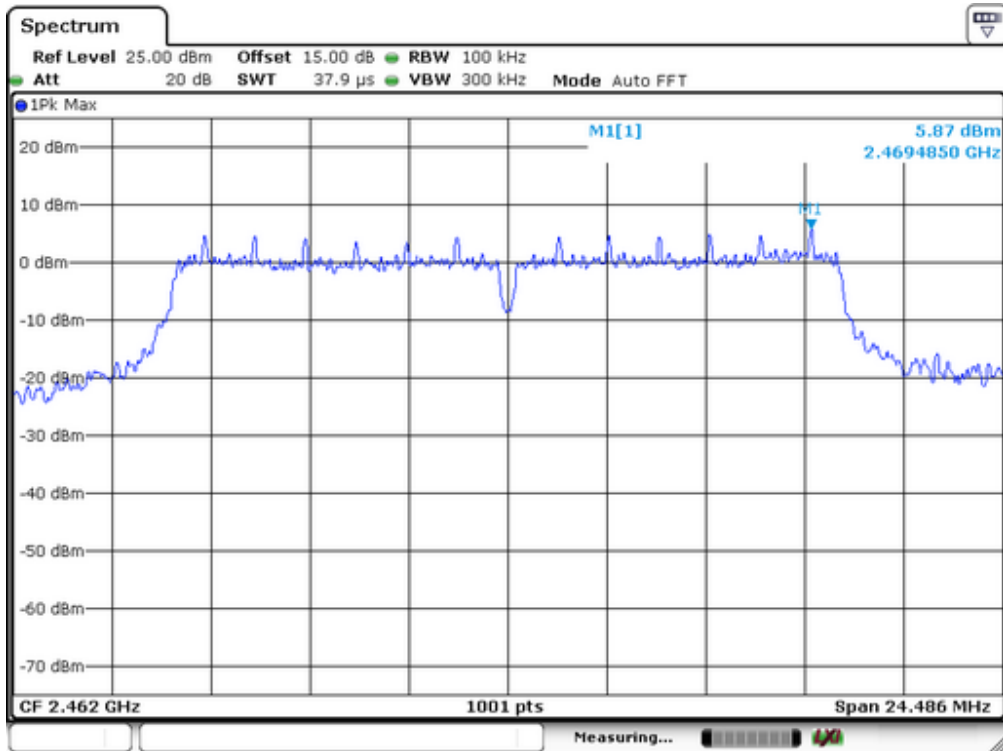


Highest Channel


Test Mode: 802.11n(H20)

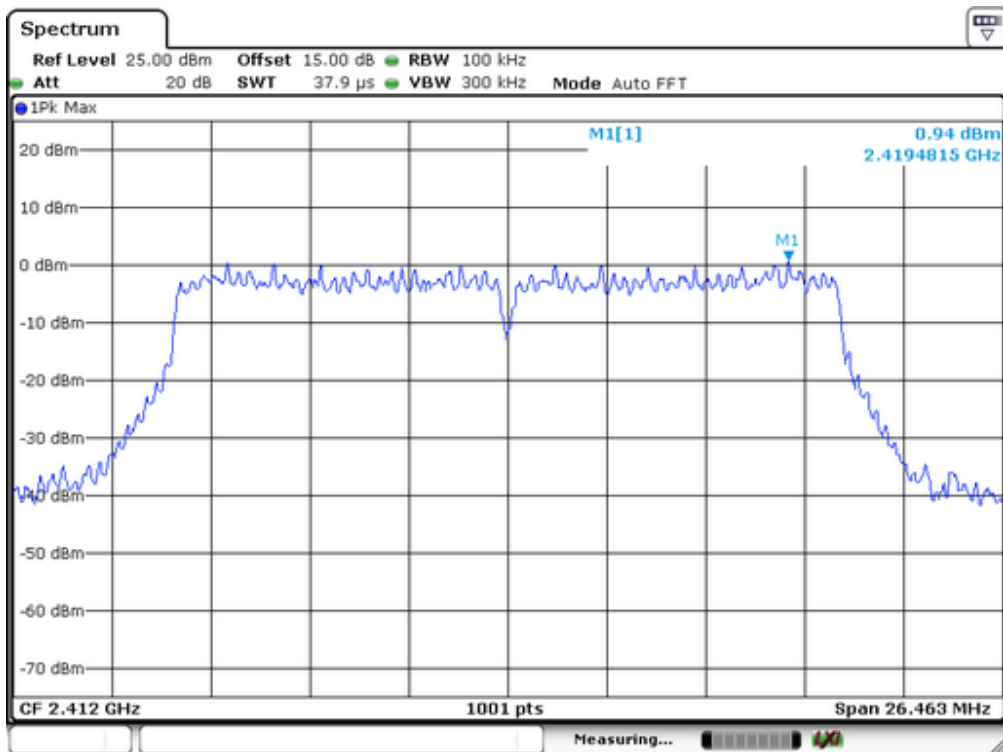

Lowest Channel

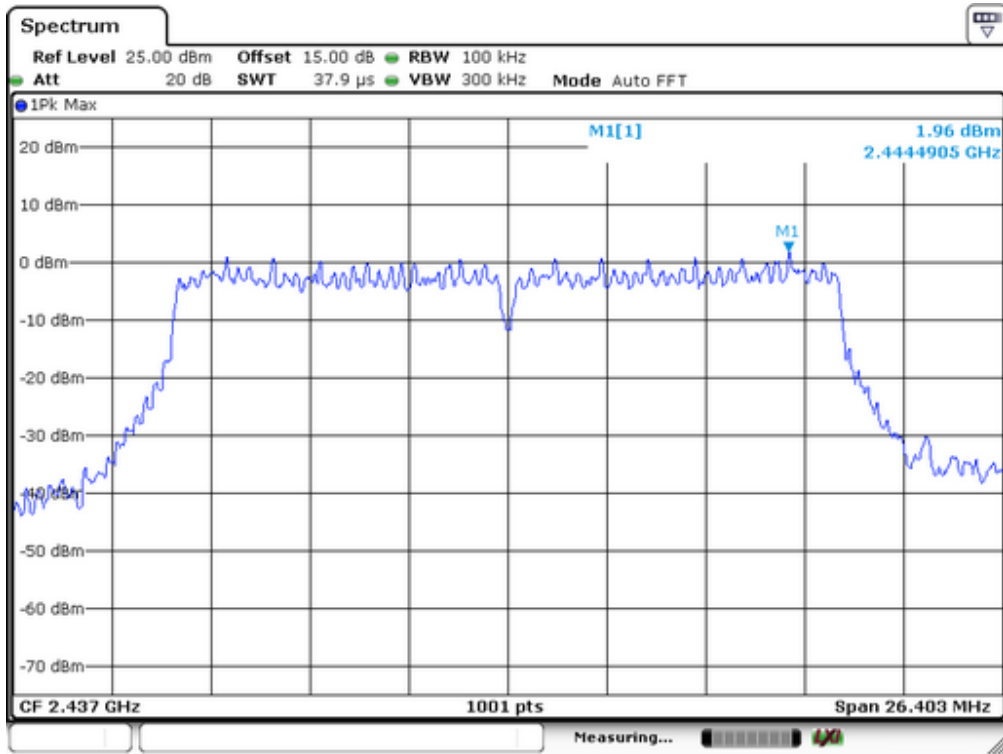


Middle Channel

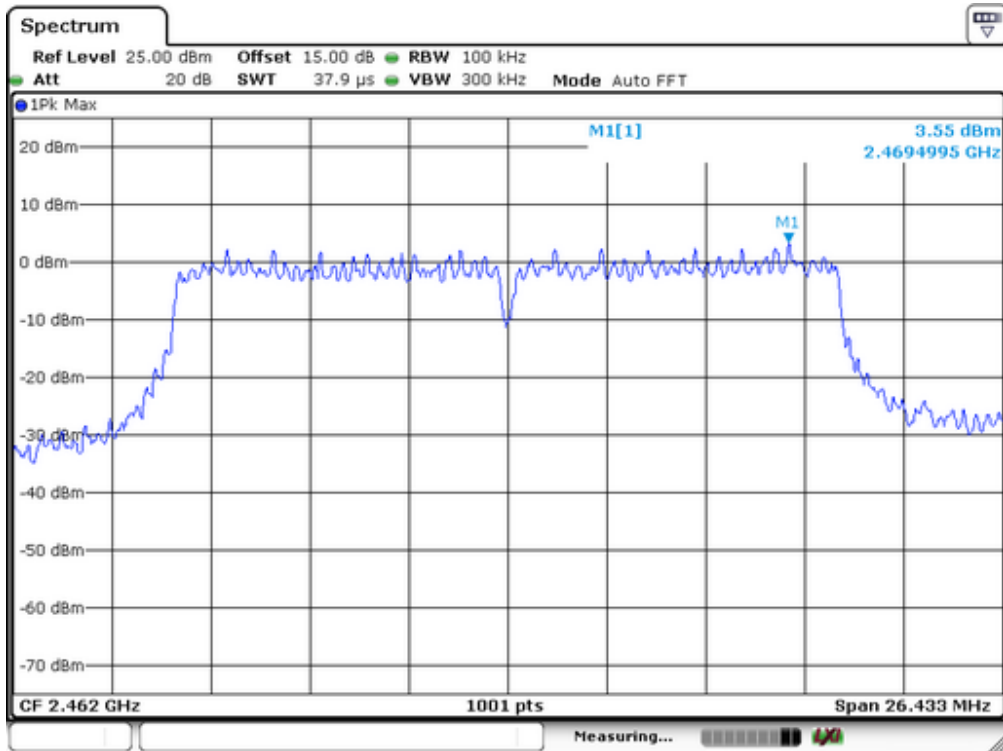


Highest Channel


Test Mode: 802.11n(H40)

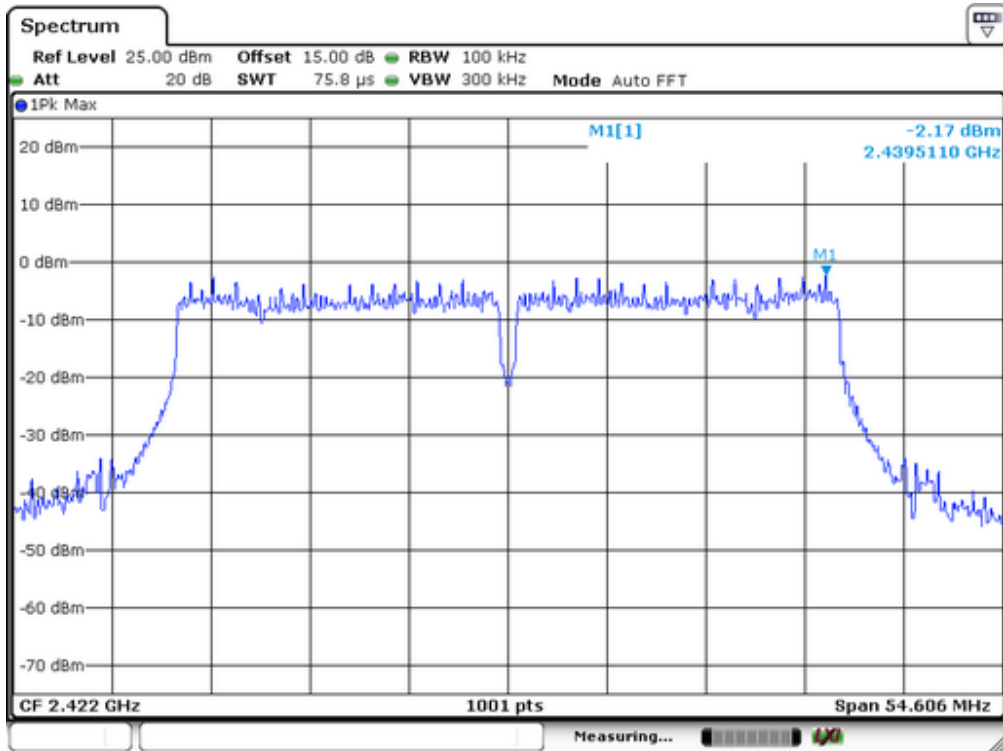

Lowest Channel

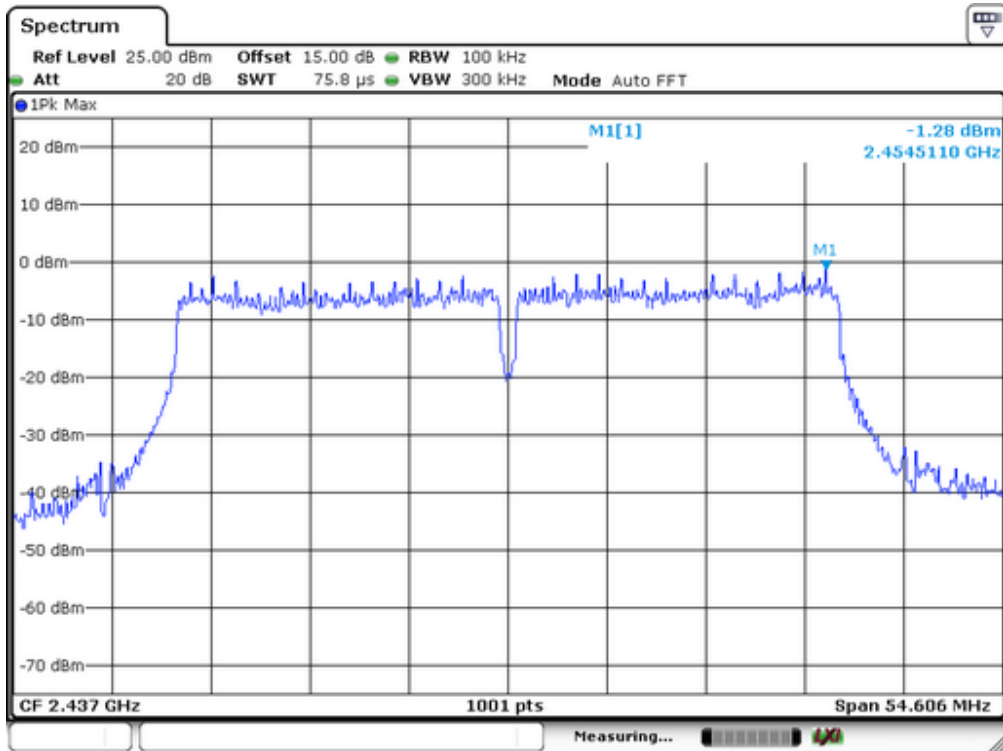


Middle Channel

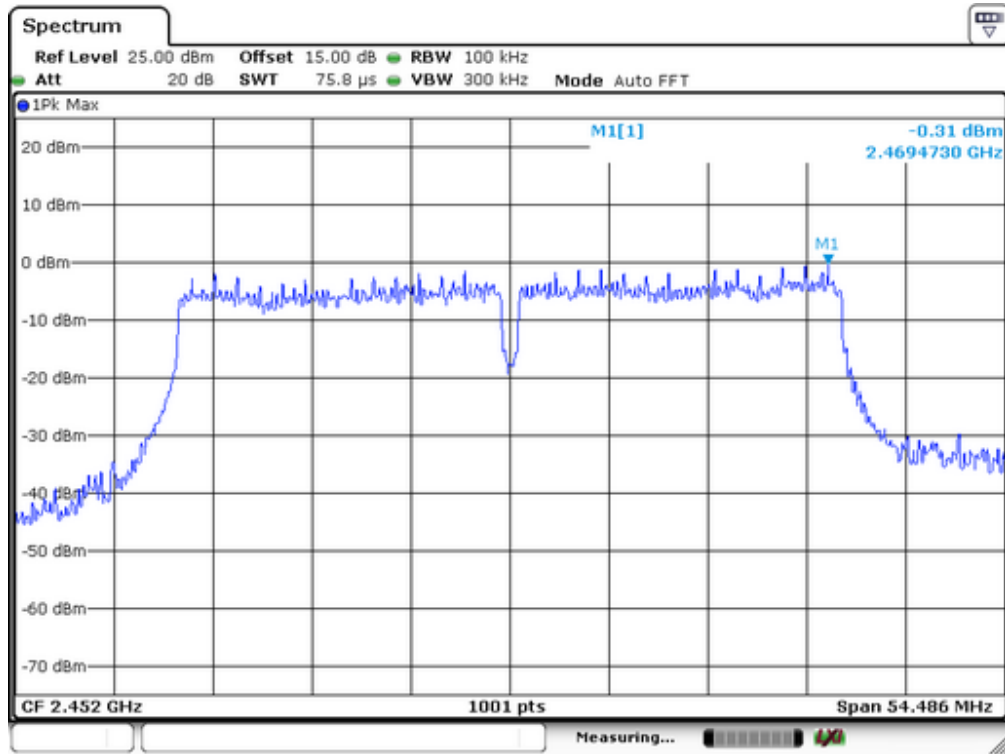


Highest Channel

Test mode: 802.11b

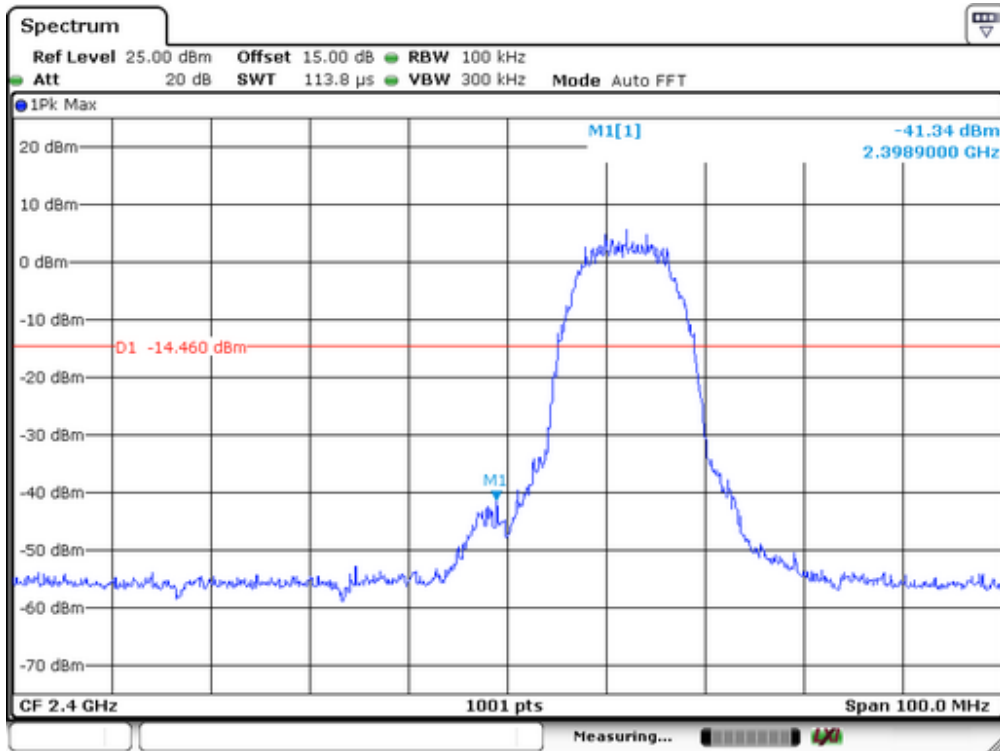


Lowest Channel

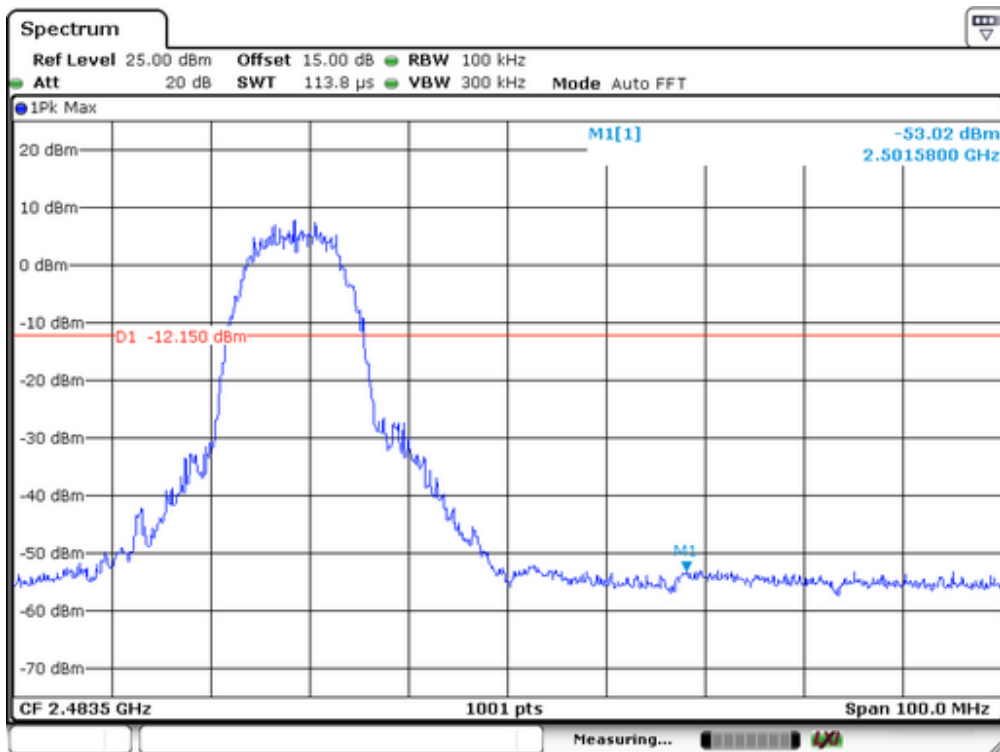


Highest Channel

Test mode: 802.11g

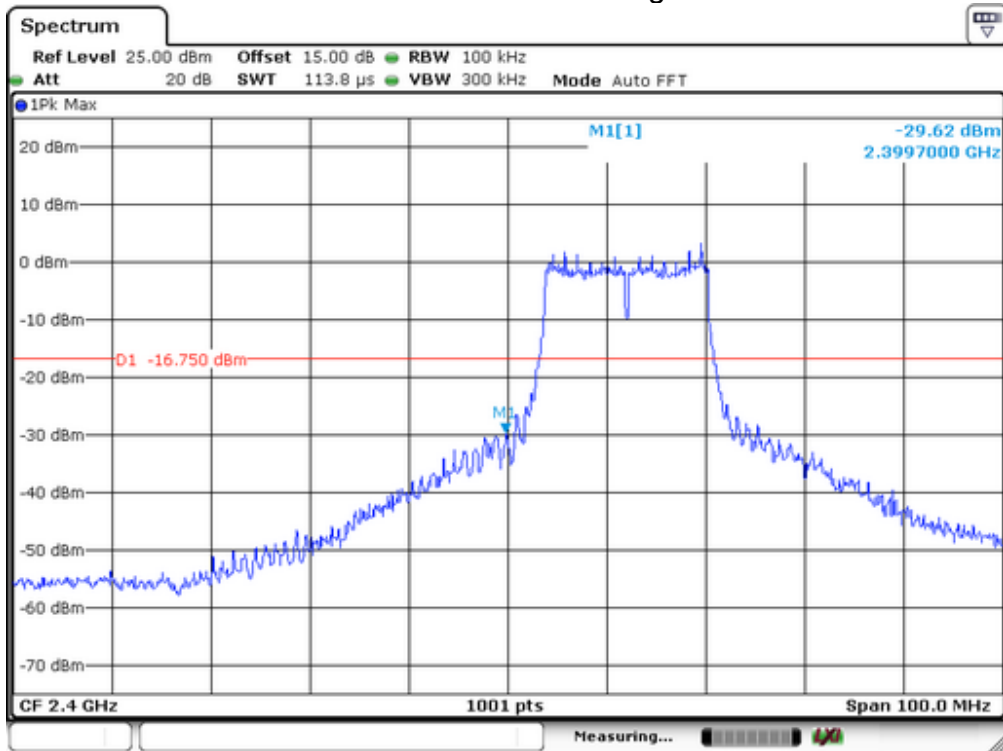


Lowest Channel

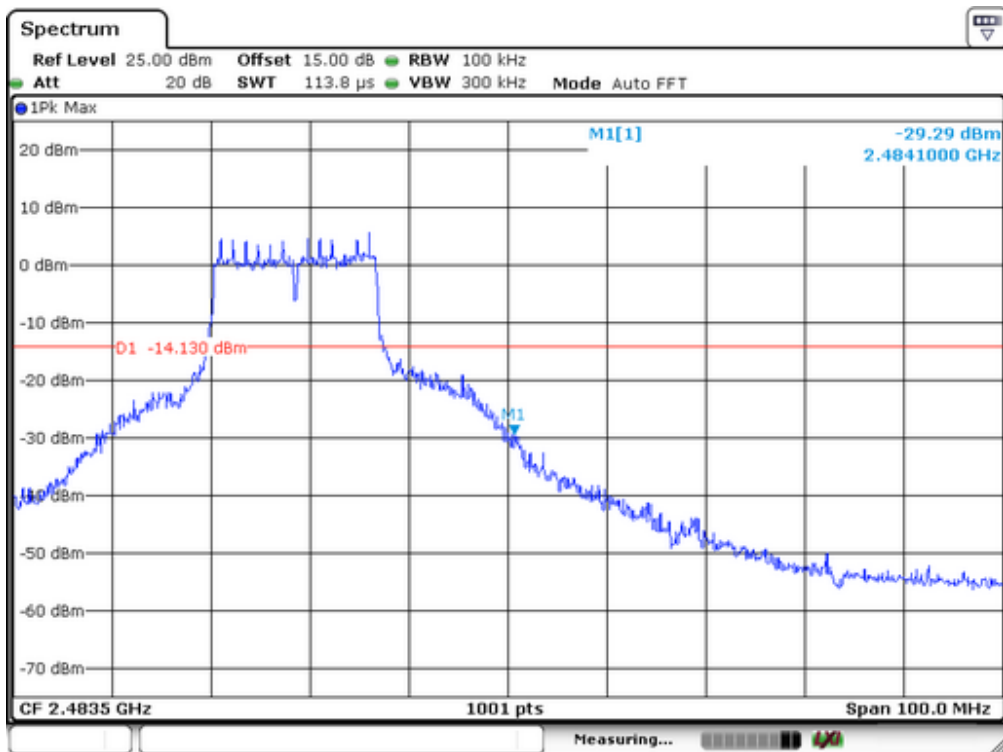


Highest Channel

Test mode: 802.11n(H20)

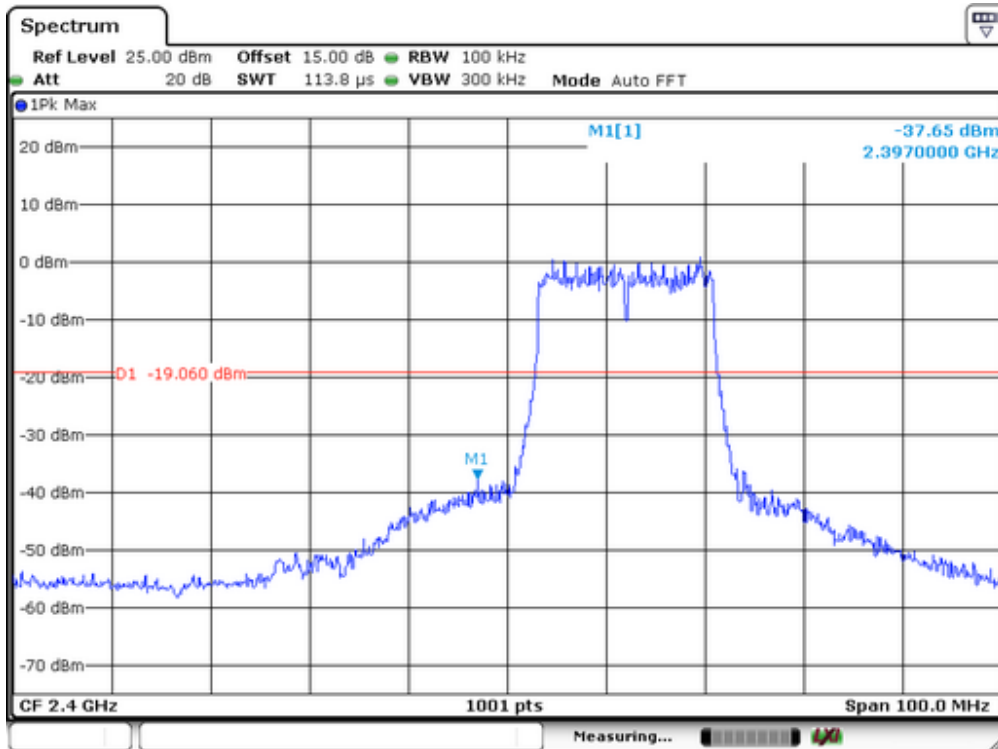


Lowest Channel

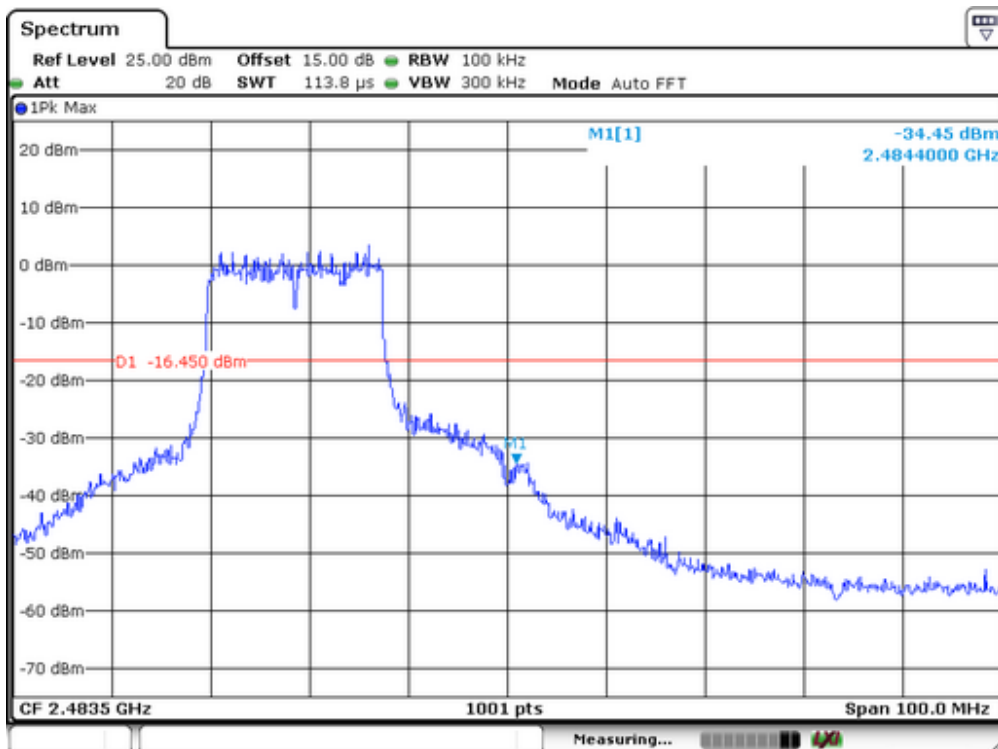


Highest Channel

Test mode: 802.11n(H40)

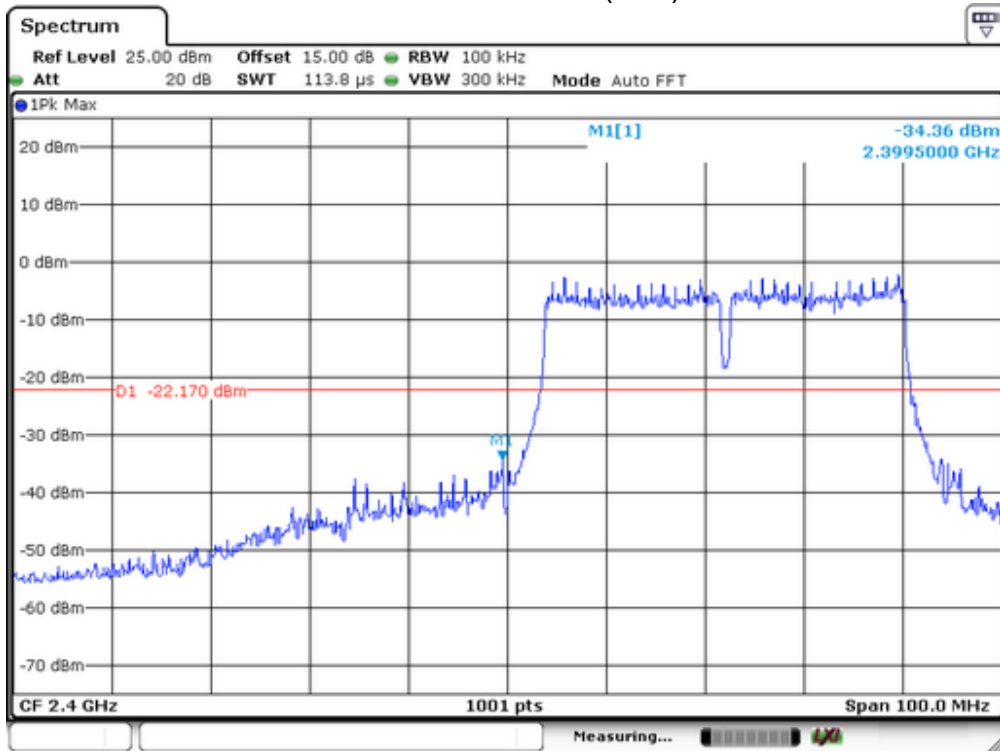

Lowest Channel

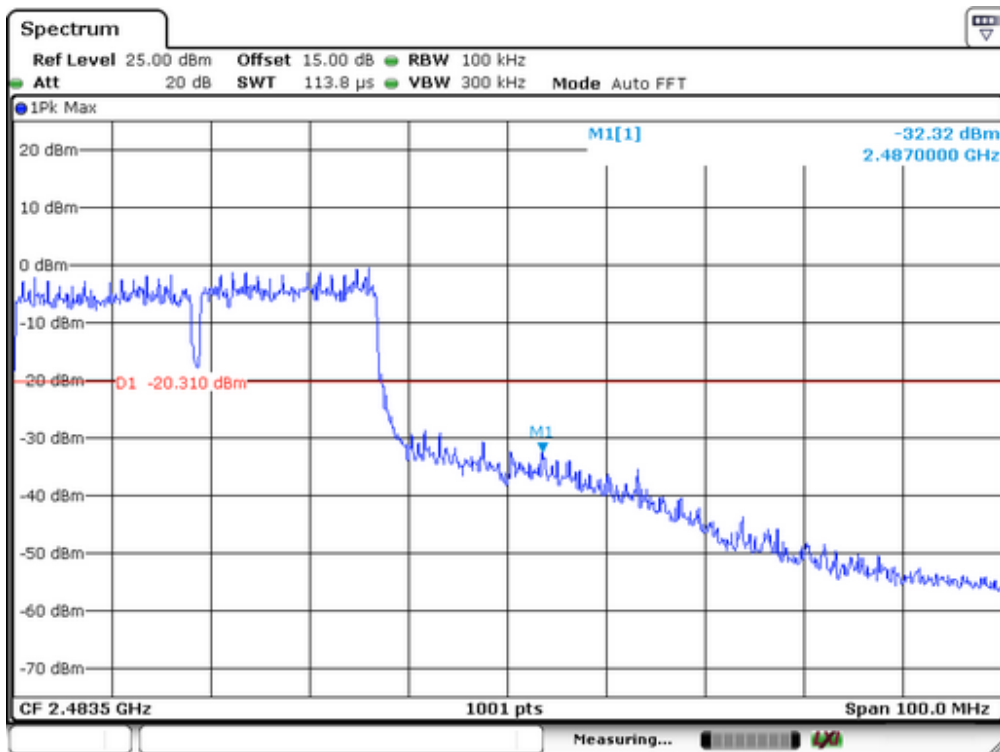

Highest Channel

2. Radiated emission Test

Spectrum Detector: PK/AV Test Date : November 30, 2014
 Test By: Andy Temperature : 28 °C
 Test mode: 802.11b Humidity : 65 %

Frequency (MHz)	Antenna polarization (H/V)	Emission (dBuV/m)		Band edge Limit (dBuV/m)		Margin (dB)	
		PK	AV	PK	AV	PK	AV
<2400	H	66.33	44.08	74.00	54.00	-7.67	-9.92
<2400	V	60.72	40.51	74.00	54.00	-13.28	-13.49
>2483.5	H	64.18	45.36	74.00	54.00	-9.82	-8.64
>2483.5	V	57.95	38.95	74.00	54.00	-16.05	-15.05

Spectrum Detector: PK/AV Test Date : November 30, 2014
 Test By: Andy Temperature : 28 °C
 Test mode: 802.11g Humidity : 65 %

Frequency (MHz)	Antenna polarization (H/V)	Emission (dBuV/m)		Band edge Limit (dBuV/m)		Margin (dB)	
		PK	AV	PK	AV	PK	AV
<2400	H	65.39	43.52	74	54	-8.61	-10.48
<2400	V	61.85	38.76	74	54	-12.15	-15.24
>2483.5	H	64.39	44.95	74	54	-9.61	-9.05
>2483.5	V	59.85	39.08	74	54	-14.15	-14.92

Spectrum Detector: PK/AV Test Date : November 30, 2014
 Test By: Andy Temperature : 28 °C
 Test mode: 802.11n(H20) Humidity : 65 %

Frequency (MHz)	Antenna polarization (H/V)	Emission (dBuV/m)		Band edge Limit (dBuV/m)		Margin (dB)	
		PK	AV	PK	AV	PK	AV
<2400	H	66.33	44.18	74	54	-7.67	-9.82
<2400	V	61.72	38.64	74	54	-12.28	-15.36
>2483.5	H	65.28	43.62	74	54	-8.72	-10.38
>2483.5	V	58.72	37.08	74	54	-15.28	-16.92

Spectrum Detector: PK/AV Test Date : November 30, 2014
 Test By: Andy Temperature : 28 °C
 Test mode: 802.11n(H40) Humidity : 65 %

Frequency (MHz)	Antenna polarization (H/V)	Emission (dBuV/m)		Band edge Limit (dBuV/m)		Margin (dB)	
		PK	AV	PK	AV	PK	AV
<2400	H	64.33	43.18	74	54	-9.67	-10.82
<2400	V	58.26	37.59	74	54	-15.74	-16.41
>2483.5	H	63.17	46.28	74	54	-10.83	-7.72
>2483.5	V	57.42	39.54	74	54	-16.58	-14.46

10. Power Density

10.1 Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Agilent	FSV30	1321.3008K	05/16/2014	05/15/2015

10.2 Measuring Instruments and Setting


The following table is the setting of spectrum analyzer.

Spectrum analyzer	Setting
Attenuation	Auto
Span Frequency	Set the span to 1.5 times the DTS bandwidth.
RB	100KHz
VB	300KHz
Detector	Peak
Trace	Max hold
Sweep Time	Automatic

10.3 Test Procedures

- The transmitter output (antenna port) was connected to the spectrum analyzer.
- Set analyzer center frequency to DTS channel center frequency.
- Set the analyzer span to a minimum of 1.5 times the DTS bandwidth.
- Set the RBW=100KHz. Set the VBW=300KHz
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level.

10.4 Block Diagram of Test Setup




10.5 Limit



The transmitted power density averaged over any 1 second interval shall not be greater +8dBm in any 3 kHz bandwidth.

10.6 Test Result

Spectrum Detector: PK Test Date : November 30, 2014
 Test By: Andy Temperature : 28°C
 Test Mode: 802.11b Humidity : 60%


Channel frequency (MHz)	Measurement level (dBm)	Limit(dBm)	Result
2412	-8.97	8	Pass
2437	-8.61		
2462	-7.10		


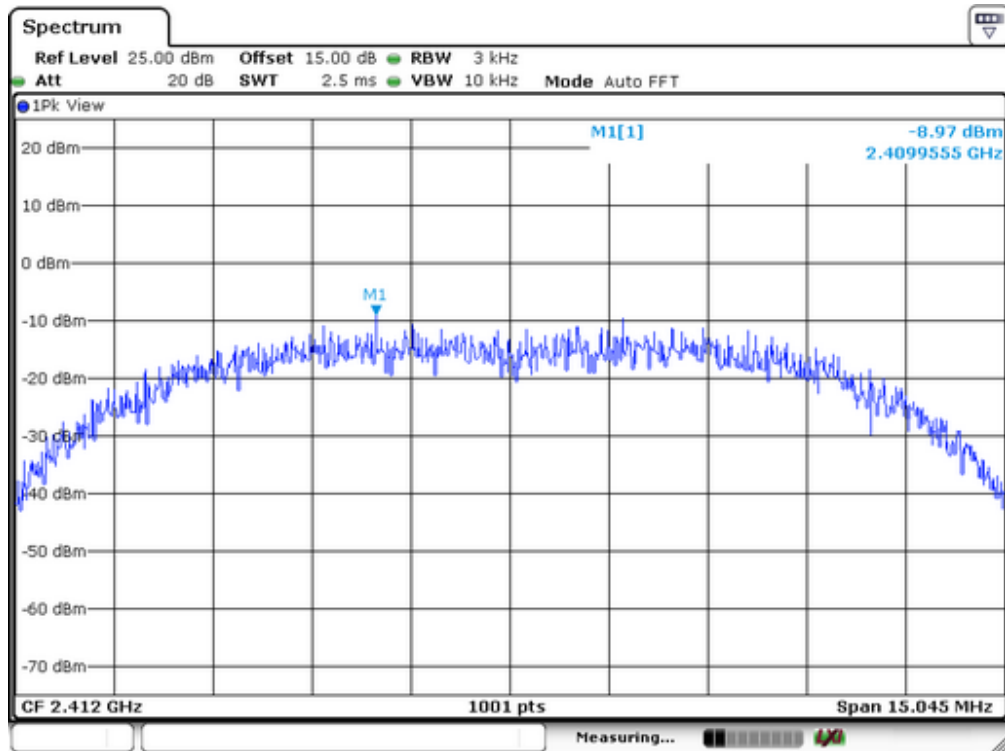


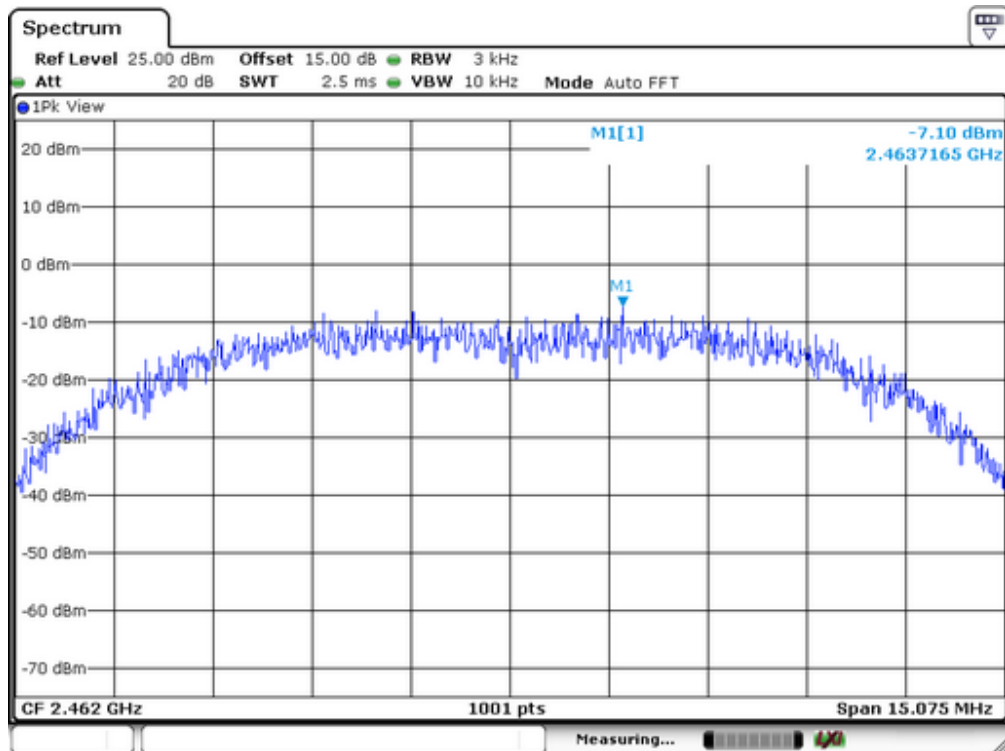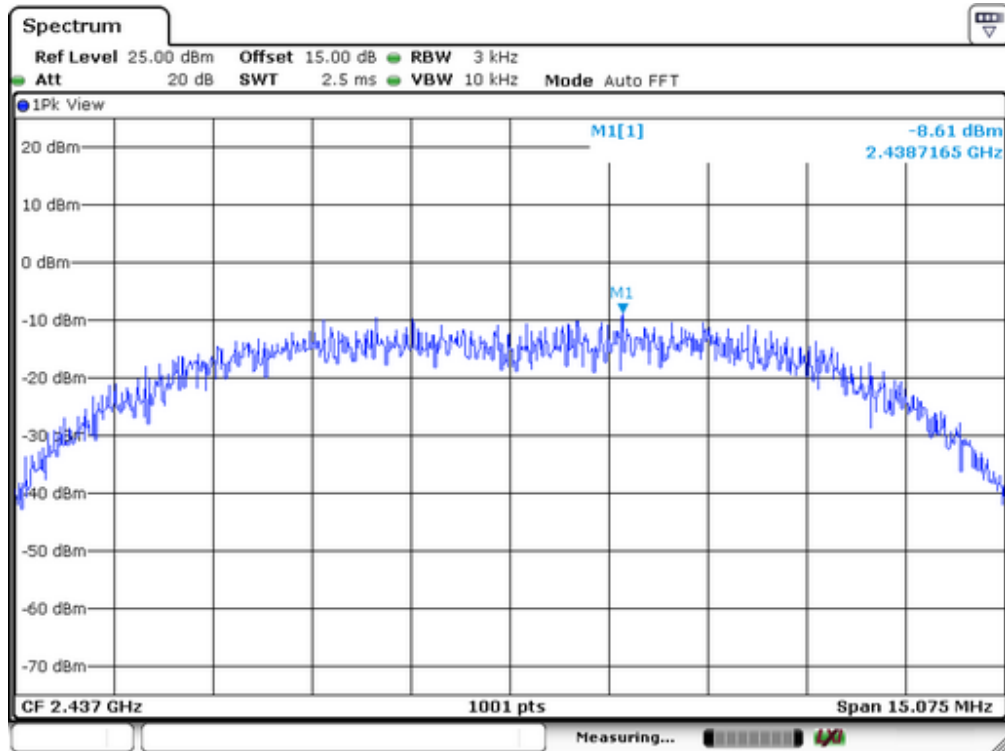

Spectrum Detector: PK Test Date : November 30, 2014
 Test By: Andy Temperature : 28°C
 Test Mode: 802.11g Humidity : 60%


Channel frequency (MHz)	Measurement level (dBm)	Limit(dBm)	Result
2412	-11.26	8	Pass
2437	-9.97		
2462	-8.62		


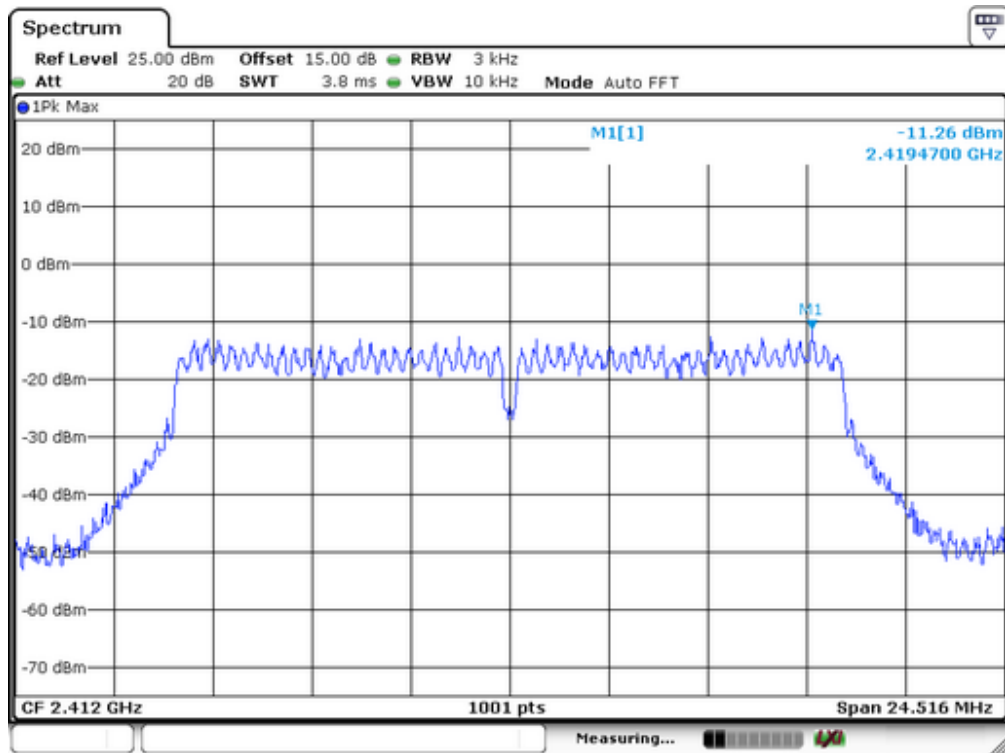


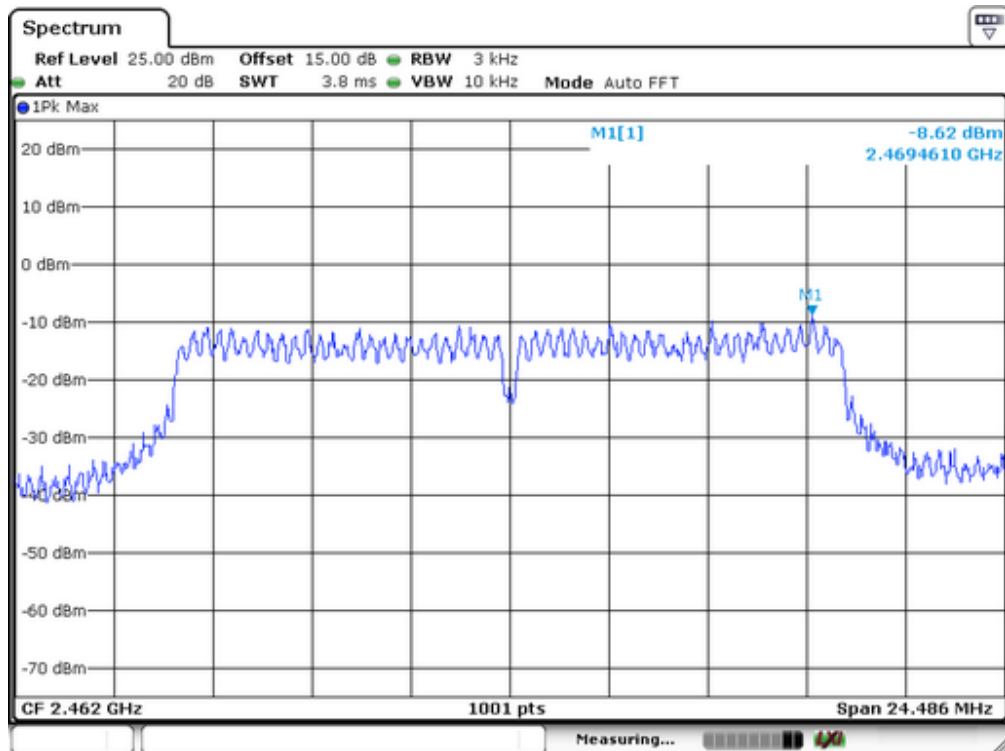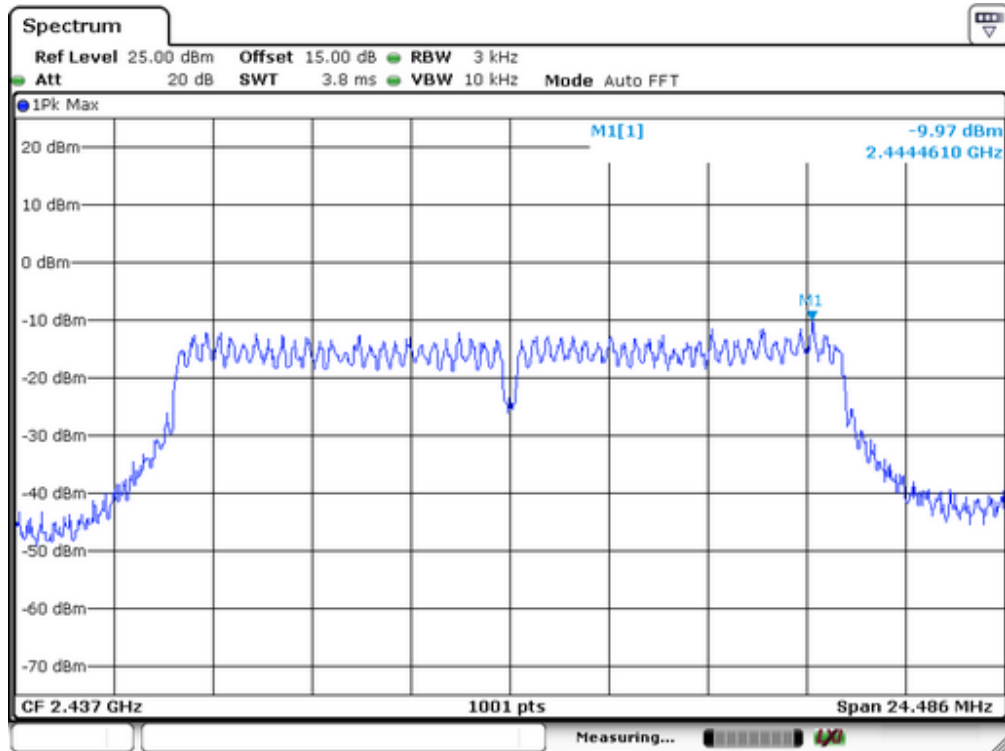

Spectrum Detector: PK Test Date : November 30, 2014
 Test By: Andy Temperature : 28°C
 Test Mode: 802.11n(H20) Humidity : 60%


Channel frequency (MHz)	Measurement level (dBm)	Limit(dBm)	Result
2412	-14.61	8	Pass
2437	-14.11		
2462	-12.58		


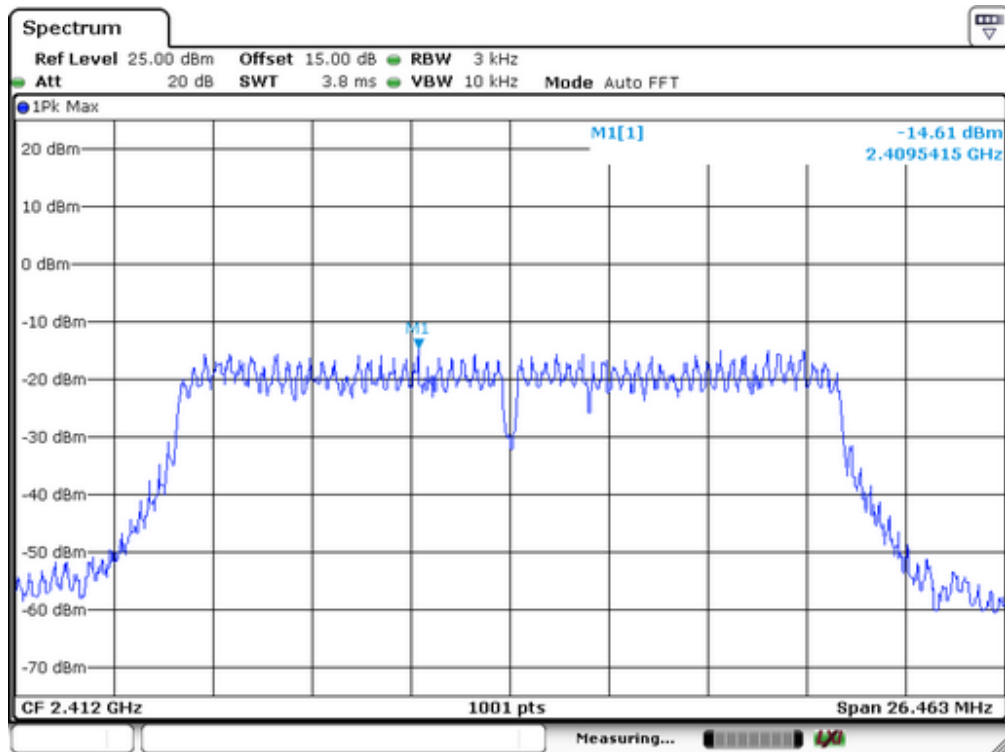


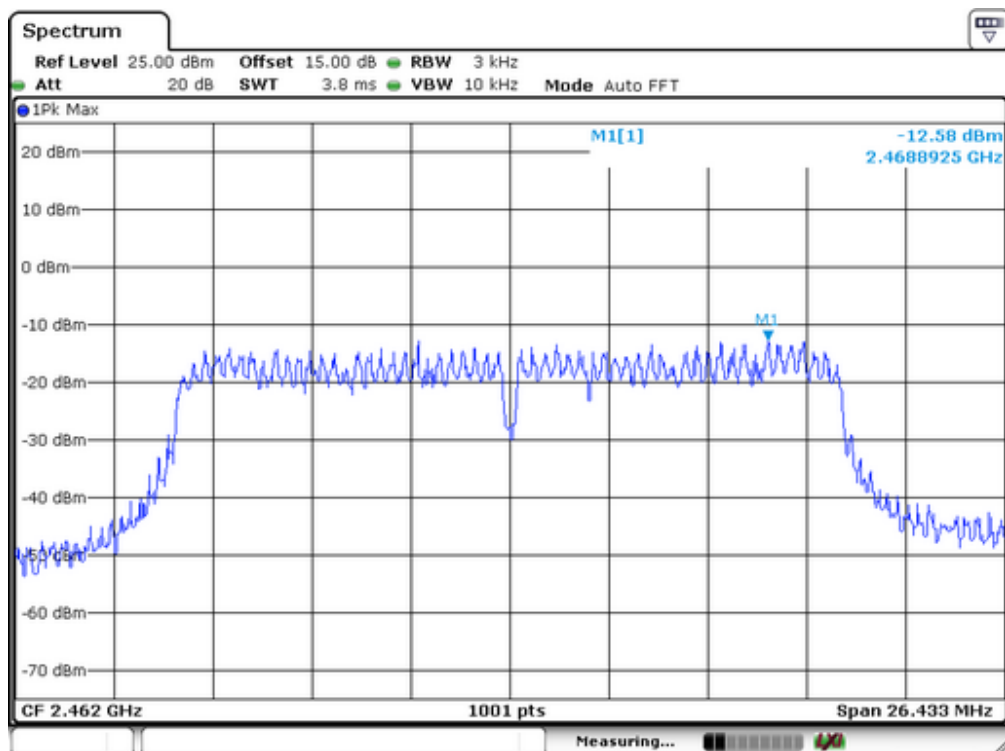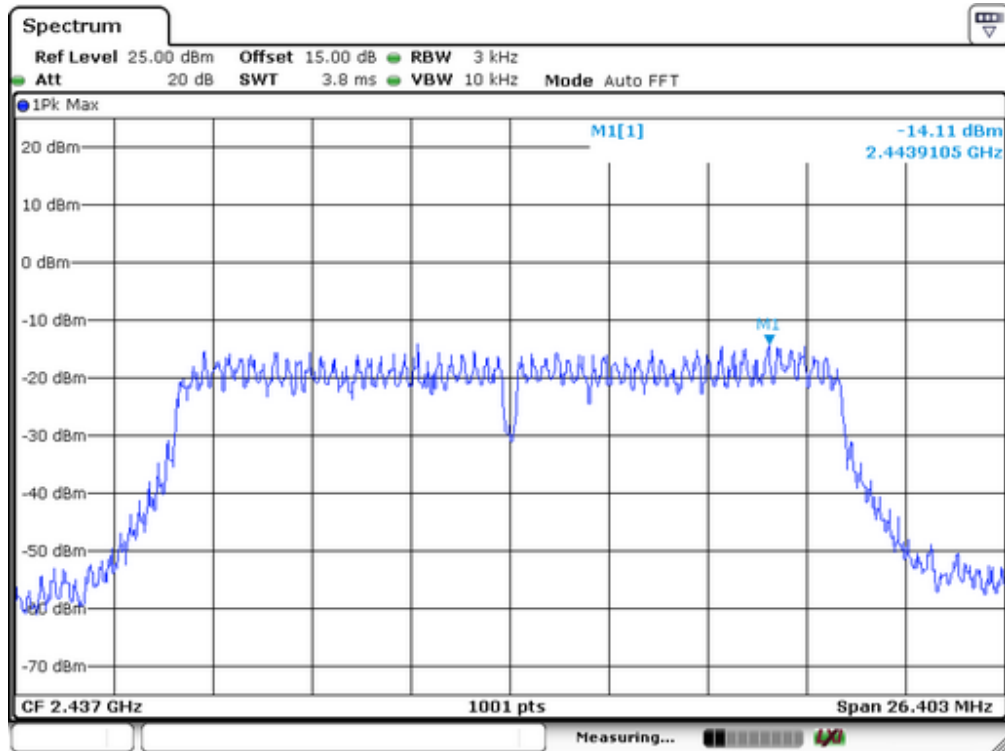

Spectrum Detector: PK Test Date : November 30, 2014
 Test By: Andy Temperature : 28°C
 Test Mode: 802.11n(H40) Humidity : 60%

Channel frequency (MHz)	Measurement level (dBm)	Limit(dBm)	Result
2422	-19.41	8	Pass
2437	-18.52		
2452	-17.79		

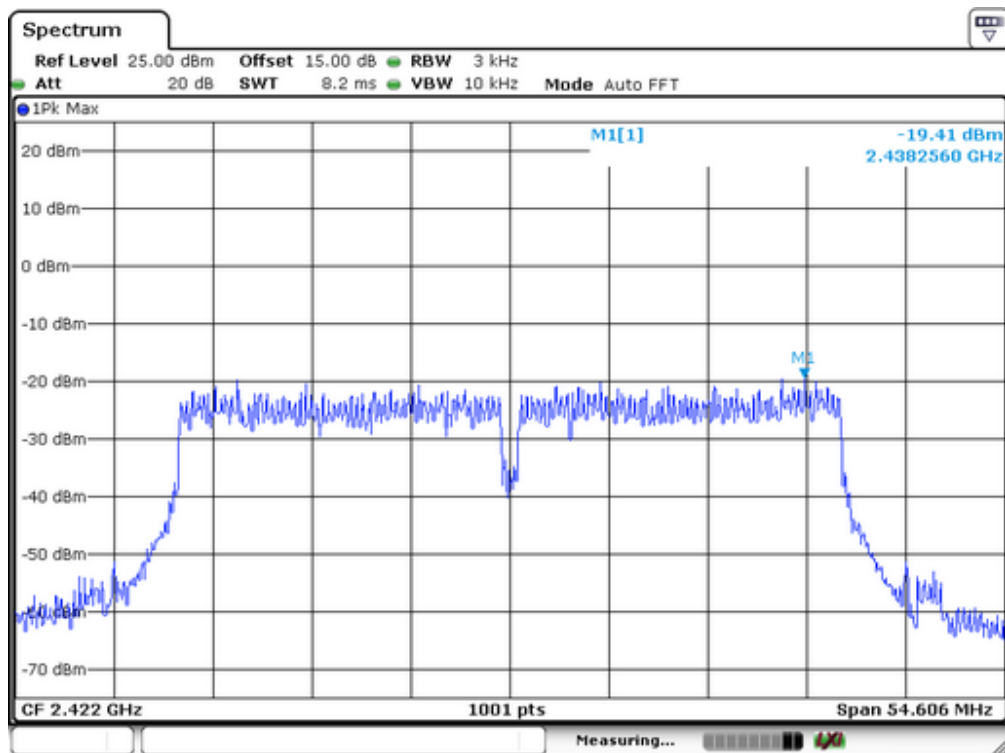

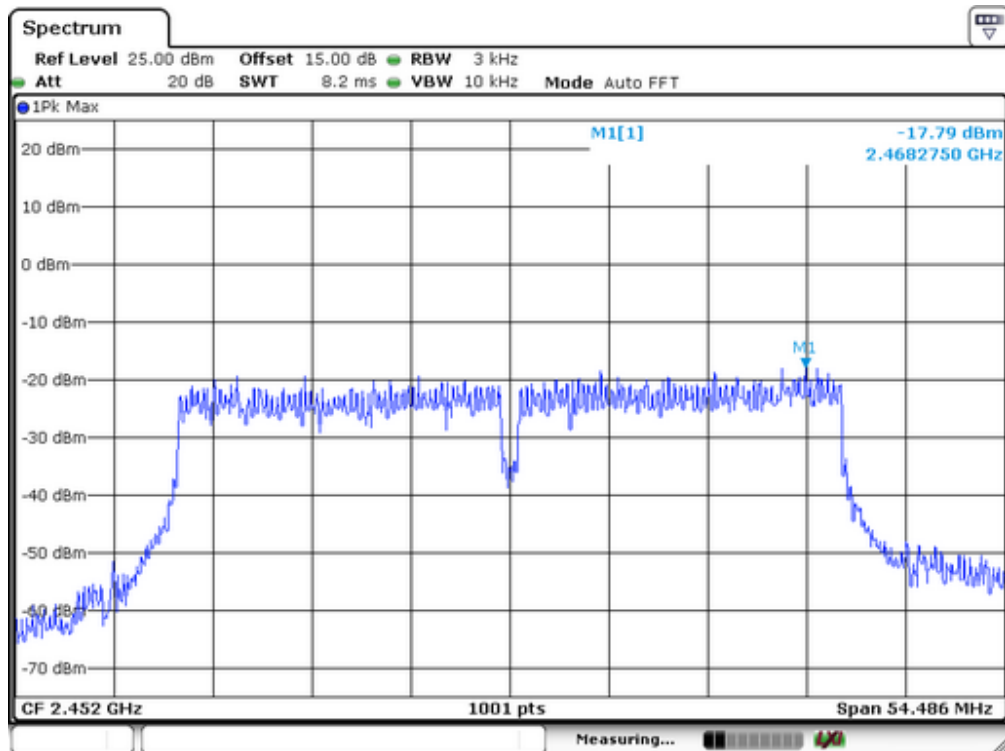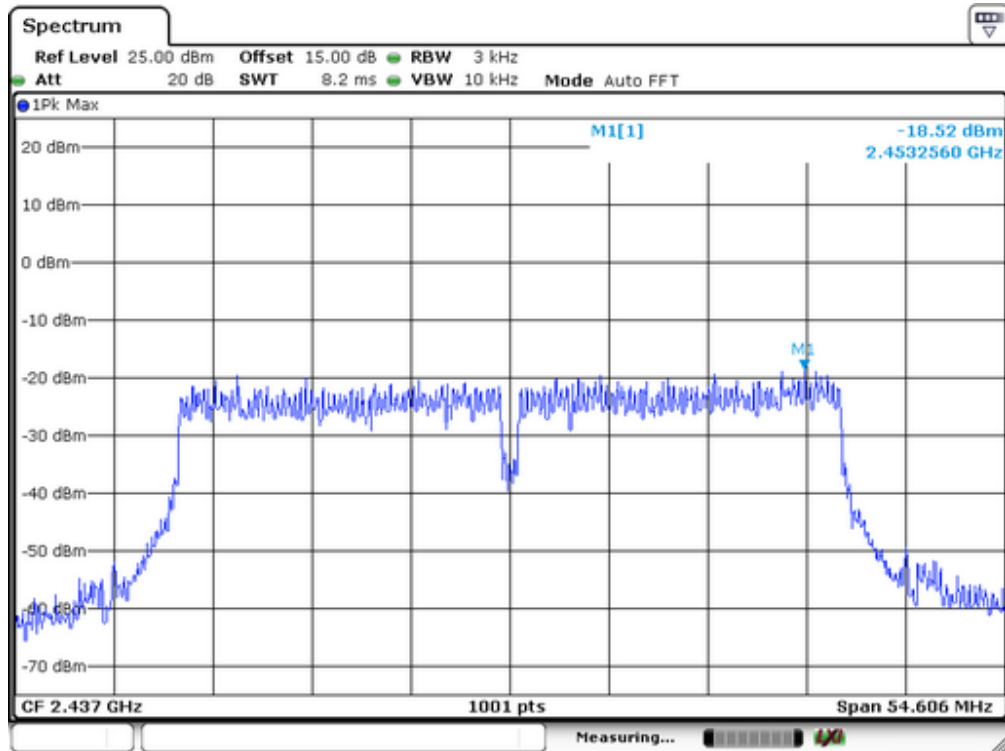

11. Antenna Port Emission

11.1 Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Agilent	FSV30	1321.3008K	05/16/2014	05/15/2015

11.2 Measuring Instruments and Setting


The following table is the setting of spectrum analyzer.

Spectrum analyzer	Setting
Attenuation	Auto
RB	100kHz
VB	300kHz
Detector	Peak
Trace	Max hold

11.3 Test Procedures

The conducted spurious emissions were measured conducted using a spectrum analyzer at low, Middle, and high channels, the limit was determined by attenuation 20dB of the RF peak power output.


11.4 Block Diagram of Test setup




11.5 Test Result

PASS.


Test Mode: 802.11b

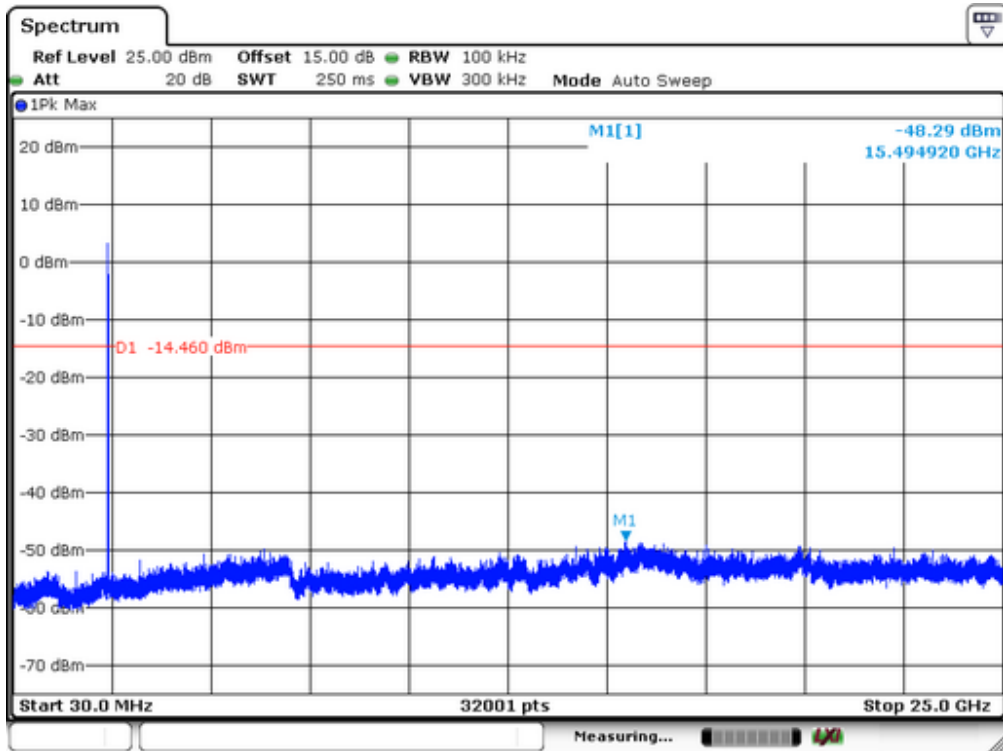

Lowest Channel

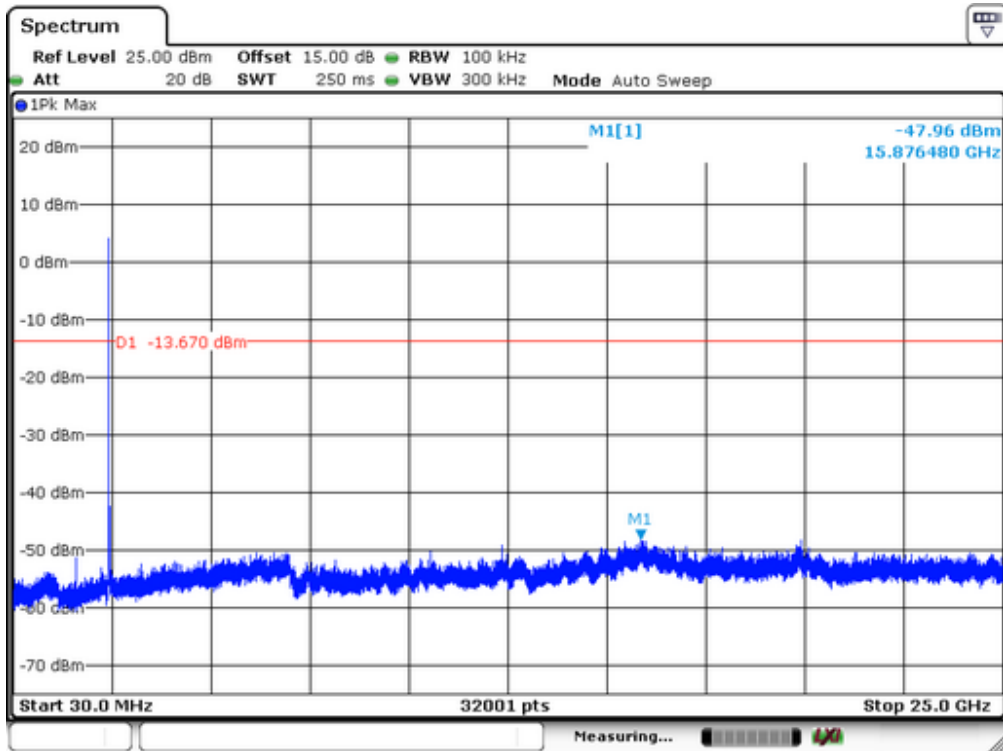


Middel Channel

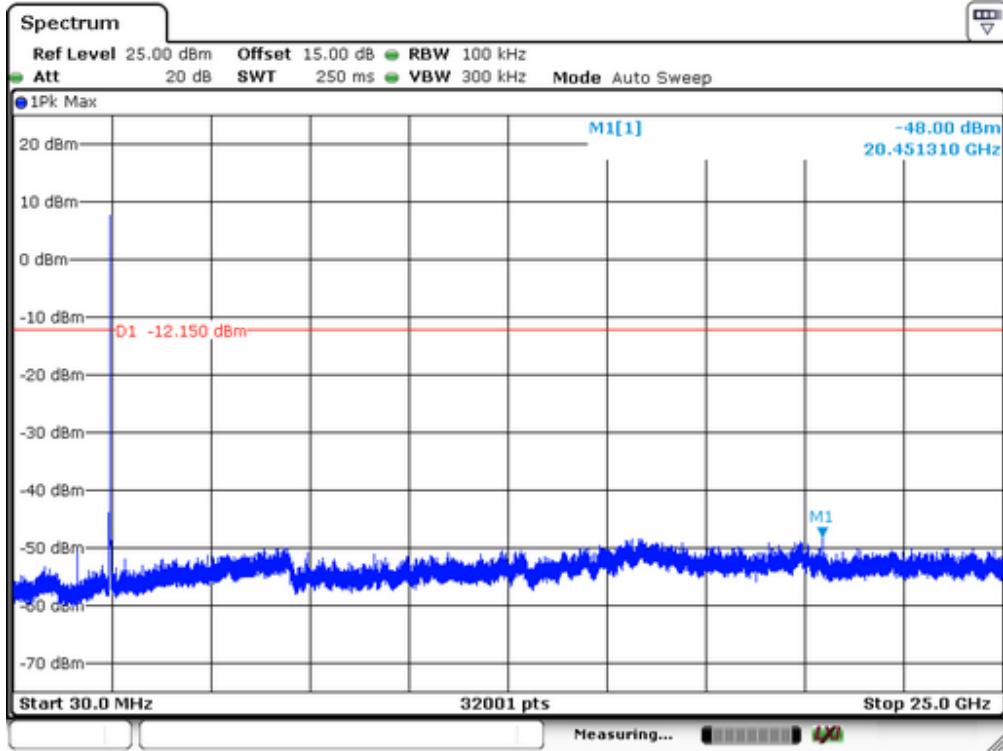


Highest Channel


Test Mode: 802.11g

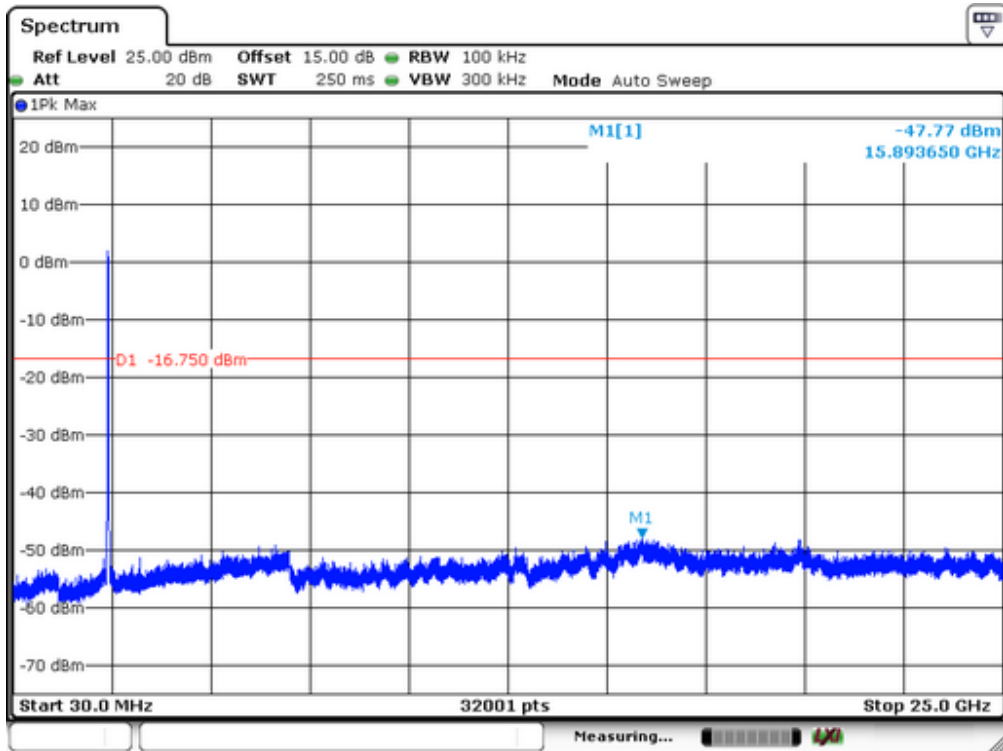

Lowest Channel

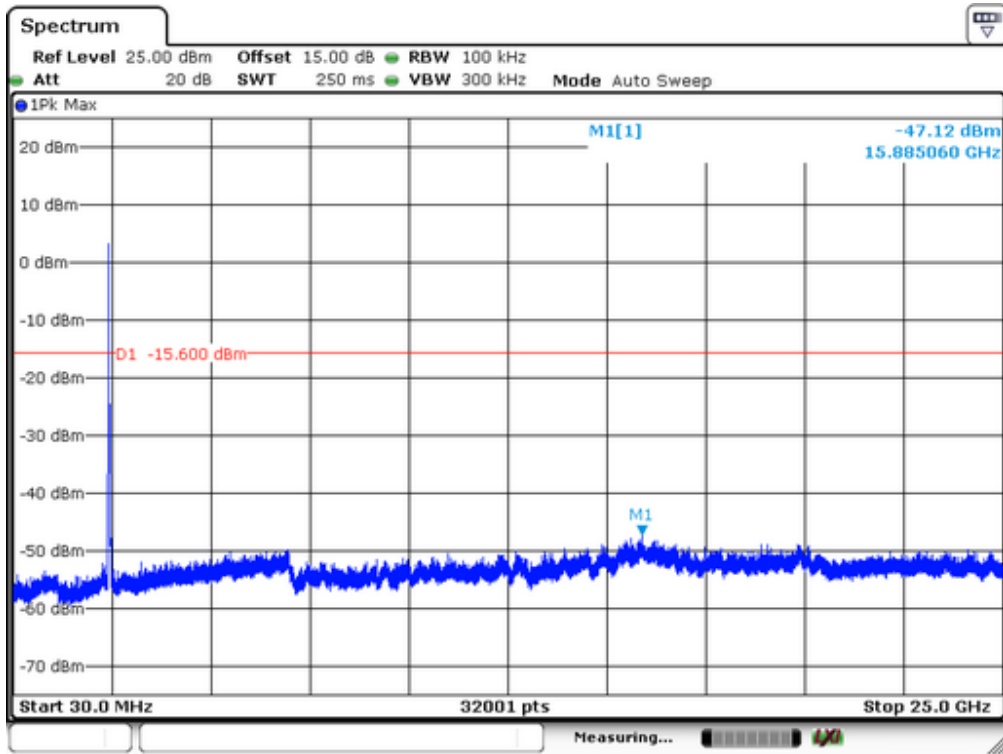


Middle Channel

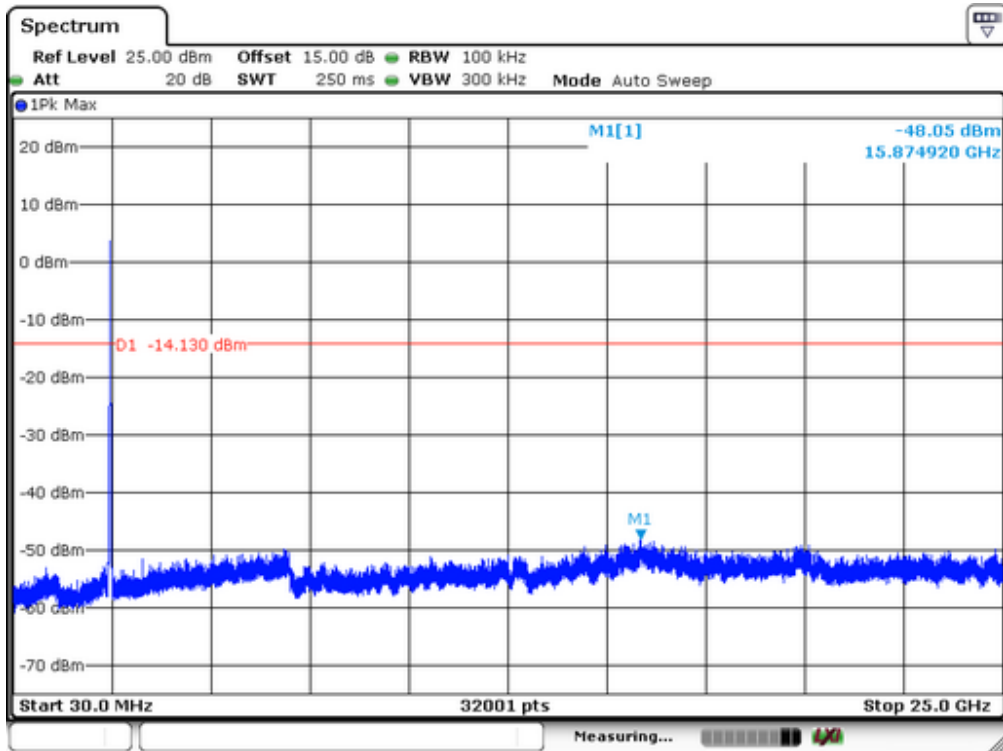


Highest Channel


Test Mode: 802.11n(H20)

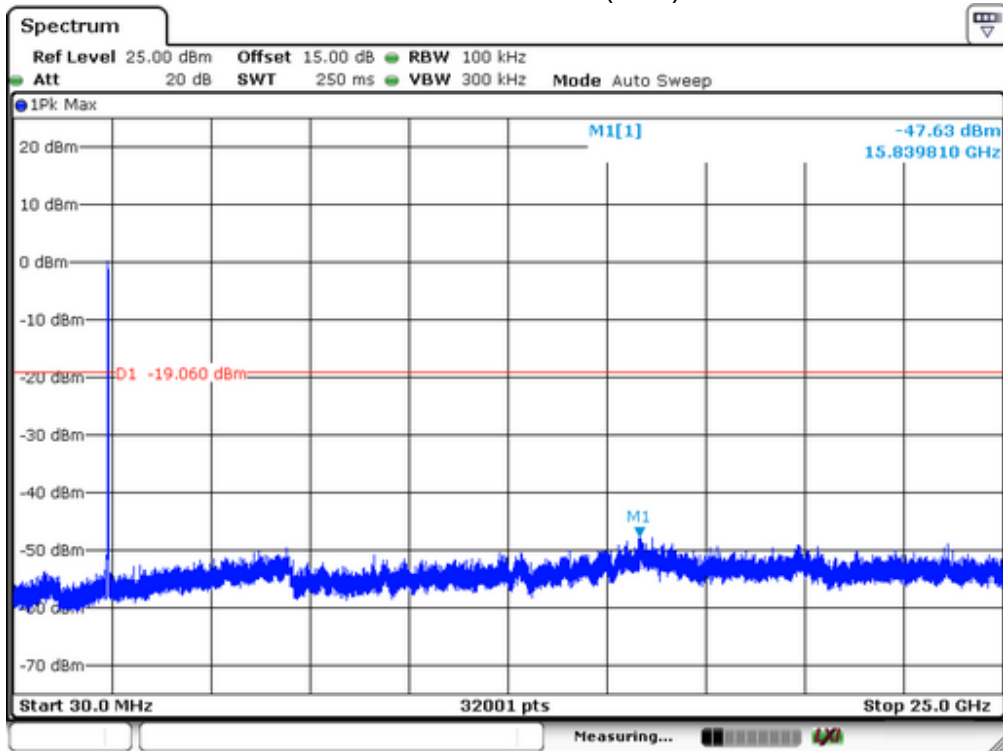

Lowest Channel

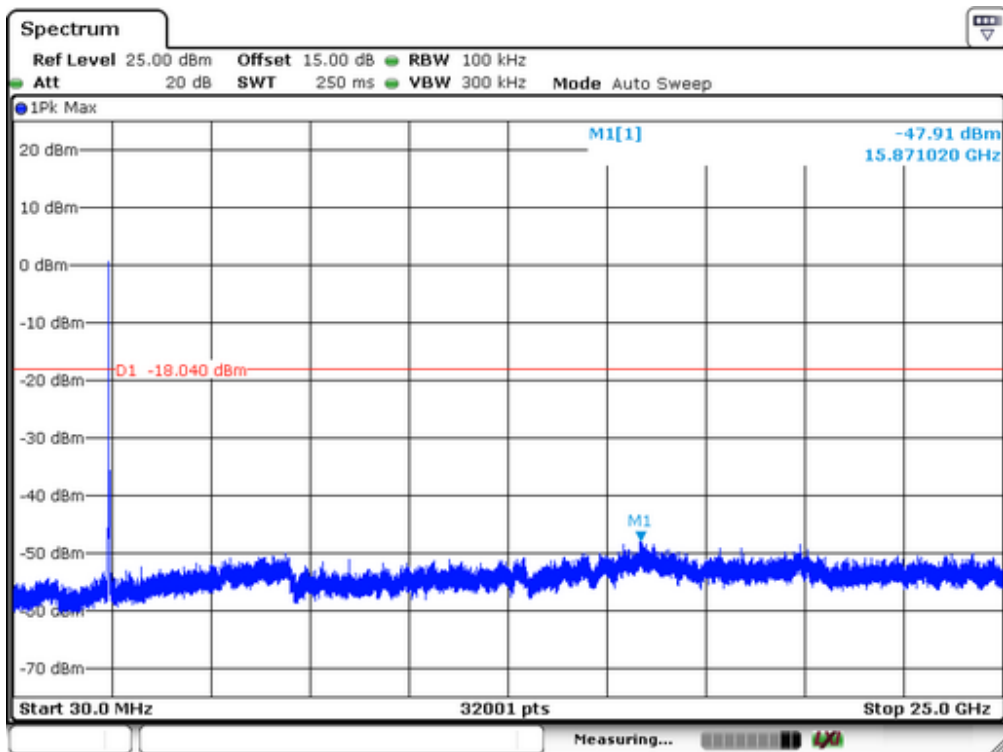


Middle Channel

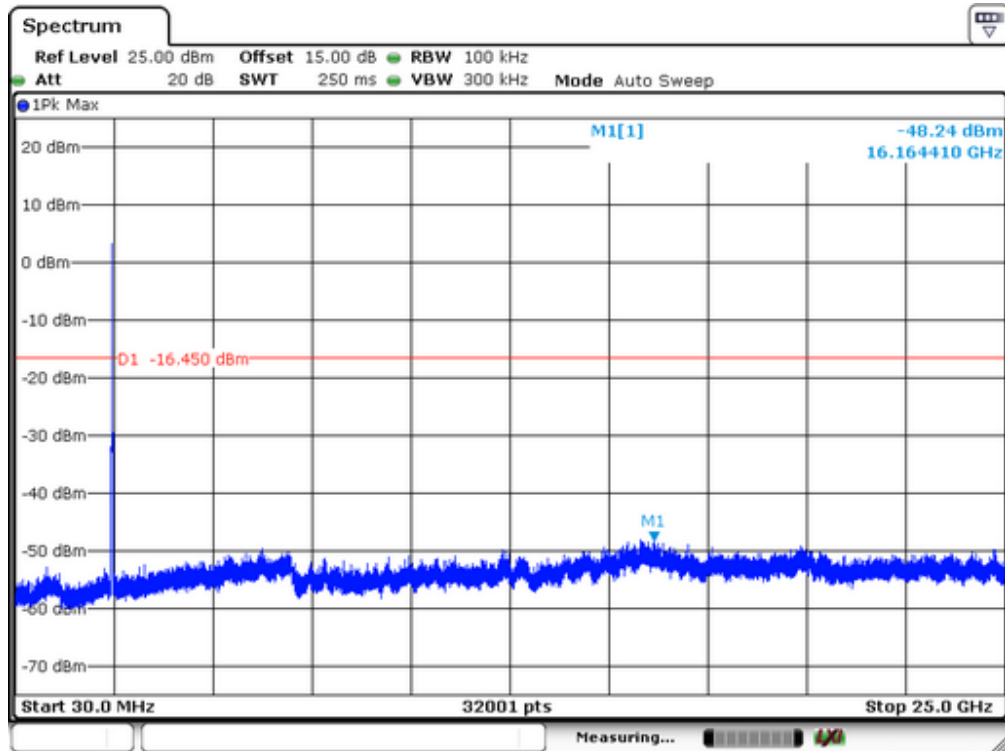


Highest Channel


Test Mode: 802.11n(H40)

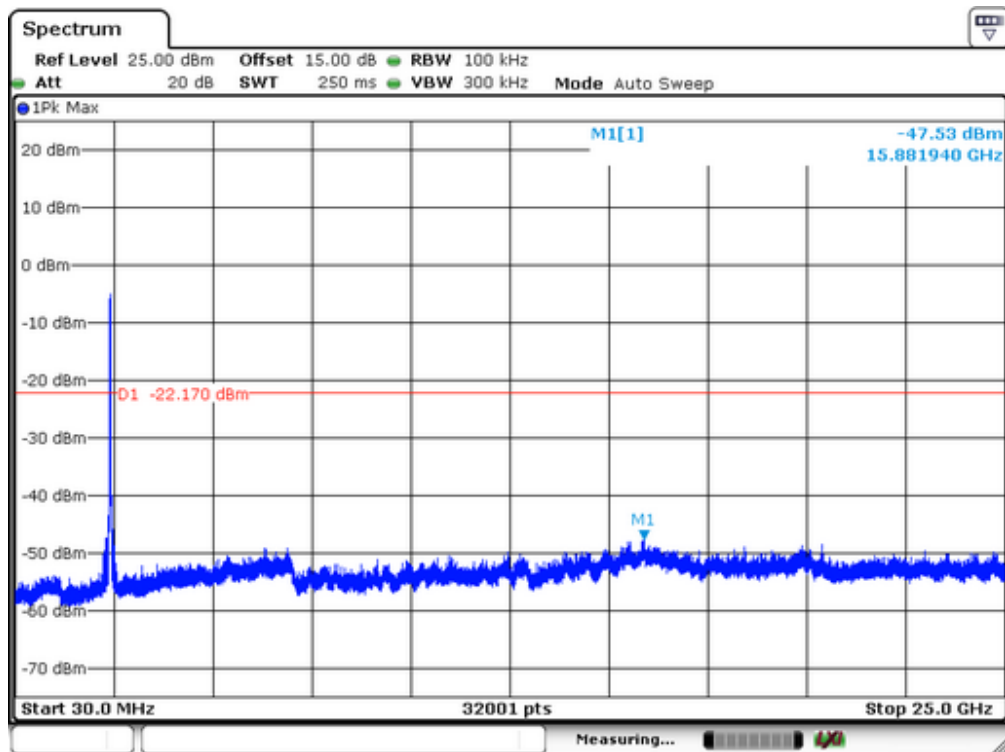

Lowest Channel

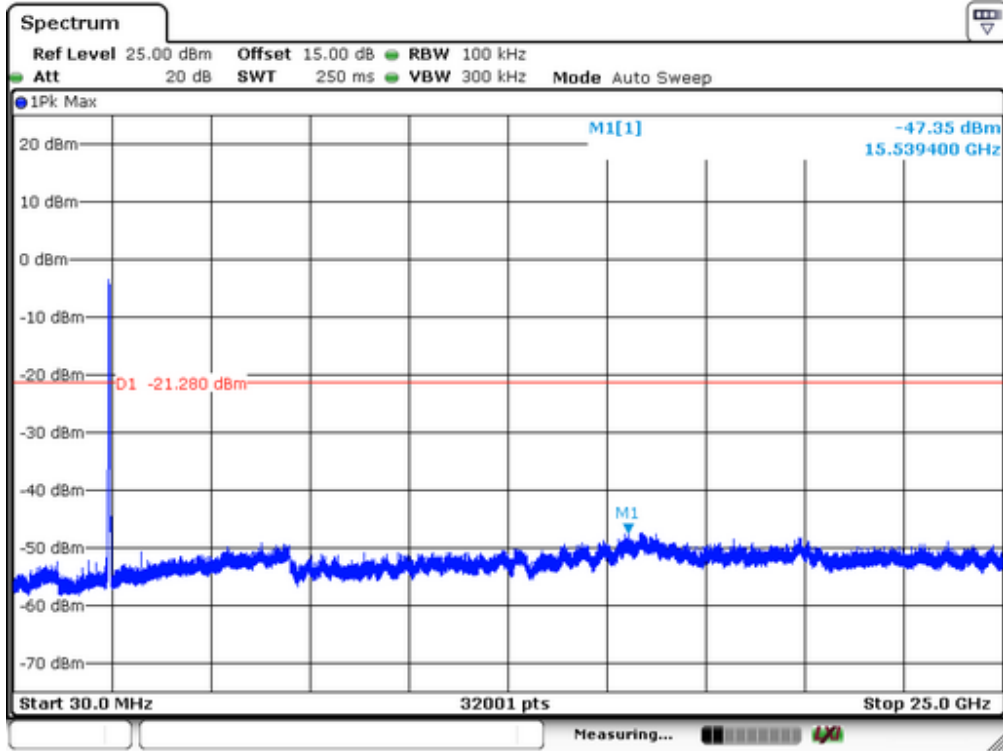

Middle Channel

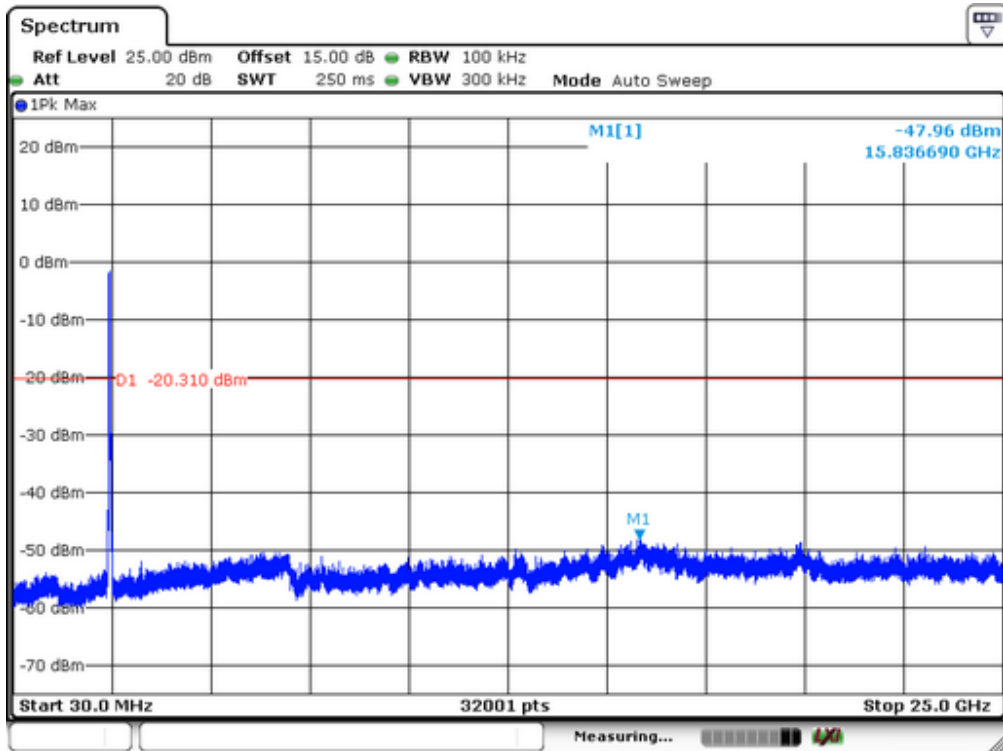

Highest Channel

12. Antenna Application

12.1 Antenna Requirement

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

12.2 Result

The EUT'S antenna, permanently attached antenna, is an external antenna. The antenna's gain is 5dBi and meets the requirement.

APPENDIX I (PHOTOS OF EUT)



