

2x45W RRH for E-UTRAN Band 25 (FCC ID: S8L-AA190045) Product Description



Key Specifications:

Base-Station Interface: CPRI High Speed Digital I/O (PCS LTE Traffic + Control)

2 Duplexed Antenna Ports:

Tx Frequency Range: 1930-1995MHz; 45WRF (+46.5dBm) max each port;


Rx Frequency Range: 1850-1915MHz; sensitivity -101.5 dBm (10MHz LTE)

And 2 RX Ports:


Rx Frequency Range: 1850-1915MHz; sensitivity -101.5 dBm (10MHz LTE)

Power Input: -48VDC nominal; Load Current 8.4 ADC (with 2x45WRF)

2x45W 1900MHz RRRH – Interface Ports (Bottom)

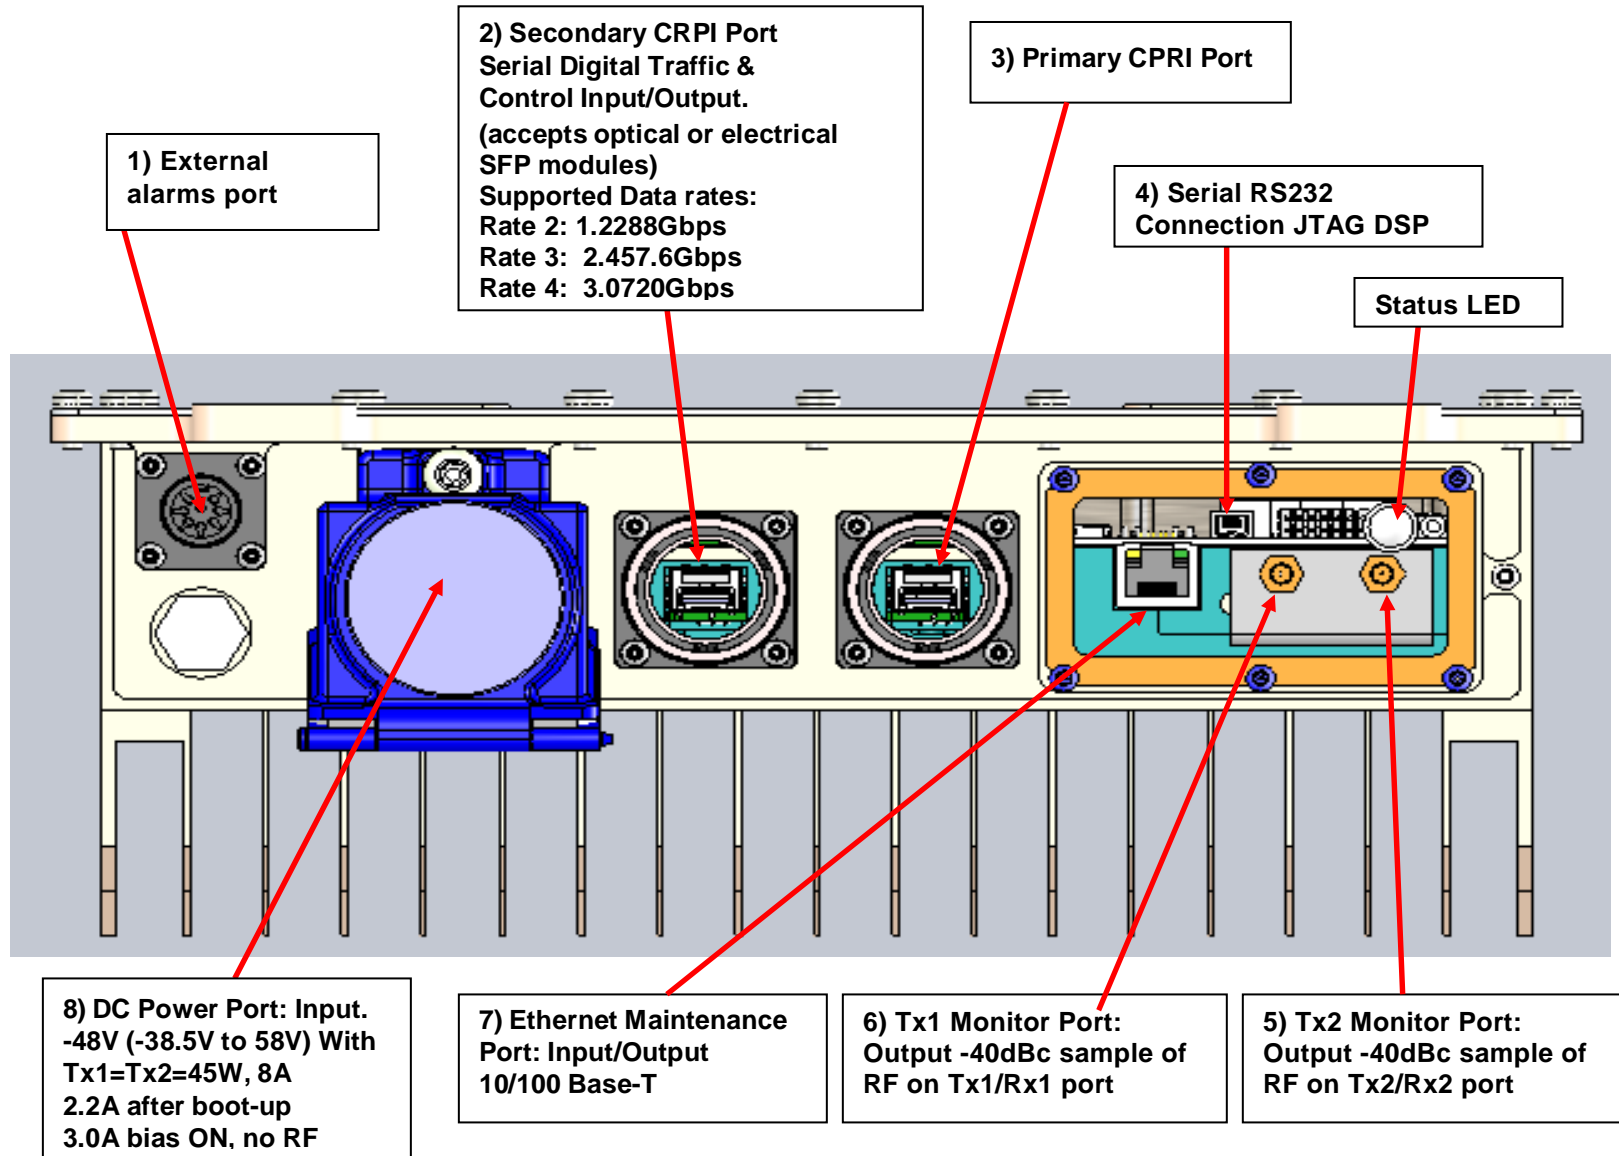

2x45W 1900MHz RRH – Interface Ports (Top)

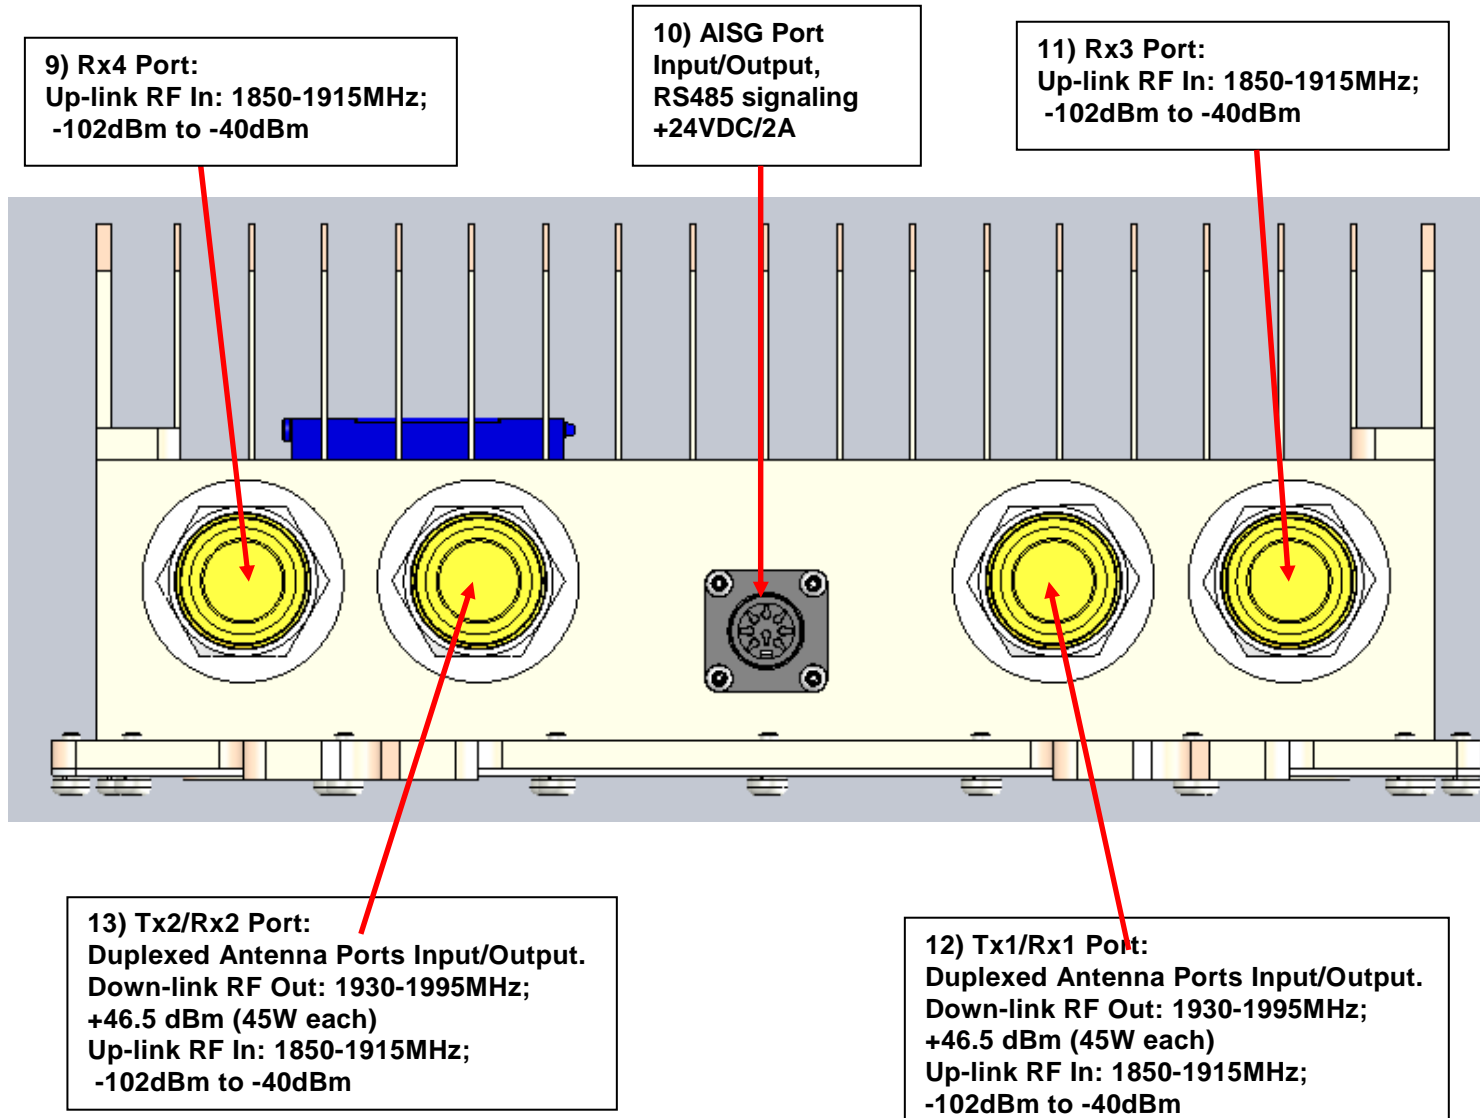

FCC Statement/

FCC ID: S8L-AA190045

This device complies with Part 2, 15 and 24 of the FCC Rules.

Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Warning

Changes of modifications not expressly approved by the manufacturer could void the user's authority to operate the equipment.

RF exposure compliance is addressed at the time of licensing, as required by the responsible FCC Bureau(s), including antenna co-location requirements of 1.1307(b)(3).