



TEST REPORT

Test Report No. : UL-RPT-RP91842JD07B V4.0

Manufacturer : Alert MetalGuard ApS
Model No. : Alert HyperGuard V2.0 Antenna 18cm
FCC ID : S8OHYPER1730
Test Standard(s) : FCC Parts 15.207, 15.209 15.215 (c)

1. This test report shall not be reproduced in full or partial, without the written approval of UL.
2. The results in this report apply only to the sample(s) tested.
3. The sample tested is in compliance with the above standard(s).
4. The test results in this report are traceable to the national or international standards.
5. Version 4.0 supersedes all previous versions.

Date of Issue: 08 June 2015

Checked by:

Steven White
Project Lead, Radio Laboratory

Issued by :

John Newell
Group Quality Manager, WiSE
Basingstoke,
UL VS LTD



This laboratory is accredited by UKAS.
The tests reported herein have been
performed in accordance with its' terms
of accreditation.

UL VS LTD

Pavilion A, Ashwood Park, Ashwood Way, Basingstoke, Hampshire, RG23 8BG, UK
Telephone: +44 (0)1256 312000
Facsimile: +44 (0)1256 312001

This page has been left intentionally blank.

Table of Contents

1. Customer Information.....	4
2. Summary of Testing.....	5
2.1. General Information	5
2.2. Summary of Test Results	5
2.3. Methods and Procedures	5
2.4. Deviations from the Test Specification	5
3. Equipment Under Test (EUT)	6
3.1. Identification of Equipment Under Test (EUT)	6
3.2. Description of EUT	6
3.3. Modifications Incorporated in the EUT	6
3.4. Additional Information Related to Testing	6
3.5. Support Equipment	7
4. Operation and Monitoring of the EUT during Testing	8
4.1. Operating Modes	8
4.2. Configuration and Peripherals	8
5. Measurements, Examinations and Derived Results.....	9
5.1. General Comments	9
5.2. Test Results	10
5.2.1. Transmitter AC Conducted Spurious Emissions	10
5.2.2. Transmitter Radiated Emissions	14
5.2.3. Transmitter Radiated Emissions (Fundamental)	18
5.2.4. Transmitter 20 dB Bandwidth	20
6. Measurement Uncertainty	21
7. Report Revision History	22

1. Customer Information

Company Name:	Alert MetalGuard ApS
Address:	Vester Voldgade 104 1552 Copenhagen V Denmark

2. Summary of Testing

2.1. General Information

Specification Reference:	47CFR15.207, 47CFR15.209 and 47CFR15.215
Specification Title:	Code of Federal Regulations Volume 47 (Telecommunications): Part 15 Subpart C (Intentional Radiators) - Sections 15.207, 209 and 15.215
Site Registration:	FCC: 209735
Location of Testing:	UL VS LTD, Unit 3 Horizon, Wade Road, Kingsland Business Park, Basingstoke, Hampshire, RG24 8AH, United Kingdom
Test Dates:	01 March 2013 to 15 May 2013

2.2. Summary of Test Results

FCC Reference (47CFR)	Measurement	Result
Part 15.207	Transmitter AC Conducted Emissions	✓
Part 15.209	Transmitter Radiated Emissions	✓
Part 15.209	Transmitter Radiated Emissions (Fundamental)	✓
Part 15.215(c)	Transmitter 20 dB Bandwidth	✓
Key to Results		
 = Complied	 = Did not comply	

2.3. Methods and Procedures

Reference:	ANSI C63.4 (2009)
Title:	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
Reference:	ANSI C63.10 (2009)
Title:	American National Standard for Testing Unlicensed Wireless Devices

2.4. Deviations from the Test Specification

For the measurements contained within this test report, there were no deviations from, additions to, or exclusions from the test specification identified above.

3. Equipment Under Test (EUT)

3.1. Identification of Equipment Under Test (EUT)

Brand Name:	Alert HyperGuard
Model Name or Number:	Alert HyperGuard V2.0 Antenna 18cm
Serial Number:	1501050186-08313001
FCC ID:	S8OHYPER1730

Brand Name:	Alert HyperGuard
Model Name or Number:	Alert HyperGuard V2.0 Antenna 18cm
Serial Number:	1501050186-08313002
FCC ID:	S8OHYPER1730

3.2. Description of EUT

The Equipment Under Test was a pair of antennas used as part of an electronic article surveillance control unit for use in a retail anti-theft system. One antenna is used as a transmit antenna, the other as a receive antenna. Both antennas are connected to a HyperGuard V2.0 Combo control unit (as listed in the Support Equipment section of this report) via CAT5 cables. The metal detecting antennas are floor standing. The antenna width is 18 cm.

3.3. Modifications Incorporated in the EUT

No modifications were applied to the EUT during testing.

3.4. Additional Information Related to Testing

Tested Technology:	RFID	
Power Supply Requirement:	Nominal	24 VDC
Type of Unit:	Transceiver	
Transmit Frequency	24.960 kHz	

3.5. Support Equipment

The following support equipment was used to exercise the EUT during testing:

Brand Name:	Alert HyperGuard
Model Name or Number:	HyperGuard V2.0 Combo
Serial Number:	2C:E8:71:00:00:15
Hardware Version Number:	AMG Hyper Controller 2.0 01066005B
Software Version Number:	1.0

Description:	Notebook PC running HyperGUARD Configuration Tool software
Brand Name:	Hewlett Packard
Model Name or Number:	nx9005
Serial Number:	CNF32905YD

Description:	DC Power Supply Unit
Brand Name:	ISO-Tech
Model Name or Number:	IPS2302A
Serial Number:	504E005G2

Description:	Ethernet cable
Brand Name:	Not marked or stated
Model Name or Number:	Not marked or stated

Description:	Mini USB cable
Brand Name:	Not marked or stated
Model Name or Number:	Not marked or stated

Description:	Male to Male USB cable
Brand Name:	Nikkai
Model Name or Number:	L03BT

Description:	Micro SD card
Brand Name:	Not marked or stated
Model Name or Number:	Not marked or stated

4. Operation and Monitoring of the EUT during Testing

4.1. Operating Modes

The EUT was tested in the following operating mode(s):

- Transceive mode
- The EUT has only one mode of operation as it is constantly transmitting and receiving when in operation. It does not have a dedicated 'receive only' mode.

4.2. Configuration and Peripherals

The EUT was tested in the following configuration(s):

- Controlled using the HyperGUARD configuration application on a laptop PC. The application was used to enable continuous transmit mode.
- For Radiated testing, the Combo was placed at the centre of the turntable, on an 80cm high table. The two antennas were floor mounted and placed at opposite ends of the table. The antennas were connected to each other and to the Combo by two CAT5 cables.
- Ethernet, USB and mini USB unused ports on the Combo were terminated into a laptop PC. The laptop was placed outside the anechoic chamber during radiated testing. The Combo had a micro SD slot; this was terminated by a micro SD card.
- Power was supplied to the EUT via the Combo box

5. Measurements, Examinations and Derived Results

5.1. General Comments

Measurement uncertainties are evaluated in accordance with current best practice. Our reported expanded uncertainties are based on standard uncertainties, which are multiplied by an appropriate coverage factor to provide a statistical confidence level of approximately 95%. Please refer to Section 6 Measurement Uncertainty for details.

In accordance with UKAS requirements all the measurement equipment is on a calibration schedule. All equipment was within the calibration period on the date of testing.

5.2. Test Results

5.2.1. Transmitter AC Conducted Spurious Emissions

Test Summary:

Test Engineer:	Andrew Edwards	Test Date:	02 April 2013
Test Sample Serial No.:	1501050186-08313001 & 1501050186-08313002		

FCC Reference:	Part 15.207
Test Method Used:	As detailed in ANSI C63.10 Section 6.2 referencing ANSI C63.4

Environmental Conditions:

Temperature (°C):	21
Relative Humidity (%):	29

Note(s):

1. The EUT power was supplied from the Combo with the Combo power being supplied from the 24 VDC output of an ISO-Tech bench power supply. The power supply input was connected to a 120 VAC 60 Hz single phase supply via a LISN.

Transmitter AC Conducted Spurious Emissions (continued)**Results: Live / Quasi Peak**

Frequency (MHz)	Line	Level (dB μ V)	Limit (dB μ V)	Margin (dB)	Result
4.501500	Live	37.5	56.0	18.5	Complied
5.001000	Live	39.3	60.0	20.7	Complied
5.293500	Live	40.5	60.0	19.5	Complied
5.401500	Live	41.4	60.0	18.6	Complied
5.707500	Live	36.5	60.0	23.5	Complied
6.499500	Live	37.9	60.0	22.1	Complied
6.999000	Live	35.8	60.0	24.2	Complied
18.001500	Live	29.7	60.0	30.3	Complied
18.645000	Live	39.7	60.0	20.3	Complied
22.002000	Live	31.8	60.0	28.2	Complied

Results: Live / Average

Frequency (MHz)	Line	Level (dB μ V)	Limit (dB μ V)	Margin (dB)	Result
4.663500	Live	20.5	46.0	25.5	Complied
4.897500	Live	21.9	46.0	24.1	Complied
5.127000	Live	23.5	50.0	26.5	Complied
5.361000	Live	23.3	50.0	26.7	Complied
6.144000	Live	21.8	50.0	28.2	Complied
9.213000	Live	25.0	50.0	25.0	Complied
15.355500	Live	21.1	50.0	28.9	Complied
18.645000	Live	38.1	50.0	11.9	Complied


Transmitter AC Conducted Spurious Emissions (continued)**Results: Neutral / Quasi Peak**

Frequency (MHz)	Line	Level (dB μ V)	Limit (dB μ V)	Margin (dB)	Result
4.501500	Neutral	38.0	56.0	18.0	Complied
5.001000	Neutral	39.5	60.0	20.5	Complied
5.293500	Neutral	40.8	60.0	19.2	Complied
5.401500	Neutral	41.8	60.0	18.2	Complied
5.599500	Neutral	40.8	60.0	19.2	Complied
5.703000	Neutral	38.8	60.0	21.2	Complied
6.499500	Neutral	37.6	60.0	22.4	Complied
7.498500	Neutral	34.8	60.0	25.2	Complied
8.002500	Neutral	33.6	60.0	26.4	Complied
18.645000	Neutral	39.2	60.0	20.8	Complied


Results: Neutral / Average

Frequency (MHz)	Line	Level (dB μ V)	Limit (dB μ V)	Margin (dB)	Result
5.127000	Neutral	23.6	50.0	26.4	Complied
5.275500	Neutral	18.4	50.0	31.6	Complied
5.356500	Neutral	22.5	50.0	27.5	Complied
5.617500	Neutral	23.1	50.0	26.9	Complied
6.058500	Neutral	24.5	50.0	25.5	Complied
9.213000	Neutral	25.3	50.0	24.7	Complied
18.645000	Neutral	37.7	50.0	12.3	Complied

Transmitter AC Conducted Spurious Emissions (continued)

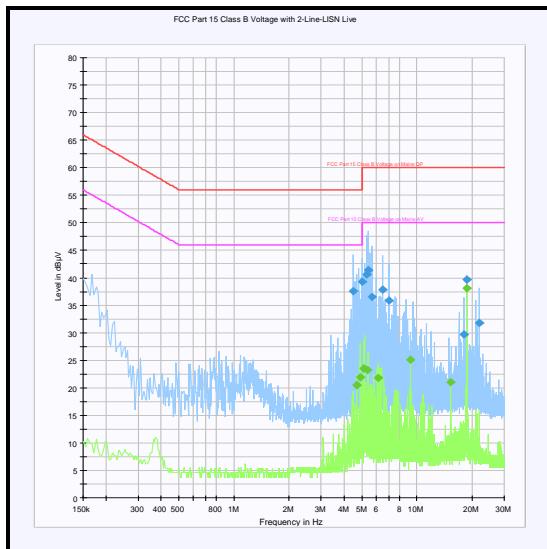

Live

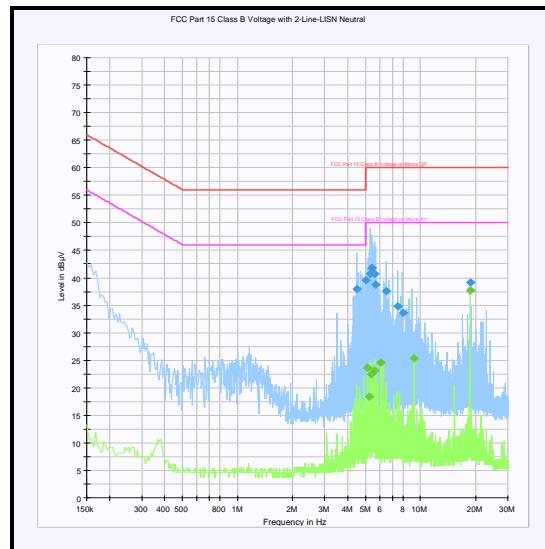

Neutral

Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables.

Test Equipment Used:

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
A649	Single Phase LISN	Rohde & Schwarz	ESH3-Z5	825562/008	19 Apr 2013	12
A1830	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100668	19 Feb 2014	12
M1263	Test Receiver	Rohde & Schwarz	ESIB7	100265	09 Aug 2013	12

5.2.2. Transmitter Radiated Emissions

Test Summary:

Test Engineer:	Andrew Edwards	Test Dates:	28 March 2013 & 01 April 2013
Test Sample Serial No.:	1501050186-08313001 & 1501050186-08313002		

FCC Reference:	Part 15.209
Test Method Used:	As detailed in ANSI C63.10 Sections 6.3 and 6.5 referencing ANSI C63.4
Frequency Range:	9 kHz to 1000 MHz

Environmental Conditions:

Temperature (°C):	21 to 22
Relative Humidity (%):	26 to 28




Note(s):

1. Limits below 30 MHz are specified at a test distance of 30 metres, whilst below 0.49 MHz they are specified at a test distance of 300 metres. However, as specified by FCC Section 15.31 (f)(2), measurements may be performed at a closer distance and the measured level corrected to the specified measurement distance by using the square of an inverse linear distance extrapolation factor (40dB/decade).
2. A transducer factor on the measuring instrument was used to extrapolate the results at 3 metres to a distance of 30 metres where required. A distance extrapolation factor of 40 dB was used.
3. Final measurement values include corrections for antenna factor and cable losses.
4. The emission shown at approximately 25 kHz is the fundamental emission frequency which was greater than 20 dB below the specified limit.
5. The emissions from 15 kHz to 54 kHz were investigated and found to be radiating from the test site turntable.
6. Measurements in the range 30 MHz to 1 GHz were performed in a semi-anechoic chamber (RFI Asset Number K0001) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.
7. Suitable RF attenuation was used when making measurements in the 9 kHz to 150 kHz frequency range to prevent the EUT carrier overloading the test receiver. The RF level offset for the attenuation has been compensated for in the measurement results.
8. The EUT formed a large system. The test site antenna measurement point was positioned so that it was 3 metres from the closest periphery of the EUT.

Transmitter Radiated Spurious Emissions (continued)**Results: Quasi Peak**

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
31.36	Vertical	23.5	40.0	16.5	Complied
49.125	Vertical	38.9	40.0	1.1	Complied
56.006	Vertical	26.8	40.0	13.2	Complied
73.723	Vertical	30.3	40.0	9.7	Complied
89.062	Vertical	30.0	43.5	13.5	Complied
147.417	Vertical	32.8	43.5	10.7	Complied
196.582	Vertical	29.6	43.5	13.9	Complied
249.991	Vertical	39.7	46.0	6.3	Complied
374.997	Vertical	34.9	46.0	11.1	Complied

Transmitter Radiated Spurious Emissions (continued)

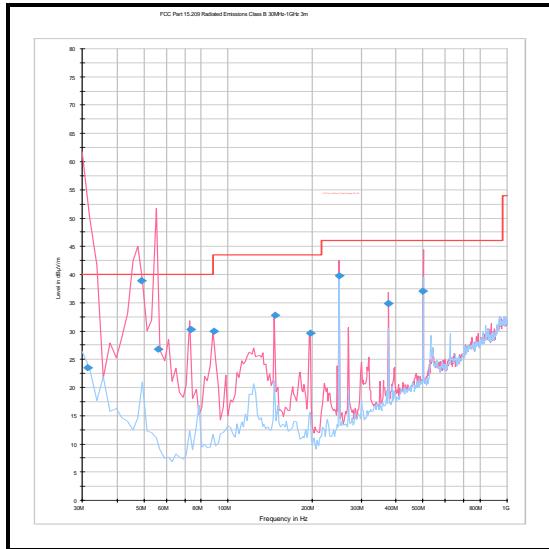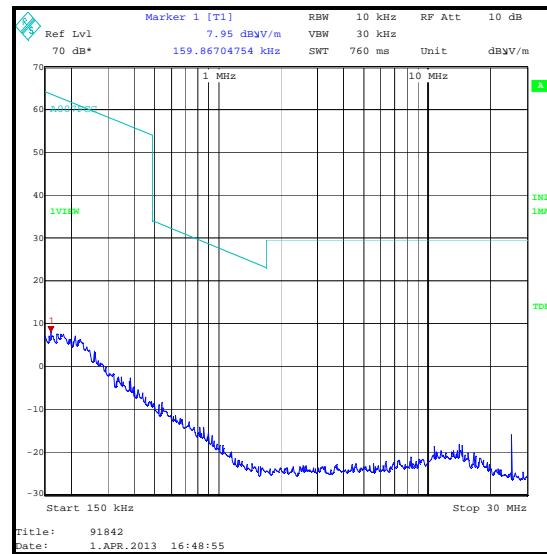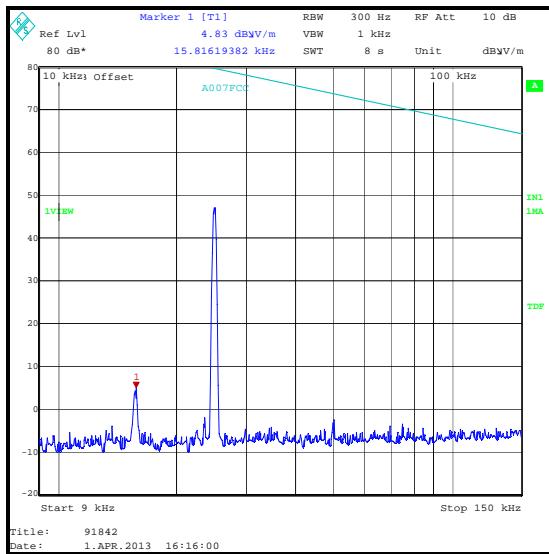

Note: All emissions on the 9 kHz – 30MHz pre-scans are low by a factor of 20dB, due to the absence of a transducer factor at the time of measurement. An additional 20dB has subsequently added to any emissions observed during these pre-scan, for comparisons with the limit, when determining the necessity for final measurements.

For final measurements, see accompanying table.

Transmitter Radiated Spurious Emissions (continued)**Test Equipment Used:**

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
A490	Bilog Antenna	Chase	CBL6111A	1590	14 May 2013	12
A1834	Attenuator	Hewlett Packard	8491B	10444	17 Jan 2014	12
A2000	Attenuator	Huber & Suhner	6830.17.B	301623	03 Apr 2013	12
G0543	Amplifier	Sonoma	310N	230801	03 Apr 2013	3
K0001	5m RSE Chamber	Rainford EMC	N/A	N/A	24 Oct 2013	12
M1273	Test Receiver	Rohde & Schwarz	ESIB 26	100275	15 Feb 2014	12
M1568	Magnetic Loop Antenna	Rohde & Schwarz	HFH2-Z2	879284/2	12 Feb 2014	12

5.2.3. Transmitter Radiated Emissions (Fundamental)

Test Summary:

Test Engineer:	Andrew Edwards	Test Date:	01 April 2013
Test Sample Serial No.:	1501050186-08313001 & 1501050186-08313002		

FCC Part:	15.209
Test Method Used:	ANSI C63.10 Section 6.4

Environmental Conditions:

Temperature (°C):	21
Relative Humidity (%):	27

Results: Quasi Peak

Frequency (kHz)	Antenna Polarity	Level (dB μ V/m)	Limit at 300 m (dB μ V/m)	Margin (dB)	Result
24.960	90° to EUT	30.5*	39.7	9.2	Complied


Note(s):

1. The limit is specified at a test distance of 300 metres. However, as specified by FCC Section 15.31 (f)(2), measurements may be performed at a closer distance and the measured level corrected to the specified measurement distance by using the square of an inverse linear distance extrapolation factor (40dB/decade).
2. A transducer factor on the measuring instrument was used to extrapolate the results at 3 metres to a distance of 30 metres. The transducer factor has a 40 dB extrapolation at a distance of 30 metres (1 decade). Measurements below 490 kHz should be performed at a distance of 300 metres (2 decades) therefore another 40 dB was subtracted from the measured value. The quasi peak level was measured as $50.5 \text{ dB}\mu\text{V/m} - 40 = 10.5 \text{ dB}\mu\text{V/m}$.

**Note: An additional 20dB has been added to attain the final value shown in the table; this is to account for a transducer factor that was not included during the original measurement.
ie: $10.5 \text{ dB}\mu\text{V/m} + 20 \text{ dB} = 30.5 \text{ dB}\mu\text{V/m}$*

3. Suitable RF attenuation was used when making measurements in the 9 kHz to 150 kHz frequency range to prevent the EUT carrier overloading the test receiver. The RF level offset for the attenuation has been compensated for in the measurement results.
4. The EUT formed a large system. The test site antenna measurement point was positioned so that it was 3 metres from the closest periphery of the EUT.

Transmitter Radiated Emissions (Fundamental) (continued)

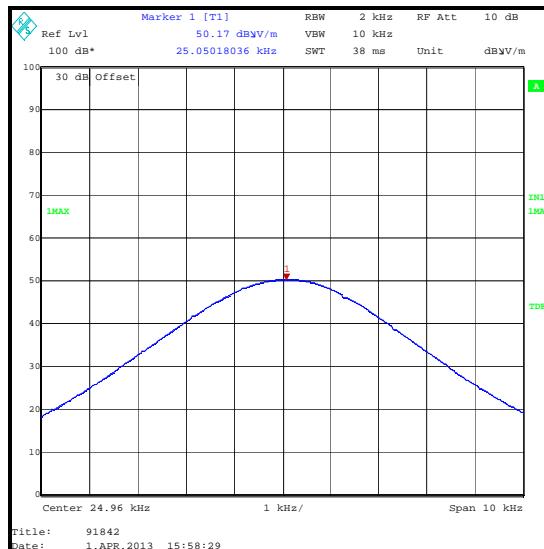

Note: This plot is a pre-scan and for indication purposes only. For final measurements, see accompanying table.

Test Equipment Used:

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
A2000	Attenuator	Huber & Suhner	6830.17.B	301623	03 Apr 2013	12
K0001	5m RSE Chamber	Rainford EMC	N/A	N/A	24 Oct 2013	12
M1273	Test Receiver	Rohde & Schwarz	ESIB 26	100275	15 Feb 2014	12
M1568	Magnetic Loop Antenna	Rohde & Schwarz	HFH2-Z2	879284/2	12 Feb 2014	12

5.2.4. Transmitter 20 dB Bandwidth**Test Summary:**

Test Engineer:	Mark Percival	Test Date:	01 March 2013
Test Sample Serial No.:	1501050186-08313001 & 1501050186-08313002		


FCC Reference:	Part 15.215(c)
Test Method Used:	As detailed in ANSI C63.10 Section 6.9.1

Environmental Conditions:

Temperature (°C):	22
Relative Humidity (%):	28

Results:

20 dB Bandwidth (kHz)	
	0.781

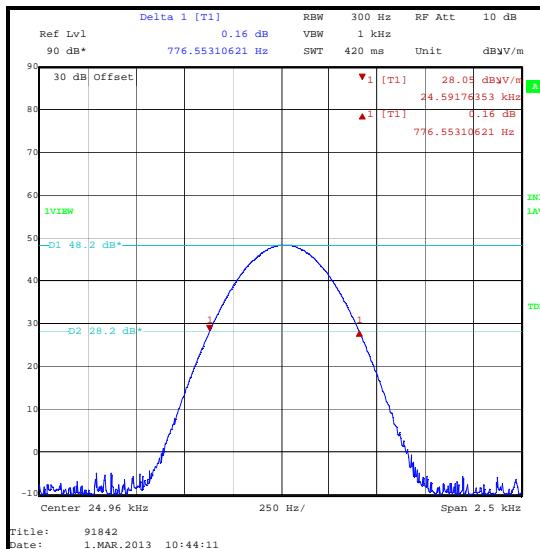**Test Equipment Used:**

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
A2000	Attenuator	Huber & Suhner	6830.17.B	301623	03 Apr 2013	12
K0001	5m RSE Chamber	Rainford EMC	N/A	N/A	24 Oct 2013	12
M1273	Test Receiver	Rohde & Schwarz	ESIB 26	100275	15 Feb 2014	12
M1568	Magnetic Loop Antenna	Rohde & Schwarz	HFH2-Z2	879284/2	12 Feb 2014	12

6. Measurement Uncertainty

No measurement or test can ever be perfect and the imperfections give rise to error of measurement in the results. Consequently the result of a measurement is only an approximation to the value of the measurand (the specific quantity subject to measurement) and is only complete when accompanied by a statement of the uncertainty of the approximation.

The expression of uncertainty of a measurement result allows realistic comparison of results with reference values and limits given in specifications and standards.

The uncertainty of the result may need to be taken into account when interpreting the measurement results.

The reported expanded uncertainties below are based on a standard uncertainty multiplied by an appropriate coverage factor such that a confidence level of approximately 95% is maintained. For the purposes of this document "approximately" is interpreted as meaning "effectively" or "for most practical purposes".

Measurement Type	Range	Confidence Level (%)	Calculated Uncertainty
AC Conducted Spurious Emissions	0.15 MHz to 30 MHz	95%	±4.69 dB
20 dB Bandwidth	24.960 kHz	95%	±0.92 ppm
Radiated Spurious Emissions	9 kHz to 30 MHz	95%	±3.73 dB
Radiated Spurious Emissions	30 MHz to 1000 MHz	95%	±2.94 dB

The methods used to calculate the above uncertainties are in line with those recommended within the various measurement specifications. Where measurement specifications do not include guidelines for the evaluation of measurement uncertainty the published guidance of the appropriate accreditation body is followed.

7. Report Revision History

Version Number	Revision Details		
	Page No(s)	Clause	Details
1.0	-	-	Initial Version
2.0	All	-	Corrected EUT description and serial numbers. Updated 99% occupied bandwidth results. References to UL VS LIMITED changed to UL VS LTD due to company name change.
3.0	All	-	Added further Industry Canada RSS-Gen and RSS-210 clause references.
4.0	16,18 & 20	-	Corrections to fundamental emission and note added to spurious emissions.
	-	-	Removed Industry Canada references and results