



SAR EVALUATION REPORT

**FCC 47 CFR § 2.1093
IEEE Std 1528-2013**

For
W04A

**FCC ID: S8W-W04A
Model Name: Whistle GO, Whistle GO Explore**

**Report Number: 4788872713-US-S0-V0
Issue Date: 5/23/2019**

Prepared for
**Whistle Labs, Inc
1355 Market Street Suite 210 San Francisco, CA 94103, USA**

Prepared by
**Underwriters Laboratories Taiwan Co., Ltd.,
Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd.,
Zhudong Township, Hsinchu County, Taiwan
TEL: +886-2-7737-3000
FAX: +886-3-583-7948
Website: www.ul.com**



The results reported herein have been performed in accordance with the laboratory's terms of accreditation. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report are responsible of the test sample(s) provided by the client only and are not to be used to indicate applicability to other similar products. This report does not imply that the product(s) has met the criteria for certification.

Revision History

Rev.	Date	Revisions	Revised By
V0	5/23/2019	Initial Issue	Sky Zhou

Table of Contents

1.	Attestation of Test Results	5
2.	Test Specification, Methods and Procedures.....	6
3.	Facilities and Accreditation.....	7
4.	SAR Measurement System & Test Equipment	8
4.1.	<i>SAR Measurement System.....</i>	8
4.2.	<i>SAR Scan Procedures.....</i>	9
4.3.	<i>Test Equipment.....</i>	11
5.	Measurement Uncertainty.....	12
6.	Device Under Test (DUT) Information	13
6.1.	<i>DUT Description</i>	13
6.2.	<i>Wireless Technologies.....</i>	13
6.3.	<i>Nominal and Maximum Output Power.....</i>	13
6.4.	<i>General LTE SAR Test and Reporting Considerations.....</i>	14
7.	RF Exposure Conditions (Test Configurations).....	15
7.1.	<i>Standalone SAR Test Exclusion Considerations.....</i>	15
7.2.	<i>Required Test Configurations</i>	16
8.	Dielectric Property Measurements & System Check	17
8.1.	<i>Dielectric Property Measurements</i>	17
8.2.	<i>System Check.....</i>	19
9.	Conducted Output Power Measurements.....	20
9.1.	<i>LTE.....</i>	20
9.2.	<i>Wi-Fi 2.4GHz (DTS Band)</i>	29
9.3.	<i>Bluetooth</i>	29
10.	Measured and Reported (Scaled) SAR Results.....	30
10.1.	<i>LTE Band 2 (20MHz Bandwidth)</i>	31
10.2.	<i>LTE Band 4 (20MHz Bandwidth)</i>	31
10.3.	<i>LTE Band 12 (10MHz Bandwidth)</i>	32
10.4.	<i>Wi-Fi_Body (DTS Band).....</i>	32
10.5.	<i>Appendixes A DUT differences verification.....</i>	33
10.6.	<i>Estimated SAR.....</i>	33
11.	SAR Measurement Variability.....	34
12.	Simultaneous Transmission SAR Analysis.....	35

Appendixes 36

4788872713-US-S1-V0 Appendix A: Antenna Dimensions and Separation Distances 36

4788872713-US-S1-V0 Appendix B: SAR System Check Plots 36

4788872713-US-S1-V0 Appendix C: Highest SAR Test Plots 36

4788872713-US-S1-V0 Appendix D: SAR Liquid Tissue Ingredients..... 36

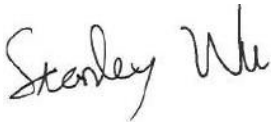

4788872713-US-S1-V0 Appendix E: SAR Probe and Dipole Calibration Certificates 36

1. Attestation of Test Results

Applicant Name	Whistle Labs, Inc		
FCC ID	S8W-W04A		
Model Name	Whistle GO, Whistle GO Explore		
Applicable Standards	FCC 47 CFR § 2.1093 Published RF exposure KDB procedures IEEE Std 1528-2013		
Exposure Category	SAR Limits (W/Kg)		
	Peak spatial-average(1g of tissue)		
General population	1.6		
RF Exposure Conditions	Equipment Class - Highest Reported SAR (W/kg)		
	PCE	DTS	DSS
Standalone	1.391	0.296	0.084
Date Tested	3/19/2019 ~ 4/3/2019		
Test Results	Pass		

Underwriters Laboratories Taiwan Co., Ltd., tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by Underwriters Laboratories Taiwan Co., Ltd., based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by Underwriters Laboratories Taiwan Co., Ltd., and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Underwriters Laboratories Taiwan Co., Ltd., will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of any government. This report is written to support regulatory compliance of the applicable standards stated above.

Approved & Released By:	Prepared By:
	
Stanley Wu Senior Project Engineer Underwriters Laboratories Taiwan Co., Ltd.	Sky Zhou Engineer Underwriters Laboratories Taiwan Co., Ltd.

2. Test Specification, Methods and Procedures

The tests documented in this report were performed in accordance with FCC 47 CFR § 2.1093, IEEE STD 1528-2013, the following FCC Published RF exposure [KDB](#) procedures:

- 248227 D01 802.11 Wi-Fi SAR v02r02
- 447498 D01 General RF Exposure Guidance v06
- 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04
- 865664 D02 RF Exposure Reporting v01r02
- 941225 D05 SAR for LTE Devices v02r05

3. Facilities and Accreditation

The test sites and measurement facilities used to collect data are located at

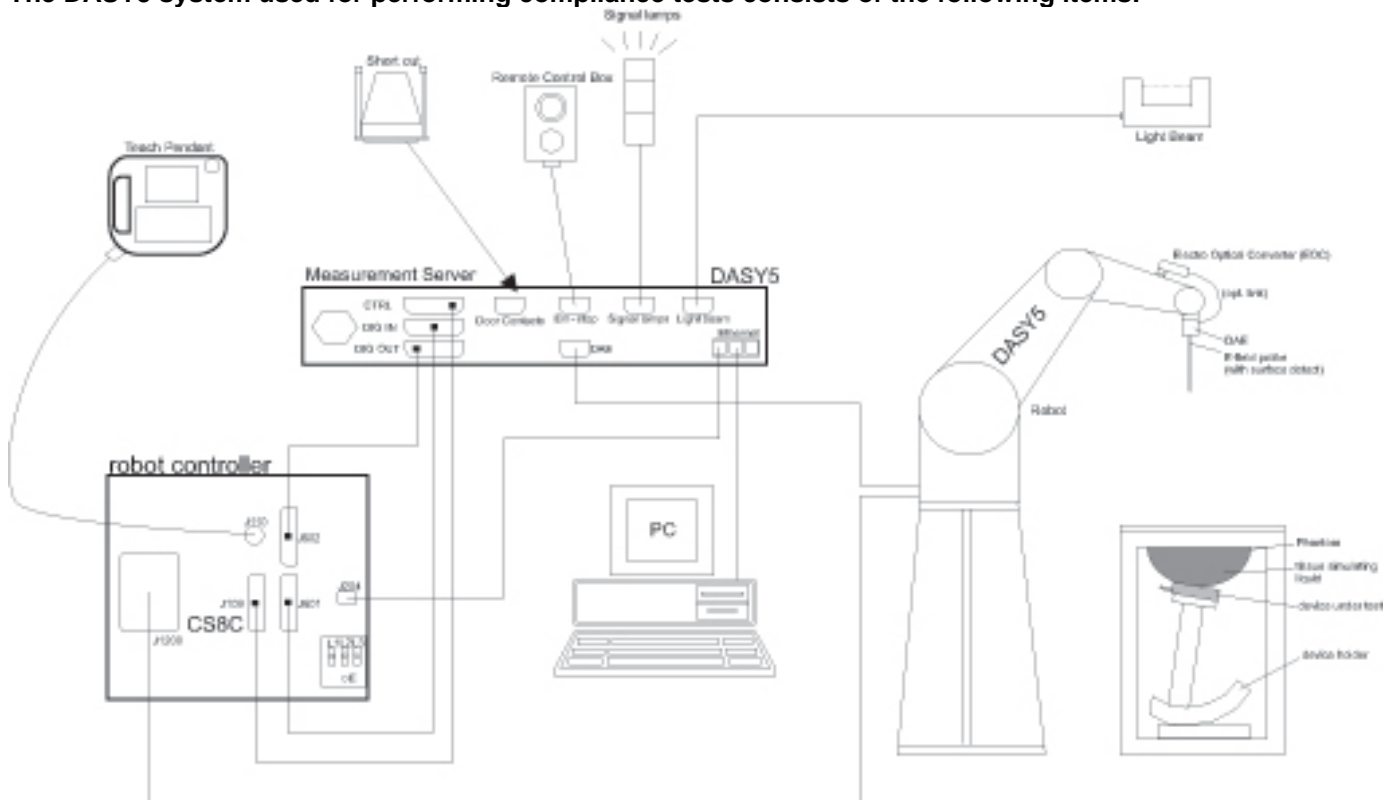
Underwriters Laboratories Taiwan Co., Ltd.,
SAR Room

Underwriters Laboratories Taiwan Co., Ltd. is accredited by TAF, Laboratory Code 3398.

4. SAR Measurement System & Test Equipment

4.1. SAR Measurement System

The DASY5 system used for performing compliance tests consists of the following items:



- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

4.2. SAR Scan Procedures

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 2.1 mm. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE Standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

Step 3: Zoom Scan

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$			≤ 2 GHz: ≤ 8 mm $2 - 3$ GHz: ≤ 5 mm*	$3 - 4$ GHz: ≤ 5 mm* $4 - 6$ GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$		≤ 5 mm	$3 - 4$ GHz: ≤ 4 mm $4 - 5$ GHz: ≤ 3 mm $5 - 6$ GHz: ≤ 2 mm
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	$3 - 4$ GHz: ≤ 3 mm $4 - 5$ GHz: ≤ 2.5 mm $5 - 6$ GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	$3 - 4$ GHz: ≥ 28 mm $4 - 5$ GHz: ≥ 25 mm $5 - 6$ GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

Step 4: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

Step 5: Z-Scan (FCC only)

The Z Scan measures points along a vertical straight line. The line runs along the Z-axis of a one-dimensional grid. In order to get a reasonable extrapolation the extrapolated distance should not be larger than the step size in Z-direction.

4.3. Test Equipment

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations, and is traceable to recognized national standards.

Dielectric Property Measurements

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Date
Network Analyzer	Agilent	MS46322B	1740002	2018/12/26
Dielectric Assessment Kit	SPEAG	DAK-3.5	1250	2018/9/19
Thermometer	DER EE	DE-3003	P0006880	2019/1/4

System Check

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Date
EXG-B RF Vector Signal Generator	Keysight Technologies	N5182B	MY56200244	2019/1/4
Power Meter	Keysight	N1914A	MY56360007	2018/12/14
Power Meter	ANRITSU	ML2495A	1645002	2018/12/17
Power Sensor	Keysight	N8481H	MY56350009	2018/12/14
Power Sensor	ANRITSU	MA2411B	1531202	2018/12/17
Power Amplifier	Mini-Circuits	ZVE-8G+	088201629	N/A
20dB Directional coupler	N/A	N/A	150820087	N/A
DC Power Supply	GW Insrek	GPD-2303S	GEQ902177	2018/4/9
10dB Attenuator	Agilent	8491A	MY39266158	2018/12/13
Dosimetric E-Field Probe	SPEAG	EX3DV4	3901	2018/9/27
Dosimetric E-Field Probe	SPEAG	EX3DV4	7369	2018/9/30
Data Acquisition Electronic	SPEAG	DAE4	1360	2018/12/18
System Validation Dipole	SPEAG	D750V3	1164	2018/10/26
System Validation Dipole	SPEAG	D1750V2	1156	2018/10/31
System Validation Dipole	SPEAG	D1900V2	5d217	2018/10/24
System Validation Dipole	SPEAG	D2450V2	988	2018/12/7
Humidity/Temp meter	TECPEL	DTM-20	N/A	2018/4/6
Thermometer	DER EE	DE-3003	P0006880	2019/1/4

UL Software

Software Version
DASY NEO52 D10.1 S14.6.11
SEMCAD-X-PostPro

5. Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval.

Therefore, the measurement uncertainty is not required.

6. Device Under Test (DUT) Information

6.1. DUT Description

Product Name	W04A
Model Name	Whistle GO, Whistle GO Explore
Device Dimension	Overall (Length x Width x height): 46 mm x 46.7 mm x 20.3 mm Display Diagonal: 52.1 mm
Back Cover	<input checked="" type="checkbox"/> The Back Cover is not removable.
Battery Options	<input checked="" type="checkbox"/> The rechargeable battery is not user accessible.
Hardware Version	N/A
Software Version	N/A
Sample Stage	PVT

6.2. Wireless Technologies

Wireless technologies	Frequency bands	Operating mode	Duty Cycle used for SAR testing
LTE(Cat-M1)	FDD Band 2 FDD Band 4 FDD Band 12	QPSK 16QAM	99% (FDD)
Wi-Fi	2.4 GHz	802.11b 802.11g 802.11n (HT20)	100% (802.11b) 100% (802.11g) 100% (802.11n 20MHz BW)
Bluetooth	2.4 GHz	BLE	62.6%

6.3. Nominal and Maximum Output Power

At the maximum rated output power and within the tune-up tolerance range specified for the product, but not more than 2 dB lower than the maximum tune-up tolerance limit.

Band/ Mode		Tune up Power (dBm)
LTE(Cat-M1)	Band 2	24
	Band 4	24
	Band 12	24
2.4 GHz	802.11b	16
	802.11g	16
	802.11n HT20	16
Bluetooth	BLE	3

Note: LTE QPSK configuration has the highest maximum average output power per 3GPP standard.

6.4. General LTE SAR Test and Reporting Considerations

Item	Description																																																				
Frequency range, Channel Bandwidth, Numbers and Frequencies	Band 2	Frequency range: 1850 - 1910 MHz																																																			
		Channel Bandwidth																																																			
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz																																														
	Low	18700 /1860	18675/ 1857.5	18650/ 1855	18625/ 1852.5	18615/ 1851.5	18607/ 1850.7																																														
	Mid	18900/ 1880	18900/ 1880	18900/ 1880	18900/ 1880	18900/ 1880	18900/ 1880																																														
	High	19100/ 1900	19125/ 1902.5	19150/ 1905	19175/ 1907.5	19185/ 1908.5	19193/ 1909.3																																														
	Band 4	Frequency range: 1710 - 1755 MHz																																																			
		Channel Bandwidth																																																			
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz																																														
	Low	20050/ 1720	20025/ 1717.5	20000/ 1715	19975/ 1712.5	19965/ 1711.5	19957/ 1710.7																																														
	Mid	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5																																														
	High	20300/ 1745	20325/ 1747.5	20350/ 1750	20375/ 1752.5	20385/ 1753.5	20393/ 1754.3																																														
	Band 12	Frequency range: 699 – 716 MHz																																																			
		Channel Bandwidth																																																			
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz																																														
	Low			23060/ 704	23035/ 701.5	23025/ 700.5	23017/ 699.7																																														
Mid			23095/ 707.5	23095/ 707.5	23095/ 707.5	23095/ 707.5																																															
High			23130/ 711	23155/ 713.5	23165/ 714.5	23173/ 715.3																																															
LTE transmitter and antenna implementation	Refer to Appendix A.																																																				
Maximum power reduction (MPR)	<p align="center">Table 6.2.3EA-1: Maximum Power Reduction (MPR) for Power Class 3</p> <table border="1"> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth (N_{RB})</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>QPSK</td> <td>>2</td> <td>>2</td> <td>>1</td> <td>>4</td> <td>-</td> <td>-</td> <td>≤ 1</td> </tr> <tr> <td>QPSK</td> <td>>5</td> <td>>5</td> <td>-</td> <td>-</td> <td>-</td> <td>-</td> <td>≤ 2</td> </tr> <tr> <td>16 QAM</td> <td>≤ 2</td> <td>≤ 2</td> <td>>1</td> <td>>3</td> <td>-</td> <td>-</td> <td>≤ 1</td> </tr> <tr> <td>16QAM</td> <td>>2</td> <td>>2</td> <td>>3</td> <td>>5</td> <td>-</td> <td>-</td> <td>≤ 2</td> </tr> </tbody> </table> <p>MPR Built-in by design The manufacturer MPR values are always within the 3GPP maximum MPR allowance but may not follow the default MPR values. A-MPR (additional MPR) was disabled during SAR testing</p>							Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	>2	>2	>1	>4	-	-	≤ 1	QPSK	>5	>5	-	-	-	-	≤ 2	16 QAM	≤ 2	≤ 2	>1	>3	-	-	≤ 1	16QAM	>2	>2	>3	>5	-	-	≤ 2
Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)																																														
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																															
QPSK	>2	>2	>1	>4	-	-	≤ 1																																														
QPSK	>5	>5	-	-	-	-	≤ 2																																														
16 QAM	≤ 2	≤ 2	>1	>3	-	-	≤ 1																																														
16QAM	>2	>2	>3	>5	-	-	≤ 2																																														
Power reduction	No																																																				
Spectrum plots for RB configurations	A properly configured base station simulator was used for the SAR and power measurements; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																				

7. RF Exposure Conditions (Test Configurations)

Refer to Appendix A for the specific details of the antenna-to-edge(s) distances.

7.1. Standalone SAR Test Exclusion Considerations

Since the *Dedicated Host Approach* is applied, the standalone SAR test exclusion procedure in KDB 447498 § 4.3.1 is applied in conjunction with KDB 616217 § 4.3 to determine the minimum test separation distance:

- When the separation distance from the antenna to an adjacent edge is ≤ 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.
- When the separation distance from the antenna to an adjacent edge is > 5 mm, the actual antenna-to-edge separation distance is applied to determine SAR test exclusion.

SAR Test Exclusion Calculations for WWAN

Antennas < 50mm to adjacent edges

Antenna	Tx Interface	Frequency (MHz)	Output Power		Separation Distances (mm)						Calculated Threshold Value					
			dBm	mW	Rear	Edge 1	Edge 2	Edge 3	Edge 4	Front	Rear	Edge 1	Edge 2	Edge 3	Edge 4	Front
Full Power, Proximity Sensor Off																
Cellular	LTE Band 2	1900	24.00	251	13	5	5	26	28	5	26.6	69.2	69.2	13.3	12.4	69.2
Cellular	LTE Band 4	1745	24.00	251	13	5	5	26	28	5	-MEASURE-	-MEASURE-	-MEASURE-	-MEASURE-	-MEASURE-	-MEASURE-
Cellular	LTE Band 12	711	24.00	251	13	5	5	26	28	5	25.5	66.3	66.3	12.8	11.8	66.3
											16.3	42.3	42.3	8.1	7.6	42.3
											-MEASURE-	-MEASURE-	-MEASURE-	-MEASURE-	-MEASURE-	-MEASURE-

Note(s):

According to KDB 447498 , if the calculated threshold value is >3 then SAR testing is required.

SAR Test Exclusion Calculations for WLAN

Antennas < 50mm to adjacent edges

Tx Interface	Frequency (MHz)	Output Power		Separation Distances (mm)						Calculated Threshold Value						
		dBm	mW	Rear	Edge 1	Edge 2	Edge 3	Edge 4	Front	Rear	Edge 1	Edge 2	Edge 3	Edge 4	Front	
Wi-Fi Antenna 1																
Wi-Fi 2.4 GHz	2462	16.00	40	13	5	5	26	28	5	4.8	12.6	12.6	2.4	2.2	12.6	
Bluetooth	2480	3.00	2	13	5	5	26	28	5	0.2	0.6	0.6	0.1	0.1	0.6	
											-EXEMPT-	-EXEMPT-	-EXEMPT-	-EXEMPT-	-EXEMPT-	

Note(s):

According to KDB 447498, if the calculated threshold value is >3 then SAR testing is required.

7.2. Required Test Configurations

The table below identifies the standalone test configurations required for this device according to the findings in Section 7.1:

Test Configurations	Rear	Edge 1	Edge 2	Edge 3	Edge 4	Front
		(Top Edge)	(Right Edge)	(Bottom Edge)	(Left Edge)	
LTE Band 2	Yes	Yes	Yes	Yes	Yes	Yes
LTE Band 4	Yes	Yes	Yes	Yes	Yes	Yes
LTE Band 12	Yes	Yes	Yes	Yes	Yes	Yes
Wi-Fi 2.4 GHz	Yes	Yes	Yes	No	No	Yes
Bluetooth	No	No	No	No	No	No

Note(s):

Yes = Testing is required.

No = Testing is not required.

8. Dielectric Property Measurements & System Check

8.1. Dielectric Property Measurements

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within $\pm 2^\circ\text{C}$ of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

Tissue dielectric parameters were measured at the low, middle and high frequency of each operating frequency range of the test device.

The dielectric constant (ϵ_r) and conductivity (σ) of typical tissue-equivalent media recipes are expected to be within $\pm 5\%$ of the required target values; but for SAR measurement systems that have implemented the SAR error compensation algorithms documented in IEEE Std 1528-2013, to automatically compensate the measured SAR results for deviations between the measured and required tissue dielectric parameters, the tolerance for ϵ_r and σ may be relaxed to $\pm 10\%$. This is limited to frequencies ≤ 3 GHz.

Tissue Dielectric Parameters

FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

Target Frequency (MHz)	Head		Body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5000	36.2	4.45	49.3	5.07
5100	36.1	4.55	49.1	5.18
5200	36.0	4.66	49.0	5.30
5300	35.9	4.76	48.9	5.42
5400	35.8	4.86	48.7	5.53
5500	35.6	4.96	48.6	5.65
5600	35.5	5.07	48.5	5.77
5700	35.4	5.17	48.3	5.88
5800	35.3	5.27	48.2	6.00

IEEE Std 1528-2013

Refer to Table 3 within the IEEE Std 1528-2013

Dielectric Property Measurements Results:

Date	Tissue Type	Frequency (MHz)	Relative Permittivity (ϵ_r)			Conductivity (σ)		
			Measured	Target	Delta (%)	Measured	Target	Delta (%)
2019/3/21	Body	690	54.55	55.76	-2.18	0.94	0.96	-2.19
		720	54.24	55.65	-2.53	0.97	0.96	0.89
		750	53.79	55.53	-3.14	1.00	0.96	3.80
2019/4/2	Body	690	54.49	55.76	-2.29	0.94	0.96	-2.35
		720	54.19	55.65	-2.62	0.97	0.96	0.73
		750	53.74	55.53	-3.23	1.00	0.96	3.63
2019/3/22	Body	1710	52.29	53.54	-2.33	1.44	1.46	-1.55
		1750	52.35	53.43	-2.02	1.46	1.49	-1.74
		1790	52.07	53.33	-2.36	1.50	1.51	-0.65
2019/3/25	Body	1850	51.89	53.30	-2.65	1.49	1.52	-1.74
		1900	51.68	53.30	-3.04	1.54	1.52	1.61
		1930	51.58	53.30	-3.23	1.57	1.52	3.57
2019/3/19	Body	2400	51.89	52.77	-1.66	1.97	1.90	3.48
		2450	51.69	52.70	-1.92	2.03	1.95	4.16
		2480	51.63	52.66	-1.96	2.07	1.99	4.02
2019/4/3	Body	2400	51.99	52.77	-1.47	1.96	1.90	2.92
		2450	51.89	52.70	-1.54	2.01	1.95	2.83
		2480	51.86	52.66	-1.52	2.04	1.99	2.15

8.2. System Check

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are re-measured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

System Performance Check Measurement Conditions:

- The measurements were performed in the flat section of the TWIN SAM or ELI phantom, shell thickness: 2.0 ±0.2 mm (bottom plate) filled with Body or Head simulating liquid of the following parameters.
- The depth of tissue-equivalent liquid in a phantom must be ≥ 15.0 cm for SAR measurements ≤ 3 GHz and ≥ 10.0 cm for measurements > 3 GHz.
- The DASY system with an E-Field Probe was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10 mm (above 1 GHz) and 15 mm (below 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 15 mm was aligned with the dipole.
For 5 GHz band - The coarse grid with a grid spacing of 10 mm was aligned with the dipole.
- Special 7x7x7 (below 3 GHz) and/or 8x8x7 (above 3 GHz) fine cube was chosen for the cube.
- Distance between probe sensors and phantom surface was set to 3 mm.
For 5 GHz band - Distance between probe sensors and phantom surface was set to 2.5 mm
- The dipole input power (forward power) was 250 mW.
- The results are normalized to 1 W input power.

System Check Results

The 1-g and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within 10% of the manufacturer calibrated dipole SAR target.

Date	Tissue Type	Dipole Type _Serial #	Dipole Cal. Due Data	Measured Results for 1g SAR				Measured Results for 10g SAR				Plot No.
				Zoom Scan to 250 mW	Normalize to 1 W	Target (Ref. Value)	Delta ±10 %	Zoom Scan to 250 mW	Normalize to 1 W	Target (Ref. Value)	Delta ±10 %	
2019/3/21	Body	D750V3_988	2019/10/25	2.22	8.9	8.84	0.45	1.46	5.8	5.87	-0.51	1
2019/4/2	Body	D750V3_988	2019/10/25	2.36	9.4	8.84	6.79	1.56	6.2	5.87	6.30	2
2019/3/22	Body	D1750V2_1156	2019/10/30	9.43	37.7	37.40	0.86	5.05	20.2	19.90	1.51	3
2019/3/25	Body	D1900V2_5d217	2019/10/23	9.83	39.3	40.60	-3.15	5.25	21.0	21.50	-2.33	4
2019/3/26	Body	D1900V2_5d217	2019/10/23	10.20	40.8	40.60	0.49	5.47	21.9	21.50	1.77	5
2019/3/19	Body	D2450V2_1244	2019/12/6	12.60	50.4	50.70	-0.59	5.86	23.4	23.60	-0.68	8
2019/3/20	Body	D2450V2_1244	2019/12/6	13.00	52.0	50.70	2.56	6.10	24.4	23.60	3.39	9
2019/4/3	Body	D2450V2_1244	2019/12/6	13.20	52.8	50.70	4.14	6.13	24.5	23.60	3.90	10

9. Conducted Output Power Measurements

9.1. LTE

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.521-1 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table TS36.521-1 of the 3GPP TS36.521-1.

Table 6.2.3EA-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (N_{RB})						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	>2	>2	>1	>4	-	-	≤ 1
QPSK	>5	>5	-	-	-	-	≤ 2
16 QAM	≤ 2	≤ 2	>1	>3	-	-	≤ 1
16QAM	>2	>2	>3	>5	-	-	≤ 2

LTE Band 2 Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	RB Index	MPR	Max. Meas. Avg Pwr (dBm)		
							1850.7 MHz	1880 MHz	1909.3 MHz
LTE Band 2	1.4	QPSK	1	0	0	0	23.22	23.29	23.03
			1	5	0	0	23.24	23.31	23.05
			3	0	0	0	22.19	22.26	21.98
			3	3	0	0	22.22	22.28	22.01
			6	0	0	2	21.14	21.24	20.99
		16QAM	1	0	0	1	22.02	22.08	21.83
			1	5	0	1	22.01	22.07	21.82
			3	0	0	0	21.98	22.01	21.78
			3	3	0	0	21.91	21.94	21.73
			6	0	0	2	-	-	-
Band	BW (MHz)	Mode	RB Allocation	RB offset	RB Index	MPR	Max. Meas. Avg Pwr (dBm)		
							1851.5 MHz	1880 MHz	1908.5 MHz
LTE Band 2	3	QPSK	1	0	0	0	23.31	23.40	23.17
			1	5	0	0	23.34	23.46	23.21
			3	0	0	0	22.06	22.12	21.93
			3	3	0	0	21.97	22.02	21.87
			6	0	0	2	21.30	21.38	21.10
		16QAM	1	0	0	1	22.30	22.42	22.17
			1	5	0	1	22.32	22.45	22.19
			3	0	0	0	22.27	22.32	22.20
			3	3	0	0	22.26	22.28	22.18
			6	0	0	2	-	-	-

Band	BW (MHz)	Mode	RB Allocation	RB offset	RB Index	MPR	Max. Meas. Avg Pwr (dBm)		
							1852.5 MHz	1880 MHz	1907.5 MHz
LTE Band 2	5	QPSK	1	0	0	0	23.41	23.47	23.24
			1	5	3	0	23.44	23.42	23.23
			1	0	3	0	23.42	23.40	23.19
			1	5	0	0	23.41	23.43	23.22
			3	0	0	0	23.39	23.38	23.15
			3	3	0	0	23.35	23.33	23.12
			6	0	0	1	22.20	22.28	22.02
			6	0	3	1	22.30	22.26	22.00
		16QAM	1	0	0	0	23.38	23.41	23.15
			1	5	3	0	23.41	23.40	23.13
			1	0	3	0	23.42	23.39	23.12
			1	5	0	0	23.41	23.45	23.15
			3	0	0	0	23.34	23.36	23.08
			3	3	0	0	23.31	23.32	23.05
6	0	0	2	-	-	-			
6	0	3	2	-	-	-			
Band	BW (MHz)	Mode	RB Allocation	RB offset	RB Index	MPR	Max. Meas. Avg Pwr (dBm)		
							1855 MHz	1880 MHz	1905 MHz
LTE Band 2	10	QPSK	1	0	0	0	23.41	23.47	23.30
			1	5	7	0	23.49	23.44	23.26
			1	0	3	0	23.46	23.44	23.24
			1	5	4	0	23.44	23.45	23.24
			4	0	0	0	23.19	23.24	23.05
			4	2	7	0	23.27	23.26	23.00
			6	0	0	1	22.26	22.30	22.07
			6	0	7	1	22.31	22.25	22.02
		16QAM	1	0	0	0	23.37	23.46	23.07
			1	5	7	0	23.44	23.47	23.01
			1	0	3	0	23.41	23.44	23.03
			1	5	4	0	23.45	23.45	23.04
			4	0	0	0	22.26	22.41	23.03
			4	2	7	0	22.27	22.29	23.02
			6	0	0	2	-	-	-
			6	0	7	2	-	-	-

Band	BW (MHz)	Mode	RB Allocation	RB offset	RB Index	MPR	Max. Meas. Avg Pwr (dBm)		
							1857.5 MHz	1880 MHz	1902.5 MHz
LTE Band 2	15	QPSK	1	0	0	-	23.43	23.55	23.29
			1	5	11	-	23.51	23.47	23.28
			1	0	3	-	23.49	23.48	23.22
			1	5	8	-	23.45	23.51	23.27
			3	0	0	-	23.39	23.47	23.26
			3	3	0	-	23.36	23.44	23.22
			6	0	0	-	23.21	23.21	23.13
		6	0	11	-	23.22	23.16	23.04	
		16QAM	1	0	0	-	23.37	23.53	23.42
			1	5	11	-	23.48	23.46	23.41
			1	0	3	-	23.43	23.51	23.42
			1	5	8	-	23.47	23.47	23.44
			3	0	0	-	23.34	23.48	23.40
			3	3	0	-	23.36	23.45	23.38
6	0		0	-	-	-	-		
6	0	11	-	-	-	-			
Band	BW (MHz)	Mode	RB Allocation	RB offset	RB Index	MPR	Max. Meas. Avg Pwr (dBm)		
							1860 MHz	1880 MHz	1900 MHz
LTE Band 2	20	QPSK	1	0	0	-	23.43	23.58	23.40
			1	5	15	-	23.57	23.49	23.32
			1	0	3	-	23.46	23.53	23.36
			1	5	12	-	23.52	23.47	23.27
			3	0	0	-	23.40	23.51	23.36
			3	3	0	-	23.38	23.45	23.30
			6	0	0	-	23.25	23.30	23.04
		6	0	15	-	23.32	23.19	22.98	
		16QAM	1	0	0	-	23.35	23.53	23.44
			1	5	15	-	23.50	23.50	23.31
			1	0	3	-	23.37	23.47	23.37
			1	5	12	-	23.49	23.47	23.39
			3	0	0	-	23.32	23.46	23.38
			3	3	0	-	23.28	23.41	23.33
6	0		0	-	-	-	-		
6	0	15	-	-	-	-			

LTE Band 4 Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	RB Index	MPR	Max. Meas. Avg Pwr (dBm)		
							1710.7 MHz	1732.5 MHz	1754.3 MHz
LTE Band 4	1.4	QPSK	1	0	0	0	23.04	23.08	23.14
			1	5	0	0	23.07	23.07	23.16
			3	0	0	0	22.95	22.98	23.01
			3	3	0	0	22.92	22.96	22.98
			6	0	0	2	21.02	21.15	20.97
		16QAM	1	0	0	1	21.84	21.77	21.97
			1	5	0	1	21.83	21.73	21.96
			3	0	0	0	21.78	21.73	21.81
			3	3	0	0	21.76	21.70	21.78
			6	0	0	2	-	-	-
Band	BW (MHz)	Mode	RB Allocation	RB offset	RB Index	MPR	Max. Meas. Avg Pwr (dBm)		
							1711.5 MHz	1732.5 MHz	1753.5 MHz
LTE Band 4	3	QPSK	1	0	0	0	23.12	23.12	23.21
			1	5	0	0	23.15	23.13	23.21
			3	0	0	0	22.87	22.89	22.92
			3	3	0	0	22.85	22.88	22.90
			6	0	0	2	21.05	21.07	21.12
		16QAM	1	0	0	1	22.05	22.08	22.17
			1	5	0	1	22.04	22.07	22.22
			3	0	0	0	21.98	22.00	22.04
			3	3	0	0	21.95	21.97	22.02
			6	0	0	2	-	-	-

Band	BW (MHz)	Mode	RB Allocation	RB offset	RB Index	MPR	Max. Meas. Avg Pwr (dBm)		
							1712.5 MHz	1732.5 MHz	1752.5 MHz
LTE Band 4	5	QPSK	1	0	0	0	23.20	23.18	23.22
			1	5	3	0	23.20	23.19	23.24
			1	0	3	0	23.17	23.19	23.21
			1	5	0	0	23.18	23.18	23.23
			3	0	0	0	23.08	23.03	23.10
			3	3	0	0	23.01	23.92	23.06
			6	0	0	1	22.01	21.99	22.01
			6	0	3	1	22.00	21.98	22.00
		16QAM	1	0	0	0	23.09	23.11	23.16
			1	5	3	0	23.08	23.13	23.18
			1	0	3	0	23.09	23.13	23.19
			1	5	0	0	23.05	23.11	23.12
			3	0	0	0	23.00	22.97	23.01
			3	3	0	0	22.93	22.91	22.95
			6	0	0	2	-	-	-
			6	0	3	2	-	-	-
Band	BW (MHz)	Mode	RB Allocation	RB offset	RB Index	MPR	Max. Meas. Avg Pwr (dBm)		
							1715 MHz	1732.5 MHz	1750 MHz
LTE Band 4	10	QPSK	1	0	0	0	23.17	23.18	23.21
			1	5	7	0	23.18	23.20	23.24
			1	0	3	0	23.17	23.21	23.22
			1	5	4	0	23.17	23.19	23.22
			4	0	0	0	22.94	22.92	22.92
			4	2	7	0	22.95	22.96	22.94
			6	0	0	1	22.00	21.99	22.01
			6	0	7	1	21.99	22.00	22.02
		16QAM	1	0	0	0	23.09	23.12	23.09
			1	5	7	0	23.09	23.13	23.12
			1	0	3	0	23.07	23.12	23.07
			1	5	4	0	23.05	23.14	23.11
			4	0	0	1	22.07	22.00	22.10
			4	2	7	1	21.88	21.92	21.88
			6	0	0	2	-	-	-
			6	0	7	2	-	-	-

Band	BW (MHz)	Mode	RB Allocation	RB offset	RB Index	MPR	Max. Meas. Avg Pwr (dBm)		
							1717.5 MHz	1732.5 MHz	1747.5 MHz
LTE Band 4	15	QPSK	1	0	0	-	23.13	23.25	23.03
			1	5	11	-	23.09	23.28	23.07
			1	0	3	-	23.13	23.25	23.03
			1	5	8	-	23.09	23.28	23.06
			3	0	0	-	23.07	23.19	22.98
			3	3	0	-	23.03	23.17	22.93
			6	0	0	-	22.87	23.03	22.73
			6	0	11	-	22.86	23.02	22.75
		16QAM	1	0	0	-	23.02	23.11	23.06
			1	5	11	-	23.05	23.13	23.15
			1	0	3	-	23.04	23.12	23.13
			1	5	8	-	23.04	23.13	23.16
			3	0	0	-	22.97	23.03	22.99
			3	3	0	-	22.93	23.00	22.96
			6	0	0	-	-	-	-
			6	0	11	-	-	-	-
Band	BW (MHz)	Mode	RB Allocation	RB offset	RB Index	MPR	Max. Meas. Avg Pwr (dBm)		
							1720 MHz	1732.5 MHz	1745 MHz
LTE Band 4	20	QPSK	1	0	0	-	23.21	23.27	23.15
			1	5	15	-	23.25	23.30	23.24
			1	0	3	-	23.12	23.14	23.06
			1	5	12	-	23.14	23.18	23.14
			3	0	0	-	23.12	23.21	23.08
			3	3	0	-	23.08	23.16	23.04
			6	0	0	-	22.88	22.92	22.90
			6	0	15	-	22.89	22.94	22.89
		16QAM	1	0	0	-	23.03	23.01	23.13
			1	5	15	-	23.06	23.03	23.12
			1	0	3	-	23.03	23.03	23.12
			1	5	12	-	23.04	23.01	23.12
			3	0	0	-	-	-	-
			3	3	0	-	-	-	-

LTE Band 12 Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	RB Index	MPR	Max. Meas. Avg Pwr (dBm)		
							699.7 MHz	707.5 MHz	715.3 MHz
LTE Band 12	1.4	QPSK	1	0	0	0	23.61	23.55	23.41
			1	5	0	0	23.60	23.54	21.54
			3	0	0	0	23.58	23.55	23.39
			3	3	0	0	23.55	23.53	23.36
			6	0	0	2	21.78	21.55	21.87
		16QAM	1	0	0	1	22.21	22.16	21.98
			1	5	0	1	22.25	22.14	21.96
			3	0	0	0	22.19	22.13	22.16
			3	3	0	0	22.20	22.11	22.17
			6	0	0	2	-	-	-
Band	BW (MHz)	Mode	RB Allocation	RB offset	RB Index	MPR	Max. Meas. Avg Pwr (dBm)		
							700.5 MHz	707.5 MHz	714.5 MHz
LTE Band 12	3	QPSK	1	0	0	0	23.65	23.60	23.56
			1	5	0	0	23.66	23.63	23.59
			3	0	0	0	23.58	23.52	23.49
			3	3	0	0	23.55	23.50	23.46
			6	0	0	2	21.64	21.64	21.59
		16QAM	1	0	0	1	22.59	22.58	22.44
			1	5	0	1	22.62	22.57	22.45
			3	0	0	0	23.52	23.48	23.42
			3	3	0	0	23.50	23.47	23.39
			6	0	0	2	-	-	-

Band	BW (MHz)	Mode	RB Allocation	RB offset	RB Index	MPR	Max. Meas. Avg Pwr (dBm)		
							701.5 MHz	707.5 MHz	713.5 MHz
LTE Band 12	5	QPSK	1	0	0	0	23.56	23.57	23.55
			1	5	3	0	23.56	23.51	23.50
			1	0	3	0	23.54	23.54	23.54
			1	5	0	0	23.54	23.57	23.51
			3	0	0	0	23.51	23.53	23.50
			3	3	0	0	23.49	23.50	23.48
			6	0	0	1	22.57	22.47	22.42
			6	0	3	1	22.54	22.45	22.39
		16QAM	1	0	0	0	23.54	23.56	23.54
			1	5	3	0	23.53	23.50	23.52
			1	0	3	0	23.53	23.53	23.53
			1	5	0	0	23.54	23.56	23.51
			3	0	0	0	23.47	23.49	23.44
			3	3	0	0	23.43	23.47	23.43
			6	0	0	2	-	-	-
			6	0	3	2	-	-	-
Band	BW (MHz)	Mode	RB Allocation	RB offset	RB Index	MPR	Max. Meas. Avg Pwr (dBm)		
							704 MHz	707.5 MHz	711 MHz
LTE Band 12	10	QPSK	1	0	0	0	23.5	23.5	23.5
			1	5	7	0	23.5	23.3	23.4
			1	0	3	0	23.6	23.7	23.5
			1	5	4	0	23.5	23.3	23.4
			4	0	0	0	23.6	23.6	23.5
			4	2	7	0	23.5	23.6	23.4
			6	0	0	1	22.7	22.6	22.5
			6	0	7	1	22.6	22.5	22.4
		16QAM	1	0	0	0	23.4	23.6	23.6
			1	5	7	0	23.4	23.6	23.5
			1	0	3	0	23.4	23.6	23.5
			1	5	4	0	23.4	23.6	23.5
			4	0	0	1	23.1	22.6	22.5
			4	2	7	1	23.4	22.4	22.3
			6	0	0	2	-	-	-
			6	0	7	2	-	-	-

9.2. Wi-Fi 2.4GHz (DTS Band)

Measured Results

Band (GHz)	Mode	Data Rate	Ch #	Freq. (MHz)	Meas. Avg Pwr (dBm)	Max Output Power (dBm)	SAR Test (Yes/No)
2.4	802.11b	1 Mbps	1	2412	15.14	16	Yes
			6	2437	15.21		
			11	2462	15.03		
	802.11g	6 Mbps	1	2412	Not required	16	No
			6	2437			
			11	2462			
	802.11n (HT20)	MCS0	1	2412		16	No
			6	2437			
			11	2462			

Note(s):

- SAR is not required for 802.11g/n modes when the adjusted SAR for 802.11b is < 1.2 W/kg.
- For "Not required", SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band. Additional output power measurements were not deemed necessary.

9.3. Bluetooth

Measured Results

Band (GHz)	Mode	Ch #	Freq. (MHz)	Meas. Avg Pwr (dBm)	Max Output Power (dBm)
2.4	BLE, GFSK	0	2402	2.03	3
		19	2440	1.64	
		39	2480	1.51	

10. Measured and Reported (Scaled) SAR Results

SAR Test Reduction criteria are as follows:

KDB 447498 D01 General RF Exposure Guidance:

Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

- ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
- ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

KDB 248227 D01 SAR meas for 802.11:

SAR test reduction for 802.11 Wi-Fi transmission mode configurations are considered separately for DSSS and OFDM. An initial test position is determined to reduce the number of tests required for certain exposure configurations with multiple test positions. An initial test configuration is determined for each frequency band and aggregated band according to maximum output power, channel bandwidth, wireless mode configurations and other operating parameters to streamline the measurement requirements. For 2.4 GHz DSSS, either the initial test position or DSSS procedure is applied to reduce the number of SAR tests; these are mutually exclusive. For OFDM, an initial test position is only applicable to next to the ear, UMPC mini-tablet and hotspot mode configurations, which is tested using the initial test configuration to facilitate test reduction. For other exposure conditions with a fixed test position, SAR test reduction is determined using only the initial test configuration.

The multiple test positions require SAR measurements in head, hotspot mode or UMPC mini-tablet configurations may be reduced according to the highest reported SAR determined using the initial test position(s) by applying the DSSS or OFDM SAR measurement procedures in the required wireless mode test configuration(s). The initial test position(s) is measured using the highest measured maximum output power channel in the required wireless mode test configuration(s). When the reported SAR for the initial test position is:

- ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and wireless mode combination within the frequency band or aggregated band. DSSS and OFDM configurations are considered separately according to the required SAR procedures.
- > 0.4 W/kg, SAR is repeated using the same wireless mode test configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position, on the highest maximum output power channel, until the reported SAR is ≤ 0.8 W/kg or all required test positions are tested.
 - For subsequent test positions with equivalent test separation distance or when exposure is dominated by coupling conditions, the position for maximum coupling condition should be tested.
 - When it is unclear, all equivalent conditions must be tested.
- For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is > 0.8 W/kg, measure the SAR for these positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required test channels are considered.
 - The additional power measurements required for this step should be limited to those necessary for identifying subsequent highest output power channels to apply the test reduction.
- When the specified maximum output power is the same for both UNII 1 and UNII 2A, begin SAR measurements in UNII 2A with the channel with the highest measured output power. If the reported SAR for UNII 2A is ≤ 1.2 W/kg, SAR is not required for UNII 1; otherwise treat the remaining bands separately and test them independently for SAR.
- When the specified maximum output power is different between UNII 1 and UNII 2A, begin SAR with the band that has the higher specified maximum output. If the highest reported SAR for the band with the highest specified power is ≤ 1.2 W/kg, testing for the band with the lower specified output power is not required; otherwise test the remaining bands independently for SAR.

10.1. LTE Band 2 (20MHz Bandwidth)

Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	RB Index	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
QPSK	5	Rear	18900	1880.0	1	0	0	24.0	23.58	0.190	0.209	0.120	0.132	1
					3	0	0	24.0	23.45	0.197	0.224	0.129	0.146	
		Front	18700	1860.0	1	0	0	24.0	23.43	0.906	1.033	0.493	0.562	
					3	0	0	24.0	23.34	0.960	1.118	0.520	0.605	
					6	0	15	24.0	23.32	0.895	1.047	0.482	0.564	
			18900	1880.0	1	0	0	24.0	23.58	0.843	0.929	0.459	0.506	
					3	0	0	24.0	23.45	0.908	1.031	0.487	0.553	
					6	0	0	24.0	23.30	0.837	0.983	0.453	0.532	
		19100	1900.0	1	0	0	24.0	23.40	0.882	1.013	0.478	0.549		
				3	0	0	24.0	23.20	0.803	0.965	0.435	0.523		
				6	0	0	24.0	23.04	0.822	1.025	0.445	0.555		
		Edge 1	18900	1880.0	1	0	0	24.0	23.58	0.320	0.352	23.580	0.162	
					3	0	0	24.0	23.45	0.322	0.365	23.450	0.164	
		Edge 2	18900	1880.0	1	0	0	24.0	23.58	0.162	0.178	0.089	0.098	
					3	0	0	24.0	23.45	0.164	0.186	0.091	0.103	
		Edge 3	18900	1880.0	1	0	0	24.0	23.58	0.457	0.503	0.267	0.294	
					3	0	0	24.0	23.45	0.462	0.524	0.270	0.306	
		Edge 4	18900	1880.0	1	0	0	24.0	23.58	0.227	0.250	0.126	0.139	
					3	0	0	24.0	23.45	0.227	0.258	0.126	0.143	

10.2. LTE Band 4 (20MHz Bandwidth)

Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	RB Index	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
QPSK	5	Rear	20175	1732.5	1	5	15	24.00	23.30	0.190	0.223	0.115	0.135	2
					3	0	0	24.00	23.10	0.221	0.272	0.132	0.162	
		Front	20050	1720.0	1	5	15	24.00	23.30	1.020	1.198	0.571	0.671	
					3	0	0	24.00	23.10	1.040	1.279	0.587	0.722	
					6	0	15	24.00	22.94	1.060	1.353	0.596	0.761	
			20175	1732.5	1	5	15	24.00	23.30	1.070	1.257	0.597	0.701	
					3	0	0	24.00	23.10	1.050	1.292	0.588	0.723	
					6	0	15	24.00	22.94	1.060	1.353	0.586	0.748	
		20300	1745.0	1	5	15	24.00	23.30	1.090	1.281	0.606	0.712		
				3	0	0	24.00	23.10	1.090	1.341	0.606	0.746		
				6	0	0	24.00	22.94	1.090	1.391	0.608	0.776		
		Edge 1	20175	1732.5	1	5	15	24.00	23.30	0.580	0.681	0.319	0.375	
					3	0	0	24.00	23.10	0.537	0.661	0.298	0.367	
		Edge 2	20175	1732.5	1	5	15	24.00	23.30	0.100	0.117	0.059	0.070	
					3	0	0	24.00	23.10	0.095	0.117	0.058	0.071	
		Edge 3	20175	1732.5	1	5	15	24.00	23.30	0.339	0.398	0.196	0.230	
					3	0	0	24.00	23.10	0.345	0.424	0.199	0.245	
		Edge 4	20175	1732.5	1	5	15	24.00	23.30	0.126	0.148	0.061	0.072	
					3	0	0	24.00	23.10	0.133	0.164	0.074	0.091	

10.3. LTE Band 12 (10MHz Bandwidth)

Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	RB Index	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
QPSK	5	Rear	23095	707.5	1	0	3	24.00	23.67	0.110	0.119	0.069	0.074	
					4	2	7	24.00	23.64	0.104	0.113	0.065	0.071	
		Front	23060	704.0	1	0	3	24.00	23.55	0.265	0.294	0.127	0.141	
					4	0	0	24.00	23.58	0.279	0.307	0.134	0.148	
			23095	707.5	1	0	3	24.00	23.67	0.386	0.416	0.180	0.194	3
					4	2	7	24.00	23.64	0.346	0.376	0.160	0.174	
		23130	711.0	1	0	3	24.00	23.55	0.231	0.256	0.110	0.122		
				4	0	0	24.00	23.58	0.288	0.317	0.135	0.149		
		Edge 1	23095	707.5	1	0	3	24.00	23.67	0.080	0.086	0.046	0.050	
					4	2	7	24.00	23.64	0.075	0.081	0.043	0.047	
		Edge 2	23095	707.5	1	0	3	24.00	23.67	0.147	0.159	0.071	0.077	
					4	2	7	24.00	23.64	0.134	0.146	0.063	0.068	
		Edge 3	23095	707.5	1	0	3	24.00	23.67	0.107	0.115	0.061	0.066	
					4	2	7	24.00	23.64	0.106	0.115	0.057	0.062	
		Edge 4	23095	707.5	1	0	3	24.00	23.67	0.034	0.037	0.019	0.020	
					4	2	7	24.00	23.64	0.029	0.032	0.017	0.018	

10.4. Wi-Fi_Body (DTS Band)

Frequency Band	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Duty Cycle	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
2.4GHz	802.11b 1 Mbps	5	Rear	6	2437.0	100.0%	16.0	15.21	0.112	0.134	0.057	0.068	
			Front	1	2412.0	100.0%	16.0	15.14	0.164	0.200	0.081	0.098	
				6	2437.0	100.0%	16.0	15.21	0.247	0.296	0.118	0.142	4
				11	2462.0	100.0%	16.0	15.03	0.166	0.208	0.080	0.100	
			Edge 1	6	2437.0	100.0%	16.0	15.21	0.178	0.214	0.094	0.113	
			Edge 2	6	2437.0	100.0%	16.0	15.21	0.161	0.193	0.078	0.094	
			Edge 3	6	2437.0	100.0%	16.0	15.21	0.157	0.188	0.075	0.090	
Edge 4	6	2437.0	100.0%	16.0	15.21	0.063	0.076	0.030	0.036				

10.5. Appendixes A DUT differences verification

LTE Band 2

Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	RB Index	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
QPSK	5	Front	18700	1860.0	1	0	0	24.0	23.43	0.938	1.070	0.512	0.584	
					3	0	0	24.0	23.34	0.929	1.081	0.506	0.589	
					6	0	15	24.0	23.32	0.871	1.019	0.471	0.551	

LTE Band 4

Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	RB Index	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
QPSK	5	Front	20300	1745.0	1	5	15	24.0	23.30	1.020	1.198	0.566	0.665	
					3	0	0	24.0	23.10	1.040	1.279	0.585	0.720	
					6	0	0	24.0	22.94	1.040	1.327	0.581	0.742	

LTE Band 12

Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	RB Index	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
QPSK	5	Front	23095	707.5	1	0	3	24.0	23.67	0.386	0.416	0.180	0.194	
					4	2	7	24.0	23.64	0.345	0.375	0.160	0.174	

Wi-Fi_Body (DTS Band)

Frequency Band	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Duty Cycle	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
2.4GHz	802.11b 1 Mbps	5	Front with collar attachment	1	2412.0	100.0%	16.0	15.14	0.162	0.197	0.080	0.098	
				6	2437.0	100.0%	16.0	15.21	0.232	0.278	0.114	0.137	
				11	2462.0	100.0%	16.0	15.03	0.160	0.200	0.077	0.097	

10.6. Estimated SAR

Tx Interface	Frequency (MHz)	Output Power		Separation Distances (mm)						Estimated 1-g SAR Value (W/kg)					
		dBm	mW	Rear	Edge 1	Edge 2	Edge 3	Edge 4	Front	Rear	Edge 1	Edge 2	Edge 3	Edge 4	Front
Wi-Fi 2.4 GHz	2462	16.00	40	13	5	5	26	28	5	-MEASURE-	-MEASURE-	-MEASURE-	0.322	0.299	-MEASURE-
Bluetooth	2480	3.00	2	13	5	5	26	28	5	0.032	0.084	0.084	0.016	0.015	0.084

11. SAR Measurement Variability

In accordance with published RF Exposure KDB 865664 D01 SAR measurement 100 MHz to 6 GHz. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is <0.8 or 2 W/kg (1-g or 10-g respectively); steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.8 or 2 W/kg (1-g or 10-g respectively), repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 or 3.6 W/kg ($\sim 10\%$ from the 1-g or 10-g respective SAR limit).
- 4) Perform a third repeated measurement only if the original, first, or second repeated measurement is ≥ 1.5 or 3.75 W/kg (1-g or 10-g respectively) and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

Frequency Band	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocatio	RB offset	RB Index	Reported SAR		Largest to Smallest SAR
									Original	Repeated	
LTE Band 2	QPSK	5	Front	18700	1860.0	3	0	0	0.960	0.932	1.03
LTE Band 4	QPSK	5	Front	20300	1745.0	6	0	0	1.090	1.040	1.05

Note(s):

Second Repeated Measurement is not required since the ratio of the largest to smallest SAR for the original and first repeated measurement is not > 1.20 .

12. Simultaneous Transmission SAR Analysis

The device WWAN, WLAN and BT are not simultaneously transmitting.

Appendixes

Refer to separated files for the following appendixes.

4788872713-US-S1-V0 Appendix A: Antenna Dimensions and Separation Distances

4788872713-US-S1-V0 Appendix B: SAR System Check Plots

4788872713-US-S1-V0 Appendix C: Highest SAR Test Plots

4788872713-US-S1-V0 Appendix D: SAR Liquid Tissue Ingredients

4788872713-US-S1-V0 Appendix E: SAR Probe and Dipole Calibration Certificates

END OF REPORT