

FCC SAR Test Report

Report No. : SA181025C05
Applicant : Trimble Inc.
Address : 345 SW Avery Ave Corvallis, Oregon, United States, 97333
Product : Handheld PC
FCC ID : S9E-121600
Brand : Trimble
Model No. : 121600
Standards : FCC 47 CFR Part 2 (2.1093), IEEE C95.1:1992, IEEE Std 1528:2013
 KDB 865664 D01 v01r04, KDB 865664 D02 v01r02, KDB 248227 D01 v02r02
 KDB 447498 D01 v06, KDB 616217 D04 v01r02, KDB 941225 D01 v03r01
 KDB 941225 D05 v02r05, KDB 941225 D05A v01r02
Sample Received Date : Oct. 25, 2018
Date of Testing : Nov. 12, 2018 ~ Nov. 15, 2018
Lab Address : No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan, R.O.C.
Test Location : No. 19, Hwa Ya 2nd Rd, Wen Hwa Vil, Kwei Shan Dist., Taoyuan City 33383, Taiwan (R.O.C)

CERTIFICATION: The above equipment have been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch – Lin Kou Laboratories**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample’s SAR characteristics under the conditions specified in this report. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product certification, approval, or endorsement by TAF or any government agencies.

Prepared By : Gina Liu
 Gina Liu / Specialist
Approved By : Gordon Lin
 Gordon Lin / Assistant Manager



FCC Accredited No.: TW0003

This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

Table of Contents

Release Control Record	3
1. Summary of Maximum SAR Value	4
2. Description of Equipment Under Test	5
3. SAR Measurement System	6
3.1 Definition of Specific Absorption Rate (SAR)	6
3.2 SPEAG DASY52 System	6
3.2.1 Robot.....	7
3.2.2 Probes.....	8
3.2.3 Data Acquisition Electronics (DAE)	8
3.2.4 Phantoms	9
3.2.5 Device Holder.....	10
3.2.6 System Validation Dipoles.....	10
3.2.7 Tissue Simulating Liquids.....	11
3.3 SAR System Verification	14
3.4 SAR Measurement Procedure	15
3.4.1 Area & Zoom Scan Procedure	15
3.4.2 Volume Scan Procedure.....	15
3.4.3 Power Drift Monitoring.....	16
3.4.4 Spatial Peak SAR Evaluation	16
3.4.5 SAR Averaged Methods	16
4. SAR Measurement Evaluation	17
4.1 EUT Configuration and Setting.....	17
4.2 EUT Testing Position	27
4.2.1 Extremity Exposure Conditions	27
4.2.2 SAR Test Exclusion Evaluations	27
4.3 Tissue Verification	29
4.4 System Validation.....	29
4.5 System Verification.....	30
4.6 Maximum Output Power.....	30
4.6.1 Maximum Target Conducted Power	30
4.6.2 Measured Conducted Power Result.....	32
4.7 SAR Testing Results	42
4.7.1 SAR Test Reduction Considerations	42
4.7.2 SAR Results for Extremity Exposure Condition (Test Separation Distance is 0 mm)	45
4.7.3 Simultaneous Multi-band Transmission Evaluation	49
5. Calibration of Test Equipment.....	57
6. Measurement Uncertainty.....	58
7. Information on the Testing Laboratories.....	62
Appendix A. SAR Plots of System Verification	
Appendix B. SAR Plots of SAR Measurement	
Appendix C. Calibration Certificate for Probe and Dipole	
Appendix D. Photographs of EUT and Setup	

Release Control Record

Report No.	Reason for Change	Date Issued
SA181025C05	Initial release	Nov. 16, 2018

1. Summary of Maximum SAR Value

Equipment Class	Mode	Highest SAR-10g Extremity Tested at 0 mm (W/kg)
PCE	WCDMA II	0.76
	WCDMA IV	0.96
	WCDMA V	0.29
	LTE 2 / 25	0.66
	LTE 4	0.89
	LTE 5	0.30
	LTE 7	0.30
	LTE 12	0.23
	LTE 13	0.27
	LTE 26	0.28
	LTE 41	0.23
DTS	2.4G WLAN	1.51
NII	5.3G WLAN	0.89
	5.6G WLAN	1.19
	5.8G WLAN	1.09
DSS	Bluetooth	0.04

Highest Simultaneous Transmission SAR	Highest SAR-10g Extremity Tested at 0 mm (W/kg)
	3.19

Note:

1. The SAR criteria (**Head & Body: SAR-1g 1.6 W/kg, and Extremity: SAR-10g 4.0 W/kg**) for general population / uncontrolled exposure is specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992.
2. This device supports both LTE band 25 and band 2. The frequency span of LTE band 25 can completely cover LTE band 2, and they has the same tune-up power. SAR was tested for LTE band 25 only.

2. Description of Equipment Under Test

EUT Type	Handheld PC
FCC ID	S9E-121600
Brand Name	Trimble
Model Name	121600
Tx Frequency Bands (Unit: MHz)	WCDMA Band II : 1852.4 ~ 1907.6 WCDMA Band IV : 1712.4 ~ 1752.6 WCDMA Band V : 826.4 ~ 846.6 LTE Band 2 : 1850.7 ~ 1909.3 (BW: 1.4M, 3M, 5M, 10M, 15M, 20M) LTE Band 4 : 1710.7 ~ 1754.3 (BW: 1.4M, 3M, 5M, 10M, 15M, 20M) LTE Band 5 : 824.7 ~ 848.3 (BW: 1.4M, 3M, 5M, 10M) LTE Band 7 : 2502.5 ~ 2567.5 (BW: 5M, 10M, 15M, 20M) LTE Band 12 : 699.7 ~ 715.3 (BW: 1.4M, 3M, 5M, 10M) LTE Band 13 : 779.5 ~ 784.5 (BW: 5M, 10M) LTE Band 25 : 1850.7 ~ 1914.3 (BW: 1.4M, 3M, 5M, 10M, 15M, 20M) LTE Band 26 : 814.7 ~ 848.3 (BW: 1.4M, 3M, 5M, 10M, 15M) LTE Band 41 : 2498.5 ~ 2687.5 (BW: 5M, 10M, 15M, 20M) WLAN : 2412 ~ 2462, 5180 ~ 5240, 5260 ~ 5320, 5500 ~ 5700, 5745 ~ 5825 Bluetooth : 2402 ~ 2480
Uplink Modulations	WCDMA : QPSK LTE : QPSK, 16QAM 802.11b : DSSS 802.11a/g/n/ac : OFDM Bluetooth : GFSK, $\pi/4$ -DQPSK, 8-DPSK
Maximum Tune-up Conducted Power (Unit: dBm)	Please refer to section 4.6.1 of this report
Antenna Type	Refer to Note as below
EUT Stage	ENGINEERING SAMPLE

Note:

1. The antenna information is listed as below.

Antenna Type	Manufacturer	Ant Status	Parts Number	Antenna Gain (dBi)	
				BT/WLAN 2.4GHz	WLAN 5 GHz
PIFA	Awan	Ant 0	APF8Y-100001	2.77	2.82
PCB		Ant 1	AEPE0-000000	0.48	1.33

Antenna Type	Manufacturer	Parts Number	Antenna Gain (dBi)								
			WCDMA II, LTE 2	WCDMA IV, LTE 4	WCDMA V, LTE 5	LTE 7	LTE 12	LTE 13	LTE 25	LTE 26	LTE 41
Coupling	Awan	APP8Y-100005	0.06	1.04	-1.05	0.61	1.33	-2.73	0.88	-0.82	0.76
		APF8Y-100000	0.37	-2.17	-1.5	0.76	1.03	-0.29	-0.34	-1.5	-0.76

2. The above EUT information is declared by manufacturer and for more detailed features description please refers to the manufacturer's specifications or User's Manual.

List of Accessory:

Battery	Brand Name	Trimble
	Model Name	121300
	Power Rating	7.27Vdc, 3150mAh, 22.9Wh
	Type	Li-ion

3. SAR Measurement System

3.1 Definition of Specific Absorption Rate (SAR)

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be related to the electrical field in the tissue by

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

3.2 SPEAG DASY52 System

DASY52 system consists of high precision robot, probe alignment sensor, phantom, robot controller, controlled measurement server and near-field probe. The robot includes six axes that can move to the precision position of the DASY52 software defined. The DASY52 software can define the area that is detected by the probe. The robot is connected to controlled box. Controlled measurement server is connected to the controlled robot box. The DAE includes amplifier, signal multiplexing, AD converter, offset measurement and surface detection. It is connected to the Electro-optical coupler (ECO). The ECO performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC.

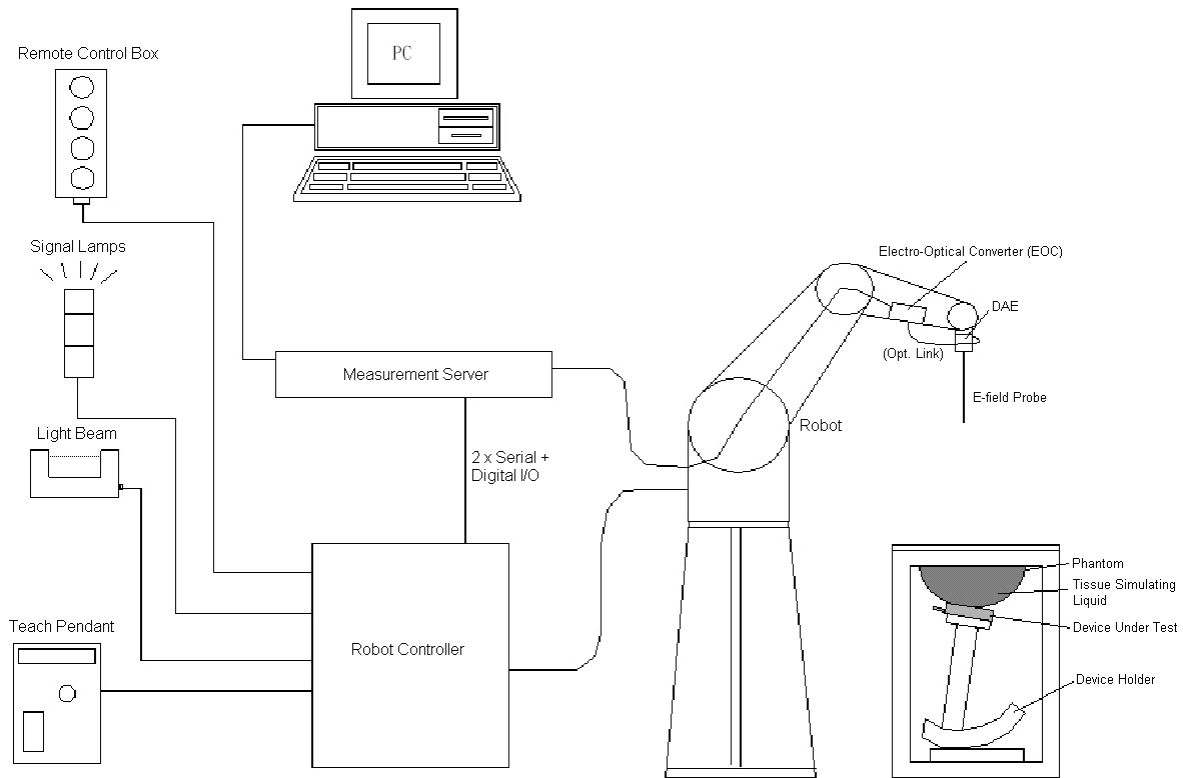


Fig-3.1 SPEAG DASY52 System Setup

3.2.1 Robot

The DASY52 systems use the high precision robots from Stäubli SA (France). For the 6-axis controller system, the robot controller version of CS8c from Stäubli is used. The Stäubli robot series have many features that are important for our application:

- High precision (repeatability ± 0.035 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)





Fig-3.2 SPEAG DASY52 System


FCC SAR Test Report

3.2.2 Probes


The SAR measurement is conducted with the dosimetric probe. The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency.

Model	EX3DV4	
Construction	Symmetrical design with triangular core. Built-in shielding against static charges. PEEK enclosure material (resistant to organic solvents, e.g., DGBE).	
Frequency	10 MHz to 6 GHz Linearity: ± 0.2 dB	
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)	
Dynamic Range	10 μ W/g to 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)	
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

Model	ES3DV3	
Construction	Symmetrical design with triangular core. Interleaved sensors. Built-in shielding against static charges. PEEK enclosure material (resistant to organic solvents, e.g., DGBE).	
Frequency	10 MHz to 4 GHz Linearity: ± 0.2 dB	
Directivity	± 0.2 dB in HSL (rotation around probe axis) ± 0.3 dB in tissue material (rotation normal to probe axis)	
Dynamic Range	5 μ W/g to 100 mW/g Linearity: ± 0.2 dB	
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 3.9 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.0 mm	


Model	ET3DV6	
Construction	Symmetrical design with triangular core Built-in optical fiber for surface detection system. Built-in shielding against static charges. PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz to 2.3 GHz; Linearity: ± 0.2 dB	
Directivity	± 0.2 dB in TSL (rotation around probe axis) ± 0.4 dB in TSL (rotation normal to probe axis)	
Dynamic Range	5 μ W/g to 100 mW/g; Linearity: ± 0.2 dB	
Dimensions	Overall length: 337 mm (Tip: 16 mm) Tip diameter: 6.8 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.7 mm	


3.2.3 Data Acquisition Electronics (DAE)

Model	DAE3, DAE4	
Construction	Signal amplifier, multiplexer, A/D converter and control logic. Serial optical link for communication with DASY embedded system (fully remote controlled). Two step probe touch detector for mechanical surface detection and emergency robot stop.	
Measurement Range	-100 to +300 mV (16 bit resolution and two range settings: 4mV, 400mV)	
Input Offset Voltage	$< 5\mu$ V (with auto zero)	
Input Bias Current	< 50 fA	
Dimensions	60 x 60 x 68 mm	

FCC SAR Test Report


3.2.4 Phantoms


Model	Twin SAM	
Construction	The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 and IEC 62209-1. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot.	
Material	Vinylester, glass fiber reinforced (VE-GF)	
Shell Thickness	2 ± 0.2 mm (6 ± 0.2 mm at ear point)	
Dimensions	Length: 1000 mm Width: 500 mm Height: adjustable feet	
Filling Volume	approx. 25 liters	

Model	ELI	
Construction	Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.	
Material	Vinylester, glass fiber reinforced (VE-GF)	
Shell Thickness	2.0 ± 0.2 mm (bottom plate)	
Dimensions	Major axis: 600 mm Minor axis: 400 mm	
Filling Volume	approx. 30 liters	


FCC SAR Test Report

3.2.5 Device Holder

Model	Mounting Device	
Construction	In combination with the Twin SAM Phantom or ELI4, the Mounting Device enables the rotation of the mounted transmitter device in spherical coordinates. Rotation point is the ear opening point. Transmitter devices can be easily and accurately positioned according to IEC, IEEE, FCC or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat).	
Material	POM	


Model	Laptop Extensions Kit	
Construction	Simple but effective and easy-to-use extension for Mounting Device that facilitates the testing of larger devices according to IEC 62209-2 (e.g., laptops, cameras, etc.). It is lightweight and fits easily on the upper part of the Mounting Device in place of the phone positioner.	
Material	POM, Acrylic glass, Foam	

3.2.6 System Validation Dipoles

Model	D-Serial	
Construction	Symmetrical dipole with 1/4 balun. Enables measurement of feed point impedance with NWA. Matched for use near flat phantoms filled with tissue simulating solutions.	
Frequency	750 MHz to 5800 MHz	
Return Loss	> 20 dB	
Power Capability	> 100 W (f < 1GHz), > 40 W (f > 1GHz)	

3.2.7 Tissue Simulating Liquids

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15 cm. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm. The nominal dielectric values of the tissue simulating liquids in the phantom and the tolerance of 5% are listed in Table-3.1.

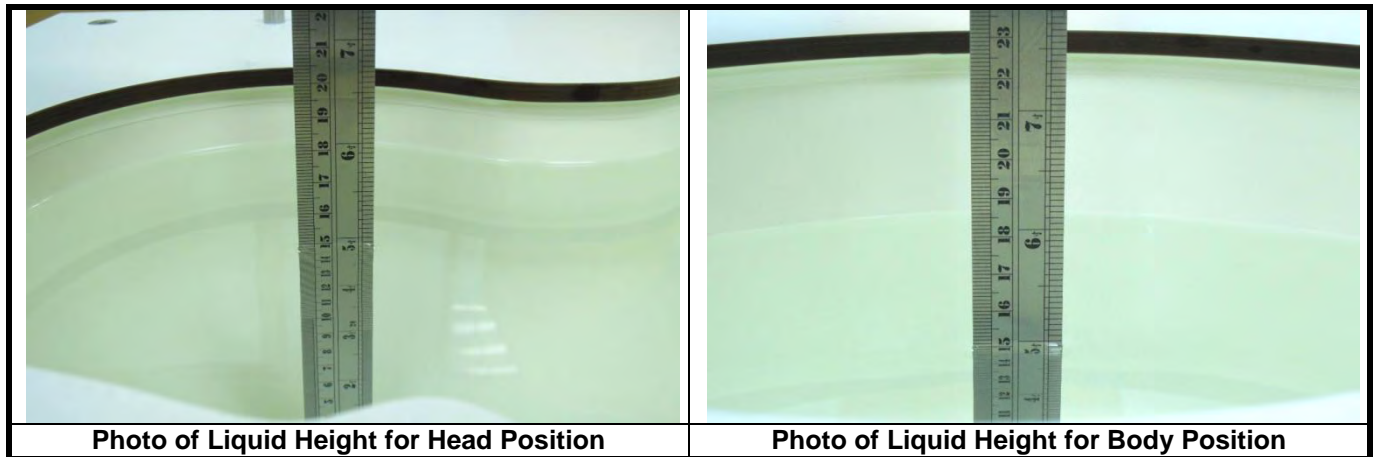

The dielectric properties of the head tissue simulating liquids are defined in IEEE 1528, and KDB 865664 D01 Appendix A. For the body tissue simulating liquids, the dielectric properties are defined in KDB 865664 D01 Appendix A. The dielectric properties of the tissue simulating liquids were verified prior to the SAR evaluation using a dielectric assessment kit and a network analyzer.

Table-3.1 Targets of Tissue Simulating Liquid

Frequency (MHz)	Target Permittivity	Range of $\pm 5\%$	Target Conductivity	Range of $\pm 5\%$
For Head				
750	41.9	39.8 ~ 44.0	0.89	0.85 ~ 0.93
835	41.5	39.4 ~ 43.6	0.90	0.86 ~ 0.95
900	41.5	39.4 ~ 43.6	0.97	0.92 ~ 1.02
1450	40.5	38.5 ~ 42.5	1.20	1.14 ~ 1.26
1640	40.3	38.3 ~ 42.3	1.29	1.23 ~ 1.35
1750	40.1	38.1 ~ 42.1	1.37	1.30 ~ 1.44
1800	40.0	38.0 ~ 42.0	1.40	1.33 ~ 1.47
1900	40.0	38.0 ~ 42.0	1.40	1.33 ~ 1.47
2000	40.0	38.0 ~ 42.0	1.40	1.33 ~ 1.47
2300	39.5	37.5 ~ 41.5	1.67	1.59 ~ 1.75
2450	39.2	37.2 ~ 41.2	1.80	1.71 ~ 1.89
2600	39.0	37.1 ~ 41.0	1.96	1.86 ~ 2.06
3500	37.9	36.0 ~ 39.8	2.91	2.76 ~ 3.06
5200	36.0	34.2 ~ 37.8	4.66	4.43 ~ 4.89
5300	35.9	34.1 ~ 37.7	4.76	4.52 ~ 5.00
5500	35.6	33.8 ~ 37.4	4.96	4.71 ~ 5.21
5600	35.5	33.7 ~ 37.3	5.07	4.82 ~ 5.32
5800	35.3	33.5 ~ 37.1	5.27	5.01 ~ 5.53
For Body				
750	55.5	52.7 ~ 58.3	0.96	0.91 ~ 1.01
835	55.2	52.4 ~ 58.0	0.97	0.92 ~ 1.02
900	55.0	52.3 ~ 57.8	1.05	1.00 ~ 1.10
1450	54.0	51.3 ~ 56.7	1.30	1.24 ~ 1.37
1640	53.8	51.1 ~ 56.5	1.40	1.33 ~ 1.47
1750	53.4	50.7 ~ 56.1	1.49	1.42 ~ 1.56
1800	53.3	50.6 ~ 56.0	1.52	1.44 ~ 1.60
1900	53.3	50.6 ~ 56.0	1.52	1.44 ~ 1.60
2000	53.3	50.6 ~ 56.0	1.52	1.44 ~ 1.60
2300	52.9	50.3 ~ 55.5	1.81	1.72 ~ 1.90
2450	52.7	50.1 ~ 55.3	1.95	1.85 ~ 2.05
2600	52.5	49.9 ~ 55.1	2.16	2.05 ~ 2.27
3500	51.3	48.7 ~ 53.9	3.31	3.14 ~ 3.48
5200	49.0	46.6 ~ 51.5	5.30	5.04 ~ 5.57
5300	48.9	46.5 ~ 51.3	5.42	5.15 ~ 5.69
5500	48.6	46.2 ~ 51.0	5.65	5.37 ~ 5.93
5600	48.5	46.1 ~ 50.9	5.77	5.48 ~ 6.06
5800	48.2	45.8 ~ 50.6	6.00	5.70 ~ 6.30

FCC SAR Test Report

The following table gives the recipes for tissue simulating liquids.

Table-3.2 Recipes of Tissue Simulating Liquid

Tissue Type	Bactericide	DGBE	HEC	NaCl	Sucrose	Triton X-100	Water	Diethylene Glycol Mono-hexylether
H750	0.2	-	0.2	1.5	56.0	-	42.1	-
H835	0.2	-	0.2	1.5	57.0	-	41.1	-
H900	0.2	-	0.2	1.4	58.0	-	40.2	-
H1450	-	43.3	-	0.6	-	-	56.1	-
H1640	-	45.8	-	0.5	-	-	53.7	-
H1750	-	47.0	-	0.4	-	-	52.6	-
H1800	-	44.5	-	0.3	-	-	55.2	-
H1900	-	44.5	-	0.2	-	-	55.3	-
H2000	-	44.5	-	0.1	-	-	55.4	-
H2300	-	44.9	-	0.1	-	-	55.0	-
H2450	-	45.0	-	0.1	-	-	54.9	-
H2600	-	45.1	-	0.1	-	-	54.8	-
H3500	-	8.0	-	0.2	-	20.0	71.8	-
H5G	-	-	-	-	-	17.2	65.5	17.3
B750	0.2	-	0.2	0.8	48.8	-	50.0	-
B835	0.2	-	0.2	0.9	48.5	-	50.2	-
B900	0.2	-	0.2	0.9	48.2	-	50.5	-
B1450	-	34.0	-	0.3	-	-	65.7	-
B1640	-	32.5	-	0.3	-	-	67.2	-
B1750	-	31.0	-	0.2	-	-	68.8	-
B1800	-	29.5	-	0.4	-	-	70.1	-
B1900	-	29.5	-	0.3	-	-	70.2	-
B2000	-	30.0	-	0.2	-	-	69.8	-
B2300	-	31.0	-	0.1	-	-	68.9	-
B2450	-	31.4	-	0.1	-	-	68.5	-
B2600	-	31.8	-	0.1	-	-	68.1	-
B3500	-	28.8	-	0.1	-	-	71.1	-
B5G	-	-	-	-	-	10.7	78.6	10.7

3.3 SAR System Verification

The system check verifies that the system operates within its specifications. It is performed daily or before every SAR measurement. The system check uses normal SAR measurements in the flat section of the phantom with a matched dipole at a specified distance. The system verification setup is shown as below.

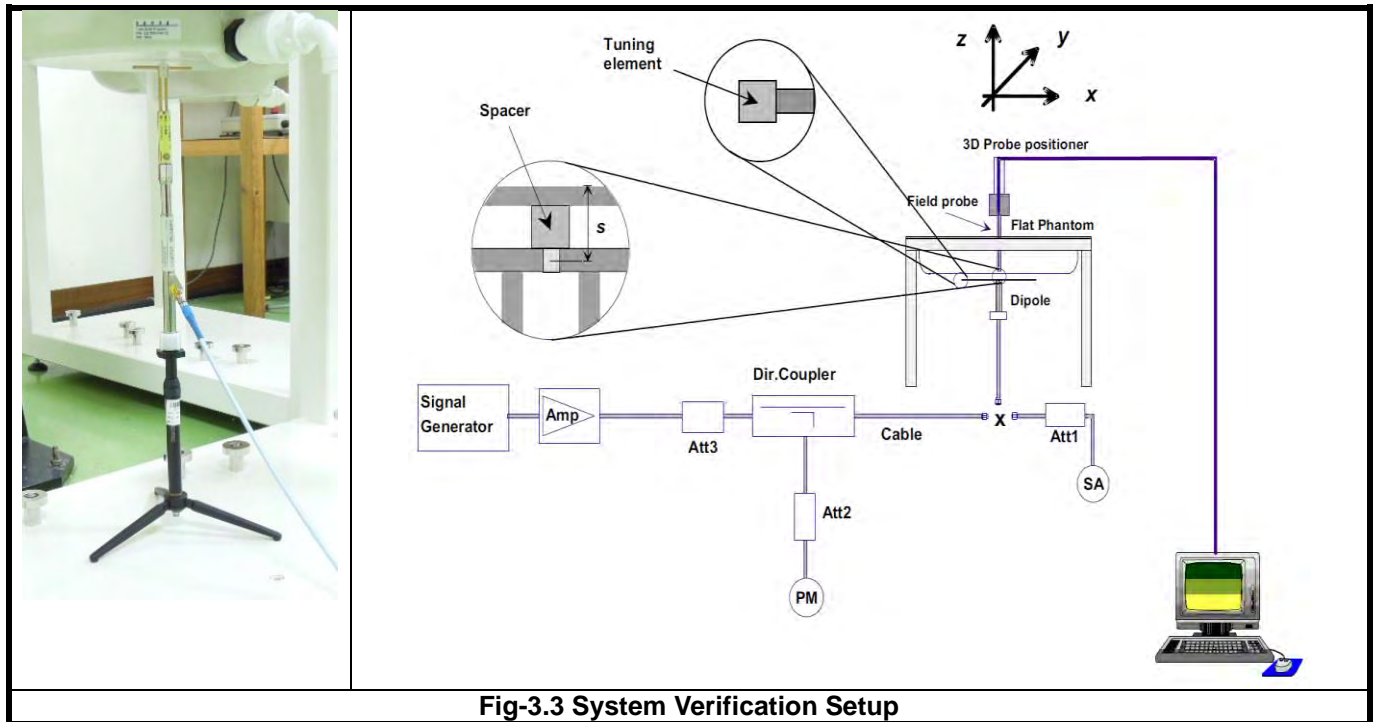


Fig-3.3 System Verification Setup

The validation dipole is placed beneath the flat phantom with the specific spacer in place. The distance spacer is touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The spectrum analyzer measures the forward power at the location of the system check dipole connector. The signal generator is adjusted for the desired forward power (250 mW is used for 700 MHz to 3 GHz, 100 mW is used for 3.5 GHz to 6 GHz) at the dipole connector and the power meter is read at that level. After connecting the cable to the dipole, the signal generator is readjusted for the same reading at power meter.

After system check testing, the SAR result will be normalized to 1W forward input power and compared with the reference SAR value derived from validation dipole certificate report. The deviation of system check should be within 10 %.

3.4 SAR Measurement Procedure

According to the SAR test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

The SAR measurement procedures for each of test conditions are as follows:

- (a) Make EUT to transmit maximum output power
- (b) Measure conducted output power through RF cable
- (c) Place the EUT in the specific position of phantom
- (d) Perform SAR testing steps on the DASY system
- (e) Record the SAR value

3.4.1 Area & Zoom Scan Procedure

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g. According to KDB 865664 D01, the resolution for Area and Zoom scan is specified in the table below.

Items	<= 2 GHz	2-3 GHz	3-4 GHz	4-5 GHz	5-6 GHz
Area Scan ($\Delta x, \Delta y$)	<= 15 mm	<= 12 mm	<= 12 mm	<= 10 mm	<= 10 mm
Zoom Scan ($\Delta x, \Delta y$)	<= 8 mm	<= 5 mm	<= 5 mm	<= 4 mm	<= 4 mm
Zoom Scan (Δz)	<= 5 mm	<= 5 mm	<= 4 mm	<= 3 mm	<= 2 mm
Zoom Scan Volume	>= 30 mm	>= 30 mm	>= 28 mm	>= 25 mm	>= 22 mm

Note:

When zoom scan is required and report SAR is <= 1.4 W/kg, the zoom scan resolution of $\Delta x / \Delta y$ (2-3GHz: <= 8 mm, 3-4GHz: <= 7 mm, 4-6GHz: <= 5 mm) may be applied.

3.4.2 Volume Scan Procedure

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

3.4.3 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drift more than 5%, the SAR will be retested.

3.4.4 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

3.4.5 SAR Averaged Methods

In DASY, the interpolation and extrapolation are both based on the modified Quadratic Shepard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5 mm.

4. SAR Measurement Evaluation

4.1 EUT Configuration and Setting

<Connections between EUT and System Simulator>

For WWAN SAR testing, the EUT was linked and controlled by base station emulator. Communication between the EUT and the emulator was established by air link. The distance between the EUT and the communicating antenna of the emulator is larger than 50 cm and the output power radiated from the emulator antenna is at least 30 dB smaller than the output power of EUT. The EUT was set from the emulator to radiate maximum output power during SAR testing.

<Considerations Related to WCDMA for Setup and Testing>

WCDMA Handsets Body-worn SAR

SAR for body-worn configurations is measured using a 12.2 kbps RMC with TPC bits configured to all “1’s”. The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCH_n configurations supported by the handset with 12.2 kbps RMC as the primary mode.

Handsets with Release 5 HSDPA

The 3G SAR test reduction procedure is applied to HSDPA body-worn configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSDPA using the HSDPA body SAR procedures in the “Release 5 HSDPA Data Devices”, for the highest reported SAR body-worn exposure configuration in 12.2 kbps RMC. Handsets with both HSDPA and HSUPA are tested according to Release 6 HSPA test procedures.

Handsets with Release 6 HSUPA

The 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) body-worn configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSPA using the HSPA body SAR procedures in the “Release 6 HSPA Data Devices”, for the highest reported body-worn exposure SAR configuration in 12.2 kbps RMC. When VOIP is applicable for next to the ear head exposure in HSPA, the 3G SAR test reduction procedure is applied to HSPA with 12.2 kbps RMC as the primary mode; otherwise, the same HSPA configuration used for body-worn measurements is tested for next to the ear head exposure.

Release 5 HSDPA Data Devices

The 3G SAR test reduction procedure is applied to body SAR with 12.2 kbps RMC as the primary mode. Otherwise, body SAR for HSDPA is measured using an FRC with H-Set 1 in Sub-test 1 and a 12.2 kbps RMC configured in Test Loop Mode 1, for the highest reported SAR configuration in 12.2 kbps RMC without HSDPA. HSDPA is configured according to the applicable UE category of a test device. The number of HS-DSCH / HS-PDSCHs, HARQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the H-set. To maintain a consistent test configuration and stable transmission conditions, QPSK is used in the H-set for SAR testing. HS-DPCCH should be configured with a CQI feedback cycle of 4 ms and a CQI repetition factor of 2 to maintain a constant rate of active CQI slots. DPCCH and DPDCH gain factors (β_c , β_d), and HS-DPCCH power offset parameters (Δ_{ACK} , Δ_{NACK} , Δ_{CQI}) are set according to values indicated in below. The CQI value is determined by the UE category, transport block size, number of HS-PDSCHs and modulation used in the H-set.

FCC SAR Test Report

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{HS}^{(1)(2)}$	CM ⁽³⁾ (dB)	MPR ⁽³⁾ (dB)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 ⁽⁴⁾	15/15 ⁽⁴⁾	64	12/15 ⁽⁴⁾	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$.
 Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{HS} = 24/15 * \beta_c$.
 Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{HS}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.
 Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Release 6 HSPA Data Devices

The 3G SAR test reduction procedure is applied to body SAR with 12.2 kbps RMC as the primary mode. Otherwise, body SAR for HSPA is measured with E-DCH Sub-test 5, using H-Set 1 and QPSK for FRC and a 12.2 kbps RMC configured in Test Loop Mode 1 and power control algorithm 2, according to the highest reported body SAR configuration in 12.2 kbps RMC without HSPA. When VOIP applies to head exposure, the 3G SAR test reduction procedure is applied with 12.2 kbps RMC as the primary mode. Otherwise, the same HSPA configuration used for body SAR measurements are applied to head exposure testing. Due to inner loop power control requirements in HSPA, a communication test set is required for output power and SAR tests. The 12.2 kbps RMC, FRC H-set 1 and E-DCH configurations for HSPA are configured according to the β values indicated in below.

Sub-test	β_c	β_d	β_d (SF)	β_c / β_d	$\beta_{HS}^{(1)}$	β_{ec}	$\beta_{ed}^{(4)(5)}$	β_{ed} (SF)	β_{ed} (Codes)	CM ⁽²⁾ (dB)	MPR ⁽²⁾⁽⁶⁾ (dB)	AG ⁽⁵⁾ Index	E-TFCI
1	11/15 ⁽³⁾	15/15 ⁽³⁾	64	11/15 ⁽³⁾	22/15	209/225	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4 4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$. For sub-test 5, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 5/15$ with $\beta_{HS} = 5/15 * \beta_c$.
 Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{HS}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.
 Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.
 Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.
 Note 5: β_{ed} can not be set directly; it is set by Absolute Grant Value.
 Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

FCC SAR Test Report

DC-HSDPA SAR Guidance

The 3G SAR test reduction procedure is applied to DC-HSDPA with 12.2 kbps RMC as the primary mode. Otherwise, when SAR is required for Rel. 5 HSDPA, SAR is required for Rel. 8 DC-HSDPA. Power is measured for DC-HSDPA according to the H-Set 12, FRC configuration in Table C.8.1.12 of 3GPP TS 34.121-1 to determine SAR test reduction. A primary and a secondary serving HS-DSCH Cell are required to perform the power measurement and for the results to be acceptable.

<Considerations Related to LTE for Setup and Testing>

This device contains LTE transmitter which follows 3GPP standards, is category 3, supports both QPSK and QAM modulations, and supported LTE band and channel bandwidth is listed in below. The output power was tested per 3GPP TS 36.521-1 maximum transmit procedures for both QPSK and QAM modulation. The results please refer to section 4.6 of this report.

EUT Supported LTE Band and Channel Bandwidth						
LTE Band	BW 1.4 MHz	BW 3 MHz	BW 5 MHz	BW 10 MHz	BW 15 MHz	BW 20 MHz
2	V	V	V	V	V	V
4	V	V	V	V	V	V
5	V	V	V	V		
7			V	V	V	V
12	V	V	V	V		
13			V	V		
25	V	V	V	V	V	V
26	V	V	V	V	V	
41			V	V	V	V

FCC SAR Test Report

The LTE maximum power reduction (MPR) in accordance with 3GPP TS 36.101 is active all times during LTE operation. The allowed MPR for the maximum output power is specified in below.

Modulation	Channel Bandwidth / RB Configurations						LTE MPR Setting (dB)
	BW 1.4 MHz	BW 3 MHz	BW 5 MHz	BW 10 MHz	BW 15 MHz	BW 20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	1
16QAM	<= 5	<= 4	<= 8	<= 12	<= 16	<= 18	1
16QAM	> 5	> 4	> 8	> 12	> 16	> 18	2


Note: MPR is according to the standard and implemented in the circuit (mandatory).

In addition, the device is compliant with additional maximum power reduction (A-MPR) requirements defined in 3GPP TS 36.101 section 6.2.4 that was disabled for all FCC compliance testing.

During LTE SAR testing, the related parameters of operating band, channel bandwidth, uplink channel number, modulation type, and RB was set in base station simulator. When the EUT has registered and communicated to base station simulator, the simulator set to make EUT transmitting the maximum radiated power.

TDD-LTE Setup Configurations

According to KDB 941225 D05, SAR testing for TDD-LTE device must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP TDD-LTE configurations. The TDD-LTE of this device supports frame structure type 2 defined in 3GPP TS 36.211 section 4.2, and the frame structure configuration can be referred to below.

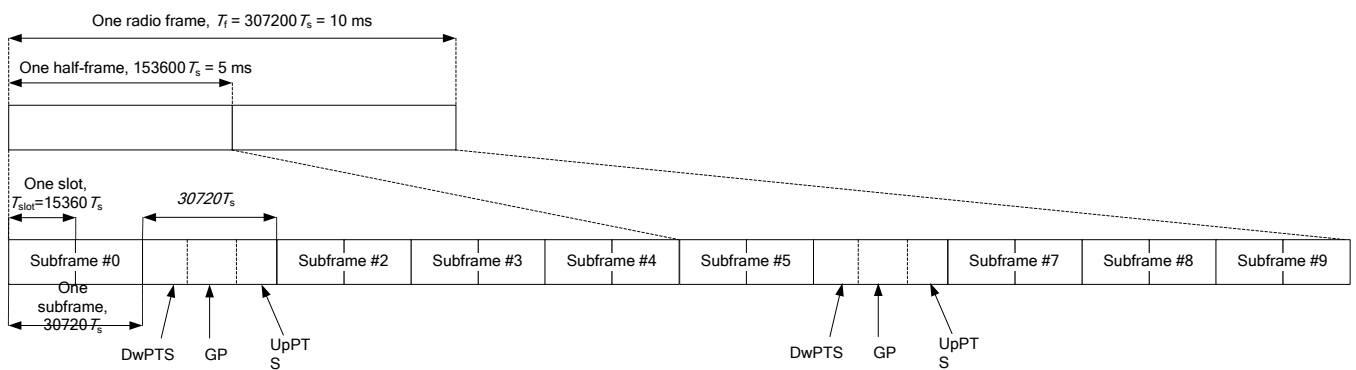

3GPP TS 36.211 Figure 4.2-1: Frame Structure Type 2

FCC SAR Test Report

Special Subframe Configuration	Normal Cyclic Prefix in Downlink			Extended Cyclic Prefix in Downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal Cyclic Prefix in Uplink	Extended Cyclic Prefix in Uplink		Normal Cyclic Prefix in Uplink	Extended Cyclic Prefix in Uplink
0	6592 • Ts	2192 • Ts	2560 • Ts	7680 • Ts	2192 • Ts	2560 • Ts
1	19760 • Ts			20480 • Ts		
2	21952 • Ts			23040 • Ts		
3	24144 • Ts			25600 • Ts		
4	26336 • Ts	4384 • Ts	5120 • Ts	7680 • Ts	4384 • Ts	5120 • Ts
5	6592 • Ts			20480 • Ts		
6	19760 • Ts			23040 • Ts		
7	21952 • Ts			12800 • Ts		
8	24144 • Ts			-		
9	13168 • Ts	-	-	-	-	-

3GPP TS 36.211 Table 4.2-1: Configuration of Special Subframe

Uplink-Downlink Configuration	Downlink-to-Uplink Switch-Point Periodicity	Subframe Number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

3GPP TS 36.211 Table 4.2-2: Uplink-Downlink Configurations

The variety of different TD-LTE uplink-downlink configurations allows a network operator to allocate the network's capacity between uplink and downlink traffic to meet the needs of the network. The uplink duty cycle of these seven configurations can readily be computed and shown in below.

UL-DL Configuration	0	1	2	3	4	5	6
Highest Duty-Cycle	63.33%	43.33%	23.33%	31.67%	21.67%	11.67%	53.33%

LTE Downlink Carrier Aggregation (CA) Setup Configurations

LTE Carrier Aggregation (CA) was defined in 3GPP release 10 and higher. The LTE device in CA mode has one Primary Component Carrier (PCC) and one or more Secondary Component Carriers (SCC). PCC acts as the anchor carrier and can optionally cross-schedule data transmission on SCC. The RRC connection is only handled by one cell, the PCC for downlink and uplink communications. After making a data connection to the PCC, the LTE device adds the SCC on the downlink only. All uplink communications and acknowledgements remain identical to release 8 specifications on the PCC. The combinations of downlink carrier aggregation supported by this device are listed in below.

LTE CA Configurations and Bandwidth Combination Sets defined for Intra-Band Contiguous CA

Downlink CA Configuration	Component carriers in order of increasing carrier frequency			Maximum Aggregated Bandwidth (MHz)	Bandwidth Combination Set
	Channel bandwidths for carrier-1 (MHz)	Channel bandwidths for carrier-2 (MHz)	Channel bandwidths for carrier-3 (MHz)		
CA_2C	5	20		20	0
	10	15, 20			
	15	10, 15, 20		8	1
	20	5, 10, 15, 20			
CA_7C	15	15		40	0
	20	20			
	10	20			
	15	15, 20		40	1
	20	10, 15, 20			
	15	10, 15		40	2
	20	15, 20			
CA_41C	10	20		40	0
	15	15, 20			
	20	10, 15, 20			
	5, 10	20		40	1
	15	15, 20			
	20	5, 10, 15, 20			
	10	15, 20		40	2
	15	10, 15, 20			
	20	10, 15, 20			
	10	20			
20	20		40	3	

LTE CA Configurations and Bandwidth Combination Sets defined for Intra-Band Non-Contiguous CA

Downlink CA Configuration	Component Carriers in order of Increasing Carrier Frequency			Maximum Aggregated Bandwidth (MHz)	Bandwidth Combination Set
	Channel Bandwidths for Carrier-1 (MHz)	Channel Bandwidths for Carrier-2 (MHz)	Channel Bandwidths for Carrier-3 (MHz)		
CA_2A-2A	5, 10, 15, 20	5, 10, 15, 20		40	0
CA_4A-4A	5, 10, 15, 20	5, 10, 15, 20		40	0
	5, 10	5, 10		20	1
CA_7A-7A	5	15		40	0
	10	10, 15			
	15	15, 20			
	20	20			
	5, 10, 15, 20	5, 10, 15, 20		40	1
	5, 10, 15, 20	5, 10		30	2
CA_41A-41A	10, 15, 20	10, 15, 20		40	0
	5, 10, 15, 20	5, 10, 15, 20		40	1
	10, 15, 20	10, 15, 20		40	0

LTE CA Configurations and Bandwidth Combination Sets defined for Inter-Band CA (Two Bands)

Downlink CA Configuration	LTE Bands	Channel Bandwidths for Carrier (MHz)	Maximum Aggregated Bandwidth (MHz)	Bandwidth Combination Set
CA_2A-5A	2	5, 10, 15, 20	30	0
	5	5, 10		
	2	5, 10	20	1
	5	5, 10		
CA_2A-12A	2	5, 10, 15, 20	30	0
	12	5, 10	30	1
	2	5, 10, 15, 20		
	12	3, 5, 10		
	2	5, 10	20	2
	12	5, 10		
CA_2A-13A	2	5, 10, 15, 20	30	0
	13	10		
	2	5, 10	20	1
	13	10		
CA_2A-29A	2	5, 10	20	0
	29	3, 5, 10		
	2	5, 10	20	1
	29	5, 10		
	2	5, 10, 15, 20	30	2
	29	5, 10		
CA_4A-5A	4	5, 10	20	0
	5	5, 10		
	4	5, 10, 15, 20	30	1
	5	5, 10		
CA_4A-12A	4	1.4, 3, 5, 10	20	0
	12	5, 10		
	4	1.4, 3, 5, 10, 15, 20	30	1
	12	5, 10		
	4	5, 10, 15, 20	30	2
	12	3, 5, 10		
	4	5, 10	20	3
	12	5, 10		
	4	5, 10, 15, 20	30	4
	12	5, 10		
4	5, 10, 15	20	5	
12	5			
CA_4A-13A	4	5, 10, 15, 20	30	0
	13	10		
	4	5, 10	20	1
	13	10		
CA_4A-29A	4	5, 10	20	0
	29	3, 5, 10		
	4	5, 10	20	1
	29	5, 10		
	4	5, 10, 15, 20	30	2
	29	5, 10		

<SAR Test Exclusion Evaluations for LTE Downlink CA>

According to Nov 2017 TCB Workshop, SAR test exclusion for LTE downlink Carrier Aggregation is determined by power measurements according to the number of component carriers (CCs) supported by the product implementation. The downlink Carrier Aggregation configurations are tabulated in separate columns. DL CA would be listed in the columns corresponding to Intra Band contiguous, 2CCs Intra Band Non-contiguous, 2bands/2CCs. The CA/CC combinations in each columns are sorted so that frequency bands listed in subsequent columns on each row are ascending subsets, as illustrated below; i.e., columns to the right correspond to increasing number of frequency bands and CCs.

Configure	Intra Band		Inter Band
	Contiguous	2 CCs Non-Contiguous	2 Bands / 2CCs
		CA_2A-2A	CA_2A-5A
			CA_2A-12A
			CA_2A-13A
			CA_2A-29A
		CA_4A-4A	CA_4A-5A
			CA_4A-12A
			CA_4A-13A
			CA_4A-29A
		CA_7A-7A	
		CA_41A-41A	
	CA_2C		
	CA_7C		
	CA_41C		

- Only yellow highlighted cells need power measurement.

FCC SAR Test Report

<Considerations Related to WLAN for Setup and Testing>

In general, various vendor specific external test software and chipset based internal test modes are typically used for SAR measurement. These chipset based test mode utilities are generally hardware and manufacturer dependent, and often include substantial flexibility to reconfigure or reprogram a device. A Wi-Fi device must be configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools for SAR measurement. The test frequencies established using test mode must correspond to the actual channel frequencies. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92 - 96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. In addition, a periodic transmission duty factor is required for current generation SAR systems to measure SAR correctly. The reported SAR must be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

According to KDB 248227 D01, this device has installed WLAN engineering testing software which can provide continuous transmitting RF signal. During WLAN SAR testing, this device was operated to transmit continuously at the maximum transmission duty with specified transmission mode, operating frequency, lowest data rate, and maximum output power.

Initial Test Configuration

An initial test configuration is determined for OFDM transmission modes in 2.4 GHz and 5 GHz bands according to the channel bandwidth, modulation and data rate combination(s) with the highest maximum output power specified for production units in each standalone and aggregated frequency band. When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band.

Subsequent Test Configuration

SAR measurement requirements for the remaining 802.11 transmission mode configurations that have not been tested in the initial test configuration are determined separately for each standalone and aggregated frequency band, in each exposure condition, according to the maximum output power specified for production units. Additional power measurements may be required to determine if SAR measurements are required for subsequent highest output power channels in a subsequent test configuration. When the highest reported SAR for the initial test configuration according to the initial test position or fixed exposure position requirements, is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for that subsequent test configuration.

FCC SAR Test Report

SAR Test Configuration and Channel Selection

When multiple channel bandwidth configurations in a frequency band have the same specified maximum output power, the initial test configuration is using largest channel bandwidth, lowest order modulation, lowest data rate, and lowest order 802.11 mode (i.e., 802.11a is chosen over 802.11n then 802.11ac or 802.11g is chosen over 802.11n). After an initial test configuration is determined, if multiple test channels have the same measured maximum output power, the channel chosen for SAR measurement is determined according to the following.

- 1) The channel closest to mid-band frequency is selected for SAR measurement.
- 2) For channels with equal separation from mid-band frequency; for example, high and low channels or two mid-band channels, the higher frequency (number) channel is selected for SAR measurement.

<Considerations Related to Bluetooth for Setup and Testing>

This device has installed Bluetooth engineering testing software which can provide continuous transmitting RF signal. During Bluetooth SAR testing, this device was operated to transmit continuously at the maximum transmission duty with specified transmission mode, operating frequency, lowest data rate, and maximum output power.

The Bluetooth call box has been used during SAR measurement and the EUT was set to DH5 mode at the maximum output power. Its duty factor was calculated as below and the measured SAR for Bluetooth would be scaled to the 100% transmission duty factor to determine compliance.



Time-domain plot for Bluetooth transmission signal

The duty factor of Bluetooth signal has been calculated as following.

$$\text{Duty Factor} = \text{Pulse Width} / \text{Total Period} = 2.88 / 3.75 = 76.80 \%$$

4.2 EUT Testing Position

4.2.1 Extremity Exposure Conditions

This hand-held device was test on the extremity exposure conditions. Extremity SAR was tested on the Rear Face, Top Side, and Left Side positions for WWAN antenna, and Rear Face, Right Side, Top Side, and Bottom Side positions for WLAN antenna. In these positions, the separation distance between EUT and phantom is 0 cm.

4.2.2 SAR Test Exclusion Evaluations

According to KDB 447498 D01, the SAR test exclusion condition is based on source-based time-averaged maximum conducted output power, adjusted for tune-up tolerance, and the minimum test separation distance required for the exposure conditions. The SAR exclusion threshold is determined by the following formula.

1. For the test separation distance <= 50 mm

$$\frac{\text{Max. Tune up Power}_{(mW)}}{\text{Min. Test Separation Distance}_{(mm)}} \times \sqrt{f_{(GHz)}} \leq 3.0 \text{ for SAR-1g, } \leq 7.5 \text{ for SAR-10g}$$

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

2. For the test separation distance > 50 mm, and the frequency at 100 MHz to 1500 MHz

$$\left[(\text{Threshold at 50 mm in Step 1}) + (\text{Test Separation Distance} - 50 \text{ mm}) \times \left(\frac{f_{(MHz)}}{150} \right) \right]_{(mW)}$$

3. For the test separation distance > 50 mm, and the frequency at > 1500 MHz to 6 GHz

$$[(\text{Threshold at 50 mm in Step 1}) + (\text{Test Separation Distance} - 50 \text{ mm}) \times 10]_{(mW)}$$

<For WWAN>

Mode	Max. Tune-up Power (dBm)	Max. Tune-up Power (mW)	Rear Face			Left Side			Right Side			Top Side			Bottom Side		
			Ant. to Surface (mm)	Calculated Result	Require SAR Testing?	Ant. to Surface (mm)	Calculated Result	Require SAR Testing?	Ant. to Surface (mm)	Calculated Result	Require SAR Testing?	Ant. to Surface (mm)	Calculated Result	Require SAR Testing?	Ant. to Surface (mm)	Calculated Result	Require SAR Testing?
WCDMA II	24	251	5	69.33	Yes	12	28.89	Yes	155.2	1161 mW	No	6	57.78	Yes	136.51	974 mW	No
WCDMA IV	24	251	5	66.46	Yes	12	27.69	Yes	155.2	1165 mW	No	6	55.38	Yes	136.51	978 mW	No
WCDMA V	24	251	5	46.19	Yes	12	19.25	Yes	155.2	757 mW	No	6	38.49	Yes	136.51	651 mW	No
LTE 2	24	251	5	69.38	Yes	12	28.91	Yes	155.2	1161 mW	No	6	57.81	Yes	136.51	974 mW	No
LTE 4	24	251	5	66.5	Yes	12	27.71	Yes	155.2	1165 mW	No	6	55.42	Yes	136.51	978 mW	No
LTE 5	24	251	5	46.25	Yes	12	19.27	Yes	155.2	758 mW	No	6	38.55	Yes	136.51	652 mW	No
LTE 7	23	200	5	64.12	Yes	12	26.72	Yes	155.2	1146 mW	No	6	53.44	Yes	136.51	959 mW	No
LTE 12	24	251	5	42.48	Yes	12	17.7	Yes	155.2	679 mW	No	6	35.4	Yes	136.51	590 mW	No
LTE 13	24	251	5	44.53	Yes	12	18.56	Yes	155.2	721 mW	No	6	37.11	Yes	136.51	623 mW	No
LTE 25	24	251	5	69.47	Yes	12	28.95	Yes	155.2	1160 mW	No	6	57.89	Yes	136.51	973 mW	No
LTE 26	24	251	5	46.25	Yes	12	19.27	Yes	155.2	758 mW	No	6	38.55	Yes	136.51	652 mW	No
LTE 41	23	200	5	65.6	Yes	12	27.34	Yes	155.2	1143 mW	No	6	54.67	Yes	136.51	957 mW	No

FCC SAR Test Report

<For BT/WLAN Ant-0>

Mode	Max. Tune-up Power (dBm)	Max. Tune-up Power (mW)	Rear Face			Left Side			Right Side			Top Side			Bottom Side		
			Ant. to Surface (mm)	Calculated Result	Require SAR Testing?	Ant. to Surface (mm)	Calculated Result	Require SAR Testing?	Ant. to Surface (mm)	Calculated Result	Require SAR Testing?	Ant. to Surface (mm)	Calculated Result	Require SAR Testing?	Ant. to Surface (mm)	Calculated Result	Require SAR Testing?
WLAN 2.4G	20.5	112	5	35.15	Yes	217.6	1772 mW	No	11.8	14.89	Yes	6	29.29	Yes	142.5	1021 mW	No
WLAN 5.2G	15	32	5	14.65	Yes	217.6	1742 mW	No	11.8	6.21	No	6	12.21	Yes	142.5	991 mW	No
WLAN 5.3G	19	79	5	36.44	Yes	217.6	1741 mW	No	11.8	15.44	Yes	6	30.37	Yes	142.5	990 mW	No
WLAN 5.6G	19	79	5	37.79	Yes	217.6	1739 mW	No	11.8	16.01	Yes	6	31.49	Yes	142.5	988 mW	No
WLAN 5.8G	19	79	5	38.13	Yes	217.6	1738 mW	No	11.8	16.16	Yes	6	31.78	Yes	142.5	987 mW	No
BT	7	5	5	1.57	No	217.6	1771 mW	No	11.8	0.67	No	6	1.31	No	142.5	1020 mW	No

<For WLAN Ant-1>

Mode	Max. Tune-up Power (dBm)	Max. Tune-up Power (mW)	Rear Face			Left Side			Right Side			Top Side			Bottom Side		
			Ant. to Surface (mm)	Calculated Result	Require SAR Testing?	Ant. to Surface (mm)	Calculated Result	Require SAR Testing?	Ant. to Surface (mm)	Calculated Result	Require SAR Testing?	Ant. to Surface (mm)	Calculated Result	Require SAR Testing?	Ant. to Surface (mm)	Calculated Result	Require SAR Testing?
WLAN 2.4G	20.5	112	5	35.15	Yes	219.5	1791 mW	No	21.9	8.02	Yes	152.5	1121 mW	No	10.9	16.12	Yes
WLAN 5.2G	15	32	5	14.65	Yes	219.5	1761 mW	No	21.9	3.34	No	152.5	1091 mW	No	10.9	6.72	No
WLAN 5.3G	19	79	5	36.44	Yes	219.5	1760 mW	No	21.9	8.32	Yes	152.5	1090 mW	No	10.9	16.72	Yes
WLAN 5.6G	19	79	5	37.79	Yes	219.5	1758 mW	No	21.9	8.63	Yes	152.5	1088 mW	No	10.9	17.33	Yes
WLAN 5.8G	19	79	5	38.13	Yes	219.5	1757 mW	No	21.9	8.71	Yes	152.5	1087 mW	No	10.9	17.49	Yes

<For WLAN Ant-0 + Ant-1>

Mode	Max. Tune-up Power (dBm)	Max. Tune-up Power (mW)	Rear Face			Left Side			Right Side			Top Side			Bottom Side		
			Ant. to Surface (mm)	Calculated Result	Require SAR Testing?	Ant. to Surface (mm)	Calculated Result	Require SAR Testing?	Ant. to Surface (mm)	Calculated Result	Require SAR Testing?	Ant. to Surface (mm)	Calculated Result	Require SAR Testing?	Ant. to Surface (mm)	Calculated Result	Require SAR Testing?
WLAN 2.4G	23.5	224	5	70.29	Yes	217.6	1772 mW	No	11.8	29.79	Yes	6	58.58	Yes	10.9	32.25	Yes
WLAN 5.2G	18	63	5	28.84	Yes	217.6	1742 mW	No	11.8	12.22	Yes	6	24.04	Yes	10.9	13.23	Yes
WLAN 5.3G	22	158	5	72.89	Yes	217.6	1741 mW	No	11.8	30.88	Yes	6	60.74	Yes	10.9	33.43	Yes
WLAN 5.6G	22	158	5	75.58	Yes	217.6	1739 mW	No	11.8	32.02	Yes	6	62.98	Yes	10.9	34.67	Yes
WLAN 5.8G	22	158	5	76.27	Yes	217.6	1738 mW	No	11.8	32.32	Yes	6	63.56	Yes	10.9	34.98	Yes

FCC SAR Test Report

4.3 Tissue Verification

The measuring results for tissue simulating liquid are shown as below.

Test Date	Tissue Type	Frequency (MHz)	Liquid Temp. (°C)	Measured Conductivity (σ)	Measured Permittivity (ϵ_r)	Target Conductivity (σ)	Target Permittivity (ϵ_r)	Conductivity Deviation (%)	Permittivity Deviation (%)
Nov. 14, 2018	Body	750	23.1	0.961	54.95	0.96	55.5	0.10	-0.99
Nov. 14, 2018	Body	835	23.2	1.014	57.038	0.97	55.2	4.54	3.33
Nov. 14, 2018	Body	1750	23.2	1.443	51.612	1.49	53.4	-3.15	-3.35
Nov. 13, 2018	Body	1900	23.3	1.58	50.851	1.52	53.3	3.95	-4.59
Nov. 15, 2018	Body	2450	23.1	2.015	51.563	1.95	52.7	3.33	-2.16
Nov. 15, 2018	Body	2600	23.3	2.191	51.187	2.16	52.5	1.44	-2.50
Nov. 12, 2018	Body	5250	23.3	5.29	48.803	5.36	48.9	-1.31	-0.20
Nov. 12, 2018	Body	5600	23.3	5.755	48.281	5.77	48.5	-0.26	-0.45
Nov. 13, 2018	Body	5750	23.3	6	46.207	5.94	48.3	1.01	-4.33

Note:

The dielectric properties of the tissue simulating liquid must be measured within 24 hours before the SAR testing and within $\pm 5\%$ of the target values. Liquid temperature during the SAR testing must be within ± 2 °C.

4.4 System Validation

The SAR measurement system was validated according to procedures in KDB 865664 D01. The validation status in tabulated summary is as below.

Test Date	Probe S/N	Calibration Point		Measured Conductivity (σ)	Measured Permittivity (ϵ_r)	Validation for CW			Validation for Modulation		
						Sensitivity Range	Probe Linearity	Probe Isotropy	Modulation Type	Duty Factor	PAR
Nov. 14, 2018	3650	Body	750	0.961	54.95	Pass	Pass	Pass	N/A	N/A	N/A
Nov. 14, 2018	3650	Body	835	1.014	57.038	Pass	Pass	Pass	N/A	N/A	N/A
Nov. 14, 2018	3650	Body	1750	1.443	51.612	Pass	Pass	Pass	N/A	N/A	N/A
Nov. 13, 2018	3650	Body	1900	1.58	50.851	Pass	Pass	Pass	N/A	N/A	N/A
Nov. 15, 2018	3650	Body	2450	2.015	51.563	Pass	Pass	Pass	OFDM	N/A	Pass
Nov. 15, 2018	3650	Body	2600	2.191	51.187	Pass	Pass	Pass	N/A	N/A	N/A
Nov. 12, 2018	3650	Body	5250	5.29	48.803	Pass	Pass	Pass	OFDM	N/A	Pass
Nov. 12, 2018	3650	Body	5600	5.755	48.281	Pass	Pass	Pass	OFDM	N/A	Pass
Nov. 13, 2018	3650	Body	5750	6	46.207	Pass	Pass	Pass	OFDM	N/A	Pass

4.5 System Verification

The measuring result for system verification is tabulated as below.

Test Date	Mode	Frequency (MHz)	1W Target SAR-10g (W/kg)	Measured SAR-10g (W/kg)	Normalized to 1W SAR-10g (W/kg)	Deviation (%)	Dipole S/N	Probe S/N	DAE S/N
Nov. 14, 2018	Body	750	5.71	1.42	5.68	-0.53	1013	3650	579
Nov. 14, 2018	Body	835	6.32	1.51	6.04	-4.43	4d121	3650	579
Nov. 14, 2018	Body	1750	19.70	4.84	19.36	-1.73	1055	3650	579
Nov. 13, 2018	Body	1900	21.20	5.32	21.28	0.38	5d036	3650	579
Nov. 15, 2018	Body	2450	23.80	5.58	22.32	-6.22	737	3650	579
Nov. 15, 2018	Body	2600	24.70	5.91	23.64	-4.29	1020	3650	579
Nov. 12, 2018	Body	5250	20.80	2.17	21.70	4.33	1019	3650	579
Nov. 12, 2018	Body	5600	22.20	2.3	23.00	3.60	1019	3650	579
Nov. 13, 2018	Body	5750	20.80	2.12	21.20	1.92	1019	3650	579

Note:

Comparing to the reference SAR value provided by SPEAG, the validation data should be within its specification of 10 %. The result indicates the system check can meet the variation criterion and the plots can be referred to Appendix A of this report.

4.6 Maximum Output Power

4.6.1 Maximum Target Conducted Power

The maximum conducted average power (Unit: dBm) including tune-up tolerance is shown as below.

Mode	WCDMA Band II	WCDMA Band IV	WCDMA Band V
RMC 12.2K	24.0	24.0	24.0
HSDPA / HSUPA / DC-HSDPA	23.0	23.0	23.0

Mode	LTE 2	LTE 4	LTE 5	LTE 7	LTE 12
QPSK	24.0	24.0	24.0	23.0	24.0
16QAM	23.0	23.0	23.0	22.0	23.0

Mode	LTE 13	LTE 25	LTE 26	LTE 41
QPSK	24.0	24.0	24.0	23.0
16QAM	23.0	23.0	23.0	22.0

FCC SAR Test Report

Mode	2.4G WLAN	5.2G WLAN	5.3G WLAN	5.6G WLAN	5.8G WLAN
802.11b	Ant. 0 / Ant. 1: CH 1: 20.0 CH 6: 20.5 CH 11: 20.0 Ant. 0+1: CH 1: 23.0 CH 6: 23.5 CH 11: 23.0	N/A	N/A	N/A	N/A
802.11g	Ant. 0 / Ant. 1: CH 1: 17.0 CH 6: 19.5 CH 11: 16.0 Ant. 0+1: CH 1: 20.0 CH 6: 22.5 CH 11: 19.0	N/A	N/A	N/A	N/A
802.11a	N/A	Ant. 0 / Ant. 1: 15.0 Ant. 0+1: 18.0	Ant. 0 / Ant. 1: CH 52, 56, 60: 19.0 CH 64: 17.0 Ant. 0+1: CH 52, 56, 60: 22.0 CH 64: 20.0	Ant. 0 / Ant. 1: CH 100: 17.0 CH 116, 120, 124, 132, 144: 19.0 CH 140: 16.5 Ant. 0+1: CH 100: 20.0 CH 116, 120, 124, 132, 144: 22.0 CH 140: 19.5	Ant. 0 / Ant. 1: CH 149: 17.0 CH 153, 157, 161, 165: 19.0 Ant. 0+1: CH 149: 20.0 CH 153, 157, 161, 165: 22.0
802.11n HT20	Ant. 0 / Ant. 1: CH 1: 17.0 CH 6: 19.5 CH 11: 16.0 Ant. 0+1: CH 1: 20.0 CH 6: 22.5 CH 11: 19.0	Ant. 0 / Ant. 1: 15.0 Ant. 0+1: 18.0	Ant. 0 / Ant. 1: CH 52, 56, 60: 19.0 CH 64: 17.0 Ant. 0+1: CH 52, 56, 60: 22.0 CH 64: 20.0	Ant. 0 / Ant. 1: CH 100: 17.0 CH 116, 120, 124, 132, 144: 19.0 CH 140: 16.0 Ant. 0+1: CH 100: 20.0 CH 116, 120, 124, 132, 144: 22.0 CH 140: 19.0	Ant. 0 / Ant. 1: CH 149: 17.0 CH 153, 157, 161, 165: 19.0 Ant. 0+1: CH 149: 20.0 CH 153, 157, 161, 165: 22.0
802.11n HT40	Ant. 0 / Ant. 1: CH 1: 13.0 CH 6: 18.5 CH 11: 12.0 Ant. 0+1: CH 1: 16.0 CH 6: 21.5 CH 11: 15.0	Ant. 0 / Ant. 1: 15.0 Ant. 0+1: 18.0	Ant. 0 / Ant. 1: CH 54: 19.0 CH 62: 17.0 Ant. 0+1: CH 54: 22.0 CH 62: 20.0	Ant. 0 / Ant. 1: CH 102: 17.0 CH 110, 118, 126, 134, 140: 19.0 Ant. 0+1: CH 102: 20.0 CH 110, 118, 126, 134, 140: 22.0	Ant. 0 / Ant. 1: CH 151: 14.5 CH 159: 19.0 Ant. 0+1: CH 151: 17.5 CH 159: 22.0
802.11ac VHT80	N/A	Ant. 0 / Ant. 1: 15.0 Ant. 0+1: 18.0	Ant. 0 / Ant. 1: 14.0 Ant. 0+1: 17.0	Ant. 0 / Ant. 1: CH 106: 14.5 CH 122, 138: 18.0 Ant. 0+1: CH 106: 17.5 CH 122, 138: 21.0	Ant. 0 / Ant. 1: CH 155: 14.0 Ant. 0+1: CH 155: 17.0

FCC SAR Test Report

Mode	2.4G Bluetooth
Bluetooth DH	CH 0: 5.0 CH 39: 7.0 CH 78: 7.0
Bluetooth LE	0

4.6.2 Measured Conducted Power Result

The measuring conducted average power (Unit: dBm) is shown as below.

Band	WCDMA Band II			WCDMA Band IV			WCDMA Band V			3GPP MPR (dB)
Channel	9262	9400	9538	1312	1413	1513	4132	4182	4233	
Frequency (MHz)	1852.4	1880.0	1907.6	1712.4	1732.6	1752.6	826.4	836.4	846.6	
RMC 12.2K	23.01	23.09	22.97	23.19	23.36	23.31	22.59	22.48	22.56	-
HSDPA Subtest-1	21.96	21.98	21.94	22.22	22.14	22.12	21.16	21.11	21.16	0
HSDPA Subtest-2	21.99	22.01	21.97	22.26	22.18	22.16	21.21	21.16	21.21	0
HSDPA Subtest-3	21.47	21.49	21.45	21.76	21.68	21.66	20.70	20.65	20.70	0.5
HSDPA Subtest-4	21.47	21.49	21.45	21.76	21.68	21.66	20.70	20.65	20.70	0.5
DC-HSDPA Subtest-1	21.94	21.96	21.92	22.13	22.05	22.03	21.14	21.09	21.14	0
DC-HSDPA Subtest-2	21.97	21.99	21.95	22.21	22.13	22.11	21.18	21.13	21.18	0
DC-HSDPA Subtest-3	21.42	21.44	21.40	22.09	22.01	21.99	20.67	20.62	20.67	0.5
DC-HSDPA Subtest-4	21.41	21.43	21.39	21.75	21.67	21.65	20.67	20.62	20.67	0.5
HSUPA Subtest-1	21.72	21.74	21.70	21.90	21.82	21.80	21.11	21.05	21.10	0
HSUPA Subtest-2	20.95	20.97	20.93	20.96	20.88	20.86	20.24	20.19	20.24	2
HSUPA Subtest-3	20.66	20.68	20.64	20.93	20.85	20.83	20.13	20.08	20.13	1
HSUPA Subtest-4	20.92	20.94	20.90	20.99	20.91	20.89	20.16	20.11	20.16	2
HSUPA Subtest-5	22.09	22.11	22.07	22.29	22.21	22.19	21.26	21.21	21.26	0

FCC SAR Test Report

LTE Band 2															
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		18700	18900	19100				Channel		18675	18900	19125	
		Frequency (MHz)		1860.0	1880.0	1900.0				Frequency (MHz)		1857.5	1880.0	1902.5	
20M	QPSK	1	0	23.23	22.97	22.82	0	15M	QPSK	1	0	23.18	22.90	22.75	0
		1	50	23.19	23.17	23.10	0			1	37	23.14	23.11	23.04	0
		1	99	22.70	22.68	22.61	0			1	74	22.63	22.61	22.53	0
		50	0	21.90	21.88	21.81	1			36	0	21.81	21.78	21.69	1
		50	25	21.86	21.84	21.77	1			36	19	21.75	21.72	21.63	1
		50	50	21.86	21.84	21.77	1			36	39	21.75	21.72	21.63	1
	100	0	21.90	21.88	21.81	1	75		0	21.81	21.78	21.69	1		
	16QAM	1	0	22.28	22.00	21.83	1		16QAM	1	0	22.23	21.91	21.75	1
		1	50	22.24	22.22	22.13	1			1	37	22.18	22.13	22.05	1
		1	99	21.70	21.68	21.61	1			1	74	21.62	21.59	21.51	1
		50	0	20.90	20.86	20.78	2			36	0	20.79	20.76	20.63	2
		50	25	20.83	20.81	20.72	2			36	19	20.72	20.68	20.57	2
		50	50	20.83	20.81	20.72	2			36	39	20.72	20.68	20.57	2
		100	0	20.90	20.86	20.78	2			75	0	20.79	20.76	20.63	2
10M		QPSK	1	0	23.12	22.80	22.64	0		5M	QPSK	1	0	23.08	22.78
	1		24	23.07	23.03	22.96	0	1	12			23.04	23.00	22.92	0
	1		49	22.52	22.49	22.41	0	1	24			22.49	22.45	22.37	0
	25		0	21.70	21.66	21.52	1	12	0			21.62	21.56	21.40	1
	25		12	21.62	21.58	21.47	1	12	6			21.51	21.46	21.34	1
	25		25	21.62	21.58	21.47	1	12	13			21.51	21.46	21.34	1
	50	0	21.70	21.66	21.52	1	25	0	21.62		21.56	21.40	1		
	16QAM	1	0	22.18	21.86	21.68	1	16QAM	1		0	22.12	21.77	21.57	1
		1	24	22.13	22.10	22.00	1		1		12	22.06	22.01	21.93	1
		1	49	21.56	21.53	21.44	1		1		24	21.44	21.38	21.31	1
		25	0	20.71	20.64	20.49	2		12		0	20.59	20.53	20.39	2
		25	12	20.60	20.56	20.43	2		12		6	20.48	20.44	20.29	2
		25	25	20.60	20.56	20.43	2		12		13	20.48	20.44	20.29	2
		50	0	20.71	20.64	20.49	2		25		0	20.59	20.53	20.39	2
3M		QPSK	1	0	23.02	22.67	22.48		0	1.4M	QPSK	1	0	22.98	22.66
	1		7	22.95	22.91	22.81	0	1	2			22.94	22.91	22.82	0
	1		14	22.34	22.31	22.22	0	1	5			22.34	22.28	22.19	0
	8		0	21.49	21.44	21.28	1	3	0			22.23	22.36	22.16	0
	8		3	21.39	21.34	21.20	1	3	1			22.18	22.11	22.05	0
	8		7	21.39	21.34	21.20	1	3	3			22.09	22.15	22.12	0
	15	0	21.49	21.44	21.28	1	6	0	21.43		21.36	21.14	1		
	16QAM	1	0	22.07	21.74	21.56	1	16QAM	1		0	22.02	21.67	21.48	1
		1	7	22.01	21.96	21.88	1		1		2	21.96	21.93	21.81	1
		1	14	21.43	21.34	21.24	1		1		5	21.35	21.32	21.22	1
		8	0	20.52	20.45	20.27	2		3		0	21.18	21.14	21.08	1
		8	3	20.38	20.31	20.17	2		3		1	21.15	21.09	21.22	1
		8	7	20.38	20.31	20.17	2		3		3	21.21	21.18	21.18	1
		15	0	20.52	20.45	20.27	2		6		0	20.48	20.40	20.08	2

FCC SAR Test Report

LTE Band 4															
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		20050	20175	20300				Channel		20025	20175	20325	
		Frequency (MHz)		1720.0	1732.5	1745.0				Frequency (MHz)		1717.5	1732.5	1747.5	
20M	QPSK	1	0	23.28	23.14	23.13	0	15M	QPSK	1	0	23.22	23.08	23.07	0
		1	50	23.12	23.03	23.04	0			1	37	23.05	22.96	22.97	0
		1	99	22.84	22.75	22.76	0			1	74	22.77	22.67	22.68	0
		50	0	22.21	22.12	22.13	1			36	0	22.12	22.02	22.04	1
		50	25	22.10	22.01	22.02	1			36	19	22.00	21.87	21.88	1
		50	50	22.07	21.98	21.99	1			36	39	21.97	21.83	21.84	1
	100	0	22.15	22.06	22.07	1	75		0	22.06	21.94	21.97	1		
	16QAM	1	0	22.33	22.19	22.17	1		1	0	22.28	22.13	22.12	1	
		1	50	22.16	22.06	22.08	1		1	37	22.10	21.98	22.01	1	
		1	99	21.87	21.76	21.79	1		1	74	21.77	21.65	21.68	1	
		50	0	21.22	21.12	21.13	2		36	0	21.10	20.99	21.01	2	
		50	25	21.10	20.97	20.99	2		36	19	20.96	20.81	20.84	2	
		50	50	21.06	20.93	20.94	2		36	39	20.91	20.78	20.79	2	
		100	0	21.15	21.04	21.06	2		75	0	21.04	20.88	20.91	2	
10M		QPSK	1	0	23.18	23.04	23.03	0	5M	QPSK	1	0	23.13	22.97	22.96
	1		24	22.97	22.87	22.89	0	1			12	22.94	22.81	22.85	0
	1		49	22.67	22.58	22.59	0	1			24	22.59	22.48	22.51	0
	25		0	22.04	21.91	21.94	1	12			0	21.92	21.78	21.81	1
	25		12	21.89	21.76	21.77	1	12			6	21.75	21.57	21.63	1
	25		25	21.85	21.71	21.73	1	12			13	21.72	21.53	21.55	1
	50	0	21.97	21.81	21.85	1	25	0		21.83	21.69	21.72	1		
	16QAM	1	0	22.22	22.07	22.06	1	1		0	22.18	22.03	22.00	1	
		1	24	22.03	21.92	21.93	1	1		12	21.98	21.87	21.88	1	
		1	49	21.73	21.60	21.64	1	1		24	21.67	21.55	21.57	1	
		25	0	21.05	20.92	20.94	2	12		0	20.99	20.83	20.85	2	
		25	12	20.89	20.74	20.76	2	12		6	20.79	20.56	20.61	2	
		25	25	20.85	20.65	20.69	2	12		13	20.72	20.50	20.53	2	
		50	0	20.98	20.81	20.85	2	25		0	20.90	20.67	20.72	2	
3M		QPSK	1	0	23.08	22.93	22.90	0	1.4M	QPSK	1	0	23.03	22.89	22.85
	1		7	22.86	22.72	22.75	0	1			2	22.83	22.67	22.72	0
	1		14	22.52	22.37	22.41	0	1			5	22.46	22.32	22.33	0
	8		0	21.82	21.67	21.70	1	3			0	22.34	22.29	22.21	0
	8		3	21.62	21.44	21.48	1	3			1	22.43	22.32	22.23	0
	8		7	21.59	21.39	21.41	1	3			3	22.15	22.09	22.24	0
	15	0	21.74	21.54	21.59	1	6	0		21.66	21.43	21.49	1		
	16QAM	1	0	22.13	21.96	21.92	1	1		0	22.08	21.93	21.90	1	
		1	7	21.87	21.74	21.77	1	1		2	21.86	21.71	21.77	1	
		1	14	21.52	21.41	21.44	1	1		5	21.49	21.34	21.38	1	
		8	0	20.85	20.67	20.72	2	3		0	21.38	21.37	21.43	1	
		8	3	20.64	20.44	20.46	2	3		1	21.23	21.32	21.22	1	
		8	7	20.58	20.34	20.38	2	3		3	21.26	21.12	21.11	1	
		15	0	20.76	20.53	20.58	2	6		0	20.68	20.41	20.46	2	

FCC SAR Test Report

LTE Band 5															
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		20450	20525	20600				Channel		20425	20525	20625	
		Frequency (MHz)		829.0	836.5	844.0				Frequency (MHz)		826.5	836.5	846.5	
10M	QPSK	1	0	22.56	22.69	22.29	0	5M	QPSK	1	0	22.51	22.64	22.23	0
		1	24	22.46	22.53	22.27	0			1	12	22.40	22.48	22.20	0
		1	49	22.26	22.33	22.07	0			1	24	22.18	22.27	22.02	0
		25	0	21.40	21.47	21.21	1			12	0	21.21	21.29	21.12	1
		25	12	21.32	21.39	21.13	1			12	6	21.31	21.38	21.07	1
		25	25	21.32	21.39	21.13	1			12	13	21.21	21.29	21.08	1
	50	0	21.24	21.31	21.05	1	25		0	21.10	21.18	21.07	1		
	16QAM	1	0	21.61	21.74	21.33	1		16QAM	1	0	21.53	21.69	21.24	1
		1	24	21.51	21.58	21.31	1			1	12	21.43	21.50	21.21	1
		1	49	21.30	21.38	21.10	1			1	24	21.19	21.28	21.05	1
		25	0	20.30	20.38	20.08	2			12	0	20.19	20.29	20.13	2
		25	12	20.42	20.49	20.17	2			12	6	20.31	20.38	20.05	2
		25	25	20.30	20.38	20.08	2			12	13	20.19	20.29	20.08	2
		50	0	20.20	20.28	20.01	2			25	0	20.09	20.17	20.16	2

LTE Band 5															
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		20415	20525	20635				Channel		20407	20525	20643	
		Frequency (MHz)		825.5	836.5	847.5				Frequency (MHz)		824.7	836.5	848.3	
3M	QPSK	1	0	22.44	22.57	22.13	0	1.4M	QPSK	1	0	22.39	22.54	22.06	0
		1	7	22.31	22.39	22.09	0			1	2	22.26	22.35	22.02	0
		1	14	22.08	22.18	22.13	0			1	5	22.01	22.12	22.19	0
		8	0	21.07	21.17	21.07	1			3	0	22.17	22.06	22.05	0
		8	3	21.20	21.27	21.21	1			3	1	22.06	22.18	22.14	0
		8	7	21.07	21.17	21.14	1			3	3	22.03	22.09	22.15	0
	15	0	21.13	21.05	21.09	1	6		0	21.13	21.02	21.09	1		
	16QAM	1	0	21.50	21.64	21.18	1		16QAM	1	0	21.43	21.58	21.06	1
		1	7	21.38	21.46	21.14	1			1	2	21.29	21.37	21.03	1
		1	14	21.11	21.23	21.15	1			1	5	21.18	21.16	21.15	1
		8	0	20.05	20.14	20.06	2			3	0	21.06	21.05	21.09	1
		8	3	20.18	20.29	20.05	2			3	1	21.18	21.19	21.11	1
		8	7	20.05	20.14	20.11	2			3	3	21.19	21.21	21.17	1
		15	0	20.09	20.02	20.13	2			6	0	20.21	20.23	20.17	2

FCC SAR Test Report

LTE Band 7															
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		20850	21100	21350				Channel		20825	21100	21375	
		Frequency (MHz)		2510.0	2535.0	2560.0				Frequency (MHz)		2507.5	2535.0	2562.5	
20M	QPSK	1	0	21.76	22.07	21.62	0	15M	QPSK	1	0	21.68	22.02	21.54	0
		1	50	21.98	22.03	21.89	0			1	37	21.92	21.97	21.82	0
		1	99	21.59	21.64	21.50	0			1	74	21.50	21.56	21.41	0
		50	0	20.90	20.95	20.81	1			36	0	20.66	20.74	20.55	1
		50	25	20.79	20.84	20.70	1			36	19	20.80	20.86	20.69	1
		50	50	20.86	20.91	20.77	1			36	39	20.76	20.82	20.63	1
		100	0	20.84	20.89	20.75	1			75	0	20.74	20.79	20.60	1
	16QAM	1	0	20.78	21.12	20.63	1		16QAM	1	0	20.71	21.07	20.57	1
		1	50	21.00	21.07	20.91	1			1	37	20.96	21.02	20.85	1
		1	99	20.60	20.66	20.50	1			1	74	20.52	20.59	20.42	1
		50	0	19.75	19.82	19.65	2			36	0	19.61	19.68	19.50	2
		50	25	19.89	19.95	19.77	2			36	19	19.78	19.85	19.64	2
		50	50	19.85	19.90	19.72	2			36	39	19.71	19.81	19.57	2
		100	0	19.82	19.88	19.70	2			75	0	19.68	19.75	19.55	2
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		20800	21100	21400				Channel		20775	21100	21425	
		Frequency (MHz)		2505.0	2535.0	2565.0				Frequency (MHz)		2502.5	2535.0	2567.5	
10M	QPSK	1	0	21.60	21.96	21.46	0	5M	QPSK	1	0	21.55	21.91	21.39	0
		1	24	21.85	21.92	21.75	0			1	12	21.80	21.86	21.69	0
		1	49	21.42	21.48	21.32	0			1	24	21.34	21.41	21.24	0
		25	0	20.54	20.61	20.41	1			12	0	20.40	20.51	20.26	1
		25	12	20.69	20.76	20.56	1			12	6	20.60	20.67	20.43	1
		25	25	20.63	20.71	20.50	1			12	13	20.53	20.62	20.36	1
		50	0	20.61	20.67	20.47	1			25	0	20.51	20.57	20.31	1
	16QAM	1	0	20.65	21.01	20.48	1		16QAM	1	0	20.56	20.97	20.40	1
		1	24	20.90	20.95	20.79	1			1	12	20.82	20.91	20.71	1
		1	49	20.44	20.51	20.33	1			1	24	20.34	20.43	20.21	1
		25	0	19.49	19.58	19.36	2			12	0	19.34	19.46	19.21	2
		25	12	19.69	19.78	19.52	2			12	6	19.55	19.62	19.38	2
		25	25	19.61	19.73	19.45	2			12	13	19.49	19.58	19.30	2
		50	0	19.58	19.67	19.42	2			25	0	19.46	19.53	19.28	2

FCC SAR Test Report

LTE Band 12															
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		23060	23095	23130				Channel		23035	23095	23155	
		Frequency (MHz)		704.0	707.5	711.0				Frequency (MHz)		701.5	707.5	713.5	
10M	QPSK	1	0	23.05	23.03	23.03	0	5M	QPSK	1	0	23.00	22.98	22.98	0
		1	24	23.03	23.01	23.02	0			1	12	22.98	22.95	22.96	0
		1	49	22.97	22.95	22.96	0			1	24	22.90	22.85	22.87	0
		25	0	22.03	21.96	21.97	1			12	0	21.84	21.81	21.82	1
		25	12	21.98	22.01	22.02	1			12	6	21.93	21.91	21.92	1
		25	25	21.99	21.97	21.98	1			12	13	21.86	21.82	21.84	1
	50	0	22.01	21.99	22.00	1	25		0	21.90	21.86	21.88	1		
	16QAM	1	0	22.09	22.07	22.07	1		16QAM	1	0	22.05	22.02	22.02	1
		1	24	22.07	22.03	22.04	1			1	12	22.02	21.93	21.95	1
		1	49	21.98	21.95	21.96	1			1	24	21.89	21.83	21.86	1
		25	0	20.94	20.91	20.93	2			12	0	20.81	20.76	20.79	2
		25	12	21.03	21.00	21.02	2			12	6	20.91	20.88	20.90	2
		25	25	20.97	20.92	20.94	2			12	13	20.84	20.77	20.81	2
		50	0	21.00	20.97	20.99	2			25	0	20.87	20.84	20.85	2

LTE Band 13															
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		23205	23230	23265				Channel		23205	23230	23265	
		Frequency (MHz)		700.5	707.5	714.5				Frequency (MHz)		699.7	707.5	715.3	
3M	QPSK	1	0	22.93	22.90	22.90	0	1.4M	QPSK	1	0	22.90	22.86	22.86	0
		1	7	22.90	22.84	22.86	0			1	2	22.86	22.78	22.81	0
		1	14	22.80	22.76	22.79	0			1	5	22.74	22.68	22.70	0
		8	0	21.72	21.67	21.70	1			3	0	22.61	22.51	22.53	0
		8	3	21.83	21.78	21.81	1			3	1	22.59	22.52	22.57	0
		8	7	21.73	21.69	21.72	1			3	3	22.48	22.44	22.49	0
	15	0	21.78	21.73	21.76	1	6		0	21.69	21.65	21.67	1		
	16QAM	1	0	22.00	21.98	21.98	1		16QAM	1	0	21.94	21.90	21.90	1
		1	7	21.98	21.89	21.92	1			1	2	21.90	21.80	21.84	1
		1	14	21.82	21.77	21.80	1			1	5	21.75	21.69	21.72	1
		8	0	20.67	20.61	20.63	2			3	0	21.55	21.47	21.51	1
		8	3	20.84	20.78	20.81	2			3	1	21.57	21.71	21.69	1
		8	7	20.71	20.63	20.67	2			3	3	21.52	21.49	21.55	1
		15	0	20.77	20.71	20.75	2			6	0	20.67	20.62	20.65	2

FCC SAR Test Report

LTE Band 25

BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		26140	26365	26590				Channel		26115	26365	26615	
		Frequency (MHz)		1860.0	1882.5	1905.0				Frequency (MHz)		1857.5	1882.5	1907.5	
20M	QPSK	1	0	23.01	23.02	23.12	0	15M	QPSK	1	0	22.96	22.97	23.07	0
		1	50	22.95	22.94	23.00	0			1	37	22.89	22.88	22.95	0
		1	99	22.60	22.59	22.65	0			1	74	22.52	22.51	22.59	0
		50	0	21.82	21.81	21.97	1			36	0	21.67	21.66	21.73	1
		50	25	21.92	21.91	21.88	1			36	19	21.83	21.82	21.89	1
		50	50	21.85	21.84	21.90	1			36	39	21.71	21.70	21.80	1
		100	0	21.90	21.89	21.95	1			75	0	21.80	21.76	21.87	1
	16QAM	1	0	22.06	22.07	22.17	1		16QAM	1	0	21.98	22.02	22.12	1
		1	50	21.99	21.98	22.05	1			1	37	21.91	21.88	21.96	1
		1	99	21.63	21.62	21.68	1			1	74	21.52	21.50	21.57	1
		50	0	20.78	20.76	20.85	2			36	0	20.65	20.62	20.71	2
		50	25	20.93	20.91	20.99	2			36	19	20.81	20.80	20.87	2
		50	50	20.82	20.80	20.89	2			36	39	20.69	20.68	20.78	2
		100	0	20.89	20.87	20.96	2			75	0	20.79	20.75	20.85	2
10M	QPSK	1	0	22.90	22.92	23.02	0	5M	QPSK	1	0	22.85	22.86	22.97	0
		1	24	22.80	22.79	22.88	0			1	12	22.74	22.72	22.82	0
		1	49	22.43	22.42	22.50	0			1	24	22.36	22.34	22.43	0
		25	0	21.54	21.51	21.62	1			12	0	21.39	21.36	21.48	1
		25	12	21.72	21.71	21.79	1			12	6	21.62	21.60	21.69	1
		25	25	21.59	21.57	21.68	1			12	13	21.45	21.44	21.57	1
		50	0	21.69	21.65	21.77	1			25	0	21.57	21.53	21.67	1
	16QAM	1	0	21.96	21.97	22.07	1		16QAM	1	0	21.83	21.85	21.99	1
		1	24	21.83	21.81	21.93	1			1	12	21.73	21.71	21.81	1
		1	49	21.41	21.39	21.51	1			1	24	21.33	21.31	21.41	1
		25	0	20.49	20.47	20.57	2			12	0	20.35	20.33	20.46	2
		25	12	20.69	20.66	20.77	2			12	6	20.63	20.59	20.69	2
		25	25	20.53	20.52	20.64	2			12	13	20.43	20.39	20.52	2
		50	0	20.65	20.61	20.73	2			25	0	20.54	20.50	20.67	2
3M	QPSK	1	0	22.92	22.94	22.90	0	1.4M	QPSK	1	0	22.82	22.99	22.95	0
		1	7	22.89	22.87	22.77	0			1	2	22.92	22.81	22.91	0
		1	14	22.51	22.41	22.55	0			1	5	22.54	22.48	22.54	0
		8	0	21.71	21.64	21.65	1			3	0	22.62	22.65	22.72	0
		8	3	21.82	21.76	21.86	1			3	1	22.85	22.70	22.87	0
		8	7	21.73	21.74	21.77	1			3	3	22.75	22.75	22.81	0
		15	0	21.77	21.73	21.88	1			6	0	21.71	21.76	21.76	1
	16QAM	1	0	21.98	21.79	21.84	1		16QAM	1	0	21.80	21.93	21.92	1
		1	7	21.71	21.71	21.74	1			1	2	21.80	21.78	21.87	1
		1	14	21.44	21.41	21.49	1			1	5	21.42	21.41	21.55	1
		8	0	20.68	20.55	20.79	2			3	0	21.52	21.56	21.71	1
		8	3	20.70	20.65	20.86	2			3	1	21.85	21.82	21.88	1
		8	7	20.58	20.70	20.74	2			3	3	21.63	21.79	21.74	1
		15	0	20.81	20.69	20.77	2			6	0	20.69	20.66	20.79	2

FCC SAR Test Report

LTE Band 26

BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		26765	26865	26965				Channel		26740	26865	26990	
		Frequency (MHz)		821.5	831.5	841.5				Frequency (MHz)		819.0	831.5	844.0	
15M	QPSK	1	0	22.75	22.85	22.59	0	10M	QPSK	1	0	22.69	22.80	22.53	0
		1	37	22.41	22.33	22.14	0			1	24	22.33	22.24	22.05	0
		1	74	22.54	22.46	22.27	0			1	49	22.47	22.38	22.18	0
		36	0	21.59	21.71	21.52	1			25	0	21.51	21.42	21.22	1
		36	19	21.61	21.53	21.34	1			25	12	21.50	21.41	21.20	1
		36	39	21.59	21.62	21.43	1			25	25	21.59	21.51	21.31	1
		75	0	21.51	21.59	21.40	1			50	0	21.48	21.39	21.17	1
	16QAM	1	0	21.80	21.90	21.64	1		16QAM	1	0	21.75	21.85	21.59	1
		1	37	21.45	21.35	21.15	1			1	24	21.38	21.28	21.07	1
		1	74	21.58	21.50	21.28	1			1	49	21.54	21.44	21.21	1
		36	0	20.62	20.52	20.31	2			25	0	20.51	20.40	20.16	2
		36	19	20.60	20.51	20.30	2			25	12	20.50	20.37	20.15	2
		36	39	20.71	20.63	20.40	2			25	25	20.62	20.53	20.25	2
		75	0	20.57	20.49	20.28	2			50	0	20.45	20.35	20.12	2
RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)		
Channel		26715	26865	27015				Channel		26705	26865	27025			
Frequency (MHz)		816.5	831.5	846.5				Frequency (MHz)		815.5	831.5	847.5			
5M	QPSK	1	0	22.63	22.74	22.47	0	3M	QPSK	1	0	22.57	22.69	22.40	0
		1	12	22.25	22.15	22.06	0			1	7	22.19	22.10	22.09	0
		1	24	22.40	22.32	22.09	0			1	14	22.35	22.26	22.03	0
		12	0	21.39	21.29	21.07	1			8	0	21.33	21.20	21.14	1
		12	6	21.38	21.28	21.04	1			8	3	21.29	21.18	21.05	1
		12	13	21.51	21.41	21.16	1			8	7	21.43	21.34	21.04	1
		25	0	21.35	21.25	21.02	1			15	0	21.26	21.16	21.12	1
	16QAM	1	0	21.69	21.80	21.51	1		16QAM	1	0	21.61	21.72	21.42	1
		1	12	21.28	21.20	21.09	1			1	7	21.22	21.11	21.08	1
		1	24	21.44	21.35	21.14	1			1	14	21.37	21.28	21.03	1
		12	0	20.46	20.31	20.06	2			8	0	20.31	20.19	20.09	2
		12	6	20.43	20.30	20.12	2			8	3	20.28	20.16	20.02	2
		12	13	20.55	20.47	20.15	2			8	7	20.44	20.34	20.04	2
		25	0	20.38	20.26	20.27	2			15	0	20.24	20.14	20.07	2
RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)		
Channel		26697	26865	27033				Channel		26697	26865	27033			
Frequency (MHz)		814.7	831.5	848.3				Frequency (MHz)		814.7	831.5	848.3			
1.4M	QPSK	1	0	22.55	22.65	22.38	0	1.4M	QPSK	1	0	22.55	22.65	22.38	0
		1	2	22.12	22.23	22.06	0			1	2	22.12	22.23	22.06	0
		1	5	22.29	22.19	22.02	0			1	5	22.29	22.19	22.02	0
		3	0	22.09	22.07	22.01	0			3	0	22.09	22.07	22.01	0
		3	1	22.08	22.11	22.02	0			3	1	22.08	22.11	22.02	0
		3	3	22.17	22.25	22.11	0			3	3	22.17	22.25	22.11	0
	6	0	21.16	21.15	21.09	1	6		0	21.16	21.15	21.09	1		
	16QAM	1	0	21.59	21.70	21.42	1		16QAM	1	0	21.59	21.70	21.42	1
		1	2	21.15	21.07	21.03	1			1	2	21.15	21.07	21.03	1
		1	5	21.34	21.23	21.19	1			1	5	21.34	21.23	21.19	1
3		0	21.19	21.27	21.13	1	3	0		21.19	21.27	21.13	1		
3	1	21.14	21.22	21.16	1	3	1	21.14	21.22	21.16	1				
3	3	21.05	21.14	21.09	1	3	3	21.05	21.14	21.09	1				
6	0	20.16	20.26	20.16	2	6	0	20.16	20.26	20.16	2				

FCC SAR Test Report

LTE Band 41																			
BW	MCS Index	RB Size	RB Offset	Low	Mid	Mid	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	Mid	Mid	High	3GPP MPR (dB)
		Channel		39750	40185	40620	41055	41490				Channel		39725	40173	40620	41068	41515	
		Frequency (MHz)		2506.0	2549.5	2593.0	2636.5	2680.0				Frequency (MHz)		2503.5	2548.3	2593.0	2637.8	2682.5	
20M	QPSK	1	0	21.47	21.51	21.59	21.47	21.91	0	15M	QPSK	1	0	21.45	21.46	21.49	21.46	21.84	0
		1	50	21.63	21.65	21.71	21.63	21.90	0			1	37	21.65	21.71	21.70	21.67	21.82	0
		1	99	21.35	21.37	21.43	21.35	21.62	0			1	74	21.32	21.36	21.37	21.31	21.62	0
		50	0	20.60	20.62	20.68	20.60	20.92	1			36	0	20.50	20.52	20.68	20.55	20.79	1
		50	25	20.58	20.60	20.66	20.58	20.85	1			36	19	20.55	20.50	20.64	20.49	20.85	1
		50	50	20.65	20.67	20.73	20.65	20.83	1			36	39	20.55	20.58	20.66	20.64	20.87	1
		100	0	20.57	20.59	20.65	20.57	20.84	1			75	0	20.47	20.51	20.57	20.50	20.78	1
	16QAM	1	0	20.40	20.49	20.58	20.46	20.83	1		16QAM	1	0	20.40	20.45	20.56	20.45	20.87	1
		1	50	20.65	20.66	20.73	20.64	20.92	1			1	37	20.68	20.71	20.76	20.71	20.99	1
		1	99	20.31	20.33	20.43	20.26	20.53	1			1	74	20.27	20.31	20.34	20.29	20.56	1
		50	0	19.58	19.60	19.67	19.55	19.87	2			36	0	19.56	19.59	19.68	19.51	19.79	2
		50	25	19.52	19.55	19.59	19.49	19.77	2			36	19	19.58	19.53	19.65	19.49	19.79	2
		50	50	19.63	19.67	19.68	19.59	19.85	2			36	39	19.61	19.61	19.63	19.59	19.89	2
		100	0	19.47	19.51	19.61	19.56	19.83	2			75	0	19.48	19.50	19.59	19.47	19.77	2
10M	QPSK	1	0	21.37	21.36	21.48	21.38	21.76	0	5M	QPSK	1	0	21.47	21.43	21.47	21.43	21.80	0
		1	24	21.69	21.65	21.70	21.69	21.84	0			1	12	21.65	21.60	21.64	21.58	21.88	0
		1	49	21.22	21.24	21.30	21.23	21.53	0			1	24	21.24	21.23	21.32	21.26	21.56	0
		25	0	20.50	20.50	20.52	20.51	20.82	1			12	0	20.49	20.48	20.64	20.53	20.77	1
		25	12	20.47	20.59	20.49	20.55	20.83	1			12	6	20.53	20.53	20.49	20.41	20.69	1
		25	25	20.56	20.61	20.66	20.57	20.83	1			12	13	20.51	20.55	20.61	20.55	20.76	1
		50	0	20.49	20.44	20.57	20.45	20.79	1			25	0	20.45	20.42	20.53	20.51	20.78	1
	16QAM	1	0	20.37	20.49	20.48	20.36	20.85	1		16QAM	1	0	20.36	20.44	20.45	20.37	20.80	1
		1	24	20.54	20.64	20.78	20.56	20.85	1			1	12	20.64	20.66	20.70	20.62	20.88	1
		1	49	20.17	20.29	20.29	20.31	20.53	1			1	24	20.30	20.21	20.30	20.20	20.57	1
		25	0	19.53	19.52	19.55	19.49	19.78	2			12	0	19.48	19.48	19.66	19.48	19.79	2
		25	12	19.41	19.52	19.58	19.41	19.67	2			12	6	19.47	19.50	19.51	19.47	19.73	2
		25	25	19.49	19.50	19.61	19.55	19.91	2			12	13	19.49	19.62	19.64	19.61	19.88	2
		50	0	19.48	19.49	19.58	19.45	19.75	2			25	0	19.49	19.51	19.53	19.48	19.75	2

FCC SAR Test Report

<WLAN 2.4G>

Mode	Channel	Frequency (MHz)	Average Power (Ant-0)	Average Power (Ant-1)	Average Power (Ant-0 + Ant-1)
802.11b	1	2412	19.71	19.43	22.85
	6	2437	20.30	20.23	23.31
	11	2462	19.97	19.72	22.65

<WLAN 5.3G>

Mode	Channel	Frequency (MHz)	Average Power (Ant-0)	Average Power (Ant-1)	Average Power (Ant-0 + Ant-1)
802.11n (HT40)	54	5270	18.87	18.62	21.62
	62	5310	16.65	16.84	19.87

<WLAN 5.6G>

Mode	Channel	Frequency (MHz)	Average Power (Ant-0)	Average Power (Ant-1)	Average Power (Ant-0 + Ant-1)
802.11n (HT40)	102	5510	16.77	16.65	19.96
	110	5550	18.90	18.62	21.76
	118	5590	18.81	18.45	21.72
	126	5630	18.80	18.54	21.70
	134	5670	18.85	18.61	21.75
	142	5710	18.81	18.60	21.67

<WLAN 5.8G>

Mode	Channel	Frequency (MHz)	Average Power (Ant-0)	Average Power (Ant-1)	Average Power (Ant-0 + Ant-1)
802.11n (HT40)	151	5755	14.04	13.72	17.20
	159	5795	18.55	18.51	21.57

<Bluetooth>

Mode	Channel	Frequency (MHz)	Average Power
Bluetooth EDR	0	2402	4.88
	39	2441	5.48
	78	2480	5.67
Bluetooth LE	0	2402	-1.76
	19	2440	-1.32
	39	2480	-1.08

4.7 SAR Testing Results

4.7.1 SAR Test Reduction Considerations

<KDB 447498 D01, General RF Exposure Guidance>

Testing of other required channels within the operating mode of a frequency band is not required when the reported SAR for the mid-band or highest output power channel is:

- (1) ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
- (2) ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- (3) ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

When SAR is not measured at the maximum power level allowed for production units, the measured SAR will be scaled to the maximum tune-up tolerance limit to determine compliance. The scaling factor for the tune-up power is defined as maximum tune-up limit (mW) / measured conducted power (mW). The reported SAR would be calculated by measured SAR x tune-up power scaling factor.

The SAR has been measured with highest transmission duty factor supported by the test mode tools for WLAN and/or Bluetooth. When the transmission duty factor could not achieve 100%, the reported SAR will be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up power. The scaling factor for the duty factor is defined as 100% / transmission duty cycle (%). The reported SAR would be calculated by measured SAR x tune-up power scaling factor x duty cycle scaling factor.

<KDB 941225 D01, 3G SAR Measurement Procedures>

The mode tested for SAR is referred to as the primary mode. The equivalent modes considered for SAR test reduction are denoted as secondary modes. Both primary and secondary modes must be in the same frequency band. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq 1/4$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.

<KDB 941225 D05, SAR Evaluation Considerations for LTE Devices>

(1) QPSK with 1 RB and 50% RB allocation

Start with the largest channel bandwidth and measure SAR, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.

(2) QPSK with 100% RB allocation

SAR is not required when the highest maximum output power for 100% RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

(3) Higher order modulations

SAR is required only when the highest maximum output power for the configuration in the higher order modulation is $> 1/2$ dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg.

(4) Other channel bandwidth

SAR is required when the highest maximum output power of the smaller channel bandwidth is $> 1/2$ dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is > 1.45 W/kg.

<Power Confirmation for SAR Test Exclusion for LTE Downlink CA>

According to KDB 941225 D05A, the uplink maximum output power below was measured with downlink CA active on the channel with highest measured maximum output power when downlink CA is inactive. The downlink SCC channel was paired with the uplink channel as normal operation. For intra-band contiguous CA, the downlink channel spacing between the component carriers was set to multiple of 300 kHz less than the nominal channel spacing per section 5.4.1A of 3GPP TS36.521. For intra-band non-contiguous CA, the downlink channel spacing between the component carriers was set to maximum separation from PCC and remain fully within the downlink transmission band. For Inter-band CA, the SCC downlink channel was set to near the middle of its transmission band.

Power Measurements for Intra-Band Contiguous Downlink CA

CA Combination	PCC								SCC1				Power	
	LTE Band	BW (MHz)	UL Channel	UL Freq. (MHz)	RB Size	RB Offset	DL Channel	DL Freq. (MHz)	LTE Band	BW (MHz)	DL Channel	DL Freq. (MHz)	Tx Power with DL-CA Active (dBm)	Single Carrier Tx Power (dBm)
CA_2C	2	20	18700	1860	1	0	700	1940	2	20	898	1959.8	23.22	23.23
CA_7C	7	20	21001	2525.1	1	0	3001	2645.1	7	20	3199	2664.9	22.05	22.07
CA_41C	41	20	41292	2660.2	1	0	41292	2660.2	41	20	41490	2680	21.88	21.91

FCC SAR Test Report

Power Measurements for Intra-Band Non-Contiguous Downlink CA

CA Combination	PCC								SCC1				Power	
	LTE Band	BW (MHz)	UL Channel	UL Freq. (MHz)	RB Size	RB Offset	DL Channel	DL Freq. (MHz)	LTE Band	BW (MHz)	DL Channel	DL Freq. (MHz)	Tx Power with DL-CA (dBm)	Single Carrier Tx Power (dBm)
CA_7A_7A	7	20	20850	2510	1	0	2850	2630	7	20	3350	2680	22.04	22.07
CA_41A_41A	41	20	39750	2506	1	0	39750	2506	41	20	41490	2680	21.85	21.91

Power Measurements for Inter-Band Downlink CA

CA Combination	PCC								SCC1				Power	
	LTE Band	BW (MHz)	UL Channel	UL Freq. (MHz)	RB Size	RB Offset	DL Channel	DL Freq. (MHz)	LTE Band	BW (MHz)	DL Channel	DL Freq. (MHz)	Tx Power with DL-CA Active (dBm)	Single Carrier Tx Power (dBm)
CA_2A_5A	2	20	18700	18600	1	0	700	1940	5	10	2525	881.5	23.17	23.23
CA_2A_12A	2	20	18700	18600	1	0	700	1940	12	10	5095	737.5	23.17	23.23
CA_2A_13A	2	20	18700	18600	1	0	700	1940	13	10	5230	751	23.15	23.23
CA_2A_29A	2	20	18700	18600	1	0	700	1940	29	10	9715	722.5	23.19	23.23
CA_4A_5A	4	20	20050	1720	1	0	2050	2120	5	10	2525	881.5	23.23	23.28
CA_4A_12A	4	20	20050	1720	1	0	2050	2120	12	10	5095	737.5	23.22	23.28
CA_4A_13A	4	20	20050	1720	1	0	2050	2120	13	10	5230	751	23.23	23.28
CA_4A_29A	4	20	20050	1720	1	0	2050	2120	29	10	9715	722.5	23.20	23.28

Summary for SAR Test Exclusion for LTE Downlink CA

Per power confirmation results in above, the uplink maximum output power with downlink CA active remains within the specified tune-up tolerance and not more than 0.25 dB higher than the maximum output power with downlink CA inactive. According to KDB 941225 D05A, the SAR test exclusion applies to LTE downlink CA operation.

<KDB 248227 D01, SAR Guidance for Wi-Fi Transmitters>

- (1) For handsets operating next to ear, hotspot mode or mini-tablet configurations, the initial test position procedures were applied. The test position with the highest extrapolated peak SAR will be used as the initial test position. When the reported SAR of initial test position is ≤ 0.4 W/kg, SAR testing for remaining test positions is not required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is ≤ 0.8 W/kg or all test positions are measured.
- (2) For WLAN 2.4 GHz, the highest measured maximum output power channel for DSSS was selected for SAR measurement. When the reported SAR is ≤ 0.8 W/kg, no further SAR testing is required. Otherwise, SAR is evaluated at the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel. For OFDM modes (802.11g/n), SAR is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and it is ≤ 1.2 W/kg.
- (3) For WLAN 5 GHz, the initial test configuration was selected according to the transmission mode with the highest maximum output power. When the reported SAR of initial test configuration is > 0.8 W/kg, SAR is required for the subsequent highest measured output power channel until the reported SAR result is ≤ 1.2 W/kg or all required channels are measured. For other transmission modes, SAR is not required when the highest reported SAR for initial test configuration is adjusted by the ratio of subsequent test configuration to initial test configuration specified maximum output power and it is ≤ 1.2 W/kg.
- (4) For WLAN MIMO mode, the power-based standalone SAR test exclusion or the sum of SAR provision in KDB 447498 to determine simultaneous transmission SAR test exclusion should be applied. Otherwise, SAR for MIMO mode will be measured with all applicable antennas transmitting simultaneously at the specified maximum output power of MIMO operation.

FCC SAR Test Report

4.7.2 SAR Results for Extremity Exposure Condition (Test Separation Distance is 0 mm)

Plot No.	Band	Mode	Test Position	Ch.	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-10g (W/kg)	Scaled SAR-10g (W/kg)
	WCDMA II	RMC12.2K	Rear Face	9400	24.0	23.09	1.23	0.08	0.225	0.28
	WCDMA II	RMC12.2K	Left Side	9400	24.0	23.09	1.23	-0.01	0.583	0.72
	WCDMA II	RMC12.2K	Top Side	9400	24.0	23.09	1.23	0.01	0.403	0.50
01	WCDMA II	RMC12.2K	Left Side	9262	24.0	23.01	1.26	0.17	0.603	0.76
	WCDMA II	RMC12.2K	Left Side	9538	24.0	22.97	1.27	0.15	0.598	0.76
	WCDMA IV	RMC12.2K	Rear Face	1413	24.0	23.36	1.16	0.08	0.157	0.18
	WCDMA IV	RMC12.2K	Left Side	1413	24.0	23.36	1.16	-0.01	0.326	0.38
	WCDMA IV	RMC12.2K	Top Side	1413	24.0	23.36	1.16	-0.07	0.777	0.90
02	WCDMA IV	RMC12.2K	Top Side	1312	24.0	23.19	1.21	0.16	0.790	0.96
	WCDMA IV	RMC12.2K	Top Side	1513	24.0	23.31	1.17	-0.15	0.633	0.74
	WCDMA V	RMC12.2K	Rear Face	4132	24.0	22.59	1.38	0.12	0.163	0.22
03	WCDMA V	RMC12.2K	Left Side	4132	24.0	22.59	1.38	0.15	0.213	0.29
	WCDMA V	RMC12.2K	Top Side	4132	24.0	22.59	1.38	-0.07	0.131	0.18
	WCDMA V	RMC12.2K	Left Side	4182	24.0	22.48	1.42	0.02	0.203	0.29
	WCDMA V	RMC12.2K	Left Side	4233	24.0	22.56	1.39	0.08	0.201	0.28

Plot No.	Band	Mode	Test Position	Ch.	RB#	RB Offset	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-10g (W/kg)	Scaled SAR-10g (W/kg)
	LTE 4	QPSK20M	Rear Face	20050	1	0	24.0	23.28	1.18	0.08	0.111	0.13
	LTE 4	QPSK20M	Left Side	20050	1	0	24.0	23.28	1.18	-0.11	0.241	0.28
04	LTE 4	QPSK20M	Top Side	20050	1	0	24.0	23.28	1.18	0.13	0.757	0.89
	LTE 4	QPSK20M	Rear Face	20050	50	0	23.0	22.21	1.20	-0.15	0.095	0.11
	LTE 4	QPSK20M	Left Side	20050	50	0	23.0	22.21	1.20	-0.02	0.211	0.25
	LTE 4	QPSK20M	Top Side	20050	50	0	23.0	22.21	1.20	-0.15	0.582	0.70
	LTE 4	QPSK20M	Top Side	20175	1	0	24.0	23.14	1.22	0.07	0.698	0.85
	LTE 4	QPSK20M	Top Side	20300	1	0	24.0	23.13	1.22	0.08	0.685	0.84
	LTE 5	QPSK10M	Rear Face	20525	1	0	24.0	22.69	1.35	0.05	0.182	0.25
	LTE 5	QPSK10M	Left Side	20525	1	0	24.0	22.69	1.35	-0.01	0.217	0.29
	LTE 5	QPSK10M	Top Side	20525	1	0	24.0	22.69	1.35	-0.17	0.129	0.17
	LTE 5	QPSK10M	Rear Face	20525	25	0	23.0	21.47	1.42	0.08	0.133	0.19
	LTE 5	QPSK10M	Left Side	20525	25	0	23.0	21.47	1.42	0.11	0.158	0.22
	LTE 5	QPSK10M	Top Side	20525	25	0	23.0	21.47	1.42	0.15	0.095	0.13
05	LTE 5	QPSK10M	Left Side	20450	1	0	24.0	22.56	1.39	0.06	0.219	0.30
	LTE 5	QPSK10M	Left Side	20600	1	0	24.0	22.29	1.48	0.08	0.199	0.29
	LTE 7	QPSK20M	Rear Face	21100	1	0	23.0	22.07	1.24	0.07	0.078	0.10
	LTE 7	QPSK20M	Left Side	21100	1	0	23.0	22.07	1.24	-0.15	0.233	0.29
06	LTE 7	QPSK20M	Top Side	21100	1	0	23.0	22.07	1.24	0.15	0.239	0.30
	LTE 7	QPSK20M	Rear Face	21100	50	0	22.0	20.95	1.27	-0.11	0.065	0.08
	LTE 7	QPSK20M	Left Side	21100	50	0	22.0	20.95	1.27	-0.05	0.223	0.28
	LTE 7	QPSK20M	Top Side	21100	50	0	22.0	20.95	1.27	-0.17	0.186	0.24
	LTE 7	QPSK20M	Top Side	20850	1	0	23.0	21.76	1.33	0.02	0.206	0.27
	LTE 7	QPSK20M	Top Side	21350	1	0	23.0	21.62	1.37	0.05	0.222	0.30

FCC SAR Test Report

Plot No.	Band	Mode	Test Position	Ch.	RB#	RB Offset	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-10g (W/kg)	Scaled SAR-10g (W/kg)
	LTE 12	QPSK10M	Rear Face	23060	1	0	24.0	23.05	1.24	0.08	0.103	0.13
	LTE 12	QPSK10M	Left Side	23060	1	0	24.0	23.05	1.24	-0.11	0.181	0.22
	LTE 12	QPSK10M	Top Side	23060	1	0	24.0	23.05	1.24	-0.05	0.096	0.12
	LTE 12	QPSK10M	Rear Face	23060	25	0	23.0	22.03	1.25	0.17	0.083	0.10
	LTE 12	QPSK10M	Left Side	23060	25	0	23.0	22.03	1.25	0.15	0.146	0.18
	LTE 12	QPSK10M	Top Side	23060	25	0	23.0	22.03	1.25	-0.08	0.079	0.10
07	LTE 12	QPSK10M	Left Side	23095	1	0	24.0	23.03	1.25	-0.18	0.187	0.23
	LTE 12	QPSK10M	Left Side	23130	1	0	24.0	23.03	1.25	0.07	0.179	0.22
	LTE 13	QPSK10M	Rear Face	23230	1	0	24.0	22.82	1.31	0.05	0.168	0.22
08	LTE 13	QPSK10M	Left Side	23230	1	0	24.0	22.82	1.31	-0.15	0.205	0.27
	LTE 13	QPSK10M	Top Side	23230	1	0	24.0	22.82	1.31	0.07	0.133	0.17
	LTE 13	QPSK10M	Rear Face	23230	25	0	23.0	21.64	1.37	-0.12	0.128	0.18
	LTE 13	QPSK10M	Left Side	23230	25	0	23.0	21.64	1.37	0.08	0.151	0.21
	LTE 13	QPSK10M	Top Side	23230	25	0	23.0	21.64	1.37	0.02	0.093	0.13
	LTE 25	QPSK20M	Rear Face	26590	1	0	24.0	23.12	1.22	0.08	0.191	0.23
	LTE 25	QPSK20M	Left Side	26590	1	0	24.0	23.12	1.22	-0.15	0.523	0.64
	LTE 25	QPSK20M	Top Side	26590	1	0	24.0	23.12	1.22	-0.17	0.325	0.40
	LTE 25	QPSK20M	Rear Face	26590	50	0	23.0	21.97	1.27	0.01	0.156	0.20
	LTE 25	QPSK20M	Left Side	26590	50	0	23.0	21.97	1.27	0.07	0.423	0.54
	LTE 25	QPSK20M	Top Side	26590	50	0	23.0	21.97	1.27	-0.15	0.252	0.32
09	LTE 25	QPSK20M	Left Side	26140	1	0	24.0	23.01	1.26	0.13	0.526	0.66
	LTE 25	QPSK20M	Left Side	26365	1	0	24.0	23.02	1.25	-0.01	0.522	0.65
	LTE 26	QPSK15M	Rear Face	26865	1	0	24.0	22.85	1.30	0.08	0.197	0.26
10	LTE 26	QPSK15M	Left Side	26865	1	0	24.0	22.85	1.30	-0.15	0.218	0.28
	LTE 26	QPSK15M	Top Side	26865	1	0	24.0	22.85	1.30	-0.11	0.129	0.17
	LTE 26	QPSK15M	Rear Face	26865	36	0	23.0	21.71	1.35	0.05	0.123	0.17
	LTE 26	QPSK15M	Left Side	26865	36	0	23.0	21.71	1.35	0.06	0.152	0.21
	LTE 26	QPSK15M	Top Side	26865	36	0	23.0	21.71	1.35	-0.01	0.093	0.13
	LTE 26	QPSK15M	Left Side	26765	1	0	24.0	22.75	1.33	-0.08	0.206	0.27
	LTE 26	QPSK15M	Left Side	26965	1	0	24.0	22.59	1.38	0.07	0.188	0.26
	LTE 41	QPSK20M	Rear Face	41490	1	0	23.0	21.91	1.29	0.05	0.026	0.03
	LTE 41	QPSK20M	Left Side	41490	1	0	23.0	21.91	1.29	-0.08	0.045	0.06
11	LTE 41	QPSK20M	Top Side	41490	1	0	23.0	21.91	1.29	0.12	0.180	0.23
	LTE 41	QPSK20M	Rear Face	41490	50	0	22.0	20.92	1.28	-0.11	< 0.001	0.00
	LTE 41	QPSK20M	Left Side	41490	50	0	22.0	20.92	1.28	0.02	0.032	0.04
	LTE 41	QPSK20M	Top Side	41490	50	0	22.0	20.92	1.28	-0.03	0.142	0.18
	LTE 41	QPSK20M	Top Side	39750	1	0	23.0	21.47	1.42	0.02	0.141	0.20
	LTE 41	QPSK20M	Top Side	40185	1	0	23.0	21.51	1.41	0.16	0.157	0.22
	LTE 41	QPSK20M	Top Side	40620	1	0	23.0	21.59	1.38	0.11	0.159	0.22
	LTE 41	QPSK20M	Top Side	41055	1	0	23.0	21.47	1.42	-0.17	0.158	0.22

Note: The "< 0.001" means there is no SAR value or the SAR is too low to be measured.

FCC SAR Test Report

Plot No.	Band	Mode	Test Position	Ch.	Ant Status	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-10g (W/kg)	Scaled SAR-10g (W/kg)
12	WLAN2.4G	802.11b	Rear Face	6	Ant 0	100.00	1.00	20.5	20.30	1.05	0.08	0.221	0.23
	WLAN2.4G	802.11b	Right Side	6	Ant 0	100.00	1.00	20.5	20.30	1.05	0.10	1.44	1.51
	WLAN2.4G	802.11b	Top Side	6	Ant 0	100.00	1.00	20.5	20.30	1.05	-0.12	0.333	0.35
	WLAN2.4G	802.11b	Rear Face	6	Ant 1	100.00	1.00	20.5	20.23	1.06	0.02	0.039	0.04
	WLAN2.4G	802.11b	Right Side	6	Ant 1	100.00	1.00	20.5	20.23	1.06	-0.02	0.348	0.37
	WLAN2.4G	802.11b	Bottom Side	6	Ant 1	100.00	1.00	20.5	20.23	1.06	0.11	0.453	0.48
	WLAN2.4G	802.11b	Rear Face	6	Ant 0+1	100.00	1.00	23.5	23.31	1.04	0.01	0.192	0.20
	WLAN2.4G	802.11b	Right Side	6	Ant 0+1	100.00	1.00	23.5	23.31	1.04	0.16	1.29	1.34
	WLAN2.4G	802.11b	Top Side	6	Ant 0+1	100.00	1.00	23.5	23.31	1.04	-0.08	0.311	0.32
	WLAN2.4G	802.11b	Bottom Side	6	Ant 0+1	100.00	1.00	23.5	23.31	1.04	0.07	0.461	0.48
	WLAN2.4G	802.11b	Right Side	1	Ant 0	100.00	1.00	20.0	19.71	1.07	0.12	1.36	1.46
	WLAN2.4G	802.11b	Right Side	11	Ant 0	100.00	1.00	20.0	19.97	1.01	0.15	1.23	1.24
13	WLAN5.3G	802.11n HT40	Rear Face	54	Ant 0	92.30	1.08	19.0	18.87	1.03	0.08	0.055	0.06
	WLAN5.3G	802.11n HT40	Right Side	54	Ant 0	92.30	1.08	19.0	18.87	1.03	0.01	0.796	0.89
	WLAN5.3G	802.11n HT40	Top Side	54	Ant 0	92.30	1.08	19.0	18.87	1.03	-0.03	0.476	0.53
	WLAN5.3G	802.11n HT40	Rear Face	54	Ant 1	92.10	1.09	19.0	18.62	1.09	0.00	< 0.001	0.00
	WLAN5.3G	802.11n HT40	Right Side	54	Ant 1	92.10	1.09	19.0	18.62	1.09	-0.08	0.127	0.15
	WLAN5.3G	802.11n HT40	Bottom Side	54	Ant 1	92.10	1.09	19.0	18.62	1.09	0.11	0.518	0.62
	WLAN5.3G	802.11n HT40	Rear Face	54	Ant 0+1	91.90	1.09	22.0	21.62	1.09	0.00	0.01	0.01
	WLAN5.3G	802.11n HT40	Right Side	54	Ant 0+1	91.90	1.09	22.0	21.62	1.09	0.03	0.365	0.43
	WLAN5.3G	802.11n HT40	Top Side	54	Ant 0+1	91.90	1.09	22.0	21.62	1.09	-0.05	0.192	0.23
	WLAN5.3G	802.11n HT40	Bottom Side	54	Ant 0+1	91.90	1.09	22.0	21.62	1.09	0.09	0.38	0.45
	WLAN5.3G	802.11n HT40	Right Side	62	Ant 0	92.30	1.08	17.0	16.65	1.08	0.05	0.397	0.46
	WLAN5.6G	802.11n HT40	Rear Face	110	Ant 0	92.30	1.08	19.0	18.90	1.02	0.00	< 0.001	0.00
WLAN5.6G	802.11n HT40	Right Side	110	Ant 0	92.30	1.08	19.0	18.90	1.02	-0.09	0.777	0.86	
WLAN5.6G	802.11n HT40	Top Side	110	Ant 0	92.30	1.08	19.0	18.90	1.02	0.09	0.267	0.29	
WLAN5.6G	802.11n HT40	Rear Face	110	Ant 1	92.10	1.09	19.0	18.62	1.09	-0.02	0.075	0.09	
WLAN5.6G	802.11n HT40	Right Side	110	Ant 1	92.10	1.09	19.0	18.62	1.09	0.06	0.262	0.31	
WLAN5.6G	802.11n HT40	Bottom Side	110	Ant 1	92.10	1.09	19.0	18.62	1.09	0.01	0.996	1.18	
WLAN5.6G	802.11n HT40	Rear Face	110	Ant 0+1	91.90	1.09	22.0	21.76	1.06	0.05	0.088	0.10	
WLAN5.6G	802.11n HT40	Right Side	110	Ant 0+1	91.90	1.09	22.0	21.76	1.06	0.01	0.491	0.57	
WLAN5.6G	802.11n HT40	Top Side	110	Ant 0+1	91.90	1.09	22.0	21.76	1.06	-0.08	0.222	0.26	
WLAN5.6G	802.11n HT40	Bottom Side	110	Ant 0+1	91.90	1.09	22.0	21.76	1.06	0.07	1.03	1.19	
WLAN5.6G	802.11n HT40	Bottom Side	102	Ant 0+1	91.90	1.09	20.0	19.96	1.01	0.03	0.666	0.73	
WLAN5.6G	802.11n HT40	Bottom Side	118	Ant 0+1	91.90	1.09	22.0	21.72	1.07	-0.06	0.989	1.15	
WLAN5.6G	802.11n HT40	Bottom Side	126	Ant 0+1	91.90	1.09	22.0	21.70	1.07	0.01	0.973	1.13	
WLAN5.6G	802.11n HT40	Bottom Side	134	Ant 0+1	91.90	1.09	22.0	21.75	1.06	0.12	0.968	1.12	
WLAN5.6G	802.11n HT40	Bottom Side	142	Ant 0+1	91.90	1.09	22.0	21.67	1.08	0.05	0.998	1.17	

Note: The "< 0.001" means there is no SAR value or the SAR is too low to be measured.

FCC SAR Test Report

Plot No.	Band	Mode	Test Position	Ch.	Ant Status	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-10g (W/kg)	Scaled SAR-10g (W/kg)
	WLAN5.8G	802.11n HT40	Rear Face	159	Ant 0	92.30	1.08	19.0	18.55	1.11	0.00	< 0.001	0.00
	WLAN5.8G	802.11n HT40	Right Side	159	Ant 0	92.30	1.08	19.0	18.55	1.11	-0.07	0.507	0.61
	WLAN5.8G	802.11n HT40	Top Side	159	Ant 0	92.30	1.08	19.0	18.55	1.11	0.02	0.309	0.37
	WLAN5.8G	802.11n HT40	Rear Face	159	Ant 1	92.10	1.09	19.0	18.51	1.12	0.06	0.072	0.09
	WLAN5.8G	802.11n HT40	Right Side	159	Ant 1	92.10	1.09	19.0	18.51	1.12	-0.03	0.244	0.30
	WLAN5.8G	802.11n HT40	Bottom Side	159	Ant 1	92.10	1.09	19.0	18.51	1.12	-0.07	0.881	1.08
	WLAN5.8G	802.11n HT40	Rear Face	159	Ant 0+1	91.90	1.09	22.0	21.57	1.10	-0.09	0.081	0.10
	WLAN5.8G	802.11n HT40	Left Side	159	Ant 0+1	91.90	1.09	22.0	21.57	1.10	0.00	< 0.001	0.00
	WLAN5.8G	802.11n HT40	Right Side	159	Ant 0+1	91.90	1.09	22.0	21.57	1.10	0.05	0.469	0.56
	WLAN5.8G	802.11n HT40	Top Side	159	Ant 0+1	91.90	1.09	22.0	21.57	1.10	0.13	0.231	0.28
15	WLAN5.8G	802.11n HT40	Bottom Side	159	Ant 0+1	91.90	1.09	22.0	21.57	1.10	0.01	0.913	1.09
	WLAN5.8G	802.11n HT40	Bottom Side	151	Ant 0+1	91.90	1.09	17.5	17.20	1.07	0.05	0.138	0.16
	BT	BR / EDR	Rear Face	78	Ant 0	79.80	1.25	7.0	5.67	1.36	0.00	< 0.001	0.00
16	BT	BR / EDR	Right Side	78	Ant 0	79.80	1.25	7.0	5.67	1.36	0.03	0.025	0.04
	BT	BR / EDR	Top Side	78	Ant 0	79.80	1.25	7.0	5.67	1.36	0.00	< 0.001	0.00
	BT	BR / EDR	Right Side	0	Ant 0	79.80	1.25	5.0	4.88	1.03	0.07	0.023	0.03
	BT	BR / EDR	Right Side	39	Ant 0	79.80	1.25	7.0	5.48	1.42	-0.06	0.021	0.04

Note: The "< 0.001" means there is no SAR value or the SAR is too low to be measured.

4.7.3 Simultaneous Multi-band Transmission Evaluation

<Possibilities of Simultaneous Transmission>

The simultaneous transmission possibilities for this device are listed as below.

Simultaneous TX Combination	Capable Transmit Configurations	Extremity Exposure Condition
1	WWAN + WLAN	Yes
2	WWAN + BT	Yes
3	WWAN + WLAN + BT	Yes

<Estimated SAR Calculation>

According to KDB 447498 D01, when standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR was estimated according to following formula to result in substantially conservative SAR values of ≤ 0.4 W/kg to determine simultaneous transmission SAR test exclusion.

$$\text{Estimated SAR} = \frac{\text{Max. Tune up Power}_{(mW)}}{\text{Min. Test Separation Distance}_{(mm)}} \times \frac{\sqrt{f_{(GHz)}}}{7.5}$$

If the minimum test separation distance is < 5 mm, a distance of 5 mm is used for estimated SAR calculation. When the test separation distance is > 50 mm, the 0.4 W/kg is used for SAR-1g.

FCC SAR Test Report

Mode / Band	Frequency (GHz)	Max. Tune-up Power (dBm)	Test Position	Separation Distance (mm)	Estimated SAR (W/kg)
WCDMA II	1.9076	24.0	Extremity	0	1.0
WCDMA IV	1.7526	24.0	Extremity	0	1.0
WCDMA V	0.8466	24.0	Extremity	0	1.0
LTE 2	1.9093	24.0	Extremity	0	1.0
LTE 4	1.7543	24.0	Extremity	0	1.0
LTE 5	0.8483	24.0	Extremity	0	1.0
LTE 7	2.5675	23.0	Extremity	0	1.0
LTE 12	0.7153	24.0	Extremity	0	1.0
LTE 13	0.7845	24.0	Extremity	0	1.0
LTE 25	1.9143	24.0	Extremity	0	1.0
LTE 26	0.8483	24.0	Extremity	0	1.0
LTE 41	2.6875	23.0	Extremity	0	1.0

<For WLAN Ant-0 / Ant-1>

Mode / Band	Frequency (GHz)	Max. Tune-up Power (dBm)	Test Position	Separation Distance (mm)	Estimated SAR (W/kg)
WLAN (DTS)	2.462	20.5	Extremity	0	1.0
WLAN (NII)	5.24	15	Extremity	0	1.0
WLAN (NII)	5.32	19	Extremity	0	1.0
WLAN (NII)	5.7	19	Extremity	0	1.0
WLAN (NII)	5.825	19	Extremity	0	1.0
BT (DSS)	2.48	7	Extremity	0	1.0

<For WLAN Ant-0 + Ant-1>

Mode / Band	Frequency (GHz)	Max. Tune-up Power (dBm)	Test Position	Separation Distance (mm)	Estimated SAR (W/kg)
WLAN (DTS)	2.462	23.5	Extremity	0	1.0
WLAN (NII)	5.24	18	Extremity	0	1.0
WLAN (NII)	5.32	22	Extremity	0	1.0
WLAN (NII)	5.7	22	Extremity	0	1.0
WLAN (NII)	5.825	22	Extremity	0	1.0

Note:

1. The separation distance is determined from the outer housing of the EUT to the user.
2. When standalone SAR testing is not required, an estimated SAR can be applied to determine simultaneous transmission SAR test exclusion.

FCC SAR Test Report

<SAR Summation Analysis>

Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneous transmitting antenna. When the sum of SAR_{1g} of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit (SAR_{1g} 1.6 W/kg), the simultaneous transmission SAR is not required. When the sum of SAR_{1g} is greater than the SAR limit (SAR_{1g} 1.6 W/kg), SAR test exclusion is determined by the SPLSR.

No.	Conditions (SAR1 + SAR2 + SAR 3)	Exposure Condition	Test Position	Max. SAR1	Max. SAR2	Max. SAR3	SAR Summation	SPLSR Analysis
1	WCDMA II + WLAN (DTS) + BT (DSS)	Extremity	Rear Face	0.28	0.23	0.00	0.51	∑ SAR < 4.0, Not required
			Left Side	0.76	1.00	1.00	2.76	∑ SAR < 4.0, Not required
			Right Side	1.00	1.51	0.04	2.55	∑ SAR < 4.0, Not required
			Top Side	0.50	0.35	0.00	0.85	∑ SAR < 4.0, Not required
			Bottom Side	1.00	0.48	1.00	2.48	∑ SAR < 4.0, Not required
2	WCDMA II + WLAN (NII) + BT (DSS)	Extremity	Rear Face	0.28	0.10	0.00	0.38	∑ SAR < 4.0, Not required
			Left Side	0.76	1.00	1.00	2.76	∑ SAR < 4.0, Not required
			Right Side	1.00	0.89	0.04	1.93	∑ SAR < 4.0, Not required
			Top Side	0.50	0.53	0.00	1.03	∑ SAR < 4.0, Not required
			Bottom Side	1.00	1.19	1.00	3.19	∑ SAR < 4.0, Not required
3	WCDMA IV + WLAN (DTS) + BT (DSS)	Extremity	Rear Face	0.18	0.23	0.00	0.41	∑ SAR < 4.0, Not required
			Left Side	0.38	0.00	1.00	1.38	∑ SAR < 4.0, Not required
			Right Side	1.00	1.51	0.04	2.55	∑ SAR < 4.0, Not required
			Top Side	0.96	0.35	0.00	1.31	∑ SAR < 4.0, Not required
			Bottom Side	1.00	0.48	1.00	2.48	∑ SAR < 4.0, Not required
4	WCDMA IV + WLAN (NII) + BT (DSS)	Extremity	Rear Face	0.18	0.10	0.00	0.28	∑ SAR < 4.0, Not required
			Left Side	0.38	0.00	1.00	1.38	∑ SAR < 4.0, Not required
			Right Side	1.00	0.89	0.04	1.93	∑ SAR < 4.0, Not required
			Top Side	0.96	0.53	0.00	1.49	∑ SAR < 4.0, Not required
			Bottom Side	1.00	1.19	1.00	3.19	∑ SAR < 4.0, Not required

FCC SAR Test Report

No.	Conditions (SAR1 + SAR2 + SAR 3)	Exposure Condition	Test Position	Max. SAR1	Max. SAR2	Max. SAR3	SAR Summation	SPLSR Analysis
5	WCDMA V + WLAN (DTS) + BT (DSS)	Extremity	Rear Face	0.22	0.23	0.00	0.45	Σ SAR < 4.0, Not required
			Left Side	0.29	1.00	1.00	2.29	Σ SAR < 4.0, Not required
			Right Side	1.00	1.51	0.04	2.55	Σ SAR < 4.0, Not required
			Top Side	0.18	0.35	0.00	0.53	Σ SAR < 4.0, Not required
			Bottom Side	1.00	0.48	1.00	2.48	Σ SAR < 4.0, Not required
6	WCDMA V + WLAN (NII) + BT (DSS)	Extremity	Rear Face	0.22	0.10	0.00	0.32	Σ SAR < 4.0, Not required
			Left Side	0.29	1.00	1.00	2.29	Σ SAR < 4.0, Not required
			Right Side	1.00	0.89	0.04	1.93	Σ SAR < 4.0, Not required
			Top Side	0.18	0.53	0.00	0.71	Σ SAR < 4.0, Not required
			Bottom Side	1.00	1.19	1.00	3.19	Σ SAR < 4.0, Not required
7	LTE 4 + WLAN (DTS) + BT (DSS)	Extremity	Rear Face	0.13	0.23	0.00	0.36	Σ SAR < 4.0, Not required
			Left Side	0.28	0.00	1.00	1.28	Σ SAR < 4.0, Not required
			Right Side	1.00	1.51	0.04	2.55	Σ SAR < 4.0, Not required
			Top Side	0.89	0.35	0.00	1.24	Σ SAR < 4.0, Not required
			Bottom Side	1.00	0.48	1.00	2.48	Σ SAR < 4.0, Not required
8	LTE 4 + WLAN (NII) + BT (DSS)	Extremity	Rear Face	0.13	0.10	0.00	0.23	Σ SAR < 4.0, Not required
			Left Side	0.28	0.00	1.00	1.28	Σ SAR < 4.0, Not required
			Right Side	1.00	0.89	0.04	1.93	Σ SAR < 4.0, Not required
			Top Side	0.89	0.53	0.00	1.42	Σ SAR < 4.0, Not required
			Bottom Side	1.00	1.19	1.00	3.19	Σ SAR < 4.0, Not required

FCC SAR Test Report

No.	Conditions (SAR1 + SAR2 + SAR 3)	Exposure Condition	Test Position	Max. SAR1	Max. SAR2	Max. SAR3	SAR Summation	SPLSR Analysis
9	LTE 5 + WLAN (DTS) + BT (DSS)	Extremity	Rear Face	0.25	0.23	0.00	0.48	Σ SAR < 4.0, Not required
			Left Side	0.30	1.00	1.00	2.30	Σ SAR < 4.0, Not required
			Right Side	1.00	1.51	0.04	2.55	Σ SAR < 4.0, Not required
			Top Side	0.17	0.35	0.00	0.52	Σ SAR < 4.0, Not required
			Bottom Side	1.00	0.48	1.00	2.48	Σ SAR < 4.0, Not required
10	LTE 5 + WLAN (NII) + BT (DSS)	Extremity	Rear Face	0.25	0.10	0.00	0.35	Σ SAR < 4.0, Not required
			Left Side	0.30	1.00	1.00	2.30	Σ SAR < 4.0, Not required
			Right Side	1.00	0.89	0.04	1.93	Σ SAR < 4.0, Not required
			Top Side	0.17	0.53	0.00	0.70	Σ SAR < 4.0, Not required
			Bottom Side	1.00	1.19	1.00	3.19	Σ SAR < 4.0, Not required
11	LTE 7 + WLAN (DTS) + BT (DSS)	Extremity	Rear Face	0.10	0.23	0.00	0.33	Σ SAR < 4.0, Not required
			Left Side	0.29	0.00	1.00	1.29	Σ SAR < 4.0, Not required
			Right Side	1.00	1.51	0.04	2.55	Σ SAR < 4.0, Not required
			Top Side	0.30	0.35	0.00	0.65	Σ SAR < 4.0, Not required
			Bottom Side	1.00	0.48	1.00	2.48	Σ SAR < 4.0, Not required
12	LTE 7 + WLAN (NII) + BT (DSS)	Extremity	Rear Face	0.10	0.10	0.00	0.20	Σ SAR < 4.0, Not required
			Left Side	0.29	0.00	1.00	1.29	Σ SAR < 4.0, Not required
			Right Side	1.00	0.89	0.04	1.93	Σ SAR < 4.0, Not required
			Top Side	0.30	0.53	0.00	0.83	Σ SAR < 4.0, Not required
			Bottom Side	1.00	1.19	1.00	3.19	Σ SAR < 4.0, Not required

FCC SAR Test Report

No.	Conditions (SAR1 + SAR2 + SAR 3)	Exposure Condition	Test Position	Max. SAR1	Max. SAR2	Max. SAR3	SAR Summation	SPLSR Analysis
13	LTE 12 + WLAN (DTS) + BT (DSS)	Extremity	Rear Face	0.13	0.23	0.00	0.36	Σ SAR < 4.0, Not required
			Left Side	0.23	1.00	1.00	2.23	Σ SAR < 4.0, Not required
			Right Side	1.00	1.51	0.04	2.55	Σ SAR < 4.0, Not required
			Top Side	0.12	0.35	0.00	0.47	Σ SAR < 4.0, Not required
			Bottom Side	1.00	0.48	1.00	2.48	Σ SAR < 4.0, Not required
14	LTE 12 + WLAN (NII) + BT (DSS)	Extremity	Rear Face	0.13	0.10	0.00	0.23	Σ SAR < 4.0, Not required
			Left Side	0.23	1.00	1.00	2.23	Σ SAR < 4.0, Not required
			Right Side	1.00	0.89	0.04	1.93	Σ SAR < 4.0, Not required
			Top Side	0.12	0.53	0.00	0.65	Σ SAR < 4.0, Not required
			Bottom Side	1.00	1.19	1.00	3.19	Σ SAR < 4.0, Not required
15	LTE 13 + WLAN (DTS) + BT (DSS)	Extremity	Rear Face	0.22	0.23	0.00	0.45	Σ SAR < 4.0, Not required
			Left Side	0.27	0.00	1.00	1.27	Σ SAR < 4.0, Not required
			Right Side	1.00	1.51	0.04	2.55	Σ SAR < 4.0, Not required
			Top Side	0.17	0.35	0.00	0.52	Σ SAR < 4.0, Not required
			Bottom Side	1.00	0.48	1.00	2.48	Σ SAR < 4.0, Not required
16	LTE 13 + WLAN (NII) + BT (DSS)	Extremity	Rear Face	0.22	0.10	0.00	0.32	Σ SAR < 4.0, Not required
			Left Side	0.27	0.00	1.00	1.27	Σ SAR < 4.0, Not required
			Right Side	1.00	0.89	0.04	1.93	Σ SAR < 4.0, Not required
			Top Side	0.17	0.53	0.00	0.70	Σ SAR < 4.0, Not required
			Bottom Side	1.00	1.19	1.00	3.19	Σ SAR < 4.0, Not required

FCC SAR Test Report

No.	Conditions (SAR1 + SAR2 + SAR 3)	Exposure Condition	Test Position	Max. SAR1	Max. SAR2	Max. SAR3	SAR Summation	SPLSR Analysis
17	LTE 25 + WLAN (DTS) + BT (DSS)	Extremity	Rear Face	0.23	0.23	0.00	0.46	Σ SAR < 4.0, Not required
			Left Side	0.66	1.00	1.00	2.66	Σ SAR < 4.0, Not required
			Right Side	1.00	1.51	0.04	2.55	Σ SAR < 4.0, Not required
			Top Side	0.40	0.35	0.00	0.75	Σ SAR < 4.0, Not required
			Bottom Side	1.00	0.48	1.00	2.48	Σ SAR < 4.0, Not required
18	LTE 25 + WLAN (NII) + BT (DSS)	Extremity	Rear Face	0.23	0.10	0.00	0.33	Σ SAR < 4.0, Not required
			Left Side	0.66	1.00	1.00	2.66	Σ SAR < 4.0, Not required
			Right Side	1.00	0.89	0.04	1.93	Σ SAR < 4.0, Not required
			Top Side	0.40	0.53	0.00	0.93	Σ SAR < 4.0, Not required
			Bottom Side	1.00	1.19	1.00	3.19	Σ SAR < 4.0, Not required
19	LTE 26 + WLAN (DTS) + BT (DSS)	Extremity	Rear Face	0.26	0.23	0.00	0.49	Σ SAR < 4.0, Not required
			Left Side	0.28	1.00	1.00	2.28	Σ SAR < 4.0, Not required
			Right Side	1.00	1.51	0.04	2.55	Σ SAR < 4.0, Not required
			Top Side	0.17	0.35	0.00	0.52	Σ SAR < 4.0, Not required
			Bottom Side	1.00	0.48	1.00	2.48	Σ SAR < 4.0, Not required
20	LTE 26 + WLAN (NII) + BT (DSS)	Extremity	Rear Face	0.26	0.10	0.00	0.36	Σ SAR < 4.0, Not required
			Left Side	0.28	1.00	1.00	2.28	Σ SAR < 4.0, Not required
			Right Side	1.00	0.89	0.04	1.93	Σ SAR < 4.0, Not required
			Top Side	0.17	0.53	0.00	0.7	Σ SAR < 4.0, Not required
			Bottom Side	1.00	1.19	1.00	3.19	Σ SAR < 4.0, Not required

FCC SAR Test Report

No.	Conditions (SAR1 + SAR2 + SAR 3)	Exposure Condition	Test Position	Max. SAR1	Max. SAR2	Max. SAR3	SAR Summation	SPLSR Analysis
21	LTE 41 + WLAN (DTS) + BT (DSS)	Extremity	Rear Face	0.03	0.23	0.00	0.26	Σ SAR < 4.0, Not required
			Left Side	0.06	0.00	1.00	1.06	Σ SAR < 4.0, Not required
			Right Side	1.00	1.51	0.04	2.55	Σ SAR < 4.0, Not required
			Top Side	0.23	0.35	0.00	0.58	Σ SAR < 4.0, Not required
			Bottom Side	1.00	0.48	1.00	2.48	Σ SAR < 4.0, Not required
22	LTE 41 + WLAN (NII) + BT (DSS)	Extremity	Rear Face	0.03	0.10	0.00	0.13	Σ SAR < 4.0, Not required
			Left Side	0.06	0.00	1.00	1.06	Σ SAR < 4.0, Not required
			Right Side	1.00	0.89	0.04	1.93	Σ SAR < 4.0, Not required
			Top Side	0.23	0.53	0.00	0.76	Σ SAR < 4.0, Not required
			Bottom Side	1.00	1.19	1.00	3.19	Σ SAR < 4.0, Not required

Test Engineer : Eric Wu, and Willy Chang

5. Calibration of Test Equipment

Equipment	Manufacturer	Model	SN	Cal. Date	Cal. Interval
System Validation Dipole	SPEAG	D750V3	1013	Aug. 23, 2018	1 Year
System Validation Dipole	SPEAG	D835V2	4d121	Aug. 23, 2018	1 Year
System Validation Dipole	SPEAG	D1750V2	1055	Aug. 27, 2018	1 Year
System Validation Dipole	SPEAG	D1900V2	5d036	Jan. 18, 2018	1 Year
System Validation Dipole	SPEAG	D2450V2	737	Aug. 24, 2018	1 Year
System Validation Dipole	SPEAG	D2600V2	1020	Aug. 24, 2018	1 Year
System Validation Dipole	SPEAG	D5GHzV2	1019	Mar. 22, 2018	1 Year
Dosimetric E-Field Probe	SPEAG	EX3DV4	3650	Jul. 27, 2018	1 Year
Data Acquisition Electronics	SPEAG	DAE3	579	Aug. 27, 2018	1 Year
Wireless Communication Test Set	Agilent	E5515C	MY50266628	Dec. 06, 2017	1 Year
Radio Communication Analyzer	Anritsu	MT8820C	6201010285	Aug. 06, 2018	1 Year
Radio Communication Analyzer	Anritsu	MT8820C	6201381727	May. 09, 2018	1 Year
Universal Radio Communication Tester	Anritsu	MT8821C	6201502978	Jul. 20, 2018	1 Year
Spectrum Analyzer	R&S	FSL6	102006	Mar. 23, 2018	1 Year
ENA Series Network Analyzer	Agilent	E5071C	MY46214281	Jun. 08, 2018	1 Year
MXG Analog Signal Generator	Agilent	N5181A	MY50143868	Jul. 03, 2018	1 Year
Vector Signal Generator	Anritsu	MG3710A	6201599977	Mar. 16, 2018	1 Year
Power Meter	Anritsu	ML2495A	1218009	Jul. 03, 2018	1 Year
Power Sensor	Anritsu	MA2411B	1207252	Jul. 03, 2018	1 Year
Thermometer	YFE	YF-160A	130504591	Mar. 23, 2018	1 Year
Power Amplifier	AR	5S1G4	0339656	Sep. 10, 2018	1 Year
Attenuator	MTJ	MTJ6011-03	N/A	Sep. 10, 2018	1 Year
Directional Coupler	Woken	0110A05602O-10	11122702	Sep. 10, 2018	1 Year

6. Measurement Uncertainty

Source of Uncertainty	Uncertainty (± %)	Probability Distribution	Divisor	Ci (1g)	Ci (10g)	Standard Uncertainty (± %, 1g)	Standard Uncertainty (± %, 10g)	Vi
Measurement System								
Probe Calibration	6.0	Normal	1	1	1	6.0	6.0	∞
Axial Isotropy	4.7	Rectangular	√3	√0.5	√0.5	1.9	1.9	∞
Hemispherical Isotropy	9.6	Rectangular	√3	√0.5	√0.5	3.9	3.9	∞
Boundary Effect	1.0	Rectangular	√3	1	1	0.6	0.6	∞
Linearity	4.7	Rectangular	√3	1	1	2.7	2.7	∞
Detection Limits	0.25	Rectangular	√3	1	1	0.14	0.14	∞
Probe Modulation Response	3.5	Rectangular	√3	1	1	2.0	2.0	∞
Readout Electronics	0.3	Normal	1	1	1	0.3	0.3	∞
Response Time	0.0	Rectangular	√3	1	1	0.0	0.0	∞
Integration Time	1.7	Rectangular	√3	1	1	1.0	1.0	∞
RF Ambient Conditions – Noise	3.0	Rectangular	√3	1	1	1.7	1.7	∞
RF Ambient Conditions – Reflections	3.0	Rectangular	√3	1	1	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	0.4	Rectangular	√3	1	1	0.2	0.2	∞
Probe Positioning with Respect to Phantom	2.9	Rectangular	√3	1	1	1.7	1.7	∞
Post-processing	2.0	Rectangular	√3	1	1	1.2	1.2	∞
Test Sample Related								
Test Sample Positioning	3.9 / 2.06	Normal	1	1	1	3.9	2.1	35
Device Holder Uncertainty	2.9 / 4.1	Normal	1	1	1	2.9	4.1	11
Power Drift of Measurement	5.0	Rectangular	√3	1	1	2.9	2.9	∞
Power Scaling	0.0	Rectangular	√3	1	1	0.0	0.0	∞
Phantom and Setup								
Phantom Uncertainty (Shape and Thickness Tolerances)	6.1	Rectangular	√3	1	1	3.5	3.5	∞
Liquid Conductivity (Temperature Uncertainty)	3.24	Rectangular	√3	0.78	0.71	1.5	1.3	∞
Liquid Conductivity (Measured)	2.88	Normal	1	0.78	0.71	2.2	2.0	43
Liquid Permittivity (Temperature Uncertainty)	1.13	Rectangular	√3	0.23	0.26	0.2	0.2	∞
Liquid Permittivity (Measured)	2.50	Normal	1	0.23	0.26	0.6	0.7	54
Combined Standard Uncertainty						± 11.4 %	± 11.2 %	
Expanded Uncertainty (K=2)						± 22.8 %	± 22.4 %	

Head SAR Uncertainty Budget for Frequency Range of 300 MHz to 3 GHz

FCC SAR Test Report

Source of Uncertainty	Uncertainty (± %)	Probability Distribution	Divisor	C _i (1g)	C _i (10g)	Standard Uncertainty (± %, 1g)	Standard Uncertainty (± %, 10g)	V _i
Measurement System								
Probe Calibration	6.55	Normal	1	1	1	6.55	6.55	∞
Axial Isotropy	4.7	Rectangular	√3	0.7	0.7	1.9	1.9	∞
Hemispherical Isotropy	9.6	Rectangular	√3	0.7	0.7	3.9	3.9	∞
Boundary Effect	2.0	Rectangular	√3	1	1	1.2	1.2	∞
Linearity	4.7	Rectangular	√3	1	1	2.7	2.7	∞
Detection Limits	0.25	Rectangular	√3	1	1	0.14	0.14	∞
Probe Modulation Response	3.5	Rectangular	√3	1	1	2.0	2.0	∞
Readout Electronics	0.3	Normal	1	1	1	0.3	0.3	∞
Response Time	0.0	Rectangular	√3	1	1	0.0	0.0	∞
Integration Time	1.7	Rectangular	√3	1	1	1.0	1.0	∞
RF Ambient Conditions – Noise	3.0	Rectangular	√3	1	1	1.7	1.7	∞
RF Ambient Conditions – Reflections	3.0	Rectangular	√3	1	1	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	0.4	Rectangular	√3	1	1	0.2	0.2	∞
Probe Positioning with Respect to Phantom	6.7	Rectangular	√3	1	1	3.9	3.9	∞
Post-processing	4.0	Rectangular	√3	1	1	2.3	2.3	∞
Test Sample Related								
Test Sample Positioning	3.9 / 2.06	Normal	1	1	1	3.9	2.1	35
Device Holder Uncertainty	2.9 / 4.1	Normal	1	1	1	2.9	4.1	11
Power Drift of Measurement	5.0	Rectangular	√3	1	1	2.9	2.9	∞
Power Scaling	0.0	Rectangular	√3	1	1	0.0	0.0	∞
Phantom and Setup								
Phantom Uncertainty (Shape and Thickness Tolerances)	6.6	Rectangular	√3	1	1	3.8	3.8	∞
Liquid Conductivity (Temperature Uncertainty)	3.24	Rectangular	√3	0.78	0.71	1.5	1.3	∞
Liquid Conductivity (Measured)	2.88	Normal	1	0.78	0.71	2.2	2.0	43
Liquid Permittivity (Temperature Uncertainty)	1.13	Rectangular	√3	0.23	0.26	0.2	0.2	∞
Liquid Permittivity (Measured)	2.50	Normal	1	0.23	0.26	0.6	0.7	54
Combined Standard Uncertainty						± 12.5 %	± 12.3 %	
Expanded Uncertainty (K=2)						± 25.0 %	± 24.6 %	

Head SAR Uncertainty Budget for Frequency Range of 3 GHz to 6 GHz

FCC SAR Test Report

Source of Uncertainty	Uncertainty (± %)	Probability Distribution	Divisor	Ci (1g)	Ci (10g)	Standard Uncertainty (± %, 1g)	Standard Uncertainty (± %, 10g)	Vi
Measurement System								
Probe Calibration	6.0	Normal	1	1	1	6.0	6.0	∞
Axial Isotropy	4.7	Rectangular	√3	√0.5	√0.5	1.9	1.9	∞
Hemispherical Isotropy	9.6	Rectangular	√3	√0.5	√0.5	3.9	3.9	∞
Boundary Effect	1.0	Rectangular	√3	1	1	0.6	0.6	∞
Linearity	4.7	Rectangular	√3	1	1	2.7	2.7	∞
Detection Limits	0.25	Rectangular	√3	1	1	0.14	0.14	∞
Probe Modulation Response	3.5	Rectangular	√3	1	1	2.0	2.0	∞
Readout Electronics	0.3	Normal	1	1	1	0.3	0.3	∞
Response Time	0.0	Rectangular	√3	1	1	0.0	0.0	∞
Integration Time	1.7	Rectangular	√3	1	1	1.0	1.0	∞
RF Ambient Conditions – Noise	3.0	Rectangular	√3	1	1	1.7	1.7	∞
RF Ambient Conditions – Reflections	3.0	Rectangular	√3	1	1	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	0.4	Rectangular	√3	1	1	0.2	0.2	∞
Probe Positioning with Respect to Phantom	2.9	Rectangular	√3	1	1	1.7	1.7	∞
Post-processing	2.0	Rectangular	√3	1	1	1.2	1.2	∞
Test Sample Related								
Test Sample Positioning	4.38 / 1.35	Normal	1	1	1	4.4	1.4	29
Device Holder Uncertainty	2.9 / 4.1	Normal	1	1	1	2.9	4.1	11
Power Drift of Measurement	5.0	Rectangular	√3	1	1	2.9	2.9	∞
Power Scaling	0.0	Rectangular	√3	1	1	0.0	0.0	∞
Phantom and Setup								
Phantom Uncertainty (Shape and Thickness Tolerances)	7.2	Rectangular	√3	1	1	4.2	4.2	∞
Liquid Conductivity (Temperature Uncertainty)	3.24	Rectangular	√3	0.78	0.71	1.5	1.3	∞
Liquid Conductivity (Measured)	2.88	Normal	1	0.78	0.71	2.2	2.0	43
Liquid Permittivity (Temperature Uncertainty)	1.13	Rectangular	√3	0.23	0.26	0.2	0.2	∞
Liquid Permittivity (Measured)	2.50	Normal	1	0.23	0.26	0.6	0.7	54
Combined Standard Uncertainty						± 11.8 %	± 11.3 %	
Expanded Uncertainty (K=2)						± 23.6 %	± 22.6 %	

Body SAR Uncertainty Budget for Frequency Range of 300 MHz to 3 GHz

FCC SAR Test Report

Source of Uncertainty	Uncertainty (± %)	Probability Distribution	Divisor	C _i (1g)	C _i (10g)	Standard Uncertainty (± %, 1g)	Standard Uncertainty (± %, 10g)	V _i
Measurement System								
Probe Calibration	6.55	Normal	1	1	1	6.55	6.55	∞
Axial Isotropy	4.7	Rectangular	√3	0.7	0.7	1.9	1.9	∞
Hemispherical Isotropy	9.6	Rectangular	√3	0.7	0.7	3.9	3.9	∞
Boundary Effect	2.0	Rectangular	√3	1	1	1.2	1.2	∞
Linearity	4.7	Rectangular	√3	1	1	2.7	2.7	∞
Detection Limits	0.25	Rectangular	√3	1	1	0.14	0.14	∞
Probe Modulation Response	3.5	Rectangular	√3	1	1	2.0	2.0	∞
Readout Electronics	0.3	Normal	1	1	1	0.3	0.3	∞
Response Time	0.0	Rectangular	√3	1	1	0.0	0.0	∞
Integration Time	1.7	Rectangular	√3	1	1	1.0	1.0	∞
RF Ambient Conditions – Noise	3.0	Rectangular	√3	1	1	1.7	1.7	∞
RF Ambient Conditions – Reflections	3.0	Rectangular	√3	1	1	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	0.4	Rectangular	√3	1	1	0.2	0.2	∞
Probe Positioning with Respect to Phantom	6.7	Rectangular	√3	1	1	3.9	3.9	∞
Post-processing	4.0	Rectangular	√3	1	1	2.3	2.3	∞
Test Sample Related								
Test Sample Positioning	4.38 / 1.35	Normal	1	1	1	4.4	1.4	29
Device Holder Uncertainty	2.9 / 4.1	Normal	1	1	1	2.9	4.1	11
Power Drift of Measurement	5.0	Rectangular	√3	1	1	2.9	2.9	∞
Power Scaling	0.0	Rectangular	√3	1	1	0.0	0.0	∞
Phantom and Setup								
Phantom Uncertainty (Shape and Thickness Tolerances)	7.6	Rectangular	√3	1	1	4.4	4.4	∞
Liquid Conductivity (Temperature Uncertainty)	3.24	Rectangular	√3	0.78	0.71	1.5	1.3	∞
Liquid Conductivity (Measured)	2.88	Normal	1	0.78	0.71	2.2	2.0	43
Liquid Permittivity (Temperature Uncertainty)	1.13	Rectangular	√3	0.23	0.26	0.2	0.2	∞
Liquid Permittivity (Measured)	2.50	Normal	1	0.23	0.26	0.6	0.7	54
Combined Standard Uncertainty						± 12.8 %	± 12.4 %	
Expanded Uncertainty (K=2)						± 25.6 %	± 24.8 %	

Body SAR Uncertainty Budget for Frequency Range of 3 GHz to 6 GHz

7. Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Taiwan HwaYa EMC/RF/Safety/Telecom Lab:

Add: No. 19, Hwa Ya 2nd Rd, Wen Hwa Vil., Kwei Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

Tel: 886-3-318-3232

Fax: 886-3-327-0892

Taiwan LinKo EMC/RF Lab:

Add: No. 47-2, 14th Ling, Chia Pau Vil., Linkou Dist., New Taipei City 244, Taiwan, R.O.C.

Tel: 886-2-2605-2180

Fax: 886-2-2605-1924

Taiwan HsinChu EMC/RF Lab:

Add: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 30078, Taiwan, R.O.C.

Tel: 886-3-593-5343

Fax: 886-3-593-5342

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The road map of all our labs can be found in our web site also.

---END---

Appendix A. SAR Plots of System Verification

The plots for system verification with largest deviation for each SAR system combination are shown as follows.

System Check_B750_181114

DUT: Dipole 750 MHz; Type: D750V3; SN: 1013

Communication System: CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: B06T09N1_1114 Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.961 \text{ S/m}$; $\epsilon_r = 54.95$; $\rho = 1000 \text{ kg/m}^3$


Ambient Temperature : $23.7 \text{ }^\circ\text{C}$; Liquid Temperature : $23.1 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(9.91, 9.91, 9.91); Calibrated: 2018/07/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2018/08/27
- Phantom: ELI Phantom_1204; Type: QDOVA;
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

Pin=250mW/Area Scan (61x81x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 2.86 W/kg

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 57.02 V/m ; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 3.18 W/kg
SAR(1 g) = 2.14 W/kg ; SAR(10 g) = 1.42 W/kg
Maximum value of SAR (measured) = 2.83 W/kg

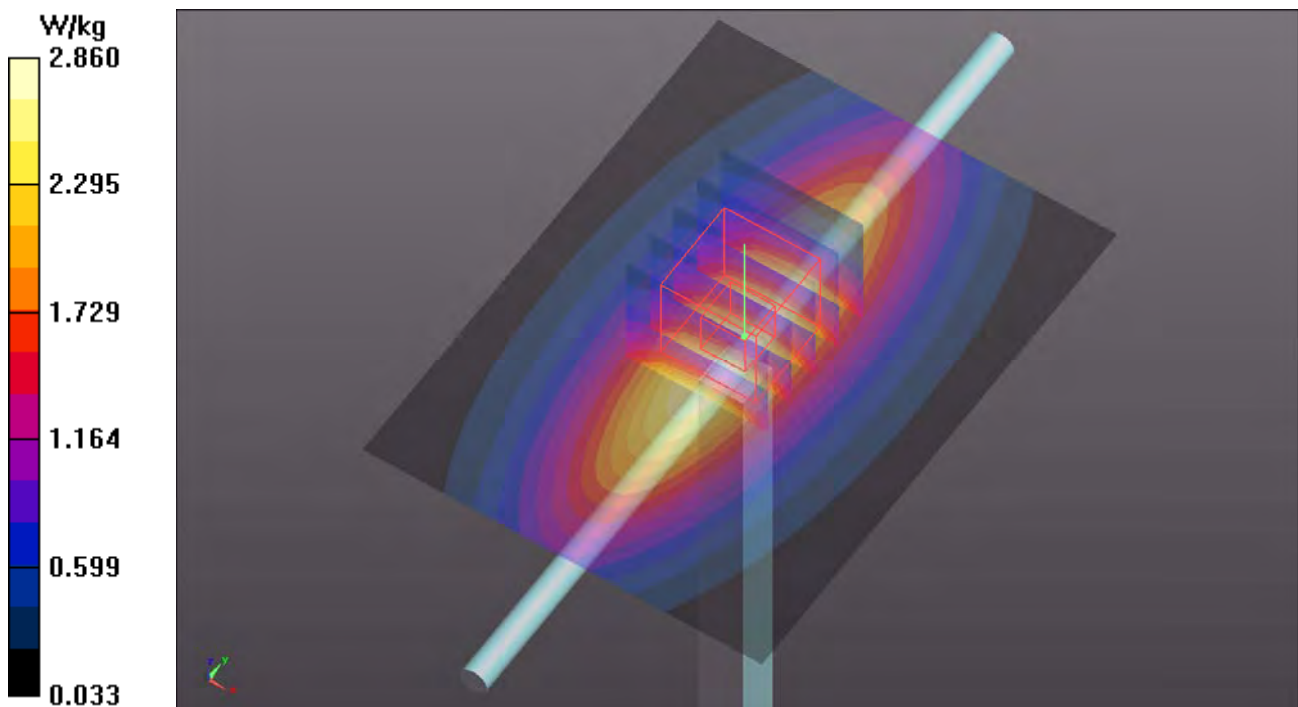

System Check_B835_181114

DUT: Dipole 835 MHz; Type: D835V2; SN: 4d121

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: B07T10N1_1114 Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 1.014 \text{ S/m}$; $\epsilon_r = 57.038$; $\rho = 1000 \text{ kg/m}^3$


Ambient Temperature : $23.8 \text{ }^\circ\text{C}$; Liquid Temperature : $23.2 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(9.74, 9.74, 9.74); Calibrated: 2018/07/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2018/08/27
- Phantom: ELI Phantom_1204; Type: QDOVA;
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 3.05 W/kg

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 57.29 V/m ; Power Drift = -0.06 dB
 Peak SAR (extrapolated) = 3.43 W/kg
SAR(1 g) = 2.29 W/kg ; SAR(10 g) = 1.51 W/kg
 Maximum value of SAR (measured) = 3.06 W/kg

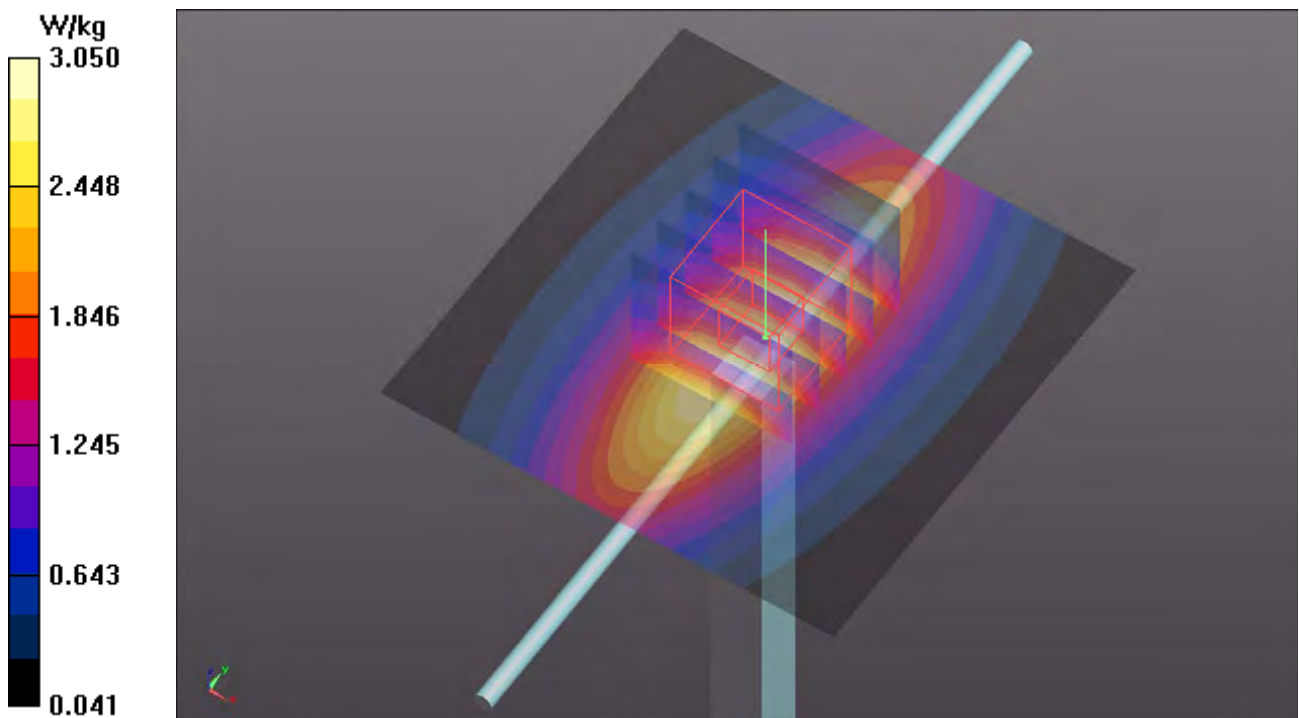

System Check_B1750_181114

DUT: Dipole 1750 MHz; Type: D1750V2; SN: 1055

Communication System: CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: B16T20N1_1114 Medium parameters used: $f = 1750$ MHz; $\sigma = 1.443$ S/m; $\epsilon_r = 51.612$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(8.2, 8.2, 8.2); Calibrated: 2018/07/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2018/08/27
- Phantom: ELI Phantom_1204; Type: QDOVA;
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 13.7 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 101.7 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 16.1 W/kg

SAR(1 g) = 9.07 W/kg; SAR(10 g) = 4.84 W/kg

Maximum value of SAR (measured) = 13.7 W/kg

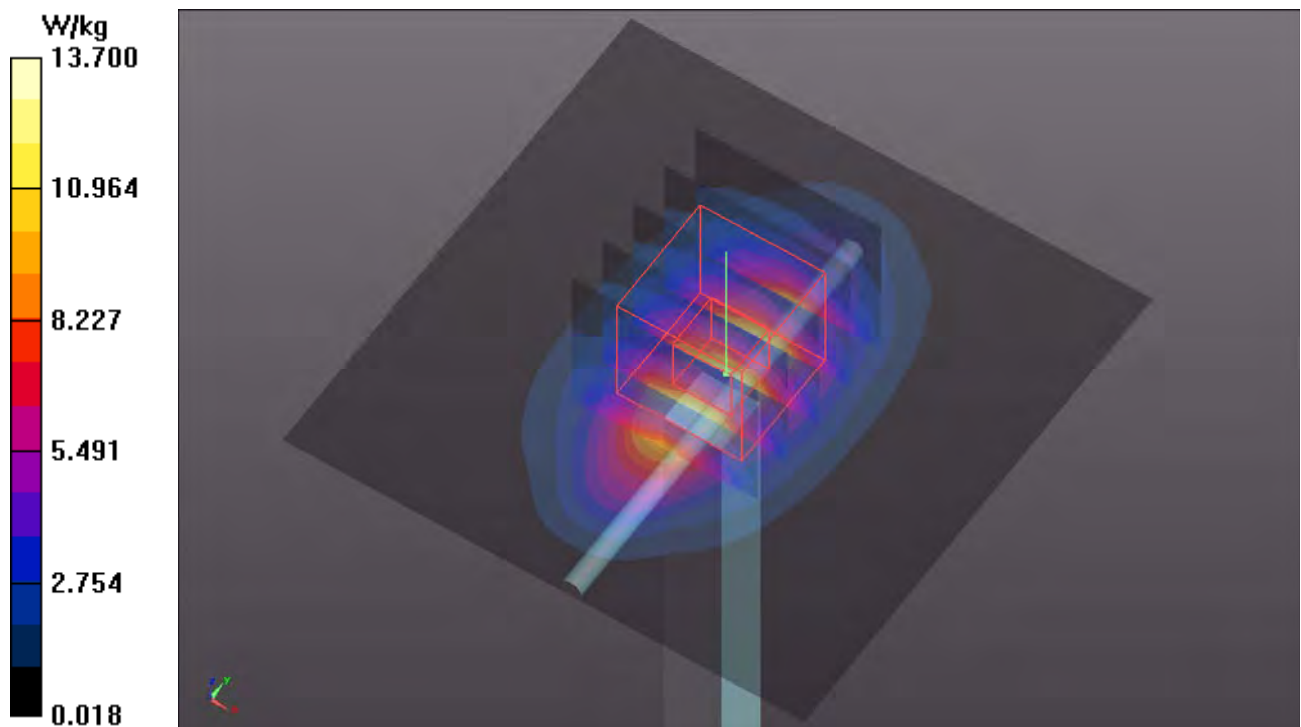

System Check_B1900_181113

DUT: Dipole 1900 MHz; Type: D1900V2; SN: 5d036

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: B16T20N1_1113 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.58$ S/m; $\epsilon_r = 50.851$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.8 °C ; Liquid Temperature : 23.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(7.89, 7.89, 7.89); Calibrated: 2018/07/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2018/08/27
- Phantom: ELI Phantom_1204; Type: QDOVA;
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 14.5 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 97.03 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 18.0 W/kg

SAR(1 g) = 10.1 W/kg; SAR(10 g) = 5.32 W/kg

Maximum value of SAR (measured) = 14.4 W/kg

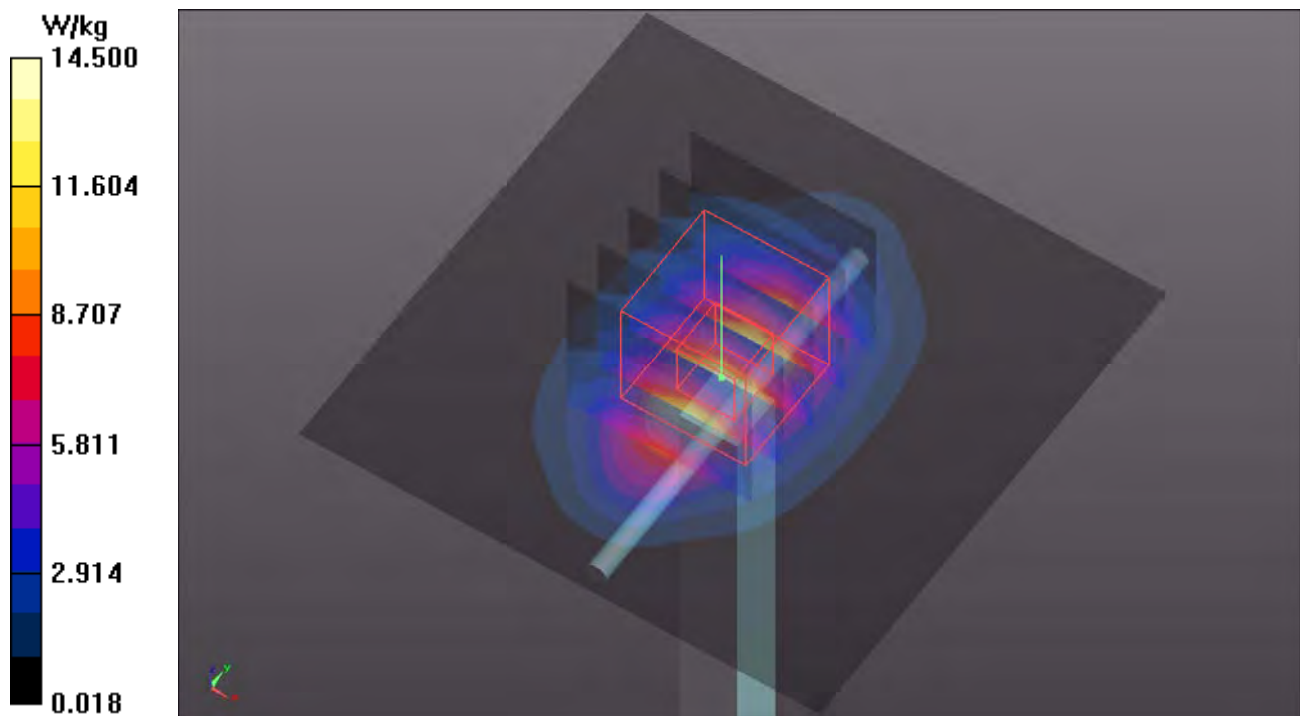

System Check_B2450_181115

DUT: Dipole 2450 MHz; Type: D2450V2; SN: 737

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: B19T27N1_1115 Medium parameters used: $f = 2450$ MHz; $\sigma = 2.015$ S/m; $\epsilon_r = 51.563$; $\rho = 1000$ kg/m³


Ambient Temperature : 23.7 °C ; Liquid Temperature : 23.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(7.61, 7.61, 7.61); Calibrated: 2018/07/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2018/08/27
- Phantom: ELI Phantom_1204; Type: QDOVA;
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

Pin=250mW/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 19.8 W/kg

Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 93.36 V/m; Power Drift = -0.11 dB
Peak SAR (extrapolated) = 24.4 W/kg
SAR(1 g) = 12 W/kg; SAR(10 g) = 5.58 W/kg
Maximum value of SAR (measured) = 20.0 W/kg

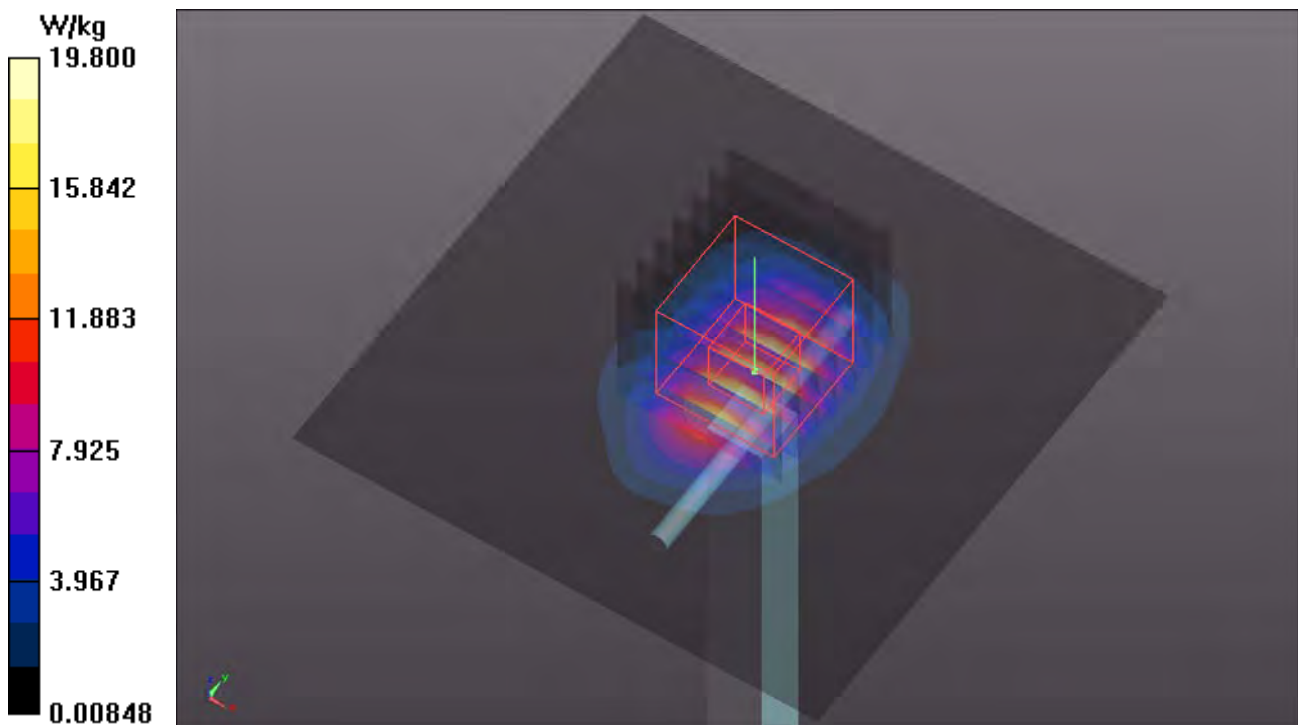

System Check_B2600_181115

DUT: Dipole 2600 MHz; Type: D2600V2; SN: 1020

Communication System: CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: B19T27N1_1115 Medium parameters used: $f = 2600$ MHz; $\sigma = 2.191$ S/m; $\epsilon_r = 51.187$; $\rho = 1000$ kg/m³


Ambient Temperature : 23.8 °C ; Liquid Temperature : 23.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(7.48, 7.48, 7.48); Calibrated: 2018/07/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2018/08/27
- Phantom: ELI Phantom_1204; Type: QDOVA;
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

Pin=250mW/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 22.2 W/kg

Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 99.19 V/m; Power Drift = -0.18 dB
Peak SAR (extrapolated) = 28.9 W/kg
SAR(1 g) = 13.2 W/kg; SAR(10 g) = 5.91 W/kg
Maximum value of SAR (measured) = 22.9 W/kg

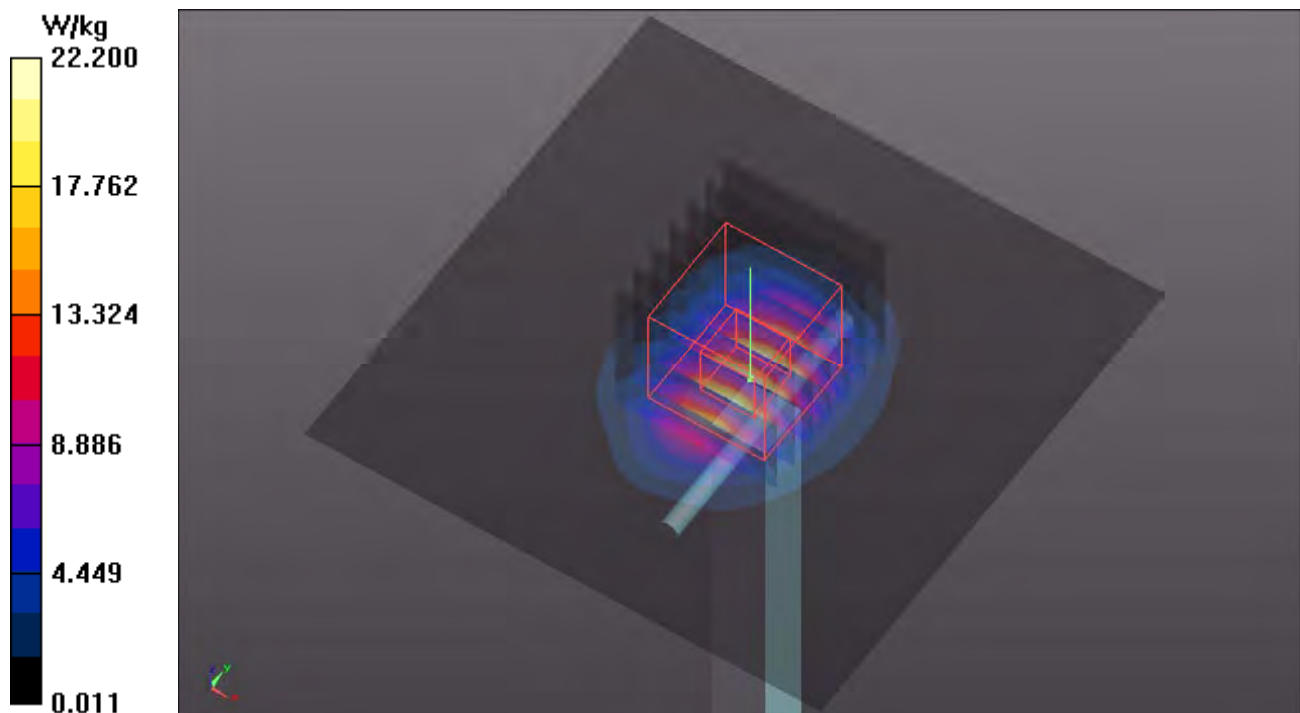

System Check_B5250_181112

DUT: Dipole 5 GHz; Type: D5GHzV2; SN: 1019

Communication System: CW; Frequency: 5250 MHz; Duty Cycle: 1:1

Medium: B34T60N1_1112 Medium parameters used: $f = 5250$ MHz; $\sigma = 5.29$ S/m; $\epsilon_r = 48.803$; $\rho = 1000$ kg/m³


Ambient Temperature : 23.6 °C ; Liquid Temperature : 23.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(4.85, 4.85, 4.85); Calibrated: 2018/07/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2018/08/27
- Phantom: ELI Phantom_1204; Type: QDOVA;
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

Pin=100mW/Area Scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 17.5 W/kg

Pin=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 69.40 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 30.8 W/kg
SAR(1 g) = 7.66 W/kg; SAR(10 g) = 2.17 W/kg
Maximum value of SAR (measured) = 19.4 W/kg

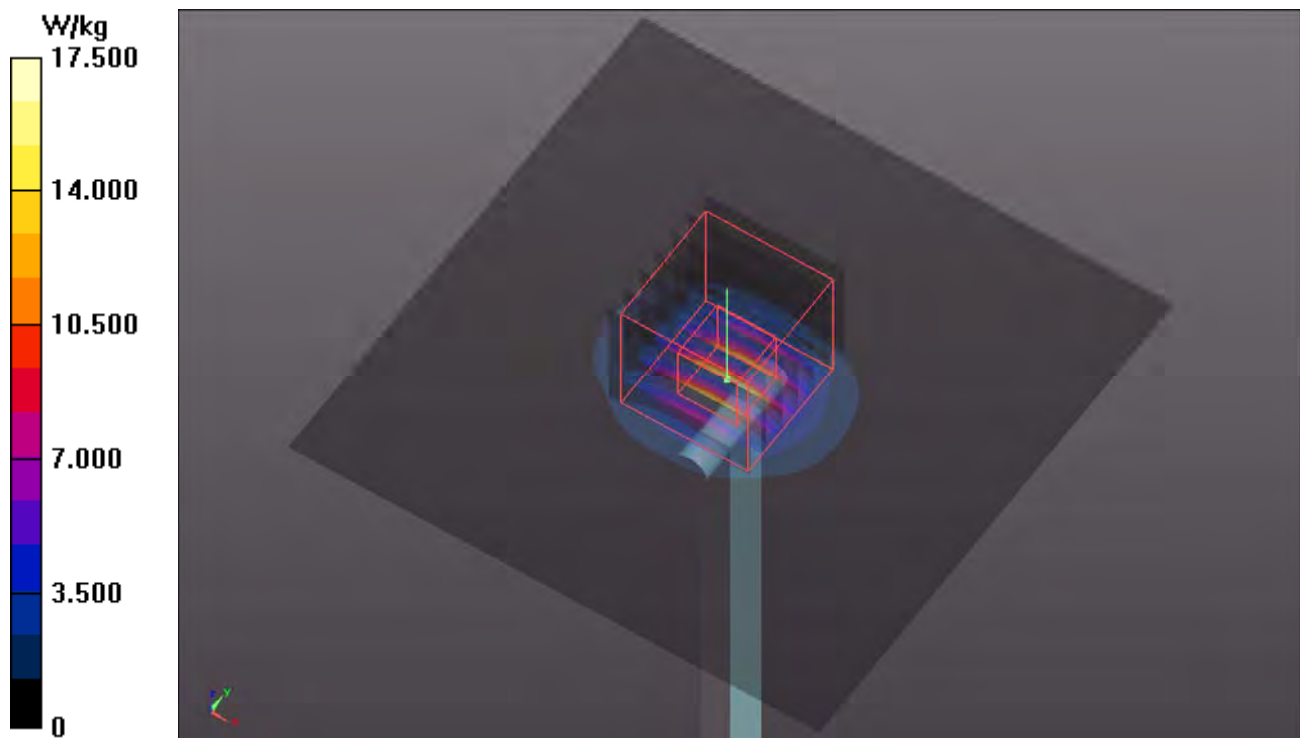

System Check_B5600_181112

DUT: Dipole 5 GHz; Type: D5GHzV2; SN: 1019

Communication System: CW; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: B34T60N1_1112 Medium parameters used: $f = 5600$ MHz; $\sigma = 5.755$ S/m; $\epsilon_r = 48.281$; $\rho = 1000$ kg/m³


Ambient Temperature : 23.6 °C ; Liquid Temperature : 23.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(4.32, 4.32, 4.32); Calibrated: 2018/07/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2018/08/27
- Phantom: ELI Phantom_1204; Type: QDOVA;
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

Pin=100mW/Area Scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 20.1 W/kg

Pin=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 70.22 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 36.4 W/kg
SAR(1 g) = 8.21 W/kg; SAR(10 g) = 2.3 W/kg
Maximum value of SAR (measured) = 21.7 W/kg

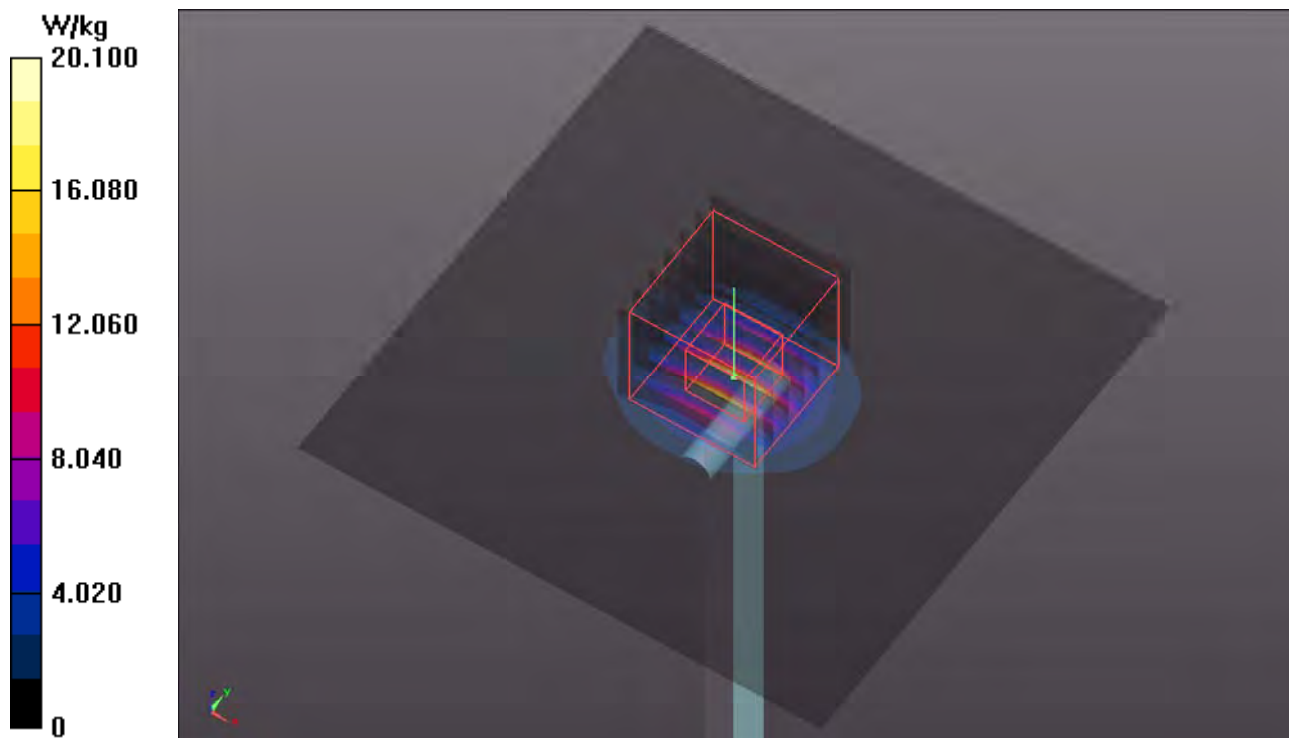

System Check_B5750_181113

DUT: Dipole 5 GHz; Type: D5GHzV2; SN: 1019

Communication System: CW; Frequency: 5750 MHz; Duty Cycle: 1:1

Medium: B34T60N1_1113 Medium parameters used: $f = 5750$ MHz; $\sigma = 6$ S/m; $\epsilon_r = 46.207$; $\rho =$

1000 kg/m³

Ambient Temperature : 23.8 °C ; Liquid Temperature : 23.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(4.6, 4.6, 4.6); Calibrated: 2018/07/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2018/08/27
- Phantom: ELI Phantom_1204; Type: QDOVA;
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

Pin=100mW/Area Scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 17.3 W/kg


Pin=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 55.32 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 31.3 W/kg

SAR(1 g) = 7.41 W/kg; SAR(10 g) = 2.12 W/kg

Maximum value of SAR (measured) = 18.8 W/kg

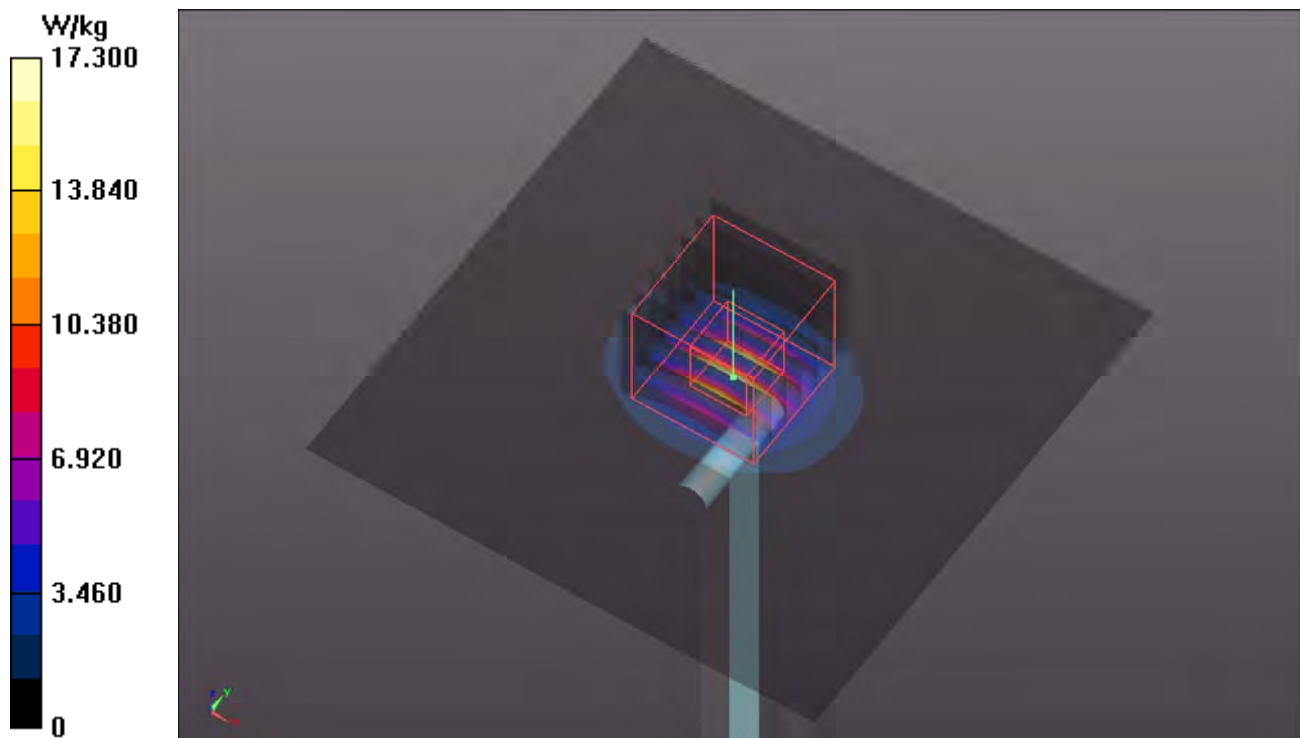

Appendix B. SAR Plots of SAR Measurement

The SAR plots for highest measured SAR in each exposure configuration, wireless mode and frequency band combination, and measured SAR > 1.5 W/kg are shown as follows.

P01 WCDMA II_RMC12.2K_Left Side_0cm_Ch9262

DUT: 181025C05

Communication System: WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: B16T20N1_1113 Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.533$ S/m; $\epsilon_r = 51.046$; $\rho = 1000$ kg/m³


Ambient Temperature : 23.8 °C ; Liquid Temperature : 23.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(7.89, 7.89, 7.89); Calibrated: 2018/07/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2018/08/27
- Phantom: ELI Phantom_1204; Type: QDOVA;
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

- Area Scan (71x141x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 1.52 W/kg

- Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 28.39 V/m; Power Drift = 0.17 dB
 Peak SAR (extrapolated) = 2.04 W/kg
SAR(1 g) = 1.11 W/kg; SAR(10 g) = 0.603 W/kg
 Maximum value of SAR (measured) = 1.68 W/kg

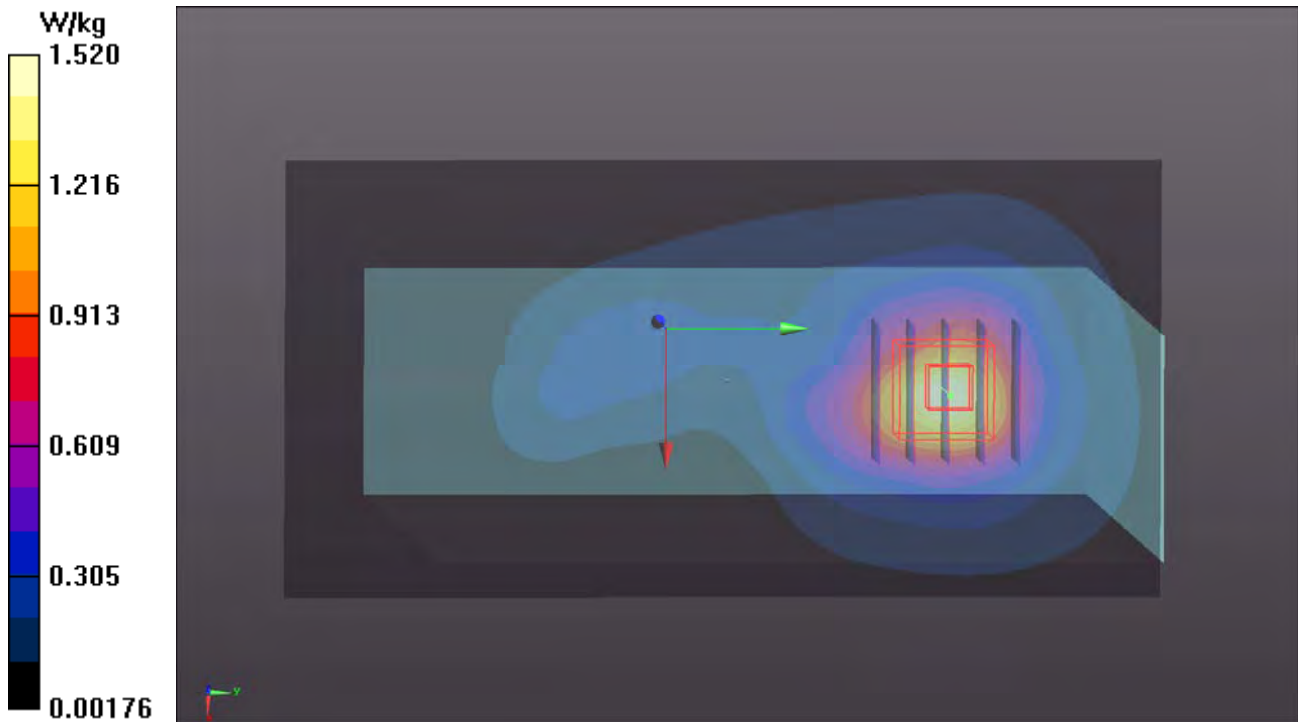

P02 WCDMA IV_RMC12.2K_Top Side_0cm_Ch1312

DUT: 181025C05

Communication System: WCDMA; Frequency: 1712.4 MHz; Duty Cycle: 1:1

Medium: B16T20N1_1114 Medium parameters used: $f = 1712.4$ MHz; $\sigma = 1.403$ S/m; $\epsilon_r = 51.697$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.8 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(8.2, 8.2, 8.2); Calibrated: 2018/07/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2018/08/27
- Phantom: ELI Phantom_1204; Type: QDOVA;
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

- **Area Scan (71x191x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.02 W/kg


- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 39.13 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 2.64 W/kg

SAR(1 g) = 1.45 W/kg; SAR(10 g) = 0.790 W/kg

Maximum value of SAR (measured) = 2.10 W/kg

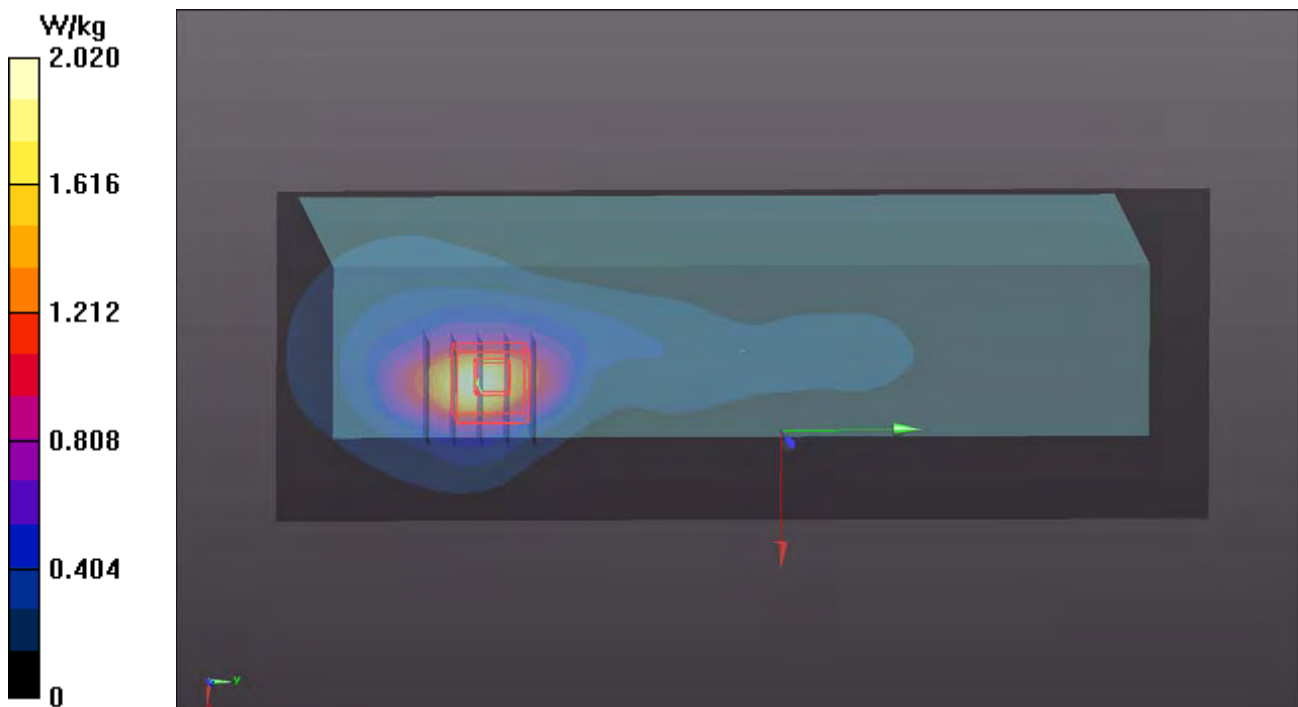

P03 WCDMA V_RMC12.2K_Left Side_0cm_Ch4132

DUT: 181025C05

Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: B07T10N1_1114 Medium parameters used: $f = 826.4 \text{ MHz}$; $\sigma = 1.007 \text{ S/m}$; $\epsilon_r = 57.109$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 23.8 °C ; Liquid Temperature : 23.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(9.74, 9.74, 9.74); Calibrated: 2018/07/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2018/08/27
- Phantom: ELI Phantom_1204; Type: QDOVA;
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

- Area Scan (71x141x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.446 W/kg


- Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 20.54 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.640 W/kg

SAR(1 g) = 0.349 W/kg; SAR(10 g) = 0.213 W/kg

Maximum value of SAR (measured) = 0.514 W/kg

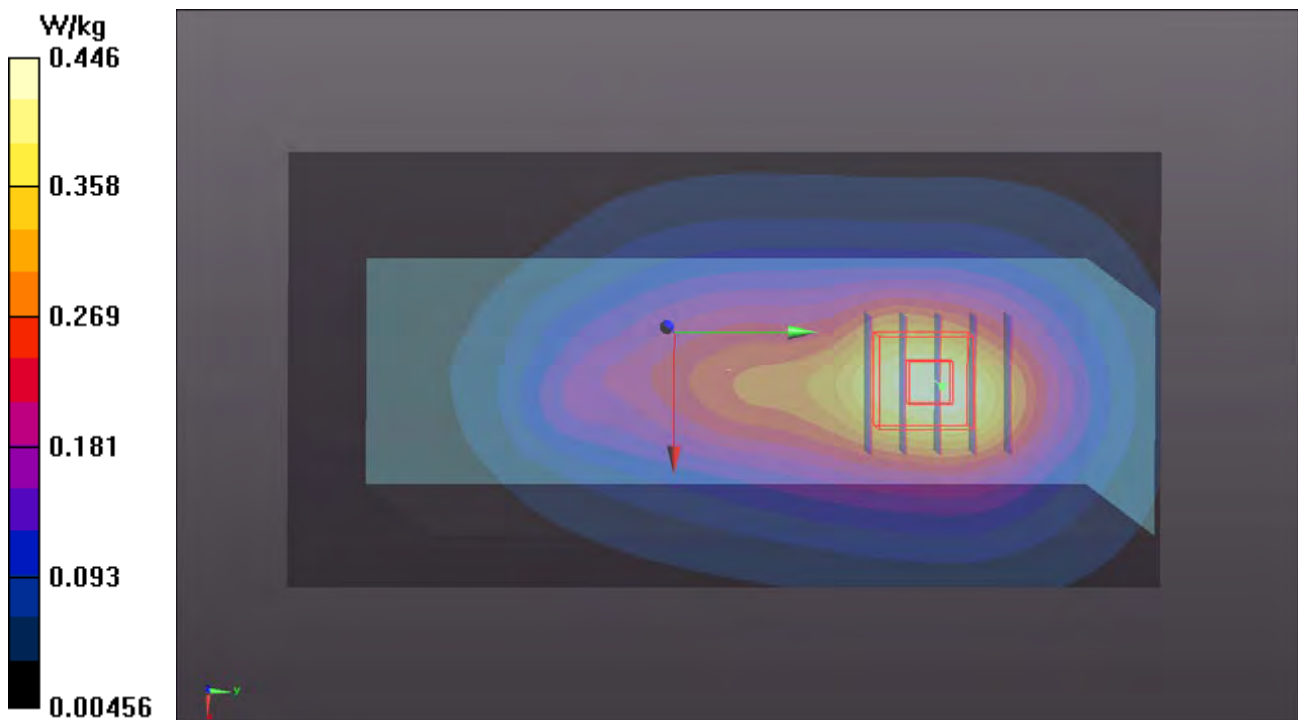

P04 LTE 4_QPSK20M_Top Side_0cm_Ch20050_1RB_OS0

DUT: 181025C05

Communication System: LTE; Frequency: 1720 MHz; Duty Cycle: 1:1

Medium: B16T20N1_1114 Medium parameters used: $f = 1720$ MHz; $\sigma = 1.411$ S/m; $\epsilon_r = 51.673$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(8.2, 8.2, 8.2); Calibrated: 2018/07/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2018/08/27
- Phantom: ELI Phantom_1204; Type: QDOVA;
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

- **Area Scan (71x191x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.66 W/kg


- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 33.12 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 2.52 W/kg

SAR(1 g) = 1.38 W/kg; SAR(10 g) = 0.757 W/kg

Maximum value of SAR (measured) = 1.96 W/kg

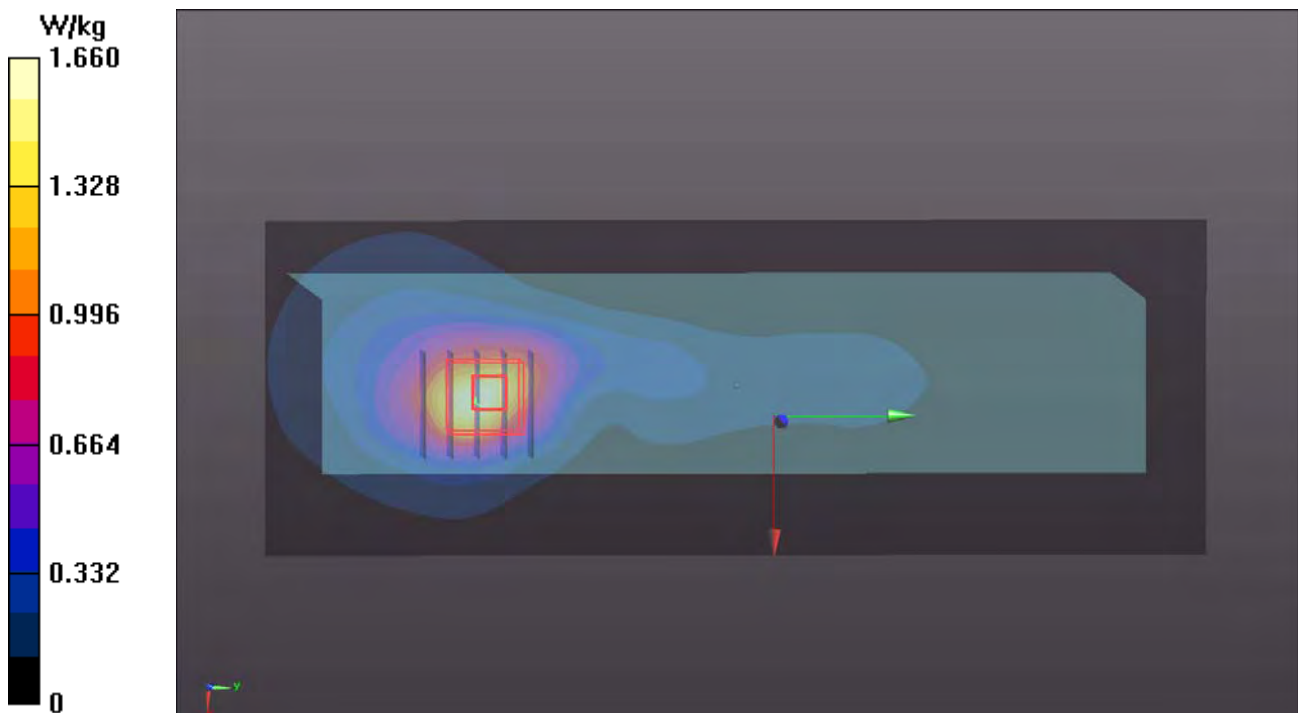

P05 LTE 5_QPSK10M_Left Side_0cm_Ch20450_1RB_OS0

DUT: 181025C05

Communication System: LTE; Frequency: 829 MHz; Duty Cycle: 1:1

Medium: B07T10N1_1114 Medium parameters used: $f = 829 \text{ MHz}$; $\sigma = 1.008 \text{ S/m}$; $\epsilon_r = 57.089$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 23.7 °C ; Liquid Temperature : 23.2 °C


DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(9.74, 9.74, 9.74); Calibrated: 2018/07/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2018/08/27
- Phantom: ELI Phantom_1204; Type: QDOVA;
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

- Area Scan (71x141x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.451 W/kg

- Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 21.02 V/m; Power Drift = 0.06 dB
 Peak SAR (extrapolated) = 0.681 W/kg
SAR(1 g) = 0.358 W/kg; SAR(10 g) = 0.219 W/kg
 Maximum value of SAR (measured) = 0.546 W/kg

- Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 21.02 V/m; Power Drift = 0.06 dB
 Peak SAR (extrapolated) = 0.415 W/kg
SAR(1 g) = 0.270 W/kg; SAR(10 g) = 0.189 W/kg
 Maximum value of SAR (measured) = 0.360 W/kg

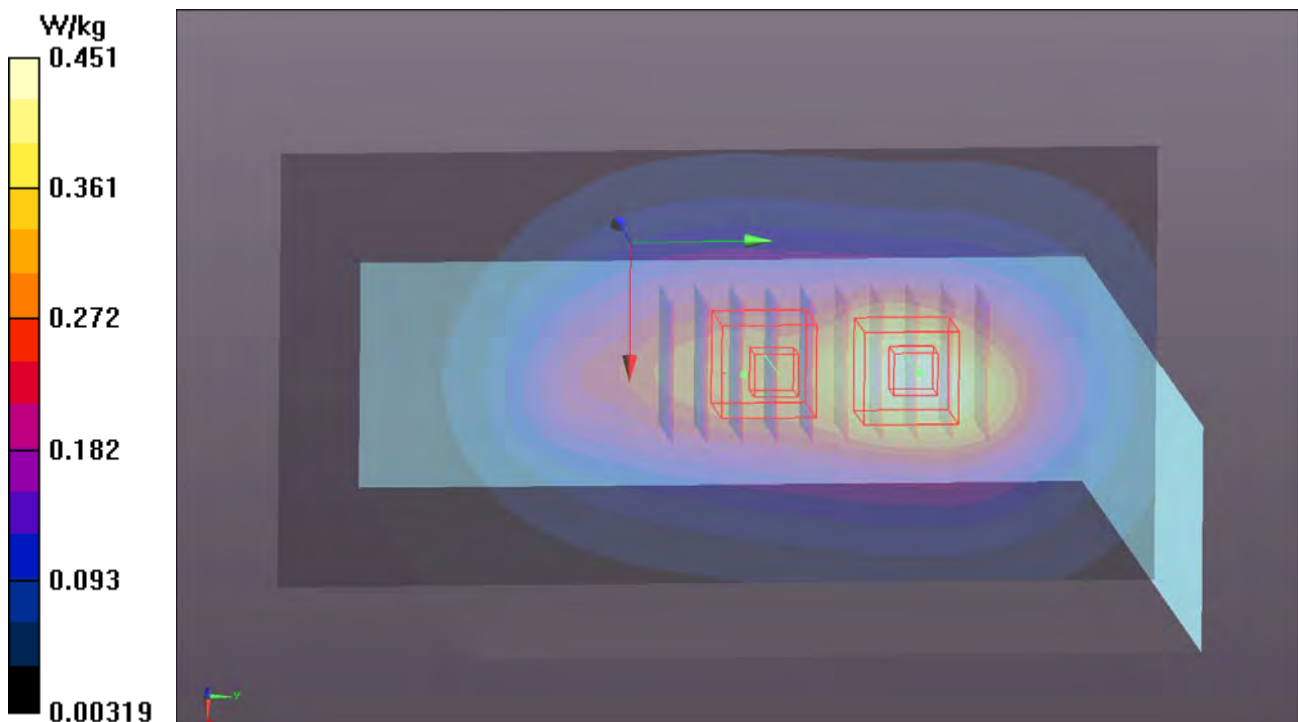

P06 LTE 7_QPSK20M_Top Side_0cm_Ch21100_1RB_OS0

DUT: 181025C05

Communication System: LTE; Frequency: 2535 MHz; Duty Cycle: 1:1

Medium: B19T27N1_1115 Medium parameters used: $f = 2535$ MHz; $\sigma = 2.111$ S/m; $\epsilon_r = 51.359$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.8 °C ; Liquid Temperature : 23.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(7.48, 7.48, 7.48); Calibrated: 2018/07/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2018/08/27
- Phantom: ELI Phantom_1204; Type: QDOVA;
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

- **Area Scan (91x241x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.722 W/kg


- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.65 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 1.05 W/kg

SAR(1 g) = 0.488 W/kg; SAR(10 g) = 0.239 W/kg

Maximum value of SAR (measured) = 0.763 W/kg

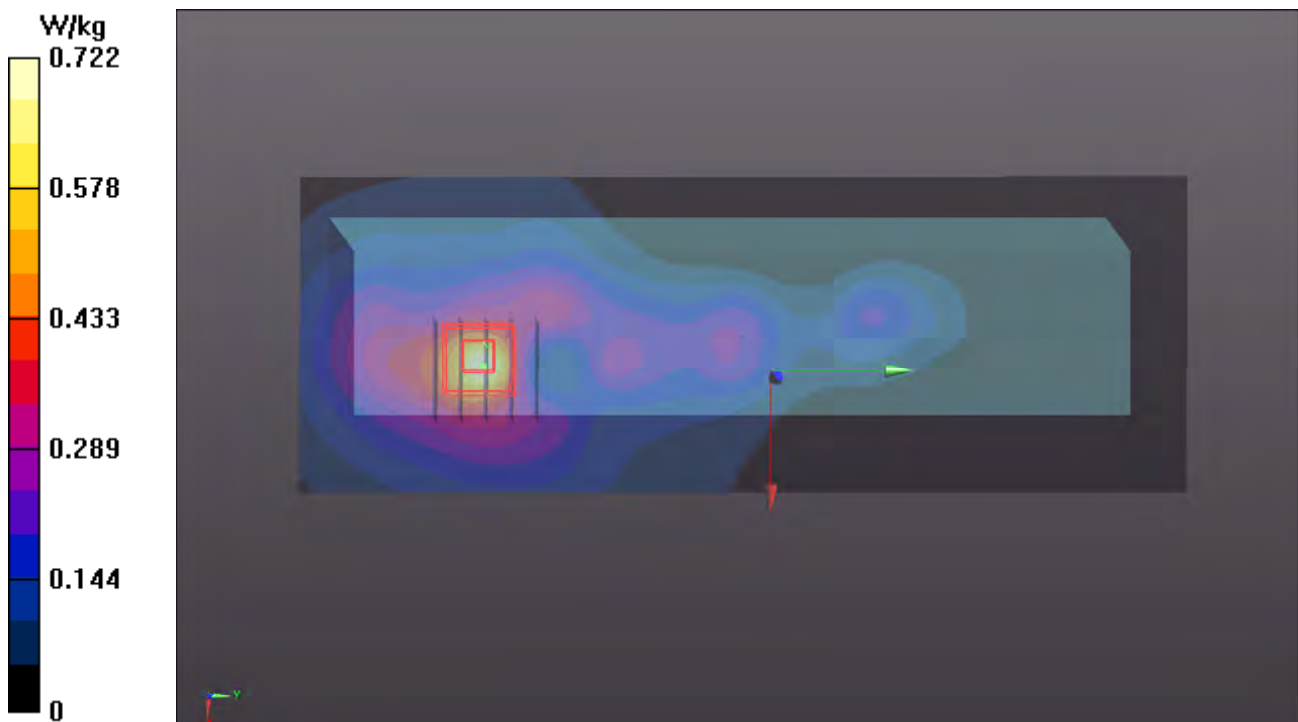

P07 LTE 12_QPSK10M_Left Side_0cm_Ch23095_1RB_OS0

DUT: 181025C05

Communication System: LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: B06T09N1_1114 Medium parameters used: $f = 707.5 \text{ MHz}$; $\sigma = 0.922 \text{ S/m}$; $\epsilon_r = 55.354$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 23.7 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(9.91, 9.91, 9.91); Calibrated: 2018/07/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2018/08/27
- Phantom: ELI Phantom_1204; Type: QDOVA;
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

- Area Scan (71x141x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.375 W/kg


- Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 19.49 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.588 W/kg

SAR(1 g) = 0.306 W/kg; SAR(10 g) = 0.187 W/kg

Maximum value of SAR (measured) = 0.463 W/kg

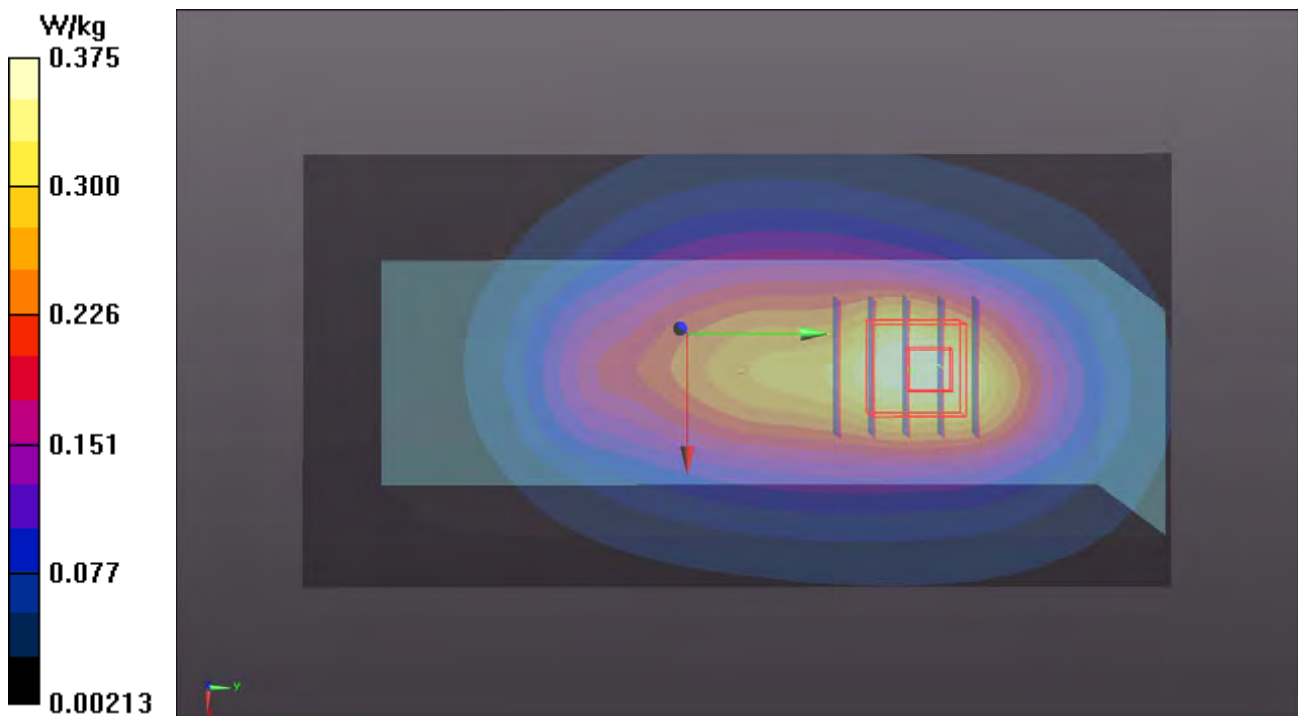

P08 LTE 13_QPSK10M_Left Side_0cm_Ch23230_1RB_OS0

DUT: 181025C05

Communication System: LTE; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: B06T09N1_1114 Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.99 \text{ S/m}$; $\epsilon_r = 54.605$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 23.7 °C ; Liquid Temperature : 23.2 °C


DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(9.91, 9.91, 9.91); Calibrated: 2018/07/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2018/08/27
- Phantom: ELI Phantom_1204; Type: QDOVA;
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

- Area Scan (71x141x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.423 W/kg

- Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 20.03 V/m; Power Drift = -0.15 dB
 Peak SAR (extrapolated) = 0.678 W/kg
SAR(1 g) = 0.343 W/kg; SAR(10 g) = 0.205 W/kg
 Maximum value of SAR (measured) = 0.529 W/kg

- Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 20.03 V/m; Power Drift = -0.15 dB
 Peak SAR (extrapolated) = 0.400 W/kg
SAR(1 g) = 0.252 W/kg; SAR(10 g) = 0.176 W/kg
 Maximum value of SAR (measured) = 0.346 W/kg

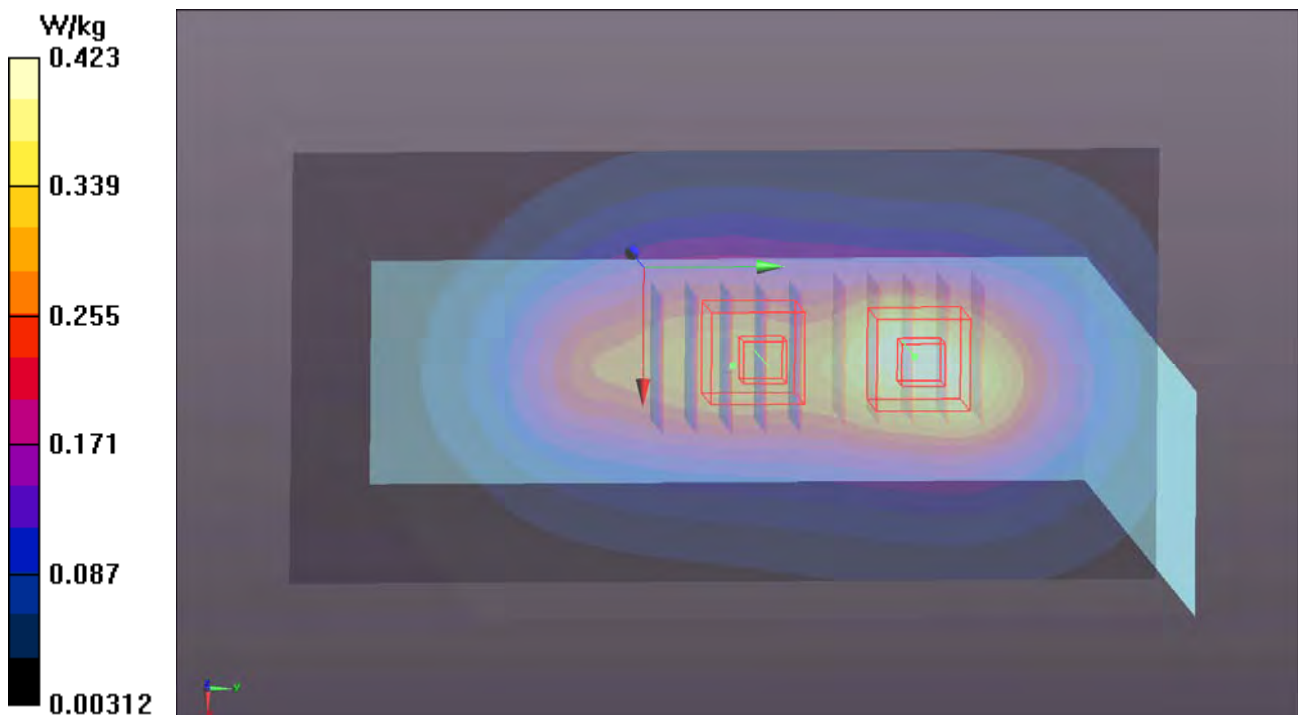

P09 LTE 25_QPSK20M_Left Side_0cm_Ch26140_1RB_OS0

DUT: 181025C05

Communication System: LTE; Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: B16T20N1_1113 Medium parameters used: $f = 1860$ MHz; $\sigma = 1.541$ S/m; $\epsilon_r = 51.013$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.8 °C ; Liquid Temperature : 23.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(7.89, 7.89, 7.89); Calibrated: 2018/07/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2018/08/27
- Phantom: ELI Phantom_1204; Type: QDOVA;
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

- **Area Scan (71x141x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.31 W/kg


- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.55 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 1.77 W/kg

SAR(1 g) = 0.964 W/kg; SAR(10 g) = 0.526 W/kg

Maximum value of SAR (measured) = 1.46 W/kg

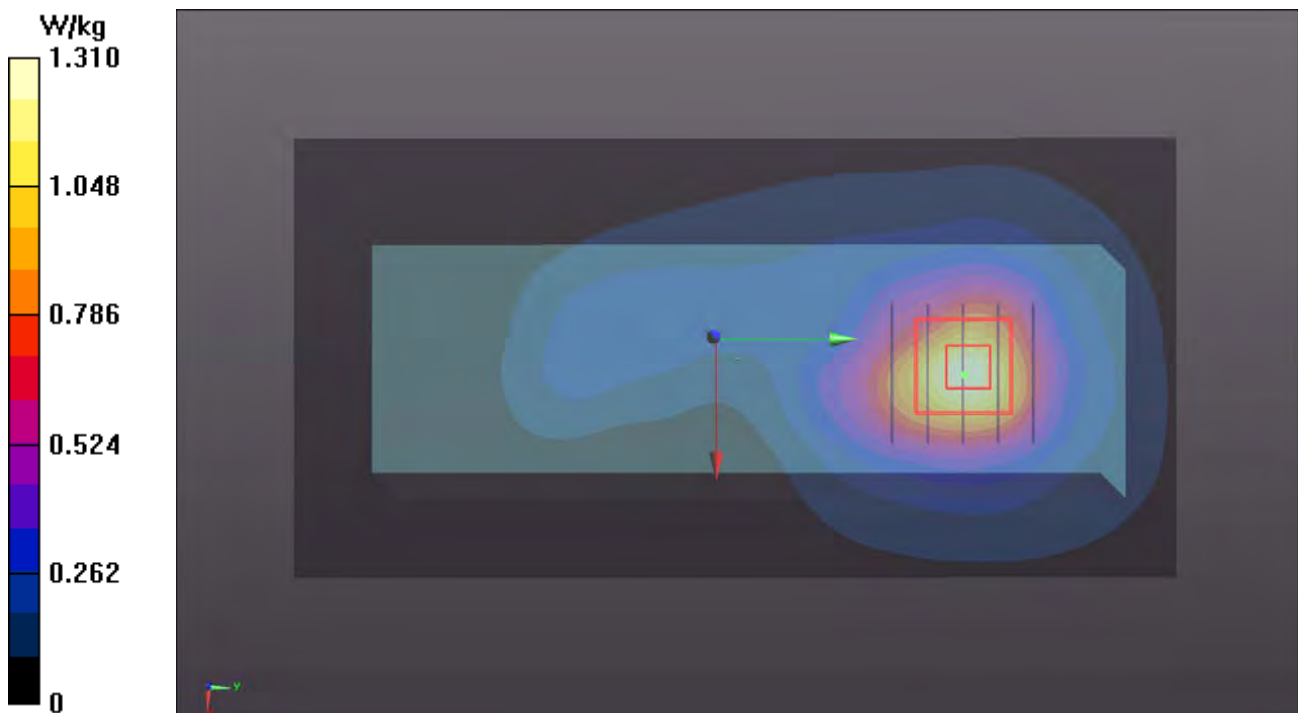

P10 LTE 26_QPSK15M_Left Side_0cm_Ch26865_1RB_OS0

DUT: 181025C05

Communication System: LTE; Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: B07T10N1_1114 Medium parameters used: $f = 831.5 \text{ MHz}$; $\sigma = 1.011 \text{ S/m}$; $\epsilon_r = 57.063$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 23.7 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(9.74, 9.74, 9.74); Calibrated: 2018/07/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2018/08/27
- Phantom: ELI Phantom_1204; Type: QDOVA;
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

- Area Scan (71x141x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.449 W/kg


- Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 20.38 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.673 W/kg

SAR(1 g) = 0.356 W/kg; SAR(10 g) = 0.218 W/kg

Maximum value of SAR (measured) = 0.535 W/kg

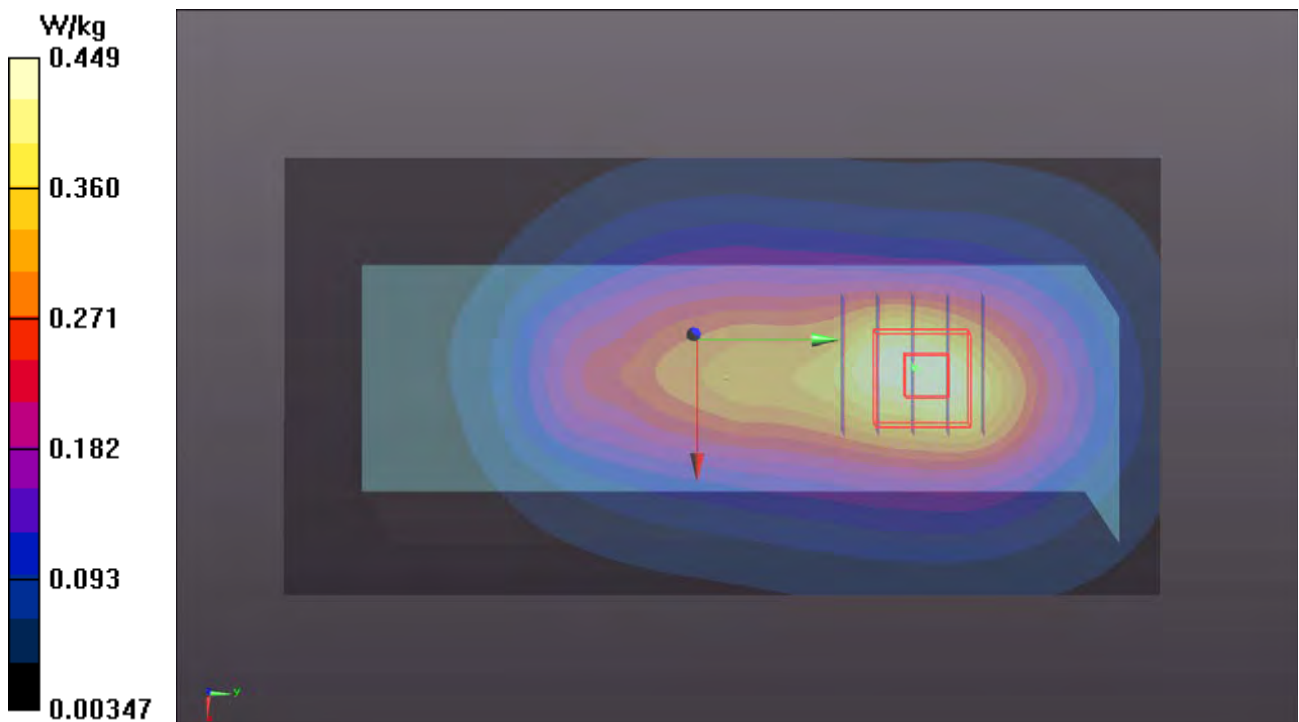

P11 LTE 41_QPSK20M_Top Side_0cm_Ch41490_1RB_OS0

DUT: 181025C05

Communication System: LTE TDD CF0; Frequency: 2680 MHz; Duty Cycle: 1:1.58

Medium: B19T27N1_1115 Medium parameters used: $f = 2680$ MHz; $\sigma = 2.286$ S/m; $\epsilon_r = 50.941$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.8 °C ; Liquid Temperature : 23.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(7.48, 7.48, 7.48); Calibrated: 2018/07/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2018/08/27
- Phantom: ELI Phantom_1204; Type: QDOVA;
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

- **Area Scan (91x241x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.456 W/kg


- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.92 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 1.19 W/kg

SAR(1 g) = 0.471 W/kg; SAR(10 g) = 0.180 W/kg

Maximum value of SAR (measured) = 0.821 W/kg

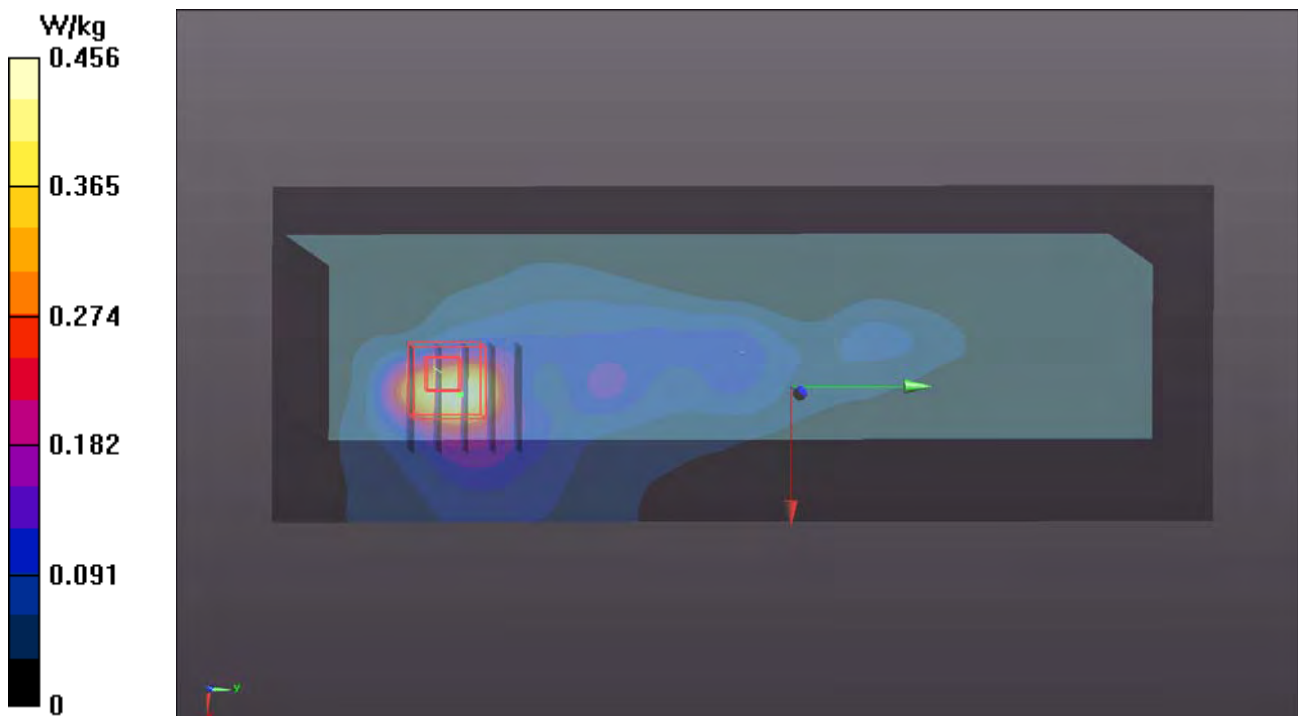

P12 WLAN2.4G_802.11b_Right Side_0cm_Ch6_Ant0

DUT: 181025C05

Communication System: WLAN_2.4G; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: B19T27N1_1115 Medium parameters used: $f = 2437$ MHz; $\sigma = 2$ S/m; $\epsilon_r = 51.595$; $\rho =$

1000 kg/m³

Ambient Temperature : 23.8 °C ; Liquid Temperature : 23.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(7.61, 7.61, 7.61); Calibrated: 2018/07/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2018/08/27
- Phantom: ELI Phantom_1204; Type: QDOVA;
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

- **Area Scan (91x171x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 4.38 W/kg


- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 36.54 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 6.39 W/kg

SAR(1 g) = 3.1 W/kg; SAR(10 g) = 1.44 W/kg

Maximum value of SAR (measured) = 5.09 W/kg

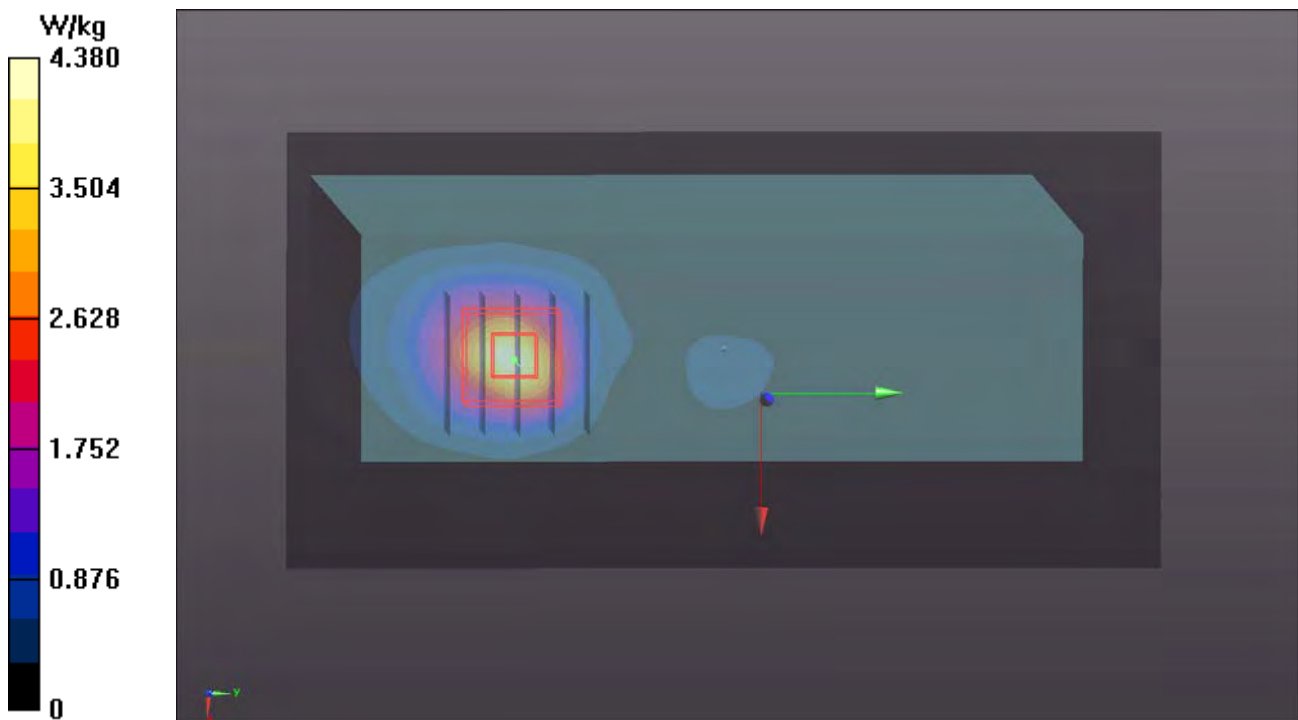

P13 WLAN5.3G_802.11n HT40_Right Side_0cm_Ch54_Ant0

DUT: 181025C05

Communication System: WLAN_5G; Frequency: 5270 MHz; Duty Cycle: 1:1.08

Medium: B34T60N1_1112 Medium parameters used: $f = 5270$ MHz; $\sigma = 5.379$ S/m; $\epsilon_r = 48.786$; $\rho = 1000$ kg/m³


Ambient Temperature : 23.6 °C ; Liquid Temperature : 23.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(4.85, 4.85, 4.85); Calibrated: 2018/07/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2018/08/27
- Phantom: ELI Phantom_1204; Type: QDOVA;
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

- **Area Scan (101x201x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 4.51 W/kg

- **Zoom Scan (6x6x12)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm
Reference Value = 32.92 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 7.73 W/kg
SAR(1 g) = 2.14 W/kg; SAR(10 g) = 0.796 W/kg
Maximum value of SAR (measured) = 4.80 W/kg

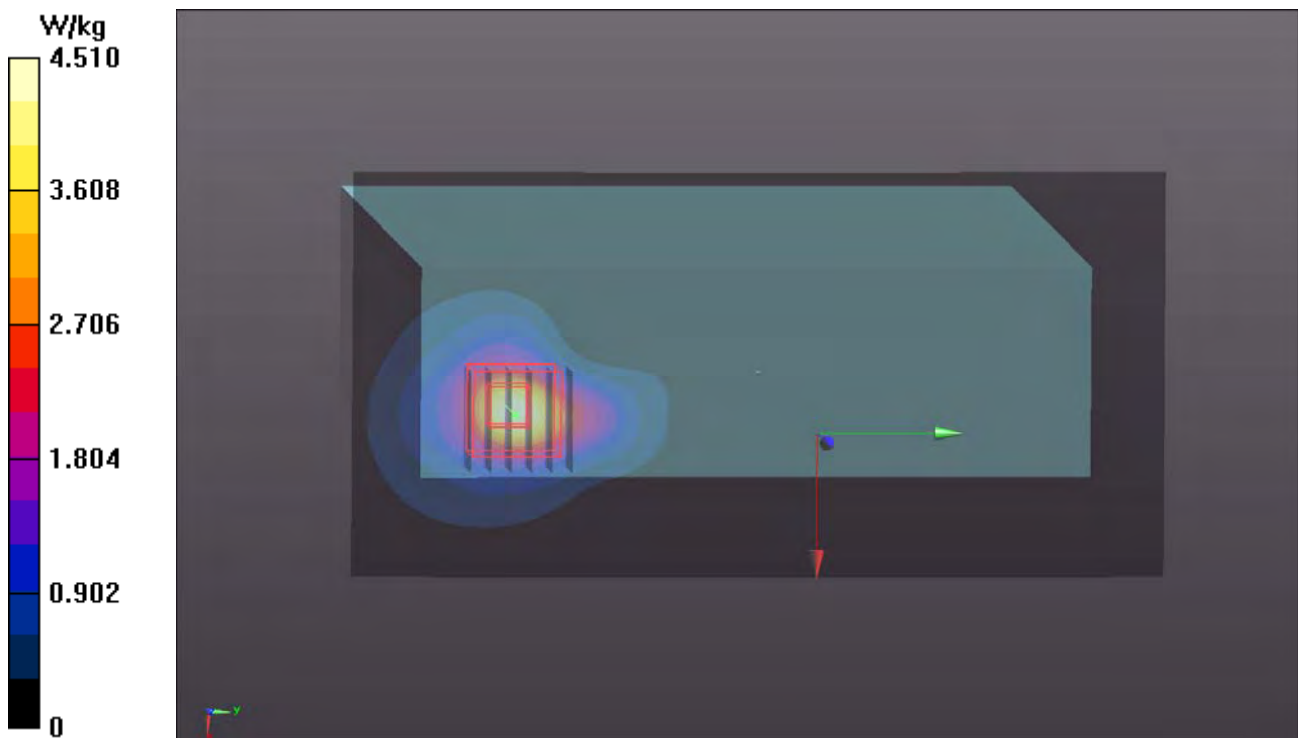

P14 WLAN5.6G_802.11n HT40_Bottom Side_0cm_Ch110_Ant0+1

DUT: 181025C05

Communication System: WLAN_5G; Frequency: 5550 MHz; Duty Cycle: 1:1.09

Medium: B34T60N1_1112 Medium parameters used: $f = 5550$ MHz; $\sigma = 5.654$ S/m; $\epsilon_r = 48.572$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 23.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(4.32, 4.32, 4.32); Calibrated: 2018/07/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2018/08/27
- Phantom: ELI Phantom_1204; Type: QDOVA;
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

- **Area Scan (101x281x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 4.75 W/kg


- **Zoom Scan (6x6x12)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 27.80 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 11.2 W/kg

SAR(1 g) = 2.74 W/kg; SAR(10 g) = 1.03 W/kg

Maximum value of SAR (measured) = 6.52 W/kg

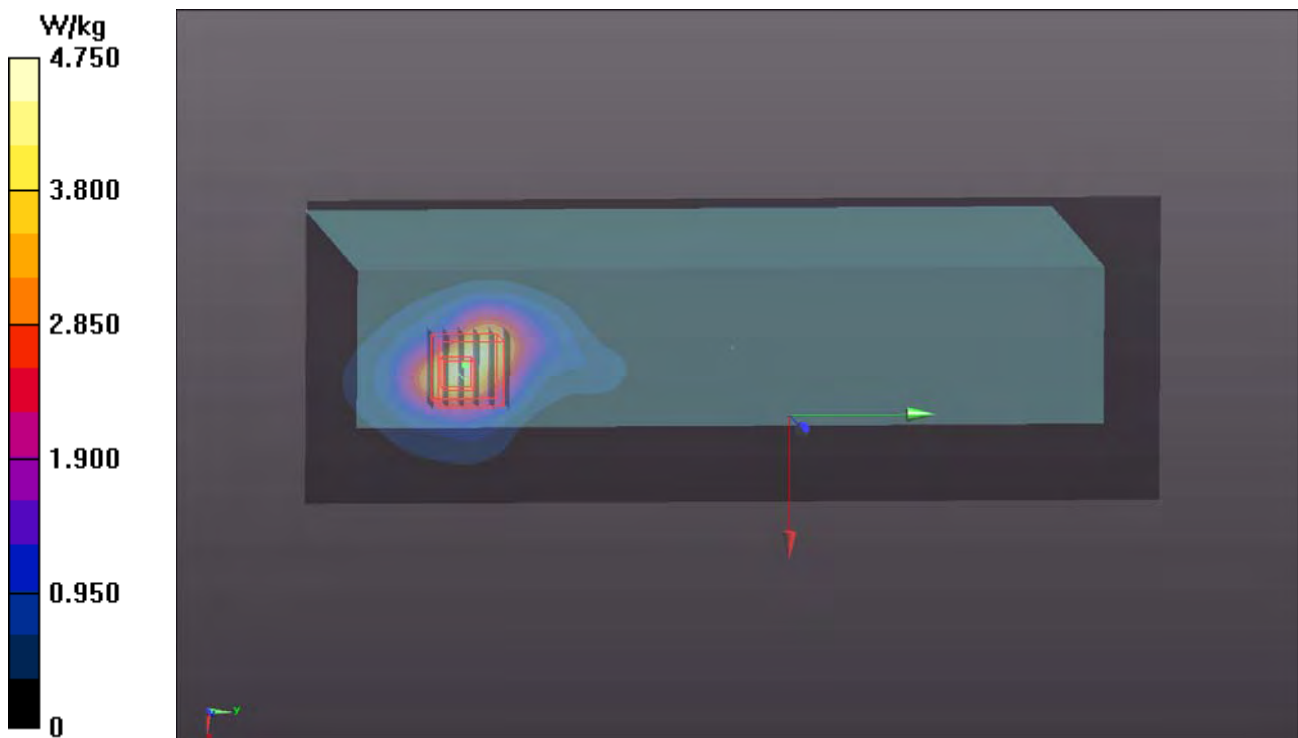

P15 WLAN5.8G_802.11n HT40_Bottom Side_0cm_Ch159_Ant0+1

DUT: 181025C05

Communication System: WLAN_5G; Frequency: 5795 MHz; Duty Cycle: 1:1.09

Medium: B34T60N1_1113 Medium parameters used: $f = 5795$ MHz; $\sigma = 6.079$ S/m; $\epsilon_r = 46.047$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.8 °C ; Liquid Temperature : 23.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(4.6, 4.6, 4.6); Calibrated: 2018/07/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2018/08/27
- Phantom: ELI Phantom_1204; Type: QDOVA;
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

- **Area Scan (101x281x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 5.59 W/kg


- **Zoom Scan (6x6x12)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 32.26 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 10.7 W/kg

SAR(1 g) = 2.49 W/kg; SAR(10 g) = 0.913 W/kg

Maximum value of SAR (measured) = 5.81 W/kg

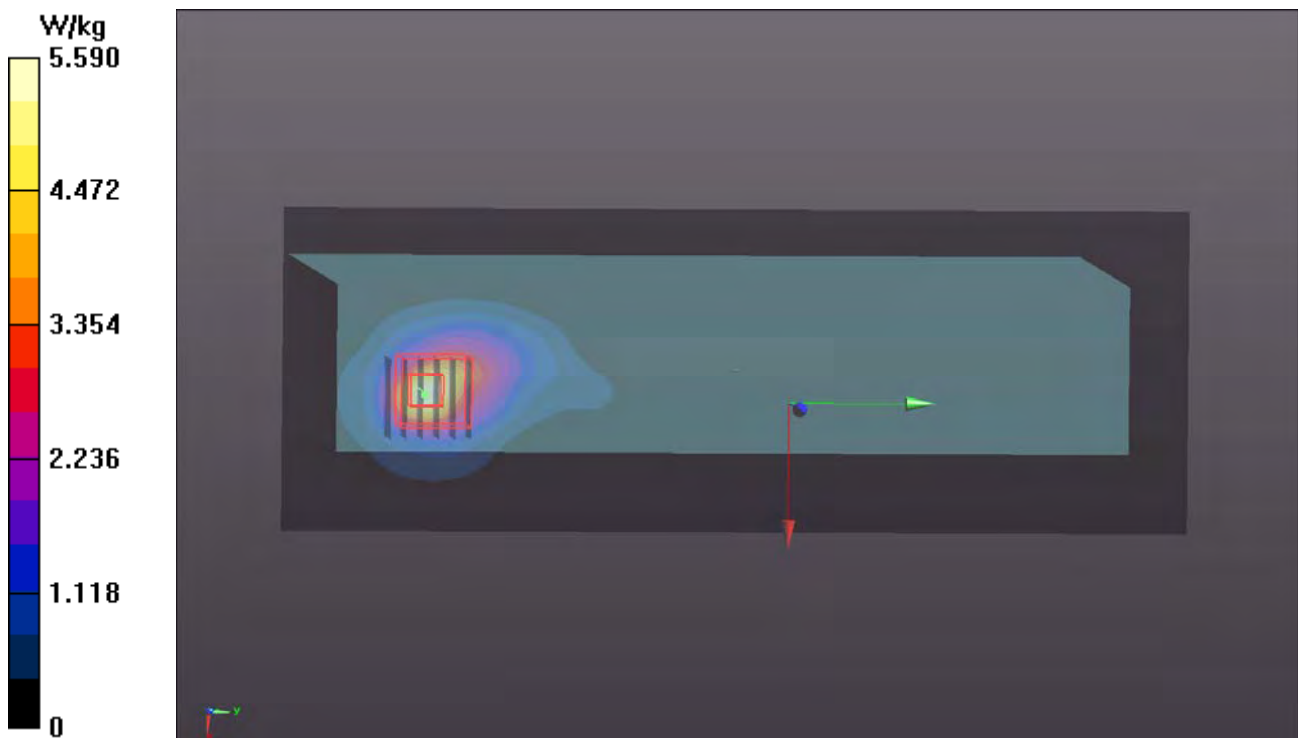

P16 BT_BE-EDR_Right Side_0cm_Ch78_Ant0

DUT: 181025C05

Communication System: BT; Frequency: 2480 MHz; Duty Cycle: 1:1.3

Medium: B19T27N1_1115 Medium parameters used: $f = 2480$ MHz; $\sigma = 2.047$ S/m; $\epsilon_r = 51.499$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C ; Liquid Temperature : 23.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(7.61, 7.61, 7.61); Calibrated: 2018/07/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2018/08/27
- Phantom: ELI Phantom_1204; Type: QDOVA;
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

- **Area Scan (91x171x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.124 W/kg


- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.168 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.109 W/kg

SAR(1 g) = 0.053 W/kg; SAR(10 g) = 0.025 W/kg

Maximum value of SAR (measured) = 0.0867 W/kg

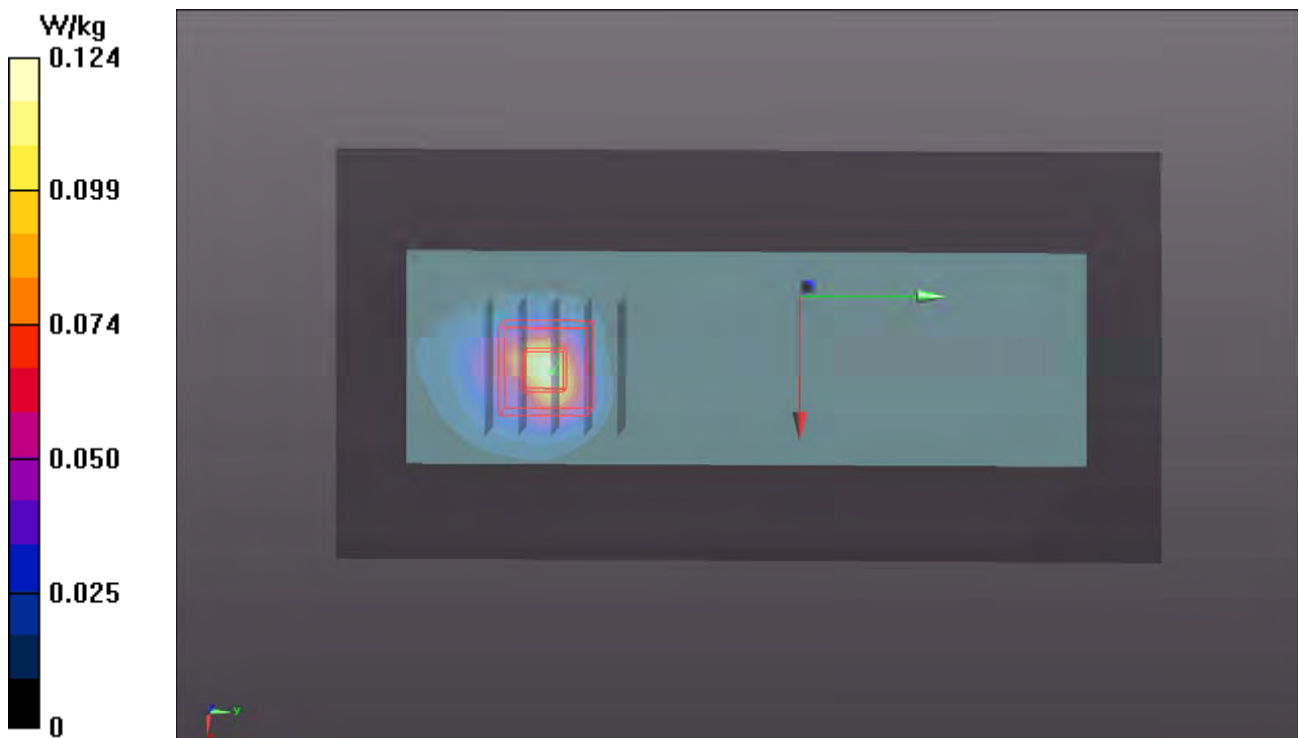

Appendix C. Calibration Certificate for Probe and Dipole

The SPEAG calibration certificates are shown as follows.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **B.V.ADT (Auden)**

Certificate No: **D750V3-1013_Aug18**

CALIBRATION CERTIFICATE

Object **D750V3 - SN:1013**

Calibration procedure(s) **QA CAL-05.v10
Calibration procedure for dipole validation kits above 700 MHz**

Calibration date: **August 23, 2018**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-18 (No. 217-02672/02673)	Apr-19
Power sensor NRP-Z91	SN: 103244	04-Apr-18 (No. 217-02672)	Apr-19
Power sensor NRP-Z91	SN: 103245	04-Apr-18 (No. 217-02673)	Apr-19
Reference 20 dB Attenuator	SN: 5058 (20k)	04-Apr-18 (No. 217-02682)	Apr-19
Type-N mismatch combination	SN: 5047.2 / 06327	04-Apr-18 (No. 217-02683)	Apr-19
Reference Probe EX3DV4	SN: 7349	30-Dec-17 (No. EX3-7349_Dec17)	Dec-18
DAE4	SN: 601	26-Oct-17 (No. DAE4-601_Oct17)	Oct-18

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-16)	In house check: Oct-18
Network Analyzer Agilent E8358A	SN: US41080477	31-Mar-14 (in house check Oct-17)	In house check: Oct-18

Calibrated by: **Michael Weber** Name: Michael Weber Function: Laboratory Technician

Signature:

Approved by: **Katja Pokovic** Name: Katja Pokovic Function: Technical Manager

Signature:

Issued: August 24, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.1
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	750 MHz \pm 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.9	0.89 mho/m
Measured Head TSL parameters	(22.0 \pm 0.2) °C	40.9 \pm 6 %	0.89 mho/m \pm 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.05 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	8.15 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.33 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	5.30 W/kg \pm 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.5	0.96 mho/m
Measured Body TSL parameters	(22.0 \pm 0.2) °C	55.0 \pm 6 %	0.96 mho/m \pm 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.16 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	8.62 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.43 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	5.71 W/kg \pm 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	53.9 Ω + 0.1 j Ω
Return Loss	- 28.6 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	48.6 Ω - 3.1 j Ω
Return Loss	- 29.2 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.035 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	March 22, 2010

DASY5 Validation Report for Head TSL

Date: 22.08.2018

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN:1013

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used: $f = 750$ MHz; $\sigma = 0.89$ S/m; $\epsilon_r = 40.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(10.22, 10.22, 10.22) @ 750 MHz; Calibrated: 30.12.2017
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 4.9 (front); Type: QD 00L P49 AA; Serial: 1001
- DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 59.09 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 3.09 W/kg


SAR(1 g) = 2.05 W/kg; SAR(10 g) = 1.33 W/kg

Maximum value of SAR (measured) = 2.75 W/kg

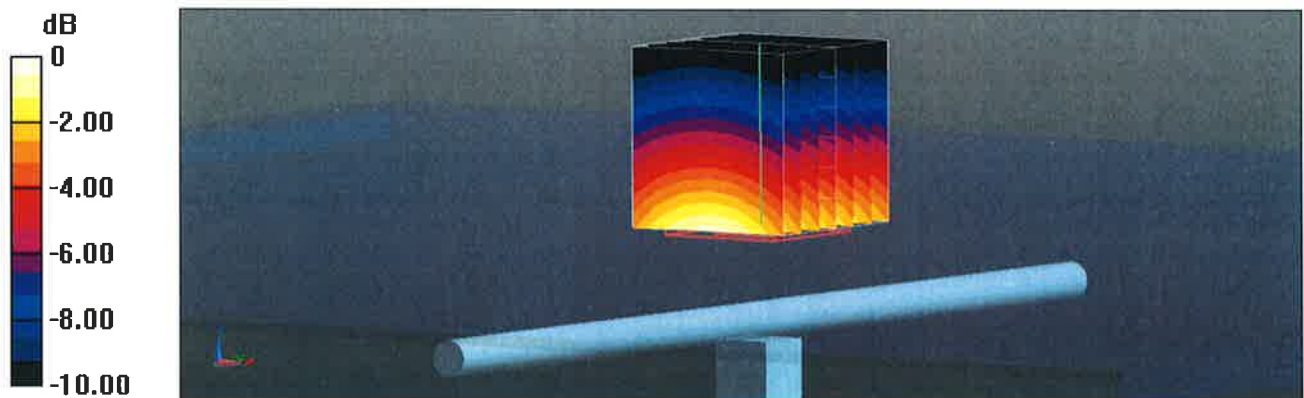

0 dB = 2.75 W/kg = 4.39 dBW/kg

Impedance Measurement Plot for Head TSL

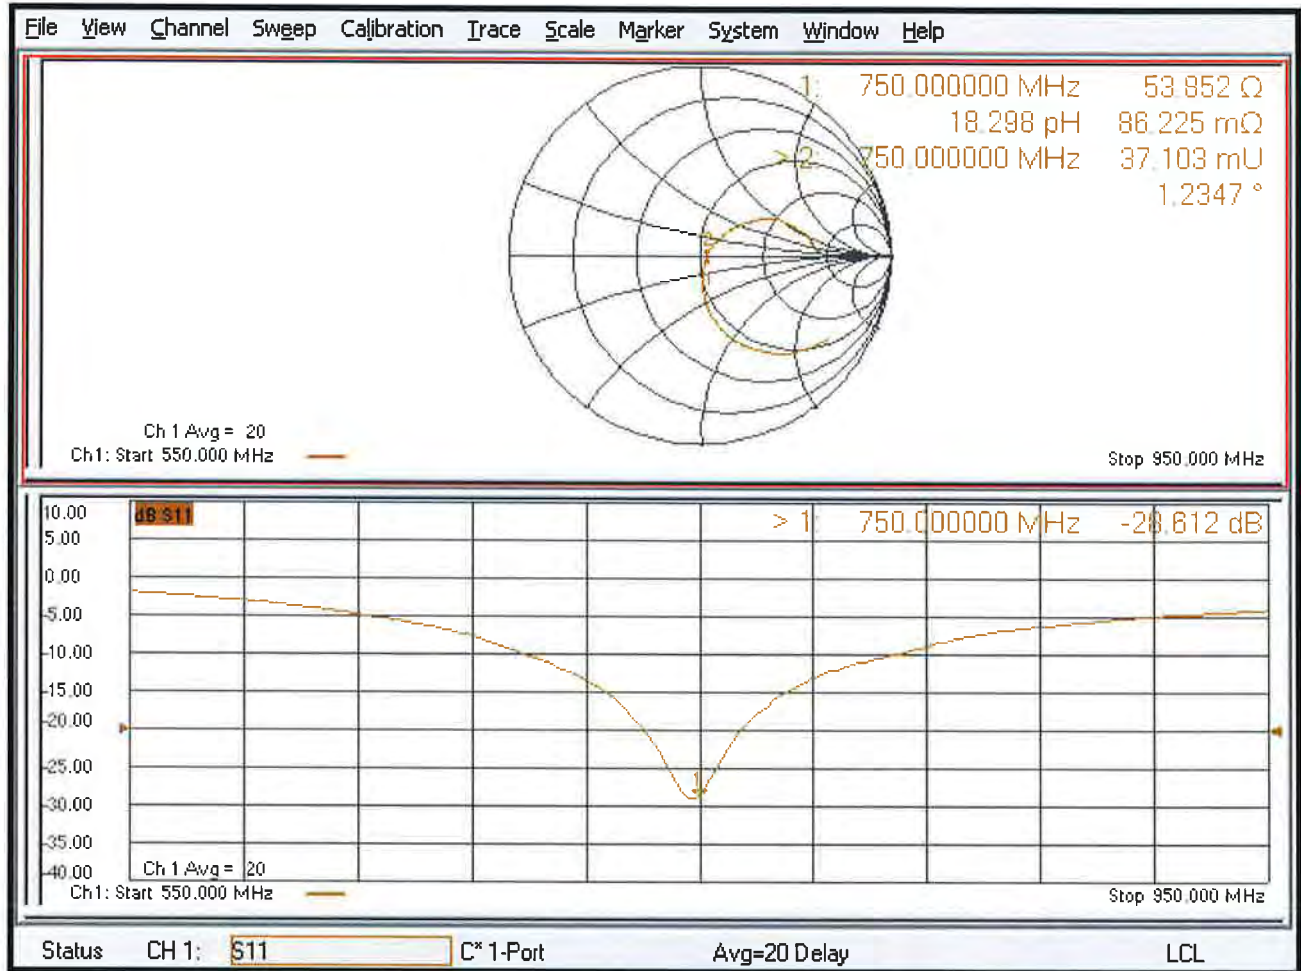

DASY5 Validation Report for Body TSL

Date: 23.08.2018

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN:1013

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used: $f = 750$ MHz; $\sigma = 0.96$ S/m; $\epsilon_r = 55$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(10.19, 10.19, 10.19) @ 750 MHz; Calibrated: 30.12.2017
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 4.9 (Back); Type: QD 00R P49 AA; Serial: 1005
- DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 57.93 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 3.18 W/kg

SAR(1 g) = 2.16 W/kg; SAR(10 g) = 1.43 W/kg

Maximum value of SAR (measured) = 2.85 W/kg

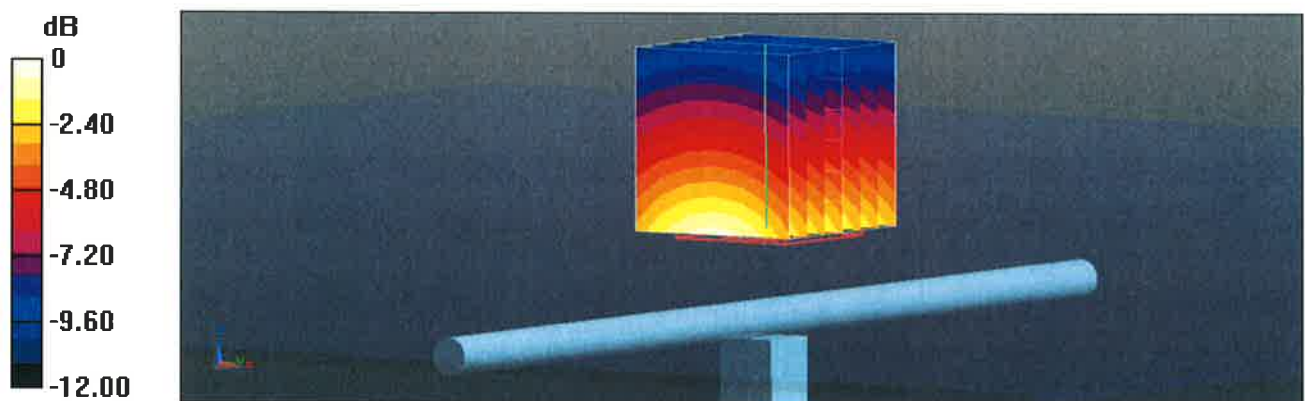

Impedance Measurement Plot for Body TSL

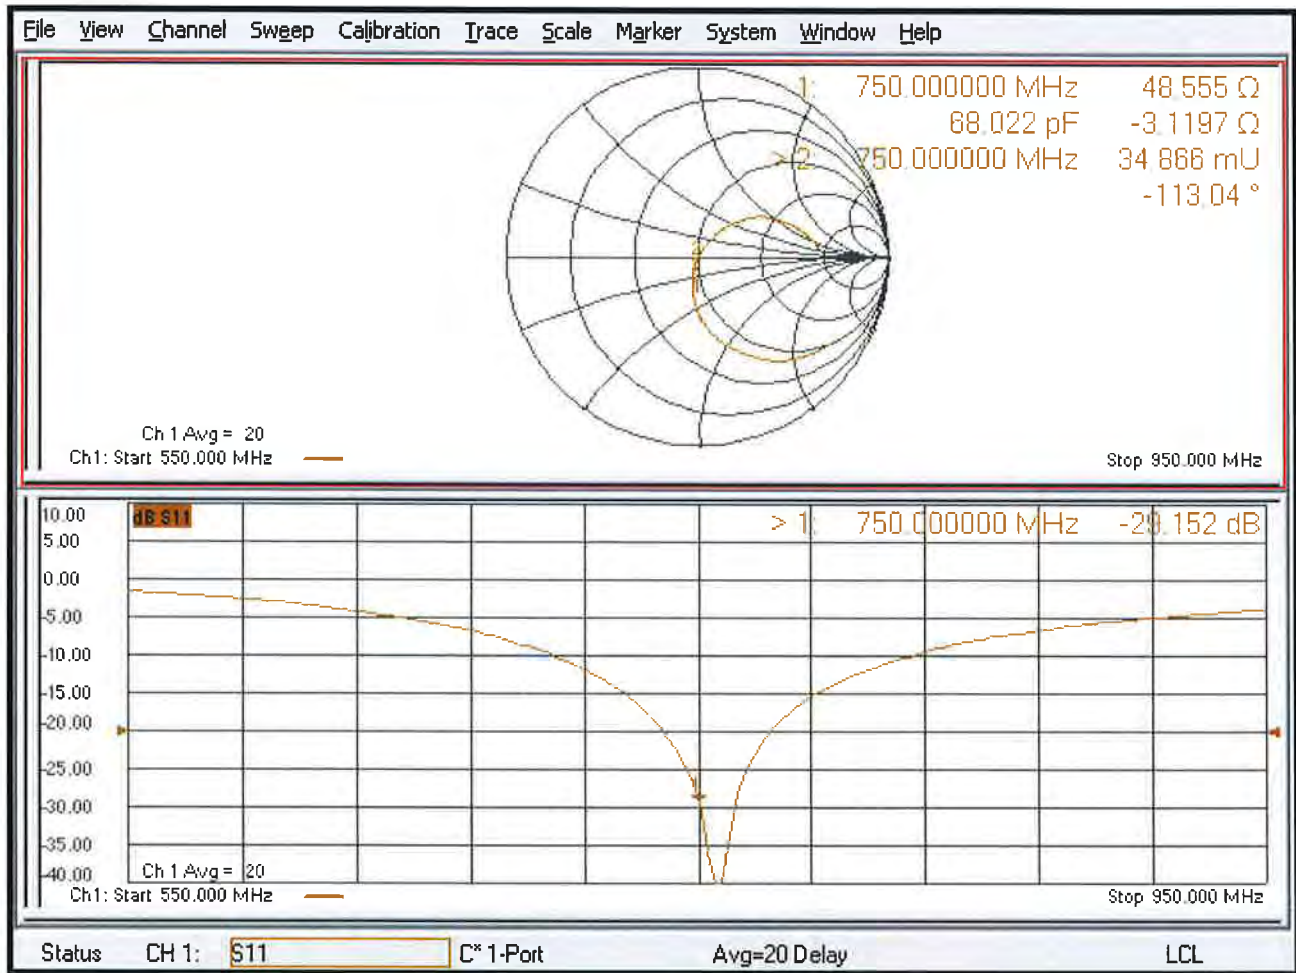



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **B.V.ADT (Auden)**

Certificate No: **D835V2-4d121_Aug18**

CALIBRATION CERTIFICATE

Object **D835V2 - SN:4d121**

Calibration procedure(s) **QA CAL-05.v10
Calibration procedure for dipole validation kits above 700 MHz**

Calibration date: **August 23, 2018**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-18 (No. 217-02672/02673)	Apr-19
Power sensor NRP-Z91	SN: 103244	04-Apr-18 (No. 217-02672)	Apr-19
Power sensor NRP-Z91	SN: 103245	04-Apr-18 (No. 217-02673)	Apr-19
Reference 20 dB Attenuator	SN: 5058 (20k)	04-Apr-18 (No. 217-02682)	Apr-19
Type-N mismatch combination	SN: 5047.2 / 06327	04-Apr-18 (No. 217-02683)	Apr-19
Reference Probe EX3DV4	SN: 7349	30-Dec-17 (No. EX3-7349_Dec17)	Dec-18
DAE4	SN: 601	26-Oct-17 (No. DAE4-601_Oct17)	Oct-18

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-16)	In house check: Oct-18
Network Analyzer Agilent E8358A	SN: US41080477	31-Mar-14 (in house check Oct-17)	In house check: Oct-18

Calibrated by: **Michael Weber** Name: Michael Weber Function: Laboratory Technician

Signature:

Approved by: **Katja Pokovic** Name: Katja Pokovic Function: Technical Manager

Signature:

Issued: August 24, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.1
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	835 MHz \pm 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.5	0.90 mho/m
Measured Head TSL parameters	(22.0 \pm 0.2) °C	40.7 \pm 6 %	0.92 mho/m \pm 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.41 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	9.44 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.55 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	6.10 W/kg \pm 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.2	0.97 mho/m
Measured Body TSL parameters	(22.0 \pm 0.2) °C	54.9 \pm 6 %	0.99 mho/m \pm 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.45 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	9.64 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.60 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	6.32 W/kg \pm 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	51.3 Ω - 2.3 j Ω
Return Loss	- 31.8 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	47.2 Ω - 5.4 j Ω
Return Loss	- 24.1 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.395 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	June 29, 2010

DASY5 Validation Report for Head TSL

Date: 22.08.2018

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d121

Communication System: UID 0 - CW; Frequency: 835 MHz

Medium parameters used: $f = 835$ MHz; $\sigma = 0.92$ S/m; $\epsilon_r = 40.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(9.9, 9.9, 9.9) @ 835 MHz; Calibrated: 30.12.2017
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 4.9 (front); Type: QD 00L P49 AA; Serial: 1001
- DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 63.11 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 3.70 W/kg


SAR(1 g) = 2.41 W/kg; SAR(10 g) = 1.55 W/kg

Maximum value of SAR (measured) = 3.26 W/kg

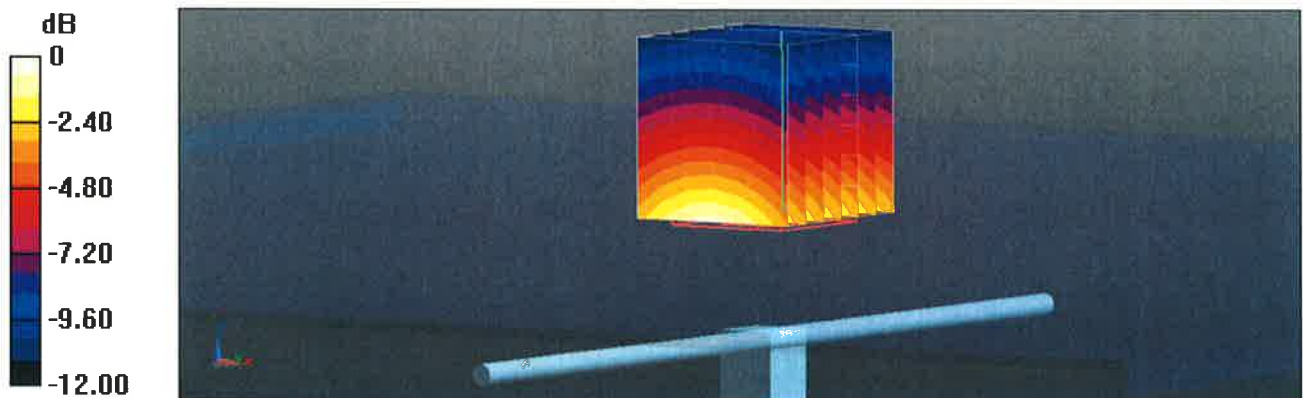

0 dB = 3.26 W/kg = 5.13 dBW/kg

Impedance Measurement Plot for Head TSL

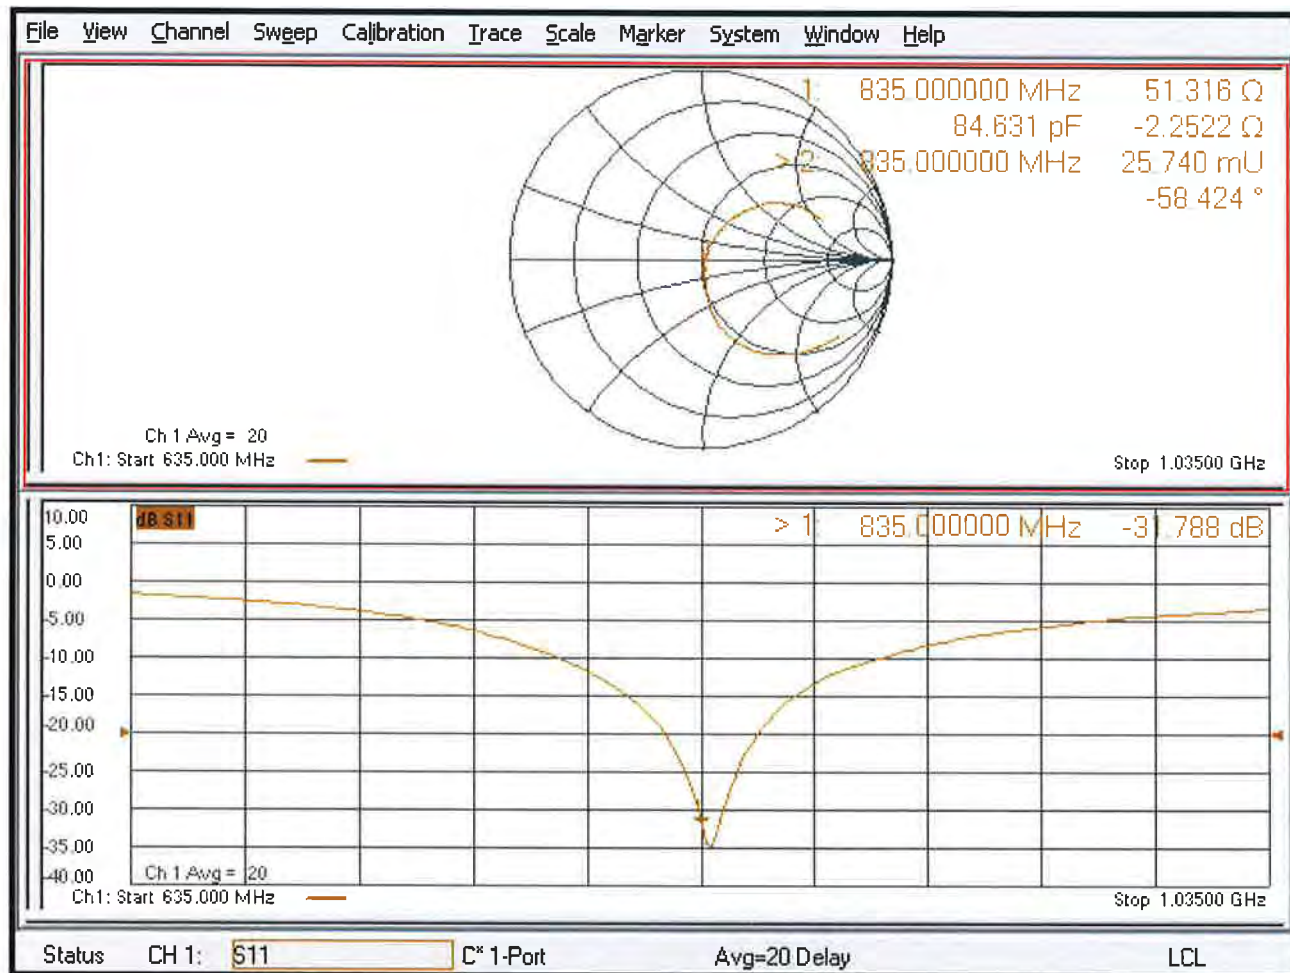

DASY5 Validation Report for Body TSL

Date: 23.08.2018

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d121

Communication System: UID 0 - CW; Frequency: 835 MHz

Medium parameters used: $f = 835$ MHz; $\sigma = 0.99$ S/m; $\epsilon_r = 54.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(10.05, 10.05, 10.05) @ 835 MHz; Calibrated: 30.12.2017
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 4.9 (Back); Type: QD 00R P49 AA; Serial: 1005
- DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 61.20 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 3.64 W/kg

SAR(1 g) = 2.45 W/kg; SAR(10 g) = 1.6 W/kg

Maximum value of SAR (measured) = 3.26 W/kg

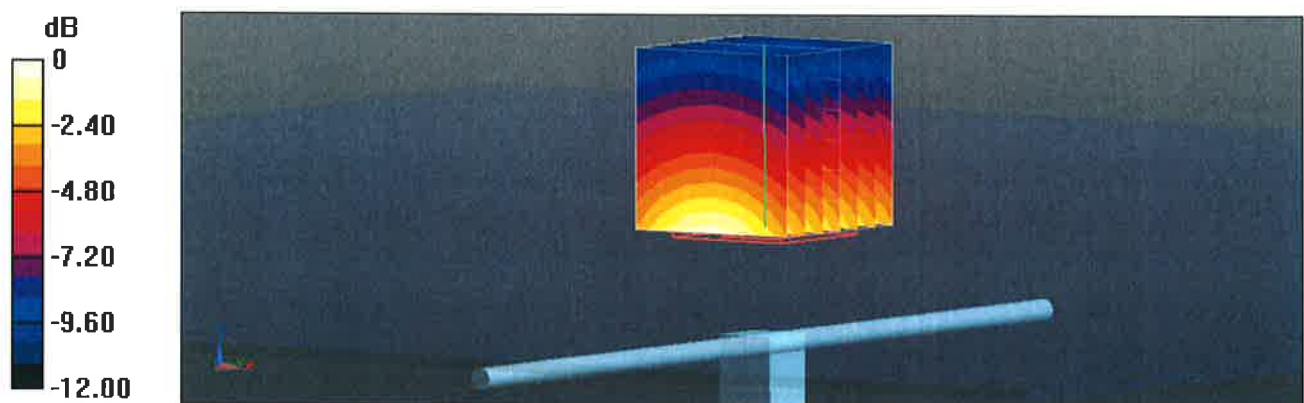

Impedance Measurement Plot for Body TSL

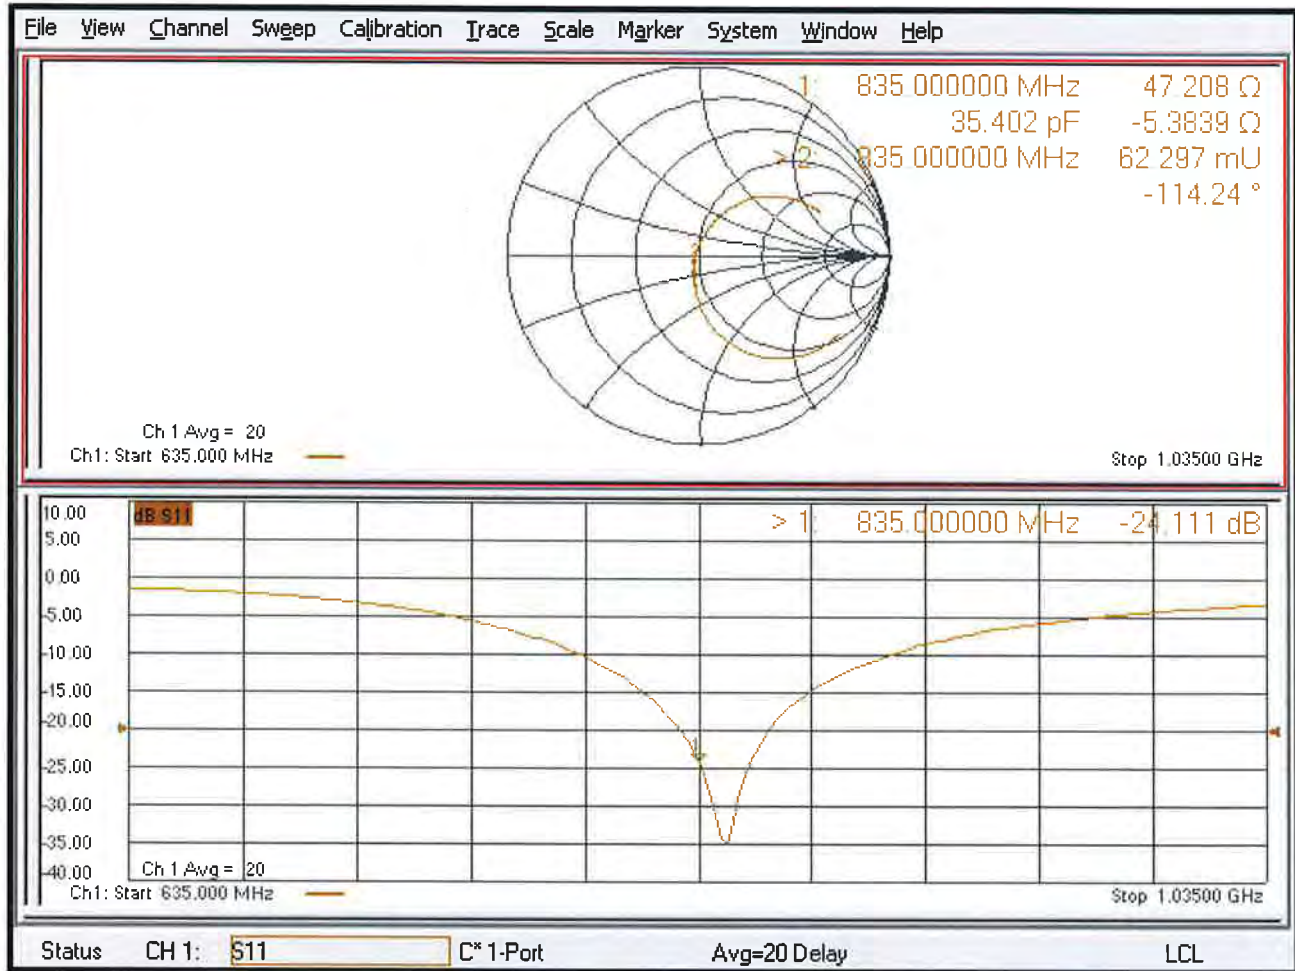



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **B.V. ADT (Auden)**

Certificate No: **D1750V2-1055_Aug18**

CALIBRATION CERTIFICATE

Object **D1750V2 - SN:1055**

Calibration procedure(s) **QA CAL-05.v10
Calibration procedure for dipole validation kits above 700 MHz**

Calibration date: **August 27, 2018**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-18 (No. 217-02672/02673)	Apr-19
Power sensor NRP-Z91	SN: 103244	04-Apr-18 (No. 217-02672)	Apr-19
Power sensor NRP-Z91	SN: 103245	04-Apr-18 (No. 217-02673)	Apr-19
Reference 20 dB Attenuator	SN: 5058 (20k)	04-Apr-18 (No. 217-02682)	Apr-19
Type-N mismatch combination	SN: 5047.2 / 06327	04-Apr-18 (No. 217-02683)	Apr-19
Reference Probe EX3DV4	SN: 7349	30-Dec-17 (No. EX3-7349_Dec17)	Dec-18
DAE4	SN: 601	26-Oct-17 (No. DAE4-601_Oct17)	Oct-18

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-16)	In house check: Oct-18
Network Analyzer Agilent E8358A	SN: US41080477	31-Mar-14 (in house check Oct-17)	In house check: Oct-18

Calibrated by: **Manu Seitz** **Manu Seitz** **Manu Seitz**
Name Function Signature
Laboratory Technician

Approved by: **Katja Pokovic** **Katja Pokovic**
Name Signature
Technical Manager

Issued: August 28, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.1
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1750 MHz \pm 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.1	1.37 mho/m
Measured Head TSL parameters	(22.0 \pm 0.2) °C	38.9 \pm 6 %	1.34 mho/m \pm 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	9.15 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	36.9 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	4.81 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	19.3 W/kg \pm 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53.4	1.49 mho/m
Measured Body TSL parameters	(22.0 \pm 0.2) °C	53.4 \pm 6 %	1.47 mho/m \pm 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	9.15 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	36.9 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	4.89 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	19.7 W/kg \pm 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	52.6 Ω + 2.1 j Ω
Return Loss	- 29.9 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	47.3 Ω + 0.5 j Ω
Return Loss	- 31.1 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.223 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	February 19, 2010

DASY5 Validation Report for Head TSL

Date: 27.08.2018

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: D1750V2 - SN:1055

Communication System: UID 0 - CW; Frequency: 1750 MHz

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.34$ S/m; $\epsilon_r = 38.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.5, 8.5, 8.5) @ 1750 MHz; Calibrated: 30.12.2017
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 107.6 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 16.9 W/kg

SAR(1 g) = 9.15 W/kg; SAR(10 g) = 4.81 W/kg

Maximum value of SAR (measured) = 14.2 W/kg

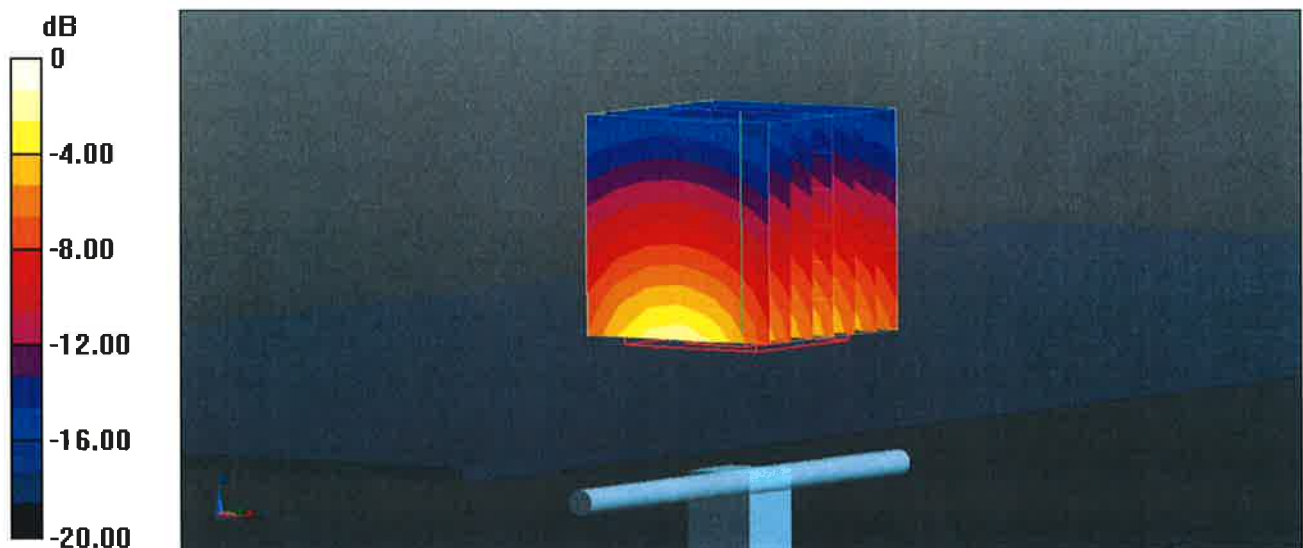

Impedance Measurement Plot for Head TSL

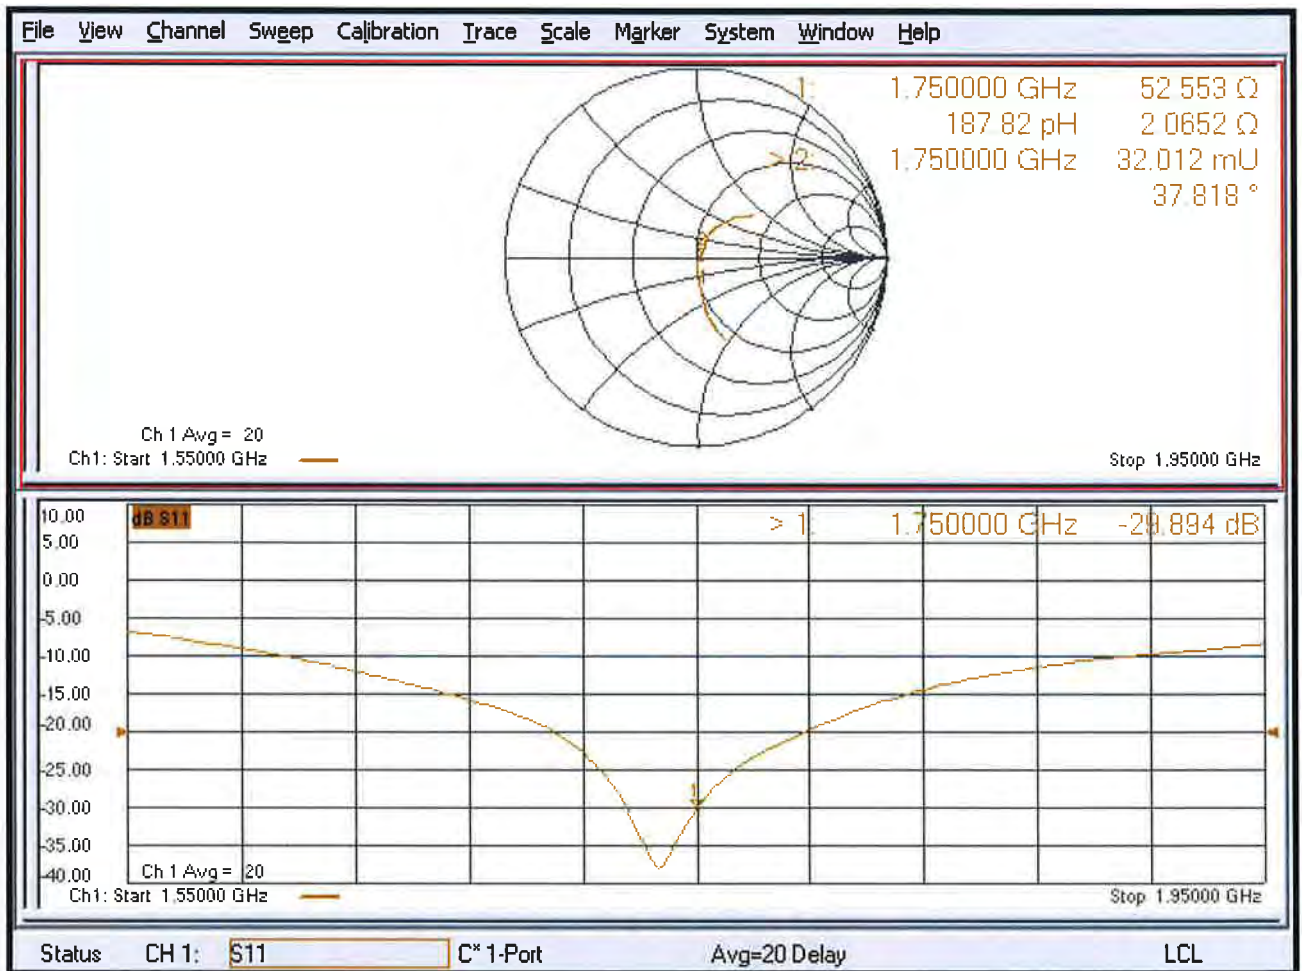

DASY5 Validation Report for Body TSL

Date: 27.08.2018

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: D1750V2 - SN:1055

Communication System: UID 0 - CW; Frequency: 1750 MHz

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.47$ S/m; $\epsilon_r = 53.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.35, 8.35, 8.35) @ 1750 MHz; Calibrated: 30.12.2017
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 5.0 (back); Type: QD 000 P50 AA; Serial: 1002
- DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 102.2 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 16.1 W/kg


SAR(1 g) = 9.15 W/kg; SAR(10 g) = 4.89 W/kg

Maximum value of SAR (measured) = 13.9 W/kg

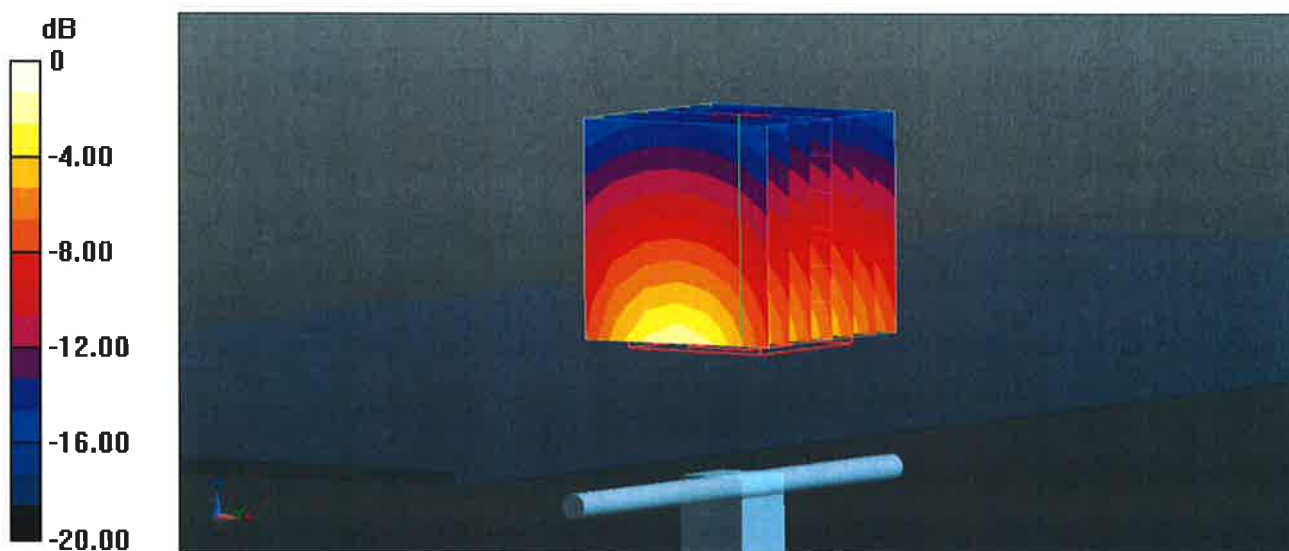

0 dB = 13.9 W/kg = 11.43 dBW/kg

Impedance Measurement Plot for Body TSL

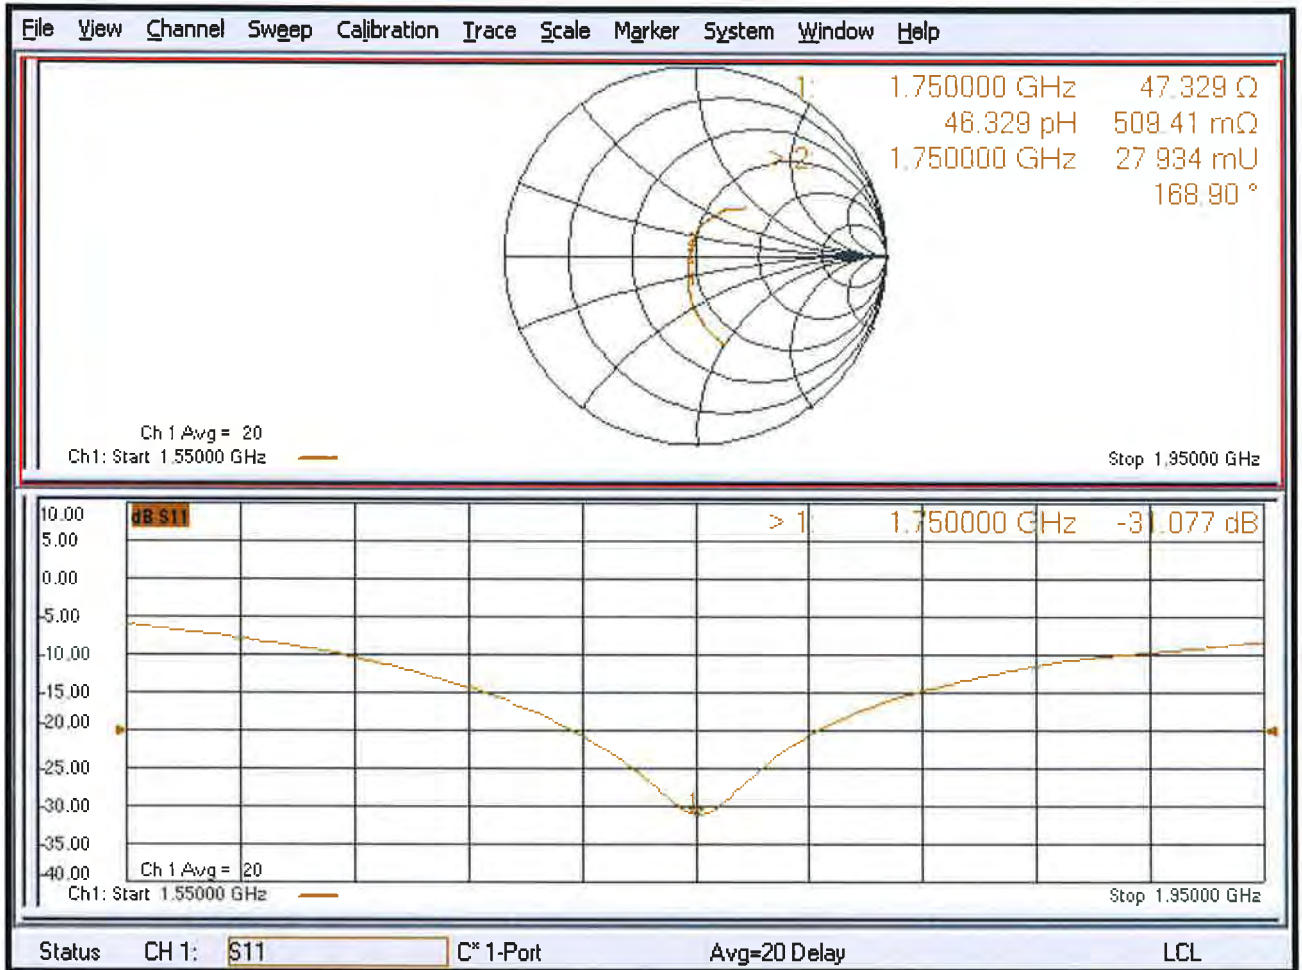



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **B.V. ADT (Auden)**

Certificate No: **D1900V2-5d036_Jan18**

CALIBRATION CERTIFICATE

Object **D1900V2 - SN:5d036**

Calibration procedure(s) **QA CAL-05.v9
Calibration procedure for dipole validation kits above 700 MHz**

Calibration date: **January 18, 2018**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-17 (No. 217-02521/02522)	Apr-18
Power sensor NRP-Z91	SN: 103244	04-Apr-17 (No. 217-02521)	Apr-18
Power sensor NRP-Z91	SN: 103245	04-Apr-17 (No. 217-02522)	Apr-18
Reference 20 dB Attenuator	SN: 5058 (20k)	07-Apr-17 (No. 217-02528)	Apr-18
Type-N mismatch combination	SN: 5047.2 / 06327	07-Apr-17 (No. 217-02529)	Apr-18
Reference Probe EX3DV4	SN: 7349	30-Dec-17 (No. EX3-7349_Dec17)	Dec-18
DAE4	SN: 601	26-Oct-17 (No. DAE4-601_Oct17)	Oct-18

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-16)	In house check: Oct-18
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-17)	In house check: Oct-18

Calibrated by: **Jeton Kastrati** **Function**
Laboratory Technician

Signature

Approved by: **Katja Pokovic** **Technical Manager**

Issued: January 18, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.0
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1900 MHz ± 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.0	1.40 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	40.4 ± 6 %	1.39 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	10.1 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	40.7 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	5.28 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	21.2 W/kg ± 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53.3	1.52 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	54.8 ± 6 %	1.46 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	9.76 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	40.2 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	5.21 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	21.2 W/kg ± 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	51.3 Ω + 5.2 j Ω
Return Loss	- 25.6 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	47.7 Ω + 5.9 j Ω
Return Loss	- 23.8 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.195 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	May 08, 2003

DASY5 Validation Report for Head TSL

Date: 18.01.2018

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d036

Communication System: UID 0 - CW; Frequency: 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.39$ S/m; $\epsilon_r = 40.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.18, 8.18, 8.18); Calibrated: 30.12.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 109.4 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 18.4 W/kg

SAR(1 g) = 10.1 W/kg; SAR(10 g) = 5.28 W/kg

Maximum value of SAR (measured) = 15.2 W/kg

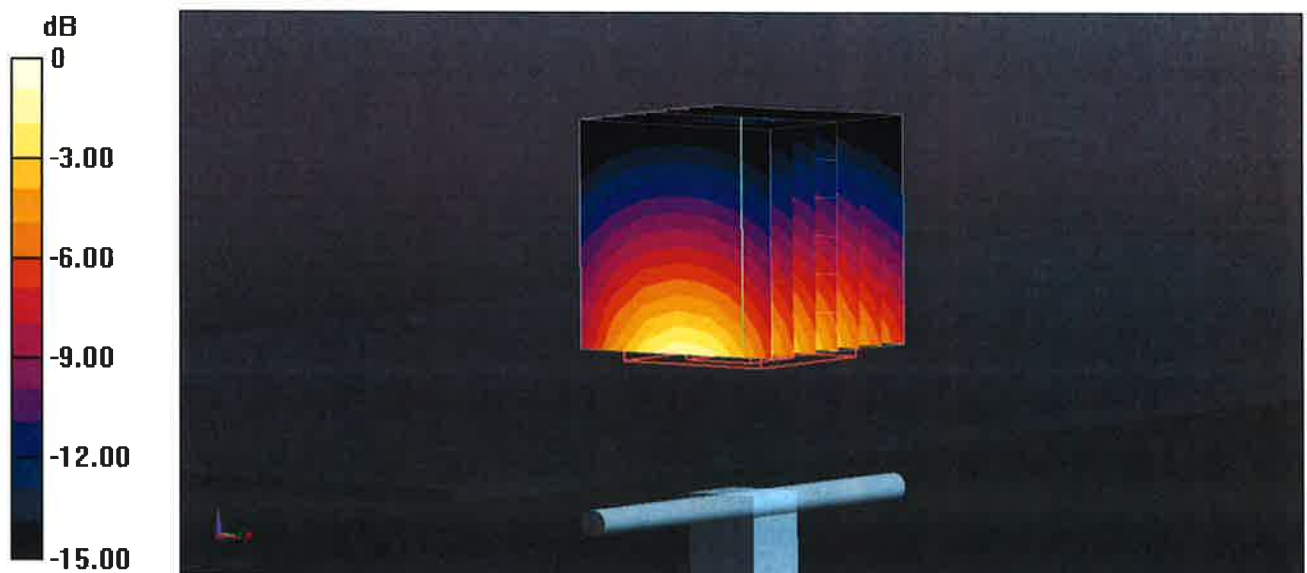

0 dB = 15.2 W/kg = 11.82 dBW/kg

Impedance Measurement Plot for Head TSL


18 Jan 2018 10:22:52
CH1 S11 1 U FS 3: 51.295 Ω 5.1582 Ω 432.08 μH 1 900.000 000 MHz

*
De 1

CA

Avg
16

H1 d

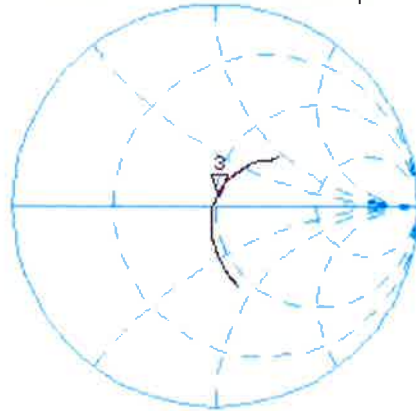


CH2 S11 LOG 5 dB/REF -20 dB 3:-25.605 dB 1 900.000 000 MHz

CA

Avg
16

H1 d

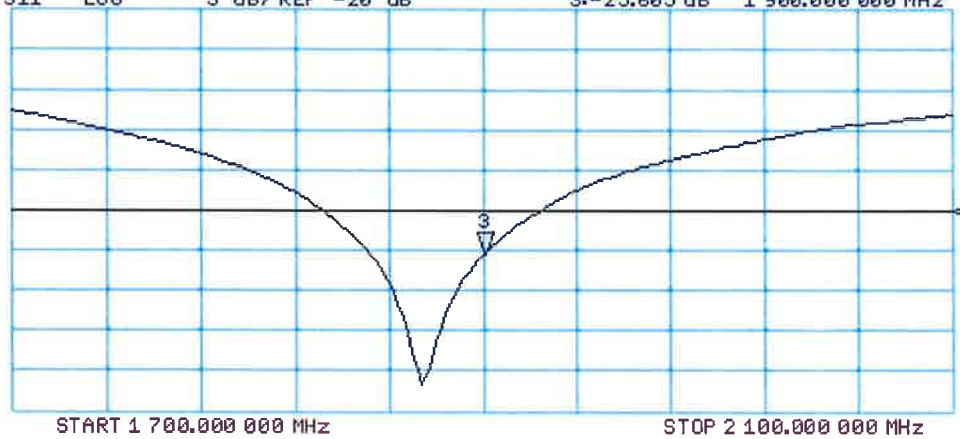

DASY5 Validation Report for Body TSL

Date: 17.01.2018

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d036

Communication System: UID 0 - CW; Frequency: 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.46$ S/m; $\epsilon_r = 54.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.15, 8.15, 8.15); Calibrated: 30.12.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 5.0 (back); Type: QD 000 P50 AA; Serial: 1002
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 103.6 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 17.4 W/kg

SAR(1 g) = 9.76 W/kg; SAR(10 g) = 5.21 W/kg

Maximum value of SAR (measured) = 14.3 W/kg

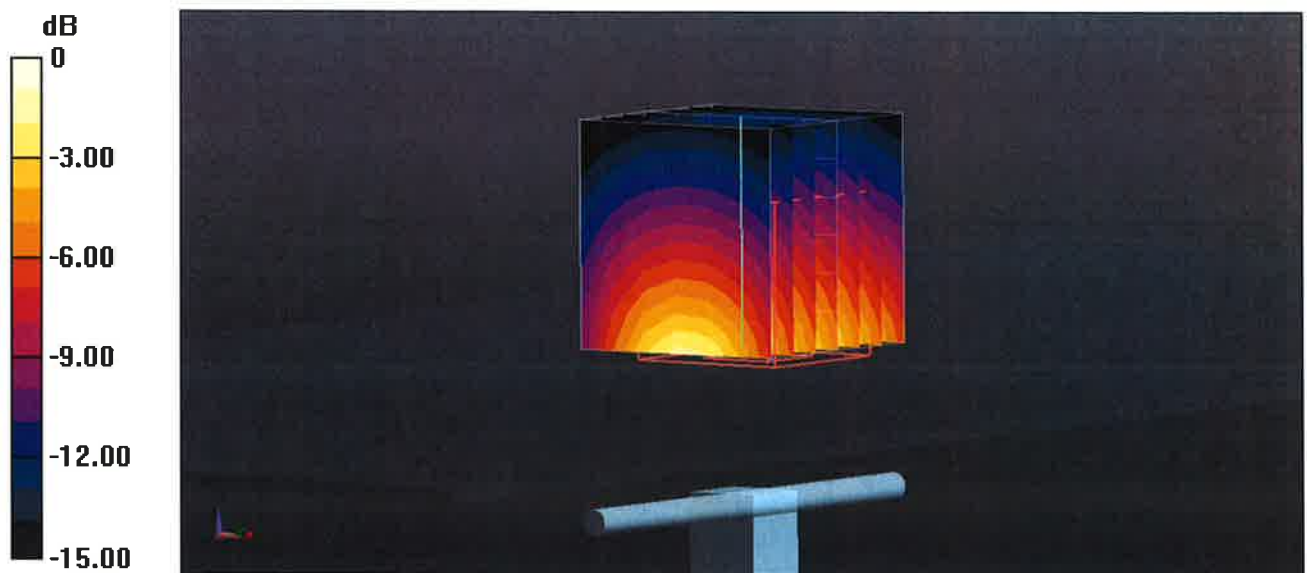

Impedance Measurement Plot for Body TSL


17 Jan 2018 16:26:31
[CH1] S11 1 U FS 1: 47.742 Ω 5.9297 Ω 496.70 pF 1 900.000 000 MHz

*
De 1

CA

Avg
16

H1 d

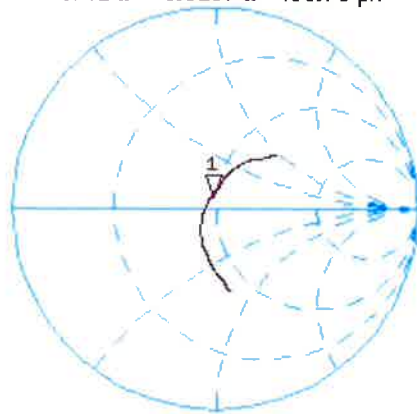

CH2 S11 LOG 5 dB/REF -20 dB 1: -23.765 dB 1 900.000 000 MHz

CA

Avg
16

H1 d





Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **B.V. ADT (Auden)**

Certificate No: **D2450V2-737_Aug18**

CALIBRATION CERTIFICATE

Object **D2450V2 - SN:737**

Calibration procedure(s) **QA CAL-05.v10
Calibration procedure for dipole validation kits above 700 MHz**

Calibration date: **August 24, 2018**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-18 (No. 217-02672/02673)	Apr-19
Power sensor NRP-Z91	SN: 103244	04-Apr-18 (No. 217-02672)	Apr-19
Power sensor NRP-Z91	SN: 103245	04-Apr-18 (No. 217-02673)	Apr-19
Reference 20 dB Attenuator	SN: 5058 (20k)	04-Apr-18 (No. 217-02682)	Apr-19
Type-N mismatch combination	SN: 5047.2 / 06327	04-Apr-18 (No. 217-02683)	Apr-19
Reference Probe EX3DV4	SN: 7349	30-Dec-17 (No. EX3-7349_Dec17)	Dec-18
DAE4	SN: 601	26-Oct-17 (No. DAE4-601_Oct17)	Oct-18
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-16)	In house check: Oct-18
Network Analyzer Agilent E8358A	SN: US41080477	31-Mar-14 (in house check Oct-17)	In house check: Oct-18

Calibrated by: **Manu Seitz** **Manu Seitz** **Manu Seitz**
Name Function Signature
Laboratory Technician

Approved by: **Katja Pokovic** **Katja Pokovic**
Technical Manager

Issued: August 24, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:* SAR measured at the stated antenna input power.
- SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.1
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2450 MHz \pm 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.2	1.80 mho/m
Measured Head TSL parameters	(22.0 \pm 0.2) °C	37.7 \pm 6 %	1.86 mho/m \pm 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	13.2 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	51.5 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	6.13 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	24.2 W/kg \pm 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	52.7	1.95 mho/m
Measured Body TSL parameters	(22.0 \pm 0.2) °C	51.8 \pm 6 %	2.02 mho/m \pm 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	12.9 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	50.5 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	6.01 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	23.8 W/kg \pm 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	55.6 Ω + 4.1 j Ω
Return Loss	- 23.7 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	49.4 Ω + 7.3 j Ω
Return Loss	- 22.7 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.162 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	August 26, 2003

DASY5 Validation Report for Head TSL

Date: 23.08.2018

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:737

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.86$ S/m; $\epsilon_r = 37.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(7.88, 7.88, 7.88) @ 2450 MHz; Calibrated: 30.12.2017
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 115.2 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 26.1 W/kg


SAR(1 g) = 13.2 W/kg; SAR(10 g) = 6.13 W/kg

Maximum value of SAR (measured) = 21.7 W/kg

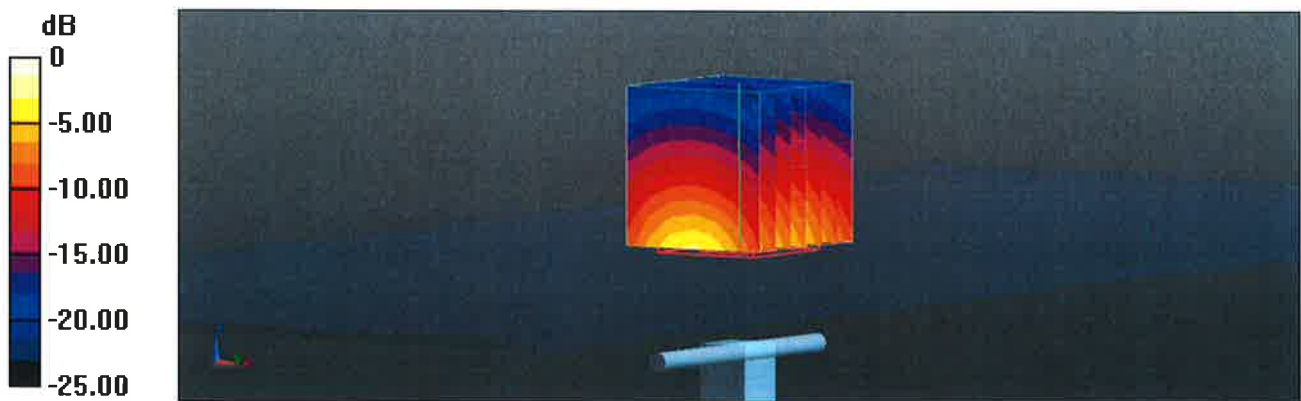

0 dB = 21.7 W/kg = 13.36 dBW/kg

Impedance Measurement Plot for Head TSL

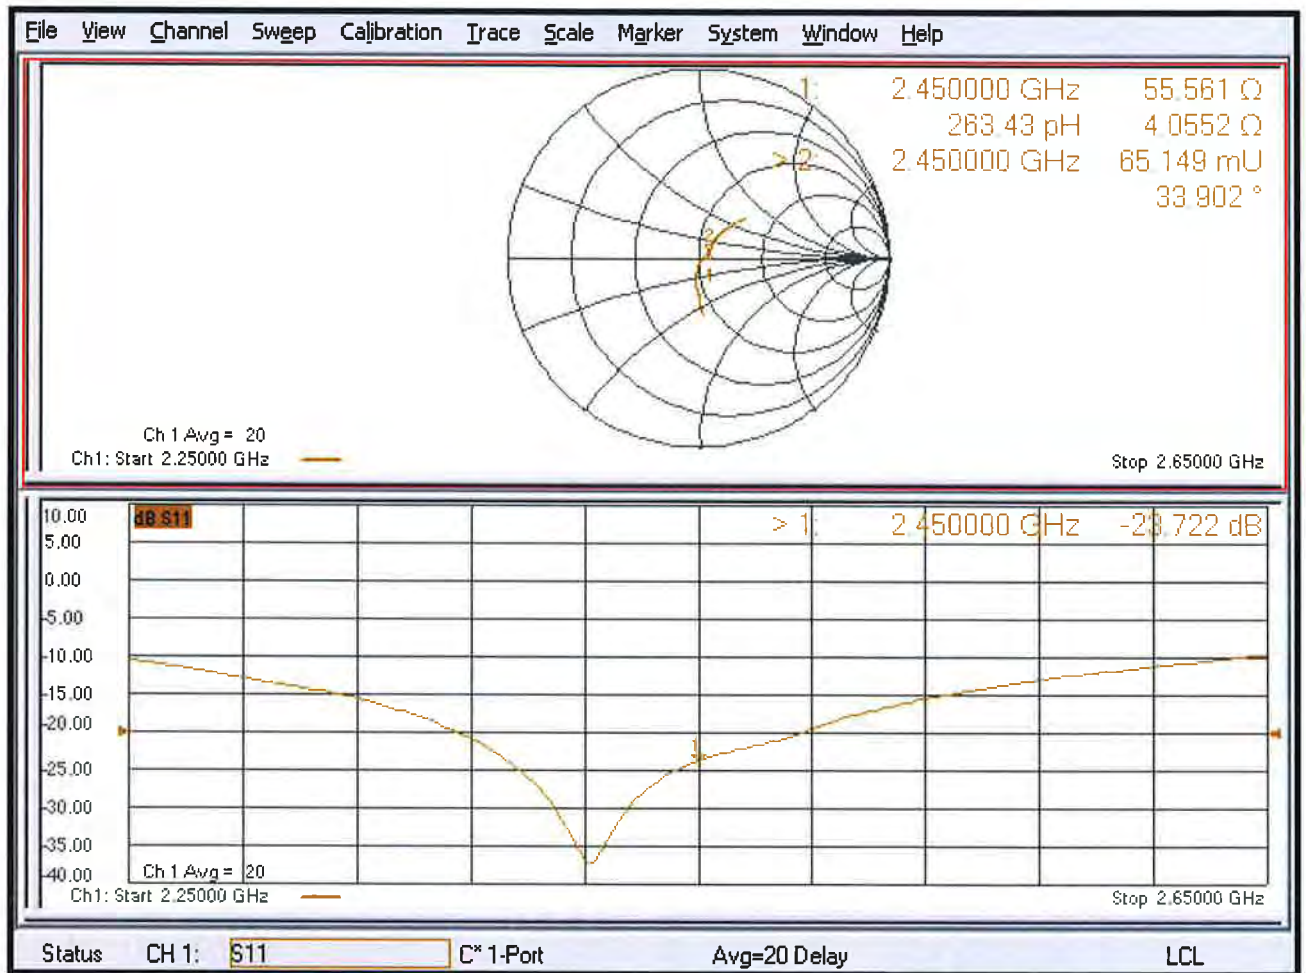

DASY5 Validation Report for Body TSL

Date: 24.08.2018

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:737

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 2.02$ S/m; $\epsilon_r = 51.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.01, 8.01, 8.01) @ 2450 MHz; Calibrated: 30.12.2017
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 5.0 (back); Type: QD 000 P50 AA; Serial: 1002
- DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 107.8 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 25.5 W/kg

SAR(1 g) = 12.9 W/kg; SAR(10 g) = 6.01 W/kg

Maximum value of SAR (measured) = 20.9 W/kg



Impedance Measurement Plot for Body TSL

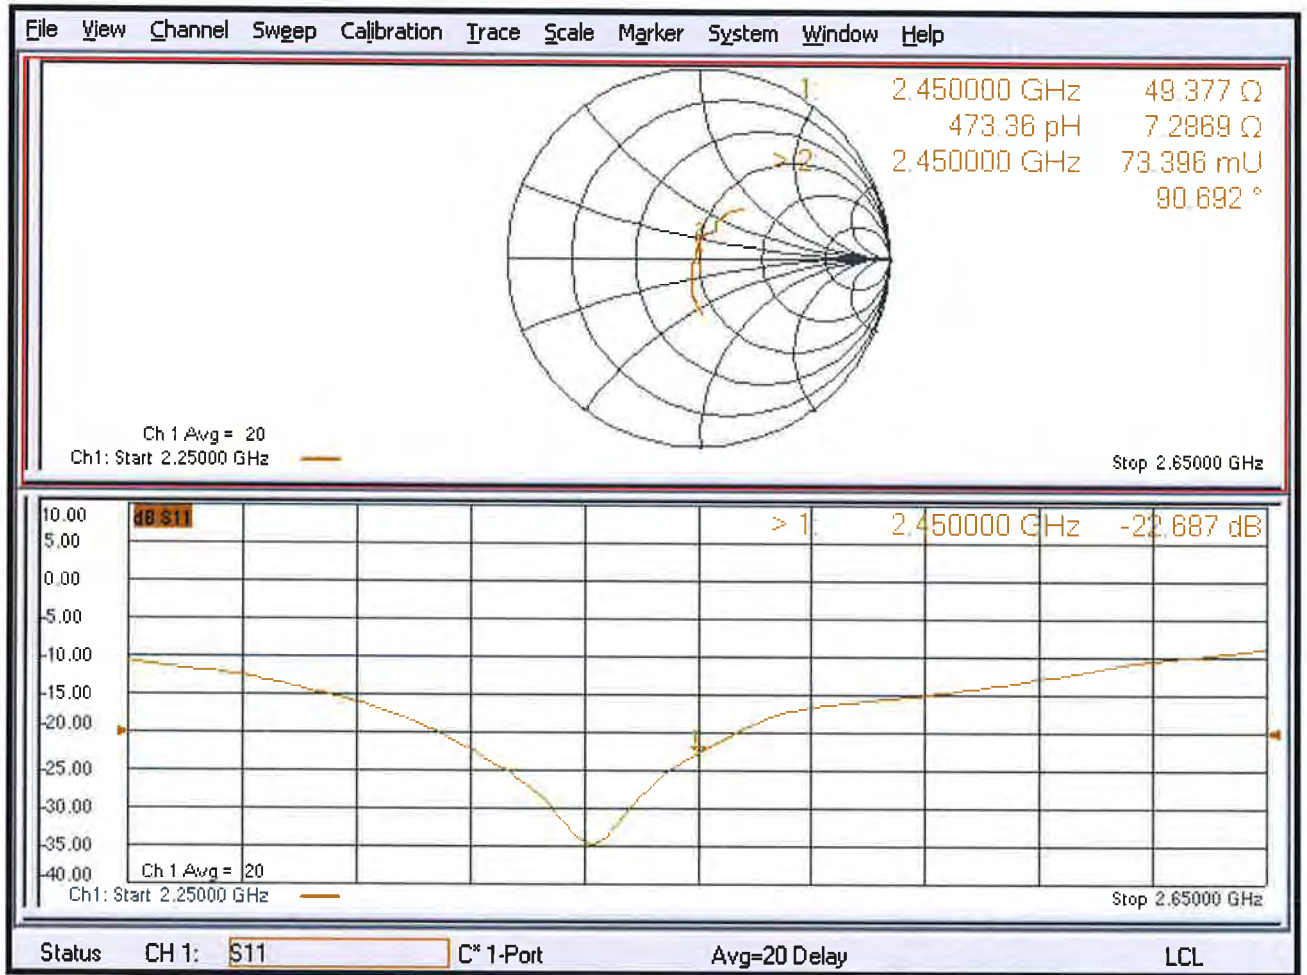



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **B.V. ADT (Auden)**

Certificate No: **D2600V2-1020_Aug18**

CALIBRATION CERTIFICATE

Object **D2600V2 - SN:1020**

Calibration procedure(s) **QA CAL-05.v10
Calibration procedure for dipole validation kits above 700 MHz**

Calibration date: **August 24, 2018**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-18 (No. 217-02672/02673)	Apr-19
Power sensor NRP-Z91	SN: 103244	04-Apr-18 (No. 217-02672)	Apr-19
Power sensor NRP-Z91	SN: 103245	04-Apr-18 (No. 217-02673)	Apr-19
Reference 20 dB Attenuator	SN: 5058 (20k)	04-Apr-18 (No. 217-02682)	Apr-19
Type-N mismatch combination	SN: 5047.2 / 06327	04-Apr-18 (No. 217-02683)	Apr-19
Reference Probe EX3DV4	SN: 7349	30-Dec-17 (No. EX3-7349_Dec17)	Dec-18
DAE4	SN: 601	26-Oct-17 (No. DAE4-601_Oct17)	Oct-18
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-16)	In house check: Oct-18
Network Analyzer Agilent E8358A	SN: US41080477	31-Mar-14 (in house check Oct-17)	In house check: Oct-18

Calibrated by: **Manu Seitz** **Manu Seitz** **Manu Seitz**
Name Function Signature
Laboratory Technician

Approved by: **Katja Pokovic** **Katja Pokovic**
Technical Manager

Issued: August 24, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.1
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2600 MHz \pm 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.0	1.96 mho/m
Measured Head TSL parameters	(22.0 \pm 0.2) °C	37.1 \pm 6 %	2.03 mho/m \pm 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	14.3 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	55.7 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	6.36 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	25.0 W/kg \pm 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	52.5	2.16 mho/m
Measured Body TSL parameters	(22.0 \pm 0.2) °C	51.3 \pm 6 %	2.20 mho/m \pm 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	14.0 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	55.3 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	6.22 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	24.7 W/kg \pm 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	48.3 Ω - 5.7 j Ω
Return Loss	- 24.3 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	44.1 Ω - 3.7 j Ω
Return Loss	- 22.6 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.154 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	May 13, 2008

DASY5 Validation Report for Head TSL

Date: 23.08.2018

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2600 MHz; Type: D2600V2; Serial: D2600V2 - SN:1020

Communication System: UID 0 - CW; Frequency: 2600 MHz

Medium parameters used: $f = 2600$ MHz; $\sigma = 2.03$ S/m; $\epsilon_r = 37.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(7.7, 7.7, 7.7) @ 2600 MHz; Calibrated: 30.12.2017
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 118.3 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 28.5 W/kg

SAR(1 g) = 14.3 W/kg; SAR(10 g) = 6.36 W/kg

Maximum value of SAR (measured) = 23.9 W/kg

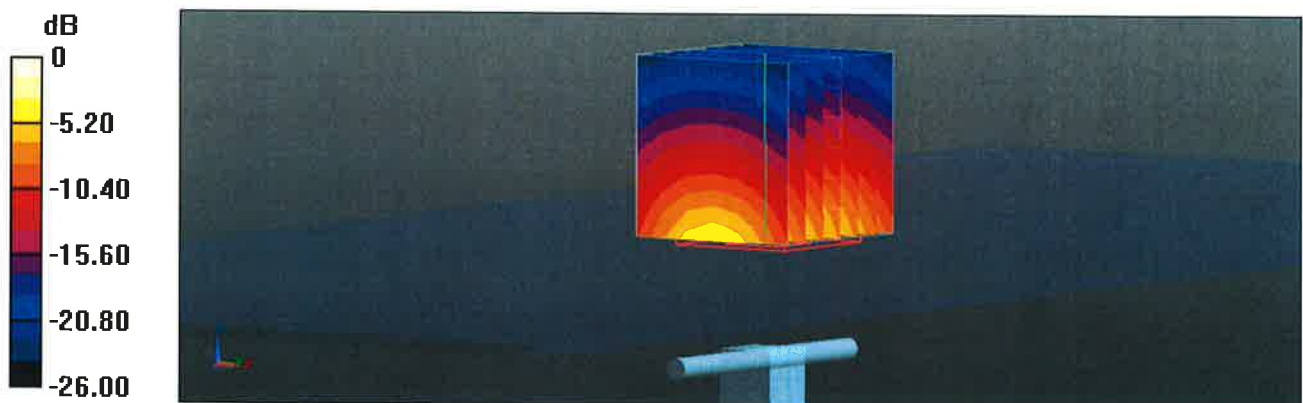

Impedance Measurement Plot for Head TSL

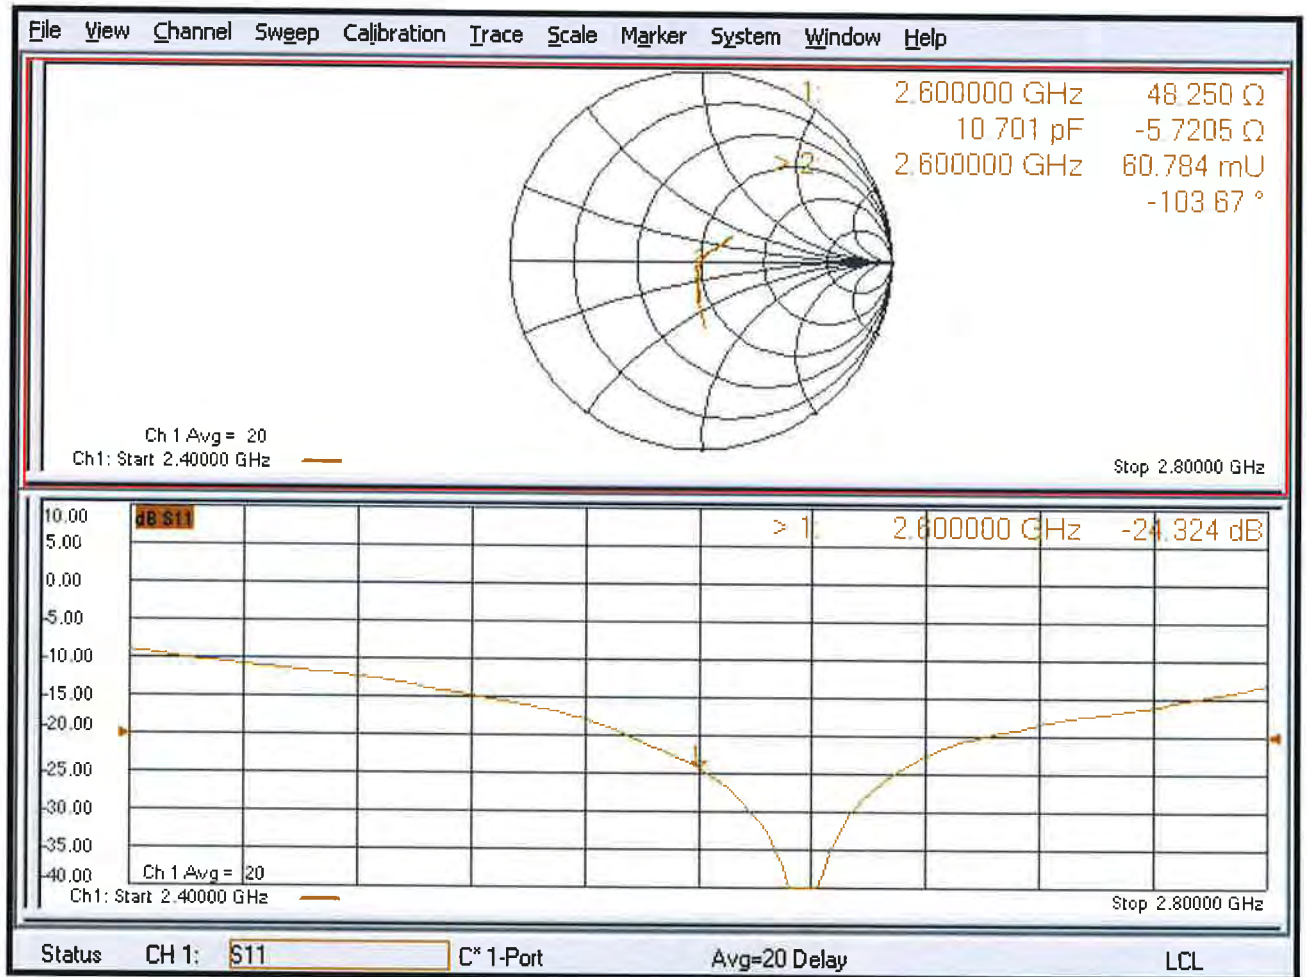

DASY5 Validation Report for Body TSL

Date: 24.08.2018

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2600 MHz; Type: D2600V2; Serial: D2600V2 - SN:1020

Communication System: UID 0 - CW; Frequency: 2600 MHz

Medium parameters used: $f = 2600$ MHz; $\sigma = 2.2$ S/m; $\epsilon_r = 51.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(7.81, 7.81, 7.81) @ 2600 MHz; Calibrated: 30.12.2017
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 5.0 (back); Type: QD 000 P50 AA; Serial: 1002
- DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 109.7 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 29.1 W/kg

SAR(1 g) = 14 W/kg; SAR(10 g) = 6.22 W/kg

Maximum value of SAR (measured) = 23.8 W/kg

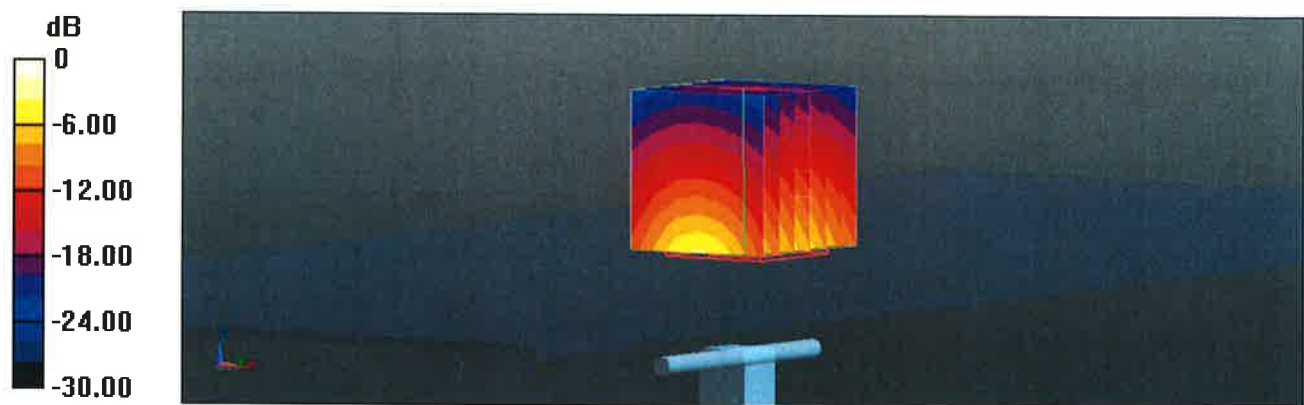

Impedance Measurement Plot for Body TSL

