

Page: 1 of 339

# SAR TEST REPORT

The following samples were submitted and identified on behalf of the client as:

**Equipment Under Test** Tablet PC

Trimble Navigation Ltd. **Brand Name** 

104962 Model No.

Trimble Navigation Ltd. **Company Name** 

345 SW Avery Ave. Corvallis, OR 97333 **Company Address** 

IEEE /ANSI C95.1, C95.3, IEEE 1528 2003, **Standards** 

> KDB248227D01v02, KDB616217D04v01r01, KDB865664D01v01r03, KDB865664D02v01r01,

KDB941225D01v03,KDB941225D05v02r03,

KDB447498D01v05r02

S9E -EM7355, S9E-7265NGW FCC ID

**Date of Receipt** May. 25, 2015

Date of Test(s) Jun. 01, 2015 ~ Jun. 18, 2015

Date of Issue Aug. 07, 2015

In the configuration tested, the EUT complied with the standards specified above.

#### Remarks:

This report details the results of the testing carried out on one sample, the results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS Taiwan Electronic & Communication Laboratory or testing done by SGS Taiwan Electronic & Communication Laboratory in connection with distribution or use of the product described in this report must be approved by SGS Taiwan Electronic & Communication Laboratory in writing.

Sr. Engineer Sr. Engineer

Date: Aug. 07, 2015

John Yeh

Date: Aug. 07, 2015

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 2 of 339

# Version

Report Number	Revision	Date	Memo
EN/2015/50005	00	2015/6/24	Initial creation of test report.
EN/2015/50005	01	2015/6/25	1 <sup>st</sup> modification
EN/2015/50005	02	2015/6/30	2 <sup>nd</sup> modification
EN/2015/50005	03	2015/8/7	3 <sup>rd</sup> modification

This test report contains a reference to the previous version test report that it replaces.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 3 of 339

# **Contents**

1. General Information	
1.1 Testing Laboratory	4
1.2 Details of Applicant	4
1.3 Description of EUT	5
1.4 Test Environment	89
1.5 Operation Description	89
1.6 Proximity sensor operation description	97
1.7 The SAR Measurement System	109
1.8 System Components	
1.9 SAR System Verification	113
1.10 Tissue Simulant Fluid for the Frequency Band	115
1.11 Evaluation Procedures	118
1.12 Probe Calibration Procedures	119
1.13 Test Standards and Limits	122
2. Summary of Results	124
3. Simultaneous Transmission Analysis	144
3.1 Estimated SAR calculation	145
3.2 SPLSR evaluation and analysis	145
4. Instruments List	200
5. Measurements	202
6. SAR System Performance Verification	238
7. DAE & Probe Calibration Certificate	
8. Uncertainty Budget	283
9. Phantom Description	
10. System Validation from Original Equipment Supplier	285

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 4 of 339

# 1. General Information

## 1.1 Testing Laboratory

SGS Taiwan Ltd. Electronics & Communication Laboratory					
No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei					
City, Taiwan					
Tel	+886-2-2299-3279				
Fax	+886-2-2298-0488				
Internet	http://www.tw.sgs.com/				

#### 1.2 Details of Applicant

Company Name	Trimble Navigation Ltd.
Company Address	345 SW Avery Ave. Corvallis, OR 97333

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 5 of 339

## 1.3 Description of EUT

Equipment Under Test	Tablet						
Brand Name	Trimble Navigation Ltd.						
Model No.	104962	104962					
FCC ID	S9E –EM7355, S9E-7265NGW						
Mode of Operation		⊠HSDPA ⊠HSUPA					
	GPRS	1/4.1 (1Dn2UP) 1/8.3 (1Dn1UP)					
	1/2 (1Dn4UP 1/2.76 (1Dn3U 1/4.1 (1Dn2Ul 1/8.3 (1Dn1Ul						
Duty Cycle	WCDMA 1						
	LTE	1					
	CDMA 1xRTT/ EVDO Rev.0/ Rev. A	1					
	WLAN802.11 a/b/g/n(20M/40M)/ ac(20M/40M/80M)	1					
	Bluetooth	1					
	GPRS850	824.2 — 848.8					
	GPRS1900	1850.2 — 1909.8					
TVF	WCDMA Band II	1852.4 — 1907.6					
TX Frequency Range (MHz)	WCDMA Band IV	1712.4 — 1752.6					
(IVII IZ)	WCDMA Band V	826.4 — 846.6					
	LTE FDD Band II	1850 — 1910					
	LTE FDD Band IV	1710 — 1755					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 6 of 339

Band V Band XIII Band XXV CO) C1) C10) C.11 b/g/n(20M) C.11 n(40M) C.11 a/n(20M)/ac(20M) 5.2G C.11 n(40M)/ac(40M) 5.2G C.11 a/n(20M)/ac(20M) 5.3G C.11 a/n(20M)/ac(40M) 5.3G C.11 ac(80M) 5.3G C.11 ac(80M) 5.3G	5190	5210 ————————————————————————————————————	849 787 1915 848.31 1908.75 823.1 2462 2452 5240 5230 5320 5310
Band XXV CO) C1) C10) 2.11 b/g/n(20M) 2.11 n(40M) 2.11 a/n(20M)/ac(20M) 5.2G 2.11 ac(80M) 5.2G 2.11 a/n(20M)/ac(20M) 5.3G 2.11 n(40M)/ac(40M) 5.3G 2.11 n(40M)/ac(40M) 5.3G	1850 824.7 1851.25 817.9 2412 2422 5180 5190		1915 848.31 1908.75 823.1 2462 2452 5240 5230
C0) C1) C10) C10) C110) C111 b/g/n(20M) C11 n(40M) C111 a/n(20M)/ac(20M) 5.2G C11 n(40M)/ac(40M) 5.2G C11 a/n(20M)/ac(20M) 5.3G C11 n(40M)/ac(40M) 5.3G C11 n(40M)/ac(40M) 5.3G	824.7 1851.25 817.9 2412 2422 5 5180 5190		848.31 1908.75 823.1 2462 2452 5240 5230
2.11 b/g/n(20M) 2.11 b/g/n(20M) 2.11 n(40M) 2.11 a/n(20M)/ac(20M) 5.2G 2.11 n(40M)/ac(40M) 5.2G 2.11 ac(80M) 5.2G 2.11 a/n(20M)/ac(20M) 5.3G 2.11 n(40M)/ac(40M) 5.3G	1851.25 817.9 2412 2422 5180 5190		1908.75 823.1 2462 2452 5240 5230
2.11 b/g/n(20M) 2.11 n(40M) 2.11 a/n(20M)/ac(20M) 5.2G 2.11 n(40M)/ac(40M) 5.2G 2.11 ac(80M) 5.2G 2.11 a/n(20M)/ac(20M) 5.3G 2.11 n(40M)/ac(40M) 5.3G	817.9 2412 2422 5 5180 5190		823.1 2462 2452 5240 5230
2.11 b/g/n(20M) 2.11 n(40M) 2.11 a/n(20M)/ac(20M) 5.2G 2.11 n(40M)/ac(40M) 5.2G 2.11 ac(80M) 5.2G 2.11 a/n(20M)/ac(20M) 5.3G 2.11 n(40M)/ac(40M) 5.3G	2412 2422 5 5180 5190 5 5260		2462 2452 5240 5230 5320
2.11 n(40M) 2.11 a/n(20M)/ac(20M) 5.2G 2.11 n(40M)/ac(40M) 5.2G 2.11 ac(80M) 5.2G 2.11 a/n(20M)/ac(20M) 5.3G 2.11 n(40M)/ac(40M) 5.3G	2422 5 5180 5190 5 5260		2452 5240 5230 5320
2.11 a/n(20M)/ac(20M) 5.2G 2.11 n(40M)/ac(40M) 5.2G 2.11 ac(80M) 5.2G 2.11 a/n(20M)/ac(20M) 5.3G 2.11 n(40M)/ac(40M) 5.3G	5180 5190 5260		5240 5230 5320
2.11 n(40M)/ac(40M) 5.2G 2.11 ac(80M) 5.2G 2.11 a/n(20M)/ac(20M) 5.3G 2.11 n(40M)/ac(40M) 5.3G	5190 5 5260		5230 5320
2.11 ac(80M) 5.2G 2.11 a/n(20M)/ac(20M) 5.3G 2.11 n(40M)/ac(40M) 5.3G	5260		5320
2.11 a/n(20M)/ac(20M) 5.3G 2.11 n(40M)/ac(40M) 5.3G			
2.11 n(40M)/ac(40M) 5.3G		— —	
. , , , ,	5270	_	5310
2.11 ac(80M) 5.3G			
		5290	
2.11 a/n(20M) 5.6G	5500		5700
2.11 ac(20M) 5.6G	5500		5720
2.11 n(40M) 5.6G	5510	_	5670
2.11 ac(40M) 5.6G	5510		5710
2.11 ac(80M) 5.6G	5530		5690
2.11 a/n(20M)/ac(20M) 5.8G	5745		5825
2.11 n(40M)/ac(40M) 5.8G	5710		5795
2.11 ac(80M) 5.8G		5775	
	2402	_	2480
)	.11 n(40M) 5.6G .11 ac(40M) 5.6G .11 ac(80M) 5.6G .11 a/n(20M)/ac(20M) 5.8G .11 n(40M)/ac(40M) 5.8G .11 ac(80M) 5.8G	.11 n(40M) 5.6G 5510 .11 ac(40M) 5.6G 5510 .11 ac(80M) 5.6G 5530 .11 a/n(20M)/ac(20M) 5.8G 5745 .11 n(40M)/ac(40M) 5.8G 5710 .11 ac(80M) 5.8G	.11 n(40M) 5.6G 5510 — .11 ac(40M) 5.6G 5510 — .11 ac(80M) 5.6G 5530 — .11 a/n(20M)/ac(20M) 5.8G 5745 — .11 n(40M)/ac(40M) 5.8G 5710 — .11 ac(80M) 5.8G 5775

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be

SGS Taiwan Ltd.

prosecuted to the fullest extent of the law.



Page: 7 of 339

	GPRS850	128	_	251
	GPRS1900	512		810
	WCDMA Band II	9262	_	9538
	WCDMA Band IV	1312		1513
S Pro	WCDMA Band V	4132		4233
	LTE FDD Band II	18607		19193
Channel Number (ARFCN)	LTE FDD Band IV	19957		20393
	LTE FDD Band V	20407		20643
	LTE FDD Band XIII	23205		23255
	LTE FDD Band XXV	26047		26683
	CDMA (BCO)	1013		777
	CDMA (BC1)	25	=	1175
	CDMA (BC10)	476		684

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 8 of 339

	WLAN802.11 b/g/n(20M)	1	_	11
	WLAN802.11 n(40M)	3	_	9
	WLAN802.11 a/n(20M)/ac(20M) 5.2G	36	_	48
	WLAN802.11 n(40M)/ac(40M) 5.2G	38	_	46
	WLAN802.11 ac(80M) 5.2G		42	
461	WLAN802.11 a/n(20M)/ac(20M) 5.3G	52	47	64
	WLAN802.11 n(40M)/ac(40M) 5.3G	54		62
Channel Number (ARFCN)	WLAN802.11 ac(80M) 5.3G		58	
	WLAN802.11 a/n(20M) 5.6G	100	_	140
	WLAN802.11 ac(20M) 5.6G	100	_	144
	WLAN802.11 n(40M) 5.6G	102	_	134
	WLAN802.11 ac(40M) 5.6G	102	_	142
	WLAN802.11 ac(80M) 5.6G	106	_	138
	WLAN802.11 a/n(20M)/ac(20M) 5.8G	149		165
	WLAN802.11 n(40M)/ac(40M) 5.8G	142	4 5	159
	WLAN802.11 ac(80M) 5.8G		155	
	Bluetooth	0	_	78

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 9 of 339

Max. SAR (1 g) (Unit: W/Kg)							
Band Measured Reported Channel Position							
			•				
GPRS 850		0.327	0.518	190	Top side		
GRPS 1900		0.888	0.974	661	Top side		
WCDMA Band II		1.010	1.043	9538	Top side		
WCDMA Band IV		1.270	1.333	1312	Top side		
WCDMA Band V		0.374	0.377	4183	Back side		
LTE FDD Band II		0.937	1.182	19100	Back side		
LTE FDD Band IV		1.280	1.381	20050	Top side		
LTE FDD Band V		0.347	0.490	20600	Back side		
LTE FDD Band XIII		0.340	0.499	23230	Back side		
LTE FDD Band XVII		0.312	0.438	23780	Back side		
LTE FDD Band XXV		1.040	1.236	26140	Top side		
CDMA (BCO)		0.307	0.369	384	Back side		
CDMA (BC1)		1.020	1.103	600	Top side		
CDMA (BC10)		0.289	0.364	684	Back side		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 10 of 339

Max. SAR (1 g) (Unit: W/Kg)						
Antenna	Band	Measured	Reported	Channel	Position	
	WLAN802.11 b	0.2	0.226	11	Top side	
	WLAN802.11 ac(20M) 5.2G	0.582	0.871	44	Top side	
arr	WLAN802.11 ac(20M) 5.3G	0.776	0.92	54	Top side	
Main	WLAN802.11 a 5.6G	1.02	1.103	104	Top side	
	WLAN802.11 ac(20M) 5.6G	0.939	1.185	136	Top side	
	WLAN802.11 ac(80M) 5.6G	1.03	1.099	138	Top side	
	WLAN802.11 ac(80M) 5.8G	0.937	1.042	155	Top side	
	WLAN802.11 b	0.491	0.491	11	Bottom side	
	WLAN802.11 n(20M) 5.2G	0.921	1.012	44	Bottom side	
	WLAN802.11 ac(20M) 5.2G	1.03	1.145	40	Bottom side	
	WLAN802.11 a 5.3G	1.36	1.474	56	Bottom side	
	WLAN802.11 n(20M) 5.3G	1.45	1.46	60	Bottom side	
	WLAN802.11 ac(20M) 5.3G	1.41	1.417	56	Bottom side	
Aux	WLAN802.11 n(40M) 5.3G	1.46	1.487	54	Bottom side	
Aux	WLAN802.11 ac(40M) 5.3G	1.44	1.47	54	Bottom side	
	WLAN802.11 a 5.6G	1.1	1.411	120	Bottom side	
	WLAN802.11 n(20M) 5.6G	0.879	0.923	136	Bottom side	
	WLAN802.11 ac(20M) 5.6G	0.631	0.638	136	Bottom side	
	WLAN802.11 n(40M) 5.6G	0.913	1.051	134	Bottom side	
	WLAN802.11 ac(40M) 5.6G	0.784	0.81	142	Bottom side	
	WLAN802.11 ac(80M) 5.8G	0.81	0.817	155	Bottom side	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 11 of 339

## **GPRS/EDGE** conducted power table:

<u> </u>	SE CONTACTO				
Burst average power					
Max. Rated Avg. Power + Max. Tolerance (dBm)			32.9	32.9	
			1Dn1UP	1Dn2UP	
EUT mode	Frequency (MHz)	СН	Avg. (dBm)	Avg. (dBm)	
GPRS 850	824.2	128	31.00	30.90	
	836.6	190	31.00	30.90	
(GMSK)	848.8	251	31.00	30.90	
	er				
GPRS 850	824.2	128	21.97	24.88	
(GMSK)	836.6	190	21.97	24.88	
(GIVISK)	848.8	251	21.97	24.88	
The division factor compared to the number of TX time slot					
Division factor			1 TX time slot	2 TX time slot	
			-9.03	-6.02	

		Burst avera	age power						
~		27.7	27.7	27.7	27.7				
		1Dn1UP	1Dn2UP	1Dn3UP	1Dn4UP				
Frequency (MHz)	СН	Avg. (dBm)	Avg. (dBm)	Avg. (dBm)	Avg. (dBm)				
824.2	128	26.00	25.90	25.80	25.70				
836.6	190	26.00	25.90	25.80	25.70				
848.8	251	26.00 25.90 25.80		25.70					
	S	ource-based tim	rce-based time average power						
824.2	128	16.97	19.88	21.54	22.69				
836.6	190	16.97	19.88	21.54	22.69				
848.8	251	16.97	19.88	21.54	22.69				
The division factor compared to the number of TX time slot									
vision factor		1 TX time slot -9.03	2 TX time slot -6.02	3 TX time slot -4.26	4 TX time slot -3.01				
	Frequency (MHz) 824.2 836.6 848.8 824.2 836.6 848.8 The div	(MHz) 824.2 128 836.6 190 848.8 251 Sc 824.2 128 836.6 190 848.8 251 The division fa	ted Avg. Power + olerance (dBm)         27.7           IDn1UP           Frequency (MHz)         CH         Avg. (dBm)           824.2         128         26.00           836.6         190         26.00           848.8         251         26.00           Source-based tim         824.2         128         16.97           836.6         190         16.97           848.8         251         16.97           The division factor compared vision factor           Vision factor         1 TX time slot	Solution factor   1	ted Avg. Power + olerance (dBm)         27.7         27.7         27.7           Frequency (MHz)         CH (dBm)         Avg. (dBm)         Avg. (dBm)           824.2         128         26.00         25.90         25.80           836.6         190         26.00         25.90         25.80           848.8         251         26.00         25.90         25.80           Source-based time average power           824.2         128         16.97         19.88         21.54           836.6         190         16.97         19.88         21.54           848.8         251         16.97         19.88         21.54           The division factor compared to the number of TX time slot           4 TX time slot         2 TX time slot         3 TX time slot				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 12 of 339

	Burs	st aver	age power						
	ted Avg. Powe olerance (dBn		29	29					
			1Dn1UP	1Dn2UP					
EUT mode	Frequency (MHz)	СН	Avg. (dBm)	Avg. (dBm)					
GPRS	1850.2	512	28.80	28.70					
1900	1880	661	28.70	28.60					
(GMSK)	1909.8	810	28.90	28.80					
	Source-bas	sed tim	ne average power						
GPRS	1850.2	512	19.77	22.68					
1900	1880	661	19.67	22.58					
(GMSK)	1909.8	810	19.87	22.78					
The divisi	The division factor compared to the number of TX time slot								
Div	ision factor		1 TX time slot -9.03	2 TX time slot -6.02					
			- 7.03	-0.02					

			Burst avera	age power						
	ted Avg. Powe olerance (dBr		25.5	25.5	25.5	25.5				
			1Dn1UP	1Dn2UP	1Dn3UP	1Dn4UP				
EUT mode	Frequency (MHz)	СН	Avg. (dBm)	Avg. (dBm)	Avg. (dBm)	Avg. (dBm)				
EDGE	1850.2	512	24.80	24.70	24.60	24.50				
1900	1880	661	24.80	24.70	24.60	24.50				
(MCS5)	1909.8	810	24.90	24.80	24.70	24.60				
		S	ource-based tim	urce-based time average power						
EDGE	1850.2	512	15.77	18.68	20.34	21.49				
1900	1880	661	15.77	18.68	20.34	21.49				
(MCS5)	1909.8	810	15.87	18.78	20.44	21.59				
	The division factor compared to the number of TX time slot									
Div	ision factor		1 TX time slot	2 TX time slot	3 TX time slot	4 TX time slot				
Div	rision ractor		-9.03	-6.02	-4.26	-3.01				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 13 of 339

### GPRS/EDGE conducted power table (Reduced power):

of K37 EDGE conducted power table (Keddced power).										
	Bur	st aver	age power							
	ted Avg. Powe olerance (dBr		28.5	28.5						
			1Dn1UP	1Dn2UP						
EUT mode Frequency CH Avg. Avg. (dBm) (dBm)										
CDDC OFO	824.2	128	28.10	27.50						
GPRS 850	836.6	190	28.10	27.50						
(GMSK)	848.8	251	28.10	27.50						
	Source-bas	sed tim	e average powe	er						
GPRS 850	824.2	128	19.07	21.48						
(GMSK)	836.6	190	19.07	21.48						
(GIVISK)	848.8	251	19.07	21.48						
The division factor compared to the number of TX time slot										

			Burst avera	age power							
	ted Avg. Powe olerance (dBr		22.5	22.5	22.5	22.5					
			1Dn1UP	1Dn2UP	1Dn3UP	1Dn4UP					
EUT mode	Frequency (MHz)	СН	Avg. (dBm)	Avg. (dBm)	Avg. (dBm)	Avg. (dBm)					
EDCE OFO	824.2	128	22.10	22.10	22.10	22.10					
EDGE 850 836.6		190	22.10	22.10	22.10	22.10					
(MCS5)	848.8	251	22.10	22.10	22.10	22.10					
		S	ource-based tim	e average powe	er						
EDGE 850	824.2	128	13.07	16.08	17.84	19.09					
	836.6	190	13.07	16.08	17.84	19.09					
(MCS5)	848.8	251	13.07	16.08	17.84	19.09					
	The div	ision fa	actor compared	to the number o	of TX time slot						
Div	ision factor		1 TX time slot	2 TX time slot	3 TX time slot	4 TX time slot					
DIV	rision ractor		-9.03	-6.02	-4.26	-3.01					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 14 of 339

	Burs	st aver	age power							
	ted Avg. Powe olerance (dBn		27	27						
			1Dn1UP	1Dn2UP						
EUT mode	Frequency (MHz)	СН	Avg. (dBm)	Avg. (dBm)						
GPRS	1850.2	512	26.80	26.70						
1900	1880	661	26.70	26.70						
(GMSK)	1909.8	810	26.70	26.80						
	Source-bas	sed tim	e average powe	er						
GPRS	1850.2	512	17.77	20.68						
1900	1880	661	17.67	20.68						
(GMSK)	1909.8	810	17.67	20.78						
The divisi	The division factor compared to the number of TX time slot									
Div	ision factor		1 TX time slot -9.03	2 TX time slot -6.02						

	Burst average power											
			Burst avera	age power								
	ted Avg. Powe olerance (dBr		23.5	23.5	23.5	23.5						
			1Dn1UP	1Dn2UP	1Dn3UP	1Dn4UP						
EUT mode	Frequency (MHz)	СН	Avg. (dBm)	Avg. (dBm)	Avg. (dBm)	Avg. (dBm)						
EDGE	1850.2	512	23.50	23.50	23.50	23.40						
1900	1880	661	23.50	23.50	23.50	23.40						
(MCS5)	1909.8	810	23.50	23.50	23.50	23.40						
		S	ource-based tim	e average powe	er							
EDGE	1850.2	512	14.47	17.48	19.24	20.39						
1900	1880	661	14.47	17.48	19.24	20.39						
(MCS5)	1909.8	810	14.47	17.48	19.24	20.39						
	The division factor compared to the number of TX time slot											
Div	ision factor			2 TX time slot								
			-9.03	-6.02	-4.26	-3.01						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 15 of 339

### WCDMA Band II / Band IV / Band V - HSDPA / HSUPA conducted power table:

		Max.		HSDPA mode AV(dBm)					HSUPA mode AV(dBm)					HSPA+ mode AV(dBm)			
Band	СН	Rated Avg. Power +	Rel99														
		Max.	AV(dBm)	SUB-1	SUB-2	SUB-3	SUB-4	SUB-1	SUB-2	SUB-3	SUB-4	SUB-5	SUB-1	SUB-2	SUB-3	SUB-4	SUB-5
		Tolerance															
		(dBm)															
WCDMA	9262	23	22.76	22.16	21.64	21.68	21.75	22.68	20.73	20.74	20.86	20.82	22.61	20.59	21.58	20.70	22.41
Band II	9400	23	22.79	22.21	21.65	21.76	21.77	22.77	20.84	20.79	20.89	20.88	22.74	20.78	21.73	20.82	22.59
Rel 7	9538	23	22.86	22.24	21.71	21.71	21.83	22.80	20.84	20.88	20.88	20.99	22.75	20.74	21.76	20.78	22.61
WCDMA	1312	23	22.79	22.35	21.67	21.87	21.94	22.71	20.76	20.77	20.89	21.13	22.64	20.62	21.61	20.73	22.44
Band IV	1412	23	22.88	22.38	21.74	21.93	21.94	22.86	20.93	20.88	20.98	21.27	22.83	20.87	21.82	20.91	22.68
Rel 7	1513	23	22.68	22.30	21.53	21.77	21.89	22.62	20.66	20.70	20.7	21.25	22.57	20.56	21.58	20.60	22.43
WCDMA	4132	23	22.14	21.50	21.07	21.04	21.09	22.10	20.16	20.14	20.21	20.98	22.07	20.10	21.05	20.13	21.88
Band V	4183	23	22.27	21.67	21.16	21.19	21.23	22.20	20.28	20.26	20.34	21.06	22.12	20.14	21.12	20.20	21.89
Rel 7	4233	23	22.17	21.52	21.04	21.03	21.09	22.09	20.13	20.17	20.21	20.92	22.00	19.97	20.99	20.03	21.82

#### **HSDPA**

SUB-TEST	$eta_{c}$	$eta_{\sf d}$	β <sub>d</sub> (SF)	$\beta_{c}/\beta_{d}$	β <sub>HS</sub> ( <i>Note1, Note 2</i> )	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15	15/15	64	12/15	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

#### HSUPA

1130174													
SUB-TEST	$eta_{c}$	β <sub>d</sub>	β <sub>d</sub> (SF)	$\beta_c/\beta_d$	β <sub>HS</sub> (Note1)	$eta_{ec}$	β <sub>ed</sub> (Note 5) (Note 6)	β <sub>ed</sub> (SF)	β <sub>ed</sub> (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 6)	E-TFCI
1	11/15	15/15	64	11/15	22/15	209/225	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β <sub>ed</sub> 1: 47/15 β <sub>ed</sub> 2: 47/15	4 4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	15/15	64	15/15	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 16 of 339

# WCDMA Band II / Band IV / Band V - HSDPA / HSUPA conducted power table (Reduced power) :

(	ittoddocd powery:																
		Max.		HSDPA mode AV(dBm)				HSUPA mode AV(dBm)					HSPA+ mode AV(dBm)				
Band	СН	Rated Avg. Power + Max. Tolerance (dRm)	Rel99 AV(dBm)	SUB-1	SUB-2	SUB-3	SUB-4	SUB-1	SUB-2	SUB-3	SUB-4	SUB-5	SUB-1	SUB-2	SUB-3	SUB-4	SUB-5
WCDMA	9262	20	19.61	18.84	18.49	18.36	18.43	19.53	17.58	17.59	17.71	18.19	19.46	17.44	18.43	17.55	19.26
Band II	9400	20	19.63	18.93	18.49	18.48	18.49	19.61	17.68	17.63	17.73	18.31	19.58	17.62	18.57	17.66	19.43
Rel 7	9538	20	19.67	19.02	18.52	18.49	18.61	19.61	17.65	17.69	17.69	18.42	19.56	17.55	18.57	17.59	19.42
WCDMA	1312	19	17.62	17.11	16.50	16.63	16.7	17.54	15.59	15.60	15.72	16.44	17.47	15.45	16.44	15.56	17.27
Band IV	1412	19	17.67	17.08	16.53	16.63	16.64	17.65	15.72	15.67	15.77	16.25	17.62	15.66	16.61	15.70	17.47
Rel 7	1513	19	17.61	17.14	16.46	16.61	16.73	17.55	15.59	15.63	15.63	16.28	17.50	15.49	16.51	15.53	17.36
WCDMA	4132	20	19.90	19.44	18.83	18.98	19.03	19.86	17.92	17.90	17.97	18.72	19.83	17.86	18.81	17.89	19.64
Band V	4183	20	19.96	19.31	18.85	18.83	18.87	19.89	17.97	17.95	18.03	18.64	19.81	17.83	18.81	17.89	19.58
Rel 7	4233	20	19.84	19.25	18.71	18.76	18.82	19.76	17.8	17.84	17.88	18.53	19.67	17.64	18.66	17.70	19.49

#### **HSDPA**

SUB-TEST	$eta_{c}$	$\beta_{\sf d}$	β <sub>d</sub> (SF)	$\beta_{c}/\beta_{d}$	β <sub>HS</sub> ( <i>Note1, Note 2</i> )	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15	15/15	64	12/15	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

#### **HSUPA**

1130171	1301 A												
SUB-TEST	$eta_{c}$	$eta_d$	β <sub>d</sub> (SF)	β <sub>c</sub> /β <sub>d</sub>	β <sub>HS</sub> (Note1)	$eta_{ec}$	β <sub>ed</sub> (Note 5) (Note 6)	β <sub>ed</sub> (SF)	β <sub>ed</sub> (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 6)	E-TFCI
1	11/15	15/15	64	11/15	22/15	209/225	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β <sub>ed</sub> 1: 47/15 β <sub>ed</sub> 2: 47/15	4 4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	15/15	64	15/15	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 17 of 339

### LTE FDD Band II/ Band IV/ Band V/ Band XIII/ Band XVII / Band XXV power table:

			FDD Ba	and 2 (Full	Power)				
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance	-	
				1860	18700	22.32	23	0	
			0	1880	18900	22.30	23	0	
				Offset (MHz)         Frequency (MHz)         Channel (dBm)         power (dBm)           0         1860         18700         22.32           1900         19100         22.24           1860         18700         22.25           50         1880         18900         22.40           1900         19100         22.25           1860         18700         22.10           99         1880         18900         22.21           1900         19100         22.42           1860         18700         21.17           1860         18700         21.14           1900         19100         21.15           1860         18700         21.15           1860         18700         21.16           1900         19100         21.04           1860         18700         21.16           1900         19100         21.08           1880         18900         21.08           1880         18900         21.08           1860         18700         21.18           1880         18900         21.20           1900         19100         21.01	22.24	23	0		
				1860	18700	22.25	23	0	
		1 RB	50	1880	18900	22.40	23	0	
				1900	19100	22.25	23	0	
						22.10	23	0	
			99			Channel Conducted power (dBm) Target Power + Max. Tolerance 18700 22.32 23 18900 22.30 23 19100 22.25 23 18900 22.40 23 19100 22.25 23 18700 22.10 23 18700 22.42 23 18700 21.17 22 18900 21.14 22 19100 21.10 22 18700 21.16 22 19100 21.04 22 18700 21.18 22 18900 21.18 22 18900 21.18 22 18900 21.19 22 18700 21.19 22 18700 21.19 22 18700 21.19 22 18700 21.19 22 18700 21.19 22 18700 21.19 22 18700 21.19 22 18700 21.19 22 18700 21.19 22 18700 21.19 22 18700 21.19 22 18700 21.19 22 18700 21.19 22 18700 21.19 22 18700 21.19 22 18700 21.19 22 18700 21.10 22 18700 21.19 22 18700 21.10 22 18700 21.10 22 18700 21.10 22 18700 21.10 22 18700 21.10 22 18700 21.10 22 18700 21.20 22 19100 21.01 22 18700 21.20 22 18900 21.20 22 18700 21.20 22 18700 21.20 22 18700 21.20 22 18700 21.20 22 18700 21.20 22 18700 21.20 22 18700 21.20 22 18700 21.20 22 18700 20.15 21 18900 20.15 21 18700 20.05 21 18700 20.10 21 18700 20.06 21 18700 20.06 21 18700 20.08 21 18700 20.08 21 18700 20.08 21 18700 20.08 21 18700 20.08 21 18700 20.08 21 18700 20.08 21 18700 20.08 21 18700 20.08 21 18700 20.08 21 18700 20.08 21 18700 20.08 21 18700 20.08 21 18700 20.08 21 18700 20.08 21 18700 20.08 21 18700 20.012 21			
				1900			23	0	
				1860		21.17	22	0-1	
	QPSK		0	1880	18900		22	0-1	
				1900	19100	21.10	22	0-1	
				1860	18700	21.15	22	0-1	
		50 RB	25	1880			22	0-1	
				1900	19100		22	0-1	
				1860	18700	21.16	22	Allowed per 3GPP(dB)  0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	
		50			21.08				
				1900		21.08	22	0-1	
			•				22	0-1	
		100	)RB	1880	18900	21.20	22	0-1	
20				1900			22	0-1	
20				1860	18700	21.49	22	0-1	
			0	1880			22	0-1	
				1900	19100	21.01	22	0-1	
				1860				0-1	
		1 RB	25 50 100RB 0 50		18900	21.16		0-1	
				1900	19100		22	0-1	
			04 1	1860	18700	21.51	22	0-1	
			99	1880	18900	21.26	22	0-1	
				1900	19100	21.30	22	0-1	
				1860	18700	20.15	21	0-2	
	16-QAM		0	1880	18900	20.13	21	0-2	
				1900	19100	20.05	21	0-2	
				1860	18700	20.17	21	0-2	
		50 RB	25				21	0-2	
				1900	19100	20.10	21	0-2	
				1860	18700	20.06	21	0-2	
			50	1880	18900	20.05	21	0-2	
				1900	19100	20.08	21	0-2	
				1860	18700	20.12	21	0-2	
		100	ORB	1880	18900	20.19	21	0-2	
				1900	19100	20.13	21	0-2	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 18 of 339

			FDD Ba	and 2 (Full	Power)			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance	
				1857.5	18675	22.11	23	0
			0	1880	18900	22.23	23	Allowed per 3GPP(dB)
				1902.5	19125	22.19	23	0
				1857.5	18675	22.29	23	0
		1 RB	36	1880	18900	22.17	23	0
				1902.5	19125	22.07	23	0
				1857.5	18675	22.22	23	Allowed per 3GPP(dB)  0 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-
			74	1880	18900	22.16	23	0
				1902.5	19125	22.30	23	0
				1857.5	18675	21.15	22	0-1
	QPSK		0	1880	18900	21.19	22	0-1
				1902.5	19125	21.03	22	0-1
				1857.5	18675	21.07	22	0-1
		36 RB	18	1880	18900	21.17	22	Allowed per 3GPP(dB) e  0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
				1902.5	19125	21.06	22	
				1857.5	18675	21.06	22	
			37	1880	18900	21.06	22	
				1902.5	19125	21.13	22	0-1
			•	1857.5	18675	21.09	22	0-1
		75	RB	1880	18900	20.98	22	0-1
15				1902.5	19125	20.96	22	0-1
13				1857.5	18675	21.04	22	0-1
			0	1880	18900	21.25	22	0-1
				1902.5	19125	21.07	22	1
			75RB 0	1857.5	18675	21.22	22	1
		1 RB	36	1880	18900	21.07	22	1
				1902.5	19125	21.42	22	0-1
			Cal E	1857.5	18675	20.87	22	
			74	1880	18900	21.00	22	
				1902.5	19125	21.42	22	
			RB Offset  0  36  74  0  18  37  5RB  0  36	1857.5	18675	20.14	21	
	16-QAM		0	1880	18900	20.16	21	0-2
				1902.5	19125	19.96	21	
				1857.5	18675	20.09	21	
		36 RB	18	1880	18900	20.08	21	
	1			1902.5	19125	20.07	21	
				1857.5	18675	19.97	21	
			37	1880	18900	20.04	21	
				1902.5	19125	20.15	21	
				1857.5	18675	20.04	21	
		75	RB	1880	18900	20.02	21	1
				1902.5	19125	19.93	21	•

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 19 of 339

			FDD Ra	and 2 (Full	Power)			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance	MPR Allowed per 3GPP(dB)
				1855	18650	22.09	23	0
			0	1880	18900	22.17	23	Allowed per 3GPP(dB)  Allowed per 3GPP(dB)  B
				1905	19150	21.96	23	
				1855	18650	22.22	23	0
CO YE		1 RB	25	1880	18900	22.08	23	0
				1905	19150	22.19	23	0
				1855	18650	22.10	23	Allowed per 3GPP(dB)  O O O O O O O O O O O O O O O O O O
			49	1880	18900	22.15	Power + Max. Tolerance	
				1905	19150	22.38	23	0
				1855	18650	21.13	22	0-1
	QPSK		0	1880	18900	21.23	22	0-1
				1905	19150	21.13	22	0-1
				1855	18650	21.08	22	0-1
		25 RB	12	1880	18900	21.24	22	0-1
				1905	19150	21.17	22	0-1
				1855	18650	21.11	22	0-1
			25	1880	18900	21.15	22	0-1
				1905	19150	21.26	22	0-1
				1855	18650	21.00	22	0-1
		50	RB	1880	18900	21.01	22	0-1
10				1905	19150	20.96	22	0-1
			0	1855	18650	21.30	22	0-1
				1880	18900	20.92	22	0-1
				1905	19150	21.15	22	0-1
				1855	18650	21.02	22	0-1
		1 RB	25	1880	18900	21.15	22	0-1
				1905	19150	21.15		
				1855	18650	21.32		0-1
			49	1880	18900	21.02		
				1905	19150	21.59		1
				1855	18650	20.05		
	16-QAM		0	1880	18900	20.12		
				1905	19150	20.20		
1 00		OF DD	40	1855	18650	20.09		
1		25 RB	12	1880	18900	20.16		
				1905	19150	20.14		
			25	1855	18650	20.15		
			25	1880	18900	20.09		
				1905	19150	20.17	21	
			DD	1855	18650	19.93	21	
		50	RB	1880	18900	20.09	21	
				1905	19150	19.97	21	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 20 of 339

				10/5 !!	- `							
			FDD Ba	ınd 2 (Full	Power)		•					
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance	MPR Allowed per 3GPP(dB)				
				1852.5	18625	22.04	23	0				
			0	1880	18900	22.31	23	Allowed per 3GPP(dB)  0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1				
CA				1907.5	19175	22.21	23	0				
				1852.5	18625	22.06	23	0				
		1 RB	12	1880	18900	22.24	23	0				
				1907.5	19175	21.98	23	0				
				1852.5	18625	22.14	23	0				
			24	1880	18900	22.20	23	0				
				1907.5	19175	22.40	23	0				
				1852.5	18625	21.13	22	ver + Allowed per 3GPP(dB) rance 23				
	QPSK		0	1880	18900	21.29	22	0-1				
				1907.5	19175	21.28	22	ower + Max. slerance 23 0 23 0 23 0 23 0 23 0 23 0 23 0 23				
				1852.5	18625	21.18	22	0-1				
		12 RB	6	1880	18900	21.31	22	0-1				
				1907.5	19175	21.34	22	2 0-1 2 0-1 2 0-1				
				1852.5	18625	21.21	22	0-1				
			13	1880	18900	21.32	22	0-1				
1 cal				1907.5	19175	21.42	22	0-1				
				1852.5	18625	21.16	22	0-1				
		25	RB	1880	18900	21.17	22	0-1				
5				1907.5	19175	21.27	22	0-1				
				1852.5	18625	21.26	22	0-1				
			0	1880	18900	21.21	22 0-1 22 0-1 22 0-1 22 0-1 22 0-1 22 0-1 22 0-1 22 0-1 22 0-1 22 0-1 22 0-1 22 0-1 22 0-1 22 0-1					
				1907.5	19175	21.19	22	0-1				
				1852.5	18625	20.95	22					
		1 RB	12	1880	18900	21.15	22					
				1907.5	19175	21.42	22	Allowed per 3GPP(dB)   0   0   0   0   0   0   0   0   0				
				1852.5	18625	21.37	22	1				
			24	1880	18900	Conducted power (dBm)  25	0-1					
				1907.5	19175							
				1852.5	18625	Ī						
	16-QAM		0	1880	18900			0-2				
				1907.5	19175							
-10		40.77		1852.5	18625							
		12 RB	6	1880	18900							
				1907.5	19175							
			40	1852.5	18625							
			13	1880	18900							
				1907.5	19175							
			DD.	1852.5	18625			1				
		25	RB	1880	18900	i e		1				
				1907.5	19175	20.22	21	0-2				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 21 of 339

			FDD Ba	and 2 (Full	Power)			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance	MPR Allowed per 3GPP(dB)
				1851.5	18615	21.92	23	0
			0	1880	18900	22.25	23	Allowed per 3GPP(dB)
				1908.5	19185	22.21	23	0
				1851.5	18615	22.17	23	0
		1 RB	7	1880	18900	22.29	23	0
				1908.5	19185	22.30	23	0
				1851.5	18615	22.24	23	
			14	1880	18900	22.25	23	
				1908.5	19185	22.36	23	-+ Allowed per 3GPP(dB) 3GPP(dB) 0 0 0 0 0 0 0
	1			1851.5	18615	21.21	22	0-1
	QPSK		0	1880	18900	21.26	22	0-1
				1908.5	19185	21.29	22	0-1
				1851.5	18615	21.21	22	0-1
		8 RB	4	1880	18900	21.27	22	0-1
				1908.5	19185	21.36	22	Allowed per 3GPP(dB)  0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
				1851.5	18615	21.22	22	
			7	1880	18900	21.24	22	0-1
				1908.5	19185	21.41	22	0-1
				1851.5	18615	21.10	22	0-1
		15	RB	1880	18900	21.28	22	0-1
3				1908.5	19185	21.28	22	0-1
9				1851.5	18615	21.00	22	0-1
			0	1880	18900	21.07	22	0-1
				1908.5	19185	21.12	22	0-1
				1851.5	18615	21.31	22	0-1
		1 RB	7	1880	18900	21.24	22	0-1
				1908.5	19185	21.52	22	0-1
				1851.5	18615	20.98	22	0-1
			14	1880	18900	21.56	22	0-1
				1908.5	19185	21.65	22	0-1
				1851.5	18615	20.02	21	0-2
	16-QAM		0	1880	18900	20.20	21	0-2
				1908.5	19185	20.07	21	0-2
				1851.5	18615	20.19	21	0-2
		8 RB	4	1880	18900	20.18	21	0-2
				1908.5	19185	20.27	21	0-2
				1851.5	18615	20.13	21	0-2
			7	1880	18900	20.09	21	0-2
	] ]			1908.5	19185	20.37	21	0-2
				1851.5	18615	20.09	21	0-2
		15	RB	1880	18900	20.23	21	0-2
				1908.5	19185	20.27	21	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 www.tw.sgs.com



Page: 22 of 339

			EDD 5	O /E	D \			
		:		Frequency		Conducted	Target	MPR
BW(Mhz)	Modulation	RB Size	RB Offset	(MHz)		power (dBm)	Max. Tolerance	Allowed per 3GPP(dB)
		1		1850.7	18607	22.07	23	Allowed per
			0	1880	18900	22.13	23	0
					Tender   Channel   Power   Power   Max.   Tolerance   Tolerance			
				1850.7			23	
		1 RB	2	1880	18900	22.25	23	0
				1909.3	19193	22.33	23	0
				1850.7	18607	22.20	23	0
			5	1880	18900	22.24		0
								Allowed per 3GPP(dB)  0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
				1850.7	18607	22.09	22	0-1
	QPSK		0	1880	18900	22.31	22	Allowed per 3GPP(dB)  0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
				1909.3	19193	22.38	22	0-1
				1850.7	18607	22.13		
		3 RB	2	1880	18900	22.22		Allowed per 3GPP(dB)  0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
				1909.3		22.41	22	
			3			22.20		
						22.38	22	
							22	0-1
		6F	RB					
1.4				1909.3			22	0-1
			0					
								1
		1 RB	2					
								1
			5					1
								1
	40.0							
	16-QAM		0					
		0.55						
		3 RB	2					
			_					
			3					
			<b>DD</b>					
		6F	RB					1
	O T C		1909.3	19193	20.39	21	0-2	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 23 of 339

		F	DD Band	2 (Reduc	ed Powe	r)					
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance	MPR Allowed per 3GPP(dB)			
				1860	18700	18.82	20	0			
			0	1880	18900	18.83	20	0			
0.4				1900	19100	18.85	20	0			
				1860	18700	18.95	20	0			
		1 RB	50	1880	18900	18.92	20	0			
				1900	19100	18.83	20	0			
				1860	18700	18.86	20	0			
			99	1880	18900	18.82	20	0			
				1900	19100	18.99	20	Allowed per 3GPP(dB)  0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0			
				1860	18700	18.86	20	0-1			
	QPSK		0	1880	18900	18.74	20	0-1			
				1900	19100	18.65	20	Allowed per 3GPP(dB) ance 3GPP(dB) ance 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0			
			64 1	1860	18700	18.81	20				
		50 RB	25	1880	18900	18.71	20				
				1900	19100	18.63	20	0-1			
				1860	18700	18.78	20	0-1			
			50	1880	18900	18.71	20				
				1900	19100	18.71	20	0-1			
				1860	18700	18.75	20				
100		100	)RB	1880	18900	18.76	20	Allowed per 3GPP(dB)  0 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-			
20				1900	19100	18.75	20	0-1			
				1860	18700	18.84	20				
			0	1880	18900	18.91	20				
				1900	19100	18.81	20				
				1860	18700	18.89	20				
		1 RB	50	1880	18900	18.97	20				
				1900	19100	18.82	20				
				1860	18700	18.87	20				
			99	1880	18900	18.80	20	Allowed per 3GPP(dB)  0 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-			
				1900	19100	18.98	20				
	40.044			1860	18700	18.69	20				
	16-QAM		0	1880	18900	18.68	20				
				1900	19100	18.61	20				
		50 DD	25	1860	18700	18.81	20				
10		50 RB	25	1880	18900	18.70	20				
				1900	19100	18.69	20				
			50	1860	18700	18.81	20				
			50	1880	18900	18.66	20				
				1900	19100	18.66	20				
		400	NDD.	1860	18700	18.82	20				
		100	)RB	1880	18900	18.71	20				
				1900	19100	18.70	20	0-2			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 24 of 339

			IDD Band	2 (Poduc	od Dowo	r)		
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance	MPR Allowed per 3GPP(dB)
				1857.5	18675	18.69	20	0
			0	1880	18900	18.81	20	Allowed per 3GPP(dB)
				1902.5	19125	18.70	20	0
				1857.5	18675	18.79	20	0
		1 RB	36	1880	18900	18.85	20	0
				1902.5	19125	18.80	20	0
				fset         Frequency (MHz)         Channel (dBm)         Power (dBm)         Power Max. Tolerance (dBm)           1857.5         18675         18.69         20           1880         18900         18.81         20           1902.5         19125         18.70         20           1857.5         18675         18.79         20           1880         18900         18.85         20           1902.5         19125         18.80         20           1857.5         18675         18.88         20           1880         18900         18.76         20           1902.5         19125         18.90         20           1880         18900         18.65         20           1857.5         18675         18.65         20           1880         18900         18.66         20           1902.5         19125         18.55         20           1880         18900         18.67         20           1902.5         19125         18.62         20           1880         18900         18.64         20           1902.5         19125         18.62         20           1887.5				
			74				Power + Max. Tolerance 20 20 20 20 20 20 20 20 20 20 20 20 20	
							20	0
					18675		20	0-1
	QPSK		0	1880	18900	18.66	20	0-1
				1902.5	19125	18.55	20	0-1
			ed I	1857.5	18675	18.70	20	0-1
		36 RB	18	1880	18900	18.67	20	0-1
				1902.5	19125	18.62	20	0-1
				1857.5	18675	18.68	20	0-1
			37	1880	18900	18.64	20	0-1
				1902.5	19125	18.72	20	0-1
				1857.5	18675	18.63	20	0-1
		75	RB	1880	18900	18.58	20	0-1
15				1902.5	19125	18.56	20	0-1
10				1857.5	18675	18.63	20	0-1
			0	1880	18900	18.79	20	0-1
				1902.5	19125	18.60	20	0-1
				1857.5	18675	18.77	20	0-1
		1 RB	36	1880	18900	18.78	20	0-1
				1902.5	19125	18.79	20	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
			AL.	1857.5	18675	18.78	20	
			74	1880	18900	18.67	20	0-1
				1902.5	19125	18.93	20	0-1
				1857.5	18675	18.64	20	0-2
	16-QAM		0					
				1902.5				
		36 RB	18					
			0-					
			37					-
								1
		75	RB					
				1902.5	19125	18.50	20	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279

Member of SGS Group



Page: 25 of 339

		F	DD Band	2 (Reduc	ed Powe	r)				
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance	MPR Allowed pe 3GPP(dB)		
				1855	18650	18.67	20	0		
			0	1880	18900	18.79	20	0		
				1905	19150	18.63	20	0		
				1855	18650	18.74	20	0		
		1 RB	25	1880	18900	18.77	20	0		
				1905	19150	18.76	20	0		
				1855	18650	18.82	20	0		
			49	1880	18900	18.67	20	MPR Allowed per sax. aGPP(dB)		
				1905	19150	18.87	20			
	1			1855	18650	18.64	20			
	QPSK		0	1880	18900	18.70	20	0-1		
				1905	19150	18.63	20	Allowed per 3GPP(dB) are a sign of the sig		
				1855	18650	18.74	20			
		25 RB	12	1880	18900	18.71	20			
				1905	19150	18.73	20	0-1		
				1855	18650	18.76	20	Allowed per 3GPP(dB)  0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0		
			25	1880	18900	18.65	20			
				1905	19150	18.69	20	0-1		
				1855	18650	18.56	20	0-1 0-1 0-1 0-1 0-1 0-1		
		50	RB	1880	18900	18.57	20	0-1		
10				1905	19150	18.48	20	0-1		
10				1855	18650	18.67	20	0-1		
			0	1880	18900	18.73	20	0-1		
				1905	19150	18.67	20	0-1		
				1855	18650	18.76	20	0-1		
		1 RB	25	1880	18900	18.77	20	0-1		
				1905	19150	18.78	20	0-1		
				1855	18650	18.72	20	0-1		
			49	1880	18900	18.75	20	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0		
				1905	19150	18.82	20	0-1		
				1855	18650	18.60	20	0-2		
	16-QAM		0	1880	18900	18.71	20	Allowed per 3GPP(dB)  0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0		
				1905	19150	18.65	20			
				1855	18650	18.67	20	0-2		
		25 RB	12	1880	18900	18.67	20	0-2		
				1905	19150	18.70	20	0-2		
				1855	18650	18.66	20	0-2		
			25	1880	18900	18.71	20	0-2		
				1905	19150	18.67	20	0-2		
				1855	18650	18.49	20	0-2		
		50	RB	1880	18900	18.56	20	0-2		
				1905	19150	18.46	20	0-2		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 26 of 339

		F	DD Band	2 (Reduc	ed Powe	r)			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance	MPR Allowed per 3GPP(dB)	
				1852.5	18625	18.60	20	0	
			0	1880	18900	18.82	20	Allowed per 3GPP(dB)	
				1907.5	19175	18.79	20	0	
				1852.5	18625	18.73	20	0	
		1 RB	12	1880	18900	18.78	20	0	
				1907.5	19175	18.76	20	0	
				1852.5	18625	18.68	20	0	
			24	1880	18900	18.77	20	Allowed per 3GPP(dB)  Ce	
				1907.5	19175	18.92	20	0	
				1852.5	18625	18.61	20	Allowed per 3GPP(dB)  Allowed per 3GPP(dB)  O O O O O O O O O O O O O O O O O O	
	QPSK		0	1880	18900	18.85	20	0-1	
				1907.5	19175	18.70	20	Allowed per 3GPP(dB)  0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	
			04 1	1852.5	18625	18.70	20	0-1	
		12 RB	6	1880	18900	18.79	20	Allowed per 3GPP(dB)  0 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-	
				1907.5	19175	18.73	20	0-1	
				1852.5	18625	18.78	20	0-1	
			13	1880	18900	18.81	20	0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1	
		V		1907.5	19175	18.84	20	0-1 0-1 0-1 0-1	
				1852.5	18625	18.61	20	0-1	
		25	RB	1880	18900	18.68	20	0-1	
5				1907.5	19175	18.72	20	0-1	
			0	1852.5	18625	18.66	20	0-1	
				1880	18900	18.77	20	0-1	
				1907.5	19175	18.79	20	0-1	
				1852.5	18625	18.73	20	0-1	
		1 RB	12	1880	18900	18.82	20		
				1907.5	19175	18.79	20	0-1	
				1852.5	18625	18.72	20	0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-1 0-	
			24	1880	18900	18.75	20		
				1907.5	19175	18.86	20	•	
				1852.5	18625	18.70	20		
	16-QAM		0	1880	18900	18.81	20	Allowed per 3GPP(dB)  0 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-	
				1907.5	19175	18.74	20		
		40.00	_	1852.5	18625	18.77	20		
		12 RB	6	1880	18900	18.77	20		
				1907.5	19175	18.81	20		
			12	1852.5	18625	18.76	20		
			13	1880	18900	18.81	20		
				1907.5	19175	18.83	20		
		QE.	DR	1852.5	18625	18.65	20		
		25	RB	1880	18900	18.65	20		
				1907.5	19175	18.69	20	0-2	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 27 of 339

		F	DD Band	2 (Reduc	ed Powe	r)		
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance	MPR Allowed per 3GPP(dB)
				1851.5	18615	18.64	20	0
			0	1880	18900	18.76	20	Allowed per 3GPP(dB)
				1908.5	19185	18.78	20	0
				1851.5	18615	18.68	20	0
		1 RB	7	1880	18900	18.75	20	0
				1908.5	19185	18.81	20	Max.   Allowed per   3GPP(dB)
				1851.5	18615	18.75		
			14	1880	18900	18.75	20	
				1908.5	19185	18.92	20	0
				1851.5	18615	18.70	20	0-1
	QPSK		0	1880	18900	18.80	20	0-1
				1908.5	19185	18.78	20	0-1
			04 1	1851.5	18615	18.71	20 20 20 20 20	0-1
		8 RB	4	1880	18900	18.78	20	T + Allowed per 3GPP(dB)  Allowed per 3GPP(dB)  O
				1908.5	19185	18.80	20	
				1851.5	18615	18.70	20	
			7	1880	18900	18.77	20	0-1
				1908.5	19185	18.86	20	0-1
				1851.5	18615	18.71	20	0-1
		15	RB	1880	18900	18.81	20	0-1
3				1908.5	19185	18.83	20	0-1
				1851.5	18615	18.65	20	0-1
			0	1880	18900	18.77	20	0-1
				1908.5	19185	18.80	20	0-1
				1851.5	18615	18.77	20	0-1
		1 RB	7	1880	18900	18.80	20	0-1
				1908.5	19185	18.81	20	0-1
				1851.5	18615	18.71	20	0-1
			14	1880	18900	18.76	20	0-1
				1908.5	19185	18.86	20	0-1
				1851.5	18615	18.60	20	0-2
	16-QAM		0	1880	18900	18.66		Allowed per 3GPP(dB)  0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-1
				1908.5	19185	18.71		
			_	1851.5	18615	18.61		
		8 RB	4	1880	18900	18.69		
				1908.5	19185	18.74		
	1		7	1851.5	18615	18.60		
			7	1880	18900	18.74		
				1908.5	19185	18.83		
		. =	<b>D</b> D	1851.5	18615	18.69		1
		15	RB	1880	18900	18.80		
				1908.5	19185	18.84	20	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 28 of 339

		F	DD Band	2 (Reduc	ed Powe	r)				
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance	MPR Allowed per 3GPP(dB)		
				1850.7	18607	18.72	20	0		
			0	1880	18900	18.80	20	0		
				1909.3	19193	18.87	20	0		
				1850.7	18607	18.73	20	0		
		1 RB	2	1880	18900	18.81	20	0		
				1909.3	19193	18.87	20	0		
				1850.7	18607	18.69	20	0		
			5	1880	18900	18.78	20	0		
				1909.3	19193	18.92	20	0		
				1850.7	18607	18.70	20	0-1		
	QPSK		0	1880	18900	18.79	20	0-1		
				1909.3	19193	18.95	20	0-1		
				1850.7	18607	18.72	20	0-1		
		3 RB	2	1880	18900	18.84	20	0-1		
				1909.3	19193	18.89	20	0-1		
				1850.7	18607	18.65	20	0-1		
			3	1880	18900	18.78	20	0-1		
				1909.3	19193	18.89	20	0-1		
			•	1850.7	18607	18.69	20	0-1		
		6	RB	1880	18900	18.82	20	0-1		
1.4				1909.3	19193	18.89	20	0-1 0-1		
1.4				1850.7	18607	18.65	20	0-1		
			0	1880	18900	18.73	20	0-1		
				1909.3	19193	18.83	20	0-1		
				1850.7	18607	18.69	20	0-1		
		1 RB	2	1880	18900	18.72	20	0-1		
				1909.3	19193	18.90	20	0-1		
				1850.7	18607	18.73	20	0-1		
			5	1880	18900	18.70	20	0-1		
				1909.3	19193	18.87	20	0-1		
				1850.7	18607	18.65	20	0-2		
	16-QAM		0	1880	18900	18.79	20	0-2		
				1909.3	19193	18.86	20	0-2		
				1850.7	18607	18.66	20	0-2		
		3 RB	2	1880	18900	18.81	20	0-2		
			ĺ	1909.3	19193	18.88	20	0-2		
				1850.7	18607	18.72	20	0-2		
			3	1880	18900	18.86	20	0-2		
			ĺ	1909.3	19193	18.95	20	0-2		
			•	1850.7	18607	18.74	20	0-2		
		6	RB	1880	18900	18.79	20	0-2		
				1909.3	19193	18.90	20	0-2		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 29 of 339

			EDD D-	up d 4 / []	Davisin			
			FDD Ba	ınd 4 (Full	Power)		T-: 1	1
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance	MPR Allowed per 3GPP(dB)
				1720	20050	21.83	22.5	0
			0	1732.5	20175	22.08	22.5	0
0.4				1745	20300	21.90	22.5	0
				1720	20050	22.17	22.5	0
		1 RB	50	1732.5	20175	22.12	22.5	0
				1745	20300	22.04	22.5	0
				1720	20050	21.88	22.5	0
			99	1732.5	20175	22.04	22.5	0
				1745	20300	22.49	22.5	0
			0	1720	20050	20.91	22	0-1
	QPSK			1732.5	20175	21.01	22	0-1
				1745	20300	21.26	22	0-1
				1720	20050	20.96	22	0-1
		50 RB	25	1732.5	20175	20.88	22	0-1
				1745	20300	21.10	22	0-1
				1720	20050	20.85	22	0-1
			50	1732.5	20175	20.95	22	0-1
Cal				1745	20300	20.97	22	0-1
		40000		1720	20050	20.98	22	0-1
		100	)RB	1732.5	20175	20.96	22	0-1
20				1745	20300	21.12	22	0-1
				1720	20050	21.19	22	0-1
			0	1732.5	20175	21.45	22	0-1
				1745	20300	21.39	22	0-1
		1 000	50	1720	20050	21.43	22	0-1
		1 RB	50	1732.5	20175	21.16	22	0-1
				1745	20300	21.44	22	0-1
			99	1720	20050	21.30	22	0-1
			99	1732.5	20175	21.14	22	0-1
				1745	20300	21.98	22	0-1
	16-QAM		0	1720 1732.5	20050 20175	19.86 20.01	21 21	0-2 0-2
	10-QAIVI		U	1732.5				0-2
4 64				1745	20300 20050	20.24 19.82	21 21	0-2
		50 RB	25	1732.5	20175	19.82	21	0-2
		00 I (D		1732.3	20300	20.06	21	0-2
				1720	20050	19.89	21	0-2
			50	1732.5	20175	19.09	21	0-2
			- •	1745	20300	19.90	21	0-2
				1720	20050	19.87	21	0-2
		100	)RB	1732.5	20175	19.94	21	0-2
				1745	20300	20.04	21	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 30 of 339

			FDD Ba	and 4 (Full	Power)				
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance	MPR Allowed pe 3GPP(dB)	
			0	1717.5	20025	22.22	22.5	0	
				1732.5	20175	22.18	22.5	0	
				1747.5	20325	22.06	22.5	0	
				1717.5	20025	22.11	22.5	0	
		1 RB	36	1732.5	20175	22.14	22.5	0	
				1747.5	20325	22.21	22.5	0	
				1717.5	20025	22.09	22.5	0	
			74	1732.5	20175	22.22	22.5	0	
				1747.5	20325	21.94	22.5	0	
				1717.5	20025	21.03	22	0-1	
	QPSK		0	1732.5	20175	21.03	22	0-1	
				1747.5	5 20325 21.16 22	0-1			
				1717.5	20025	20.96	22	0-1	
		36 RB	18 1732.5 1747.5 1717.5	20175	20.98	22	0-1		
				1747.5	20325	21.04	22	0-1	
				1717.5	20025	20.98	22	0-1	
			37	1732.5	20175	21.09	22	0-1	
		V		1747.5	20325	20.99	22	0-1	
				1717.5	20025	20.90	22	0-1	
		75	RB	1732.5	20175	0175 20.87 22 0-			
15				1747.5	20325	20.84			
10			1717.5	20025	21.48	22	0-1		
			0	1732.5	20175	21.44	22	0-1	
				1747.5	20325	21.29	22	0-1	
				1717.5	20025	21.17	22	0-1	
		1 RB	36	1732.5	20175	21.07	22	0-1	
				1747.5	20325	21.42	22	0-1	
			40	1717.5	20025	20.88	22	0-1	
			74	1732.5	20175	21.40	22	0-1	
				1747.5	20325	21.85	22	0-1	
				1717.5	20025	19.89	21	0-2	
	16-QAM		0	1732.5	20175	20.01	21	0-2	
				1747.5	20325	20.11	21	0-2	
				1717.5	20025	19.96	21	0-2	
		36 RB	18	1732.5	20175	19.96	21	0-2	
				1747.5	20325	19.94	21	0-2	
				1717.5	20025	19.98	21	0-2	
			37	1732.5	20175	20.04	21	0-2	
	[			1747.5	20325	20.01	21	0-2	
				1717.5	20025	19.81	21	0-2	
		75	RB	1732.5	20175	19.84	21	0-2	
				1747.5	20325	19.92	21	0-2	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279



Page: 31 of 339

			FDD Ba	and 4 (Full	Power)				
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance	MPR Allowed pe 3GPP(dB)	
				1715	20000	22.01	22.5	0	
			0	1732.5	20175	22.17	22.5	0	
				1750	20350	22.21	22.5	0	
				1715	20000	22.09	22.5	0	
		1 RB	25	1732.5	20175	22.26	22.5	0	
				1750	20350	22.15	22.5	0	
				1715	20000	22.07	22.5	0	
			49	1732.5	20175	22.42	22.5	0	
				1750	20350	22.12	22.5	0	
				1715	20000	21.18	22	0-1	
	QPSK	(	0	1732.5	20175	21.19	22	0-1	
				1750	20350	21.18	22	0-1	
				1715	20000	21.04	22	0-1	
		25 RB	12	1732.5	20175	21.07	22	0-1	
				1750	20350	21.17	22	0-1	
				1715	20000	21.00	22	0-1	
			25	1732.5	20175	21.14	22	0-1	
				1750	20350	21.17	22	0-1	
				1715	20000	20.95	22	0-1	
		50	RB	1732.5	20175	20.96	22	0-1	
10				1750	20350	21.10	22 0-1 22 0-1		
10				1715	20000	20.93	22	0-1	
			0	1732.5	20175	20.88	22	0-1	
				1750	20350	21.02	22	0-1	
				1715	20000	21.28	22	0-1	
		1 RB	25	1732.5	20175	20.64	22	0-1	
				1750	20350	21.16	22	0-1	
				1715	20000	21.16	22	0-1	
			49	1732.5	20175	21.42	22	0-1	
				1750	20350	21.44	22	0-1	
				1715	20000	20.01	21	0-2	
	16-QAM		0	1732.5	20175	19.99	21	0-2	
				1750	20350	20.01	21	0-2	
				1715	20000	19.96	21	0-2	
		25 RB	12	1732.5	20175	20.07	21	0-2	
				1750	20350	20.06	21	0-2	
				1715	20000	19.98	21	0-2	
			25	1732.5	20175	20.08	21	0-2	
				1750	20350	20.08	21	0-2	
				1715	20000	19.92	21	0-2	
		50	RB	1732.5	20175	19.88	21	0-2	
				1750	20350	20.06	21	0-2	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279



Page: 32 of 339

			EDD D	n d 4 / [ . 11	Deversity			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance	MPR Allowed per 3GPP(dB)
				1712.5	19975	22.01	22.5	0
			0	1732.5	20175	22.15	22.5	0
				1752.5	20375	22.10	22.5	0
				1712.5	19975	22.03	22.5	0
		1 RB	12	1732.5	20175	22.15	22.5	0
				1752.5	20375	21.93	22.5	0
				1712.5	19975	22.30	22.5	0
			24	1732.5	20175	22.24	22.5	0
				1752.5	20375	22.23	22.5	0
				1712.5	19975	21.26	22	0-1
	QPSK		0	1732.5	20175	21.23	22	0-1
				1752.5	20375	21.36	22	0-1
			04/1	1712.5	19975	20.98	22	0-1
		12 RB	6	1732.5	20175	21.22	22	0-1
				1752.5	20375	21.04		0-1
				1712.5	19975	20.99	22	0-1
			13	1732.5	20175	21.07	22	0-1
				1752.5	20375	21.47	22	0-1
04				1712.5	19975	21.22	22	0-1
		25	RB	1732.5	20175	21.11	22	0-1
5				1752.5	20375	20.86	22	0-1
				1712.5	19975	20.98	22	0-1
			0	1732.5	20175	21.07	22	0-1
				1752.5	20375	20.88	22	0-1
				1712.5	19975	20.98	22	0-1
		1 RB	12	1732.5	20175	21.30	22	0-1
				1752.5	20375	21.37	22	0-1
				1712.5	19975	21.18	22	0-1
			24	1732.5	20175	20.93	22	0-1
				1752.5	20375	21.03	22	0-1
				1712.5	19975	20.22	21	0-2
	16-QAM		0	1732.5	20175	20.17	21	0-2
				1752.5	20375	20.27	21	0-2
				1712.5	19975	20.27	21	0-2
		12 RB	6	1732.5	20175	20.18	21	0-2
				1752.5	20375	19.94	21	0-2
			40	1712.5	19975	20.22	21	0-2
			13	1732.5	20175	20.01	21	0-2
				1752.5	20375	19.82	21	0-2
			DD	1712.5	19975	20.12	21	0-2
		25	RB	1732.5	20175	20.16	21	0-2
				1752.5	20375	20.27	21	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 33 of 339

			FDD Ba	ınd 4 (Full	Power)			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance	MPR Allowed per 3GPP(dB)
				1711.5	19965	22.03	22.5	0
			0	1732.5	20175	22.12	22.5	0
				1753.5	20385	21.82	22.5	0
				1711.5	19965	21.86	22.5	0
		1 RB	7	1732.5	20175	22.17	22.5	0
				1753.5	20385	21.93	22.5	0
				1711.5	19965	22.24	22.5	0
			14	1732.5	20175	22.27	22.5	0
			1753.5		20385	22.34	22.5	0
	l			1711.5	19965	21.20	22	0-1
	QPSK		0	1732.5	20175	21.27	22	0-1
				1753.5	20385	21.08	22	0-1
			04 1	1711.5	19965	21.33	22	0-1
		8 RB	4	1732.5	20175	21.23	22	0-1
				1753.5	20385	21.17	22	0-1
				1711.5	19965	21.29	22	0-1
			7	1732.5	20175	21.19	22	0-1
				1753.5	20385	21.07	22	0-1
			_	1711.5	19965	21.22	22	0-1
		15	RB	1732.5	20175	21.20	22	0-1
3				1753.5	20385	21.56	22	0-1
3				1711.5	19965	21.24	22	0-1
			0	1732.5	20175	21.05	22	0-1
				1753.5	20385	21.19	22	0-1
				1711.5	19965	20.98	22	0-1
		1 RB	7	1732.5	20175	21.08	22	0-1
				1753.5	20385	21.06	22	0-1
				1711.5	19965	21.29	22	0-1
			14	1732.5	20175	21.04	22	0-1
				1753.5	20385	21.59	22	0-1
				1711.5	19965	20.11	21	0-2
	16-QAM		0	1732.5	20175	20.17	21	0-2
				1753.5	20385	20.05	21	0-2
				1711.5	19965	19.84	21	0-2
		8 RB	4	1732.5	20175	20.04	21	0-2
				1753.5	20385	20.13	21	0-2
				1711.5	19965	19.81	21	0-2
			7	1732.5	20175	20.26	21	0-2
				1753.5	20385	20.02	21	0-2
	<b>[</b>			1711.5	19965	20.16	21	0-2
		15	RB	1732.5	20175	20.20	21	0-2
				1753.5	20385	20.02	21	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 34 of 339

			EDD Ba	nd 4 (Full	Dowor\			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance	MPR Allowed per 3GPP(dB)
				1710.7	19957	22.06	22.5	0
			0	1732.5	20175	22.04	22.5	0
				1754.3	20393	21.99	22.5	0
				1710.7	19957	22.03	22.5	0
		1 RB	2	1732.5	20175	21.97	22.5	0
				1754.3	20393	22.43	22.5	0
				1710.7	19957	22.07	22.5	0
			5	1732.5	20175	22.36	22.5	0
				1754.3	20393	22.43	22.5	0
				1710.7	19957	20.66	22	0-1
	QPSK		0	1732.5	20175	20.89	22	0-1
			2	1754.3	20393	21.00	22	0-1
				1710.7	19957	20.58	22	0-1
		3 RB		1732.5	20175	20.42	22	0-1
				1754.3	20393	21.00	22	0-1
				1710.7	19957	20.60	22	0-1
			3	1732.5	20175	20.83	22	0-1
				1754.3	20393	20.98	22	0-1
				1710.7	19957	19.65	22	0-1
		6F	RB	1732.5	20175	20.00	22	0-1
1.4				1754.3	20393	19.49	22	0-1
				1710.7	19957	20.40	22	0-1
			0	1732.5	20175	20.65	22	0-1
				1754.3	20393	20.91	22	0-1
			2	1710.7	19957	20.51	22	0-1
		1 RB		1732.5	20175	20.91	22	0-1
				1754.3	20393	20.54	22	0-1
				1710.7	19957	20.35	22	0-1
			5	1732.5	20175	20.52	22	0-1
				1754.3	20393	20.74	22	0-1
				1710.7	19957	20.52	21	0-2
	16-QAM		0	1732.5	20175	20.66	21	0-2
				1754.3	20393	21.00	21	0-2
		0.00	_	1710.7	19957	20.72	21	0-2
		3 RB	2	1732.5	20175	20.90	21	0-2
10		<b>&gt;</b>		1754.3	20393	20.42	21	0-2
			_	1710.7	19957	20.72	21	0-2
			3	1732.5	20175	20.92	21	0-2
	}			1754.3	20393	21.00	21	0-2
		er	DD.	1710.7	19957	19.71	21	0-2
	6RB		1732.5 1754.3	20175 20393	19.68 20.17	21 21	0-2 0-2	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 www.tw.sgs.com



Page: 35 of 339

		F	DD Band	l 4 (Reduc	ed Powe	r)			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance	MPR Allowed per 3GPP(dB)	
				1720	20050	19.57	20	0	
			0	1732.5	20175	19.68	20	0	
				1745	20300	19.81	20	0	
		4.00		1720	20050	19.69	20	0	
		1 RB	50	1732.5	20175	19.88	20	0	
				1745	20300	19.76	20	0	
			00	1720	20050	19.78	20	0	
			99	1732.5	20175	19.86	20	0	
				1745	20300	19.89	20	0	
	QPSK	0	1720	20050	19.59	20	0-1		
	QPSK		0	1732.5	20175	19.57	20	0-1	
				1745	20300	19.68	20	0-1	
		50 DD	0.5	1720	20050	19.55	20	0-1	
		50 RB	25	1732.5	20175	19.58	20 20 20	0-1	
				1745	20300	19.54		0-1	
			50	1720	20050	19.56		0-1	
			50	1732.5	20175	19.63	20	0-1	
				1745	20300	19.62	20		
				1720	20050	19.57	20	0-1	
		100	)RB	1732.5	20175	19.66	20		
20				1745	20300	19.69	20	0-1	
			0	1720	20050	19.59	20	0-1	
				1732.5	20175	19.60	20	0-1	
				1745	20300	19.48	20	0-1	
				1720	20050	19.73	20	0-1	
		1 RB	50	1732.5	20175	19.41	20	0-1	
				1745	20300	19.19	20	0-1	
				1720	20050	19.16	20	0-1	
			99	1732.5	20175	19.37	20	0-1	
				1745	20300	19.72	20	0-1	
				1720	20050	19.19	20	0-2	
	16-QAM		0	1732.5	20175	19.20	20	0-2	
				1745	20300	19.52	20	0-2	
				1720	20050	19.19	20	0-2	
		50 RB	25	1732.5	20175	19.27	20	0-2	
				1745	20300	19.24	20	0-2	
				1720	20050	19.19	20	0-2	
			50	1732.5	20175	19.34	20	0-2	
				1745	20300	19.20	20	0-2	
				1720	20050	19.30	20	0-2	
		100	)RB	1732.5	20175	19.26	20	0-2	
				1745	20300	19.30	20	0-2	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 36 of 339

		F	DD Band	4 (Reduc	ed Powe	r)		
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance	MPR Allowed per 3GPP(dB)
				1717.5	20025	19.30	20	0
			0	1732.5	20175	19.43	20	0
				1747.5	20325	19.42	20	0
				1717.5	20025	19.47	20	0
		1 RB	36	1732.5	20175	19.46	20	0
				1747.5	20325	19.46	20	0
				1717.5	20025	19.35	20	0
			74	1732.5	20175	19.56	20	0
				1747.5	20325	19.62	20	0
	l			1717.5	20025	19.20	20	0-1
	QPSK		0	1732.5	20175	19.23	20	0-1
				1747.5	20325	19.33	20	0-1
				1717.5	20025	19.14	20	0-1
		36 RB	18	1732.5	20175	19.25	20	0-1
				1747.5	20325	19.31	20	0-1
				1717.5	20025	19.27	20	0-1
			37	1732.5	20175	19.38	20	0-1
				1747.5	20325	19.27	20	0-1
				1717.5	20025	19.05	20	0-1
		75	RB	1732.5	20175	19.22	20	0-1
15				1747.5	20325	19.23	20	0-1
				1717.5	20025	18.78	20	0-1
			1 RB 36	1732.5	20175	19.28	20	0-1
				1747.5	20325	19.28	20	0-1
				1717.5	20025	19.02	20	0-1
		1 RB		1732.5	20175	19.40	20	0-1
				1747.5	20325	19.54	20	0-1
				1717.5	20025	19.12	20	0-1
			74	1732.5	20175	19.55	20	0-1
	l .			1747.5	20325	19.47	20	0-1
				1717.5	20025	19.12	20	0-2
	16-QAM		0	1732.5	20175	19.09	20	0-2
				1747.5	20325	19.17	20	0-2
				1717.5	20025	19.04	20	0-2
		36 RB	18	1732.5	20175	19.00	20	0-2
				1747.5	20325	19.04	20	0-2
			67	1717.5	20025	19.02	20	0-2
			37	1732.5	20175	19.17	20	0-2
	]			1747.5	20325	19.16	20	0-2
			-	1717.5	20025	18.98	20	0-2
		75	RB	1732.5	20175	19.07	20	0-2
				1747.5	20325	18.96	20	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 www.tw.sgs.com



Page: 37 of 339

		F	DD Band	4 (Reduc	ed Powe	r)		
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance	MPR Allowed per 3GPP(dB)
				1715	20000	19.21	20	0
			0	1732.5	20175	19.45	20	0
				1750	20350	19.30	20	0
				1715	20000	19.29	20	0
		1 RB	25	1732.5	20175	19.41	20	0
				1750	20350	19.46	20	0
				1715	20000	19.34	20	0
			49	1732.5	20175	19.44	20	0
				1750	20350	19.54	20	0
	l			1715	20000	19.25	20	0-1
	QPSK		0	1732.5	20175	19.29	20	0-1
				1750	20350	19.36	20	0-1
			64 1	1715	20000	19.35	20	0-1
		25 RB	12	1732.5	20175	19.34	20	Power + Max. Allowed per 3GPP(dB) Tolerance 20 0 0 20 0 20 0 20 0 20 0 20 0 20 0
				1750	20350	19.35		0-1
				1715	20000	19.25	20	wer + Allowed per 3GPP(dB) erance 20 0 0 20 0 20 0 20 0 20 0 20 0 20 0
			25	1732.5	20175	19.46	20	
				1750	20350	19.37	20	
				1715	20000	19.19	20	0-1
		50	RB	1732.5	20175	19.27	20	0-1
10				1750	20350	19.24	20	0-1
10				1715	20000	19.27	20	0-1
			0	1732.5	20175	19.21	20	0-1
				1750	20350	19.00		0-1
				1715	20000	19.46	20	0-1
		1 RB	25	1732.5	20175	19.22	20	0-1
				1750	20350	19.12	20	1
				1715	20000	19.44		Allowed per 3GPP(dB) ance 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
			49	1732.5	20175	18.89	20	0-1
				1750	20350	18.98	20	0-1
				1715	20000	19.18	20	0-2
	16-QAM		0	1732.5	20175	19.15	20	0-2
				1750	20350	19.22	20	
				1715	20000	19.05	20	0-2
		25 RB	12	1732.5	20175	19.21	20	0-2
				1750	20350	19.27		0-2
				1715	20000	19.03		0-2
			25	1732.5	20175	19.31		0-2
				1750	20350	19.25		0-2
			-	1715	20000	19.04	20	0-2
		50	RB	1732.5	20175	18.99	20	0-2
				1750	20350	19.10	20	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 38 of 339

			DD Band	l 4 (Reduc	ed Power	r)		
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max.	MPR Allowed per
				1712.5	19975	19.13	Tolerance 20	` ′
			0	1732.5	20175	19.32	20	
				1752.5	20375	19.43	20	
				1712.5	19975	19.34	20	0
		1 RB	12	1732.5	20175	19.37	20	0
				1752.5	20375	19.44	20	0
				1712.5	19975	19.24	20	
			24	1732.5	20175	19.45	20	
				1752.5	20375	19.43	20	
				1712.5	19975	19.39	20	0-1
	QPSK		0	1732.5	20175	19.42	20	0-1
				1752.5	20375	19.35	20	
				1712.5	19975	19.43	20	
		12 RB	6	1732.5	20175	19.41	20	0-1
				1752.5	20375	19.41	20	0-1
				1712.5	19975	19.38	20	0-1
			13	1732.5	20175	19.49	20	0-1
		V		1752.5	20375	19.42	20	0-1
				1712.5	19975	19.31	20	0-1
		25	RB	1732.5	20175	19.30	20	0-1
1 A				1752.5	20375	19.34	20	0-1
5				1712.5	19975	18.99	20	0-1
			0	1732.5	20175	19.39	20	0-1
				1752.5	20375	19.56	20	0-1
				1712.5	19975	18.85	20	0-1
		1 RB	12	1732.5	20175	19.41	20	Allowed per 3GPP(dB)  0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-1
				1752.5	20375	19.46	20	0-1
				1712.5	19975	19.01	20	0-1
			24	1732.5	20175	19.23	20	0-1
				1752.5	20375	19.16	20	Allowed per 3GPP(dB)  0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-1
				1712.5	19975	19.19	20	0-2
	16-QAM		0	1732.5	20175	19.38	20	0-2
				1752.5	20375	19.23	20	0-2
				1712.5	19975	19.16	20	0-2
		12 RB	6	1732.5	20175	19.29	20	0-2
				1752.5	20375	19.40	20	0-2
				1712.5	19975	19.23	20	0-2
			13	1732.5	20175	19.32	20	0-2
				1752.5	20375	19.31	20	0-2
				1712.5	19975	19.20	20	0-2
		25	RB	1732.5	20175	19.05	20	0-2
				1752.5	20375	19.26	20	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 39 of 339

		F	DD Band	4 (Reduc	ed Powe	r)				
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance	MPR Allowed per 3GPP(dB)		
				1711.5	19965	19.12	20	0		
			0	1732.5	20175	19.08	20	0		
				1753.5	20385	19.14	20	0		
				1711.5	19965	19.26	20	0		
		1 RB	7	1732.5	20175	19.16	20	0		
				1753.5	20385	19.09	20	0		
				1711.5	19965	19.17	20	0		
			14	1732.5	20175	19.22	20	0		
				1753.5	20385	19.16	20	0		
				1711.5	19965	19.10	20	0-1		
	QPSK		0	1732.5	20175	19.19	20	0-1		
				1753.5	20385	19.20	20	0-1		
				1711.5	19965	19.17	20	0-1		
		8 RB	4	1732.5	20175	19.20	20	+ Allowed per 3GPP(dB)  Ce		
				1753.5	20385	19.26	20			
				1711.5	19965	19.17	20	0-1		
			7	1732.5	20175	19.23	20	0 0 0 0 0 0 0 0-1 0-1 0-1 0-1 0-1 0-1 0-		
				1753.5	20385	19.19	20	0-1		
				1711.5	19965	19.09	20	0-1		
		15	RB	1732.5	20175	19.19	20	0 0 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1		
3				1753.5	20385	19.21	20	0-1		
3				1711.5	19965	18.78	20	0-1		
			0	1732.5	20175	19.29	20	0-1		
			7 15RB	1753.5	20385	18.69	20	0-1		
				1711.5	19965	18.96	20	0-1		
		1 RB	7	1732.5	20175	18.96	20	0-1		
				1753.5	20385	19.31	20	0-1		
				1711.5	19965	19.17	20	0-1		
			14	1732.5	20175	18.70	20	0-1		
				1753.5	20385	19.20	20	0-1		
				1711.5	19965	18.66	20	0-2		
	16-QAM		0	1732.5	20175	19.02	20	0-2		
				1753.5	20385	18.78	20	0-2		
				1711.5	19965	19.03	20	0-2		
		8 RB	4	1732.5	20175	18.96	20	0-2		
				1753.5	20385	18.87	20	0-2		
				1711.5	19965	18.92	20	0-2		
			7	1732.5	20175	18.95	20	0-2		
				1753.5	20385	18.95	20	0-2		
				1711.5	19965	19.08	20	0-2		
		15	RB	1732.5	20175	19.26	20	0-2		
			0 7 14 0	1753.5	20385	18.98	20	0-2		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 40 of 339

			DD Band	4 (Podus	and Dowe	r)				
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance	MPR Allowed per 3GPP(dB)		
				1710.7	19957	19.02	20	0		
			0	1732.5	20175	19.21	20	0		
				1754.3	20393	19.13	20	0		
				1710.7	19957	19.13	20	0		
		1 RB	2	1732.5	20175	19.30	20	0		
				1754.3	20393	19.31	20	0		
				1710.7	19957	19.15	20	0		
			5	1732.5	20175	19.22	20	0		
				1754.3	20393	19.31	20	0		
				1710.7	19957	19.03	20	0-1		
	QPSK		0	1732.5	20175	19.31	20	0-1		
				1754.3	20393	19.26	20	Mer + Allowed per 3GPP(dB) erance 20 0 0 20 0 20 0 20 0 20 0 20 0 20 0		
			04 1	1710.7	19957	18.98	20	0-1		
		3 RB	2	1732.5	20175	19.18	20	0-1		
				1754.3	20393	19.33	20			
				1710.7	19957	19.01	20	0-1		
			3	1732.5	20175	19.21	20	Allowed per 3GPP(dB)  0 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-		
				1754.3	20393	19.15	20	0-1		
				1710.7	19957	19.00	20	0-1		
		6F	RB	1732.5	20175	19.31	20	0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1		
1.4				1754.3	20393	19.27	20	0-1		
				1710.7	19957	19.20	20	0-1		
			0	1732.5	20175	18.94		0-1		
				1754.3	20393	19.13	20	0-1		
				1710.7	19957	18.48		0-1		
		1 RB	2	1732.5	20175	19.29				
				1754.3	20393	18.97				
				1710.7	19957	19.15				
			5	1732.5	20175	18.98		1		
	•			1754.3	20393	19.20		<b>•</b>		
	40 0 4 14			1710.7	19957	19.01				
	16-QAM		0	1732.5	20175	19.05				
				1754.3	20393	19.12				
		3 RB	2	1710.7	19957	18.99				
		O ND	۷	1732.5	20175	18.97				
				1754.3	20393	19.14				
			3	1710.7	19957	18.89				
			J	1732.5 1754.3	20175	19.18				
				1754.3	20393 19957	19.13				
		61	RB			18.83				
		Or	()	1732.5	20175 20393	19.15 18.97	20	0-2		
				1754.3	20393	10.97	∠0	U-Z		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 41 of 339

			FDD Ba	and 5 (Full	Power)			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				829	20450	21.76	22.5	0
			0	836.5	20525	21.86	22.5	0
				844	20600	22.04	22.5	0
				829	20450	21.87	22.5	0
		1 RB	25	836.5	20525	21.83	22.5	0
				844	20600	21.95	22.5	0
				829	20450	21.84	22.5	0
			49	836.5	20525	21.77	22.5	0
				844	20600	22.24	22.5	+ MPR Allowed per 3GPP(dB)  0 0 0 0 0 0 0 0 0 0 0 0
				829	20450	20.74	21	
	QPSK		0	836.5	20525	20.76	21	
				844	20600	20.70	21	
			12	829	20450	20.80	21	
		25 RB		836.5	20525	20.80	21	
				844	20600	20.75	21	
				829	20450	20.89		
			25	836.5	20525	20.77	21 0- 21 0- 21 0-	
				844	20600	20.71		
			•	829	20450	20.58		
		50	RB	836.5	20525	20.68	21	
				844	20600	20.62	21	
10				829	20450	20.77	21	
			0	836.5	20525	20.75	21	
			U	844	20600	20.79	21	
				829	20450	20.73	21	
		1 RB	25	836.5	20525	20.82	21	
		1110	20	844	20600	21.08	21	
				829	20450	21.04	21	
			49	836.5	20525	20.72	21	
			7.0	844	20600	21.78	21	
				829	20450	19.68	20	
	16-QAM		0		20525		20	
	10-QAIVI		Ů	836.5 844	20600	19.89		
				829	20450	19.78 19.76	20 20	
		25 RB	12	836.5	20450	19.76	20	
		23 ND	14			19.79		
	\			844	20600	19.77	20	
			25	829	20450	19.91	20	
			20	836.5	20525	19.71	20	
				844	20600	19.75	20	
		F0	DD	829	20450	19.56	20	
		50	RB	836.5	20525	19.63	20	
				844	20600	19.59	20	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 42 of 339

					D			
			FDD Ba	nd 5 (Full	Power)			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
		V		826.5	20425	21.62	22.5	0
			0	836.5	20525	21.71	22.5	0
				846.5	20625	21.69	22.5	0
				826.5	20425	21.67	22.5	0
		1 RB	12	836.5	20525	21.75	22.5	0
				846.5	20625	21.71	22.5	0
				826.5	20425	21.65	22.5	0
			24	836.5	20525	21.83	22.5	0
				846.5	20625	21.71	22.5	0
				826.5	20425	20.80	21	0-1
	QPSK		0	836.5	20525	20.86	21	0-1
			00	846.5	20625	20.77	21	0-1
				826.5	20425	20.79	21	0-1
		12 RB	6	836.5	20525	20.87		0-1
				846.5	20625	20.81		0-1
				826.5	20425	20.77	21	0-1
			13	836.5	20525	20.80	21	0-1
				846.5	20625	20.82	21	0-1
				826.5	20425	20.67	21	0-1
		25	RB	836.5	20525	20.69	21	0-1
5				846.5	20625	20.70	21	0-1
				826.5	20425	20.90		0-1
			0	836.5	20525	20.73		0-1
				846.5	20625	20.62		0-1
				826.5	20425	20.63		0-1
		1 RB	12	836.5	20525	20.94	0.77     21       0.79     21       0.87     21       0.81     21       0.77     21       0.80     21       0.67     21       0.69     21       0.70     21       0.90     21       0.73     21       0.62     21       0.63     21       0.63     21       0.57     21       0.41     21       0.57     21       0.41     21       0.75     20       0.83     20       0.74     20	0-1
				846.5	20625	20.63		0-1
				826.5	20425	21.00		0-1
			24	836.5	20525	20.57		0-1
				846.5	20625	20.41		0-1
	40.0444			826.5	20425	19.75		0-2
	16-QAM		0	836.5	20525	19.83		0-2
( CA				846.5	20625	19.74		0-2
		40.00		826.5	20425	19.84		0-2
		12 RB	6	836.5	20525	19.88	20	0-2
				846.5	20625	19.87	20	0-2
			12	826.5	20425	19.71	20	0-2
			13	836.5	20525	19.78	20	0-2
				846.5	20625	19.93	20	0-2
		0.5	DD	826.5	20425	19.61	20	0-2
		25	KD	836.5	20525	19.68	20	0-2
				846.5	20625	19.68	20	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 43 of 339

			FDD Ba	ınd 5 (Full	Power)			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				825.5	20415	21.69	22.5	0
			0	836.5	20525	21.62	22.5	0
				847.5	20635	21.52	22.5	0
				825.5	20415	21.66	22.5	0
		1 RB	7	836.5	20525	21.68	22.5	0
				847.5	20635	21.55	22.5	0
				825.5	20415	21.67	22.5	0
			14	836.5	20525	21.80	22.5	0
				847.5	20635	21.74	22.5	0
				825.5	20415	20.71	21	0-1
	QPSK		0	836.5	20525	20.77	21	0-1
				847.5	20635	20.75	21	0-1
				825.5	20415	20.72	21	0-1
		8 RB	4	836.5	20525	20.82	21	0-1
				847.5	20635	20.79	21	0-1
				825.5	20415	20.78	21	0-1
			7	836.5	20525	20.76	21	0-1
				847.5	20635	20.74	21	0-1
				825.5	20415	20.65	21	0-1
		15	RB	836.5	20525	20.78	21	0-1
3				847.5	20635	20.70	21	0-1
3				825.5	20415	20.88	21	0-1
			0	836.5	20525	20.54	21	0-1
				847.5	20635	20.85	21	0-1
				825.5	20415	20.39	21	0-1
		1 RB	7	836.5	20525	20.99	21	0-1
				847.5	20635	20.87	21	0-1
				825.5	20415	20.56	21	0-1
			14	836.5	20525	20.75	21	0-1
				847.5	20635	20.68	21	0-1
				825.5	20415	19.65	20	0-2
	16-QAM		0	836.5	20525	19.74	20	0-2
				847.5	20635	19.71	20	0-2
64				825.5	20415	19.74	20	0-2
		8 RB	4	836.5	20525	19.78	20	0-2
				847.5	20635	19.75	20	0-2
				825.5	20415	19.76	20	0-2
			7	836.5	20525	19.85	20	0-2
				847.5	20635	19.71	20	0-2
				825.5	20415	19.72	20	0-2
		15	RB	836.5	20525	19.76	20	0-2
				847.5	20635	19.84	20	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be

prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 44 of 339

			EDD Ba	nd 5 (Full	Dowor)					
			רטט אז	nd 5 (Full	rower)		Target			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Power + Max. Tolerance	MPR Allowed per 3GPP(dB)		
1				824.7	20407	21.61		0		
			0	836.5	20525	21.72	22.5	0		
				848.3	20643	21.69		0		
				824.7	20407	21.69	22.5	0		
		1 RB	2	836.5	20525	21.75	22.5	0		
				848.3	20643	21.78	22.5	0		
				824.7	20407	21.79	22.5	0		
			5	836.5	20525	21.74	22.5	0		
				848.3	20643	21.70	Dower (dBm)         Max. Tolerance (dBm)         Allow 3GP           21.61         22.5         22.5           21.72         22.5         22.5           21.69         22.5         22.5           21.75         22.5         22.5           21.79         22.5         22.7           21.70         22.5         22.7           21.70         22.5         22.7           20.72         21         0           20.68         21         0           20.72         21         0           20.72         21         0           20.72         21         0           20.72         21         0           20.72         21         0           20.72         21         0           20.72         21         0           20.72         21         0           20.72         21         0           20.72         21         0           20.72         21         0           20.67         21         0           19.74         21         0           20.67         21         0           20.68	0		
				824.7	20407	20.72		0-1		
	QPSK		0	836.5	20525	20.68		0-1		
				848.3	20643			0-1		
				824.7	20407	20.72         21         0-1           20.68         21         0-1           20.76         21         0-1           20.69         21         0-1           20.72         21         0-1           20.74         21         0-1           20.72         21         0-1           20.67         21         0-1           20.67         21         0-1           20.67         21         0-1				
		3 RB	2	836.5	20525		21	0-1		
				848.3	20643			r + MPR Allowed per noce 3GPP(dB)  5		
				824.7	20407					
			3	836.5	20525					
				848.3	20643					
				824.7	20407					
		6F	RB	836.5	20525			0 0 0 0 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1		
0.				848.3	20643					
1.4				824.7	20407		21	0-1		
			0	836.5	20525					
				848.3	20643			Allowed per 3GPP(dB)  0 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-		
				824.7	20407					
		1 RB	2	836.5	20525			Allowed per 3GPP(dB)  0 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-		
				848.3	20643					
				824.7	20407			Power + MPR Allowed per 3GPP(dB) (dBm) 22.5 0 22.5		
			5	836.5	20525					
			G-61 F	848.3	20643	20.35		1		
				824.7	20407					
	16-QAM		0	836.5	20525					
				848.3	20643					
				824.7	20407	40.75	00	0.0		
		3 RB	2	836.5	20525					
	3 RB		848.3	20643	20.00					
			824.7	20407						
		3	836.5	20525						
				848.3	20643	19.63				
			•	824.7	20407	18.82				
		6F	RB	836.5	20525	18.94				
				848.3	20643	18.92				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 45 of 339

		F	DD Band	5 (Reduc	ed Powe	r)				
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance	MPR Allowed per 3GPP(dB)		
			0	829 836.5	20450 20525	18.24 18.33	20	0		
				844	20600	18.18	20	0		
				829	20450	18.39	20	0		
		1 RB	25	836.5	20525	18.29				
				844	20600	18.19	20	0		
				829	20450	18.36	20	0		
			49	836.5	20525	18.27	20	0		
				844	20600	18.50	20	0		
				829	20450	18.20		0-1		
	QPSK		0	836.5	20525	18.27		<del></del>		
	<b>—</b>		40	844	20600	18.21		1		
				829	20450	18.42				
		25 RB	12	836.5	20525	18.39		•		
				844	20600	18.28				
				829	20450	18.49		•		
			25	836.5	20525	18.36	Power + MPR Max. Tolerance (dBm) 20 0 20 0 20 0 20 0 20 0 20 0 20 0 20			
				844	20600	18.29				
				829	20450	18.29				
		50	RB	836.5	20525	18.21				
		00	. (5	844	20600	18.27		0 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-		
10				829	20450	18.36				
			0	836.5	20525	18.47				
			Ĭ	844	20600	18.44				
				829	20450	18.47				
		1 RB	25	836.5	20525	18.20				
				844	20600	17.93				
				829	20450	18.12				
			49	836.5	20525	18.21				
				844	20600	18.09		•		
				829	20450	17.91				
	16-QAM		0	836.5	20525	18.05		1		
	. 5 30 1111			844	20600	18.10				
				829	20450	18.13				
		25 RB	12	836.5	20525	18.10				
		20110	' <u>*</u>	844	20600	17.92				
100				829	20450	18.16				
			25	836.5	20525					
			25	844	20600	18.01	20	0-2		
				829	20450	17.87	20			
		50	RB			18.00		0-2		
		30	מאו	836.5	20525	17.96	20	0-2		
				844	20600	17.96	20	0-2		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 46 of 339

			DD Band	5 (Reduc	ed Power	r)		
	1		מוומם טט	5 (Reduc	eu rowe		Target	
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Power + Max. Tolerance	MPR Allowed per 3GPP(dB)
				826.5	20425	18.02	20	0
			0	836.5	20525	18.12	20	0
				846.5	20625	18.18	20	0
				826.5	20425	18.15	20	0
		1 RB	12	836.5	20525	18.23	20	0
				846.5	20625	18.15	20	0
				826.5	20425	18.22	20	0
			24	836.5	20525	18.21	20	0
				846.5	20625	18.07	20	0
				826.5	20425	18.07	20	0-1
	QPSK		0	836.5	20525	18.13	20	0-1
				846.5	20625	18.07	20	
				826.5	20425	18.18	20	
		12 RB	6	836.5	20525	18.22	20	
				846.5	20625	18.16	20	
				826.5	20425	18.20	20	
			13	836.5	20525	18.24	20	Allowed per 3GPP(dB)  0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
				846.5	20625	18.16	20	
				826.5	20425	18.05	20	
		25	RB	836.5	20525	18.13	20	
				846.5	20625	18.13	20	
5				826.5	20425	17.73	20	
			0	836.5	20525	17.93	20	
				846.5	20625	18.08	20	Allowed per 3GPP(dB)  0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
				826.5	20425	18.24	20	
		1 RB	12	836.5	20525	17.87	20	•
				846.5	20625	17.84	20	
				826.5	20425	18.43	20	•
			24	836.5	20525	18.35	20	
				846.5	20625	17.98	20	0-1
				826.5	20425	18.16	20	
	16-QAM		0	836.5	20525	18.23	20	
				846.5	20625	18.13	20	
				826.5	20425	18.19	20	
		12 RB	6	836.5	20525	18.28	20	0-2
				846.5	20625	18.10	20	
	\			826.5	20425	18.26	20	
			13	836.5	20525	18.24	20	
				846.5	20625	18.05	20	1
				826.5	20425	18.05	20	
		25	RB	836.5	20525	18.09	20	0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-1 0-
			846.5	20625	18.10	20	1	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 47 of 339

		F	DD Band	5 (Reduc	ed Powe	r)		
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance	MPR Allowed per 3GPP(dB)
			0	825.5 836.5	20415 20525	18.02 18.13	20	0
	١.			847.5 825.5	20635 20415	18.04 18.14	20 20	0
		1 RB	7	836.5 847.5	20525	18.23	20	0
			14	825.5 836.5	20415 20525	18.13 18.22	20 20 20	0 0
				847.5 825.5	Channel         power (dBm)         Max. Tolerance (dBm)         Allower 3GPF           20415         18.02         20         0           20525         18.13         20         0           20635         18.04         20         0           20415         18.14         20         0           20525         18.23         20         0           20635         18.04         20         0           20415         18.13         20         0           20525         18.22         20         0           20635         18.16         20         0           20635         18.16         20         0           20635         18.16         20         0           20525         18.17         20         0           20525         18.17         20         0           20635         18.23         20         0           20635         18.23         20         0           20525         18.22         20         0           20635         18.22         20         0           20525         18.17         20         0           20525	0 0-1		
	QPSK		0	836.5 847.5	20635			0-1 0-1
		8 RB	4	825.5 836.5	20525	18.22	20	0-1 0-1
			7	847.5 825.5 836.5	20415	18.09	20	0-1 0-1 0-1
				847.5 825.5	20635	18.16	20	0-1 0-1
		15	RB	836.5 847.5	20525	18.17	20	0-1 0-1
3			0	825.5 836.5				0-1 0-1
				847.5 825.5				0-1 0-1
		1 RB	7	836.5 847.5				0-1 0-1
			14	825.5 836.5	20525	18.48	20	0-1 0-1
	16-QAM		0	847.5 825.5 836.5				0-1 0-2 0-2
				847.5 825.5	20635 20415	18.03 17.93	20	0-2 0-2
		8 RB	4	836.5 847.5	20525 20635	18.23 18.06	20 20	0-2 0-2
			7	825.5 836.5	20415 20525	17.97 18.13	20	0-2 0-2
		45	D.D.	847.5 825.5	20635 20415	18.14 18.02	20	0-2
		15	RB	836.5 847.5	20525 20635	18.17 18.19	20	0-2 0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 48 of 339

		F	DD Band	5 (Reduc	ed Powe	r)		
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance	MPR Allowed per 3GPP(dB)
			0	824.7 836.5	20407 20525	18.01 18.12	20 20	0
				848.3 824.7	20643 20407	18.10 18.16	20 20	0
		1 RB	2	836.5 848.3	20525 20643	18.18 18.15	20	0
			5	824.7 836.5	20407 20525	18.17 18.28	20 20	0
	ODCK		0	848.3 824.7	20643	18.11	20	0 0-1
	QPSK		0	836.5 848.3	20525 20643 20407	18.19 18.21 18.12	20 20 20	0-1 0-1 0-1
		3 RB	2	824.7 836.5 848.3	20525 20643	18.18 18.18	20 20	0-1 0-1 0-1
			3	824.7 836.5	20407 20525	18.09 18.25	20	0-1 0-1
				848.3 824.7	20643 20407	18.18 18.13	20 20	0-1 0-1
1.4		6F	RB	836.5 848.3	20525 20643	18.23 18.18	20	0-1 0-1
			0	824.7 836.5	20407 20525	18.39 17.94	20	0-1 0-1
		1 RB	2	848.3 824.7 836.5	20643 20407 20525	18.42 18.24 18.42	20 20 20	0-1 0-1 0-1
				848.3 824.7	20643 20407	18.30 17.96	20	0-1 0-1
			5	836.5 848.3	20525 20643	18.36 17.90	20 20	0-1 0-1
	16-QAM		0	824.7 836.5 848.3	20407 20525 20643	18.18 18.29 18.23	20 20 20	0-2 0-2 0-2
		3 RB	2	824.7 836.5	20407 20525	18.21 18.26	20 20	0-2 0-2
			3	848.3 824.7 836.5	20643 20407 20525	18.18 18.16 18.23	20 20 20	0-2 0-2 0-2
				848.3 824.7	20643 20407	18.03 18.03	20	0-2 0-2
		6F	RB	836.5 848.3	20525 20643	18.22 18.17	20 20	0-2 0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 49 of 339

			FDD Ba	nd 13 (Ful	l Power)			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
			0	782	23230	21.65	22	0
		1 RB	25	782	23230	22.00	22	0
A-00 (			49	782	23230	21.85	22	0
	QPSK		0	782	23230	20.89	21	0-1
		25 RB	12	782	23230	20.95	21	er + MPR Allowed pe 3GPP(dB) 2 0 2 0 2 0 2 0 1 0-1 1 0-1 1 0-1 1 0-1 1 0-1 1 0-1 1 0-1 1 0-1 0 0-2 0 0-2 0 0-2 0 0-2
			25	782	23230	20.86	21	0-1
10		50RB		782	23230	20.74	21	0-1
10			0	782	23230	20.57	21	0-1
		1 RB	25	782	23230	20.93	21	0-1
			49	782	23230	20.82	21	0-1
	16-QAM		0	782	23230	19.81	20	0-2
		25 RB	12	782	23230	19.82	20	0-2
			25	782	23230	19.78	20	0-2
		50	RB	782	23230	19.79	20	0-2



This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 50 of 339

			FDD Bai	nd 13 (Ful	Il Power)			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
			0	779.5 782 784.5	23205 23230 23255	21.76 21.79	22 22 22	0 0
		1 RB	12	779.5 782	23205 23230	21.59 21.69 21.86	22 22	0
QPSK			24	784.5 779.5 782	23255 23205 23230	21.67 21.87 21.78	22 22 22	0 0
	OPSK		0	784.5 779.5 782	23255 23205 23230	21.74 20.77 20.83	22 21 21	0 0-1 0-1
	QI SIX			784.5 779.5	23255 23205	20.85 20.70	21 21	0-1 0-1 0-1
		12 RB	6	782 784.5 779.5	23230 23255 23205	20.95 20.87 20.84	21 21 21	0-1 0-1 0-1
			13	782 784.5	23230 23255	20.86 20.78	21 21	0-1 0-1
2		25	RB	779.5 782 784.5	23205 23230 23255	20.81 20.86 20.90	21 21 21	0-1 0-1 0-1
5			0	779.5 782	23205 23230	20.89 20.99	21	0-1 0-1
		1 RB	12	784.5 779.5 782	23255 23205 23230	20.98 20.94 20.93	21 21 21	0-1 0-1 0-1
				784.5 779.5	23255 23205	20.54 20.87	21 21	0-1 0-1
			24	782 784.5 779.5	23230 23255 23205	20.72 20.97 19.77	21 21 20	0-1 0-1 0-2
	16-QAM		0	782 784.5	23230 23255	19.89 19.93	20 20	0-2 0-2
		12 RB	6	779.5 782 784.5	23205 23230 23255	19.72 19.96 19.88	20 20 20	0-2 0-2 0-2
			13	779.5 782	23205 23230	19.91 19.98	20 20	0-2 0-2
		25	RB	784.5 779.5 782	23255 23205 23230	19.76 19.63 19.72	20 20 20	0-2 0-2 0-2
		20		784.5	23255	19.75	20	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 51 of 339

		F	DD Band	13 (Redu	ced Powe	er)		
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
			0	782	23230	18.01	20	0
		1 RB	25	782	23230	18.33	20	0
			49	782	23230	18.09	20	0
	QPSK		0	782	23230	18.01	20	0-1
		25 RB	12	782	23230	18.17	20	0-1
			25	782	23230	18.15	20	0-1
10		50RB		782	23230	18.02	20	0-1
10			0	782	23230	18.14	20	0-1
		1 RB	25	782	23230	18.24	20	0-1
			49	782	23230	18.02	20	0-1
	16-QAM		0	782	23230	18.05	20	0-2
		25 RB	12	782	23230	18.15     20       18.02     20       18.14     20       18.24     20       18.02     20	0-2	
			25	782	23230	18.08	20	0-2
		50	RB	782	23230	18.09	20	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 52 of 339

	FDD Band 13 (Reduced Power)											
		F	שט שמחם שט Band	13 (Redu	cea Powe	) 	Toract					
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				779.5	23205	17.85	20	0				
			0	782	23230	17.95	20					
				784.5	23255	18.10	20					
				779.5	23205	18.12	20	0				
		1 RB	12	782	23230	18.13	20	0				
				784.5	23255	17.90	20	0				
				779.5	23205	18.21	20	0				
			24	782	23230	18.11	20	0				
				784.5	23255	18.04	20	0				
				779.5	23205	18.01	20	0-1				
	QPSK		0	782	23230	18.12	20	0-1				
				784.5	23255	18.26	20	+ MPR Allowed per 3GPP(dB)  0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0				
				779.5	23205	17.83	20	0-1				
		12 RB	6	782	23230	18.16	20	0-1				
				784.5	23255	18.23	20	0-1				
				779.5	23205	18.13	20	0-1				
			13	782	23230	18.20	20	0-1				
				784.5	23255	17.96	20	0-1				
				779.5	23205	18.04	20					
		25	RB	782	23230	18.09	20	0 0 0 0 0 0 0 0 0 0-1 0-1 0-1 0-1 0-1 0-				
5				784.5	23255	18.17	20	0-1				
3			0	779.5	23205	17.94	20	0-1				
				782	23230	17.78	20	0-1				
				784.5	23255	17.74	20	0-1				
			25RB 0	779.5	23205	17.87	20	0-1				
		1 RB	12	782	23230	18.27	20	0-1				
				784.5	23255	18.06	20	3GPP(dB)  0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0				
			9	779.5	23205	18.16	20	0-1				
			24	782	23230	17.90	20	e 3GPP(dB)  0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0				
				784.5	23255	17.83	20	0-1				
				779.5	23205	17.84	20					
	16-QAM		0	782	23230	18.03	20	0-2				
				784.5	23255	17.93	20	0-2				
				779.5	23205	17.95	20					
		12 RB	6	782	23230	17.99	20					
				784.5	23255	17.87	20					
				779.5	23205	17.98	20					
			13	782	23230	17.95	20	1				
				784.5	23255	17.88	20					
				779.5	23205	17.60	20					
		25	RB	782	23230	17.76	20					
			AL	784.5	23255	17.89	20	0-2				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be

prosecuted to the fullest extent of the law. SGS Taiwan Ltd.



Page: 53 of 339

FDD Band 17 (Full Power)											
			FDD Ba	nd 17 (Ful	l Power)	1		•			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)			
		- V		709	23780	21.70	22.5	0			
			0	710	23790	21.89	22.5	0			
							22.5	0			
							22.5	0			
		1 RB	25	710			22.5	0			
				711		21.96	22.5	0			
					23780	21.94	22.5	0			
			49				22.5	0			
							22.5	0			
				709	23780	20.97	21.5	0-1			
	QPSK		0				21.5	0-1			
							21.5	0-1			
						20.94	21.5	0-1			
		25 RB	12			20.90	21.5	0-1			
							21.5	0-1			
							21.5	0-1			
			25				21.5	0-1			
							21.5	0-1			
							21.5	0-1			
		50	RB	710	23790	20.82	21.5	0-1			
10				711	23800	20.79	21.5	0-1			
10			0	709	23780	21.02	21.5	0-1			
				710	23790	20.85	21.5	0-1			
				711		20.52	21.5	0-1			
				709	23780	21.34	21.5	0-1			
		1 RB	25	710	23790	20.82	21.5	0-1			
				711	23800	21.17	21.5	0-1			
				709	23780	21.08	21.5	0-1			
			49	710	23790	20.96	21.5	0-1			
				711	23800	20.74	21.5	0-1			
				709	23780	19.91	20.5	0-2			
	16-QAM		0	710	23790	19.84	20.5	0-2			
				711	23800	19.86	20.5	0-2			
				711         23800         21.71           709         23780         22.09           710         23790         21.95           711         23800         21.96           709         23780         21.94           710         23790         21.81           711         23800         21.62           709         23780         20.97           710         23790         20.92           711         23800         20.95           709         23780         20.94           710         23790         20.90           711         23800         20.90           711         23800         20.90           710         23790         20.90           711         23800         20.78           709         23780         21.07           710         23790         20.82           711         23800         20.79           709         23780         21.02           710         23790         20.85           711         23800         20.52           709         23780         21.34           710         23790         2	19.95	20.5	0-2				
		25 RB	12	710	23790	19.82	20.5	0-2			
				711	23800	19.94	20.5	0-2			
				709		20.11	21.5 0-1 21.5 0-1 21.5 0-1 21.5 0-1 21.5 0-2 21.5 0-2 20.5 0-2 20.5 0-2 20.5 0-2 20.5 0-2 20.5 0-2 20.5 0-2 20.5 0-2 20.5 0-2 20.5 0-2 20.5 0-2 20.5 0-2	0-2			
			25	710	23790	19.74	20.5	0-2			
				711	23800	19.77	20.5	0-2			
				709	23780	19.80	20.5	0-2			
		50	RB	710	23790	19.76	20.5	0-2			
			AL.	711	23800	19.76	20.5	0-2			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be

prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

台灣檢驗科技股份有限公司



Page: 54 of 339

FDD Band 17 (Full Power)											
	I I		FDD Bai	nd 1/ (Ful	l Power)		- ·				
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)			
				706.5	23755	21.73	22.5	0			
			0	710	23790	22.04	22.5	0			
				713.5	23825	21.95	22.5	0			
				706.5	23755	21.74	22.5	0			
		1 RB	12	710	23790	21.74	22.5	0			
				713.5	23825	21.86	22.5	0			
				706.5	23755	22.05	22.5	0			
			24	710	23790	22.02	22.5	0			
				713.5	23825	21.61	22.5	0			
				706.5	23755	20.84	21.5	0-1			
	QPSK		0	710	23790	21.11	21.5	0-1			
				713.5	23825	21.02	21.5	0-1			
				706.5	23755	21.06	21.5	0-1			
		12 RB	6	710	23790	21.07	21.5	0-1			
				713.5	23825	20.85	21.5	0-1			
				706.5	23755	21.10	21.5	0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1			
			13	710	23790	20.86	21.5	0-1			
				713.5	23825	20.76	21.5	0-1			
			•	706.5	23755	20.91		0-1			
FO A		25	RB	710	23790	21.05	21.5				
				713.5	23825	20.63	21.5	0-1			
5			706.5	23755	20.89	21.5	0-1				
			0	710	23790	20.98	74         22.5         0           74         22.5         0           86         22.5         0           05         22.5         0           02         22.5         0           61         22.5         0           84         21.5         0-1           11         21.5         0-1           02         21.5         0-1           06         21.5         0-1           07         21.5         0-1           08         21.5         0-1           10         21.5         0-1           86         21.5         0-1           91         21.5         0-1           92         21.5         0-1           89         21.5         0-1           89         21.5         0-1           89         21.5         0-1           88         21.5         0-1           85         21.5         0-1           85         21.5         0-1           85         21.5         0-1           85         21.5         0-1           85         21.5         0-1 <t< td=""></t<>				
				713.5	23825	20.54		MPR Allowed per 3GPP(dB)  0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0			
				706.5	23755	20.85		0-1			
		1 RB	12	710	23790	21.16		0-1			
				713.5	23825	21.11	21.5	0-1			
			64 V	706.5	23755	20.92	21.5	0-1			
			24	710	23790	20.54	21.5	0-1			
				713.5	23825	20.21	21.5	0-1			
				706.5	23755	19.88	20.5	0-2			
	16-QAM		0	710	23790	20.07	20.5	0-2			
				713.5	23825	19.87	20.5	0-2			
				706.5	23755	19.92	20.5	0-2			
		12 RB	6	710	23790	20.07		0-2			
				713.5	23825	19.80		0-2			
				706.5	23755	20.05	20.5	0-2			
			13	710	23790	20.11	20.5	0-2			
				713.5	23825	19.75	20.5	0-2			
				706.5	23755	19.95	20.5	0-2			
		25	RB	710	23790	19.88	20.5	0-2			
				713.5	23825	19.69	20.5				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 55 of 339

		F	DD Band	17 (Redu	ced Powe	er)		
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed pe 3GPP(dB)
				709	23780	18.00	20	0
			0	710	23790	18.16	20	0
				711	23800	18.12	20	0
				709	23780	18.53	20	0
		1 RB	25	710	23790	18.45	20	0
				711	23800	18.38	20	
				709	23780	18.28	20	0
			49	710	23790	18.26	20	0
				711	23800	18.11	20	
				709	23780	18.30	20	
	QPSK		0	710	23790	18.20	20	
				711	23800	18.24	20	<b>†</b>
				709	23780	18.26	20	•
		25 RB	12	710	23790	18.37	20	
				711	23800	18.38	20	•
				709	23780	18.36	20	
			25	710	23790	18.35	20	
				711	23800	18.20	20	
			ı	709	23780	18.18	20	
		50	RB	710	23790	18.20	20	
		00	I L	711	23800	18.25	20	
10				709	23780	17.93	20	
			50RB 0	710	23790	18.36	20	•
				711	23800	17.94	20	<b>.</b>
				709	23780	18.29	20	<b>.</b>
		1 RB	25	710	23790		20	0 0 0 0 0 0 0 0
		TIND	23			18.40		1
				711	23800	18.21	20	<b>†</b>
			49	709	23780	18.06	20	<del> </del>
			49	710	23790	18.25	20	•
	l			711	23800	17.80	20	
	46 0 4 14		0	709	23780	18.20	20	
	16-QAM		0	710	23790	18.12	20	
				711	23800	18.19	20	
		25 DD	10	709	23780	18.17	20	
		25 RB	12	710	23790	18.07	20	
				711	23800	18.29	20	
				709	23780	18.29	20	1
			25	710	23790	18.10	20	
	]			711	23800	18.13	20	
				709	23780	18.02	20	1
		50	RB	710	23790	18.01	20	
	<u>                                      </u>		6-4	711	23800	18.13	20	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 56 of 339

		F	DD Band	17 (Redu	ced Powe	er)		
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
			0	706.5 710	23755 23790	17.88 18.21	20	0
				713.5	23825	18.14	20	0
				706.5	23755	18.02	20	0
		1 RB	12	710	23790	18.23	20	0
				713.5	23825	18.03	20	0
				706.5	23755	18.40	20	0
			24	710	23790	18.00	20	0
				713.5	23825	17.68	20	0
				706.5	23755	18.01	20	0-1
	QPSK		0	710	23790	18.20	20	0-1
	Q. 311			713.5	23825	18.21	20	0-1
				706.5	23755	18.04	20	0-1
		12 RB	6	710	23790	18.23	20	0-1
		12110		713.5	23825	17.95	20	0-1
				706.5	23755	18.23	20	0-1
			13	710	23790	18.19	20	0-1
				713.5	23825	17.93	20	0-1
				706.5	23755	18.03	20	0-1
		25	RB	710	23790	18.13	20	0-1
		20	I CD	713.5	23825	18.02	20	0-1
5				706.5	23755	17.95	20	0-1
			0	710	23790	17.95	20	0-1
			0	713.5	23825	17.99	20	0-1
				706.5	23755	17.80	20	0-1
		1 RB	12	710	23790	18.34	20	0-1
		1 1/0	12	713.5	23825	18.15	20	0-1
				713.5	23755	17.84	20	0-1
			24	700.5	23790	17.89	20	0-1
				713.5	23825	17.43	20	0-1
				706.5	23755	17.43	20	0-1
	16-QAM		0	710	23790	18.16	20	0-2
	10 Q/NIVI			713.5	23825	18.15	20	0-2
				713.5	23755	17.97	20	0-2
		12 RB	6	700.5	23790	18.21	20	0-2
				713.5	23825	17.93	20	0-2
				713.5	23755	18.20	20	0-2
			13	700.5	23790	18.13	20	0-2
			.~	713.5	23825	17.85	20	0-2
				713.5	23755	17.65	20	0-2
		25	RB	706.5		17.96	20	0-2
		25	מוו		23790			
				713.5	23825	17.96	20	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The

therein. Any noticer of this document is advised that information contained hereon reflects the Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 57 of 339

			FDD Ba	nd 25 (Ful	I Power)					
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)		
				1860	26140	22.20	23	0		
			0	1882.5	26365	22.12	23	0		
	<u> </u>			1905	26590	22.02	23	0		
				1860	26140	22.19	23	0		
		1 RB	50	1882.5	26365	22.07	23	0		
				1905	26590	22.14	23	0		
				1860	26140	22.25	23	Allowed pe 3GPP(dB) 0 0 0		
			99	1882.5	26365	22.28	23	1		
				1905	26590	22.37	23	1		
				1860	26140	21.11	22	0-1		
	QPSK		0	1882.5	26365	21.02	22	0-1		
			ed T	1905	26590	21.04	22	0-1		
				1860	26140	21.08	22	0-1		
		50 RB	25	1882.5	26365	20.97	22	0-1		
				1905	26590	21.01	22	Allowed per 3GPP(dB)  0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0		
				1860	26140	20.99	22	0-1		
			50	1882.5	26365	20.97	22	Allowed per 3GPP(dB)  0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0		
				1905	26590	21.14	22	0-1		
				1860	26140	21.12	22	0-1		
		100	)RB	1882.5	26365	21.10	22	0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-1 0-1 0-1		
20				1905	26590	21.16	22	0-1		
20				1860	26140	21.06	22	0-1		
			0	1882.5	26365	21.31	22	0-1		
				1905	26590	21.45	22	0-1		
				1860	26140	21.18	22	0-1		
		1 RB	50	1882.5	26365	21.39	22	0-1		
				1905	26590	21.42	22	0-1		
				1860	26140	21.00	22	0-1		
			99	1882.5	26365	21.46	22	0-1		
				1905	26590	21.65	22	0-1		
				1860	26140	20.00	21	0-2		
	16-QAM		0	1882.5	26365	20.02	21	0-2		
				1905	26590	19.94	21	0-2		
				1860	26140	19.96	21	0-2		
120		50 RB	25	1882.5	26365	20.10	21	0-2		
				1905	26590	20.00	21	0-2		
				1860	26140	19.95	21	0-2		
			50	1882.5	26365	19.93	21	0-2		
				1905	26590	20.19	21	0-2		
				1860	26140	20.03	21	0-2		
		100	RB	1882.5	26365	19.98	21	0-2		
				1905	26590	20.10	21	0-2		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 58 of 339

			FDD Ba	nd 25 (Ful	l Power)			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
		V		1857.5	26115	22.33	23	0
			0	1882.5	26365	22.26	23	0
				1907.5	26615	22.07	23	Allowed per 3GPP(dB)
				1857.5	26115	22.18	23	0
		1 RB	36	1882.5	26365	22.17	23	0
				1907.5	26615	22.23	23	0
				1857.5	26115	22.19	23	0
			74	1882.5	26365	22.11	23	0
				1907.5	26615	22.33	23	0
				1857.5	26115	21.06	22	0-1
	QPSK		0	1882.5	26365	21.10	22	0-1
				1907.5	26615	20.98	22	0-1
			18	1857.5	26115	21.08	22	0-1
		36 RB		1882.5	26365	21.06	22	0-1
				1907.5	26615	21.10	22	0-1
				1857.5	26115	21.04	22	0-1
			37	1882.5	26365	20.93	22	0-1
				1907.5	26615	21.26	22	0-1
				1857.5	26115	20.98	22	0-1
		75	RB	1882.5	26365	20.91	22	0-1
15				1907.5	26615	21.07	22	0-1
15				1857.5	26115	20.85	22	0-1
			0	1882.5	26365	20.92	22	0-1
				1907.5	26615	21.12	22	0-1
				1857.5	26115	21.44	22	0-1
		1 RB	36	1882.5	26365	21.02	22	0-1
				1907.5	26615	20.98	22	0-1
				1857.5	26115	21.40	22	0-1
			74	1882.5	26365	20.98	22	0-1
				1907.5	26615	21.36	22	0-1
				1857.5	26115	20.06	21	0-2
	16-QAM		0	1882.5	26365	20.08	21	0-2
				1907.5	26615	19.94	21	0-2
0-1				1857.5	26115	20.08	21	0-2
		36 RB	18	1882.5	26365	19.92	21	0-2
				1907.5	26615	20.03	21	0-2
				1857.5	26115	20.03	21	0-2
			37	1882.5	26365	19.94	21	
				1907.5	26615	20.29	21	0-2
				1857.5	26115	19.93	21	0-2
		75	RB	1882.5	26365	19.94	21	0-2
	<u> </u>			1907.5	26615	20.12	21	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 59 of 339

			500.0	105 (5.1				
			FDD Ba	nd 25 (Ful	I Power)			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
1				1855	26090	22.10	23	0
			0	1882.5	26365	22.06	23	0
				1910	26640	22.18	23	0
				1855	26090	22.17	23	0
	>	1 RB	25	1882.5	26365	22.19	23	0
				1910	26640	22.31	23	0
				1855	26090	22.19	23	0
			49	1882.5	26365	22.13	23	0
				1910	26640	22.32	23	0
				1855	26090	21.06	22	0-1
	QPSK		0	1882.5	26365	21.16	22	0-1
				1910	26640	21.16	22	0-1
			04 1	1855	26090	21.16	22	0-1
		25 RB	12	1882.5	26365	21.13	22	0 0 0 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-
				1910	26640	21.31	22	0-1
				1855	26090	21.00	22	
			25	1882.5	26365	21.03	22	0-1
				1910	26640	21.22	22	0-1
				1855	26090	21.02	22	0-1
		50	RB	1882.5	26365	20.91	22	0-1
40				1910	26640	21.08	22	0-1
10				1855	26090	21.03	22	0-1
			0	1882.5	26365	21.42	22	0-1
				1910	26640	21.32	22	0-1
				1855	26090	20.85	22	0-1
		1 RB	25	1882.5	26365	21.05	22	0-1
				1910	26640	21.29	22	0-1
				1855	26090	21.13	22	0-1
			49	1882.5	26365	21.09	22	0-1
				1910	26640	21.48	22	0-1
				1855	26090	19.98	21	0-2
	16-QAM		0	1882.5	26365	20.08	21	0-2
				1910	26640	20.16	21	0-2
				1855	26090	20.07	21	0-2
		25 RB	12	1882.5	26365	20.08	21	0-2
				1910	26640	20.10	21	0-2
				1855	26090	20.04	21	0-2
			25	1882.5	26365	20.04	21	0-2
				1910	26640	20.19	21	0-2
				1855	26090	19.91	21	0-2
		50	RB	1882.5	26365	19.84	21	0-2
				1910	26640	20.17	21	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be

prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 60 of 339

	FDD Band 25 (Full Power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
			0	1852.5 1882.5 1912.5	26065 26365 26665	22.12 22.10 22.26	23 23 23	0 0				
		1 RB	12	1852.5 1882.5	26065 26365	22.07 22.06	23 23	0				
	QPSK		24	1912.5 1852.5 1882.5	26665 26065 26365	22.29 22.13 22.04	23 23 23	0 0 0				
			0	1912.5 1852.5 1882.5	26665 26065 26365	22.30 21.20 21.22	23 22 22	0 0-1 0-1				
		12 RB	6	1912.5 1852.5 1882.5	26665 26065 26365	21.27 21.16 21.17	22 22 22	0-1 0-1 0-1				
			13	1912.5 1852.5	26665 26065	21.23 21.20	22 22	0-1 0-1				
			13	1882.5 1912.5 1852.5	26365 26665 26065	21.11 21.28 21.04	22 22 22	0-1 0-1 0-1				
5		25	RB	1882.5 1912.5 1852.5	26365 26665 26065	21.07 21.23 21.29	22 22 22	0-1 0-1 0-1				
			0	1882.5 1912.5	26365 26665	21.37 21.30	22 22	0-1 0-1				
		1 RB	12	1852.5 1882.5 1912.5	26065 26365 26665	21.24 21.04 21.30	22 22 22	0-1 0-1 0-1				
			24	1852.5 1882.5 1912.5	26065 26365 26665	21.39 21.34 21.13	22 22 22	0-1 0-1 0-1				
	16-QAM		0	1852.5 1882.5	26065 26365	20.08 20.10	21 21	0-2 0-2				
		12 RB	6	1912.5 1852.5 1882.5	26665 26065 26365	20.32 20.15 20.09	21 21 21	0-2 0-2 0-2				
			13	1912.5 1852.5 1882.5	26665 26065 26365	20.35 20.25 20.21	21 21 21	0-2 0-2 0-2				
					26665 26065	20.35 19.97	21 21	0-2 0-2				
		25	RB	1882.5 1912.5	26365 26665	20.08 20.18	21 21	0-2 0-2				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 61 of 339

			FDD Ba	nd 25 (Ful	l Power)			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				1851.5	26055	22.08	23	0
			0	1882.5	26365	22.03	23	0
				1913.5	26675	22.30	23	0
				1851.5	26055	22.20	23	0
		1 RB	7	1882.5	26365	22.17	23	0
				1913.5	26675	22.20	23	0
				1851.5	26055	22.14	23	0
			14	1882.5	26365	22.18	23	0
				1913.5	26675	22.24	23	0
	QPSK			1851.5	26055	21.16	22	0-1
		0	1882.5	26365	21.27	22	0-1	
				1913.5	26675	21.33	22	0-1
				1851.5	26055	21.22	22	0-1
		8 RB	4	1882.5	26365	21.19	22	0-1
				1913.5	26675	21.27	22	0-1
				1851.5	26055	21.22	22	0-1
			7	1882.5	26365	21.26	22	0-1
	-			1913.5	26675	21.28	22	0-1
				1851.5	26055	21.19	22	0-1
		15	RB	1882.5	26365	21.20	22	0-1
				1913.5	26675	21.25	22	0-1
3				1851.5	26055	20.97	22	0-1
			0	1882.5	26365	21.53	22	0-1
				1913.5	26675	20.95	22	0-1
				1851.5	26055	20.82	22	0-1
		1 RB	7	1882.5	26365	21.14	22	0-1
				1913.5	26675	21.22	22	0-1
				1851.5	26055	21.18	22	0-1
			14	1882.5	26365	21.38	22	0-1
				1913.5	26675	21.25	22	0-1
				1851.5	26055	20.17	21	0-2
	16-QAM		0	1882.5	26365	20.19	21	0-2
	10 0,			1913.5	26675	20.24	21	0-2
				1851.5	26055	20.00	21	0-2
		8 RB	4	1882.5	26365	20.04	21	0-2
		01.0	'	1913.5	26675	20.04	21	0-2
	1			1851.5	26055	20.24	21	0-2
			7		26365	20.23	21	0-2
			<b>'</b>	1882.5 1913.5		20.12	21	0-2
					26675 26055	20.40	21	0-2
		15	RB	1851.5		20.12	21	0-2
		13	ועט	1882.5	26365			1
				1913.5	26675	20.39	21	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 62 of 339

			EDD D-	LOE /EI	D			
			רחח פמ	nd 25 (Ful	Power)		T-: - 1	
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				1850.7	26047	22.06	23	0
			0	1882.5	26365	22.10	23	0
				1914.3	26683	22.24	23	0
		•		1850.7	26047	22.12	23	0
		1 RB	2	1882.5	26365	22.15	23	0
				1914.3	26683	22.29	23	0
				1850.7	26047	22.11	23	0
			5	1882.5	26365	22.16	23	0
				1914.3	26683	22.28	23	0
				1850.7	26047	21.07	22	0-1
	QPSK		0	1882.5	26365	21.04	22	0-1
				1914.3	26683	21.24	22	0-1
			64 1	1850.7	26047	21.16	22	0-1
	3 RB	2	1882.5	26365	21.06	22	0-1	
				1914.3	26683	21.18	22	0-1
				1850.7	26047	21.01	22	0-1
			3	1882.5	26365	21.09	22	0-1
				1914.3	26683	21.05	22	0-1
				1850.7	26047	20.11	22	0-1
		6F	RB	1882.5	26365	20.14	22	0-1
1.4				1914.3	26683	20.23	22	0-1
1.4				1850.7	26047	21.04	22	0-1
			0	1882.5	26365	21.06	22	0-1
				1914.3	26683	21.34	22	0-1
				1850.7	26047	21.09	22	0-1
		1 RB	2	1882.5	26365	21.36	22	0-1
				1914.3	26683	21.15	22	0-1
				1850.7	26047	21.43	22	0-1
			5	1882.5	26365	21.10	22	0-1
				1914.3	26683	20.89	22	0-1
				1850.7	26047	20.03	21	0-2
	16-QAM		0	1882.5	26365	20.17	21	0-2
				1914.3	26683	20.28	21	0-2
				1850.7	26047	19.86	21	0-2
		3 RB	2	1882.5	26365	20.10	21	0-2
				1914.3	26683	20.25	21	0-2
				1850.7	26047	20.14	21	0-2
		3	1882.5	26365	19.96	21	0-2	
				1914.3	26683	20.17	21	0-2
				1850.7	26047	19.13	21	0-2
		6F	RB	1882.5	26365	19.14	21	0-2
				1914.3	26683	19.25	21	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 63 of 339

FDD Band 25 (Reduced Power)										
		Г	טט סמווט	25 (Redu	cea Powe	er <i>)</i>				
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)		
				1860	26140	19.75	20	0		
			0	1882.5	26365	19.66	20	0		
				1905	26590	19.60	20	0		
				1860	26140	19.81	20	0		
		1 RB	50	1882.5	26365	19.72	20	0		
				1905	26590	19.69	20	0		
				1860	26140	19.80	20	0		
			99	1882.5	26365	19.65	20	0		
				1905	26590	19.93	20	0		
				1860	26140	19.53	20	0-1		
	QPSK		0	1882.5	26365	19.49	20	0-1		
				1905	26590	19.46	20	0-1		
				1860	26140	19.58	20	0-1		
		50 RB	25	1882.5	26365	19.50	20	0-1		
				1905	26590	19.46	20	0-1		
				1860	26140	19.63	20	0-1		
			50	1882.5	26365	19.49	20	0-1		
				1905	26590	19.64	20	0-1		
				1860	26140	19.59	20	0-1		
		100	)RB	1882.5	26365	19.47	20	0-1		
20				1905	26590	19.61	20	0-1		
20				1860	26140	19.78	20	0-1		
			0	1882.5	26365	19.66	20	0-1		
				1905	26590	19.62	20	0-1		
				1860	26140	19.83	20	0-1		
		1 RB	50	1882.5	26365	19.73	20	0-1		
			AL.	1905	26590	19.67	20	0-1		
				1860	26140	19.75	20	0-1		
			99	1882.5	26365	19.60	20	0-1		
				1905	26590	19.85	20	0-1		
				1860	26140	19.53	20	0-2		
	16-QAM		0	1882.5	26365	19.39	20	0-2		
CAL				1905	26590	19.39	20	0-2		
				1860	26140	19.59	20	0-2		
		50 RB	25	1882.5	26365	19.40	20	0-2		
	-			1905	26590	19.44	20	0-2		
		<b>5</b> 0	1860	26140	19.59	20	0-2			
			50	1882.5	26365	19.39	20	0-2		
				1905	26590	19.59	20	0-2		
			, DD	1860	26140	19.54	20	0-2		
		100	)RB	1882.5	26365	19.48	20	0-2		
				1905	26590	19.62	20	0-2		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 64 of 339

			DD Dand	OF (Dod.)	and David	\		
			שם שם שם Band	25 (Redu	ced Powe	1)	T. (	
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				1857.5	26115	19.79	20	0
			0	1882.5	26365	19.75	20	0
				1907.5	26615	19.65	20	0
				1857.5	26115	19.75	20	0
		1 RB	36	1882.5	26365	19.77	20	0
				1907.5	26615	19.81	20	0
				1857.5	26115	19.82	20	0
		74	1882.5	26365	19.65	20	0	
				1907.5	26615	19.91	20	0
			1857.5	26115	19.71	20	0-1	
	QPSK		0	1882.5	26365	19.58	20	0-1
				1907.5	26615	19.53	20	0-1
				1857.5	26115	19.67	20	0-1
		36 RB	18	1882.5	26365	19.63	20	0-1
				1907.5	26615	19.65	20	0-1
				1857.5	26115	19.70	20	0-1
			37	1882.5	26365	19.47	20	0-1
				1907.5	26615	19.79	20	0-1
				1857.5	26115	19.62	20	0-1
		75	RB	1882.5	26365	19.49	20	0-1
				1907.5	26615	19.64	20	0-1
15				1857.5	26115	19.71	20	0-1
			0	1882.5	26365	19.72	20	0-1
				1907.5	26615	19.64	20	0-1
				1857.5	26115	19.78	20	0-1
		1 RB	36	1882.5	26365	19.70	20	0-1
				1907.5	26615	19.72	20	0-1
				1857.5	26115	19.77	20	0-1
			74	1882.5	26365	19.59	20	0-1
				1907.5	26615	19.90	20	0-1
				1857.5	26115	19.62	20	0-2
	16-QAM		0	1882.5	26365	19.53	20	0-2
				1907.5	26615	19.49	20	0-2
				1857.5	26115	19.63	20	0-2
		36 RB	18	1882.5	26365	19.55	20	0-2
				1907.5	26615	19.63	20	0-2
				1857.5	26115	19.66	20	0-2
			37	1882.5	26365	19.49	20	0-2
				1907.5	26615	19.76	20	0-2
				1857.5	26115	19.54	20	0-2
		75	RB	1882.5	26365	19.43	20	0-2
				1907.5	26615	19.59	20	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 65 of 339

			DD Band	25 (Dodu	and Daws	\r\			
		Г	טט סמווט	25 (Redu	cea Powe	; ( )	Target		
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Power + Max. Tolerance	MPR Allowed per 3GPP(dB)	
				1855	26090	19.75	20	0	
			0	1882.5	26365	19.71	20	0	
				1910	26640	19.68	20	0	
				1855	26090	19.81	20	0	
		1 RB	25	1882.5	26365	19.72	20	0	
		5		1910	26640	19.83	20	0	
			49	1855	26090	19.71	20	0	
				1882.5	26365	19.63	20	0	
				1910	26640	19.85	20	0	
	l			1855	26090	19.69	20	0-1	
	QPSK			0	1882.5	26365	19.63	20	0-1
				1910	26640	19.70	20	0-1	
				1855	26090	19.76	20	0-1	
		25 RB	12	1882.5	26365	19.70	20	0-1	
				1910	26640	19.75	20	0-1	
				1855	26090	19.60	20	0-1	
			25	1882.5	26365	19.56	20	0-1	
	-			1910	26640	19.73	20	0-1	
				1855	26090	19.58	20	0-1	
		50	RB	1882.5	26365	19.48	20	0-1	
				1910	26640	19.66	20	0-1	
10				1855	26090	19.74	20	0-1	
			0	1882.5	26365	19.77	20	0-1	
				1910	26640	19.70	20	0-1	
				1855	26090	19.80	20	0-1	
İ		1 RB	25	1882.5	26365	19.66	20	0-1	
				1910	26640	19.79	20	0-1	
				1855	26090	19.69	20	0-1	
			49	1882.5	26365	19.62	20	0-1	
				1910	26640	19.82	20	0-1	
				1855	26090	19.59	20	0-2	
	16-QAM		0	1882.5	26365	19.58	20	0-2	
				1910	26640	19.70	20	0-2	
( ea/				1855	26090	19.63	20	0-2	
		25 RB	12	1882.5	26365	19.66	20	0-2	
	2310			1910	26640	19.69	20	0-2	
			1855	26090	19.63	20	0-2		
			25	1882.5	26365	19.53	20	0-2	
				1910	26640	19.67	20	0-2	
				1855	26090	19.55	20	0-2	
		50	RB	1882.5	26365	19.45	20	0-2	
				1910	26640	19.63	20	0-2	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 66 of 339

		F	DD Band	25 (Redu	red Powe	2r)		
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
			0	1852.5 1882.5	26065 26365	19.75 19.70	20 20	0
				1912.5	26665	19.78	20	0
				1852.5	26065	19.76	20	0
		1 RB	12	1882.5	26365	19.73	20	0
				1912.5	26665	19.87	20	0
				1852.5	26065	19.80	20	0
			24	1882.5	26365	19.69	20	0
				1912.5	26665	19.81	20	0
				1852.5	26065	19.78	20	0-1
	QPSK		0	1882.5	26365	19.75	20	0-1
				1912.5	26665	19.83	20	0-1
				1852.5	26065	19.71	20	0-1
		12 RB	6	1882.5	26365	19.72	20	0-1
	\ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \			1912.5	26665	19.75	20	0-1
				1852.5	26065	19.76	20	0-1
			13	1882.5	26365	19.73	20	0-1
				1912.5	26665	19.83	20	0-1
				1852.5	26065	19.71	20	0-1
		251	RB	1882.5	26365	19.63	20	0-1
				1912.5	26665	19.65	20	0-1
5				1852.5	26065	19.72	20	0-1
			0	1882.5	26365	19.70	20	0-1
				1912.5	26665	19.80	20	0-1
				1852.5	26065	19.75	20	0-1
		1 RB	12	1882.5	26365	19.63	20	0-1
				1912.5	26665	19.84	20	0-1
				1852.5	26065	19.75	20	0-1
			24	1882.5	26365	19.70	20	0-1
				1912.5	26665	19.80	20	0-1
				1852.5	26065	19.80	20	0-2
	16-QAM		0	1882.5	26365	19.73	20	0-2
				1912.5	26665	19.81	20	0-2
				1852.5	26065	19.76	20	0-2
0.4		12 RB	6	1882.5	26365	19.69	20	0-2
	12 110		1912.5	26665	19.73	20	0-2	
FO A				1852.5	26065	19.79	20	0-2
			13	1882.5	26365	19.69	20	0-2
				1912.5	26665	19.80	20	0-2
				1852.5	26065	19.59	20	0-2
		25	RB	1882.5	26365	19.59	20	0-2
				1912.5	26665	19.66	20	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 67 of 339

		F	DD Band	25 (Redu	ced Powe	er)		
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance	MPR Allowed per 3GPP(dB)
			0	1851.5 1882.5	26055 26365	19.76 19.68	20 20	0
				1913.5	26675	19.84	20	0
				1851.5	26055	19.78	20	0
	b	1 RB	7	1882.5	26365	19.71	20	0
				1913.5	26675	19.83	20	0
		-	14	1851.5	26055	19.74	20	0
				1882.5	26365	19.72	20	0
				1913.5	26675	19.83	20	0
				1851.5	26055	19.80	20	0-1
	QPSK		0	1882.5	26365	19.76	20	0-1
				1913.5	26675	19.82	20	0-1
				1851.5	26055	19.80	20	0-1
		8 RB	4	1882.5	26365	19.69	20	0-1
				1913.5	26675	19.86	20	0-1
				1851.5	26055	19.90	20	0-1
			7	1882.5	26365	19.74	20	0-1
				1913.5	26675	19.84	20	0-1
	-			1851.5	26055	19.82	20	0-1
		15	RB	1882.5	26365	19.71	20	0-1
		101		1913.5	26675	19.78	20	0-1
3				1851.5	26055	19.71	20	0-1
			0	1882.5	26365	19.72	20	0-1
				1913.5	26675	19.81	20	0-1
				1851.5	26055	19.78	20	0-1
i		1 RB	7	1882.5	26365	19.73	20	0-1
ı			·	1913.5	26675	19.85	20	0-1
				1851.5	26055	19.71	20	0-1
			14	1882.5	26365	19.66	20	0-1
				1913.5	26675	19.75	20	0-1
				1851.5	26055	19.73	20	0-2
	16-QAM		0	1882.5	26365	19.66	20	0-2
	. 5 30 1111			1913.5	26675	19.74	20	0-2
				1851.5	26055	19.74	20	0-2
		8 RB	4	1882.5	26365	19.74	20	0-2
04		J.,_	·	1913.5	26675	19.77	20	0-2
				1851.5	26055	19.77	20	0-2
TO A			7	1882.5	26365	19.69	20	0-2
			,	1913.5	26675	19.83	20	0-2
				1851.5	26055	19.79	20	0-2
		15	RB	1882.5	26365	19.79	20	0-2
		15		1913.5	26675	19.77	20	0-2
				1913.3	20075	19.11	20	U-Z

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 68 of 339

				25 (Dad.)	and David	\		
	1 1	<u></u>	DD Band	25 (Redu	cea Powe	er)	<b>-</b> ,	1
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
1				1850.7	26047	19.81	20	0
			0	1882.5	26365	19.74	20	0
				1914.3	26683	19.90	20	0
	ł .			1850.7	26047	19.85	20	0
		1 RB	2	1882.5	26365	19.70	20	0
				1914.3	26683	19.85	20	0
				1850.7	26047	19.83	20	0
			5	1882.5	26365	19.76	20	0
				1914.3	26683	19.87	20	0
	l			1850.7	26047	19.84	20	0-1
	QPSK	QPSK	0	1882.5	26365	19.78	20	0-1
				1914.3	26683	19.90	20	0-1
			64 1	1850.7	26047	19.83	20	0-1
		3 RB	2	1882.5	26365	19.72	20	0-1
				1914.3	26683	19.77	20	0-1
				1850.7	26047	19.77	20	0-1
			3	1882.5	26365	19.69	20	0-1
				1914.3	26683	19.80	20	0-1
				1850.7	26047	19.80	20	0-1
	<u> </u>	6F	RB	1882.5	26365	19.72	20	0-1
				1914.3	26683	19.85	20	0-1
1.4				1850.7	26047	19.69	20	0-1
			0	1882.5	26365	19.65	20	0-1
				1914.3	26683	19.82	20	0-1
				1850.7	26047	19.73	20	0-1
		1 RB	2	1882.5	26365	19.64	20	0-1
				1914.3	26683	19.74	20	0-1
				1850.7	26047	19.74	20	0-1
			5	1882.5	26365	19.71	20	0-1
				1914.3	26683	19.72	20	0-1
				1850.7	26047	19.81	20	0-2
	16-QAM		0	1882.5	26365	19.76	20	0-2
				1914.3	26683	19.87	20	0-2
				1850.7	26047	19.82	20	0-2
		3 RB	2	1882.5	26365	19.75	20	0-2
	2 7.0		1914.3	26683	19.78	20	0-2	
				1850.7	26047	19.85	20	0-2
			3	1882.5	26365	19.75	20	0-2
				1914.3	26683	19.83	20	0-2
			•	1850.7	26047	19.83	20	0-2
		6F	RB	1882.5	26365	19.76	20	0-2
				1914.3	26683	19.86	20	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 69 of 339

**CDMA** conducted power table:

		icteu po				1vDTT		Г	'DO
						1xRTT		EV	DO
Band	Channel	Frequency (MHz)	Tune-up tolerance	SO55	SO55	TDSO/SO32	TDSO/SO32	1x EvDO Rev. 0, FTAP/RTAP	1x EvDO Rev. A, FETAP/RETAP
				RC1	RC3	FCH+SCH	FCH	Subtype 0/1	Subtype 2
ODMA	1013	824.7	23.50	22.92	22.86	22.69	22.75	22.96	22.94
CDMA (BC0)	384	836.52	23.50	22.93	22.88	22.67	23.01	23.11	22.98
(500)	777	848.31	23.50	22.75	22.74	22.66	22.74	22.76	22.72
CDMA	25	1851.25	24.00	23.61	23.62	23.65	23.61	23.72	23.64
CDMA (BC1)	600	1880	24.00	23.59	23.58	23.61	23.62	23.66	23.58
(501)	1175	1908.75	24.00	23.49	23.48	23.49	23.46	23.62	23.49
00144	476	817.9	23.50	22.95	22.88	22.94	22.86	22.97	22.89
CDMA (BC10)	560	820	23.50	22.98	22.95	22.98	22.97	23.04	22.92
(5010)	684	823.1	23.50	23.02	22.97	22.99	22.96	23.05	22.97

CDMA conducted power table (Reduced power):

						1xRTT		EV	/DO
Band	Channel	Frequency (MHz)	Tune-up tolerance	SO55	SO55	TDSO/SO32	TDSO/SO32	1x EvDO Rev. 0, FTAP/RTAP	1x EvDO Rev. A, FETAP/RETAP
4				RC1	RC3	FCH+SCH	FCH	Subtype 0/1	Subtype 2
ODMA	1013	824.7	20.00	19.16	19.12	19.06	18.94	19.23	19.11
CDMA (BC0)	384	836.52	20.00	18.98	18.93	18.97	18.91	19.20	19.04
(500)	777	848.31	20.00	19.02	19.01	18.99	19.96	19.06	18.92
ODMA	25	1851.25	20.00	18.65	18.64	18.65	18.63	18.76	18.63
CDMA (BC1)	600	1880	20.00	18.64	18.61	18.66	18.62	18.72	18.59
(BC1)	1175	1908.75	20.00	18.57	18.56	18.58	18.54	18.67	18.45
00144	476	817.9	20.00	18.91	18.79	18.88	18.78	18.92	18.85
CDMA (BC10)	560	820	20.00	18.95	18.84	18.94	18.85	18.96	18.88
(5010)	684	823.1	20.00	18.99	18.97	18.94	18.87	19.00	18.95

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 70 of 339

## #. WLAN802.11 a/b/g/n(20M/40M)/ac(20M/40M/80M) conducted power table:

<i>"</i>			is rollis dollis dollar	otou portor tubio.
	Antenna	SI	SO	MIMO
Band		Chain 0	Chain 1	Chain0+1
WLAN	802.11b	V	V	_
WLAN	802.11g	V	V	
WLAN802	2.11n(20M)	V	V	V
WLAN802	2.11n(40M)	V	V	V
WLAN	802.11a	V	V	
WLAN802.1	11n(20M) 5G	V	V	V
WLAN802.1	11n(40M) 5G	V	V	V
WLAN802.1	1ac(20M) 5G	V	V	V
WLAN802.1	1ac(40M) 5G	V	V	V
WLAN802.1	1ac(80M) 5G	V	V	V

Main Antenna (CHO)

	_			
	8	02.11 b	Max. Rated Avg.	Average Power Output (dBm)
		Frequency	Power + Max.	Data Rate (Mbps)
(	CH	Frequency (MHz)	Tolerance (dBm)	1
	1	2412	15	13.82
	6	2437	15	14.16
1	11	2462	15	14.47

802.11 g		Max. Rated Avg.	Average Power Output (dBm)			
СН	Frequency (MHz)	Power + Max. Tolerance (dBm)	Data Rate (Mbps)			
			6			
1	2412	14	12.02			
6	2437	14	13.78			
11	2462	11.5	11.33			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 71 of 339

Main Antenna (CHO)

Walli Aliterila (Olio)							
802.11 n(20M)		Max. Rated Avg.	Average Power Output (dBm)				
СН	Frequency (MHz)	Power + Max. Tolerance (dBm)	Data Rate (Mbps)				
			6.5				
1	2412	11.5	11.48				
6	2437	14	13.66				
11	2462	11.5	11.25				

802.11 n(40M)		Max. Rated Avg.	Average Power Output (dBm)
СН	Frequency (MHz)	Power + Max. Tolerance (dBm)	Data Rate (Mbps)
			13.5
3	2422	12	11.58
6	2437	14	13.61
9	2452	12	11.05

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 72 of 339

Main	Antenna (	CHO)	
802.11 a		Max. Rated Avg. Power + Max.	Average Power Output(dBm)
5.2/5.3/5.6/5.8G			Average Fower Output(dbill)
СН	Frequency (MHz)	Tolerance (dBm)	Data Rate (Mbps)
			6
36	5180	11.5	11.52
40	5200	14	12.41
44	5220	14	12.37
48	5240	14	12.46
52	5260	14	13.38
56	5280	14	13.45
60	5300	14	13.58
64	5320	11.5	11.42
100	5500	11.5	11.91
104	5520	14.5	14.16
108	5540	14.5	13.72
112	5560	14.5	13.62
116	5580	14.5	13.58
120	5600	14.5	13.48
124	5620	14.5	13.41
128	5640	14.5	13.37
132	5660	14.5	13.31
136	5680	14.5	13.25
140	5700	11.5	11.11
149	5745	14.5	13.22
153	5765	14.5	13.25
157	5785	14.5	13.15
161	5805	14.5	13.47
165	5825	14.5	13.01

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 73 of 339

Main Antenna (CH0)			
802	.11 n(20M)	Max. Rated  Average Power Output(dBm)	Average Power Output(dBm)
5.2/5	5.3/5.6/5.8G	Avg. Power + Max.	,
СН	Frequency	Tolerance	Data Rate (Mbps)
011	(MHz)	(dBm)	6.5
36	5180	11.5	11.77
40	5200	14	12.41
44	5220	14	12.57
48	5240	14	12.71
52	5260	14	13.18
56	5280	14	13.34
60	5300	14	13.42
64	5320	12.5	11.28
100	5500	12.5	12.17
104	5520	14.5	14.06
108	5540	14.5	13.61
112	5560	14.5	13.52
116	5580	14.5	13.44
120	5600	14.5	13.35
124	5620	14.5	13.31
128	5640	14.5	13.27
132	5660	14.5	13.18
136	5680	14.5	13.57
140	5700	11	10.82
149	5745	14	13.24
153	5765	14	13.53
157	5785	14	13.47
161	5805	14	13.39
165	5825	14	12.84

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 74 of 339

Main Antenna (CHO)

Main Antenna (CHO)			
802.	.11 n(40M)	Max. Rated Avg. Power + Max.	Average Power Output(dBm)
5.2/5	.3/5.6/5.8G		Average Fewer Europat(ubin)
СН	Frequency	Tolerance	Data Rate (Mbps)
CIT	(MHz)	(dBm)	13.5
38	5190	9	8.59
46	5230	13.5	12.75
54	5270	13.5	13.24
62	5310	12	11.16
102	5510	12	11.68
110	5550	14	13.36
118	5590	14	13.37
126	5630	14	13.21
134	5670	14	13.48
142	5710	14	13.95
151	5755	14	13.85
159	5795	14	13.81

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 75 of 339

Main Antenna (CH0)				
802.	11 ac(20M)	Max. Rated	Average Power Output(dBm)	
5.2/5	.3/5.6/5.8G	Avg. Power + Max.	Average Fower Output (dbirt)	
СН	Frequency	Tolerance	Data Rate (Mbps)	
CII	(MHz)	(dBm)	6.5	
36	5180	12	11.11	
40	5200	14.5	12.59	
44	5220	14.5	12.75	
48	5240	14.5	12.77	
52	5260	14.5	13.58	
56	5280	14.5	13.76	
60	5300	14.5	13.38	
64	5320	12.5	11.29	
100	5500	12.5	12.13	
104	5520	14.5	14.02	
108	5540	14.5	13.59	
112	5560	14.5	13.47	
116	5580	14.5	13.41	
120	5600	14.5	13.39	
124	5620	14.5	13.28	
128	5640	14.5	13.24	
132	5660	14.5	13.19	
136	5680	14.5	13.49	
140	5700	12.5	10.77	
144	5720	12.5	12.00	
149	5745	13.5	13.19	
153	5765	13.5	13.16	
157	5785	13.5	13.02	
161	5805	13.5	12.96	
165	5825	13.5	12.97	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 76 of 339

Main Antenna (CHO)

iviaiii	Antenna (	СПО)	
	11 ac(40M)	Max. Rated	Average Power Output(dBm)
5.2/5	.3/5.6/5.8G	Avg. Power + Max.	3 1 , ,
СН	Frequency	Tolerance	Data Rate (Mbps)
OH	(MHz)	(dBm)	13.5
38	5190	9.5	9.02
46	5230	13.5	13.08
54	5270	13.5	13.27
62	5310	12	11.19
102	5510	12	11.67
110	5550	14	13.48
118	5590	14	13.31
126	5630	14	13.19
134	5670	14	13.44
142	5710	14	13.51
151	5755	14	13.42
159	5795	14	13.84

	11 ac(80M)	Max. Rated Avg.	Average Power Output(dBm)
	Frequency	Power + Max. Tolerance	Data Rate (Mbps)
СН	(MHz)	(dBm)	29.3
42	5210	12	10.64
58	5290	12	11.32
106	5530	12	11.29
122	5610	14	12.09
138	5690	14	13.72
155	5775	14	13.54

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 77 of 339

Aux Antenna (CH1)

Aux Antenna (OTT)				
802.11 b	Max. Rated Avg.	Average Power Output (dBm)		
Frequency	Power + Max. Tolerance (dBm)	Data Rate (Mbps)		
(MHz)		1		
2412	15	14.76		
2437	15	14.47		
2462	15	15.00		
	802.11 b  Frequency (MHz)  2412  2437	802.11 b  Frequency (MHz)  Annual Street Str		

8	02.11 g	Max. Rated Avg.	Average Power Output (dBm)		
CII	Frequency	Power + Max. Tolerance (dBm)	Data Rate (Mbps)		
СП			6		
1	2412	14	13.21		
6	2437	14	13.92		
11	2462	11.5	11.24		

	802.11 n(20M)		Max. Rated Avg.	Average Power Output (dBm)
1	כם	Frequency	Power + Max.	Data Rate (Mbps)
	CH (MHz)	Tolerance (dBm)	6.5	
	1	2412	14	13.34
	6	2437	14	13.82
	11	2462	11.5	11.13

802	.11 n(40M)	Max. Rated Avg.	Average Power Output (dBm)
СП	Frequency	equency Power + Max. Tolerance (dBm)	Data Rate (Mbps)
СН	(MHz)		13.5
3	2422	12	11.95
6	2437	14	13.69
9	2452	10.5	10.11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 78 of 339

Aux Antenna (CH1)			
	02.11 a .3/5.6/5.8G	Max. Rated Avg.	Average Power Output(dBm)
СН	Frequency (MHz)	Power + Max. Tolerance	Data Rate (Mbps)
24		(dBm)	6
36	5180	14	12.72
40	5200	14	13.36
44	5220	14	13.59
48	5240	14	13.46
52	5260	14	13.85
56	5280	14	13.65
60	5300	14	13.41
64	5320	11.5	11.06
100	5500	11.5	11.29
104	5520	14.5	12.80
108	5540	14.5	13.31
112	5560	14.5	13.39
116	5580	14.5	13.31
120	5600	14.5	13.42
124	5620	14.5	13.46
128	5640	14.5	13.57
132	5660	14.5	13.66
136	5680	14.5	14.04
140	5700	11.5	11.31
149	5745	14	13.46
153	5765	14	13.41
157	5785	14	13.52
161	5805	14	13.92
165	5825	14	13.31

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 79 of 339

Aux Antenna (CH1)			
802	.11 n(20M)	Max. Rated	Average Power Output(dBm)
5.2/5	5.3/5.6/5.8G	Avg. Power + Max.	
СН	Frequency	Tolerance	Data Rate (Mbps)
CIT	(MHz)	(dBm)	6.5
36	5180	14	12.86
40	5200	14	13.48
44	5220	14	13.44
48	5240	14	13.31
52	5260	14	13.56
56	5280	14	13.44
60	5300	13.3	13.27
64	5320	11.5	10.89
100	5500	11.5	11.06
104	5520	14	13.38
108	5540	14	13.02
112	5560	14	13.38
116	5580	14	12.95
120	5600	14	13.33
124	5620	14	13.43
128	5640	14	13.11
132	5660	14	13.73
136	5680	14	13.79
140	5700	11.5	11.02
149	5745	14.5	13.48
153	5765	14.5	13.37
157	5785	14.5	14.34
161	5805	14.5	13.24
165	5825	14.5	13.19

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 80 of 339

Aux Antenna (CH1)

<del>Antenna (C</del>	H I)	
.11 n(40M)	Max. Rated	Average Power Output(dBm)
.3/5.6/5.8G		Average Fower Output (dBill)
Frequency	Tolerance	Data Rate (Mbps)
(MHz)	(dBm)	13.5
5190	11.5	11.19
5230	14	13.53
5270	13.7	13.62
5310	11.5	10.92
5510	11.5	11.46
5550	14.5	12.96
5590	14.5	12.91
5630	14.5	13.31
5670	14.5	13.89
5710	14.5	14.39
5755	14.5	14.36
5795	14.5	14.28
	11 n(40M) .3/5.6/5.8G Frequency (MHz) 5190 5230 5270 5310 5510 5550 5590 5630 5670 5710 5755	Avg. Power + Max. Tolerance (dBm)  5190 11.5  5230 14  5270 13.7  5310 11.5  5510 11.5  5550 14.5  5630 14.5  5670 14.5  5710 14.5  5710 14.5

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 81 of 339

Aux Antenna (CH1)		H1)	
802.	11 ac(20M)	Max. Rated	Average Power Output(dBm)
5.2/5.3/5.6/5.8G		Avg. Power + Max.	Average rower output (ubin)
СН	Frequency	Tolerance	Data Rate (Mbps)
CIT	(MHz)	(dBm)	6.5
36	5180	14	12.72
40	5200	14	13.54
44	5220	14	13.35
48	5240	14	13.29
52	5260	14	13.62
56	5280	14	13.48
60	5300	14	13.24
64	5320	11.5	10.95
100	5500	11.5	11.16
104	5520	14	13.35
108	5540	14	12.92
112	5560	14	13.31
116	5580	14	12.97
120	5600	14	13.34
124	5620	14	13.42
128	5640	14	13.46
132	5660	14	13.83
136	5680	14	13.95
140	5700	11.5	11.25
144	5720	13.5	13.04
149	5745	13.5	13.46
153	5765	13.5	13.43
157	5785	13.5	13.38
161	5805	13.5	13.32
165	5825	13.5	13.14

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 82 of 339

Antenna (C	SH1)	
		Average Power Output(dBm)
2/5.3/5.6/5.8G Avg.		Average rower output(ubin)
Frequency	Tolerance	Data Rate (Mbps)
(MHz)	(dBm)	13.5
5190	11.5	11.04
5230	14	13.73
5270	13.5	13.41
5310	11.5	10.86
5510	11.5	11.42
5550	14.5	13.27
5590	14.5	13.19
5630	14.5	13.37
5670	14.5	13.86
5710	14.5	14.36
5755	14.5	14.34
5795	14.5	14.23
	11 ac(40M) 5.3/5.6/5.8G Frequency (MHz) 5190 5230 5270 5310 5510 5550 5590 5630 5670 5710 5755	Frequency (MHz)  Frequency (MHz)  5190  11.5  5230  14  5270  13.5  5310  11.5  5510  11.5  5550  14.5  5590  14.5  5670  14.5  5710  14.5  5755  14.5

	.11 ac(80M) Max. Rated Avg.		Average Power Output(dBm)	
5.2/5	.3/5.6/5.8G	Power + Max.		
СН	Frequency	Tolerance	Data Rate (Mbps)	
CIT	(MHz)	(dBm)	29.3	
42	5210	12.5	11.41	
58	5290	12.5	10.82	
106	5530	12.5	10.57	
122	5610	12.5	12.21	
138	5690	14.5	14.19	
155	5775	14.5	14.46	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 83 of 339

MIMO (CH0 + CH1)

	WING (CITE   CITI)						
802	802.11 n(20M) Max. Rated Avg.		Average Power Output (dBm)				
CLI	Frequency	Power + Max.		Data Rate (Mbp	os)		
СН	(MHz)	Tolerance (dBm)	CH0	CH1	CH0 + CH1		
1	2412	14	9.87	10.21	13.05		
6	2437	14	10.31	10.55	13.44		
11	2462	14	10.60	10.63	13.63		

802	2.11 n(40M)	Max. Rated Avg.	Average Power Output (dBm)		
CII	Frequency	Power + Max.		Data Rate (Mbp	os)
СН	(MHz)	Tolerance (dBm)	CH0	CH1	CH0 + CH1
3	2422	14	7.47	8.09	10.80
6	2437	14	10.65	10.46	13.57
9	2452	14	7.71	7.74	10.74

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 84 of 339

MIM	MIMO (CH0 + CH1)					
802	.11 n(20M)	5	Avera	nae Power Outo	ut (dBm)	
5.2/5.3/5.6/5.8G		Max. Rated Avg. Power + Max.	Average Power Output (dBm)			
CH Frequency			Data Rate (Mbps)			
011	(MHz)		CH0	CH1	CH0 + CH1	
36	5180	14	6.78	8.82	10.93	
40	5200	14	7.62	9.06	11.41	
44	5220	14	7.58	9.16	11.45	
48	5240	14	7.78	8.82	11.34	
52	5260	14	9.38	10.48	12.98	
56	5280	14	9.42	9.72	12.58	
60	5300	14	9.62	10.06	12.86	
64	5320	14	7.82	7.53	10.69	
100	5500	14	7.96	6.95	10.49	
104	5520	14	10.71	9.82	13.30	
108	5540	14	10.77	9.83	13.34	
112	5560	14	10.62	9.81	13.24	
116	5580	14	10.16	9.78	12.98	
120	5600	14	10.06	9.77	12.93	
124	5620	14	9.82	10.41	13.14	
128	5640	14	10.17	10.31	13.25	
132	5660	14	10.08	10.78	13.45	
136	5680	14	10.16	10.91	13.56	
140	5700	14	7.52	8.12	10.84	
149	5745	14	10.26	10.92	13.61	
153	5765	14	10.01	10.82	13.44	
157	5785	14	9.92	10.78	13.38	
161	5805	14	9.97	10.62	13.32	
165	5825	14	9.92	10.51	13.24	
				· · · · · · · · · · · · · · · · · · ·		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 85 of 339

# MIMO(CHO + CH1)

WINO (CHO + CHI)					
.11 n(40M)	Ma Dalada		Average Power Output (dBm)		
.3/5.6/5.8G	9				
Frequency			Data Rate (Mb	ps)	
(MHz)		CH0	CH1	CH0 + CH1	
5190	10	6.16	7.67	9.99	
5230	14	8.55	9.63	12.13	
5270	14	9.21	10.44	12.88	
5310	14	7.82	7.86	10.85	
5510	14	8.62	7.53	11.12	
5550	14	10.32	9.97	13.16	
5590	14	10.18	10.02	13.11	
5630	14	9.97	10.07	13.03	
5670	14	10.42	10.56	13.50	
5710	14	10.44	10.62	13.54	
5755	14	10.55	10.71	13.64	
5795	14	10.15	10.89	13.55	
	11 n(40M) .3/5.6/5.8G Frequency (MHz) .5190 .5230 .5270 .5310 .5510 .5550 .5590 .5630 .5670 .5710 .5755	11 n(40M) .3/5.6/5.8G Frequency (MHz)  5190 10 5230 14 5270 14 5310 14 5510 14 5550 14 5590 14 5630 14 5670 14 5710 14 5755 14	11 n(40M) .3/5.6/5.8G  Max. Rated Avg. Power + Max. Tolerance (dBm)  (MHz)  CH0  5190  10  6.16  5230  14  8.55  5270  14  9.21  5310  14  7.82  5510  14  8.62  5550  14  10.32  5590  14  10.18  5630  14  9.97  5670  14  10.42  5710  14  10.55	11 n(40M)   .3/5.6/5.8G   Max. Rated Avg. Power + Max. Tolerance (dBm)   CH0   CH1	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 86 of 339

# MINTO (CLIO . CLIA)

MIMO (CH0 + CH1)						
802.11 ac(20M) 5 2/5 3/5 6/5 8C Max. Rated Avg.		Avera	ge Power Outp	ut (dBm)		
5.2/5.3/5.6/5.8G		Power + Max.				
СН	Frequency		Data Rate (Mbps)			
0	(MHz)	CH0	CH1	CH0 + CH1		
36	5180	14	7.53	9.03	11.35	
40	5200	14	7.92	9.38	11.72	
44	5220	14	7.95	9.26	11.66	
48	5240	14	8.02	9.11	11.61	
52	5260	14	10.19	10.38	13.30	
56	5280	14	10.18	10.25	13.23	
60	5300	14	10.26	9.96	13.12	
64	5320	14	8.36	7.92	11.16	
100	5500	14	8.13	7.05	10.63	
104	5520	14	10.76	9.98	13.40	
108	5540	14	10.82	10.02	13.45	
112	5560	14	10.62	10.36	13.50	
116	5580	14	10.19	9.78	13.00	
120	5600	14	10.04	9.86	12.96	
124	5620	14	10.36	10.42	13.40	
128	5640	14	9.78	9.88	12.84	
132	5660	14	10.39	10.82	13.62	
136	5680	14	10.41	10.62	13.53	
140	5700	14	7.53	8.39	10.99	
144	5720	14	9.28	10.00	12.67	
149	5745	14	10.31	11.19	13.78	
153	5765	14	10.36	11.11	13.76	
157	5785	14	9.62	10.44	13.06	
161	5805	14	10.25	11.01	13.66	
165	5825	14	10.11	10.82	13.49	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 87 of 339

# MIMO(CHO + CH1)

802.	11 ac(40M)				
5.2/5.3/5.6/5.8G		Max. Rated Avg.	Average Power Output (dBm)		
СН	Frequency	Power + Max. Tolerance (dBm)		Data Rate (Mbp	os)
СП	(MHz)		CH0	CH1	CH0 + CH1
38	5190	10	5.88	7.35	9.69
46	5230	14	9.42	9.91	12.68
54	5270	14	10.06	10.25	13.17
62	5310	14	8.31	8.08	11.21
102	5510	14	8.97	8.06	11.55
110	5550	14	10.62	9.71	13.20
118	5590	14	9.97	9.74	12.87
126	5630	14	10.04	10.21	13.14
134	5670	14	10.08	10.82	13.48
142	5710	14	10.41	10.75	13.59
151	5755	14	9.78	10.67	13.26
159	5795	14	10.18	11.02	13.63

802.	11 ac(80M)		Average Power Output (dBm)		ıt (dRm)		
5.2/5	.3/5.6/5.8G	Max. Rated Avg.	Avera	Average Fower Output (ubili)			
СН	Frequency	Power + Max. Tolerance (dBm)		Data Rate (Mbp	os)		
СП	(MHz)		CH0	CH1	CH0 + CH1		
42	5210	10	6.82	7.03	9.94		
58	5290	13	8.05	8.03	11.05		
106	5530	13	7.71	6.83	10.30		
122	5610	14	10.58	10.55	13.58		
138	5690	14	10.34	10.61	13.49		
155	5775	14	9.76	10.86	13.36		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

SGS Taiwan Ltd. t (886-2) 2299-3279 f (886-2) 2298-0488



Page: 88 of 339

#. Bluetooth conducted power table:

#. Diactooti	7. Bidetootii conducted power table.				
Frequency	Data	Max. Rated Avg. Power + Max.	Avg.		
(MHz)	Rate	Tolerance (dBm)	dBm	mW	
2402	1	6	4.72	2.965	
2441	1	6	5.09	3.228	
2480	1	6	5.25	3.350	
2402	2	3	1.43	1.390	
2441	2	3	1.79	1.510	
2480	2	3	2.25	1.679	
2402	3	2	0.64	1.159	
2441	3	2	0.93	1.239	
2480	3	2	1.17	1.309	

Frequency	Max. Rated Avg. Power + Max.	Avg. (dBm)
(MHz)	Tolerance (dBm)	BT4.0
2402	4	2.04
2442	4	2.87
2480	4	3.08

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 89 of 339

#### 1.4 Test Environment

Ambient Temperature: 22±2° C Tissue Simulating Liquid: 22±2° C

# 1.5 Operation Description

 WWAN (GPRS/EDGE/WCDMA/HSDPA/HSPA/CDMA 1xRTT/CDMA EVDO rev.0 & rev.A/LTE):

The EUT is controlled by using Radio Communication Tester(R&S CMU200 and Anritsu MT8820C), and the communication between the EUT and the tester is established by air link. The EUT was tested in three configurations:

Configuration 1: Back side\_0mm with power reduction and\_25mm without power reduction.

Configuration 2: Top side\_0mm with power reduction and\_12mm without power reduction.

Configuration 3: Right/left/bottom sides\_Omm without power reduction. (SAR measurement for right/left/bottom sides can be excluded based on KDB447498D01. Since the simultaneous transmission needs to be considered, we do the SAR test for these sides. For LTE, we choose the maximum channel bandwidth/RB configuration/modulation with highest specified power to do SAR measurement for these sides to be the worst cases.)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

台灣檢驗科技股份有限公司




Page: 90 of 339

Band	Power Reduction
GPRS850	YES
EDGE850	YES
GPRS1900	YES
EDGE1900	YES
WCDMA B2	YES
WCDMA B4	YES
WCDMA B5	YES
CDMA BC0	YES
CDMA BC1	YES
CDMA BC10	YES
LTE B2/4/5/13/17/25	YES
WLAN	NO
ВТ	NO

# 2. WLAN (802.11 a/b/g/n/ac):

Use chipset specific software to control the EUT, and makes it transmit in maximum power. The EUT was tested in the following configurations:

Configurations: Back/top/right/bottom/Left sides\_0mm.

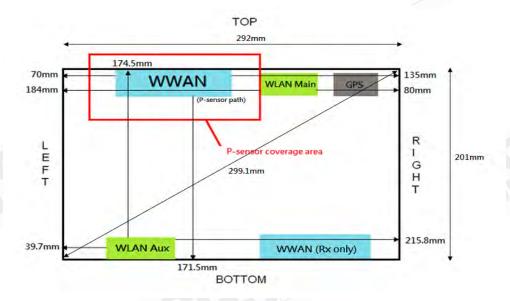

# Antenna position plot(front view)

(Note: The proximity sensor is collocated with WWAN antenna.)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 91 of 339

#### Note:

### The test configuration for standalone tablet

- 1. On the backside of tablet, the left and right rubber corners are removed to make WWAN/WLAN antennas against the phantom, besides, unloading the cover of GPS bumper and make it to be flat so as to let WLAN1 against the phantom. This configuration is accepted by FCC via KDB inquiry.(tracking number: 928161)
- 2. SAR test for GPRS was performed on the maximum sourced-based time-averaged power.
- 3. The SAR measurement is not required for HSDPA/HSPA/HSPA+ since its maximum output power is less than 1/4 dB higher than RMC without HSDPA/HSPA/HSPA+.
- 4. Body SAR was measured using Subtype 0/1 Physical Layer configurations for Rev. 0. The 3G SAR test reduction procedure is applied to Rev. A, Subtype 2 Physical layer configuration, with Rev. 0 as the primary mode.
- 5. For this Ev-Do data device that also support 1x RTT data operations, the 3G SAR test reduction procedure is applied to 1x RTT RC3 and RC1 with Ev-Do Rev. 0, Rev. A as the respective primary modes. (Since SAR is not required for Ev-Do Rev. A, only Rev. 0 need consideration as the primary mode.)
- 6. LTE modes test according to FCC KDB 941225 D05v02r03.
  - a. Per Section 5.2.1, the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation.
    - Using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
    - When the reported SAR is  $\leq 0.8$  W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel.
    - When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.
  - b. Per Section 5.2.2, the largest channel bandwidth and measure SAR for QPSK with 50% RB allocation
    - The procedures required for 1 RB allocation in 5.2.1 are applied to measure the SAR for QPSK with 50% RB allocation.
  - c. Per Section 5.2.3, the largest channel bandwidth and measure SAR for QPSK with 100% RB allocation
    - For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 92 of 339

SAR for 1 RB and 50% RB allocation in 5.2.1 and 5.2.2 are ≤ 0.8 W/kg.

- Otherwise, SAR is measured for the highest output power channel and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
- d. Per Section 5.2.4, Higher order modulations
  - For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in sections 5.2.1, 5.2.2 and 5.2.3 to determine the QAM configurations that may need SAR measurement. For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is > 1/2 dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg.
- e. Per Section 5.3, other channel bandwidth standalone SAR test requirements
  - For the other channel bandwidths used by the device in a frequency band, apply all the procedures required for the largest channel bandwidth in section 5.2 to determine the channels and RB configurations that need SAR testing and only measure SAR when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is > 1/2 dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is > 1.45 W/kg.
  - The equivalent channel configuration for the RB allocation, RB offset and modulation etc. is determined for the smaller channel bandwidth according to the same number of RB allocated in the largest channel bandwidth.

#### 802.11b DSSS SAR Test Requirements:

- 7. SAR is measured for 2.4 GHz 802.11b DSSS mode using the highest measured maximum output power channel, when the reported SAR of the highest measured maximum output power channel for the exposure configuration is  $\leq 0.8$  W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- **8.** When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

#### 802.11g/n OFDM SAR Test Exclusion Requirements:

**9.** SAR is not required for 802.11g/n since the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2$ W/kg.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd. t (886-2) 2299-3279

www.tw.sas.com



Page: 93 of 339

# **Initial Test Configuration:**

- **10**. An initial test configuration is determined for OFDM transmission modes according to the channel bandwidth, modulation and data rate combination(s) with the highest maximum output power specified for production units in each standalone and aggregated frequency
- 11. SAR is measured using the highest measured maximum output power channel. When the reported SAR of the initial test configuration is > 0.8 W/kg, SAR measurement is required for the subsequent next highest measured output power channel(s) in the initial test configuration until the reported SAR is  $\leq 1.2$  W/kg or all required channels are tested.
- **12.** For WLAN Main antenna, 5.2G ac(20), 5.3G ac(20), 5.6G a/ac(20)/ac(80), 5.8G ac(80) are chosen to be the initial test configurations.
- 13. For WLAN Main antenna, since the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is < 1.2 W/kg, SAR is not required for that subsequent test configuration.
- **14.** For WLAN Aux antenna, 5.2G a, 5.3G a, 5.6G a/n(40)/ac(80), 5.8G ac(80) are chosen to be the initial test configurations.
- **15.** For WLAN Aux antenna, 5.3G n(20)/ac(20)/n(40)/ac(40), 5.6G n(20)/ac(20) are chosen to be the subsequent test configurations since the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is > 1.2 W/kg.
- 16. SAR for subsequent highest measured maximum output power channels in the subsequent test configuration is required only when the reported SAR of the preceding higher maximum output power channel(s) in the subsequent test configuration is > 1.2
- 17. BT and WLAN Aux use the same antenna path and Bluetooth may transmit simultaneously with WLAN Main.
- 18. BT SAR measurement for back/top/right/left/bottom sides can be excluded based on KDB447498D01. Since the simultaneous transmission needs to be considered, we do the BT SAR test for these sides. We choose the highest specified BT power to do SAR measurement for these sides to be the worst cases.
- 19. For 2.4/5.2/5.3/5.6/5.8GHz WLAN Main and Aux antennas, the maximum output power of each antenna during simultaneous transmission (for 802.11n/ac) is much less than that used in standalone transmission (802.11a/b/g/n/ac), so it is more conservative to use the sum of 1-g SAR provision to exclude the SAR measurement for 802.11n/ac MIMO.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

www.tw.sas.com



Page: 94 of 339

#### 20. Based on KDB447498D01,

(1) SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$$\frac{\text{Max. tune up power(mW)}}{\text{Min. test separation distance(mm)}} \times \sqrt{f(GHz)} \le 3$$

When the minimum test separation distance is < 5mm, 5mm is applied to determine SAR test exclusion.

(2) For test separation distances > 50 mm, and the frequency at 100 MHz to 1500MHz, the SAR test exclusion threshold is determined according to the following, and as illustrated in Appendix B of KDB447498 D01.

[(Threshold at 50mm in step1) + (test separation distance-50mm) $x(\frac{f(MHz)}{180})$ ](mW),

(3) For test separation distances > 50 mm, and the frequency at >1500MHz to 6GHz, the SAR test exclusion threshold is determined according to the following, and as illustrated in Appendix B of KDB447498 D01.

[(Threshold at 50mm in step1) + (test separation distance-50mm)x10](mW)

			Top side			Right side			Left side		
Mode	Maximum power(dBm)	Maximum power(mW)	Ant. to surface (mm)	Exclusion threshold	Require SAR testing?	Ant. to surface (mm)	over 200mm	Require SAR testing?	Ant. to surface (mm)	Exclusion threshold	I SAR I
ВТ	6	3.981	174.5	1245.125	NO	216	yes	NO	39.7	0.158	NO
			Bottom side			Back side					
Mode	Maximum power(dBm)	Maximum power(mW)	Ant. to surface (mm)	Exclusion threshold	Require SAR testing?	Ant. to surface (mm)	Exclusion threshol d	Require SAR testing?			
ВТ	6	3.981	less than	1.254	NO	less than	1.254	NO			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 95 of 339

				Top side			Right side			Left side	
Mode	Max. tune-up power(dBm)	Max. tune-up power(mW)	Ant. to surface (mm)	Exclusion threshold (mW)	Require SAR testing?	Ant. to surface (mm)	Exclusion threshold (mW)	Require SAR testing?	Ant. to surface (mm)	Exclusion threshold (mW)	Require SAR testing?
GPRS850 class10	32.9	1949.845	less than 5	359.280	YES	135	516.915	NO	70	149.101	NO
GPRS1900 class10	29	794.328	less than 5	219.545	YES	135	871.955	NO	70	221.955	NO
WCDMA B2	23	199.526	less than 5	55.115	YES	135	855.512	NO	70	205.512	NO
WCDMA B4	23	199.526	less than 5	52.829	YES	135	855.283	NO	70	205.283	NO
WCDMA B5	23	199.526	less than 5	36.717	YES	135	483.412	NO	70	116.552	NO
Cellular BC0 1xEVDO	23.5	223.872	less than 5	41.239	YES	135	484.833	NO	70	117.232	NO
Cellular BC1 1xEVDO	24	251.189	less than 5	69.407	YES	135	856.941	NO	70	206.941	NO
Cellular BC10 1xEVDO	23.5	223.872	less than 5	40.622	YES	135	470.485	NO	70	113.809	NO
LTE Band 2	23	199.526	less than 5	55.150	YES	135	855.515	NO	70	205.515	NO
LTE Band 4	22.5	223.872	less than 5	47.116	YES	135	854.712	NO	70	204.712	NO
LTE Band 5	22.5	177.828	less than 5	32.771	YES	135	484.377	NO	70	116.477	NO
LTE Band 13	22	158.489	less than 5	28.120	YES	135	448.779	NO	70	107.745	NO
LTE Band 17	22.5	177.828	less than 5	30.094	YES	135	408.743	NO	70	98.476	NO
LTE Band 25	23	199.526	less than 5	55.222	YES	135	855.522	NO	70	205.522	NO



This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 96 of 339

				Bottom side		Back side			
Mode	Max. tune-up power(dBm)	Max. tune-up power(mW)	Ant. to surface (mm)	Exclusion threshold (mW)	Require SAR testing?	Ant. to surface (mm)	Exclusion threshold (mW)	Require SAR testing?	
GPRS850 class10	32.9	1949.845	171.5	723.456	NO	less than 5	359.280	YES	
GPRS1900 class10	29	794.328	171.5	1236.955	NO	less than 5	219.545	YES	
WCDMA B2	23	199.526	171.5	1220.512	NO	less than 5	55.115	YES	
WCDMA B4	23	199.526	171.5	1220.283	NO	less than 5	52.829	YES	
WCDMA B5	23	199.526	171.5	689.418	NO	less than 5	36.717	YES	
Cellular BC0 1xEVDO	23.5	223.872	171.5	691.255	NO	less than 5	41.239	YES	
Cellular BC1 1xEVDO	24	251.189	171.5	1221.941	NO	less than 5	69.407	YES	
Cellular BC10 1xEVDO	23.5	223.872	171.5	670.773	NO	less than 5	40.622	YES	
LTE Band 2	23	199.526	171.5	1220.515	NO	less than 5	55.150	YES	
LTE Band 4	22.5	223.872	171.5	1219.712	NO	less than 5	47.116	YES	
LTE Band 5	22.5	177.828	171.5	690.967	NO	less than 5	32.771	YES	
LTE Band 13	22	158.489	171.5	640.282	NO	less than 5	28.120	YES	
LTE Band 17	22.5	177.828	171.5	582.969	NO	less than 5	30.094	YES	
LTE Band 25	23	199.526	171.5	1220.522	NO	less than 5	55.222	YES	

- **21.** According to KDB447498 D01, testing of other required channels is not required when the reported 1-g SAR for the highest output channel is  $\leq$  0.8 W/kg, when the transmission band is  $\leq$  100 MHz.
- 22. According to KDB865664 D01, SAR measurement variability must be assessed for each frequency band. When the original highest measured SAR is ≥ 0.8 W/kg, repeated that measurement once. Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit)
- 23. There is an optional battery, and we do the worst case check in each band to make sure the device installed the optional battery can comply with the SAR limit.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Page: 97 of 339

# 1.6 Proximity sensor operation description

The P-sensor being used to reduce output power is capacitive in which when the object such as human body, metal or plastic is being approached, the sensing capacitance would be increased with the antenna pad. Once the capacitance is accumulated, and reached over the threshold as set in MCU of the microchip, the interruption signal is pulled low (High state without trigger) and further inform modem module of the transmitter to make power reduction.

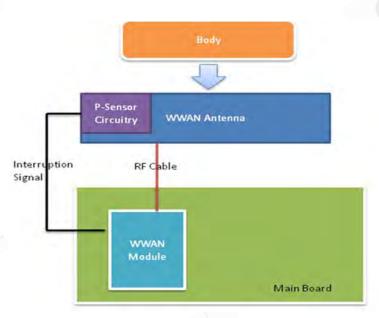

- 1.6.1 Proximity sensor measurement procedure
- (1) The proximity sensor is collocated with WWAN antenna.
- (2) Output power is measured, and monitored by using the communication tester. A RF cables with sufficient length was being attached from the antenna port of the module, and used for the measurement. The appropriate loss attenuated from cable is compensated in the communication tester.

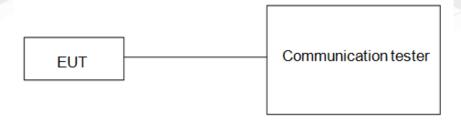

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 98 of 339

# 1.6.2 Trigger distances for back/top side

#### Test procedure:

- 1) The entire back surface or edge of the tablet is positioned below a flat phantom filled with the required tissue equivalent medium and positioned at least 20 mm further than the distance that triggers power reduction.
- 2) The back surface or edge is moved toward the phantom in 3 mm steps until the sensor triggers.
- 3) The back surface or edge is then moved back (further away) from the phantom until maximum output power is returned to the normal maximum level.
- 4) The back surface or edge is again moved toward the phantom, but in 1 mm steps, until it is at least 5 mm past the triggering point or touching the phantom
- 5) If the tablet is not touching the phantom, it is moved in 3 mm steps until it touches the phantom to confirm that the sensor remains triggered and the maximum power stays reduced.
- 6) The process is then reversed by moving the tablet away from the phantom to determine triggering release, until it is at least 10 mm beyond the point that triggers the return of normal maximum power.
- 7) The measured output power within  $\pm$  5 mm of the triggering points, or until the tablet is touching the phantom, for movements to and from the phantom should be tabulated.
- 8) To ensure all production units are compliant, it is generally necessary to reduce the triggering distance determined from the triggering tests by 1 mm, or more if it is necessary, and use the smallest distance for movements to and from the phantom, minus 1 mm, as the sensor triggering distance for determining the SAR measurement distance.
- 9) For back side, the trigger distance of proximity sensor is 26mm.
- 10) For top side, the trigger distance of proximity sensor is 14mm, and we perform the 1.6.3 tilt angle testing in next step.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留00天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Talwan Ltd.

No.134.Wu Kung Road. New Taipei Industrial Park. Wuku District. New Taipei City. Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 99 of 339

### 1.6.3 Tilt angle testing

#### Test procedure:

- 1) The influence of table tilt angles to proximity sensor triggering is determined by positioning each tablet edge that contains a transmitting antenna, perpendicular to the flat phantom, at the smallest sensor triggering test distance determined in sections 1.6.2 by rotating the tablet around the edge next to the phantom in  $\leq$  10 deg increments until the tablet is +/-45deg or more from the vertical position at 0 deg.
- 2) If sensor triggering is released and normal maximum output power is restored within the +/- 45deg range, the procedures in step 1) should be repeated by reducing the tablet to phantom separation distance by 1 mm until the proximity sensor no longer releases triggering, and maximum output power remains in the reduced mode.
- 3) The smallest separation distance determined in steps 1) and 2), minus 1 mm, is the sensor triggering distance for tablet tilt coverage. The smallest separation distance determined in sections 1.6.2, 1.6.3 minus 1 mm should be used in the SAR measurements.
- 4) The influence of tablet tilt angles to proximity sensor triggering is determined by positioning top and right sides, please refer to table 1.6.5 and 1.6.6.
- 5) After the tilt angle testing for top side, the sensor is not released during +/- 45deg, so 14-1=13mm, is the sensor triggering distance for tablet tilt coverage. The smallest separation distance minus 1 mm(13-1=12mm) should be used in the SAR measurements.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 100 of 339

### 1.6.4 Proximity sensor coverage

The following procedures do not apply and are not required for configurations where the antenna and sensor are collocated and the peak SAR location is overlapping with the sensor.

### Test procedure:

- 1) The back surface or edges of the tablet is positioned at a test separation distance less than or equal to the distance required for back surface or edge triggering, with both the antenna and sensor pad located at least 20 mm laterally outside the edge (boundary) of the phantom, along the direction of maximum antenna and sensor offset.
- 2) The similar sequence of steps applied to determine sensor triggering distance in section 1.6.2 are used to verify back surface and edge sensor coverage by moving the tablet (sensor and antenna) horizontally toward the phantom while maintaining the same vertical separation between the back surface or edge and the phantom.
- 3) After the exact location where triggering of power reduction is determined, with respect to the sensor and antenna, the tablet movement should be continued, in 3 mm increments, until both the sensor and antenna(s) are fully under the phantom and at least 20 mm inside the phantom edge.
- 4) The process is then repeated from the other direction, at the opposite end of maximum antenna and sensor offset, by rotating the tablet 180 degrees.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.




Page: 101 of 339

#### 1.6.5 Results

The measured output power within  $\pm$  5 mm of the triggering points, or until the tablet is touching the phantom, for movements to and from the phantom is tabulated in the following.

#### Back side

Moving device toward the phantom

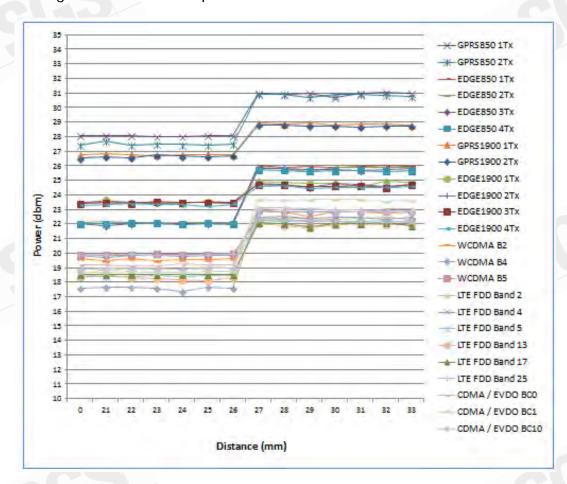

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 102 of 339

### Moving device away from the phantom

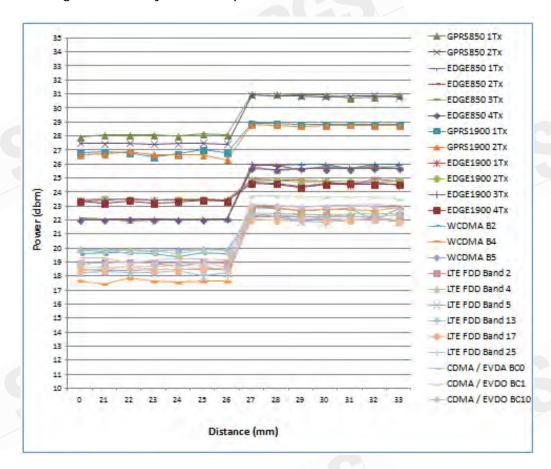

For back side, the worst trigger distance of proximity sensor is 26mm, thus we test back side SAR in 25mm without power reduction and 0mm with power reduction.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


SGS Taiwan Ltd.



Page: 103 of 339

### Top side

Moving device toward the phantom

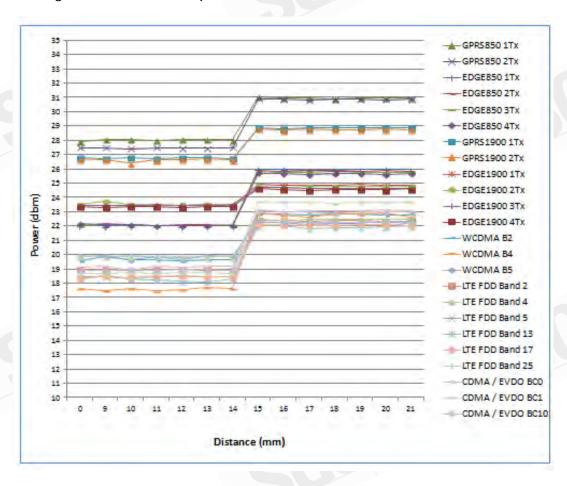

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 104 of 339

# Moving device away from the phantom

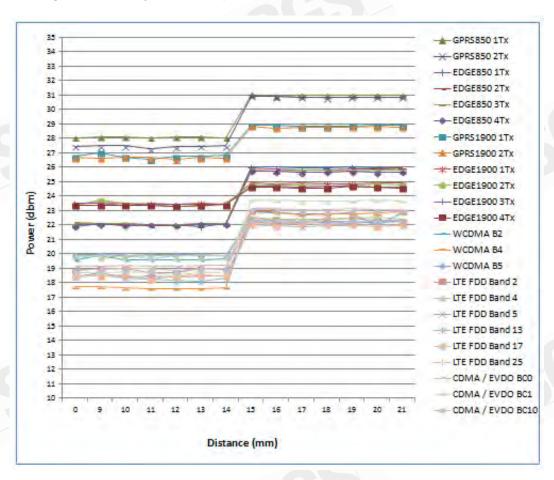


Table 1.6.5 Tilt angle test results for top side

P-sensor	-50	-45	-40	-30	-20	-10	0	10	20	30	40	45	50
ON/OFF	deg												
14mm	ON												

During the tilt angle testing for top side, the sensor is not released in 14mm, so 14-1=13mm, is the sensor triggering distance for tablet tilt coverage. The smallest separation distance minus 1 mm(13-1=12mm) should be used in the SAR measurements for top side.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 105 of 339

#### Note:

- 1. The triggering variations and hysteresis effect has been evaluated separately according to the tissue-equivalent medium required for each frequency band, and sensor triggering does not change with different tissue-equivalent media.
- 2. The default power level for sensor failure and malfunctioning, including all compliance concerns, has been addressed in the client's operation description (1.6.6) for the proximity sensor implementation to be acceptable.
- 3. Conducted power is monitored qualitatively to identify the general triggering characteristics and recorded quantitatively, versus spacing.
- 4. The optional battery doesn't influence the p-sensor triggering distance after the verification.
- 5. Attaching or unloading the left/right rubber/the cover of GPS bumper doesn't influence the p-sensor triggering distance after the verification.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 106 of 339

### 1.6.6 Operation description for P-sensor

#### **Power Reduction Design Specification (for P-sensor)**

The mechanism of power reduction is used only for WWAN, not for Wi-Fi and Bluetooth. The reduced power for each technology/band is defined in Table1-1. With P-sensor mechanism, the GPRS/WCDMA default power when P-sensor failure or malfunction are show in Table1-2 as below.

**Table1-1: The power reduction scenario table** 

Band	Power Reduction
GPRS850	YES
EDGE850	YES
GPRS1900	YES
EDGE1900	YES
WCDMA B2	YES
WCDMA B4	YES
WCDMA B5	YES
CDMA BC0	YES
CDMA BC1	YES
CDMA BC10	YES
LTE B2/4/5/13/17/25	YES
WLAN	NO
BT	NO

Table1-2: The default maximum power when p-sensor failure or malfunction

The delical maximum pewer when p concer failure of ma								
Technology / Band	Mode	Default Maximum Power (dBm)						
GPRS 850	Class 8	28.5						
GFR3 650	Class 10	28.5						
	Class 8	22.5						
EDCE 950	Class 10	22.5						
EDGE 850	Class 11	22.5						
	Class 12	22.5						
CDBS 1000	Class 8	27						
GPRS 1900	Class 10	27						
	Class 8	23.5						
EDCE 1000	Class 10	23.5						
EDGE 1900	Class 11	23.5						
	Class 12	23.5						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 107 of 339

Technology / Band	Mode	Default Maximum Power (dBm)
	RMC 12.2K data	20
	HSDPA case 1	20
	HSDPA case 2	20
	HSDPA case 3	20
LINATO DO	HSDPA case 4	20
UMTS B2	HSUPA case 1	20
	HSUPA case 2	20
	HSUPA case 3	20
	HSUPA case 4	20
	HSUPA case 5	20
	RMC 12.2K data	19
	HSDPA case 1	19
	HSDPA case 2	19
	HSDPA case 3	19
	HSDPA case 4	19
UMTS B4	HSUPA case 1	19
	HSUPA case 2	19
	HSUPA case 3	19
	HSUPA case 4	19
	HSUPA case 5	19
	RMC 12.2K data	20
	HSDPA case 1	20
	HSDPA case 2	20
	HSDPA case 3	20
	HSDPA case 4	20
UMTS B5	HSUPA case 1	20
	HSUPA case 2	20
	HSUPA case 3	20
	HSUPA case 4	20
	HSUPA case 5	20

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format


documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 108 of 339

Technology / Band	Mode	Default Maximum Power (dBm)
CDMA BC0	All	20
CDMA BC1	All	20
CDMA BC10	All	20
LTE B2	All	20
LTE B4	All	20
LTE B5	All	20
LTE B13	All	20
LTE B17	All	20
LTE B25	All	20



This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 109 of 339

# 1.7 The SAR Measurement System

A block diagram of the SAR measurement System is given in Fig. a. This SAR Measurement System uses a Computer-controlled 3-D stepper motor system (SPEAG DASY 5 professional system). The model EX3DV4 field probe is used to determine the internal electric fields. The SAR can be obtained from the equation SAR=  $\sigma$  ( $|Ei|^2$ )/  $\rho$  where  $\sigma$  and  $\rho$  are the conductivity and mass density of the tissue-simulant.

The DASY 5 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Staubli RX family) with controller, teach pendant and software. An arm extension is for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage intissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.

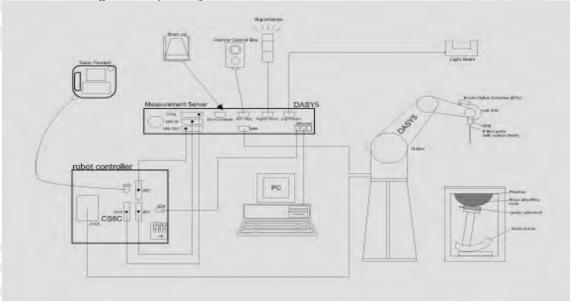


Fig. a The block diagram of SAR system

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The

Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.

> t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sas.com



Page: 110 of 339

- The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to the DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows 7.
- DASY 5 software.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom enabling testing left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
   Validation dipole kits allowing to validate the proper functioning of the system.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 111 of 339

# 1.8 System Components

#### EX3DV4 E-Field Probe

EX3DV4 E-FIEID	1110be						
Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)						
Calibration	Basic Broad Band Calibration in air Conversion Factors (CF) for HSL 750/835/ 1750/1900/2450/5200/5300/5600/5800 MHz Additional CF for other liquids and frequencies upon request						
Frequency	10 MHz to > 6 GHz						
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)						
Dynamic Range	10 μW/g to > 100 mW/g Linearity: $\pm$ 0.2 dB (noise: typically < 1 μW/g)						
Dimensions	Tip diameter: 2.5 mm						
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%.						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 112 of 339

#### **SAM PHANTOM V4.0C**

SAM PHANTOM	V4.0C	
Construction	The shell corresponds to the specifi Anthropomorphic Mannequin (SAM) and IEC 62209. It enables the dosimetric evaluation usage as well as body mounted usa cover prevents evaporation of the liphantom allow the complete setup positions and measurement grids by with the robot.	phantom defined in IEEE 1528  of left and right hand phone age at the flat phantom region. A quid. Reference markings on the of all predefined phantom
Shell Thickness	2 ± 0.2 mm	
Filling Volume Dimensions	Approx. 25 liters Height: 850 mm; Length: 1000 mm; Width: 500 mm	

## **DEVICE HOLDER**

The device holder (Supporter) for Notebook is made by POM (polyoxymethylene resin ) , which is non-metal and non-conductive. The height can be adjusted to fit varies kind of notebooks.  Device Holder

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 113 of 339

# 1.9 SAR System Verification

The microwave circuit arrangement for system verification is sketched in Fig. b. The daily system accuracy verification occurs within the flat section of the SAM phantom. A SAR measurement was performed to see if the measured SAR was within +/- 10% from the target SAR values. These tests were done at 750/835/1750/1900/2450/5200/5300/5600/5800MHz. The tests were conducted on the same days as the measurement of the DUT. The obtained results from the system accuracy verification are displayed in the table 1 (SAR values are normalized to 1W forward power delivered to the dipole). During the tests, the ambient temperature of the laboratory was  $21.7^{\circ}$ C, the relative humidity was 62% and the liquid depth above the ear reference points was  $\geq 15$  cm  $\pm 5$  mm (frequency  $\leq 3$  GHz) or  $\geq 10$  cm  $\pm 5$  mm (frequency > 3 G Hz) in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.





Fig. b The block diagram of system verification

- A. Signal generator
- B. Amplifier
- C. Power meter
- D. Dual directional coupling
- E. Reference dipole antenna



Photograph of the dipole Antenna

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 114 of 339

Validation Kit	S/N	Frequency (MHz)		1W Target SAR-1g (mW/g)	Measured SAR-1g (mW/g)	Measured SAR-1g normalized to 1W (mW/g)	Deviation (%)	Measured Date					
D750V2	1015	750	Body	8.75	2.28	9.12	4.23%	Jun. 16, 2015					
D835V2	4d063	835	Body	9.35	2.35	9.4	0.53%	Jun. 12, 2015					
D033V2	40063	033	Body	9.35	2.35	9.4	0.53%	Jun. 15, 2015					
D1750V2	1008	1750	Body	37.5	9.36	37.44	-0.16%	Jun. 17, 2015					
D1900V2	5d027	E4027	1900	Body	39.3	10.1	40.4	2.80%	Jun. 11, 2015				
D1900V2		50027 1900	Body	39.3	10.1	40.4	2.80%	Jun. 18, 2015					
D2450V2	727	2450	Body	51	13.5	54	5.88%	Jun. 01, 2015					
D2430V2	121	121	121	121	121	727	2430	Body	51	12.7	50.8	-0.39%	Jun. 05, 2015
		5200	Body	73.5	7.47	74.7	1.63%	Jun. 02, 2015					
D5GHzV2	1023	5300	Body	74.6	8.13	81.3	8.98%	Jun. 03, 2015					
D5GHZVZ	1023	5600	Body	77.9	7.32	73.2	-6.03%	Jun. 04, 2015					
		5800	Body	75.6	8.04	80.4	6.35%	Jun. 01, 2015					

Table 1. Results of system validation

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 115 of 339

# 1.10 Tissue Simulant Fluid for the Frequency Band

The dielectric properties for this body-simulant fluid were measured by using the Agilent Model 85070E Dielectric Probe (rates frequency band 200 MHz to 20 GHz) in conjunction with Network Analyzer (30 KHz-6000 MHz).

All dielectric parameters of tissue simulates were measured within 24 hours of SAR measurements. The depth of the tissue simulant in the flat section of the phantom was ≥ 15 cm  $\pm$  5 mm (Frequency  $\leq$ 3G) or  $\geq$  10 cm  $\pm$  5 mm (Frequency >3G) during all tests. (Fig. 2)

			Torget	Torget	Magaurad			
Tissue	Measurement	Measured	Target Dielectric	Target Conductivi	Measured	Measured		
Type	Date	Frequency				Conductivity,	% dev εr	% dev σ
Турс	Dute	(MHz)	Constant,	ty,	Constant,	σ (S/m)		
		1850.2	53.300	1.520	52.559	1.477	1.39%	2.83%
		1851.25	53.300	1.520	52.554	1.478	1.40%	2.76%
		1852.4	53.300	1.520	52.546	1.479	1.41%	2.70%
	Jun. 11, 2015	1880	53.300	1.520	52.356	1.508	1.77%	0.79%
		1900	53.300	1.520	52.226	1.529	2.02%	-0.59%
		1907.6	53.300	1.520	52.188	1.537	2.09%	-1.12%
		1908.75	53.300	1.520	52.176	1.539	2.11%	-1.25%
		1909.8	53.300	1.520	52.167	1.540	2.13%	-1.32%
		824.2	55.242	0.969	54.389	0.944	1.54%	2.58%
		824.7	55.240	0.969	54.385	0.944	1.55%	2.60%
		826.4	55.234	0.969	54.372	0.946	1.56%	2.37%
		835	55.200	0.970	54.344	0.955	1.55%	1.55%
	Jun. 12, 2015	836.52	55.195	0.972	54.333	0.956	1.56%	1.63%
		836.6	55.195	0.972	54.333	0.956	1.56%	1.65%
		846.6	55.164	0.984	54.315	0.966	1.54%	1.83%
		848.31	55.159	0.986	54.265	0.969	1.62%	1.76%
		848.8	55.158	0.987	54.261	0.970	1.63%	1.72%
		817.9	55.253	0.949	54.067	0.943	2.15%	0.63%
		820	55.246	0.952	54.051	0.947	2.16%	0.53%
	Jun. 15, 2015	823.1	55.237	0.955	54.033	0.950	2.18%	0.52%
Body		829	55.223	0.970	54.064	0.957	2.10%	1.29%
		835	55.200	0.970	54.035	0.963	2.11%	0.72%
		836.5	55.194	0.970	54.017	0.965	2.13%	0.53%
		844	55.172	0.981	53.996	0.973	2.13%	0.82%
		709	55.691	0.960	54.312	0.922	2.48%	3.98%
		710	55.687	0.960	54.301	0.923	2.49%	3.88%
	Jun. 16, 2015	711	55.683	0.960	54.294	0.924	2.49%	3.78%
		750	55.531	0.963	54.188	0.964	2.42%	-0.06%
		782	55.406	0.966	53.973	0.993	2.59%	-2.81%
		1712.4	53.531	1.465	52.410	1.431	2.09%	2.32%
		1720	53.511	1.469	52.394	1.440	2.09%	2.01%
		1732.4	53.478	1.477	52.305	1.452	2.19%	1.69%
	Jun. 17, 2015	1732.5	53.478	1.477	52.304	1.452	2.19%	1.69%
		1745	53.445	1.485	52.257	1.464	2.22%	1.43%
		1750	53.432	1.488	52.225	1.470	2.26%	1.21%
		1752.6	53.425	1.490	52.215	1.473	2.26%	1.14%
	-	1860	53.300	1.520	52.890	1.493	0.77%	1.78%
	Jun. 18, 2015	1880	53.300	1.520	52.309	1.514	1.86%	0.39%
		1882.5	53.300	1.520	52.269	1.517	1.93%	0.20%
		1900	53.300	1.520	52.126	1.536	2.20%	-1.05%
		1905	53.300	1.520	52.080	1.541	2.29%	-1.38%

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 116 of 339

Tissue Type	Measurement Date	Measured Frequency (MHz)	Target Dielectric Constant,	Target Conductivity, σ (S/m)	Measured Dielectric Constant,	Measured Conductivity, σ (S/m)	% dev εr	% dev σ
	luno 1 2015	2450 52.700		1.950	51.219	2.035	2.81%	-4.36%
	June. 1, 2015	2462	52.685	1.967	51.185	2.053	2.85%	-4.37%
		2402	52.764	1.904	51.41	1.974	2.57%	-3.67%
		2441	52.712	1.941	51.234	2.024	2.80%	-4.25%
	June. 5, 2015	2450	52.700	1.950	51.254	2.033	2.74%	-4.26%
		2471	52.673	1.980	51.146	2.059	2.90%	-3.99%
		2480	52.662	1.993	51.112	2.072	2.94%	-3.99%
	June. 2, 2015	5200	49.014	5.299	47.895	5.470	2.28%	-3.22%
		5220	48.987	5.323	47.860	5.496	2.30%	-3.26%
		5240	48.960	5.346	47.807	5.521	2.35%	-3.27%
	June. 3, 2015	5260	48.933	5.369	47.728	5.552	2.46%	-3.40%
		5270	48.919	5.381	47.696	5.567	2.50%	-3.46%
		5280	48.906	5.393	47.659	5.583	2.55%	-3.53%
Body		5300	48.879	5.416	47.584	5.610	2.65%	-3.58%
Dody		5310	48.865	5.428	47.554	5.618	2.68%	-3.51%
		5320	48.851	5.439	47.518	5.637	2.73%	-3.63%
		5520	48.580	5.673	46.795	5.910	3.67%	-4.18%
		5550	48.539	5.708	46.728	5.942	3.73%	-4.10%
		5600	48.471	5.766	46.587	6.005	3.89%	-4.14%
		5610	48.458	5.778	46.537	5.993	3.96%	-3.72%
	June. 4, 2015	5630	48.431	5.801	46.474	6.055	4.04%	-4.37%
	Julic. 4, 2013	5670	48.376	5.848	46.380	6.017	4.13%	-2.89%
		5680	48.363	5.860	46.359	6.021	4.14%	-2.75%
		5690	48.349	5.872	46.330	6.021	4.18%	-2.55%
		5700	48.336	5.883	46.297	6.137	4.22%	-4.31%
		5710	48.322	5.895	46.241	6.041	4.31%	-2.48%
	June. 1, 2015	5775	48.234	5.971	46.085	6.2	4.46%	-3.84%
	30110. 1, 2010	5800	48.200	6.000	46.008	6.210	4.55%	-3.50%

Table 2. Dielectric Parameters of Tissue Simulant Fluid

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 117 of 339

# The composition of the body tissue simulating liquid:

	The composition of the body tissue similating liquid.													
			Ingredient											
Frequency (MHz)	Mode	DGMBE	Water	Salt	Preventol D-7	Cellulose	Sugar	Total amount						
750	Body		631.68 g	11.72 g	1.2 g		600 g	1.0L(Kg)						
850	Body		631.68 g	11.72 g	1.2 g		600 g	1.0L(Kg)						
1750	Body	300.67 g	716.56 g	4.0 g				1.0L(Kg)						
1900	Body	300.67 g	716.56 g	4.0 g				1.0L(Kg)						
2450	Body	301.7ml	698.3ml	+	_		_	1.0L(Kg)						

Simulating Liquids for 5 GHz, Manufactured by SPEAG:

Ingredients	Water	Esters, Emulsifiers, Inhibitors	Sodium and Salt
(% by weight)	60-80	20-40	0-1.5

Table 3. Recipes for Tissue Simulating Liquid

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 118 of 339

#### 1.11 Evaluation Procedures

The entire evaluation of the spatial peak values is performed within the Post-processing engine (SEMCAD). The system always gives the maximum values for the 1 g and 10 g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- 1. The extraction of the measured data (grid and values) from the Zoom Scan.
- 2. The calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- 3. The generation of a high-resolution mesh within the measured volume
- 4. The interpolation of all measured values from the measurement grid to the high-resolution grid
- 5. The extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- 6. The calculation of the averaged SAR within masses of 1g and 10g.

The probe is calibrated at the center of the dipole sensors that is located 1 to 2.7mm away from the probe tip. During measurements, the probe stops shortly above the phantom surface, depending on the probe and the surface detecting system. Both distances are included as parameters in the probe configuration file. The software always knows exactly how far away the measured point is from the surface. As the probe cannot directly measure at the surface, the values between the deepest measured point and the surface must be extrapolated. The angle between the probe axis and the surface normal line is less than 30 degree.

In the Area Scan, the gradient of the interpolation function is evaluated to find all the extreme of the SAR distribution. The uncertainty on the locations of the extreme is less than 1/20 of the grid size. Only local maximum within –2 dB of the global maximum are searched and passed for the Cube Scan measurement. In the Cube Scan, the interpolation function is used to extrapolate the Peak SAR from the lowest measurement points to the inner phantom surface (the extrapolation distance). The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5mm.

The maximum search is automatically performed after each area scan measurement. It is based on splines in two or three dimensions. The procedure can find the maximum for most SAR distributions even with relatively large grid spacing. After the area scanning measurement, the probe is automatically moved to a position at the interpolated maximum. The following scan can directly use this position for reference, e.g., for a finer resolution grid or the cube evaluations. The 1g and 10g peak evaluations are only available for the predefined cube 7x7x7 scans. The routines are verified and optimized for the grid dimensions used in these cube measurements.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No. 台灣檢驗科技股份有限公司 t (8



Page: 119 of 339

The measured volume of 30x30x30mm contains about 30g of tissue.

The first procedure is an extrapolation (incl. Boundary correction) to get the points between the lowest measured plane and the surface. The next step uses 3D interpolation to get all points within the measured volume. In the last step, a 1g cube is placed numerically into the volume and its averaged SAR is calculated. This cube is the moved around until the highest averaged SAR is found. If the highest SAR is found at the edge of the measured volume, the system will issue a warning: higher SAR values might be found outside of the measured volume. In that case the cube measurement can be repeated, using the new interpolated maximum as the center.

#### 1.12 Probe Calibration Procedures

For the calibration of E-field probes in lossy liquids, an electric field with an accurately known field strength must be produced within the measured liquid. For standardization purposes it would be desirable if all measurements which are necessary to assess the correct field strength would be traceable to standardized measurement procedures. In the following two different calibration techniques are summarized:

# 1.12.1 Transfer Calibration with Temperature Probes

In lossy liquids the specific absorption rate (SAR) is related both to the electric field (E) and the temperature gradient ( $\delta T / \delta t$ ) in the liquid.

$$SAR = \frac{\sigma}{\rho} |E|^2 = c \frac{\delta T}{\delta t}$$

whereby  $\sigma$  is the conductivity,  $\rho$  the density and c the heat capacity of the liquid.

Hence, the electric field in lossy liquid can be measured indirectly by measuring the temperature gradient in the liquid. Non-disturbing temperature probes (optical probes or thermistor probes with resistive lines) with high spatial resolution (<1-2 mm) and fast reaction time (<1 s) are available and can be easily calibrated with high precision [1]. The setup and the exciting source have no influence on the calibration; only the relative positioning uncertainties of the standard temperature probe and the E-field probe to be calibrated must be considered. However, several problems limit the available accuracy of probe calibrations with temperature probes:

• The temperature gradient is not directly measurable but must be evaluated from temperature measurements at different time steps. Special precaution is necessary to avoid measurement errors caused by temperature gradients due to energy equalizing effects or convection currents in the liquid. Such effects cannot be completely avoided, as the measured field itself destroys the thermal equilibrium in the liquid. With a careful setup these errors can be kept small.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 120 of 339

• The measured volume around the temperature probe is not well defined. It is difficult to calculate the energy transfer from a surrounding gradient temperature field into the probe. These effects must be considered, since temperature probes are calibrated in liquid with homogeneous temperatures. There is no traceable standard for temperature rise measurements.

- The calibration depends on the assessment of the specific density, the heat capacity
  and the conductivity of the medium. While the specific density and heat capacity can
  be measured accurately with standardized procedures (~ 2% for c; much better for
  ρ), there is no standard for the measurement of the conductivity. Depending on the
  method and liquid, the error can well exceed ±5%.
- Temperature rise measurements are not very sensitive and therefore are often performed at a higher power level than the E-field measurements. The nonlinearities in the system (e.g., power measurements, different components, etc.) must be considered.

Considering these problems, the possible accuracy of the calibration of E-field probes with temperature gradient measurements in a carefully designed setup is about  $\pm 10\%$  (RSS) [2]. Recently, a setup which is a combination of the waveguide techniques and the thermal measurements was presented in [3]. The estimated uncertainty of the setup is  $\pm 5\%$  (RSS) when the same liquid is used for the calibration and for actual measurements and  $\pm 7$ -9% (RSS) when not, which is in good agreement with the estimates given in [2].

# 1.12.2 Calibration with Analytical Fields

In this method a technical setup is used in which the field can be calculated analytically from measurements of other physical magnitudes (e.g., input power). This corresponds to the standard field method for probe calibration in air; however, there is no standard defined for fields in lossy liquids.

When using calculated fields in lossy liquids for probe calibration, several points must be considered in the assessment of the uncertainty:

- The setup must enable accurate determination of the incident power.
- The accuracy of the calculated field strength will depend on the assessment of the dielectric parameters of the liquid.
- Due to the small wavelength in liquids with high permittivity, even small setups might be above the resonant cutoff frequencies. The field distribution in the setup must be carefully checked for conformity with the theoretical field distribution.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 121 of 339

## References

- [1] N. Kuster, Q. Balzano, and J.C. Lin, Eds., *Mobile Communications Safety*, Chapman & Hall, London, 1997.
- [2] K. Meier, M. Burkhardt, T. Schmid, and N. Kuster, \Broadband calibration of E-field probes in lossy media", *IEEE Transactions on Microwave Theory and Techniques*, vol. 44, no. 10, pp. 1954{1962, Oct. 1996.
- [3] K. Jokela, P. Hyysalo, and L. Puranen, \Calibration of specific absorption rate (SAR) probes in waveguide at 900 MHz", *IEEE Transactions on Instrumentation and Measurements*, vol. 47, no. 2, pp. 432{438, Apr. 1998.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 122 of 339

#### 1.13 Test Standards and Limits

According to FCC 47CFR §2.1093(d) The limits to be used for evaluation are based generally on criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate ("SAR") in Section 4.2 of "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz," ANSI/IEEE C95.1, By the Institute of Electrical and Electronics Engineers, Inc., New York, New York 10017. These criteria for SAR evaluation are similar to those recommended by the National Council on Radiation Protection and Measurements (NCRP) in "Biological Effects and Exposure Criteria for Radio frequency Electromagnetic Fields," NCRP Report No. 86, Section 17.4.5. Copyright NCRP, 1986, Bethesda, Maryland 20814. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards. The criteria to be used are specified in paragraphs (d)(1) and (d)(2) of this section and shall apply for portable devices transmitting in the frequency range from 100 kHz to 6 GHz. Portable devices that transmit at frequencies above 6 GHz are to be evaluated in terms of the MPE limits specified in § 1.1310 of this chapter. Measurements and calculations to demonstrate compliance with MPE field strength or power density limits for devices operating above 6 GHz should be made at a minimum distance of 5 cm from the radiating source.

- Limits for Occupational/Controlled exposure: 0.4 W/kg as averaged over the whole-body and spatial peak SAR not exceeding 8 W/kg as averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the hands, wrists, feet and ankles where the spatial peak SAR shall not exceed 20 W/kg, as averaged over an 10 grams of tissue (defined as a tissue volume in the shape of a cube).
- Occupational/Controlled limits apply when persons are exposed as a consequence of their employment provided these persons are fully aware of and exercise control over their exposure. Awareness of exposure can be accomplished by use of warning labels or by specific training or education through appropriate means, such as an RF safety program in a work environment.
- Limits for General Population/Uncontrolled exposure: 0.08 W/kg as averaged over the whole-body and spatial peak SAR not exceeding 1.6 W/kg as averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the hands, wrists, feet and ankles where the spatial peak SAR shall not exceed 4 W/kg, as averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube). General Population/Uncontrolled limits apply when the general public may be exposed, or when persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or do not exercise control over their exposure. Warning labels placed on consumer devices such as cellular telephones will not be sufficient reason to allow these devices to be evaluated subject to limits for occupational/controlled exposure in paragraph (d)(1)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.

t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sas.com



Page: 123 of 339

of this section. (Table 4.)

Human Exposure	Uncontrolled Environment	Controlled Environment							
Human Exposure	General Population	Occupational							
Spatial Peak SAR (Brain)	1.60 m W/g	8.00 m W/g							
Spatial Average SAR (Whole Body)	0.08 m W/g	0.40 m W/g							
Spatial Peak SAR (Hands/Feet/Ankle/Wrist)	4.00 m W/g	20.00 m W/g							

Table 4. RF exposure limits

#### Notes:

- 1. Uncontrolled environments are defined as locations where there is potential exposure of individuals who have no knowledge or control of their potential exposure.
- 2. Controlled environments are defined as locations where there is potential exposure of individuals who have knowledge of their potential exposure and can exercise control over their exposure.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 124 of 339

# 2. Summary of Results

**GPRS 850 MHz (without power reduction)** 

01 103 030		iout po	VVCI	Caac	(1011)					
Mode	Position	Distanc e (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Scaling	Averaged 1 (W/ Measured	'kg)	Plot page
	Back side	25mm	190	836.6	32.9	30.90	58.49%	0.193	0.306	-
	Top side	12mm	128	824.2	32.9	30.90	58.49%	0.321	0.509	-
	Top side	12mm	190	836.6	32.9	30.90	58.49%	0.327	0.518	-
GPRS 850	Top side with optional	12mm	190	836.6	32.9	30.90	58.49%	0.321	0.509	-
(1Dn2UP)	Top side	12mm	251	848.8	32.9	30.90	58.49%	0.323	0.512	-
	Bottom side	0mm	190	836.6	32.9	30.90	58.49%	0.024	0.038	-
	Right side	0mm	190	836.6	32.9	30.90	58.49%	0.012	0.019	-
	Left side	0mm	190	836.6	32.9	30.90	58.49%	0.014	0.022	-

**GPRS 850 MHz (with power reduction)** 

	•									
Mode	Position	Distanc e (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	AVg. Power	Scaling	Averaged 19 (W/ Measured	g kg)	Plot page
GPRS 850	Back side	0mm	190	836.6	27.5	27.50	0.00%	0.493	0.493	202
(1Dn2UP)	Top side	0mm	190	836.6	27.5	27.50	0.00%	0.202	0.202	-

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 125 of 339

**GPRS 1900 MHz (without power reduction)** 

<u> </u>	O IVII IZ (VVIC	out p	0110.	1044	011011)					
Mode	Position	Distanc e (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Scaling	Averaged 1 (W/ Measured	g ˈkg)	Plot page
	Back side	25mm	810	1909.8	29	28.80	4.71%	0.170	0.178	-
	Top side	12mm	512	1850.2	29	28.70	7.15%	0.769	0.824	-
	Top side	12mm	661	1880	29	28.60	9.65%	0.888	0.974	203
	Top side*	12mm	661	1880	29	28.60	9.65%	0.886	0.971	-
GPRS 1900 (1Dn2UP)	Top side with optional battery	12mm	661	1880	29	28.60	9.65%	0.881	0.966	-
	Top side	12mm	810	1909.8	29	28.80	4.71%	0.808	0.846	-
	Bottom side	0mm	810	1909.8	29	28.80	4.71%	0.035	0.037	-
	Right side	0mm	810	1909.8	29	28.80	4.71%	0.028	0.029	-
	Left side	0mm	810	1909.8	29	28.80	4.71%	0.019	0.020	-

**GPRS 1900 MHz (with power reduction)** 

•	31 K3 170C	IVII IZ (VVIC	ii pow		auctio	''/					
	Mode	Position	Distanc e (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Avg. Power	Scaling	Averaged 1 (W/	g	Plot page
H			(111111)			Tolerance (dbill)	(dBm)		Measured	Reported	
		Back side	0mm	512	1850.2	27	26.70	7.15%	0.667	0.715	-
	GPRS 1900	Back side	0mm	661	1880	27	26.70	7.15%	0.781	0.837	-
	(1Dn2UP)	Back side	0mm	810	1909.8	27	26.80	4.71%	0.850	0.890	-
		Top side	0mm	810	1909.8	27	26.80	4.71%	0.694	0.727	-

<sup>\* -</sup> repeated at the highest SAR measurement according to the KDB 865664 D01

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 126 of 339

WCDMA Band II (without power reduction)

Mode	Position	Distanc e (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Scaling	Averaged 1 (W/	g	Plot page
	Back side	25mm	9538	1907.6	23	22.86	3.28%	0.203	0.210	-
	Top side	12mm	9262	1852.4	23	22.76	5.68%	0.930	0.983	-
	Top side	12mm	9400	1880	23	22.79	4.95%	0.978	1.026	-
	Top side	12mm	9538	1907.6	23	22.86	3.28%	1.000	1.033	204
WCDMA	Top side*	12mm	9538	1907.6	23	22.86	3.28%	0.997	1.030	-
Band 2	Top side with optional battery	12mm	9538	1907.6	23	22.86	3.28%	0.901	0.931	-
	Bottom side	0mm	9538	1907.6	23	22.86	3.28%	0.042	0.043	-
	Right side	0mm	9538	1907.6	23	22.86	3.28%	0.019	0.020	-
	Left side	0mm	9538	1907.6	23	22.86	3.28%	0.0082	0.008	-

WCDMA Band II (with power reduction)

		po			7					
Mode	Position	Distanc e (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power	Scaling	Averaged 1 (W/	g	Plot page
		(111111)			Tolerance (dbin)	(dBm)		Measured	Reported	
	Back side	0mm	9262	1852.4	20	19.61	9.40%	0.707	0.773	-
WCDMA	Back side	0mm	9400	1880	20	19.63	8.89%	0.801	0.872	-
Band 2	Back side	0mm	9538	1907.6	20	19.67	7.89%	0.872	0.941	-
	Top side	0mm	9538	1907.6	20	19.67	7.89%	0.615	0.664	-

<sup>\* -</sup> repeated at the highest SAR measurement according to the KDB 865664 D01

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 127 of 339

WCDMA Band IV (without power reduction)

Mode	Position	Distanc e (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Avg. Power	Scaling	Averaged 1 (W/ Measured	g kg)	Plot page
	Back side	25mm	1412	1732.4	23	22.88	2.80%	0.217	0.223	-
	Top side	12mm	1312	1712.4	23	22.79	4.95%	1.270	1.333	205
	Top side*	12mm	1312	1712.4	23	22.79	4.95%	1.250	1.312	-
WCDMA	Top side with optional	12mm	1312	1712.4	23	22.79	4.95%	1.240	1.301	-
Band 4	Top side	12mm	1412	1732.4	23	22.88	2.80%	1.190	1.223	-
	Top side	12mm	1513	1752.6	23	22.68	7.65%	1.030	1.109	-
	Bottom side	0mm	1412	1732.4	23	22.88	2.80%	0.031	0.032	-
	Right side	0mm	1412	1732.4	23	22.88	2.80%	0.014	0.014	-
	Left side	0mm	1412	1732.4	23	22.88	2.80%	0.026	0.027	-

WCDMA Band IV (with power reduction)

110511111150	and iv (voic	pour	0 0	adotio	• • • • • • • • • • • • • • • • • • • •					
Mode	Position	Distanc e	СН	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged 1 (W/	g	Plot page
		(mm)			Tolerance (dBm)	(dBm)		Measured	Reported	
	Back side	0mm	1312	1712.4	19	17.62	37.40%	0.687	0.944	-
	Back side	0mm	1412	1732.4	19	17.67	35.83%	0.675	0.917	-
WCDMA	Back side	0mm	1513	1752.6	19	17.61	37.72%	0.627	0.864	-
Band 4	Top side	0mm	1312	1712.4	19	17.62	37.40%	0.634	0.871	-
	Top side	0mm	1412	1732.4	19	17.67	35.83%	0.602	0.818	-
	Top side	0mm	1513	1752.6	19	17.61	37.72%	0.568	0.782	-

<sup>\* -</sup> repeated at the highest SAR measurement according to the KDB 865664 D01

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 128 of 339

WCDMA Band V (without power reduction)

	•	. <del> </del>								
Mode	Position	Distanc e (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Avg. Power	Scaling	Averaged 1 (W/	g	Plot page
		(11111)			Tolerance (dbin)	(dBm)		Measured	Reported	
	Back side	25mm	4183	836.6	23	22.27	18.30%	0.139	0.164	-
14/000144	Top side	12mm	4183	836.6	23	22.27	18.30%	0.217	0.257	-
WCDMA Band 5	Bottom side	0mm	4183	836.6	23	22.27	18.30%	0.031	0.037	-
Darid 5	Right side	0mm	4183	836.6	23	22.27	18.30%	0.0052	0.006	-
	Left side	0mm	4183	836.6	23	22.27	18.30%	0.0084	0.010	-

WCDMA Band V (with power reduction)

Mode	Position	Distanc e (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Avg. Power	Scaling	Averaged 1 (W/	g	Plot page
		()			(0.211)	(dBm)		Measured	Reported	
	Back side	0mm	4132	826.4	20	19.90	2.33%	0.366	0.375	-
	Back side	0mm	4183	836.6	20	19.96	0.93%	0.374	0.377	206
WCDMA Band 5	Back side with optional battery	0mm	4183	836.6	20	19.96	0.93%	0.121	0.122	-
	Back side	0mm	4233	846.6	20	19.84	3.75%	0.351	0.364	-
	Top side	0mm	4183	836.6	20	19.96	0.93%	0.360	0.363	-

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 129 of 339

LTE FDD Band II (without power reduction)

	ט ט	aria ri	(,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	100	t powci	Icaac	tionij							
	Bandwid								Max. Rated	Measure d		Averaged 1g (W		
Mode		Modulatior	RB Size	RB start	Position	Distance (mm)	СН	Freq. (MHz)	Avg. Power + Max. Toleranc	Avg. Power (dBm)	Scaling	Measured	Reported	Plot page
				0	Top side	12mm	18700	1860	23	22.32	16.95%	0.911	1.065	-
				50	Top side	12mm	18900	1880	23	22.40	14.82%	0.986	1.132	-
					Back side	25mm	19100	1900	23	22.42	14.29%	0.303	0.346	-
			1 RB		Top side	12mm	19100	1900	23	22.42	14.29%	0.989	1.130	207
			1 KD	99	Top side*	12mm	19100	1900	23	22.42	14.29%	0.987	1.128	-
				77	Bottom side	0mm	19100	1900	23	22.42	14.29%	0.039	0.045	-
					Right side	0mm	19100	1900	23	22.42	14.29%	0.021	0.024	-
LTE	20MHz	QPSK			Left side	0mm	19100	1900	23	22.42	14.29%	0.00937	0.011	-
Band 2	ZOIVII IZ	QI SIK			Back side	25mm	18700	1860	22	21.17	21.06%	0.241	0.292	-
			50 RB	0	Top side	12mm	18700	1860	22	21.17	21.06%	0.705	0.853	-
			30 KD		Top side	12mm	19100	1900	22	21.10	23.03%	0.727	0.894	-
				25	Top side	12mm	18900	1880	22	21.16	21.34%	0.739	0.897	-
					Back side	25mm	18900	1880	22	21.20	20.23%	0.244	0.293	-
			100	RR	Top side	12mm	18700	1860	22	21.18	20.78%	0.701	0.847	-
			100	ΝD	Top side	12mm	18900	1880	22	21.20	20.23%	0.726	0.873	-
					Top side	12mm	19100	1900	22	21.19	20.50%	0.714	0.860	-

LTE FDD Band II (with power reduction)

	7			<u> </u>	VCI ICC		<u>'/</u>							
									Max. Rated	Measure d		Averaged 1g (V		
Mode	Bandwidth (MHz)	Modulatior	RB Size	RB start	Position	Distance (mm)	СН	Freq. (MHz)	Avg. Power + Max. Tolerance (dBm)	Avg. Power (dBm)	Scaling	Measured	Reported	Plot page
					Back side	0mm	18700	1860	20	18.95	27.35%	0.816	1.039	-
				50	Back side	0mm	18900	1880	20	18.92	28.23%	0.868	1.113	-
				50	Top side	0mm	18700	1860	20	18.95	27.35%	0.711	0.905	-
			1 00		Top side	0mm	18900	1880	20	18.92	28.23%	0.705	0.904	-
			1 RB		Back side	0mm	19100	1900	20	18.99	26.18%	0.937	1.182	-
				99	Back side with optional	0mm	19100	1900	20	18.99	26.18%	0.547	0.690	-
					Top side	0mm	19100	1900	20	18.99	26.18%	0.724	0.914	-
					Back side	0mm	18700	1860	20	18.86	30.02%	0.754	0.980	-
LTE	20MHz	QPSK		0	Back side	0mm	18900	1880	20	18.74	33.66%	0.731	0.977	-
Band 2	ZOWITZ	QI SIC	50 RB	_	Top side	0mm	18700	1860	20	18.86	30.02%	0.655	0.852	-
			30 KB		Top side	0mm	18900	1880	20	18.74	33.66%	0.632	0.845	-
				50	Back side	0mm	19100	1900	20	18.71	34.59%	0.719	0.968	-
				30	Top side	0mm	19100	1900	20	18.71	34.59%	0.621	0.836	-
					Back side	0mm	18700	1860	20	18.75	33.35%	0.770	1.027	-
					Back side	0mm	18900	1880	20	18.76	33.05%	0.825	1.098	-
			100	RR	Back side	0mm	19100	1900	20	18.75	33.35%	0.586	0.781	-
			100	ND	Top side	0mm	18700	1860	20	18.75	33.35%	0.657	0.876	-
					Top side	0mm	18900	1880	20	18.76	33.05%	0.670	0.891	-
					Top side	0mm	19100	1900	20	18.75	33.35%	0.659	0.879	-

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 130 of 339

LTE FDD Band IV (without power reduction)

					Power									
	Bandwidt								Max. Rated	Measure			SAR over V/kg)	
Mode	h (MHz)	Modulatior	RB Size	RB start	Position	Distance (mm)	СН	Freq. (MHz)	Avg. Power + Max. Tolerance	d Avg. Power (dBm)	Scaling	Measured	Reported	Plot page
					Top side	12mm	20050	1720	22.5	22.17	7.89%	1.280	1.381	208
					Top side*	12mm	20050	1720	22.5	22.17	7.89%	1.230	1.327	-
				50	Top side with optional battery	12mm	20050	1720	22.5	22.17	7.89%	1.260	1.359	-
					Top side	12mm	20175	1732.5	22.5	22.12	9.14%	1.220	1.332	-
			1 RB		Top side with optional battery	12mm	20175	1732.5	22.5	22.12	9.14%	1.210	1.321	-
					Back side	25mm	20300	1745	22.5	22.49	0.23%	0.209	0.209	-
					Top side	12mm	20300	1745	22.5	22.49	0.23%	0.940	0.942	-
LTE				99	Bottom side	0mm	20300	1745	22.5	22.49	0.23%	0.031	0.031	-
Band 4	20MHz	QPSK			Right side	0mm	20300	1745	22.5	22.49	0.23%	0.012	0.012	-
Dana 4					Left side	0mm	20300	1745	22.5	22.49	0.23%	0.014	0.014	-
					Back side	25mm	20300	1745	22	21.26	18.58%	0.151	0.179	-
			50	0	Top side	12mm	20175	1732.5	22	21.01	25.60%	0.843	1.059	-
			RB		Top side	12mm	20300	1745	22	21.26	18.58%	0.902	1.070	-
				25	Top side	12mm	20050	1720	22	20.96	27.06%	0.821	1.043	-
					Back side	25mm	20300	1745	22	21.12	22.46%	0.139	0.170	-
			100	DR.	Top side	12mm	20050	1720	22	20.98	26.47%	0.779	0.985	-
			100	עט	Top side	12mm	20175	1732.5	22	20.96	27.06%	0.771	0.980	-
					Top side	12mm	20300	1745	22	21.12	22.46%	0.808	0.989	-

repeated at the highest SAR measurement according to the FCC KDB865664D01v01r03

# LTE FDD Band IV (with power reduction)

									Max. Rated	Measure d			SAR over V/kg)	
Mode	Bandwidth (MHz)	Modulation	RB Size	RB start	Position	Distance (mm)	СН	Freq. (MHz)	Avg. Power + Max. Tolerance	Avg. Power (dBm)	Scaling	Measured	Reported	Plot page
				50	Top side	0mm	20175	1732.5	20	19.88	2.80%	0.930	0.956	-
			1 RB		Top side	0mm	20050	1720	20	19.78	5.20%	0.934	0.983	-
			IKD	99	Back side	0mm	20300	1745	20	19.89	2.57%	0.777	0.797	-
					Top side	0mm	20300	1745	20	19.89	2.57%	0.849	0.871	-
					Back side	0mm	20300	1745	20	19.68	7.65%	0.683	0.735	-
LTE	20MHz	QPSK	50 RB	0	Top side	0mm	20050	1720	20	19.59	9.90%	0.868	0.954	-
Band 4	ZUIVII IZ	QF3K	30 KB		Top side	0mm	20300	1745	20	19.68	7.65%	0.808	0.870	-
				50	Top side	0mm	20175	1732.5	20	19.63	8.89%	0.875	0.953	-
					Back side	0mm	20300	1745	20	19.69	7.40%	0.681	0.731	-
			100	RR	Top side	0mm	20050	1720	20	19.57	10.41%	0.811	0.895	-
			100	IND.	Top side	0mm	20175	1732.5	20	19.66	8.14%	0.821	0.888	-
					Top side	0mm	20300	1745	20	19.69	7.40%	0.877	0.942	-

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 131 of 339

LTE FDD Band V (without power reduction)

	<i></i>	14 1			701101 10									
	Bandwidt								Max. Rated	Measured			SAR over V/kg)	Plot
Mode		Modulatior	RB Size	RB start	Position	Distance (mm)	СН	Freq. (MHz)	Avg. Power + Max. Tolerance (dBm)	Avg. Power (dBm)	Scaling	Measured	Reported	pag
	0.1	\			Back side	25mm	20600	844	22.5	22.24	6.17%	0.108	0.115	-
					Top side	12mm	20600	844	22.5	22.24	6.17%	0.145	0.154	-
			1 RB	49	Bottom side	0mm	20600	844	22.5	22.24	6.17%	0.039	0.041	-
LTE					Right side	0mm	20600	844	22.5	22.24	6.17%	0.011	0.012	-
Band 5	10MHz	QPSK			Left side	0mm	20600	844	22.5	22.24	6.17%	0.019	0.020	-
Dana 3			25 RB	25	Back side	25mm	20450	829	21	20.89	2.57%	0.074	0.076	-
			23 KD	25	Top side	12mm	20450	829	21	20.89	2.57%	0.104	0.107	-
			50	DR	Back side	25mm	20525	836.5	21	20.68	7.65%	0.071	0.076	-
			50	מא	Top side	12mm	20525	836.5	21	20.68	7.65%	0.092	0.099	-

LTE FDD Band V (with power reduction)

	DD Dai	10 0 (0	VICII		er reduci	.1011)								
	Bandwidt									Measured			SAR over V/kg)	Plot
Mode	Mode h Modulatii (MHz)	Modulatior	RB Size	RB start	Position	Distance (mm)	СН	Freq. (MHz)	Avg. Power + Max. Tolerance	Avg. Power (dBm)	Scaling	Measured	Reported	pag
				0	Back side	0mm	20525	836.5	20	18.33	46.89%	0.327	0.480	-
				25	Back side	0mm	20450	829	20	18.39	44.88%	0.331	0.480	-
			1 RB		Back side	0mm	20600	844	20	18.50	41.25%	0.347	0.490	209
LTE	1 10MHz 1 0PS	QPSK	IKB	49	Back side with optional battery	0mm	20600	844	20	18.50	41.25%	0.119	0.168	-
Band 5	TOWNIE	Qi Sik			Top side	0mm	20600	844	20	18.50	41.25%	0.166	0.234	-
			25 DR	25	Back side	0mm	20450	829	20	18.49	41.58%	0.331	0.469	-
			25 RB	23	Top side	0mm	20450	829	20	18.49	41.58%	0.156	0.221	-
			50	RB	Back side	0mm	20450	829	20	18.29	48.25%	0.301	0.446	-
			50	ΝD	Top side	0mm	20450	829	20	18.29	48.25%	0.142	0.211	-

<sup>\* -</sup> repeated at the highest SAR measurement according to the FCC KDB865664D01v01r03

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 132 of 339

LTE FDD Band XIII (without power reduction)

	DD Duii		<b>\</b>		pomo		,							
									Max. Rated	Measure			SAR over V/kg)	
Mode	Bandwidth (MHz)	Modulatior	RB Size	RB start	Position	Distance (mm)	СН	Freq. (MHz)	Avg. Power + Max. Tolerance	d Avg. Power (dBm)	Scaling	Measured	Reported	Plot page
					Back side	25mm	23230	782	22	22.00	0.00%	0.190	0.190	-
					Top side	12mm	23230	782	22	22.00	0.00%	0.257	0.257	-
			1 RB	25	Bottom side	0mm	23230	782	22	22.00	0.00%	0.016	0.016	-
LTE					Right side	0mm	23230	782	22	22.00	0.00%	0.0058	0.006	-
Band 13	10MHz	QPSK			Left side	0mm	23230	782	22	22.00	0.00%	0.027	0.027	-
Dana 13			25 RB	12	Back side	25mm	20450	782	21	20.95	1.16%	0.147	0.149	-
			23 KD	12	Top side	12mm	20450	782	21	20.95	1.16%	0.207	0.209	-
			50	RR	Back side	25mm	20525	782	21	20.74	6.17%	0.141	0.150	-
			30	ND	Top side	12mm	20525	782	21	20.74	6.17%	0.199	0.211	-

LTE FDD Band XIII (with power reduction)

	DD Duii		(	··· Ի	7 7 - 7		,							
									Max. Rated	Measure d		Averaged 1g (V	SAR over V/kg)	
Mode	Bandwidth (MHz)	Modulatior	RB Size	RB start	Position	Distance (mm)	СН	Freq. (MHz)	Avg. Power + Max. Tolerance	Avg. Power	Scaling	Measured	Reported	Plot page
				0	Back side	0mm	23230	782	20	18.01	58.12%	0.302	0.478	-
					Back side	0mm	23230	782	20	18.33	46.89%	0.340	0.499	210
			1 RB	25	Back side with optional	0mm	23230	782	20	18.33	46.89%	0.117	0.172	-
LTE	10MHz	QPSK			Top side	0mm	23230	782	20	18.33	46.89%	0.204	0.300	-
Band 13	TOWNIE	QISK		49	Back side	0mm	23230	782	20	18.09	55.24%	0.305	0.473	-
			25	12	Back side	0mm	23230	782	20	18.17	52.41%	0.315	0.480	-
			RB	12	Top side	0mm	23230	782	20	18.17	52.41%	0.193	0.294	-
			50	DR	Back side	0mm	23230	782	20	18.02	57.76%	0.314	0.495	-
			50	ΝD	Top side	0mm	23230	782	20	18.02	57.76%	0.192	0.303	-

<sup>\* -</sup> repeated at the highest SAR measurement according to the FCC KDB865664D01v01r03

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 133 of 339

LTE FDD Band XVII (without power reduction)

					p =									
	Bandwidt								Max. Rated	Measured		Averaged 1g (V		
Mode		Modulatior	RB Size	RB start	Position	Distance (mm)	СН	Freq. (MHz)	Avg. Power + Max. Tolerance (dRm)	Avg. Power (dBm)	Scaling	Measured	Reported	Plot page
					Back side	25mm	23780	709	22.5	22.09	9.90%	0.161	0.177	-
					Top side	12mm	23780	709	22.5	22.09	9.90%	0.310	0.341	-
			1 RB	25	Top side with optional battery	12mm	23780	709	22.5	22.09	9.90%	0.301	0.331	-
LTE	LTC				Bottom	0mm	23780	709	22.5	22.09	9.90%	0.044	0.048	-
	10MHz	QPSK			Right side	0mm	23780	709	22.5	22.09	9.90%	0.014	0.015	-
Bana 17	Band 17 10MHz				Left side	0mm	23780	709	22.5	22.09	9.90%	0.045	0.049	-
			25 RB	25	Back side	25mm	23780	709	21.5	21.07	10.41%	0.129	0.142	-
			23 KD	20	Top side	12mm	23780	709	21.5	21.07	10.41%	0.249	0.275	-
			50	PR .	Back side	25mm	23780	709	21.5	20.83	16.68%	0.127	0.148	-
			50	ΝD	Top side	12mm	23780	709	21.5	20.83	16.68%	0.244	0.285	-

LTE FDD Band XVII (with power reduction)

	Bandwidt			-						Measured		Averaged 1g (V	SAR over V/kg)	
Mode		Modulatior	RB Size	RB start	Position	Distance (mm)	СН	Freq. (MHz)	Avg. Power + Max. Tolerance (dBm)	Avg. Power (dBm)	Scaling	Measured	Reported	Plot page
					Back side	0mm	23780	709	20	18.53	40.28%	0.312	0.438	211
					Back side	0mm	23790	710	20	18.45	42.89%	0.302	0.432	-
			1 RB	25	Back side with optional battery	0mm	23780	709	20	18.53	40.28%	0.307	0.431	-
LTE	10MHz	QPSK			Back side	0mm	23800	711	20	18.38	45.21%	0.289	0.420	-
Band 17	TOWNIZ	QI SIK			Top side	0mm	23780	709	20	18.53	40.28%	0.256	0.359	-
			25 RB	12	Back side	0mm	23800	711	20	18.38	45.21%	0.299	0.434	-
			23 KB	12	Top side	0mm	23800	711	20	18.38	45.21%	0.231	0.335	-
			50	DR	Back side	0mm	23800	711	20	18.25	49.62%	0.284	0.425	-
		\	50	IVD.	Top side	0mm	23800	711	20	18.25	49.62%	0.222	0.332	-

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 134 of 339

LTF FDD Band XXV (without power reduction)

LIEFL	טע Band	AVV	(vvi	uio	ut pow	er rea	action	<u>''</u>						
									Max. Rated	Measured			SAR over V/kg)	
Mode	Bandwidth (MHz)	Modulatior	RB Size	RB start	Position	Distance (mm)	СН	Freq. (MHz)	Avg. Power + Max. Tolerance	Avg. Power (dBm)	Scaling	Measured	Reported	Plot page
					Back side	25mm	26590	1905	23	22.37	15.61%	0.283	0.327	-
					Top side	12mm	26140	1860	23	22.25	18.85%	1.040	1.236	212
					Top side	12mm	26365	1882.5	23	22.28	18.03%	0.962	1.135	-
				Top side	12mm	26590	1905	23	22.37	15.61%	1.000	1.156	-	
			1	99	Top side*	12mm	26140	1860	23	22.25	18.85%	1.020	1.212	-
			RB	77	Top side with optional	12mm	26140	1860	23	22.25	18.85%	0.984	1.169	-
					Bottom	0mm	26590	1905	23	22.37	15.61%	0.034	0.039	-
LTE	20MHz	QPSK			Right side	0mm	26590	1905	23	22.37	15.61%	0.004	0.005	-
Band 25	ZOWINZ	QI SIK			Left side	0mm	26590	1905	23	22.37	15.61%	0.001	0.001	-
				0	Top side	12mm	26140	1860	22	21.11	22.74%	0.769	0.944	-
			50	0	Top side	12mm	26365	1882.5	22	21.02	25.31%	0.796	0.998	-
			RB	50	Back side	25mm	26590	1905	22	21.14	21.90%	0.219	0.267	-
			50	Top side	12mm	26590	1905	22	21.14	21.90%	0.799	0.974	-	
					Back side	25mm	26590	1905	22	21.12	22.46%	0.219	0.268	-
			100	) RB	Top side	12mm	26140	1860	22	21.12	22.46%	0.796	0.975	-
				, 110	Top side	12mm	26365	1882.5	22	21.10	23.03%	0.771	0.949	-
					Top side	12mm	26590	1905	22	21.16	21.34%	0.802	0.973	-

# LTE FDD Band XXV (with power reduction)

			(						Max. Rated	Measured		_	SAR over V/kg)	
Mode	Bandwidth (MHz)	Modulatior	RB Size	RB start	Position	Distance (mm)	СН	Freq. (MHz)	Avg. Power + Max. Tolerance (dBm)	Avg. Power (dBm)	Scaling	Measured	Reported	Plot page
				50	Back side	0mm	26140	1860	20	19.81	4.47%	0.814	0.850	-
			1 RB	50	Back side	0mm	26365	1882.5	20	19.72	6.66%	0.838	0.894	-
			1 KD	99	Back side	0mm	26590	1905	20	19.93	1.62%	0.931	0.946	-
				77	Top side	0mm	26590	1905	20	19.93	1.62%	0.697	0.708	-
				25	Back side	0mm	26365	1882.5	20	19.50	12.20%	0.830	0.931	-
LTE	20MHz	QPSK	50 RB		Back side	0mm	26140	1860	20	19.63	8.89%	0.783	0.853	-
Band 25	ZUIVII IZ	QF3K	30 KB	50	Back side	0mm	26590	1905	20	19.64	8.64%	0.866	0.941	-
					Top side	0mm	26590	1905	20	19.64	8.64%	0.665	0.722	-
					Back side	0mm	26140	1860	20	19.59	9.90%	0.766	0.842	-
			100	DD	Back side	0mm	26365	1860	20	19.47	12.98%	0.818	0.924	-
			100	ΝD	Back side	0mm	26590	1882.5	20	19.61	9.40%	0.864	0.945	-
					Top side	0mm	26590	1905	20	19.61	9.40%	0.667	0.730	-

<sup>\* -</sup> repeated at the highest SAR measurement according to the FCC KDB865664D01v01r03

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 135 of 339

CDMA / EVDO (BC0) (without power reduction)

•				without	Pouci	···	action	'/					
	Mode		Service	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	0	SAR over 1g /kg)	Plot page
					()		(12)	Tolerance (dBm)	(dBm)		Measured	Reported	page
				Back side	25mm	384	836.52	23.5	23.11	9.40%	0.173	0.189	-
	CDMA		Davi O	Top side	12mm	384	836.52	23.5	23.11	9.40%	0.224	0.245	-
	CDMA BC 0 EVDO	Rev. 0 Subtype 0/1	Bottom side	0mm	384	836.52	23.5	23.11	9.40%	0.032	0.035	-	
4	DC 0		Subtype of 1	Right side	0mm	384	836.52	23.5	23.11	9.40%	0.0042	0.005	-
				Left side	0mm	384	836.52	23.5	23.11	9.40%	0.0031	0.003	-

CDMA / EVDO (BCO) (with power reduction)

Mode		Service	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	3	AR over 1g 'kg)	Plot page
				(11111)		(IVII IZ)	Tolerance (dBm)	(dBm)		Measured	Reported	page
			Back side	0mm	1013	824.7	20	19.23	19.40%	0.291	0.347	-
CDMA	EVDO	Rev. 0	Back side	0mm	384	836.52	20	19.20	20.23%	0.307	0.369	213
BC 0	FVI)()	Subtype 0/1	Back side	0mm	777	848.31	20	19.06	24.17%	0.296	0.368	-
			Top side	0mm	384	836.52	20	19.20	20.23%	0.281	0.338	-

<sup>\* -</sup> repeated at the highest SAR measurement according to the FCC KDB 865664

CDMA / EVDO (BC0) - optional battery spot check (with power reduction)

		_ ( /			· <i>J</i>		<b>(</b>					
Mode		Service	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged S (W/	AR over 1g 'kg)	Plot page
				()		(2)	Tolerance (dBm)	(dBm)		Measured	Reported	pago
CDMA BC 0	EVDO	Rev. 0 Subtype 0/1	Back side	0mm	384	836.52	20	19.20	20.23%	0.098	0.118	-

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 136 of 339

CDMA / EVDO (BC1) (without power reduction)

CDIVIA	/ LVD	, (DC I) (	without	POWEI	Leat	action,	,					
Mode		Service	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged S (W/	3	Plot page
				(11111)		(WII 12)	Tolerance (dBm)	(dBm)		Measured	Reported	page
			Back side	25mm	25	1851.25	24	23.72	6.66%	0.267	0.285	-
			Top side	12mm	25	1851.25	24	23.72	6.66%	0.866	0.924	-
			Top side	12mm	600	1880	24	23.66	8.14%	1.020	1.103	214
CDMA	LVDO	Rev. 0	Top side*	12mm	25	1880	24	23.66	8.14%	1.010	1.092	-
BC 1	EVDO	Subtype 0/1	Top side	12mm	1175	1908.75	24	23.62	9.14%	0.998	1.089	-
			Bottom side	0mm	25	1851.25	24	23.72	6.66%	0.046	0.049	-
			Right side	0mm	25	1851.25	24	23.72	6.66%	0.027	0.029	-
			Left side	0mm	25	1851.25	24	23.72	6.66%	0.020	0.021	-

CDMA / EVDO (BC1) (with power reduction)

Mode		Service	Position	Distance	СН	Freq.	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	3	AR over 1g 'kg)	Plot
Mode		361 1166	1 03/110/11	(mm)	011	(MHz)	Tolerance (dBm)	(dBm)	Coding	Measured	Reported	page
CDMA	EVDO	Rev. 0	Back side	0mm	25	1851.25	20	18.76	33.05%	0.519	0.691	-
BC 1	EVDO	Subtype 0/1	Top side	0mm	25	1851.25	20	18.76	33.05%	0.437	0.581	-

<sup>\* -</sup> repeated at the highest SAR measurement according to the FCC KDB 865664

CDMA / EVDO (BC1) - optional battery spot check (with power reduction)

ODIVITY		J (DU 1)	Optiona	Date	ור עיי	JUL 0	COIL (VVIII	Povici	. caa	311011)		
Mode		Service	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	3	AR over 1g 'kg)	Plot page
				()		(	Tolerance (dBm)	(dBm)		Measured	Reported	
CDMA BC 1	EVDO	Rev. 0 Subtype 0/1	Top side	12mm	600	1880	24	23.66	8.14%	0.992	1.073	-

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 137 of 339

CDMA / EVDO (BC10) (without power reduction)

	<u> </u>		,	(11111111111111111111111111111111111111				<u> </u>					
	Mode		Service	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	•	AR over 1g 'kg)	Plot page
					(11111)		(IVII IZ)	Tolerance (dBm)	(dBm)		Measured	Reported	page
				Back side	25mm	684	823.1	23.5	23.05	10.92%	0.170	0.189	-
	ODMA		D 0	Top side	12mm	684	823.1	23.5	23.05	10.92%	0.246	0.273	-
	CDMA BC 10	EVDO	Rev. 0 Subtype 0/1	Bottom side	0mm	684	823.1	23.5	23.05	10.92%	0.041	0.045	-
1	DC 10		Subtype 0/1	Right side	0mm	684	823.1	23.5	23.05	10.92%	0.0016	0.002	-
				Left side	0mm	684	823.1	23.5	23.05	10.92%	0.0034	0.004	-

CDMA / EVDO (BC10) (with power reduction)

Mode		Service	Position	Distance (mm)	СН	Freq.	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	3	AR over 1g 'kg)	Plot page
				(11111)		(111112)	Tolerance (dBm)	(dBm)		Measured	Reported	page
			Back side	0mm	476	817.9	20	18.92	28.23%	0.274	0.351	-
CDMA	EVDO	Rev. 0	Back side	0mm	560	820	20	18.96	27.06%	0.281	0.357	-
BC 10	EVDO	Subtype 0/1	Back side	0mm	684	823.1	20	19.00	25.89%	0.289	0.364	215
			Top side	0mm	684	823.1	20	19.00	25.89%	0.282	0.355	-

<sup>\* -</sup> repeated at the highest SAR measurement according to the FCC KDB 865664

CDMA / EVDO (BC10) – optional battery spot check (with power reduction)

Mode		Service	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged S (W/	AR over 1g 'kg)	Plot page
				()		(2)	Tolerance (dBm)	(dBm)		Measured	Reported	pago
CDMA BC 10	EVDO	Rev. 0 Subtype 0/1	Back side	0mm	684	823.1	20	19.00	25.89%	0.087	0.110	-

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 138 of 339

### WLAN802.11 Main Antenna

Antenna	Mode	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged S (W/		Plot page
			(11111)		(IVII IZ)	Tolerance (dBm)	(dBm)		Measured	Reported	page
		Back side	0	11	2462	15	14.47	12.98%	0.0395	0.045	-
		Top side	0	11	2462	15	14.47	12.98%	0.2	0.226	216
	WLAN802.11 b	Top side_ with optional battery	0	11	2462	15	14.47	12.98%	0.18	0.203	-
		Left side	0	11	2462	15	14.47	12.98%	0.0212	0.024	-
		Right side	0	11	2462	15	14.47	12.98%	0.0148	0.017	-
		Bottom side	0	11	2462	15	14.47	12.98%	0.00478	0.005	-
		Back side	0	48	5240	14.5	12.77	48.94%	0.0475	0.071	-
		Top side	0	44	5220	14.5	12.75	49.62%	0.582	0.871	217
	WLAN802.11 ac(20M)	Top side_ with optional battery	0	44	5220	14.5	12.75	49.62%	0.539	0.806	-
Main	5.2G	Top side	0	48	5240	14.5	12.77	48.94%	0.576	0.858	-
		Left side	0	48	5240	14.5	12.77	48.94%	0.0141	0.021	-
		Right side	0	48	5240	14.5	12.77	48.94%	0.015	0.022	-
		Bottom side	0	48	5240	14.5	12.77	48.94%	0.0157	0.023	-
		Back side	0	56	5280	14.5	13.76	18.58%	0.0521	0.062	-
		Top side	0	52	5260	14.5	13.58	23.59%	0.688	0.850	-
		Top side	0	56	5280	14.5	13.76	18.58%	0.776	0.920	218
	WLAN802.11 ac(20M) 5.3G	Top side_ with optional battery	0	56	5280	14.5	13.76	18.58%	0.754	0.894	-
		Left side	0	56	5280	14.5	13.76	18.58%	0.0141	0.017	-
		Right side	0	56	5280	14.5	13.76	18.58%	0.0156	0.018	-
		Bottom side	0	56	5280	14.5	13.76	18.58%	0.0137	0.016	-

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 139 of 339

Antenna	Mode	Position	Distance	СН	Freq.	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged S (W/	SAR over 1g /kg)	Plot
			(mm)		(MHz)	Tolerance (dBm)	(dBm)	,	Measured	Reported	page
		Back side	0	104	5520	14.5	14.16	8.14%	0.088	0.095	-
		Top side	0	104	5520	14.5	14.16	8.14%	1.02	1.103	219
	1	Top side*	0	104	5520	14.5	14.16	8.14%	0.995	1.076	-
	WLAN802.11 a 5.6G	Top side	0	120	5600	14.5	13.48	26.47%	0.794	1.004	-
		Left side	0	104	5520	14.5	14.16	8.14%	0.0187	0.020	-
		Right side	0	104	5520	14.5	14.16	8.14%	0.0172	0.019	-
6 1		Bottom side	0	104	5520	14.5	14.16	8.14%	0.0149	0.016	-
		Back side	0	104	5520	14.5	14.02	11.69%	0.138	0.154	-
		Top side	0	104	5520	14.5	14.02	11.69%	0.977	1.091	220
		Top side	0	136	5680	14.5	13.49	26.18%	0.939	1.185	-
	WLAN802.11 ac(20M) 5.6G	Top side_ with optional battery	0	136	5680	14.5	13.49	26.18%	0.893	1.127	-
		Left side	0	104	5520	14.5	14.02	11.69%	0.0222	0.025	-
		Right side	0	104	5520	14.5	14.02	11.69%	0.0195	0.022	-
Main		Bottom side	0	104	5520	14.5	14.02	11.69%	0.0179	0.020	-
IVIAIII		Back side	0	138	5690	14	13.72	6.66%	0.123	0.131	-
		Top side	0	122	5610	14	12.09	55.24%	0.696	1.080	-
	WLAN802.11 ac(80M)	Top side	0	138	5690	14	13.72	6.66%	1.06	1.131	221
	5.6G	Left side	0	138	5690	14	13.72	6.66%	0.0228	0.024	-
		Right side	0	138	5690	14	13.72	6.66%	0.0317	0.034	-
		Bottom side	0	138	5690	14	13.72	6.66%	0.016	0.017	-
		Back side	0	155	5775	14	13.54	11.17%	0.153	0.170	-
		Top side	0	155	5775	14	13.54	11.17%	0.937	1.042	222
	WLAN802.11 ac(80M)	Top side_ with optional battery	0	155	5775	14	13.54	11.17%	0.907	1.008	-
	5.8G	Top side*	0	155	5775	14	13.54	11.17%	0.915	1.017	-
		Left side	0	155	5775	14	13.54	11.17%	0.0154	0.017	-
		Right side	0	155	5775	14	13.54	11.17%	0.0353	0.039	-
		Bottom side	0	155	5775	14	13.54	11.17%	0.0276	0.031	-

<sup>\* -</sup> repeated at the highest SAR measurement according to the KDB 865664 D01

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 140 of 339

#### WLAN802.11 Aux Antenna

Antenna	Mode	Position	Distance	СН	Freq.	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling		SAR over 1g /kg)	Plot
			(mm)		(MHz)	Tolerance (dBm)	(dBm)		Measured	Reported	page
		Back side	0	11	2462	15	15.00	0.00%	0.0878	0.088	-
		Bottom side	0	11	2462	15	15.00	0.00%	0.491	0.491	223
	WLAN802.11 b	Bottom side_ with optional battery	0	11	2462	15	15.00	0.00%	0.486	0.486	-
		Left side	0	11	2462	15	15.00	0.00%	0.0312	0.031	-
		Right side	0	11	2462	15	15.00	0.00%	0.0136	0.014	-
		Top side	0	11	2462	15	15.00	0.00%	0.0133	0.013	-
		Back side	0	44	5220	14	13.59	9.90%	0.288	0.317	-
		Bottom side	0	44	5220	14	13.59	9.90%	0.921	1.012	224
		Bottom side_ with optional battery	0	44	5220	14	13.59	9.90%	0.906	0.996	-
	WLAN802.11 a 5.2G	Bottom side*	0	44	5220	14	13.59	9.90%	0.913	1.003	-
		Bottom side	0	48	5240	14	13.46	13.24%	0.849	0.961	-
		Left side	0	44	5220	14	13.59	9.90%	0.039	0.043	-
Aux		Right side	0	44	5520	14	13.59	9.90%	0.0136	0.015	-
		Top side	0	44	5220	14	13.59	9.90%	0.0133	0.015	-
	WLAN802.11 ac(20M)	Bottom side	0	40	5200	14	13.54	11.17%	0.854	0.949	225
	5.2G	Bottom side	0	48	5240	14	13.29	17.76%	0.772	0.909	-
		Back side	0	52	5260	14	13.85	3.51%	0.334	0.346	-
		Bottom side	0	52	5260	14	13.85	3.51%	1.19	1.232	-
		Bottom side	0	56	5280	14	13.65	8.39%	1.36	1.474	226
	WLAN802.11 a 5.3G	Bottom side	0	60	5300	14	13.41	14.55%	1.1	1.260	-
	WLANOUZ.11 a 5.3G	Bottom side	0	64	5320	11.5	11.06	10.66%	0.854	0.945	-
		Left side	0	52	5260	14	13.85	3.51%	0.0423	0.044	-
		Right side	0	52	5260	14	13.85	3.51%	0.0169	0.017	-
		Top side	0	52	5260	14	13.85	3.51%	0.0181	0.019	-
		Bottom side	0	52	5260	14	13.56	10.66%	1.21	1.339	-
	WLAN802.11 n(20M)	Bottom side	0	56	5280	14	13.44	13.76%	1.23	1.399	-
	5.3G	Bottom side	0	60	5300	13.3	13.27	0.69%	1.45	1.460	227
		Bottom side	0	64	5320	11.5	10.89	15.08%	0.835	0.961	-

\* - repeated at the highest SAR measurement according to the KDB 865664 D01

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 141 of 339

Antenna	Mode	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	(W/	<u> </u>	Plot page
			` '		` ,	Tolerance (dBm)	(dBm)		Measured	Reported	1 3
		Bottom side	0	52	5260	14	13.62	9.14%	0.971	1.060	-
	WLAN802.11 ac(20M)	Bottom side	0	56	5280	13.5	13.48	0.46%	1.41	1.417	228
	5.3G	Bottom side	0	60	5300	13.5	13.24	6.17%	1.23	1.306	-
		Bottom side	0	64	5320	11.5	10.92	14.29%	0.513	0.586	-
		Bottom side	0	54	5270	13.7	13.62	1.86%	1.46	1.487	229
	WLAN802.11 n(40M)	Bottom side_ with optional battery	0	54	5270	13.7	13.62	1.86%	1.38	1.406	-
	5.3G	Bottom side*	0	54	5270	13.7	13.62	1.86%	1.44	1.467	-
		Bottom side*	0	54	5270	13.7	13.62	1.86%	1.42	1.446	-
		Bottom side	0	62	5310	11.5	10.92	14.29%	0.698	0.798	-
	WLAN802.11 ac(40M)	Bottom side	0	54	5270	13.5	13.41	2.09%	1.44	1.470	230
	5.3G	Bottom side	0	62	5310	11.5	10.86	15.88%	0.781	0.905	-
		Back side	0	136	5680	14.5	14.04	11.17%	0.247	0.275	-
Aux		Bottom side	0	104	5520	13.5	12.8	17.49%	1.09	1.281	-
		Bottom side	0	120	5600	14.5	13.42	28.23%	1.1	1.411	231
		Bottom side_ with optional battery	0	120	5600	14.5	13.42	28.23%	1.07	1.372	-
	WLAN802.11 a 5.6G	Bottom side*	0	120	5600	14.5	13.42	28.23%	1.05	1.346	-
		Bottom side	0	136	5680	14.5	14.04	11.17%	0.781	0.868	-
		Bottom side	0	140	5700	11.5	11.31	4.47%	0.469	0.490	-
		Left side	0	136	5680	14.5	14.04	11.17%	0.0537	0.060	-
		Right side	0	136	5680	14.5	14.04	11.17%	0.0186	0.021	-
		Top side	0	136	5680	14.5	14.04	11.17%	0.0223	0.025	-
	WLAN802.11 n(20M) 5.6G	Bottom side	0	136	5680	14	13.79	4.95%	0.879	0.923	232
	WLAN802.11 ac(20M) 5.6G	Bottom side	0	136	5680	14	13.95	1.16%	0.631	0.638	233

<sup>\* -</sup> repeated at the highest SAR measurement according to the KDB 865664 D01

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 142 of 339

Antenna	Mode	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling		AR over 1g 'kg)	Plot
			(111111)		(IVITZ)	Tolerance (dBm)	(dBm)		Measured	Reported	page
		Back side	0	134	5670	14.5	13.89	15.08%	0.269	0.310	
		Bottom side	0	110	5550	14.5	12.96	42.56%	0.477	0.680	-
	WLAN802.11 n(40M)	Bottom side	0	134	5670	14.5	13.89	15.08%	0.913	1.051	234
	5.6G	Left side	0	134	5670	14.5	13.89	15.08%	0.0512	0.059	-
		Right side	0	134	5670	14.5	13.89	15.08%	0.0179	0.021	-
		Top side	0	134	5670	14.5	13.89	15.08%	0.0163	0.019	-
		Back side	0	142	5710	14.5	14.36	3.28%	0.254	0.262	
		Bottom side	0	126	5630	14.5	13.37	29.72%	0.467	0.606	-
	WLAN802.11 ac(40M)	Bottom side	0	142	5710	14.5	14.36	3.28%	0.784	0.810	235
_	5.6G	Left side	0	142	5710	14.5	14.36	3.28%	0.0463	0.048	-
Aux		Right side	0	142	5710	14.5	14.36	3.28%	0.018	0.019	-
		Top side	0	142	5710	14.5	14.36	3.28%	0.0152	0.016	-
		Back side	0	155	5775	14.5	14.46	0.93%	0.205	0.207	
		Bottom side	0	155	5775	14.5	14.46	0.93%	0.81	0.817	236
	WLAN802.11 ac(80M)	Bottom side_ with optional battery	0	155	5775	14.5	14.46	0.93%	0.759	0.766	-
	5.8G	Bottom side*	0	155	5775	14.5	14.46	0.93%	0.788	0.795	-
		Left side	0	155	5775	14.5	14.46	0.93%	0.0377	0.038	-
		Right side	0	155	5775	14.5	14.46	0.93%	0.0173	0.017	-
		Top side	0	155	5775	14.5	14.46	0.93%	0.0128	0.013	-

<sup>\* -</sup> repeated at the highest SAR measurement according to the KDB 865664 D01

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 143 of 339

#### **Bluetooth**

Blueto	Otti										
Antenna	Mode	Position	Distanc e (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance	Measured Avg. Power (dBm)	Scaling	Averaged : 1g (W/F Measured	J	Plot page
		Back side	0	78	2480	6	5.25	18.85%		0.014	-
		Top side	0	78	2480	6	5.25	18.85%	0.0000288	0.00003	-
		Left side	0	78	2480	6	5.25	18.85%	0.00455	0.005	-
		Right side	0	78	2480	6	5.25	18.85%	0.00193	0.002	-
Aux	ВТ	Bottom side	0	0	2402	6	4.72	34.28%	0.0107	0.014	-
		Bottom side	0	39	2441	6	5.09	23.31%	0.0141	0.017	-
		Bottom side	0	78	2480	6	5.25	18.85%	0.0585	0.070	237
		bottom side_ with optional battery	0	78	2480	6	5.25	18.85%	0.0515	0.061	-

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 144 of 339

# 3. Simultaneous Transmission Analysis

Simultaneous Transmission Scenarios:

Body
Yes

#### Note:

- 1. WWAN and WLAN may transmit simultaneously.
- 2. Bluetooth and WLAN Aux share the same antenna path, and BT can't transmit with WLAN Aux simultaneously.
- 3. For 2.4/5GHz WLAN Main and Aux antennas, the maximum output power of each antenna during simultaneous transmission (for 802.11n/ac) is much less than that used in standalone transmission (for 802.11a/b/g/n/ac), so it is more conservative to use the sum of 1-g SAR provision in KDB447498D01 to exclude the SAR measurement for 802.11n/ac MIMO.
- 4. There are so many combination for simultaneous transmission, we choose the worst cases(all transmitters transmit simultaneously at maximum power) to do the simultaneous transmission analysis to capture the worst cases.
- 5. For the simultaneous transmission analysis in BT part, the simultaneous transmission for WWAN + WLAN Main had been evaluated and shown before, so we don't show them here

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 145 of 339

#### 3.1 Estimated SAR calculation

According to KDB447498 D01v05 – When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

Estimated SAR = 
$$\frac{\text{Max.tune up power(mW)}}{\text{Min.test separation distance(mm)}} \times \frac{\sqrt{f(\text{GHz})}}{7.5}$$

If the minimum test separation distance is < 5mm, a distance of 5mm is used for estimated SAR calculation. When the test separation distance is >50mm, the 0.4W/kg is used for SAR-1q.

# 3.2 SPLSR evaluation and analysis

Per KDB447498D01, when the sum of SAR is larger than the limit, SAR test exclusion is determined by the SAR sum to peak location separation ratio(SPLSR).

The simultaneous transmitting antennas in each operating mode and exposure condition combination must be considered one pair at a time to determine the SAR to peak location separation ratio to qualify for test exclusion.

The ratio is determined by (SAR1 + SAR2) \(^1.5/Ri\), rounded to two decimal digits, and must be ≤ 0.04 for all antenna pairs in the configuration to qualify for 1-g SAR test exclusion.

SAR1 and SAR2 are the highest reported or estimated SAR for each antenna in the pair, and Ri is the separation distance between the peak SAR locations for the antenna pair in mm.

When standalone test exclusion applies, SAR is estimated; the peak location is assumed to be at the feed-point or geometric center of the antenna.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd. t (886-2) 2299-3279



Page: 146 of 339

# GPRS 850 + 2.4GHz WLAN MIMO

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	Max. WLAN Aux	SAR Sum	SPLSR
		Back side	0	0.493	0.045	0.088	0.626	ΣSAR<1.6, Not required
		Top side	0	0.202	0.226	0.013	0.441	ΣSAR<1.6, Not required
1	850	Bottom side	0	0.038	0.005	0.491	0.534	ΣSAR<1.6, Not required
		Left side	0	0.022	0.024	0.031	0.077	ΣSAR<1.6, Not required
		Right side	0	0.019	0.017	0.014	0.05	ΣSAR<1.6, Not required

#### GPRS 1900 + 2.4GHz WLAN MIMO

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	Max. WLAN Aux	SAR Sum	SPLSR
6	70	Back side	0	0.89	0.045	0.088	1.023	ΣSAR<1.6, Not required
		Top side	0	0.727	0.226	0.013	0.966	ΣSAR<1.6, Not required
2	1900	Bottom side	0	0.037	0.005	0.491	0.533	ΣSAR<1.6, Not required
		Left side	0	0.02	0.024	0.031	0.075	ΣSAR<1.6, Not required
		Right side	0	0.029	0.017	0.014	0.06	ΣSAR<1.6, Not required

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 147 of 339

# WCDMA Band II + 2.4GHz WLAN MIMO

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	Max. WLAN Aux	SAR Sum	SPLSR
		Back side	0	0.941	0.045	0.088	1.074	ΣSAR<1.6, Not required
0		Top side	0	0.664	0.226	0.013	0.903	ΣSAR<1.6, Not required
3	WCDMA B2	Bottom side	0	0.043	0.005	0.491	0.539	ΣSAR<1.6, Not required
		Left side	0	0.008	0.024	0.031	0.063	ΣSAR<1.6, Not required
		Right side	0	0.02	0.017	0.014	0.051	ΣSAR<1.6, Not required

#### WCDMA Band IV + 2.4GHz WLAN MIMO

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	Max. WLAN Aux	SAR Sum	SPLSR
6	3	Back side	0	0.944	0.045	0.088	1.077	ΣSAR<1.6, Not required
	WCDMA B4	Top side	0	0.871	0.226	0.013	1.11	ΣSAR<1.6, Not required
4		Bottom side	0	0.032	0.005	0.491	0.528	ΣSAR<1.6, Not required
		Left side	0	0.027	0.024	0.031	0.082	ΣSAR<1.6, Not required
		Right side	0	0.014	0.017	0.014	0.045	ΣSAR<1.6, Not required

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 148 of 339

# WCDMA Band V + 2.4GHz WLAN MIMO

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	Max. WLAN Aux	SAR Sum	SPLSR
		Back side	0	0.377	0.045	0.088	0.51	ΣSAR<1.6, Not required
6	0	Top side	0	0.363	0.226	0.013	0.602	ΣSAR<1.6, Not required
5	WCDMA B5	Bottom side	0	0.037	0.005	0.491	0.533	ΣSAR<1.6, Not required
		Left side	0	0.01	0.024	0.031	0.065	ΣSAR<1.6, Not required
		Right side	0	0.006	0.017	0.014	0.037	ΣSAR<1.6, Not required

# CDMA / EVDO BCO + 2.4GHz WLAN MIMO

No	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	Max. WLAN Aux	SAR Sum	SPLSR
		Back side	0	0.369	0.045	0.088	0.502	ΣSAR<1.6, Not required
		Top side	0	0.338	0.226	0.013	0.577	ΣSAR<1.6, Not required
6	EVDO BC0	Bottom side	0	0.035	0.005	0.491	0.531	ΣSAR<1.6, Not required
		Left side	0	0.003	0.024	0.031	0.058	ΣSAR<1.6, Not required
		Right side	0	0.005	0.017	0.014	0.036	ΣSAR<1.6, Not required

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained bereen reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions if any The

therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Talwan Ltd. No.134.Wu Kung Road. New Taipei Industrial Park. Wuku District. New Taipei City. Taiwan 24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司



Page: 149 of 339

# CDMA / EVDO BC1 + 2.4GHz WLAN MIMO

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	Max. WLAN Aux	SAR Sum	SPLSR
		Back side	0	0.691	0.045	0.088	0.824	ΣSAR<1.6, Not required
•		Top side	0	0.581	0.226	0.013	0.82	ΣSAR<1.6, Not required
7	EVDO BC1	Bottom side	0	0.049	0.005	0.491	0.545	ΣSAR<1.6, Not required
		Left side	0	0.021	0.024	0.031	0.076	ΣSAR<1.6, Not required
		Right side	0	0.029	0.017	0.014	0.06	ΣSAR<1.6, Not required

## CDMA / EVDO BC10 + 2.4GHz WLAN MIMO

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	Max. WLAN Aux	SAR Sum	SPLSR
9		Back side	0	0.364	0.045	0.088	0.497	ΣSAR<1.6, Not required
		Top side	0	0.355	0.226	0.013	0.594	ΣSAR<1.6, Not required
8	EVDO BC10	Bottom side	0	0.045	0.005	0.491	0.541	ΣSAR<1.6, Not required
		Left side	0	0.004	0.024	0.031	0.059	ΣSAR<1.6, Not required
		Right side	0	0.002	0.017	0.014	0.033	ΣSAR<1.6, Not required

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 150 of 339

#### LTE FDD Band II + 2.4GHz WLAN MIMO

	No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	Max. WLAN Aux	SAR Sum	SPLSR
			Back side	0	1.182	0.045	0.088	1.315	ΣSAR<1.6, Not required
1	P		Top side	0	0.914	0.226	0.013	1.153	ΣSAR<1.6, Not required
	9	LTE B2	Bottom side	0	0.045	0.005	0.491	0.541	ΣSAR<1.6, Not required
			Left side	0	0.011	0.024	0.031	0.066	ΣSAR<1.6, Not required
			Right side	0	0.024	0.017	0.014	0.055	ΣSAR<1.6, Not required

## LTE FDD Band IV + 2.4GHz WLAN MIMO

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	Max. WLAN Aux	SAR Sum	SPLSR
9	701	Back side	0	0.797	0.045	0.088	0.93	ΣSAR<1.6, Not required
		Top side	0	0.983	0.226	0.013	1.222	ΣSAR<1.6, Not required
10	LTE B4	Bottom side	0	0.031	0.005	0.491	0.527	ΣSAR<1.6, Not required
		Left side	0	0.014	0.024	0.031	0.069	ΣSAR<1.6, Not required
		Right side	0	0.012	0.017	0.014	0.043	ΣSAR<1.6, Not required

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 151 of 339

# LTE FDD Band V + 2.4GHz WLAN MIMO

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	Max. WLAN Aux	SAR Sum	SPLSR
		Back side	0	0.49	0.045	0.088	0.623	ΣSAR<1.6, Not required
	5	Top side	0	0.234	0.226	0.013	0.473	ΣSAR<1.6, Not required
11	LTE B5	Bottom side	0	0.041	0.005	0.491	0.537	ΣSAR<1.6, Not required
		Left side	0	0.02	0.024	0.031	0.075	ΣSAR<1.6, Not required
		Right side	0	0.012	0.017	0.014	0.043	ΣSAR<1.6, Not required

#### LTE FDD Band XIII + 2.4GHz WLAN MIMO

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	Max. WLAN Aux	SAR Sum	SPLSR
		Back side	0	0.499	0.045	0.088	0.632	ΣSAR<1.6, Not required
		Top side	0	0.303	0.226	0.013	0.542	ΣSAR<1.6, Not required
12	LTE B13	Bottom side	0	0.016	0.005	0.491	0.512	ΣSAR<1.6, Not required
		Left side	0	0.027	0.024	0.031	0.082	ΣSAR<1.6, Not required
		Right side	0	0.006	0.017	0.014	0.037	ΣSAR<1.6, Not required

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents subject to Terms and Conditions for Electronic Pocuments at www.sgs.com/terms\_and\_conditions for Electronic Pocuments at www.sgs.com/terms\_and\_conditions for Electronic Pocuments at www.sgs.com/terms\_and\_conditions.htm</a> Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined.

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 152 of 339

#### LTE FDD Band XVII + 2.4GHz WLAN MIMO

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	Max. WLAN Aux	SAR Sum	SPLSR
		Back side	0	0.438	0.045	0.088	0.571	ΣSAR<1.6, Not required
-		Top side	0	0.359	0.226	0.013	0.598	ΣSAR<1.6, Not required
13	LTE B17	Bottom side	0	0.048	0.005	0.491	0.544	ΣSAR<1.6, Not required
		Left side	0	0.049	0.024	0.031	0.104	ΣSAR<1.6, Not required
		Right side	0	0.015	0.017	0.014	0.046	ΣSAR<1.6, Not required

#### LTE FDD Band XXV + 2.4GHz WLAN MIMO

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	Max. WLAN Aux	SAR Sum	SPLSR
1		Back side	0	0.946	0.045	0.088	1.079	ΣSAR<1.6, Not required
		Top side	0	0.73	0.226	0.013	0.969	ΣSAR<1.6, Not required
14	LTE B25	Bottom side	0	0.039	0.005	0.491	0.535	ΣSAR<1.6, Not required
		Left side	0	0.001	0.024	0.031	0.056	ΣSAR<1.6, Not required
		Right side	0	0.005	0.017	0.014	0.036	ΣSAR<1.6, Not required

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 153 of 339

# GPRS 850 + 5GHz WLAN MIMO

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	Max. WLAN Aux	SAR Sum	SPLSR
		Back side	0	0.493	0.17	0.346	1.009	ΣSAR<1.6, Not required
		Top side	0	0.202	1.185	0.025	1.412	ΣSAR<1.6, Not required
15	850	Bottom side	0	0.038	0.031	1.487	1.556	ΣSAR<1.6, Not required
		Left side	0	0.022	0.025	0.06	0.107	ΣSAR<1.6, Not required
		Right side	0	0.019	0.039	0.021	0.079	ΣSAR<1.6, Not required

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司




Page: 154 of 339

# **GPRS 1900 + 5GHz WLAN MIMO**

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	Max. WLAN Aux	SAR Sum	SPLSR	
		Back side	0	0.89	0.17	0.346	1.406	ΣSAR<1.6, Not required	
0		Top side	0	0.727	1.185	0.025	1.937	Analyzed as below	
16	1900	Bottom side	0	0.037	0.031	1.487	1.555	ΣSAR<1.6, Not required	
		Left side	0	0.02	0.025	0.06	0.105	ΣSAR<1.6, Not required	
		Right side	0	0.029	0.039	0.021	0.089	ΣSAR<1.6, Not required	

# SPLSR GPRS1900 & WLAN Main

<u> </u>	LON OF NOT	700 G 11 L	iii.a.ii							
	Conditions	Position	SAR Value	Coor	Coordinates (cm)			Peak Location Separation	SPLSR	Simultaneous Transmission
			(W/kg)	Х	у	Z	(W/kg)	Distance (mm)		SAR Test
	GPRS 1900 CH810	Top side	0.727	-1.35	-4.33	-0.27	1.912	97.8	0.027	SPLSR<0.04,
ac	WLAN Main (20M) CH136	·	1.185	-1.74	5.44	-0.44	1.712	77.0	0.027	Not required

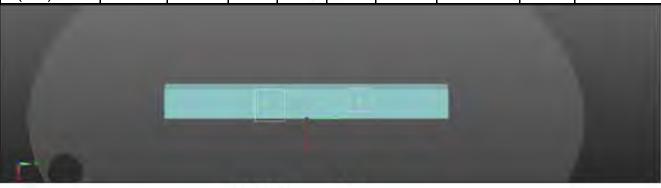

WWAN

Main

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 155 of 339

# SPLSR GPRS1900 & WLAN Aux

		SAR	Coordinates (cm)			ΣSAR	Peak Location		Simultaneous
Conditions	Position	n I Value I I I		(W/kg)	Separation Distance (mm)	SPLSR	Transmission SAR Test		
GPRS 1900 CH810	Ton side	0.727	-1.35	-4.33	-0.27	0.752		0.023	SPLSR<0.04,
WLAN Aux a CH 136	Top side	0.025	-1.50	-2.34	1.77	0.732	20.0	0.023	Not required
	CH810 WLAN Aux	GPRS 1900 CH810 WLAN Aux Top side	Conditions Position Value (W/kg)  GPRS 1900 CH810  WLAN Aux  Top side  0.727	Conditions Position Value (W/kg) x  GPRS 1900 CH810 Top side  O 0.727 -1.35	Conditions Position Value (W/kg) x y  GPRS 1900 CH810 Top side 0.727 -1.35 -4.33  WLAN Aux Top side 0.025 -1.50 -2.34	Conditions Position Value (W/kg) x y z  GPRS 1900 CH810  Top side  O 0.727  -1.35  -4.33  -0.27  Top side	Conditions         Position         Value (W/kg)         x         y         z         ΣSAR (W/kg)           GPRS 1900 CH810         Top side         0.727         -1.35         -4.33         -0.27           WLAN Aux         0.025         -1.50         -2.34         1.77	Conditions         Position         Value (W/kg)         x         y         z         ΣSAR (W/kg)         Location Separation Distance (mm)           GPRS 1900 CH810         Top side         0.727         -1.35         -4.33         -0.27         0.752         28.6	Conditions         Position         Value (W/kg)         x         y         z         ΣSAR (W/kg)         Location Separation Distance (mm)         SPLSR           GPRS 1900 CH810         Top side         0.727         -1.35         -4.33         -0.27         0.752         28.6         0.023

# WWAN Aux

#### SPLSR WLAN Main & WLAN Aux

OI LOIK WEATH									
Conditions	Position Va	SAR Value	Coor	Coordinates (cm)		ΣSAR	Peak Location Separation	SPLSR	Simultaneous Transmission
		(W/kg)	Х	у	Z	(W/kg)	Distance (mm)		SAR Test
WLAN Main ac(20M) CH136	Top side	1.185	-1.74	5.44	-0.44	1.21	80.9	0.016	SPLSR<0.04,
WLAN Aux a CH 136	Top side	0.025	-1.50	-2.34	1.77	1.21	00.7	0.010	Not required



Aux Main

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.




Page: 156 of 339

# WCDMA Band II + 5GHz WLAN MIMO

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	Max. WLAN Aux	SAR Sum	SPLSR
		Back side	0	0.941	0.17	0.346	1.457	ΣSAR<1.6, Not required
6	7	Top side	0	0.664	1.185	0.025	1.874	Analyzed as below
17	WCDMA B2	Bottom side	0	0.043	0.031	1.487	1.561	ΣSAR<1.6, Not required
		Left side	0	0.008	0.025	0.06	0.093	ΣSAR<1.6, Not required
		Right side	0	0.02	0.039	0.021	0.08	ΣSAR<1.6, Not required

#### SPLSR WCDMA B2 & WLAN Main

Conditions	Position	SAR Value	Coor	dinates	(cm)	ΣSAR	Peak Location Separation	SPLSR	Simultaneous Transmission
		(W/kg)	Х	у	Z	(W/kg)	Distance (mm)		SAR Test
WCDMA B2 CH9538	Top side	0.664	-0.91	-4.20	-0.28	1.849	96.8	0.026	SPLSR<0.04,
WLAN Main ac(20M) CH136	·	1.185	-1.74	5.44	-0.44	1.049	70.0	0.020	Not required

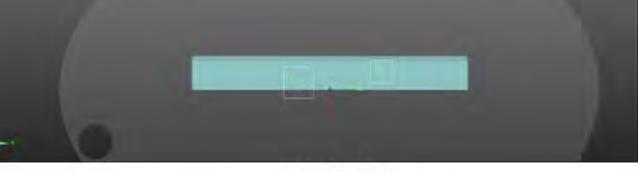

WWAN Main

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 157 of 339

# SPLSR WCDMA B2 & WLAN Aux


Conditions	Position	SAR	Coordinates (cm)			ΣSAR	Peak Location	SPLSR	Simultaneous
Conditions		Value (W/kg)	Х	у	Z	(W/kg)	Separation Distance	SFLSK	Transmission SAR Test
WCDMA B2 CH9538	Top side	0.664	-0.91	-4.20	-0.28	0.689	28.3	0.020	SPLSR<0.04,
WLAN Aux a CH 136	Top side	0.025	-1.50	-2.34	1.77	0.009	20.3	0.020	Not required

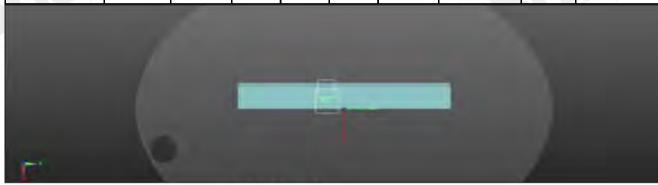

# WWAN Aux

#### SPLSR WLAN Main & WLAN Aux

SI ESIK WEATNI	VIAIII & VV	LAN AUA							
Conditions	Position	SAR Value	Coor	dinates	(cm)	ΣSAR (W/kg)	Peak Location Separation	SPLSR	Simultaneous Transmission
		(W/kg)	Х	у	Z	(W/Kg)	Distance (mm)		SAR Test
WLAN Main ac(20M) CH136	Top side	1.185	-1.74	5.44	-0.44	1.21	80.9	0.016	SPLSR<0.04,
WLAN Aux a CH 136	Top side	0.025	-1.50	-2.34	1.77	1.21	00.7	0.010	Not required

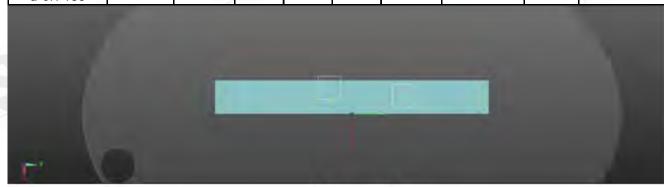

Aux Main

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.




Page: 158 of 339

# WCDMA Band IV + 5GHz WLAN MIMO

l	No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	Max. WLAN Aux	SAR Sum	SPLSR
			Back side	0	0.944	0.17	0.346	1.46	ΣSAR<1.6, Not required
			Top side	0	0.871	1.185	0.025	2.081	Analyzed as below
	18	WCDMA B4	Bottom side	0	0.032	0.031	1.487	1.55	ΣSAR<1.6, Not required
			Left side	0	0.027	0.025	0.06	0.112	ΣSAR<1.6, Not required
			Right side	0	0.014	0.039	0.021	0.074	ΣSAR<1.6, Not required

# SPLSR WCDMA B4 & WLAN Main

Conditions	Position	SAR Value	Coor	dinates	(cm)	ΣSAR	Peak Location Separation SPLSR		Simultaneous Transmission		
		(W/kg)	Х	у	Z	(W/kg)	Distance (mm)		SAR Test		
WCDMA B4 CH1412	Top side	0.871	-1.05	-3.04	-0.25	2.054	0F 1	0.035	SPLSR<0.04,		
WLAN Main ac(20M) CH136	Top side	1.185	-1.74	5.44	-0.44	2.056	85.1	0.035	Not required		
1								N.			

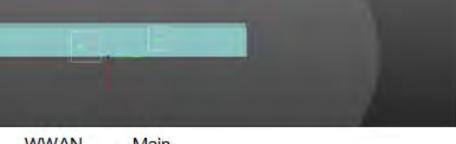

WWAN Main

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 159 of 339

## SDISD WCDMA RA & WI AN AUV

<u> 261</u>	PLSR WCDMA B4 & WLAN Aux											
	Conditions	Position	SAR Value	Coor	dinates	(cm)	ΣSAR	Peak Location	SPLSR	Simultaneous Transmission		
	Conditions	1 OSITION	(W/kg)	Х	у	Z	(W/kg)	Separation Distance	JI LJK	SAR Test		
٧	VCDMA B4 CH1412	Top side	0.871	-1.05	-3.04	-0.25	0.896	21.9	0.039	SPLSR<0.04,		
	WLAN Aux a CH 136	Top side	0.025	-1.50	-2.34	1.77	0.690	21.9	0.039	Not required		
п		0.025										
1		A							7			

WWAN Aux

# SPLSR WLAN Main & WLAN Aux

OI LOIK VVL/IIV I	VIGITI G VV								
Conditions	Position	SAR Value	Coor	dinates	(cm)	ΣSAR (W/kg)	Peak Location Separation	SPLSR	Simultaneous Transmission
		(W/kg)	Х	у	Z	(W/Kg)	Distance (mm)		SAR Test
WLAN Main ac(20M) CH136	Top side	1.185	-1.74	5.44	-0.44	1.21	80.9	0.016	SPLSR<0.04,
WLAN Aux a CH 136	Top side	0.025	-1.50	-2.34	1.77	1.21	00.7	0.010	Not required



Aux Main

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 160 of 339

# WCDMA Band V + 5GHz WLAN MIMO

_								
No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	Max. WLAN Aux	SAR Sum	SPLSR
		Back side	0	0.377	0.17	0.346	0.893	ΣSAR<1.6, Not required
		Top side	0	0.363	1.185	0.025	1.573	ΣSAR<1.6, Not required
19	WCDMA B5	Bottom side	0	0.037	0.031	1.487	1.555	ΣSAR<1.6, Not required
		Left side	0	0.01	0.025	0.06	0.095	ΣSAR<1.6, Not required
		Right side	0	0.006	0.039	0.021	0.066	ΣSAR<1.6, Not required

#### CDMA / EVDO BCO + 5GHz WLAN MIMO

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	Max. WLAN Aux	SAR Sum	SPLSR
9		Back side	0	0.369	0.17	0.346	0.885	ΣSAR<1.6, Not required
		Top side	0	0.338	1.185	0.025	1.548	ΣSAR<1.6, Not required
20	EVDO BC0	Bottom side	0	0.035	0.031	1.487	1.553	ΣSAR<1.6, Not required
		Left side	0	0.003	0.025	0.06	0.088	ΣSAR<1.6, Not required
		Right side	0	0.005	0.039	0.021	0.065	ΣSAR<1.6, Not required

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 161 of 339

# CDMA / EVDO BC1 + 5GHz WLAN MIMO

I	Vo.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	Max. WLAN Aux	SAR Sum	SPLSR
			Back side	0	0.691	0.17	0.346	1.207	ΣSAR<1.6, Not required
	9		Top side	0	0.581	1.185	0.025	1.791	Analyzed as below
	21	EVDO BC1	Bottom side	0	0.049	0.031	1.487	1.567	ΣSAR<1.6, Not required
			Left side	0	0.021	0.025	0.06	0.106	ΣSAR<1.6, Not required
			Right side	0	0.029	0.039	0.021	0.089	ΣSAR<1.6, Not required

# SPLSR CDMA / EVDO BC1 & WLAN Main

Conditions	Position	SAR Value (W/kg)	Coor	dinates	(cm)	ΣSAR	Peak Location Separation	SPLSR	Simultaneous Transmission
			Х	у	Z	(W/kg)	Distance (mm)		SAR Test
EVDO BC1 CH25	Top side	0.581	-0.76	-3.95	-0.36	1.766	94.4	0.025	SPLSR<0.04,
WLAN Main ac(20M) CH136	•	1.185	-1.74	5.44	-0.44	1.700	74.4	0.025	Not required



WWAN

Main

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 162 of 339

# SPLSR CDMA / EVDO BC1 & WLAN Aux

Conditions	Position	SAR Value	Coor	dinates	(cm)	ΣSAR	Peak Location	CDI CD	Simultaneous
Conditions	POSITION	(W/kg)	Х	(W/kg		(W/kg)	Separation Distance	SPLSR	Transmission SAR Test
EVDO BC1 CH25	Top side	0.581	-0.76	-3.95	-0.36	0.606	27.7	0.017	SPLSR<0.04,
WLAN Aux a CH 136	Top side	0.025	-1.50	-2.34	1.77	0.606	21.1	0.017	Not required

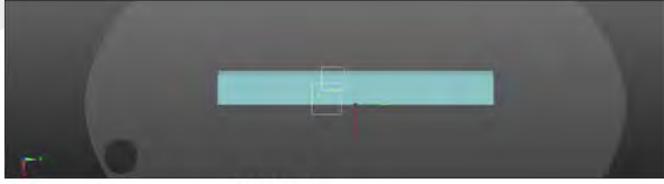

# WWAN Aux

## SPLSR WLAN Main & WLAN Aux

Conditions	Position	SAR Value	Coor	dinates	(cm)	ΣSAR	Peak Location Separation	SPLSR	Simultaneous Transmission
		(W/kg)	Х	у	Z	(W/kg)	Distance (mm)		SAR Test
WLAN Main ac(20M) CH136	Top side	1.185	-1.74	5.44	-0.44	1.21	80.9	0.016	SPLSR<0.04,
WLAN Aux a CH 136	rop side	0.025	-1.50	-2.34	1.77	1.21	80.9	0.010	Not required



Aux Main

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The

therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 163 of 339

## CDMA / EVDO BC10 + 5GHz WLAN MIMO

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	Max. WLAN Aux	SAR Sum	SPLSR
		Back side	0	0.364	0.17	0.346	0.88	ΣSAR<1.6, Not required
		Top side	0	0.355	1.185	0.025	1.565	ΣSAR<1.6, Not required
22	EVDO BC10	Bottom side	0	0.045	0.031	1.487	1.563	ΣSAR<1.6, Not required
		Left side	0	0.004	0.025	0.06	0.089	ΣSAR<1.6, Not required
		Right side	0	0.002	0.039	0.021	0.062	ΣSAR<1.6, Not required

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 164 of 339

# LTE FDD Band II + 5GHz WLAN MIMO

				_A_/_				
No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	Max. WLAN Aux	SAR Sum	SPLSR
		Back side	0	1.182	0.17	0.346	1.698	Analyzed as below
6		Top side	0	0.914	1.185	0.025	2.124	Analyzed as below
23	LTE B2	Bottom side	0	0.045	0.031	1.487	1.563	ΣSAR<1.6, Not required
		Left side	0	0.011	0.025	0.06	0.096	ΣSAR<1.6, Not required
		Right side	0	0.024	0.039	0.021	0.084	ΣSAR<1.6, Not required

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 165 of 339


## SPLSR LTE Band 2 & WLAN Main

Conditions	Position	SAR Value	Coor	dinates (	(cm)	ΣSAR	Peak Location Separation SPLSI		Simultaneous Transmission
		(W/kg)	Х	у	Z	(W/kg)	Distance (mm)		SAR Test
LTE B2 CH19100	Dook side	1.182	9.46	-3.51	-0.19	1 252	82.7	0.010	SPLSR<0.04,
WLAN Main ac(80M) CH155	Back side	0.17	9.30	4.72	0.60	1.352	82.7	0.019	Not required
		_							

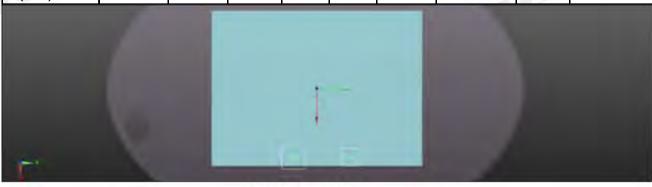

# WWAN Main

Conditions Posi	Position	SAR Value (W/kg)	Coordinates (cm)			ΣSAR	Peak Location Separation	SPLSR	Simultaneous Transmission
			Х	у	Z	(W/kg)	Distance (mm)		SAR Test
LTE B2 CH19100	Top side	0.914	-0.75	-3.84	-0.32	2.099	02.2	0.033	SPLSR<0.04,
WLAN Main ac(20M) CH136	Top side	1.185	-1.74	5.44	-0.44	2.099	93.3	0.033	Not required

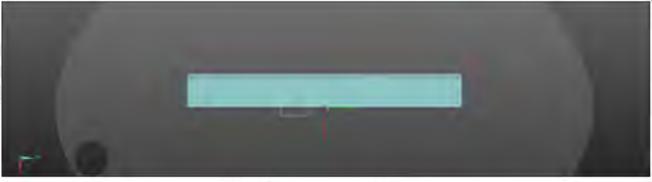

WWAN

Main

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 166 of 339

## SPLSR LTE Band 2 & WLAN Aux

Conditions	Position	sition SAR Value (W/kg)	Coord	dinates (	(cm)	ΣSAR	Peak Location	SPLSR	Simultaneous
Conditions			Х	у	Z	(W/kg)	Separation Distance		Transmission SAR Test
LTE B2 CH19100	- Back side	1.182	9.46	-3.51	-0.19	1.528	82.7	0.023	SPLSR<0.04,
WLAN Aux a CH52	DACK SIDE	0.346	-10.20			1.028	02.1	0.023	Not required

#### Aux



### WWAN

Conditions	Position	SAR Value	Coor	dinates	(cm)	ΣSAR (W/kg)	Peak Location Separation Distance	SPLSR	Simultaneous
Conditions	POSITION	(W/kg)	Х	у	Z			SPLSK	Transmission SAR Test
LTE B2 CH19100	19100	0.914	-0.75	-3.84	-0.32	0.939	26.8	0.034	SPLSR<0.04,
WLAN Aux a CH 136	Top side	0.025	-1.50	-2.34	1.77	0.939	20.0	0.034	Not required



# WWAN Aux

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 167 of 339

## SPLSR WLAN Main & WLAN Aux

Conditions	Position	SAR Value	Coordinates (cm)			ΣSAR	Peak Location Separation	SPLSR	Simultaneous Transmission
		(W/kg)	х	у	Z	(W/kg)	Distance (mm)		SAR Test
WLAN Main ac(80M) CH155	Back side	0.17	9.30	4.72	0.60	0.516	240.3	0.002	SPLSR<0.04,
WLAN Aux a CH52	Dack Side	0.346	-10.20	-9.32	0.61	0.510	240.3	0.002	Not required





Main

Conditions	Position	SAR Value	Coor	dinates	(cm)	ΣSAR (W/kg)	Peak Location Separation	SPLSR	Simultaneous Transmission
		(W/kg)	Х	у	Z		Distance (mm)		SAR Test
WLAN Main ac(20M) CH136	Top side	1.185	-1.74	5.44	-0.44	1.21	80.9	0.016	SPLSR<0.04,
WLAN Aux a CH 136	Top side	0.025	-1.50	-2.34	1.77	1.21	60.9	0.010	Not required



Aux Main

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 168 of 339

# LTE FDD Band IV + 5GHz WLAN MIMO

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	Max. WLAN Aux	SAR Sum	SPLSR
		Back side	0	0.797	0.17	0.346	1.313	ΣSAR<1.6, Not required
F	2	Top side	0	0.983	1.185	0.025	2.193	Analyzed as below
24	LTE B4	Bottom side	0	0.031	0.031	1.487	1.549	ΣSAR<1.6, Not required
		Left side	0	0.014	0.025	0.06	0.099	ΣSAR<1.6, Not required
		Right side	0	0.012	0.039	0.021	0.072	ΣSAR<1.6, Not required

#### SPLSR LTF Band 4 & WLAN Main

Conditions	Position	SAR Value	Coor	dinates	(cm)	ΣSAR (W/kg)	Peak Location Separation Distance (mm)	SPLSR	Simultaneous Transmission
		(W/kg)	Х	у	Z				SAR Test
LTE B4 CH20050	Top side	0.983	-1.06	-3.34	-0.35	2.168	88.1	0.036	SPLSR<0.04,
WLAN Main ac(20M) CH136	·	1.185	-1.74	5.44	-0.44	2.100	00.1	0.030	Not required



Main

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279



Page: 169 of 339

# SPLSR LTE Band 4 & WLAN Aux

Conditions	Position	SAR	Coor	dinates	(cm)	ΣSAR	Peak Location	CDI CD	Simultaneous
Conditions		Value (W/kg)	Х	у	Z	(W/kg)	Separation Distance	SPLSR	Transmission SAR Test
LTE B4 CH20050	Top side	0.983	-1.06	-3.34	-0.35	1.008	26.9	0.038	SPLSR<0.04,
WLAN Aux a CH 136	Top side	0.025		-2.34	1.77	1.008	20.9	0.036	Not required

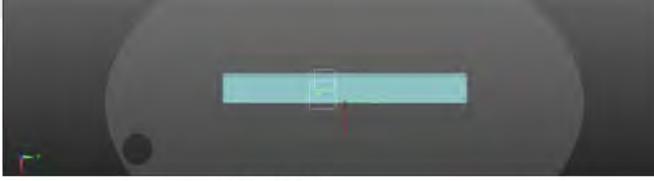

#### WWAN Aux

## SPLSR WLAN Main & WLAN Aux

JI LJIN VVLAIN I	VIGITI & VV	LINIII							
Conditions	Position	SAR Value	Coor	dinates	(cm)	ΣSAR (M/kg)	Peak Location Separation	SPLSR	Simultaneous Transmission
		(W/kg)		у	Z	(W/kg)	Distance (mm)		SAR Test
WLAN Main ac(20M) CH136	Top side	1.185	-1.74	5.44	-0.44	1.21	80.9	0.016	SPLSR<0.04,
WLAN Aux a CH 136	Top side	0.025	-1.50	-2.34	1.77	1.21	00.7	0.010	Not required



Aux Main

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 170 of 339

# LTE FDD Band V + 5GHz WLAN MIMO

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	Max. WLAN Aux	SAR Sum	SPLSR
		Back side	0	0.49	0.17	0.346	1.006	ΣSAR<1.6, Not required
		Top side	0	0.234	1.185	0.025	1.444	ΣSAR<1.6, Not required
25	LTE B5	Bottom side	0	0.041	0.031	1.487	1.559	ΣSAR<1.6, Not required
		Left side	0	0.02	0.025	0.06	0.105	ΣSAR<1.6, Not required
		Right side	0	0.012	0.039	0.021	0.072	ΣSAR<1.6, Not required

#### LTE FDD Band XIII + 5GHz WLAN MIMO

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	Max. WLAN Aux	SAR Sum	SPLSR
		Back side	0	0.499	0.17	0.346	1.015	ΣSAR<1.6, Not required
		Top side	0	0.303	1.185	0.025	1.513	ΣSAR<1.6, Not required
26	LTE B13	Bottom side	0	0.016	0.031	1.487	1.534	ΣSAR<1.6, Not required
		Left side	0	0.027	0.025	0.06	0.112	ΣSAR<1.6, Not required
		Right side	0	0.006	0.039	0.021	0.066	ΣSAR<1.6, Not required

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 171 of 339

## LTE FDD Band XVII + 5GHz WLAN MIMO

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	Max. WLAN Aux	SAR Sum	SPLSR
		Back side	0	0.438	0.17	0.346	0.954	ΣSAR<1.6, Not required
6		Top side	0	0.359	1.185	0.025	1.569	ΣSAR<1.6, Not required
27	LTE B17	Bottom side	0	0.048	0.031	1.487	1.566	ΣSAR<1.6, Not required
		Left side	0	0.049	0.025	0.06	0.134	ΣSAR<1.6, Not required
		Right side	0	0.015	0.039	0.021	0.075	ΣSAR<1.6, Not required

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 172 of 339

# LTE FDD Band XXV + 5GHz WLAN MIMO

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	Max. WLAN Aux	SAR Sum	SPLSR
		Back side	0	0.946	0.17	0.346	1.462	ΣSAR<1.6, Not required
6	8	Top side	0	0.73	1.185	0.025	1.94	Analyzed as below
28	LTE B25	Bottom side	0	0.039	0.031	1.487	1.557	ΣSAR<1.6, Not required
		Left side	0	0.001	0.025	0.06	0.086	ΣSAR<1.6, Not required
		Right side	0	0.005	0.039	0.021	0.065	ΣSAR<1.6, Not required

## SPLSR LTE Band 25 & WLAN Main

 0., 0	ESTA ETE Barro 25 a WETT Mari											
Conditions	Position	SAR Value	Coordinates (cm)			ΣSAR	Peak Location Separation	SPLSR	Simultaneous Transmission			
		(W/kg)	Х	у	Z	(W/kg)	Distance (mm)		SAR Test			
LTE B25 CH26590	Top side	0.73	-0.75	-3.84	-0.33	1.915	93.3	0.028	SPLSR<0.04,			
WLAN Main ac(20M) CH136	·	1.185	-1.74	5.44	-0.44	1.713	73.3	0.020	Not required			



WWAN

Main

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 173 of 339

# SPLSR LTE Band 25 & WLAN Aux

	D. elition	SAR	Coor	dinates	(cm)	ΣSAR	Peak Location	001.00	Simultaneous
Conditions	Position	Value (W/kg)	х	у	Z	(W/kg)	Separation Distance (mm)	SPLSR	Transmission SAR Test
LTE B25 CH26590	Top side	0.73	-0.75	-3.84	-0.33	0.755	26.8	0.024	SPLSR<0.04,
WLAN Aux a CH 136	Top side	0.025	-1.50	-2.34	1.77	0.755	20.0	0.024	Not required

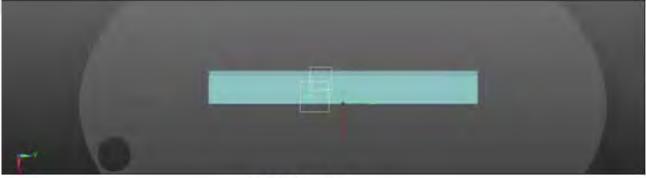

# WWAN Aux

#### SPLSR WLAN Main & WLAN Aux

Conditions	Position	SAR Value	'alue ΣSAR		Peak Location Separation	SPLSR	Simultaneous Transmission		
Conditions		(W/kg)	Х	у	Z	(W/kg)	Distance (mm)		SAR Test
WLAN Main ac(20M) CH136	Top side	1.185	-1.74	5.44	-0.44	1.21	80.9	0.016	SPLSR<0.04,
WLAN Aux a CH 136	Top side	0.025	-1.50	-2.34	1.77	1.21	00.7	0.010	Not required



Aux Main

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 174 of 339

# GPRS 850 + BT+ 2.4GHz WLAN Main

	-	-					-	-
No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	Max. WLAN BT	SAR Sum	SPLSR
		Back side	0	0.493	0.045	0.014	0.552	ΣSAR<1.6, Not required
		Top side	0	0.202	0.226	0.00003	0.42803	ΣSAR<1.6, Not required
29	850	Bottom side	0	0.038	0.005	0.07	0.113	ΣSAR<1.6, Not required
		Left side	0	0.022	0.024	0.005	0.051	ΣSAR<1.6, Not required
		Right side	0	0.019	0.017	0.002	0.038	ΣSAR<1.6, Not required

#### GPRS 1900 + BT+ 2.4GHz WLAN Main

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	Max. WLAN BT	SAR Sum	SPLSR
-	3	Back side	0	0.89	0.045	0.014	0.949	ΣSAR<1.6, Not required
		Top side	0	0.727	0.226	0.00003	0.95303	ΣSAR<1.6, Not required
30	1900	Bottom side	0	0.037	0.005	0.07	0.112	ΣSAR<1.6, Not required
		Left side	0	0.02	0.024	0.005	0.049	ΣSAR<1.6, Not required
		Right side	0	0.029	0.017	0.002	0.048	ΣSAR<1.6, Not required

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 175 of 339

#### WCDMA Band II + BT+ 2.4GHz WLAN Main

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	Max. WLAN BT	SAR Sum	SPLSR
		Back side	0	0.941	0.045	0.014	1	ΣSAR<1.6, Not required
0		Top side	0	0.664	0.226	0.00003	0.89003	ΣSAR<1.6, Not required
31	WCDMA B2	Bottom side	0	0.043	0.005	0.07	0.118	ΣSAR<1.6, Not required
		Left side	0	0.008	0.024	0.005	0.037	ΣSAR<1.6, Not required
		Right side	0	0.02	0.017	0.002	0.039	ΣSAR<1.6, Not required

#### WCDMA Band IV + BT+ 2.4GHz WLAN Main

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	Max. WLAN BT	SAR Sum	SPLSR
	9	Back side	0	0.944	0.045	0.014	1.003	ΣSAR<1.6, Not required
		Top side	0	0.871	0.226	0.00003	1.09703	ΣSAR<1.6, Not required
32	WCDMA B4	Bottom side	0	0.032	0.005	0.07	0.107	ΣSAR<1.6, Not required
		Left side	0	0.027	0.024	0.005	0.056	ΣSAR<1.6, Not required
		Right side	0	0.014	0.017	0.002	0.033	ΣSAR<1.6, Not required

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 176 of 339

#### WCDMA Band V + BT+ 2.4GHz WLAN Main

No	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	Max. WLAN BT	SAR Sum	SPLSR
		Back side	0	0.377	0.045	0.014	0.436	ΣSAR<1.6, Not required
		Top side	0	0.363	0.226	0.00003	0.58903	ΣSAR<1.6, Not required
33	WCDMA B5	Bottom side	0	0.037	0.005	0.07	0.112	ΣSAR<1.6, Not required
		Left side	0	0.01	0.024	0.005	0.039	ΣSAR<1.6, Not required
		Right side	0	0.006	0.017	0.002	0.025	ΣSAR<1.6, Not required

#### CDMA / EVDO BCO + BT+ 2.4GHz WLAN Main

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	Max. WLAN BT	SAR Sum	SPLSR
6	1	Back side	0	0.369	0.045	0.014	0.428	ΣSAR<1.6, Not required
		Top side	0	0.338	0.226	0.00003	0.56403	ΣSAR<1.6, Not required
34	EVDO BC0	Bottom side	0	0.035	0.005	0.07	0.11	ΣSAR<1.6, Not required
		Left side	0	0.003	0.024	0.005	0.032	ΣSAR<1.6, Not required
		Right side	0	0.005	0.017	0.002	0.024	ΣSAR<1.6, Not required

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 177 of 339

#### CDMA / EVDO BC1 + BT+ 2.4GHz WLAN Main

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	Max. WLAN BT	SAR Sum	SPLSR
		Back side	0	0.691	0.045	0.014	0.75	ΣSAR<1.6, Not required
(		Top side	0	0.581	0.226	0.00003	0.80703	ΣSAR<1.6, Not required
35	EVDO BC1	Bottom side	0	0.049	0.005	0.07	0.124	ΣSAR<1.6, Not required
		Left side	0	0.021	0.024	0.005	0.05	ΣSAR<1.6, Not required
		Right side	0	0.029	0.017	0.002	0.048	ΣSAR<1.6, Not required

## CDMA / EVDO BC10 + BT+ 2.4GHz WLAN Main

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	Max. WLAN BT	SAR Sum	SPLSR
6	9	Back side	0	0.364	0.045	0.014	0.423	ΣSAR<1.6, Not required
		Top side	0	0.355	0.226	0.00003	0.58103	ΣSAR<1.6, Not required
36	EVDO BC10	Bottom side	0	0.045	0.005	0.07	0.12	ΣSAR<1.6, Not required
		Left side	0	0.004	0.024	0.005	0.033	ΣSAR<1.6, Not required
		Right side	0	0.002	0.017	0.002	0.021	ΣSAR<1.6, Not required

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 178 of 339

#### LTE FDD Band II + BT+ 2.4GHz WLAN Main

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	Max. WLAN BT	SAR Sum	SPLSR	
		Back side	0	1.182	0.045	0.014	1.241	ΣSAR<1.6, Not required	
6		Top side	0	0.914	0.226	0.00003	1.14003	ΣSAR<1.6, Not required	
37	LTE B2	Bottom side	0	0.045	0.005	0.07	0.12	ΣSAR<1.6, Not required	
		Left side	0	0.011	0.024	0.005	0.04	ΣSAR<1.6, Not required	
		Right side	0	0.024	0.017	0.002	0.043	ΣSAR<1.6, Not required	

# LTE FDD Band IV + BT+ 2.4GHz WLAN Main

Ν	lo.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	Max. WLAN BT	SAR Sum	SPLSR
			Back side	0	0.797	0.045	0.014	0.856	ΣSAR<1.6, Not required
			Top side	0	0.983	0.226	0.00003	1.20903	ΣSAR<1.6, Not required
];	38	LTE B4	Bottom side	0	0.031	0.005	0.07	0.106	ΣSAR<1.6, Not required
			Left side	0	0.014	0.024	0.005	0.043	Not required ΣSAR<1.6,
			Right side	0	0.012	0.017	0.002	0.031	ΣSAR<1.6, Not required

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 179 of 339

#### LTE FDD Band V + BT+ 2.4GHz WLAN Main

	No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	Max. WLAN BT	SAR Sum	SPLSR
			Back side	0	0.49	0.045	0.014	0.549	ΣSAR<1.6, Not required
	6		Top side	0	0.234	0.226	0.00003	0.46003	ΣSAR<1.6, Not required
39	39	LTE B5	Bottom side	0	0.041	0.005	0.07	0.116	ΣSAR<1.6, Not required
			Left side	0	0.02	0.024	0.005	0.049	ΣSAR<1.6, Not required
			Right side	0	0.012	0.017	0.002	0.031	ΣSAR<1.6, Not required

#### LTE FDD Band XIII + BT+ 2.4GHz WLAN Main

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	Max. WLAN BT	SAR Sum	SPLSR
		Back side	0	0.499	0.045	0.014	0.558	ΣSAR<1.6, Not required
		Top side	0	0.303	0.226	0.00003	0.52903	ΣSAR<1.6, Not required
40	LTE B13	Bottom side	0	0.016	0.005	0.07	0.091	ΣSAR<1.6, Not required
		Left side	0	0.027	0.024	0.005	0.056	ΣSAR<1.6, Not required
		Right side	0	0.006	0.017	0.002	0.025	ΣSAR<1.6, Not required

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 180 of 339

#### LTE FDD Band XVII + BT+ 2.4GHz WLAN Main

١	No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	Max. WLAN BT	SAR Sum	SPLSR
			Back side	0	0.438	0.045	0.014	0.497	ΣSAR<1.6, Not required
			Top side	0	0.359	0.226	0.00003	0.58503	ΣSAR<1.6, Not required
	41	LTE B17	Bottom side	0	0.048	0.005	0.07	0.123	ΣSAR<1.6, Not required
			Left side	0	0.049	0.024	0.005	0.078	ΣSAR<1.6, Not required
			Right side	0	0.015	0.017	0.002	0.034	ΣSAR<1.6, Not required

#### LTE FDD Band XXV + BT+ 2.4GHz WLAN Main

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	Max. WLAN BT	SAR Sum	SPLSR
		Back side	0	0.946	0.045	0.014	1.005	ΣSAR<1.6, Not required
		Top side	0	0.73	0.226	0.00003	0.95603	ΣSAR<1.6, Not required
42	LTE B25	Bottom side	0	0.039	0.005	0.07	0.114	ΣSAR<1.6, Not required
		Left side	0	0.001	0.024	0.005	0.03	ΣSAR<1.6, Not required
		Right side	0	0.005	0.017	0.002	0.024	ΣSAR<1.6, Not required

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 181 of 339

## GPRS 850 + BT+ 5GHz WLAN Main

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	Max. WLAN BT	SAR Sum	SPLSR
		Back side	0	0.493	0.17	0.014	0.677	ΣSAR<1.6, Not required
•		Top side	0	0.202	1.185	0.00003	1.38703	ΣSAR<1.6, Not required
43	850	Bottom side	0	0.038	0.031	0.07	0.139	ΣSAR<1.6, Not required
		Left side	0	0.022	0.025	0.005	0.052	ΣSAR<1.6, Not required
		Right side	0	0.019	0.039	0.002	0.06	ΣSAR<1.6, Not required

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format document by <a href="https://document.edu/terms\_and\_conditions.htm">Attention is drawn to the limitation of lim

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 182 of 339

## GPRS 1900 + BT+ 5GHz WLAN Main

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	Max. WLAN BT	SAR Sum	SPLSR
		Back side	0	0.89	0.17	0.014	1.074	ΣSAR<1.6, Not required
C		Top side	0	0.727	1.185	0.00003	1.91203	Analyzed as below
44	1900	Bottom side	0	0.037	0.031	0.07	0.138	ΣSAR<1.6, Not required
		Left side	0	0.02	0.025	0.005	0.05	ΣSAR<1.6, Not required
		Right side	0	0.029	0.039	0.002	0.07	ΣSAR<1.6, Not required

#### SPLSR GPRS 1900 & BT

Conditions	Position	SAR Value	Coo	Coordinates (cm)			Peak Location Separation	SPLSR	Simultaneous Transmission
		(W/kg)	Х	у	Z	(W/kg)	Distance (mm)		SAR Test
GPRS 1900 CH810	Top side	0.727	-1.35	-4.33	-0.27	0.72703	63.7	0.010	SPLSR<0.04,
WLAN BT	Top side	0.00003	-1.40	-10.70	-0.45	0.72703	03.7	0.010	Not required

#### WWAN



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.




Page: 183 of 339

#### SPLSR WLAN Main & BT

<del></del>	LON WE'N WAIT A DI												
		SAR Value (W/kg)	Coordinates (cm)			ΣSAR	Peak Location		Simultaneous				
Conditions	Position		х	у	Z	(W/kg)	Separation Distance	SPLSR	Transmission SAR Test				
WLAN Main ac(20M) CH136	Top side	1.185	-1.74	5.44	-0.44	1.18503	161.4	0.008	SPLSR<0.04,				
WLAN BT	Top side	0.00003	-1.40	-10.70	-0.45	1.16503	101.4	0.006	Not required				

#### WLAN

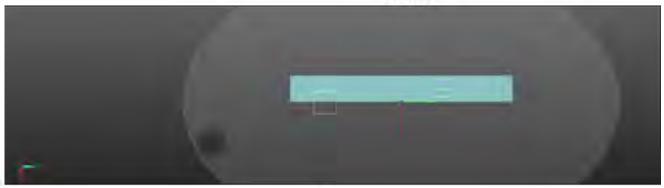

BT

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 184 of 339

#### WCDMA Band II + BT+ 5GHz WLAN Main

ſ	No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	Max. WLAN BT	SAR Sum	SPLSR			
			Back side	0	0.941	0.17	0.014	1.125	ΣSAR<1.6, Not required			
	-		Top side	0	0.664	1.185	0.00003	1.84903	Analyzed as below			
	45	WCDMA B2	Bottom side	0	0.043	0.031	0.07	0.144	ΣSAR<1.6, Not required			
			Left side	0	0.008	0.025	0.005	0.038	ΣSAR<1.6, Not required			
			Right side	0	0.02	0.039	0.002	0.061	ΣSAR<1.6, Not required			

#### SPLSR WCDMA B2 & BT

Conditions	Position	SAR Value	Coo	rdinates (	(cm)	ΣSAR	Peak Location Separation	SPLSR	Simultaneous Transmission
		(W/kg)	Х	У	Z	(W/kg)	Distance (mm)		SAR Test
WCDMA B2	Top side	0.664	-0.91	-4.20	-0.28	0.66403	65.2	0.008	SPLSR<0.04,
WLAN BT	Top side	0.00003	-1.40	-10.70	-0.45	0.00403	05.2	0.008	Not required





BT

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 185 of 339

#### SPLSR WLAN Main & BT

SI ESIX WEAR Main & DI												
	Position	SAR	Coo	rdinates (	(cm)	ΣSAR	Peak Location		Simultaneous			
Conditions		Value (W/kg)	х	у	Z	(W/kg)	Separation Distance	SPLSR	Transmission SAR Test			
WLAN Main ac(20M) CH136	Top side	1.185	-1.74	5.44	-0.44	1.18503	161.4	0.008	SPLSR<0.04,			
WLAN BT	Top Side	0.00003	-1.40	-10.70	-0.45	1.16503	101.4	0.008	Not required			

#### WLAN



BT

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 186 of 339

#### WCDMA Band IV + BT+ 5GHz WLAN Main

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	Max. WLAN BT	SAR Sum	SPLSR
		Back side	0	0.944	0.17	0.014	1.128	ΣSAR<1.6, Not required
(		Top side	0	0.871	1.185	0.00003	2.05603	Analyzed as below
46	WCDMA B4	Bottom side	0	0.032	0.031	0.07	0.133	ΣSAR<1.6, Not required
		Left side	0	0.027	0.025	0.005	0.057	ΣSAR<1.6, Not required
		Right side	0	0.014	0.039	0.002	0.055	ΣSAR<1.6, Not required

#### SPLSR WCDMA B4 & BT

Conditions	Position  Top side	SAR Value	Coo	rdinates (	(cm)	ΣSAR	Peak Location Separation	SPLSR	Simultaneous Transmission
		(W/kg)	Х	у	Z	(W/kg)	Distance (mm)		SAR Test
WCDMA B4		0.871	-1.05	-3.04	-0.25	0.87103	76.7	0.011	SPLSR<0.04,
WLAN BT	Top side	0.00003	-1.40	-10.70	-0.45	0.87103	70.7	0.011	Not required

#### WWAN



вт

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 187 of 339

#### SPLSR WLAN Main & BT

SI ESIX WEAR Main & DI												
	Position	SAR	Coo	rdinates (	(cm)	ΣSAR	Peak Location		Simultaneous			
Conditions		Value (W/kg)	х	у	Z	(W/kg)	Separation Distance	SPLSR	Transmission SAR Test			
WLAN Main ac(20M) CH136	Top side	1.185	-1.74	5.44	-0.44	1.18503	161.4	0.008	SPLSR<0.04,			
WLAN BT	Top Side	0.00003	-1.40	-10.70	-0.45	1.16503	101.4	0.008	Not required			

#### WLAN



BT

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 188 of 339

#### WCDMA Band V + BT+ 5GHz WLAN Main

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	Max. WLAN BT	SAR Sum	SPLSR
		Back side	0	0.377	0.17	0.014	0.561	ΣSAR<1.6, Not required
		Top side	0	0.363	1.185	0.00003	1.54803	ΣSAR<1.6, Not required
47	WCDMA B5	Bottom side	0	0.037	0.031	0.07	0.138	ΣSAR<1.6, Not required
		Left side	0	0.01	0.025	0.005	0.04	ΣSAR<1.6, Not required
		Right side	0	0.006	0.039	0.002	0.047	ΣSAR<1.6, Not required

#### CDMA / EVDO BCO + BT+ 5GHz WLAN Main

N	0.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	Max. WLAN BT	SAR Sum	SPLSR
	40	P	Back side	0	0.369	0.17	0.014	0.553	ΣSAR<1.6, Not required
			Top side	0	0.338	1.185	0.00003	1.52303	ΣSAR<1.6, Not required
4	8	EVDO BC0	Bottom side	0	0.035	0.031	0.07	0.136	ΣSAR<1.6, Not required
			Left side	0	0.003	0.025	0.005	0.033	ΣSAR<1.6, Not required
			Right side	0	0.005	0.039	0.002	0.046	ΣSAR<1.6, Not required

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 189 of 339

#### CDMA / EVDO BC1 + BT+ 5GHz WLAN Main

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	Max. WLAN BT	SAR Sum	SPLSR
		Back side	0	0.691	0.17	0.014	0.875	ΣSAR<1.6, Not required
0		Top side	0	0.581	1.185	0.00003	1.76603	Analyzed as below
49	EVDO BC1	Bottom side	0	0.049	0.031	0.07	0.15	ΣSAR<1.6, Not required
		Left side	0	0.021	0.025	0.005	0.051	ΣSAR<1.6, Not required
		Right side	0	0.029	0.039	0.002	0.07	ΣSAR<1.6, Not required

## SPLSR CDMA BC1 & BT

Conditions	ditions I Position I Value I		ΣSAR	Peak Location Separation	SPLSR	Simultaneous Transmission			
		(W/kg)	Х	У	Z	(W/kg)	Distance (mm)		SAR Test
EVDO BC1	Top side	0.581 -0.76 -3.95 -0.36 op side 0.58103	67.8	0.007	SPLSR<0.04,				
WLAN BT	Top side	0.00003	-1.40	-10.70	-0.45	0.56105	58103 67.8		Not required





BT

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 190 of 339

#### SPLSR WLAN Main & BT

<del></del>	TEST VEH Wall a B												
Conditions	Position	SAR Value (W/kg)	Coordinates (cm)			ΣSAR	Peak Location	CDLCD	Simultaneous				
			х	у	Z	(W/kg)	Separation Distance	SPLSR	Transmission SAR Test				
WLAN Main ac(20M) CH136	Top side	1.185	-1.74	5.44	-0.44	1 10502	161.4	0.008	SPLSR<0.04,				
WLAN BT	Top side	0.00003	-1.40	-10.70	-0.45 1.1850	1.16503	101.4	0.006	Not required				

#### WLAN



BT

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 191 of 339

#### CDMA / EVDO BC10 + BT+ 5GHz WLAN Main

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	Max. WLAN BT	SAR Sum	SPLSR
		Back side	0	0.364	0.17	0.014	0.548	ΣSAR<1.6, Not required
0		Top side	0	0.355	1.185	0.00003	1.54003	ΣSAR<1.6, Not required
50	EVDO BC10	Bottom side	0	0.045	0.031	0.07	0.146	ΣSAR<1.6, Not required
		Left side	0	0.004	0.025	0.005	0.034	ΣSAR<1.6, Not required
		Right side	0	0.002	0.039	0.002	0.043	ΣSAR<1.6, Not required

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 192 of 339

#### LTE FDD Band II + BT+ 5GHz WLAN Main

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	Max. WLAN BT	SAR Sum	SPLSR
		Back side	0	1.182	0.17	0.014	1.366	ΣSAR<1.6, Not required
		Top side	0	0.914	1.185	0.00003	2.09903	Analyzed as below
51	LTE B2	Bottom side	0	0.045	0.031	0.07	0.146	ΣSAR<1.6, Not required
		Left side	0	0.011	0.025	0.005	0.041	ΣSAR<1.6, Not required
		Right side	0	0.024	0.039	0.002	0.065	ΣSAR<1.6, Not required

#### SPLSR LTE B2 & BT

Conditions	Position	SAR Value	Coo	rdinates (	(cm)	ΣSAR	Peak Location Separation	SPLSR	Simultaneous Transmission
		(W/kg)	Х	у	Z	(W/kg)	Distance (mm)		SAR Test
LTE B2	Top side	0.914	-0.75	-3.84	-0.32	0.91403	68.9	0.013	SPLSR<0.04,
WLAN BT	Top side	0.00003	-1.40	-10.70	-0.45	0.71403	00.9	0.013	Not required

#### WWAN



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.




Page: 193 of 339

#### SPLSR WLAN Main & BT

DI ESIX WEARI Main & DI												
Conditions	Position	SAR	Coordinates (cm)			ΣSAR	Peak Location	CDI CD	Simultaneous			
		Value (W/kg)	х	у	Z	(W/kg)	Separation Distance	SPLSR	Transmission SAR Test			
WLAN Main ac(20M) CH136	Top side	1.185	-1.74	5.44	-0.44	1.18503		0.008	SPLSR<0.04,			
WLAN BT	Top side	0.00003	-1.40	-10.70	-0.45	1.16503	18503 161.4		Not required			

#### WLAN

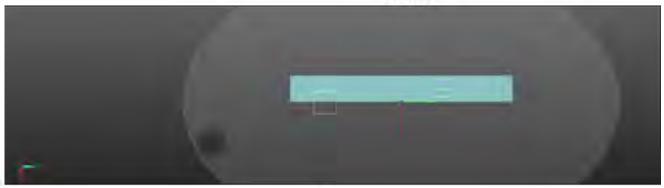

BT

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 194 of 339

#### LTE FDD Band IV + BT+ 5GHz WLAN Main

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	Max. WLAN BT	SAR Sum	SPLSR
		Back side	0	0.797	0.17	0.014	0.981	ΣSAR<1.6, Not required
6		Top side	0	0.983	1.185	0.00003	2.16803	Analyzed as below
52	LTE B4	Bottom side	0	0.031	0.031	0.07	0.132	ΣSAR<1.6, Not required
		Left side	0	0.014	0.025	0.005	0.044	ΣSAR<1.6, Not required
		Right side	0	0.012	0.039	0.002	0.053	ΣSAR<1.6, Not required

#### SPLSR LTE B4 & BT

Conditions	Position	SAR Value	Coo	rdinates (	(cm)	ΣSAR	Peak Location Separation	SPLSR	Simultaneous Transmission
		(W/kg)	Х	у	Z	(W/kg)	Distance (mm)		SAR Test
LTE B4	Top side	0.983	-1.06	-3.34	-0.35	0.98303	73.7	0.013	SPLSR<0.04,
WLAN BT	Top side	0.00003	-1.40	-10.70	-0.45	0.70303	73.1	0.013	Not required

#### WWAN



вт

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

除非另有説明,此報告結果僅對測試乙樣品負責,同時此樣品僅保留90大。本報告未經本公司書面計可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 195 of 339

#### SPLSR WLAN Main & BT

SI ESIX WEAR Main & DI												
Conditions	Position	SAR	Coordinates (cm)			ΣSAR	Peak Location	CDI CD	Simultaneous			
		Value (W/kg)	х	у	Z	(W/kg)	Separation Distance	SPLSR	Transmission SAR Test			
WLAN Main ac(20M) CH136	Ton side	1.185	-1.74	5.44	-0.44	1.18503		0.008	SPLSR<0.04,			
WLAN BT	Top side	0.00003	-1.40	-10.70	-0.45	1.16303	8503 161.4		Not required			

#### WLAN



BT

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 196 of 339

#### LTE FDD Band V + BT+ 5GHz WLAN Main

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	Max. WLAN BT	SAR Sum	SPLSR
		Back side	0	0.49	0.17	0.014	0.674	ΣSAR<1.6, Not required
6		Top side	0	0.234	1.185	0.00003	1.41903	ΣSAR<1.6, Not required
53	LTE B5	Bottom side	0	0.041	0.031	0.07	0.142	ΣSAR<1.6, Not required
		Left side	0	0.02	0.025	0.005	0.05	ΣSAR<1.6, Not required
		Right side	0	0.012	0.039	0.002	0.053	ΣSAR<1.6, Not required

#### LTE FDD Band XIII + BT+ 5GHz WLAN Main

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	Max. WLAN BT	SAR Sum	SPLSR
1		Back side	0	0.499	0.17	0.014	0.683	ΣSAR<1.6, Not required
		Top side	0	0.303	1.185	0.00003	1.48803	ΣSAR<1.6, Not required
54	LTE B13	Bottom side	0	0.016	0.031	0.07	0.117	ΣSAR<1.6, Not required
		Left side	0	0.027	0.025	0.005	0.057	ΣSAR<1.6, Not required
		Right side	0	0.006	0.039	0.002	0.047	ΣSAR<1.6, Not required

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 197 of 339

#### LTE FDD Band XVII + BT+ 5GHz WLAN Main

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	Max. WLAN BT	SAR Sum	SPLSR		
		Back side	0	0.438	0.17	0.014	0.622	ΣSAR<1.6, Not required		
6		Top side	0	0.359	1.185	0.00003	1.54403	ΣSAR<1.6, Not required		
55	LTE B17	Bottom side	0	0.048	0.031	0.07	0.149	ΣSAR<1.6, Not required		
		Left side	0	0.049	0.025	0.005	0.079	ΣSAR<1.6, Not required		
		Right side	0	0.015	0.039	0.002	0.056	ΣSAR<1.6, Not required		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 198 of 339

#### LTE FDD Band XXV + BT+ 5GHz WLAN Main

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	Max. WLAN BT	SAR Sum	SPLSR
		Back side	0	0.946	0.17	0.014	1.13	ΣSAR<1.6, Not required
-		Top side	0	0.73	1.185	0.00003	1.91503	Analyzed as below
56	LTE B25	Bottom side	0	0.039	0.031	0.07	0.14	ΣSAR<1.6, Not required
		Left side	0	0.001	0.025	0.005	0.031	ΣSAR<1.6, Not required
		Right side	0	0.005	0.039	0.002	0.046	ΣSAR<1.6, Not required

#### SPLSR LTE B25 & BT

Conditions	Position	SAR Value (W/kg)	Coordinates (cm)			ΣSAR (W/kg)	Peak Location Separation	SPLSR	Simultaneous Transmission
			Х	у	Z	(W/Kg)	Distance (mm)		SAR Test
LTE B25	Top side	0.73	-0.75	-3.84	-0.33	0.73003	68.9	0.000	SPLSR<0.04,
WLAN BT		0.00003	-1.40	-10.70	-0.45	0.73003	00.9	0.009	Not required

#### WWAN



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 199 of 339

#### SPLSR WLAN Main & BT

- 2	of Eart WE'll Main & Di									
Cor		Position	SAR Value (W/kg)	Coordinates (cm)			ΣSAR	Peak Location		Simultaneous
	Conditions			х	у	Z	(W/kg)	Separation Distance	SPLSR	Transmission SAR Test
	WLAN Main ac(20M) CH136	Top side	1.185	-1.74	5.44	-0.44	1.18503	161.4	0.008	SPLSR<0.04,
	WLAN BT	Top side	0.00003	-1.40	-10.70	-0.45	1.16505	101.4	0.008	Not required

#### WLAN



BT

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 200 of 339

# 4. Instruments List

4. IIISti uille	iits List				
Manufacturer	Device	Туре	Serial number	Date of last calibration	Date of next calibration
Schmid & Partner	Dosimetric E-Field	EX3DV4	3923	Aug.28,2014	Aug.27,2015
Engineering AG	Probe	EA3DV4	3770	Apr.28,2015	Apr.27,2016
		D750V2	1015	Aug.28,2014	Aug.27,2015
		D835V2	4d063	Aug.28,2014	Aug.27,2015
Schmid & Partner	System Validation Dipole	D1750V2	1008	Aug.28,2014	Aug.27,2015
Engineering AG		D1900V2	5d027	Apr.29,2015	Apr.28,2016
		D2450V2	727	Apr.22,2015	Apr.21,2016
		D5GHzV2	1023	Jan.29,2015	Jan.28,2016
Schmid & Partner	Data acquisition	DAE4	856	Aug.27,2015	Aug.26,2016
Engineering AG	Electronics	DAE4	1374	May.06,2015	May.05,2016
Schmid & Partner Engineering AG	Software	DASY 52 V52.8.8	N/A	Calibration not required	Calibration not required
Schmid & Partner Engineering AG	Phantom	SAM	N/A	Calibration not required	Calibration not required
HP	Network Analyzer	8753D	3410A05547	May.21,2015	May.20,2016
Agilent	Dielectric Probe Kit	85070E	MY44300677	Calibration not required	Calibration not required
Agilont	Dual-directional	777D	50114	Aug.07,2014	Aug.06,2015
Agilent	coupler	778D	50313	Aug.07,2014	Aug.06,2015
Agilent	RF Signal Generator	N5181A	MY50144143	Jun.25.2014	Jun.24.2015

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 201 of 339

Manufacturer	Device	Туре	Serial number	Date of last calibration	Date of next calibration
Agilent	Power Meter	E4417A	MY51410006	Oct.25,2013	Oct.24,2015
Agilent	Power Sensor	E9301H	MY51470001	Dec.11,2014	Dec.10,2015
TECPEL	Digital thermometer	DTM-303A	TP130078	Mar.30,2015	Mar.29,2016
R&S	Radio Communication Test	CMU200	122498	Aug.14,2014	Aug.13,2015
Anritsu	Radio Communication Test	MT8820C	6201061014	Aug.06,2014	Aug.05,2015

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 202 of 339

## 5. Measurements

Date: 2015/6/12

# GPRS 850\_Body\_Back side\_CH 190\_0mm

Communication System: GPRS(1Dn2Up); Frequency: 836.6 MHz

Medium parameters used: f = 837 MHz;  $\sigma = 0.956 \text{ S/m}$ ;  $\varepsilon_r = 54.333$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

## **DASY5** Configuration:

Probe: EX3DV4 - SN3923; ConvF(10.32, 10.32, 10.32); Calibrated: 2014/8/28;

Sensor-Surface: 2mm (Mechanical Surface Detection)

• Electronics: DAE4 Sn1374; Calibrated: 2015/5/6

Phantom: Body

DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

# Configuration/BODY/Area Scan (101x121x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.625 W/kg

# Configuration/BODY/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.571 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.738 W/kg

SAR(1 g) = 0.493 W/kg; SAR(10 g) = 0.324 W/kg

Maximum value of SAR (measured) = 0.617 W/kg

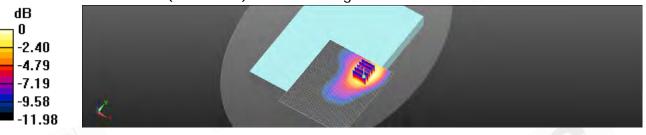

0 dB = 0.617 W/kq = -2.10 dBW/kq

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 203 of 339

Date: 2015/6/11

# GPRS 1900\_Body\_Top side\_CH 661\_12mm

Communication System: GPRS(1Dn2Up); Frequency: 1880 MHz

Medium parameters used: f = 1880 MHz;  $\sigma = 1.508 \text{ S/m}$ ;  $\epsilon_r = 52.356$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

## **DASY5** Configuration:

Probe: EX3DV4 - SN3923; ConvF(8.03, 8.03, 8.03); Calibrated: 2014/8/28;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1374; Calibrated: 2015/5/6

Phantom: Body

• DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

# Configuration/BODY/Area Scan (61x121x1): Interpolated grid: dx=15 mm,

dy=15 mm

Maximum value of SAR (interpolated) = 1.19 W/kg

## Configuration/BODY/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.79 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.40 W/kg

SAR(1 q) = 0.888 W/kq; SAR(10 q) = 0.532 W/kq

Maximum value of SAR (measured) = 1.16 W/kg

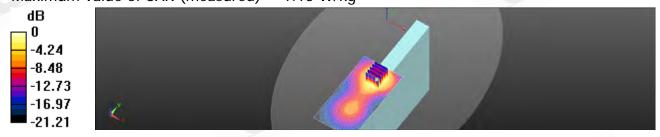

0 dB = 1.19 W/kg = 0.75 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 204 of 339

Date: 2015/6/11

# WCDMA Band II\_Body\_Top side\_CH 9538\_12mm\_repeated with Transceiver

Communication System: WCDMA; Frequency: 1907.6 MHz

Medium parameters used: f = 1908 MHz;  $\sigma = 1.537$  S/m;  $\varepsilon_r = 52.188$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

## **DASY5** Configuration:

Probe: EX3DV4 - SN3923; ConvF(8.03, 8.03, 8.03); Calibrated: 2014/8/28;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1374; Calibrated: 2015/5/6

Phantom: Body

DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

# Configuration/BODY/Area Scan (61x121x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 1.34 W/kg

# Configuration/BODY/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.73 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.59 W/kg

SAR(1 g) = 1.00 W/kg; SAR(10 g) = 0.600 W/kg

Maximum value of SAR (measured) = 1.32 W/kg

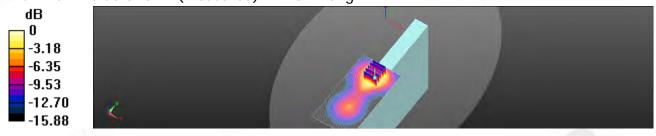

0 dB = 1.32 W/kq = 1.19 dBW/kq

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

台灣檢驗科技股份有限公司



Page: 205 of 339

Date: 2015/6/17

# WCDMA Band IV\_Body\_Top side\_CH 1312\_12mm

Communication System: WCDMA; Frequency: 1712.4 MHz

Medium parameters used: f = 1712.4 MHz;  $\sigma = 1.431 \text{ S/m}$ ;  $\varepsilon_r = 52.41$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

## **DASY5** Configuration:

Probe: EX3DV4 - SN3923; ConvF(8.3, 8.3, 8.3); Calibrated: 2014/8/28;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1374; Calibrated: 2015/5/6

Phantom: Body

DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

# Configuration/BODY/Area Scan (61x121x1): Interpolated grid: dx=15 mm,

dy=15 mm

Maximum value of SAR (interpolated) = 1.63 W/kg

## Configuration/BODY/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.58 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 1.90 W/kg

SAR(1 g) = 1.27 W/kg; SAR(10 g) = 0.780 W/kg

Maximum value of SAR (measured) = 1.61 W/kg

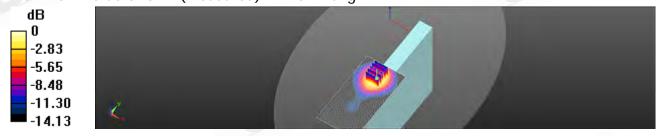

0 dB = 1.61 W/kg = 2.05 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 206 of 339

Date: 2015/6/12

# WCDMA Band V\_Body\_Back side\_CH 4183\_0mm

Communication System: WCDMA; Frequency: 836.6 MHz

Medium parameters used: f = 837 MHz;  $\sigma = 0.956 \text{ S/m}$ ;  $\varepsilon_r = 54.333$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

## **DASY5** Configuration:

Probe: EX3DV4 - SN3923; ConvF(10.32, 10.32, 10.32); Calibrated: 2014/8/28;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1374; Calibrated: 2015/5/6

Phantom: Body

• DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

# Configuration/BODY/Area Scan (101x121x1): Interpolated grid: dx=15 mm,

dy=15 mm

Maximum value of SAR (interpolated) = 0.538 W/kg

## Configuration/BODY/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.494 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.601 W/kg

SAR(1 g) = 0.374 W/kg; SAR(10 g) = 0.223 W/kg

Maximum value of SAR (measured) = 0.491 W/kg

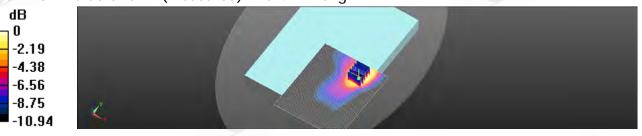

0 dB = 0.491 W/kg = -3.09 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

台灣檢驗科技股份有限公司



Page: 207 of 339

Date: 2015/6/18

# LTE Band 2 (20MHz)\_Body\_Top side\_CH 19100\_QPSK\_1-99\_12mm

Communication System: LTE; Frequency: 1900 MHz

Medium parameters used: f = 1900 MHz;  $\sigma = 1.536 \text{ S/m}$ ;  $\epsilon_r = 52.126$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

## **DASY5** Configuration:

Probe: EX3DV4 - SN3923; ConvF(8.03, 8.03, 8.03); Calibrated: 2014/8/28;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1374; Calibrated: 2015/5/6

Phantom: Body

DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

# Configuration/BODY/Area Scan (61x121x1): Interpolated grid: dx=15 mm,

dy=15 mm

Maximum value of SAR (interpolated) = 1.34 W/kg

# Configuration/BODY/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.74 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.56 W/kg

SAR(1 g) = 0.989 W/kg; SAR(10 g) = 0.593 W/kg

Maximum value of SAR (measured) = 1.29 W/kg

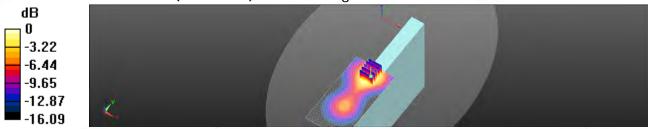

0 dB = 1.29 W/kg = 1.12 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 208 of 339

Date: 2015/6/17

# LTE Band 4 (20Mhz)\_Body\_Top side\_CH 20050\_QPSK\_1-50\_12mm

Communication System: LTE; Frequency: 1720 MHz

Medium parameters used: f = 1720 MHz;  $\sigma = 1.44 \text{ S/m}$ ;  $\varepsilon_r = 52.394$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

## **DASY5** Configuration:

Probe: EX3DV4 - SN3831; ConvF(7.5, 7.5, 7.5); Calibrated: 2015/1/29;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1305; Calibrated: 2014/12/11

Phantom: Body

• DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

# Configuration/BODY/Area Scan (61x101x1): Interpolated grid: dx=15 mm,

dy=15 mm

Maximum value of SAR (interpolated) = 1.72 W/kg

## Configuration/BODY/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.79 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 1.96 W/kg

SAR(1 g) = 1.28 W/kg; SAR(10 g) = 0.780 W/kg

Maximum value of SAR (measured) = 1.65 W/kg

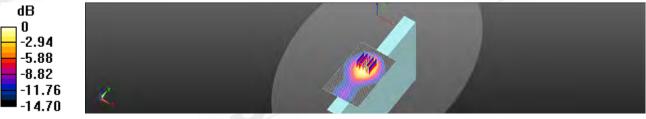

0 dB = 1.65 W/kq = 2.17 dBW/kq

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 209 of 339

Date: 2015/6/15

# LTE Band 5 (10MHz)\_Body\_Back side\_CH 20600\_QPSK\_1-49\_0mm

Communication System: LTE; Frequency: 844 MHz

Medium parameters used: f = 844 MHz;  $\sigma = 0.973$  S/m;  $\varepsilon_r = 53.996$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

## **DASY5** Configuration:

Probe: EX3DV4 - SN3923; ConvF(10.32, 10.32, 10.32); Calibrated: 2014/8/28;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1374; Calibrated: 2015/5/6

Phantom: Body

• DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

# Configuration/BODY/Area Scan (71x101x1): Interpolated grid: dx=15 mm,

dy=15 mm

Maximum value of SAR (interpolated) = 0.429 W/kg

## Configuration/BODY/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.492 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.528 W/kg

SAR(1 g) = 0.347 W/kg; SAR(10 g) = 0.226 W/kg

Maximum value of SAR (measured) = 0.439 W/kg

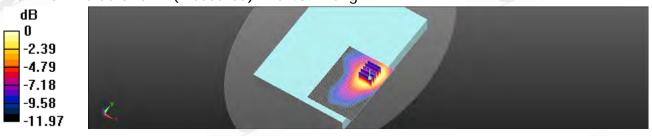

0 dB = 0.439 W/kg = -3.58 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

台灣檢驗科技股份有限公司



Page: 210 of 339

Date: 2015/6/16

# LTE Band 13 (10MHz)\_Body\_Back side\_CH 23230\_QPSK\_1-25\_0mm

Communication System: LTE; Frequency: 782 MHz

Medium parameters used: f = 782 MHz;  $\sigma = 0.993 \text{ S/m}$ ;  $\varepsilon_r = 53.973$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

## **DASY5** Configuration:

Probe: EX3DV4 - SN3923; ConvF(10.29, 10.29, 10.29); Calibrated: 2014/8/28;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1374; Calibrated: 2015/5/6

Phantom: Body

• DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

# Configuration/BODY/Area Scan (71x101x1): Interpolated grid: dx=15 mm,

dy=15 mm

Maximum value of SAR (interpolated) = 0.420 W/kg

## Configuration/BODY/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.454 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.511 W/kg

SAR(1 g) = 0.340 W/kg; SAR(10 g) = 0.224 W/kg

Maximum value of SAR (measured) = 0.432 W/kg

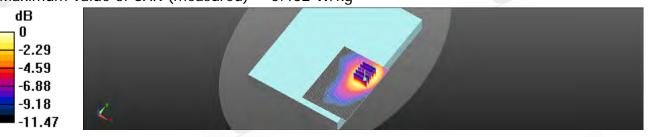

0 dB = 0.432 W/kg = -3.64 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 211 of 339

Date: 2015/6/16

# LTE Band 17 (10MHz)\_Body\_Back side\_CH 23780\_QPSK\_1-25\_0mm

Communication System: LTE; Frequency: 709 MHz

Medium parameters used: f = 709 MHz;  $\sigma = 0.922$  S/m;  $\varepsilon_r = 54.312$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

## **DASY5** Configuration:

Probe: EX3DV4 - SN3923; ConvF(10.29, 10.29, 10.29); Calibrated: 2014/8/28;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1374; Calibrated: 2015/5/6

Phantom: Body

• DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

# Configuration/BODY/Area Scan (71x101x1): Interpolated grid: dx=15 mm,

dy=15 mm

Maximum value of SAR (interpolated) = 0.387 W/kg

## Configuration/BODY/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.316 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.462 W/kg

SAR(1 g) = 0.312 W/kg; SAR(10 g) = 0.211 W/kg

Maximum value of SAR (measured) = 0.389 W/kg

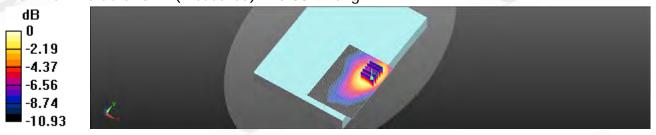

0 dB = 0.389 W/kq = -4.10 dBW/kq

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 212 of 339

Date: 2015/6/18

# LTE Band 25 (20MHz)\_Body\_Top side\_CH 26140\_QPSK\_1-99\_12mm

Communication System: LTE; Frequency: 1860 MHz

Medium parameters used: f = 1860 MHz;  $\sigma = 1.493 \text{ S/m}$ ;  $\varepsilon_r = 52.89$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

## **DASY5** Configuration:

Probe: EX3DV4 - SN3923; ConvF(8.03, 8.03, 8.03); Calibrated: 2014/8/28;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1374; Calibrated: 2015/5/6

Phantom: Body

• DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

# Configuration/BODY/Area Scan (61x121x1): Interpolated grid: dx=15 mm,

dy=15 mm

Maximum value of SAR (interpolated) = 1.39 W/kg

## Configuration/BODY/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.64 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.65 W/kg

SAR(1 g) = 1.04 W/kg; SAR(10 g) = 0.616 W/kg

Maximum value of SAR (measured) = 1.36 W/kg

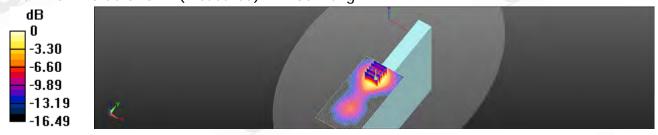

0 dB = 1.36 W/kg = 1.32 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

台灣檢驗科技股份有限公司



Page: 213 of 339

Date: 2015/6/12

## Cellular BC0\_Body\_Back side\_CH 384\_0mm\_1xEVDO Rev. 0

Communication System: 1xEVDO; Frequency: 836.52 MHz

Medium parameters used: f = 836.52 MHz;  $\sigma = 0.956 \text{ S/m}$ ;  $\epsilon_r = 54.333$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

## **DASY5** Configuration:

Probe: EX3DV4 - SN3923; ConvF(10.32, 10.32, 10.32); Calibrated: 2014/8/28;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1374; Calibrated: 2015/5/6

Phantom: Body

• DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

# Configuration/BODY/Area Scan (81x101x1): Interpolated grid: dx=15 mm,

dy=15 mm

Maximum value of SAR (interpolated) = 0.390 W/kg

## Configuration/BODY/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.719 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.462 W/kg

SAR(1 g) = 0.307 W/kg; SAR(10 g) = 0.202 W/kg

Maximum value of SAR (measured) = 0.387 W/kg

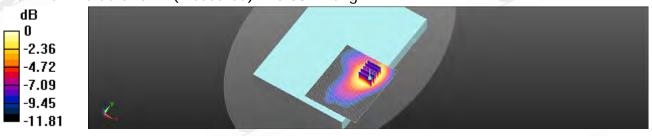

0 dB = 0.387 W/kg = -4.12 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

台灣檢驗科技股份有限公司



Page: 214 of 339

Date: 2015/6/11

# PCS BC1\_Body\_Top side\_CH 600\_12mm\_1xEVDO Rev. 0

Communication System: 1xEVDO; Frequency: 1880 MHz

Medium parameters used: f = 1880 MHz;  $\sigma = 1.508 \text{ S/m}$ ;  $\epsilon_r = 52.356$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

## **DASY5** Configuration:

Probe: EX3DV4 - SN3923; ConvF(8.03, 8.03, 8.03); Calibrated: 2014/8/28;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1374; Calibrated: 2015/5/6

Phantom: Body

• DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

# Configuration/BODY/Area Scan (61x121x1): Interpolated grid: dx=15 mm,

dy=15 mm

Maximum value of SAR (interpolated) = 1.40 W/kg

## Configuration/BODY/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.07 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.63 W/kg

SAR(1 q) = 1.02 W/kq; SAR(10 q) = 0.603 W/kq

Maximum value of SAR (measured) = 1.34 W/kg

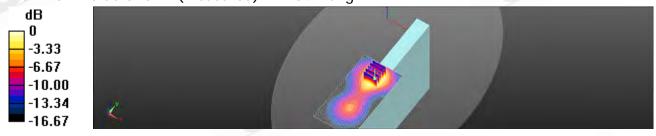

0 dB = 1.34 W/kg = 1.27 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 215 of 339

Date: 2015/6/15

# Cellular BC10\_Body\_Back side\_CH 684\_0mm\_1xEVDO Rev. 0

Communication System: 1xEVDO; Frequency: 823.1 MHz

Medium parameters used: f = 823.1 MHz;  $\sigma = 0.95 \text{ S/m}$ ;  $\epsilon_r = 54.033$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

## **DASY5** Configuration:

Probe: EX3DV4 - SN3923; ConvF(10.32, 10.32, 10.32); Calibrated: 2014/8/28;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1374; Calibrated: 2015/5/6

Phantom: Body

• DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

# Configuration/BODY/Area Scan (81x101x1): Interpolated grid: dx=15 mm,

dy=15 mm

Maximum value of SAR (interpolated) = 0.371 W/kg

## Configuration/BODY/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.390 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.431 W/kg

SAR(1 g) = 0.289 W/kg; SAR(10 g) = 0.191 W/kg

Maximum value of SAR (measured) = 0.363 W/kg

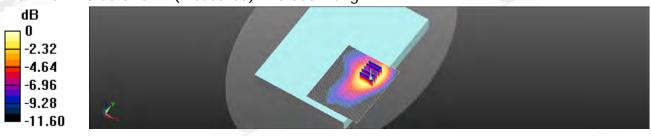

0 dB = 0.363 W/kg = -4.40 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 216 of 339

Date: 2015/6/1

# WLAN802.11 b\_Body\_Top side\_CH 11\_Main

Communication System: WLAN 2.45G; Frequency: 2462 MHz

Medium parameters used: f = 2462 MHz;  $\sigma = 2.053$  S/m;  $\varepsilon_r = 51.185$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

## **DASY5** Configuration:

Probe: EX3DV4 - SN3770; ConvF(7.21, 7.21, 7.21); Calibrated: 2015/4/28;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn856; Calibrated: 2014/8/27

Phantom: Body

DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

# Configuration/Body/Area Scan (71x121x1): Interpolated grid: dx=12 mm,

dy=12 mm

Maximum value of SAR (interpolated) = 0.293 W/kg

## Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.485 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.401 W/kg

SAR(1 q) = 0.200 W/kq; SAR(10 q) = 0.095 W/kq

Maximum value of SAR (measured) = 0.298 W/kg

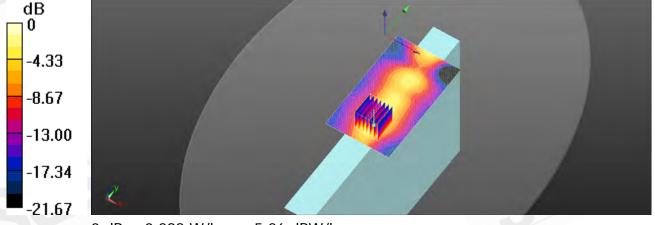

0 dB = 0.298 W/kg = -5.26 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 217 of 339

Date: 2015/6/2

## WLAN802.11 ac(20M) 5.2G\_Body\_Top side\_CH 44\_Main

Communication System: WLAN 5G; Frequency: 5220 MHz

Medium parameters used: f = 5220 MHz;  $\sigma = 5.496 \text{ S/m}$ ;  $\varepsilon_r = 47.86$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

### **DASY5** Configuration:

Probe: EX3DV4 - SN3770; ConvF(4.7, 4.7, 4.7); Calibrated: 2015/4/28;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn856; Calibrated: 2014/8/27

Phantom: Body

DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

## Configuration/Body/Area Scan (61x101x1): Interpolated grid: dx=10 mm,

dy=10 mm

Maximum value of SAR (interpolated) = 1.14 W/kg

### Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid:


dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.184 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 2.30 W/kg

SAR(1 g) = 0.582 W/kg; SAR(10 g) = 0.212 W/kg

Maximum value of SAR (measured) = 1.08 W/kg

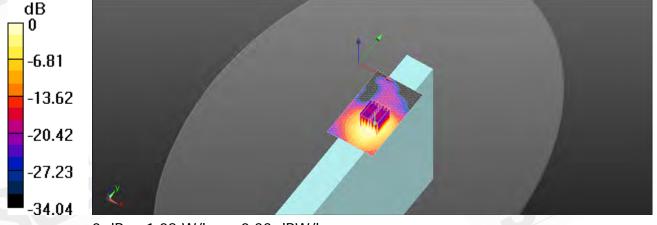

0 dB = 1.08 W/kg = 0.33 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 218 of 339

Date: 2015/6/3

## WLAN802.11 ac(20M) 5.3G\_Body\_Top side\_CH 56\_Main

Communication System: WLAN 5G; Frequency: 5280 MHz

Medium parameters used: f = 5280 MHz;  $\sigma = 5.583 \text{ S/m}$ ;  $\epsilon_r = 47.659$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

#### **DASY5** Configuration:

Probe: EX3DV4 - SN3770; ConvF(4.7, 4.7, 4.7); Calibrated: 2015/4/28;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn856; Calibrated: 2014/8/27

Phantom: Body

DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (61x101x1): Interpolated grid: dx=10 mm,

dy=10 mm

Maximum value of SAR (interpolated) = 1.55 W/kg

### Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid:


dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.878 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 3.07 W/kg

SAR(1 g) = 0.776 W/kg; SAR(10 g) = 0.282 W/kg

Maximum value of SAR (measured) = 1.45 W/kg

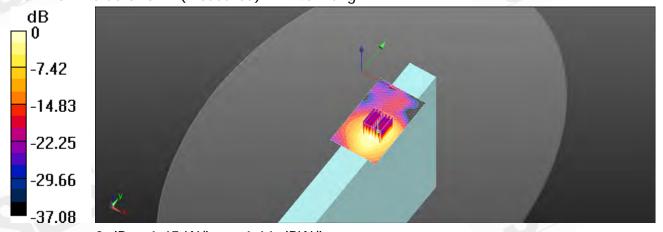

0 dB = 1.45 W/kg = 1.61 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 219 of 339

Date: 2015/6/4

## WLAN802.11 a 5.6G\_Body\_Top side\_CH 104\_Main

Communication System: WLAN 5G; Frequency: 5520 MHz

Medium parameters used: f = 5520 MHz;  $\sigma = 5.91 \text{ S/m}$ ;  $\varepsilon_r = 46.795$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

### **DASY5** Configuration:

Probe: EX3DV4 - SN3770; ConvF(4.03, 4.03, 4.03); Calibrated: 2015/4/28;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn856; Calibrated: 2014/8/27

Phantom: Body

• DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

## Configuration/Body/Area Scan (61x101x1): Interpolated grid: dx=10 mm,

dy=10 mm

Maximum value of SAR (interpolated) = 1.94 W/kg

### Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid:


dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.984 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 4.07 W/kg

SAR(1 g) = 1.02 W/kg; SAR(10 g) = 0.374 W/kg

Maximum value of SAR (measured) = 1.90 W/kg

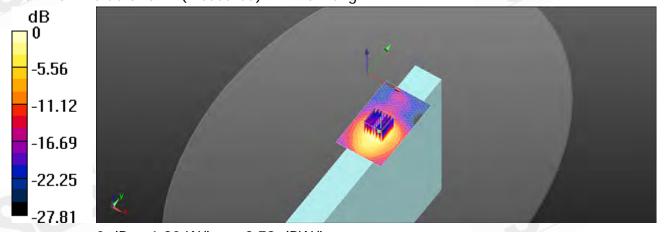

0 dB = 1.90 W/kg = 2.79 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 220 of 339

Date: 2015/6/4

## WLAN802.11 ac(20M) 5.6G\_Body\_Top side\_CH 104\_Main

Communication System: WLAN 5G; Frequency: 5520 MHz

Medium parameters used: f = 5520 MHz;  $\sigma = 5.91 \text{ S/m}$ ;  $\varepsilon_r = 46.795$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

### **DASY5** Configuration:

Probe: EX3DV4 - SN3770; ConvF(4.03, 4.03, 4.03); Calibrated: 2015/4/28;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn856; Calibrated: 2014/8/27

Phantom: Body

• DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

## Configuration/Body/Area Scan (61x101x1): Interpolated grid: dx=10 mm,

dy=10 mm

Maximum value of SAR (interpolated) = 1.84 W/kg

### Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid:


dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.870 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 3.92 W/kg

SAR(1 g) = 0.977 W/kg; SAR(10 g) = 0.351 W/kg

Maximum value of SAR (measured) = 1.82 W/kg

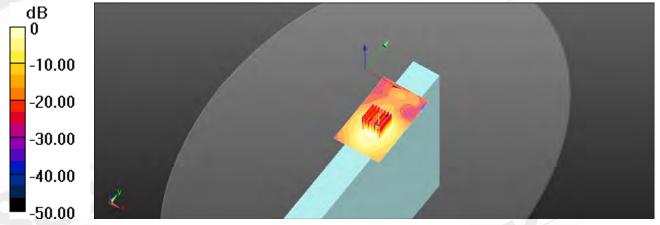

0 dB = 1.82 W/kq = 2.60 dBW/kq

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 221 of 339

Date: 2015/6/4

## WLAN802.11 ac(80M) 5.6G\_Body\_Top side\_CH 138\_Main

Communication System: WLAN 5G; Frequency: 5690 MHz

Medium parameters used: f = 5690 MHz;  $\sigma = 6.029 \text{ S/m}$ ;  $\varepsilon_r = 46.33$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

### **DASY5** Configuration:

Probe: EX3DV4 - SN3770; ConvF(4.03, 4.03, 4.03); Calibrated: 2015/4/28;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn856; Calibrated: 2014/8/27

Phantom: Body

• DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

## Configuration/Body/Area Scan (61x101x1): Interpolated grid: dx=10 mm,

dy=10 mm

Maximum value of SAR (interpolated) = 2.22 W/kg

### Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid:


dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.463 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 4.23 W/kg

SAR(1 g) = 1.06 W/kg; SAR(10 g) = 0.380 W/kg

Maximum value of SAR (measured) = 1.97 W/kg

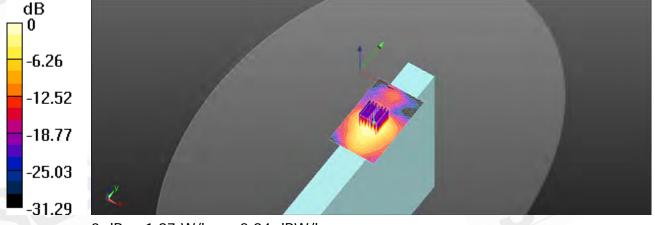

0 dB = 1.97 W/kg = 2.94 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 222 of 339

Date: 2015/6/1

## WLAN802.11 ac(80M) 5.8G\_Body\_Top side\_CH 155\_Main

Communication System: WLAN 5G; Frequency: 5775 MHz

Medium parameters used: f = 5775 MHz;  $\sigma = 6.2$  S/m;  $\varepsilon_r = 46.085$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

#### **DASY5** Configuration:

Probe: EX3DV4 - SN3770; ConvF(4.33, 4.33, 4.33); Calibrated: 2015/4/28;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn856; Calibrated: 2014/8/27

Phantom: Body

DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

## Configuration/Body/Area Scan (61x101x1): Interpolated grid: dx=10 mm,

dy=10 mm

Maximum value of SAR (interpolated) = 1.99 W/kg

### Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid:


dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.634 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 3.80 W/kg

SAR(1 g) = 0.937 W/kg; SAR(10 g) = 0.338 W/kg

Maximum value of SAR (measured) = 1.77 W/kg

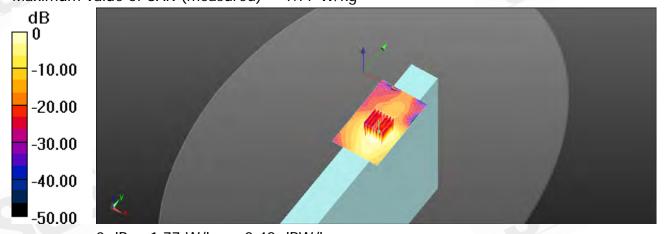

0 dB = 1.77 W/kg = 2.48 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 223 of 339

Date: 2015/6/1

## WLAN802.11 b\_Body\_Bottom\_CH 11\_Aux

Communication System: WLAN 2.45G; Frequency: 2462 MHz

Medium parameters used: f = 2462 MHz;  $\sigma = 2.053$  S/m;  $\epsilon_r = 51.185$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

#### **DASY5** Configuration:

Probe: EX3DV4 - SN3770; ConvF(7.21, 7.21, 7.21); Calibrated: 2015/4/28;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn856; Calibrated: 2014/8/27

Phantom: Body

• DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

## Configuration/Body/Area Scan (71x121x1): Interpolated grid: dx=12 mm,

dy=12 mm

Maximum value of SAR (interpolated) = 0.796 W/kg

### Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid:

dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.899 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 1.06 W/kg

SAR(1 g) = 0.491 W/kg; SAR(10 g) = 0.210 W/kg

Maximum value of SAR (measured) = 0.748 W/kg

## Configuration/Body/Zoom Scan (7x7x7)/Cube 1: Measurement grid:


dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.899 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.784 W/kg

SAR(1 g) = 0.384 W/kg; SAR(10 g) = 0.175 W/kg

Maximum value of SAR (measured) = 0.583 W/kg

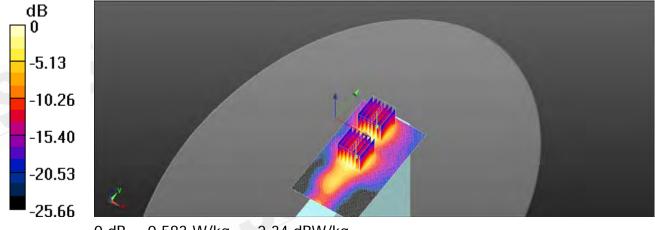

0 dB = 0.583 W/kg = -2.34 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 224 of 339

Date: 2015/6/2

## WLAN802.11 a 5.2G\_Body\_Bottom\_CH 44\_Aux

Communication System: WLAN 5G; Frequency: 5220 MHz

Medium parameters used: f = 5220 MHz;  $\sigma = 5.496 \text{ S/m}$ ;  $\varepsilon_r = 47.86$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

### **DASY5** Configuration:

Probe: EX3DV4 - SN3770; ConvF(4.7, 4.7, 4.7); Calibrated: 2015/4/28;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn856; Calibrated: 2014/8/27

Phantom: Body

DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

## Configuration/Body/Area Scan (61x101x1): Interpolated grid: dx=10 mm,

dy=10 mm

Maximum value of SAR (interpolated) = 2.00 W/kg

### Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid:


dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.790 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 3.78 W/kg

SAR(1 g) = 0.921 W/kg; SAR(10 g) = 0.290 W/kg

Maximum value of SAR (measured) = 1.77 W/kg

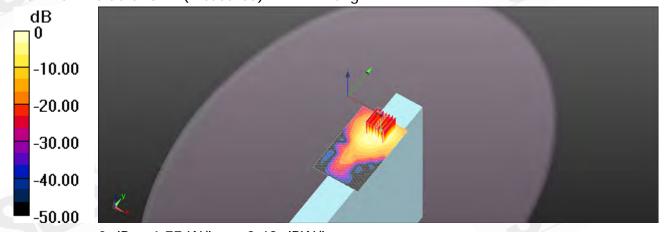

0 dB = 1.77 W/kg = 2.48 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be

f (886-2) 2298-0488

be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

www.tw.sas.com



Page: 225 of 339

Date: 2015/6/2

## WLAN802.11 ac(20M) 5.2G\_Body\_Bottom\_CH 40\_Aux

Communication System: WLAN 5G; Frequency: 5200 MHz

Medium parameters used: f = 5200 MHz;  $\sigma = 5.47 \text{ S/m}$ ;  $\varepsilon_r = 47.895$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

### **DASY5** Configuration:

Probe: EX3DV4 - SN3770; ConvF(4.7, 4.7, 4.7); Calibrated: 2015/4/28;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn856; Calibrated: 2014/8/27

Phantom: Body

DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

## Configuration/Body/Area Scan (61x101x1): Interpolated grid: dx=10 mm,

dy=10 mm

Maximum value of SAR (interpolated) = 1.73 W/kg

### Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid:


dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.662 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 3.49 W/kg

SAR(1 q) = 0.854 W/kq; SAR(10 q) = 0.280 W/kq

Maximum value of SAR (measured) = 1.60 W/kg

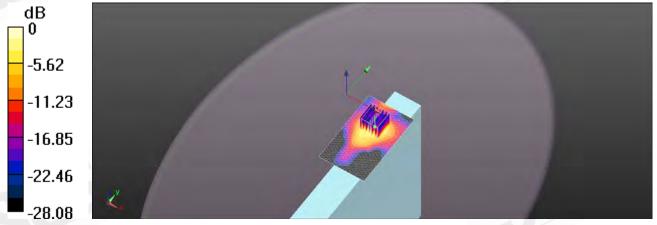

0 dB = 1.60 W/kq = 2.04 dBW/kq

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sqs.com

prosecuted to the fullest extent of the law.



Page: 226 of 339

Date: 2015/6/3

# WLAN802.11 a 5.3G\_Body\_Bottom\_CH 56\_Aux

Communication System: WLAN 5G; Frequency: 5280 MHz

Medium parameters used: f = 5280 MHz;  $\sigma = 5.583 \text{ S/m}$ ;  $\epsilon_r = 47.659$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

### **DASY5** Configuration:

Probe: EX3DV4 - SN3770; ConvF(4.7, 4.7, 4.7); Calibrated: 2015/4/28;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn856; Calibrated: 2014/8/27

Phantom: Body

• DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

## Configuration/Body/Area Scan (61x101x1): Interpolated grid: dx=10 mm,

dy=10 mm

Maximum value of SAR (interpolated) = 2.82 W/kg

### Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid:


dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.145 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 5.45 W/kg

SAR(1 g) = 1.36 W/kg; SAR(10 g) = 0.444 W/kg

Maximum value of SAR (measured) = 2.58 W/kg

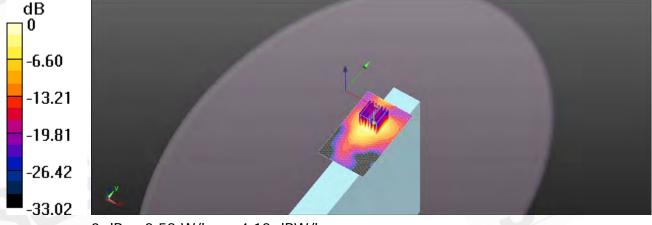

0 dB = 2.58 W/kg = 4.12 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 227 of 339

Date: 2015/6/3

## WLAN802.11 n(20M) 5.3G\_Body\_Bottom\_CH 60\_Aux

Communication System: WLAN 5G; Frequency: 5300 MHz

Medium parameters used: f = 5300 MHz;  $\sigma = 5.61 \text{ S/m}$ ;  $\varepsilon_r = 47.584$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

### **DASY5** Configuration:

Probe: EX3DV4 - SN3770; ConvF(4.7, 4.7, 4.7); Calibrated: 2015/4/28;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn856; Calibrated: 2014/8/27

Phantom: Body

DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

# Configuration/Body/Area Scan (61x101x1): Interpolated grid: dx=10 mm,

dy=10 mm

Maximum value of SAR (interpolated) = 3.03 W/kg

### Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid:


dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.240 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 5.95 W/kg

SAR(1 g) = 1.45 W/kg; SAR(10 g) = 0.460 W/kg

Maximum value of SAR (measured) = 2.85 W/kg

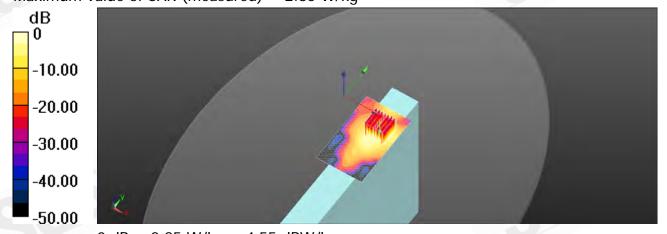

0 dB = 2.85 W/kg = 4.55 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 228 of 339

Date: 2015/6/3

## WLAN802.11 ac(20M) 5.3G\_Body\_Bottom\_CH 56\_Aux

Communication System: WLAN 5G; Frequency: 5280 MHz

Medium parameters used: f = 5280 MHz;  $\sigma = 5.583 \text{ S/m}$ ;  $\epsilon_r = 47.659$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

### **DASY5** Configuration:

Probe: EX3DV4 - SN3770; ConvF(4.7, 4.7, 4.7); Calibrated: 2015/4/28;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn856; Calibrated: 2014/8/27

Phantom: Body

DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

# Configuration/Body/Area Scan (61x101x1): Interpolated grid: dx=10 mm,

dy=10 mm

Maximum value of SAR (interpolated) = 2.94 W/kg

## Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid:


dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.520 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 5.70 W/kg

SAR(1 g) = 1.41 W/kg; SAR(10 g) = 0.453 W/kg

Maximum value of SAR (measured) = 2.73 W/kg

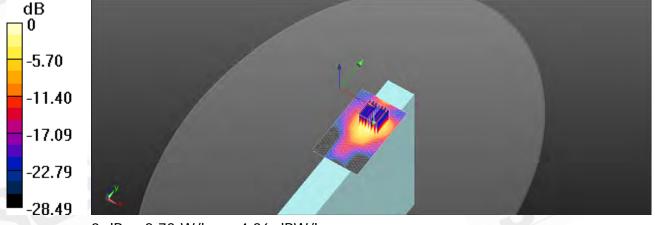

0 dB = 2.73 W/kg = 4.36 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 229 of 339

Date: 2015/6/3

## WLAN802.11 n(40M) 5.3G\_Body\_Bottom\_CH 54\_Aux

Communication System: WLAN 5G; Frequency: 5270 MHz

Medium parameters used: f = 5270 MHz;  $\sigma = 5.567 \text{ S/m}$ ;  $\epsilon_r = 47.696$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

### **DASY5** Configuration:

Probe: EX3DV4 - SN3770; ConvF(4.7, 4.7, 4.7); Calibrated: 2015/4/28;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn856; Calibrated: 2014/8/27

Phantom: Body

DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

## Configuration/Body/Area Scan (61x101x1): Interpolated grid: dx=10 mm,

dy=10 mm

Maximum value of SAR (interpolated) = 3.39 W/kg

### Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid:


dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.738 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 5.91 W/kg

SAR(1 g) = 1.46 W/kg; SAR(10 g) = 0.461 W/kg

Maximum value of SAR (measured) = 2.89 W/kg

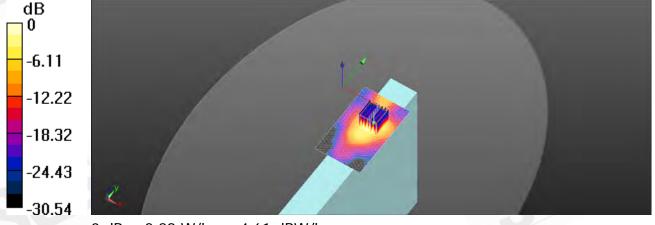

0 dB = 2.89 W/kg = 4.61 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 230 of 339

Date: 2015/6/3

## WLAN802.11 ac(40M) 5.3G\_Body\_Bottom\_CH 54\_Aux

Communication System: WLAN 5G; Frequency: 5270 MHz

Medium parameters used: f = 5270 MHz;  $\sigma = 5.567 \text{ S/m}$ ;  $\epsilon_r = 47.696$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

#### **DASY5** Configuration:

Probe: EX3DV4 - SN3770; ConvF(4.7, 4.7, 4.7); Calibrated: 2015/4/28;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn856; Calibrated: 2014/8/27

Phantom: Body

DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

# Configuration/Body/Area Scan (61x101x1): Interpolated grid: dx=10 mm,

dy=10 mm

Maximum value of SAR (interpolated) = 3.29 W/kg

### Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid:


dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.914 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 5.78 W/kg

SAR(1 g) = 1.44 W/kg; SAR(10 g) = 0.456 W/kg

Maximum value of SAR (measured) = 2.82 W/kg

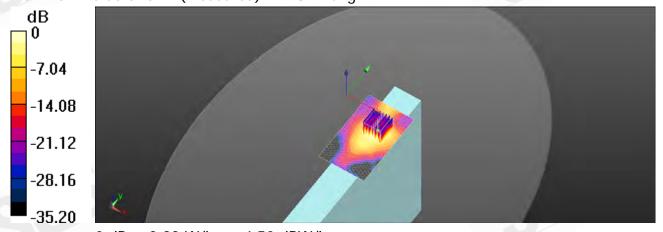

0 dB = 2.82 W/kg = 4.50 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 231 of 339

Date: 2015/6/4

## WLAN802.11 a 5.6G\_Body\_Bottom\_CH 120\_Aux

Communication System: WLAN 5G; Frequency: 5600 MHz

Medium parameters used: f = 5600 MHz;  $\sigma = 6.005 \text{ S/m}$ ;  $\epsilon_r = 46.587$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

#### **DASY5** Configuration:

Probe: EX3DV4 - SN3770; ConvF(4.03, 4.03, 4.03); Calibrated: 2015/4/28;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn856; Calibrated: 2014/8/27

Phantom: Body

• DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

## Configuration/Body/Area Scan (61x101x1): Interpolated grid: dx=10 mm,

dy=10 mm

Maximum value of SAR (interpolated) = 2.27 W/kg

### Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid:


dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.813 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 4.59 W/kg

SAR(1 g) = 1.1 W/kg; SAR(10 g) = 0.363 W/kg

Maximum value of SAR (measured) = 2.13 W/kg

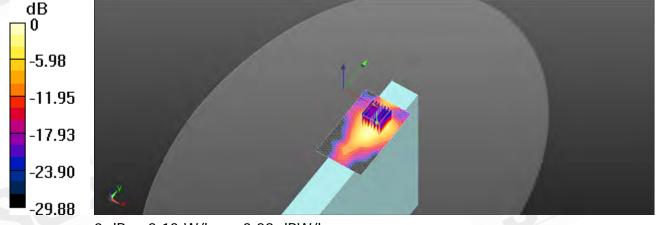

0 dB = 2.13 W/kg = 3.28 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined

therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 232 of 339

Date: 2015/6/4

## WLAN802.11 n(20M) 5.6G\_Body\_Bottom\_CH 136\_Aux

Communication System: WLAN 5G; Frequency: 5680 MHz

Medium parameters used: f = 5680 MHz;  $\sigma = 6.021 \text{ S/m}$ ;  $\epsilon_r = 46.359$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

#### **DASY5** Configuration:

Probe: EX3DV4 - SN3770; ConvF(4.03, 4.03, 4.03); Calibrated: 2015/4/28;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn856; Calibrated: 2014/8/27

Phantom: Body

• DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

## Configuration/Body/Area Scan (61x101x1): Interpolated grid: dx=10 mm,

dy=10 mm

Maximum value of SAR (interpolated) = 1.98 W/kg

### Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid:


dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.117 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 3.70 W/kg

SAR(1 q) = 0.879 W/kq; SAR(10 q) = 0.279 W/kq

Maximum value of SAR (measured) = 1.76 W/kg

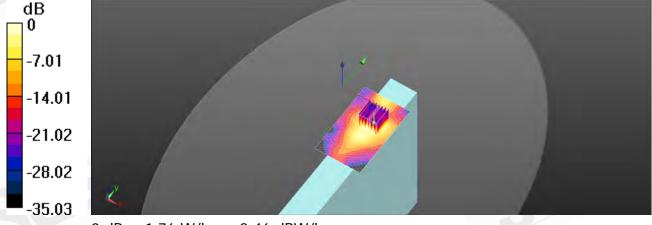

0 dB = 1.76 W/kg = 2.46 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined

therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 233 of 339

Date: 2015/6/4

## WLAN802.11 ac(20M) 5.6G\_Body\_Bottom\_CH 136\_Aux

Communication System: WLAN 5G; Frequency: 5680 MHz

Medium parameters used: f = 5680 MHz;  $\sigma = 6.021 \text{ S/m}$ ;  $\epsilon_r = 46.359$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

#### **DASY5** Configuration:

Probe: EX3DV4 - SN3770; ConvF(4.03, 4.03, 4.03); Calibrated: 2015/4/28;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn856; Calibrated: 2014/8/27

Phantom: Body

• DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

# Configuration/Body/Area Scan (61x101x1): Interpolated grid: dx=10 mm,

dy=10 mm

Maximum value of SAR (interpolated) = 1.38 W/kg

### Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid:


dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.916 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 2.62 W/kg

SAR(1 g) = 0.631 W/kg; SAR(10 g) = 0.206 W/kg

Maximum value of SAR (measured) = 1.26 W/kg

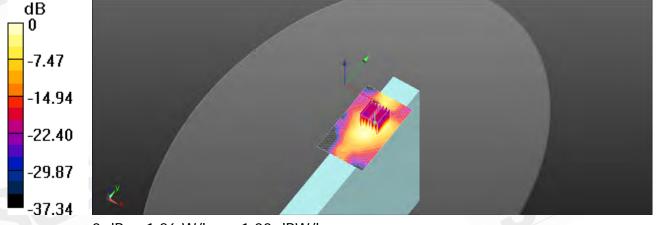

0 dB = 1.26 W/kg = 1.00 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined

therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 234 of 339

Date: 2015/6/4

## WLAN802.11 n(40M) 5.6G\_Body\_Bottom\_CH 134\_Aux

Communication System: WLAN 5G; Frequency: 5670 MHz

Medium parameters used: f = 5670 MHz;  $\sigma = 6.017 \text{ S/m}$ ;  $\varepsilon_r = 46.38$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

### **DASY5** Configuration:

Probe: EX3DV4 - SN3770; ConvF(4.03, 4.03, 4.03); Calibrated: 2015/4/28;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn856; Calibrated: 2014/8/27

Phantom: Body

• DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

## Configuration/Body/Area Scan (61x101x1): Interpolated grid: dx=10 mm,

dy=10 mm

Maximum value of SAR (interpolated) = 1.96 W/kg

### Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid:


dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.227 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 3.94 W/kg

SAR(1 q) = 0.913 W/kq; SAR(10 q) = 0.291 W/kq

Maximum value of SAR (measured) = 1.84 W/kg

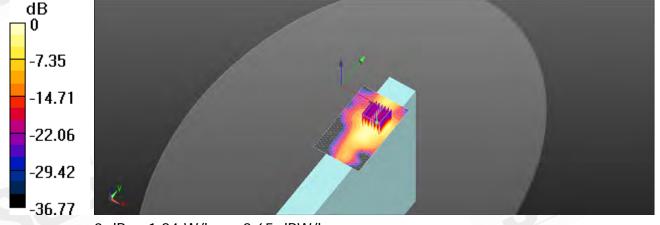

0 dB = 1.84 W/kg = 2.65 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The

therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134.Wu Kung Road. New Taipei Industrial Park. Wuku District. New Taipei City. Taiwan 24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司



Page: 235 of 339

Date: 2015/6/4

## WLAN802.11 ac(40M) 5.6G\_Body\_Bottom\_CH 142\_Aux

Communication System: WLAN 5G; Frequency: 5710 MHz

Medium parameters used: f = 5710 MHz;  $\sigma = 6.041$  S/m;  $\varepsilon_r = 46.241$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

#### **DASY5** Configuration:

Probe: EX3DV4 - SN3770; ConvF(4.03, 4.03, 4.03); Calibrated: 2015/4/28;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn856; Calibrated: 2014/8/27

Phantom: Body

• DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

## Configuration/Body/Area Scan (61x101x1): Interpolated grid: dx=10 mm,

dy=10 mm

Maximum value of SAR (interpolated) = 1.69 W/kg

### Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid:


dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.347 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 3.35 W/kg

SAR(1 g) = 0.784 W/kg; SAR(10 g) = 0.250 W/kg

Maximum value of SAR (measured) = 1.58 W/kg

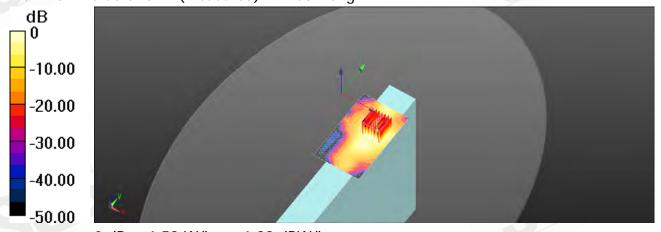

0 dB = 1.58 W/kg = 1.99 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 236 of 339

Date: 2015/6/1

## WLAN802.11 ac(80M) 5.8G\_Body\_Bottom\_CH 155\_Aux

Communication System: WLAN 5G; Frequency: 5775 MHz

Medium parameters used: f = 5775 MHz;  $\sigma = 6.2$  S/m;  $\varepsilon_r = 46.085$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

#### **DASY5** Configuration:

Probe: EX3DV4 - SN3770; ConvF(4.33, 4.33, 4.33); Calibrated: 2015/4/28;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn856; Calibrated: 2014/8/27

Phantom: Body

• DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

## Configuration/Body/Area Scan (61x101x1): Interpolated grid: dx=10 mm,

dy=10 mm

Maximum value of SAR (interpolated) = 1.72 W/kg

### Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid:


dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.9590 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 3.51 W/kg

SAR(1 q) = 0.810 W/kq; SAR(10 q) = 0.272 W/kq

Maximum value of SAR (measured) = 1.61 W/kg

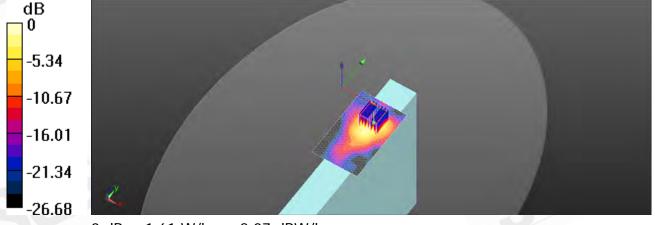

0 dB = 1.61 W/kg = 2.07 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

prosecuted to the fullest extent of the law.



Page: 237 of 339

Date: 2015/6/5

## Bluetooth\_Body\_Bottom\_CH 78

Communication System: Bluetooth; Frequency: 2480 MHz

Medium parameters used: f = 2480 MHz;  $\sigma = 2.072 \text{ S/m}$ ;  $\epsilon_r = 51.112$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

#### **DASY5** Configuration:

Probe: EX3DV4 - SN3770; ConvF(7.21, 7.21, 7.21); Calibrated: 2015/4/28;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn856; Calibrated: 2014/8/27

Phantom: Body

DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (71x121x1): Interpolated grid: dx=12 mm,

dy=12 mm

Maximum value of SAR (interpolated) = 0.0956 W/kg

## Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.798 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.127 W/kg

SAR(1 g) = 0.058 W/kg; SAR(10 g) = 0.025 W/kg

Maximum value of SAR (measured) = 0.0886 W/kg

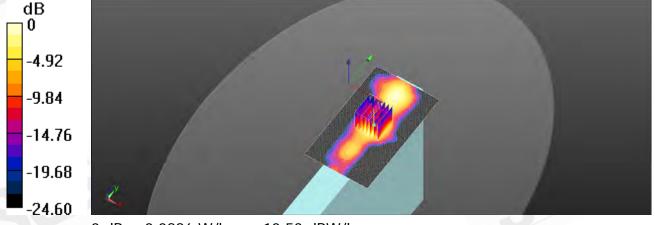

0 dB = 0.0886 W/kg = -10.53 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 238 of 339

# 6. SAR System Performance Verification

Date: 2015/6/16

### Dipole 750 MHz\_SN:1015

Communication System: CW; Frequency: 750 MHz

Medium parameters used: f = 750 MHz;  $\sigma = 0.964 \text{ S/m}$ ;  $\varepsilon_r = 54.188$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

#### **DASY5** Configuration:

Probe: EX3DV4 - SN3923; ConvF(10.29, 10.29, 10.29); Calibrated: 2014/8/28;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1374; Calibrated: 2015/5/6

Phantom: Body

DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

## Configuration/Pin=250mW/Area Scan (51x141x1): Interpolated grid:

dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 2.78 W/kg

## Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement


grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 53.14 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 3.33 W/kg

# SAR(1 g) = 2.28 W/kg; SAR(10 g) = 1.5 W/kg

Maximum value of SAR (measured) = 2.80 W/kg

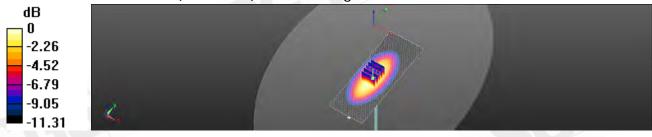

0 dB = 2.80 W/kq = 4.47 dBW/kq

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 239 of 339

Date: 2015/6/12

## Dipole 835 MHz\_SN:4d063

Communication System: CW; Frequency: 835 MHz

Medium parameters used: f = 835 MHz;  $\sigma = 0.955 \text{ S/m}$ ;  $\varepsilon_r = 54.344$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

#### **DASY5** Configuration:

Probe: EX3DV4 - SN3923; ConvF(10.32, 10.32, 10.32); Calibrated: 2014/8/28;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1374; Calibrated: 2015/5/6

Phantom: Body

DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

## Configuration/Pin=250mW/Area Scan (51x131x1): Interpolated grid:

dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 3.01 W/kg

## Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement


grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 55.44 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 3.61 W/kg

SAR(1 g) = 2.35 W/kg; SAR(10 g) = 1.53 W/kg

Maximum value of SAR (measured) = 3.03 W/kg

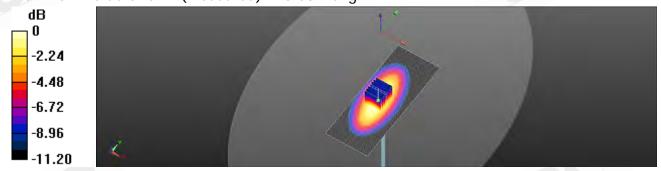

0 dB = 3.03 W/kq = 4.81 dBW/kq

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

台灣檢驗科技股份有限公司



Page: 240 of 339

Date: 2015/6/15

## Dipole 835 MHz\_SN:4d063

Communication System: CW; Frequency: 835 MHz

Medium parameters used: f = 835 MHz;  $\sigma = 0.963 \text{ S/m}$ ;  $\varepsilon_r = 54.035$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

#### **DASY5** Configuration:

Probe: EX3DV4 - SN3923; ConvF(10.32, 10.32, 10.32); Calibrated: 2014/8/28;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1374; Calibrated: 2015/5/6

Phantom: Body

• DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

## Configuration/Pin=250mW/Area Scan (51x131x1): Interpolated grid:

dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 3.01 W/kg

## Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement


grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 55.14 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 3.63 W/kg

SAR(1 g) = 2.35 W/kg; SAR(10 g) = 1.51 W/kg

Maximum value of SAR (measured) = 3.04 W/kg

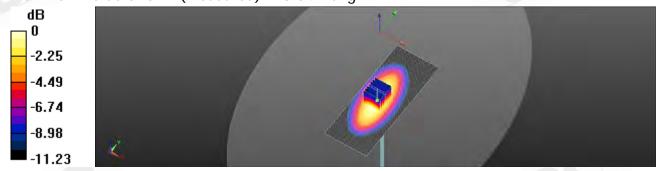

0 dB = 3.04 W/kq = 4.84 dBW/kq

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 241 of 339

Date: 2015/6/17

## Dipole 1750 MHz\_SN:1008

Communication System: CW; Frequency: 1750 MHz

Medium parameters used: f = 1750 MHz;  $\sigma = 1.47 \text{ S/m}$ ;  $\varepsilon_r = 52.225$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

#### **DASY5** Configuration:

Probe: EX3DV4 - SN3923; ConvF(8.3, 8.3, 8.3); Calibrated: 2014/8/28;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1374; Calibrated: 2015/5/6

Phantom: Body

DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

## Configuration/Pin=250mW/Area Scan (51x61x1): Interpolated grid: dx=15

mm, dy=15 mm

Maximum value of SAR (interpolated) = 13.0 W/kg

## Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement


grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 92.51 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 16.3 W/kg

SAR(1 g) = 9.36 W/kg; SAR(10 g) = 5.08 W/kg

Maximum value of SAR (measured) = 12.6 W/kg

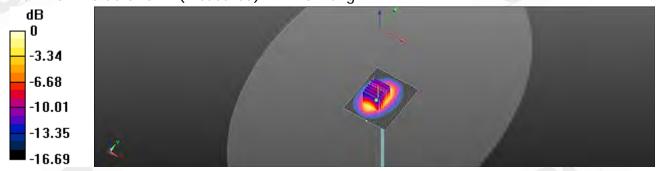

0 dB = 12.6 W/kg = 11.02 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 242 of 339

Date: 2015/6/11

## Dipole 1900 MHz\_SN:5d027

Communication System: CW; Frequency: 1900 MHz

Medium parameters used: f = 1900 MHz;  $\sigma = 1.529 \text{ S/m}$ ;  $\varepsilon_r = 52.226$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

#### **DASY5** Configuration:

Probe: EX3DV4 - SN3923; ConvF(8.03, 8.03, 8.03); Calibrated: 2014/8/28;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1374; Calibrated: 2015/5/6

Phantom: Body

DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

## Configuration/Pin=250mW/Area Scan (51x61x1): Interpolated grid: dx=15

mm, dy=15 mm

Maximum value of SAR (interpolated) = 14.1 W/kg

## Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement


grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 95.18 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 16.5 W/kg

SAR(1 g) = 10.1 W/kg; SAR(10 g) = 5.3 W/kg

Maximum value of SAR (measured) = 13.7 W/kg

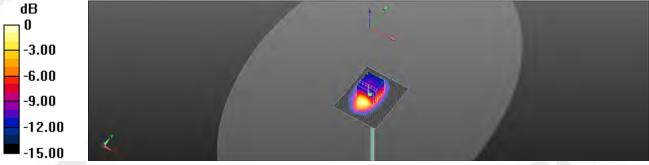

0 dB = 13.7 W/kg = 11.37 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 243 of 339

Date: 2015/6/18

## Dipole 1900 MHz\_SN:5d027

Communication System: CW; Frequency: 1900 MHz

Medium parameters used: f = 1900 MHz;  $\sigma = 1.536 \text{ S/m}$ ;  $\varepsilon_r = 52.126$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

### **DASY5** Configuration:

Probe: EX3DV4 - SN3923; ConvF(8.03, 8.03, 8.03); Calibrated: 2014/8/28;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1374; Calibrated: 2015/5/6

Phantom: Body

DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

## Configuration/Pin=250mW/Area Scan (51x61x1): Interpolated grid: dx=15

mm, dy=15 mm

Maximum value of SAR (interpolated) = 14.1 W/kg

## Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement


grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 96.06 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 16.6 W/kg

SAR(1 g) = 10.1 W/kg; SAR(10 g) = 5.29 W/kg

Maximum value of SAR (measured) = 13.8 W/kg

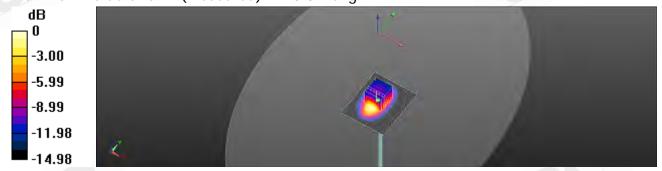

0 dB = 13.8 W/kg = 11.39 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

台灣檢驗科技股份有限公司



Page: 244 of 339

Date: 2015/6/1

# Dipole 2450 MHz\_SN:727\_Body

Communication System: CW; Frequency: 2450 MHz

Medium parameters used: f = 2450 MHz;  $\sigma = 2.035 \text{ S/m}$ ;  $\epsilon_r = 51.219$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

### **DASY5** Configuration:

Probe: EX3DV4 - SN3770; ConvF(7.21, 7.21, 7.21); Calibrated: 2015/4/28;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn856; Calibrated: 2014/8/27

Phantom: Body

DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

## Configuration/Pin=250mW/Area Scan (51x51x1): Interpolated grid: dx=12

mm, dy=12 mm

Maximum value of SAR (interpolated) = 21.6 W/kg

## Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement


grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 102.8 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 28.7 W/kg

SAR(1 g) = 13.5 W/kg; SAR(10 g) = 6.12 W/kg

Maximum value of SAR (measured) = 20.9 W/kg

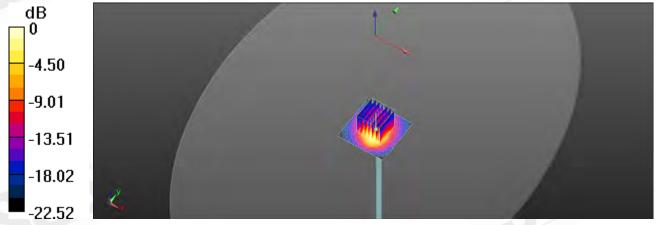

0 dB = 20.9 W/kq = 13.20 dBW/kq

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 245 of 339

Date: 2015/6/5

# Dipole 2450 MHz\_SN:727\_Body

Communication System: CW; Frequency: 2450 MHz

Medium parameters used: f = 2450 MHz;  $\sigma = 2.033 \text{ S/m}$ ;  $\varepsilon_r = 51.254$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

### **DASY5** Configuration:

Probe: EX3DV4 - SN3770; ConvF(7.21, 7.21, 7.21); Calibrated: 2015/4/28;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn856; Calibrated: 2014/8/27

Phantom: Body

DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

## Configuration/Pin=250mW/Area Scan (51x51x1): Interpolated grid: dx=12

mm, dy=12 mm

Maximum value of SAR (interpolated) = 20.4 W/kg

## Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement


grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 99.09 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 27.0 W/kg

SAR(1 g) = 12.7 W/kg; SAR(10 g) = 5.77 W/kg

Maximum value of SAR (measured) = 19.7 W/kg

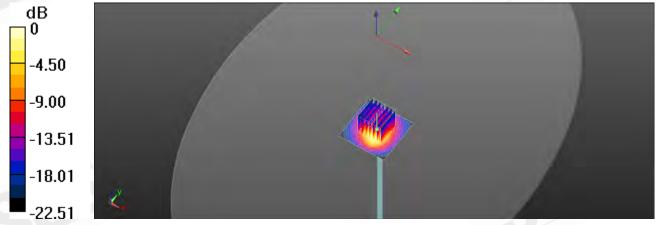

0 dB = 19.7 W/kq = 12.94 dBW/kq

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

台灣檢驗科技股份有限公司



Page: 246 of 339

Date: 2015/6/5

# Dipole 2450 MHz\_SN:727\_Body

Communication System: CW; Frequency: 2450 MHz

Medium parameters used: f = 2450 MHz;  $\sigma = 2.033 \text{ S/m}$ ;  $\varepsilon_r = 51.254$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

#### **DASY5** Configuration:

Probe: EX3DV4 - SN3770; ConvF(7.21, 7.21, 7.21); Calibrated: 2015/4/28;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn856; Calibrated: 2014/8/27

Phantom: Body

DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

## Configuration/Pin=250mW/Area Scan (51x51x1): Interpolated grid: dx=12

mm, dy=12 mm

Maximum value of SAR (interpolated) = 20.4 W/kg

## Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement


grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 99.09 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 27.0 W/kg

SAR(1 g) = 12.7 W/kg; SAR(10 g) = 5.77 W/kg

Maximum value of SAR (measured) = 19.7 W/kg

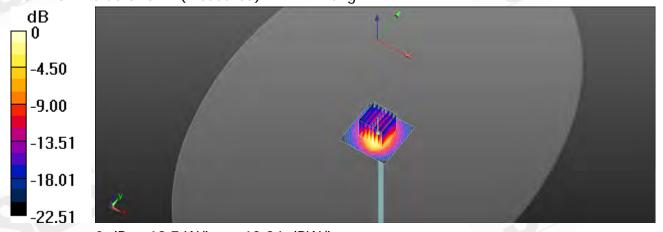

0 dB = 19.7 W/kg = 12.94 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be

SGS Taiwan Ltd.

台灣檢驗科技股份有限公司

prosecuted to the fullest extent of the law.



Page: 247 of 339

Date: 2015/6/2

## Dipole 5200 MHz\_SN:1023\_Body

Communication System: CW; Frequency: 5200 MHz

Medium parameters used: f = 5200 MHz;  $\sigma = 5.47 \text{ S/m}$ ;  $\varepsilon_r = 47.895$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

#### **DASY5** Configuration:

Probe: EX3DV4 - SN3770; ConvF(4.7, 4.7, 4.7); Calibrated: 2015/4/28;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn856; Calibrated: 2014/8/27

Phantom: Body

• DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

## Configuration/Pin=100mW/Area Scan (51x51x1): Interpolated grid: dx=10

mm, dy=10 mm

Maximum value of SAR (interpolated) = 16.3 W/kg

## Configuration/Pin=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement


grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 57.77 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 33.9 W/kg

SAR(1 g) = 7.47 W/kg; SAR(10 g) = 2.07 W/kg

Maximum value of SAR (measured) = 15.4 W/kg

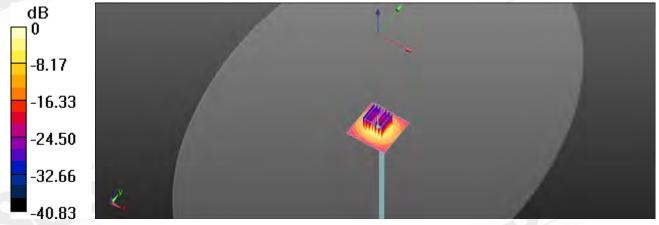

0 dB = 15.4 W/kg = 11.88 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 248 of 339

Date: 2015/6/3

## Dipole 5300 MHz\_SN:1023\_Body

Communication System: CW; Frequency: 5300 MHz

Medium parameters used: f = 5300 MHz;  $\sigma = 5.61 \text{ S/m}$ ;  $\varepsilon_r = 47.584$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

### **DASY5** Configuration:

Probe: EX3DV4 - SN3770; ConvF(4.7, 4.7, 4.7); Calibrated: 2015/4/28;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn856; Calibrated: 2014/8/27

Phantom: Body

DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

## Configuration/Pin=100mW/Area Scan (51x51x1): Interpolated grid: dx=10

mm, dy=10 mm

Maximum value of SAR (interpolated) = 16.4 W/kg

## Configuration/Pin=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement


grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 53.39 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 36.4 W/kg

SAR(1 g) = 8.13 W/kg; SAR(10 g) = 2.24 W/kg

Maximum value of SAR (measured) = 17.3 W/kg

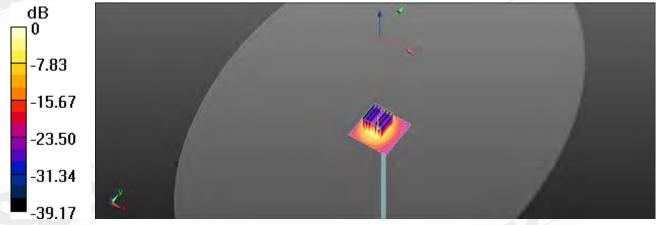

0 dB = 17.3 W/kq = 12.38 dBW/kq

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

台灣檢驗科技股份有限公司



Page: 249 of 339

Date: 2015/6/4

## Dipole 5600 MHz\_SN:1023\_Body

Communication System: UID 0, CW; Frequency: 5600 MHz

Medium parameters used: f = 5600 MHz;  $\sigma = 5.99 \text{ S/m}$ ;  $\varepsilon_r = 46.587$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

#### **DASY5** Configuration:

Probe: EX3DV4 - SN3770; ConvF(4.03, 4.03, 4.03); Calibrated: 2015/4/28;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn856; Calibrated: 2014/8/27

Phantom: Body

DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

## Configuration/Pin=100mW/Area Scan (51x51x1): Interpolated grid: dx=10

mm, dy=10 mm

Maximum value of SAR (interpolated) = 16.1 W/kg

## Configuration/Pin=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement


grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 53.98 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 33.2 W/kg

SAR(1 g) = 7.32 W/kg; SAR(10 g) = 2.01 W/kg

Maximum value of SAR (measured) = 15.9 W/kg

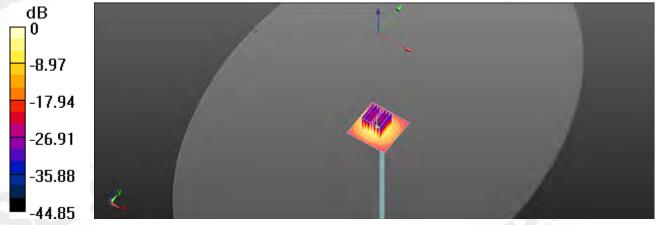

0 dB = 15.9 W/kq = 12.01 dBW/kq

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined

therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 250 of 339

Date: 2015/6/1

## Dipole 5800 MHz\_SN:1023\_Body

Communication System: CW; Frequency: 5800 MHz

Medium parameters used: f = 5800 MHz;  $\sigma = 6.21 \text{ S/m}$ ;  $\varepsilon_r = 46.008$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

### **DASY5** Configuration:

Probe: EX3DV4 - SN3770; ConvF(4.33, 4.33, 4.33); Calibrated: 2015/4/28;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn856; Calibrated: 2014/8/27

Phantom: Body

DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

## Configuration/Pin=100mW/Area Scan (51x51x1): Interpolated grid: dx=10

mm, dy=10 mm

Maximum value of SAR (interpolated) = 17.4 W/kg

## Configuration/Pin=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement


grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 48.47 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 38.2 W/kg

SAR(1 g) = 8.04 W/kg; SAR(10 g) = 2.2 W/kg

Maximum value of SAR (measured) = 17.7 W/kg

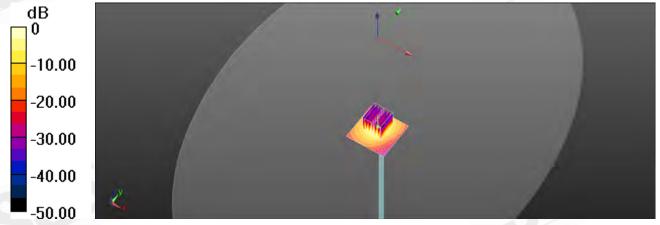

0 dB = 17.7 W/kq = 12.48 dBW/kq

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

台灣檢驗科技股份有限公司



Page: 251 of 339

# 7. DAE & Probe Calibration Certificate

Calibration Laboratory of Schmid & Partner

Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





Schweizerischer Kalibrierdie Service suisse d'étalonnage C Servizio svizzero di tarature S Swiss Calibration Service

According by the Swas According Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

SGS - TW (Auden)

Accreditation No.: SCS 108

Certificate No. DAE4-856\_Aug14

CALIBRATION CERTIFICATE

Ottent

DAE4 - SD 000 D04 BM - SN: 856

Calibration procedure(s)

QA CAL-06.v26

Calibration procedure for the data acquisition electronics (DAE)

Clastivation date:

August 27, 2014

This collibration conflicate documents the transability to national standards, which resilize the physical units of measurements (31). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate

All calibrations have been ponducted in the closed taboratory facility: environment temperature (22 ± 31% and humidity < 70%

Califiration Equipment used (M&TE critical for pastiration)

IDL#

Primary Standards Car Date (Certificase No.) Scheduled Calibration Keithley Musimeler Type 2001 SN 0810278 (71-Oct-13 (No. 13978) Oct-14 Auto DAE Calibration Unit SE UWS 053 AA 1001 07-Jan-14 (in house check) III hocae dhick, Jan-15

Calibrator Box V2.1

SE LAVIS 005 AA 1002 07-Jan-14 (in fouse check)

In house check: Jan-15

Calibrated by:

This pallbration certificate shall not be reproduced except in full without written approval of the lapprajory

Function

Approved by:

Deputy Technical Manage

Issued: August 27, 2014

Certificate No: DAEs-856\_Aug 14

Page 1 of 5

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 252 of 339



Schmid & Partner
Engineering AG
Zeighausstrasse 43, 9004 Zurich, Switzerland





Service suitate d'átelormage Service suitate d'átelormage Service suitatero d'átelormage Service suitatero d'átelormage Service suitatero Service

Accreditation No.: SCS 108

According by the Seiss Address attention Service (SAS)

The Savas Accreditation Service is one of the signatories to the EA Middlewral Agreement for the recognition of calibration certificates

#### Glossary

DAE data acquisition electronics

Connector angle information used in DASY system to align probe sensor X to the robot

coordinate system.

#### Methods Applied and Interpretation of Parameters

- DC Voltage Measurement: Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to reational standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- Connector angle: The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters as documented in the Appendix contain technical information as a
  result from the performance test and require no uncertainty.
  - DC Voltage Measurement Linearity: Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this
  - Common mode sensitivity: Influence of a positive or negative common mode voltage on the differential measurement.
  - Channel separation: Influence of a voltage on the neighbor channels not subject to an
    input voltage.
  - AD Converter Values with inputs shorted. Values on the internal AD converter corresponding to zero input voltage.
  - Input Offset Measurement. Output voltage and statistical results over a large number of zero voltage measurements.
  - Input Offset Current: Typical value for information; Maximum channel input offset current, not considering the input resistance.
  - Input resistance: Typical value for information: DAE input resistance at the connector, during internal auto-zeroing and during measurement.
  - Low Battery Alarm Voltage: Typical value for information. Below this voltage, a battery alarm signal is generated.
  - Power consumption: Typical value for information. Supply currents in various operating

Continue No: DAE4-966\_Aug 14

Fage 2 of 5

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 253 of 339

## DC Voltage Measurement

A/D - Converter Resolution nomina

full range = -100 full range = -1 High Ranger ILSB = +100,-+300 mV Low Range: 1LSB = 61nV : VmE+ DASY measurement parameters: Auto Zoro Time: 3 sec; Measuring time: 3 sec

Calibration Factors	x	Ÿ	Z
High Range	403,468 ± 0.02% (k=2)	404.581 ± 0.02% ((+2)	403.903 ± 0.02% (k-2)
Low Range	3.97681 ± 1.50% (k-2)	3.97783 ± 1.50% (k=2)	3.97815 ± 1.50% (k+2)

### Connector Angle

Connector Angle to be used in DASY system	52.5 °±1"

Certificate No. DAE4-856\_Aug14

Page 5 of 6

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 www.tw.sas.com

台灣檢驗科技股份有限公司

f (886-2) 2298-0488







Page: 254 of 339

## Appendix (Additional assessments outside the scope of SCS108)

High Range	Reading (µV)	Difference (µV)	Error (%)
Channel X + Input	19999933	0.84	0.00
Channel X + Input	19990.00	32.25	+0,01
Channel X - Input	20000.45	0.34	-0,00
Channel Y + Input	199999.95	0.96	0.00
Channel Y + Input	19997.51	-3.82	-0,02
Channal Y Input	-2000n 77	0.07	-0,00
Channel Z + Input	199997.26	0.19	-0,00
Channel Z + Input	19997.65	-3.57	-0.02
Channel Z - Input	-20002.47	1.55	0.01

Low Range	Reading (µV)	Difference (µV)	Error (%)
Channel X + Input	2001.05	-0.09	-0,00
Channel X + Input	202,34	0.80	0.40
Channel X - Input	-198.21	0.26	-0.13
Channel Y + Input	2001.39	0,26	0.01
Channel Y + Input	201.08	-0,36	0.18
Channel Y - Input	-199,24	-0.78	0,39
Channel Z + Input	2000.92	-0.78	-0.01
Channel Z + Input	200,26	-1.22	-0.60
Channel Z - Input	-199,91	+1/47	0.74

#### 2. Common mode sensitivity

rement parameters: Auto Zero Time: 9 sec: Measuring time: 3 sec

	Input Voltage (mV)	High Range Average Reading (µV)	Low Range Average Reading (µV)
Channel X	200	-14,76	-16.42
	-200	17.19	15,88
Channel Y	500	+2.17	2,25
	+200	0.39	.0.01
Channel Z	200	10.27	10,05
	-300	-13.06	-12.03

### 3. Channel separation

	Input Voltage (mV)	Channel X (µV)	Channel V (µV)	Channel Z (µV)
Channel X	200		2.81	-1.15
Channel Y	200	7.99		.3:07
Channel Z	200	8.55	5.24	-

Cartilizate No: DAE4-856\_Aug14

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488



Page: 255 of 339

4. AD-Converter Values with Inputs shorted

	High Range (LSB)	Low Range (LSB)
Channel X	16226	18620
Channel Y	15942	16803
Channel 2	15875	16811

5. Input Offset Measurement

DASY measurement parameters. Auto Zero Time: 3 sec; Measuring time: 3 sec

	ui		

	Average (μV)	min. Offset (µV)	max. Offset (µV)	Std. Deviation (µV)
Channel X	0.72	+0.77	1.89	0.38
Channel Y	-0.24	-1.07	1.08	0,42
Channel Z	-0.98	-2.01	0.07	0.40

6. Input Offset Current

Nominal input circuitry offset current on all channels <25fA

7. Input Resistance (Typical values for information)

	Zeroing (kOhm)	Measuring (MOhm)
Channel X	200	200
Channel Y	200	200
Channel Z	200	200

8. Low Battery Alarm Voltage (Typical values for information)

Typical values	Alarm Level (VDC)	
Supply (+ Vcc)	+7.9	
Supply (- Vcc)	-7.0	

9. Power Consumption (Typics values for information)

Typical values	Switched off (mA)	Stand by (mA)	Transmitting (mA)
Supply (+ Vee)	:+0.01	+6.	+14
Supply (- Vcc)	-0:01	-8	-9

Certificate No DAE4-856\_Aug14

Page 5 of 5

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sas.com



Page: 256 of 339

## Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





Schweizerischer Kalibrierdienst Service suisse d'étalonnage Servizio svizzero di taratura Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA

Multilateral Agreement for the recognition of calibration certificates

Client SGS-TW (Auden)

Accreditation No.: SCS 0108

Certificate No: DAE4-1374\_May15

## CALIBRATION CERTIFICATE

Object

DAE4 - SD 000 D04 BM - SN: 1374

Calibration procedure(s)

QA CAL-06.v29

Calibration procedure for the data acquisition electronics (DAE)

Calibration date:

May 06, 2015

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature  $(22 \pm 3)$ °C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID#	Cal Date (Certificate No.)	Scheduled Calibration
Keithley Multimeter Type 2001	SN: 0810278	03-Oct-14 (No:15573)	Oct-15
Secondary Standards	ID#	Check Date (in house)	Scheduled Check
Auto DAE Calibration Unit		06-Jan-15 (in house check)	In house check: Jan-16
Calibrator Box V2.1	SE UMS 006 AA 1002	06-Jan-15 (in house check)	In house check: Jan-16

Calibrated by:

Name R.Mayoraz Function Technician

Signature

Approved by:

Fin Bomholt

Deputy Technical Manager

Issued: May 6, 2015

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: DAE4-1374\_May15

Page 1 of 5

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 257 of 339

## Calibration Laboratory of Schmid & Partner

Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





Schweizerischer Kalibrierdienst Service suisse d'étalonnage Servizio svizzero di taratura

Swiss Calibration Service

Accreditation No.: SCS 0108

Accredited by the Swiss Accreditation Service (SAS) The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Glossary

data acquisition electronics

Connector angle information used in DASY system to align probe sensor X to the robot

coordinate system.

## Methods Applied and Interpretation of Parameters

- DC Voltage Measurement: Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- Connector angle: The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters as documented in the Appendix contain technical information as a result from the performance test and require no uncertainty.
  - DC Voltage Measurement Linearity: Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this measurement.
  - Common mode sensitivity: Influence of a positive or negative common mode voltage on the differential measurement.
  - Channel separation: Influence of a voltage on the neighbor channels not subject to an input voltage.
  - AD Converter Values with inputs shorted: Values on the internal AD converter corresponding to zero input voltage
  - Input Offset Measurement. Output voltage and statistical results over a large number of zero voltage measurements.
  - Input Offset Current: Typical value for information; Maximum channel input offset current, not considering the input resistance.
  - Input resistance: Typical value for information: DAE input resistance at the connector, during internal auto-zeroing and during measurement.
  - Low Battery Alarm Voltage; Typical value for information. Below this voltage, a battery alarm signal is generated.
  - Power consumption: Typical value for information. Supply currents in various operating modes.

Certificate No: DAE4-1374\_May15

Page 2 of 5

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sas.com



Page: 258 of 339

## **DC Voltage Measurement**

A/D - Converter Resolution nominal

High Range: 1L\$B = 6.1µV, full range = -100...+300 mV 1LSB = 61nV, full range = -1.....+3mV DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Calibration Factors	х	Υ	Z
High Range	405.241 ± 0.02% (k=2)	405.484 ± 0.02% (k=2)	405.011 ± 0.02% (k=2)
			3.98770 ± 1.50% (k=2)

## Connector Angle

Connector Angle to be used in DASY system	245.0 ° ± 1 °

Certificate No: DAE4-1374\_May15

Page 3 of 5

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 www.tw.sas.com

台灣檢驗科技股份有限公司

f (886-2) 2298-0488



Page: 259 of 339

## Appendix (Additional assessments outside the scope of SCS0108)

## 1. DC Voltage Linearity

High Range	Reading (μV)	Difference (μV)	Error (%)
Channel X + Input	200027.58	-3.42	-0.00
Channel X + Input	20005.73	2.63	0.01
Channel X - Input	-20003.18	3.04	-0.02
Channel Y + Input	200027.12	-3.98	-0.00
Channel Y + Input	20002.62	-0.35	-0.00
Channel Y - Input	-20006.98	-0.59	0.00
Channel Z + Input	200031.31	-0.10	-0.00
Channel Z + Input	20000.66	-2.25	-0.01
Channel Z - Input	-20008.41	-1.94	0.01

Low Range	Reading (μV)	Difference (μV)	Error (%)
Channel X + Input	1999.56	-0.09	-0.00
Channel X + Input	199.64	0.05	0.02
Channel X - Input	-201.87	-1.56	0.78
Channel Y + Input	1999.63	0.03	0.00
Channel Y + Input	198.55	-0.89	-0.45
Channel Y - Input	-201.10	-0.69	0.35
Channel Z + Input	2000.11	0.64	0.03
Channel Z + Input	197.27	-2.23	-1.12
Channel Z - Input	-202.39	-1.99	0.99

## 2. Common mode sensitivity

	Common mode Input Voltage (mV)	High Range Average Reading (μV)	Low Range Average Reading (μV)
Channel X	200	-6.38	-8.61
	- 200	9.68	7.55
Channel Y	200	3.79	3.72
	- 200	-5.43	-6.05
Channel Z	200	-15.24	-15.61
	- 200	12.53	12.72

## 3. Channel separation

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 se

	Input Voltage (mV)	Channel X (μV)	Channel Y (μV)	Channel Z (μV)
Channel X	200	-	6.28	-2.15
Channel Y	200	9.34	-	7.43
Channel Z	200	9.24	6.77	-

Certificate No: DAE4-1374\_May15

Page 4 of 5

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com



Page: 260 of 339

4. AD-Converter Values with inputs shorted

DASY measurement parameters: Auto Zero Time: 3 sec; Mea

	High Range (LSB)	Low Range (LSB)
Channel X	16120	15044
Channel Y	15972	15769
Channel Z	16364	15426

5. Input Offset Measurement

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Average (μV)	min. Offset (μV)	max. Offset (μV)	Std. Deviation (µV)
Channel X	-0.68	-1.85	0.72	0.51
Channel Y	-1.37	-2.25	-0.26	0.36
Channel Z	1.05	-0.13	2.45	0.53

6. Input Offset Current

Nominal Input circuitry offset current on all channels: <25fA

7. Input Resistance (Typical values for information)

	Zeroing (kOhm)	Measuring (MOhm)
Channel X	200	200
Channel Y	200	200
Channel Z	200	200

8. Low Battery Alarm Voltage (Typical values for information)

Typical values	Alarm Level (VDC)
Supply (+ Vcc)	+7.9
Supply (- Vcc)	-7.6

9. Power Consumption (Typical values for information)

Typical values	Switched off (mA)	Stand by (mA)	Transmitting (mA)
Supply (+ Vcc)	+0.01	+6	+14
Supply (- Vcc)	-0.01	-8	-9

Certificate No: DAE4-1374\_May15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sas.com



Page: 261 of 339

Calibration Laboratory of Schmid & Partner Engineering AG aughausstrasse 43, 6004 Zurick, Switterland





Schweizenscher Kallbrierdienst Service stillses d'étalonnape Servizio evizzero di faratura iss Calibration Service

Accredied by the Swes Accreditation Service (BAS) The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificate

SGS-TW (Auden)

Certificate No: EX3-3923 Aug 14

## CALIBRATION CERTIFICATE

EX3DV4 - SN:3923

Calibration procedure(s)

QA GAL-01.v9, QA CAL-14.v4, QA GAL-23.v5, QA GAL-25.v6

Calibration procedure for dosimetric E field probes

Calibration date:

August 28, 2014

The calibration certificate documents me traccability to national standards, which realize the physical units of imposurements (S) The manusements and the uncertainties with confidence propatelly are given on the following pages and are part of the certification

All calibrations have been conducted in the closed into seron facility, environment temperature (22 ± 3)°C and number < 70%

Galibration Equipment used IM&TE critical for calibration)

Primary Standards	10	Cat Date (Certificate No.)	Scheduled Calibration
Power mater E44198	GB41293874	03-Apr-14 (No. 217-01811)	Apr-15
Power senior E4412A	MY41498087	03-Apr/14 (No. 217-01911)	April 5
Reference 3 dft Attenuator	SN: SS054 (3u)	03-Apr-14 (No. 217-01915)	Apr. 15
Reference 20 ds Attenuator	SN: 85277 (20x)	1/3-Apr-14 (No. 217-01919)	Apr-15
Reference 30 dB Attenuelor	SN. 85129 (30b)	II3-Apr-14 (No. 217-01920)	April 15
Reférence Probe E830V2	SN: 3013	30-Dec-13 (No. ESS-3013, Dec13)	Dap-14
DAE4	SN, 660	13-Dec-13 (No. DAE4-660_Dec13)	Dec-14
Secondary Standards	(0)	Check Ditte (in house)	Scheduled Chick
RF generator HP 8648C	LIS3642U01700	4-Aug-98 (in house check Acr-13)	in house check. Ap:-16-
Network Analyzer HP 8753E	U837390585	18-Oct-01 (in house check Oct-13)	In house check: Oct-14.

Californited by sme L wood Laboratory Featmont Elmoseum Tuctivisi Minagai Approved by Issueri August 26, 2014 This contration certificate shall not be reproduced supply to full will our written acquired of the laborator

Certificate No. EX3-3955 Aug 14

Page 1 of 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sas.com



Page: 262 of 339



Schmid & Partner Engineering AG





Schweizenscher Kalterentieren Service suisse d'étaionnage C Servicio sylzzero di paretora Swiss Calibration Service

Acceptitation No.: SCS 108

Accredited by the Same Accreminator Service (SAS)

The Swise Accreditation Service is one of the signatories to the Elli Multilearni Agmement for the recognition of calibration certificate

#### Glossary:

fesure simulating liquid sensitivity in free space TSI. NORMK.y.z sensitivity in TSL / NORMx, y.z. CONVE

diode compression point crest factor (1/duty\_cycle) of the RF signal A B C D modulation dependent linearization parameters

Polarization in a rotation around probe axis.

in repeated an axis that is in the plane normal to probe asis (at measurement public), Polarization it

i.e.,  $\eta=0$  is normal to probe existinformation used in DASY system to align probe sensor X to the robot coordinate system. Connector Angle

## Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Minasurement
- Techniques", June 2013
  IEC 62209-1, "Procedure to measure the Specific Atsorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

### Methods Applied and Interpretation of Parameters:

- NORMx, y, z: Assessed for E-field polarization  $B \approx 0$  (f = 100 MHz in TEM-stall; T > 1800 MHz. R22 waveguide). NDRMx, y, z are only intermediate values. i.e., the uncontainties of NORMx, y, z does not affect the  $E^2$ -field interactionty inside TSL (see below GonwF).
- MCRM(f)x,y,z = MCRMx,y,z \* frequency\_response (see Frequency Response Chart). This linearization ∈ implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response ≼ included in the stated uncertainty of ConvF.
- DCPx.y.z: CCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR: PAR is the Peak in Average Ratio that is not calibrated but determined based on the signal
- $Ax_iy_i z_i \, \exists x_iy_i z_i \, \exists x_iy_i z_i \, \forall Rx_iy_i z_i \, A_i B_i \, C_i \, D_i$  an numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters. Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $l \le 800$  MHz) and inside waveguide using enalytical field distributions based on power measurements for  $l \ge 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 achiware to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to WORMs,y,z.\* ConvF. A frequency dependent ConvF a used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100
- Spherical isotropy (3D deviation from isotropy), in a field of low gradients realized using a flat phantom
- Sensor Offset: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle: The angle is assessed using the information gamed by determining the WORMs (no uncertainty required),

Cartingate No. EX3-3923 Aug 14

Page Z of 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279

台灣檢驗科技股份有限公司

f (886-2) 2298-0488

www.tw.sas.com



Page: 263 of 339

EX 10VA - SVLTVE

/80gm6: 50 -500c



# Probe EX3DV4

SN:3923

Manufactured; Calibrated:

March 8, 2013 August 28, 2014

Calibrated for DASY/EASY Systems (Note: non-compatible will DASV2 system))

Cortificate No: EX3-3923, Aug 14

Priper 2 of TT

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 f (886-2) 2298-0488



Page: 264 of 339

EX3DV4-5N 3973

Avagost set 2014

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:3923

#### Basic Calibration Parameters

	SensorX	Sensor Y	Sensor Z	Line (k=2)
Norm (µV/(V/m)*)*	0.58	0.48	0.47	±10,1%
DCP (mV)"	99.2	102.2	103.3	

#### Modulation Calibration Parameters

UID	Communication System Name		A tilli	B dBõV	C	dB	WR mV	Unc (k=Z)
O .	CW	X	0.0	0.0	1.0	0.00	132.9	43.0 %
		Ÿ	0.0	-0.0	1.0		134.8	_
		2	0.0	0.0	1.0		135 (0	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Certificate No. EX3-3923 Aug 14

Page 4 of 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 www.tw.sas.com

台灣檢驗科技股份有限公司

f (886-2) 2298-0488

The uniorbitities of NormX V / do not effect the E field underturny make TS. (see Page 5 4nd 5).

Normalization parameter uncontainty our required.

Uncoffering to determined lesing the mak, deviation from most response appoints vector point definitions and to expression for the equals of the



Page: 265 of 339

EX30V4 SN:3923

August 20, 2014

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:3923

## ter Datemalised in Head Thomas Circulation Media

r (MHz) <sup>E</sup>	Relative Permittivity	Conductivity (S/m)	ConvF X	ConvF V	ConvF Z	Alphé <sup>9</sup>	Depth <sup>G</sup> (mm)	Unct. (k=2)
750	41.9	0.89	10.91	10.91	10.91	0.25	1.16	± 12.0 %
835	41.5	0.90	10.48	10.48	10.48	0.27	1.07	± 12.0 W
900	41.5	0.97	10.26	10.26	10.26	0.17	1.53	± 12-0.9
1750	40.1	3.37	8.72	B,72	8.72	0.75	0.57	± 12.0 %
1900	40.0	1.40	3.42	8.42	8.42	0.45	0.77	±12.09
2000	40.0	1.48	8.46	5,46	B.46	0,67	0.63	± 12.0 %
2300	39.5	1.67	B.02	5.02	W.02	0.35	0.85	±12.09
2450	39.2	1.80	7.66	7,66	7,66	0.33	0.87	112.03
2600	39.0	1.96	7.41	7.41	7:41	0.35	0.86	±12.09
5200	36.0	4.68	5.17	5.17	5.17	0.35	1.80	+13.1 9
5300	35.9	4.76	4.99	4.99	4,99	0.35	1.80	±13.19
SECKT	35,5	5.07	4.71	4.71	4.71	0.40	1.80	±13.19
5600	35.3	5.27	4.67	4.67	4.67	0.40	1.B0	± 13.1 9

Frequency wilding wave 300 MHz of ± 100 MHz only applies to DASY will 4 and highly (use Page 2), who is intrestricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at perfect on the uncertainty is the original briganized briganized being which is not a second of the 100 MHz of 200 MHz of

Cermicate No. EX3-3923 Aug 14

Page 5 of 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279

台灣檢驗科技股份有限公司

f (886-2) 2298-0488

www.tw.sas.com



Page: 266 of 339

E830V4- SN:3022

August 28, 2014

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:3923

### Calibration Parameter Determined in Body Tissue Simulating Media

(MHz)	Relative Permittivity	Conductivity (S/m)	ConvF X	ConvFY	ConvF2	Alphu <sup>u</sup>	Depth D (mm)	Unct. (k=2)
750	55.5	0.96	10.29	10.29	10.29	0.30	1.04	± 12.0.%
03E	55.2	0.97	10.32	10.32	10.32	0.55	0.78	± 12.0 %
900	55,0	1,05	10.04	10.04	10.04	0.44	0.88	± 12.0%
1750	53.4	1.49	8.30	8.30	8,30	0.39	0.85	± 12.01%
1900	53,3	1,52	8.03	B 03	8.03	0.30	0.95	± 12.0 %
2000	53,3	1.52	8.16	B.16	8.16	0.23	116	± 12.0 %
2300	62.9	1.01	7.76	7.76	7.76	0.44	0.77	± 12,0 %
2450	52.7	1.95	7.58	7.56	7.56	0.80	0.50	± 12.0 %
2600	52.5	216	7.36	1,36	7.36	0.80	0.50	± 12.0 %
5200	49.0	5,30	4.71	4.71	4.71	0.35	1.90	± 13.1 %
5300	48,9	5.42	4.58	4,58	4.58	0.35	1.90	± 13.1 %
5600	48.5	5.77	4.09	W.09	4:09	0.40	1.00	±13.19
5800	48.2	6.00	4.33	4,33	4:33	0.40	1.90	2 13,1 3

Frequency validity above 300 MHz of a 100 MHz only applies for DASY VII if and higher (see Page 2), when it is connected to 4 50 MHz. The "Finguncy validly obsers 300 MHz of ± 100 MHz only applies for DASY vill 4 and higher (see Page 2), a feet this remember is 4.50 MHz. The uncertainty in the RSS of the Count projections at content or here are content for the indicated frequency band. Finguisher, validly below 300 MHz or ± 0.35, 40, 50 and 70 MHz for Count assumption at 30, 54, 128, 150 and 200 MHz or specified; Above 6 GHz they addity on the exception of 200 MHz or 200 MHz or specified; Above 6 GHz they addity of asset parameters (a and a) can be released to ± 10% (injud) compressed from 45 septiments above 5 GHz, the validity of asset parameters (a and a) to be be released to ± 10% (injud) compressed from 45 septiments above 5 GHz, the validity of issue parameters (a and a) is remitted to ± 5%. The uncertainty for indicated target throughout the configuration and to be configurated to ± 5%. The uncertainty for indicated target throughout are distinctioned auring satisfation. SPEAG semants that the remaining deviation and to the boundary effect ofter componishing a state of the 15% for transferrable seeds 3 GHz and below ± 2% for requested between 3-6 GHz at any distinct larger than full his (mice tip

Certificate No. EX3-3923, Aug 14

Page E of 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 f (886-2) 2298-0488 www.tw.sas.com



Page: 267 of 339

EX3DV4- SN:3923

August 28, 2014

## Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide: R22)

1.0 Frequency response (normalized) 0.9 0.8 0.7 3000 2500 500 1000 f [MHz] TEN

Uncertainty of Frequency Response of E-field: ± 6.3% (k=2)

Certificate No: EX3-3923, Aug/14


Page 7 of 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sas.com







Page: 268 of 339

EX3DV4-SN:3923

August 28, 2014

## Receiving Pattern (6), 9 = 0°

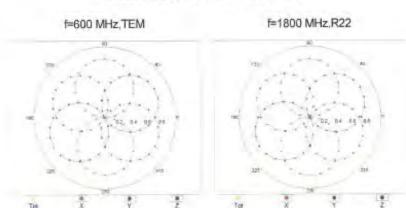

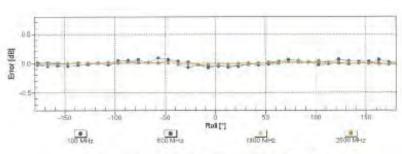

Uncertainty of Axial Isotropy Assessment: ± 0.5% (k=2)

Certificate No: EX3-3923\_Aug14

Page 8 of 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com





Page: 269 of 339

EX3DV4- SN:3923

August 28, 2014

# Dynamic Range f(SAR<sub>head</sub>) (TEM cell , f<sub>eval</sub>= 1900 MHz)

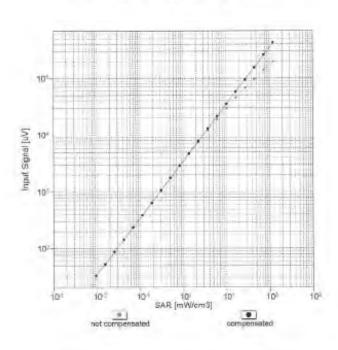

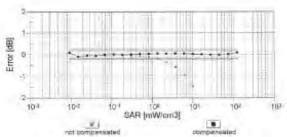

Uncertainty of Linearity Assessment: ± 0.6% (k=2)

Certificate No: EX3-3923\_Aug14

Page 9 of 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.


No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 f (886-2) 2298-0488



Page: 270 of 339


August 29, 2014 EX3DV4- SN:3923

## Conversion Factor Assessment

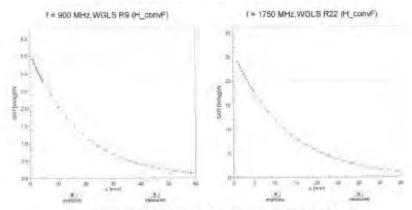

## Deviation from Isotropy in Liquid

Error (¢, 8), f = 900 MHz

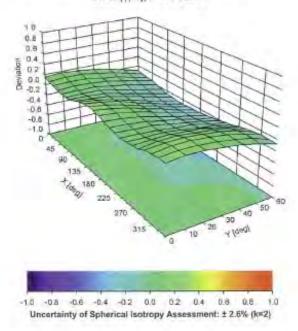

Certificate No: EX3-3923\_Aug 14

Page 10 of 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279



Page: 271 of 339

EXCIDVA 8N:3923

August 28, 2016

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:3923

#### Other Probe Parameters

Sensor Arrangament	Triangular
Connector Angle (*)	-57
Mechanical Surface Delection Mode	anabled
Optical Surface Dejection Mode	disabled
Probe Overall Length	337 min
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	1.4 mm

Certificate No. EX3-3925, Aug 14

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 www.tw.sgs.com



Page: 272 of 339

## Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





Schweizerischer Kalibrierdienst Service suisse d'étalonnage C Servizio svizzero di taratura Swiss Calibration Service

Accreditation No.: SCS 0108

Accredited by the Swiss Accreditation Service (SAS) The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Client

SGS-TW (Auden)

Certificate No: EX3-3770\_Apr15

## CALIBRATION CERTIFICATE

EX3DV4 - SN:3770

Calibration procedure(s)

QA CAL-01.v9, QA CAL-14.v4, QA CAL-23.v5, QA CAL-25.v6

Calibration procedure for dosimetric E-field probes

Calibration date:

April 28, 2015

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate

All calibrations have been conducted in the closed laboratory facility; environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	01-Apr-15 (No. 217-02128)	Mar-16
Power sensor E4412A	MY41498087	01-Apr-15 (No. 217-02128)	Mar-16
Reference 3 dB Attenuator	SN: S5054 (3c)	01-Apr-15 (No. 217-02129)	Mar-16
Reference 20 dB Attenuator	SN: S5277 (20x)	01-Apr-15 (No. 217-02132)	Mar-16
Reference 30 dB Attenuator	SN: S5129 (30b)	01-Apr-15 (No. 217-02133)	Mar-16
Reference Probe ES3DV2	SN: 3013	30-Dec-14 (No. ES3-3013_Dec14)	Dec-15
DAE4	SN: 660	14-Jan-15 (No. DAE4-660_Jan15)	Jan-16
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Apr-13)	In house check: Apr-16
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-14)	In house check: Oct-15

	Name	Function	Signature
Calibrated by:	Jeton Kastrati	Laboratory Technician	1+1
Approved by:	Katja Pokovic	Technical Menager	Blog
			Issued: April 30, 2015
This calibration certificate	e shall not be reproduced except in ful	without written approval of the laborato	

Certificate No: EX3-3770\_Apr15

Page 1 of 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279



Page: 273 of 339

## Calibration Laboratory of Schmid & Partner

Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





Schweizerischer Kalibrierdienst Service sulsse d'étalonnage Servizio svizzero di taratura Swiss Calibration Service

Accreditation No.: SCS 0108

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

#### Glossary:

tissue simulating liquid TSL NORMx,y,z sensitivity in free space sensitivity in TSL / NORMx,y,z ConvF DCP diode compression point

crest factor (1/duty\_cycle) of the RF signal modulation dependent linearization parameters CF A. B. C. D

p rotation around probe axis Polarization in

9 rotation around an axis that is in the plane normal to probe axis (at measurement center). Polarization 9

i.e., 9 = 0 is normal to probe axis

information used in DASY system to align probe sensor X to the robot coordinate system Connector Angle

#### Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices; Measurement
- Techniques", June 2013 IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

### Methods Applied and Interpretation of Parameters:

- NORMx, y, z: Assessed for E-field polarization 9 = 0 (f ≤ 900 MHz in TEM-cell; f > 1800 MHz; R22 waveguide). NORMx,y,z are only intermediate values, i.e., the uncertainties of NORMx,y,z does not affect the E2-field uncertainty inside TSL (see below ConvF).
- NORM(f)x,y,z = NORMx,y,z \* frequency\_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCPx,y,z: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal
- Ax.y,z; Bx.y,z; Cx.y,z; Dx.y,z; VRx.y,z: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode
- ConvF and Boundary Effect Parameters: Assessed in flat phantom using E-field (or Temperature Transfer Standard for f ≤ 800 MHz) and inside waveguide using analytical field distributions based on power measurements for f > 800 MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORMx, y, z \* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100
- Spherical isotropy (3D deviation from isotropy): in a field of low gradients realized using a flat phantom
- Sensor Offset: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle: The angle is assessed using the information gained by determining the NORMx (no uncertainty required).

Certificate No: EX3-3770\_Apr15

Page 2 of 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 www.tw.sas.com



EX3DV4 - SN:3770 April 28, 2015

Report No.: EN/2015/50005

Page: 274 of 339



# Probe EX3DV4

SN:3770

Manufactured: Calibrated:

July 6, 2010 April 28, 2015



Certificate No: EX3-3770\_Apr15

Page 3 of 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com



Page: 275 of 339

EX3DV4-SN:3770

April 28, 2015

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:3770

#### **Basic Calibration Parameters**

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm (µV/(V/m) <sup>2</sup> ) <sup>A</sup>	0.31	0.62	0.40	± 10.1 %
DCP (mV) <sup>B</sup>	105.3	100.7	101.6	

#### **Modulation Calibration Parameters**

UID	Communication System Name		A dB	B dB√μV	С	D dB	VR mV	Unc <sup>E</sup> (k=2)
0	CW	Х	0.0	0.0	1.0	0.00	145.1	±3.8 %
		Y	0.0	0.0	1.0		129.4	
		Z	0.0	0.0	1.0		138.4	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

The uncertainties of NormX,Y,Z do not affect the E2-field uncertainty inside TSL (see Pages 5 and 6).

Certificate No: EX3-3770\_Apr15

Page 4 of 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488

B Numerical linearization parameter: uncertainty not required.

5 Uncertainty is determined using the max, deviation from linear response applying rectangular distribution and is expressed for the square of the



Page: 276 of 339

April 28, 2015 EX3DV4-SN:3770

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:3770

## Calibration Parameter Determined in Head Tissue Simulating Media

Cambration Farameter Determined in Head Tissue Simulating Media									
f (MHz) <sup>C</sup>	Relative Permittivity <sup>F</sup>	Conductivity (S/m) F	ConvF X	ConvF Y	ConvF Z	Alpha <sup>G</sup>	Depth <sup>G</sup> (mm)	Unct. (k=2)	
750	41.9	0.89	9.53	9.53	9.53	0.26	1.28	± 12.0 %	
835	41.5	0.90	9.13	9.13	9.13	0.21	1.53	± 12.0 %	
900	41.5	0.97	8.89	8.89	8.89	0.23	1.38	± 12.0 %	
1450	40.5	1.20	8.19	8.19	8.19	0.18	1.59	± 12.0 %	
1750	40.1	1.37	8.04	8.04	8.04	0.38	0.80	± 12.0 %	
1900	40.0	1.40	7.82	7.82	7.82	0.36	0.80	± 12.0 %	
2000	40.0	1.40	7.81	7.81	7.81	0.36	0.80	± 12.0 %	
2300	39.5	1.67	7.47	7.47	7.47	0.27	0.96	± 12.0 %	
2450	39.2	1.80	7.16	7.16	7.16	0.34	0.80	± 12.0 %	
2600	39.0	1.96	6.85	6.85	6.85	0.34	0.92	± 12.0 %	
5250	35.9	4.71	5.27	5.27	5.27	0.30_	1.80	± 13.1 %	
5600	35.5	5.07	4.65	4.65	4.65	0.35	1.80	± 13.1 %	
5750	35.4	5.22	4.92	4.92	4.92	0.40	1.80	± 13.1 %	

<sup>&</sup>lt;sup>C</sup> Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

FAt frequencies below 3 GHz, the validity of tissue parameters (ε and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ε and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

GAlpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

diameter from the boundary.

Certificate No: EX3-3770\_Apr15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 www.tw.sgs.com



Page: 277 of 339

EX3DV4-SN:3770

April 28, 2015

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:3770

## Calibration Parameter Determined in Body Tissue Simulating Media

alibration Parameter Determined in Body Hissue Simulating Media									
f (MHz) <sup>C</sup>	Relative Permittivity <sup>F</sup>	Conductivity (S/m) <sup>F</sup>	ConvF X	ConvF Y	ConvF Z	Alpha <sup>G</sup>	Depth <sup>G</sup> (mm)	Unct. (k=2)	
750	55.5	0.96	9.30	9.30	9.30	0.25	1.38	± 12.0 %	
835	55.2	0.97	9.17	9.17	9.17	0.34	1.05	± 12.0 %	
900	55.0	1.05	8.91	8.91	8.91	0.30	1.20	± 12.0 %	
1450	54.0	1.30	8.12	8.12	8.12	0.18	1.62	± 12.0 %	
1750	53.4	1.49	7.79	7.79	7.79	0.44	0.80	± 12.0 %	
1900	53.3	1.52	7.59	7.59	7.59	0.44	0.80	± 12.0 %	
2000	53.3	1.52	7.73	7.73	7.73	0.42	0.80	± 12.0 %	
2300	52.9	1.81	7.32	7.32	7.32	0.41	0.80	± 12.0 %	
2450	52.7	1.95	7.21	7.21	7.21	0.31	0.80	± 12.0 %	
2600	52.5	2.16	6.96	6.96	6.96	0.27	0.80	± 12.0 %	
5250	48.9	5.36	4.70	4.70	4.70	0.35	1.90	± 13.1 %	
5600	48.5	5.77	4.03	4.03	4.03	0.45	1.90	± 13.1 %	
5750	48.3	5.94	4.33	4.33	4.33	0.50	1.90	± 13.1 %	

<sup>&</sup>lt;sup>C</sup> Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

\*\*PAt frequencies below 3 GHz, the validity of tissue parameters (ε and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ε and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

\*\*Alphat/Pepth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

Certificate No: EX3-3770\_Apr15

Page 6 of 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 www.tw.sgs.com




Page: 278 of 339

EX3DV4-SN:3770

April 28, 2015

## Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide: R22)

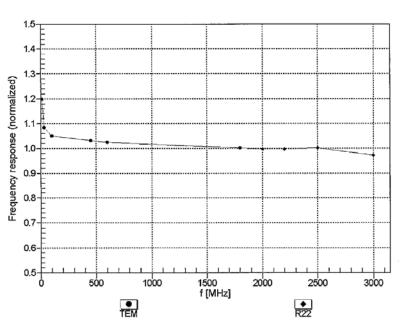

Uncertainty of Frequency Response of E-field: ± 6.3% (k=2)

Certificate No: EX3-3770\_Apr15

Page 7 of 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279

台灣檢驗科技股份有限公司

f (886-2) 2298-0488

www.tw.sgs.com




Page: 279 of 339

April 28, 2015 EX3DV4-SN:3770

## Receiving Pattern ( $\phi$ ), $\vartheta = 0^{\circ}$





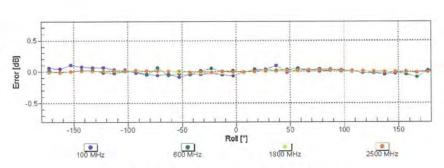

Uncertainty of Axial Isotropy Assessment: ± 0.5% (k=2)

Certificate No: EX3-3770\_Apr15

Page 8 of 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.


No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 www.tw.sgs.com




Page: 280 of 339

April 28, 2015 EX3DV4-SN:3770

# Dynamic Range f(SAR<sub>head</sub>) (TEM cell , f<sub>eval</sub>= 1900 MHz)

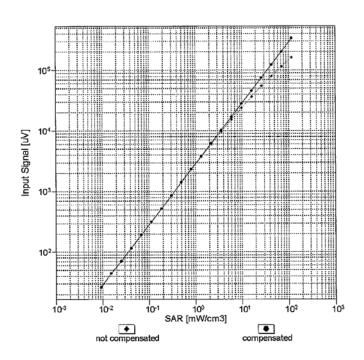

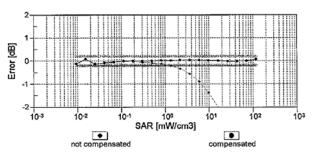

Uncertainty of Linearity Assessment: ± 0.6% (k=2)

Page 9 of 11 Certificate No: EX3-3770\_Apr15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.


No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279




Page: 281 of 339

EX3DV4- SN:3770 April 28, 2015

## Conversion Factor Assessment

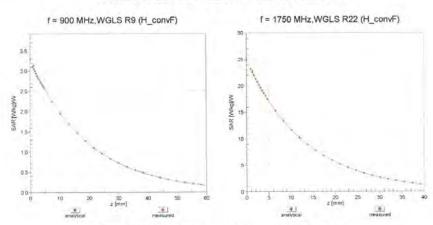

## Deviation from Isotropy in Liquid Error (φ, θ), f = 900 MHz

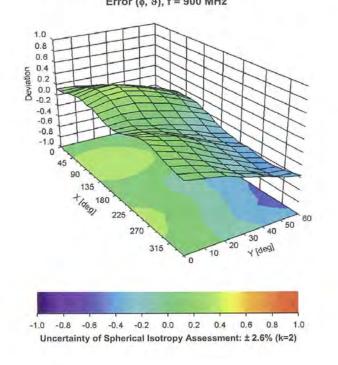

Certificate No: EX3-3770\_Apr15

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

Page 10 of 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com



April 28, 2015

Page: 282 of 339

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:3770

#### Other Probe Parameters

FX3DV4-- SN:3770

Sensor Arrangement	Triangular
Connector Angle (°)	-32.7
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	1.4 mm





Certificate No: EX3-3770\_Apr15

Page 11 of 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279

台灣檢驗科技股份有限公司

f (886-2) 2298-0488 www.tw.sgs.com



Page: 283 of 339

# 8. Uncertainty Budget

Measurement Uncertainty evaluation template for DUT SAR test

A	С	D	е		f	g	h=c * f / e	i=c * g / e	k
Source of Uncertainty	Tolerance/ Uncertainty	Probability Distributioi	Div	Div Value	ci (1g)	ci (10g)	Standard uncertainty	Standard uncertainty	vi, or Vef
Measurement system									( e
Probe calibration	6.55%	N	1	1	1	1	6.55%	6.55%	∞
Isotropy , Axial	3.50%	R	√3	1.732	1	1	2.02%	2.02%	∞
Isotropy, Hemispherical	9.60%	R	√3	1.732	1	1	5.54%	5.54%	∞
Boundary Effect	1.00%	R	√3	1.732	1	1	0.58%	0.58%	∞
Linearity	4.70%	R	√3	1.732	1	1	2.71%	2.71%	∞
Detection Limits	1.00%	R	√3	1.732	1	1	0.58%	0.58%	∞
Readout Electronics	0.30%	N	1	1	1	1	0.30%	0.30%	∞
Response time	0.80%	R	√3	1.732	1	1	0.46%	0.46%	∞
Integration Time	2.60%	R	√3	1.732	1	1	1.50%	1.50%	∞
Measurement drift (class A evaluation)	1.75%	R	√3	1.732	1	1	1.01%	1.01%	∞
RF ambient condition - noise	3.00%	R	√3	1.732	1	1	1.73%	1.73%	∞
RF ambient conditions - reflections	3.00%	R	√3	1.732	1	1	1.73%	1.73%	∞
Probe positioner Mechanical restrictions	0.40%	R	√3	1.732	1	1	0.23%	0.23%	∞
Probe Positioning with respect to phantom shell	2.90%	R	√3	1.732	1	1	1.67%	1.67%	∞
Post-processing	1.00%	R	√3	1.732	1	1	0.58%	0.58%	∞
Max SAR Eval	1.00%	R	√3	1.732	1	1	0.58%	0.58%	∞
Test Sample related									
Test sample positioning	2.90%	N	1	1	1	1	2.90%	2.90%	M-1
Device Holder Uncertainty	3.60%	N	1	1	1	1	3.60%	3.60%	M-1
Drift of output power	5.00%	R	√3	1.732	1	1	2.89%	2.89%	∞
Phantom and Setup									(C
Phantom Uncertainty	4.00%	R	√3	1.732	1	1	2.31%	2.31%	∞
Deviation from reference liquid target ε 'r(Body)	3.04%	N	1	1	0.64	0.43	1.95%	1.31%	М
Deviation from reference liquid target σ (Body)	3.74%	N	1	1	0.6	0.49	2.24%	1.83%	М
Liquid conductivity σ — temperature uncertainty	2.20%	R	√3	1.732	0.78	0.71	0.99%	0.90%	∞
Liquid permittivity ε – temperature uncertainty	0.20%	R	√3	1.732	0.23	0.26	0.03%	0.03%	∞
Combined standard		RSS	16				11.99%	11.82%	
uncertainty Expant uncertainty (95% confidence interval), K=2							23.97%		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 www.tw.sgs.com



Page: 284 of 339

# 9. Phantom Description

Schmid & Panner Engineering AG

Zeughausstasse 42, 8004 Zurch, Swiczerland Phone +41 1 245 9709, Fax +41 1 245 9779 http://www.seeg.com

#### Certificate of Conformity / First Article Inspection

ttens	SAM Twin Phantom V4.0	
Type No	QD 000 P40 C	
Series No	TP-1150 and higher	
Manufacturer	SPEAG Zeughaupstrasse 43 CH-8004 Zürich Sutzerland	

#### Tests

The series production process used allows the amitation to test of first articles.

Complete tests were made on the pre-series Type No. QD 000 P40 AA, Serial No. TP-1001 and on the series first article Type No. QD 000 P40 BA, Serial No. TP-1006. Certain parameters have been retested using further series items (called samples) or are tested at each item.

Test	Requirement	Details	Units tested
Dimensions	Compliant with the geometry according to the CAD model.	IT IS CAD File (*)	First article, Samples
Material thickness of shell	Compliant with the requirements according to the standards	2mm +/- 0,2mm in flat and specific areas of head section	First article, Samples, TP-1314 ff.
Material thickness at ERP	Compliant with the requirements according to the standards	6mm +/- 0.2mm at ERP	First article, All items
Material parameters	Dielectric parameters for required frequencies	300 MHz – 6 GHz: Relative permittivity < 5, Loss tangent < 0.05	Material samples
Material resistivity	The material has been tested to be compatible with the liquids defined in the standards if handled and cleaned according to the instructions. Observe technical Note for material competibility.	DEGMBE based simulating liquids	Pre-series, First article, Material samples
Sagging	Compliant with the requirements according to the standards. Sagging of the flat section when filled with tissue simulating liquid.	< 1% typical < 0.8% if filled with 155mm of HSL900 and without DUT below	Prototypes, Sample testing

- Standards [1] CENELEC EN 50361 [2] IEEE Sid 1528-2003
- IEC 62209 Part I
- The IT'S CAD file is derived from [2] and is also within the tolerance requirements of the shapes of the other documents.

## Conformity

Based on the sample tests above, we cartify that this item is in compliance with the uncertainty requirements of SAR measurements specified in standards [1] to [4].

07.07.2005

Signature / Stamp

Direction 881 - QQ 000 040 C-F

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488

www.tw.sas.com



Page: 285 of 339

# 10. System Validation from Original Equipment Supplier

Calibration Laboratory of Schmid & Partner Engineering AG





S Service suisse d'étalonnaire C Servizio svizzero di taratura S

Accredited by the Swiss Accreditation Service (BAS)

The Swiss Accreditation Service is one of the signatures to the EA Multilateral Agreement for the recognition of calibration certificates

SGS-TW (Auden)

Certificate No: D750V3-1015\_Aug14

Accreditation No.: SCS 108

CALIBRATION CERTIFICATE D750V3-SN 1015 Calibration procedura(s) Calibration procedure for dipole validation kits above 700 MHz August 28, 2014 This contribution certificate documents the traceposity to national standards, which during the physical units of magazinements (Ei). The measurements and the uncertainties with confidence probability are given on the following pages and are pain of the certificani. All contrastors have been conducted in the crosed laboratory facility environment temperature (12 ± 37°C and humidity < 70% Primary Standards Piwer meter EPM-482A GB374H0704 00-Cet-13 (No. 217-01827) Dct-14 uS37292783 Oct-16 Power sensor HP 8481A 09-Oct-13 (No. 217-01827) Power sensor HP 8481 A MY41002317 09-Oct-13 (No. 217 01828) DEE-14 Neterice 20 dB Attenuator SN. 5058 (20k) 03-Apr-14 (No. 217-01916) AD1-15 Type-N mismatch combination 9N: 5047.2 / 00327 03-Apr-14 (No. 217-01921) Apr-15. Finterense Probe ES3DV3 BN: 3205 30-Dec-13 (No. ES3-3205, Dec13) Dec 14 SN: 601 (B-Aug-14 (No. DAE4-63) Aug 14) Aug-15 Secondary Standards RF generator RAS SMT-06 Check Date (in house Scheduled Check in house check. Oct-16 100006 04-Aug-99 (in house check Oct-15) Network Analyzer HP 8753E US37390585 B4208 18-Oct-01 (in house check Oct-13) in house chack: Oct-1a Function Michael Wilder Laboratory Technician Californian by M. Webes Katju Pólicivia: Technical Aumyre Issued August 26, 2018 This calloration partitipage shall not be reproduced bridget in full without written approval of the laboratory

Certificate No: D750V3-1015 Aug14

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488



Page: 286 of 339

Calibration Laboratory of Schmid & Partner Engineering AG Joughausstriese 43, 0004 Zurich, Switzerland







C Servizio evizzero di erratura S Synas Calibration Service

Accorditation No.: SCS 108

Ascendited by the Swas Accenditation Service (SAS)

The Swies Accentitation Service in one of the agreements to the EA Mustilateral Agreement for the recognition of calibration certificates

#### Glossary:

TSL

tissue simulating liquid

ConvF N/A sensitivity in TSL / NORM x,y,z, not applicable or not measured

#### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- EC 62209-1. "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)". February 2005
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

#### Additional Documentation:

d) DASY4/5 System Handbook

#### Methods Applied and Interpretation of Parameters:

- Measurement Conditions: Further details are available from the Validation Report at the end
  of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL. The dipole is mounted with the spacer to position its feed
  point exactly below the center marking of the flat phentom section, with the arms oriented
  parallel to the body axis;
- Feed Point Impedance and Return Loss: These parameters are measured with the dipole
  positioned under the liquid filled phantom. The impedance stated is transformed from the
  measurement at the SMA connector to the feed point. The Return Loss ensures low
  reflected power. No uncertainty required.
- Electrical Delay: One-way delay between the SMA connector and the antenna feed point.
   No uncertainty required.
- · SAR measured: SAR measured at the stated antenna input power
- SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Cartilicate New 0750V3-1015 Aug 14

Page 8 of

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com



Page: 287 of 339

#### Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.5
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx dy, dz = 5 mm	
Frequency	750 MHz = 1 MHz	

#### Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.9	0.89 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	#2.2 ± 6 %	0,91 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C		-

#### SAR result with Head TSL

SAR averaged over 1 cm2 (1 g) of Head TSL	Condition	
SAR (necesured	250 mW Input power	2.11 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	8.31 W/kg ± 17.0 % (km2)

5AR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	250 mW input prover	1.38 W/kg
SAR for nominal Head TSL parameters	W of bestermon	5.45 W/kg ± 16.5 % (k=2)

## Body TSL parameters

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22,0 °C	55,5	0,96 mho/m
Measured Body TSL parameters	(22.0±0.2) °C	55,4±8%	0.99 mho/m ± 6 %
Body TSL temperature change during lest	< 0.5 °C	1,660	name of

## SAR result with Body TSL

SAR averaged over 1 cm <sup>2</sup> (1 g) of Body TSL	Condition	
SAFI measured	950 mW input power	2,24 WAG
SAR for nominal Body TSL parameters	nermalized to 1W	8.75 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm2 (10 g) of Body TSL	condition	
SAR measured	250 mW Input power	1.49 W/kg
SARI for nominal Body TSL gammeters	normalized to 1W	5.85 W/kg ± 16.5 % (k=2)

Certificate No: 0750V3+1015\_Aug14

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 www.tw.sgs.com



Page: 288 of 339

#### Appendix (Additional assessments outside the scope of SCS108)

#### Antenna Parameters with Head TSL

Impedance, transformed to feed point	53.1 Ω - 0.4 jΩ
Return Loss	- 30.4 dB

#### Antenna Parameters with Body TSL

Impedance, transformed to feed point	48.3 Ω - 2.9 jΩ	
Return Loss	- 29.5 dB	

## General Antenna Parameters and Design

Electrical Delay (one direction)	1.037 ns
Ereduled Dolly (one direction)	1.001 119

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the

#### Additional EUT Data

Manufactured by	SPEAG	
Manufactured on	March 22, 2010	

Certificate No: D750V3-1015\_Aug14


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 www.tw.sgs.com

f (886-2) 2298-0488





Page: 289 of 339

### **DASY5 Validation Report for Head TSL**

Date: 28.08.2014

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN: 1015

Communication System: UID 0 - CW; Frequency: 750 MHz Medium parameters used: f = 750 MHz;  $\sigma = 0.91$  S/m;  $\varepsilon_r = 42.2$ ; p = 1000 kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

### DASY52 Configuration:


- Probe: ES3DV3 SN3205; ConvF(6.37, 6.37, 6.37); Calibrated: 30.12.2013;
- · Sensor-Surface: 3mm (Mechanical Surface Detection)
- · Electronics: DAE4 Sn601; Calibrated: 18.08.2014
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52-52.8.8(1222); SEMCAD X 14.6.10(7331)

### Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid; dx=5mm, dy=5mm, dz=5mm Reference Value = 53.68 V/m; Power Drift = 0.01 dB Peak SAR (extrapolated) = 3.13 W/kg

SAR(1 g) = 2.11 W/kg; SAR(10 g) = 1.38 W/kg

Maximum value of SAR (measured) = 2.46 W/kg

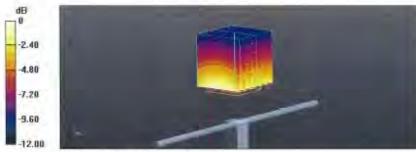

0 dB = 2.46 W/kg = 3.91 dBW/kg

Cartificate No: D750V3-1015\_Aug14

Page 5 of B



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 290 of 339

### Impedance Measurement Plot for Head TSL



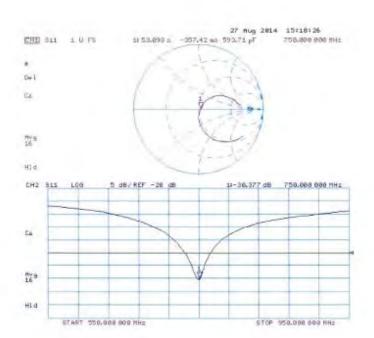

Certificate No: D750V3-1015\_Aug14

Page 6 of 8



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 291 of 339

### DASY5 Validation Report for Body TSL

Date: 27.08.2014

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN: 1015

Communication System: UID 0 - CW; Frequency: 750 MHz. Medium parameters used: f = 750 MHz;  $\sigma = 0.99 \text{ S/m}$ ;  $\epsilon_r = 55.4$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63,19-2011)


### DASY52 Configuration:

- Probe: ES3DV3 SN3205; ConvF(6.13, 6.13, 6.13); Calibrated: 30.12.2013;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 18.08.2014
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52,8,8(1222); SEMCAD X 14.6.10(7331)

### Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 53.06 V/m; Power Drift = 40.02 dB Peak SAR (extrapolated) = 3,26 W/kg SAR(1 g) = 2.24 W/kg; SAR(10 g) = 1.49 W/kg

Maximum value of SAR (measured) = 2.60 W/kg

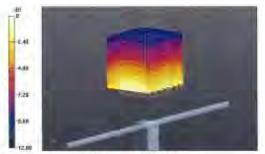

0 dB = 2.60 W/kg = 4.15 dBW/kg

Certificate No D750V3-1015\_Aug/4

Page 7 of 8



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sas.com


台灣檢驗科技股份有限公司



Page: 292 of 339

### Impedance Measurement Plot for Body TSL



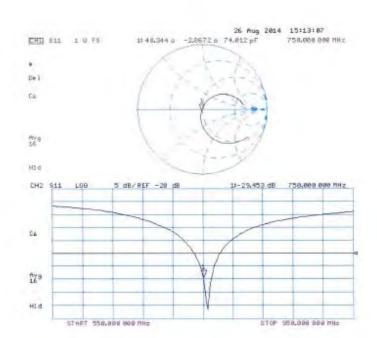

Certificate No: D750V3-1015\_Aug14

Page 8 of 8



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 www.tw.sgs.com

台灣檢驗科技股份有限公司

f (886-2) 2298-0488



Page: 293 of 339

# Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





Schweizertscher Kalibrierdienst S Service suisse d'étalonnage C Servizio svizzoro di taratura S Swiss Calibration Service

According by the Swas According Service (SAS). The Swine Accreditation Service is one of the aignatories to the EA Multilateral Agreement for the recognition of calibration certificates

SGS-TW (Auden)

Accreditation No.: SCS 108

Certificate No. D835V2-4d063\_Aug14

CALIBRATION CERTIFICATE

D835V2 - SN: 4d063

**DA CAL-05.v9** Clarevation procedure(b)

Calibration procedure for dipole validation kits above 700 MHz

Owntrution date:

August 28, 2014

This calibration certificate obcurrents the transability to national standards, which maligrate projected units of measurements (Sr). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed becombiny leading, any numeral immergation (22 ± 31°C and maniphy < 70%).

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	JD:4	Cal Date (Certificate No.)	Scheduled Calibration
Power meller EFM-442A	BB37480704	09-Oct-13 (No. 217-01627)	Ges-14
Proves sensor HP 8461A	US37292783	09-Cist-13 (No. 217-31827)	Oct-14
Power sensol HP 8481A	MY41092317	09-06-13 (No. 217-91828)	Oct-14
Reference 20 dB Attenuator	SN: 5058 (20K)	03-Apr-14 (No. 217-01916)	Apr-15
Type-N mismatch combination	SN: 5047.2 / 08327	03-Apr-14 (No. 217-01921)	Apr-15
Reference Prope ES3DV	SN: 3206-	30-Dec-13 (No. ES3-3205_Dec13)	Dec-14
DAE¢	SN: 601	18-Aug-14 (No. DAE4-601_Aug14)	Aug-15
Secondary Standards	ma	Creck Date (in house)	Schoolaled Chack
RF generator R&S SMT-ce	100006	04-Aug-89 (in house check Oct-13)	In House check: Oct 16
Welwork Arusyzer HP 8753E	US37380585 S4206	18-Cicl-U1 (in house chack Cicl-15)	III house chack, Oct-14
	Name	Function	Slovenure
Calibrated by:	Michiel Walne	Salamitory Technician	M. Weboo
Approved by:	Katia Pokova:	Technical Manager	1001111

Certificate No: D835V2-4d063 Aug14

The calibration certificate wheil not be reproduced except to full withour written approval of the laboratory

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 294 of 339

# Calibration Laboratory of Schmid & Partner

Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





Berylod puisso d'étalponage C Servizio evizzero di terratura Swine Calibration Service

recomition No. 5CS 108

According to the Swee Application Service (BAS)

The Swiss Appreciation Service is one of the signatures to the EA Mulfillabe of Agreement for the recognition of calibration cartific

#### Glossary:

TSL tissue simulating liquid

sensitivity in TSL / NORM x,y,z ConvE NVA not applicable or not measured

### Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013.
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)\*. February 2005
- c) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

#### Additional Documentation:

d) DASY4/5 System Handbook

### Methods Applied and Interpretation of Parameters:

- Measurement Conditions: Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL. The dipole is mounted with the spacer to position its feed. point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss: These parameters are measured with the dipole. positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay: One-way delay between the SMA connector and the antenna feed point. No uncertainty required
- SAR measured: SAR measured at the stated antenna input power,
- SAR normalized SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters. The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%

Certificate No: D835V2-4df6:L Audi vi

Page P of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 www.tw.sas.com

台灣檢驗科技股份有限公司

f (886-2) 2298-0488

Member of SGS Group





Page: 295 of 339

### Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	835 MHz ± 1 MHz	

### Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.5	0.90 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	42.0 ± 6 %	0.94 mha/m ± 6 %
Head TSL temperature change during test	< 0.5 °C		

#### SAR result with Head TSL

SAR averaged over 1 cm <sup>2</sup> (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.38 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	9.24 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm3 (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.55 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	6.05 W/kg ± 16.5 % (k=2)

### **Body TSL parameters**


	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.2	0.97 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	55.2 ± 6 %	1.01 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C		

### SAR result with Body TSL

SAR averaged over 1 cm <sup>2</sup> (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.41 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	9.35 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm3 (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.59 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	6.21 W/kg ± 16.5 % (k=2)

Certificate No: D835V2-4d063\_Aug14



This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The

Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 296 of 339

### Appendix (Additional assessments outside the scope of SCS108)

### Antenna Parameters with Head TSL

Impedanca: transformed to filed point	51,7 (1 - 3,6 j(1	
Return Loss	-28.2 dB	

### Antenna Parameters with Body TSL

Impedance, transformed to feed point	47.1 LL - 5.8 ju	
Raturn Loss	-29.7 dB	

#### General Antenna Parameters and Design

115
Okt.

After long term use with 100W radiated power, only a slight warming of the dipole ness the feedpoint can be measured.

The dipole is made of standard-samingin coascal pable. This center conductor of the feeding line at directly connected to the second anniof the dipole. The antenna is therefore short-clicuited for DC-signals. On some of the dipole, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the

"Measurement Donditions" paragraph. The SAR data are not affected by this change. The overall cipcle length is still according to the Standars:

No excessive large must be applied to the globic arms, because they might bend or the soldered connections near the feedpoint may be damaged.

#### Additional EUT Data

Manufactured by	SPEAG
Manufactured on	November 27, 2006

Certificate No: D835V2-4d065\_Aug14

Fage 4 of 5

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 297 of 339

### DASY5 Validation Report for Head TSL

Date: 28.08.2014

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d063

Communication System: UID 0 - CW; Frequency: 835 MHz. Medium parameters used: f = 835 MHz;  $\sigma = 0.94$  S/m;  $\epsilon_r = 42$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section; Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63,19-2011)

### DASY52 Configuration:

- Probe: ES3DV3 SN3205; ConvF(6.22, 6.22, 6.22); Calibrated: 30.12,2013;
- · Sensor-Surface: 3mm (Mechanical Surface Detection)
- · Electronics: DAE4 Sn601; Calibrated: 18.08.2014
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial; 1001
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)


### Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy≈5mm, dz=5mm Reference Value = 56.23 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 3.53 W/kg

SAR(1 g) = 2.38 W/kg; SAR(10 g) = 1.55 W/kg

Maximum value of SAR (measured) = 2,78 W/kg

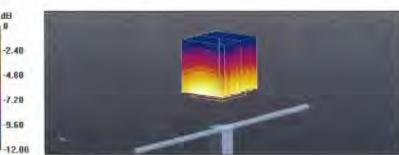

0 dB = 2.78 W/kg = 4.44 dBW/kg

Certificate No: D835V2-4c083\_Aug14

Page 5 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 298 of 339

### Impedance Measurement Plot for Head TSL



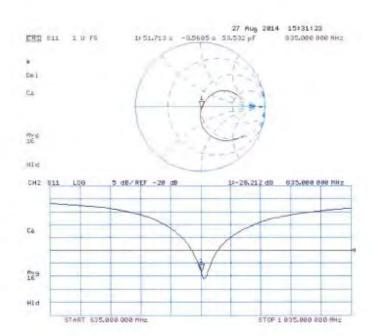

Certificate No: D835V2-4d063\_Aug14

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 f (886-2) 2298-0488



Page: 299 of 339

### DASY5 Validation Report for Body TSL

Date: 27.08.2014

Test Laboratory: SPEAG, Zurich, Switzerland

### DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d063


Communication System: UID 0 – CW; Frequency: 835 MHz
Medium parameters used: f = 835 MHz; σ = 1.01 S/m; ε<sub>e</sub> = 55.2; ρ = 1000 kg/m<sup>3</sup>
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

### DASY52 Configuration:

- Probe: ES3DV3 SN3205; ConvF(6.09, 6.09, 6.09). Calibrated: 30.12.2013;
- Sensor-Surface; 3mm (Mechanical Surface Detection)
- · Electronics: DAE4 Sn601; Calibrated: 18.08.2014
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8,8(1222); SEMCAD X 14.6.10(7331)

### Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 54.65 V/m; Power Drift = -0.03 dB Peak SAR (extrapolated) = 3.53 W/kg SAR(1 g) = 2.41 W/kg; SAR(10 g) = 1.59 W/kg Maximum value of SAR (measured) = 2.80 W/kg

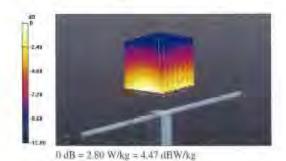



Page 7 of 8



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sqs.com

, ,

Member of SGS Group

SE

SG






Page: 300 of 339

### Impedance Measurement Plot for Body TSL



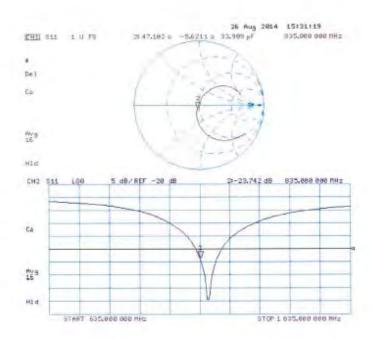

Certificate No: D835V2-4d063\_Aug14

Page 8 of 8



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 f (886-2) 2298-0488



Page: 301 of 339

Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





Service suisse d'étalonnage Servizio svizzero di taratura Swiss Calibration Service

Accredited by the Swes Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multitalizal Agreement for the recognition of calibration partificates

SGS-TW (Auden)

Accreditation No.: SCS 108

C

Certificate No: D1750V2-1008\_Aug14

### CALIBRATION CERTIFICATE

D1750V2 - SN: 1008

**DA CAL-05.v9** 

Calibration procedure for dipole validation kits above 700 MHz

August 26, 2014 Galitration mitel

This combration certificate documents the traceworkly to netional scandards, which results the physical units of measurements (Sit. The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate

All caliprations have been conducted in the order laboratory actify: environment, emperature (52 ± 3)°C and injuricity > 70%

Calibration Equipment used (M&TE critical for calibration)

	(E): 4	Cal Date (Certificate No.)	Scheduled Calgration
Fower meter EPM-942A	GB37480704	RH-Oct-13 (No. 217-01827)	Oct-14
Power sensor HF 8481A	0/937282783	09-Oct-13 (No. 217-01827)	Oct-18
Power sensor HP 8481A	MY41092317	09-Oct-13 (No. 217-01828)	OCE 14
Relevence 20 dB Attenuato	SN: 5058 (20k)	03-Apr-14 (No. 217-01918)	Apr-15
Type N mismatch combination	SN: 5047.2 / 06327	03-Apr-14 (No. 217-01921)	Apr 15
Reference Probe ES3OV3	SN: 3205	30-Dec-13 (No. EB3-3206_Dws13)	Duc-14
DAE4	9N: 601	18-Aug-14 (No. DAE4-601_Aug14)	Aug/15
Socuritary Standards	10.4	Check Date (in house)	Schedoled Check
RF generator RAS SMT-06	100005	04-Aug-99 (in house check Oct-13)	in house creck: Oct-18
Nelwork Analyzer HP 8753E	US37390585 84208	18-Oct-01 (in flower chick Oct-13)	In house check, Oct-14
	Name	Function	Signifure
Calibrated by:	Name Michael Water	Euroción Laborátory Technician	Milleto

Certificate No: D1750V2-1008\_Aug14

This calibration pertificate shall not be reproduced except at full without written approval of the laboratory

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 302 of 339

### Calibration Laboratory of

Schmid & Parmer Engineering AG





Schweizerischer Kalibrierdiene Service suitage d'étalonnage Servizio svizzero ili faratura

Accorditation No.: SCS 108

Apprenage by the Swire Apprehinition Street (BAS)

The Sweet Accreditation Service is one of the signalistics to line EA. Multilateral Agreement for the recognition of calibration certificates

TSL ConvF N/A

tissue simulating liquid sensitivity in TSL / NORM x,y,z

not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) KDB 865864, "SAR Measurement Requirements for 100 MHz to 6 GHz"

#### Additional Documentation:

d) DASY4/5 System Handbook

### Methods Applied and Interpretation of Parameters:

- Measurement Conditions: Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL: The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented
- Feed Point Impedance and Return Loss: These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required,
- Electrical Delay: One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured: SAR measured at the stated antenna input power.
- SAR normalized: SAR as measured, normalized to an input power of 1 W at the entenna
- SAR for nominal TSL parameters. The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Combosos No: D1760V2-1008\_Aug14

Page 2 nl 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 303 of 339

### Measurement Conditions

DASY system configuration, as far as not given on page 1

DASY Version	DASY5	V52.6,8
Extrapolation	Advanced Extrapolation	
Phentom	Modular Flat Phantom	
Distance Dipole Center - TSL	) D mm	with Space
Zoom Scan Resolution	dx. dy, dz = 5 mm	
Frequency	1750 MHz ± 1 MHz	

### Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	55.0 °C	40.1	1.37 mmp/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	392=5%	1.37 mho/m = 6.%
Head TSL temperature change during test	< 0.5 °C		-

### SAR result with Head TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	9.26 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	36.9 W/kg = 17.0 % (k=2)

SAR averaged over 10 cm² (10 g) of Head TSL	nordonop	
SAR measured	250 mW input power	4,91 W/kg
SAR for nominal Head TSL parameters	normalized to fW	19.6 W/kg ± 16.5 % (k=2)

### **Body TSL parameters**

	Tamperature	Permittivity	Conductivity
Nominal Body TSL parameters	22,0 °C	53,A	1.49 mholm
Measured Body TSL parameters	(22.0 ± 0.2) °C	52.0±8%	1.49 mbo/m ± 6 %
Body TSL temperature change during test	< 0.5 °C		

### SAR result with Body TSL

SAR averaged over 1 cm <sup>2</sup> (1 g) of Body TSL	Condition	
SAS measured	250 mW input power	9.44 W/kg
SAR for nominal Body TSL parameters	nomisized to 1W	37.5 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm <sup>2</sup> (10 g) of Body TSL	condition	
SAR measured	250 mW input power	5.07 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	20.2 W/kp ± 16.5 % (k=2)

Certificate No: D1750V2-1068\_Aug1/I

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 304 of 339

### Appendix (Additional assessments outside the scope of SCS108)

### Antenna Parameters with Head TSL

Impedance, transformed to feed point	$50.4 \Omega + 0.3 j\Omega$	
Return Loss	- 46.4 dB	

### Antenna Parameters with Body TSL

Impedance, transformed to feed point	$46.4 \Omega + 0.3 j\Omega$
Return Loss	- 28.5 dB

#### General Antenna Parameters and Design

Electrical Delay (one direction)	1.222 ns

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

#### Additional EUT Data


Manufactured by	SPEAG
Manufactured on	February 11, 2009

Certificate No: D1750V2-1008\_Aug14

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.





Page: 305 of 339

### DASY5 Validation Report for Head TSL

Date: 28.08.2014

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: D1750V2 - SN: 1008

Communication System: UID 0 - CW; Frequency: 1750 MHz

Medium parameters used: f = 1750 MHz;  $\sigma = 1.37$  S/m;  $\epsilon_r = 39.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

### DASY52 Configuration:

- Probe: ES3DV3 SN3205; ConyF(5.23, 5.23, 5.23); Calibrated: 30.12.2013;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 18.08.2014
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)


### Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 95.53 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 16.7 W/kg

SAR(1 g) = 9.26 W/kg; SAR(10 g) = 4.91 W/kg


Maximum value of SAR (measured) = 11.6 W/kg

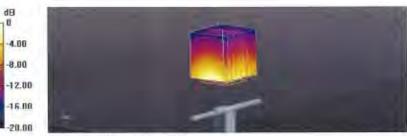

0 dB = 11.6 W/kg = 10.64 dBW/kg

Certificate No: D1750V2-1008\_Aug14

Page 5 of 9



This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司




Page: 306 of 339

### Impedance Measurement Plot for Head TSL

SGE



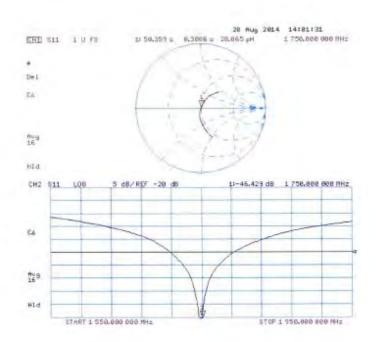

Certificate No: D1750V2-1008\_Aug14

Page 6 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 307 of 339

### DASY5 Validation Report for Body TSL

Date: 28.08.2014

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: D1750V2 - SN: 1008

Communication System: UID 0 - CW; Frequency: 1750 MHz

Medium parameters used: f = 1750 MHz;  $\sigma = 1.49 \text{ S/m}$ ;  $\epsilon_r = 52$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

### DASY52 Configuration:


- Probe: ES3DV3 SN3205; ConvF(4.89, 4.89, 4.89); Calibrated: 30.12.2013;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 18:08,2014
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

### Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 93,44 V/m; Power Drift = 0,01 dB Peak SAR (extrapolated) = 16.3 W/kg

SAR(1 g) = 9.44 W/kg; SAR(10 g) = 5.07 W/kg

Maximum value of SAR (measured) = 11.9 W/kg

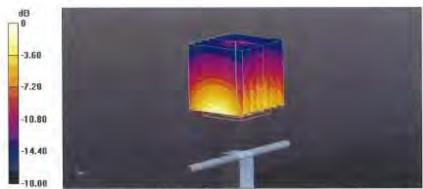

0 dB = 11.9 W/kg = 10.76 dBW/kg

Certificate No: D1750V2-1008\_Aug14

Page 7 of 8



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 308 of 339

### Impedance Measurement Plot for Body TSL



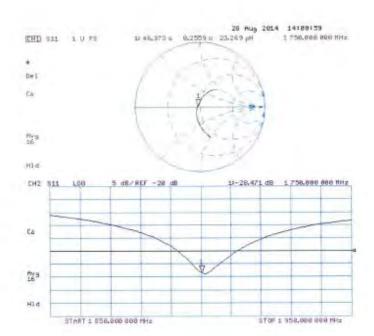

Certificate No: D1750V2-1008\_Aug14

Page 8 of 8



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 309 of 339

Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Client SGS-TW (Auden)

Accreditation No.: SCS 0108

Certificate No: D1900V2-5d027\_Apr15

### CALIBRATION CERTIFICATE

Object D1900V2 - SN:5d027

Calibration procedure(s) QA CAL-05.v9

Calibration procedure for dipole validation kits above 700 MHz

Calibration date: April 29, 2015

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility; environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	07-Oct-14 (No. 217-02020)	Oct-15
Power sensor HP 8481A	US37292783	07-Oct-14 (No. 217-02020)	Oct-15
Power sensor HP 8481A	MY41092317	07-Oct-14 (No. 217-02021)	Oct-15
Reference 20 dB Attenuator	SN: 5058 (20k)	01-Apr-15 (No. 217-02131)	Mar-16
Type-N mismatch combination	SN: 5047.2 / 06327	01-Apr-15 (No. 217-02134)	Mar-16
Reference Probe ES3DV3	SN: 3205	30-Dec-14 (No. ES3-3205_Dec14)	Dec-15
DAE4	SN: 601	18-Aug-14 (No. DAE4-601_Aug14)	Aug-15
Secondary Standards	ID#	Check Date (in house)	Scheduled Check
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-13)	In house check: Oct-16
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-14)	In house check: Oct-15
	Name	Function	Signature
Calibrated by:	Claudio Leubler	Laboratory Technician	

dibrated by: Claudio Leubler Laboratory Technician

Approved by: Katja Pokovic Technical Manage

Issued: April 29, 2015

This calibration certificate shall not be reproduced except in full without written approval of the laboratory

Certificate No: D1900V2-5d027\_Apr15

Page 1 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com

Mombor of SCS G



Page: 310 of 339

# Calibration Laboratory of Schmid & Partner

Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





Schweizerischer Kalibrierdienst. Service suisse d'étalonnage Servizio svizzero di taratura Swiss Calibration Service

Accreditation No.: SCS 0108

Accredited by the Swiss Accreditation Service (SAS) The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

#### Glossary:

TSL tissue simulating liquid sensitivity in TSL / NORM x,y,z ConvF not applicable or not measured N/A

### Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

### Additional Documentation:

d) DASY4/5 System Handbook

### Methods Applied and Interpretation of Parameters:

- Measurement Conditions: Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL: The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss: These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay: One-way delay between the SMA connector and the antenna feed point, No uncertainty required.
- SAR measured: SAR measured at the stated antenna input power.
- SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna
- SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Certificate No: D1900V2-5d027 Apr15

Page 2 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 311 of 339

### **Measurement Conditions**

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, $dy$ , $dz = 5 mm$	
Frequency	1900 MHz ± 1 MHz	

### **Head TSL parameters**

The following parameters and calculations were applied

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.0	1.40 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	38.6 ± 6 %	1.37 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C		

### SAR result with Head TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	10.1 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	40.6 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	250 mW input power	5.30 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	21.3 W/kg ± 16.5 % (k=2)

# **Body TSL parameters**

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53.3	1.52 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	52.8 ± 6 %	1.50 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C		

### SAR result with Body TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	9.78 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	39.3 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	condition	
SAR measured	250 mW input power	5.20 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	20.9 W/kg ± 16.5 % (k=2)

Certificate No: D1900V2-5d027\_Apr15

Page 3 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 312 of 339

### Appendix (Additional assessments outside the scope of SCS 0108)

### **Antenna Parameters with Head TSL**

Impedance, transformed to feed point	50.2 Ω + 2.5 jΩ
Return Loss	- 32.2 dB

### **Antenna Parameters with Body TSL**

Impedance, transformed to feed point	46.5 Ω + 2.5 jΩ
Return Loss	- 27.0 dB

### General Antenna Parameters and Design

Electrical Delay (one direction)	1.197 ns

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### **Additional EUT Data**

Manufactured by	SPEAG
Manufactured on	December 17, 2002

Certificate No: D1900V2-5d027\_Apr15

Page 4 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 313 of 339

### **DASY5 Validation Report for Head TSL**

Date: 29.04.2015

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d027

Communication System: UID 0 - CW; Frequency: 1900 MHz

Medium parameters used: f = 1900 MHz;  $\sigma = 1.37 \text{ S/m}$ ;  $\varepsilon_r = 38.6$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

Probe; ES3DV3 - SN3205; ConvF(5, 5, 5); Calibrated: 30.12.2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn601; Calibrated: 18.08.2014


Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001

DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

### Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 97.71 V/m; Power Drift = 0.03 dB Peak SAR (extrapolated) = 18.5 W/kg

SAR(1 g) = 10.1 W/kg; SAR(10 g) = 5.3 W/kgMaximum value of SAR (measured) = 12.3 W/kg

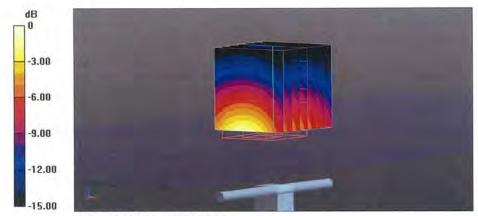

0 dB = 12.3 W/kg = 10.90 dBW/kg

Certificate No: D1900V2-5d027 Apr15

Page 5 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司


No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 www.tw.sas.com



Page: 314 of 339

### Impedance Measurement Plot for Head TSL



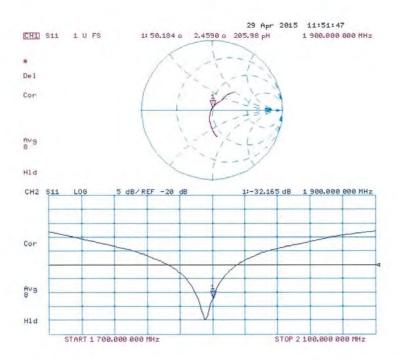

Certificate No: D1900V2-5d027\_Apr15

Page 6 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 315 of 339

### **DASY5 Validation Report for Body TSL**

Date: 29.04.2015

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d027

Communication System: UID 0 - CW; Frequency: 1900 MHz

Medium parameters used: f = 1900 MHz;  $\sigma = 1.5 \text{ S/m}$ ;  $\varepsilon_r = 52.8$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

### DASY52 Configuration:

Probe: ES3DV3 - SN3205; ConvF(4.65, 4.65, 4.65); Calibrated: 30.12.2014;

· Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn601; Calibrated: 18.08.2014


Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002

DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

### Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 94.63 V/m; Power Drift = 0.06 dB Peak SAR (extrapolated) = 16.7 W/kg SAR(1 g) = 9.78 W/kg; SAR(10 g) = 5.2 W/kg

Maximum value of SAR (measured) = 12.4 W/kg

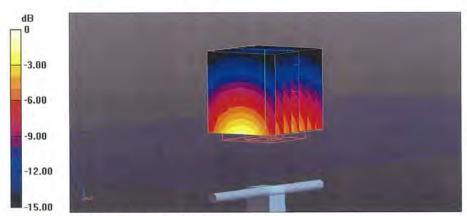

0 dB = 12.4 W/kg = 10.93 dBW/kg

Certificate No: D1900V2-5d027\_Apr15

Page 7 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 316 of 339

### Impedance Measurement Plot for Body TSL

29 Apr 2015 11:50:54 CHI S11 1: 46.518 Ω 210.40 pH 1 900,000 000 MHz De 1 Avg Hld 5 dB/REF -20 dB 1:-27.044 dB 1 900.000 000 MHz Av9 H1d START 1 700.000 000 MHz STOP 2 100,000 000 MHz

Certificate No: D1900V2-5d027\_Apr15

Page 8 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 f (886-2) 2298-0488

t (886-2) 2299-3279

www.tw.sgs.com



Page: 317 of 339

Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
Servizio svizzero di taratura
S Swiss Calibration Service

Accreditation No.: SCS 0108

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA

Multilateral Agreement for the recognition of calibration certificates

Client SGS-TW (Auden)

Certificate No: D2450V2-727\_Apr15

## CALIBRATION CERTIFICATE

D2450V2 - SN: 727

Calibration procedure(s) QA CAL-05.v9

Calibration procedure for dipole validation kits above 700 MHz

Calibration date: April 22, 2015

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).

The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID#	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	07-Oct-14 (No. 217-02020)	Oct-15
Power sensor HP 8481A	US37292783	07-Oct-14 (No. 217-02020)	Oct-15
Power sensor HP 8481A	MY41092317	07-Oct-14 (No. 217-02021)	Oct-15
Reference 20 dB Attenuator	SN: 5058 (20k)	01-Apr-15 (No. 217-02131)	Mar-16
Type-N mismatch combination	SN: 5047.2 / 06327	01-Apr-15 (No. 217-02134)	Mar-16
Reference Probe ES3DV3	SN: 3205	30-Dec-14 (No. ES3-3205_Dec14)	Dec-15
DAE4	SN: 601	18-Aug-14 (No. DAE4-601_Aug14)	Aug-15
Secondary Standards	ID#	Check Date (in house)	Scheduled Check
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-13)	In house check: Oct-16
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-14)	In house check: Oct-15
	Name	Function	Signature
Calibrated by:	Michael Weber	Laboratory Technician	M.Webes
Approved by:	Katja Pokovic	Technical Manager	Det-
			Issued: April 23, 2015

Certificate No: D2450V2-727\_Apr15

Page 1 of 8

This calibration certificate shall not be reproduced except in full without written approval of the laboratory

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 318 of 339

### Calibration Laboratory of Schmid & Partner

Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





Schweizerischer Kallbrierdienst Service suisse d'étalonnage C Servizio svizzero di taratura Swiss Calibration Service

Accreditation No.: SCS 0108

Accredited by the Swiss Accreditation Service (SAS) The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Glossary:

tissue simulating liquid TSL

ConvF sensitivity in TSL / NORM x,y,z not applicable or not measured N/A

### Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

#### Additional Documentation:

d) DASY4/5 System Handbook

### Methods Applied and Interpretation of Parameters:

- Measurement Conditions: Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL: The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss: These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay: One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured: SAR measured at the stated antenna input power.
- SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna
- SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%

Certificate No: D2450V2-727 Apr15

Page 2 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 319 of 339

#### **Measurement Conditions**

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2450 MHz ± 1 MHz	

### Head TSL parameters

s and calculations were applied

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.2	1.80 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	37.6 ± 6 %	1.82 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C		

### SAR result with Head TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	13.2 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	52.0 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	250 mW input power	6.10 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	24.2 W/kg ± 16.5 % (k=2)

### **Body TSL parameters**

ving parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	52.7	1.95 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	50.6 ± 6 %	2.02 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C		

### SAR result with Body TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	13.1 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	51.0 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	condition	
SAR measured	250 mW input power	6.10 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	24.0 W/kg ± 16.5 % (k=2)

Certificate No: D2450V2-727\_Apr15

Page 3 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 320 of 339

### Appendix (Additional assessments outside the scope of SCS 0108)

### Antenna Parameters with Head TSL

Impedance, transformed to feed point	56.2 Ω + 1.3 jΩ
Return Loss	- 24.6 dB

# Antenna Parameters with Body TSL

Impedance, transformed to feed point	51.8 Ω + 3.3 jΩ
Return Loss	- 28.6 dB

### General Antenna Parameters and Design

Electrical Delay (one direction)	1.149 ns

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

#### **Additional EUT Data**

Manufactured by	SPEAG
Manufactured on	January 09, 2003

Certificate No: D2450V2-727\_Apr15

Page 4 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 321 of 339

### **DASY5 Validation Report for Head TSL**

Date: 22.04.2015

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 727

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used: f = 2450 MHz;  $\sigma = 1.82$  S/m;  $\varepsilon_r = 37.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

### DASY52 Configuration:

Probe: ES3DV3 - SN3205; ConvF(4.54, 4.54, 4.54); Calibrated: 30.12.2014;

· Sensor-Surface: 3mm (Mechanical Surface Detection)

· Electronics: DAE4 Sn601; Calibrated: 18.08.2014

Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001

DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)


### Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 101.5 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 27.4 W/kg

SAR(1 g) = 13.2 W/kg; SAR(10 g) = 6.1 W/kg

Maximum value of SAR (measured) = 17.5 W/kg



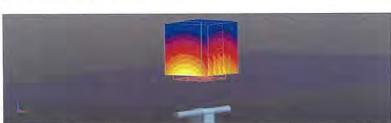

0 dB = 17.5 W/kg = 12.43 dBW/kg

Certificate No: D2450V2-727\_Apr15

Page 5 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 322 of 339

### Impedance Measurement Plot for Head TSL

22 Apr 2015 13:45:33 2 450.000 000 MHz 1 U FS Hld 2 450.000 000 MHz CH2 5 dB/REF -20 dE 1:-24,555 dB De 1 Cor Av9 START 2 250,000 000 MHz STOP 2 650.000 000 MHz

Certificate No: D2450V2-727\_Apr15

Page 6 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 323 of 339

### **DASY5 Validation Report for Body TSL**

Date: 22.04.2015

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 727

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used: f = 2450 MHz;  $\sigma = 2.02 \text{ S/m}$ ;  $\varepsilon_r = 50.6$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

### DASY52 Configuration:

Probe: ES3DV3 - SN3205; ConvF(4.32, 4.32, 4.32); Calibrated: 30.12.2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn601; Calibrated: 18.08.2014

Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002

DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

# Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 95.54 V/m; Power Drift = -0.01 dB Peak SAR (extrapolated) = 27.2 W/kg

SAR(1 g) = 13.1 W/kg; SAR(10 g) = 6.1 W/kgMaximum value of SAR (measured) = 17.4 W/kg



0 dB = 17.4 W/kg = 12.41 dBW/kg

Certificate No: D2450V2-727\_Apr15

Page 7 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 324 of 339

### Impedance Measurement Plot for Body TSL

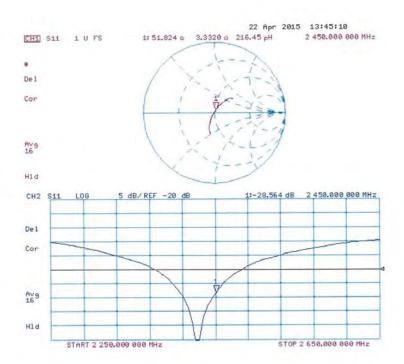

Certificate No: D2450V2-727\_Apr15

Page 8 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279



Page: 325 of 339

Calibration Laboratory of Schmid & Partner Engineering AG sstrasse 43, 8004 Zurich, Switzerland





Schweizerischer Kallbrierdianst Service suisse d'étalonnage Servizio svizzero di tarature Swiss Calibration Service

Accidented by the Swiss Accreditation Service (SAS) Appreditation No.: SCS 0108 The Swiss Accreditation Service is one of the signatories to the EA

SGS-TW (Auden)

Certificate No: D5GHzV2-1023\_Jan15

# CALIBRATION CERTIFICATE

Multitateral Agreement for the recognition of calibration certificates

Direct

D5GHzV2 - SN:1023

Calibration procedure(s)

QA CAL-22.v2 Calibration procedure for dipole validation kits between 3-6 GHz

Calibration date:

January 29, 2015.

This collibration certificate documents the traceability to retional standards, which realize the physical units of measurements (SI) The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate

dibrations have been conducted in the classed laboratory facility environment temperature (22 ± 3)°G and (winking a 70%)

Calibration Equipment used (MATE critical for calibration)

LOWEL LEIGHT CLIM-HISTOR	CIPSAABOLDA	nOct-14 (MC 511-05050)	Oct-15
Power sensor HP 8481A	US37292783	07-Oct-14 (No. 217-02020)	D0-15
Power sensor HP 8481A	MY41092317	07-Oct-14 (No. 217-02021)	Dot-15
Reference 20 dB Attanuator	BN: 5058 (20k)	09-Apr-14 (No. 217-01918)	Apr-15
Type-N mismatch combination	SN: 8047.2 / 06327	03-Apr-14 (No. 217-01921)	Apr-15
Fleteence Probe EX3DV4	SN: 3503	30-Dec-14 (No. EX3-3503_Dec14)	Dec-15
DAE4	SN: 601	18-Aug-14 (No. DAE4-601_Aug-14)	Aug-15
Secondary Standards	(D a	Check Liste (in house)	Scheduled Check
RF generator R&S SMT 06	100005	94-Aug-89 (in house shack Out-13)	In house check: Oct-16
	US37590585 S4206	19-Oct-01 (In house check Oct-14).	In house cheps: Oct-15

Function Laboratory Technician

Technical Manager

Issued Jercury 29, 2015

This calibration certificate shall not be regradueled except in full without written approved of the laberatory

Certificate No: D5GHzV2-1023 Jan 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 www.tw.sgs.com



Page: 326 of 339

#### Calibration Laboratory of

Schmid & Partner
Engineering AG
Zeuchausstresse 43, 8004 Zurich, Switzerland





S Schweiserischer Kellprierpiers

Service suisse d'étationnage

Service evizzera d'havitoris

S Series Cellbration Service

Accomplisation No.: SCS 0108

Accredition by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Mullitateral Agreement for the recognition of calibration certificates

#### Glossary:

TSL fissue simulating liquid
ConvF sensitivity in TSL / NORM x,y,z
N/A not applicable or not measured

# Calibration is Performed According to the Following Standards:

- a) IEC 62209-2, "Evaluation of Human Exposure to Radio Frequency Fields from Handheld and Body-Mounted Wireless Communication Devices in the Frequency Range of 30 MHz to 6 GHz: Human models, Instrumentation, and Procedures" Part 2: "Procedure to determine the Specific Absorption Rate (SAR) for including accessories and multiple transmitters", March 2010
- b) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"
- c) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013.

# Additional Documentation:

d) DASY4/5 System Handbook

#### Methods Applied and Interpretation of Parameters:

- Measurement Conditions: Further details are available from the Validation Report at the end
  of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL: The dipole is mounted with the spacer to position its teed
  point exactly below the center marking of the flat phantom section, with the arms oriented
  parallel to the body axis.
- Feed Point Impedance and Return Loss: These parameters are measured with the dipole
  positioned under the liquid filled phantom. The impedance stated is transformed from the
  measurement at the SMA connector to the feed point. The Return Loss ensures low
  reflected power. No uncertainty required.
- Electrical Delay: One-way delay between the SMA connector and the antenna feed point.
   No uncertainty required.
- SAR measured: SAR measured at the stated antenna input power.
- SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Certificant No. 05GHzV2-1023\_Jan15

Page 2 of 18

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com

Mombar of SGS G



Page: 327 of 339

#### Measurement Conditions

DASY system configuration, as for as not given on page 1

DASY Version	DASYS	V52.6.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V5.0	
Distance Dipole Center - TSL	10 mm	with Specer
Zoom Scan Resolution	dx, dy = 4.0 mm, dz = 1.4 mm	Graded Ratio = 1.4 (Z direction)
Frequency	5200 MHz ± 1 MHz 5300 MHz ± 1 MHz 5600 MHz ± 1 MHz 5600 MHz ± 1 MHz	

# Head TSL parameters at 5200 MHz

The following parameters and calculations were applied

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	36.0	4.56 mhorm
Measured Head TSL parameters	[22,0±02] °C	36.3±0 %	4.56 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	_	_

# SAR result with Head TSL at 5200 MHz

SAR averaged over 1 cm² (1 g) of Head TSL	Condition	
SAR measured	100 mW Input power	7.78 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	77.9 W/kg = 19.9 % (k=2)

SAR averaged over 10 cm <sup>2</sup> (10 g) of Head TSL	condition	
SAR measured	100 mW Input power	2:32 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	22.2 W/kg = 19.5 % (k=2)

Certilizate No. 05GHzV2-1023 Jan 15

Pamerá ni to

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com



Page: 328 of 339

## Head TSL parameters at 5300 MHz

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35,9	4.78 mham
Measured Head TSL parameters	(22.0 ± 0.2) °C	361 + 6 %	4.66 mho/m = 6 %
Head TSL temperature change during test	<0.5 °C	-	-

# SAR result with Head TSL at 5300 MHz

SAR averaged over 1 cm² (1 g) of Head TSL.	Condition	
BAR measured	100 mW inpul power	8.17 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	81.7 W / kg ± 19.9 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.34 W/kg
SAH for nominal Head TSL parameters	nomalized to 1W	23.4 W/kg ± 19.5 % (km2)

#### Head TSL parameters at 5600 MHz

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	S5'0, O.	35.5	5.07 mha/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	35.7 ± 6.%	4.97 mho/m ± 6%
Head TSL temperature change during test	< 0.5 °C	-	100

# SAR result with Head TSL at 5600 MHz

SAR averaged over 1 cm <sup>2</sup> (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.14 W/kg
SAR for nominal Hoad TSL parameters	WI al besilamon	81.4 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm3 (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.31 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.1 W/kg ± 19.5 % (k=2)

Certificate No: D5GHzV2-1023 Jan 15

Page 4 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

SGS Taiwan Ltd.

t (886-2) 2299-3279 www.tw.sgs.com



Page: 329 of 339

## Head TSL parameters at 5800 MHz

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22,0 °C	35.3	5.27 mholm
Measured Head TSL parameters	(22.0 ± 0.2) °C	35.4 = 6.16	5.18 mho/m = 6 %
Head TSL temperature change during test	€ 0.5 °C	_	-

#### SAR result with Head TSL at 5800 MHz

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	7.82 W/kg
SAR for nominal Head TSL parameters	Wt at bestemon	78.2 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm2 (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.23 W/kg
SAR for nominal Flead TSL parameters	normalized to 1W	22.3 W/kg ± 19.5 % (k=2)

Certificate No. D9GHzV2-1023\_Jan 15

Page 5 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

SGS Taiwan Ltd.

t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com



Page: 330 of 339

# Body TSL parameters at 5200 MHz

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	49,0	5.30 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	49.4 ± 6 %	5.42 mho/m ± 6 %
Body TSL temperature change during test	<0.5°C		-

## SAR result with Body TSL at 5200 MHz

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7,33 W/kg
SAR for nominal Body TSL parameters.	normalized to 1W	73.5 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm2 (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2,04 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	20.5 W/kg = 19.5 % (k=2)

# Body TSL parameters at 5300 MHz

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	220.0	48.9	5.42 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	492=619	5.55 mho/m = 8.%
Body TSL temperature change during lest	< 0.5 °C	_	-

# SAR result with Body TSL at 5300 MHz

SAR averaged over 1 cm2 (1 g) of Body TSL	Condition	
SAR massurina	100 mW Input power	7.45 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	74.6 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm² (10 g) of Body TSL	gondition	
SAR measured	100 mW input power	2.07 W/kg
SAR for nominal Flody TSL parameters	normalized to 1W	20.8 W/kg = 19.5 % (N=2)

Certificate No: D5GHzV2-1023 Jan 15

Papers of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com



Page: 331 of 339

## Body TSL parameters at 5600 MHz

The following parameters and calculations were applied

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	.82,0 °C	48.5	5.77 mholm
Measured Body TSL parameters	(22,0 ± 0.2) °C	48.7 ± 6 %	5.96 mho/m ± 6 %
Body TSL temperature change during test	≤05°C		

## SAR result with Body TSL at 5600 MHz

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	Condition	
SAR measured	100 mW (ripul power	7.77 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	77.9 W/kg = 19.9 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.15 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	21.6 W/kg ± 19.5 % (k=2)

#### Body TSL parameters at 5800 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.2	6,00 mno/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	48.4 ± 6.5 <sub>6</sub>	6.25 mhg/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	-	_

# SAR result with Body TSL at 5800 MHz

SAR averaged over 1 cm <sup>2</sup> (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.54 W/kg
SAFI for nominal Body TSL parameters	normalized to tW	75,5 W/kg ± 19,9 % (k=2)

SAR averaged over 10 cm2 (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.07 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	30.7 W/kg = 19.5 % (k=2)

Certificate No: D5GHzV2-1828\_Jan 15

Page 7 of 19

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com



Page: 332 of 339

# Appendix (Additional assessments outside the scope of SCS0108)

## Antenna Parameters with Head TSL at 5200 MHz

Impedance, transformed to leed point	49.2 (2 - 8.5 (2)
Return Loss	-21.4 dB

#### Antenna Parameters with Head TSL at 5300 MHz

Impedance, transformed to leed point	51.0 tr - 3.8 pt	
Raum Loss	- 28.2 aB	

## Antenna Parameters with Head TSL at 5600 MHz

Impedance, transformed to lead point	53.4 (1 - 2.7 )(1	
Fletury Loss	- 27.5 dB	

#### Antenna Parameters with Head TSL at 5800 MHz

Impedance, transformed to feed point	55.5 D + 1.0 JO
Return Loss	- 25.4 dB

# Antenna Parameters with Body TSL at 5200 MHz

Impedance, transformed to feed point	49.0 Q - 7.1 pg
Relum Loss	- 22.8 dB

#### Antenna Parameters with Body TSL at 5300 MHz

Impedance, transformed to feed point	51.5 D - 2.2 pJ	
Rejum Loss	-31,7 de	

# Antenna Parameters with Body TSL at 5600 MHz

Impedance, transformed to feed point	54.6 Ω - 1.5 μT
Return Loss	-26.8 dB

Dertricate No. D50HzV2-1023\_Jan (4)

Page 6 of 15



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279

台灣檢驗科技股份有限公司

f (886-2) 2298-0488

www.tw.sgs.com



Page: 333 of 339

# Antenna Parameters with Body TSL at 5800 MHz

Impedance, transformed to feed point	55.8 £7 + 2.8 jQ	
Retirm Loss	24.5 06	

## General Antenna Parameters and Design

Electrical Delay (one direction)	1.199 ns

After lang term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semiripid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The amenina is therefore short-capalised for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in proor to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be carriaged.

#### Additional EUT Data

Manufactimed by	SPEAG
Manufactured on	February 05, 2004

Certificate No. D9GHzV2-1023\_Jan 15

Page 8 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 f (886-2) 2298-0488 www.tw.sgs.com

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

Member of SGS Group





Page: 334 of 339

#### DASY5 Validation Report for Head TSL

Date: 28,01-2015

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 5GHz; Type; D5GHzV2; Serial: D5GHzV2 - SN:1023

Communication System: UID 0 - CW; Frequency: 5200 MHz, Frequency: 5300 MHz, Frequency: 5600 MHz, Frequency: 5800 MHz

Medium parameters used: f = 5200 MHz;  $\sigma = 4.56 \text{ S/m}$ ;  $\epsilon_r = 36.3$ ;  $\rho = 1000 \text{ kg/m}^3$ . Medium parameters used: f = 5300 MHz;  $\sigma = 4.66$  S/m;  $\epsilon_t = 36.1$ ;  $\rho = 1000$  kg/m $^2$ , Medium parameters used: f = 5600 MHz;  $\sigma = 1000$  kg/m $^2$ , Medium parameters used: f = 5600 MHz;  $\sigma = 1000$  kg/m $^2$ , Medium parameters used:  $\sigma = 1000$  kg/m $^2$ ,  $\sigma = 1000$  kg/m $^2$  kg/m $^2$ ,  $\sigma = 10000$  kg/m $^2$  kg/m $^2$  kg/m $^2$ 11.97 S/m;  $\epsilon_{j} = 35.7$ ;  $\rho = 1000 \text{ kg/m}^{3}$ . Medium parameters used: I = 5800 MHz; n = 5.18 S/m;  $\epsilon_{i} = 35.4$ ;  $\rho = 1000 \text{ kg/m}^{3}$ 

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63,19-2011)

#### DASY52 Configuration.

- Probe: EX3DV4 SN3503; ConvF(5.51, 5.51, 5.51); Calibrated: 30.12.2014, ConvF(5.21, 5.21, 5.21); Calibrated: 30.12.2014, ConvF(4.92, 4.92, 4.92); Calibrated: 30.12.2014, ConvF(4.9, 4.9, 4.9);
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4-Sn601; Calibrated: 18.08.2014
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5200 MHz/Zoom Sean,

dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 64:14 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 28.3 W/kg

SAR(1 g) = 7.78 W/kg; SAR(10 g) = 2.22 W/kg

Maximum value of SAR (measured) = 17.8 W/kg

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5300 MHz/Zoom Scan.

dist=1.4mm (8x8x7)/Cube 0: Measurement gral. dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 65.47 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 30.7 W/kg

SAR(1 g) = 8.17 W/kg; SAR(10 g) = 2.34 W/kg

Maximum value of SAR (measured) = 18.6 W/kg

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan.

dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 63.68 V/m, Power Drift = 0.08 dB

Peak 5AR (extrapolated) = 32.2 W/kg

SAR(1 g) = 8.14 W/kg; SAR(10 g) = 2.31 W/kg

Maximum value of SAR (measured) = 18.9 W/kg

Cintillosta No: D5GHzV2-1023\_Jan 15

Page 10 or 15



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The

Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 www.tw.sas.com

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

Member of SGS Group



Page: 335 of 339

# Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan,

dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 61.76 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 32.0 W/kg

SAR(1 g) = 7.82 W/kg; SAR(10 g) = 2.23 W/kg

Maximum value of SAR (measured) = 18.4 W/kg



0 dB = 17.8 W/kg = 12.50 dBW/kg

SG

Cartificate No: D5GHzV2-1023\_Jan 15

Page 11 of 15



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279


f (886-2) 2298-0488 www.tw.sgs.com



Page: 336 of 339

#### Impedance Measurement Plot for Head TSL



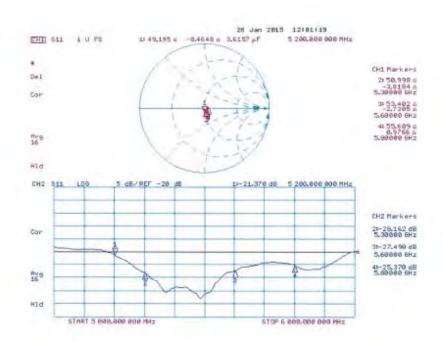

Certificate No: D5GHzV2-1023\_Jan15

Page 12 of 15



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 www.tw.sgs.com



Page: 337 of 339

#### DASY5 Validation Report for Body TSL

Date: 29,01.2015

Test Laboratory SPEAG, Zorich, Switzerland

DUT: Dipole 5GHz; Type: D5GHzV2; Serial: D5GHzV2 - SN:1023

Communication System: UID 0 - CW: Frequency: 5200 MHz, Frequency: 5300 MHz, Frequency: 5600 MHz, Frequency: 5800 MHz

Medium parameters used: l = 5200 MHz;  $\sigma = 5.42 \text{ S/m}$ ;  $v_i = 49.4$ ;  $\rho = 1000 \text{ kg/m}^3$ . Medium parameters used: t = 5300 MHz;  $\alpha = 5.55$  S/m;  $\kappa = 49.2$ ;  $\rho = 1000$  kg/m $^{\circ}$ , Medium parameters used: t = 5600 MHz;  $\alpha = 1000$  kg/m $^{\circ}$ 5.96 S/m;  $\epsilon_r = 48.7$ ;  $\rho = 1000 \text{ kg/m}^3$ . Medium parameters used: f = 5800 MHz:  $\alpha = 6.25 \text{ S/m}$ :  $\epsilon_r = 68.4$ ;  $\rho = 6.00 \text{ MHz}$ :  $\alpha = 6.25 \text{ S/m}$ :  $\epsilon_r = 6.00 \text{ MHz}$ :  $\alpha = 6.25 \text{ S/m}$ :  $\epsilon_r = 6.00 \text{ MHz}$ :  $\alpha = 6.25 \text{ S/m}$ :  $\epsilon_r = 6.00 \text{ MHz}$ :  $\alpha = 6.25 \text{ S/m}$ :  $\epsilon_r = 6.00 \text{ MHz}$ :  $\alpha = 6.00 \text{$ 

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63 19-2011)

#### DASY 52 Configuration:

- Probe: EX3DV4 SN3503; ConvF(4.95, 4.95, 4.95); Calibrated; 30.12.2014, ConvF(4.78, 4.78. 4.78); Calibrated: 30,12,2014, ConvF(4.35, 4.35, 4.35); Calibrated: 30.12.2014, ConvF(4.32, 4.32, 4.32); Calibrated: 30.12.2014.
- Sensor-Surface: 1 Annu (Mechanical Surface Detection)
- Electronics: DAE4 Sn601 | Calibrated | 18:08:2014
- Flanton: Flat Phantom 5.0 (back); Type: QD000P50AA; Seral: 1002
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5200 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm Reference Value = 57.97 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 28.6 W/kg SAR(1 g) = 7.33 W/kg; SAR(10 g) = 2.04 W/kgMaximum value of SAR (measured) = 17.3 W/kg

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5300 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 57.58 V/m. Power Drift = -0.06 (B)

Peak SAR (extrapolated) = 30.0 W/kg

SAR(1 g) = 7.45 W/kg; SAR(10 g) = 2.07 W/kg

Maximum value of SAR (measured) = 17.8 W/kg

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan,

dist=1.4mm (8x8x7)/Cube 0: Measurement grid dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 56.88 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 34.4 W/kg

SAR(1 g) = 7.77 W/kg; SAR(10 g) = 2.15 W/kg

Maximum value of SAR (measured) = 19.3 W/kg

Certificate No. D6GHzV2-1022 Jan15

Page 18 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279

台灣檢驗科技股份有限公司

f (886-2) 2298-0488

Member of SGS Group

www.tw.sas.com



Page: 338 of 339

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan,


dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 55.10 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 35.2 W/kg

SAR(1 g) = 7.54 W/kg; SAR(10 g) = 2.07 W/kg

Maximum value of SAR (measured) = 19.1 W/kg

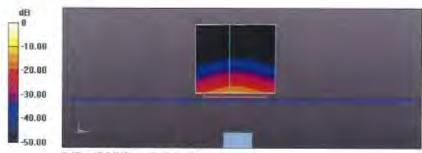

0 dB = 17.3 W/kg = 12.38 dBW/kg



Page 14 of 15



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 www.tw.sgs.com

台灣檢驗科技股份有限公司


f (886-2) 2298-0488



Page: 339 of 339

## Impedance Measurement Plot for Body TSL

SGS

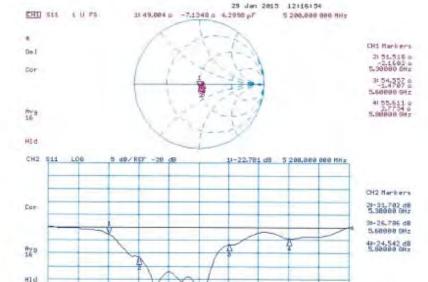

SGS

SG

Certificate No: D5GHzV2-1023\_Jan15

Page 15 of 15

# - End of 1st part of report -

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488 www.tw.sgs.com