

Partial FCC Test Report

(PART 24)

Report No.: RF200522C02-6

FCC ID: S9E-EM7565

Test Model: EM7565

Received Date: May 22, 2020

Test Date: Jun. 08 ~ Jun. 30, 2020

Issued Date: Jul. 03, 2020

Applicant: Trimble Inc.

Address: 5475 Kellenburger Rd, Dayton, OH 45424

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location: No.19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City
33383, Taiwan

**FCC Registration /
Designation Number:** 788550 / TW0003



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

Table of Contents

Release Control Record	3
1 Certificate of Conformity	4
2 Summary of Test Results	5
2.1 Measurement Uncertainty	5
2.2 Test Site and Instruments	6
3 General Information	7
3.1 General Description of EUT	7
3.2 Configuration of System under Test.....	9
3.3 Test Mode Applicability and Tested Channel Detail	9
3.4 EUT Operating Conditions	11
3.5 General Description of Applied Standards and references.....	11
4 Test Types and Results	12
4.1 Output Power Measurement	12
4.1.1 Limits of Output Power Measurement	12
4.1.2 Test Procedures.....	12
4.1.3 Test Setup	13
4.1.4 Test Results	14
4.2 Radiated Emission Measurement	22
4.2.1 Limits of Radiated Emission Measurement	22
4.2.2 Test Procedure	22
4.2.3 Deviation from Test Standard	22
4.2.4 Test Setup	23
4.2.5 Test Results	24
5 Pictures of Test Arrangements	28
Appendix – Information of the Testing Laboratories	29

Release Control Record

Issue No.	Description	Date Issued
RF200522C02-6	Original Release	Jul. 03, 2020

1 Certificate of Conformity

Product: LTE/UMTS Wireless Module

Brand: AirPrime

Test Model: EM7565

Sample Status: Identical Prototype

Applicant: Trimble Inc.

Test Date: Jun. 08 ~ Jun. 30, 2020

Standards: FCC Part 24, Subpart E

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by : Lena Wang , **Date:** Jul. 03, 2020
Lena Wang / Specialist

Approved by : Dylan Chiou , **Date:** Jul. 03, 2020
Dylan Chiou / Senior Project Engineer

2 Summary of Test Results

Applied Standard: FCC Part 24 & Part 2			
FCC Clause	Test Item	Result	Remarks
2.1046 24.232	Effective Isotropic Radiated Power	Pass	Meet the requirement of limit.
2.1047	Modulation Characteristics	N/A	Refer to Note 1
24.232(d)	Peak to Average Ratio	N/A	Refer to Note 1
2.1055 24.235	Frequency Stability	N/A	Refer to Note 1
2.1049	Occupied Bandwidth	N/A	Refer to Note 1
24.238	Band Edge Measurements	N/A	Refer to Note 1
2.1051 24.238	Conducted Spurious Emissions	N/A	Refer to Note 1
2.1053 24.238	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -27.15 dB at 36.79 MHz.

Note:

1. This report is a partial report, only test item of Effective Radiated Power and Radiated Spurious Emissions tests were performed for this report. Radiated Emission test according to the maximum output power (EIRP) channel. Other testing data please refer to the SPORTON report no.: FG791919A, FG791919B for module (Brand: Sierra, Model: EM7565).
2. Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Radiated Emissions up to 1 GHz	9 kHz ~ 30 MHz	3.04 dB
	30 MHz ~ 200 MHz	2.93 dB
	200 MHz ~ 1000 MHz	2.95 dB
Radiated Emissions above 1 GHz	1 GHz ~ 18 GHz	2.26 dB
	18 GHz ~ 40 GHz	1.94 dB

2.2 Test Site and Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver Agilent	N9038A	MY51210203	Mar. 18, 2020	Mar. 17, 2021
Spectrum Analyzer Agilent	N9010A	MY52220314	Dec. 12, 2019	Dec. 11, 2020
Spectrum Analyzer ROHDE & SCHWARZ	FSU43	101261	Apr. 16, 2020	Apr. 15, 2021
Spectrum Analyzer ROHDE & SCHWARZ	FSW26	102023	Oct. 08, 2019	Oct. 07, 2020
HORN Antenna SCHWARZBECK	BBHA 9120D	9120D-969	Nov. 24, 2019	Nov. 23, 2020
BILOG Antenna SCHWARZBECK	VULB 9168	9168-472	Nov. 08, 2019	Nov. 07, 2020
HORN Antenna EMCO	3115	00027023	Nov. 24, 2019	Nov. 23, 2020
Fixed Attenuator WOKEN	MDCS18N-10	MDCS18N-10-01	Apr. 14, 2020	Apr. 13, 2021
Loop Antenna	HLA 6121	45745	Jul. 01, 2019	Jun. 30, 2020
Preamplifier EMCI	EMC 012645	980115	Oct. 08, 2019	Oct. 07, 2020
Preamplifier EMCI	EMC 184045	980116	Oct. 08, 2019	Oct. 07, 2020
Preamplifier EMCI	EMC 330H	980112	Oct. 08, 2019	Oct. 07, 2020
RF Coaxial Cable HUBER+SUHNNER	EMC104-SM-SM- 8000&3000	140811+170717	Oct. 08, 2019	Oct. 07, 2020
RF Coaxial Cable HUBER+SUHNNER	SUCOFLEX 104	EMC104-SM-SM- 1000(140807)	Oct. 08, 2019	Oct. 07, 2020
RF Coaxial Cable WOKEN	8D-FB	Cable-Ch10-01	Oct. 08, 2019	Oct. 07, 2020
Software BV ADT	E3 6.120103	NA	NA	NA
Antenna Tower MF	MFA-440H	NA	NA	NA
Turn Table MF	MFT-201SS	NA	NA	NA
Antenna Tower & Turn Table Controller MF	MF-7802	NA	NA	NA
Radio Communication Analyzer Anritsu	MT8820C	6201300640	Aug. 19, 2019	Aug. 18, 2021
Spectrum Analyzer ROHDE & SCHWARZ	FSW43	101582	Mar. 31, 2020	Mar. 30, 2021
HORN Antenna SCHWARZBECK(15- 40G)	BBHA 9170	148	Nov. 24, 2019	Nov. 23, 2020

- Note: 1. The calibration interval of the above test instruments is 12 / 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Chamber 10.

3 General Information

3.1 General Description of EUT

Product	LTE/UMTS Wireless Module	
Brand	AirPrime	
Test Model	EM7565	
Status of EUT	Identical Prototype	
Power Supply Rating	5.0 Vdc (adapter)	
Modulation Type	WCDMA	QPSK
	LTE	QPSK, 16QAM, 64QAM
Frequency Range	WCDMA	1852.4 ~ 1907.6 MHz
	LTE Band 2 (Channel Bandwidth: 1.4 MHz)	1850.7 ~ 1909.3 MHz
	LTE Band 2 (Channel Bandwidth: 3 MHz)	1851.5 ~ 1908.5 MHz
	LTE Band 2 (Channel Bandwidth: 5 MHz)	1852.5 ~ 1907.5 MHz
	LTE Band 2 (Channel Bandwidth: 10 MHz)	1855.0 ~ 1905.0 MHz
	LTE Band 2 (Channel Bandwidth: 15 MHz)	1857.5 ~ 1902.5 MHz
	LTE Band 2 (Channel Bandwidth: 20 MHz)	1860.0 ~ 1900.0 MHz
Max. EIRP Power	WCDMA	318.42 mW
	LTE Band 2 (Channel Bandwidth: 1.4 MHz)	221.82 mW
	LTE Band 2 (Channel Bandwidth: 3 MHz)	235.50 mW
	LTE Band 2 (Channel Bandwidth: 5 MHz)	250.61 mW
	LTE Band 2 (Channel Bandwidth: 10 MHz)	266.07 mW
	LTE Band 2 (Channel Bandwidth: 15 MHz)	280.54 mW
	LTE Band 2 (Channel Bandwidth: 20 MHz)	297.17 mW
Antenna Type	Refer to Note as below	
Accessory Device	Refer to Note as below	
Data Cable Supplied	Refer to Note as below	

Note:

- The EUT is authorized for use in specific End-product. Please refer to below table for more details.

Product	Brand	Model
10" Handheld computer	Trimble Inc.	121800

- The End-product contains following accessory devices.

Product	Brand	Model	Description
Adapter	ADAPTER TECH	APD065T-A200	I/P: 100-240 Vac, 50/60 Hz, 1.6 A O/P: 5 Vdc, 3 A 1 meter, non-shielded cable, with ferrite core
POWER CORD	ADAPTER TECH	N/A	1.75 meter, non-shielded cable, w/o ferrite core

3. The antenna information is listed as below.


Antenna Type		PIFA	
		WCDMA	LTE
Band		II	2
Gain	Main	0.26	0.26
	Aux.	1.76	1.76

4. The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

5. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

3.2 Configuration of System under Test

<Radiated Emission Test> & <E.I.R.P. Test>

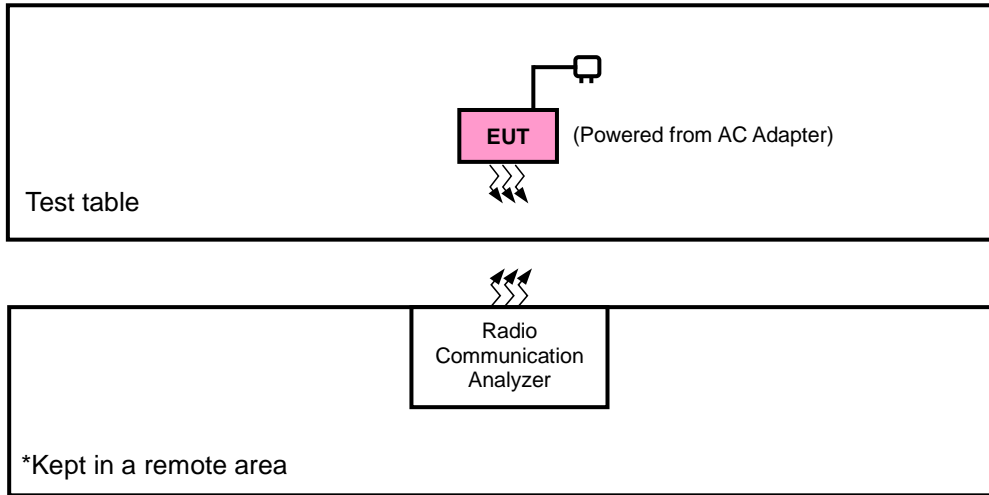

3.3 Test Mode Applicability and Tested Channel Detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis, and antenna ports.

The worst case was found when positioned as the table below. Following channel(s) was (were) selected for the final test as listed below:

Band	EIRP	Radiated Emission
WCDMA	Z-plane	Z-plane
LTE Band 2	Z-plane	Z-plane

WCDMA

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Mode
-	EIRP	9262 to 9538	9262, 9400, 9538	WCDMA
-	Radiated Emission	9262 to 9538	9262	WCDMA

LTE Band 2

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	EIRP	18607 to 19193	18607, 18900, 19193	1.4 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		18615 to 19185	18615, 18900, 19185	3 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		18650 to 19150	18650, 18900, 19150	10 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		18675 to 19125	18675, 18900, 19125	15 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
-	Radiated Emission	18700 to 19100	19100	20 MHz	QPSK	1 RB / 0 RB Offset

Note:

1. This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation. Therefore, only EIRP, modulation characteristics, occupied bandwidth and peak to average ratio items had been tested under QPSK, 16QAM mode, the other items were performed under QPSK mode only.
2. For radiated emission above 1 GHz, according to 3GPP 36.521 Section 6.6.3.1.4, choose the lowest, 5 MHz & highest channel bandwidth for final test.
3. For radiated emissions below 1 GHz, select the worst radiated emission channel for final testing.

Test Condition:

Test Item	Environmental Conditions	Input Power	Tested By
EIRP	26 deg. C, 58 % RH	120 Vac, 60 Hz	Wayne Lin
Radiated Emission	25 deg. C, 65 % RH	120 Vac, 60 Hz	Tim Chen

3.4 EUT Operating Conditions

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

3.5 General Description of Applied Standards and references

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and references:

Test Standard:

FCC 47 CFR Part 2

FCC 47 CFR Part 24

ANSI 63.26-2015

NOTE: All test items have been performed and recorded as per the above standards.

References Test Guidance:

KDB 971168 D01 Power Meas License Digital Systems v03r01

ANSI/TIA/EIA-603-E 2016

NOTE: All test items have been performed as a reference to the above KDB test guidance.

4 Test Types and Results

4.1 Output Power Measurement

4.1.1 Limits of Output Power Measurement

Mobile / Portable station are limited to 2 watts e.i.r.p.

4.1.2 Test Procedures

EIRP / ERP Measurement:

- a. All measurements were done at low, middle and high operational frequency range. RBW is 5 MHz for WCDMA and 5MHz \ 10 MHz \ 15 MHz \ 20 MHz for LTE mode, and VBW $\geq 3 \times$ RBW.
- b. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- c. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a tx cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step b. Record the power level of S.G.
- d. $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, $E.R.P \text{ power} = E.I.R.P \text{ power} - 2.15 \text{ dB}$.


Conducted Power Measurement:

The EUT was set up for the maximum power with WCDMA and LTE link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.


4.1.3 Test Setup

EIRP / ERP Measurement:

<Radiated Emission below or equal 1 GHz>

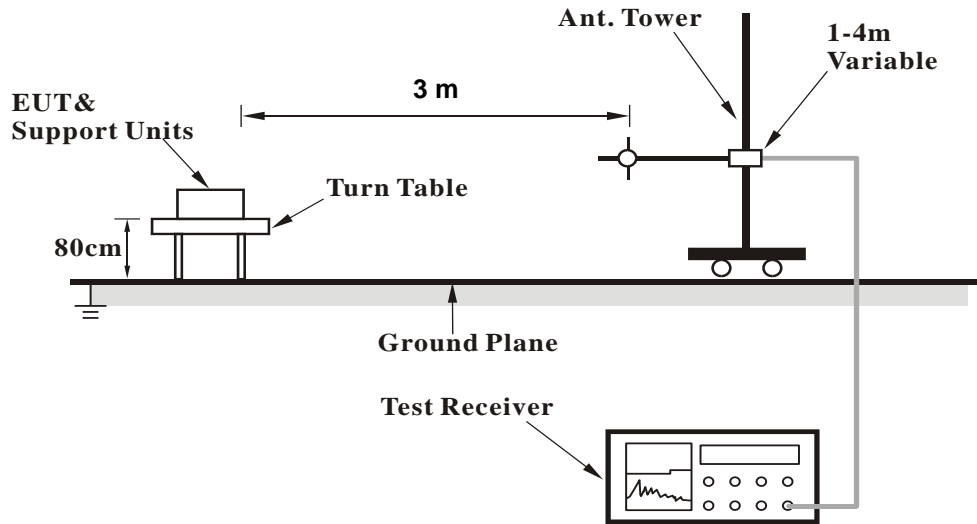


<Radiated Emission above 1 GHz>

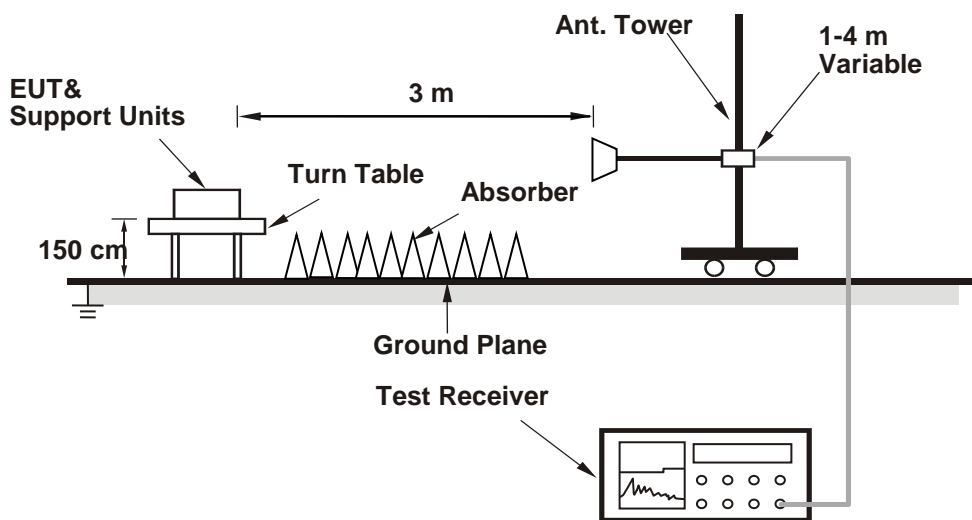

For the actual test configuration, please refer to the attached file (Test Setup Photo).

Conducted Power Measurement:



4.1.4 Test Results

Conducted Output Power (dBm)

Band	WCDMA II		
	9262	9400	9538
Channel	1852.4	1880.0	1907.6
Frequency (MHz)	1852.4	1880.0	1907.6
RMC 12.2K	23.24	23.31	23.39
HSDPA Subtest-1	22.28	22.35	22.43
HSDPA Subtest-2	22.21	22.28	22.36
HSDPA Subtest-3	21.84	21.91	21.99
HSDPA Subtest-4	21.75	21.82	21.90
DC-HSDPA Subtest-1	22.17	22.24	22.32
DC-HSDPA Subtest-2	22.10	22.17	22.25
DC-HSDPA Subtest-3	21.73	21.80	21.88
DC-HSDPA Subtest-4	21.64	21.71	21.79
HSUPA Subtest-1	22.19	22.26	22.34
HSUPA Subtest-2	20.29	20.36	20.44
HSUPA Subtest-3	21.18	21.25	21.33
HSUPA Subtest-4	20.21	20.28	20.36
HSUPA Subtest-5	22.05	22.12	22.20

LTE Band 2																	
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)		
				18700	18900	19100						18675	18900	19125			
				Channel Frequency (MHz)	1860.0	1880.0						1900.0	Channel Frequency (MHz)	1857.5		1880.0	1902.5
20M	QPSK	1	0	22.81	22.78	22.99	0	15M	QPSK	1	0	22.77	22.69	22.90	0		
		1	50	22.78	22.75	22.96	0			1	37	22.71	22.75	22.91	0		
		1	99	22.71	22.68	22.89	0			1	74	22.65	22.68	22.79	0		
		50	0	21.87	21.84	22.05	1			36	0	21.79	21.84	22.05	1		
		50	25	21.84	21.81	22.02	1			36	19	21.74	21.74	21.98	1		
		50	50	21.80	21.77	21.98	1			36	39	21.72	21.72	21.92	1		
	16QAM	100	0	21.83	21.80	22.01	1		75	0	21.75	21.72	22.00	1			
		1	0	21.85	21.82	22.03	1		16QAM	1	0	21.82	21.79	21.99	1		
		1	50	21.82	21.79	22.00	1			1	37	21.74	21.71	21.91	1		
		1	99	21.78	21.75	21.96	1			1	74	21.69	21.66	21.96	1		
		50	0	20.82	20.79	21.00	2			36	0	20.72	20.71	20.90	2		
		50	25	20.78	20.75	20.96	2			36	19	20.72	20.69	20.87	2		
	50	50	20.74	20.71	20.92	2	36			39	20.66	20.63	20.86	2			
	64QAM	100	0	20.82	20.79	21.00	2		75	0	20.73	20.72	20.94	2			
		1	0	20.84	20.81	21.02	2		64QAM	1	0	20.82	20.71	20.98	2		
		1	50	20.82	20.79	21.00	2			1	37	20.73	20.70	20.95	2		
		1	99	20.78	20.75	20.96	2			1	74	20.78	20.69	20.93	2		
		50	0	19.82	19.79	20.00	3			36	0	19.82	19.72	19.94	3		
		50	25	19.77	19.74	19.95	3			36	19	19.71	19.68	19.87	3		
	50	50	19.74	19.71	19.92	3	36			39	19.68	19.63	19.86	3			
	100	0	19.85	19.82	20.03	3	75		0	19.85	19.82	19.93	3				
	10M	QPSK	1	0	22.76	22.68	22.91		0	5M	QPSK	1	0	22.58	22.72	22.68	0
			1	24	22.63	22.63	22.84		0			1	12	22.58	22.58	22.89	0
			1	49	22.54	22.57	22.78		0			1	24	22.54	22.51	22.59	0
25			0	21.77	21.79	22.03	1	12	0			21.73	21.76	21.94	1		
25			12	21.63	21.71	21.89	1	12	6			21.72	21.69	21.81	1		
25			25	21.73	21.62	21.93	1	12	13			21.67	21.67	21.77	1		
16QAM		50	0	21.66	21.64	21.94	1	25	0		21.65	21.71	21.84	1			
		1	0	21.67	21.66	21.85	1	16QAM	1		0	21.71	21.59	22.00	1		
		1	24	21.59	21.72	21.85	1		1		12	21.77	21.64	21.94	1		
		1	49	21.68	21.63	21.85	1		1		24	21.56	21.53	21.81	1		
		25	0	20.71	20.76	20.96	2		12		0	20.66	20.67	20.94	2		
		25	12	20.70	20.60	20.85	2		12		6	20.63	20.62	20.75	2		
25		25	20.59	20.66	20.76	2	12		13		20.58	20.63	20.72	2			
64QAM		50	0	20.73	20.75	20.93	2	25	0		20.72	20.65	20.99	2			
		1	0	20.72	20.67	21.00	2	64QAM	1		0	20.75	20.58	20.91	2		
		1	24	20.69	20.73	20.82	2		1		12	20.78	20.65	20.89	2		
		1	49	20.73	20.54	20.90	2		1		24	20.70	20.67	20.91	2		
		25	0	19.67	19.69	19.95	3		12		0	19.67	19.75	19.90	3		
		25	12	19.73	19.70	19.93	3		12		6	19.72	19.68	19.91	3		
25		25	19.69	19.63	19.81	3	12		13		19.59	19.66	19.69	3			
50		0	19.84	19.60	19.90	3	25	0	19.72		19.68	19.98	3				
3M		QPSK	1	0	22.74	22.70	22.79	0	1.4M		QPSK	1	0	22.64	22.77	22.95	0
			1	7	22.66	22.51	22.75	0				1	2	22.71	22.60	22.82	0
			1	14	22.53	22.50	22.82	0				1	5	22.47	22.60	22.84	0
	8		0	21.83	21.83	21.85	1	3		0		22.83	22.82	22.91	0		
	8		3	21.77	21.68	21.82	1	3		1		22.76	22.66	22.80	0		
	8		7	21.69	21.57	21.86	1	3		3		22.66	22.65	22.87	0		
	16QAM	15	0	21.73	21.57	21.84	1	6		0	21.63	21.57	21.92	1			
		1	0	21.76	21.64	21.90	1	16QAM		1	0	21.80	21.78	21.91	1		
		1	7	21.79	21.57	21.96	1			1	2	21.75	21.67	21.88	1		
		1	14	21.59	21.62	21.73	1			1	5	21.65	21.61	21.85	1		
		8	0	20.62	20.68	20.97	2			3	0	21.62	21.63	21.85	1		
		8	3	20.60	20.67	20.76	2			3	1	21.67	21.64	21.78	1		
	8	7	20.57	20.67	20.72	2	3			3	21.66	21.57	21.79	1			
	64QAM	15	0	20.67	20.62	20.89	2	6		0	20.69	20.67	20.97	2			
		1	0	20.76	20.60	20.88	2	64QAM		1	0	20.70	20.63	20.88	2		
		1	7	20.66	20.64	20.77	2			1	2	20.73	20.76	20.89	2		
		1	14	20.74	20.61	20.74	2			1	5	20.70	20.72	20.90	2		
		8	0	19.73	19.55	19.93	3			3	0	20.70	20.64	20.85	2		
		8	3	19.67	19.64	19.84	3			3	1	20.60	20.57	20.94	2		
	8	7	19.67	19.55	19.86	3	3			3	20.66	20.53	20.76	2			
	15	0	19.68	19.78	19.88	3	6	0		19.69	19.65	19.88	3				

EIRP Power (dBm)

WCDMA							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Z	9262	1852.4	-11.54	36.57	25.03	318.42	H
	9400	1880.0	-12.21	37.22	25.01	316.96	
	9538	1907.6	-12.29	37.18	24.89	308.32	
	9262	1852.4	-21.65	37.65	16.00	39.81	V
	9400	1880.0	-21.74	37.58	15.84	38.37	
	9538	1907.6	-21.85	37.48	15.63	36.56	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 2							
Channel Bandwidth: 1.4 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Z	18607	1850.7	-18.35	36.57	18.22	66.37	H
	18900	1880.0	-19.09	37.22	18.13	65.01	
	19193	1909.3	-18.89	37.18	18.29	67.45	
	18607	1850.7	-14.32	37.65	23.33	215.28	V
	18900	1880.0	-14.39	37.58	23.19	208.45	
	19193	1909.3	-14.02	37.48	23.46	221.82	
Channel Bandwidth: 1.4 MHz / 16QAM							
Z	18607	1850.7	-19.37	36.57	17.20	52.48	H
	18900	1880.0	-20.11	37.22	17.11	51.40	
	19193	1909.3	-19.91	37.18	17.27	53.33	
	18607	1850.7	-15.34	37.65	22.31	170.22	V
	18900	1880.0	-15.41	37.58	22.17	164.82	
	19193	1909.3	-15.04	37.48	22.44	175.39	
Channel Bandwidth: 1.4 MHz / 64QAM							
Z	18607	1850.7	-20.42	36.57	16.15	41.21	H
	18900	1880.0	-21.16	37.22	16.06	40.36	
	19193	1909.3	-20.96	37.18	16.22	41.88	
	18607	1850.7	-16.39	37.65	21.26	133.66	V
	18900	1880.0	-16.46	37.58	21.12	129.42	
	19193	1909.3	-16.09	37.48	21.39	137.72	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 2							
Channel Bandwidth: 3 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Z	18615	1851.5	-18.09	36.57	18.48	70.47	H
	18900	1880.0	-18.83	37.22	18.39	69.02	
	19185	1908.5	-18.63	37.18	18.55	71.61	
	18615	1851.5	-14.06	37.65	23.59	228.56	V
	18900	1880.0	-14.13	37.58	23.45	221.31	
	19185	1908.5	-13.76	37.48	23.72	235.50	
Channel Bandwidth: 3 MHz / 16QAM							
Z	18615	1851.5	-19.13	36.57	17.44	55.46	H
	18900	1880.0	-19.87	37.22	17.35	54.33	
	19185	1908.5	-19.67	37.18	17.51	56.36	
	18615	1851.5	-15.10	37.65	22.55	179.89	V
	18900	1880.0	-15.17	37.58	22.41	174.18	
	19185	1908.5	-14.80	37.48	22.68	185.35	
Channel Bandwidth: 3 MHz / 64QAM							
Z	18615	1851.5	-20.14	36.57	16.43	43.95	H
	18900	1880.0	-20.88	37.22	16.34	43.05	
	19185	1908.5	-20.68	37.18	16.50	44.67	
	18615	1851.5	-16.11	37.65	21.54	142.56	V
	18900	1880.0	-16.18	37.58	21.40	138.04	
	19185	1908.5	-15.81	37.48	21.67	146.89	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 2							
Channel Bandwidth: 5 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Z	18625	1852.5	-17.82	36.57	18.75	74.99	H
	18900	1880.0	-18.56	37.22	18.66	73.45	
	19175	1907.5	-18.36	37.18	18.82	76.21	
	18625	1852.5	-13.79	37.65	23.86	243.22	V
	18900	1880.0	-13.86	37.58	23.72	235.50	
	19175	1907.5	-13.49	37.48	23.99	250.61	
Channel Bandwidth: 5 MHz / 16QAM							
Z	18625	1852.5	-18.88	36.57	17.69	58.75	H
	18900	1880.0	-19.62	37.22	17.60	57.54	
	19175	1907.5	-19.42	37.18	17.76	59.70	
	18625	1852.5	-14.85	37.65	22.80	190.55	V
	18900	1880.0	-14.92	37.58	22.66	184.50	
	19175	1907.5	-14.55	37.48	22.93	196.34	
Channel Bandwidth: 5 MHz / 64QAM							
Z	18625	1852.5	-19.87	36.57	16.70	46.77	H
	18900	1880.0	-20.61	37.22	16.61	45.81	
	19175	1907.5	-20.41	37.18	16.77	47.53	
	18625	1852.5	-15.84	37.65	21.81	151.71	V
	18900	1880.0	-15.91	37.58	21.67	146.89	
	19175	1907.5	-15.54	37.48	21.94	156.31	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 2							
Channel Bandwidth: 10 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Z	18650	1855.0	-17.56	36.57	19.01	79.62	H
	18900	1880.0	-18.30	37.22	18.92	77.98	
	19150	1905.0	-18.10	37.18	19.08	80.91	
	18650	1855.0	-13.53	37.65	24.12	258.23	V
	18900	1880.0	-13.60	37.58	23.98	250.03	
	19150	1905.0	-13.23	37.48	24.25	266.07	
Channel Bandwidth: 10 MHz / 16QAM							
Z	18650	1855.0	-18.61	36.57	17.96	62.52	H
	18900	1880.0	-19.35	37.22	17.87	61.24	
	19150	1905.0	-19.15	37.18	18.03	63.53	
	18650	1855.0	-14.58	37.65	23.07	202.77	V
	18900	1880.0	-14.65	37.58	22.93	196.34	
	19150	1905.0	-14.28	37.48	23.20	208.93	
Channel Bandwidth: 10 MHz / 64QAM							
Z	18650	1855.0	-19.62	36.57	16.95	49.55	H
	18900	1880.0	-20.36	37.22	16.86	48.53	
	19150	1905.0	-20.16	37.18	17.02	50.35	
	18650	1855.0	-15.59	37.65	22.06	160.69	V
	18900	1880.0	-15.66	37.58	21.92	155.60	
	19150	1905.0	-15.29	37.48	22.19	165.58	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 2							
Channel Bandwidth: 15 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Z	18675	1857.5	-17.33	36.57	19.24	83.95	H
	18900	1880.0	-18.07	37.22	19.15	82.22	
	19125	1902.5	-17.87	37.18	19.31	85.31	
	18675	1857.5	-13.30	37.65	24.35	272.27	V
	18900	1880.0	-13.37	37.58	24.21	263.63	
	19125	1902.5	-13.00	37.48	24.48	280.54	
Channel Bandwidth: 15 MHz / 16QAM							
Z	18675	1857.5	-18.35	36.57	18.22	66.37	H
	18900	1880.0	-19.09	37.22	18.13	65.01	
	19125	1902.5	-18.89	37.18	18.29	67.45	
	18675	1857.5	-14.32	37.65	23.33	215.28	V
	18900	1880.0	-14.39	37.58	23.19	208.45	
	19125	1902.5	-14.02	37.48	23.46	221.82	
Channel Bandwidth: 15 MHz / 64QAM							
Z	18675	1857.5	-19.36	36.57	17.21	52.60	H
	18900	1880.0	-20.10	37.22	17.12	51.52	
	19125	1902.5	-19.90	37.18	17.28	53.46	
	18675	1857.5	-15.33	37.65	22.32	170.61	V
	18900	1880.0	-15.40	37.58	22.18	165.20	
	19125	1902.5	-15.03	37.48	22.45	175.79	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 2							
Channel Bandwidth: 20 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Z	18700	1860.0	-17.08	36.57	19.49	88.92	H
	18900	1880.0	-17.82	37.22	19.40	87.10	
	19100	1900.0	-17.62	37.18	19.56	90.36	
	18700	1860.0	-13.05	37.65	24.60	288.40	V
	18900	1880.0	-13.12	37.58	24.46	279.25	
	19100	1900.0	-12.75	37.48	24.73	297.17	
Channel Bandwidth: 20 MHz / 16QAM							
Z	18700	1860.0	-18.10	36.57	18.47	70.31	H
	18900	1880.0	-18.84	37.22	18.38	68.87	
	19100	1900.0	-18.64	37.18	18.54	71.45	
	18700	1860.0	-14.07	37.65	23.58	228.03	V
	18900	1880.0	-14.14	37.58	23.44	220.80	
	19100	1900.0	-13.77	37.48	23.71	234.96	
Channel Bandwidth: 20 MHz / 64QAM							
Z	18700	1860.0	-19.13	36.57	17.44	55.46	H
	18900	1880.0	-19.87	37.22	17.35	54.33	
	19100	1900.0	-19.67	37.18	17.51	56.36	
	18700	1860.0	-15.10	37.65	22.55	179.89	V
	18900	1880.0	-15.17	37.58	22.41	174.18	
	19100	1900.0	-14.80	37.48	22.68	185.35	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

4.2 Radiated Emission Measurement

4.2.1 Limits of Radiated Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit is equal to -13 dBm.

4.2.2 Test Procedure

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step a. Record the power level of S.G.
- c. EIRP = Output power level of S.G – TX cable loss + Antenna gain of substitution horn.
- d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, E.R.P power = E.I.R.P power - 2.15 dB.


NOTE: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz/3 MHz.

4.2.3 Deviation from Test Standard


No deviation.

4.2.4 Test Setup

<Radiated Emission below or equal 1 GHz>

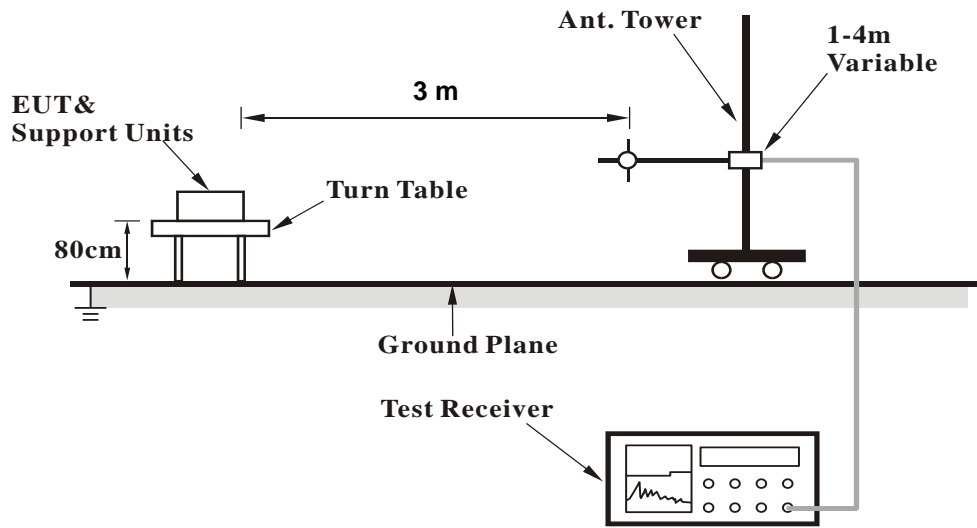

<Radiated Emission above 1 GHz>

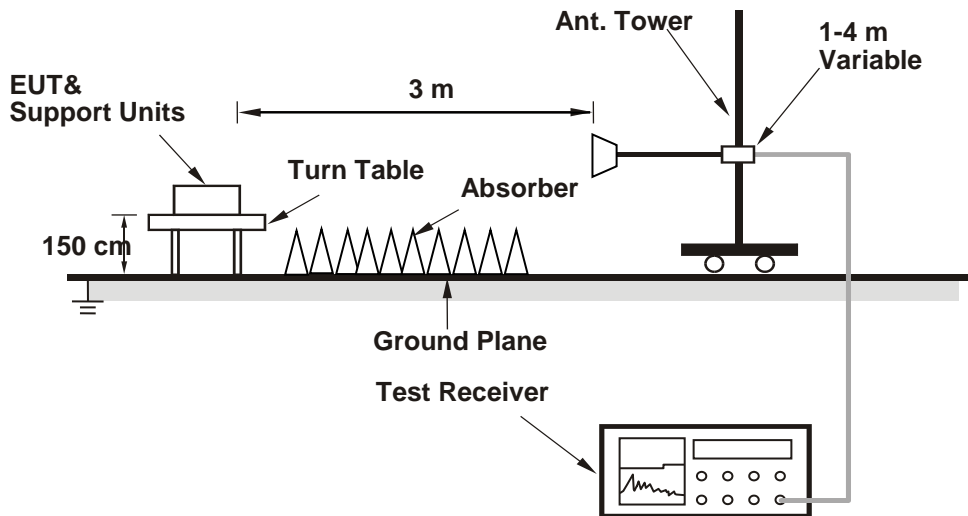

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.5 Test Results

WCDMA:


Low Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

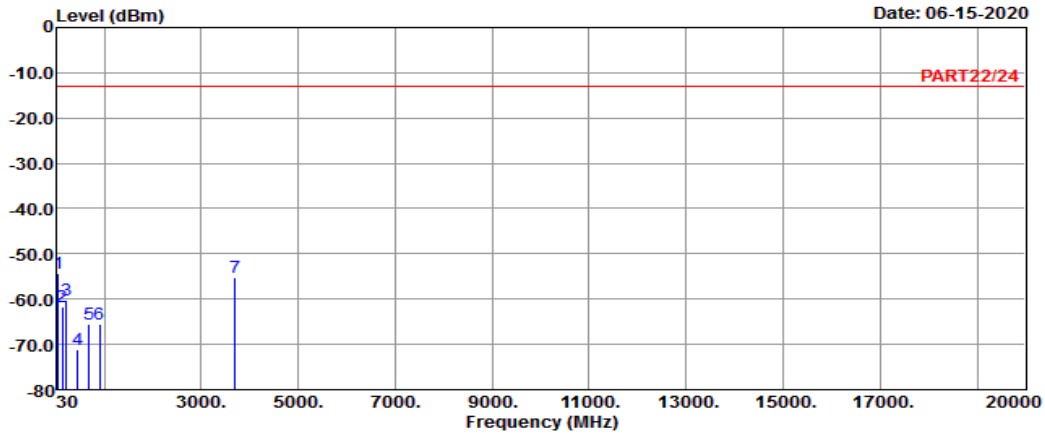

Site : 966 Chamber 5
 Condition: PART22/24 HORIZONTAL
 Remak : WCDMA Band 2 Link_L-CH
 Tested by: tim-chen

	Freq	Level	Read Level	Limit Line	Over Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	pp	44.55	-54.34	-52.35	-13.00	-1.99	-41.34 Peak
2		140.58	-61.69	-53.13	-13.00	-8.56	-48.69 Peak
3		216.24	-60.12	-52.76	-13.00	-7.36	-47.12 Peak
4		450.98	-71.03	-65.50	-13.00	-5.53	-58.03 Peak
5		679.90	-65.63	-65.21	-13.00	-0.42	-52.63 Peak
6		905.91	-65.57	-66.29	-13.00	0.72	-52.57 Peak
7		3704.80	-55.16	-48.23	-13.00	-6.93	-42.16 Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 6

Date: 2020-06-15

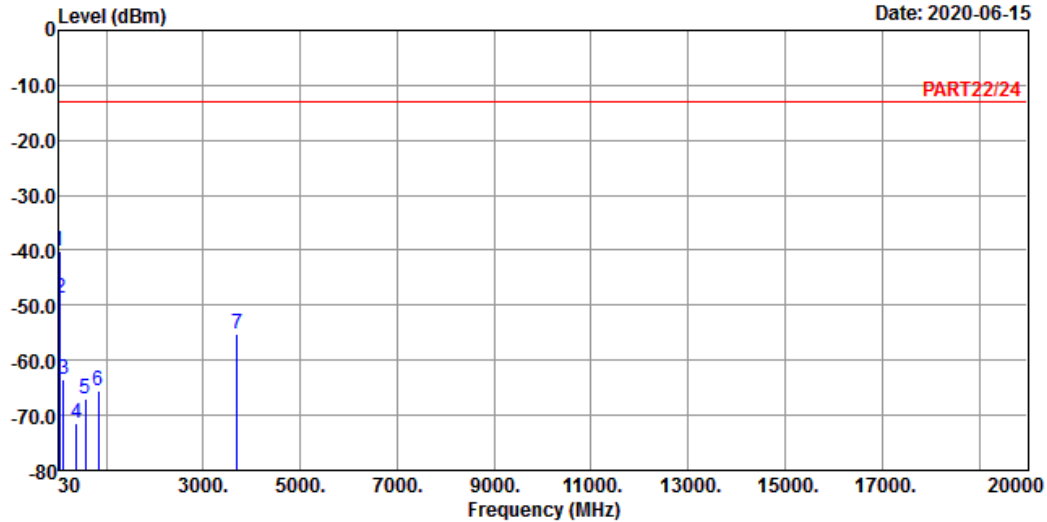

Site : 966 Chamber 5
 Condition: PART22/24 VERTICAL
 Remak : WCDMA Band 2 Link_L-CH
 Tested by: tim-chen

	Freq	Level	Read Level	Limit Line	Over Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1 pp	36.79	-40.15	-39.16	-13.00	-0.99	-27.15	Peak
2	45.52	-48.82	-46.32	-13.00	-2.50	-35.82	Peak
3	123.12	-63.41	-53.91	-13.00	-9.50	-50.41	Peak
4	385.99	-71.45	-65.42	-13.00	-6.03	-58.45	Peak
5	569.32	-67.13	-65.09	-13.00	-2.04	-54.13	Peak
6	838.01	-65.58	-65.98	-13.00	0.40	-52.58	Peak
7	3704.80	-55.25	-48.32	-13.00	-6.93	-42.25	Peak


LTE Band 2
Channel Bandwidth: 20 MHz / QPSK
High Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

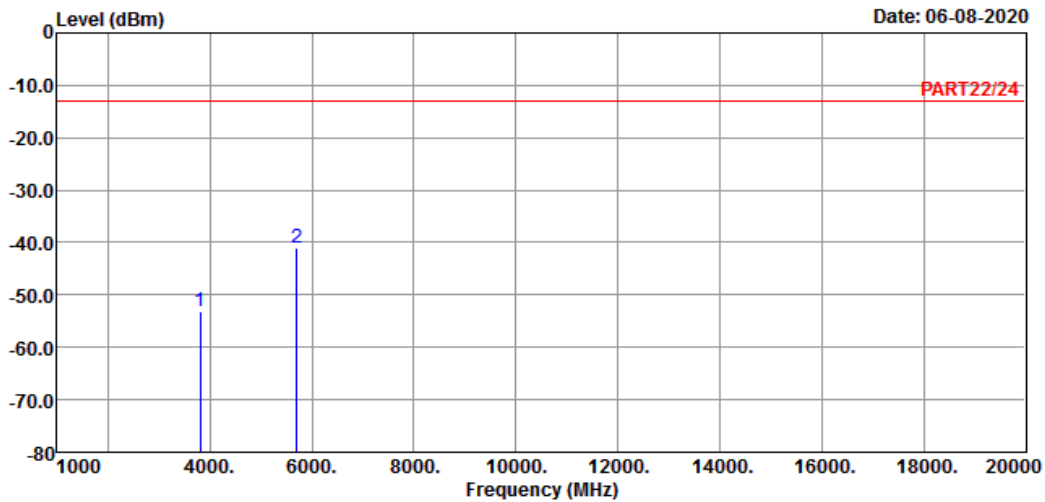

Site : 966 Chamber 5
Condition: PART22/24 HORIZONTAL
Remak : LTE Band 2 QPSK_20M Link_H-CH
Tested by: Jisyong Wqang


	Freq	Level	Read	Limit	Over		Remark
			Level	Line	Factor	Limit	
	MHz	dBm	dBm	dBm	dB	dB	
1	3800.00	-53.09	-46.66	-13.00	-6.43	-40.09	Peak
2 pp	5700.00	-41.16	-39.43	-13.00	-1.73	-28.16	Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

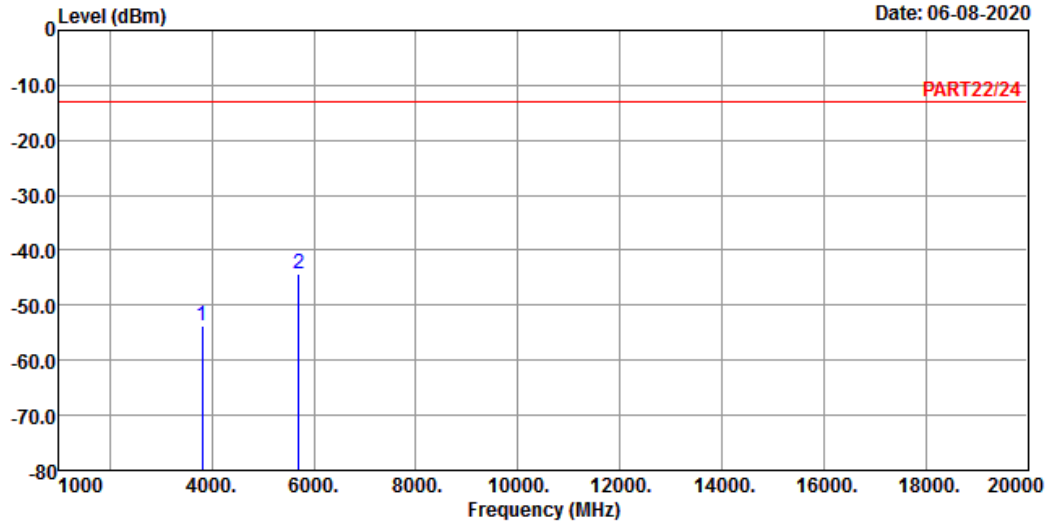

Site : 966 Chamber 5
 Condition: PART22/24 VERTICAL
 Remak : LTE Band 2 QPSK_20M Link_H-CH
 Tested by: Jisyong Wqang

	Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	3800.00	-53.73	-47.30	-13.00	-6.43	-40.73	Peak
2	5700.00	-44.26	-42.53	-13.00	-1.73	-31.26	Peak

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---