



**Trimble Navigation Limited MCS  
Ranger/TSC3**

**SAR Evaluation Report #: TRPO0081.1**

**Evaluated to the following SAR Specifications:**

**FCC 2.1093**



Report Prepared By Northwest EMC Inc.

NORTHWEST EMC – (888) 364-2378 – [www.nwemc.com](http://www.nwemc.com)

California – Minnesota – Oregon – New York – Washington

**Last Date of Test: December 13, 2012**  
**Trimble Navigation Limited MCS**  
**Model: Ranger /TSC3**

### Applicable Standard

Test Description	Specification	Test Method	Pass/Fail
SAR Evaluation	FCC 2.1093:2012 FCC 15.247:2012	FCC OET 65C:2001	Pass
		IEEE Std 1528:2003	
		FCC KDB 447498 D01 v04	
	Health Safety Code 6:2009	RSS-102, Issue 4:2010	Pass

### Highest SAR Values

Frequency Bands (GHz)	Head 1g (W/kg)	Body 1g (W/kg)	Limit 1g (W/kg)	Exposure Environment
2.4	N/A	0.19	1.6	General Population Uncontrolled

### Deviations From Test Standards

None

### Approved By:



Don Facteau, IS Manager



NVLAP Lab Code: 200630-0

### Test Facility

The measurement facility used to collect the data is located at:

Northwest EMC, Inc.  
 22975 NW Evergreen Parkway, Suite 400  
 Hillsboro, OR 97124

Phone: (503) 844-4066      Fax: 844-3826

*This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government of the United States of America.*

*Product compliance is the responsibility of the client, therefore the tests and equipment modes of operation represented in this report were agreed upon by the client, prior to testing. This Report may only be duplicated in its entirety. The results of this test pertain only to the sample(s) tested. The specific description is noted in each of the individual sections of the test report supporting this certificate of test.*

Revision Number	Description	Date	Page Number
00	None		

## Barometric Pressure

The recorded barometric pressure has been normalized to sea level.

---

## United States

**FCC** - Designated by the FCC as a Telecommunications Certification Body (TCB). Certification chambers, Open Area Test Sites, and conducted measurement facilities are listed with the FCC.

**A2LA** - Accredited by A2LA to ISO / IEC Guide 65 as a product certifier. This allows Northwest EMC to certify transmitters to FCC and IC specifications.

**NVLAP** - Each laboratory is accredited by NVLAP to ISO 17025

---

## Canada

**IC** - Recognized by Industry Canada as a Certification Body (CB). Certification chambers and Open Area Test Sites are filed with IC.

---

## European Union

**European Commission** – Validated by the European Commission as a Conformity Assessment Body (CAB) under the EMC directive and as a Notified Body under the R&TTE Directive.

---

## Australia/New Zealand

**ACMA** - Recognized by ACMA as a CAB for the acceptance of test data.

---

## Korea

**KCC / RRA** - Recognized by KCC's RRA as a CAB for the acceptance of test data.

---

## Japan

**VCCI** - Associate Member of the VCCI. Conducted and radiated measurement facilities are registered.

---

## Taiwan

**BSMI** – Recognized by BSMI as a CAB for the acceptance of test data.

**NCC** - Recognized by NCC as a CAB for the acceptance of test data.

---

## Singapore

**IDA** – Recognized by IDA as a CAB for the acceptance of test data.

---

## Hong Kong

**OFTA** – Recognized by OFTA as a CAB for the acceptance of test data.

---

## Vietnam

**MIC** – Recognized by MIC as a CAB for the acceptance of test data.

---

## Russia

**GOST** – Accredited by Certinform VNIINMASH, CERTINFO, SAMTES, and Federal CHEC to perform EMC and Hygienic testing for Information Technology products to GOST standards.

---


## SCOPE

For details on the Scopes of our Accreditations, please visit:

<http://www.nwemc.com/accreditations/>



<p><b>Oregon</b> Labs EV01-EV12 22975 NW Evergreen Pkwy, #400 Hillsboro, OR 97124 (503) 844-4066</p>	<p><b>California</b> Labs OC01-OC13 41 Tesla Irvine, CA 92618 (949) 861-8918</p>	<p><b>New York</b> Labs WA01-WA04 4939 Jordan Rd. Elbridge, NY 13060 (315) 685-0796</p>	<p><b>Minnesota</b> Labs MN01-MN08 9349 W Broadway Ave. Brooklyn Park, MN 55445 (763) 425-2281</p>	<p><b>Washington</b> Labs SU01-SU07 14128 339<sup>th</sup> Ave. SE Sultan, WA 98294 (360) 793-8675</p>
<b>VCCI</b>				
A-0108	A-0029		A-0109	A-0110
<b>Industry Canada</b>				
2834D-1, 2834D-2	2834B-1, 2834B-2, 2834B-3		2834E-1	2834C-1

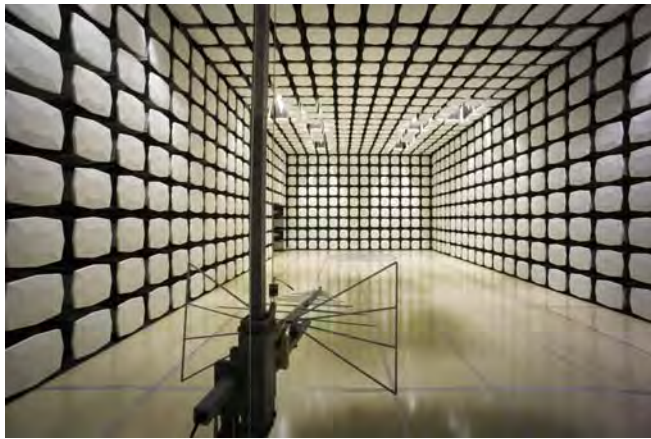

**Client and Equipment Under Test (EUT) Information**

<b>Company Name:</b>	Trimble Navigation Limited MCS
<b>Address:</b>	3337 Michelson Drive
<b>City, State, Zip:</b>	Irvine, CA 92612
<b>Test Requested By:</b>	Bob Grant
<b>Model:</b>	Ranger/TSC3
<b>First Date of Test:</b>	November 26, 2012
<b>Last Date of Test:</b>	December 13, 2012
<b>Receipt Date of Samples:</b>	November 26, 2012
<b>Equipment Design Stage:</b>	Production
<b>Equipment Condition:</b>	No Damage

**Information Provided by the Party Requesting the Test**

**Functional Description of the EUT (Equipment Under Test):**

The EUT is Trimble’s Model Ranger/TSC3 FHSS radio module FCC ID: S9E-RNGR2410. It has limited modular approval. A Class II Permissive change (C2PC) will be made to add this radio to Trimble’s Yuma 2 tablet computer. FCC ID: S93-Y2C3. In this configuration, it will be co-located with the Yuma 2’s cellular WWAN and also with another modular radio, the Atheros Model AR5B22 Wi-Fi / Bluetooth combo module, FCC ID: PPD-AR5B22. Through a C2PC, the AR5B22 has been previously authorized for co-location with the Yuma 2. The Yuma 2 allows for a tether strap. This strap is non-conductive elastic material. However, in this configuration being evaluated the tether strap is not an option.


The Ranger/TSC3 radio has one external antenna (2 dBi, omni-directional) and operates in the 2.4 GHz band.

The closest antenna spacing’s between the FHSS antenna and the other radio antennas is shown below:

**Antenna Separation from FHSS antenna (in inches)**

FHSS (0)      WWAN (.75)      Bluetooth (3.25)      WiFi (4.25)



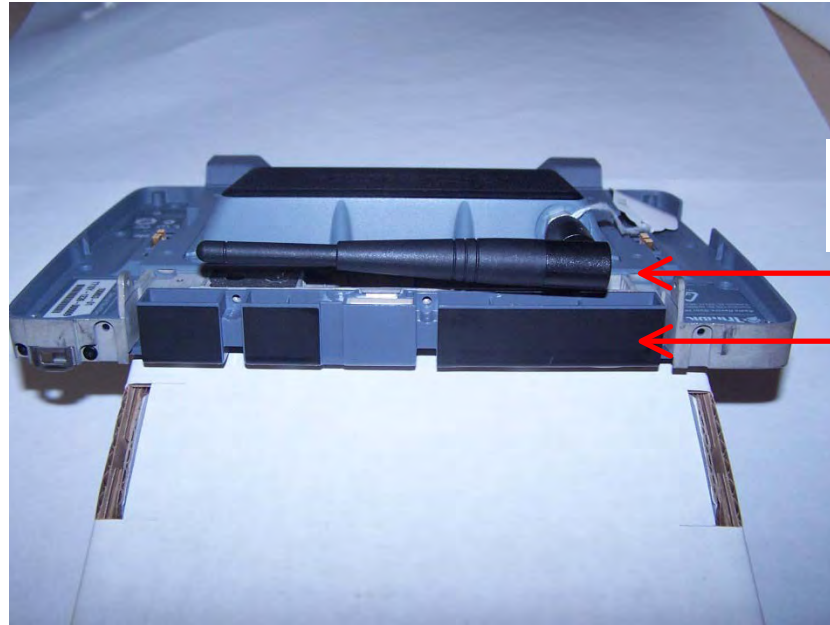

Antenna  
centerlines  
.875

## Testing Objective:

To demonstrate compliance with the SAR requirements of FCC 2.1093 and Canada's Health Safety Code 6. This evaluation will be used to support a C2PC for FCC ID: S9E-RNGR2410, and IC: 5817A-RNGR2410.

## Test Locations

The EUT's diagonal dimension is 27.29 cm. Since it is greater than 20 cm, KDB 941225 is not applicable and the SAR guidance of KDB 447498 D01v04 is applied.

4) b) The following procedures are applicable to tablet computers with antennas installed along the tablet edges while operating in Tablet Mode. (Footnote 21) When the output power of an antenna is  $> 60/f(\text{GHz})$  mW, SAR is required for both bottom face and edge exposure conditions.

i) Each antenna is evaluated for bottom face exposure with the base/bottom of the tablet in direct contact with a flat phantom. Convertible tablets must be tested in normal use conditions with the display folded on top of the keyboard section. The simultaneous transmission test requirements in item 3) b) ii) (1) may be applied to tablet computers in this operating mode.

ii) Antennas installed along the edges of a tablet are each evaluated with the corresponding edge in direct contact with a flat phantom. The applicable edge configurations include: (A) one fixed display orientation in either portrait or landscape configuration; (B) two fixed display orientations with one in portrait and one in landscape configurations; and (C) multiple display orientations supporting both portrait and landscape configurations.

(1) For edge configuration (A): SAR is required for each antenna located within 5 cm of the

tablet edge closest to the user for the applicable display orientation. For antenna(s) located  $\geq 5$  cm from this edge, the test reduction and exclusion procedures for laptop computers in KDB 616217 are applied. (Footnote 22)

(2) For edge configurations (B) and (C): The procedures for edge configuration (A) are applied to each antenna, for the applicable display orientations where the corresponding edge is closest to the user. For each antenna, SAR is required only for the edge with the most conservative exposure condition.

The bottom face (referred to as “back” in this report) and the top edge were tested. The Ranger/TSC3 antenna swivels, so when it is horizontal, it is located closest to the top edge, and when it is vertical, it is closest to the back.

**Simultaneous Transmission**

During testing, a KDB analysis was done to determine whether a SAR evaluation is required for simultaneous transmission. KDB 616217 D03 SAR Supplement is the FCC’s Policy for SAR evaluation of Notebooks, Netbooks, Laptops, and Tablet Computers. Whether a SAR evaluation is required for simultaneous transmission is determined by the output power, antenna spacing, and SAR distributions of each antenna.

The FHSS, WWAN, WiFi /BT radios can transmit simultaneously. Simultaneous transmission of the WWAN, WiFi and Bluetooth radios was addressed in the SAR report filed in the original application for Trimble’s Yuma 2, FCC ID: S93-Y2C3. Section 11.2 of that SAR report (Sporton FCC Test Report No: FA280604A) contains tables where the stand-alone SAR values for each possible radio and antenna combination are summed. The worst case condition has a summed SAR value of 1.32 W/kg. See below:


<Ant. 1>

Position	WWAN			WLAN5G		Max. SAR Summation	Scaled WWAN				Scaled WWAN + WLAN
	WWAN Band	Plot No	Max. WWAN SAR (W/kg)	Plot No	Max. WLAN SAR (W/kg)		Average Power (dBm)	Tune-up Limit (dBm)	Scaling Factor	Scaled WWAN (W/kg)	
Bottom Face At 0cm	GSM850	34	0.625	9	0.6	1.23	32.91	33.5	1.146	0.716	1.32
	GSM1900	43	0.424	9	0.6	1.02	30.94	31.5	1.138	0.482	1.08
	WCDMA V	37	0.332	9	0.6	0.93	24.16	24.5	1.081	0.359	0.96
	WCDMA IV	46	0.344	9	0.6	0.94	24.17	24.5	1.079	0.371	0.97
	WCDMA II	40	0.446	9	0.6	1.05	24.44	25	1.138	0.507	1.11
	CDMA BC0	49	0.348	9	0.6	0.95	23.73	24	1.064	0.370	0.97
	CDMA BC1	52	0.435	9	0.6	1.04	23.72	24	1.067	0.464	1.06
Edge4 At 0cm	GSM850	-	0	10	0.035	0.04	0	0	1.000	0.000	0.04
	GSM1900	-	0	10	0.035	0.04	0	0	1.000	0.000	0.04
	WCDMA V	-	0	10	0.035	0.04	0	0	1.000	0.000	0.04
	WCDMA IV	-	0	10	0.035	0.04	0	0	1.000	0.000	0.04
	WCDMA II	-	0	10	0.035	0.04	0	0	1.000	0.000	0.04
	CDMA BC0	-	0	10	0.035	0.04	0	0	1.000	0.000	0.04
	CDMA BC1	-	0	10	0.035	0.04	0	0	1.000	0.000	0.04
Edge2 At 0cm	GSM850	35	0.415	-	0	0.42	32.91	33.5	1.146	0.475	0.48
	GSM1900	44	0.288	-	0	0.29	30.94	31.5	1.138	0.328	0.33
	WCDMA V	38	0.198	-	0	0.20	24.16	24.5	1.081	0.214	0.21
	WCDMA IV	47	0.616	-	0	0.62	24.17	24.5	1.079	0.665	0.67
	WCDMA II	41	0.451	-	0	0.45	24.44	25	1.138	0.513	0.51
	CDMA BC0	50	0.193	-	0	0.19	23.73	24	1.064	0.205	0.21
	CDMA BC1	53	0.436	-	0	0.44	23.72	24	1.067	0.465	0.47

The highest stand-alone SAR value for the Ranger/TSC3 radio as documented in this SAR report is 0.19 W/kg. The summation of the worst-case values: 1.32 + 0.19 = 1.51 W/kg.

Since the sum of the highest SAR from each of the individual antennas is less than 1.6 W/kg, per item 4(a) KDB 616217, simultaneous transmission SAR evaluation is not required.





---

## Scope

Per KDB 447498 D01 Mobile Portable RF Exposure v04:

4) b) The following procedures are applicable to tablet computers with antennas installed along the tablet edges while operating in Tablet Mode. (Footnote 21) When the output power of an antenna is  $> 60/f(\text{GHz})$  mW, SAR is required for both bottom face and edge exposure conditions.

The SAR evaluation documented in this report is for the Trimble's Model Ranger/TSC3 FHSS radio module installed in Trimble's Yuma 2 tablet computer.

---

## Configuration TRPO0081- 1

Software/Firmware Running during test	
Description	Version
Tera Term	4.6.9 (SVN #4365)

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
FHSS radio	Trimble Navigation Limited MCS	Ranger /TSC3	W2410M4G-I-417006

Peripherals in test setup boundary			
Description	Manufacturer	Model/Part Number	Serial Number
AC adapter	LITEON	PA-1061-0	L21225043024
USB Mouse	Logitech	M-BE58	LZE02357693
USB Keyboard	Lenovo	KU-0225	0758502

Cables					
Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
AC power	No	1.8m	No	AC adapter	AC Mains
DC power	PA	1.4m	Yes	AC adapter	Tablet Computer
USB	Yes	1.8m	No	USB Mouse	Tablet Computer
USB	Yes	1.9m	No	USB Keyboard	Tablet Computer

**PA = Cable is permanently attached to the device. Shielding and/or presence of ferrite may be unknown.**



WTD 12.5.23

# MODIFICATIONS

## Equipment Modifications

Item	Date	Test	Modification	Note	Disposition of EUT
1	11/26/2012	SAR	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
2	12/13//2012	SAR	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.

## 2.4 GHz Band

Per FCC KDB 447498, the conducted output power was measured at the lowest, a middle, and the highest channels in the operational band. Measurements for each channel were made while the EUT was transmitting at the available data rate.

Per FCC KDB 447498, among the channels required for normal testing, SAR must be measured on the highest output channel (highlighted). When the SAR measured on the highest output channel is  $>0.8$  W/kg, SAR evaluation for the other required test channels is necessary.

Output power measurements are on the following page.

EUT:	Ranger/TSC3	Work Order:	TRPO0082
Serial Number:	W2410M4G-I-417006	Date:	11/26/2012
Customer:	Trimble Navigation Limited MCS	Temperature:	21.2°C
Attendees:	None	Relative Humidity:	37%
Customer Project:	None	Bar. Pressure:	1016 mb
Tested By:	Carl Engholm, Ethan Schoonover	Job Site:	EV06
Power:	110VAC/60Hz	Configuration:	TRPO0082-1

**TEST SPECIFICATIONS**

Specification:	Method:
FCC 2.1093:2012	FCC OET 65C:2001

**COMMENTS**



Conducted output power

**DEVIATIONS FROM TEST STANDARD**

None

**RESULTS**

Low Channel, Ch. 0 (2401.67 MHz)	17.93 dBm
Mid Channel, Ch. 37 (2435.76 MHz)	18.38 dBm
High Channel, Ch. 74 (2469.85 MHz)	18.26 dBm

Tested By

**Characterization of tissue-equivalent liquid dielectric properties**

Per IEEE 1528: 2003, Section 5.2.2, the permittivity and conductivity of the tissue material should be measured at least within 24 hours of any full-compliance test. The measured values must be within +/- 5% of the target values. The temperature variation in the liquid during SAR measurements must be within +/- 2 degrees C of that recorded when the dielectric properties were measured.

The dielectric parameters of the tissue-equivalent liquids were measured within 24 hours of the start of testing using the HP85070E dielectric probe kit. The dielectric measurements were made across the frequency range of the liquid. The attached data sheets show that the dielectric parameters of the liquid were within the required 5% tolerances.

**Target values of dielectric parameters**

Per FCC OET 65C, Appendix C:

“The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations and extrapolated according to the head parameters specified in P1528.”

Target Frequency (MHz)	Head		Body	
	$\epsilon_r$	$\sigma$ (S/m)	$\epsilon_r$	$\sigma$ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5800	35.3	5.27	48.2	6.00

( $\epsilon_r$  = relative permittivity,  $\sigma$  = conductivity and  $\rho = 1000 \text{ kg/m}^3$ )

## Composition of Ingredients for Liquid Tissue Phantoms

Northwest EMC uses tissue-equivalent liquids prepared by SPEAG and confirmed by them to be within +/- 5% from the target values. Their recipes are based upon the following formulations as found in FCC OET 65C, Appendix C:

“The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.”

Ingredients (% by weight)	Frequency (MHz)									
	450		835		915		1900		2450	
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body
Water	38.56	51.16	41.45	52.4	41.05	56.0	54.9	40.4	62.7	73.2
Salt (NaCl)	3.95	1.49	1.45	1.4	1.35	0.76	0.18	0.5	0.5	0.04
Sugar	56.32	46.78	56.0	45.0	56.5	41.76	0.0	58.0	0.0	0.0
HEC	0.98	0.52	1.0	1.0	1.0	1.21	0.0	1.0	0.0	0.0
Bactericide	0.19	0.05	0.1	0.1	0.1	0.27	0.0	0.1	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	36.8	0.0
DGBE	0.0	0.0	0.0	0.0	0.0	0.0	44.92	0.0	0.0	26.7
Dielectric Constant	43.42	58.0	42.54	56.1	42.0	56.8	39.9	54.0	39.8	52.5
Conductivity (S/m)	0.85	0.83	0.91	0.95	1.0	1.07	1.42	1.45	1.88	1.78

Salt: 99<sup>+</sup>% Pure Sodium Chloride

Sugar: 98<sup>+</sup>% Pure Sucrose

Water: De-ionized, 16 M $\Omega$ <sup>+</sup> resistivity

HEC: Hydroxyethyl Cellulose

DGBE: 99<sup>+</sup>% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]

Triton X-100 (ultra pure): Polyethylene glycol mono [4-(1,1, 3, 3-tetramethylbutyl)phenyl]ether

Tissue:	Body	Work Order:	TRPO0082
Serial Number:	0360-003899	Date:	11/26/2012
Customer:	Trimble Navigation Limited MCS	Temperature:	21.6°C
Customer Project:	None	Liquid Temperature:	22.4°C
Tested By:	Carl Engholm, Ethan Schoonover	Relative Humidity:	36%
Job Site:	EV08	Bar. Pressure:	2450

**TEST SPECIFICATIONS**

**RESULTS**

Frequency (MHz)	Actual Values		Target Values		Deviation (%)	
	Relative Permittivity	Conductivity	Relative Permittivity	Conductivity	Relative Permittivity	Conductivity
2450	51.8	1.974	52.7	1.95	1.71	-1.23

Frequency (MHz)	Relative Permittivity	Conductivity
1900	53.5	4.277
1925	56.8	1.044
1950	56.9	0.94
1975	56.8	0.952
2000	56.6	0.99
2025	56.4	1.04
2050	56.3	1.096
2100	55.8	1.212
2125	55.5	1.273
2150	55.2	1.328
2175	55	1.386
2200	54.7	1.438
2225	54.4	1.496
2250	54.1	1.552
2300	53.4	1.65
2325	53.2	1.698
2350	52.9	1.743
2375	52.7	1.789
2400	52.5	1.858
2425	52.1	1.92
2450	51.8	1.974
2500	51.1	2.08
2525	50.7	2.123
2550	50.4	2.166
2575	50	2.206
2600	49.7	2.244
2625	49.4	2.278
2675	48.8	2.348
2700	48.5	2.385



## REQUIREMENT

Per IEEE 1528, Section 8.2.1, "System checks are performed prior to compliance tests and the results must always be within  $\pm 10\%$  of the target value corresponding to the test frequency, liquid, and the source used. The target values are 1 g or 10 g averaged SAR values measured on systems having current system validation and calibration status, and using the system check setup as shown in Figure 14. These target values should be determined using a standard source."

## TEST DESCRIPTION


Within 24 hours of a measurement, Northwest EMC used the system validation kit (calibrated reference dipole) to test whether the system was operating within its specifications. The validation was performed in the indicated bands by making SAR measurements of the reference dipole with the phantom filled with the tissue-equivalent liquid. First, a signal generator and power amplifier were used to produce a 100mW level as measured with a power meter at the antenna terminals of the dipole. Then, the reference dipole was positioned below the bottom of the phantom and centered with its axis parallel to the longest side of the phantom. A low loss and low relative permittivity spacer was used to establish the correct distance between the center axis of the reference dipole and the liquid.

For the reference dipoles, the spacing distance  $s$  is given by:

$s = 15\text{mm}, \pm 0.2\text{mm}$  for  $300\text{MHz} \leq f \leq 1000 \text{MHz}$ :

$s = 10\text{mm}, \pm 0.2\text{mm}$  for  $1000\text{MHz} \leq f \leq 6000\text{MHz}$

The measured 1 g and 10 g spatial average SAR values were normalized to a 1W dipole input power for comparison to the calibration data. The results are summarized in the attached table. The deviation is less than 10% in all cases, indicating that the system performance check was within tolerance.

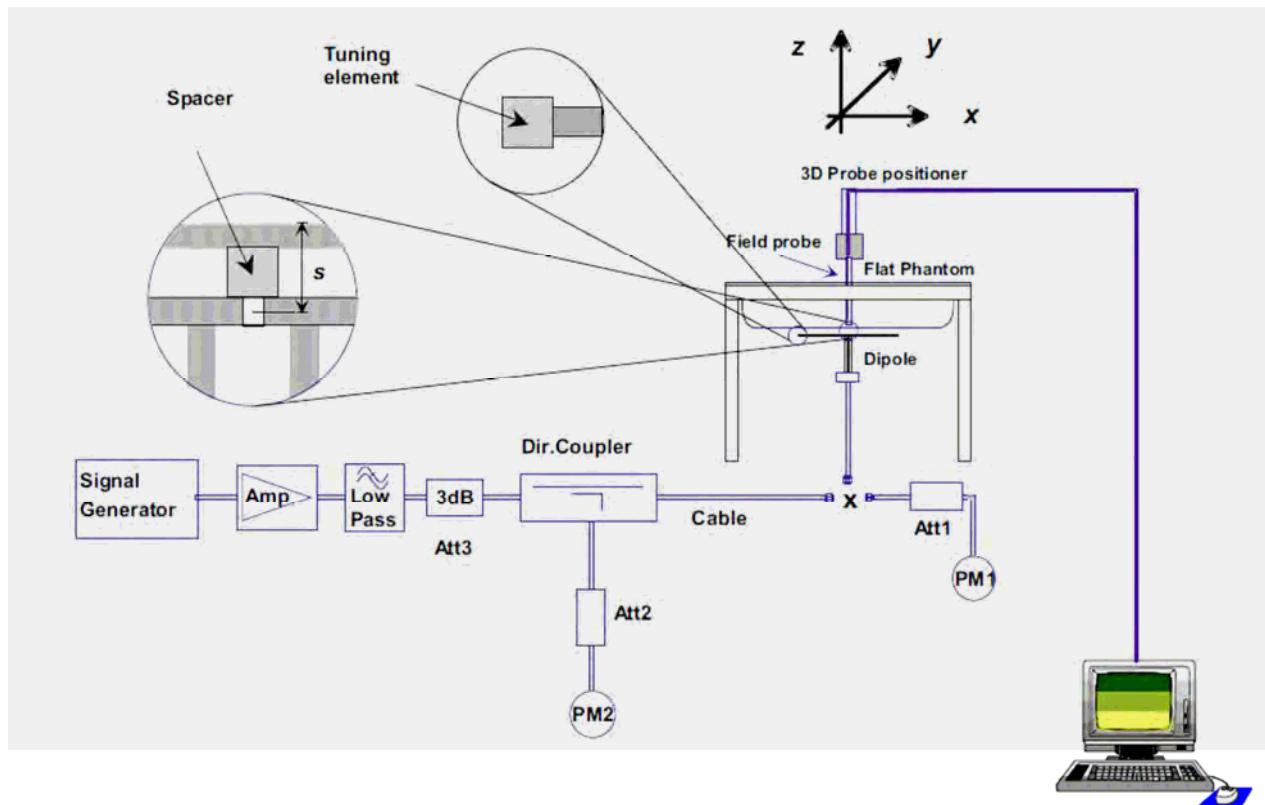

EUT:	Ranger/TSC3	Work Order:	TRPO0082
Customer:	Trimble Navigation Limited MCS	Job Site:	EV08
Attendees:	None	Customer Project:	None

## TEST SPECIFICATIONS

Specification:	Method:
FCC 2.1093:2012 FCC 15.247:2012	FCC OET 65C:2001 IEEE Std 1528:2003 FCC KDB 447498 D01 v04
Health Safety Code 6:2009	RSS-102, Issue 4:2010

## COMMENTS

None

## DEVIATIONS FROM TEST STANDARD

None

## RESULTS

Date	Liquid part number and frequency	Conducted Power into the Dipole (dBm)	Correction Factor	Measured		Normalized to 1W		Target (Normalized to 1W) Get from Dipole Calibration Certificate		% Difference	
				1g	10g	1g	10g	1g	10g	1g	10g
11/26/2012	MSL 2450	20.82	8.28	5.77	2.65	47.78	21.94	50.4	23.7	-5.2	-7.43
12/13/2012	MSL 2450	20	10	4.92	2.3	49.2	23	50.4	23.7	-2.38	-2.95

Tested By:	Carl Engholm	Room Temperature (°C):	21.4°C
Date:	11/26/2012	Liquid Temperature (°C):	20.6°C
Serial Number:	0360-003899	Humidity (%RH):	35%
Configuration:	TRPO0082-1	Bar. Pressure (mb):	1016 mb
Comments:	None		

**MSL2450 2450 11-26-12**

**DUT: Dipole 2450 MHz D2450V2; Type: D2450V2; Serial: D2450V2**

Communication System: CW; Communication System Band: D2450 (2450.0 MHz); Frequency: 2450 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.974$  mho/m;  $\epsilon_r = 51.81$ ;  $\rho = 1000$  kg/m<sup>3</sup>, Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- DASYS 52.8.3(988); SEMCAD X 14.6.7(6848)

**System Check/System Check/Area Scan (51x61x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 6.10 W/kg

**System Check/System Check/Z Scan (1x1x21):** Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of Total (measured) = 68.08 V/m



**System Check/System Check/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 54.268 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 11.9 W/kg

**SAR(1 g) = 5.77 W/kg; SAR(10 g) = 2.65 W/kg**

Maximum value of SAR (measured) = 5.77 W/kg

   
Approved By

MSL2450 2450 11-26-12

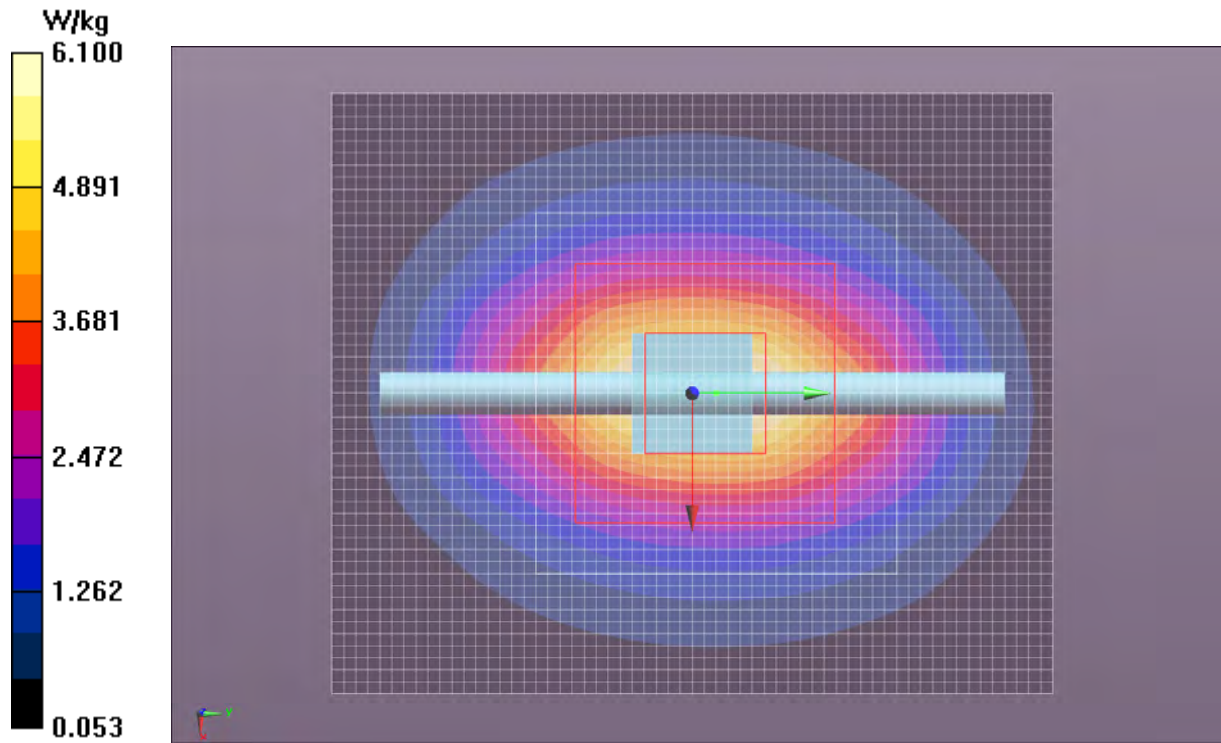

Tested By:	Ethan Schoonover	Room Temperature (°C):	23.1
Date:	12/13/2012	Liquid Temperature (°C):	23.1
Serial Number:	0360-003899	Humidity (%RH):	36.4
Configuration:	TRPO0082-1	Bar. Pressure (mb):	1009
Comments:	None		

**MSL2450 12-13-12**

**DUT: Dipole 2450 MHz D2450V2; Type: D2450V2; Serial: D2450V2**

Communication System: CW; Communication System Band: D2450 (2450.0 MHz); Frequency: 2450 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.974$  mho/m;  $\epsilon_r = 51.81$ ;  $\rho = 1000$  kg/m<sup>3</sup>, Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- DASYS52 52.8.3(988); SEMCAD X 14.6.7(6848)

**System Check/System Check/Area Scan (51x61x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 5.20 W/kg

**System Check/System Check/Z Scan (1x1x21):** Measurement grid: dx=20mm, dy=20mm, dz=5mm  
Maximum value of Total (measured) = 68.92 V/m

**System Check/System Check/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 48.436 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 9.87 W/kg

**SAR(1 g) = 4.92 W/kg; SAR(10 g) = 2.3 W/kg**


Maximum value of SAR (measured) = 4.93 W/kg

Maximum value of SAR (measured) = 9.38 W/kg




Approved By

MSL2450 12-13-12

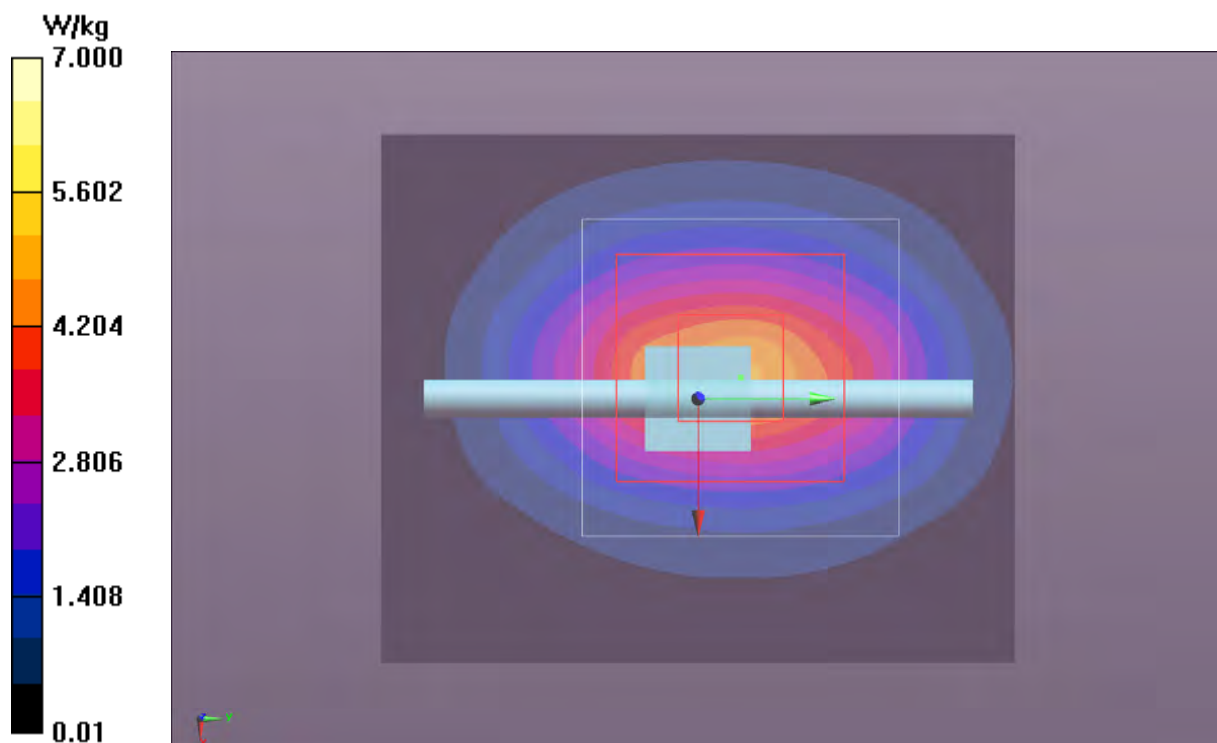

---

## Test Configurations

### Test Locations

The EUT's diagonal dimension is 27.29 cm. Since it is greater than 20 cm, KDB 941225 is not applicable and the SAR guidance of KDB 447498 D01v04 is applied. The bottom face (referred to as "back" in this report) and the top edge were tested. The Ranger/TSC3 antenna swivels, so when it is horizontal, it is located closest to the top edge, and when it is vertical, it is closest to the back.

### Simultaneous Transmission

During testing, a KDB analysis was done to determine whether a SAR evaluation is required for simultaneous transmission. KDB 616217 D03 SAR Supplement is the FCC's Policy for SAR evaluation of Notebooks, Netbooks, Laptops, and Tablet Computers. Whether a SAR evaluation is required for simultaneous transmission is determined by the output power, antenna spacing, and SAR distributions of each antenna.

The FHSS, WWAN, WiFi /BT radios can transmit simultaneously. Simultaneous transmission of the WWAN, WiFi and Bluetooth radios was addressed in the SAR report filed in the original application for Trimble's Yuma 2, FCC ID: S93-Y2C3. Section 11.2 of that SAR report (Sporton FCC Test Report No: FA280604A) contains tables where the stand-alone SAR values for each possible radio and antenna combination are summed. The worst case condition has a summed SAR value of 1.32 W/kg.

The highest stand-alone SAR value for the Ranger/TSC3 radio as documented in this SAR report is 0.19 W/kg. The summation of the worst-case values:  $1.32 + 0.19 = 1.51$  W/kg.

Since the sum of the highest SAR from each of the individual antennas is less than 1.6 W/kg, per item 4(a) KDB 616217, simultaneous transmission SAR evaluation is not required.

---

## Summary

The following tables summarize the measured SAR values.

Per FCC KDB 447498, SAR must be measured on the channel with the highest conducted output power. When the SAR measured on the highest output channel is  $>0.8$  W/kg, SAR evaluation for the other required test channels is necessary.

---

EUT:	Ranger/TSC3	Work Order:	TRPO0082
Customer:	Trimble Navigation Limited MCS	Job Site:	EV08
Attendees:	None	Customer Project:	None

**TEST SPECIFICATIONS**

Specification:	Method:
FCC 2.1093:2012 FCC 15.247:2012	FCC OET 65C:2001 IEEE Std 1528:2003 FCC KDB 447498 D01 v04
Health Safety Code 6:2009	RSS-102, Issue 4:2010

**COMMENTS**

None

**DEVIATIONS FROM TEST STANDARD**

None

**RESULTS**

Test Configuration	Frequency Band	Transmit Frequency (MHz)	Transmit Channel	EUT Position	Antenna Position	SAR Drift During Test (dB)	Measured 10g SAR Level (mW/g)	Test#
Body	2.4GHz	2435.76	37	Top	Horizontal	0.33	0.162	1
Body	2.4GHz	2435.76	37	Back	Horizontal	0.09	0.157	2
Body	2.4GHz	2435.76	37	Back	Vertical	0.08	0.185	3



Tested By:	Carl Engholm	Room Temperature (°C):	21.6°C
Date:	11/26/2012	Liquid Temperature (°C):	22.4°C
Serial Number:	W2410M4G-I-417006	Humidity (%RH):	36%
Configuration:	TRPO0082-1	Bar. Pressure (mb):	1016 mb
Comments:	None		

**Test 1**

**DUT: FHSS radio Model Ranger/TSC3; Serial: W2410M4G-I-417006**

Communication System: CW; Communication System Band: D2450 (2450.0 MHz); Frequency: 2435.76 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>, Medium parameters used (interpolated):  $f = 2435.76$  MHz;  $\sigma = 1.943$  mho/m;  $\epsilon_r = 51.997$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- DASYS2 52.8.3(988); SEMCAD X 14.6.7(6848)

**Body/Body/Z Scan (1x1x21):** Measurement grid: dx=20mm, dy=20mm, dz=5mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of Total (measured) = 7.601 V/m

**Body/Body/Reference scan (41x101x1):** Interpolated grid: dx=3.000 mm, dy=3.000 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.0462 W/kg

**Body/Body/Area scan (71x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.299 W/kg

**Body/Body/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.658 V/m; Power Drift = 0.33 dB

Peak SAR (extrapolated) = 0.319 W/kg

**SAR(1 g) = 0.162 W/kg; SAR(10 g) = 0.075 W/kg**


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.214 W/kg

Maximum value of SAR (measured) = 0.112 W/kg

Approved By

## Test 1

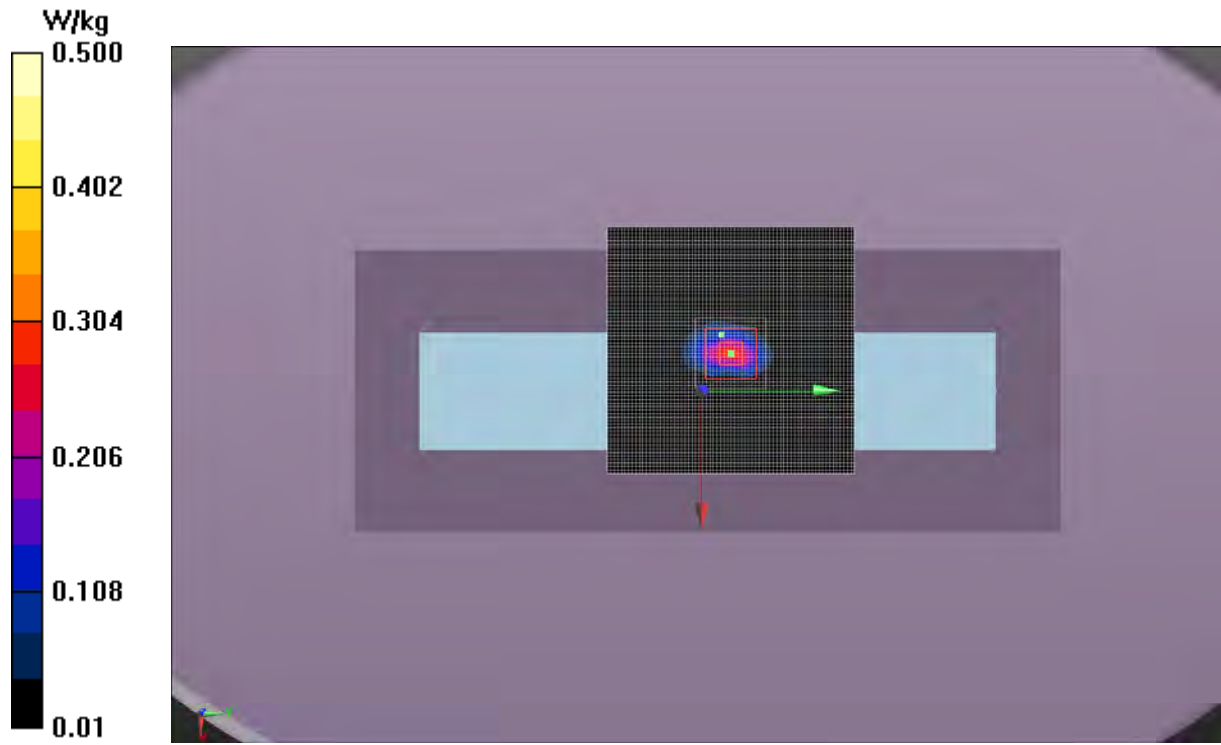

Tested By:	Carl Engholm	Room Temperature (°C):	21.2°C
Date:	11/26/2012	Liquid Temperature (°C):	21.5°C
Serial Number:	W2410M4G-I-417006	Humidity (%RH):	35%
Configuration:	TRPO0082-1	Bar. Pressure (mb):	1016 mb
Comments:	None		

**Test 2**

**DUT: FHSS radio Model Ranger/TSC3; Serial: W2410M4G-I-417006**

Communication System: CW; Communication System Band: D2450 (2450.0 MHz); Frequency: 2435.76 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>, Medium parameters used (interpolated):  $f = 2435.76$  MHz;  $\sigma = 1.943$  mho/m;  $\epsilon_r = 51.997$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- DASYS 52.8.3(988); SEMCAD X 14.6.7(6848)

**Body/Body/Z Scan (1x1x21):** Measurement grid: dx=20mm, dy=20mm, dz=5mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of Total (measured) = 7.358 V/m

**Body/Body/Reference scan (71x101x1):** Interpolated grid: dx=3.000 mm, dy=3.000 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.00242 W/kg

**Body/Body/Area scan (71x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.206 W/kg

**Body/Body/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.456 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.327 W/kg

**SAR(1 g) = 0.157 W/kg; SAR(10 g) = 0.069 W/kg**



[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.211 W/kg


**Body/Body/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.456 V/m; Power Drift = 0.09 dB

[Info: Interpolated medium parameters used for SAR evaluation.](#)

   
Approved By

## Test 2

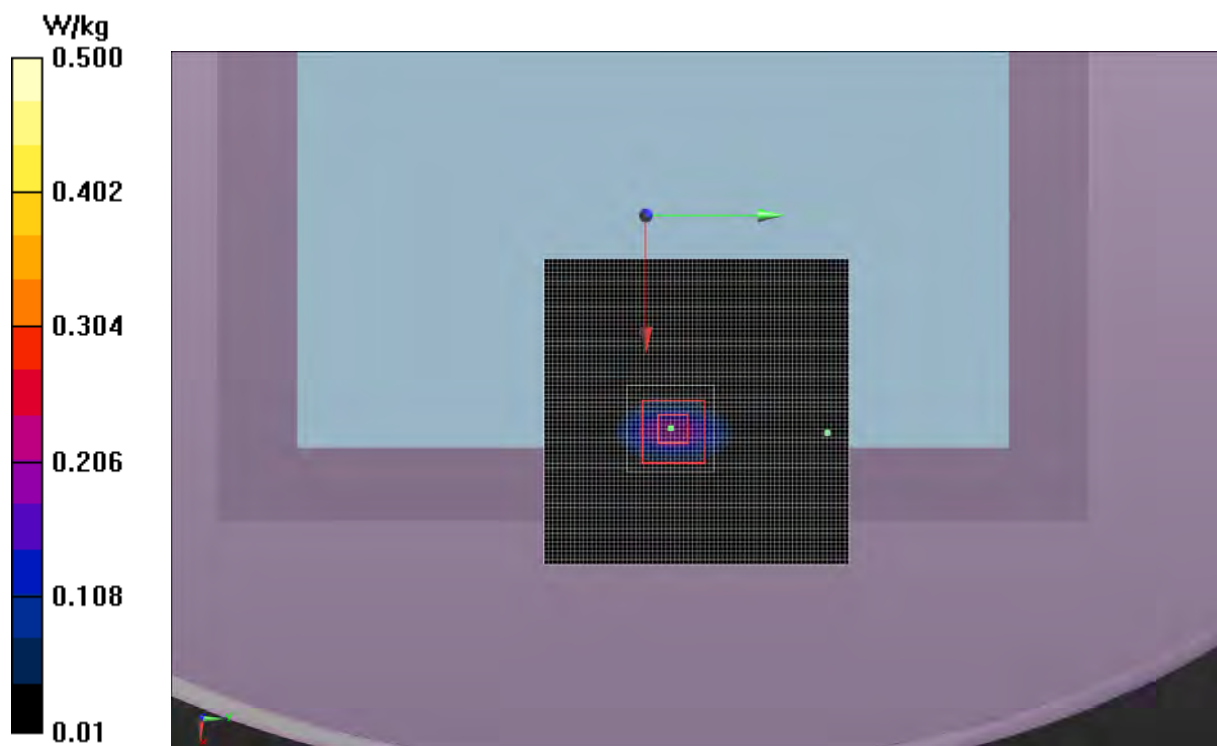

Tested By:	Ethan Schoonover	Room Temperature (°C):	23.1
Date:	12/13/2012	Liquid Temperature (°C):	23.1
Serial Number:	W2410M4G-I-417006	Humidity (%RH):	36.4
Configuration:	TRPO0082-1	Bar. Pressure (mb):	1011
Comments:	None		

**Test 3**

**DUT: FHSS radio Model Ranger/TSC3; Serial: W2410M4G-I-417006**

Communication System: CW; Communication System Band: D2450 (2450.0 MHz); Frequency: 2435.76 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>, Medium parameters used (interpolated):  $f = 2435.76$  MHz;  $\sigma = 1.943$  mho/m;  $\epsilon_r = 51.997$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- DASYS2 52.8.3(988); SEMCAD X 14.6.7(6848)

**Body/Body/Z Scan (1x1x21):** Measurement grid: dx=20mm, dy=20mm, dz=5mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of Total (measured) = 8.029 V/m

**Body/Body/Reference scan (101x101x1):** Interpolated grid: dx=3.000 mm, dy=3.000 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.124 W/kg

**Body/Body/Area scan (71x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.270 W/kg

**Body/Body/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.028 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.373 W/kg

**SAR(1 g) = 0.185 W/kg; SAR(10 g) = 0.085 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.246 W/kg

Maximum value of SAR (measured) = 0.125 W/kg





Approved By

## Test 3



## Test 3

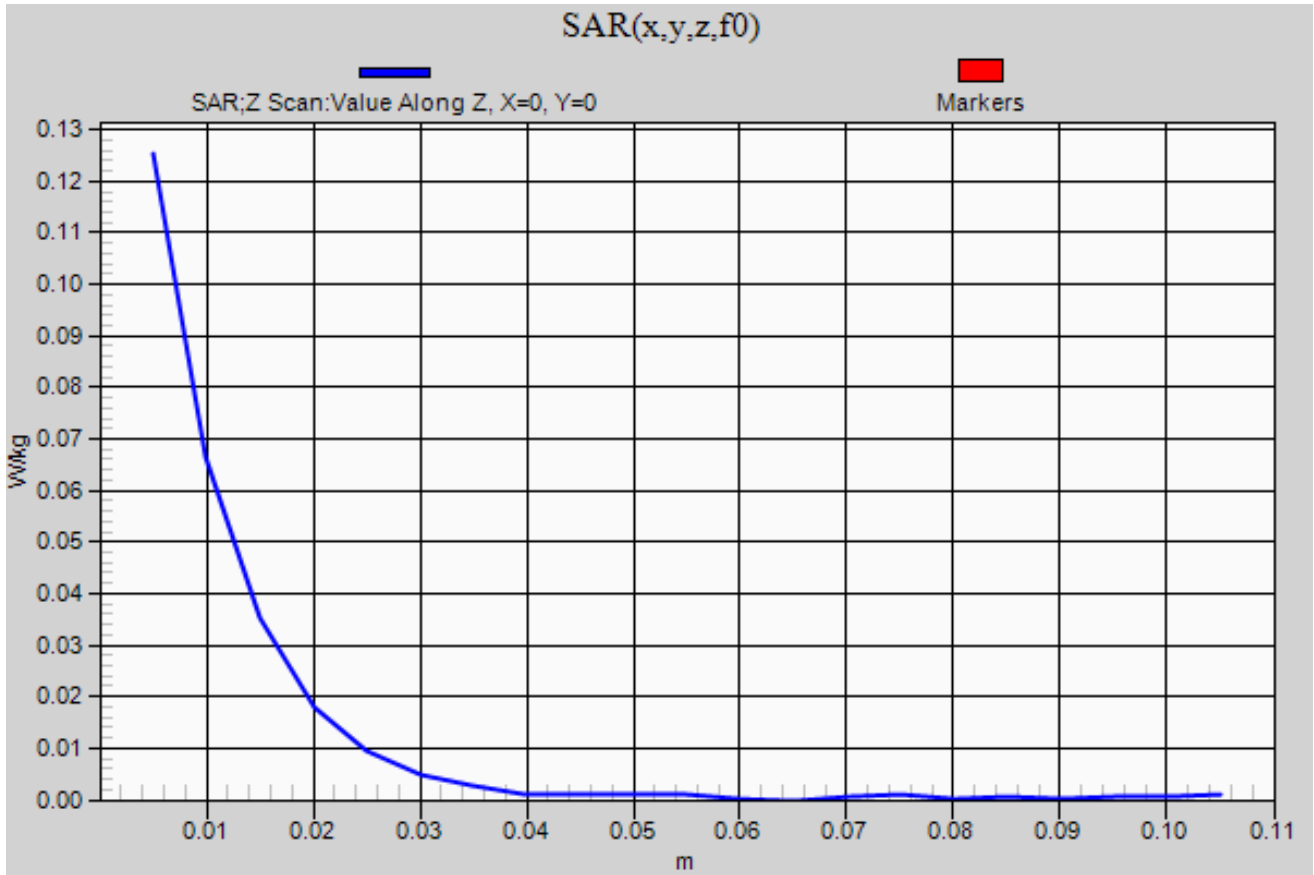


## SAR MEASUREMENT SYSTEM

### Schmid & Partner Engineering AG, DASY52

Northwest EMC selected the leader in SAR evaluation systems to provide the measurement tools for this evaluation. SPEAG's DASY52 is the fastest and most accurate scanner on the market. It is fully compatible with all world-wide standards for transmitters operating at the ear or within 20cm of the body. It provides full compatibility with IEC 62209-1, IEC 62209-2, IEEE 1528 as well as national adaptations such as FCC OET-65c and Korean Std. MIC #2000-93

The DASY52 system for performing compliance tests consists of the following items:

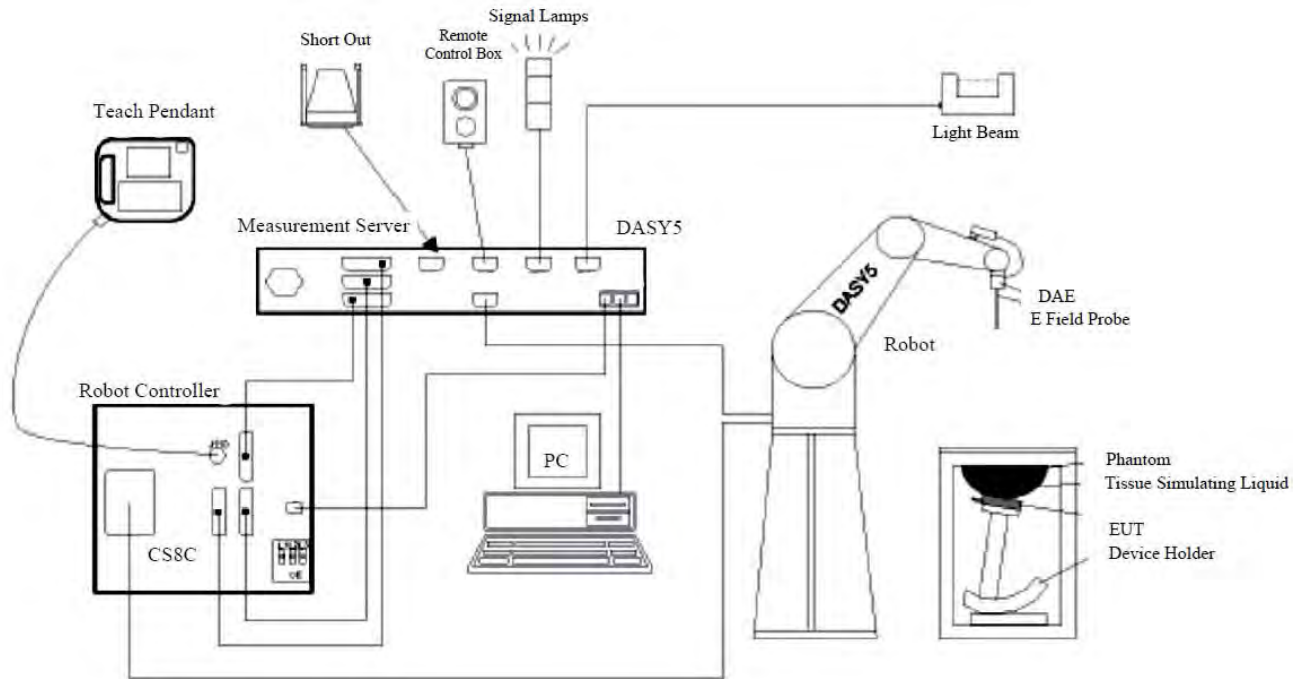

- A standard high precision 6-axis robot (Staubli TX=RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom, oval flat phantom, device holder, tissue simulating liquids, and validation dipole kits.




## TEST SITE

### Northwest EMC, Lab EV08

The SAR measurement system is located in a semi-anechoic chamber. This provides an ambient free environment that also eliminates reflections.

The chamber is 12 ft wide by 16 ft long x 8 ft high. A dedicated HVAC unit provides +/- 1 degree C temperature control.

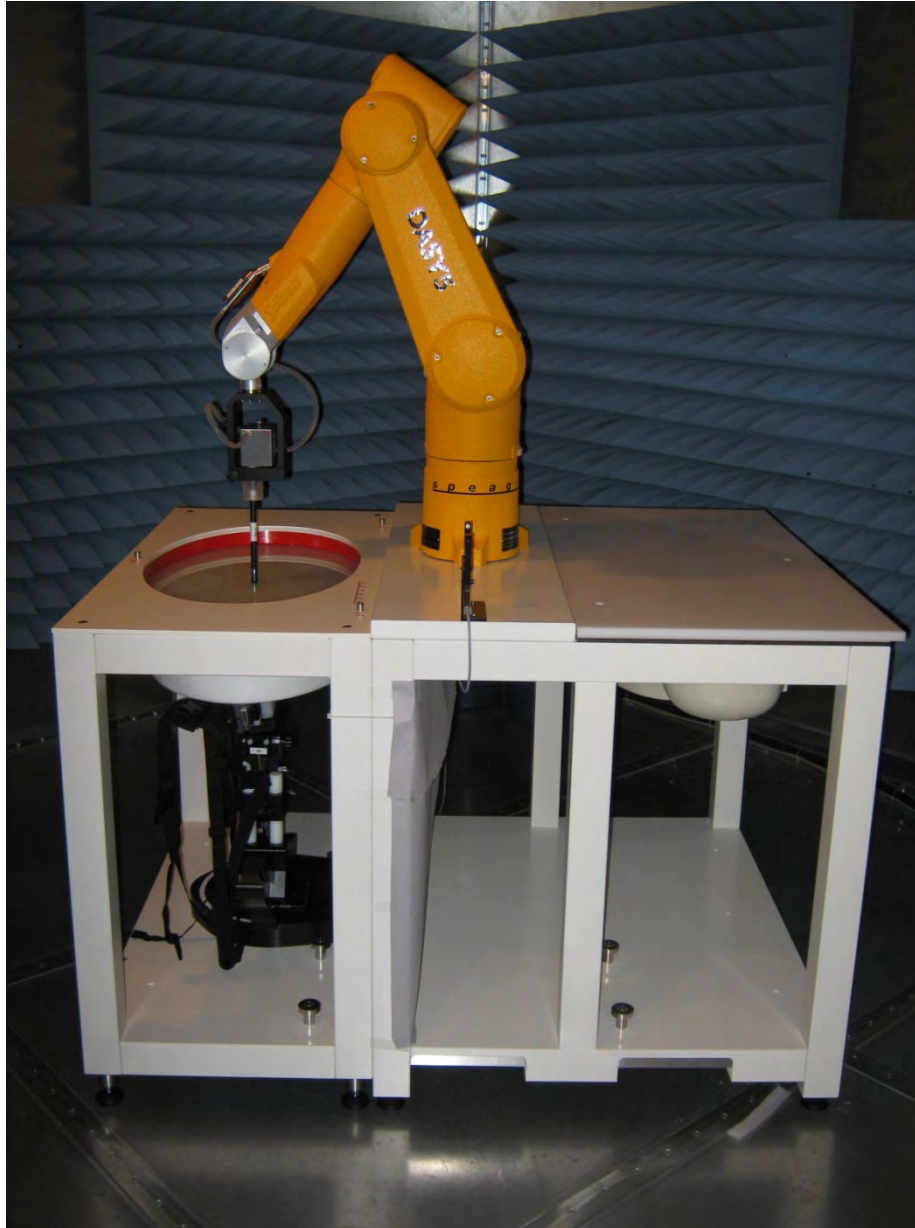

**TEST EQUIPMENT**

Description	Manufacturer	Model	ID	Last Cal.	Interval
Antenna, Dipole 2450MHz SAR	SPEAG	D2450V2	ADL	12/09/2011	12 mo
Humidity Temperature Meter	Omegaette	HH311	DTY	03/29/2011	24 mo
Dielectric Probe Kit	Agilent	85070E	IPP	09/08/2010	36 mo
Network Analyzer	Hewlett Packard	N5230A	NAD	06/19/2012	12 mo
Robot Arm	Staeubli	TX60LSPEAG	SAA	NCR	0 mo
Phantom, 2mm Oval ELI4 (Body)	SPEAG	QD OVA 001 BB	SAC	NCR	0 mo
Light Beam Unit	SPEAG	SE UKS 030 AA	SAD	NCR	0 mo
Robot Controller	Staeubli	CS8C	SAI	NCR	0 mo
Robot Chasis and Power Supply	Staeubli	N/A	SAJ	NCR	0 mo
DASY5 Measurement Server	Staeubli	DAYS5	SAK	NCR	0 mo
Body Solution	SPEAG	MSL 2450	SAM	Within 24 hours from start of test	
Device Holder	SPEAG	N/A	SAW	NCR	0 mo
Power Sensor	Agilent	E9300H	SQO	06/06/2011	24 mo
Power Meter	Agilent	N1913A	SQR	06/06/2011	24 mo
MXG Analog Signal Generator	Agilent	N5181A	TIG	NCR	0 mo
Amplifier	Mini Circuits	ZVE-3W-83+	TTA	NCR	0 mo
SAR Probe	SPEAG	EX3DV4	SAG	11/14/2012	12 mo
DAE4	SPEAG	SD000D04EJ	SAH	11/02/2012	12 mo

**MEASUREMENT UNCERTAINTY BUDGETS PER IEEE 1528:2003**

**300-3000 MHz Range**

Uncertainty Component	Tolerance (+/- %)	Probability Distribution	Divisor	$c_i$ (1g)	$c_i$ (10g)	$u_i$ (1g) (+/-%)	$u_i$ (10g) (+/-%)	$v_i$
<b>Measurement System</b>								
Probe calibration (k=1)	5.5	normal	1	1	1	5.5	5.5	$\infty$
Axial isotropy	4.7	rectangular	1.732	0.707	0.707	1.9	1.9	$\infty$
Hemispherical isotropy	9.6	rectangular	1.732	0.707	0.707	3.9	3.9	$\infty$
Boundary effect	1.0	rectangular	1.732	1	1	0.6	0.6	$\infty$
Linearity	4.7	rectangular	1.732	1	1	2.7	2.7	$\infty$
System detection limits	1.0	rectangular	1.732	1	1	0.6	0.6	$\infty$
Readout electronics	0.3	normal	1	1	1	0.3	0.3	$\infty$
Response time	0.8	rectangular	1.732	1	1	0.5	0.5	$\infty$
Integration time	2.6	rectangular	1.732	1	1	1.5	1.5	$\infty$
RF ambient conditions - noise	1.7	rectangular	1.732	1	1	1.0	1.0	$\infty$
RF Ambient Reflections	0.0	rectangular	1.732	1	1	0.0	0.0	$\infty$
Probe positioner mechanical tolerance	0.4	rectangular	1.732	1	1	0.2	0.2	$\infty$
Probe positioner with respect to phantom shell	2.9	rectangular	1.732	1	1	1.7	1.7	$\infty$
Extrapolation, interpolation, and integration algorithms for max. SAR evaluation	1.0	rectangular	1.732	1	1	0.6	0.6	$\infty$
<b>Test Sample Related</b>								
Device Positioning	2.9	normal	1	1	1	2.9	2.9	145
Device Holder	3.6	normal	1	1	1	3.6	3.6	5
Power Drift	5.0	rectangular	1.732	1	1	2.9	2.9	$\infty$
<b>Phantom and tissue parameters</b>								
Phantom Uncertainty - shell thickness tolerances	4.0	rectangular	1.732	1	1	2.3	2.3	$\infty$
Liquid conductivity - deviation from target values	5.0	rectangular	1.732	0.64	0.43	1.8	1.2	$\infty$
Liquid conductivity - measurement uncertainty	6.5	normal	1	0.64	0.43	4.2	2.8	$\infty$
Liquid permittivity - deviation from target values	5.0	rectangular	1.732	0.6	0.49	1.7	1.4	$\infty$
Liquid permittivity - measurement uncertainty	3.2	normal	1	0.6	0.49	1.9	1.6	$\infty$
Combined Standard Uncertainty	RSS					11.2	10.6	387
Expanded Measurement Uncertainty (95% Confidence/	normal (k=2)					22.5	21.2	

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Northwest EMC**

Certificate No: **EX3-3746\_Nov12**

**CALIBRATION CERTIFICATE**

Object **EX3DV4 - SN:3746**

Calibration procedure(s) **QA CAL-01.v8, QA CAL-14.v3, QA CAL-23.v4, QA CAL-25.v4  
Calibration procedure for dosimetric E-field probes**

Calibration date: **November 14, 2012**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	29-Mar-12 (No. 217-01508)	Apr-13
Power sensor E4412A	MY41498087	29-Mar-12 (No. 217-01508)	Apr-13
Reference 3 dB Attenuator	SN: S5054 (3c)	27-Mar-12 (No. 217-01531)	Apr-13
Reference 20 dB Attenuator	SN: S5086 (20b)	27-Mar-12 (No. 217-01529)	Apr-13
Reference 30 dB Attenuator	SN: S5129 (30b)	27-Mar-12 (No. 217-01532)	Apr-13
Reference Probe ES3DV2	SN: 3013	29-Dec-11 (No. ES3-3013_Dec11)	Dec-12
DAE4	SN: 660	20-Jun-12 (No. DAE4-660_Jun12)	Jun-13
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Apr-11)	In house check: Apr-13
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-12)	In house check: Oct-13

Calibrated by:	Name <b>Claudio Leubler</b>	Function <b>Laboratory Technician</b>	Signature 
Approved by:	Name <b>Katja Pokovic</b>	Function <b>Technical Manager</b>	Signature 

Issued: November 14, 2012

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

**Glossary:**

TSL	tissue simulating liquid
NORM <sub>x,y,z</sub>	sensitivity in free space
ConvF	sensitivity in TSL / NORM <sub>x,y,z</sub>
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C	modulation dependent linearization parameters
Polarization $\phi$	$\phi$ rotation around probe axis
Polarization $\vartheta$	$\vartheta$ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

**Calibration is Performed According to the Following Standards:**

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

**Methods Applied and Interpretation of Parameters:**

- **NORM<sub>x,y,z</sub>**: Assessed for E-field polarization  $\vartheta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not affect the E<sup>2</sup>-field uncertainty inside TSL (see below ConvF).
- **NORM(f)<sub>x,y,z</sub>** = NORM<sub>x,y,z</sub> \* frequency\_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- **DCP<sub>x,y,z</sub>**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- **PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- **A<sub>x,y,z</sub>; B<sub>x,y,z</sub>; C<sub>x,y,z</sub>; VR<sub>x,y,z</sub>**: A, B, C are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- **ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> \* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- **Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- **Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

# Probe EX3DV4

## SN:3746

Manufactured: March 26, 2010  
Calibrated: November 14, 2012

**Calibrated for DASY/EASY Systems**  
(Note: non-compatible with DASY2 system!)

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:3746

### Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ( $\mu\text{V}/(\text{V}/\text{m})^2$ ) <sup>A</sup>	0.49	0.47	0.50	$\pm 10.1 \%$
DCP (mV) <sup>B</sup>	106.9	94.9	95.5	

### Modulation Calibration Parameters

UID	Communication System Name	PAR		A dB	B dB	C dB	VR mV	Unc <sup>E</sup> (k=2)
0	CW	0.00	X	0.0	0.0	1.0	159.2	$\pm 3.0 \%$
			Y	0.0	0.0	1.0	155.6	
			Z	0.0	0.0	1.0	159.2	
10061	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps)	3.60	X	17.25	98.2	29.4	112.3	$\pm 3.5 \%$
			Y	3.25	68.3	18.0	146.5	
			Z	3.72	68.7	17.9	111.5	
10069	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps)	10.57	X	12.24	71.2	23.8	124.4	$\pm 4.4 \%$
			Y	10.68	68.7	22.7	105.1	
			Z	12.12	70.7	23.6	122.9	
10077	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps)	11.00	X	11.29	70.7	24.0	106.9	$\pm 4.1 \%$
			Y	10.72	71.0	24.7	131.8	
			Z	11.13	70.1	23.6	105.2	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of NormX,Y,Z do not affect the  $E^2$ -field uncertainty inside TSL (see Pages 5 and 6).

<sup>B</sup> Numerical linearization parameter: uncertainty not required.

<sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:3746

### Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) <sup>C</sup>	Relative Permittivity <sup>F</sup>	Conductivity (S/m) <sup>F</sup>	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
2450	39.2	1.80	6.70	6.70	6.70	0.44	0.77	± 12.0 %
5200	36.0	4.66	4.95	4.95	4.95	0.37	1.80	± 13.1 %
5300	35.9	4.76	4.65	4.65	4.65	0.40	1.80	± 13.1 %
5500	35.6	4.96	4.60	4.60	4.60	0.40	1.80	± 13.1 %
5600	35.5	5.07	4.43	4.43	4.43	0.40	1.80	± 13.1 %
5800	35.3	5.27	4.37	4.37	4.37	0.39	1.80	± 13.1 %

<sup>C</sup> Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.



## DASY/EASY - Parameters of Probe: EX3DV4 - SN:3746


### Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) <sup>C</sup>	Relative Permittivity <sup>F</sup>	Conductivity (S/m) <sup>F</sup>	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
2450	52.7	1.95	6.88	6.88	6.88	0.80	0.58	± 12.0 %
5200	49.0	5.30	4.39	4.39	4.39	0.41	1.90	± 13.1 %
5300	48.9	5.42	4.03	4.03	4.03	0.47	1.90	± 13.1 %
5500	48.6	5.65	3.91	3.91	3.91	0.45	1.90	± 13.1 %
5600	48.5	5.77	3.78	3.78	3.78	0.42	1.90	± 13.1 %
5800	48.2	6.00	4.15	4.15	4.15	0.45	1.90	± 13.1 %

<sup>C</sup> Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.


### Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)

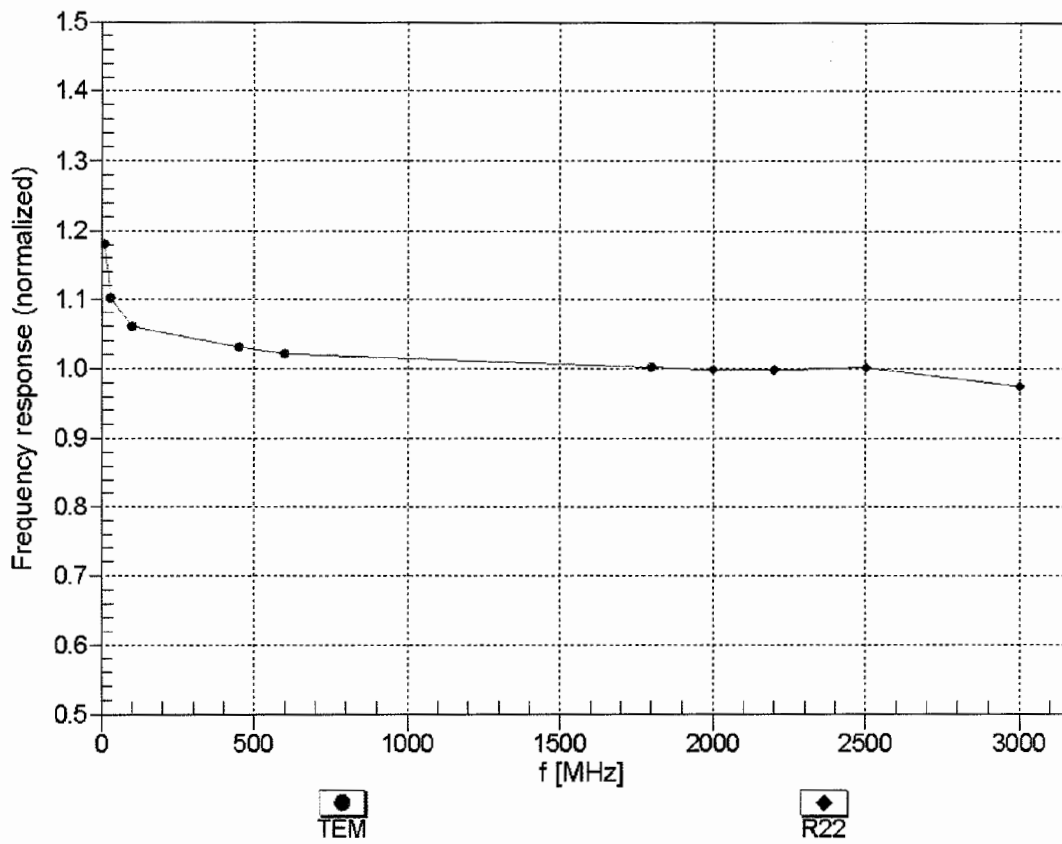



Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  ( $k=2$ )

### Receiving Pattern ( $\phi$ ), $\theta = 0^\circ$

f=600 MHz, TEM


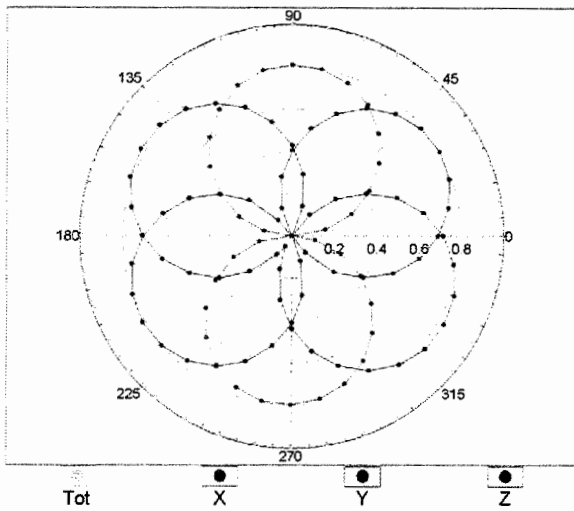


f=1800 MHz, R22

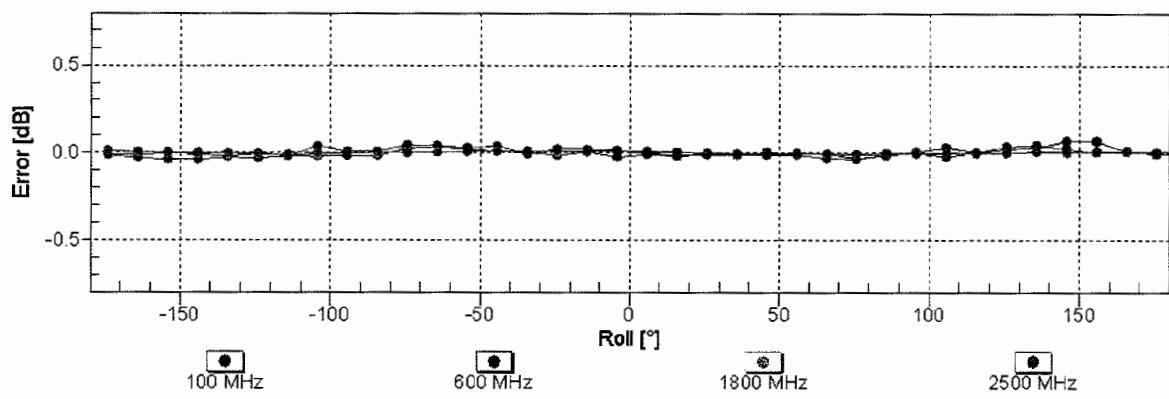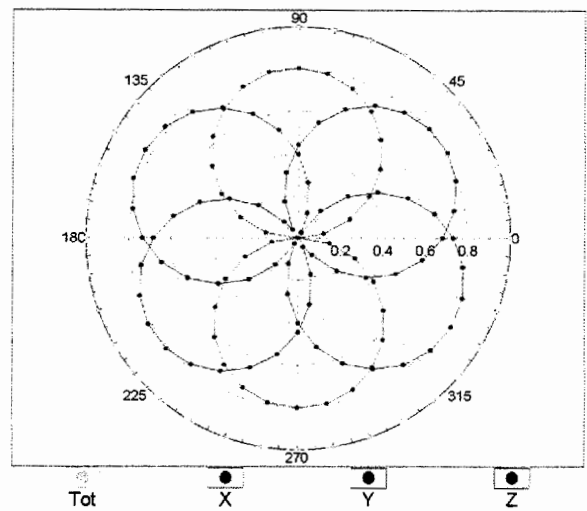


Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  (k=2)

### Dynamic Range $f(SAR_{head})$ (TEM cell , $f = 900$ MHz)

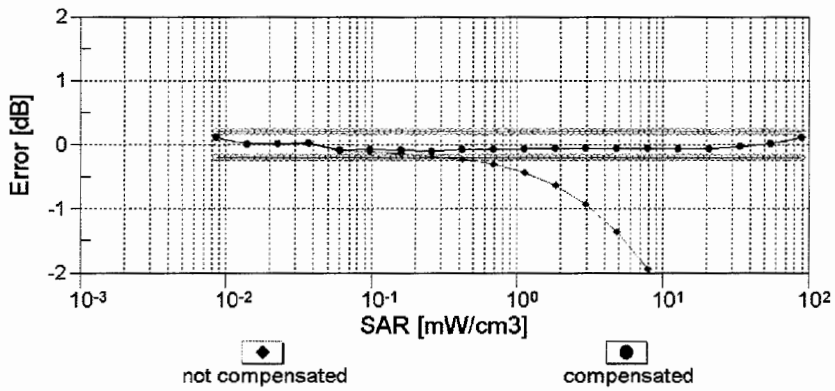
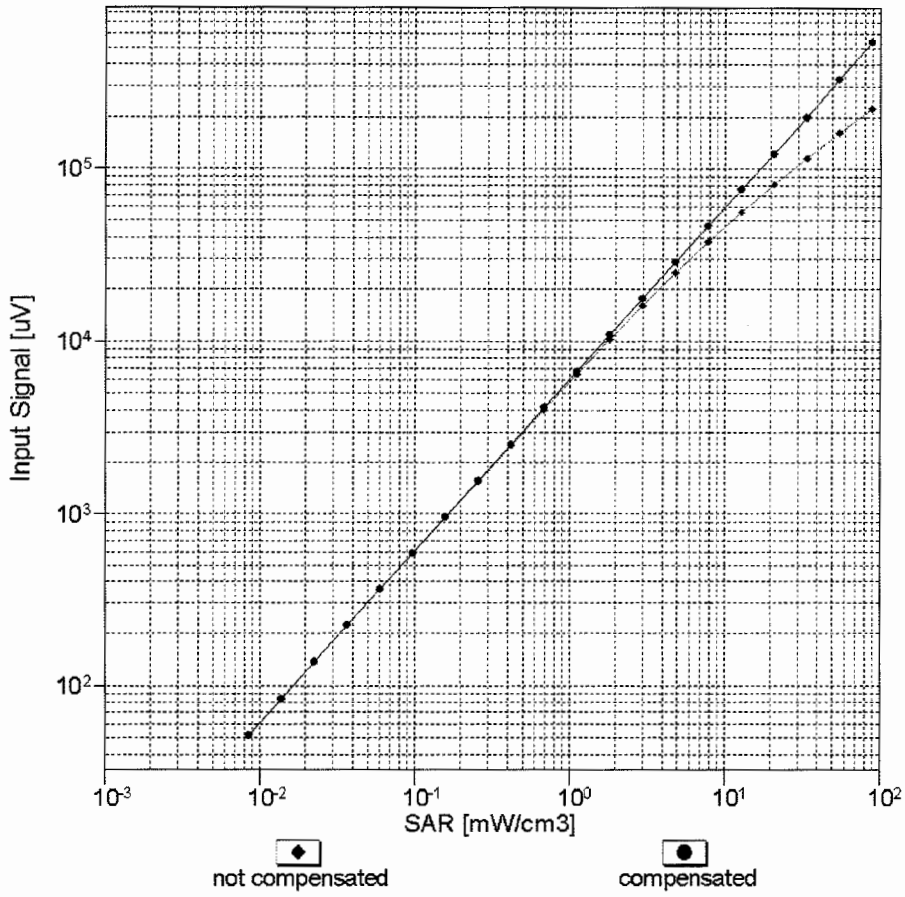


Uncertainty of Linearity Assessment:  $\pm 0.6\%$  ( $k=2$ )

# Conversion Factor Assessment

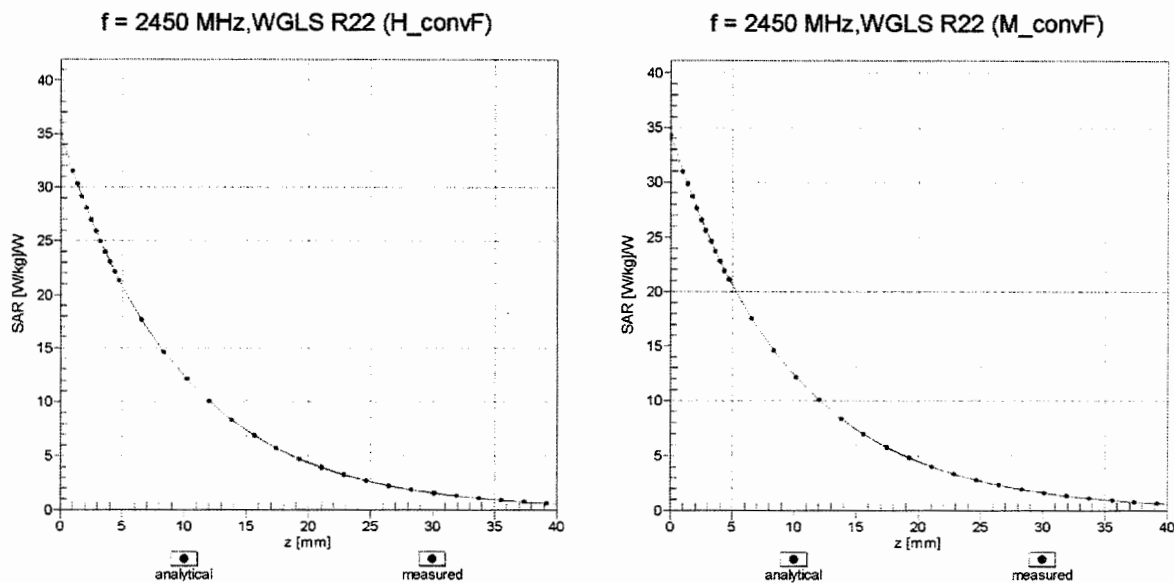

## Deviation from Isotropy in Liquid Error ( $\phi, \theta$ ), f = 900 MHz

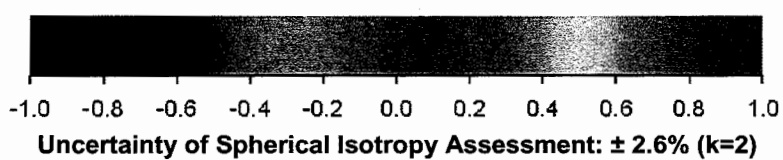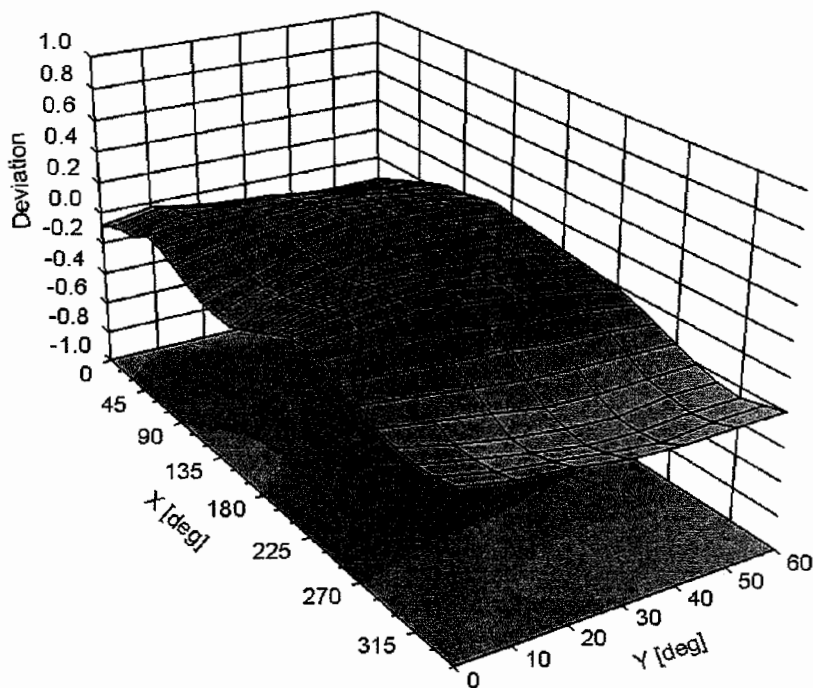

**DASY/EASY - Parameters of Probe: EX3DV4 - SN:3746****Other Probe Parameters**

Sensor Arrangement	Triangular
Connector Angle (°)	45.8
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	2 mm

**Calibration Laboratory of**  
**Schmid & Partner**  
**Engineering AG**  
 Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Northwest EMC**

Certificate No: **D2450V2-855\_Dec11**

## CALIBRATION CERTIFICATE

Object **D2450V2 - SN: 855**

Calibration procedure(s) **QA CAL-05.v8**  
**Calibration procedure for dipole validation kits above 700 MHz**

Calibration date: **December 09, 2011**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	05-Oct-11 (No. 217-01451)	Oct-12
Power sensor HP 8481A	US37292783	05-Oct-11 (No. 217-01451)	Oct-12
Reference 20 dB Attenuator	SN: 5086 (20g)	29-Mar-11 (No. 217-01368)	Apr-12
Type-N mismatch combination	SN: 5047.2 / 06327	29-Mar-11 (No. 217-01371)	Apr-12
Reference Probe ES3DV3	SN: 3205	29-Apr-11 (No. ES3-3205_Apr11)	Apr-12
DAE4	SN: 601	04-Jul-11 (No. DAE4-601_Jul11)	Jul-12
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-11)	In house check: Oct-13
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-11)	In house check: Oct-13
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-11)	In house check: Oct-12

Calibrated by: **Dimce Iliev** Laboratory Technician

*Dimce Iliev*

Approved by: **Katja Pokovic** Technical Manager

*Katja Pokovic*

Issued: December 9, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

### Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

### Additional Documentation:

- DASY4/5 System Handbook

### Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.



## Measurement Conditions

DASY system configuration, as far as not given on page 1.

<b>DASY Version</b>	DASY5	V52.8.0
<b>Extrapolation</b>	Advanced Extrapolation	
<b>Phantom</b>	Modular Flat Phantom	
<b>Distance Dipole Center - TSL</b>	10 mm	with Spacer
<b>Zoom Scan Resolution</b>	dx, dy, dz = 5 mm	
<b>Frequency</b>	2450 MHz ± 1 MHz	

## Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
<b>Nominal Head TSL parameters</b>	22.0 °C	39.2	1.80 mho/m
<b>Measured Head TSL parameters</b>	(22.0 ± 0.2) °C	39.5 ± 6 %	1.87 mho/m ± 6 %
<b>Head TSL temperature change during test</b>	< 0.5 °C	----	----

## SAR result with Head TSL

<b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</b>	Condition	
SAR measured	250 mW input power	13.7 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	<b>53.9 mW / g ± 17.0 % (k=2)</b>

<b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</b>	condition	
SAR measured	250 mW input power	6.38 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	<b>25.3 mW / g ± 16.5 % (k=2)</b>

## Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
<b>Nominal Body TSL parameters</b>	22.0 °C	52.7	1.95 mho/m
<b>Measured Body TSL parameters</b>	(22.0 ± 0.2) °C	50.7 ± 6 %	2.04 mho/m ± 6 %
<b>Body TSL temperature change during test</b>	< 0.5 °C	----	----

## SAR result with Body TSL

<b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Body TSL</b>	Condition	
SAR measured	250 mW input power	13.0 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	<b>50.4 mW / g ± 17.0 % (k=2)</b>

<b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Body TSL</b>	condition	
SAR measured	250 mW input power	6.02 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	<b>23.7 mW / g ± 16.5 % (k=2)</b>

## Appendix

### Antenna Parameters with Head TSL

Impedance, transformed to feed point	52.9 $\Omega$ + 4.5 j $\Omega$
Return Loss	- 25.7 dB

### Antenna Parameters with Body TSL

Impedance, transformed to feed point	50.4 $\Omega$ + 5.3 j $\Omega$
Return Loss	- 25.5 dB

### General Antenna Parameters and Design

Electrical Delay (one direction)	1.157 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

Manufactured by	SPEAG
Manufactured on	November 10, 2009

# DASY5 Validation Report for Head TSL

Date: 09.12.2011

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 855**

Communication System: CW; Frequency: 2450 MHz

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.87$  mho/m;  $\epsilon_r = 39.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.45, 4.45, 4.45); Calibrated: 29.04.2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 04.07.2011
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

## Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 100.7 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 28.3310

**SAR(1 g) = 13.7 mW/g; SAR(10 g) = 6.38 mW/g**

Maximum value of SAR (measured) = 17.684 mW/g

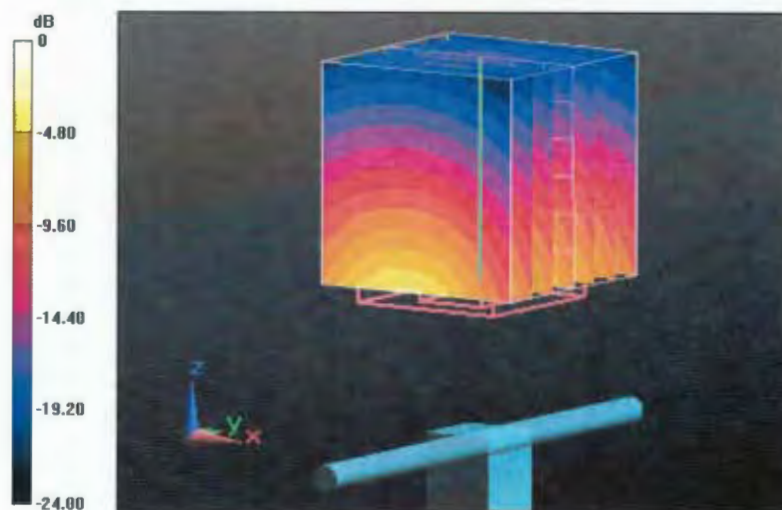

0 dB = 17.680mW/g = 24.95 dB mW/g

# Impedance Measurement Plot for Head TSL

9 Dec 2011 13:32:30


CH1 S11 1 U FS 1: 52.912  $\Omega$  4.5527  $\Omega$  295.75  $\mu$ H 2 450.000 000 MHz

\*  
Del

Cor

Avg  
16

↑

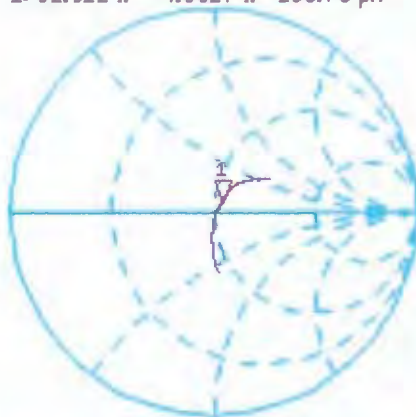


CH2 S11 LOG 5 dB/REF -20 dB 1:-25.595 dB 2 450,000 000 MHz

Cor

Avg  
16

↑

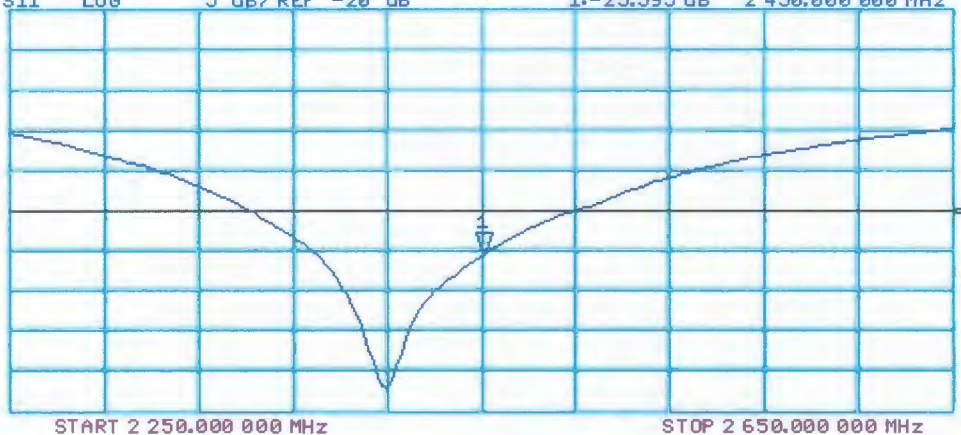

# DASY5 Validation Report for Body TSL

Date: 08.12.2011

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 855**

Communication System: CW; Frequency: 2450 MHz

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 2.04$  mho/m;  $\epsilon_r = 50.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.26, 4.26, 4.26); Calibrated: 29.04.2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 04.07.2011
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

**Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:**


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 95.074 V/m; Power Drift = -0.0092 dB

Peak SAR (extrapolated) = 27.0840

**SAR(1 g) = 13 mW/g; SAR(10 g) = 6.02 mW/g**

Maximum value of SAR (measured) = 17.188 mW/g

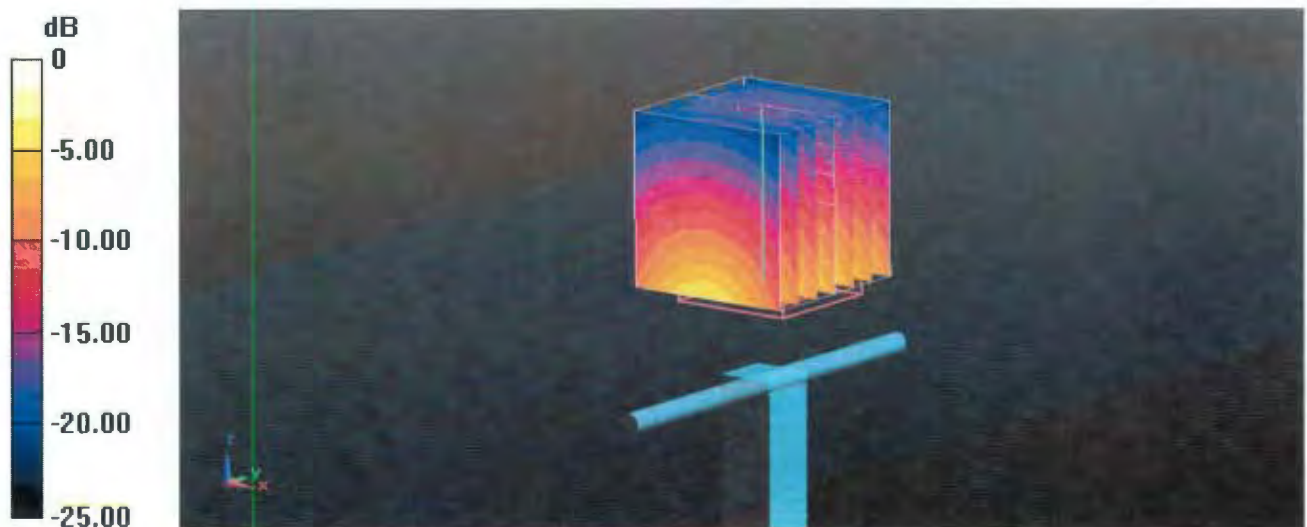


0 dB = 17.190mW/g = 24.71 dB mW/g

# Impedance Measurement Plot for Body TSL

8 Dec 2011 11:09:43

CH1 S11 1 U FS 2: 50.367  $\Omega$  5.3594  $\Omega$  348.12 pF 2 450.220 000 MHz

\*  
De1  
CA

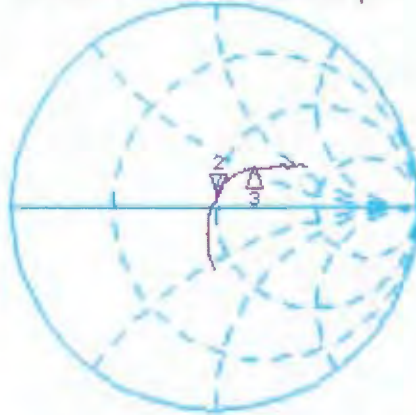


CH1 Markers

2: 65.660  $\Omega$   
27.344  $\Omega$   
2.60000 GHz

H1d

CH2 S11 LOG 5 dB/REF -20 dB 2:-25.455 dB 2 450.220 000 MHz

CA  
Avg  
16  
H1d

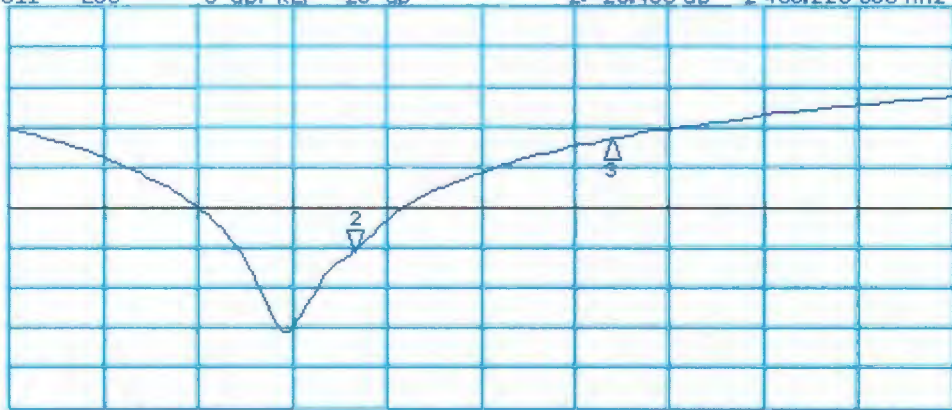

CH2 Markers

2:-11.515 dB  
2.60000 GHz

START 2 250.000 000 MHz


STOP 2 800.000 000 MHz







*No Repair*

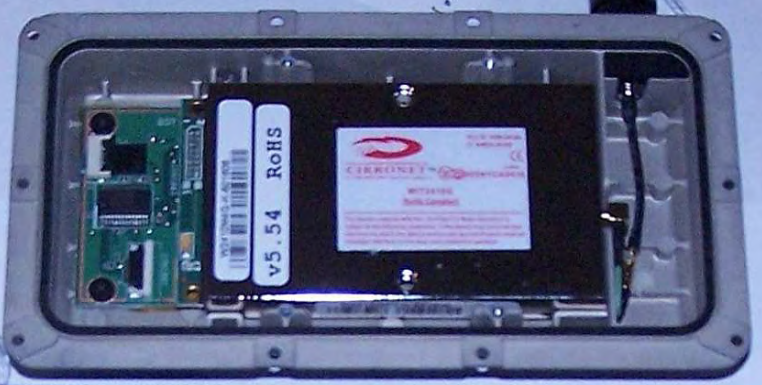




## RADIOS

cell module

cirronet (in rear accessory bay)

wifi / bluetooth combo

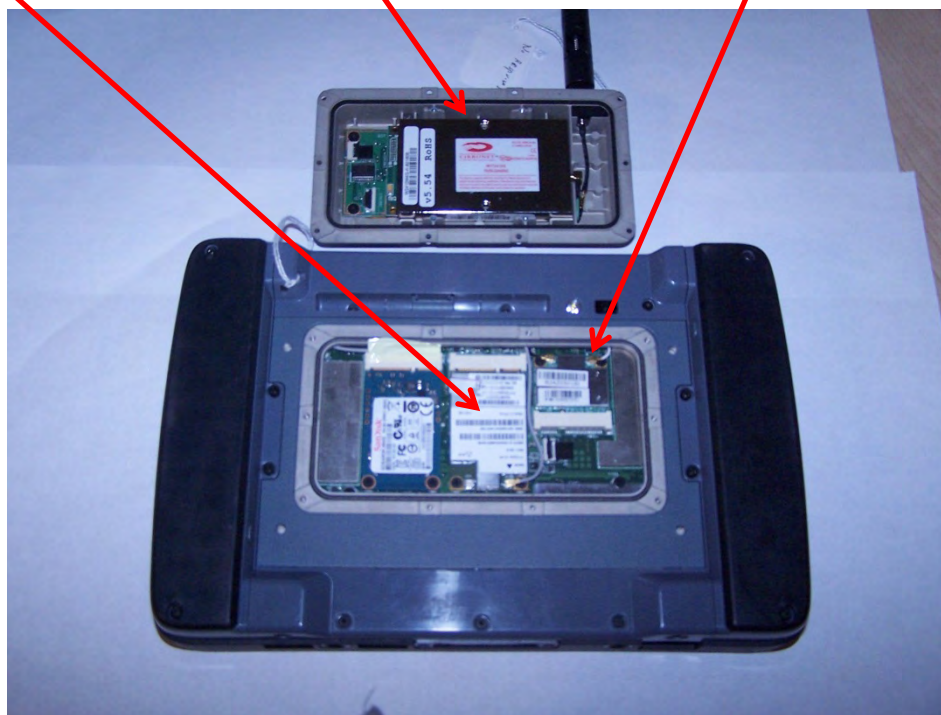



WIT2410M4-R-089245

OPERATIONAL  
EQUIPMENT

100  
100  
100



WIT2410M4-R-089233

V5.46

CIRRONET

FCC ID: HSW-2410M

MODEL: WIT2410




This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.




0889  
CAN 3381032223A



7511  
911  
2

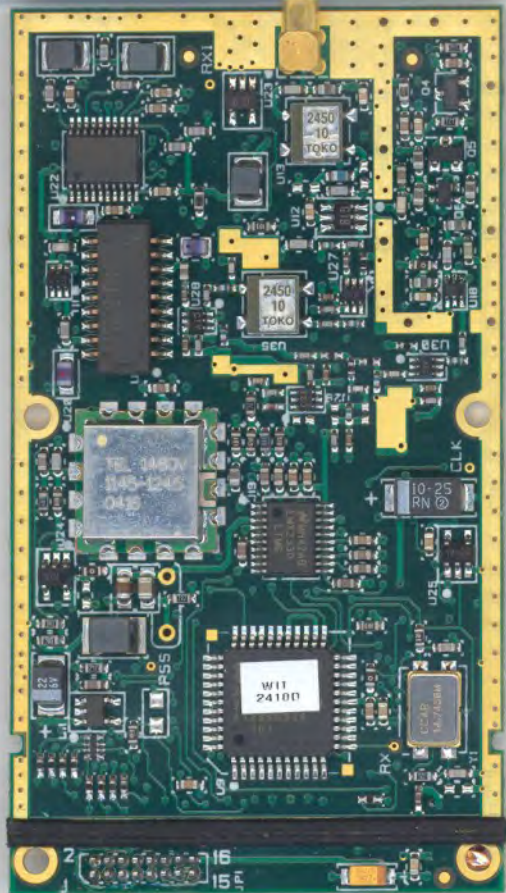

Back of EUT – Antenna Horizontal

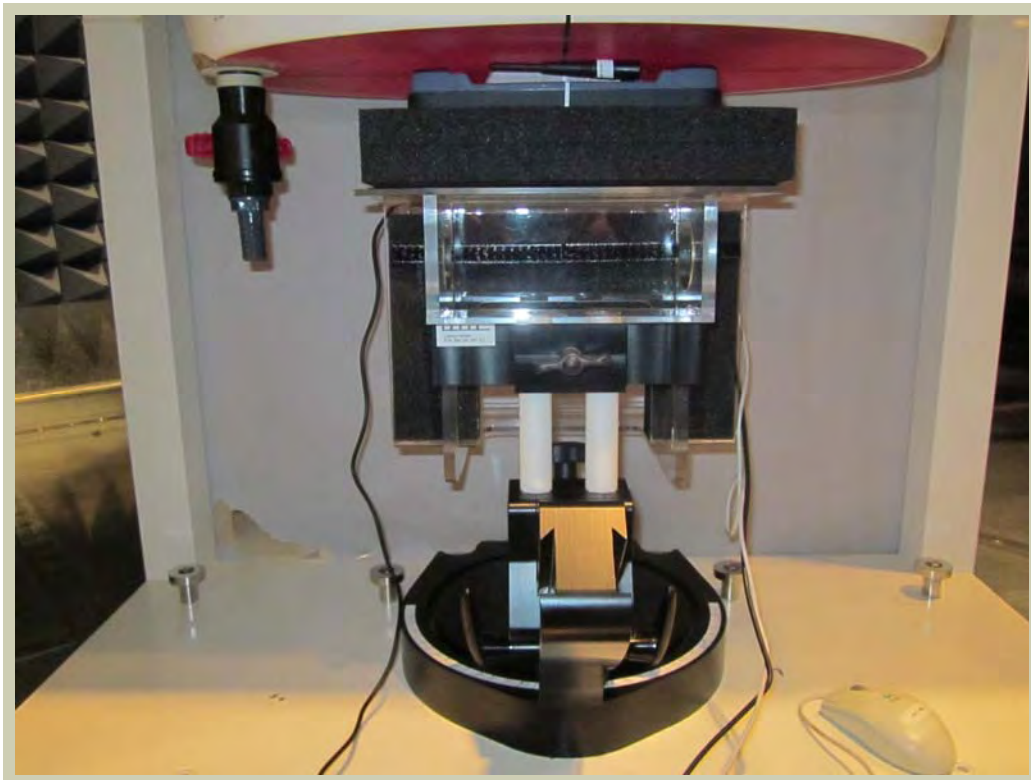

Top of EUT – Antenna Horizontal



# SETUP PHOTOS

Back of EUT – Antenna Vertical

