

Tripod Data Systems, Inc.

USI Radio Module installed in the Ranger X Series Handheld Computer

May 23, 2005

Report No. TRPO0007.1

Report Prepared By



www.nwemc.com
1-888-EMI-CERT

© 2005 Northwest EMC, Inc

EMC Test Report



22975 NW Evergreen Parkway
Suite 400
Hillsboro, Oregon 97124

Certificate of Test

Issue Date: May 23, 2005

Tripod Data Systems, Inc.

USI Radio Module installed in the Ranger X Series Handheld Computer

Emissions			
Specification	Test Method	Pass	Fail
FCC 15.207 AC Powerline Conducted Emissions:2005-04	ANSI C63.4:2003	<input checked="" type="checkbox"/>	<input type="checkbox"/>
FCC 15.247(d) Spurious Radiated Emissions:2005-04	ANSI C63.4:2003	<input checked="" type="checkbox"/>	<input type="checkbox"/>

Modifications made to the product

See the Modifications section of this report

Test Facility

The measurement facility used to collect the data is located at:

Northwest EMC, Inc.
22975 NW Evergreen Parkway, Suite 400; Hillsboro, OR 97124
Phone: (503) 844-4066
Fax: 844-3826

This site has been fully described in a report filed with and accepted by the FCC (Federal Communications Commission) and Industry Canada.

Approved By:

Greg Kiemel, Director of Engineering

This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government of the United States of America.

Product compliance is the responsibility of the client, therefore the tests and equipment modes of operation represented in this report were agreed upon by the client, prior to testing. This Report may only be duplicated in its entirety. The results of this test pertain only to the sample(s) tested, the specific description is noted in each of the individual sections of the test report supporting this certificate of test.

Revision Number	Description	Date	Page Number
00	None		

FCC: Accredited by NVLAP for performance of FCC radio, digital, and ISM device testing. Our Open Area Test Sites, certification chambers, and conducted measurement facilities have been fully described in reports filed with the FCC and accepted by the FCC in letters maintained in our files. Northwest EMC has been accredited by ANSI to ISO / IEC Guide 65 as a product certifier. We have been designated by the FCC as a Telecommunications Certification Body (TCB). This allows Northwest EMC to certify transmitters to FCC specifications in accordance with 47 CFR 2.960 and 2.962.



NVLAP: Northwest EMC, Inc. is recognized under the United States Department of Commerce, National Institute of Standards and Technology, and National Voluntary Laboratory Accreditation Program for satisfactory compliance with the requirements of ISO/IEC 17025 for Testing Laboratories. The NVLAP accreditation encompasses Electromagnetic Compatibility Testing in accordance with the European Union EMC Directive 89/336/EEC, ANSI C63.4, MIL-STD 461E, DO-160D and SAE J1113. Additionally, Northwest EMC is accredited by NVLAP to perform radio testing in accordance with the European Union R&TTE Directive 1999/5/EEC, the requirements of FCC, and the RSS radio standards for Industry Canada.



200629-0
200630-0
200676-0

Industry Canada: Accredited by NVLAP for performance of Industry Canada RSS and ICES testing. Our Open Area Test Sites and certification chambers comply with RSS 212, Issue 1 (Provisional) and have been filed with Industry Canada and accepted. Northwest EMC has been accredited by ANSI to ISO / IEC Guide 65 as a product certifier. We have been designated by NIST and recognized by Industry Canada as a Certification Body (CB) per the APEC Mutual Recognition Arrangement (MRA). This allows Northwest EMC to certify transmitters to Industry Canada technical requirements.



CAB: Designated by NIST and validated by the European Commission as a Conformity Assessment Body (CAB) to conduct tests and approve products to the EMC directive and transmitters to the R&TTE directive, as described in the U.S. - EU Mutual Recognition Agreement.



TÜV Product Service: Included in TÜV Product Service Group's Listing of Recognized Laboratories. It qualifies in connection with the TÜV Certification after Recognition of Agent's Testing Program for the product categories and/or standards shown in TÜV's current Listing of CARAT Laboratories, available from TÜV. A certificate was issued to represent that this laboratory continues to meet TÜV's CARAT Program requirements. Certificate No. USA0401C.



TÜV Rheinland: Authorized to carryout EMC tests by order and under supervision of TÜV Rheinland. This authorization is based on "Conditions for EMC-Subcontractors" of November 1992.



NEMKO: Assessed and accredited by NEMKO (Norwegian testing and certification body) for European emissions and immunity testing. As a result of NEMKO's laboratory assessment, they will accept test results from Northwest EMC, Inc. for product certification (Authorization No. ELA 119).



Technology International: Assessed in accordance with ISO Guide 25 defining the general international requirements for the competence of calibration and testing laboratories and with ITI assessment criteria LACO196. Based upon that assessment, Interference Technology International, Ltd., has granted approval for specifications implementing the EU Directive on EMC (89/336/EEC and amendments). The scope of the approval was provided on a Schedule of Assessment supplied with the certificate and is available upon request.



Australia/New Zealand: The National Association of Testing Authorities (NATA), Australia has been appointed by the ACA as an accreditation body to accredit test laboratories and competent bodies for EMC standards. Accredited test reports or assessments by competent bodies must carry the NATA logo. Test reports made by an overseas laboratory that has been accredited for the relevant standards by an overseas accreditation body that has a Mutual Recognition Agreement (MRA) with NATA are also accepted as technical grounds for product conformity. The report should be endorsed with the respective logo of the accreditation body (NVLAP).



VCCI: Accepted as an Associate Member to the VCCI, Acceptance No. 564. Conducted and radiated measurement facilities have been registered in accordance with Regulations for Voluntary Control Measures, Article 8. (*Registration Numbers. - Hillsboro: C-1071 and R-1025, Irvine: C-2094 and R-1943, Newberg: C-1877 and R-1760, Sultan: R-871, C-1784 and R-1761.*)



BSMI: Northwest EMC has been designated by NIST and validated by C-Taipei (BSMI) as a CAB to conduct tests as described in the APEC Mutual Recognition Agreement. License No.SL2-IN-E-1017.



GOST: Northwest EMC, Inc. has been assessed and accredited by the Russian Certification bodies Certinform VNIINMASH, CERTINFO, SAMTES, and Federal CHEC, to perform EMC and Hygienic testing for Information Technology Products. As a result of their laboratory assessment, they will accept test results from Northwest EMC, Inc. for product certification



SCOPE

For details on the Scopes of our Accreditations, please visit:

<http://www.nwemc.com/scope.asp>

What is measurement uncertainty?


When a measurement is made, the result will be different from the true or theoretically correct value. The difference is the result of tolerances in the measurement system that cannot be completely eliminated. To the extent that technology allows us, it has been our aim to minimize this error. The following statement of measurement uncertainty is used to reflect the accuracy of the measured result as compared with its "true" value. In the case of transient tests (ESD, EFT, Surge, Voltage Dips and Interruptions), the test equipment has been demonstrated by calibration to provide at least a 95% confidence that it complies with the test specification requirements.

The following documents were the basis for determining the uncertainty levels of our measurements:

- "ISO Guide to the Expression of Uncertainty in Measurements", October 1993
- "NIS81: The Treatment of Uncertainty in EMC Measurements", May 1994
- "IEC CISPR 16-3 A1 f1 Ed.1: Radio-interference measurements and statistical techniques", December 2000

How might measurement uncertainty be applied to test results?

If the diamond marks the measured value for the test and the vertical bars bracket the range of + and - measurement uncertainty, then test results can be interpreted from the diagram below.

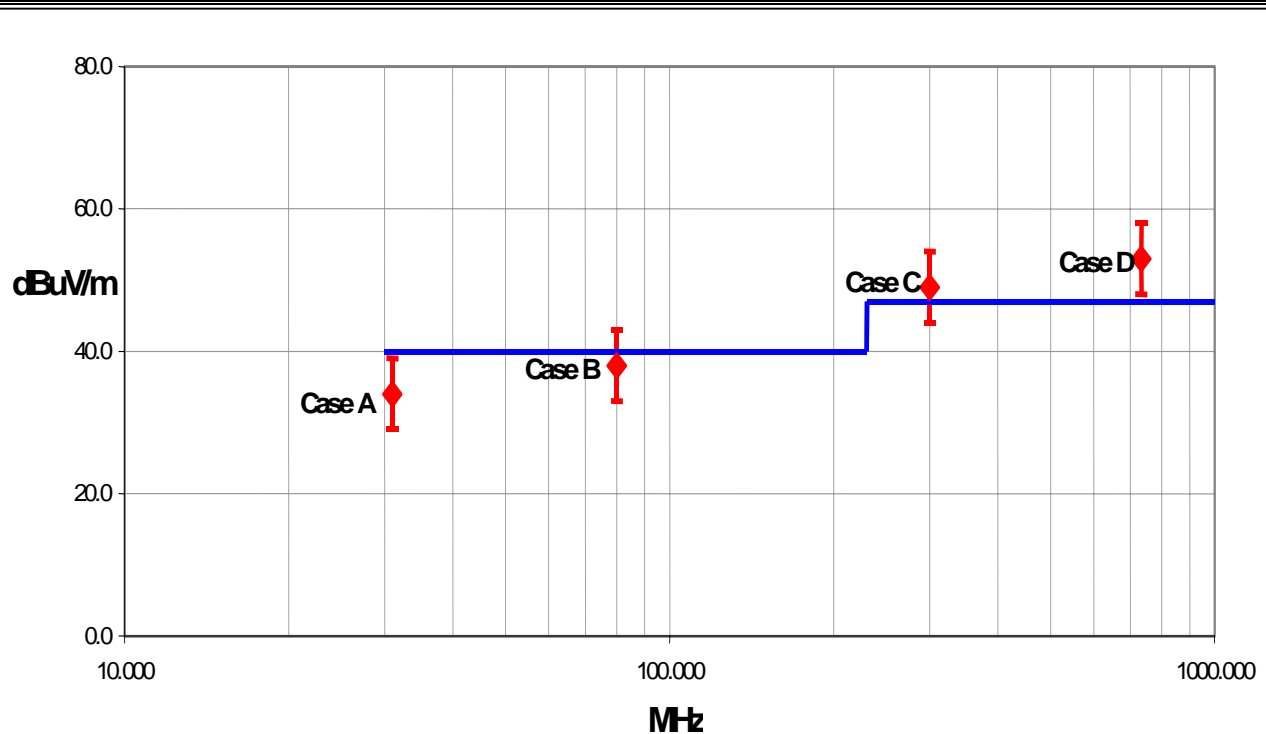

Test Result Scenarios:

Case A: Product complies.

Case B: Product conditionally complies. It is not possible to say with 95% confidence that the product complies.

Case C: Product conditionally does not comply. It is not possible to say with 95% confidence that the product does not comply.

Case D: Product does not comply.

Radiated Emissions ≤ 1 GHz

Value (dB)

Test Distance	Probability Distribution	Biconical Antenna		Log Periodic Antenna		Dipole Antenna	
		3m	10m	3m	10m	3m	10m
Combined standard uncertainty $u_c(y)$	normal	+ 1.86	+ 1.82	+ 2.23	+ 1.29	+ 1.31	+ 1.25
		- 1.88	- 1.87	- 1.41	- 1.26	- 1.27	- 1.25
Expanded uncertainty U (level of confidence ≈ 95%)	normal (k=2)	+ 3.72	+ 3.64	+ 4.46	+ 2.59	+ 2.61	+ 2.49
		- 3.77	- 3.73	- 2.81	- 2.52	- 2.55	- 2.49

Radiated Emissions > 1 GHz

Value (dB)

Test Distance	Probability Distribution	Without High Pass Filter		With High Pass Filter	
		3m	10m	3m	10m
Combined standard uncertainty $u_c(y)$	normal	+ 1.29	+ 1.38	- 1.25	- 1.35
		- 1.25	- 1.35	- 1.25	- 1.35
Expanded uncertainty U (level of confidence ≈ 95%)	normal (k=2)	+ 2.57	+ 2.76	- 2.51	- 2.70
		- 2.51	- 2.70	- 2.51	- 2.70

Conducted Emissions

Test Distance	Probability Distribution	Value (+/- dB)
Combined standard uncertainty $u_c(y)$	normal	1.48
Expanded uncertainty U (level of confidence ≈ 95 %)	normal (k = 2)	2.97

Radiated Immunity

Test Distance	Probability Distribution	Value (+/- dB)
Combined standard uncertainty $u_c(y)$	normal	1.05
Expanded uncertainty U (level of confidence ≈ 95 %)	normal (k = 2)	2.11

Conducted Immunity

Test Distance	Probability Distribution	Value (+/- dB)
Combined standard uncertainty $u_c(y)$	normal	1.05
Expanded uncertainty U (level of confidence ≈ 95 %)	normal (k = 2)	2.10

Legend

$u_c(y)$ = square root of the sum of squares of the individual standard uncertainties

U = combined standard uncertainty multiplied by the coverage factor: k . This defines an interval about the measured result that will encompass the true value with a confidence level of approximately 95%. If a higher level of confidence is required, then $k=3$ (CL of 99.7%) can be used. Please note that with a coverage factor of one, $u_c(y)$ yields a confidence level of only 68%.



California

Orange County Facility

Labs OC01 – OC13

41 Tesla Ave.
Irvine, CA 92618
(888) 364-2378
FAX (503) 844-3826



Oregon

Evergreen Facility

Labs EV01 – EV10

22975 NW Evergreen Pkwy.
Suite 400
Hillsboro, OR 97124
(503) 844-4066
FAX (503) 844-3826



Oregon

Trails End Facility

Labs TE01 – TE03

30475 NE Trails End Lane
Newberg, OR 97132
(503) 844-4066
FAX (503) 537-0735



Washington

Sultan Facility

Labs SU01 – SU07

14128 339th Ave. SE
Sultan, WA 98294
(888) 364-2378
FAX (360) 793-2536

Party Requesting the Test

Company Name:	Tripod Data Systems, Inc.
Address:	345 SW Avery Ave
City, State, Zip:	Corvallis, OR 97333
Test Requested By:	Dennis York
Model:	USI Radio Module installed in the Ranger X Series Handheld Computer
First Date of Test:	4/26/2005
Last Date of Test:	5/11/2005
Receipt Date of Samples:	4/26/2005
Equipment Design Stage:	Pre-Production
Equipment Condition:	No visual damage.

Information Provided by the Party Requesting the Test

Clocks/Oscillators:	Not provided.
I/O Ports:	Not provided.

Functional Description of the EUT (Equipment Under Test):

The EUT is Tripod's USI radio module, FCC ID: S9E-RNGR80BT. It is an 802.11b / Bluetooth combo radio operating in the 2.4 GHz band. The radio module is installed in Tripod's Ranger X Series handheld computer.

Tripod's Ranger X handheld computer will also contain a second radio module (Cirronet) , FCC ID: S9E-RNGR2410. It is a 2.4 GHz frequency hopping spread spectrum radio.

All radios in the Ranger X can transmit simultaneously – each radio through its own antenna.

The USI radio utilizes two identical chip antennas that are integral to the printed circuit board. One antenna is used for the 802.11b portion, and the other antenna is used for the Bluetooth portion.

Client Justification for EUT Selection:

The product is a representative production sample.

Client Justification for Test Selection:

The USI radio was previously certified under FCC ID: IXMWM-BB-AG-01. All the antenna direct connect test data from the previous certification continues to be representative, and will be used in support of the application of certification for the USI radio in the Tripod's Ranger X handheld computer. New radiated spurious emissions data and AC powerline conducted emissions data was taken for Tripod's Ranger X configuration and is documented in this test report.

Equipment modifications

Item	Test	Date	Modification	Note	Disposition of EUT
1	Spurious Radiated Emissions	04/26/2005	No EMI suppression devices were added or modified during this test.	Same configuration as in previous test.	EUT remained at Northwest EMC.
2	AC Power Line Conducted Emissions for Intentional Radiator	05/11/2005	No EMI suppression devices were added or modified during this test.	Same configuration as in previous test.	EUT was returned to the client.

Justification

The individuals and/or the organization requesting the test provided the modes, configurations and settings available to evaluate. While scanning the radiated emissions, all of the EUT parameters listed below were investigated. This includes, but may not be limited to, antennas, tuned transmit frequency ranges, operating modes, and data rates.

Channels in Specified Band Investigated:

Low

Mid

High

Operating Modes Investigated:

No Hop

Data Rates Investigated:

Maximum

Output Power Setting(s) Investigated:

Maximum

Power Input Settings Investigated:

120 VAC/60 Hz.

Other Settings Investigated:

All radios transmitting simultaneously

Frequency Range Investigated**Start Frequency**

30 MHz

Stop Frequency

25 GHz

Software\Firmware Applied During Test

Operating system	Windows CE	Version	2003 Ozone Update
Exercise software	RTS 802.11	Version	1.0
Exercise software	BlueEMI	Version	1.0
Exercise software	Cirrochat	Version	1.0

Description

Program written by Tripod Data Systems to exercise hardware for test purposes. Running Cirrochat v1.0 to continuously Transmit PSBS, running RTS 802.11 v1.0 to continuously Transmit PSBS, running BlueEMI v1.0 to continuously Transmit PSBS.

EUT and Peripherals

Description	Manufacturer	Model/Part Number	Serial Number
EUT - 802.11b/Bluetooth Radio Module installed in Ranger X Series	USI	USI	Unknown
2.4 GHz FHSS Radio Module installed in Ranger X Series	Cirronet	Cirronet	Unknown
Host Device – Handheld Computer	Tripod Data Systems, Inc.	Ranger X Series	C24
GPS receiver	Tripod Data Systems, Inc.	Pocket Pathfinder	Unknown
Compact Flash GPS Receiver	Holux	Unknown	Unknown
DC Power Supply	Cincon	TR30R	N/A

Cables

Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
USB	Yes	1.0	Yes	Host Device – Handheld Computer	Unterminated
USB	Yes	1.8	No	Host Device – Handheld Computer	Unterminated
DC Leads	No	1.8	Yes	Host Device – Handheld Computer	AC Power
Serial	Yes	1.7	Yes	Host Device – Handheld Computer	GPS receiver

Measurement Equipment

Description	Manufacturer	Model	Identifier	Last Cal	Interval
Spectrum Analyzer	Hewlett-Packard	8566B	AAL	12/02/2004	13 mo
Quasi-Peak Adapter	Hewlett-Packard	85650A	AQF	12/02/2004	13 mo
Pre-Amplifier	Amplifier Research	LN1000A	APS	03/01/2005	13 mo
Pre-Amplifier	Miteq	AMF-4D-005180-24-10P	APJ	01/05/2004	16 mo
Antenna, Biconilog	EMCO	3141	AXE	12/03/2003	24 mo
Antenna, Horn	EMCO	3115	AHC	09/07/2004	12 mo
Pre-Amplifier	Miteq	AMF-4D-005180-24-10P	APC	02/17/2005	13 mo
Antenna, Horn	EMCO	3160-08	AHK	NCR	NA
Antenna, Horn	EMCO	3160-09	AHG	NCR	NA
Pre-Amplifier	Miteq	JSD4-18002600-26-8P	APU	02/15/2005	13 mo
Spectrum Analyzer	Tektronix	2784	AAO	01/02/2005	12 mo
Attenuator	Coaxicom	66702 5910-20	RBJ	02/25/2005	13 mo
High Pass Filter	Micro-Tronics	HPM50111	HFO	03/09/2005	13 mo


Test Description

Requirement: The field strength of any spurious emissions or modulation products that fall in a restricted band, as defined in 47 CFR 15.205, is measured. The peak level must comply with the limits specified in 47 CFR 15.35(b). The average level (taken with a 10Hz VBW) must comply with the limits specified in 15.209.

Configuration: The antenna to be used with the EUT was tested. The EUT was configured for low, mid, and high band transmit frequencies. For each configuration, the spectrum was scanned throughout the specified range. In addition, measurements were made in the restricted bands to verify compliance. While scanning, emissions from the EUT were maximized by rotating the EUT on a turntable, adjusting the position of the EUT and the EUT antenna in three orthogonal axis, and adjusting measurement antenna height and polarization, and manipulating the EUT antenna in 3 orthogonal planes (per ANSI C63.4:2003). A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.

Measurement Bandwidths			
Frequency Range (MHz)	Peak Data (kHz)	Quasi-Peak Data (kHz)	Average Data (kHz)
0.01 – 0.15	1.0	0.2	0.2
0.15 – 30.0	10.0	9.0	9.0
30.0 - 1000	100.0	120.0	120.0
Above 1000	1000.0	N/A	1000.0

Measurements were made using the bandwidths and detectors specified. No video filter was used.

Completed by:

EUT: USI Radio Module installed in the Ranger X Series Handheld Computer		Work Order: TRPO0007
Serial Number:		Date: 04/26/05
Customer: Tripod Data Systems, Inc.		Temperature: 21
Attendees: Dennis York		Humidity: 46%
Cust. Ref. No.:		Barometric Pressure: 30.09
Tested by: Dan Haas	Power: 120VAC/60Hz	Job Site: EV01

TEST SPECIFICATIONS

Specification: FCC 15.247(d) Spurious Radiated Emissions:2004 Method: ANSI C63.4:2003

SAMPLE CALCULATIONS

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation
 Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator

COMMENTS

Maximum data rate. Ranger X Series Handheld contains USI & Cirronet radio modules.

EUT OPERATING MODES

Tx Low Channel on all radios.

DEVIATIONS FROM TEST STANDARD


No deviations.

RESULTS

Pass	Run #
	1

Other

Dan Haas
Tested By:

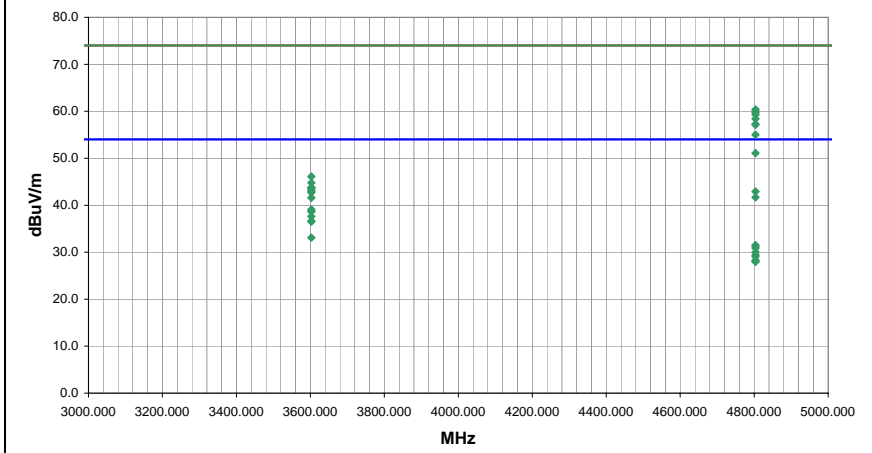

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Duty Cycle Correction (dB)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)	Comments
4803.378	47.8	3.3	238.0	1.3	0.0	0.0	H-Horn	AV	0.0	51.1	54.0	-2.9	EUT on side, 802.11 data rate=11Mbps.
3602.530	42.3	0.7	112.0	1.1	0.0	0.0	H-Horn	AV	0.0	43.0	54.0	-11.0	EUT Vertical, 802.11 data rate=11Mbps.
4803.378	57.1	3.3	285.0	1.3	0.0	0.0	V-Horn	PK	0.0	60.4	74.0	-13.6	EUT Horizontal, 802.11 data rate=11Mbps.
4803.378	56.7	3.3	130.0	1.1	0.0	0.0	H-Horn	PK	0.0	60.0	74.0	-14.0	EUT Vertical, 802.11 data rate=11Mbps.
4803.378	56.4	3.3	140.0	1.2	0.0	0.0	H-Horn	PK	0.0	59.7	74.0	-14.3	EUT Horizontal, 802.11 data rate=11Mbps.
4803.378	56.0	3.3	261.0	1.2	0.0	0.0	V-Horn	PK	0.0	59.3	74.0	-14.7	EUT Horizontal, 802.11 data rate=11Mbps.
3602.530	38.4	0.7	248.0	1.3	0.0	0.0	H-Horn	AV	0.0	39.1	54.0	-14.9	EUT Horizontal, 802.11 data rate=11Mbps.
3602.530	38.0	0.7	249.0	1.2	0.0	0.0	H-Horn	AV	0.0	38.7	54.0	-15.3	EUT Horizontal, 802.11 data rate=11Mbps.
3602.530	38.0	0.7	358.0	1.2	0.0	0.0	H-Horn	AV	0.0	38.7	54.0	-15.3	EUT on side, 802.11 data rate=11Mbps.
4803.378	55.1	3.3	133.0	1.3	0.0	0.0	H-Horn	PK	0.0	58.4	74.0	-15.6	EUT Horizontal, 802.11 data rate=11Mbps.
3602.530	36.9	0.7	98.0	1.3	0.0	0.0	V-Horn	AV	0.0	37.6	54.0	-16.4	EUT Horizontal, 802.11 data rate=11Mbps.
4803.378	54.0	3.3	213.0	1.1	0.0	0.0	V-Horn	PK	0.0	57.3	74.0	-16.7	EUT Vertical, 802.11 data rate=11Mbps.
4803.378	53.8	3.3	122.0	1.1	0.0	0.0	V-Horn	PK	0.0	57.1	74.0	-16.9	EUT on side, 802.11 data rate=11Mbps.
3602.530	35.9	0.7	96.0	1.2	0.0	0.0	V-Horn	AV	0.0	36.6	54.0	-17.4	EUT Horizontal, 802.11 data rate=11Mbps.
3602.530	35.8	0.7	146.0	1.2	0.0	0.0	V-Horn	AV	0.0	36.5	54.0	-17.5	EUT Vertical, 802.11 data rate=11Mbps.
4803.378	51.7	3.3	238.0	1.3	0.0	0.0	H-Horn	PK	0.0	55.0	74.0	-19.0	EUT on side, 802.11 data rate=11Mbps.
3602.530	32.4	0.7	87.0	1.2	0.0	0.0	V-Horn	AV	0.0	33.1	54.0	-20.9	EUT on side, 802.11 data rate=11Mbps.
4803.378	54.5	3.3	285.0	1.3	26.3	0.0	V-Horn	AV	0.0	31.5	54.0	-22.5	EUT Horizontal, 802.11 data rate=11Mbps.
4803.378	54.2	3.3	130.0	1.1	26.3	0.0	H-Horn	AV	0.0	31.2	54.0	-22.8	EUT Vertical, 802.11 data rate=11Mbps.
4803.378	53.9	3.3	140.0	1.2	26.3	0.0	H-Horn	AV	0.0	30.9	54.0	-23.1	EUT Horizontal, 802.11 data rate=11Mbps.

RADIATED EMISSIONS DATA SHEET

EUT:	USI Radio Module installed in the Ranger X Series Handheld Computer	Work Order:	TRPO0007
Serial Number:		Date:	04/26/05
Customer:	Tripod Data Systems, Inc.	Temperature:	21
Attendees:	Dennis York	Humidity:	46%
Cust. Ref. No.:		Barometric Pressure:	30.09
Tested by:	Dan Haas	Power:	120VAC/60Hz
		Job Site:	EV01

TEST SPECIFICATIONS	
Specification:	FCC 15.247(d) Spurious Radiated Emissions:2004
Method:	ANSI C63.4:2003

SAMPLE CALCULATIONS
 Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation
 Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator

COMMENTS
 Maximum data rate. Ranger X Series Handheld contains USI & Cirronet radio modules.


EUT OPERATING MODES
 Tx Low Channel on all radios.

DEVIATIONS FROM TEST STANDARD
 No deviations.

RESULTS	Run #
Pass	2

Other


 Tested By:

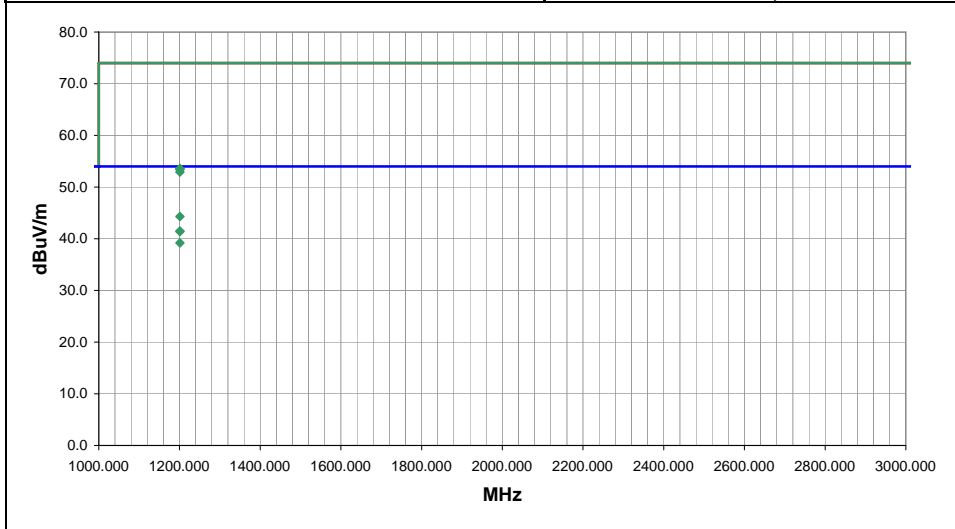

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Duty Cycle Correction (dB)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)	Comments
1200.865	32.5	-8.2	286.0	1.1	0.0	20.0	H-Horn	AV	0.0	44.3	54.0	-9.7	EUT Horizontal, 802.11 data rate=1Mbps.
1200.865	29.7	-8.2	326.0	1.2	0.0	20.0	V-Horn	AV	0.0	41.5	54.0	-12.5	EUT Horizontal, 802.11 data rate=1Mbps.
1200.865	29.6	-8.2	14.0	1.3	0.0	20.0	H-Horn	AV	0.0	41.4	54.0	-12.6	EUT Horizontal, 802.11 data rate=1Mbps.
1200.865	27.4	-8.2	55.0	1.2	0.0	20.0	V-Horn	AV	0.0	39.2	54.0	-14.8	EUT Horizontal, 802.11 data rate=1Mbps.
1200.865	41.8	-8.2	326.0	1.2	0.0	20.0	V-Horn	PK	0.0	53.6	74.0	-20.4	EUT Horizontal, 802.11 data rate=1Mbps.
1200.865	41.7	-8.2	14.0	1.3	0.0	20.0	H-Horn	PK	0.0	53.5	74.0	-20.5	EUT Horizontal, 802.11 data rate=1Mbps.
1200.865	41.6	-8.2	286.0	1.1	0.0	20.0	H-Horn	PK	0.0	53.4	74.0	-20.6	EUT Horizontal, 802.11 data rate=1Mbps.
1200.865	41.1	-8.2	55.0	1.2	0.0	20.0	V-Horn	PK	0.0	52.9	74.0	-21.1	EUT Horizontal, 802.11 data rate=1Mbps.

EUT: USI Radio Module installed in the Ranger X Series Handheld Computer		Work Order: TRPO0007
Serial Number:		Date: 04/26/05
Customer: Tripod Data Systems, Inc.		Temperature: 21
Attendees: Dennis York		Humidity: 46%
Cust. Ref. No.:		Barometric Pressure: 30.09
Tested by: Dan Haas	Power: 120VAC/60Hz	Job Site: EV01

TEST SPECIFICATIONS		
Specification: FCC 15.247(d) Spurious Radiated Emissions:2004	Method: ANSI C63.4:2003	

SAMPLE CALCULATIONS
 Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation
 Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator


COMMENTS
 Maximum data rate. Ranger X Series Handheld contains USI & Cirronet radio modules.


EUT OPERATING MODES
 Tx Mid Channel on all radios.

DEVIATIONS FROM TEST STANDARD
 No deviations.

RESULTS	Run #
Pass	3

Other


 Tested By: _____

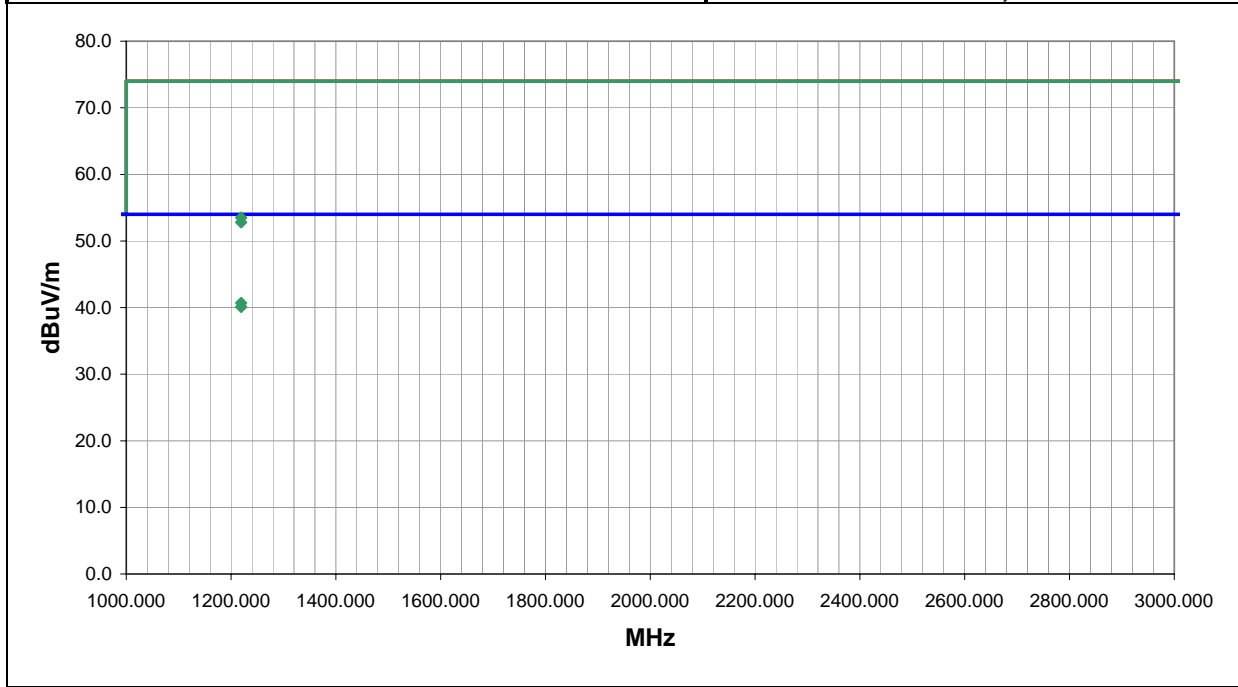

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Duty Cycle Correction (dB)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)
1219.253	28.9	-8.2	38.0	1.3	0.0	20.0	H-Horn	AV	0.0	40.7	54.0	-13.3
1219.253	28.3	-8.2	245.0	1.2	0.0	20.0	V-Horn	AV	0.0	40.1	54.0	-13.9
1219.253	41.7	-8.2	38.0	1.3	0.0	20.0	H-Horn	PK	0.0	53.5	74.0	-20.5
1219.253	41.0	-8.2	245.0	1.2	0.0	20.0	V-Horn	PK	0.0	52.8	74.0	-21.2

EUT: USI Radio Module installed in the Ranger X Series Handheld Computer		Work Order: TRPO007
Serial Number:		Date: 04/26/05
Customer:	Tripod Data Systems, Inc.	Temperature: 21
Attendees:	Dennis York	Humidity: 46%
Cust. Ref. No.:		Barometric Pressure: 30.09
Tested by:	Dan Haas	Power: 120VAC/60Hz
		Job Site: EV01

TEST SPECIFICATIONS	
Specification: FCC 15.247(d) Spurious Radiated Emissions:2004	Method: ANSI C63.4:2003

SAMPLE CALCULATIONS
 Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation
 Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator

COMMENTS
 Maximum data rate. Ranger X Series Handheld contains USI & Cirronet radio modules.


EUT OPERATING MODES
 Tx Mid Channel on all radios.

DEVIATIONS FROM TEST STANDARD
 No deviations.

RESULTS	Run #
Pass	4

Other


 Tested By: _____

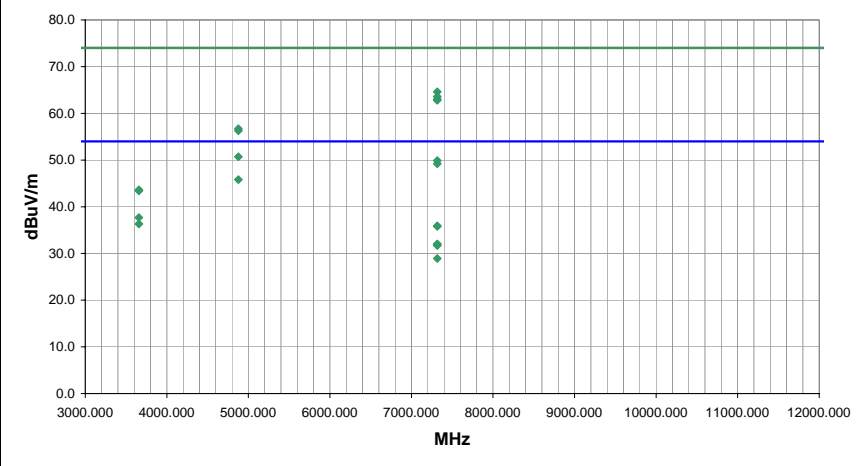

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Duty Cycle Correction (dB)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)	Comments
4877.127	47.2	3.5	263.0	1.2	0.0	0.0	V-Horn	AV	0.0	50.7	54.0	-3.3	EUT Horizontal, 802.11 data rate=11Mbps.
4877.127	42.3	3.5	223.0	1.3	0.0	0.0	H-Horn	AV	0.0	45.8	54.0	-8.2	EUT Horizontal, 802.11 data rate=11Mbps.
7315.652	54.1	10.5	164.0	1.2	0.0	0.0	V-Horn	PK	0.0	64.6	74.0	-9.4	EUT Horizontal, 802.11 data rate=11Mbps.
7315.652	53.1	10.5	157.0	1.2	0.0	0.0	V-Horn	PK	0.0	63.6	74.0	-10.4	EUT Horizontal, 802.11 data rate=11Mbps.
7315.652	52.5	10.5	211.0	1.3	0.0	0.0	H-Horn	PK	0.0	63.0	74.0	-11.0	EUT Horizontal, 802.11 data rate=11Mbps.
7315.652	52.3	10.5	212.0	1.3	0.0	0.0	H-Horn	PK	0.0	62.8	74.0	-11.2	EUT Horizontal, 802.11 data rate=11Mbps.
3657.830	36.7	1.0	99.0	1.3	0.0	0.0	V-Horn	AV	0.0	37.7	54.0	-16.3	EUT Horizontal, 802.11 data rate=11Mbps.
4877.127	53.2	3.5	263.0	1.2	0.0	0.0	V-Horn	PK	0.0	56.7	74.0	-17.3	EUT Horizontal, 802.11 data rate=11Mbps.
3657.830	35.3	1.0	255.0	1.3	0.0	0.0	H-Horn	AV	0.0	36.3	54.0	-17.7	EUT Horizontal, 802.11 data rate=11Mbps.
4877.127	52.8	3.5	223.0	1.3	0.0	0.0	H-Horn	PK	0.0	56.3	74.0	-17.7	EUT Horizontal, 802.11 data rate=11Mbps.
7315.652	25.4	10.5	298.0	1.2	0.0	0.0	V-Horn	AV	0.0	35.9	54.0	-18.1	EUT Horizontal, 802.11 data rate=1Mbps. Cirronet radio off.
7315.652	25.3	10.5	150.0	1.7	0.0	0.0	H-Horn	AV	0.0	35.8	54.0	-18.2	EUT Horizontal, 802.11 data rate=1Mbps. Cirronet radio off.
7315.652	47.8	10.5	212.0	1.3	26.3	0.0	H-Horn	AV	0.0	32.0	54.0	-22.0	EUT Horizontal, 802.11 data rate=1Mbps.
7315.652	47.8	10.5	157.0	1.2	26.3	0.0	V-Horn	AV	0.0	32.0	54.0	-22.0	EUT Horizontal, 802.11 data rate=1Mbps.
7315.652	47.5	10.5	164.0	1.2	26.3	0.0	V-Horn	AV	0.0	31.7	54.0	-22.3	EUT Horizontal, 802.11 data rate=1Mbps.
7315.652	39.4	10.5	150.0	1.7	0.0	0.0	H-Horn	PK	0.0	49.9	74.0	-24.1	EUT Horizontal, 802.11 data rate=1Mbps. Cirronet radio off.
7315.652	38.7	10.5	298.0	1.2	0.0	0.0	V-Horn	PK	0.0	49.2	74.0	-24.8	EUT Horizontal, 802.11 data rate=1Mbps. Cirronet radio off.
7315.652	44.7	10.5	211.0	1.3	26.3	0.0	H-Horn	AV	0.0	28.9	54.0	-25.1	EUT Horizontal, 802.11 data rate=11Mbps.
3657.830	42.6	1.0	99.0	1.3	0.0	0.0	V-Horn	PK	0.0	43.6	74.0	-30.4	EUT Horizontal, 802.11 data rate=11Mbps.
3657.830	42.4	1.0	255.0	1.3	0.0	0.0	H-Horn	PK	0.0	43.4	74.0	-30.6	EUT Horizontal, 802.11 data rate=11Mbps.

EUT: USI Radio Module installed in the Ranger X Series Handheld Computer		Work Order: TRPO007
Serial Number:		Date: 04/26/05
Customer:	Tripod Data Systems, Inc.	Temperature: 21
Attendees:	Dennis York	Humidity: 46%
Cust. Ref. No.:		Barometric Pressure: 30.09
Tested by:	Dan Haas	Power: 120VAC/60Hz
		Job Site: EV01

TEST SPECIFICATIONS	
Specification: FCC 15.247(d) Spurious Radiated Emissions:2004	Method: ANSI C63.4:2003

SAMPLE CALCULATIONS
 Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation
 Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator

COMMENTS
 Maximum data rate. Ranger X Series Handheld contains USI & Cirronet radio modules.

EUT OPERATING MODES
 Tx High Channel on all radios.


DEVIATIONS FROM TEST STANDARD
 No deviations.

RESULTS	Run #
Pass	5

Other



Tested By: _____

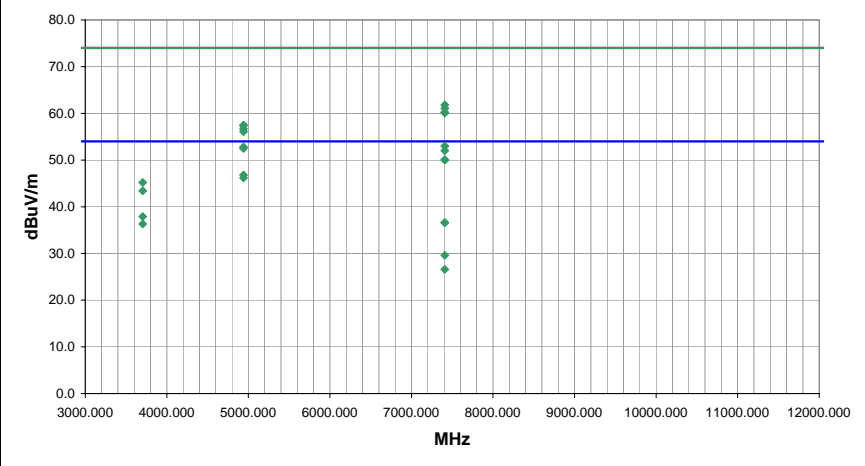

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Duty Cycle Correction (dB)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Spec. Limit (dB)	Comments
7409.666	41.9	11.1	319.0	1.2	0.0	0.0	V-Horn	AV	0.0	53.0	54.0	-1.0	EUT Horizontal, 802.11 data rate=11Mbps.
4939.778	49.2	3.6	282.0	1.2	0.0	0.0	V-Horn	AV	0.0	52.8	54.0	-1.2	EUT Horizontal, 802.11 data rate=1Mbps.
4939.778	48.9	3.6	281.0	1.2	0.0	0.0	V-Horn	AV	0.0	52.5	54.0	-1.5	EUT Horizontal, 802.11 data rate=11Mbps.
7409.666	40.9	11.1	300.0	1.3	0.0	0.0	H-Horn	AV	0.0	52.0	54.0	-2.0	EUT Horizontal, 802.11 data rate=11Mbps.
4939.778	43.2	3.6	229.0	1.3	0.0	0.0	H-Horn	AV	0.0	46.8	54.0	-7.2	EUT Horizontal, 802.11 data rate=1Mbps.
4939.778	42.6	3.6	228.0	1.3	0.0	0.0	H-Horn	AV	0.0	46.2	54.0	-7.8	EUT Horizontal, 802.11 data rate=11Mbps.
7409.666	50.7	11.1	305.0	1.6	0.0	0.0	H-Horn	PK	0.0	61.8	74.0	-12.2	EUT Horizontal, 802.11 data rate=1Mbps.
7409.666	50.0	11.1	271.0	1.6	0.0	0.0	V-Horn	PK	0.0	61.1	74.0	-12.9	EUT Horizontal, 802.11 data rate=1Mbps.
7409.666	49.1	11.1	319.0	1.2	0.0	0.0	V-Horn	PK	0.0	60.2	74.0	-13.8	EUT Horizontal, 802.11 data rate=11Mbps.
7409.666	49.0	11.1	300.0	1.3	0.0	0.0	H-Horn	PK	0.0	60.1	74.0	-13.9	EUT Horizontal, 802.11 data rate=11Mbps.
3704.838	36.8	1.1	265.0	1.3	0.0	0.0	H-Horn	AV	0.0	37.9	54.0	-16.1	EUT Horizontal, 802.11 data rate=11Mbps.
4939.778	53.9	3.6	229.0	1.3	0.0	0.0	H-Horn	PK	0.0	57.5	74.0	-16.5	EUT Horizontal, 802.11 data rate=1Mbps.
4939.778	53.8	3.6	228.0	1.3	0.0	0.0	H-Horn	PK	0.0	57.4	74.0	-16.6	EUT Horizontal, 802.11 data rate=11Mbps.
4939.778	53.1	3.6	282.0	1.2	0.0	0.0	V-Horn	PK	0.0	56.7	74.0	-17.3	EUT Horizontal, 802.11 data rate=1Mbps.
7409.666	25.5	11.1	290.0	3.5	0.0	0.0	V-Horn	AV	0.0	36.6	54.0	-17.4	EUT Horizontal, 802.11 data rate=1Mbps. Cirronet radio off.
7409.666	25.5	11.1	249.0	1.3	0.0	0.0	H-Horn	AV	0.0	36.6	54.0	-17.4	EUT Horizontal, 802.11 data rate=1Mbps. Cirronet radio off.
3704.838	35.2	1.1	261.0	1.2	0.0	0.0	V-Horn	AV	0.0	36.3	54.0	-17.7	EUT Horizontal, 802.11 data rate=11Mbps.
4939.778	52.5	3.6	281.0	1.2	0.0	0.0	V-Horn	PK	0.0	56.1	74.0	-17.9	EUT Horizontal, 802.11 data rate=11Mbps.
7409.666	39.0	11.1	290.0	3.5	0.0	0.0	V-Horn	PK	0.0	50.1	74.0	-23.9	EUT Horizontal, 802.11 data rate=1Mbps. Cirronet radio off.
7409.666	38.9	11.1	249.0	1.3	0.0	0.0	H-Horn	PK	0.0	50.0	74.0	-24.0	EUT Horizontal, 802.11 data rate=1Mbps. Cirronet radio off.

EUT: USI Radio Module installed in the Ranger X Series Handheld Computer		Work Order: TRPO0007
Serial Number:		Date: 04/26/05
Customer: Tripod Data Systems, Inc.		Temperature: 21
Attendees: Dennis York		Humidity: 46%
Cust. Ref. No.:		Barometric Pressure: 30.09
Tested by: Dan Haas	Power: 120VAC/60Hz	Job Site: EV01

TEST SPECIFICATIONS		
Specification: FCC 15.247(d) Spurious Radiated Emissions:2004	Method: ANSI C63.4:2003	

SAMPLE CALCULATIONS
 Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation
 Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator


COMMENTS
 Maximum data rate. Ranger X Series Handheld contains USI & Cirronet radio modules.


EUT OPERATING MODES
 Tx High Channel on all radios.

DEVIATIONS FROM TEST STANDARD
 No deviations.

RESULTS	Run #
Pass	6

Other


 Tested By: _____

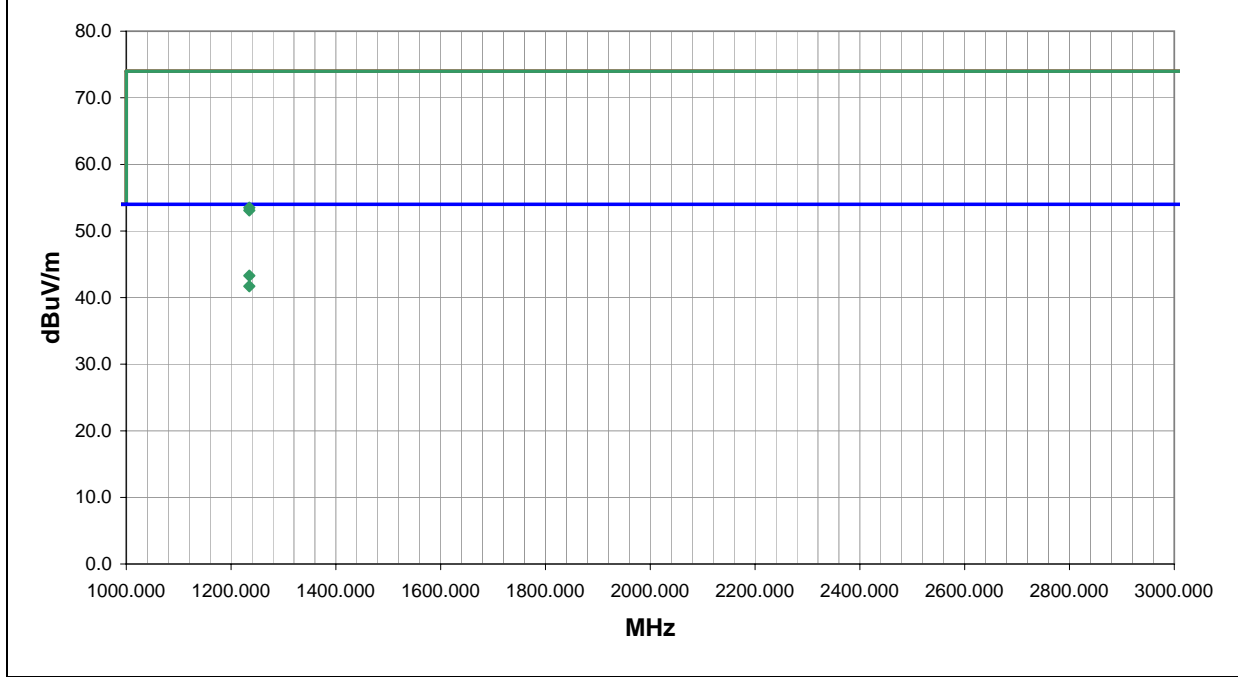

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Duty Cycle Correction (dB)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)
1234.938	31.4	-8.1	19.0	1.3	3.0	20.0	H-Horn	AV	0.0	43.3	54.0	-10.7
1234.938	29.8	-8.1	281.0	1.2	3.0	20.0	V-Horn	AV	0.0	41.7	54.0	-12.3
1234.938	41.6	-8.1	19.0	1.3	3.0	20.0	H-Horn	PK	0.0	53.5	74.0	-20.5
1234.938	41.2	-8.1	281.0	1.2	3.0	20.0	V-Horn	PK	0.0	53.1	74.0	-20.9

EUT: USI Radio Module installed in the Ranger X Series Handheld Computer		Work Order: TRPO0007
Serial Number:		Date: 04/26/05
Customer: Tripod Data Systems, Inc.		Temperature: 21
Attendees: Dennis York		Humidity: 46%
Cust. Ref. No.:		Barometric Pressure: 30.09
Tested by: Dan Haas	Power: 120VAC/60Hz	Job Site: EV01

TEST SPECIFICATIONS		
Specification: FCC 15.247(d) Spurious Radiated Emissions:2004	Method: ANSI C63.4:2003	

SAMPLE CALCULATIONS
 Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation
 Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator

COMMENTS
 Maximum data rate. Ranger X Series Handheld contains USI & Cirronet radio modules.


EUT OPERATING MODES
 Tx High Channel on all radios.

DEVIATIONS FROM TEST STANDARD
 No deviations.



RESULTS	Run #
Pass	7

Other




 Tested By: _____

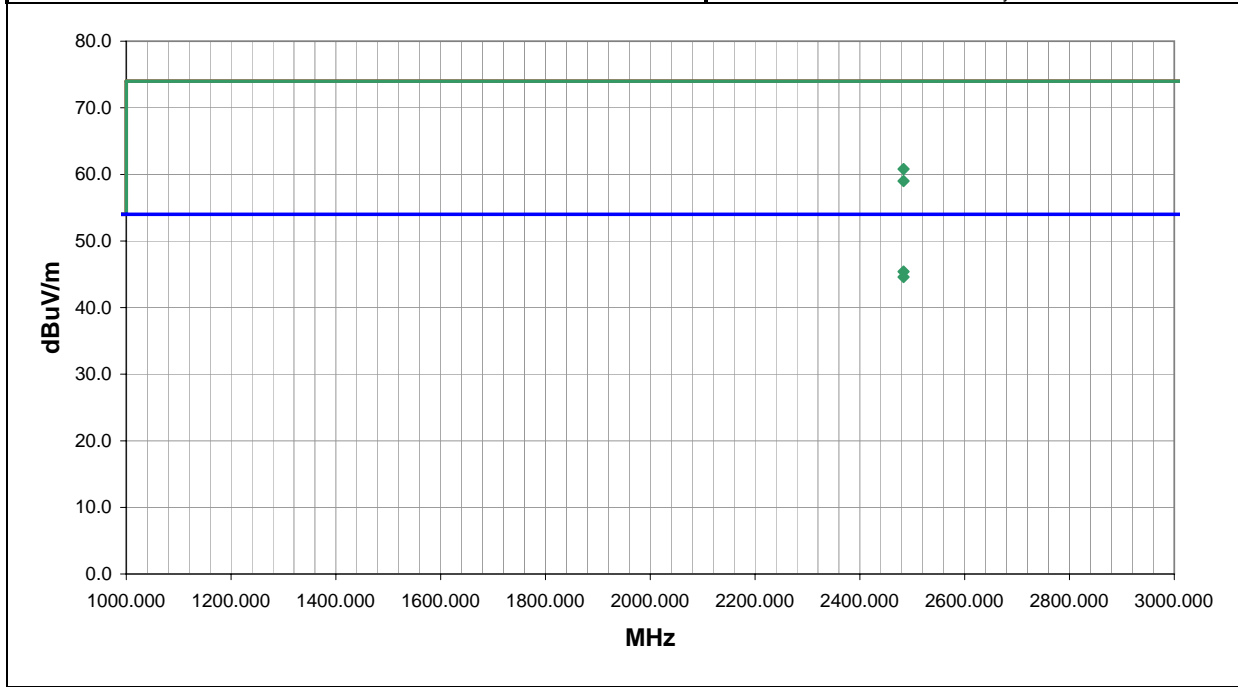

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Duty Cycle Correction (dB)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)
2483.500	27.6	-2.2	265.0	1.2	3.0	20.0	H-Horn	AV	0.0	45.4	54.0	-8.6
2483.500	26.8	-2.2	155.0	1.2	3.0	20.0	V-Horn	AV	0.0	44.6	54.0	-9.4
2483.500	43.0	-2.2	265.0	1.2	3.0	20.0	H-Horn	PK	0.0	60.8	74.0	-13.2
2483.500	41.2	-2.2	155.0	1.2	3.0	20.0	V-Horn	PK	0.0	59.0	74.0	-15.0

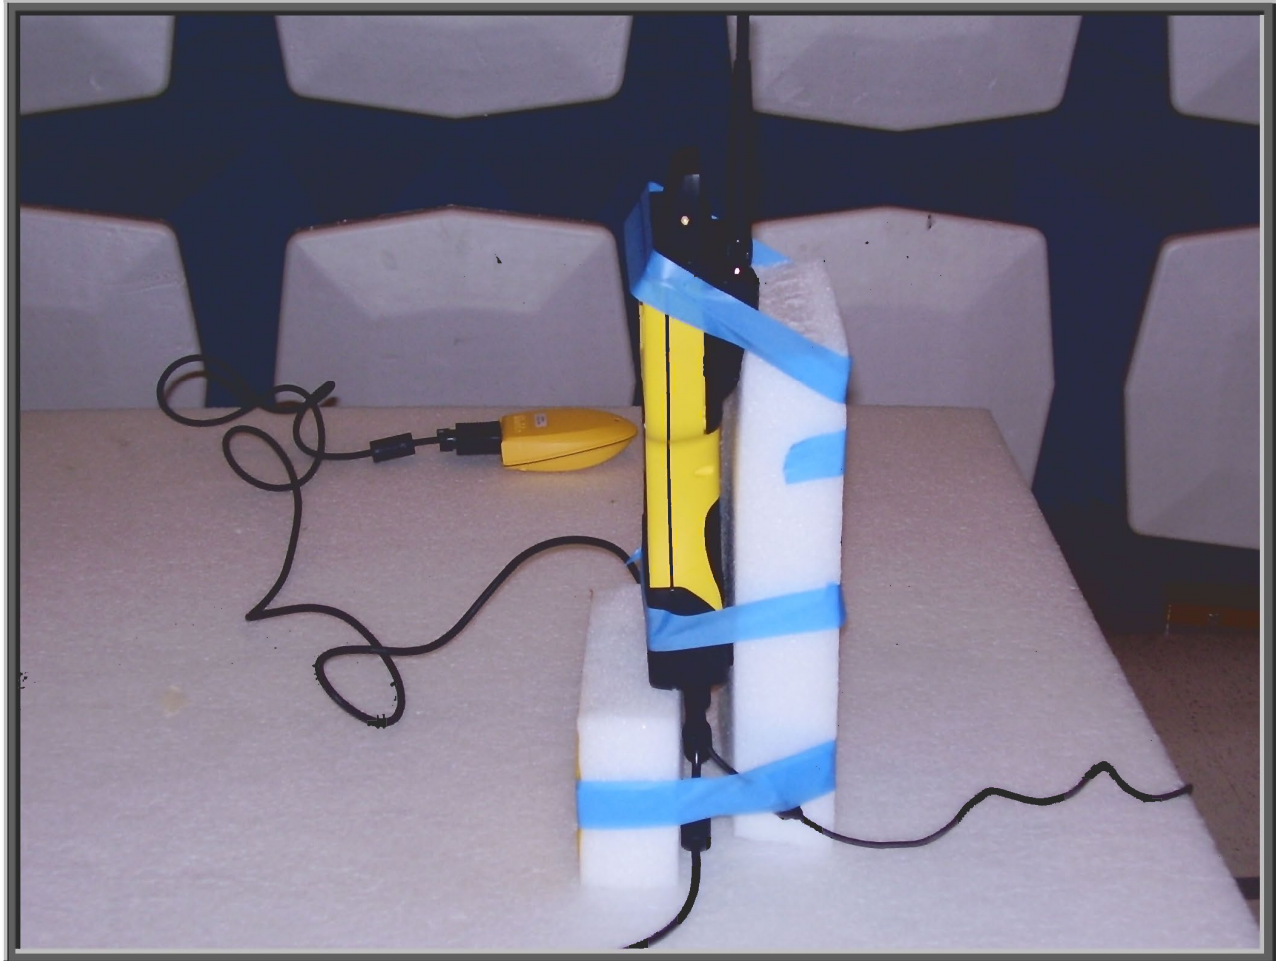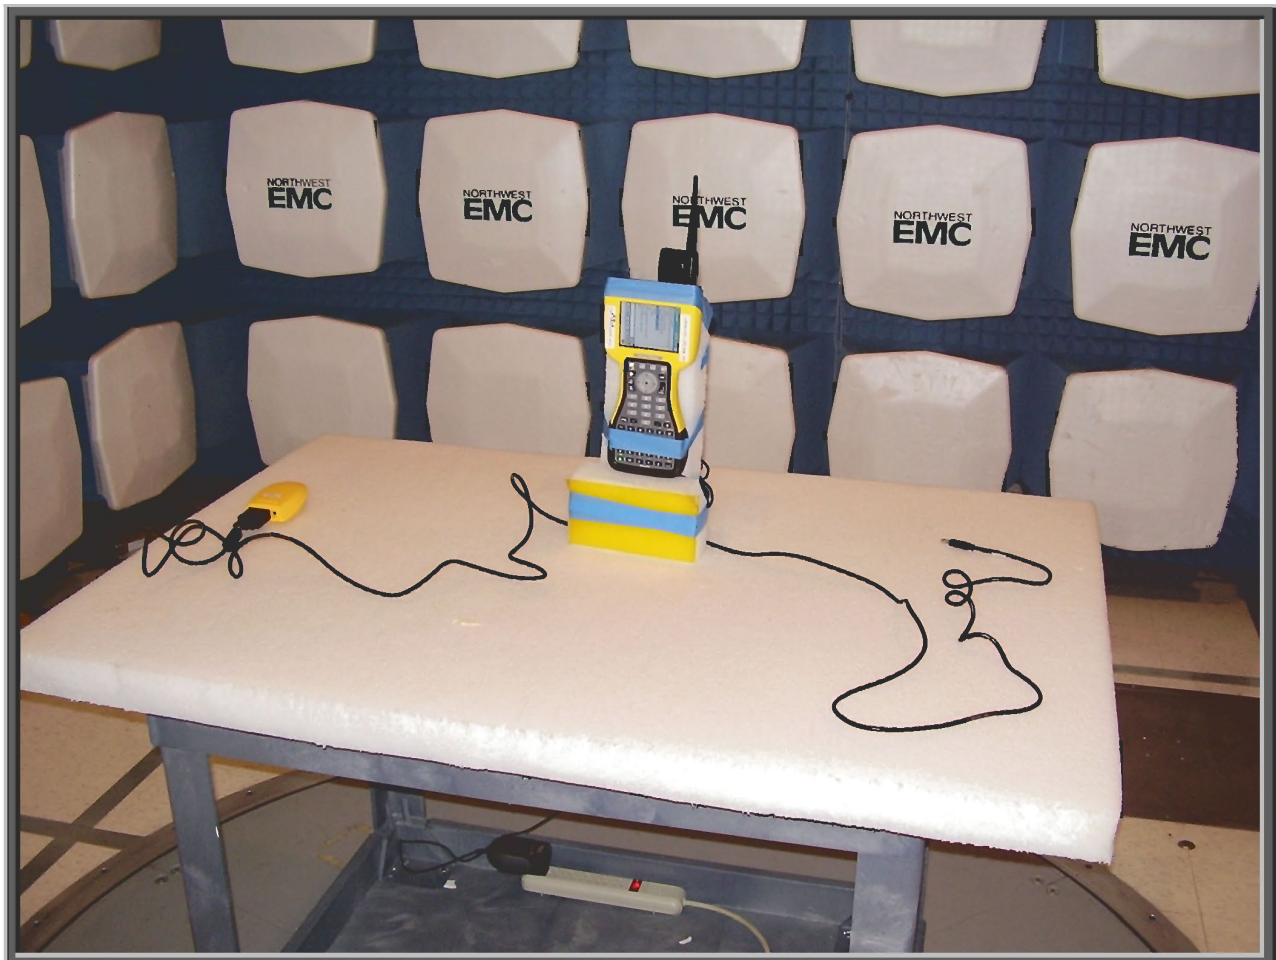



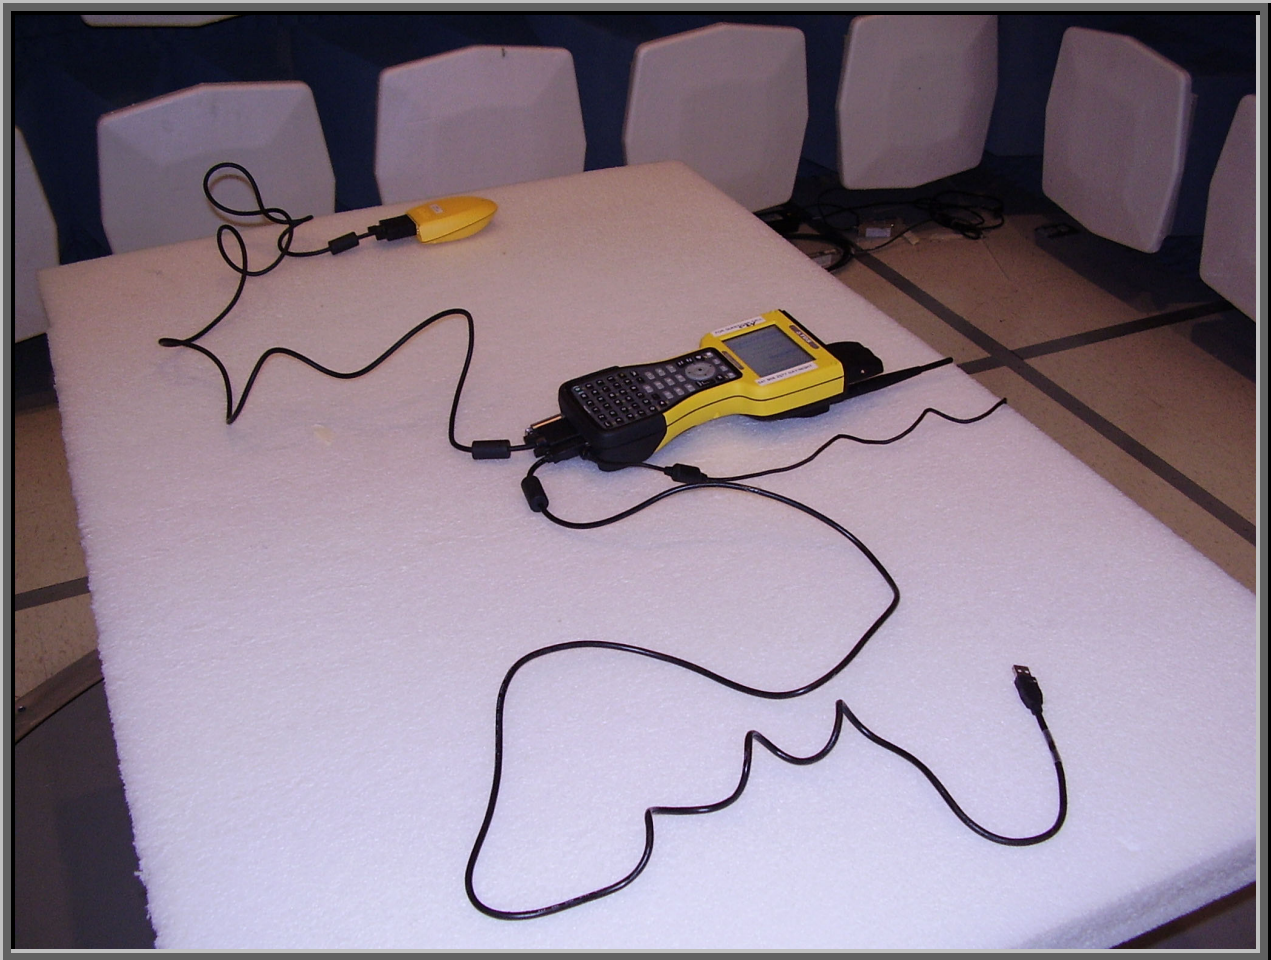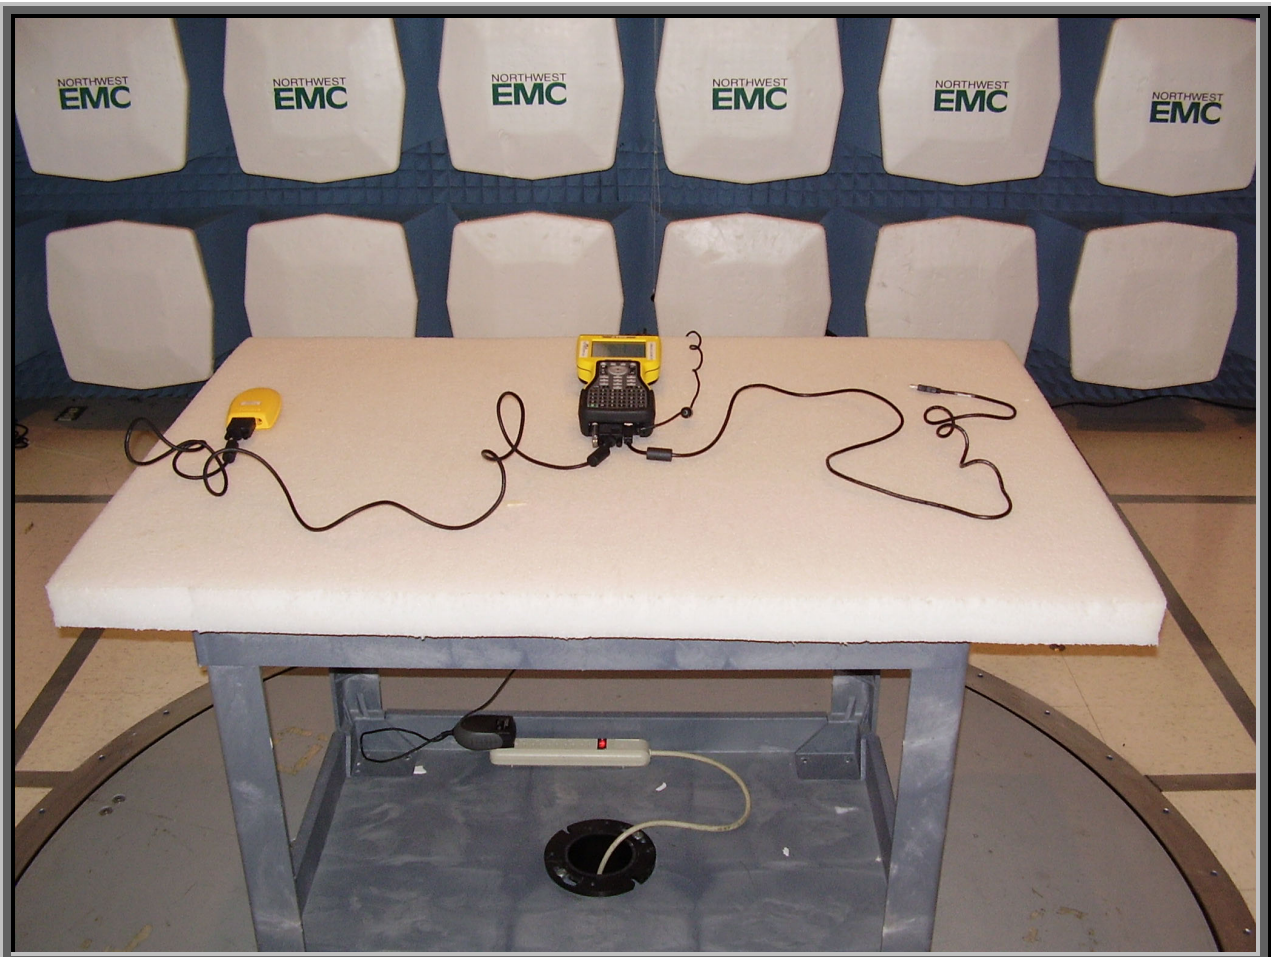

Justification

The individuals and/or the organization requesting the test provided the modes, configurations and settings available to evaluate. While scanning the radiated emissions, all of the EUT parameters listed below were investigated. This includes, but may not be limited to, antennas, tuned transmit frequency ranges, operating modes, and data rates.

Channels in Specified Band Investigated:

Low

Mid

High

Operating Modes Investigated:

No Hop

Data Rates Investigated:

Maximum

Output Power Setting(s) Investigated:

Maximum

Power Input Settings Investigated:

120 VAC/60 Hz.

Other Settings Investigated:

All radios transmitting simultaneously

Software\Firmware Applied During Test

Operating system	Windows CE	Version	2003 Ozone Update
Exercise software	RTS 802.11	Version	1.0
Exercise software	BlueEMI	Version	1.0
Exercise software	Cirrochat	Version	1.0

Description

Program written by Tripod Data Systems to exercise hardware for test purposes. Running Cirrochat v1.0 to continuously Transmit PSBS, running RTS 802.11 v1.0 to continuously Transmit PSBS, running BlueEMI v1.0 to continuously Transmit PSBS.

EUT and Peripherals

Description	Manufacturer	Model/Part Number	Serial Number
EUT - 802.11b/Bluetooth Radio Module installed in Ranger X Series	USI	USI	Unknown
2.4 GHz FHSS Radio Module installed in Ranger X Series	Cirronet	Cirronet	Unknown
Host Device – Handheld Computer	Tripod Data Systems, Inc.	Ranger X Series	C24
GPS receiver	Tripod Data Systems, Inc.	Pocket Pathfinder	Unknown
Compact Flash GPS Receiver	Holux	Unknown	Unknown
DC Power Supply	Cincon	TR30R	N/A

Cables

Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
USB	Yes	1.0	Yes	Host Device – Handheld Computer	Unterminated
USB	Yes	1.8	No	Host Device – Handheld Computer	Unterminated
DC Leads	No	1.8	Yes	Host Device – Handheld Computer	AC Power
Serial	Yes	1.7	Yes	Host Device – Handheld Computer	GPS receiver

Measurement Equipment

Description	Manufacturer	Model	Identifier	Last Cal	Interval
Spectrum Analyzer	Hewlett-Packard	8566B	AAL	12/02/2004	13 mo
Quasi-Peak Adapter	Hewlett-Packard	85650A	AQF	12/02/2004	13 mo
High Pass Filter	TTE	H97-100k-50-720B	HFC	12/29/2004	13 mo
LISN	Solar	9252-50-R-24-BNC	LIN	12/29/2004	13 mo

Test Description

Requirement: Per 47 15.207(c), in addition to devices which are powered directly from the AC power line, conducted emissions measurements shall also be made on battery operated devices that can transmit while charging, as well as on devices that are powered from AC adaptors, or devices that connect to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines. All of these devices shall be tested to demonstrate compliance with the conducted limits of 15.207.

Configuration: The EUT will be powered either directly or indirectly from the AC power line. Therefore, conducted emissions measurements were made on the AC input of the EUT, or on the AC input of the device used to power the EUT. The AC power line conducted emissions were measured with the EUT operating at the lowest, the highest, and a middle channel in the operational band. The EUT was transmitting at its maximum data rate. For each mode, the spectrum was scanned from 150 kHz to 30 MHz. The test setup and procedures were in accordance with ANSI C63.4-2003.

Completed by:

EUT: USI Radio Module installed in the Ranger X Series Handheld Computer		Work Order: TRPO0007
Serial Number:		Date: 05/11/05
Customer: Tripod Data Systems, Inc.		Temperature: 21
Attendees: None		Humidity: 46%
Cust. Ref. No.:		Barometric Pressure: 30.09
Tested by: Rod Peloquin	Power: 120VAC/60Hz	Job Site: EV01

TEST SPECIFICATIONS		
Specification: FCC 15.207 AC Powerline Conducted Emissions:2004	Method: ANSI C63.4:2003	

SAMPLE CALCULATIONS
 Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation
 Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator

COMMENTS
 Maximum data rate. Ranger X Series Handheld contains USI & Cirronet radio modules.


EUT OPERATING MODES
 Tx low Channel on all radios.

DEVIATIONS FROM TEST STANDARD
 No deviations.

RESULTS	Line	Run #
Pass	L1	1

Other


 Tested By:

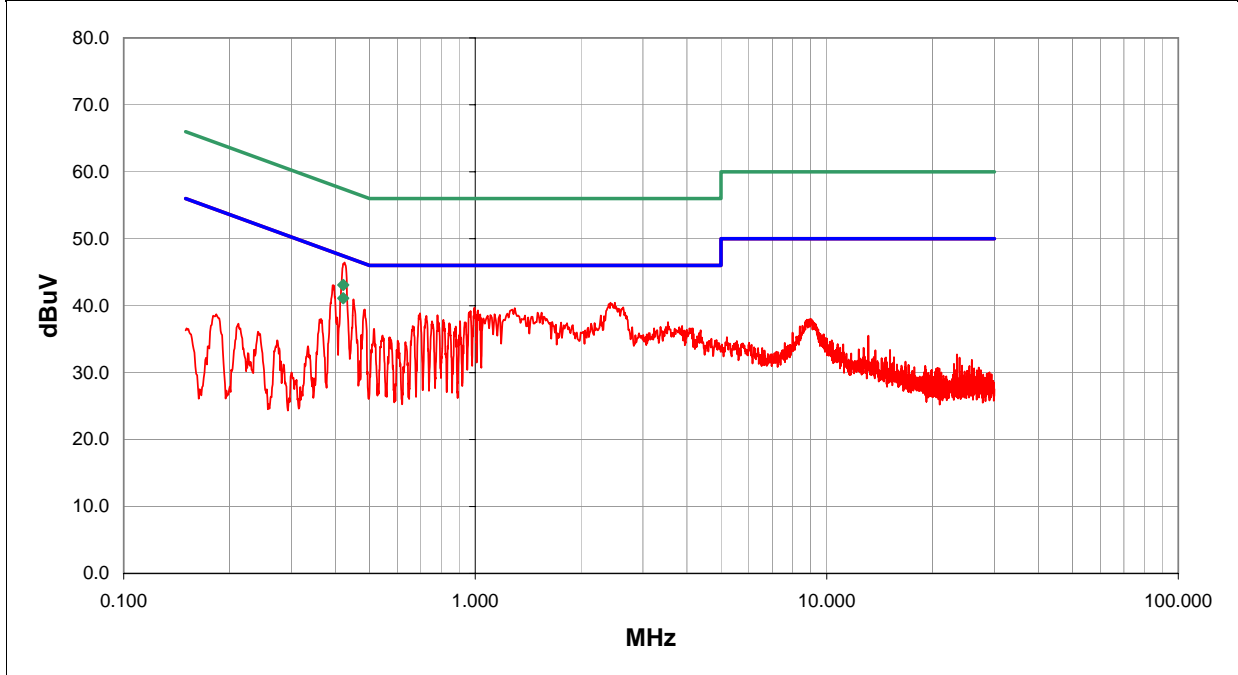

Freq (MHz)	Amplitude (dBuV)	Transducer (dB)	Cable (dB)	External Attenuation (dB)	Detector (blank equal peaks [PK] from scan)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
0.421	21.1	0.0	0.0	20.0	AV	41.1	47.4	-6.3
0.421	23.1	0.0	0.0	20.0	QP	43.1	57.4	-14.3
0.425	26.2	0.0	0.2	20.0		46.4	47.3	-0.9
0.396	22.8	0.0	0.2	20.0		43.0	47.9	-4.9
2.496	20.0	0.0	0.4	20.0		40.4	46.0	-5.6
0.451	20.7	0.0	0.2	20.0		40.9	46.9	-5.9
0.995	19.4	0.0	0.3	20.0		39.7	46.0	-6.3
1.295	19.3	0.0	0.3	20.0		39.6	46.0	-6.4
1.018	19.0	0.0	0.3	20.0		39.3	46.0	-6.7
0.970	18.9	0.0	0.3	20.0		39.2	46.0	-6.8
0.485	19.2	0.0	0.2	20.0		39.4	46.3	-6.8
1.545	18.6	0.0	0.4	20.0		39.0	46.0	-7.0
0.696	18.6	0.0	0.3	20.0		38.9	46.0	-7.1
1.135	18.4	0.0	0.3	20.0		38.7	46.0	-7.3
1.175	18.3	0.0	0.3	20.0		38.6	46.0	-7.4
1.105	18.3	0.0	0.3	20.0		38.6	46.0	-7.4
0.781	18.3	0.0	0.3	20.0		38.6	46.0	-7.4
2.276	18.1	0.0	0.4	20.0		38.5	46.0	-7.5
0.726	18.2	0.0	0.3	20.0		38.5	46.0	-7.5

CONDUCTED EMISSIONS DATA SHEET

EUT: USI Radio Module installed in the Ranger X Series Handheld Computer		Work Order: TRPO0007
Serial Number:		Date: 05/11/05
Customer: Tripod Data Systems, Inc.		Temperature: 21
Attendees: None		Humidity: 46%
Cust. Ref. No.:		Barometric Pressure: 30.09
Tested by: Rod Peloquin	Power: 120VAC/60Hz	Job Site: EV01

TEST SPECIFICATIONS		
Specification: FCC 15.207 AC Powerline Conducted Emissions:2004	Method: ANSI C63.4:2003	

SAMPLE CALCULATIONS
 Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation
 Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator

COMMENTS
 Maximum data rate. Ranger X Series Handheld contains USI & Cirronet radio modules.


EUT OPERATING MODES
 Tx low Channel on all radios.

DEVIATIONS FROM TEST STANDARD
 No deviations.

RESULTS	Line	Run #
Pass	N	2

Other


 Tested By: _____

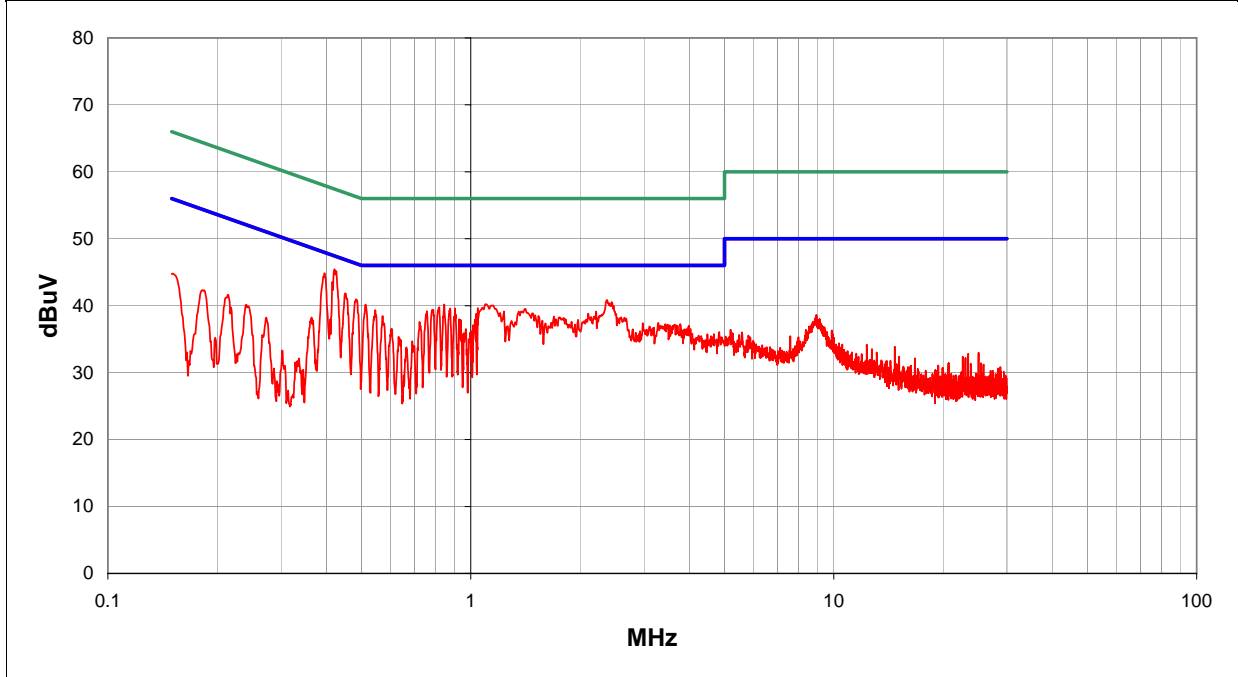

Freq (MHz)	Amplitude (dBuV)	Transducer (dB)	Cable (dB)	External Attenuation (dB)	Detector (blank equal peaks [PK] from scan)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
0.421	25.2	0.0	0.2	20.0		45.4	47.4	-2.0
0.396	24.6	0.0	0.2	20.0		44.8	47.9	-3.1
0.452	21.6	0.0	0.2	20.0		41.8	46.8	-5.0
2.376	20.4	0.0	0.4	20.0		40.8	46.0	-5.2
0.484	20.7	0.0	0.2	20.0		40.9	46.3	-5.3
1.105	19.9	0.0	0.3	20.0		40.2	46.0	-5.8
0.845	19.9	0.0	0.3	20.0		40.2	46.0	-5.8
0.514	19.9	0.0	0.2	20.0		40.1	46.0	-5.9
0.819	19.5	0.0	0.3	20.0		39.8	46.0	-6.2
1.045	19.3	0.0	0.3	20.0		39.6	46.0	-6.4
0.904	19.3	0.0	0.3	20.0		39.6	46.0	-6.4
0.878	19.3	0.0	0.3	20.0		39.6	46.0	-6.4
1.415	19.2	0.0	0.3	20.0		39.5	46.0	-6.5
0.788	19.1	0.0	0.3	20.0		39.4	46.0	-6.6
0.545	19.1	0.0	0.3	20.0		39.4	46.0	-6.6
0.757	18.9	0.0	0.3	20.0		39.2	46.0	-6.8
2.216	18.7	0.0	0.4	20.0		39.1	46.0	-6.9
1.035	18.5	0.0	0.3	20.0		38.8	46.0	-7.2
0.571	18.2	0.0	0.3	20.0		38.5	46.0	-7.5

CONDUCTED EMISSIONS DATA SHEET

EUT: USI Radio Module installed in the Ranger X Series Handheld Computer		Work Order: TRPO0007
Serial Number:		Date: 05/11/05
Customer: Tripod Data Systems, Inc.		Temperature: 21
Attendees: None		Humidity: 46%
Cust. Ref. No.:		Barometric Pressure: 30.09
Tested by: Rod Peloquin	Power: 120VAC/60Hz	Job Site: EV01

TEST SPECIFICATIONS		
Specification: FCC 15.207 AC Powerline Conducted Emissions:2004	Method: ANSI C63.4:2003	

SAMPLE CALCULATIONS
 Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation
 Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator

COMMENTS
 Maximum data rate. Ranger X Series Handheld contains USI & Cirronet radio modules.


EUT OPERATING MODES
 Tx mid channel on all radios.

DEVIATIONS FROM TEST STANDARD
 No deviations.

RESULTS	Line	Run #
Pass	L1	3

Other


 Tested By: _____

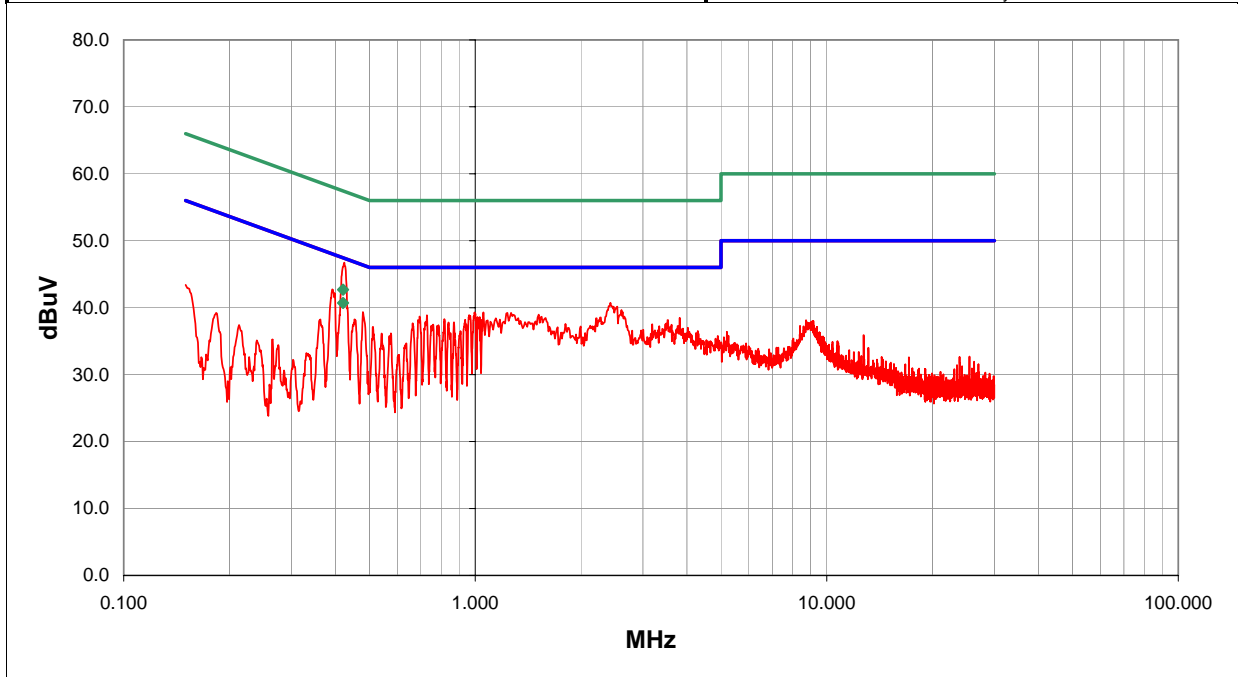

Freq (MHz)	Amplitude (dBuV)	Transducer (dB)	Cable (dB)	External Attenuation (dB)	Detector (blank equal peaks [PK] from scan)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
0.421	20.7	0.0	0.0	20.0	AV	40.7	47.4	-6.7
0.421	22.7	0.0	0.0	20.0	QP	42.7	57.4	-14.7
0.425	26.5	0.0	0.2	20.0		46.7	47.4	-0.6
2.426	20.3	0.0	0.4	20.0		40.7	46.0	-5.3
0.392	22.5	0.0	0.2	20.0		42.7	48.0	-5.3
2.606	19.2	0.0	0.5	20.0		39.7	46.0	-6.3
1.055	19.0	0.0	0.3	20.0		39.3	46.0	-6.7
0.996	19.0	0.0	0.3	20.0		39.3	46.0	-6.7
1.265	18.9	0.0	0.3	20.0		39.2	46.0	-6.8
0.479	19.1	0.0	0.2	20.0		39.3	46.3	-7.0
1.515	18.6	0.0	0.3	20.0		38.9	46.0	-7.1
0.961	18.6	0.0	0.3	20.0		38.9	46.0	-7.1
0.729	18.6	0.0	0.3	20.0		38.9	46.0	-7.1
0.695	18.4	0.0	0.3	20.0		38.7	46.0	-7.3
1.029	18.3	0.0	0.3	20.0		38.6	46.0	-7.4
3.816	17.9	0.0	0.6	20.0		38.5	46.0	-7.5
1.145	18.1	0.0	0.3	20.0		38.4	46.0	-7.6
1.005	18.1	0.0	0.3	20.0		38.4	46.0	-7.6
0.817	18.0	0.0	0.3	20.0		38.3	46.0	-7.7

EUT: USI Radio Module installed in the Ranger X Series Handheld Computer		Work Order: TRPO0007
Serial Number:		Date: 05/11/05
Customer: Tripod Data Systems, Inc.		Temperature: 21
Attendees: None		Humidity: 46%
Cust. Ref. No.:		Barometric Pressure: 30.09
Tested by: Rod Peloquin	Power: 120VAC/60Hz	Job Site: EV01

TEST SPECIFICATIONS		
Specification: FCC 15.207 AC Powerline Conducted Emissions:2004	Method: ANSI C63.4:2003	

SAMPLE CALCULATIONS
 Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation
 Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator

COMMENTS
 Maximum data rate. Ranger X Series Handheld contains USI & Cirronet radio modules.


EUT OPERATING MODES
 Tx mid channel on all radios.

DEVIATIONS FROM TEST STANDARD
 No deviations.

RESULTS	Line	Run #
Pass	N	4

Other


 Tested By:

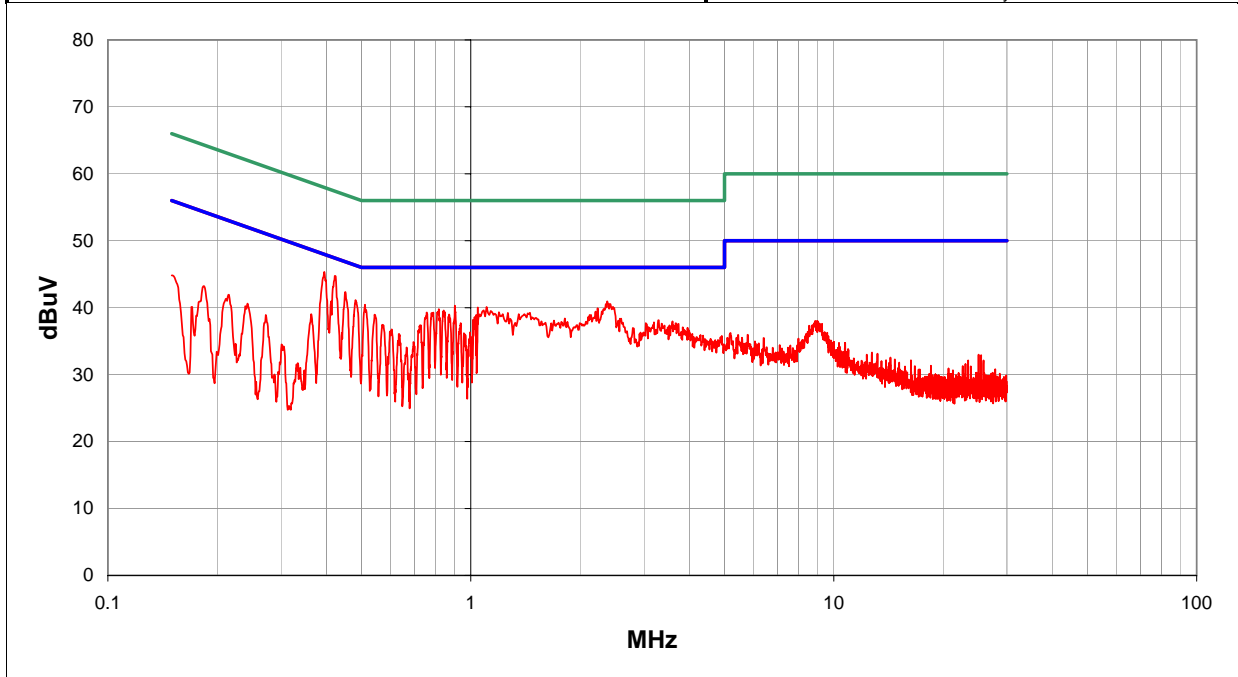

Freq (MHz)	Amplitude (dBuV)	Transducer (dB)	Cable (dB)	External Attenuation (dB)	Detector (blank equal peaks [PK] from scan)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
0.395	25.1	0.0	0.2	20.0		45.3	48.0	-2.6
0.424	24.5	0.0	0.2	20.0		44.7	47.4	-2.6
0.452	22.1	0.0	0.2	20.0		42.3	46.8	-4.5
2.376	20.5	0.0	0.4	20.0		40.9	46.0	-5.1
0.481	20.9	0.0	0.2	20.0		41.1	46.3	-5.2
0.511	20.2	0.0	0.2	20.0		40.4	46.0	-5.6
0.904	20.0	0.0	0.3	20.0		40.3	46.0	-5.7
1.105	19.8	0.0	0.3	20.0		40.1	46.0	-5.9
1.045	19.7	0.0	0.3	20.0		40.0	46.0	-6.0
2.236	19.5	0.0	0.4	20.0		39.9	46.0	-6.1
0.817	19.5	0.0	0.3	20.0		39.8	46.0	-6.2
0.842	19.3	0.0	0.3	20.0		39.6	46.0	-6.4
0.788	19.0	0.0	0.3	20.0		39.3	46.0	-6.7
0.757	19.0	0.0	0.3	20.0		39.3	46.0	-6.7
1.455	18.9	0.0	0.3	20.0		39.2	46.0	-6.8
0.872	18.7	0.0	0.3	20.0		39.0	46.0	-7.0
0.543	18.7	0.0	0.3	20.0		39.0	46.0	-7.0
1.035	18.6	0.0	0.3	20.0		38.9	46.0	-7.1
1.024	18.3	0.0	0.3	20.0		38.6	46.0	-7.4

EUT: USI Radio Module installed in the Ranger X Series Handheld Computer		Work Order: TRPO0007
Serial Number:		Date: 05/11/05
Customer: Tripod Data Systems, Inc.		Temperature: 21
Attendees: None		Humidity: 46%
Cust. Ref. No.:		Barometric Pressure: 30.09
Tested by: Rod Peloquin	Power: 120VAC/60Hz	Job Site: EV01

TEST SPECIFICATIONS		
Specification: FCC 15.207 AC Powerline Conducted Emissions:2004	Method: ANSI C63.4:2003	

SAMPLE CALCULATIONS
 Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation
 Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator

COMMENTS
 Maximum data rate. Ranger X Series Handheld contains USI & Cirronet radio modules.


EUT OPERATING MODES
 Tx high channel on all radios.

DEVIATIONS FROM TEST STANDARD
 No deviations.

RESULTS	Line	Run #
Pass	L1	5

Other


 Tested By:

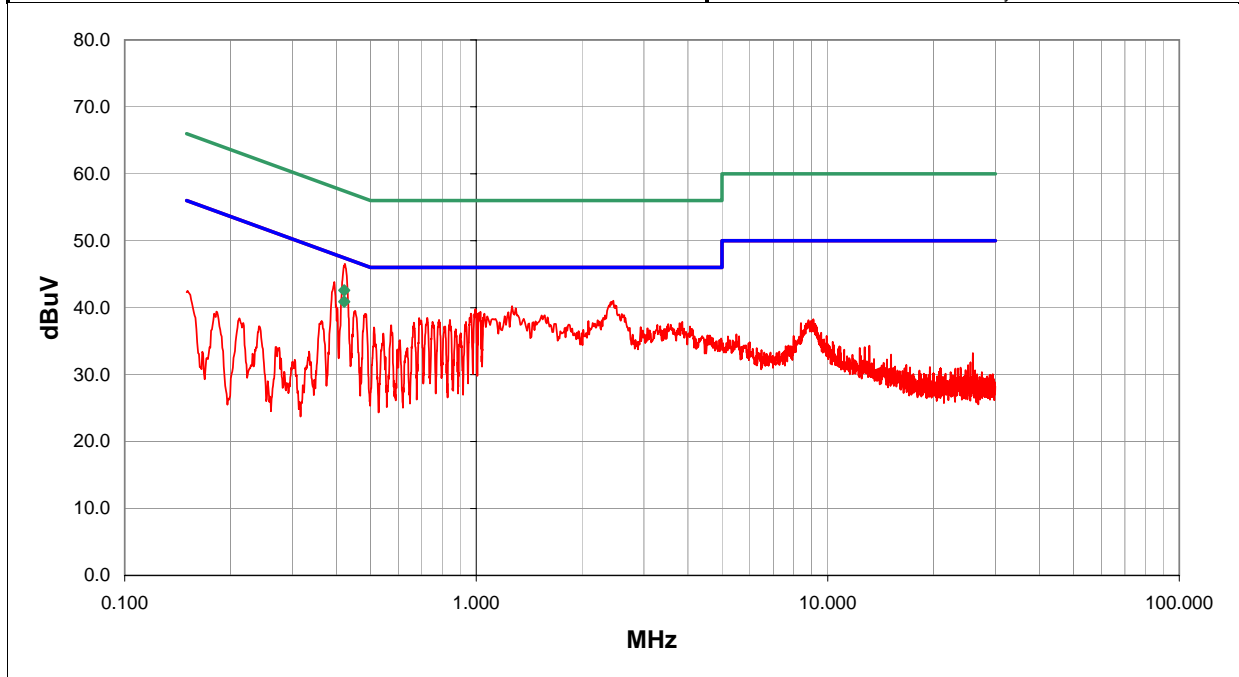

Freq (MHz)	Amplitude (dBuV)	Transducer (dB)	Cable (dB)	External Attenuation (dB)	Detector (blank equal peaks [PK] from scan)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
0.421	20.9	0.0	0.0	20.0	AV	40.9	47.4	-6.5
0.421	22.6	0.0	0.0	20.0	QP	42.6	57.4	-14.8
0.424	26.3	0.0	0.2	20.0		46.5	47.4	-0.8
0.395	23.6	0.0	0.2	20.0		43.8	48.0	-4.1
2.456	20.6	0.0	0.4	20.0		41.0	46.0	-5.0
1.265	19.9	0.0	0.3	20.0		40.2	46.0	-5.8
0.995	19.5	0.0	0.3	20.0		39.8	46.0	-6.2
1.027	19.1	0.0	0.3	20.0		39.4	46.0	-6.6
1.235	19.0	0.0	0.3	20.0		39.3	46.0	-6.7
1.055	18.8	0.0	0.3	20.0		39.1	46.0	-6.9
0.966	18.8	0.0	0.3	20.0		39.1	46.0	-6.9
1.005	18.7	0.0	0.3	20.0		39.0	46.0	-7.0
1.565	18.5	0.0	0.4	20.0		38.9	46.0	-7.1
0.486	18.8	0.0	0.2	20.0		39.0	46.2	-7.2
0.452	19.3	0.0	0.2	20.0		39.5	46.8	-7.3
0.726	18.2	0.0	0.3	20.0		38.5	46.0	-7.5
0.688	18.2	0.0	0.3	20.0		38.5	46.0	-7.5
0.842	17.9	0.0	0.3	20.0		38.2	46.0	-7.8
0.784	17.9	0.0	0.3	20.0		38.2	46.0	-7.8

CONDUCTED EMISSIONS DATA SHEET

EUT: USI Radio Module installed in the Ranger X Series Handheld Computer		Work Order: TRPO0007
Serial Number:		Date: 05/11/05
Customer: Tripod Data Systems, Inc.		Temperature: 21
Attendees: None		Humidity: 46%
Cust. Ref. No.:		Barometric Pressure: 30.09
Tested by: Rod Peloquin	Power: 120VAC/60Hz	Job Site: EV01

TEST SPECIFICATIONS		
Specification: FCC 15.207 AC Powerline Conducted Emissions:2004	Method: ANSI C63.4:2003	

SAMPLE CALCULATIONS
 Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation
 Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator

COMMENTS
 Maximum data rate. Ranger X Series Handheld contains USI & Cirronet radio modules.


EUT OPERATING MODES
 Tx high channel on all radios.

DEVIATIONS FROM TEST STANDARD
 No deviations.

RESULTS	Line	Run #
Pass	N	6

Other


 Tested By:

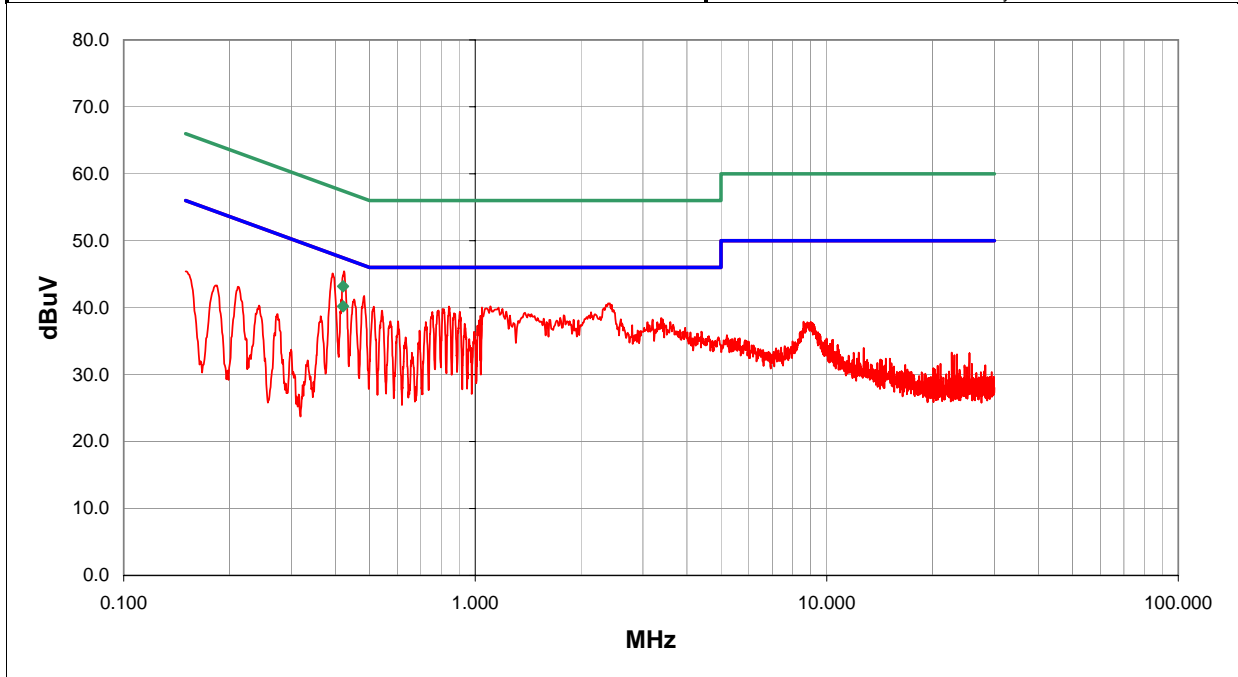

Freq (MHz)	Amplitude (dBuV)	Transducer (dB)	Cable (dB)	External Attenuation (dB)	Detector (blank equal peaks [PK] from scan)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
0.421	20.2	0.0	0.0	20.0	AV	40.2	47.4	-7.2
0.421	23.2	0.0	0.0	20.0	QP	43.2	57.4	-14.2
0.424	25.2	0.0	0.2	20.0		45.4	47.4	-1.9
0.393	24.9	0.0	0.2	20.0		45.1	48.0	-2.9
0.483	21.5	0.0	0.2	20.0		41.7	46.3	-4.5
2.416	20.2	0.0	0.4	20.0		40.6	46.0	-5.4
0.452	21.0	0.0	0.2	20.0		41.2	46.8	-5.6
1.105	19.9	0.0	0.3	20.0		40.2	46.0	-5.8
0.842	19.9	0.0	0.3	20.0		40.2	46.0	-5.8
0.514	19.9	0.0	0.2	20.0		40.1	46.0	-5.9
1.045	19.7	0.0	0.3	20.0		40.0	46.0	-6.0
0.814	19.5	0.0	0.3	20.0		39.8	46.0	-6.2
0.785	19.3	0.0	0.3	20.0		39.6	46.0	-6.4
0.543	19.3	0.0	0.3	20.0		39.6	46.0	-6.4
0.904	19.1	0.0	0.3	20.0		39.4	46.0	-6.6
0.755	19.1	0.0	0.3	20.0		39.4	46.0	-6.6
1.385	18.9	0.0	0.3	20.0		39.2	46.0	-6.8
0.871	18.9	0.0	0.3	20.0		39.2	46.0	-6.8
1.785	18.5	0.0	0.4	20.0		38.9	46.0	-7.1



