

## #34 GSM850\_GPRS10\_Bottom Face\_0cm\_Ch189\_Battery1

**DUT: 280604**

Communication System: GSM850; Frequency: 836.4 MHz; Duty Cycle: 1:4

Medium: MSL\_850\_120824 Medium parameters used :  $f = 836.4$  MHz;  $\sigma = 0.956$  mho/m;  $\epsilon_r = 52.7$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.5 °C; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: ET3DV6R - SN1788; ConvF(5.75, 5.75, 5.75); Calibrated: 2012/1/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2012/6/6
- Phantom: ELI 4.0\_Front; Type: QD 0VA 002 AA; Serial: TP-1131
- Software: DASY5 Version; SEMCAD X Version 13.4 Build 45

**Ch189/Area Scan (101x141x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.700 mW/g



**Ch189/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.53 V/m; Power Drift = -0.181 dB

Peak SAR (extrapolated) = 0.830 W/kg

**SAR(1 g) = 0.625 mW/g; SAR(10 g) = 0.432 mW/g**

Maximum value of SAR (measured) = 0.663 mW/g

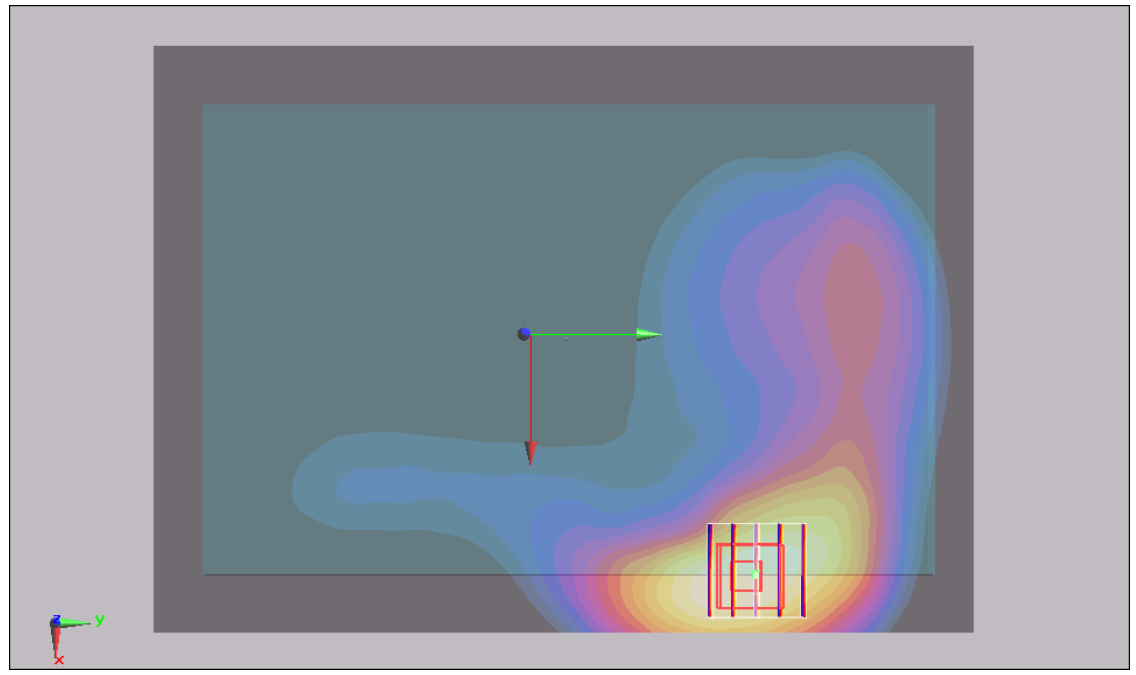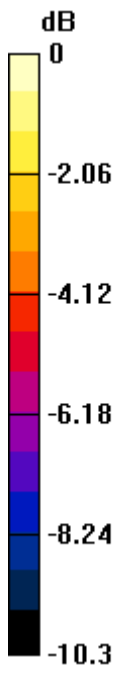

0 dB = 0.663mW/g

## #34 GSM850\_GPRS10\_Bottom Face\_0cm\_Ch189\_Battery1\_2D

**DUT: 280604**

Communication System: GSM850; Frequency: 836.4 MHz; Duty Cycle: 1:4

Medium: MSL\_850\_120824 Medium parameters used :  $f = 836.4$  MHz;  $\sigma = 0.956$  mho/m;  $\epsilon_r = 52.7$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.5 °C; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: ET3DV6R - SN1788; ConvF(5.75, 5.75, 5.75); Calibrated: 2012/1/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2012/6/6
- Phantom: ELI 4.0\_Front; Type: QD 0VA 002 AA; Serial: TP-1131
- Software: DASY5 Version; SEMCAD X Version 13.4 Build 45

**Ch189/Area Scan (101x141x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.700 mW/g

**Ch189/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 7.53 V/m; Power Drift = -0.181 dB

Peak SAR (extrapolated) = 0.830 W/kg

**SAR(1 g) = 0.625 mW/g; SAR(10 g) = 0.432 mW/g**

Maximum value of SAR (measured) = 0.663 mW/g

# 1g/10g Averaged SAR

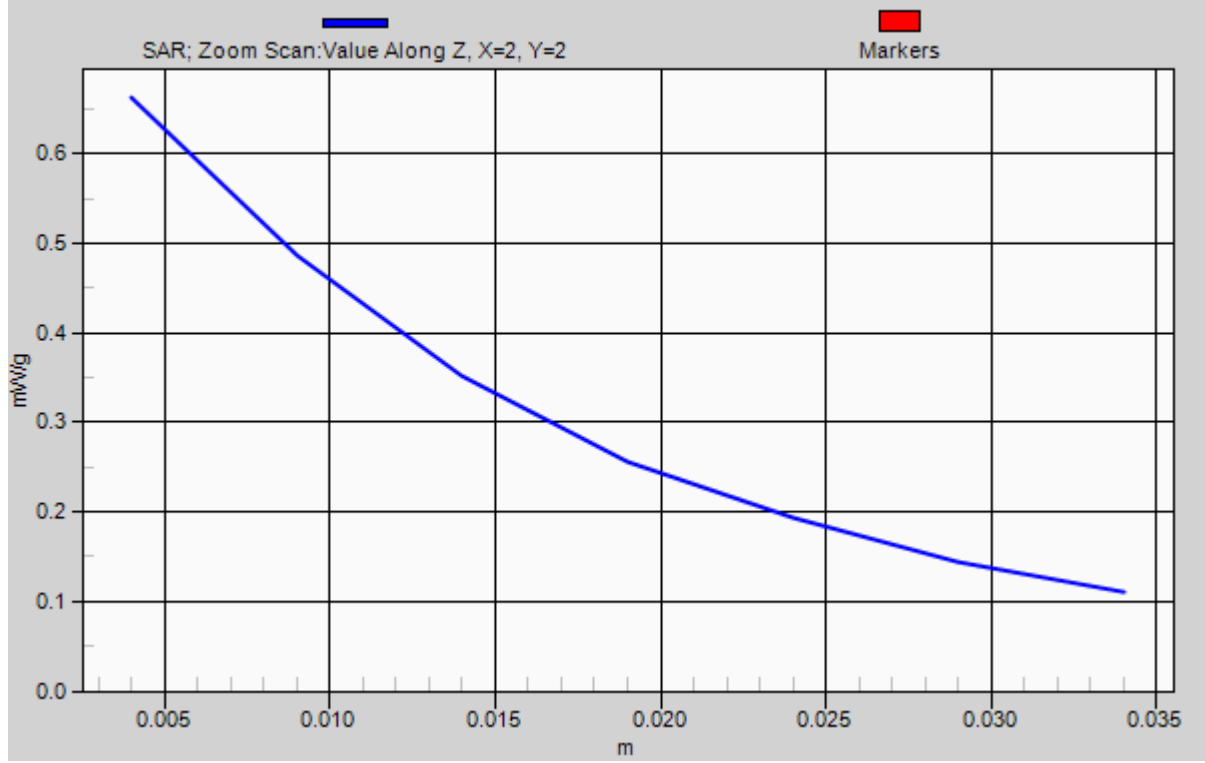

## #35 GSM850\_GPRS10\_Edge2\_0cm\_Ch189\_Battery1

**DUT: 280604**

Communication System: GSM850; Frequency: 836.4 MHz; Duty Cycle: 1:4

Medium: MSL\_850\_120824 Medium parameters used :  $f = 836.4$  MHz;  $\sigma = 0.956$  mho/m;  $\epsilon_r = 52.7$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.5 °C; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: ET3DV6R - SN1788; ConvF(5.75, 5.75, 5.75); Calibrated: 2012/1/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2012/6/6
- Phantom: ELI 4.0\_Front; Type: QD 0VA 002 AA; Serial: TP-1131
- Software: DASY5 Version; SEMCAD X Version 13.4 Build 45

**Ch189/Area Scan (41x121x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.446 mW/g



**Ch189/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.8 V/m; Power Drift = -0.091 dB

Peak SAR (extrapolated) = 0.598 W/kg

**SAR(1 g) = 0.415 mW/g; SAR(10 g) = 0.280 mW/g**

Maximum value of SAR (measured) = 0.445 mW/g

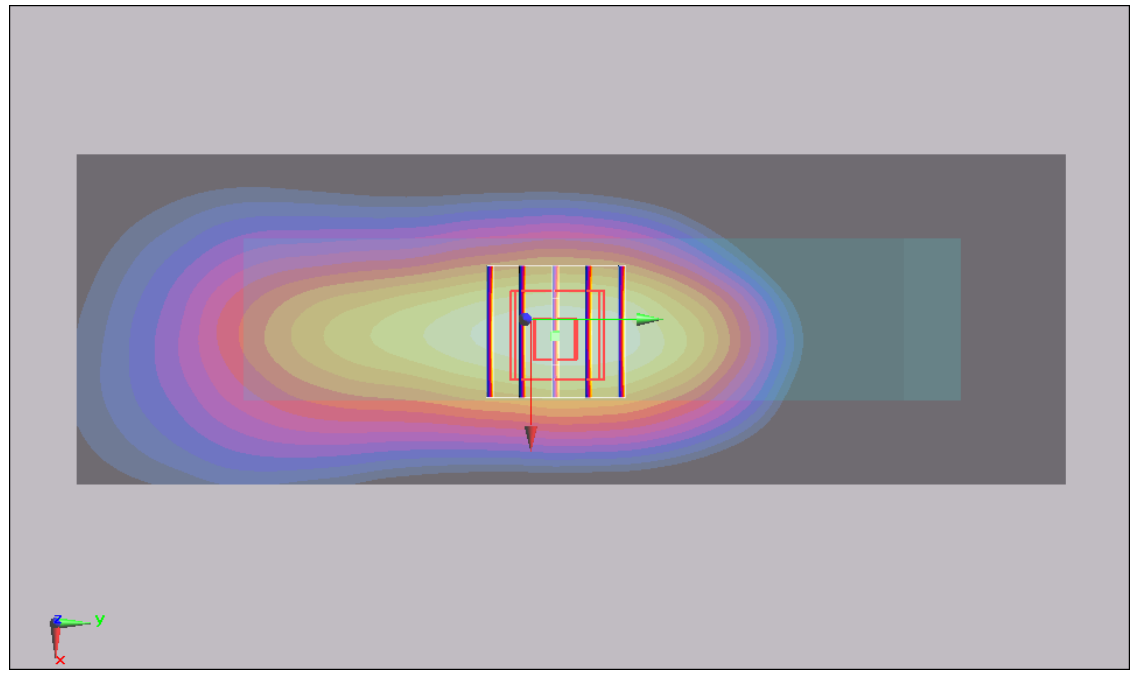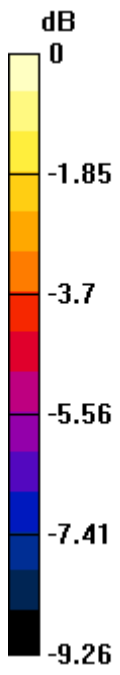

0 dB = 0.445mW/g

## #36 GSM850\_GPRS10\_Bottom Face\_0cm\_Ch189\_Battery2

**DUT: 280604**

Communication System: GSM850; Frequency: 836.4 MHz; Duty Cycle: 1:4

Medium: MSL\_850\_120824 Medium parameters used :  $f = 836.4$  MHz;  $\sigma = 0.956$  mho/m;  $\epsilon_r = 52.7$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.5 °C; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: ET3DV6R - SN1788; ConvF(5.75, 5.75, 5.75); Calibrated: 2012/1/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2012/6/6
- Phantom: ELI 4.0\_Front; Type: QD 0VA 002 AA; Serial: TP-1131
- Software: DASY5 Version; SEMCAD X Version 13.4 Build 45

**Ch189/Area Scan (101x141x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.331 mW/g



**Ch189/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.51 V/m; Power Drift = -0.153 dB

Peak SAR (extrapolated) = 0.546 W/kg

**SAR(1 g) = 0.252 mW/g; SAR(10 g) = 0.171 mW/g**

Maximum value of SAR (measured) = 0.265 mW/g

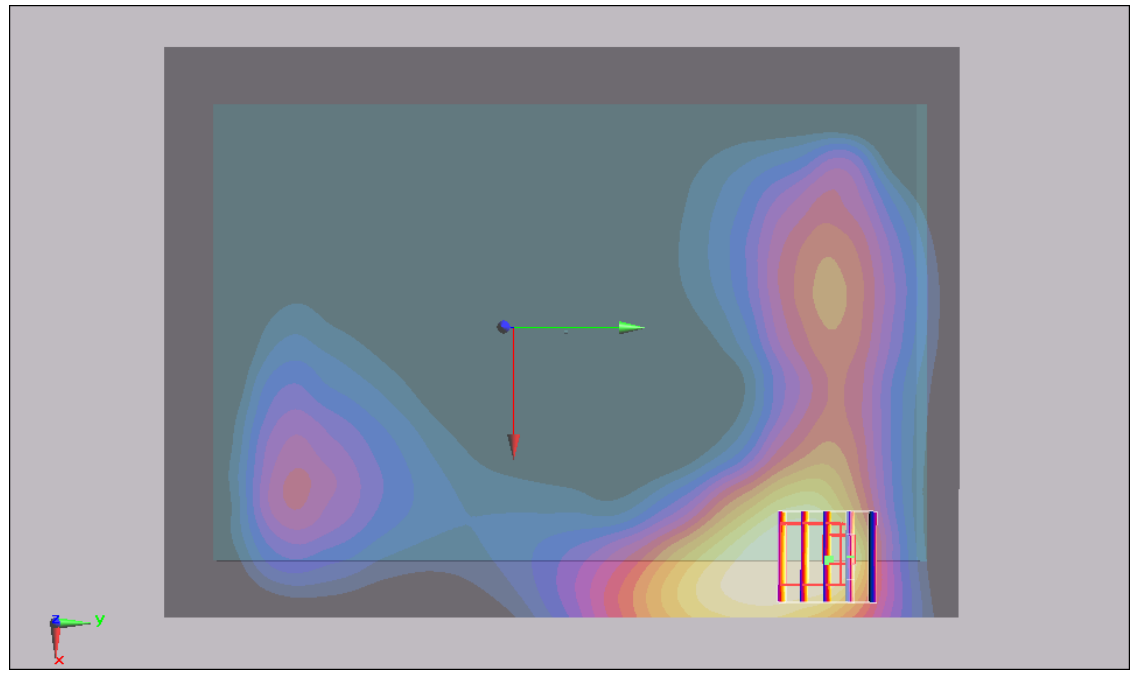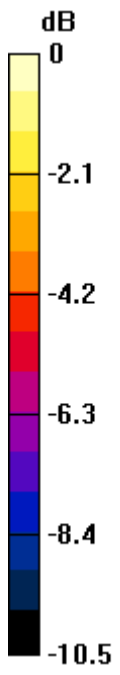

0 dB = 0.265mW/g



## #43 GSM1900\_GPRS10\_Bottom Face\_0cm\_Ch512\_Battery1

**DUT: 280604**

Communication System: PCS; Frequency: 1850.2 MHz; Duty Cycle: 1:4

Medium: MSL\_1900\_120824 Medium parameters used :  $f = 1850.2$  MHz;  $\sigma = 1.5$  mho/m;  $\epsilon_r = 52.2$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.5 °C; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: ET3DV6R - SN1788; ConvF(4.06, 4.06, 4.06); Calibrated: 2012/1/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2012/6/6
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1029
- Software: DASY5 Version; SEMCAD X Version 13.4 Build 45

**Ch512/Area Scan (101x141x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.428 mW/g

**Ch512/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.89 V/m; Power Drift = -0.154 dB

Peak SAR (extrapolated) = 0.657 W/kg

**SAR(1 g) = 0.424 mW/g; SAR(10 g) = 0.248 mW/g**

Maximum value of SAR (measured) = 0.453 mW/g



**Ch512/Zoom Scan (5x5x7)/Cube 1:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.89 V/m; Power Drift = -0.154 dB

Peak SAR (extrapolated) = 0.489 W/kg

**SAR(1 g) = 0.358 mW/g; SAR(10 g) = 0.235 mW/g**

Maximum value of SAR (measured) = 0.391 mW/g

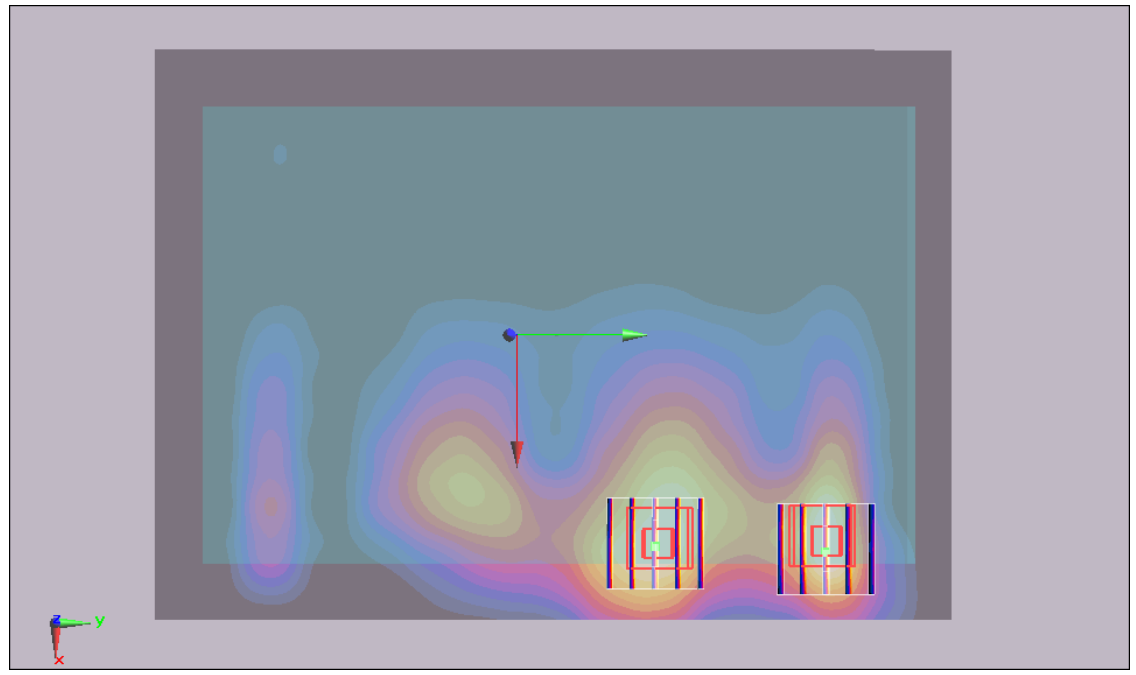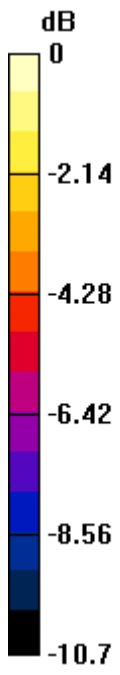

0 dB = 0.391mW/g

## #43 GSM1900\_GPRS10\_Bottom Face\_0cm\_Ch512\_Battery1\_2D

**DUT: 280604**

Communication System: PCS; Frequency: 1850.2 MHz; Duty Cycle: 1:4

Medium: MSL\_1900\_120824 Medium parameters used :  $f = 1850.2$  MHz;  $\sigma = 1.5$  mho/m;  $\epsilon_r = 52.2$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.5 °C; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: ET3DV6R - SN1788; ConvF(4.06, 4.06, 4.06); Calibrated: 2012/1/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2012/6/6
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1029
- Software: DASY5 Version; SEMCAD X Version 13.4 Build 45

**Ch512/Area Scan (101x141x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.428 mW/g

**Ch512/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.89 V/m; Power Drift = -0.154 dB

Peak SAR (extrapolated) = 0.657 W/kg

**SAR(1 g) = 0.424 mW/g; SAR(10 g) = 0.248 mW/g**

Maximum value of SAR (measured) = 0.453 mW/g

**Ch512/Zoom Scan (5x5x7)/Cube 1:** Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 5.89 V/m; Power Drift = -0.154 dB

Peak SAR (extrapolated) = 0.489 W/kg

**SAR(1 g) = 0.358 mW/g; SAR(10 g) = 0.235 mW/g**

Maximum value of SAR (measured) = 0.391 mW/g

# 1g/10g Averaged SAR

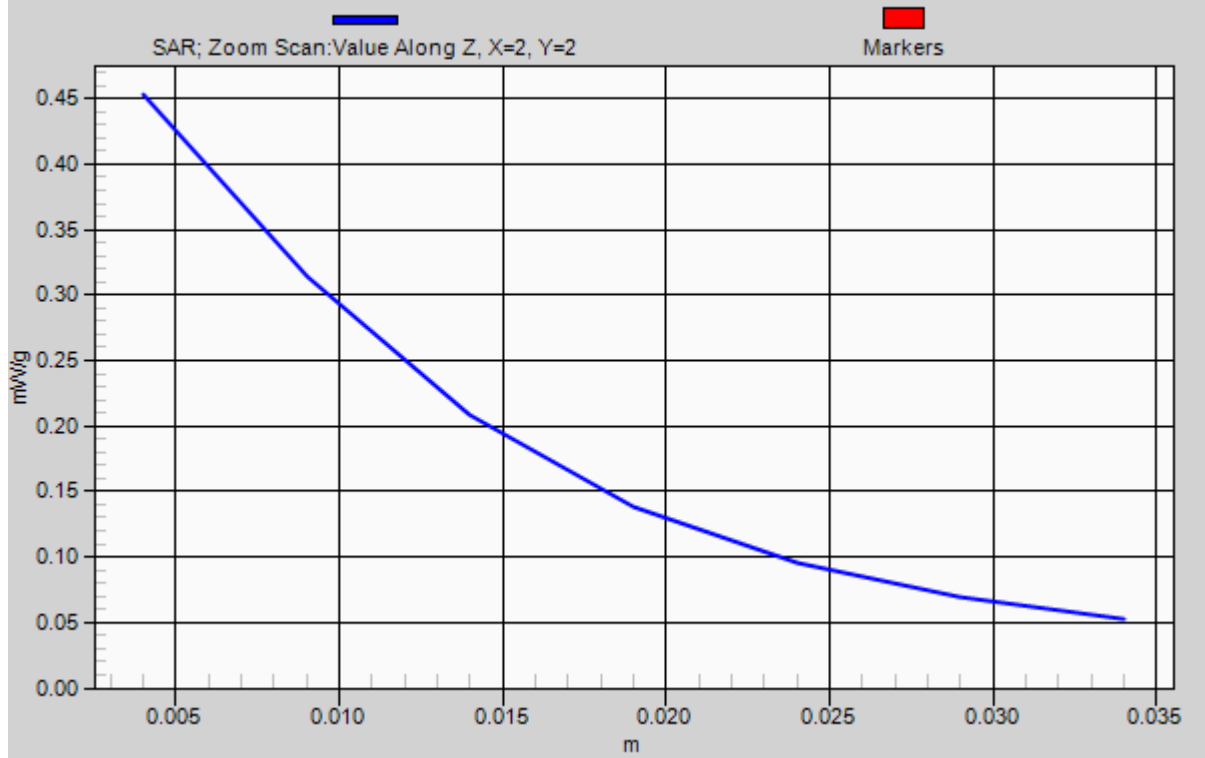

## #44 GSM1900\_GPRS10\_Edge2\_0cm\_Ch512\_Battery1

**DUT: 280604**

Communication System: PCS; Frequency: 1850.2 MHz; Duty Cycle: 1:4

Medium: MSL\_1900\_120824 Medium parameters used :  $f = 1850.2$  MHz;  $\sigma = 1.5$  mho/m;  $\epsilon_r = 52.2$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: ET3DV6R - SN1788; ConvF(4.06, 4.06, 4.06); Calibrated: 2012/1/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2012/6/6
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1029
- Software: DASY5 Version; SEMCAD X Version 13.4 Build 45

**Ch512/Area Scan (41x121x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.330 mW/g



**Ch512/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.4 V/m; Power Drift = -0.010 dB

Peak SAR (extrapolated) = 0.404 W/kg

**SAR(1 g) = 0.288 mW/g; SAR(10 g) = 0.176 mW/g**

Maximum value of SAR (measured) = 0.315 mW/g

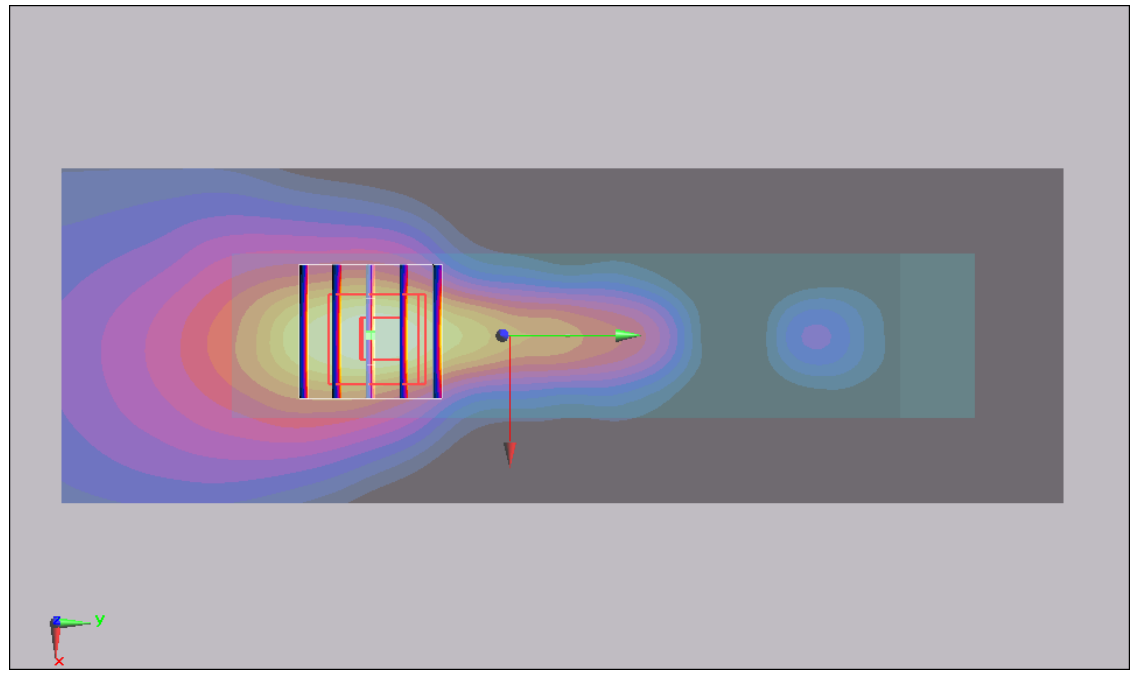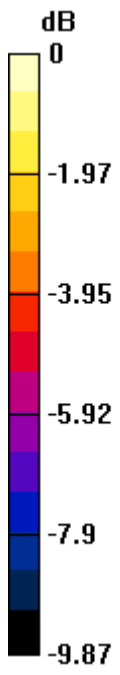

0 dB = 0.315mW/g

## #45 GSM1900\_GPRS10\_Bottom Face\_0cm\_Ch512\_Battery2

**DUT: 280604**

Communication System: PCS; Frequency: 1850.2 MHz; Duty Cycle: 1:4

Medium: MSL\_1900\_120824 Medium parameters used :  $f = 1850.2$  MHz;  $\sigma = 1.5$  mho/m;  $\epsilon_r = 52.2$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.5 °C; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: ET3DV6R - SN1788; ConvF(4.06, 4.06, 4.06); Calibrated: 2012/1/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2012/6/6
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1029
- Software: DASY5 Version; SEMCAD X Version 13.4 Build 45

**Ch512/Area Scan (101x141x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.116 mW/g



**Ch512/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.05 V/m; Power Drift = -0.033 dB

Peak SAR (extrapolated) = 0.144 W/kg

**SAR(1 g) = 0.107 mW/g; SAR(10 g) = 0.075 mW/g**

Maximum value of SAR (measured) = 0.113 mW/g

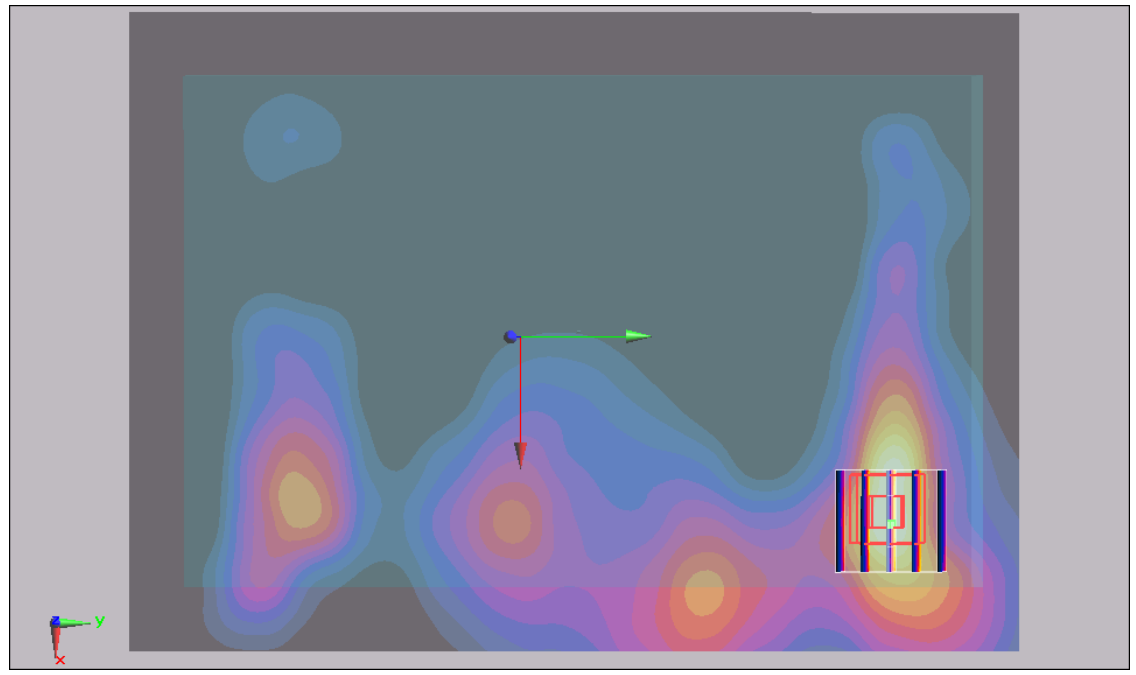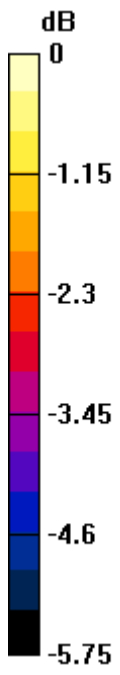

0 dB = 0.113mW/g



## #37 WCDMA V\_RMC12.2K\_Bottom Face\_0cm\_Ch4233\_Battery1

**DUT: 280604**

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: MSL\_850\_120824 Medium parameters used:  $f = 847$  MHz;  $\sigma = 0.967$  mho/m;  $\epsilon_r = 52.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.5 °C; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: ET3DV6R - SN1788; ConvF(5.75, 5.75, 5.75); Calibrated: 2012/1/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2012/6/6
- Phantom: ELI 4.0\_Front; Type: QD 0VA 002 AA; Serial: TP-1131
- Software: DASY5 Version; SEMCAD X Version 13.4 Build 45

**Ch4233/Area Scan (101x141x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.365 mW/g



**Ch4233/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.93 V/m; Power Drift = -0.182 dB

Peak SAR (extrapolated) = 0.446 W/kg

**SAR(1 g) = 0.332 mW/g; SAR(10 g) = 0.228 mW/g**

Maximum value of SAR (measured) = 0.356 mW/g

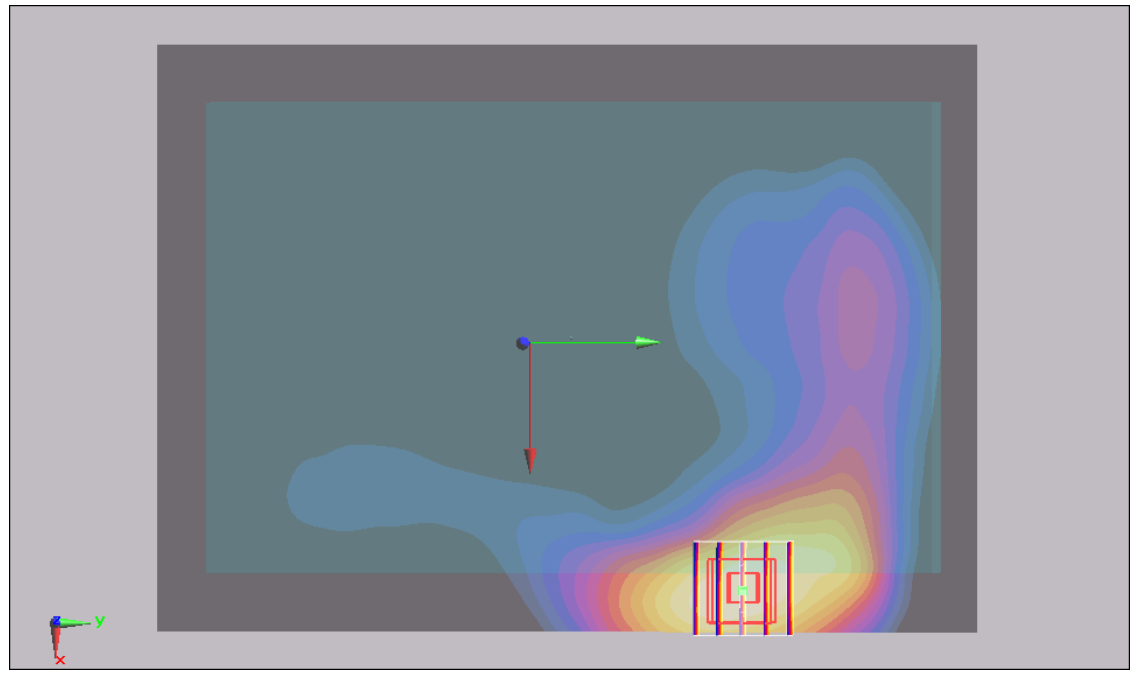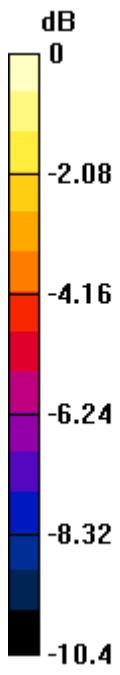

0 dB = 0.356mW/g

## #37 WCDMA V\_RMC12.2K\_Bottom Face\_0cm\_Ch4233\_Battery1\_2D

**DUT: 280604**

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: MSL\_850\_120824 Medium parameters used:  $f = 847$  MHz;  $\sigma = 0.967$  mho/m;  $\epsilon_r = 52.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.5 °C; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: ET3DV6R - SN1788; ConvF(5.75, 5.75, 5.75); Calibrated: 2012/1/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2012/6/6
- Phantom: ELI 4.0\_Front; Type: QD 0VA 002 AA; Serial: TP-1131
- Software: DASY5 Version; SEMCAD X Version 13.4 Build 45

**Ch4233/Area Scan (101x141x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.365 mW/g

**Ch4233/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 4.93 V/m; Power Drift = -0.182 dB

Peak SAR (extrapolated) = 0.446 W/kg

**SAR(1 g) = 0.332 mW/g; SAR(10 g) = 0.228 mW/g**

Maximum value of SAR (measured) = 0.356 mW/g

# 1g/10g Averaged SAR

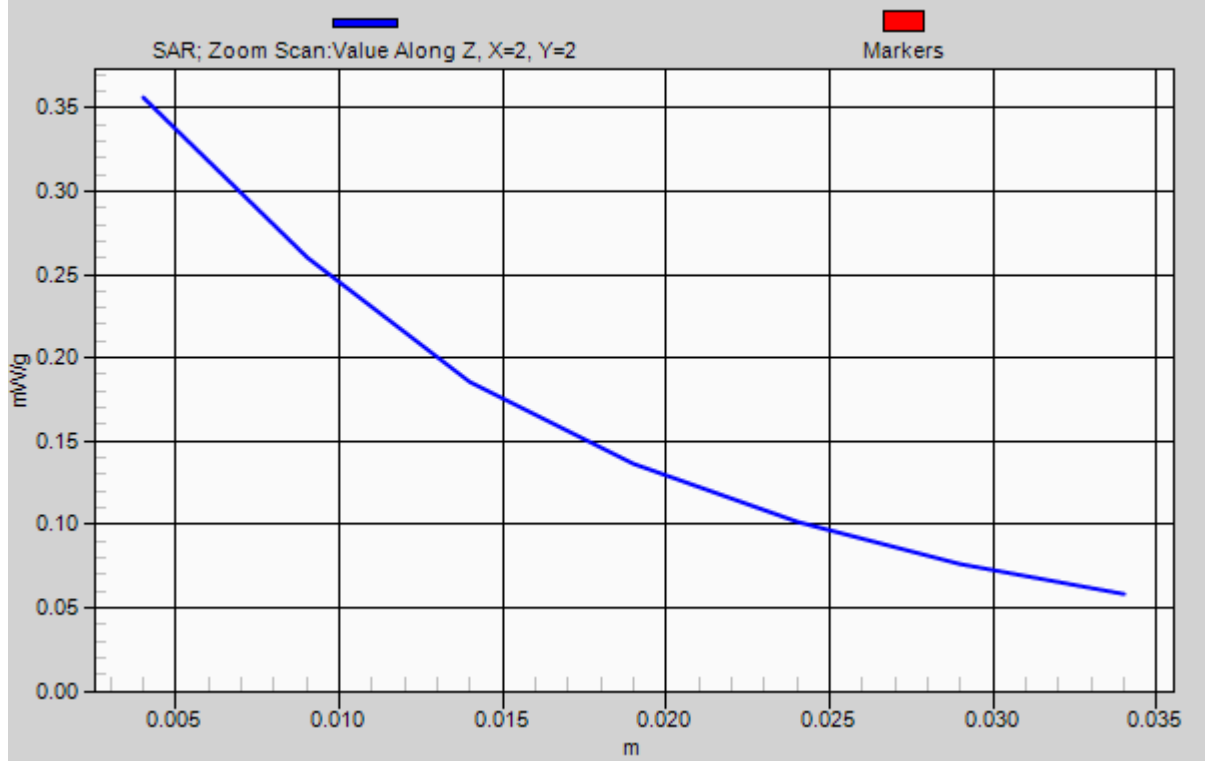

## #38 WCDMA V\_RMC12.2K\_Edge2\_0cm\_Ch4233\_Battery1

**DUT: 280604**

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: MSL\_850\_120824 Medium parameters used:  $f = 847$  MHz;  $\sigma = 0.967$  mho/m;  $\epsilon_r = 52.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.5 °C; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: ET3DV6R - SN1788; ConvF(5.75, 5.75, 5.75); Calibrated: 2012/1/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2012/6/6
- Phantom: ELI 4.0\_Front; Type: QD 0VA 002 AA; Serial: TP-1131
- Software: DASY5 Version; SEMCAD X Version 13.4 Build 45

**Ch4233/Area Scan (41x121x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.220 mW/g



**Ch4233/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.4 V/m; Power Drift = -0.164 dB

Peak SAR (extrapolated) = 0.284 W/kg

**SAR(1 g) = 0.198 mW/g; SAR(10 g) = 0.136 mW/g**

Maximum value of SAR (measured) = 0.212 mW/g

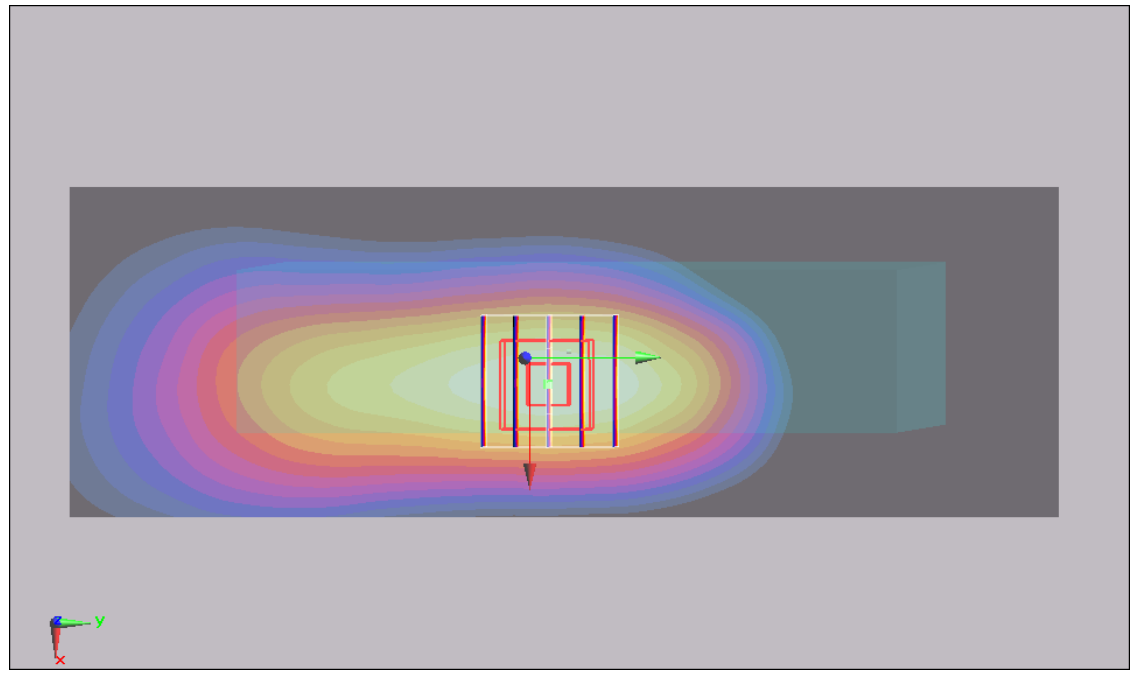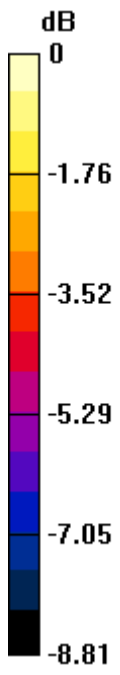

0 dB = 0.212mW/g

## #39 WCDMA V\_RMC12.2K\_Bottom Face\_0cm\_Ch4233\_Battery2

**DUT: 280604**

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: MSL\_850\_120824 Medium parameters used:  $f = 847$  MHz;  $\sigma = 0.967$  mho/m;  $\epsilon_r = 52.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.5 °C; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: ET3DV6R - SN1788; ConvF(5.75, 5.75, 5.75); Calibrated: 2012/1/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2012/6/6
- Phantom: ELI 4.0\_Front; Type: QD 0VA 002 AA; Serial: TP-1131
- Software: DASY5 Version; SEMCAD X Version 13.4 Build 45

**Ch4233/Area Scan (101x141x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.131 mW/g



**Ch4233/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.67 V/m; Power Drift = 0.118 dB

Peak SAR (extrapolated) = 0.230 W/kg

**SAR(1 g) = 0.113 mW/g; SAR(10 g) = 0.079 mW/g**

Maximum value of SAR (measured) = 0.117 mW/g

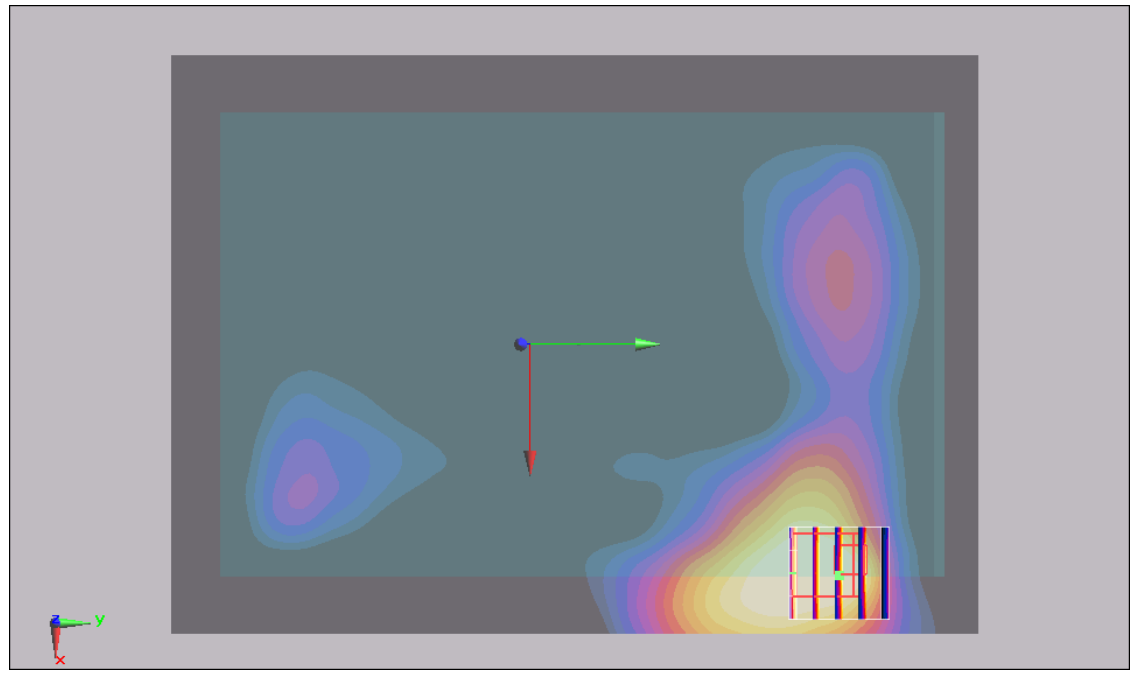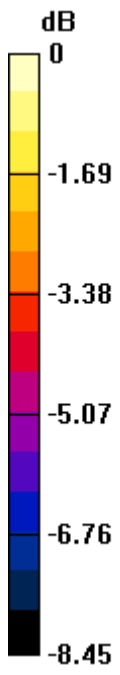

0 dB = 0.117mW/g



## #46 WCDMA IV\_RMC12.2K\_Bottom Face\_0cm\_Ch1513\_Battery1

**DUT: 280604**

Communication System: WCDMA; Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium: MSL\_1750\_120824 Medium parameters used:  $f = 1753$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r = 52.2$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.5 °C; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: ET3DV6R - SN1788; ConvF(4.29, 4.29, 4.29); Calibrated: 2012/1/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2012/6/6
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1029
- Software: DASY5 Version; SEMCAD X Version 13.4 Build 45

**Ch1513/Area Scan (101x141x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.382 mW/g

**Ch1513/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.73 V/m; Power Drift = -0.124 dB

Peak SAR (extrapolated) = 0.465 W/kg

**SAR(1 g) = 0.344 mW/g; SAR(10 g) = 0.209 mW/g**

Maximum value of SAR (measured) = 0.378 mW/g



**Ch1513/Zoom Scan (5x5x7)/Cube 1:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.73 V/m; Power Drift = -0.124 dB

Peak SAR (extrapolated) = 0.388 W/kg

**SAR(1 g) = 0.300 mW/g; SAR(10 g) = 0.197 mW/g**

Maximum value of SAR (measured) = 0.326 mW/g

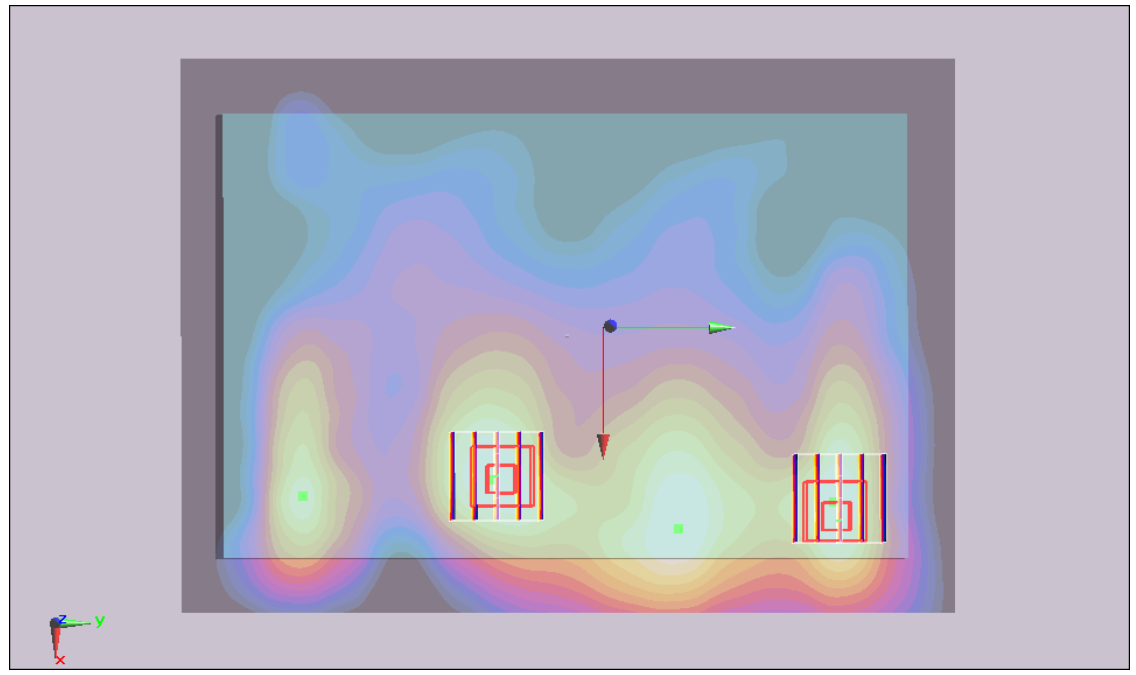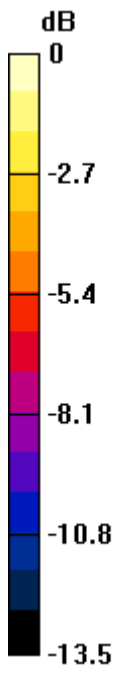

0 dB = 0.326mW/g

## #47 WCDMA IV\_RMC12.2K\_Edge2\_0cm\_Ch1513\_Battery1

**DUT: 280604**

Communication System: WCDMA; Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium: MSL\_1750\_120824 Medium parameters used:  $f = 1753$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r = 52.2$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.5 °C; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: ET3DV6R - SN1788; ConvF(4.29, 4.29, 4.29); Calibrated: 2012/1/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2012/6/6
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1029
- Software: DASY5 Version; SEMCAD X Version 13.4 Build 45

**Ch1513/Area Scan (31x101x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.681 mW/g



**Ch1513/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15 V/m; Power Drift = -0.131 dB

Peak SAR (extrapolated) = 0.845 W/kg

**SAR(1 g) = 0.616 mW/g; SAR(10 g) = 0.382 mW/g**

Maximum value of SAR (measured) = 0.677 mW/g

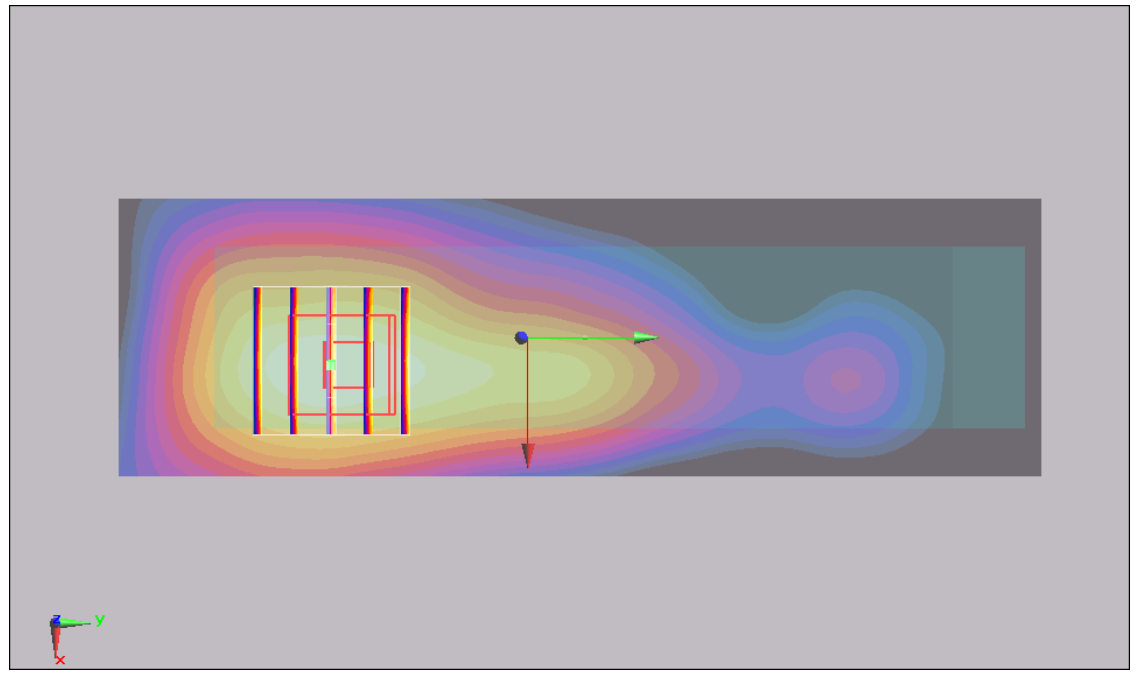

0 dB = 0.677mW/g

### #47 WCDMA IV\_RMC12.2K\_Edge2\_0cm\_Ch1513\_Battery1\_2D

**DUT: 280604**


Communication System: WCDMA; Frequency: 1752.6 MHz; Duty Cycle: 1:1  
Medium: MSL\_1750\_120824 Medium parameters used:  $f = 1753$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r = 52.2$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

**DASY5 Configuration:**

- Probe: ET3DV6R - SN1788; ConvF(4.29, 4.29, 4.29); Calibrated: 2012/1/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2012/6/6
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1029
- Software: DASY5 Version; SEMCAD X Version 13.4 Build 45

**Ch1513/Area Scan (31x101x1):** Measurement grid: dx=20mm, dy=20mm  
Maximum value of SAR (interpolated) = 0.681 mW/g

**Ch1513/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 15 V/m; Power Drift = -0.131 dB  
Peak SAR (extrapolated) = 0.845 W/kg  
**SAR(1 g) = 0.616 mW/g; SAR(10 g) = 0.382 mW/g**  
Maximum value of SAR (measured) = 0.677 mW/g

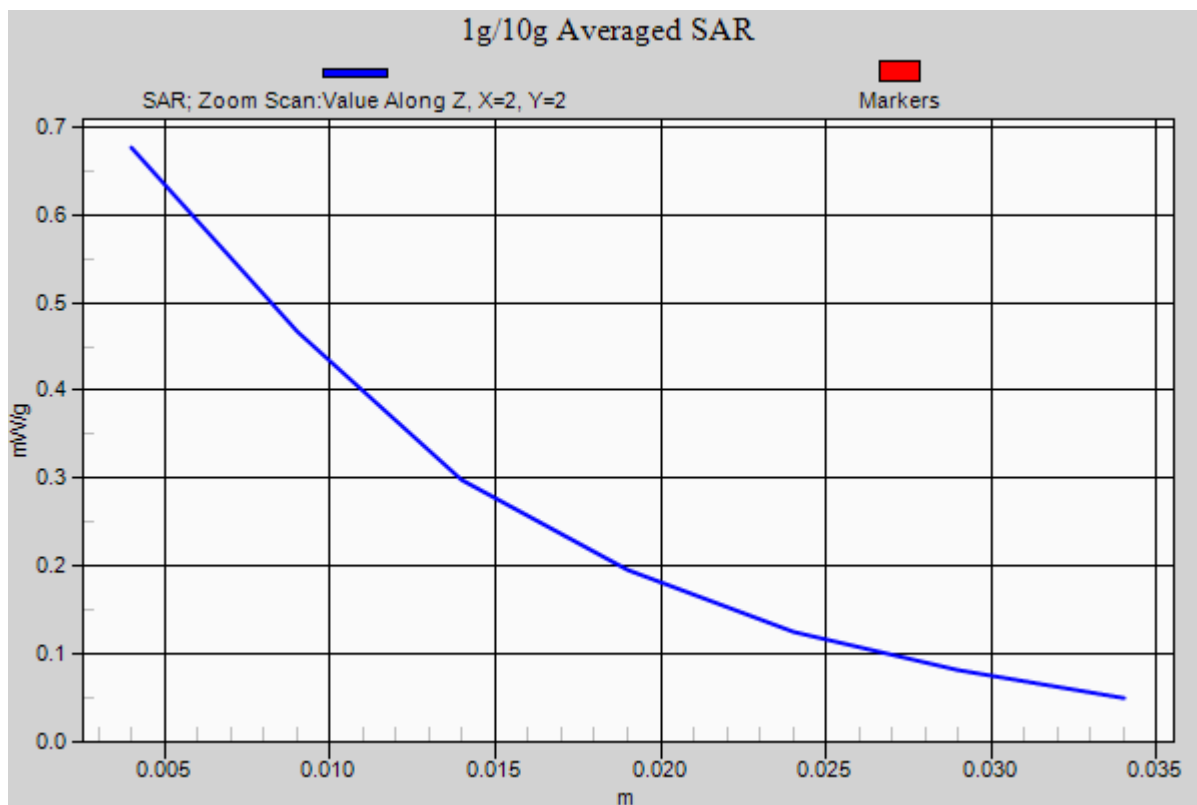

## #48 WCDMA IV\_RMC12.2K\_Edge2\_0cm\_Ch1513\_Battery2

**DUT: 280604**

Communication System: WCDMA; Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium: MSL\_1750\_120824 Medium parameters used:  $f = 1753$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r = 52.2$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.5 °C; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: ET3DV6R - SN1788; ConvF(4.29, 4.29, 4.29); Calibrated: 2012/1/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2012/6/6
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1029
- Software: DASY5 Version; SEMCAD X Version 13.4 Build 45

**Ch1513/Area Scan (41x101x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.610 mW/g

**Ch1513/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.5 V/m; Power Drift = -0.163 dB

Peak SAR (extrapolated) = 0.784 W/kg

**SAR(1 g) = 0.569 mW/g; SAR(10 g) = 0.354 mW/g**

Maximum value of SAR (measured) = 0.616 mW/g



**Ch1513/Zoom Scan (5x5x7)/Cube 1:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.5 V/m; Power Drift = -0.163 dB

Peak SAR (extrapolated) = 0.916 W/kg

**SAR(1 g) = 0.498 mW/g; SAR(10 g) = 0.269 mW/g**

Maximum value of SAR (measured) = 0.590 mW/g

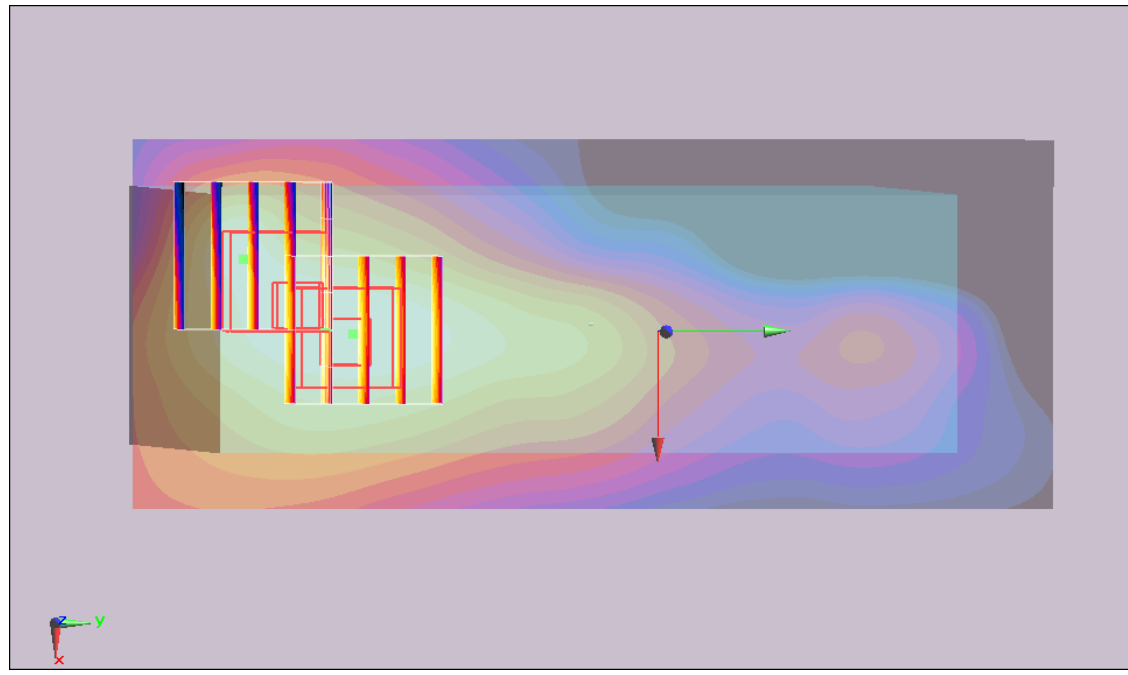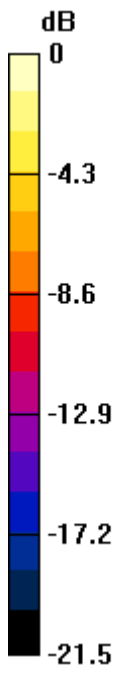

0 dB = 0.590mW/g

## #40 WCDMA II\_RMC12.2K\_Bottom Face\_0cm\_Ch9262\_Battery1

**DUT: 280604**

Communication System: WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: MSL\_1900\_120824 Medium parameters used :  $f = 1852.4$  MHz;  $\sigma = 1.5$  mho/m;  $\epsilon_r = 52.2$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.5 °C; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: ET3DV6R - SN1788; ConvF(4.06, 4.06, 4.06); Calibrated: 2012/1/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2012/6/6
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1029
- Software: DASY5 Version; SEMCAD X Version 13.4 Build 45

**Ch9262/Area Scan (101x141x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.466 mW/g

**Ch9262/Zoom Scan (5x5x7)/Cube 1:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.31 V/m; Power Drift = -0.174 dB

Peak SAR (extrapolated) = 0.720 W/kg

**SAR(1 g) = 0.446 mW/g; SAR(10 g) = 0.256 mW/g**

Maximum value of SAR (measured) = 0.483 mW/g

**Ch9262/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm



Reference Value = 6.31 V/m; Power Drift = -0.174 dB

Peak SAR (extrapolated) = 0.587 W/kg

**SAR(1 g) = 0.431 mW/g; SAR(10 g) = 0.282 mW/g**

Maximum value of SAR (measured) = 0.466 mW/g



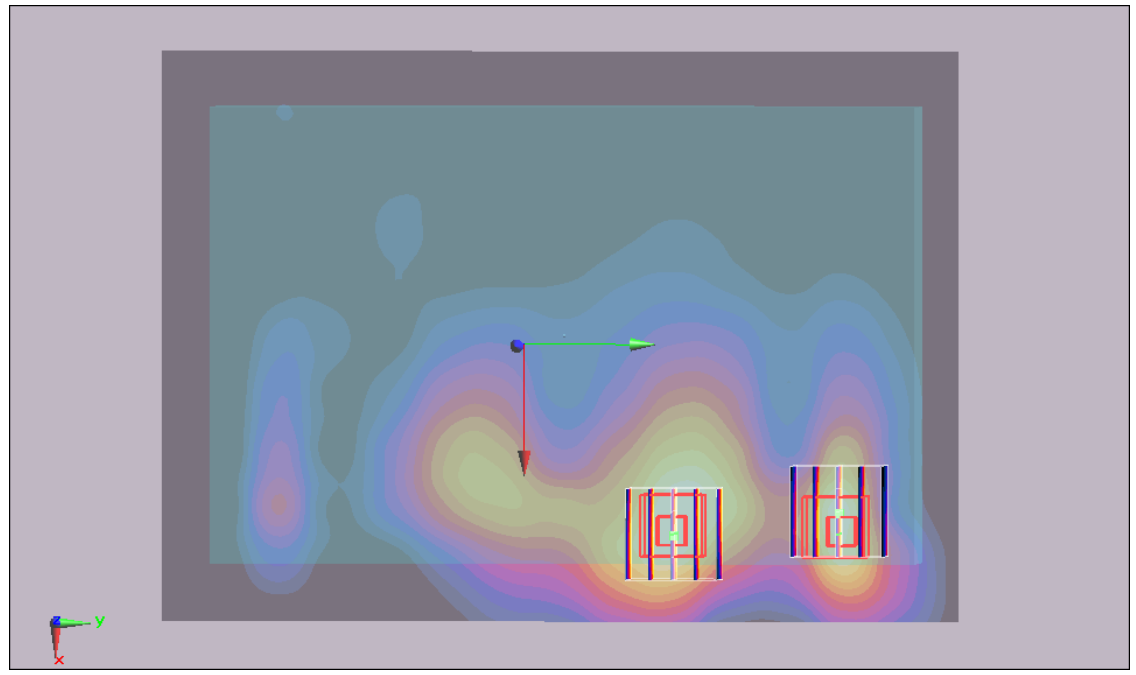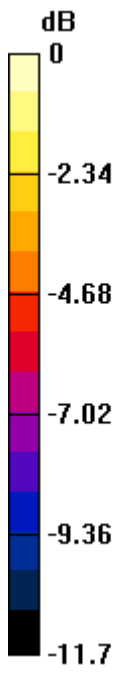

0 dB = 0.466mW/g

## #41 WCDMA II\_RMC12.2K\_Edge2\_0cm\_Ch9262\_Battery1

**DUT: 280604**

Communication System: WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: MSL\_1900\_120824 Medium parameters used :  $f = 1852.4$  MHz;  $\sigma = 1.5$  mho/m;  $\epsilon_r = 52.2$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.5 °C; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: ET3DV6R - SN1788; ConvF(4.06, 4.06, 4.06); Calibrated: 2012/1/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2012/6/6
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1029
- Software: DASY5 Version; SEMCAD X Version 13.4 Build 45

**Ch9262/Area Scan (41x121x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.517 mW/g



**Ch9262/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12 V/m; Power Drift = -0.164 dB

Peak SAR (extrapolated) = 0.647 W/kg

**SAR(1 g) = 0.451 mW/g; SAR(10 g) = 0.275 mW/g**

Maximum value of SAR (measured) = 0.493 mW/g

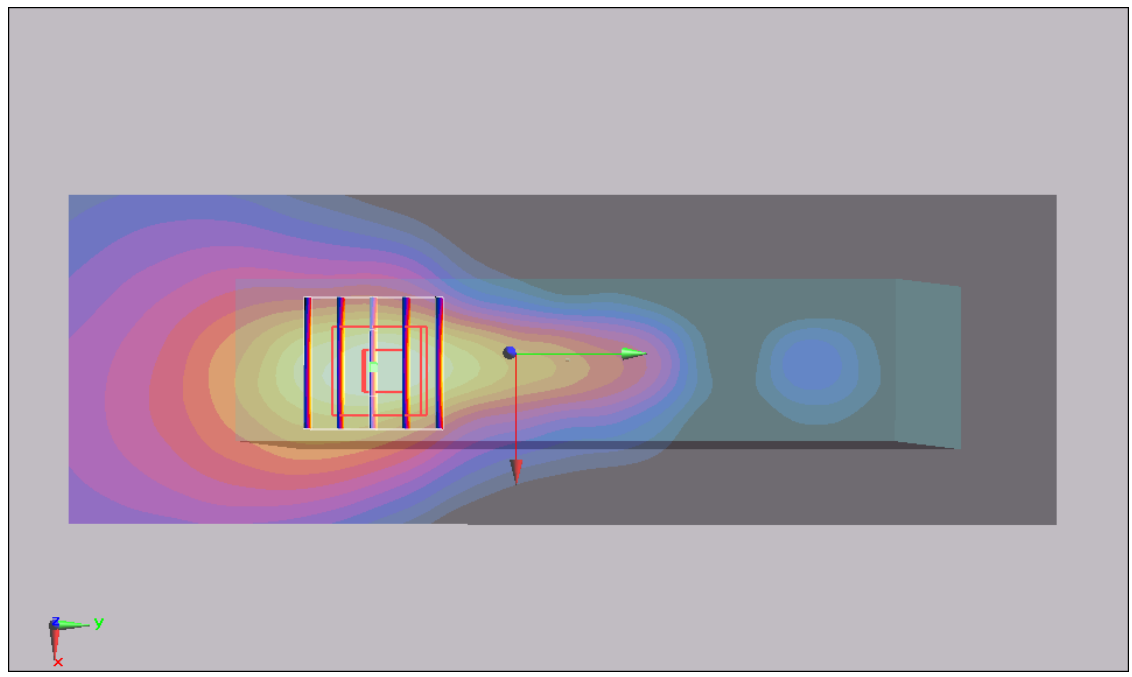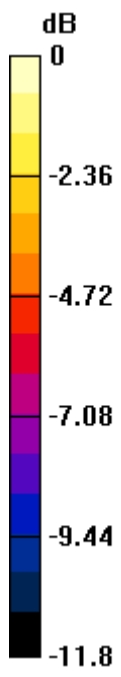

0 dB = 0.493mW/g

## #41 WCDMA II\_RMC12.2K\_Edge2\_0cm\_Ch9262\_Battery1\_2D

**DUT: 280604**

Communication System: WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: MSL\_1900\_120824 Medium parameters used :  $f = 1852.4$  MHz;  $\sigma = 1.5$  mho/m;  $\epsilon_r = 52.2$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.5 °C; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: ET3DV6R - SN1788; ConvF(4.06, 4.06, 4.06); Calibrated: 2012/1/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2012/6/6
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1029
- Software: DASY5 Version; SEMCAD X Version 13.4 Build 45

**Ch9262/Area Scan (41x121x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.517 mW/g

**Ch9262/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 12 V/m; Power Drift = -0.164 dB

Peak SAR (extrapolated) = 0.647 W/kg

**SAR(1 g) = 0.451 mW/g; SAR(10 g) = 0.275 mW/g**

Maximum value of SAR (measured) = 0.493 mW/g

# 1g/10g Averaged SAR

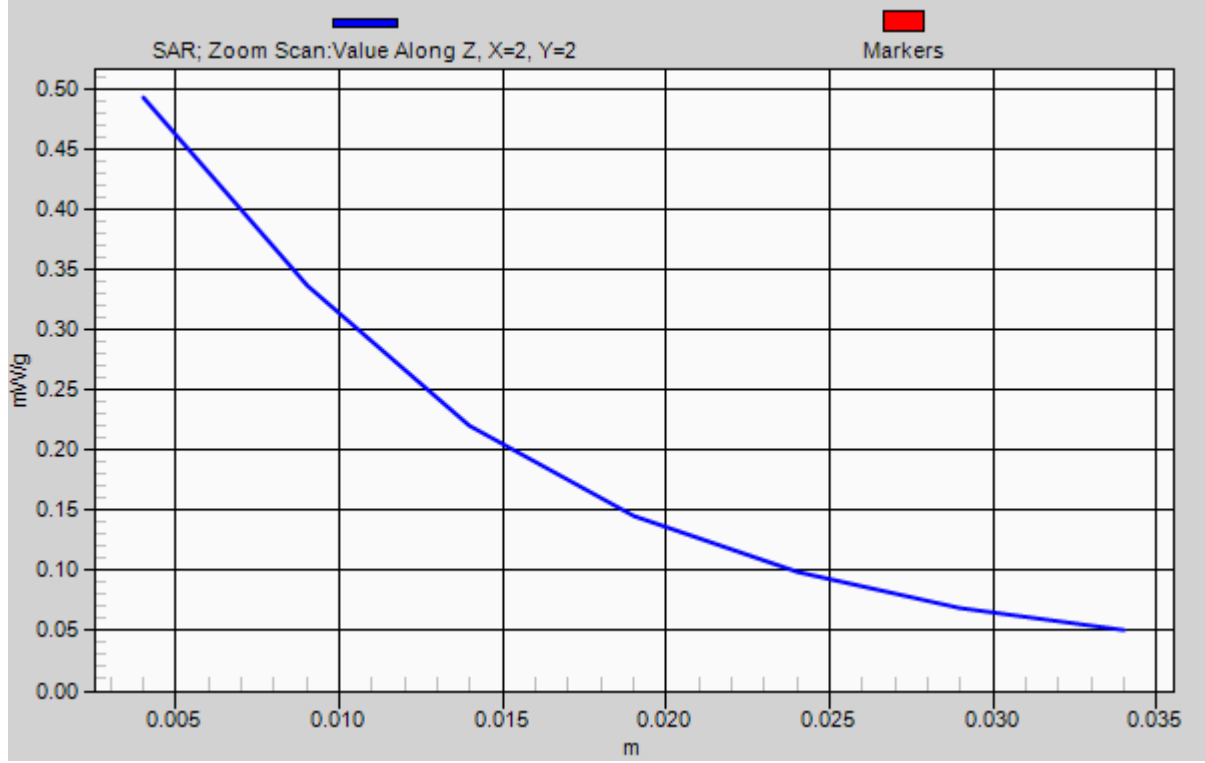

## #42 WCDMA II\_RMC12.2K\_Edge2\_0cm\_Ch9262\_Battery2

**DUT: 280604**

Communication System: WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: MSL\_1900\_120824 Medium parameters used :  $f = 1852.4$  MHz;  $\sigma = 1.5$  mho/m;  $\epsilon_r = 52.2$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.5 °C; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: ET3DV6R - SN1788; ConvF(4.06, 4.06, 4.06); Calibrated: 2012/1/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2012/6/6
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1029
- Software: DASY5 Version; SEMCAD X Version 13.4 Build 45

**Ch9262/Area Scan (41x121x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.322 mW/g



**Ch9262/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.3 V/m; Power Drift = -0.198 dB

Peak SAR (extrapolated) = 0.456 W/kg

**SAR(1 g) = 0.315 mW/g; SAR(10 g) = 0.203 mW/g**

Maximum value of SAR (measured) = 0.335 mW/g

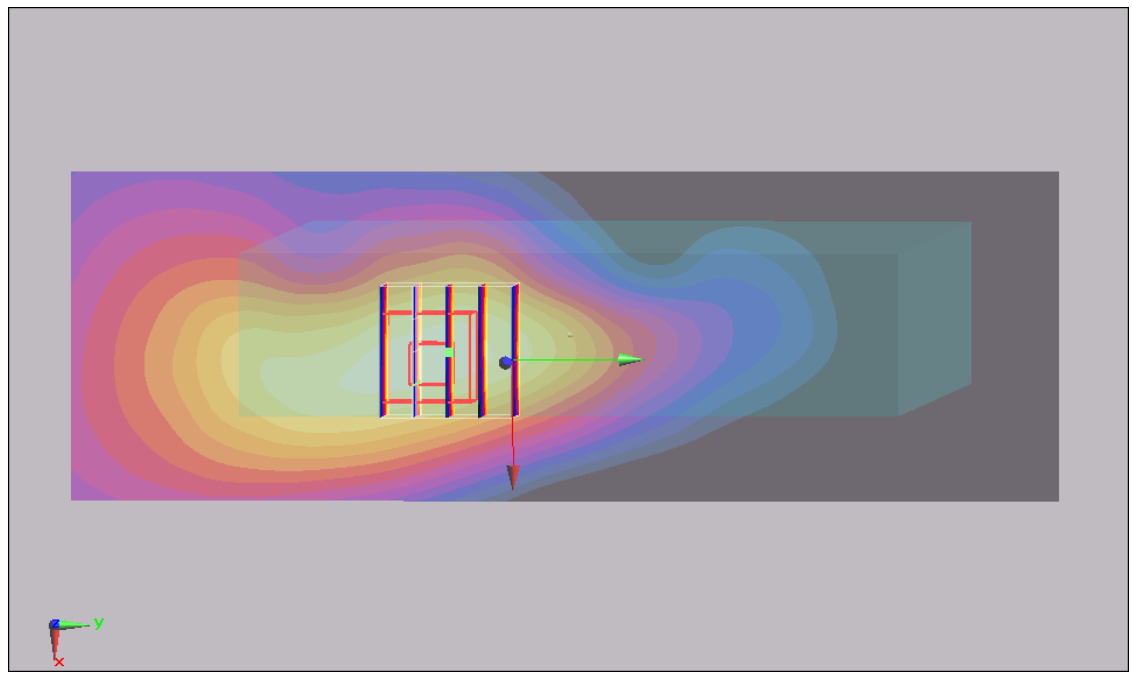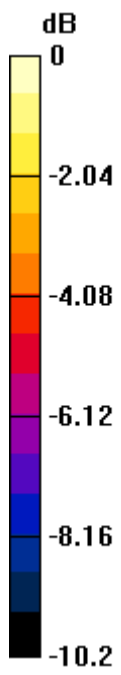

0 dB = 0.335mW/g

### #49 CDMA BC0\_RTAP153.6\_Bottom Face\_0cm\_Ch1013\_Battery1

**DUT: 280604**

Communication System: CDMA ; Frequency: 824.7 MHz; Duty Cycle: 1:1

Medium: MSL\_850\_121102 Medium parameters used:  $f = 825$  MHz;  $\sigma = 0.985$  mho/m;  $\epsilon_r = 54.788$ ;  $\rho =$

$1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(8.82, 8.82, 8.82); Calibrated: 2012/6/22;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1173
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Ch1013/Area Scan (101x141x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.372 mW/g



**Ch1013/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.723 V/m; Power Drift = 0.125 dB

Peak SAR (extrapolated) = 0.464 mW/g

**SAR(1 g) = 0.348 mW/g; SAR(10 g) = 0.250 mW/g**

Maximum value of SAR (measured) = 0.372 mW/g

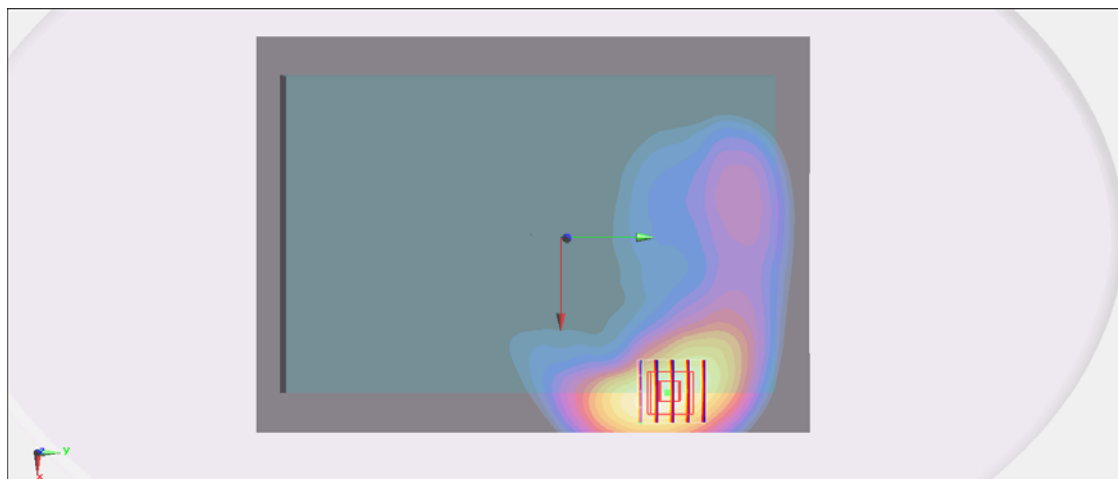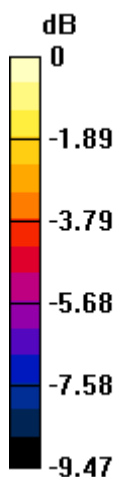

0 dB = 0.372 mW/g = -8.59 dB mW/g



### #49 CDMA BC0\_RTAP153.6\_Bottom Face\_0cm\_Ch1013\_Battery1\_2D

**DUT: 280604**

Communication System: CDMA ; Frequency: 824.7 MHz; Duty Cycle: 1:1

Medium: MSL\_850\_121102 Medium parameters used:  $f = 825$  MHz;  $\sigma = 0.985$  mho/m;  $\epsilon_r = 54.788$ ;  $\rho =$

$1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(8.82, 8.82, 8.82); Calibrated: 2012/6/22;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1173
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Ch1013/Area Scan (101x141x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.372 mW/g


**Ch1013/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.723 V/m; Power Drift = 0.125 dB

Peak SAR (extrapolated) = 0.464 mW/g

**SAR(1 g) = 0.348 mW/g; SAR(10 g) = 0.250 mW/g**

Maximum value of SAR (measured) = 0.372 mW/g

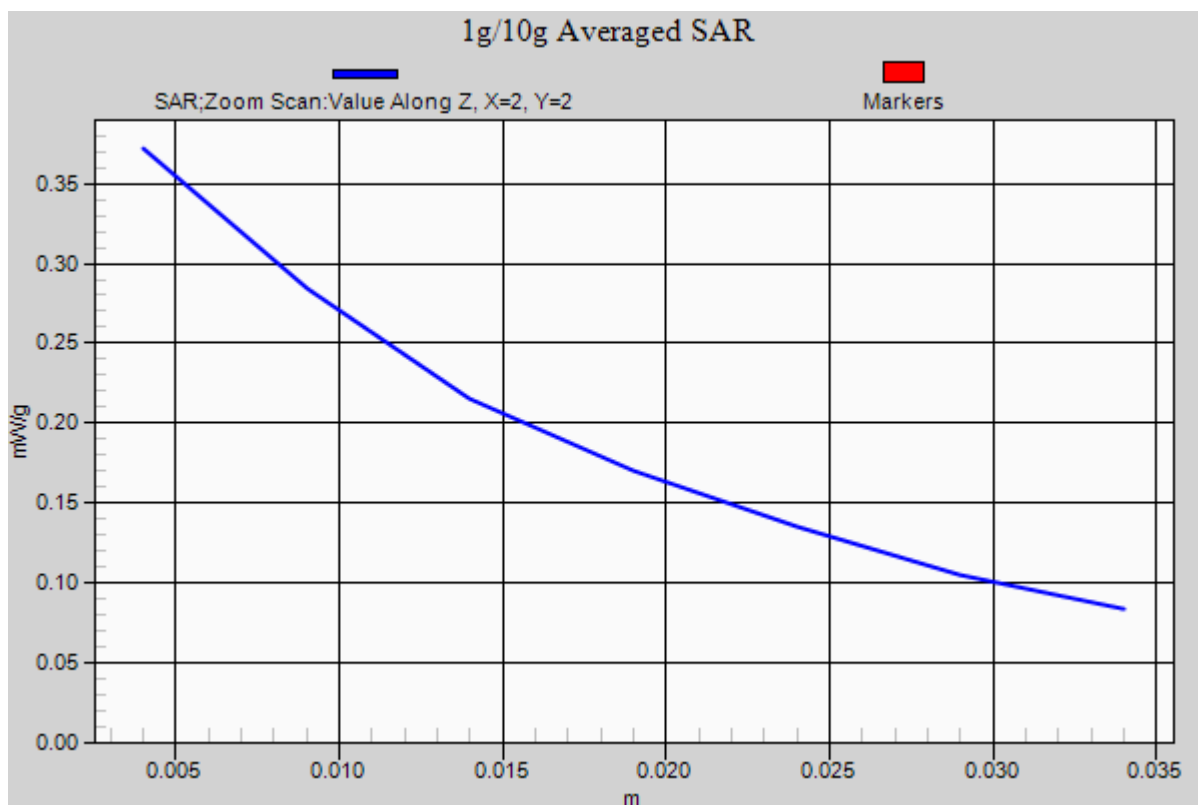

## #50 CDMA BC0\_RTAP153.6\_Edge 2\_0cm\_Ch1013\_Battery1

**DUT: 280604**

Communication System: CDMA ; Frequency: 824.7 MHz; Duty Cycle: 1:1

Medium: MSL\_850\_121102 Medium parameters used:  $f = 825$  MHz;  $\sigma = 0.985$  mho/m;  $\epsilon_r = 54.788$ ;  $\rho =$

$1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(8.82, 8.82, 8.82); Calibrated: 2012/6/22;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1173
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Ch1013/Area Scan (51x101x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.209 mW/g



**Ch1013/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.018 V/m; Power Drift = 0.121 dB

Peak SAR (extrapolated) = 0.260 mW/g

**SAR(1 g) = 0.193 mW/g; SAR(10 g) = 0.137 mW/g**

Maximum value of SAR (measured) = 0.206 mW/g

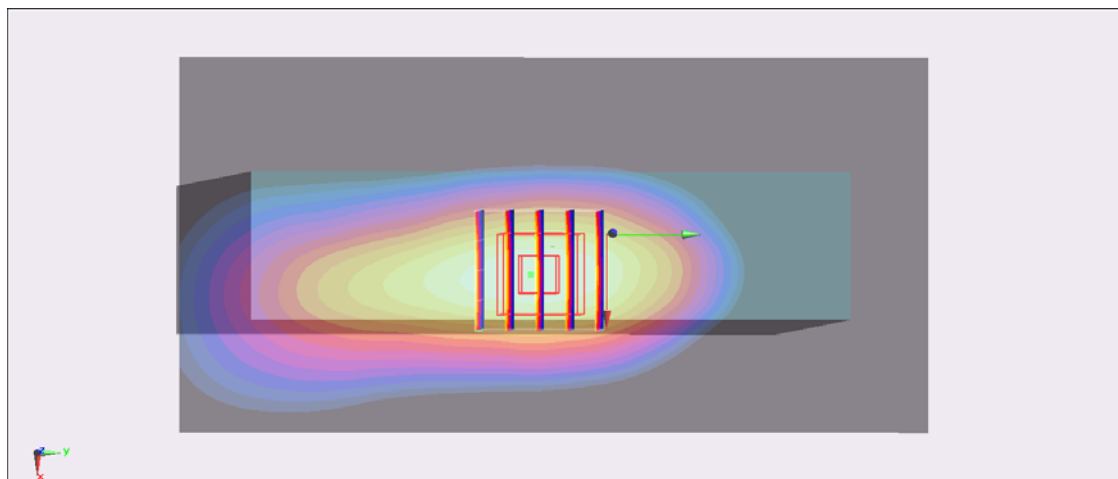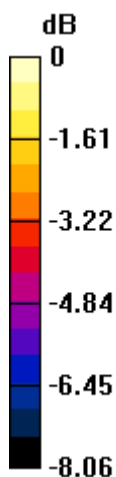

0 dB = 0.206 mW/g = -13.72 dB mW/g

## #51 CDMA BC0\_RTAP153.6\_Bottom Face\_0cm\_Ch1013\_Battery2

**DUT: 280604**

Communication System: CDMA ; Frequency: 824.7 MHz; Duty Cycle: 1:1

Medium: MSL\_850\_121102 Medium parameters used:  $f = 825$  MHz;  $\sigma = 0.985$  mho/m;  $\epsilon_r = 54.788$ ;  $\rho =$

$1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(8.82, 8.82, 8.82); Calibrated: 2012/6/22;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1173
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Ch1013/Area Scan (101x141x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.142 mW/g



**Ch1013/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.022 V/m; Power Drift = 0.196 dB

Peak SAR (extrapolated) = 0.167 mW/g

**SAR(1 g) = 0.131 mW/g; SAR(10 g) = 0.100 mW/g**

Maximum value of SAR (measured) = 0.138 mW/g

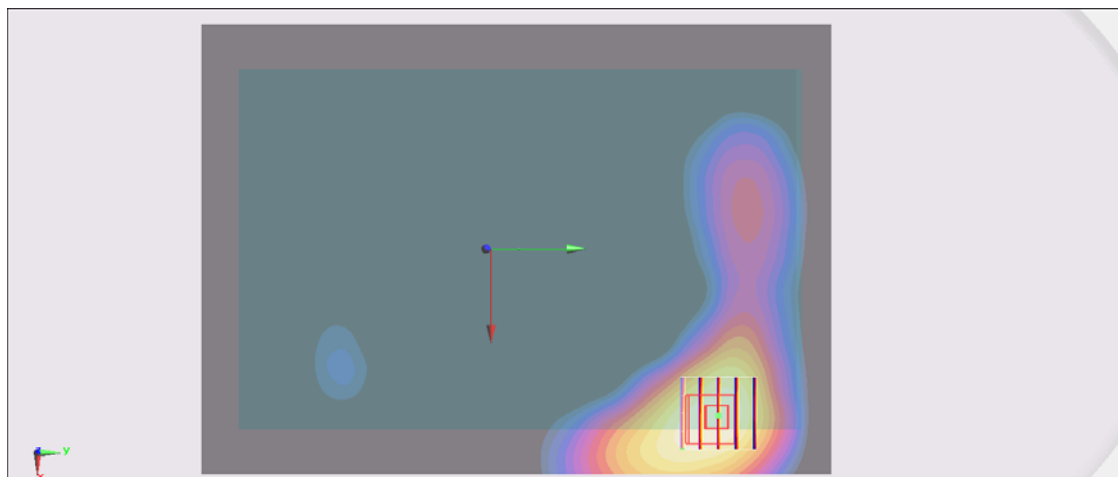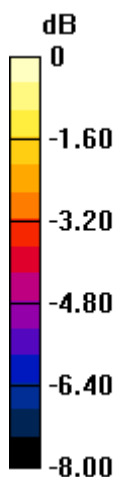

0 dB = 0.138 mW/g = -17.20 dB mW/g

## #52 CDMA BC1\_RTAP153.6\_Bottom Face\_0cm\_Ch25\_Battery1

**DUT: 280604**

Communication System: CDMA ; Frequency: 1851.25 MHz; Duty Cycle: 1:1  
 Medium: MSL\_1900\_121102 Medium parameters used:  $f = 1851.25 \text{ MHz}$ ;  $\sigma = 1.501 \text{ mho/m}$ ;  $\epsilon_r = 51.813$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.4 °C


DASY5 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(7.13, 7.13, 7.13); Calibrated: 2012/6/22;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1173
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Ch25/Area Scan (101x141x1):** Measurement grid:  $dx=20\text{mm}$ ,  $dy=20\text{mm}$   
 Maximum value of SAR (interpolated) = 0.449 mW/g

**Ch25/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 5.534 V/m; Power Drift = -0.10 dB  
 Peak SAR (extrapolated) = 0.678 mW/g  
**SAR(1 g) = 0.435 mW/g; SAR(10 g) = 0.246 mW/g**  
 Maximum value of SAR (measured) = 0.463 mW/g

**Ch25/Zoom Scan (5x5x7)/Cube 1:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 5.534 V/m; Power Drift = -0.10 dB  
 Peak SAR (extrapolated) = 0.562 mW/g  
**SAR(1 g) = 0.375 mW/g; SAR(10 g) = 0.239 mW/g**  
 Maximum value of SAR (measured) = 0.405 mW/g

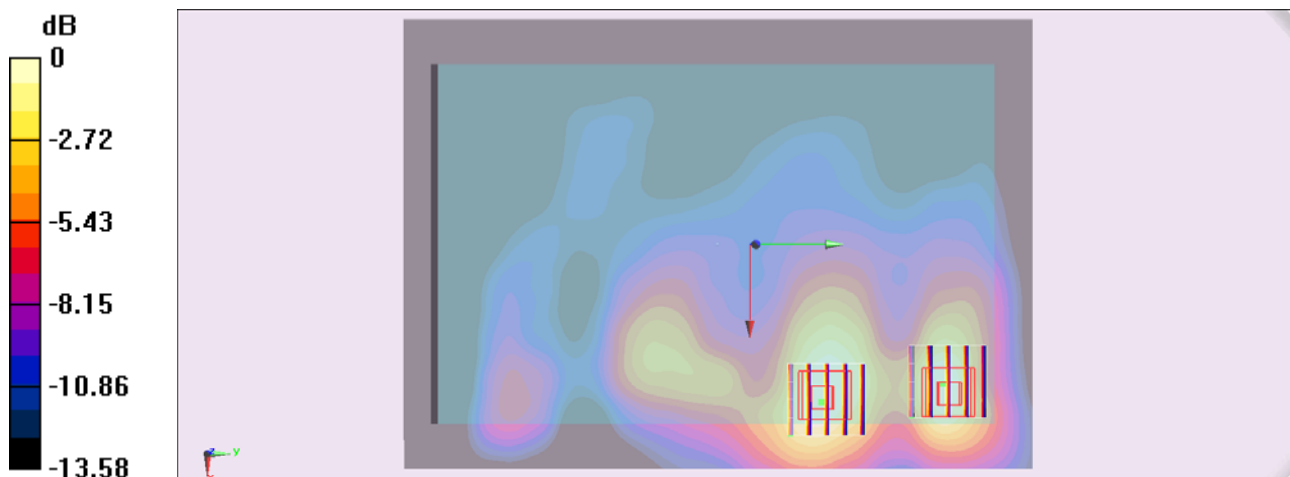

0 dB = 0.405 mW/g = -7.85 dB mW/g

### #53 CDMA BC1\_RTAP153.6\_Edge 2\_0cm\_Ch25\_Battery1

**DUT: 280604**

Communication System: CDMA ; Frequency: 1851.25 MHz;Duty Cycle: 1:1

Medium: MSL\_1900\_121102 Medium parameters used:  $f = 1851.25$  MHz;  $\sigma = 1.501$  mho/m;  $\epsilon_r =$

$51.813$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(7.13, 7.13, 7.13); Calibrated: 2012/6/22;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1173
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Ch25/Area Scan (51x101x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.483 mW/g



**Ch25/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.570 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.683 mW/g

**SAR(1 g) = 0.436 mW/g; SAR(10 g) = 0.260 mW/g**

Maximum value of SAR (measured) = 0.479 mW/g

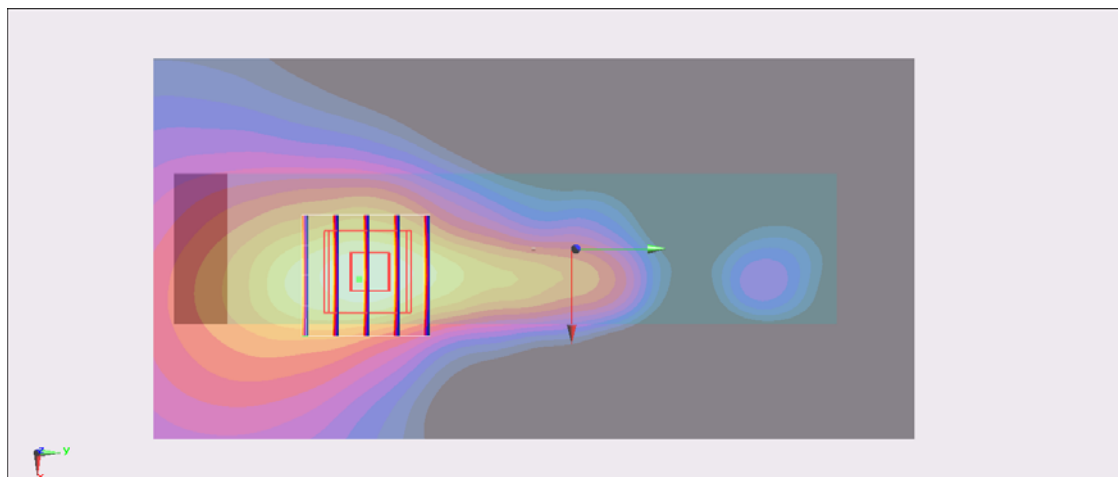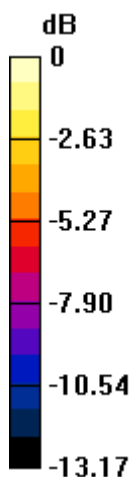

0 dB = 0.479 mW/g = -6.39 dB mW/g

### #53 CDMA BC1\_RTAP153.6\_Edge 2\_0cm\_Ch25\_Battery1\_2D

**DUT: 280604**


Communication System: CDMA ; Frequency: 1851.25 MHz;Duty Cycle: 1:1  
Medium: MSL\_1900\_121102 Medium parameters used:  $f = 1851.25 \text{ MHz}$ ;  $\sigma = 1.501 \text{ mho/m}$ ;  $\epsilon_r = 51.813$ ;  $\rho = 1000 \text{ kg/m}^3$   
Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(7.13, 7.13, 7.13); Calibrated: 2012/6/22;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1173
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Ch25/Area Scan (51x101x1):** Measurement grid:  $dx=20\text{mm}$ ,  $dy=20\text{mm}$   
Maximum value of SAR (interpolated) = 0.483 mW/g

**Ch25/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value = 10.570 V/m; Power Drift = -0.05 dB  
Peak SAR (extrapolated) = 0.683 mW/g  
**SAR(1 g) = 0.436 mW/g; SAR(10 g) = 0.260 mW/g**  
Maximum value of SAR (measured) = 0.479 mW/g

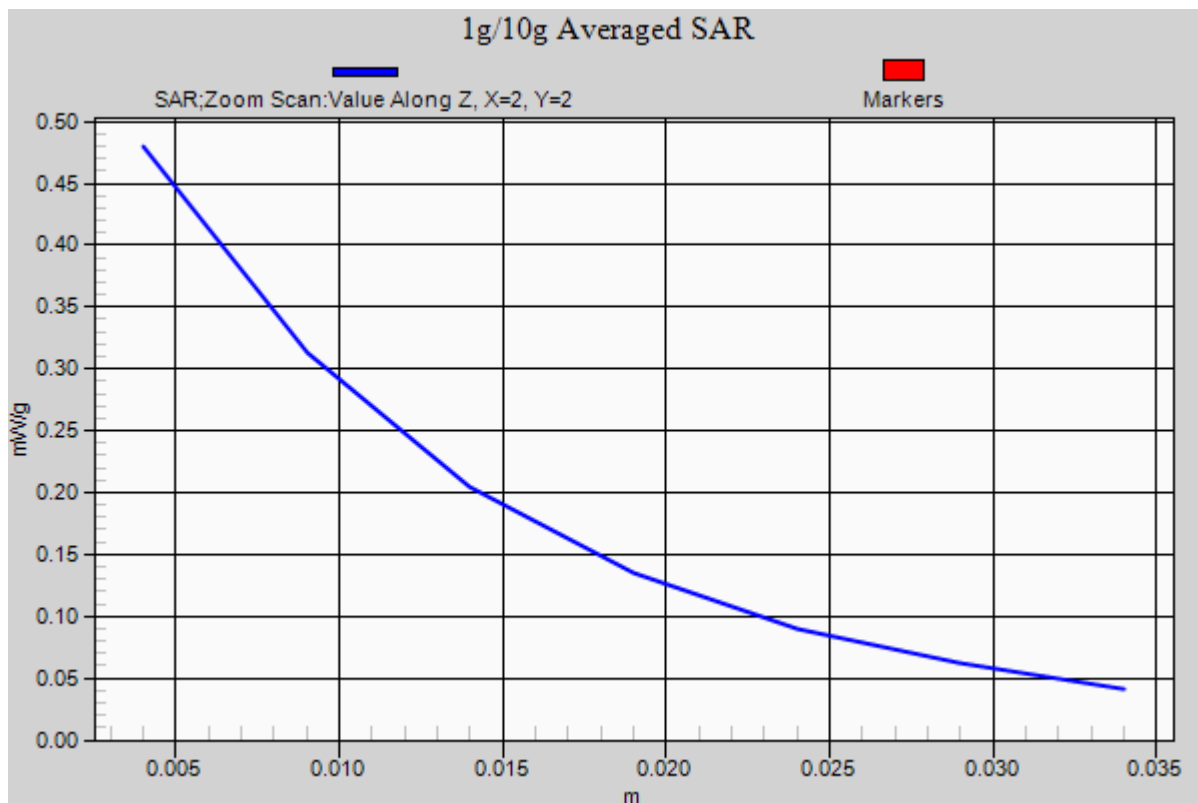

## #54 CDMA BC1\_RTAP153.6\_Edge 2\_0cm\_Ch25\_Battery2

**DUT: 280604**

Communication System: CDMA ; Frequency: 1851.25 MHz;Duty Cycle: 1:1

Medium: MSL\_1900\_121102 Medium parameters used:  $f = 1851.25$  MHz;  $\sigma = 1.501$  mho/m;  $\epsilon_r =$

$51.813$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(7.13, 7.13, 7.13); Calibrated: 2012/6/22;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1173
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Ch25/Area Scan (51x101x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.308 mW/g

**Ch25/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.785 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.426 mW/g

**SAR(1 g) = 0.269 mW/g; SAR(10 g) = 0.167 mW/g**

Maximum value of SAR (measured) = 0.282 mW/g

