



FCC PART 15.247
IC RSS-210, ISSUE 8, DEC 2010
TEST AND MEASUREMENT REPORT

For

Ruckus Wireless, Inc.

880 West Maude Avenue, Suite 101,
Sunnyvale, CA 94085, USA

FCC ID: S9G-MPE2N33A
IC: 5912A-MPE2N33A

Report Type: Original Report	Product Type: 802.11 b/g/n Wireless Module
Test Engineers: <u>Quinn Jiang</u> 	
Report Number: <u>R1110211-247</u>	
Report Date: <u>2012-02-01</u>	
Reviewed By: <u>EMC/RF Lead</u>  Victor Zhang	
Prepared By: Bay Area Compliance Laboratories Corp. (LH) 1274 Anvilwood Avenue, Sunnyvale, CA 94089, USA Tel: (408) 732-9162 Fax: (408) 732-9164	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by NVLAP*, NIST, or any agency of the Federal Government.

* This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "*" (Rev 2)

TABLE OF CONTENTS

1	GENERAL DESCRIPTION.....	6
1.1	PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	6
1.2	MECHANICAL DESCRIPTION OF EUT	6
1.3	OBJECTIVE.....	6
1.4	RELATED SUBMITTAL(S)/GRANT(S)	6
1.5	TEST METHODOLOGY	6
1.6	MEASUREMENT UNCERTAINTY	6
1.7	TEST FACILITY	7
2	SYSTEM TEST CONFIGURATION.....	8
2.1	JUSTIFICATION	8
2.2	EUT EXERCISE SOFTWARE.....	8
2.3	EQUIPMENT MODIFICATIONS	8
2.4	SPECIAL ACCESSORIES	8
2.5	LOCAL SUPPORT EQUIPMENT	8
2.6	EUT INTERNAL CONFIGURATION	8
3	SUMMARY OF TEST RESULTS	9
4	FCC §15.247(I), §2.1091 & IC RSS-102 - RF EXPOSURE	10
4.1	APPLICABLE STANDARD	10
4.2	MPE PREDICTION	11
4.3	MPE RESULTS	11
5	FCC §15.203 & IC RSS-GEN §7.1.2 – ANTENNA REQUIREMENTS.....	12
5.1	APPLICABLE STANDARD	12
5.2	ANTENNA LIST	12
6	FCC §15.207 & IC RSS-GEN §7.2.2 – AC LINE CONDUCTED EMISSIONS	13
6.1	APPLICABLE STANDARD	13
6.2	TEST SETUP	13
6.3	TEST PROCEDURE	13
6.4	TEST SETUP BLOCK DIAGRAM.....	14
6.5	CORRECTED AMPLITUDE & MARGIN CALCULATION	14
6.6	TEST EQUIPMENT LIST AND DETAILS	15
6.7	TEST ENVIRONMENTAL CONDITIONS.....	15
6.8	SUMMARY OF TEST RESULTS.....	15
6.9	CONDUCTED EMISSIONS TEST PLOTS AND DATA	16
7	FCC §15.247(D) & IC RSS-210 §A8.5 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS.....	18
7.1	APPLICABLE STANDARD	18
7.2	MEASUREMENT PROCEDURE	18
7.3	TEST EQUIPMENT LIST AND DETAILS	18
7.4	TEST ENVIRONMENTAL CONDITIONS.....	18
7.5	TEST RESULTS	18
8	FCC §15.205, §15.209, §15.247(D) & IC RSS-210 §A8.5 – SPURIOUS RADIATED EMISSIONS	47
8.1	APPLICABLE STANDARD	47
8.2	TEST SETUP	48
8.3	EUT SETUP.....	48

8.4	TEST PROCEDURE	48
8.5	CORRECTED AMPLITUDE & MARGIN CALCULATION	49
8.6	TEST EQUIPMENT LIST AND DETAILS	49
8.7	TEST ENVIRONMENTAL CONDITIONS.....	49
8.8	SUMMARY OF TEST RESULTS.....	50
8.9	RADIATED EMISSIONS TEST RESULT DATA	51
9	FCC §15.247(A)(2) & IC RSS-210 §A8.2– 6 DB & 99% BANDWIDTH.....	58
9.1	APPLICABLE STANDARD	58
9.2	MEASUREMENT PROCEDURE	58
9.3	TEST EQUIPMENT LIST AND DETAILS	58
9.4	TEST ENVIRONMENTAL CONDITIONS.....	58
10	FCC §15.247(B) & IC RSS-210 §A8.4- PEAK OUTPUT POWER MEASUREMENT	75
10.1	APPLICABLE STANDARD	75
10.2	MEASUREMENT PROCEDURE	75
10.3	TEST EQUIPMENT LIST AND DETAILS	75
10.4	TEST ENVIRONMENTAL CONDITIONS.....	75
10.5	TEST RESULTS	76
11	FCC §15.247(D) & IC RSS-210 §A8.5 - 100 KHZ BANDWIDTH OF BAND EDGES.....	77
11.1	APPLICABLE STANDARD	77
11.2	MEASUREMENT PROCEDURE	77
11.3	TEST EQUIPMENT LIST AND DETAILS	77
11.4	TEST ENVIRONMENTAL CONDITIONS.....	77
11.5	TEST RESULTS	78
12	FCC §15.247(E) & IC RSS-210 §A8.2 (B) - POWER SPECTRAL DENSITY	86
12.1	APPLICABLE STANDARD	86
12.2	MEASUREMENT PROCEDURE	86
12.3	TEST EQUIPMENT LIST AND DETAILS	86
12.4	TEST ENVIRONMENTAL CONDITIONS.....	86
12.5	TEST RESULTS	87
13	IC RSS-210 §2.3 & RSS-GEN §6 - RECEIVER SPURIOUS RADIATED EMISSIONS.....	100
13.1	APPLICABLE STANDARD	100
13.2	EUT SETUP.....	100
13.3	TEST PROCEDURE	100
13.4	CORRECTED AMPLITUDE & MARGIN CALCULATION	101
13.5	TEST EQUIPMENT LISTS AND DETAILS	101
13.6	TEST ENVIRONMENTAL CONDITIONS.....	101
13.7	SUMMARY OF TEST RESULTS.....	102
13.8	TEST RESULTS	103
14	EXHIBIT A - FCC & IC EQUIPMENT LABELING REQUIREMENTS.....	105
14.1	FCC ID LABEL REQUIREMENTS	105
14.2	IC LABEL REQUIREMENTS	105
14.3	FCC ID & IC LABEL CONTENTS.....	106
14.4	FCC ID & IC LABEL LOCATION	106
15	EXHIBIT B - TEST SETUP PHOTOGRAPHS	107
15.1	CONDUCTED EMISSION FRONT VIEW.....	107
15.2	CONDUCTED EMISSION SIDE VIEW	107
15.3	RADIATED EMISSION FRONT VIEW	108
15.4	RADIATED EMISSION BELOW 1 GHZ REAR VIEW	108
15.5	RADIATED EMISSION ABOVE 1 GHZ REAR VIEW.....	109

16 EXHIBIT C - EUT PHOTOGRAPHS..... 110

16.1 EUT–TOP VIEW 110

16.2 EUT–BOTTOM VIEW 110

16.3 ANTENNA TOP VIEW 111

16.4 ANTENNA BOTTOM VIEW 111

16.5 SUPPORTING BOARD TOP VIEW 112

16.6 SUPPORTING BOARD BOTTOM VIEW 112

16.7 EUT – TOP VIEW WITHOUT SHIELDING 113

16.8 AC/DC POWER SUPPLY VIEW 113

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	R1110211-247	Original Report	2012-02-01

1 General Description

1.1 Product Description for Equipment under Test (EUT)

This test and measurement report was prepared on behalf of *Ruckus Wireless, Inc.*, and their product model: *MPE2N33A*, *FCC ID: S9G-MPE2N33A*, *IC: 5912A-MPE2N33A* or the “EUT” as referred to in this report. The EUT is a dual band Wireless 802.11b/g/n wireless module.

1.2 Mechanical Description of EUT

The “EUT” measures approximately 6.9cm (L) x 3.9cm (W) x 1.0cm (H), and weighs approximately 16.0g.

The test data gathered are from typical production sample, serial number: 114721040001, provided by the manufacturer.

1.3 Objective

This report is prepared on behalf of *Ruckus Wireless, Inc.*, in accordance with Part 2, Subpart J, and Part 15, Subparts B and C of the Federal Communication Commissions rules and IC RSS-210 Issue 8, Dec 2010.

The objective is to determine compliance with FCC/IC rules for Antenna Requirements, Conducted Emissions, Occupied Bandwidth, Output Power, Power Spectral Density, Radiated and Conducted Spurious Emissions, and Band Edge.

1.4 Related Submittal(s)/Grant(s)

N/A

1.5 Test Methodology

All measurements contained in this report were conducted in accordance with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

1.6 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on CISPR16-4-2:2003, The Treatment of Uncertainty in EMC Measurements, the values ranging from ± 2.0 dB for Conducted Emissions tests and ± 4.0 dB for Radiated Emissions tests are the most accurate estimates pertaining to uncertainty of EMC measurements at BACL Corp.

All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratory, Corp. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

1.7 Test Facility

The test site used by BACL Corp. to collect radiated and conducted emissions measurement data is located at its facility in Sunnyvale, California, USA.

The test site at BACL Corp. has been fully described in reports submitted to the Federal Communication Commission (FCC) and Voluntary Control Council for Interference (VCCI). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 11 and December 10, 1997, and Article 8 of the VCCI regulations on December 25, 1997. The test site also complies with the test methods and procedures set forth in CISPR 22:2008 §10.4 for measurements below 1 GHz and §10.6 for measurements above 1 GHz as well as ANSI C63.4-2003, ANSI C63.4-2009, TIA/EIA-603 & CISPR 24:2010.

The Federal Communications Commission and Voluntary Control Council for Interference have the reports on file and they are listed under FCC registration number: 90464 and VCCI Registration No.: R-3729, C-4176, G-469, and T-1206. The test site has been approved by the FCC and VCCI for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, BACL Corp. is a National Institute of Standards and Technology (NIST) accredited laboratory under the National Voluntary Laboratory Accredited Program (Lab Code 200167-0). The current scope of accreditations can be found at <http://ts.nist.gov/Standards/scopes/2001670.htm>

2 System Test Configuration

2.1 Justification

The EUT was configured for testing according to ANSI C63.4-2003.

The EUT was tested in a testing mode to represent worst-case results during the final qualification test.

The worst-case data rates are determined to be as follows for each mode based upon investigation by measuring the average power, peak power and PPSD across all data rates bandwidths, and modulations.

2.2 EUT Exercise Software

The software used, 3CDaemon Version 2.0, Putty Version 0.60.0.0, and Snoop Art version 2.18.2 were provided by client and verified by Quinn Jiang to comply with the standard requirements being tested against.

2.3 Equipment Modifications

No modifications were made to the EUT.

2.4 Special Accessories

Manufacturer	Description	Model No.	Serial No.
Atheros Communications	Module Supporting Board	HPCB D1 94V-0	PB92-021-D0897

2.5 Local Support Equipment

Manufacturer	Description	Model No.	Serial No.
Dell	Laptop	Latitude E5420	CHZMLQ1

2.6 EUT Internal Configuration

NA: Only the module card was tested the s/n was in the section 1.2.

3 Summary of Test Results

Results reported relate only to the product tested.

FCC & IC Rules	Description of Test	Results
FCC §15.247(i), §2.1091 IC RSS-102	RF Exposure	Compliant
FCC §15.203 IC RSS-Gen §7.1.2	Antenna Requirement	Compliant
FCC §15.207(a) IC RSS-Gen §7.2.4	AC Line Conducted Emissions	Compliant
FCC §15.247(d) IC RSS-210 §A8.5	Spurious Emissions at Antenna Port	Compliant
FCC §15.205 IC RSS-210 §2.2	Restricted Bands	Compliant
FCC §15.209, §15.247 IC RSS-210 §A8.5	Radiated Spurious Emissions	Compliant
FCC §15.247(a)(2) IC RSS-210 §A8.2	6 dB Emission Bandwidth	Compliant
FCC §15.247(b)(3) IC RSS-210 §A8.4	Maximum Peak Output Power	Compliant
FCC §15.247(d) IC RSS-210 §A8.5	100 kHz Bandwidth of Frequency Band Edge	Compliant
FCC §15.247(e) IC RSS-210 §A8.2 (b)	Power Spectral Density	Compliant
IC §RSS-210 §2.3 RSS-Gen §6	Receiver Spurious Emission	Compliant

4 FCC §15.247(i), §2.1091 & IC RSS-102 - RF Exposure

4.1 Applicable Standard

According to FCC §15.247(i) and §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for General Population/Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

Before equipment certification is granted, the procedure of IC RSS-102 must be followed concerning the exposure of humans to RF fields.

According to RSS-102 Issue 2 section 4.1, RF limits used for general public will be applied to the EUT.

Frequency Range (MHz)	Electric Field (V/m rms)	Magnetic Field (A/m rms)	Power Density (W/m ²)	Time Averaging (min)
0.003 - 1	280	2.19	-	6
1 - 10	280 / f	2.19 / f	-	6
10 - 30	28	2.19 / f	-	6
30 - 300	28	0.073	2*	6
300 - 1 500	1.585 f ^{0.5}	0.0042 f ^{0.5}	f / 150	6
1 500 - 15 000	61.4	0.163	10	6
15 000 - 150 000	61.4	0.163	10	616000 / f ^{1.2}
150 000- 300 000	0.158 f ^{0.5}	4.21 x 10 ⁻⁴ f ^{0.5}	6.67 x 10 ⁻⁵ f	616000 / f ^{1.2}

Note: f is frequency in MHz

* Power density limit is applicable at frequencies greater than 100 MHz

4.2 MPE Prediction

Predication of MPE limit at a given distance, Equation from OET Bulletin 65, Edition 97-01

$$S = PG/4\pi R^2$$

Where: S = power density

P = power input to antenna

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna

4.3 MPE Results

<u>Maximum peak output power at antenna input terminal (dBm):</u>	<u>25.72</u>
<u>Maximum peak output power at antenna input terminal (mW):</u>	<u>373.25</u>
<u>Prediction distance (cm):</u>	<u>20</u>
<u>Prediction frequency (MHz):</u>	<u>2462</u>
<u>Maximum Antenna Gain, typical (dBi):</u>	<u>3.0</u>
<u>Maximum Antenna Gain (numeric):</u>	<u>1.995</u>
<u>Power density of prediction frequency at 20.0 cm (mW/cm²):</u>	<u>0.14816</u>
<u>Power density of prediction frequency at 20.0 cm (W/m²):</u>	<u>1.4816</u>
<u>MPE limit for uncontrolled exposure at prediction frequency (mW/cm²):</u>	<u>1.0</u>
<u>MPE limit for uncontrolled exposure at prediction frequency (W/m²):</u>	<u>10</u>

Device is compliance with the requirement MPE limit at 20 cm distance for the uncontrolled exposure.

5 FCC §15.203 & IC RSS-Gen §7.1.2 – Antenna Requirements

5.1 Applicable Standard

According to FCC §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

And according to FCC §15.247 (b)(4), if transmitting antennas of directional gain greater than 6 dBi are used the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

As per IC RSS-Gen §7.1.2: Transmitter Antenna

A transmitter can only be sold or operated with antennas with which it was certified. A transmitter may be certified with multiple antenna types. An antenna type comprises antennas having similar in-band and out-of-band radiation patterns. Testing shall be performed using the highest-gain antenna of each combination of transmitter and antenna type for which certification is being sought, with the transmitter output power set at the maximum level. Any antenna of the same type and having equal or lesser gain as an antenna that had been successfully tested for certification with the transmitter, will also be considered certified with the transmitter, and may be used and marketed with the transmitter. The manufacturer shall include with the application for certification a list of acceptable antenna types to be used with the transmitter.

When a measurement at the antenna connector is used to determine RF output power, the effective gain of the device's antenna shall be stated, based on measurement or on data from the antenna manufacturer. Any antenna gain in excess of 6 dBi (6 dB above isotropic gain) shall be added to the measured RF output power before using the power limits specified in RSS-210 or RSS-310 for devices of RF output powers of 10 milliwatts or less. For devices of output powers greater than 10 milliwatts, except devices subject to RSS-210 Annex 8 (Frequency Hopping and Digital Modulation Systems Operating in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz Bands) or RSS-210 Annex 9 (Local Area Network Devices), the total antenna gain shall be added to the measured RF output power before using the specified power limits. For devices subject to RSS-210 Annex 8 or Annex 9, the antenna gain shall not be added.

5.2 Antenna List

Antenna Model	Antenna Gain (dBi) 2.4 GHz
FAB 100-11205-001 REV 4	3.0

6 FCC §15.207 & IC RSS-Gen §7.2.2 – AC Line Conducted Emissions

6.1 Applicable Standard

As per FCC §15.207 & RSS-Gen §7.2.2 Conducted limits:

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequencies ranges.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

Decreases with the logarithm of the frequency.

6.2 Test Setup

The measurement was performed at shield room, using the setup per ANSI C63.4-2003 measurement procedure. The specification used was FCC and IC limits.

External I/O cables were draped along the edge of the test table and bundle when necessary.

The AC/DC power adapter of the Support Board was connected with LISN-1 which provided 120 V/60 Hz AC power.


6.3 Test Procedure

During the conducted emissions test, the power cord of the EUT host system was connected to the mains outlet of the LISN-2

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the peak detection mode, quasi-peak and average. Quasi-Peak readings are distinguished with a “QP.” Average readings are distinguished with an “Ave”.

6.4 Test Setup Block Diagram

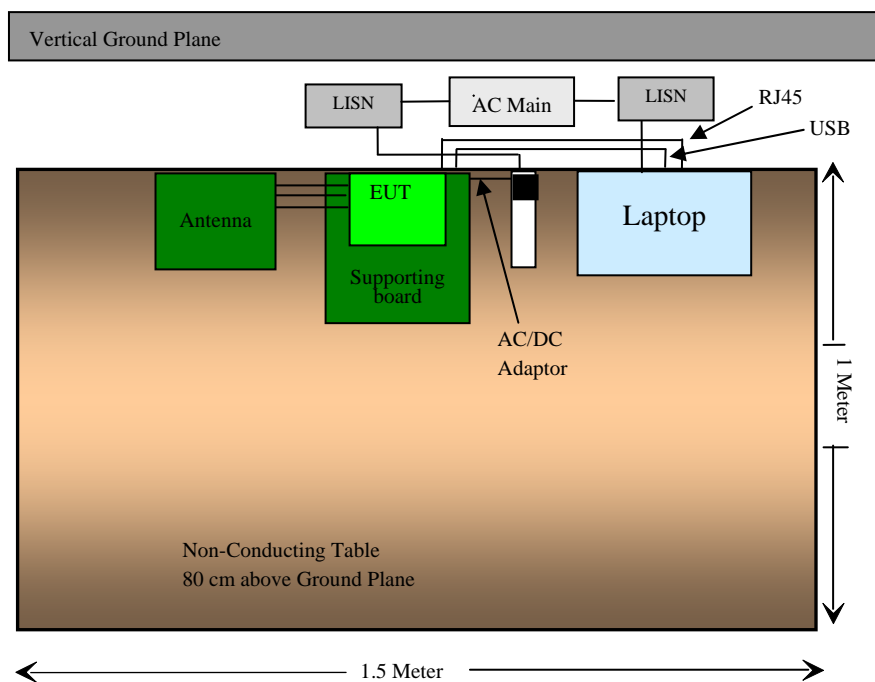

6.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude (CA) is calculated by adding the Cable Loss (CL), the Attenuator Factor (Atten) to indicated Amplitude (A_i) reading. The basic equation is as follows:

$$CA = A_i + CL + \text{Atten}$$

For example, a corrected amplitude of 46.2 dBuV = Indicated Reading (32.5 dBuV) + Cable Loss (3.7 dB) + Attenuator (10 dB)

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of -7 dB means the emission is 7 dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corrected Amplitude} - \text{Limit}$$

6.6 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date
Rohde & Schwarz	EMI Test Receiver	ESCI 1166.5950K03	100044	2011-04-14
Solar Electronics	LISN	9252-R-24-BNC	511205	2011-06-25
TTE	Filter, High Pass	H9962-150K-50-21378	K7133	2011-06-10

Statement of Traceability: BACL Corp. attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

6.7 Test Environmental Conditions

Temperature:	19~23 °C
Relative Humidity:	37~45 %
ATM Pressure:	101-102 kPa

The testing was performed by Quinn Jiang on 01-27-2012 in 5 meter chamber 3.


6.8 Summary of Test Results

According to the recorded data in following table, the EUT complied with the FCC/IC standard's conducted emissions limits, with the margin reading of:

Connection: 120 V/60 Hz, AC			
Margin (dB)	Frequency (MHz)	Conductor (Line/Neutral)	Range (MHz)
-3.63	2.535954	Line	0.15 to 30

6.9 Conducted Emissions Test Plots and Data

802.11b: 2462 MHz
120 V, 60 Hz – Line

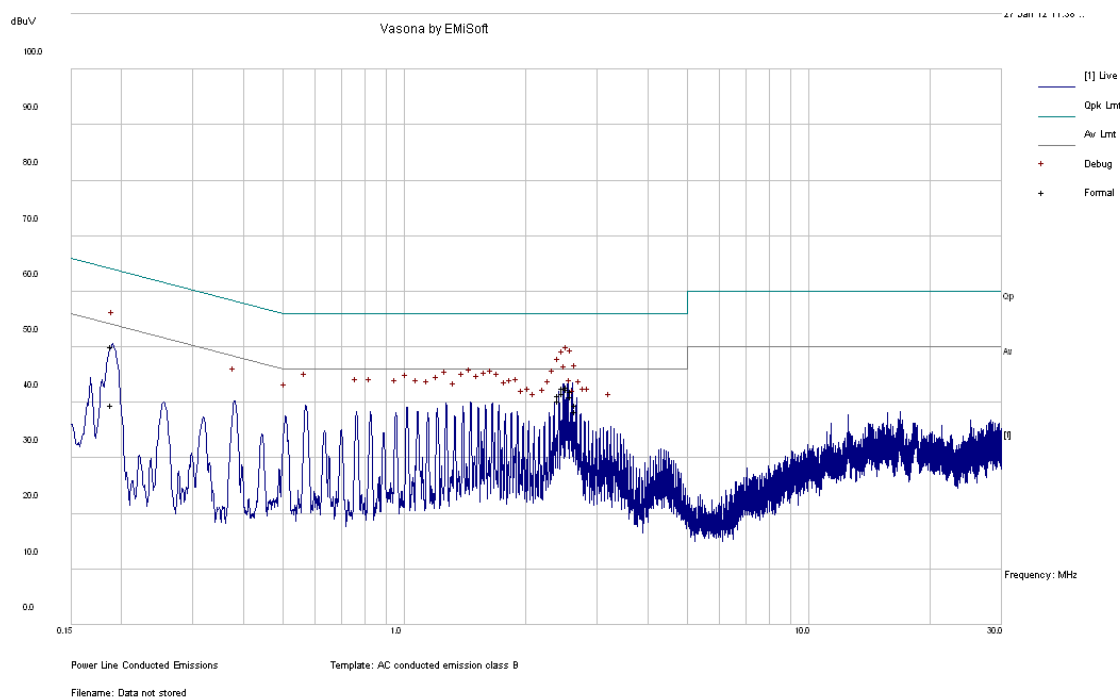


Quasi-Peak Measurements

Frequency (MHz)	Corrected Amplitude (dBμV)	Conductor (Line/Neutral)	Limit (dBμV)	Margin (dB)
2.535954	42.83	Line	56	-13.17
2.599608	42.13	Line	56	-13.87
2.471305	42.59	Line	56	-13.41
0.189579	50.17	Line	64.06	-13.89
2.408075	41.26	Line	56	-14.74
2.662115	39.62	Line	56	-16.38

Average Measurements

Frequency (MHz)	Corrected Amplitude (dBμV)	Conductor (Line/Neutral)	Limit (dBμV)	Margin (dB)
2.535954	42.37	Line	46	-3.63
2.599608	41.08	Line	46	-4.92
2.471305	41.73	Line	46	-4.27
0.189579	39.47	Line	54.06	-14.58
2.408075	40.27	Line	46	-5.73
2.662115	38.44	Line	46	-7.56

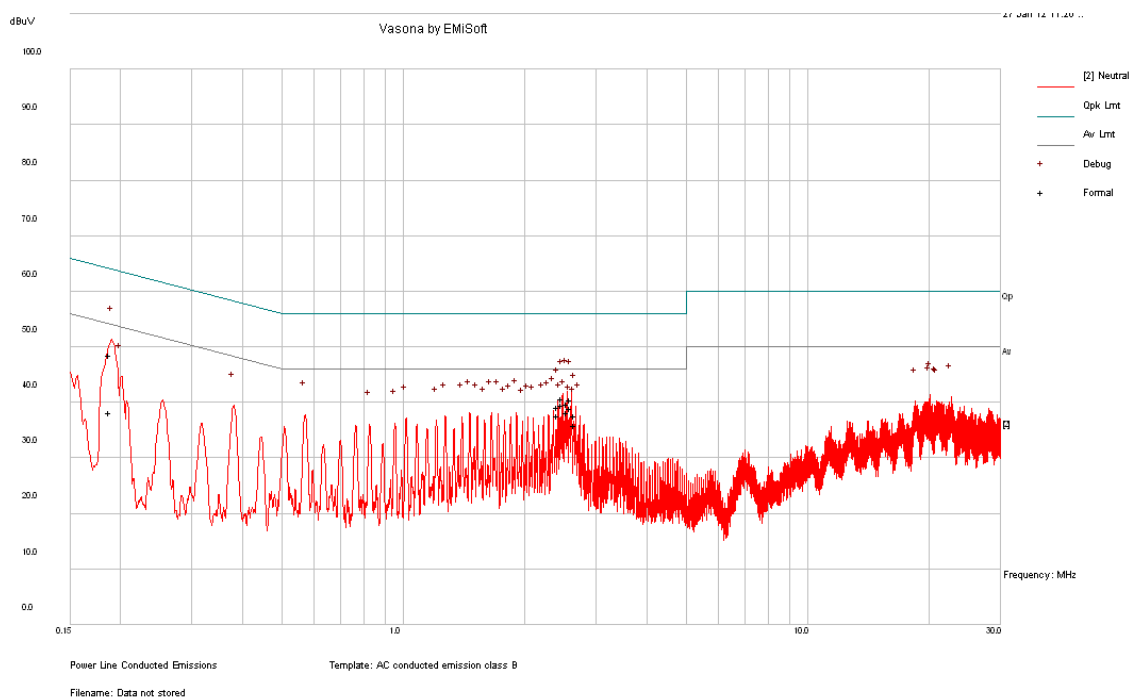120 V, 60 Hz – Neutral**Quasi-Peak Measurements**

Frequency (MHz)	Corrected Amplitude (dBμV)	Conductor (Line/Neutral)	Limit (dBμV)	Margin (dB)
0.187977	48.5	Neutral	64.13	-15.62
2.53955	39.82	Neutral	56	-16.18
2.600606	40.48	Neutral	56	-15.52
2.473426	40.78	Neutral	56	-15.22
2.410963	39.13	Neutral	56	-16.87
2.66461	37.6	Neutral	56	-18.4

Average Measurements

Frequency (MHz)	Corrected Amplitude (dBμV)	Conductor (Line/Neutral)	Limit (dBμV)	Margin (dB)
0.187977	38.2	Neutral	54.13	-15.92
2.53955	38.24	Neutral	46	-7.76
2.600606	38.99	Neutral	46	-7.01
2.473426	39.51	Neutral	46	-6.49
2.410963	37.65	Neutral	46	-8.35
2.66461	35.87	Neutral	46	-10.13

7 FCC §15.247(d) & IC RSS-210 §A8.5 - Spurious Emissions at Antenna Terminals

7.1 Applicable Standard

For FCC §15.247(d) and IC RSS-210 § A8.5 in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

7.2 Measurement Procedure

The RF output of the EUT was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100 kHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

7.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date
Agilent	Spectrum Analyzer	E4446A	US44300386	2011-08-11

Statement of Traceability: BACL Corp. attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

7.4 Test Environmental Conditions

Temperature:	19~24 °C
Relative Humidity:	38~48 %
ATM Pressure:	101.2-102 kPa


The testing was performed by Quinn Jiang on 01-19-2012 to 01-20-2012 in RF site.

7.5 Test Results


Please refer to following plots.

2400 MHz – 2483.5 MHz


802.11b mode, Low Channel, Chain J1
30MHz – 3GHz

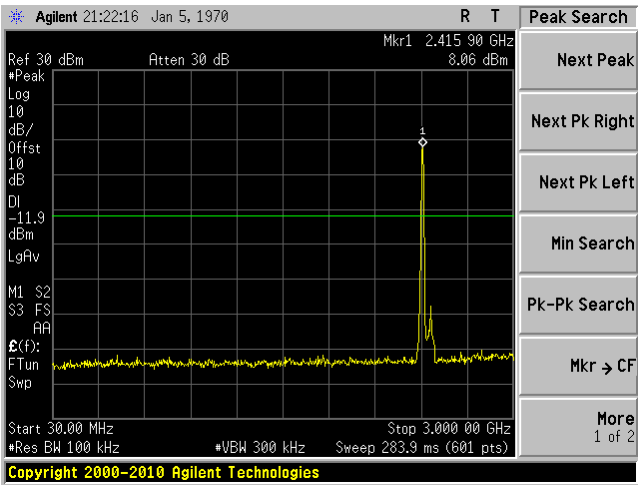


802.11b mode, Low Channel, Chain J1
3G – 25 GHz

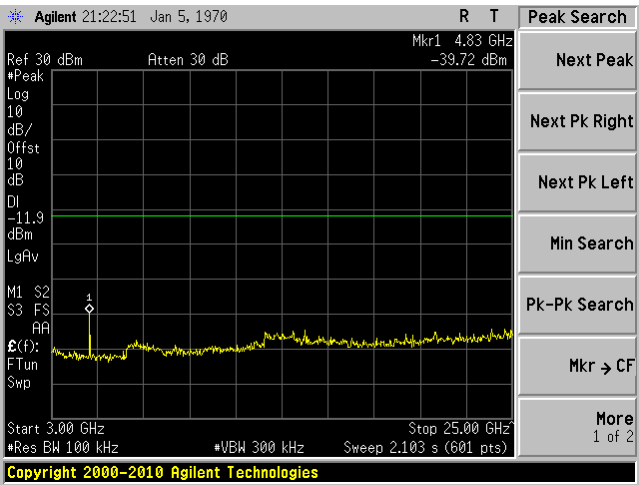


802.11b mode, Low Channel, Chain J2
30MHz – 3GHz

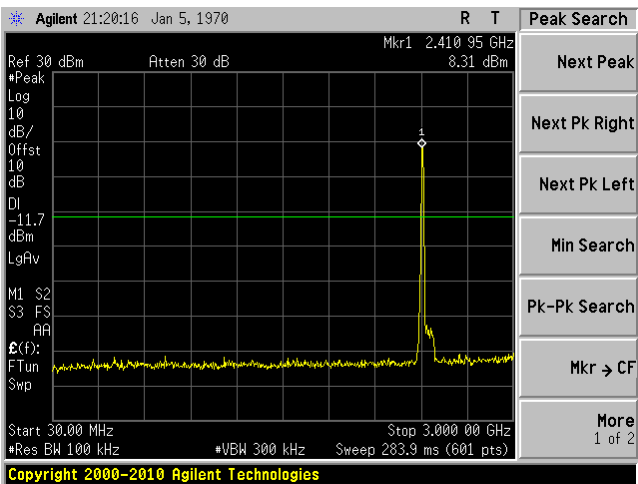


802.11b mode, Low channel, Chain J2
3G – 25 GHz

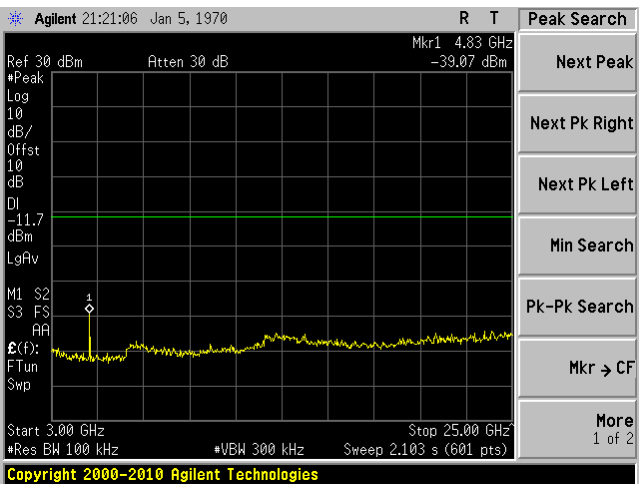


802.11b mode, Low Channel, Chain J3
30MHz – 3GHz

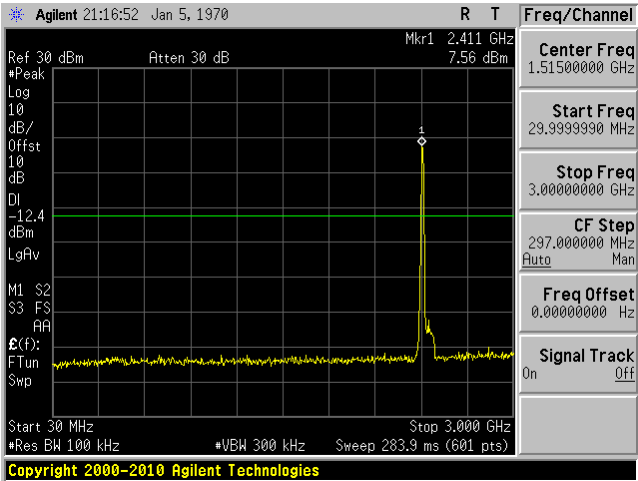


802.11b mode, Low Channel, Chain J3
3G – 25 GHz

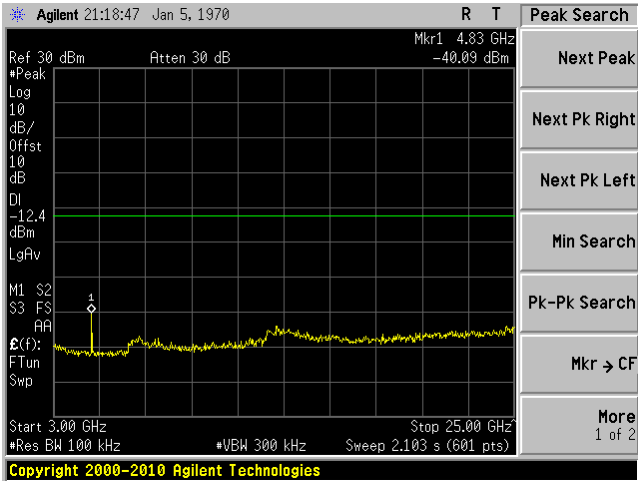


802.11b mode, Middle Channel, Chain J1
30MHz – 3GHz

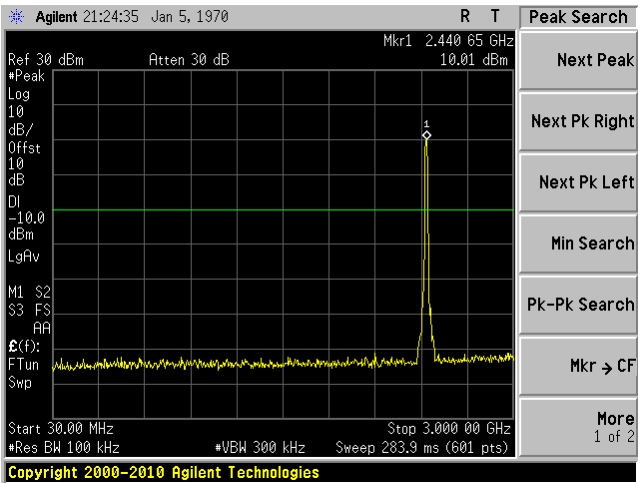


802.11b mode, Middle Channel, Chain J1
3G – 25 GHz

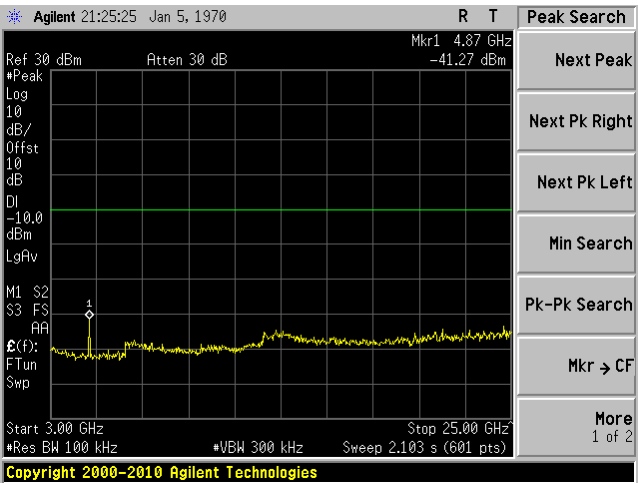


802.11b mode, Middle Channel, Chain J2
30MHz – 3GHz

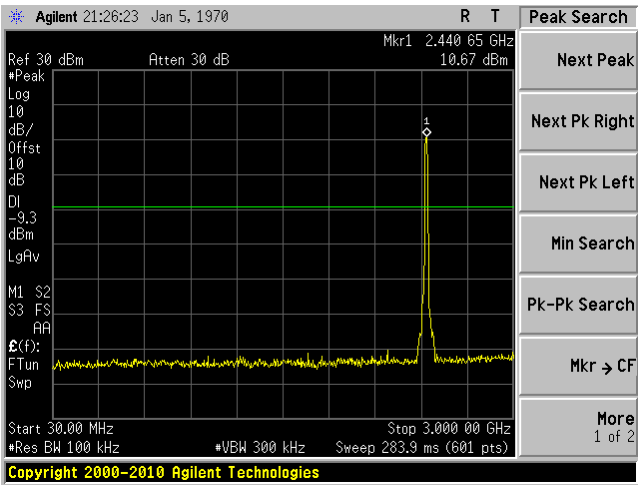


802.11b mode, Middle Channel, Chain J2
3G – 25 GHz

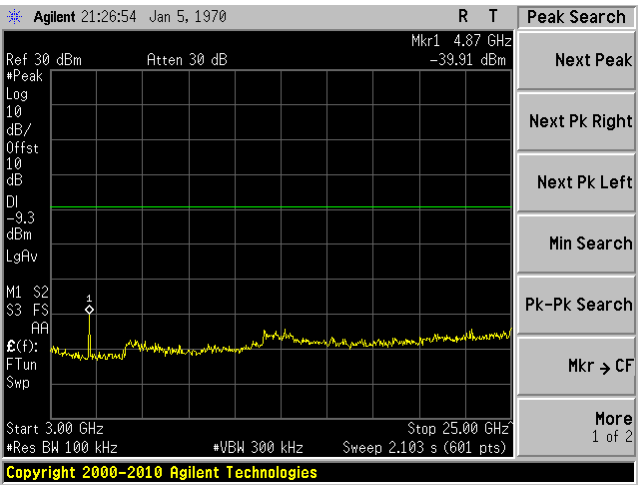


802.11b mode, Middle Channel, Chain J3
30MHz – 3GHz

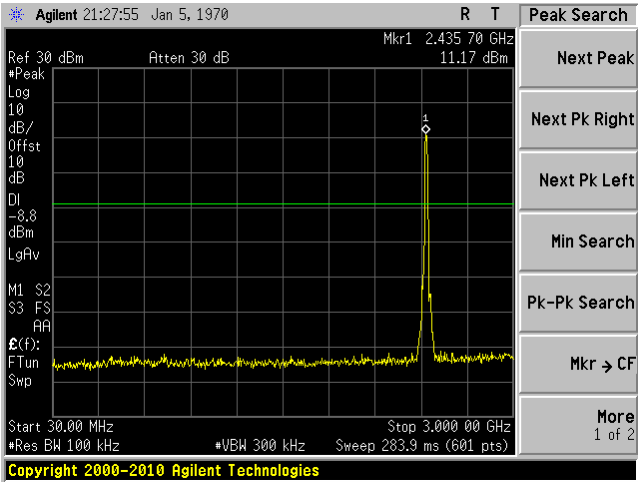


802.11b mode, Middle Channel, Chain J3
3G – 25 GHz

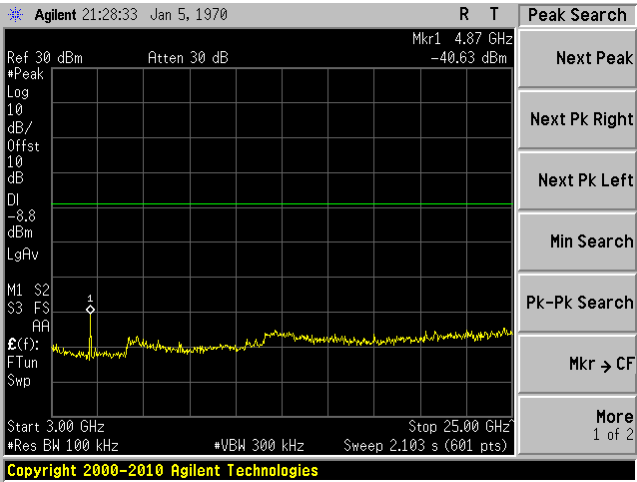


802.11b mode, High Channel, Chain J1
30MHz – 3GHz

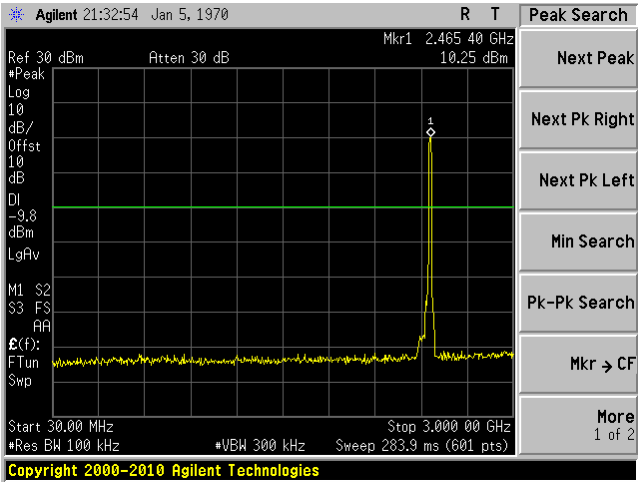


802.11b mode, High Channel, Chain J1
3G – 25 GHz

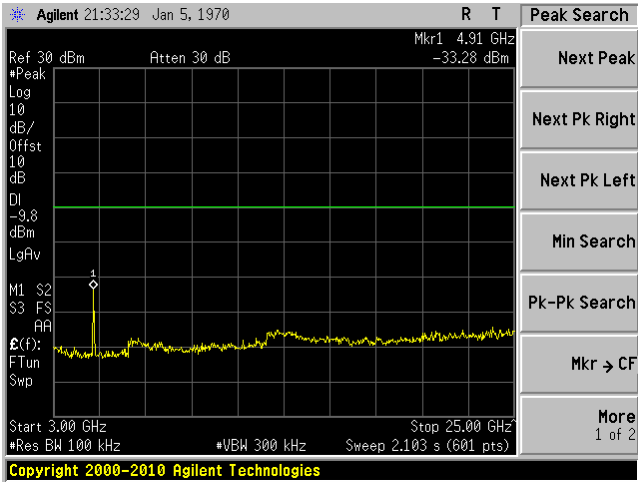


802.11b mode, High Channel, Chain J2
30MHz – 3GHz

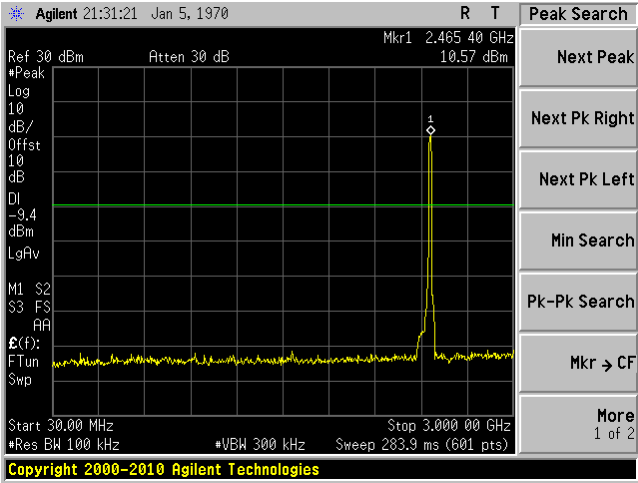


802.11b mode, High Channel, Chain J2
3G – 25 GHz

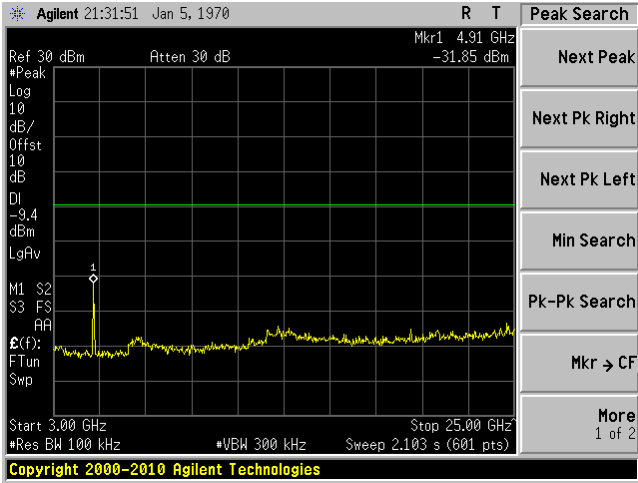


802.11b mode, High Channel, Chain J3
30MHz – 3GHz

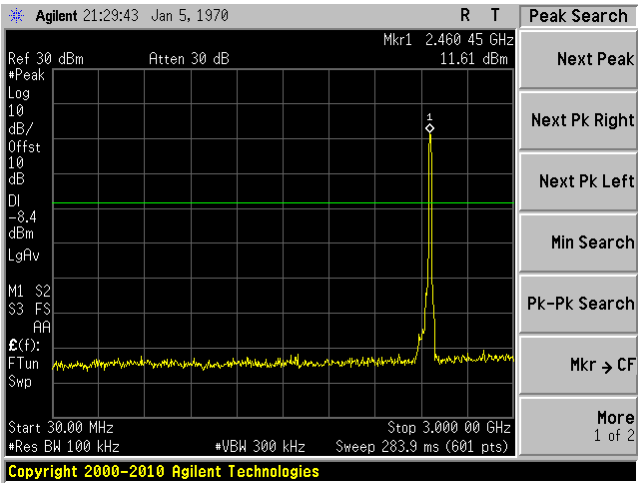


802.11b mode, High Channel, Chain J3
3G – 25 GHz

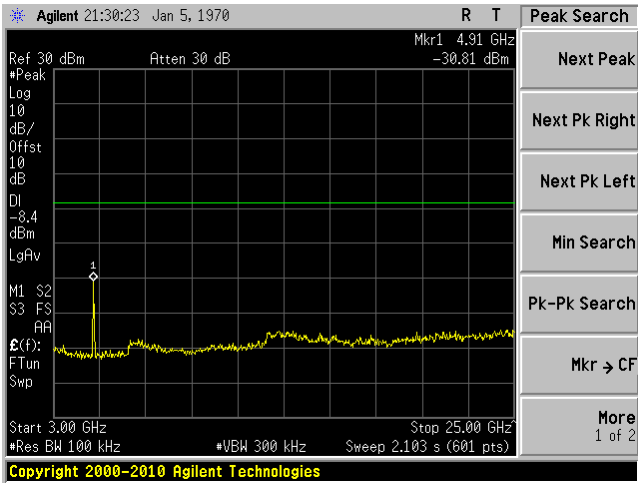


802.11g mode, Low Channel, Chain J1
30MHz – 3GHz

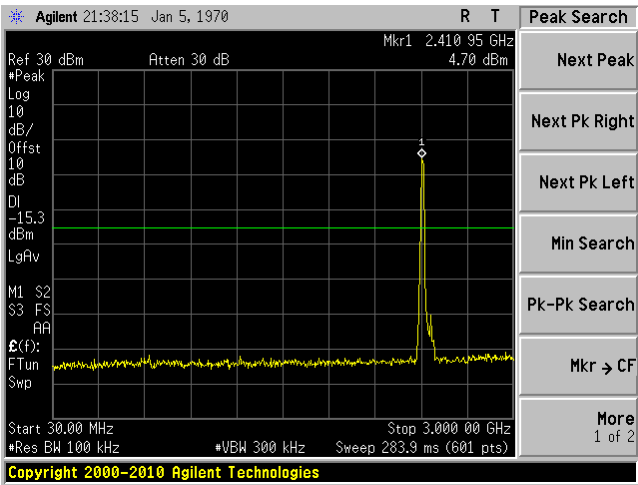


802.11g mode, Low Channel, Chain J1
3G – 25 GHz

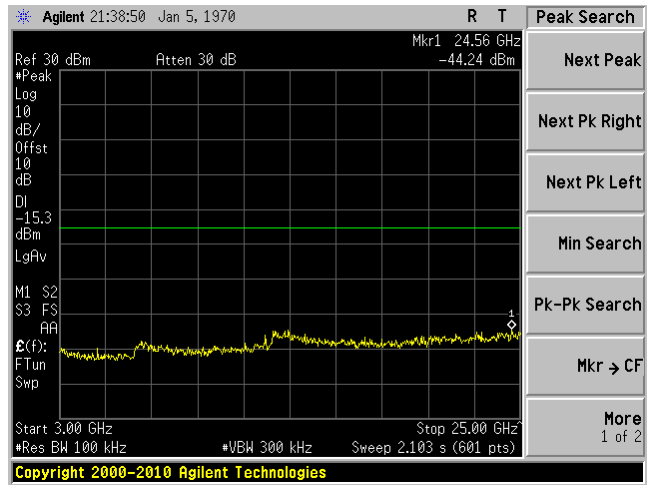


802.11g mode, Low Channel, Chain J2
30MHz – 3GHz

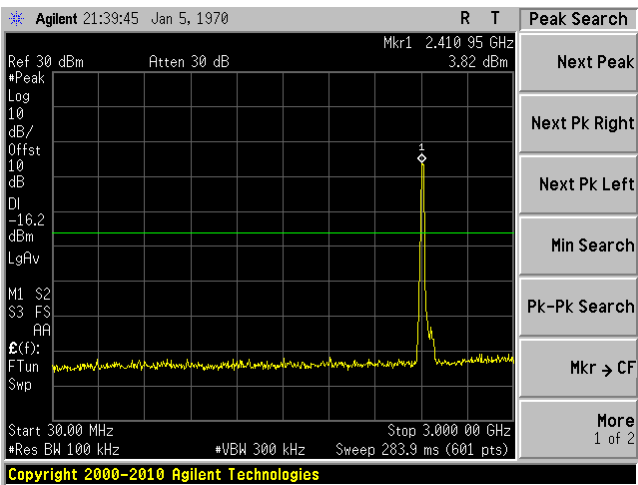


802.11g mode, Low Channel, Chain J2
3G – 25 GHz

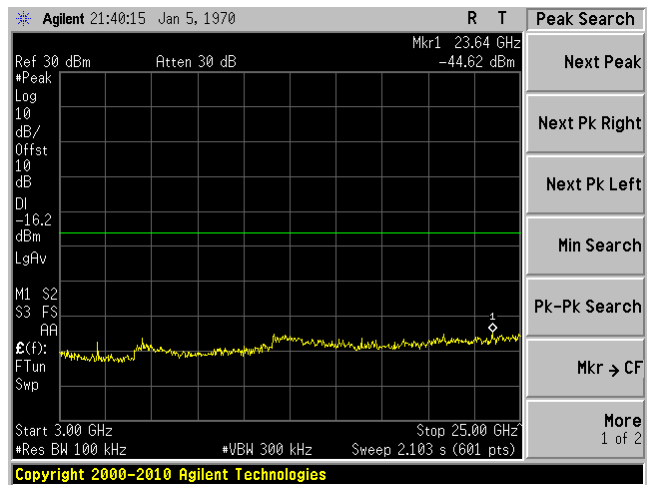


802.11g mode, Low Channel, Chain J3
30MHz – 3GHz

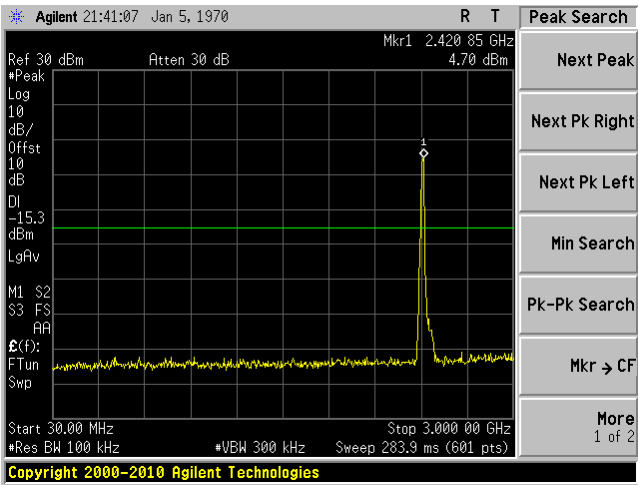


802.11g mode, Low Channel, Chain J3
3G – 25 GHz

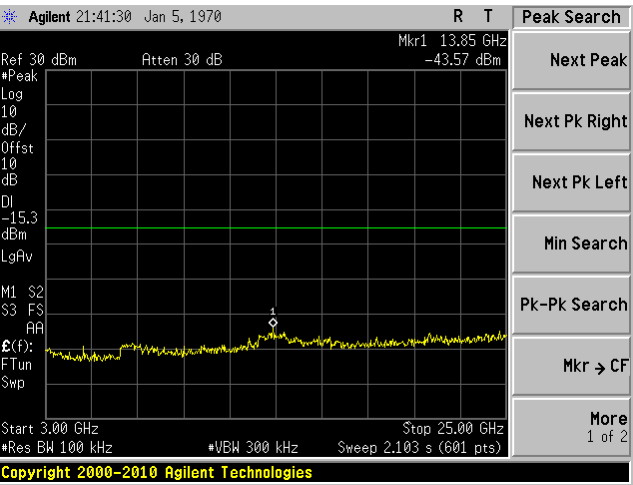


802.11g mode, Middle Channel, Chain J1
30MHz – 3GHz

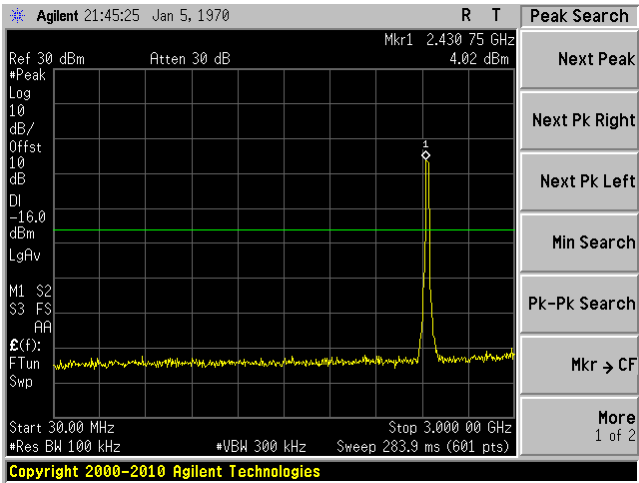


802.11g mode, Middle Channel, Chain J1
3G – 25 GHz

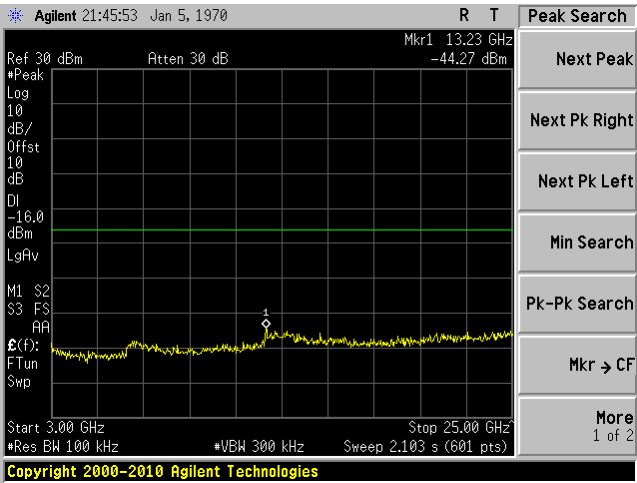


802.11g mode, Middle Channel, Chain J2
30MHz – 3GHz

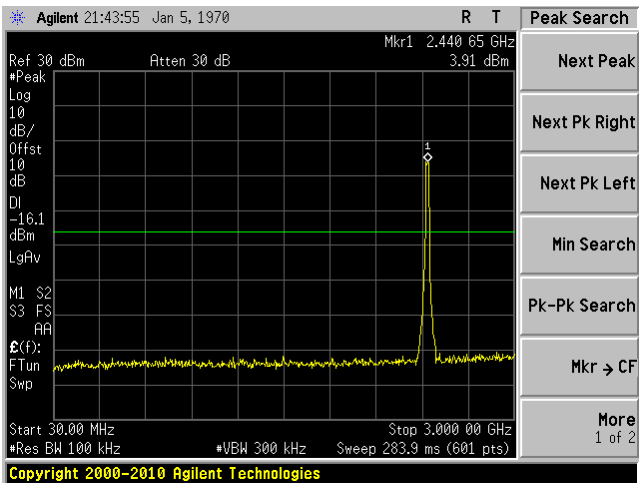


802.11g mode, Middle Channel, Chain J2
3G – 25 GHz

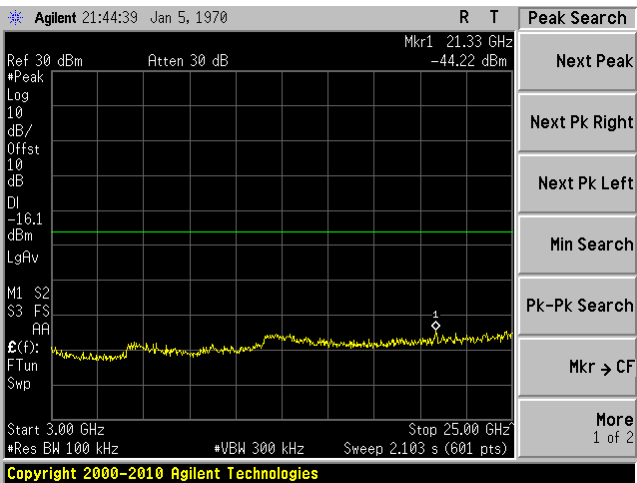


802.11g mode, Middle Channel, Chain J3
30MHz – 3GHz

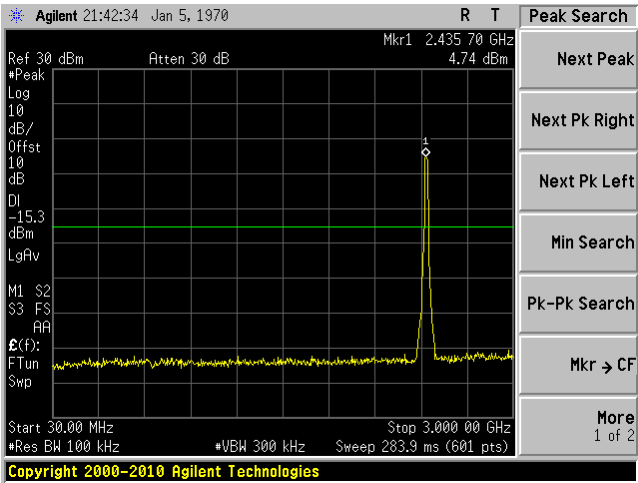


802.11g mode, Middle Channel, Chain J3
3G – 25 GHz

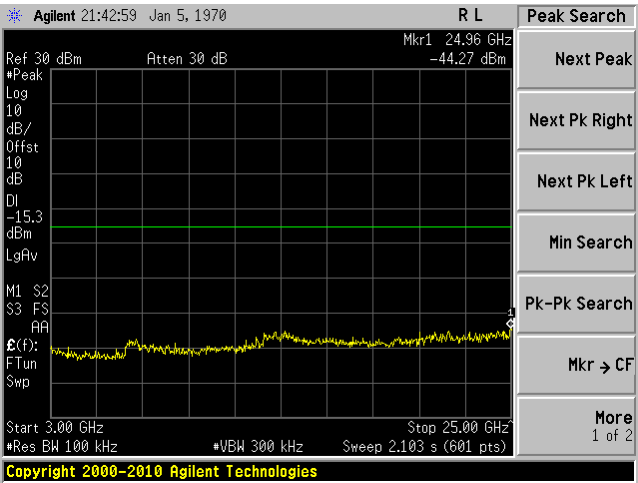


802.11g mode, High Channel, Chain J1
30MHz – 3GHz

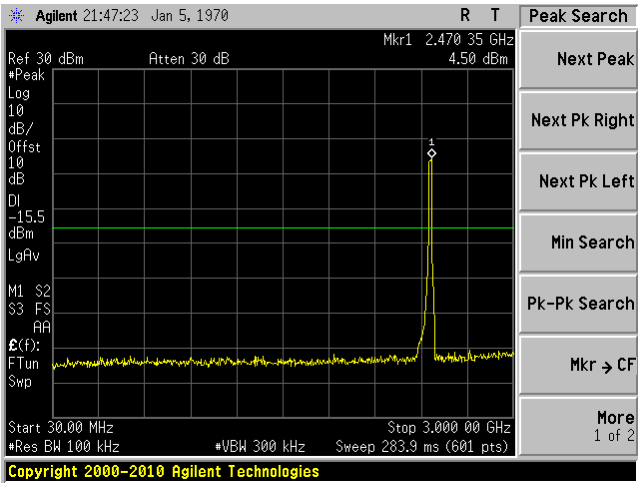


802.11g mode, High Channel, Chain J1
3G – 25 GHz

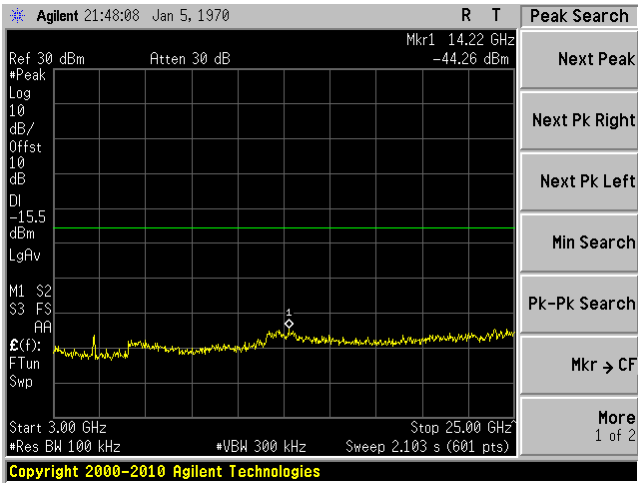


802.11g mode, High Channel, Chain J2
30MHz – 3GHz

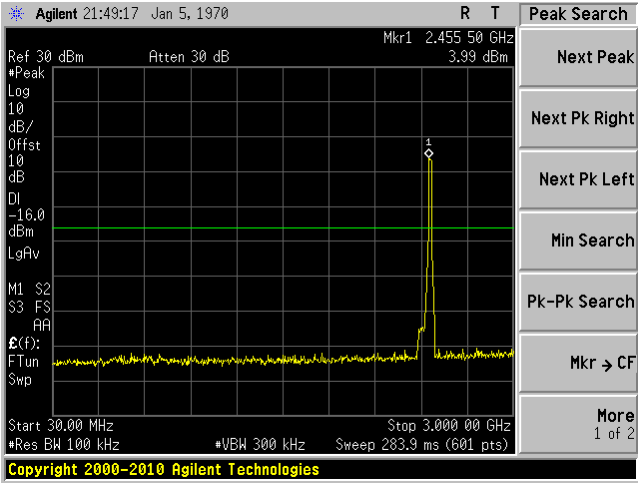


802.11g mode, High Channel, Chain J2
3G – 25 GHz

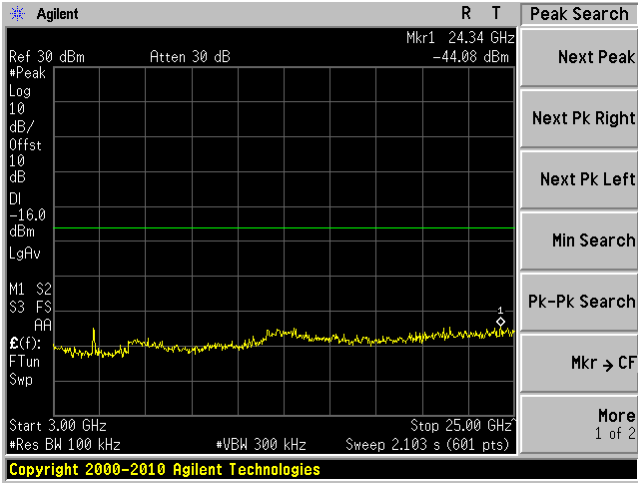


802.11g mode, High Channel, Chain J3
30MHz – 3GHz

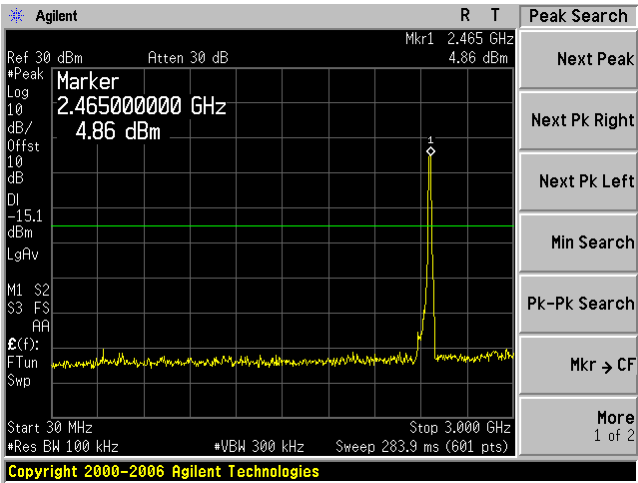


802.11g mode, High Channel, Chain J3
3G – 25 GHz

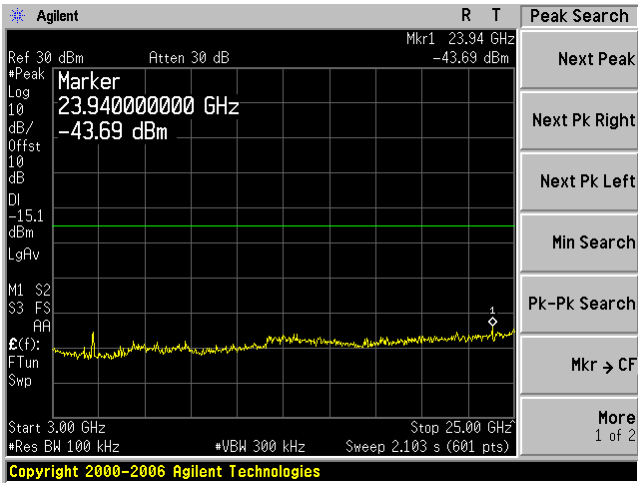


802.11n20 mode, Low Channel, Chain J1
30MHz – 3GHz

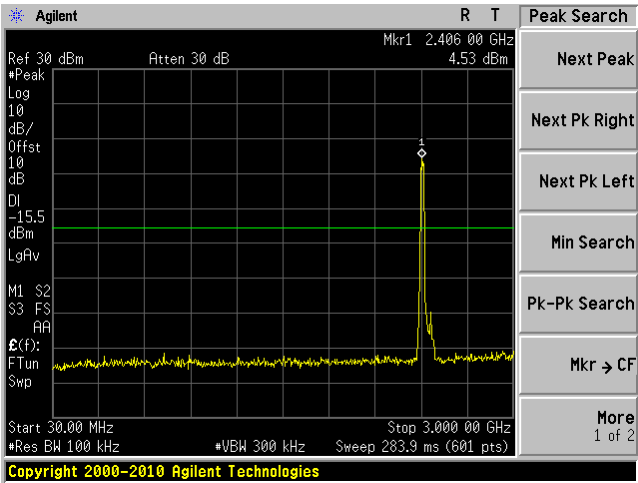


802.11n20 mode, Low Channel, Chain J1
3G – 25 GHz

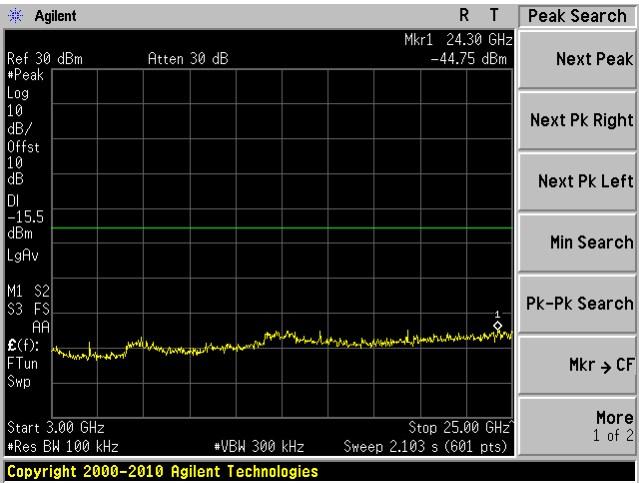


802.11n20 mode, Low Channel, Chain J2
30MHz – 3GHz

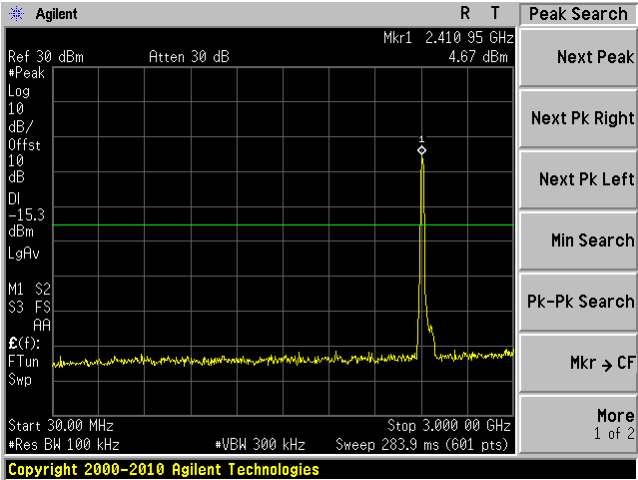


802.11n20 mode, Low Channel, Chain J2
3G – 25 GHz

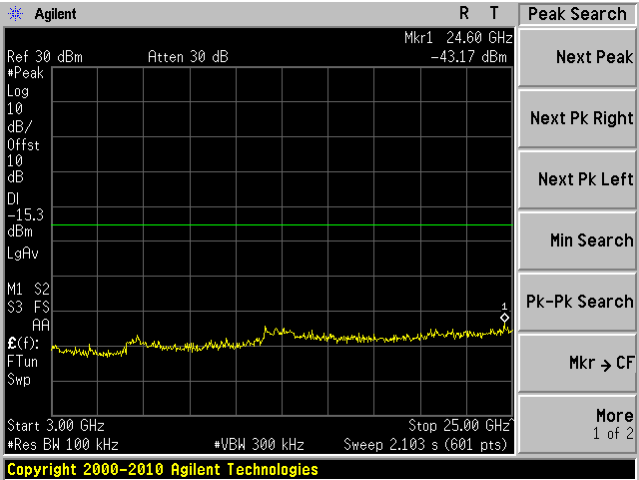


802.11n20 mode, Low Channel, Chain J3
30MHz – 3GHz

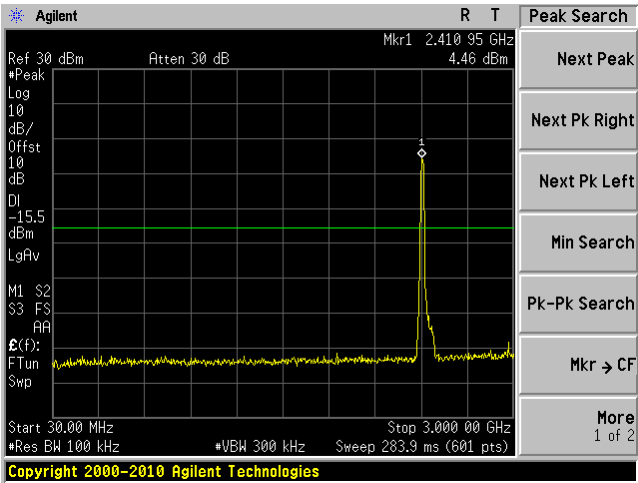


802.11 n20 mode, Low Channel, Chain J3
3G – 25 GHz

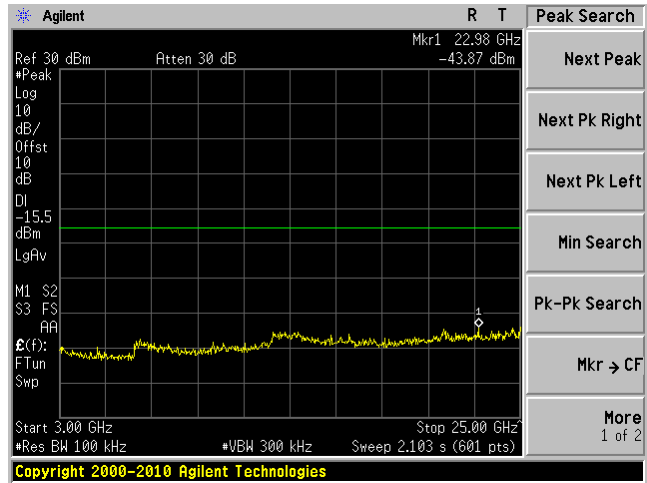


802.11 n20 mode, Middle Channel, Chain J1
30MHz – 3GHz

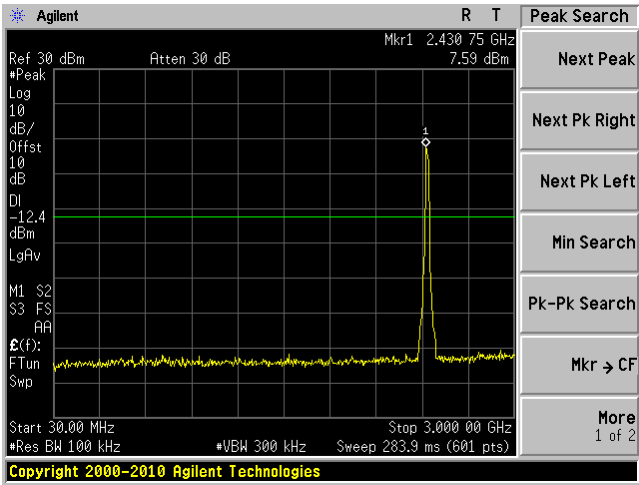


802.11 n20 mode, Middle Channel, Chain J1
3G – 25 GHz

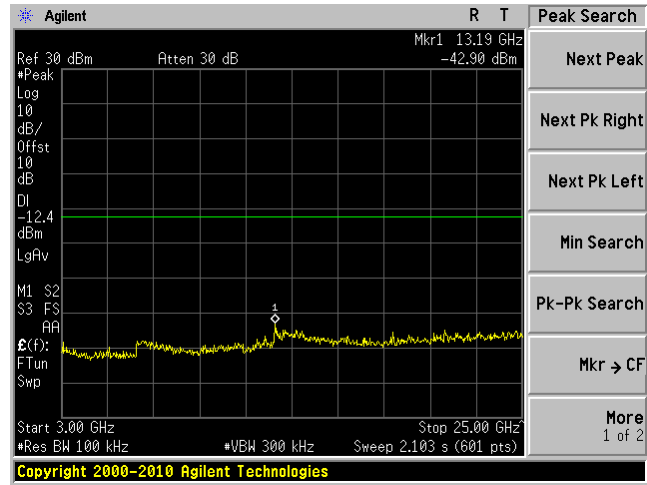


802.11n20 mode, Middle Channel, Chain J2
30MHz – 3GHz

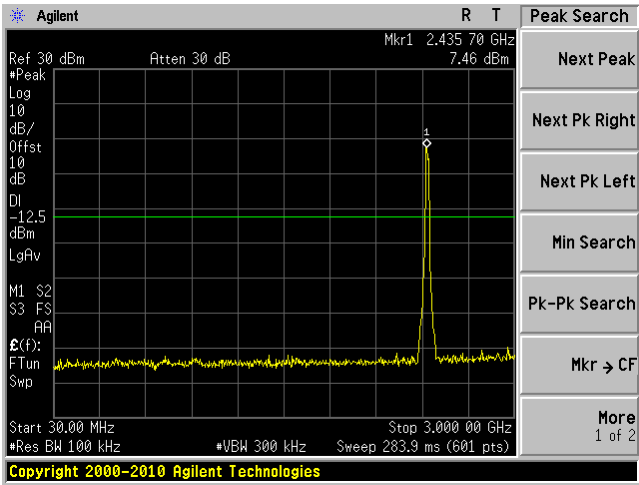


802.11n20 mode, Middle Channel, Chain J2
3G – 25 GHz

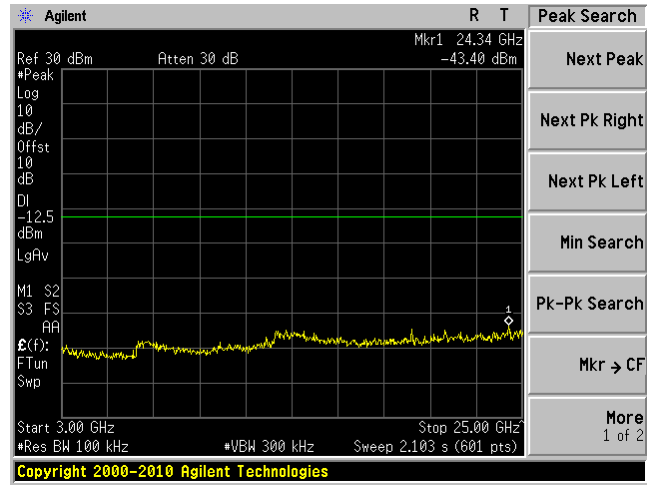


802.11n20 mode, Middle Channel, Chain J3
30MHz – 3GHz

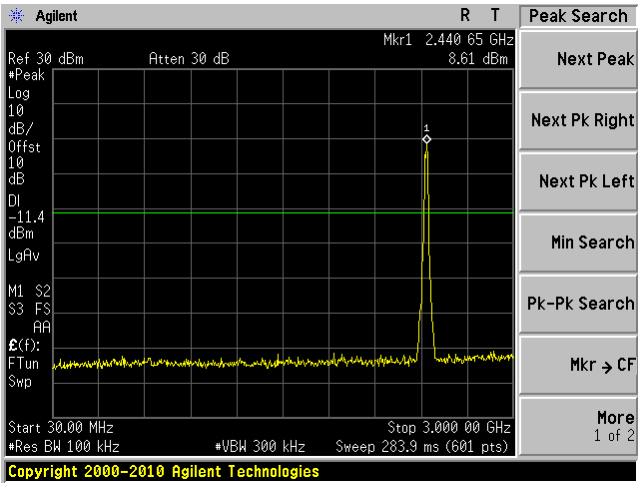


802.11n20 mode, Middle Channel, Chain J3
3G – 25 GHz

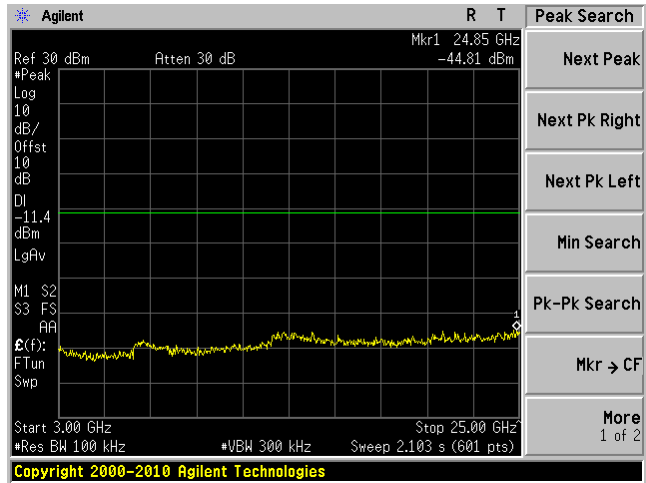


802.11n20 mode, High Channel, Chain J1
30MHz – 3GHz

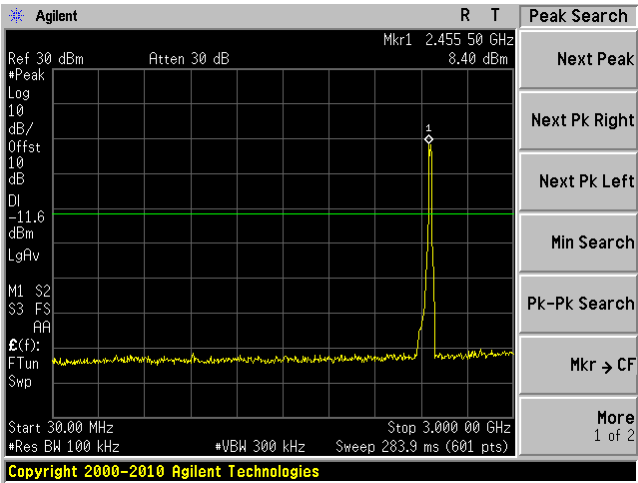


802.11n20 mode, High Channel, J1
3G – 25 GHz

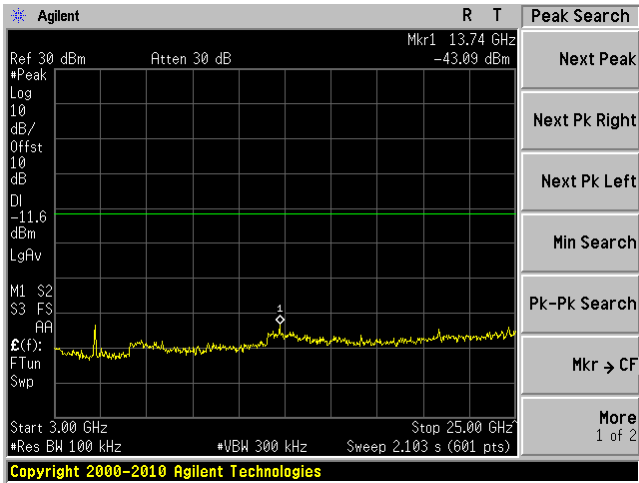


802.11n20 mode, High Channel, Chain J2
30MHz – 3GHz

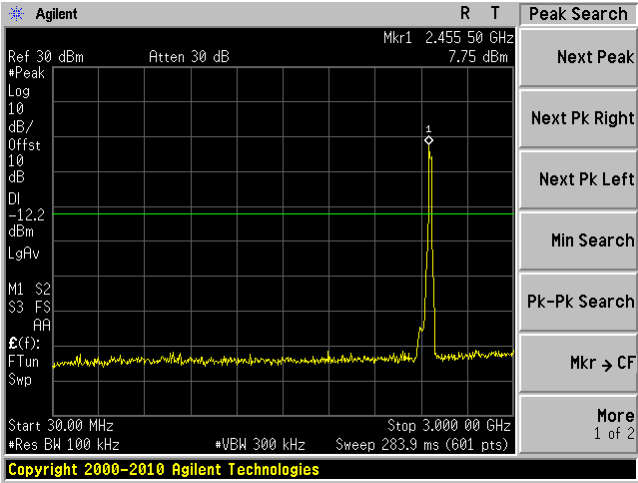


802.11n20 mode, High Channel, Chain J2
3G – 25 GHz

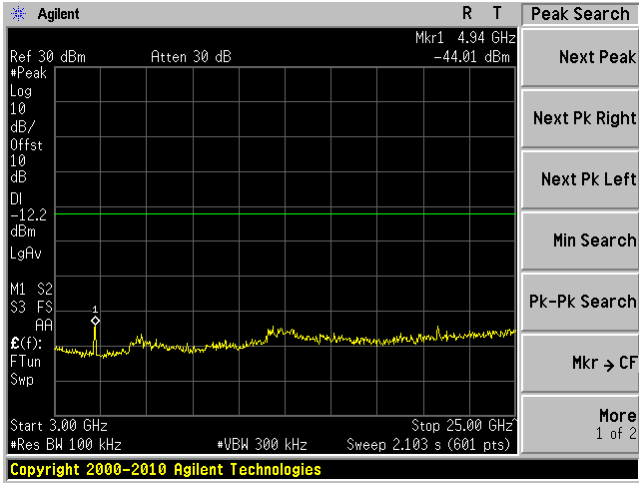


802.11n20 mode, High Channel, Chain J3
30MHz – 3GHz

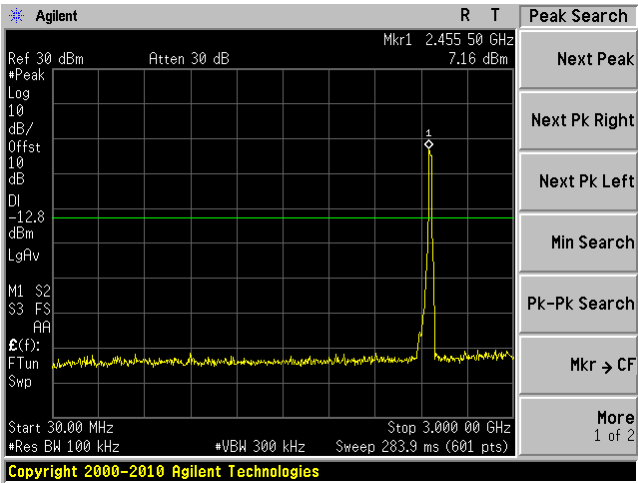


802.11n20 mode, High Channel, Chain J3
3G – 25 GHz

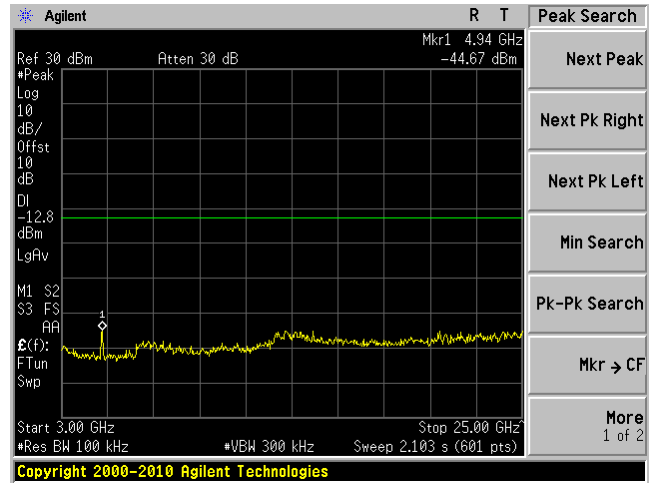


802.11n20 mode, Low Channel, Chain J1, J2, J3
30MHz – 3GHz

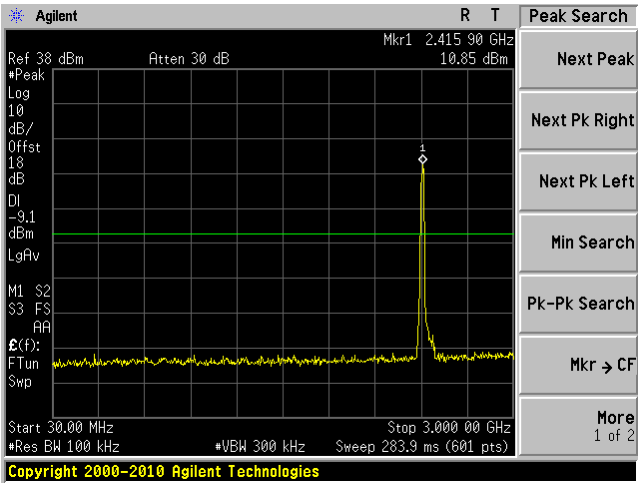


802.11n20 mode, Low Channel, Chain J1, J2, J3
3G – 25 GHz

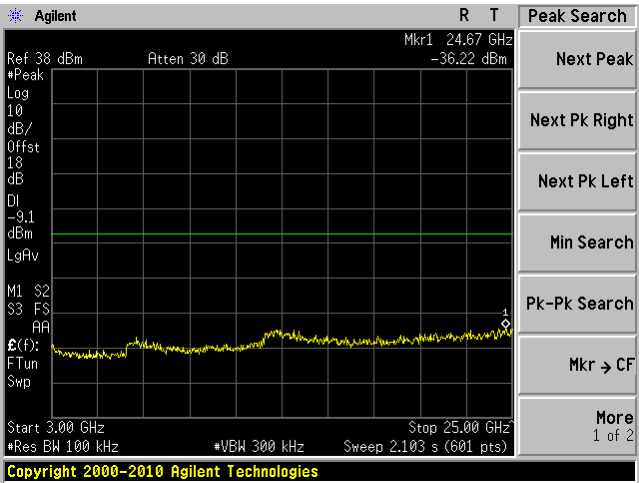


802.11n20 mode, Middle Channel, Chain J1, J2, J3
30MHz – 3GHz

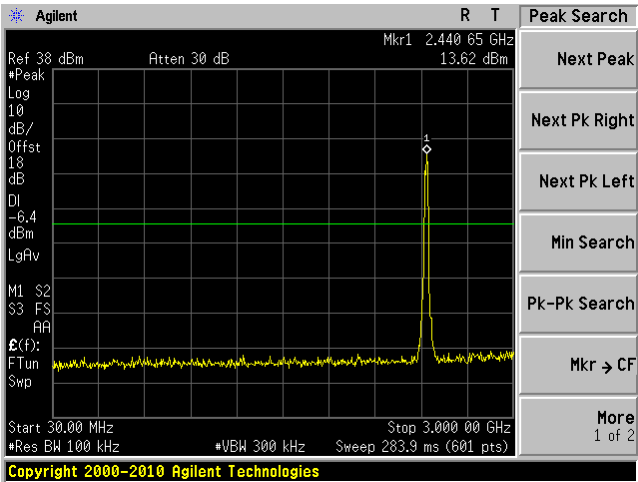


802.11n20 mode, Middle Channel, Chain J1, J2, J3
3G – 25 GHz

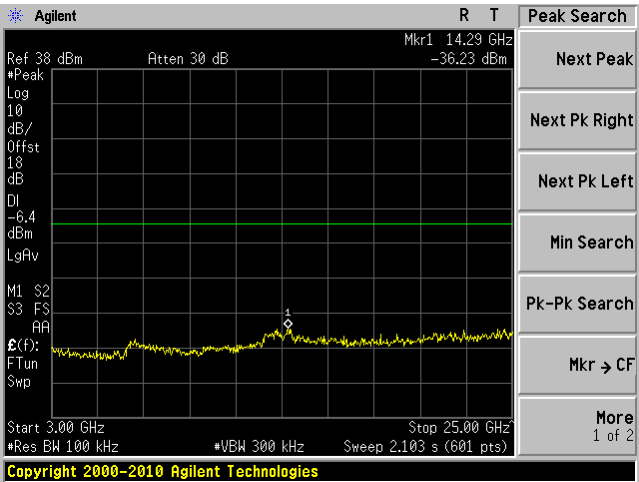


802.11n20 mode, High Channel, Chain J1, J2, J3
30MHz – 3GHz

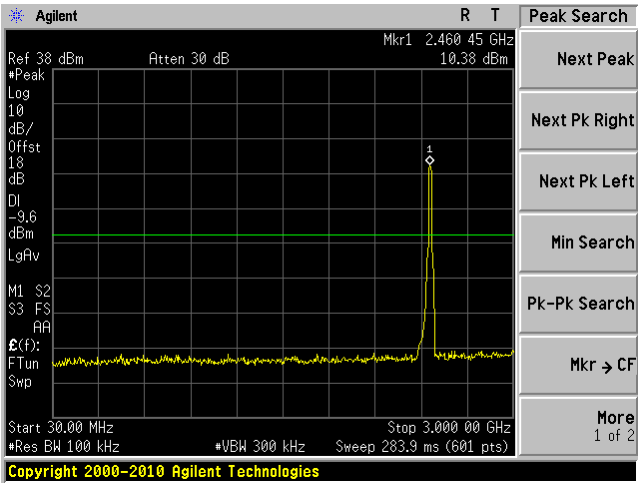


802.11n20 mode, High Channel, Chain J1, J2, J3
3G – 25 GHz

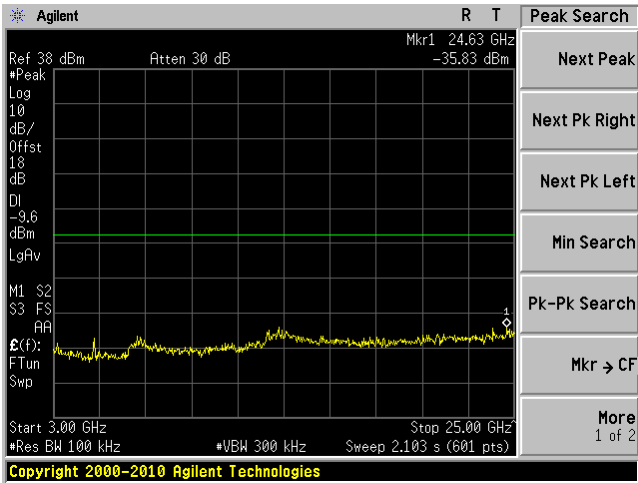


802.11n40 mode, Low Channel, Chain J1
30MHz – 3GHz

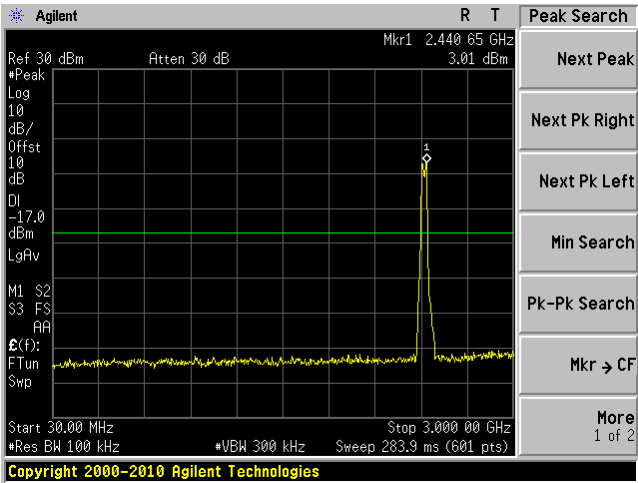


802.11n40 mode, Low Channel, Chain J1
3G – 25 GHz

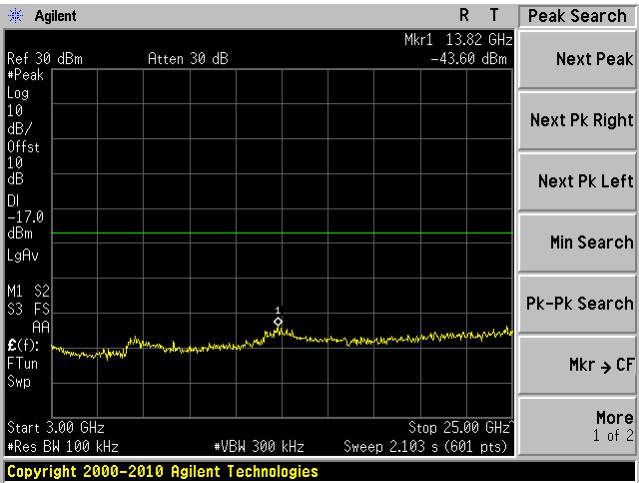


802.11n40 mode, Low Channel, Chain J2
30MHz – 3GHz

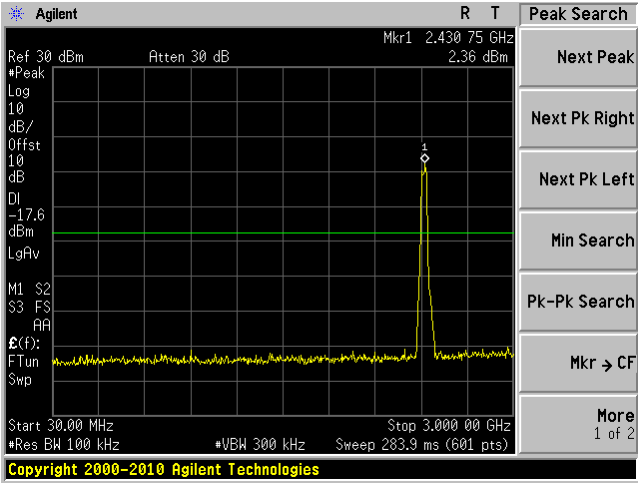


802.11n40 mode, Low Channel, Chain J2
3G – 25 GHz

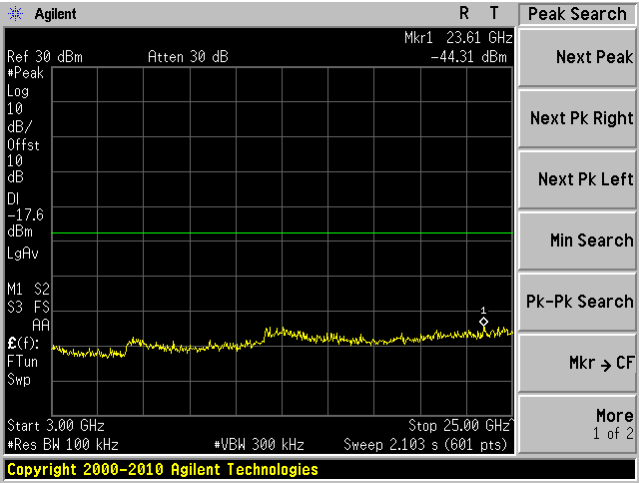


802.11n40 mode, Low Channel, Chain J3
30MHz – 3GHz

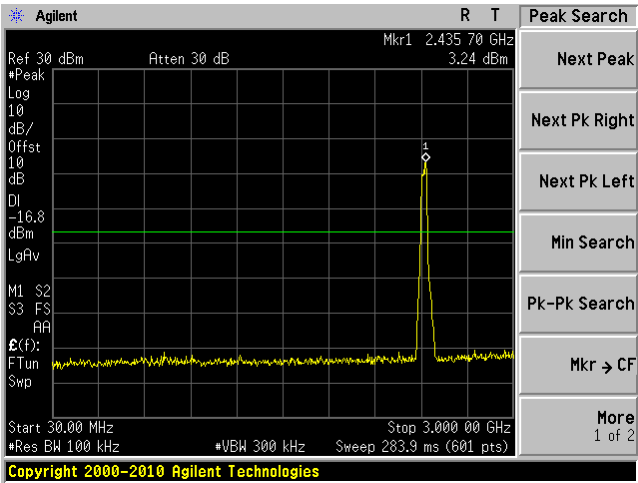


802.11n40 mode, Low Channel, Chain J3
3G – 25 GHz

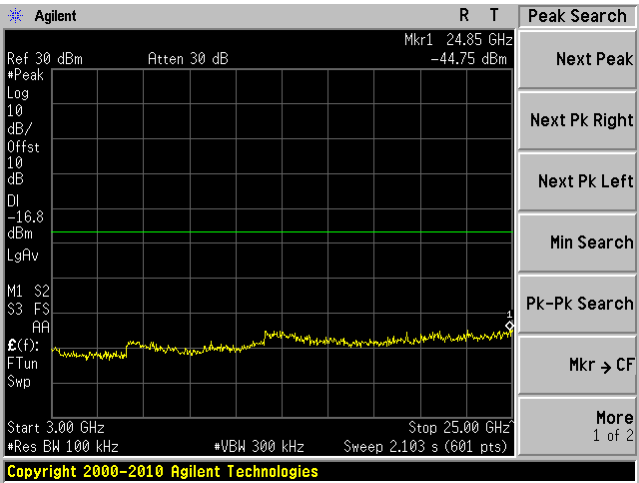


802.11n40 mode, Middle Channel, Chain J1
30MHz – 3GHz

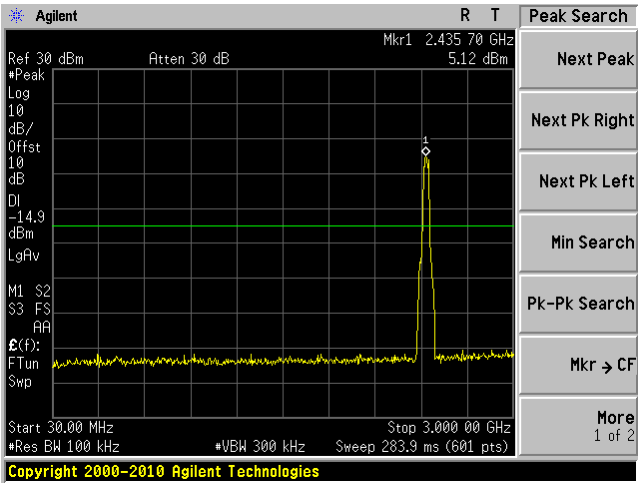


802.11n40 mode, Middle Channel, Chain J1
3G – 25 GHz

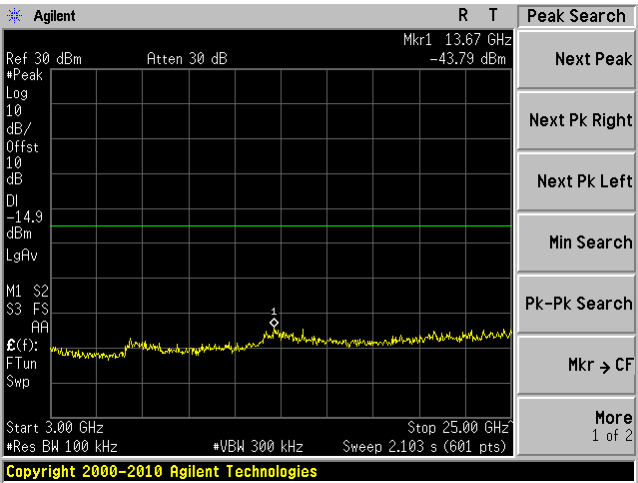


802.11n40 mode, Middle Channel, Chain J2
30MHz – 3GHz

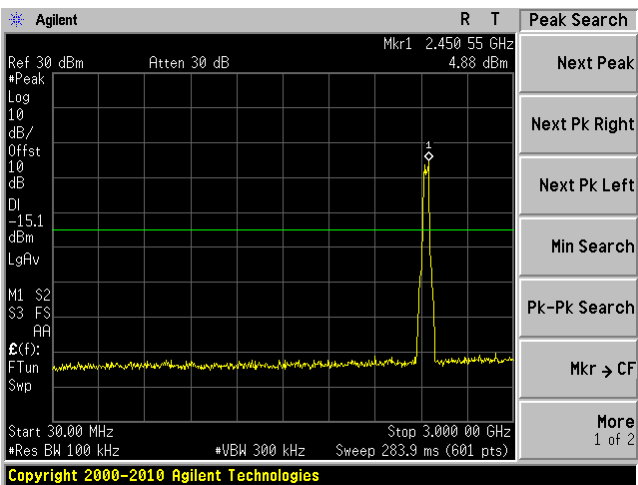


802.11n40 mode, Middle Channel, Chain J2
3G – 25 GHz

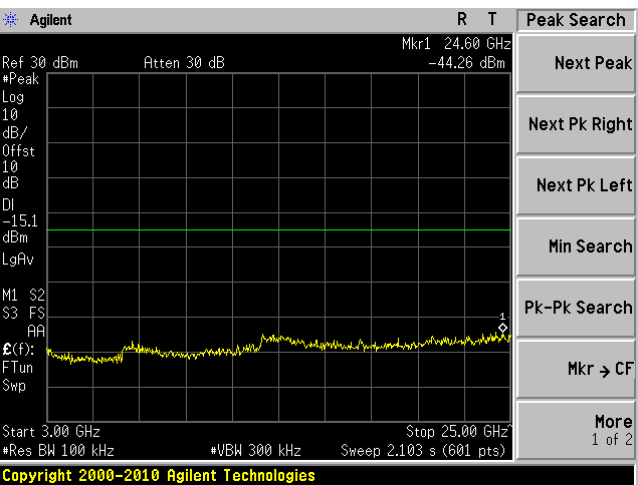


802.11n40 mode, Middle Channel, Chain J3
30MHz – 3GHz

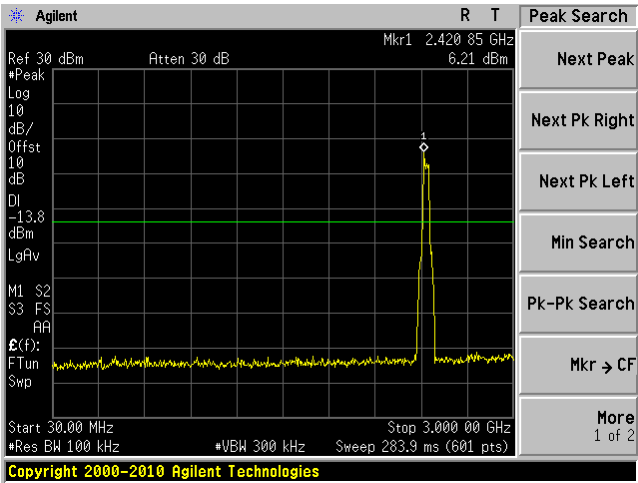


802.11n40 mode, Middle Channel, Chain J3
3G – 25 GHz

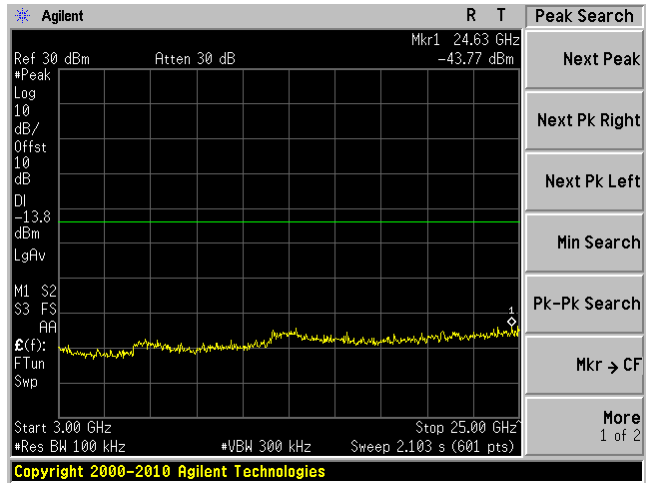


802.11n40 mode, High Channel, Chain J1
30MHz – 3GHz

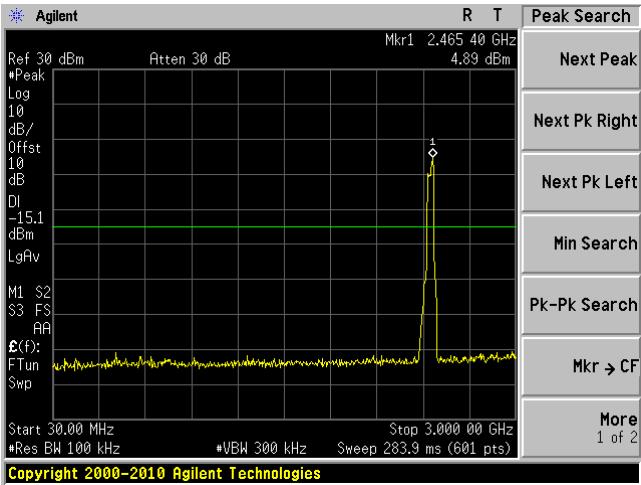


802.11n40 mode, High Channel, Chain J1
3G – 25 GHz

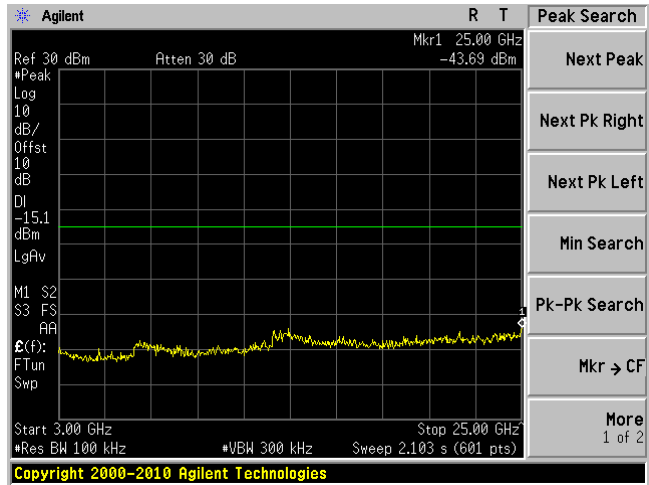


802.11n40 mode, High Channel, Chain J2
30MHz – 3GHz

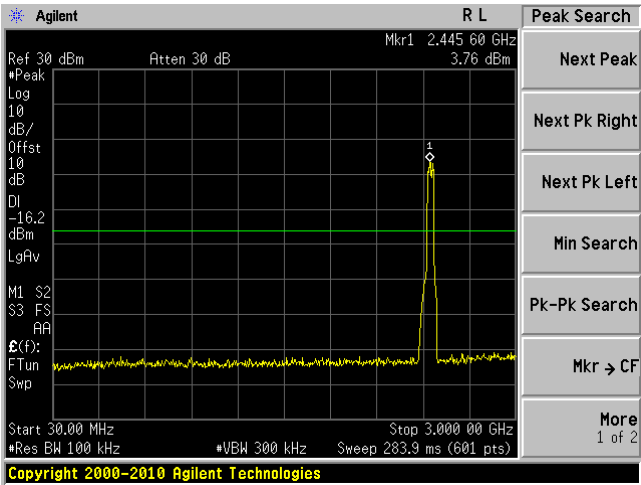


802.11n40 mode, High Channel, Chain J2
3G – 25 GHz

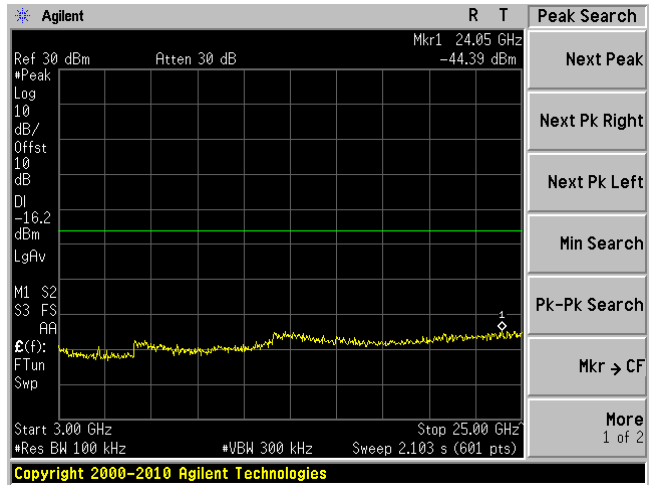


802.11n40 mode, High Channel, Chain J3
30MHz – 3GHz

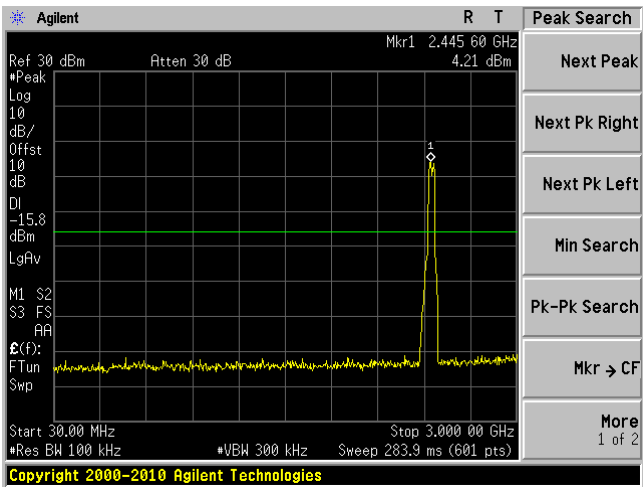


802.11n40 mode, High Channel, Chain J3
3G – 25 GHz

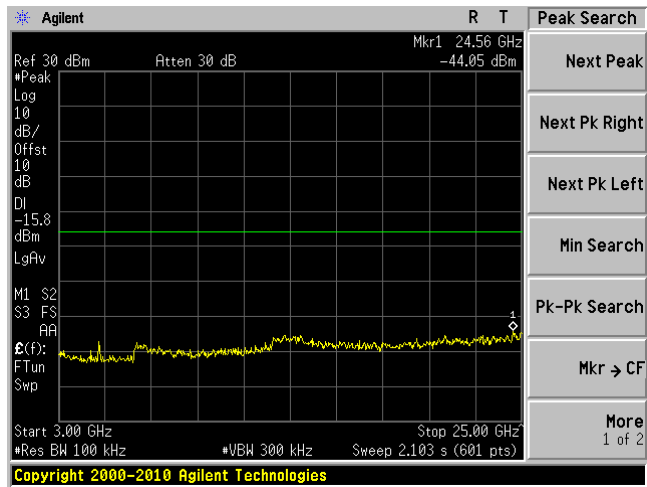


802.11n40 mode, Low Channel, Chain J1, J2, J3
30MHz – 3GHz

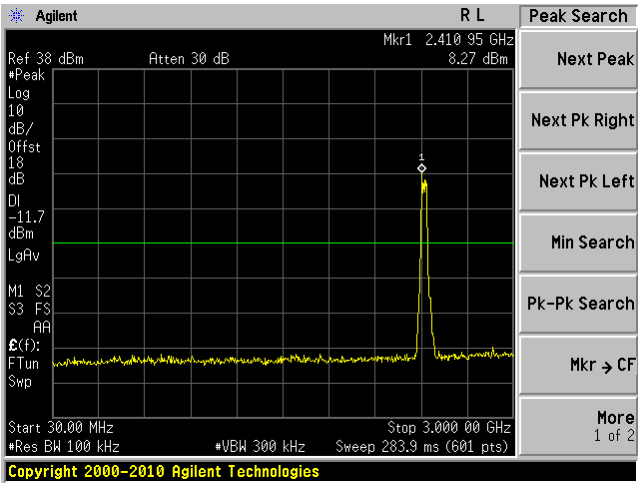


802.11n40 mode, Low Channel, Chain J1, J2, J3
3G – 25 GHz

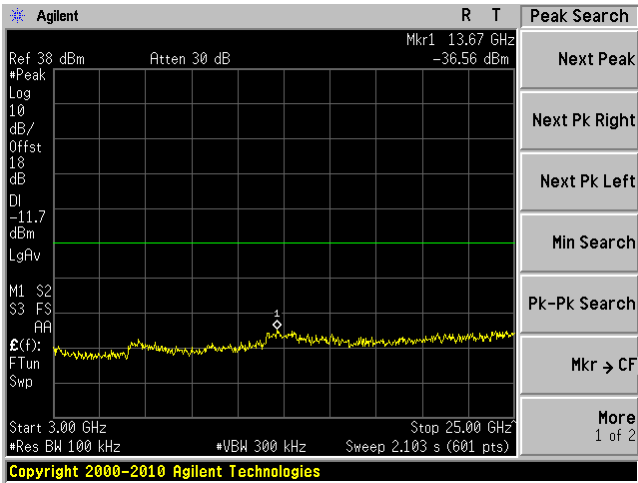


802.11n40 mode, Middle Channel, Chain J1, J2, J3
30MHz – 3GHz

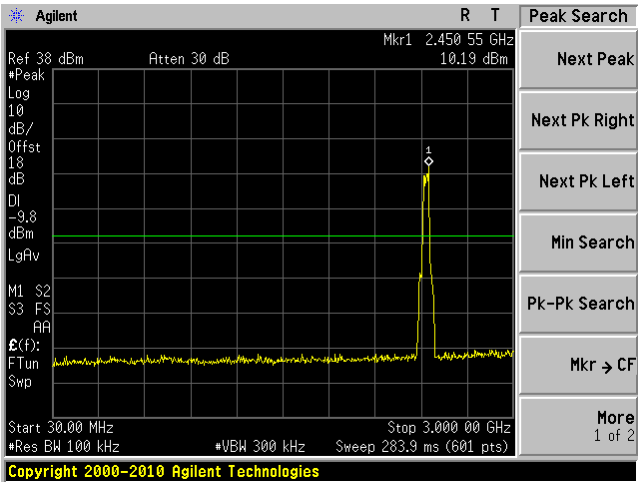


802.11n40 mode, Middle Channel, Chain J1, J2, J3
3G – 25 GHz

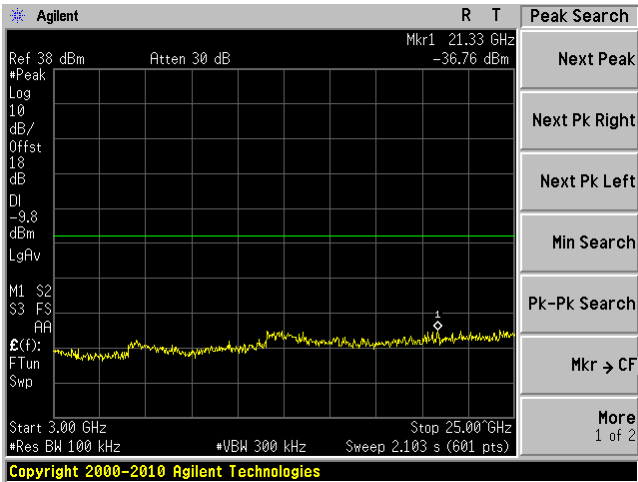

802.11n40 mode, High Channel, Chain J1, J2, J3
30MHz – 3GHz

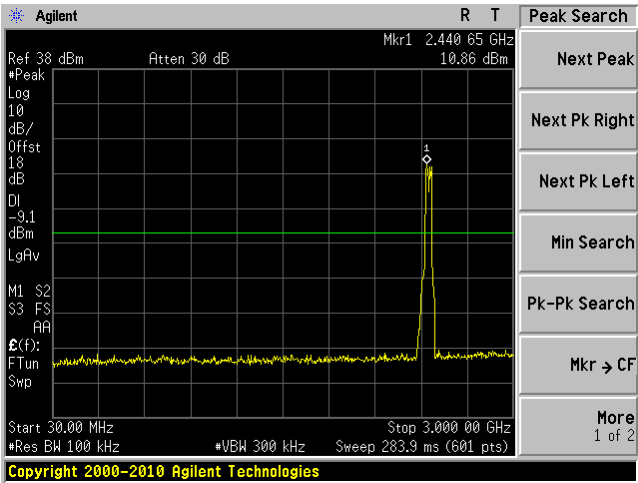

802.11n40 mode, High Channel, Chain J1, J2, J3
3G – 25 GHz

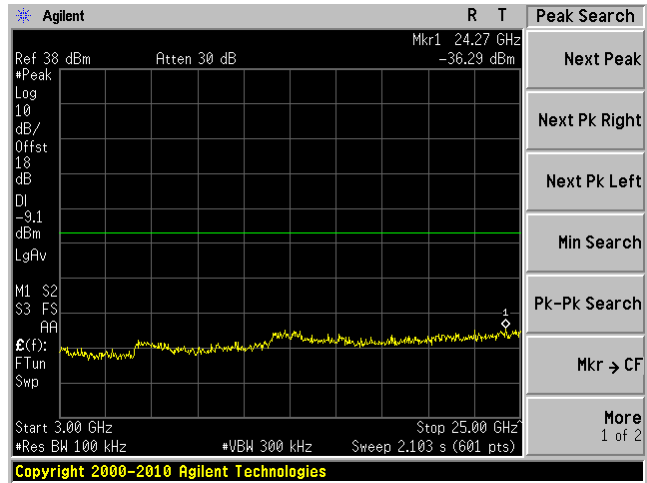

8 FCC §15.205, §15.209, §15.247(d) & IC RSS-210 §A8.5 – Spurious Radiated Emissions

8.1 Applicable Standard

As per FCC §15.35(d): Unless otherwise specified, on any frequency or frequencies above 1000 MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. Unless otherwise specified, measurements above 1000 MHz shall be performed using a minimum resolution bandwidth of 1 MHz.

As per FCC §15.209(a) and RSS-210: Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table

Frequency (MHz)	Field Strength (micro volts/meter)	Measurement Distance (meters)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100**	3
88 - 216	150**	3
216 - 960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

As Per FCC §15.205(a) except as show in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 – 0.110	16.42 – 16.423	960 – 1240	4.5 – 5.15
0.495 – 0.505	16.69475 – 16.69525	1300 – 1427	5.35 – 5.46
2.1735 – 2.1905	25.5 – 25.67	1435 – 1626.5	7.25 – 7.75
4.125 – 4.128	37.5 – 38.25	1645.5 – 1646.5	8.025 – 8.5
4.17725 – 4.17775	73 – 74.6	1660 – 1710	9.0 – 9.2
4.20725 – 4.20775	74.8 – 75.2	1718.8 – 1722.2	9.3 – 9.5
6.215 – 6.218	108 – 121.94	2200 – 2300	10.6 – 12.7
6.26775 – 6.26825	123 – 138	2310 – 2390	13.25 – 13.4
6.31175 – 6.31225	149.9 – 150.05	2483.5 – 2500	14.47 – 14.5
8.291 – 8.294	156.52475 – 156.52525	2690 – 2900	15.35 – 16.2
8.362 – 8.366	156.7 – 156.9	3260 – 3267	17.7 – 21.4
8.37625 – 8.38675	162.0125 – 167.17	3.332 – 3.339	22.01 – 23.12
8.41425 – 8.41475	167.72 – 173.2	3.3458 – 3.358	23.6 – 24.0
12.29 – 12.293	240 – 285	3.600 – 4.400	31.2 – 31.8
12.51975 – 12.52025	322 – 335.4		36.43 – 36.5
12.57675 – 12.57725	399.9 – 410		Above 38.6
13.36 – 13.41	608 – 614		

As per FCC §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.2 Test Setup

The radiated emissions tests were performed in the 5-meter Chamber, using the setup in accordance with ANSI C63.4-2003. The specification used was the FCC 15 Subpart C and IC RSS-210 limits.

8.3 EUT Setup

The radiated emissions tests were performed using the setup accordance with the ANSI C63.4-2003. The specification used was the FCC 15C, IC RSS-210 limits.

The spacing between the peripherals was 10 centimeters.

External I/O cables were draped along the edge of the test table and bundle when necessary.

8.4 Test Procedure

For the radiated emissions test, the EUT host, and all support equipment power cords was connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The EUT is set 3 meter away from the testing antenna, which is varied from 1-4 meter, and the EUT is placed on a turntable, which is 0.8 meter above ground plane, the table shall be rotated for 360 degrees to find out the highest emission. The receiving antenna should be changed the polarization both of horizontal and vertical.

The spectrum analyzer or receiver is set as:

Below 1000 MHz:

RBW = 100 kHz / VBW = 300 kHz / Sweep = Auto

Above 1000 MHz:

- (1) Peak: RBW = 1MHz / VBW = 1MHz / Sweep = Auto
- (2) Average: RBW = 1MHz / VBW = 10Hz / Sweep = Auto

8.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude (CA) is calculated by adding the Antenna Factor (AF), the Cable Loss (CL), the Attenuator Factor (Atten) and subtracting the Amplifier Gain (Ga) to the indicated Amplitude (Ai) reading. The basic equation is as follows:

$$CA = Ai + AF + CL + Atten - Ga$$

For example, the Corrected Amplitude (CA) of 40.3 dBuV/m = indicated Amplitude reading (Ai) 32.5 dBuV + Antenna Factor (AF) 23.5dB + Cable Loss (CL) 3.7 dB + Attenuator (Atten) 10 dB - Amplifier Gain (Ga) 29.4 dB

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of -7 dB means the emission is 7 dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corrected Amplitude} - \text{Limit}$$

8.6 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date
Rohde & Schwarz	EMI Test Receiver	ESCI 1166.5950K03	100337	2011-03-21
Agilent	Spectrum Analyzer	E4440A	MY44303352	2011-05-10
Sunol Science Corp	System Controller	SC99V	122303-1	N/R
Sunol Science Corp	Combination Antenna	JB3	A0020106-3	2011-06-29
EMCO	Horn antenna	3115	9511-4627	2011-10-03
Hewlett Packard	Pre amplifier	8447D	2944A06639	2011-06-09
Mini-Circuits	Pre Amplifier	ZVA-183-S	570400946	2011-05-09

Statement of Traceability: BACL attests that all calibrations have been performed per the NVLAP requirements, traceable to NIST.

8.7 Test Environmental Conditions

Temperature:	18~25 °C
Relative Humidity:	38~50 %
ATM Pressure:	101-102 kPa

The testing was performed by Quinn Jiang on 10-21-2011, 01-17-2012 and 01-23-2012 in 5 meter chamber 3.

8.8 Summary of Test Results

According to the data hereinafter, the EUT complied with the FCC Part 15, Subpart C, section 15.205, 15.209 and 15.247 & IC RSS-210, RSS-Gen standard's radiated emissions limits, and had the worst margin of:

30-1000 MHz:

Mode: Transmitting			
Margin (dB)	Frequency (MHz)	Polarization (Horizontal/Vertical)	Range
-5.18	249.95	Vertical	30 MHz-1 GHz

Above 1GHz:


Mode: Transmitting			
Margin (dB)	Frequency (MHz)	Polarization (Horizontal/Vertical)	Range
-0.36	7385	Vertical	1 GHz- 25 GHz

Please refer to the following table and plots for specific test result details

8.9 Radiated Emissions Test Result Data

(1) Radiated Emission at 3 meters, 30 MHz – 1 GHz

802.11b mode (2462 MHz)

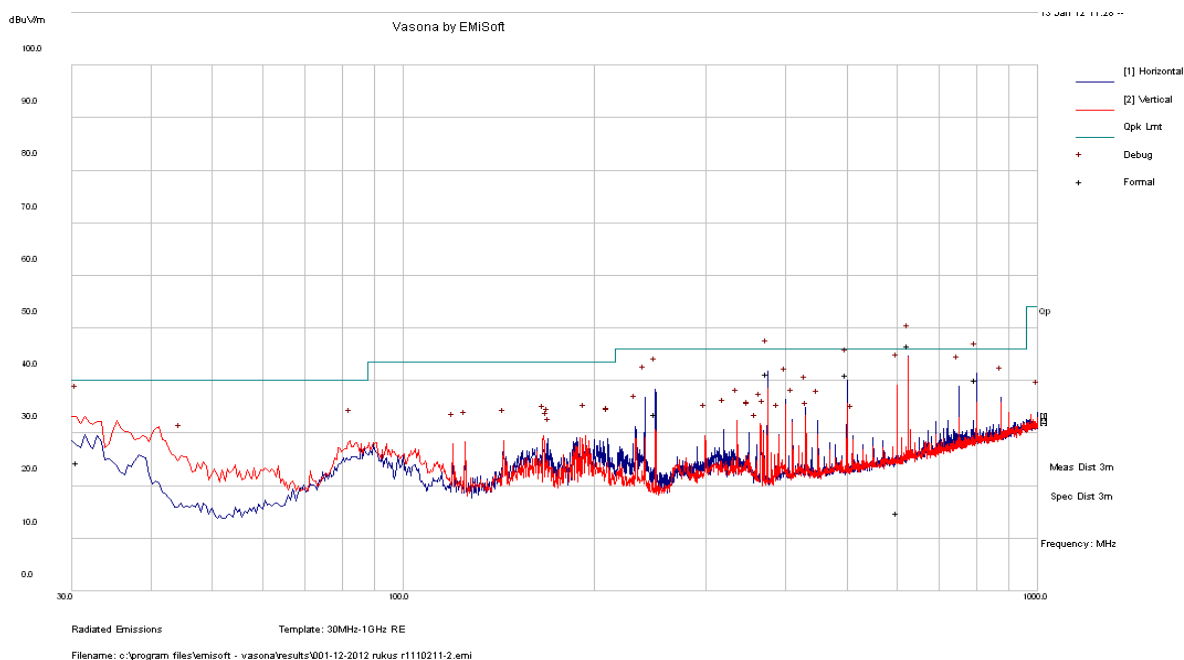


Quasi-Peak Measurements

Frequency (MHz)	Corrected Amplitude (dBμV/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dBμV/m)	Margin (dB)
249.9538	33.65	99	H	130	46	-12.35

Note: other emissions are from the supporting board/equipments.

802.11n40 mode (2422 MHz)

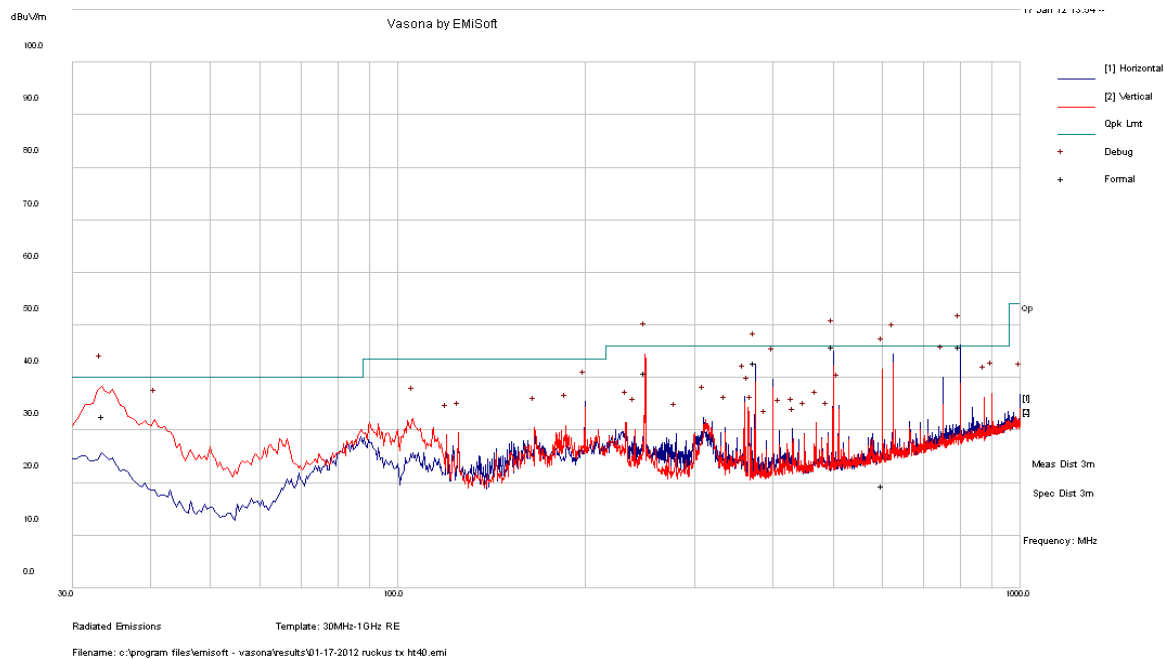

Quasi-Peak Measurements

Frequency (MHz)	Corrected Amplitude (dBμV/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dBμV/m)	Margin (dB)
249.95	40.82	100	V	285	46	-5.18

Note: other emissions are from the supporting board/equipments.

(2) Radiated Emission at 3 meters, above 1 GHz**802.11b Mode:**

Frequency (MHz)	S.A. Reading (dBμV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre- Amp. (dB)	Cord. Reading (dBμV/m)	FCC/IC		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dBμV/m)	Margin (dB)	
Low Channel 2412 MHz, measured at 3 meters											
4823	43.23	91	137	V	32.6	5.56	27.77	53.62	74	-20.38	Peak
4823	42.32	146	133	H	32.6	5.56	27.77	52.71	74	-21.29	Peak
4823	38.61	91	137	V	32.6	5.56	27.77	49	54	-5	Ave
4823	37.44	146	133	H	32.6	5.56	27.77	47.83	54	-6.17	Ave
Middle Channel 2437 MHz measured at 3 meters											
4874	42.71	26	137	V	32.8	5.52	27.7	53.33	74	-20.67	Peak
4874	41.89	187	120	H	32.8	5.52	27.7	52.51	74	-21.49	Peak
4874	36.28	26	137	V	32.8	5.52	27.7	46.90	54	-7.10	Ave
4874	36.46	187	120	H	32.8	5.52	27.7	47.08	54	-6.92	Ave
7310	52.09	337	126	V	35.9	6.57	27.9	66.70	74	-7.30	Peak
7310	50.1	14	140	H	35.9	6.57	27.9	64.71	74	-9.29	Peak
7310	36.79	337	126	V	35.9	6.57	27.9	51.40	54	-2.60	Ave
High Channel 2462 MHz measured at 3 meters											
4920	44.31	268	129	V	32.8	5.52	27.7	54.93	74	-19.07	Peak
4920	43.38	161	133	H	32.8	5.52	27.7	54.00	74	-20.00	Peak
4920	39.91	268	129	V	32.8	5.52	27.7	50.53	54	-3.47	Ave
4920	38.77	161	133	H	32.8	5.52	27.7	49.39	54	-4.61	Ave
7385	44.71	330	116	V	36.1	6.62	27.9	59.53	74	-14.47	Peak
7385	43.83	15	148	H	36.1	6.62	27.9	58.65	74	-15.35	Peak
7385	38.82	330	116	V	36.1	6.62	27.9	53.64	54	-0.36	Ave
7385	36.27	15	148	H	36.1	6.62	27.9	51.09	54	-2.91	Ave

802.11g Mode:

Frequency (MHz)	S.A. Reading (dBμV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre- Amp. (dB)	Cord. Reading (dBμV/m)	FCC/IC		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dBμV/m)	Margin (dB)	
Low Channel 2412 MHz, measured at 3 meters											
2385	55.02	7	200	V	28.4	4.05	27.61	59.86	74	-14.14	Peak
2385	56.39	109	186	H	28.4	4.05	27.61	61.23	74	-12.77	Peak
2385	34.09	7	200	V	28.4	4.05	27.61	38.93	54	-15.07	Ave
2385	35.88	109	186	H	28.4	4.05	27.61	40.72	54	-13.28	Ave
Middle Channel 2437 MHz measured at 3 meters											
7310	52.87	339	124	V	35.9	6.57	27.9	67.48	74	-6.52	Peak
7310	48.68	24	145	H	35.9	6.57	27.9	63.29	74	-10.71	Peak
7310	37.29	339	124	V	35.9	6.57	27.9	51.90	54	-2.10	Ave
7310	34	24	145	H	35.9	6.57	27.9	48.61	54	-5.39	Ave
High Channel 2462 MHz measured at 3 meters											
7385	45	351	124	V	36.1	6.62	27.9	59.82	74	-14.18	Peak
7385	42.44	22	135	H	36.1	6.62	27.9	57.26	74	-16.74	Peak
7385	30	351	124	V	36.1	6.62	27.9	44.82	54	-9.18	Ave
7385	27.62	22	135	H	36.1	6.62	27.9	42.44	54	-11.56	Ave

802.11n HT20 Mode:

Frequency (MHz)	S.A. Reading (dBμV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre- Amp. (dB)	Cord. Reading (dBμV/m)	FCC/IC		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dBμV/m)	Margin (dB)	
Low Channel 2412 MHz, measured at 3 meters											
4828	41	92	126	V	32.6	5.56	27.77	51.39	74	-22.61	Peak
4828	38.03	158	143	H	32.6	5.56	27.77	48.42	74	-25.58	Peak
4828	25.57	92	126	V	32.6	5.56	27.77	35.96	54	-18.04	Ave
4828	23	158	143	H	32.6	5.56	27.77	33.39	54	-20.61	Ave
Middle Channel 2437 MHz measured at 3 meters											
7310	54.45	340	126	V	35.9	6.57	27.9	69.06	74	-4.94	Peak
7310	51.15	23	126	H	35.9	6.57	27.9	65.76	74	-8.24	Peak
7310	38.87	340	126	V	35.9	6.57	27.9	53.48	54	-0.52	Ave
7310	35.38	23	126	H	35.9	6.57	27.9	49.99	54	-4.01	Ave
High Channel 2462 MHz measured at 3 meters											
7385	48.4	340	125	V	36.1	6.62	27.9	63.22	74	-10.78	Peak
7385	45.74	15	126	H	36.1	6.62	27.9	60.56	74	-13.44	Peak
7385	32.47	340	125	V	36.1	6.62	27.9	47.29	54	-6.71	Ave
7385	30.35	15	126	H	36.1	6.62	27.9	45.17	54	-8.83	Ave

802.11n HT40 Mode:

Frequency (MHz)	S.A. Reading (dBμV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre- Amp. (dB)	Cord. Reading (dBμV/m)	FCC/IC		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dBμV/m)	Margin (dB)	
Low Channel 2422 MHz, measured at 3 meters											
7263	42.43	231	160	V	35.9	6.57	27.9	57.04	74	-16.96	Peak
7263	38.27	144	148	H	35.9	6.57	27.9	52.88	74	-21.12	Peak
7263	25.39	231	160	V	35.9	6.57	27.9	40.00	54	-14.00	Ave
7263	22.47	144	148	H	35.9	6.57	27.9	37.08	54	-16.92	Ave
Middle Channel 2437 MHz measured at 3 meters											
7310	45.16	232	161	V	35.9	6.57	27.9	59.77	74	-14.23	Peak
7310	41.62	144	142	H	35.9	6.57	27.9	56.23	74	-17.77	Peak
7310	29.01	232	161	V	35.9	6.57	27.9	43.62	54	-10.38	Ave
7310	24.85	144	142	H	35.9	6.57	27.9	39.46	54	-14.54	Ave
High Channel 2452 MHz measured at 3 meters											
7357	45.93	29	152	V	36.1	6.62	27.9	60.75	74	-13.25	Peak
7357	42.47	143	130	H	36.1	6.62	27.9	57.29	74	-16.71	Peak
7357	28.87	29	152	V	36.1	6.62	27.9	43.69	54	-10.31	Ave
7357	25.9	143	130	H	36.1	6.62	27.9	40.72	54	-13.28	Ave

(3) Restricted Band Emissions**802.11b Mode**

Low Channel 2412 MHz, measured at 3 meters

Frequency (MHz)	S.A. Reading (dBμV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre-Amp. (dB)	Cord. Reading (dBμV/m)	FCC/IC		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dBμV/m)	Margin (dB)	
2390	41.2	285	157	V	28.1	3.12	0	72.42	74	-1.58	Peak
2390	39.42	57	173	H	28.1	3.12	0	70.64	74	-3.36	Peak
2390	22.56	285	157	V	28.1	3.12	0	53.78	54	-0.22	Ave
2390	19.98	57	173	H	28.1	3.12	0	51.2	54	-2.8	Ave

High Channel 2462 MHz, measured at 3 meters

Frequency (MHz)	S.A. Reading (dBμV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre-Amp. (dB)	Cord. Reading (dBμV/m)	FCC/IC		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dBμV/m)	Margin (dB)	
2483.5	30.86	99	150	V	28.4	3.25	0	62.51	74	-11.49	Peak
2483.5	26.4	55	150	H	28.4	3.25	0	58.05	74	-15.95	Peak
2483.5	14.02	99	150	V	28.4	3.25	0	45.67	54	-8.33	Ave
2483.5	12.96	55	150	H	28.4	3.25	0	44.61	54	-9.39	Ave

802.11g Mode

Low Channel 2412 MHz, measured at 3 meters

Frequency (MHz)	S.A. Reading (dBμV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre-Amp. (dB)	Cord. Reading (dBμV/m)	FCC/IC		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dBμV/m)	Margin (dB)	
2390	41.26	95	120	V	28.1	3.12	0	72.48	74	-1.52	Peak
2390	31.7	78	218	H	28.1	3.12	0	62.92	74	-11.08	Peak
2390	21.69	95	120	V	28.1	3.12	0	52.91	54	-1.09	Ave
2390	15.14	78	218	H	28.1	3.12	0	46.36	54	-7.64	Ave

High Channel 2462 MHz, measured at 3 meters

Frequency (MHz)	S.A. Reading (dBμV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre-Amp. (dB)	Cord. Reading (dBμV/m)	FCC/IC		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dBμV/m)	Margin (dB)	
2483.5	29.2	92	150	V	28.4	3.25	0	60.85	74	-13.15	Peak
2483.5	25.19	80	207	H	28.4	3.25	0	56.84	74	-17.16	Peak
2483.5	13.6	92	150	V	28.4	3.25	0	45.25	54	-8.75	Ave
2483.5	12.53	80	207	H	28.4	3.25	0	44.18	54	-9.82	Ave

802.11n HT20 Mode

Low Channel 2412 MHz, measured at 3 meters

Frequency (MHz)	S.A. Reading (dBμV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre-Amp. (dB)	Cord. Reading (dBμV/m)	FCC/IC		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dBμV/m)	Margin (dB)	
2390	42.63	279	156	V	28.1	3.12	0	73.85	74	-0.15	Peak
2390	38.11	280	190	H	28.1	3.12	0	69.33	74	-4.67	Peak
2390	22.08	279	156	V	28.1	3.12	0	53.3	54	-0.7	Ave
2390	18.46	280	190	H	28.1	3.12	0	49.68	54	-4.32	Ave

High Channel 2462 MHz, measured at 3 meters

Frequency (MHz)	S.A. Reading (dBμV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre-Amp. (dB)	Cord. Reading (dBμV/m)	FCC/IC		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dBμV/m)	Margin (dB)	
2483.5	33.2	98	147	V	28.4	3.25	0	64.85	74	-9.15	Peak
2483.5	28.56	272	107	H	28.4	3.25	0	60.21	74	-13.79	Peak
2483.5	17.13	98	147	V	28.4	3.25	0	48.78	54	-5.22	Ave
2483.5	14.21	272	107	H	28.4	3.25	0	45.86	54	-8.14	Ave

802.11n HT40 Mode

Low Channel 2422 MHz, measured at 3 meters

Frequency (MHz)	S.A. Reading (dBμV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre-Amp. (dB)	Cord. Reading (dBμV/m)	FCC/IC		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dBμV/m)	Margin (dB)	
2390	39.1	99	149	V	28.1	3.12	0	70.32	74	-3.68	Peak
2390	37.35	275	180	H	28.1	3.12	0	68.57	74	-5.43	Peak
2390	22.29	99	149	V	28.1	3.12	0	53.51	54	-0.49	Ave
2390	16.72	275	180	H	28.1	3.12	0	47.94	54	-6.06	Ave

High Channel 2452 MHz, measured at 3 meters

Frequency (MHz)	S.A. Reading (dBμV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre-Amp. (dB)	Cord. Reading (dBμV/m)	FCC/IC		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dBμV/m)	Margin (dB)	
2483.5	36.58	97	146	V	28.4	3.25	0	68.23	74	-5.77	Peak
2483.5	31.55	277	136	H	28.4	3.25	0	63.2	74	-10.8	Peak
2483.5	21.26	97	146	V	28.4	3.25	0	52.91	54	-1.09	Ave
2483.5	17.1	277	136	H	28.4	3.25	0	48.75	54	-5.25	Ave

9 FCC §15.247(a)(2) & IC RSS-210 §A8.2– 6 dB & 99% Bandwidth

9.1 Applicable Standard

According to FCC §15.247(a)(2) and IC RSS-210 A8.2 (a), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz

9.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emissions bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

9.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date
Agilent	Spectrum Analyzer	E4446A	US44300386	2011-08-11

Statement of Traceability: **BACL Corp.** attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

9.4 Test Environmental Conditions

Temperature:	19~24 °C
Relative Humidity:	38~48 %
ATM Pressure:	101.2-102 kPa

The testing was performed by Quinn Jiang on 01-19-2012 to 01-20-2012 in RF site.

802.11b mode

Chain J1

Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	99% Emission Bandwidth (MHz)	Limit (kHz)	Results
Low	2412	10.139	13.7488	> 500	Compliant
Middle	2437	10.186	13.9781	> 500	Compliant
High	2462	10.120	13.8531	> 500	Compliant

Chain J2

Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	99% Emission Bandwidth (MHz)	Limit (kHz)	Results
Low	2412	10.161	13.7552	> 500	Compliant
Middle	2437	10.181	14.0521	> 500	Compliant
High	2462	10.172	13.9877	> 500	Compliant

Chain J3

Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	99% Emission Bandwidth (MHz)	Limit (kHz)	Results
Low	2412	10.160	13.6633	> 500	Compliant
Middle	2437	10.212	14.3398	> 500	Compliant
High	2462	10.146	14.0864	> 500	Compliant

802.11g mode

Chain J1

Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	99% Emission Bandwidth (MHz)	Limit (kHz)	Results
Low	2412	16.677	16.5046	> 500	Compliant
Middle	2437	16.705	16.5242	> 500	Compliant
High	2462	16.681	16.4830	> 500	Compliant

Chain J2

Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	99% Emission Bandwidth (MHz)	Limit (kHz)	Results
Low	2412	16.682	16.4999	> 500	Compliant
Middle	2437	16.663	16.5050	> 500	Compliant
High	2462	16.719	16.5414	> 500	Compliant

Chain J3

Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	99% Emission Bandwidth (MHz)	Limit (kHz)	Results
Low	2412	16.669	16.5062	> 500	Compliant
Middle	2437	16.707	16.5779	> 500	Compliant
High	2462	16.682	16.5206	> 500	Compliant

802.11n HT20 mode

Chain J1

Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	99% Emission Bandwidth (MHz)	Limit (kHz)	Results
Low	2412	17.892	17.7074	> 500	Compliant
Middle	2437	17.926	17.7271	> 500	Compliant
High	2462	17.883	17.6833	> 500	Compliant

Chain J2

Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	99% Emission Bandwidth (MHz)	Limit (kHz)	Results
Low	2412	17.914	17.7052	> 500	Compliant
Middle	2437	17.885	17.7051	> 500	Compliant
High	2462	17.925	17.7177	> 500	Compliant

Chain J3

Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	99% Emission Bandwidth (MHz)	Limit (kHz)	Results
Low	2412	17.873	17.7134	> 500	Compliant
Middle	2437	17.943	17.7986	> 500	Compliant
High	2462	17.906	17.7264	> 500	Compliant

802.11n HT40 mode

Chain J1

Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	99% Emission Bandwidth (MHz)	Limit (kHz)	Results
Low	2422	36.775	36.2841	> 500	Compliant
Middle	2437	36.863	36.3972	> 500	Compliant
High	2452	36.796	36.3304	> 500	Compliant


Chain J2

Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	99% Emission Bandwidth (MHz)	Limit (kHz)	Results
Low	2422	36.821	36.3443	> 500	Compliant
Middle	2437	36.843	36.3545	> 500	Compliant
High	2452	36.803	36.3295	> 500	Compliant


Chain J3

Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	99% Emission Bandwidth (MHz)	Limit (kHz)	Results
Low	2422	36.819	36.2646	> 500	Compliant
Middle	2437	36.847	36.4559	> 500	Compliant
High	2452	36.773	36.3238	> 500	Compliant


802.11b mode, Low Channel, Chain J1

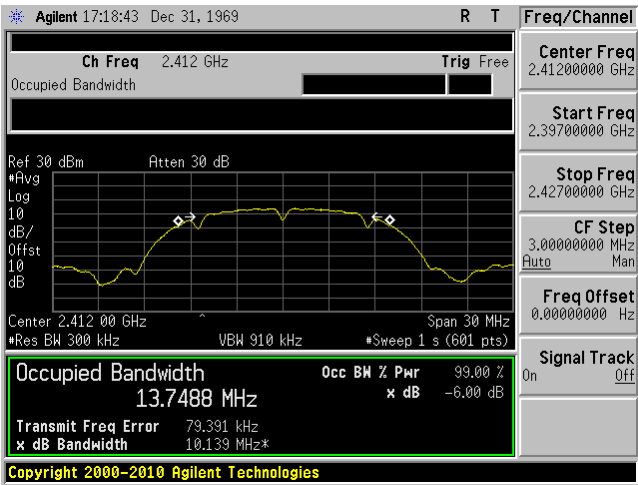


802.11b mode, Low Channel, Chain J2

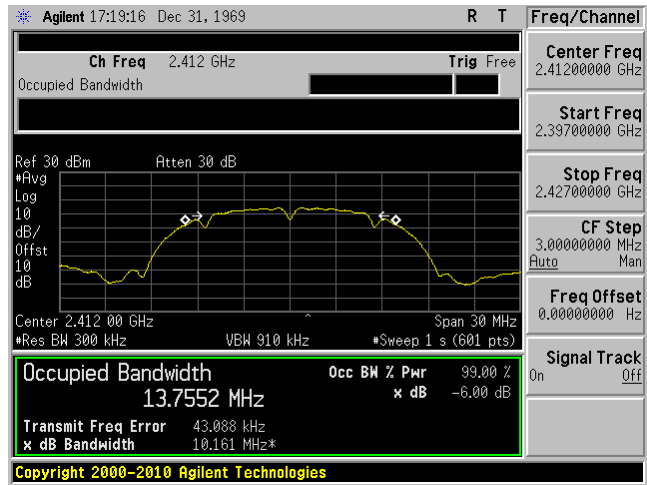


802.11b mode, Low Channel, Chain J3

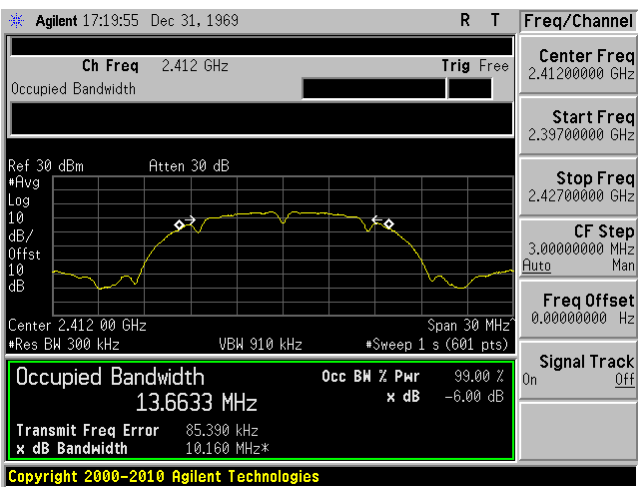


802.11b mode, Mid Channel, Chain J1

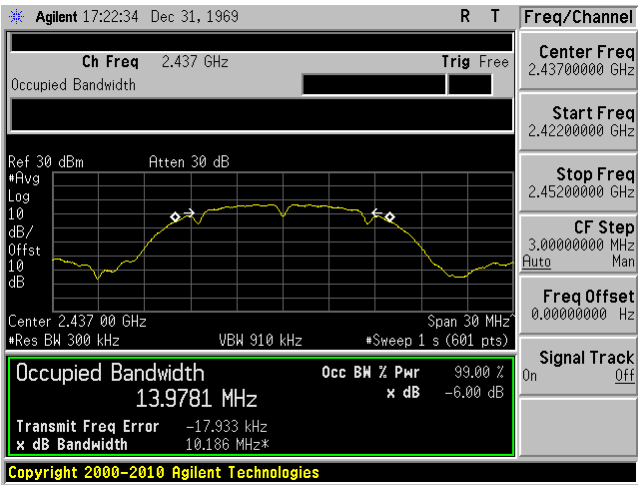


802.11b mode, Mid Channel, Chain J2

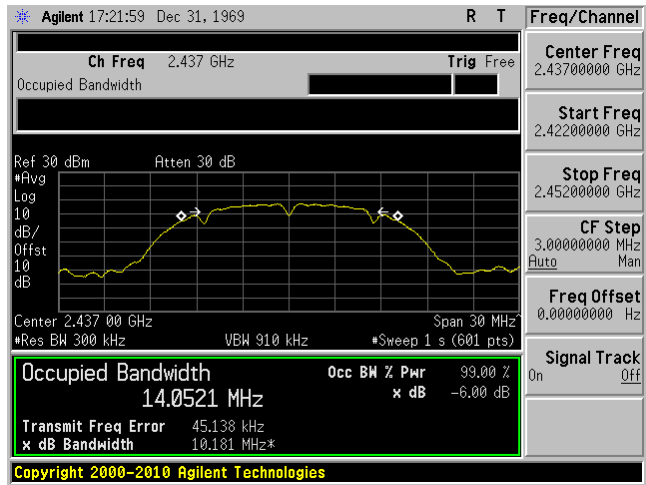


802.11b mode, Mid Channel, Chain J3

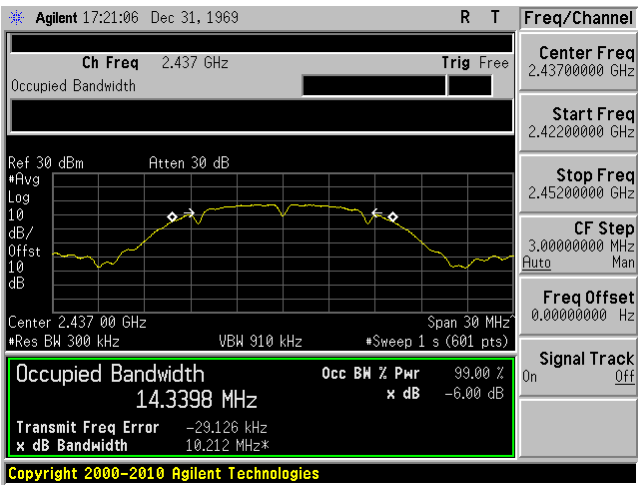


802.11b mode, High Channel, Chain J1

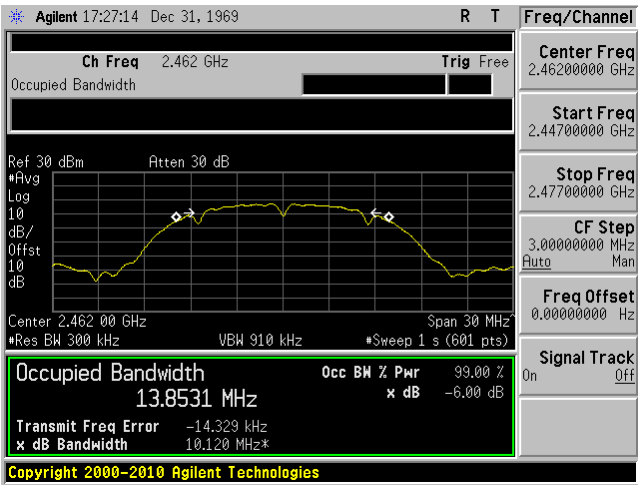


802.11b mode, High Channel, Chain J2

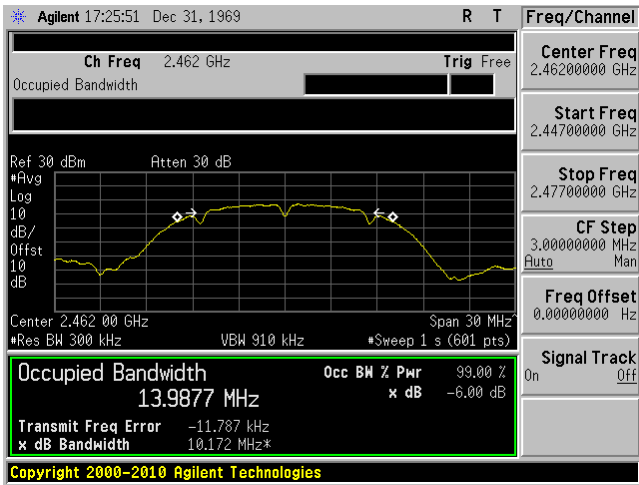


802.11b mode, High Channel, Chain J3

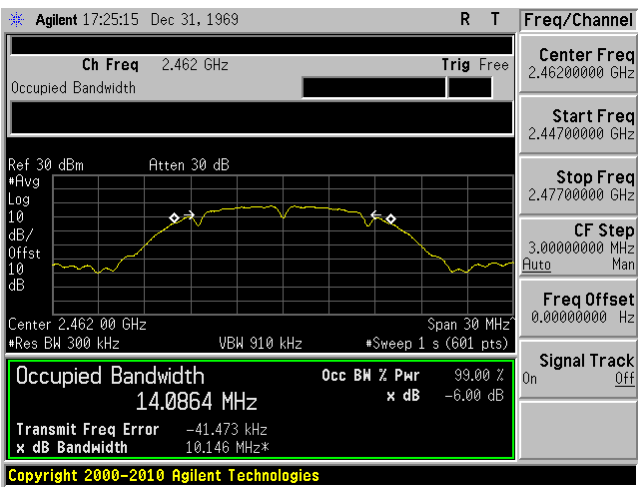


802.11g mode, Low Channel, Chain J1

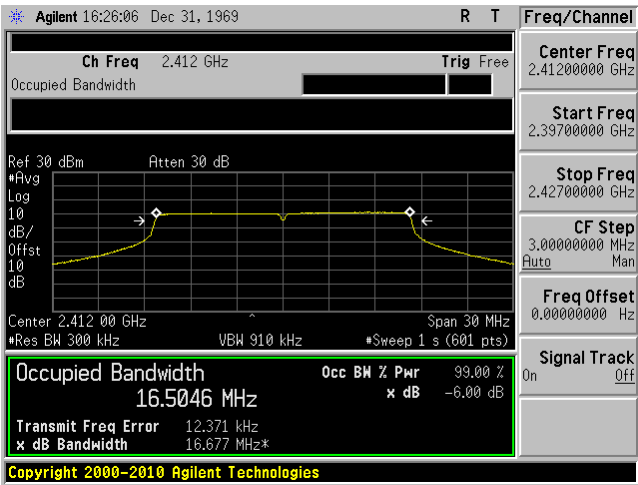


802.11g mode, Low Channel, Chain J2

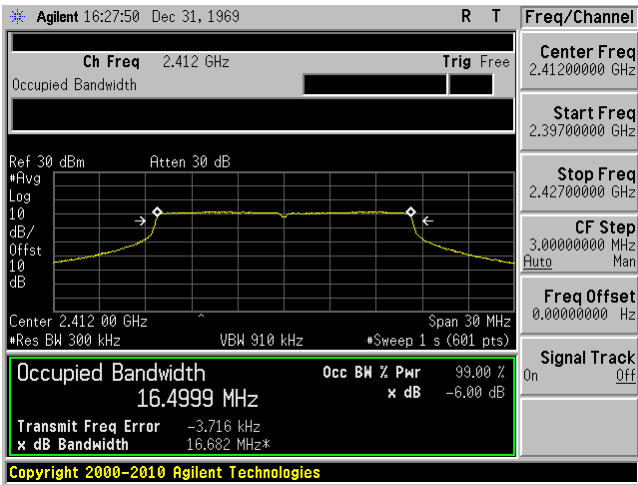


802.11g mode, Low Channel, Chain J3

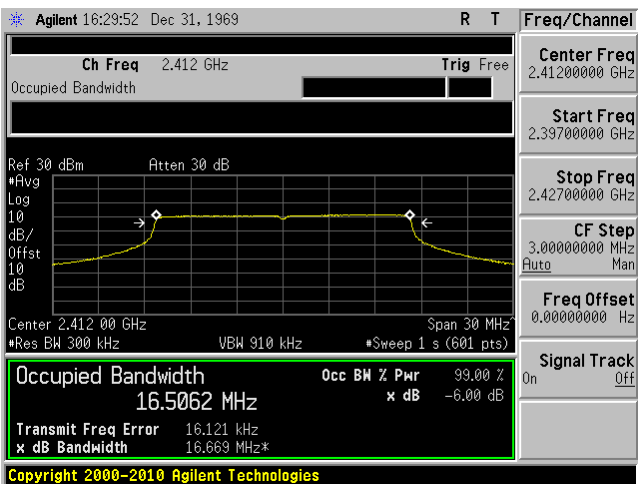


802.11g mode, Middle Channel, Chain J1

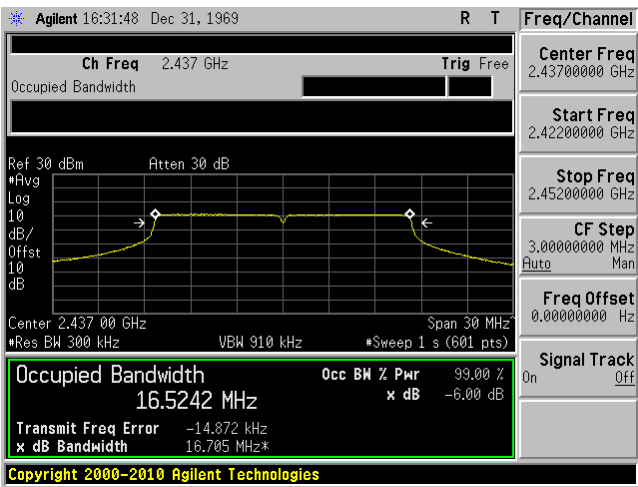


802.11g mode, Middle Channel, Chain J2

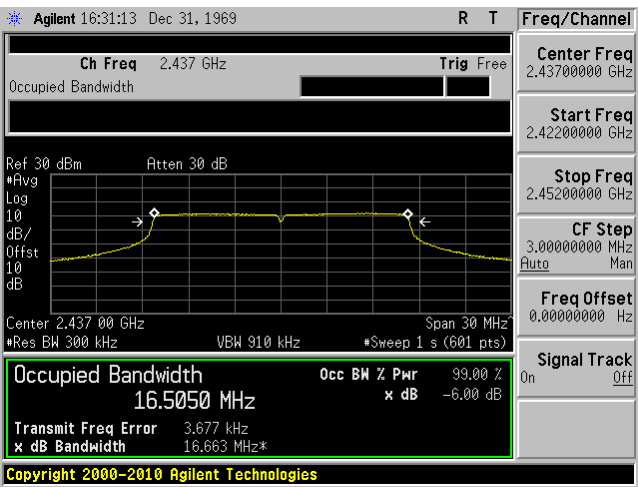


802.11g mode, Middle Channel, Chain J3

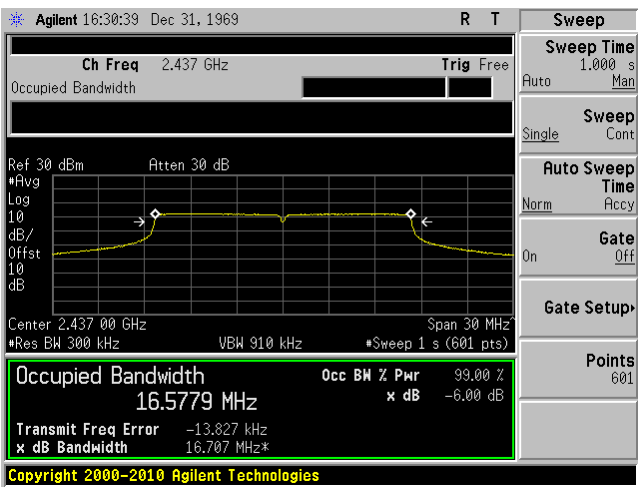


802.11g mode, High Channel, Chain J1

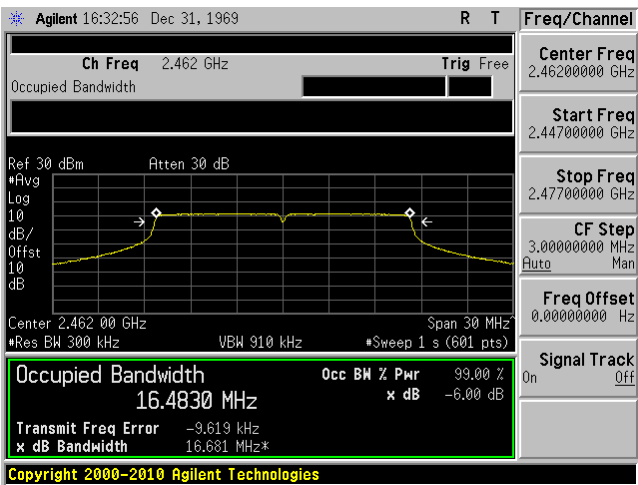


802.11g mode, High Channel, Chain J2

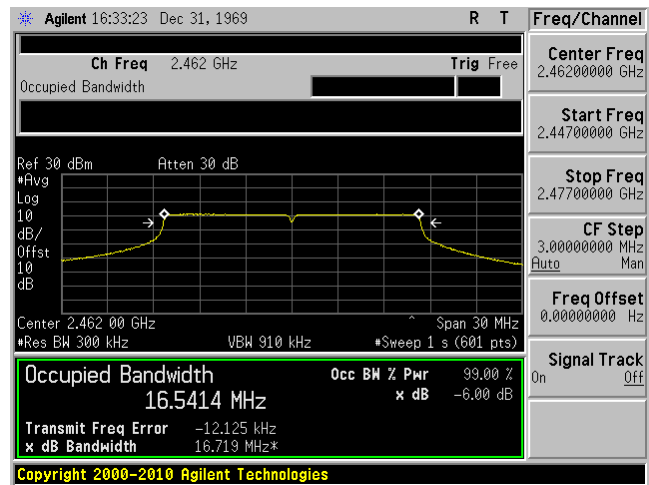


802.11g mode, High Channel, Chain J3

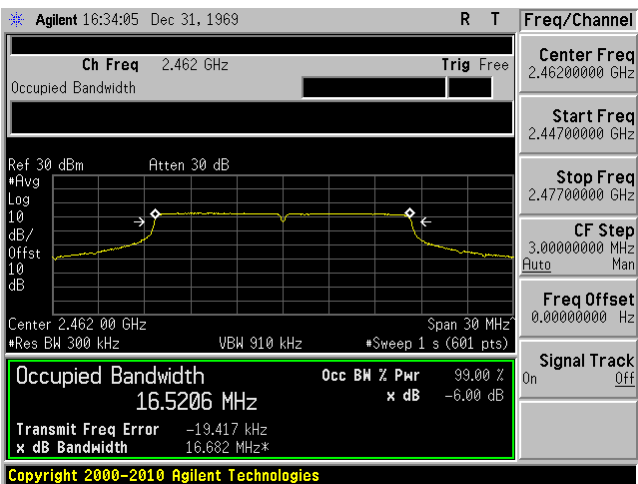


802.11n20 mode, Low Channel, Chain J1

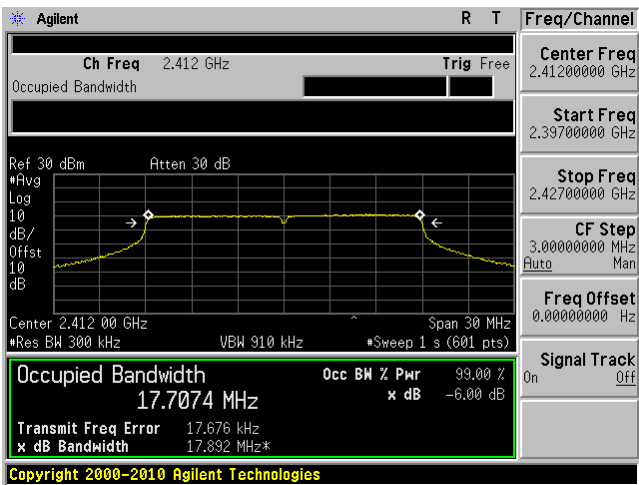


802.11n20 mode, Low Channel, Chain J2

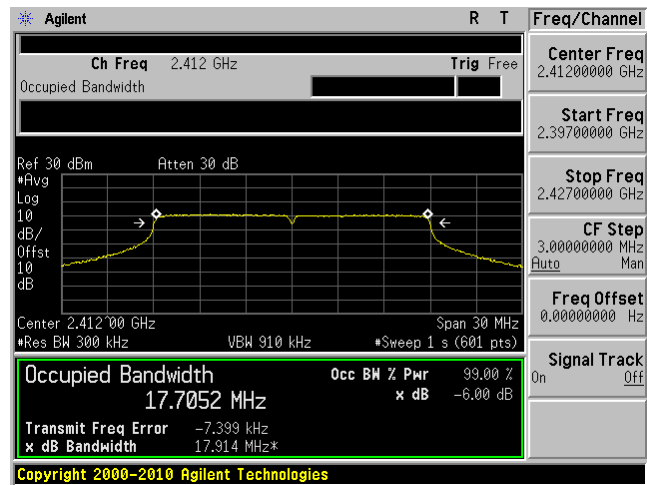


802.11n20 mode, Low Channel, Chain J3

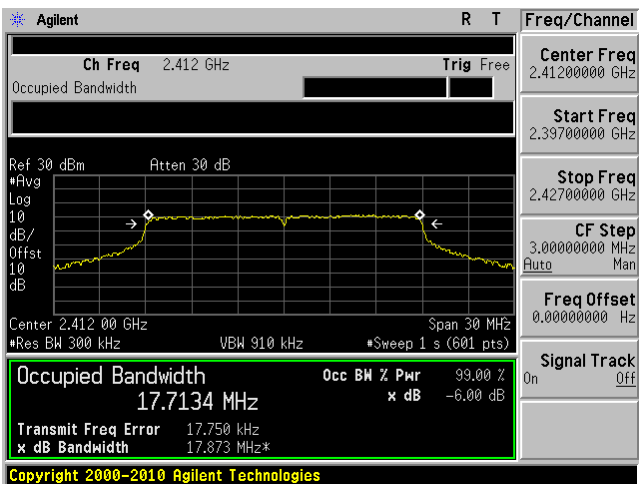


802.11n20 mode, Middle Channel, Chain J1

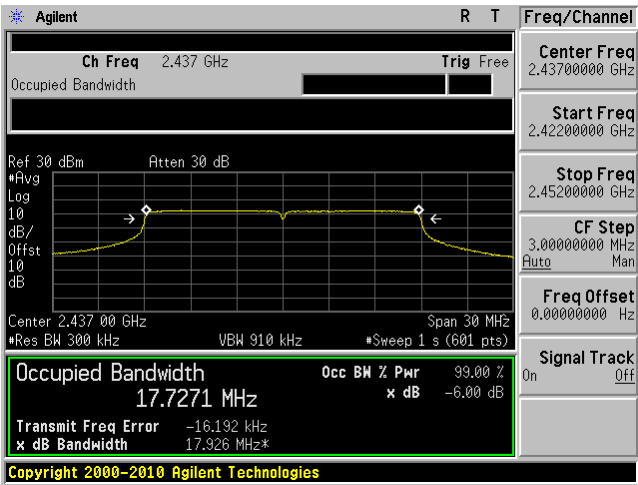


802.11n20 mode, Middle Channel, Chain J2

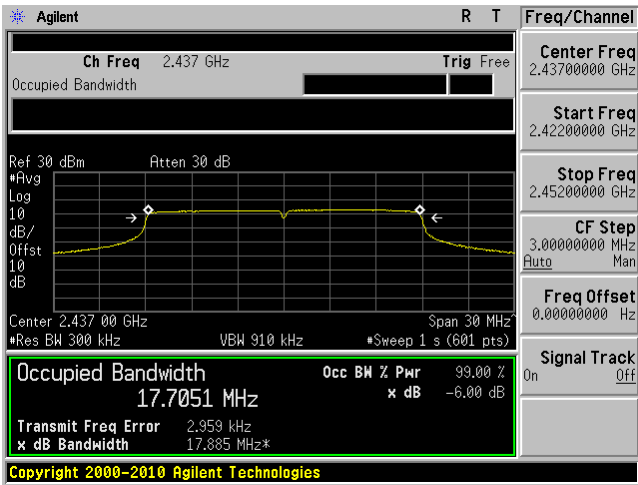


802.11n20 mode, Middle Channel, Chain J3

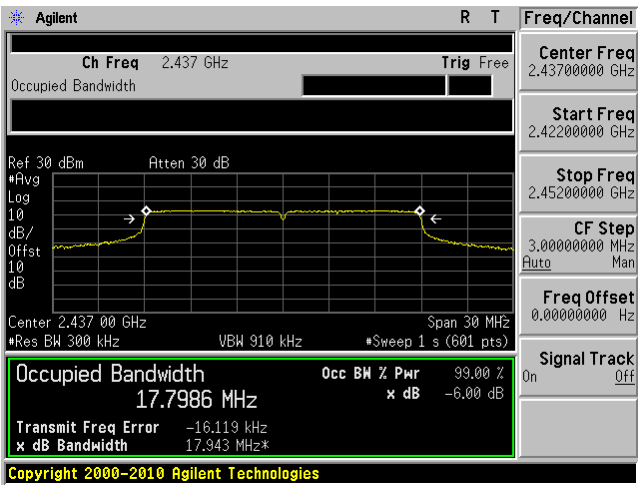


802.11n20 mode, High Channel, Chain J1

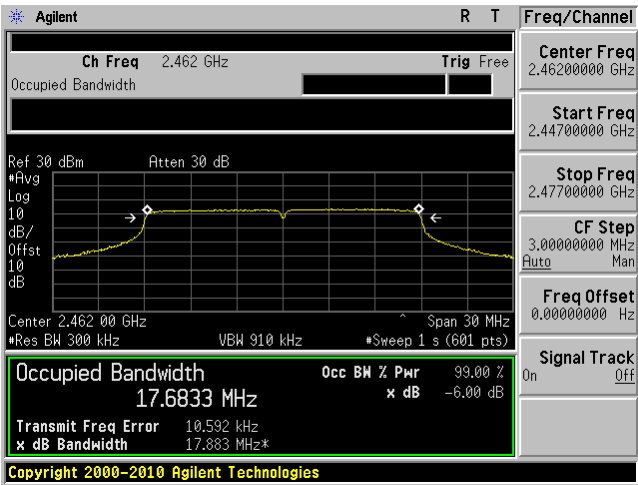


802.11n20 mode, High Channel, Chain J2

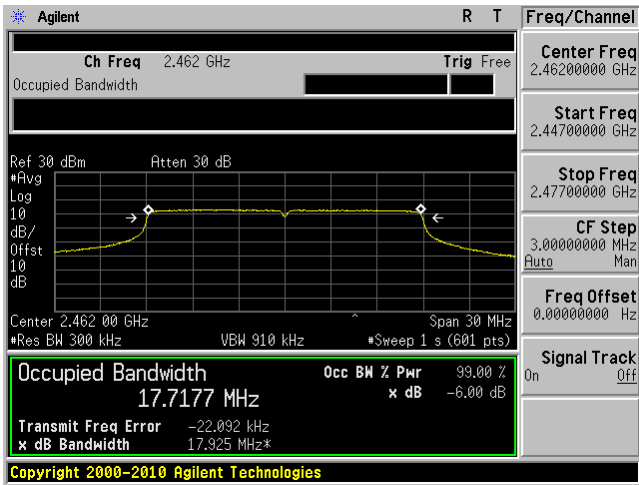


802.11n20 mode, High Channel, Chain J3

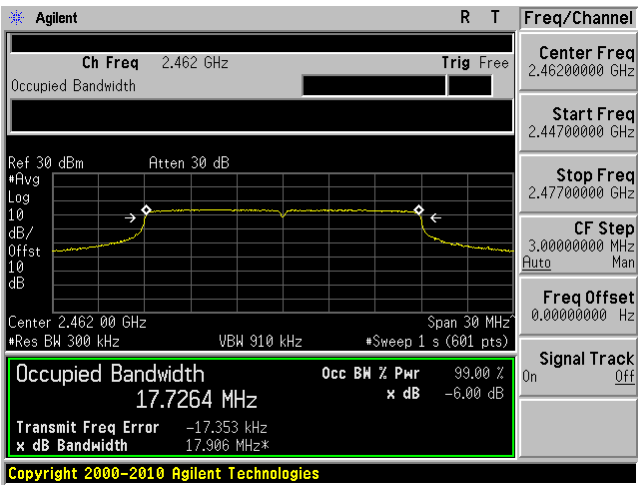


802.11n40 mode, Low Channel, Chain J1

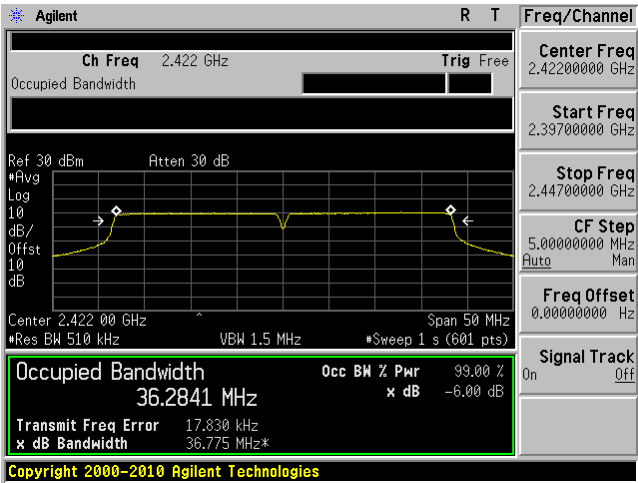


802.11n40 mode, Low Channel, Chain J2

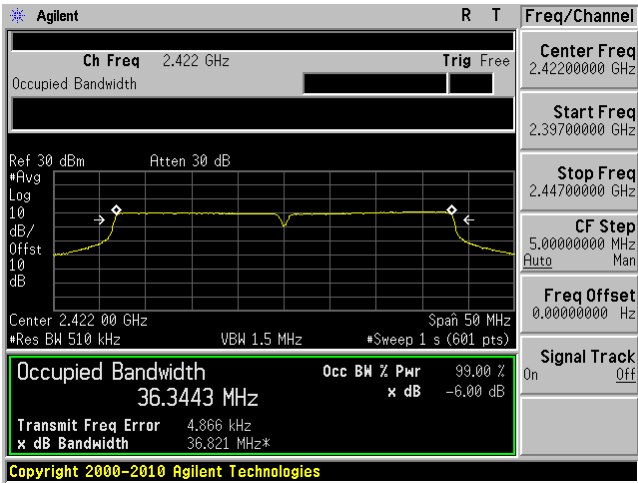


802.11n40 mode, Low Channel, Chain J3

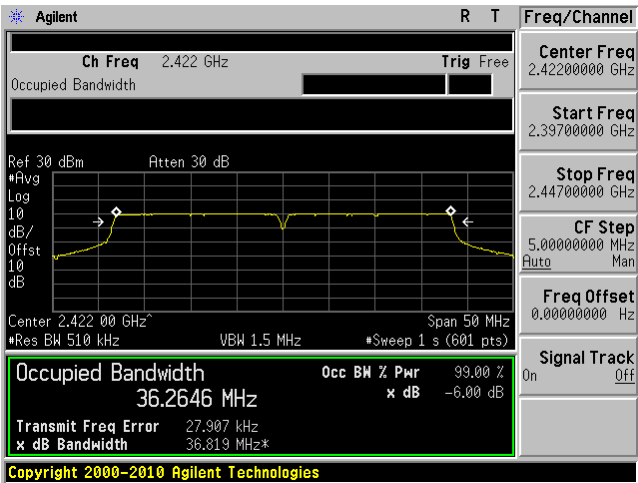


802.11n40 mode, Middle Channel, Chain J1

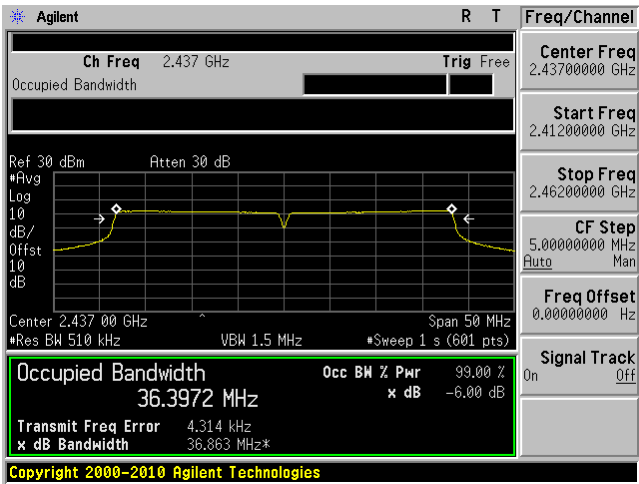


802.11n40 mode, Middle Channel, Chain J2

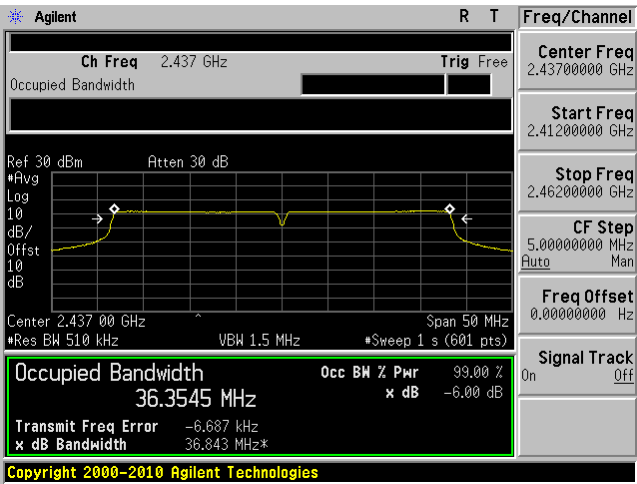


802.11n40 mode, Middle Channel, Chain J3

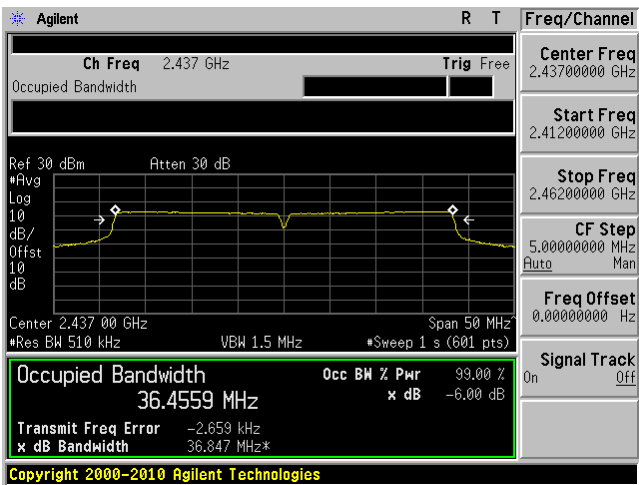


802.11n40 mode, High Channel, Chain J1

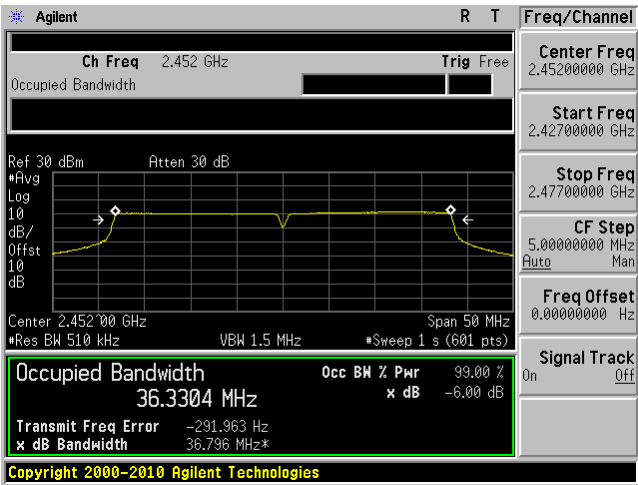

802.11n40 mode, High Channel, Chain J2

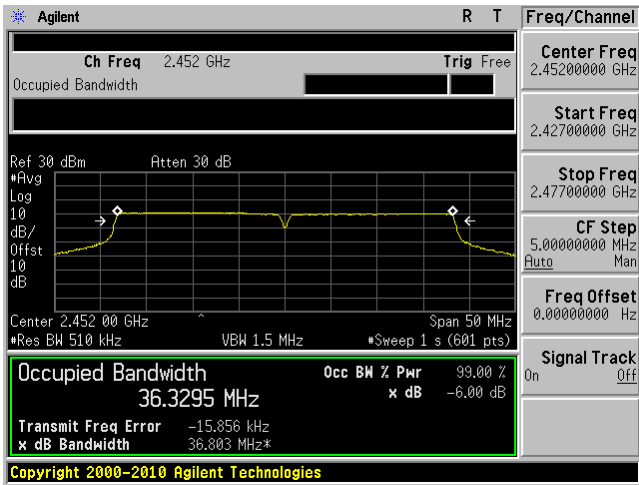

802.11n40 mode, High Channel, Chain J3

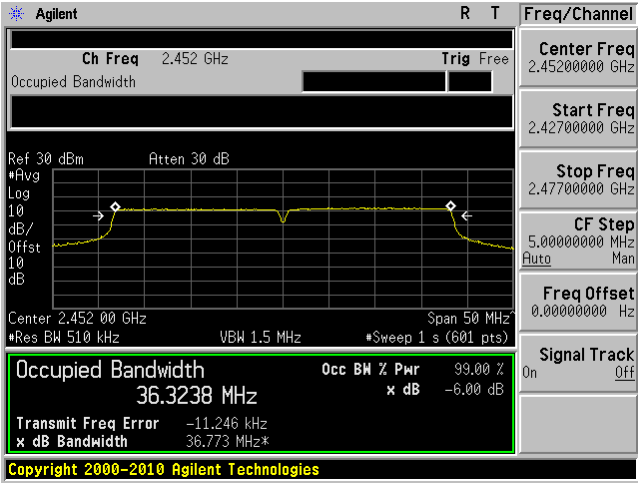


10 FCC §15.247(b) & IC RSS-210 §A8.4- Peak Output Power Measurement

10.1 Applicable Standard

According to FCC §15.247(b) (3) and RSS-210 §A8.4 (4) for systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.

10.2 Measurement Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to a spectrum analyzer.
3. Add a correction factor to the display.

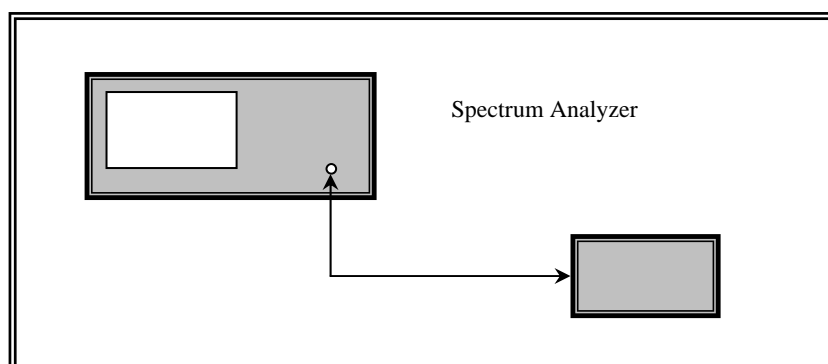

10.3 Test Equipment List and Details

Manufacturers	Description	Models	Serial Numbers	Calibration Dates
Agilent	Spectrum Analyzer	E4446A	US44300386	2011-08-11

Statement of Traceability: BACL Corp. attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

10.4 Test Environmental Conditions

Temperature:	19~24 °C
Relative Humidity:	38~48 %
ATM Pressure:	101.2-102 kPa

The testing was performed by Quinn Jiang on 01-19-2012 to 01-20-2012 in RF site.

10.5 Test Results

802.11b mode

Channel	Frequency (MHz)	TX Chain J1 Power (dBm)	TX Chain J2 Power (dBm)	TX Chain J3 Power (dBm)	Total Power (dBm)	Limit (dBm)	Margin (dB)	Power Setting
Low	2412	18.1	18.21	18.34	22.99	30	-7.01	21
Middle	2437	20.35	20.7	20.96	25.45	30	-4.55	24
High	2462	20.62	20.94	21.27	25.72	30	-4.28	24

802.11g mode

Channel	Frequency (MHz)	TX Chain J1 Power (dBm)	TX Chain J2 Power (dBm)	TX Chain J3 Power (dBm)	Total Power (dBm)	Limit (dBm)	Margin (dB)	Power Setting
Low	2412	18.39	18.01	18.38	23.03	30	-6.97	20.5
Middle	2437	18.44	18.66	19.31	23.59	30	6.41	21
High	2462	18.86	18.46	19.27	23.65	30	-6.35	21

802.11n HT20 mode

Channel	Frequency (MHz)	TX Chain J1 Power (dBm)	TX Chain J2 Power (dBm)	TX Chain J3 Power (dBm)	Total Power (dBm)	Limit (dBm)	Margin (dB)	Power Setting
Low	2412	17.26	17.41	16.8	21.94	30	-8.06	19.5
Middle	2437	19.25	19.47	20	24.36	30	-5.64	22
High	2462	19.76	19.2	20.17	24.50	30	-5.50	22

802.11n HT40 mode

Channel	Frequency (MHz)	TX Chain J1 Power (dBm)	TX Chain J2 Power (dBm)	TX Chain J3 Power (dBm)	Total Power (dBm)	Limit (dBm)	Margin (dB)	Power Setting
Low	2422	17.84	17.94	17.72	22.61	30	-7.39	19.5
Middle	2437	19.62	19.72	20.29	24.66	30	-5.34	22
High	2452	18.48	18.23	19.56	23.57	30	-6.43	20.5

11 FCC §15.247(d) & IC RSS-210 §A8.5 - 100 kHz Bandwidth of Band Edges

11.1 Applicable Standard

According to FCC §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emissions limits specified in §15.209(a) see §15.205(c).

According to IC RSS-210 §A8.5, in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the radio frequency power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under section A8.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Tables 2 and 3 is not required.

11.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

11.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date
Agilent	Spectrum Analyzer	E4446A	US44300386	2011-08-11

Statement of Traceability: BACL Corp. attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

11.4 Test Environmental Conditions


Temperature:	19~24 °C
Relative Humidity:	38~48 %
ATM Pressure:	101.2-102 kPa

The testing was performed by Quinn Jiang on 01-19-2012 to 01-20-2012 in RF site.


11.5 Test Results

Please refer to following pages for plots of band edge.


802.11b mode, Lowest Channel, Chain J1

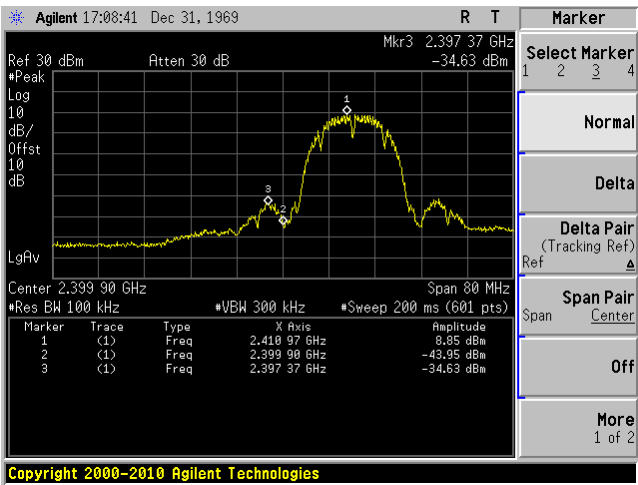


802.11b mode, Lowest Channel, Chain J2

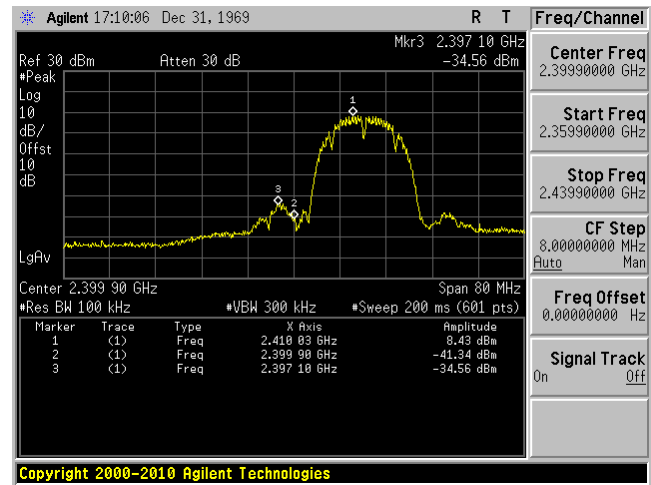


802.11b mode, Lowest Channel, Chain J3

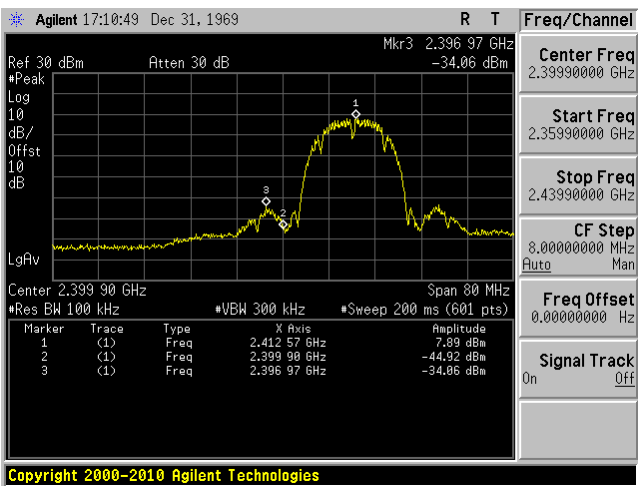


802.11b mode, Highest Channel, Chain J1

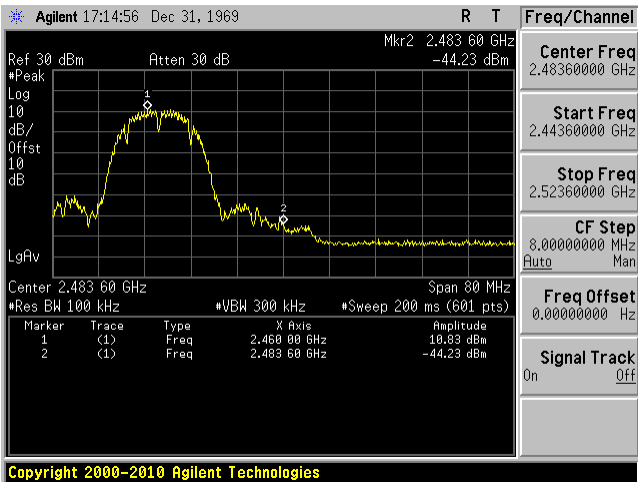


802.11b mode, Highest Channel, Chain J2

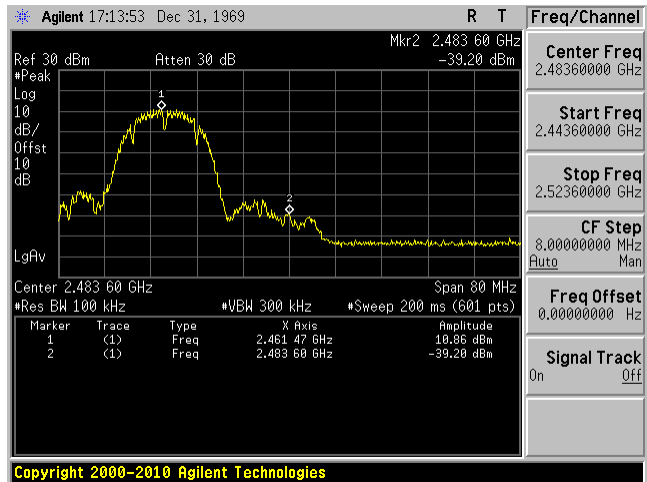


802.11b mode, Highest Channel, Chain J3

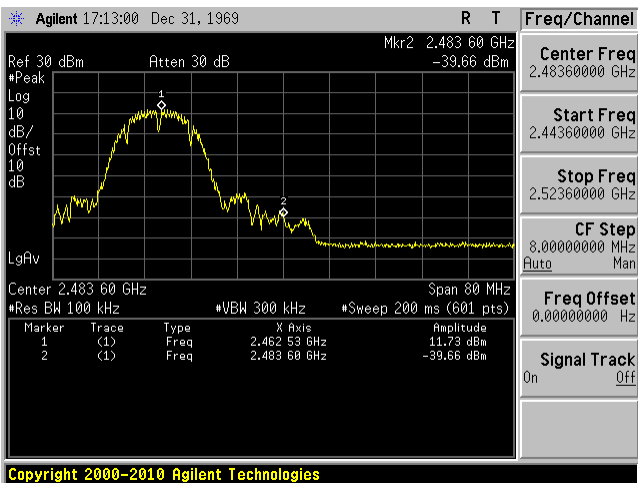


802.11g mode, Lowest Channel, Chain J1

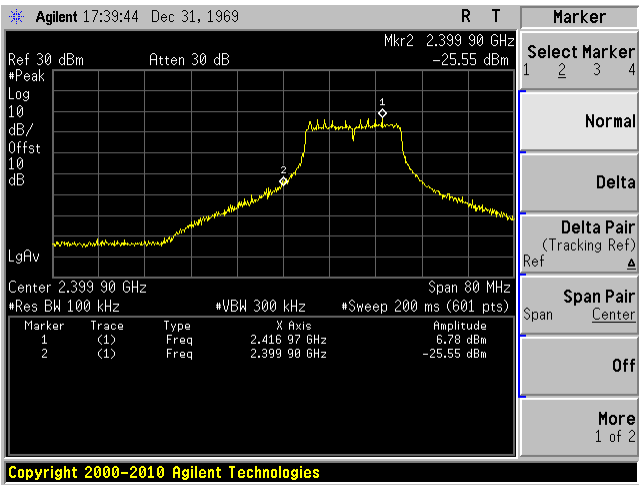


802.11g mode, Lowest Channel, Chain J2

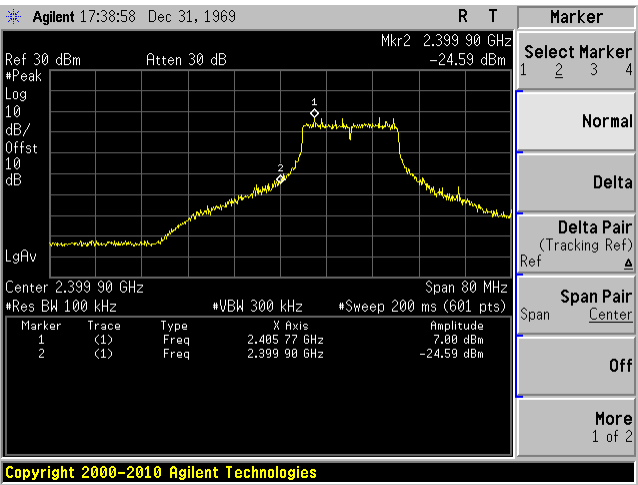


802.11g mode, Lowest Channel, Chain J3

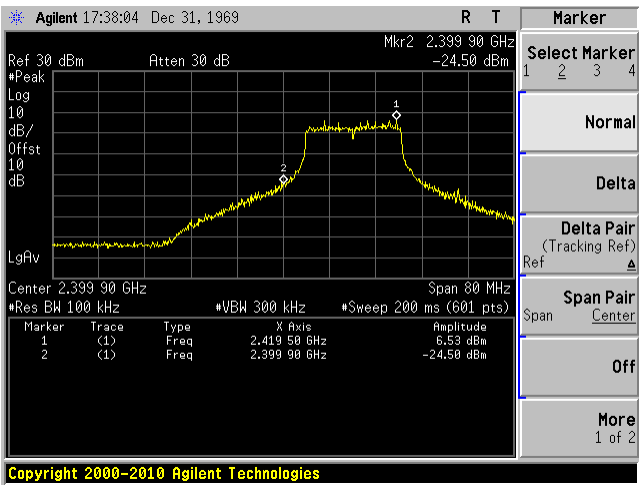


802.11g mode, Highest Channel, Chain J1

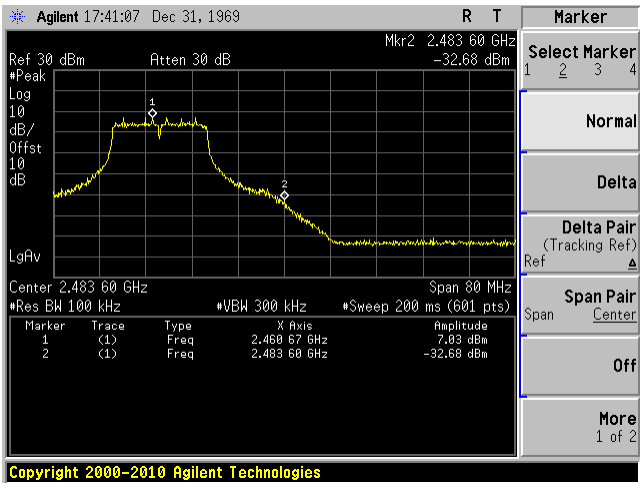


802.11g mode, Highest Channel, Chain J2

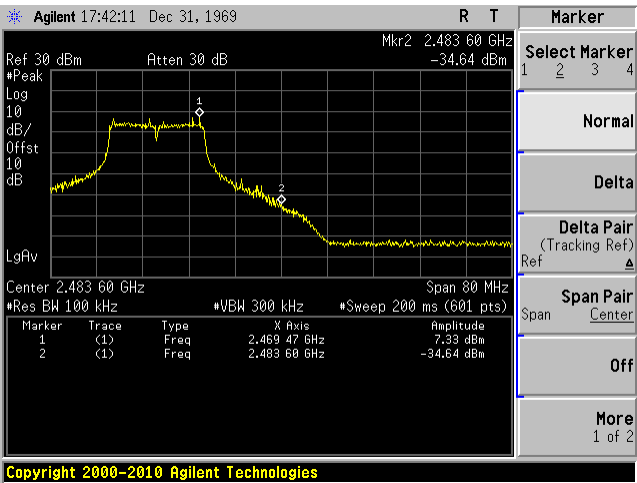


802.11g mode, Highest Channel, Chain J3

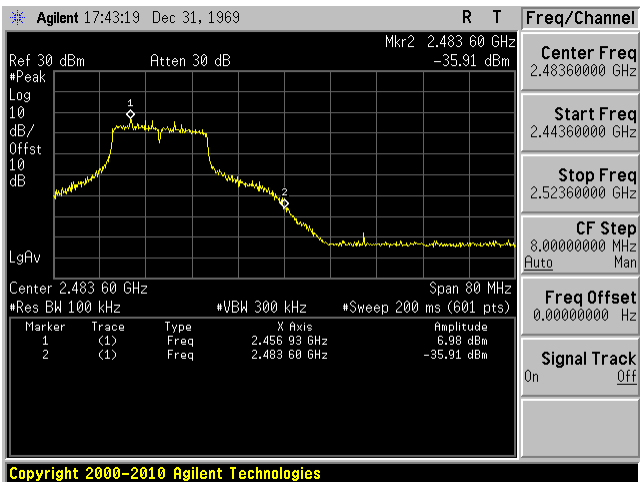


802.11n20 mode, Lowest Channel, Chain J1

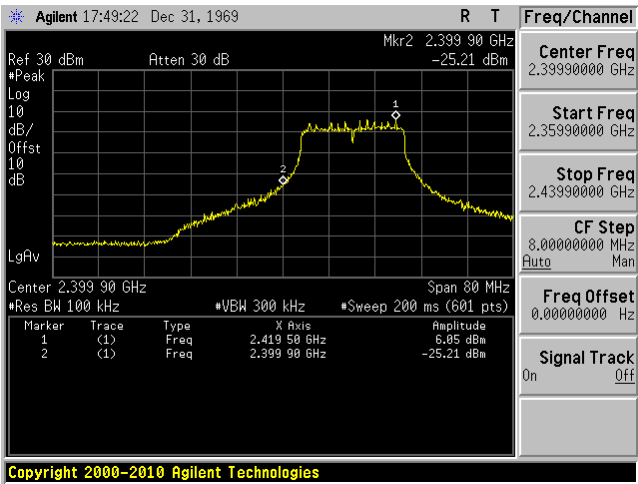


802.11 n20 mode, Lowest Channel, Chain J2

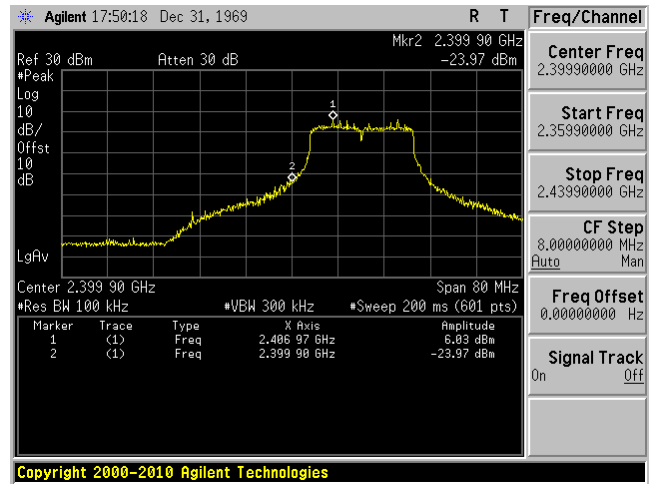


802.11n20 mode, Lowest Channel, Chain J3

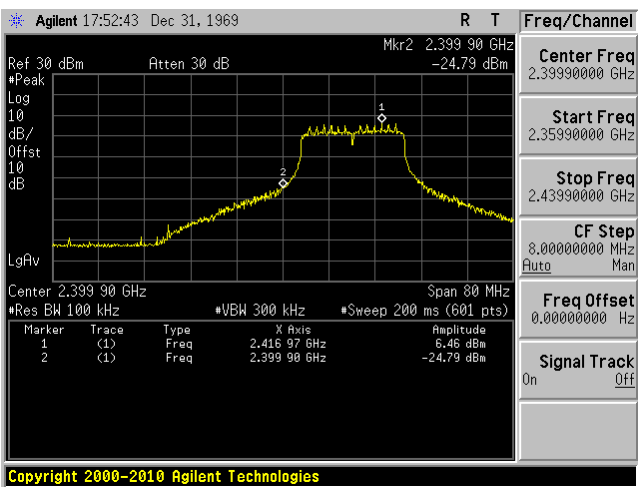


802.11n20 mode, Highest Channel, Chain J1

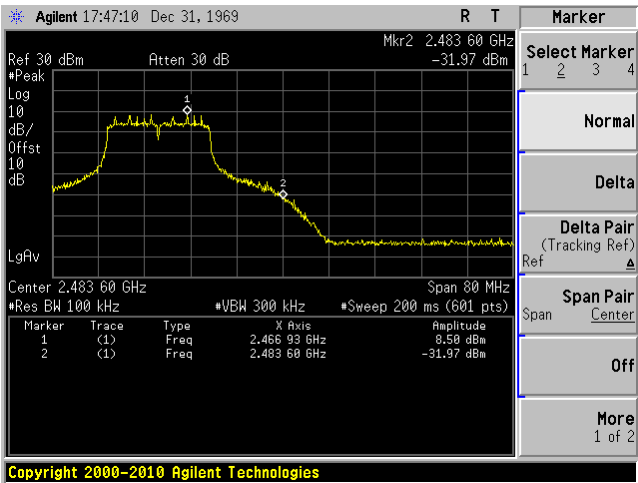


802.11n20 mode, Highest Channel, Chain J2

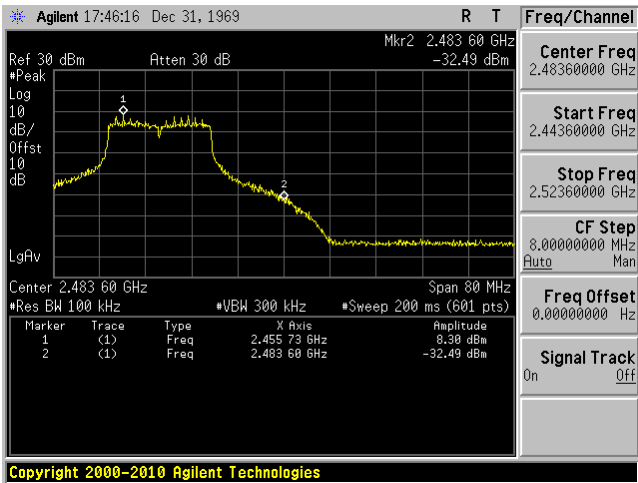


802.11n20 mode, Highest Channel, Chain J3

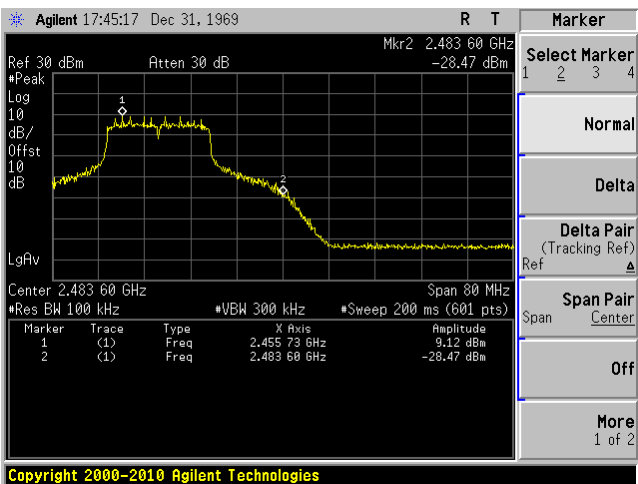


802.11n40 mode, Lowest Channel, Chain J1

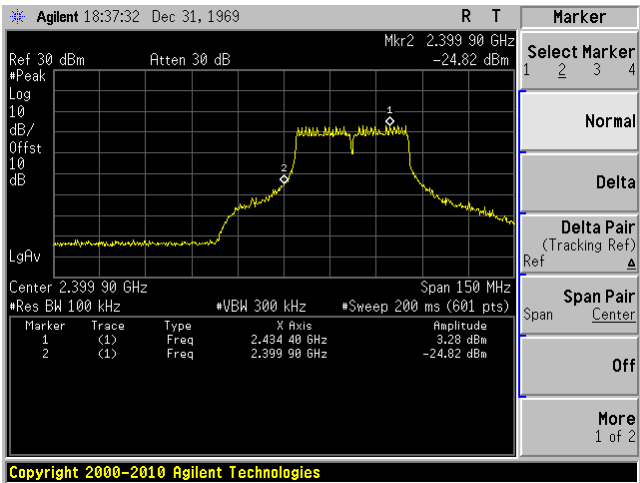


802.11n40 mode, Lowest Channel, Chain J2

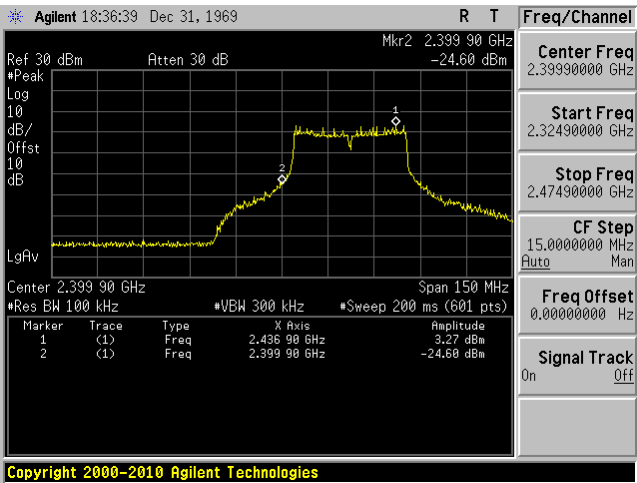


802.11n40 mode, Lowest Channel, Chain J3

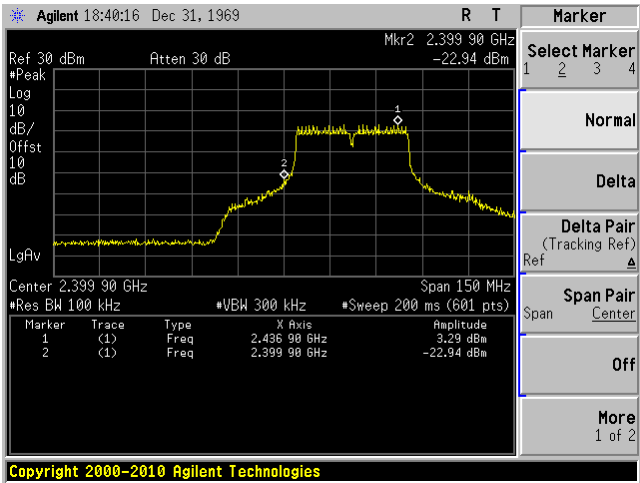


802.11n40 mode, Highest Channel, Chain J1

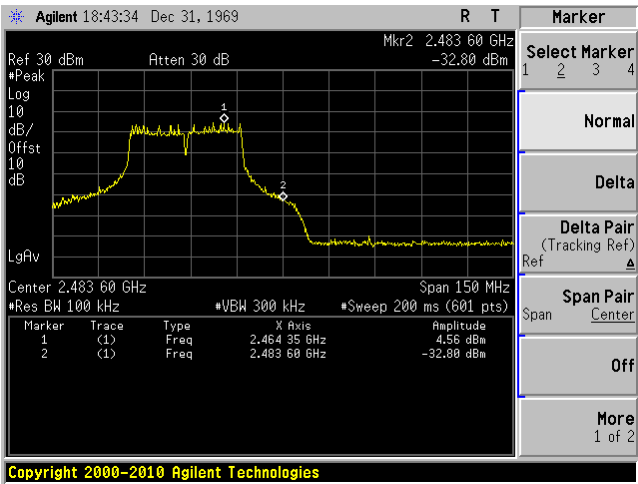

802.11n40 mode, Highest Channel, Chain J2

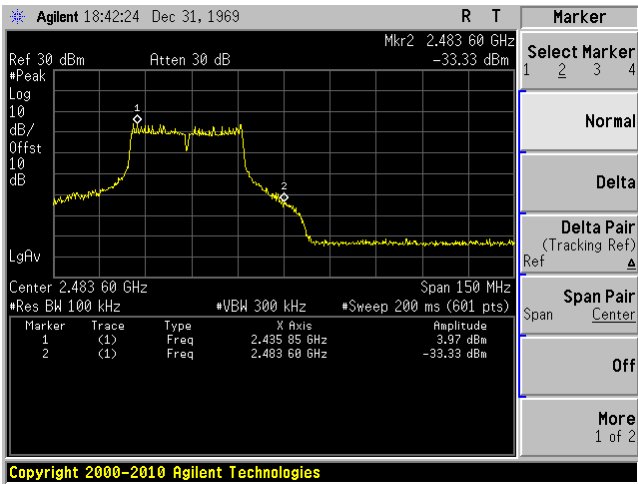

802.11n40 mode, Highest Channel, Chain 3

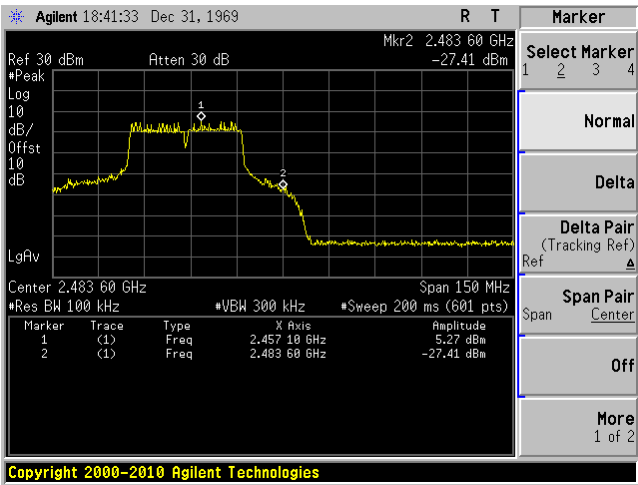

12 FCC §15.247(e) & IC RSS-210 §A8.2 (b) - Power Spectral Density

12.1 Applicable Standard

According to FCC §15.247 (e) and IC RSS-210 §A8.2 (b) , for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

12.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT was set without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Adjust the center frequency of SA on any frequency be measured and set SA to 1.5MHz span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
4. Repeat above procedures until all frequencies measured were complete.

12.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date
Agilent	Spectrum Analyzer	E4446A	US44300386	2011-08-11

Statement of Traceability: BACL Corp. attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

12.4 Test Environmental Conditions

Temperature:	19~24 °C
Relative Humidity:	38~48 %
ATM Pressure:	101.2-102 kPa

The testing was performed by Quinn Jiang on 01-19-2012 to 01-20-2012 in RF site.

12.5 Test Results

802.11b mode

Channel	Frequency (MHz)	TX Chain J1 PSD (dBm)	TX Chain J2 PSD (dBm)	TX Chain J3 PSD (dBm)	Total PSD (dBm)	Limit (dBm/3kHz)	Margin (dB)	Power Setting
Low	2412	-4.57	-4.09	-4.12	0.52	8	-7.48	21
Middle	2437	-0.71	-1.96	-1.98	3.26	8	-4.74	24
High	2462	-2.28	-2.54	-1.42	2.72	8	-5.28	24

802.11g mode

Channel	Frequency (MHz)	TX Chain J1 PSD (dBm)	TX Chain J2 PSD (dBm)	TX Chain J3 PSD (dBm)	Total PSD (dBm)	Limit (dBm/3kHz)	Margin (dB)	Power Setting
Low	2412	0.17	-7.98	-6.72	1.50	8	-6.5	20.5
Middle	2437	0.36	-7.55	-6.12	1.78	8	-6.22	21
High	2462	-6.62	-7.07	-6.11	-1.81	8	-9.81	21


802.11n HT20 mode

Channel	Frequency (MHz)	TX Chain J1 PSD (dBm)	TX Chain J2 PSD (dBm)	TX Chain J3 PSD (dBm)	Total PSD (dBm)	Limit (dBm/3kHz)	Margin (dB)	Power Setting
Low	2412	-8.85	-8.53	-7.76	-3.58	8	-11.58	19.5
Middle	2437	-5.93	-6.64	-2.17	0.33	8	-7.67	22
High	2462	-5.24	1.74	-5.86	3.12	8	-4.88	22


802.11n HT40 mode

Channel	Frequency (MHz)	TX Chain J1 PSD (dBm)	TX Chain J2 PSD (dBm)	TX Chain J3 PSD (dBm)	Total PSD (dBm)	Limit (dBm/3kHz)	Margin (dB)	Power Setting
Low	2422	-9.75	-9.87	-10.89	-5.37	8	-13.37	19.5
Middle	2437	-8.41	-7.56	-5.12	-2.03	8	-10.03	22
High	2452	-9.29	-9.71	-9.26	-4.64	8	-12.64	20.5


802.11bmode, Low Channel, Chain J1

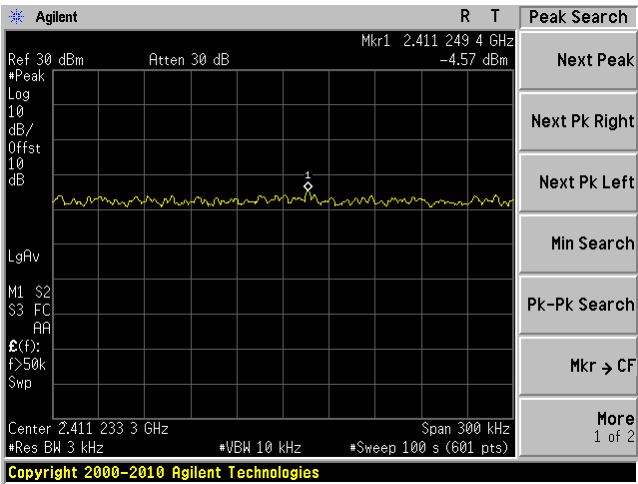


802.11b mode, Low Channel, Chain J2

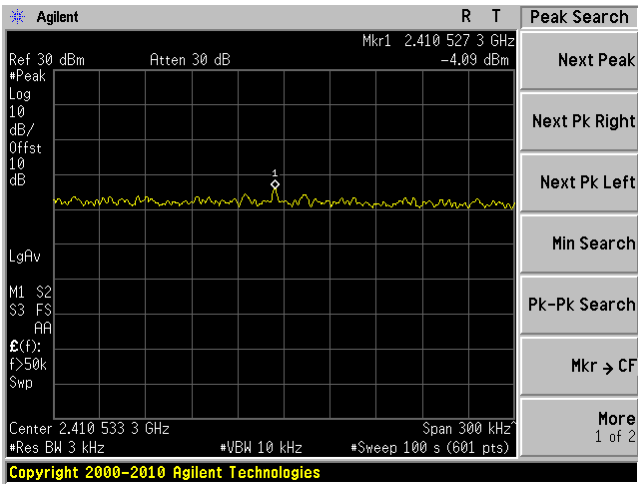


802.11b mode, Low Channel, Chain J3

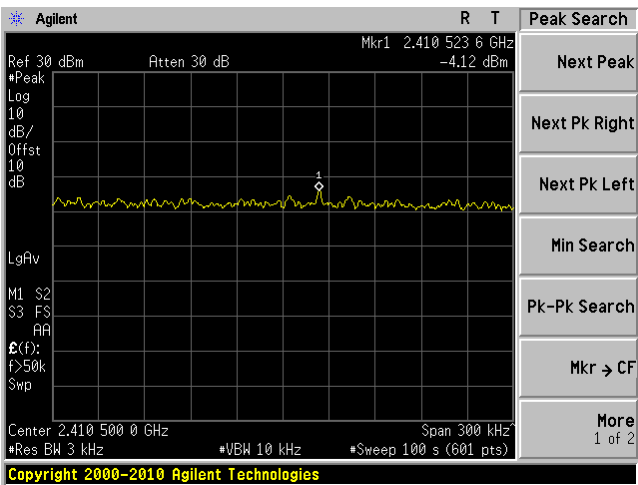


802.11b mode, Middle Channel, Chain J1

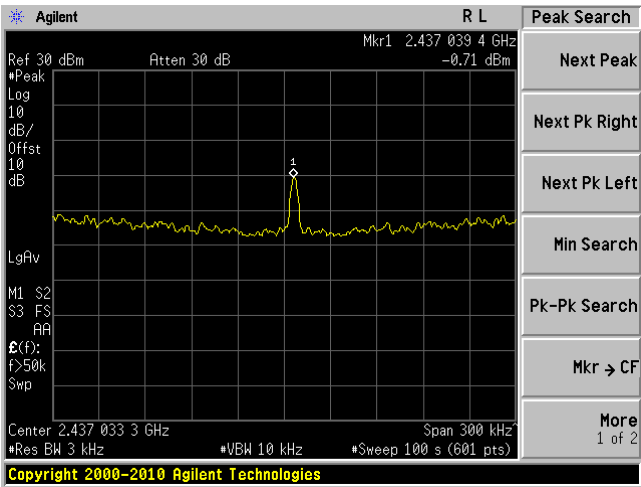


802.11b mode, Middle Channel, Chain J2

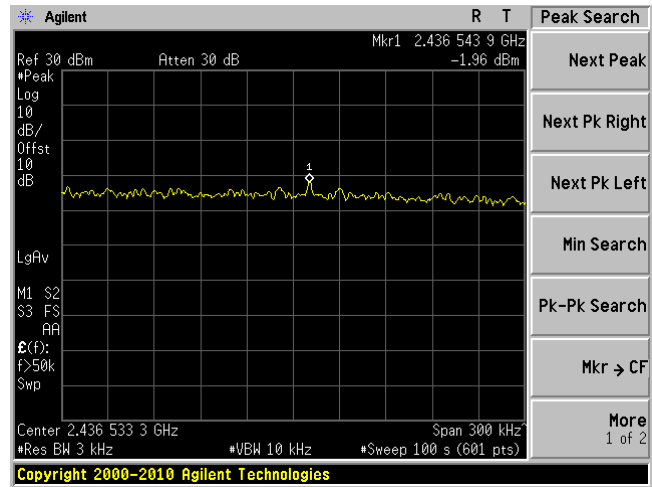


802.11b mode, Middle Channel, Chain J3

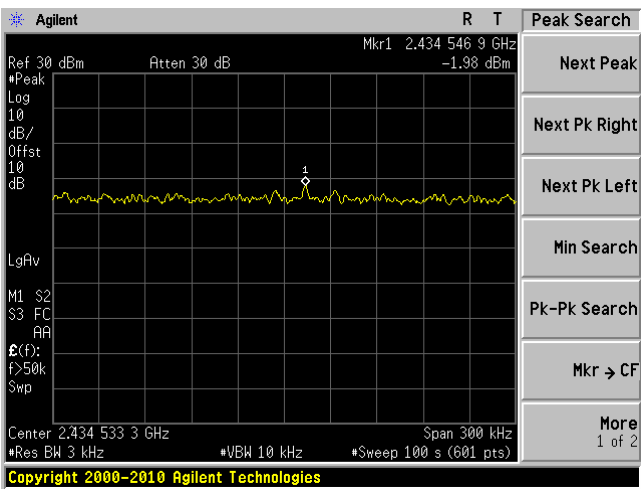


802.11b mode, High Channel, Chain J1

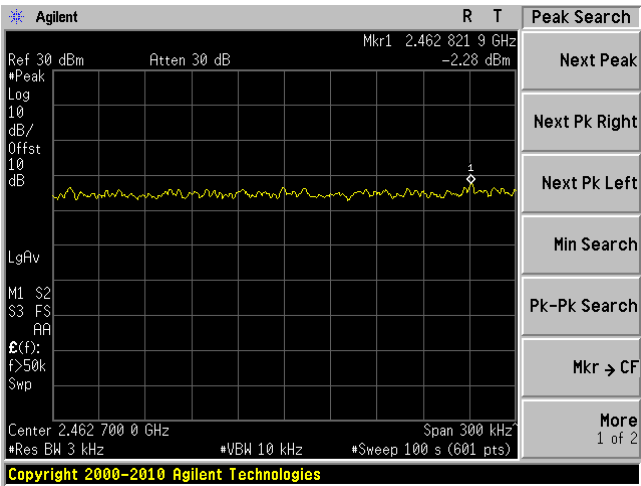


802.11b mode, High Channel, Chain J2

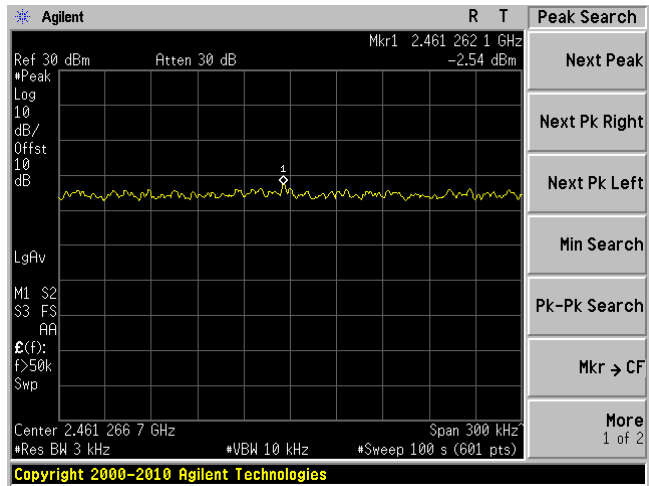


802.11b mode, High Channel, Chain J3

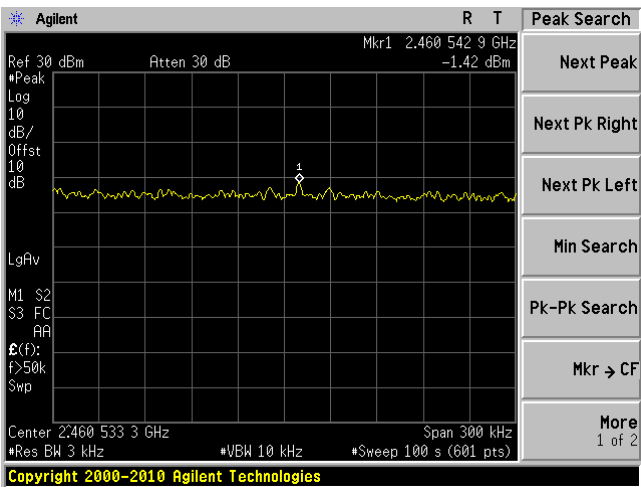


802.11g mode, Low Channel, Chain J1

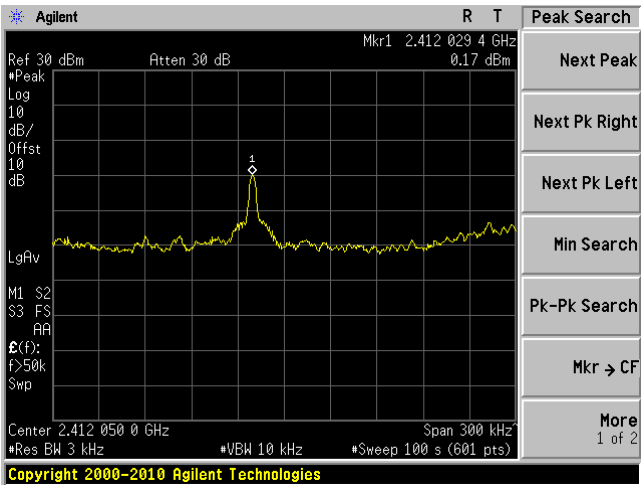


802.11g mode, Low Channel, Chain J2

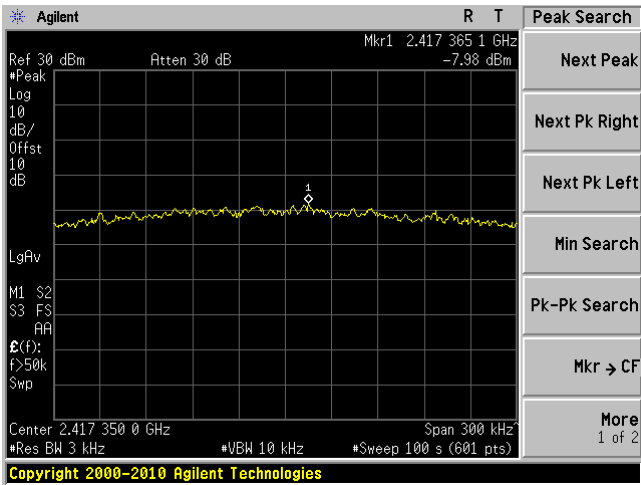


802.11g mode, Low Channel, Chain J3

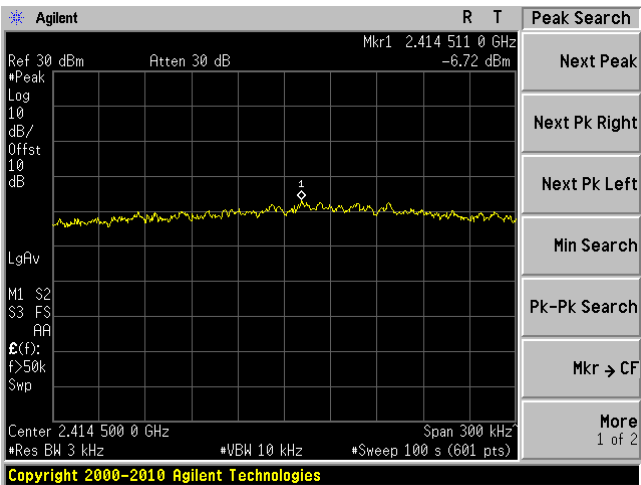


802.11g mode, Middle Channel, Chain J1

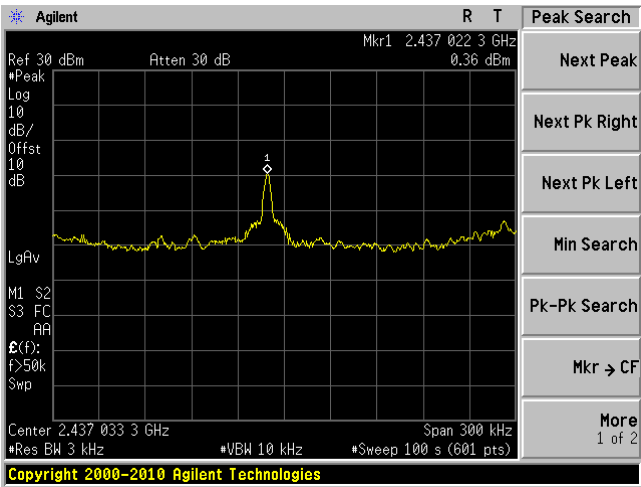


802.11g mode, Middle Channel, Chain J2

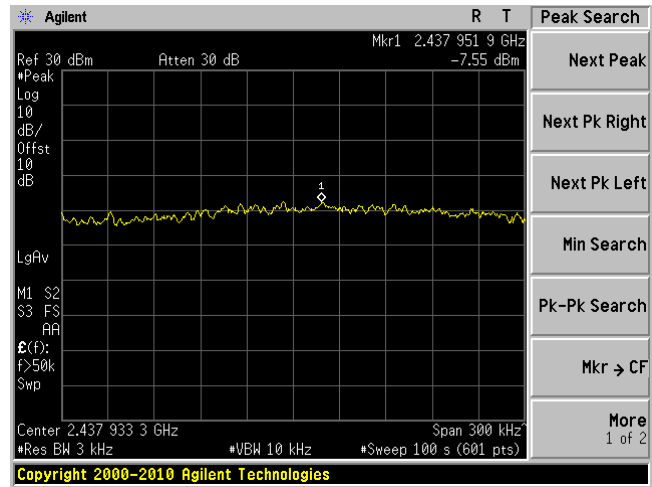


802.11g mode, Middle Channel, Chain J3

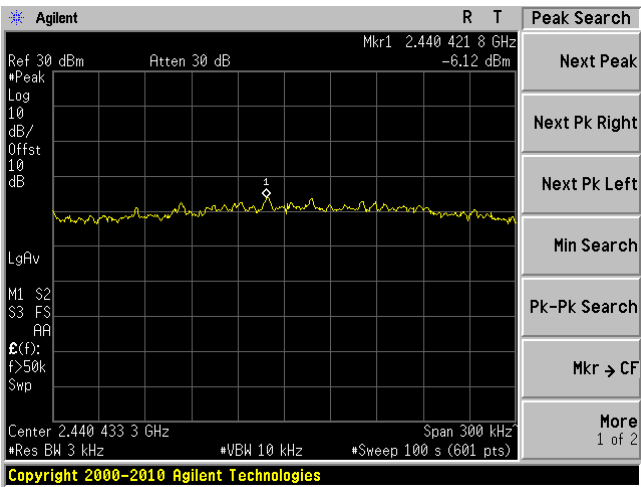


802.11g mode, High Channel, Chain J1

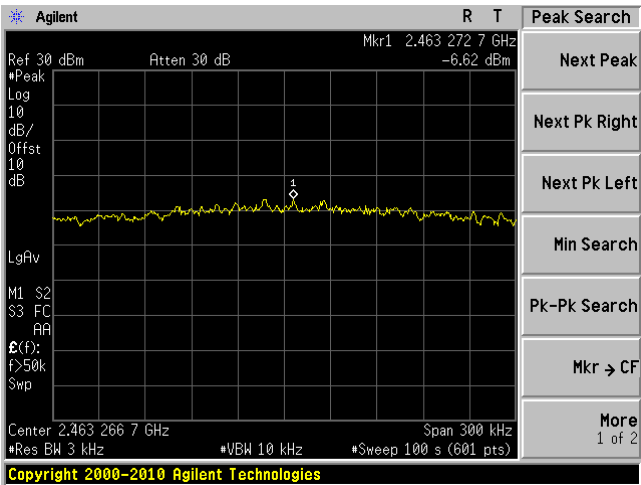


802.11g mode, High Channel, Chain J2

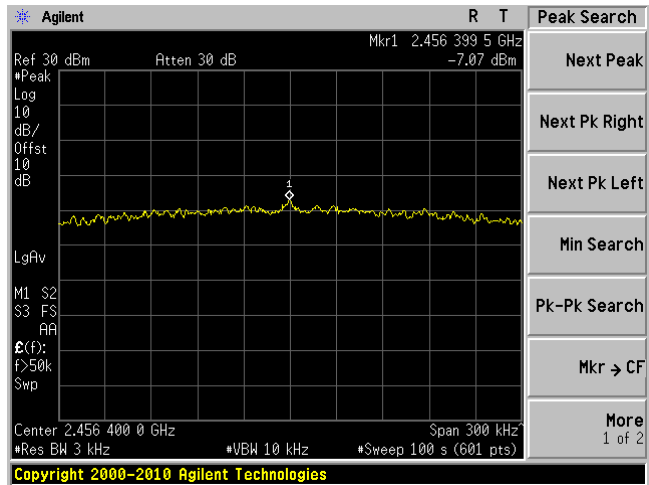


802.11g mode, High Channel, Chain J3

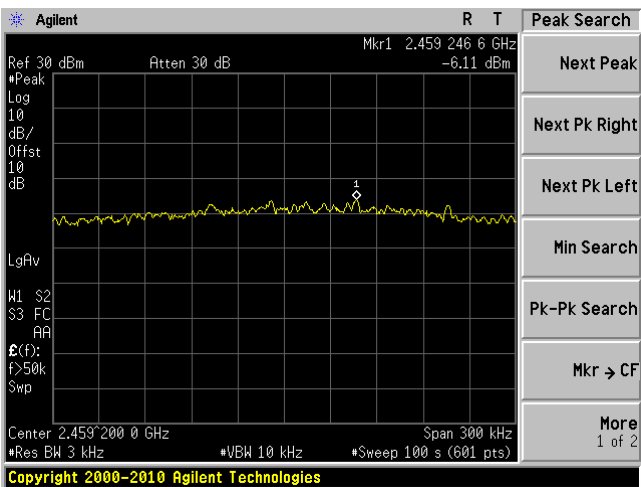


802.11n20 mode, Low Channel, Chain J1

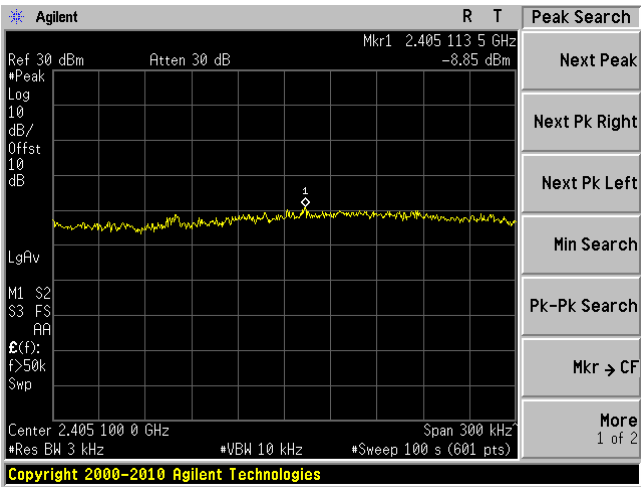


802.11n20 mode, Low Channel, Chain J2

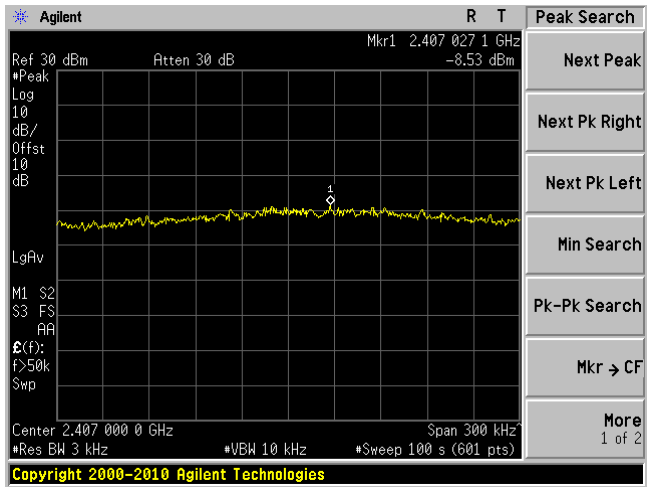


802.11n20 mode, Low Channel, Chain J3

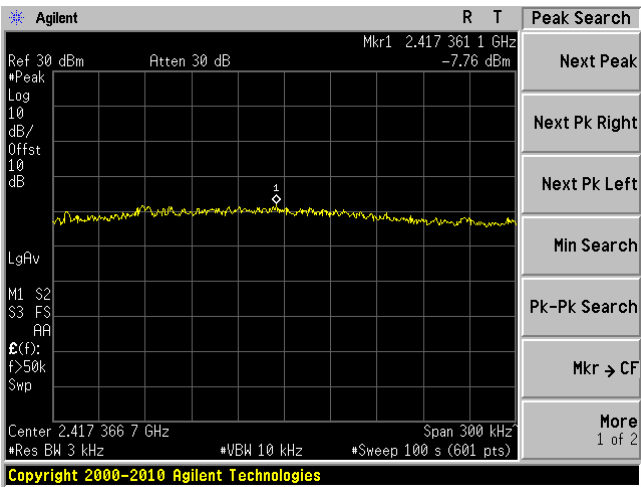


802.11n20 mode, Middle Channel, Chain J1

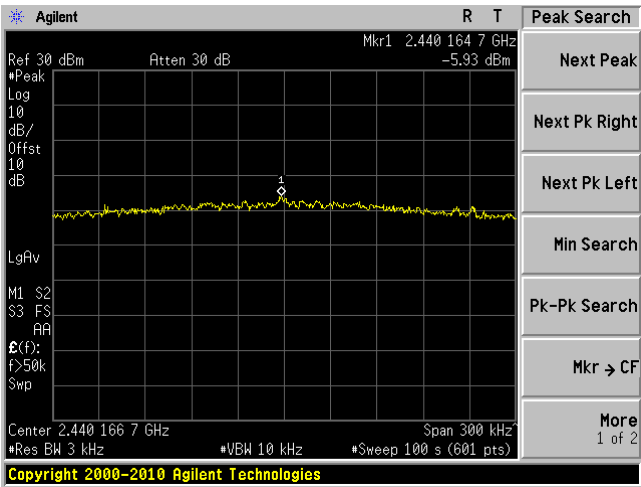


802.11n20 mode, Middle Channel, Chain J2

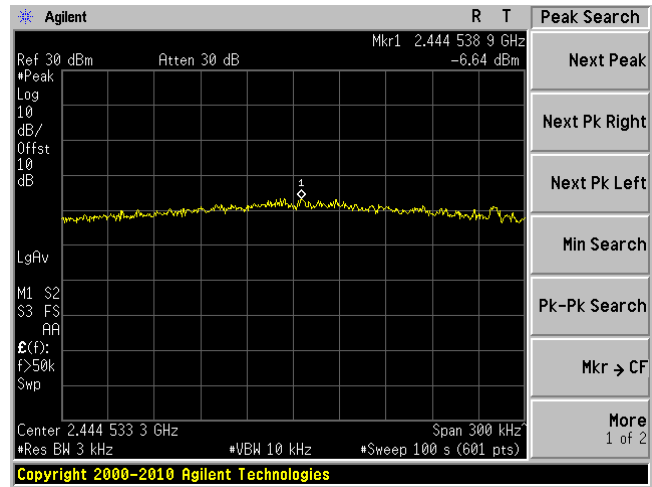


802.11n20 mode, Middle Channel, Chain J3

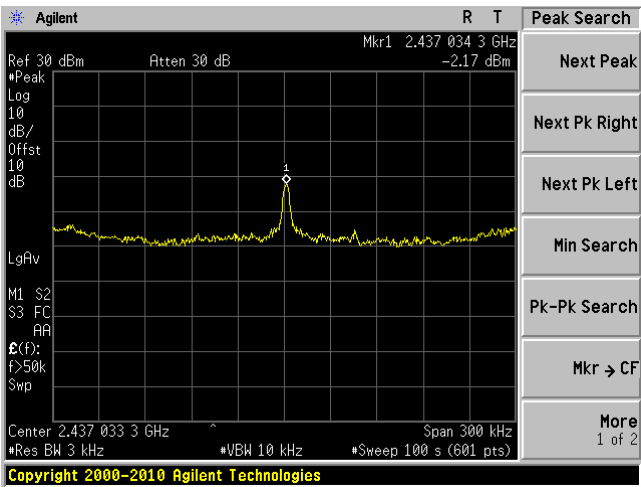


802.11n20 mode, High Channel, Chain J1

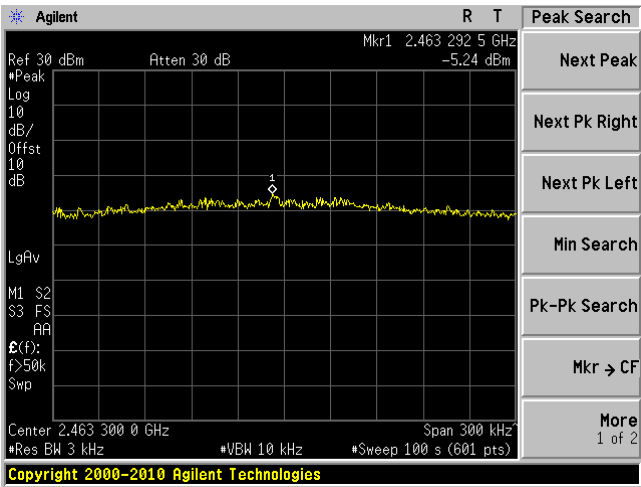


802.11n20 mode, High Channel, Chain J2

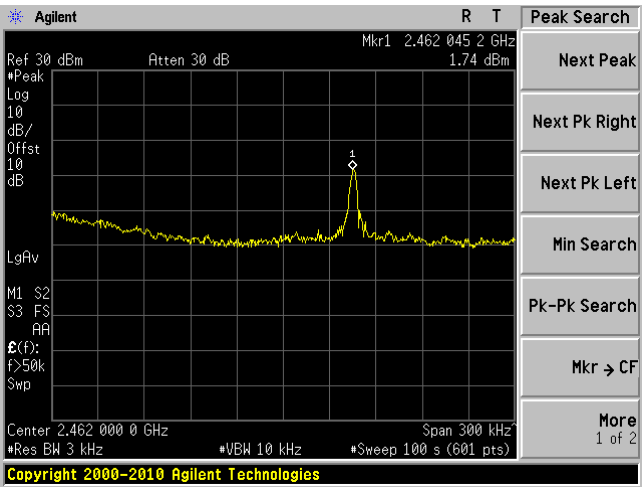


802.11n20 mode, High Channel, Chain J3

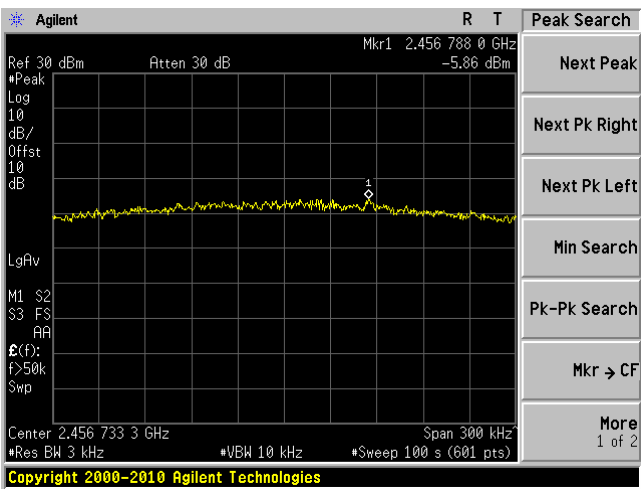


802.11n40 mode, Low Channel, Chain J1

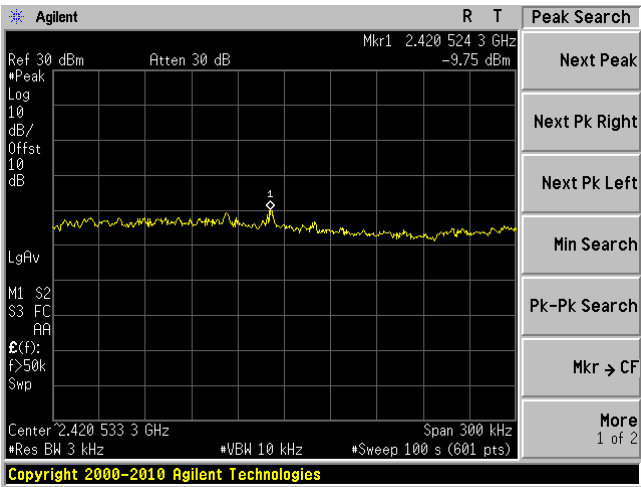


802.11 n40 mode, Low Channel, Chain J2

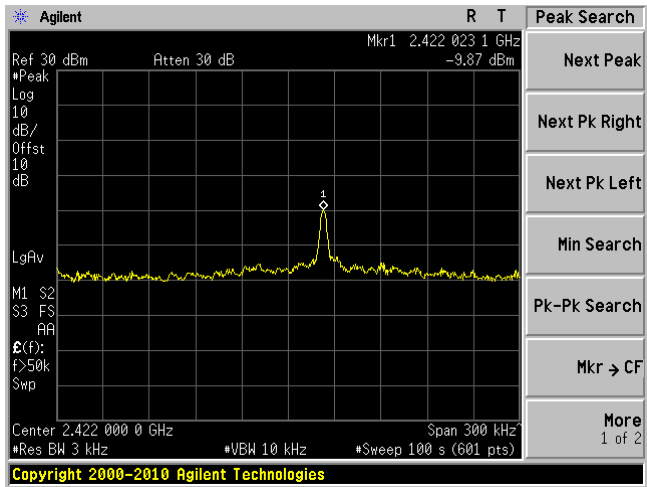


802.11n40 mode, Low Channel, Chain J3

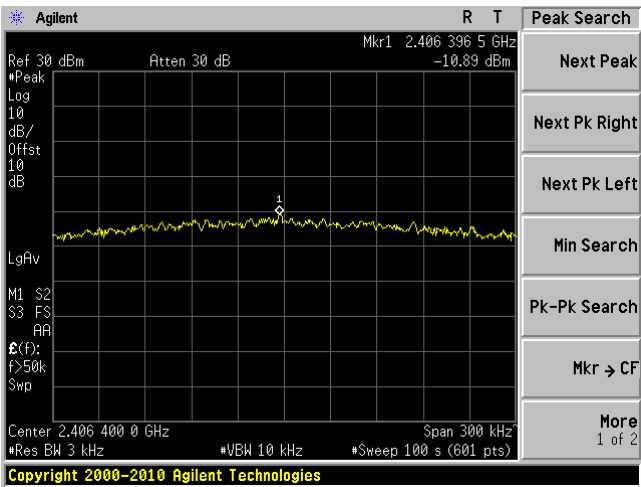


802.11n40 mode, Middle Channel, Chain J1

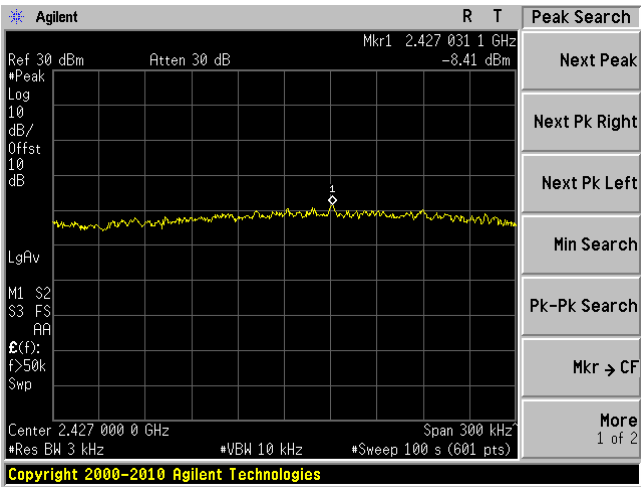


802.11n40 mode, Middle Channel, Chain J2

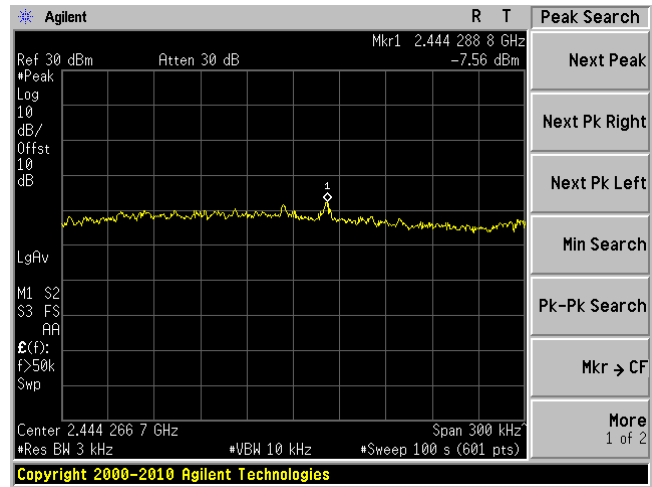


802.11n40 mode, Middle Channel, Chain J3

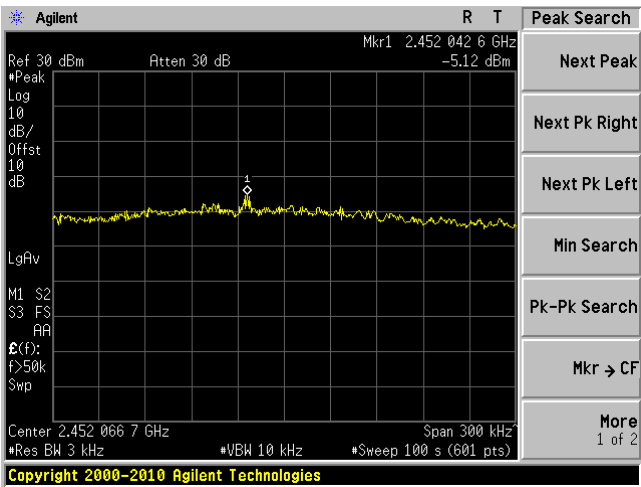


802.11n40 mode, High Channel, Chain J1

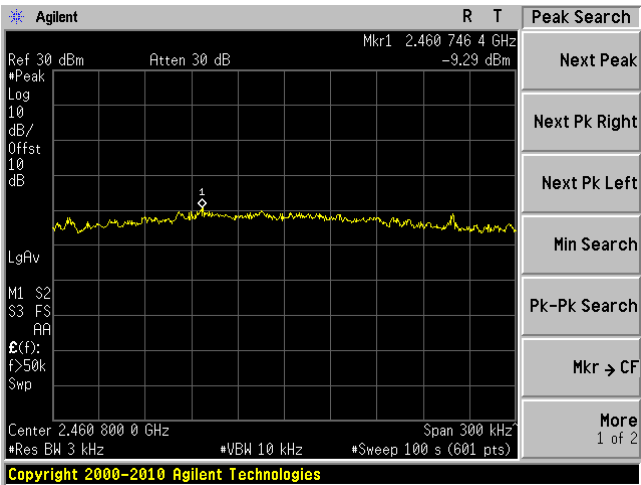

802.11n40 mode, High Channel, Chain J2

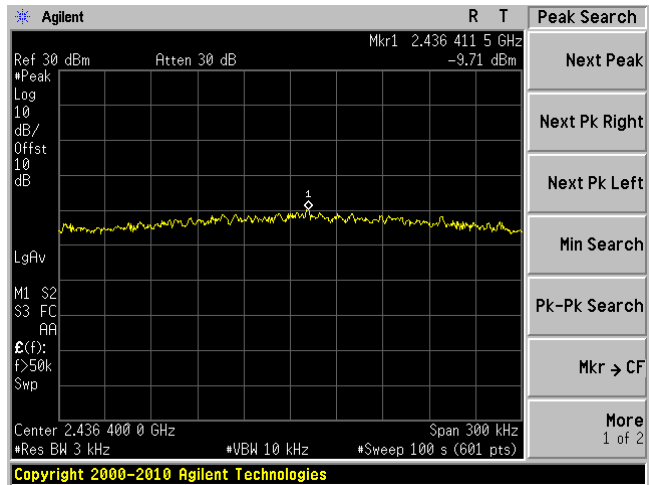

802.11n40 mode, High Channel, Chain J3

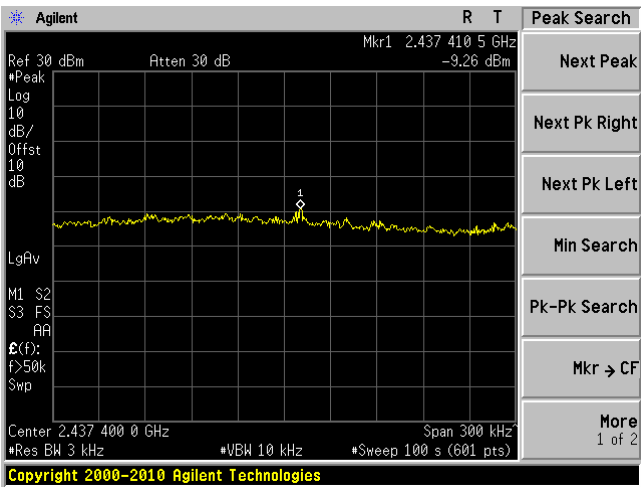

13 IC RSS-210 §2.3 & RSS-Gen §6 - Receiver Spurious Radiated Emissions

13.1 Applicable Standard

According to IC RSS-Gen §4.10, the receiver shall be operated in the normal receive mode near the mid-point of the band over which the receiver is designed to operate.

Unless otherwise specified in the applicable RSS, the radiated emission measurement is the standard measurement method (with the device's antenna in place) to measure receiver spurious emissions.

Radiated emission measurements are to be performed using a calibrated open-area test site.

For either method, the search for spurious emissions shall be from the lowest frequency internally generated or used in the receiver (e.g. local oscillator, intermediate or carrier frequency), or 30 MHz, whichever is the higher, to at least 3 times the highest tuneable or local oscillator frequency, whichever is the higher, without exceeding 40 GHz.

For emissions below 1 GHz, measurements shall be performed using a CISPR quasi-peak detector and the related measurement bandwidth. As an alternative to CISPR quasi-peak measurement, compliance with the emission limit can be demonstrated using measuring equipment employing a peak detector with the same measurement bandwidth as that for CISPR quasi-peak measurements. Above 1 GHz, measurements shall be performed using an average detector and a resolution bandwidth of 300 kHz to 1 MHz.

According to RSS-Gen §6.1, Table 2, the radiated limit of receiver spurious emissions

Frequency (MHz)	Field Strength (Microvolts/m at 3 meters)
30-88	100
88-216	150
216-960	200
Above 960	500

13.2 EUT Setup

The radiated emissions tests were performed in the 3 meter chamber, using the setup in accordance with ANSI C63.4-2003.

13.3 Test Procedure

Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations.

All data were recorded in the peak detection mode. Quasi-peak readings was performed only when an emissions was found to be marginal (within -4 dB of specification limits), and are distinguished with a "QP" in the data table.

13.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude (CA) is calculated by adding the Antenna Factor (AF), the Cable Loss (CL), the Attenuator Factor (Atten) and subtracting the Amplifier Gain (Ga) to indicated Amplitude (Ai) reading. The basic equation is as follows:

$$CA = Ai + AF + CL + Atten - Ga$$

For example, a corrected amplitude of 40.3 dBuV/m = Indicated Reading (32.5 dBuV) + Antenna Factor (+23.5dB) + Cable Loss (3.7 dB) + Attenuator (10 dB) - Amplifier Gain (29.4 dB)

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of -7 dB means the emission is 7 dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corrected Amplitude} - \text{Limit}$$

13.5 Test Equipment Lists and Details

Manufacturer	Description	Model	Serial Number	Calibration Date
Sunol Science Corp	Combination Antenna	JB3	A020106-3	2011-06-29
Rohde & Schwarz	EMI Test Receiver	ESCI 1166.5950K03	100337	2011-03-21
Sunol Science Corp	System Controller	SC99V	122303-1	N/R
EMCO	Horn antenna	3115	9511-4627	2011-10-03
Agilent	PSA Series Spectrum Analyzer	E4440A	MY44303352	2011-05-10
HP	Pre Amplifier	8449B	3147A00400	2011-02-03

Statement of Traceability: BACL attests that all calibrations have been performed per the NVLAP requirements, traceable to NIST.

13.6 Test Environmental Conditions

Temperature:	18~25 °C
Relative Humidity:	38~50 %
ATM Pressure:	101-102 kPa

The testing was performed by Quinn Jiang on 01-17-2012 and 01-23-2012 in 5 meter chamber 3.

13.7 Summary of Test Results

According to the test data,, the EUT complied with the with the RSS-210/RSS-Gen, with the closest margins from the limit listed below:

30-1000 MHz:


Mode: Receiving			
Margin (dB)	Frequency (MHz)	Polarization (Horizontal/Vertical)	Range (MHz)
-4.91	249.9545	Vertical	30 to 1000

Above 1GHz

Mode: Receiving			
Margin (dB)	Frequency (MHz)	Polarization (Horizontal/Vertical)	Range (GHz)
-9.82	1600.01	Vertical	Above 1GHz

13.8 Test Results

(1) Radiated Emission at 3 meters, 30 MHz -1 GHz

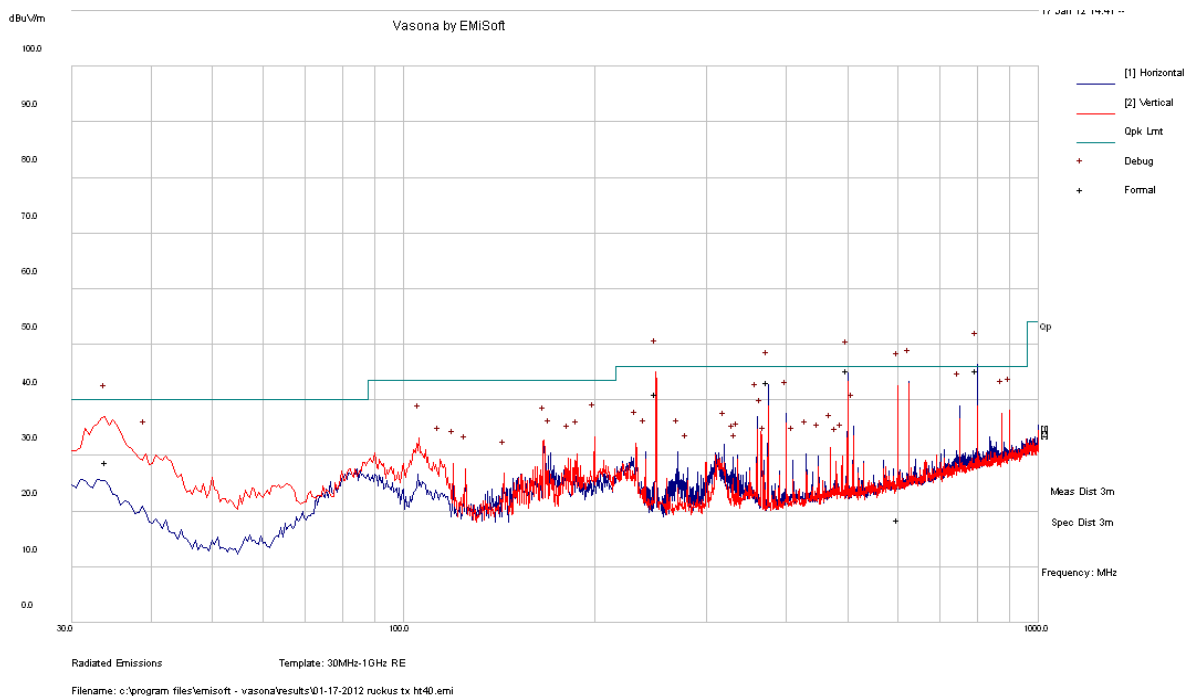

Quasi-Peak Measurements

Frequency (MHz)	Corrected Amplitude (dBμV/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dBμV/m)	Margin (dB)
799.9845	45.26	99	H	12	46	-0.74
249.9545	41.09	99	V	288	46	-4.91
500.0003	45.32	139	H	219	46	-0.68
34.003	28.8	153	V	277	40	-11.2
374.9993	43.24	100	H	242	46	-2.76
600.1105	18.42	209	V	214	46	-27.58

Note: 799.9845 MHz, 500 MHz and 375 MHz are Digital Emissions from the supporting board.

(2) Radiated Emission at 3 meters, above 1 GHz**Average Measurement**

Frequency (MHz)	Corrected Amplitude (dBμV/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dBμV/m)	Margin (dB)
1600.01	44.18	121	V	283	54	-9.82
1056.178	31.15	100	H	238	54	-22.85
1992.967	26.47	170	V	94	54	-27.53
2141.604	23.67	100	V	220	54	-30.33
2173.141	23.28	119	V	192	54	-30.72
2033.045	22.72	102	V	172	54	-31.28