

RF TEST REPORT



Report No.: FCC_RF_SL14091001-RUC-015A1_UNII Rev1.0
Supersede Report No.: FCC_RF_SL14091001-RUC-015A1_UNII

Applicant	:	Ruckus Wireless, Inc.
Product Name	:	Access Point
Model No.	:	H500
Test Standard	:	47 CFR 15.407
Test Method	:	ANSI C63.4: 2014 789033 D02 General UNII Test Procedures New Rules v01
FCC ID	:	S9GH500
IC ID	:	5912A-H500
Dates of test	:	11/08/ 2014 – 12/10/2014
Issue Date	:	02/18/2015
Test Result	:	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail
Equipment complied with the specification <input checked="" type="checkbox"/>		
Equipment did not comply with the specification <input type="checkbox"/>		

This Test Report is Issued Under the Authority of:	
Angel Escamilla	David Zhang
Test Engineer	Engineer Reviewer
This test report may be reproduced in full only Test result presented in this test report is applicable to the tested sample only	

Issued By:
SIEMIC Laboratories
775 Montague Expressway, Milpitas, 95035 CA



775 Montague Expressway, Milpitas, CA 95035, USA • Phone: (+1) 408 526 1188 • Facsimile (+1) 408 526 1088

Visit us at: www.siemic.com; Follow us at:

Laboratory Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Accreditation Body	Scope
USA	FCC, A2LA	EMC, RF/Wireless, Telecom
Canada	IC, A2LA, NIST	EMC, RF/Wireless, Telecom
Taiwan	BSMI, NCC, NIST	EMC, RF, Telecom, Safety
Hong Kong	OFTA, NIST	RF/Wireless, Telecom
Australia	NATA, NIST	EMC, RF, Telecom, Safety
Korea	KCC/RRA, NIST	EMI, EMS, RF, Telecom, Safety
Japan	VCCI, JATE, TELEC, RFT	EMI, RF/Wireless, Telecom
Mexico	NOM, COFETEL, Caniety	Safety, EMC, RF/Wireless, Telecom
Europe	A2LA, NIST	EMC, RF, Telecom, Safety
Israel	MOC, NIST	EMC, RF, Telecom, Safety

Accreditations for Product Certifications

Country	Accreditation Body	Scope
USA	FCC TCB, NIST	EMC, RF, Telecom
Canada	IC FCB, NIST	EMC, RF, Telecom
Singapore	iDA, NIST	EMC, RF, Telecom
EU	NB	EMC & R&TTE Directive
Japan	MIC (RCB 208)	RF, Telecom
Hong Kong	OFTA (US002)	RF, Telecom

CONTENTS

1 REPORT REVISION HISTORY4

2 EXECUTIVE SUMMARY5

3 CUSTOMER INFORMATION5

4 TEST SITE INFORMATION5

5 MODIFICATION5

6 EUT INFORMATION6

6.1 EUT Description6

6.2 Radio Description6

6.3 EUT Photos – External8

6.4 EUT Photos - Internal9

6.5 EUT Test Setup Photos10

7 SUPPORTING EQUIPMENT/SOFTWARE AND CABLING DESCRIPTION11

7.1 Supporting Equipment11

7.2 Cabling Description11

7.3 Test Software Description11

8 TEST SUMMARY12

9 MEASUREMENT UNCERTAINTY13

10 MEASUREMENTS, EXAMINATION AND DERIVED RESULTS14

10.1 Conducted Emissions14

10.2 26 dB & 6dB Bandwidth17

10.3 Peak Output Power24

10.4 Peak Spectral Density26

10.5 Conducted Spurious Emissions37

10.6 Radiated Emissions below 1GHz52

10.7 Radiated Spurious Emissions above 1GHz55

ANNEX A. TEST INSTRUMENT67

ANNEX B. SIEMIC ACCREDITATION68

1 Report Revision History

Report No.	Report Version	Description	Issue Date
FCC_RF_SL14091001-RUC-015A1_UNII	None	Original	02/12/2015
FCC_RF_SL14091001-RUC-015A1_UNII Rev1.0	Rev1.0	Update setup photo	02/18/2015

2 Executive Summary

The purpose of this test program was to demonstrate compliance of following product

Company: Ruckus Wireless, Inc.
Product: Access Point
Model: H500

against the current Stipulated Standards. The specified model product stated above has demonstrated compliance with the Stipulated Standard listed on 1st page.

3 Customer information

Applicant Name	:	Ruckus Wireless, Inc.
Applicant Address	:	350 West Java Drive, Sunnyvale, California 94089 U.S.A
Manufacturer Name	:	Ruckus Wireless, Inc.
Manufacturer Address	:	350 West Java Drive, Sunnyvale, California 94089 U.S.A

4 Test site information

Lab performing tests	SIEMIC Laboratories
Lab Address	775 Montague Expressway, Milpitas, CA 95035
FCC Test Site No.	881796
IC Test Site No.	4842D-2
VCCI Test Site No.	A0133

5 Modification

Index	Item	Description	Note
-	-	-	-

6 EUT Information

6.1 EUT Description

Product Name	:	Access Point
Model No.	:	H500
Trade Name	:	Ruckus
Serial No.	:	431406000022
Host Model No.	:	N/A
Input Power	:	48VDC (PoE) and 12 VDC (AC/DC Adapter)
Power Adapter Manu/Model	:	100VAC - 240VAC
Power Adapter SN	:	CN3210372
Hardware version	:	N/A
Software version	:	N/A
Date of EUT received	:	11/08/2014
Equipment Class/ Category	:	DTS, UNII
Clock Frequencies	:	N/A
Port/Connectors	:	PoE, Ethernet, USB


6.2 Radio Description

Radio Type	802.11b	802.11g	802.11a	802.11n-20M	802.11n-40M	802.11ac-80M
Operating Frequency	2412-2462MHz	2412-2462MHz	5180-5320MHz 5500-5720MHz 5745-5825MHz	2412-2462MHz 5180-5320MHz 5500-5720MHz 5745-5825MHz	2422-2452MHz 5190-5310MHz 5510-5710MHz 5755-5795MHz	5210MHz, 5290MHz, 5530MHz, 5690MHz, 5775MHz
Modulation	DSSS (CCK, DQPSK, DBPSK)	OFDM-CCK (BPSK, QPSK, 16QAM, 64QAM)	OFDM (BPSK, QPSK, 16QAM, 64QAM)	OFDM (BPSK, QPSK, 16QAM, 64QAM)	OFDM (BPSK, QPSK, 16QAM, 64QAM)	OFDM (BPSK, QPSK, 16QAM, 64QAM)
Channel Spacing	5MHz	5MHz	20MHz	5MHz(2.4GHz), 20MHz (5GHz)	40MHz	80MHz
Number of Channels	11	11	20	11(2.4GH) 20 (5GHz)	9(2.4GH) 10(5GHz)	5
Antenna Type	Internal Omni PCB Antennas					
Antenna Gain (Peak)	0 dBi (2.4GHz), 1 dBi (5 GHz)					
Antenna Connector Type	U.FL					
Note	N/A					


EUT ART Power level setting

Mode	Frequency	ART Power Setting
802.11-a	5260	18.5
802.11-a	5280	18.5
802.11-a	5320	18.5
802.11-n-20	5260	19
802.11-n-20	5280	19
802.11-n-20	5320	19
802.11-n-40	5270	22
802.11-n-40	5310	22
802.11-ac-80	5290	22
802.11-a	5500	19
802.11-a	5580	19
802.11-a	5700	20
802.11-a	5720	20
802.11-n-20	5500	20.5
802.11-n-20	5580	19.5
802.11-n-20	5700	19
802.11-n-20	5720	19
802.11-n-40	5510	22
802.11-n-40	5550	22
802.11-n-40	5670	22
802.11-n-40	5710	22
802.11-ac-80	5530	22
802.11-ac-80	5690	22


6.3 EUT Photos – External

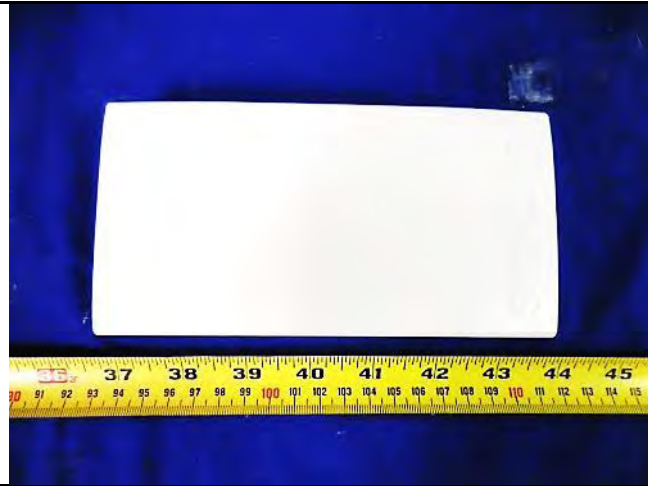

Top View

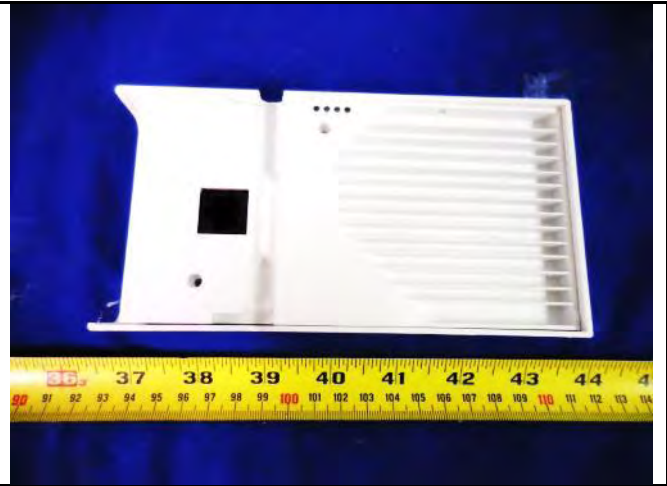


Bottom View

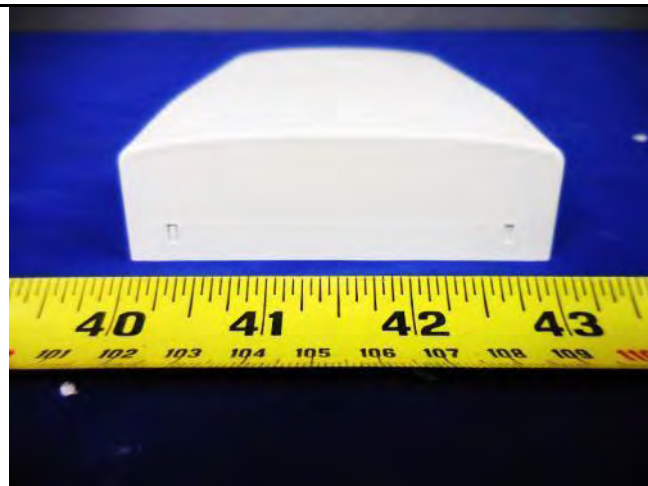


Front View



Rear View

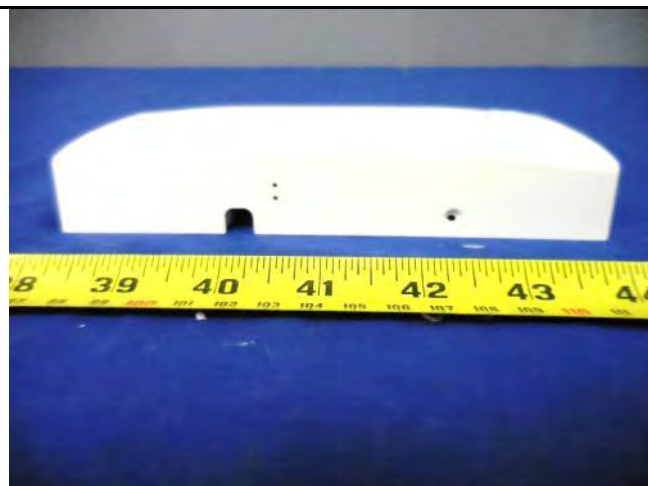


Left Side View

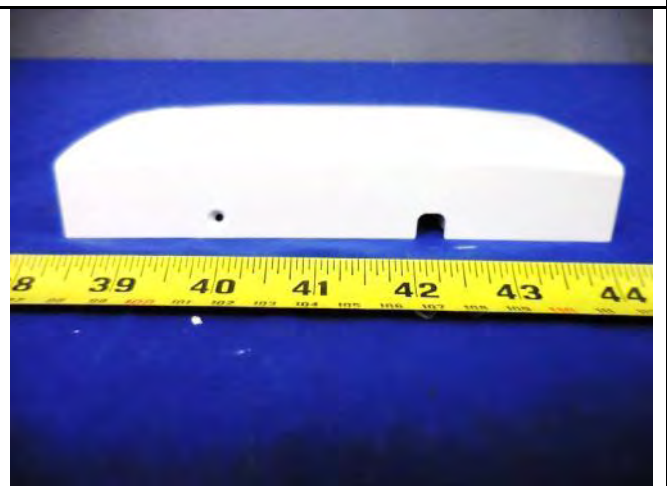

Right Side View

6.4 EUT Photos - Internal

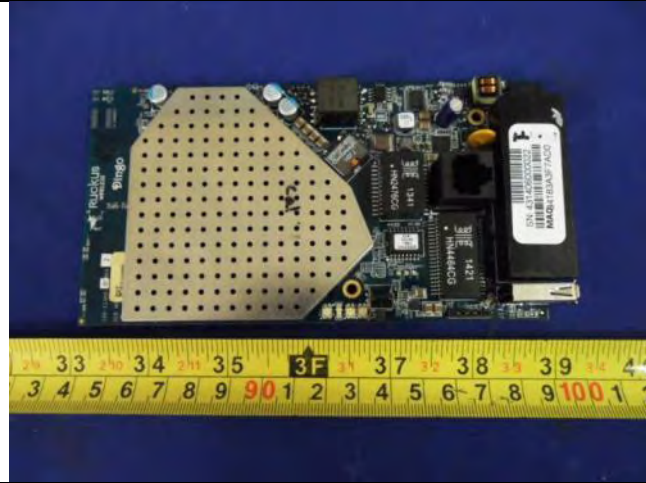

EUT with Shielding Top View



EUT without Shielding Top View



EUT without Shielding Close View



EUT Bottom View

6.5 EUT Test Setup Photos



AC Line Conducted Emissions – Front View



AC Line Conducted Emissions – Rear View



Radiated Emissions (<1GHz) – Front View



Radiated Emissions (<1GHz) – Rear View



Radiated Emissions (>1GHz) – Front View



Radiated Emissions (>1GHz) – Rear View

7 Supporting Equipment/Software and cabling Description

7.1 Supporting Equipment

Item	Supporting Equipment Description	Model	Serial Number	Manufacturer	Note
1	Laptop	S551M	E5NOCX02795518E	ASUS	-
2	POE Adapter	740-64157-001	133279963	Ruckus	-

7.2 Cabling Description

Name	Connection Start		Connection Stop		Length / shielding Info		Note
	From	I/O Port	To	I/O Port	Length (m)	Shielding	
RJ45	EUT	RJ45	POE	RJ45	2	Unshielded	-
RJ45	POE	RJ45	Laptop	RJ45	3	Unshielded	-

7.3 Test Software Description

Test Item	Software	Description
RF Testing	Command Line in windows	Set the EUT to transmit continuously in diferent test modes and channels

8 Test Summary

Test Item	Test standard		Test Method/Procedure	Pass / Fail
Restricted Band of Operation	FCC	15.205	ANSI C63.4: 2014 789033 D02 General UNII Test Procedures New Rules v01	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> N/A
AC Conducted Emissions Voltage	FCC	15.207(a)	ANSI C63.4: 2014	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> N/A

Test Item	Test standard		Test Method/Procedure	Pass / Fail
26 & 6 dB Emission Bandwidth	FCC	15.407 (a) (2)	789033 D02 General UNII Test Procedures New Rules v01	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> N/A
Maximum conducted Output Power	FCC	15.407 (a) (2)	789033 D02 General UNII Test Procedures New Rules v01	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> N/A
Power reduction (Antenna Gain > 6 dBi)	FCC	15.407 (a) (2)	-	<input type="checkbox"/> Pass <input checked="" type="checkbox"/> N/A
Band Edge and Radiated Spurious Emissions	FCC	15.407(b)(2), 15.407(b)(6)	ANSI C63.4: 2014 789033 D02 General UNII Test Procedures New Rules v01	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> N/A
Power Spectral Density	FCC	15.407 (a) (2)	789033 D02 General UNII Test Procedures New Rules v01	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> N/A
Frequency Stability	FCC	15.407 (g)	-	<input type="checkbox"/> Pass <input checked="" type="checkbox"/> N/A
Transmit Power Control (TPC)	FCC	15.407 (h)(1)	-	<input type="checkbox"/> Pass <input checked="" type="checkbox"/> N/A
User Manual	FCC	-	-	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> N/A

Remark	<ol style="list-style-type: none"> All measurement uncertainties are not taken into consideration for all presented test result. The applicant shall ensure frequency stability by showing that an emission is maintained within the band of operation under all normal operating conditions as specified in the user's manual.
--------	---

9 Measurement Uncertainty


Emissions			
Test Item	Frequency Range	Description	Uncertainty
Band Edge and Radiated Spurious Emissions	30MHz – 1GHz	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	+5.6dB/-4.5dB
Band Edge and Radiated Spurious Emissions	1GHz – 40GHz	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	+4.3dB/-4.1dB

10 Measurements, Examination and Derived Results

10.1 Conducted Emissions

Conducted Emission Limit

Frequency ranges (MHz)	Limit (dBuV)	
	QP	Average
0.15 ~ 0.5	66 – 56	56 – 46
0.5 ~ 5	56	46
5 ~ 30	60	50

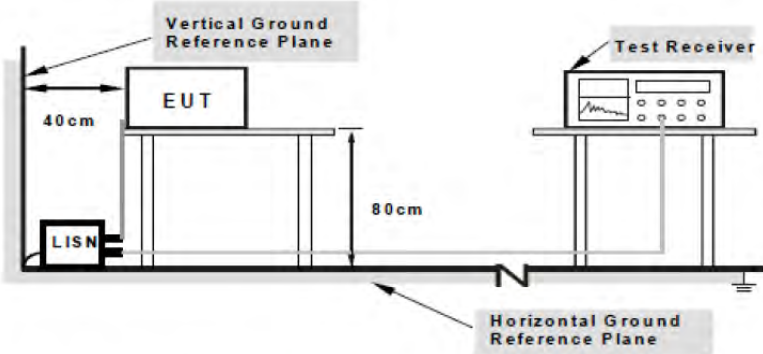
Spec	Item	Requirement	Applicable
47CFR§15.207	a)	For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μH/50 ohms line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequency ranges.	☒
Test Setup	 <p>Note: 1. Support units were connected to second LISN. 2. Both of LISNs (AMN) are 80cm from EUT and at least 80cm from other units and other metal planes support units.</p>		
Procedure	<ul style="list-style-type: none"> - The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table, as shown in Annex B. - The power supply for the EUT was fed through a 50Ω/50μH EUT LISN, connected to filtered mains. - The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss coaxial cable. - All other supporting equipment was powered separately from another main supply. 		
Remark	EUT was tested at 120VAC, 60Hz		
Result	☒ Pass ☐ Fail		

Test Data ☒ Yes ☐ N/A

Test Plot ☒ Yes (See below) ☐ N/A

Conducted Emission Test Results

Test specification:	Conducted Emissions			
Environmental Conditions:	Temp(°C):	21	Result:	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail
	Humidity (%):	42		
	Atmospheric(mbar):	1021		
Mains Power:	120Vac, 60Hz			
Tested by:	George Arias			
Test Date:	12/08/2014			
Remarks	Line			

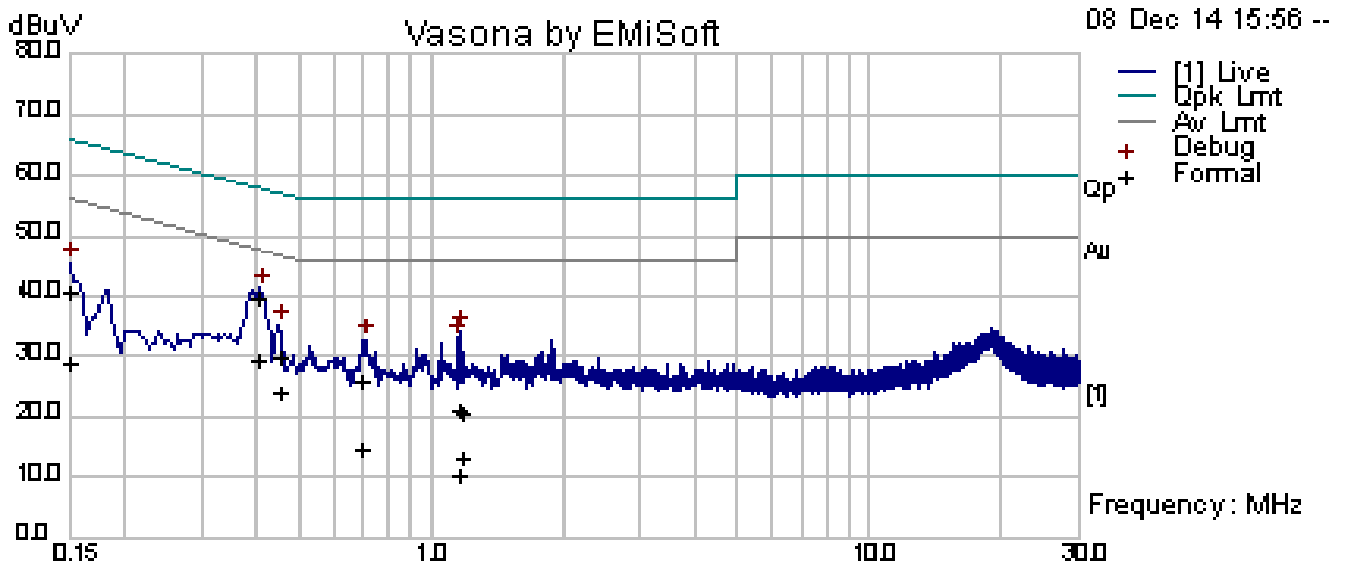


Line Plot at 120Vac, 60Hz

Frequency (MHz)	Raw (dBuV)	Cable Loss (dB)	Factors (dB)	Level (dBuV)	Measurement Type	Line	Limit (dBuV)	Margin (dB)	Pass /Fail
0.15	29.77	10.00	0.76	40.53	Quasi Peak	Line	66.00	-25.46	Pass
0.40	28.86	10.01	0.73	39.60	Quasi Peak	Line	57.81	-18.21	Pass
0.45	19.12	10.01	0.73	29.86	Quasi Peak	Line	56.87	-27.01	Pass
0.70	15.06	10.01	0.75	25.83	Quasi Peak	Line	56.00	-30.17	Pass
1.16	10.24	10.02	0.81	21.07	Quasi Peak	Line	56.00	-34.93	Pass
1.17	10.03	10.02	0.81	20.86	Quasi Peak	Line	56.00	-35.14	Pass
0.15	18.00	10.00	0.76	28.76	Average	Line	56.00	-27.24	Pass
0.40	18.93	10.01	0.73	29.66	Average	Line	47.81	-18.14	Pass
0.45	13.07	10.01	0.73	23.81	Average	Line	46.87	-23.07	Pass
0.70	4.17	10.01	0.75	14.93	Average	Line	46.00	-31.07	Pass
1.16	-0.43	10.02	0.81	10.40	Average	Line	46.00	-35.60	Pass
1.17	2.48	10.02	0.81	13.31	Average	Line	46.00	-32.69	Pass

Conducted Emission Test Results

Test specification:	Conducted Emissions			Result:	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail
Environmental Conditions:	Temp(°C):	21			
	Humidity (%):	42			
	Atmospheric(mbar):	1021			
Mains Power:	120Vac, 60Hz				
Tested by:	George Arias				
Test Date:	12/08/2014				
Remarks	Neutral				

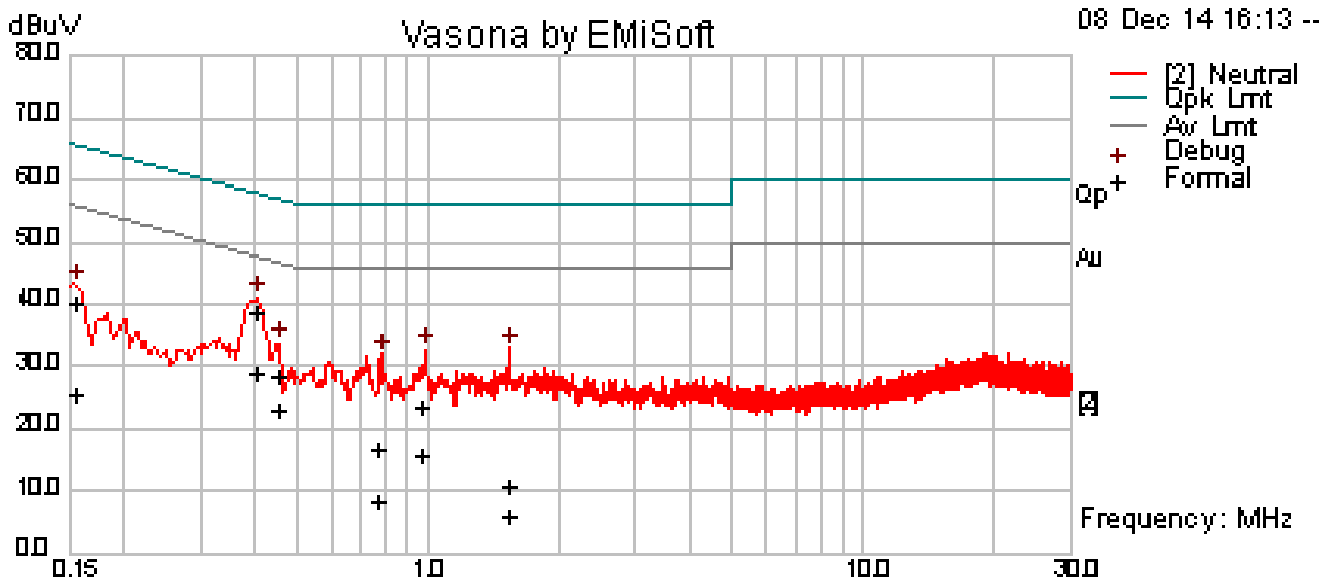


Neutral Plot at 120Vac, 60Hz

Frequency (MHz)	Raw (dBuV)	Cable Loss (dB)	Factors (dB)	Level (dBuV)	Measurement Type	Line	Limit (dBuV)	Margin (dB)	Pass /Fail
0.15	29.22	10.00	0.76	39.97	Quasi Peak	Neutral	65.78	-25.81	Pass
0.40	28.17	10.01	0.73	38.90	Quasi Peak	Neutral	57.83	-18.92	Pass
0.45	17.74	10.01	0.73	28.48	Quasi Peak	Neutral	56.84	-28.36	Pass
0.77	5.94	10.01	0.76	16.71	Quasi Peak	Neutral	56.00	-39.29	Pass
0.97	12.90	10.02	0.78	23.70	Quasi Peak	Neutral	56.00	-32.30	Pass
1.53	0.02	10.02	0.88	10.92	Quasi Peak	Neutral	56.00	-45.08	Pass
0.15	14.59	10.00	0.76	25.35	Average	Neutral	55.78	-30.43	Pass
0.40	18.43	10.01	0.73	29.16	Average	Neutral	47.83	-18.66	Pass
0.45	12.11	10.01	0.73	22.85	Average	Neutral	46.84	-23.99	Pass
0.77	-2.41	10.01	0.76	8.36	Average	Neutral	46.00	-37.64	Pass
0.97	5.16	10.02	0.78	15.95	Average	Neutral	46.00	-30.05	Pass
1.53	-4.84	10.02	0.88	6.06	Average	Neutral	46.00	-39.94	Pass

10.2 26 dB & 6dB Bandwidth

Requirement(s):

Spec	Item	Requirement	Applicable
§ 15.407	-	26 dB Emission BW: Report only for reference.	<input checked="" type="checkbox"/>
	a) (2)	26 dB Emission BW: Report only for power limit calculation.	<input type="checkbox"/>
	e)	Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.	<input type="checkbox"/>

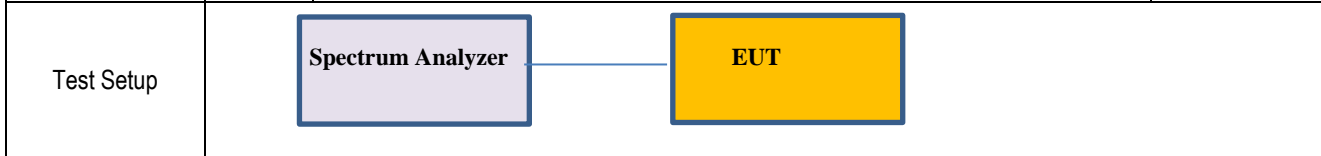

Test Procedure	<p>789033 D02 General UNII Test Procedures New Rules v01</p> <p><u>26dB Emission bandwidth measurement procedure (Other than 5.725-5.85 GHz)</u></p> <ul style="list-style-type: none"> - Allow the trace to stabilize. - Use the spectrum analyzer built-in measurement function to determine the 26dB BW. <ul style="list-style-type: none"> o Set RBW = around 1% of emission bandwidth o Set VBW > RBW o Detector = Peak o Trace mode = max hold - Capture the plot. - Repeat above steps for different test channel and other modulation type. <p><u>6 dB Minimum emission bandwidth measurement procedure (for 5.725-5.85 GHz)</u></p> <ul style="list-style-type: none"> - Allow the trace to stabilize. - Use the spectrum analyzer built-in measurement function to determine the 6dB BW. <ul style="list-style-type: none"> o Set RBW = 100 KHz o Set VBW ≥ 3 x RBW o Detector = Peak o Trace mode = max hold o Sweep = auto couple - Capture the plot. - Repeat above steps for different test channel and other modulation type. 		
----------------	--	--	--

Test Date	11/10/2014	Environmental condition	Temperature 22°C Relative Humidity 38% Atmospheric Pressure 1020mbar
Remark	N/A		
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Equipment Setting

Test	RBW	VBW	Span	Detector	Sweep	Trace	Notes
26 dB Emission Bandwidth	1% of 26 dB EBW	>RBW	>EBW	PK	Auto	Maxhold	-
6 dB Bandwidth	100 KHz	≥3 x RBW	1.5 - 5 times of OBW	PK	Auto	Maxhold	-

Test Data Yes N/A
Test Plot Yes N/A

26dB Bandwidth measurement result for 5.2GHz

Type	Test mode	Frequency (MHz)	CH	Result (MHz)	Limit (MHz)	Result
26dB BW	802.11a	5260	Low	30.00	-	-
26dB BW	802.11a	5280	Mid	29.85	-	-
26dB BW	802.11a	5320	High	30.00	-	-
26dB BW	802.11n-20	5260	Low	30.00	-	-
26dB BW	802.11n-20	5300	Mid	30.00	-	-
26dB BW	802.11n-20	5320	High	29.99	-	-
26dB BW	802.11n-40	5270	Low	50.00	-	-
26dB BW	802.11n-40	5310	High	50.00	-	-
26dB BW	802.11ac-80	5290	Mid	90.68	-	-


26dB Bandwidth measurement result for 5.5GHz

Type	Test mode	Freq (MHz)	CH	Result (MHz)	Limit (MHz)	Result
26dB BW	802.11a	5500	Low	29.10	-	-
26dB BW	802.11a	5580	Mid	28.47	-	-
26dB BW	802.11a	5700	High	28.32	-	-
26dB BW	802.11n-20	5500	Low	29.58	-	-
26dB BW	802.11n-20	5580	Mid	29.58	-	-
26dB BW	802.11n-20	5700	High	28.55	-	-
26dB BW	802.11n-40	5510	Low	50.00	-	-
26dB BW	802.11n-40	5670	Mid	49.99	-	-
26dB BW	802.11ac-80	5530	Low	88.85	-	-

Channel that extends across the 5.725GHz boundary

Type	Test mode	Freq (MHz)	CH	Result (MHz)	Limit (MHz)	Result
26dB BW	802.11a	5720	High	29.27	-	-
26dB BW	802.11n-20	5720	High	29.64	-	-
26dB BW	802.11n-40	5710	High	50.00	-	-
26dB BW	802.11ac-80	5690	High	99.88	-	-


26dB Bandwidth Test Plots

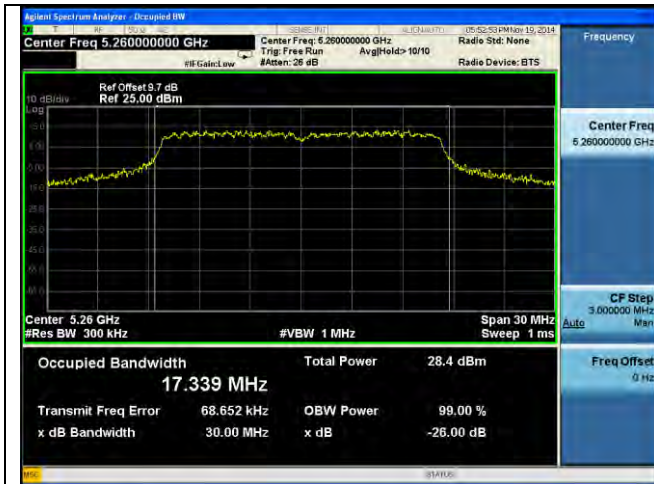

26dB BW - 802.11a 5260MHz



26dB BW - 802.11a 5280MHz

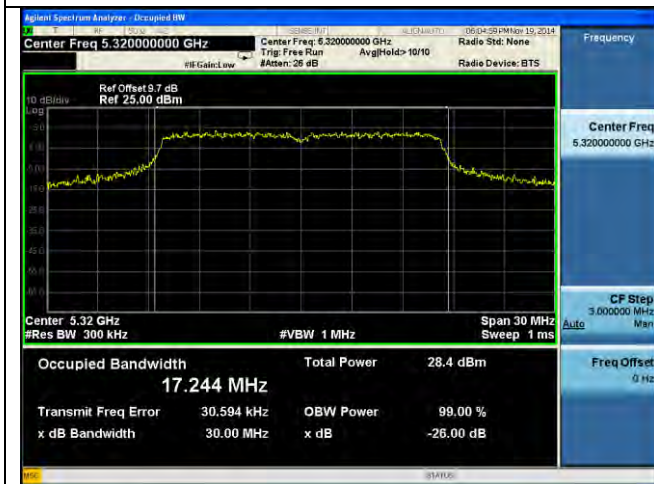

26dB BW - 802.11a 5320MHz




26dB BW - 802.11n-20M 5260MHz



26dB BW - 802.11n-20M 5280MHz




26dB BW - 802.11n-20M 5320MHz

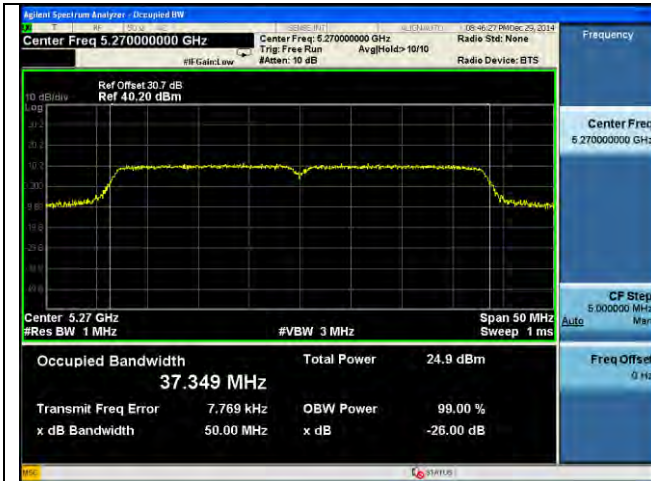

26dB BW - 802.11n-40M 5270MHz




26dB BW - 802.11n-40M 5310MHz

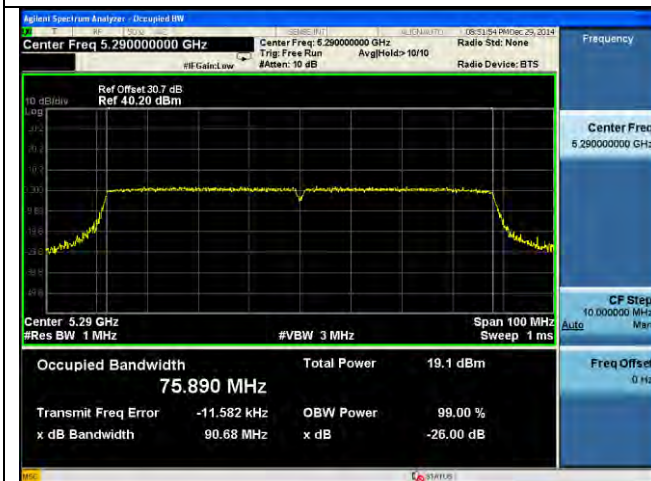

26dB BW - 802.11ac-80M 5290MHz




26dB BW - 802.11a 5500MHz

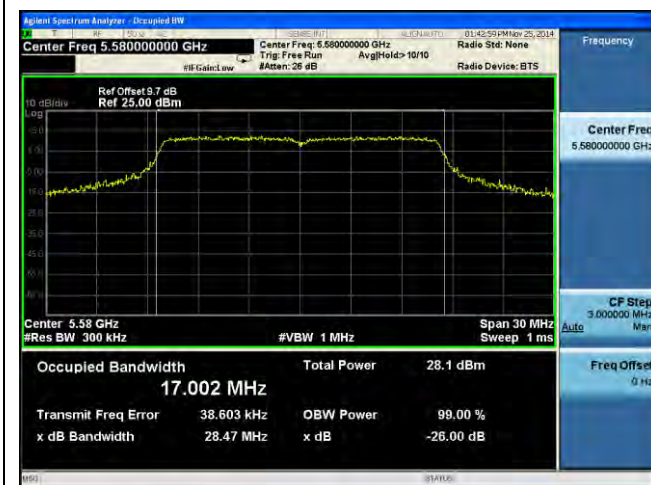

26dB BW - 802.11a 5580MHz




26dB BW - 802.11a 5700MHz

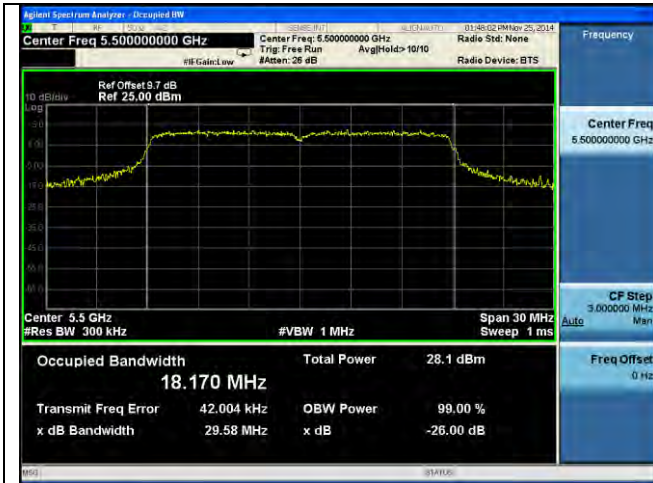

26dB BW - 802.11n-20M 5500MHz



26dB BW - 802.11n-20M 5580MHz

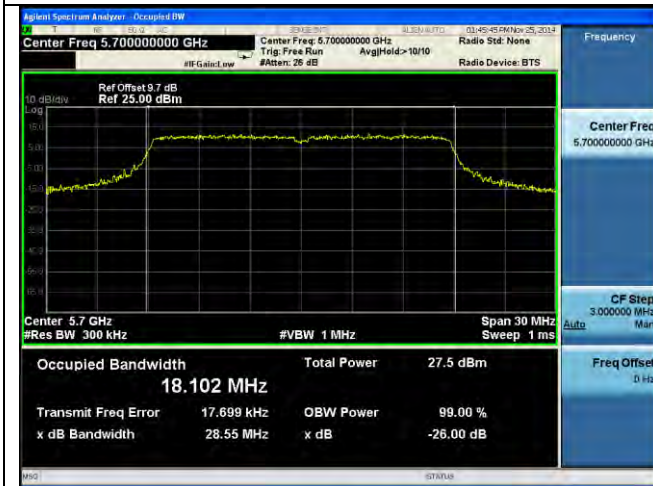

26dB BW - 802.11n-20M 5700MHz



26dB BW - 802.11n-40M 5510MHz



26dB BW - 802.11n-40M 5570MHz



26dB BW - 802.11n-40M 5670MHz




26dB & 99% BW - 802.11ac-80M 5530MHz

Plots for Channel that extends across the 5.725GHz boundary



26dB & 99% BW - 802.11a-20M 5720MHz

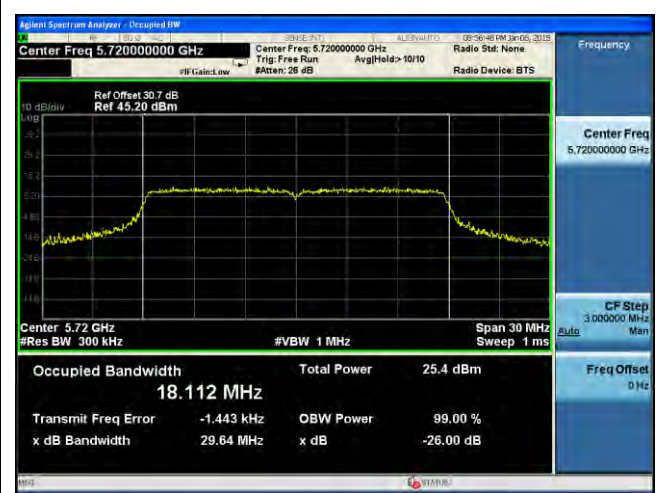

26dB & 99% BW - 802.11n-20M 5720MHz




26dB & 99% BW - 802.11n-40M 5710MHz



26dB & 99% BW - 802.11n-40M 5690MHz

10.3 Peak Output Power

Requirement(s):

Spec	Item	Requirement	Applicable
§ 15.407	a)(1)(i)	For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).	<input type="checkbox"/>
	a)(1)(ii)	For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi.	<input type="checkbox"/>
	a)(1)(iii)	For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi.	<input type="checkbox"/>
	a)(1)(iv)	For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi.	<input type="checkbox"/>
	a)(2)	For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm 10 log B, where B is the 26 dB emission bandwidth in megahertz.	<input checked="" type="checkbox"/>
	a)(3)	For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.	<input checked="" type="checkbox"/>
Test Setup			
Test Procedure	<p>789033 D02 General UNII Test Procedures New Rules v01</p> <p><u>Measurement using a Power Meter (PM)</u></p> <p>Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.</p> <ul style="list-style-type: none"> - Connect EUT's RF output power to power meter - Set EUT to be continuous transmission mode - Measurement the average output power using power meter and record the result - Repeat above steps for different test channel and other modulation type. 		
Test Date	11/22/2014	Environmental condition	Temperature 21°C Relative Humidity 40% Atmospheric Pressure 1019mbar
Remark	For the cross band channels, the output power of full bandwidth is compared to the power limit in 5.5G and 5.8G as the worst case.		
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Test Data Yes N/A

Test Plot Yes (See below) N/A

Output Power measurement result for 5.2GHz

Type	Test mode	Freq (MHz)	CH	Conducted Power (dBm)			Limit (dBm)	Result
				Chain0	Chain1	Combined Power		
Output Power	802.11a	5260	Low	18.99	18.77	21.89	≤24	Pass
Output Power	802.11a	5280	Mid	18.96	18.75	21.87	≤24	Pass
Output Power	802.11a	5320	High	18.20	18.55	21.39	≤24	Pass
Output Power	802.11n-20	5260	Low	19.31	19.23	22.28	≤24	Pass
Output Power	802.11n-20	5300	Mid	19.27	19.11	22.20	≤24	Pass
Output Power	802.11n-20	5320	High	19.19	18.95	22.08	≤24	Pass
Output Power	802.11n-40	5270	Low	20.95	20.95	23.96	≤24	Pass
Output Power	802.11n-40	5310	High	20.77	21.03	23.91	≤24	Pass
Output Power	802.11ac-80	5290	Mid	20.78	20.91	23.86	≤24	Pass

Output Power measurement result for 5.5GHz

Type	Test mode	Freq (MHz)	CH	Conducted Power (dBm)			Limit (dBm)	Result
				Chain0	Chain1	Combined Power		
Output power	802.11a	5500	Low	18.96	18.95	21.97	≤24	Pass
Output power	802.11a	5580	Mid	19.30	18.93	22.13	≤24	Pass
Output power	802.11a	5700	High	18.92	19.15	22.05	≤24	Pass
Output power	802.11n-20	5500	Low	19.14	19.07	22.12	≤24	Pass
Output power	802.11n-20	5580	Mid	19.28	19.43	22.37	≤24	Pass
Output power	802.11n-20	5700	High	19.39	19.00	22.21	≤24	Pass
Output power	802.11n-40	5510	Low	21.09	20.85	23.98	≤24	Pass
Output power	802.11n-40	5590	Mid	20.94	20.83	23.90	≤24	Pass
Output power	802.11n-40	5670	High	20.98	20.91	23.96	≤24	Pass
Output power	802.11ac-80	5530	Low	21.10	20.75	23.94	≤24	Pass

Channel that extends across the 5.725GHz boundary in band 5470-5725MHz


Type	Test mode	Freq (MHz)	CH	Conducted Power (dBm)			Limit (dBm)	Result
				Chain0	Chain1	Combined Power		
Output power	802.11a	5720	High	19.00	18.88	21.95	≤24	Pass
Output power	802.11n-20	5720	High	19.43	18.56	22.03	≤24	Pass
Output power	802.11n-40	5710	High	20.98	20.91	23.96	≤24	Pass
Output power	802.11ac-80	5690	High	20.63	21.14	23.90	≤24	Pass

Channel that extends across the 5.725GHz boundary in band 5725-5850MHz

Type	Test mode	Freq (MHz)	CH	Conducted Power (dBm)			Limit (dBm)	Result
				Chain0	Chain1	Combined Power		
Output power	802.11a	5720	High	19.00	18.88	21.95	≤30	Pass
Output power	802.11n-20	5720	High	19.43	18.56	22.03	≤30	Pass
Output power	802.11n-40	5710	High	20.98	20.91	23.96	≤30	Pass
Output power	802.11ac-80	5690	High	20.63	21.14	23.90	≤30	Pass

10.4 Peak Spectral Density

Requirement(s):

Spec	Item	Requirement	Applicable
§ 15.407	a)(1)(i)	For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band.	<input type="checkbox"/>
	a)(1)(ii)	For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band.	<input type="checkbox"/>
	a)(2)	For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.	<input checked="" type="checkbox"/>
	a)(3)	For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.	<input checked="" type="checkbox"/>
Test Setup			
Test Procedure	<p>789033 D02 General UNII Test Procedures New Rules v01, II.F. Method SA-1</p> <p><u>Maximum spectral density measurement procedure</u></p> <ul style="list-style-type: none"> - Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal. - Set RBW = 1 MHz - Set VBW ≥ 3 MHz - Detector = RMS. - Sweep time = auto couple. - Trace mode = max hold. - Trace average at least 100 traces in power averaging - Use the peak marker function to determine the maximum amplitude level within the RBW. <p>Apply correction to the result if different RBW is used.</p>		
Test Date	11/21/2014	Environmental condition	Temperature 22°C Relative Humidity 42% Atmospheric Pressure 1020mbar
Remark	For the cross band channels, the PSD of full bandwidth is compared to the PSD limit in 5.5G and 5.8G as the worst case. For 5.8GHz band, the PSD measurement on cross band channel is using 1MHz BW as the worst case.		
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Equipment Setting

Test	RBW	VBW	Span	Detector	Sweep	Trace	Notes
PSD	1MHz	≥3MHz	>EBW	RMS	Auto	Average	-

Test Data Yes N/A

Test Plot Yes (See below) N/A

PSD measurement result for 5.2GHz

Type	Test mode	Freq (MHz)	CH	Conducted PSD (dBm/MHz)			Limit (dBm/MHz)	Result
				Chain0	Chain1	Combined PSD		
PSD	802.11a	5260	Low	7.928	7.777	10.863	≤11	Pass
PSD	802.11a	5300	Mid	7.819	7.621	10.732	≤11	Pass
PSD	802.11a	5320	High	7.735	7.548	10.653	≤11	Pass
PSD	802.11n-20	5260	Low	7.942	7.778	10.871	≤11	Pass
PSD	802.11n-20	5300	Mid	7.857	7.696	10.788	≤11	Pass
PSD	802.11n-20	5320	High	7.707	7.610	10.669	≤11	Pass
PSD	802.11n-40	5270	Low	6.464	6.456	9.470	≤11	Pass
PSD	802.11n-40	5310	High	6.280	6.531	9.418	≤11	Pass
PSD	802.11ac-80	5290	Mid	3.227	3.309	6.278	≤11	Pass

PSD measurement result for 5.5GHz

Type	Test mode	Freq (MHz)	CH	Conducted PSD (dBm/MHz)			Limit (dBm/MHz)	Result
				Chain0	Chain1	Combined PSD		
PSD	802.11a	5500	Low	7.914	7.895	10.915	≤11	Pass
PSD	802.11a	5580	Mid	7.993	7.909	10.962	≤11	Pass
PSD	802.11a	5700	High	7.937	7.908	10.933	≤11	Pass
PSD	802.11n-20	5500	Low	7.763	7.703	10.744	≤11	Pass
PSD	802.11n-20	5580	Mid	7.942	7.996	10.979	≤11	Pass
PSD	802.11n-20	5700	High	7.919	7.745	10.844	≤11	Pass
PSD	802.11n-40	5510	Low	6.573	6.494	9.544	≤11	Pass
PSD	802.11n-40	5550	Mid	6.550	6.363	9.468	≤11	Pass
PSD	802.11n-40	5670	High	5.842	5.538	8.703	≤11	Pass
PSD	802.11ac-80	5530	Mid	3.466	3.371	6.429	≤11	Pass


Channel that extends across the 5.725GHz boundary in band 5470-5725MHz

Type	Test mode	Freq (MHz)	CH	Conducted PSD (dBm/MHz)			Limit (dBm)	Result
				Chain0	Chain1	Combined PSD		
PSD	802.11a	5720	High	7.813	7.832	10.833	≤11	Pass
PSD	802.11n-20	5720	High	7.905	7.399	10.670	≤11	Pass
PSD	802.11n-40	5710	High	6.616	6.598	9.617	≤11	Pass
PSD	802.11ac-80	5690	High	3.040	1.959	5.543	≤11	Pass

Channel that extends across the 5.725GHz boundary in band 5725-5850MHz

Type	Test mode	Freq (MHz)	CH	Conducted PSD (dBm/MHz)			Limit (dBm)	Result
				Chain0	Chain1	Combined PSD		
PSD	802.11a	5720	High	7.813	7.832	10.833	≤30	Pass
PSD	802.11n-20	5720	High	7.905	7.399	10.670	≤30	Pass
PSD	802.11n-40	5710	High	6.616	6.598	9.617	≤30	Pass
PSD	802.11ac-80	5690	High	3.040	1.959	5.543	≤30	Pass

Test Plots

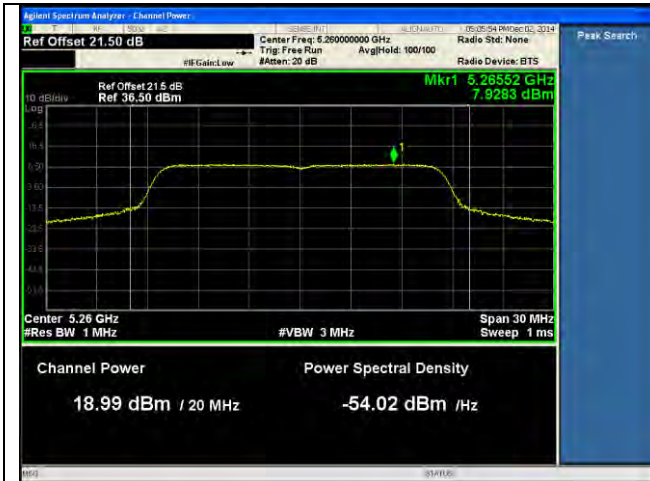

PSD-802.11a-5260M-chain0



PSD-802.11a-5260M-chain1



PSD-802.11a-5280M-chain0



PSD-802.11a-5280M-chain1



PSD-802.11a-5320M-chain0



PSD-802.11a-5320M-chain1



PSD-802.11n-20M-5260M-chain0



PSD-802.11n-20M-5260M-chain1



PSD-802.11n-20M-5280M-chain0



PSD-802.11n-20M-5280M-chain1



PSD-802.11n-20M-5320M-chain0



PSD-802.11n-20M-5320M-chain1



PSD-802.11n-40M-5270M-chain0



PSD-802.11n-40M-5270M-chain1



PSD-802.11n-40M-5310M-chain0



PSD-802.11n-40M-5310M-chain1



PSD-802.11ac-80M-5290M-chain0




PSD-802.11ac-80M-5290M-chain1



PSD-802.11a-5500M-chain0



PSD-802.11a-5500M-chain1

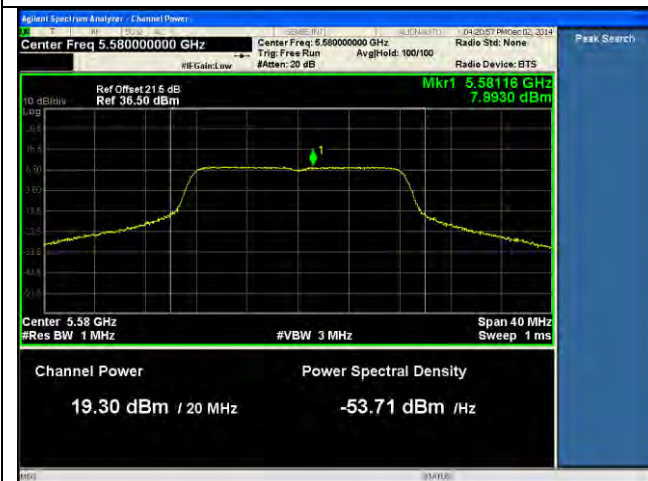

PSD-802.11a-5580M-chain0




PSD-802.11a-5580M-chain1



PSD-802.11a-5700M-chain0



PSD-802.11a-5700M-chain1

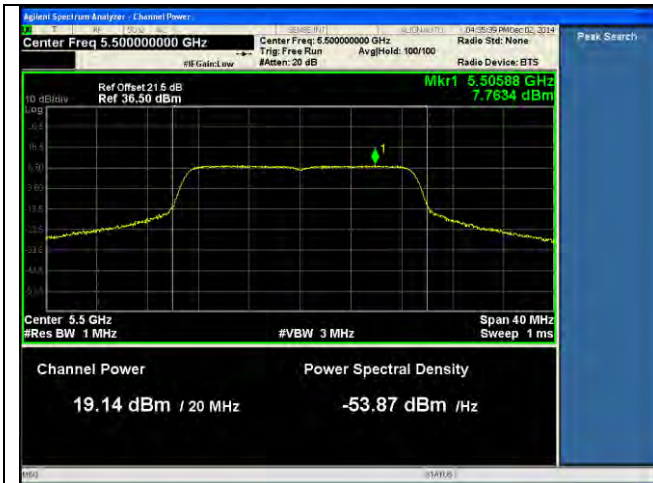

PSD-802.11n-20-5500M-chain0



PSD-802.11n-20-5500M-chain1



PSD-802.11n-20-5580M-chain0



PSD-802.11n-20-5580M-chain1



PSD-802.11n-20-5700M-chain0



PSD-802.11n-20-5700M-chain1



PSD-802.11n-40M-5510M-chain0



PSD-802.11n-40M-5510M-chain1



PSD-802.11n-40M-5550M-chain0



PSD-802.11n-40M-5550M-chain1



PSD-802.11n-40M-5670M-chain0



PSD-802.11n-40M-5670M-chain1



PSD-802.11ac-80M-5530M-chain0



PSD-802.11ac-80M-5530M-chain1

Test Plots for cross band channels



PSD-802.11a-5720M-chain0



PSD-802.11a-5720M-chain1



PSD-802.11n-20M-5720M-chain0



PSD-802.11n-20M-5720M-chain1



PSD-802.11n-40M-5710M-chain0



PSD-802.11n-40M-5710M-chain1




PSD-802.11ac-80M-5690M-chain0



PSD-802.11ac-80M-5690M-chain1

10.5 Conducted Spurious Emissions


Requirement(s):

Spec	Item	Requirement	Applicable
47CFR§ 15.407(b)(2), 15.407(b)(6)	(1)	For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.	<input checked="" type="checkbox"/>
	(2)	For transmitters operating in the 5.25-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5.25-5.35 GHz band that generate emissions in the 5.15-5.25 GHz band must meet all applicable technical requirements for operation in the 5.15-5.25 GHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5.15-5.25 GHz band.	<input type="checkbox"/>
	(3)	For transmitters operating in the 5.47-5.725 GHz band: all emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz.	<input type="checkbox"/>
	(4)	For transmitters operating in the 5.725-5.825 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an EIRP of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an EIRP of -27 dBm/MHz.	<input checked="" type="checkbox"/>
	-	Restricted band, emission must also comply with the radiated emission limits specified in 15.209	<input checked="" type="checkbox"/>
Test Setup			
Procedure	<p>The unwanted emission limits in both the restricted and non-restricted bands are based on radiated measurements; however, as an alternative, antenna-port conducted measurements in conjunction with cabinet emissions tests will be permitted to demonstrate compliance provided that the following steps are performed:</p> <ul style="list-style-type: none"> - (i) Cabinet emissions measurements. A radiated test shall be performed to ensure that cabinet emissions are below the emission limits. For the cabinet-emission measurements the antenna may be replaced by a termination matching the nominal impedance of the antenna. - (ii) Impedance matching. Conducted tests shall be performed using equipment that matches the nominal impedance of the antenna assembly used with the EUT. - (iii) EIRP calculation. A value representative of an upper bound on out-of-band antenna gain (in dBi) shall be added to the measured antenna-port conducted emission power to compute EIRP within the specified measurement bandwidth. (For emissions in the restricted bands, additional calculations are required to convert EIRP to field strength at the specified distance.) The upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands or 2 dBi, whichever is greater. 		
Remark	Per KDB 662911 D01 Multiple Transmitter Output v02r01, c), the measurement trace result on each plot has been added with 10 log(NANT) dB, where NANT is the number of outputs, to account for the summing of power due to MIMO mode.		
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		


Test Data Yes (See below) N/A

Test Plot Yes (See below) N/A


Conducted Spurious Emissions Plots:

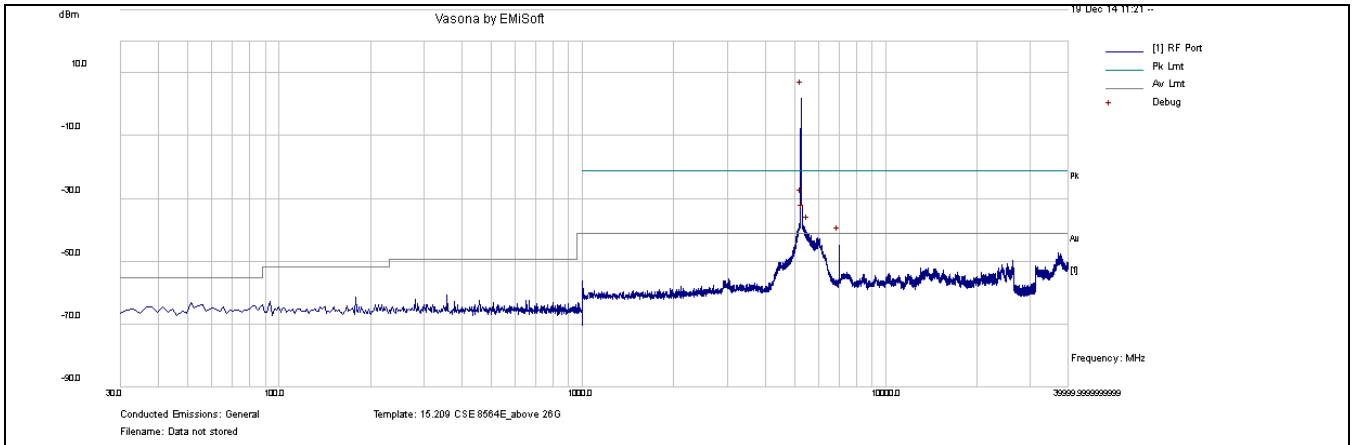


CSE-802.11a 5260MHz-chain0

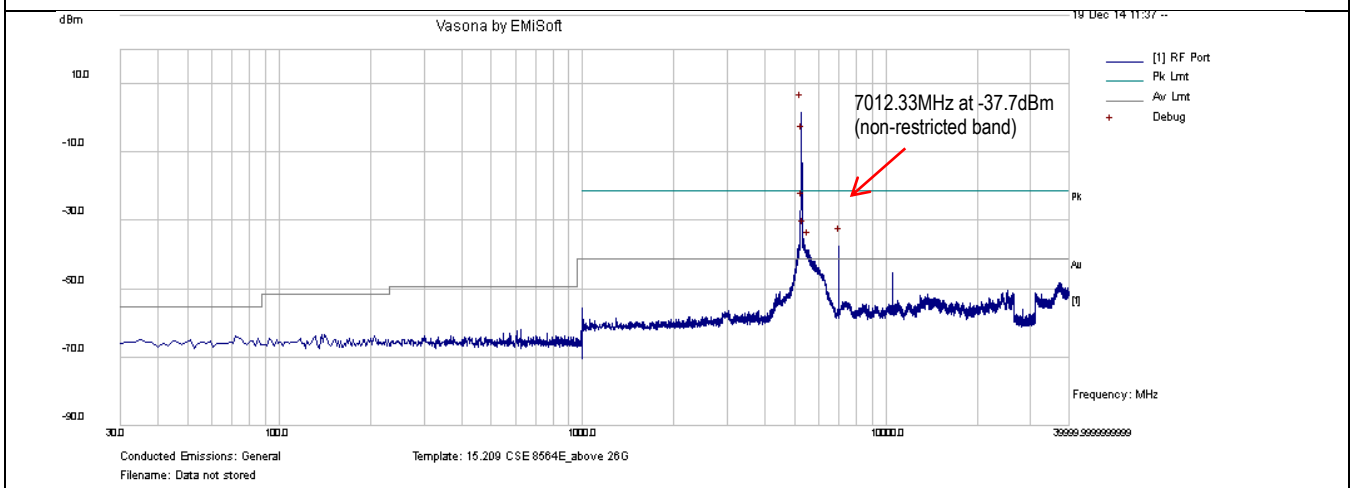


CSE-802.11a 5260MHz-chain1

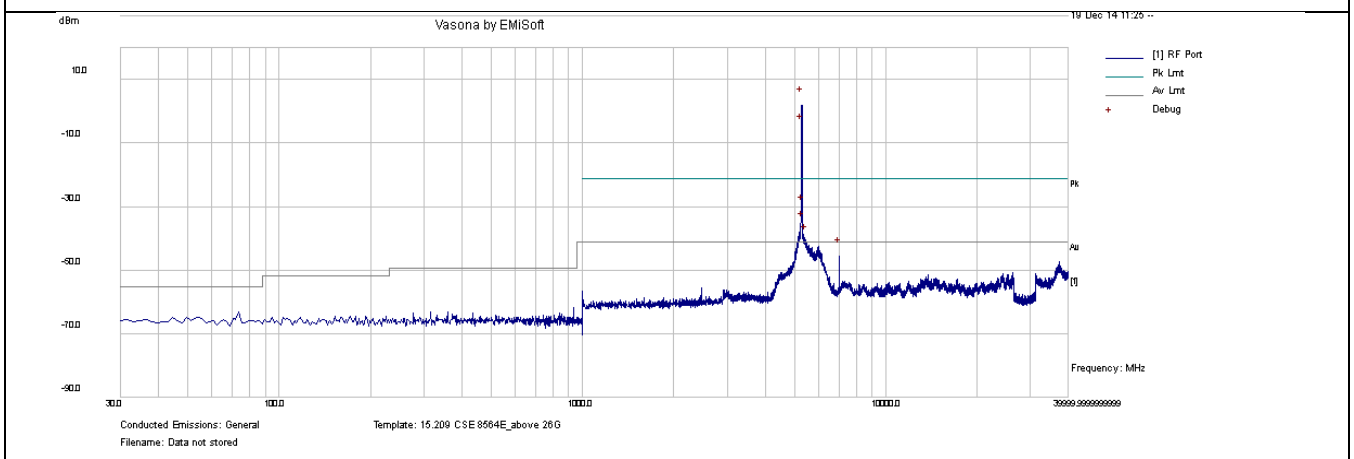


CSE-802.11a 5280MHz-chain0

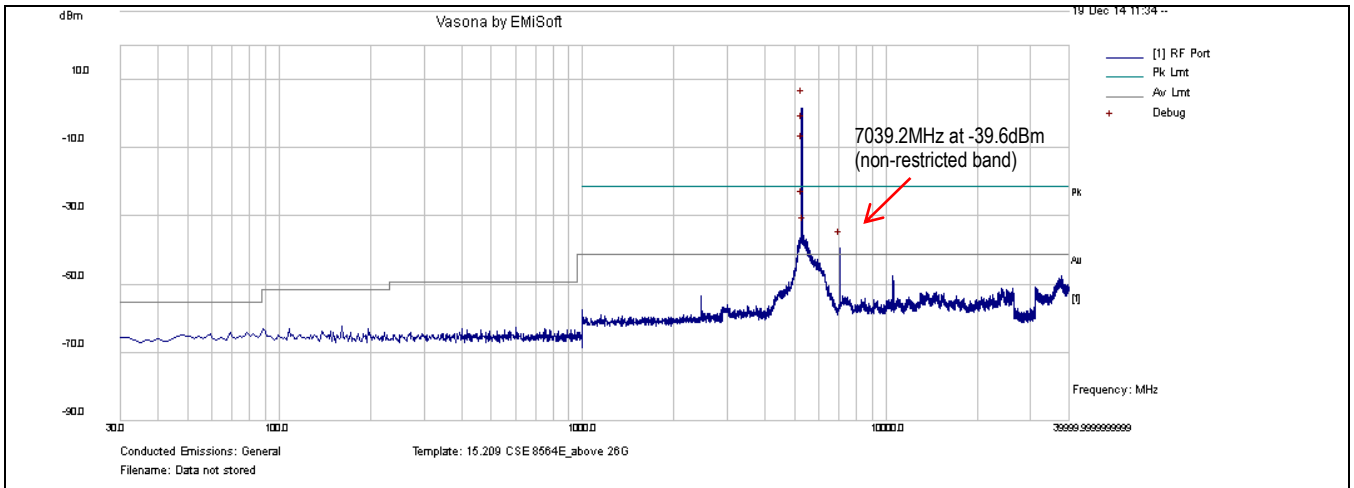


CSE-802.11a 5280MHz-chain1

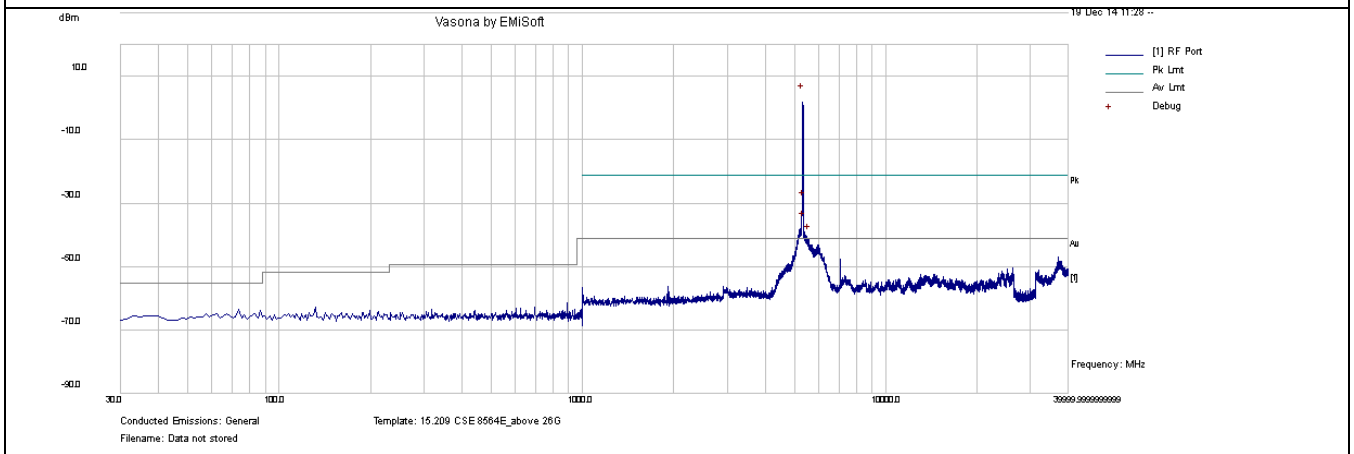


CSE-802.11a 5320MHz-chain0

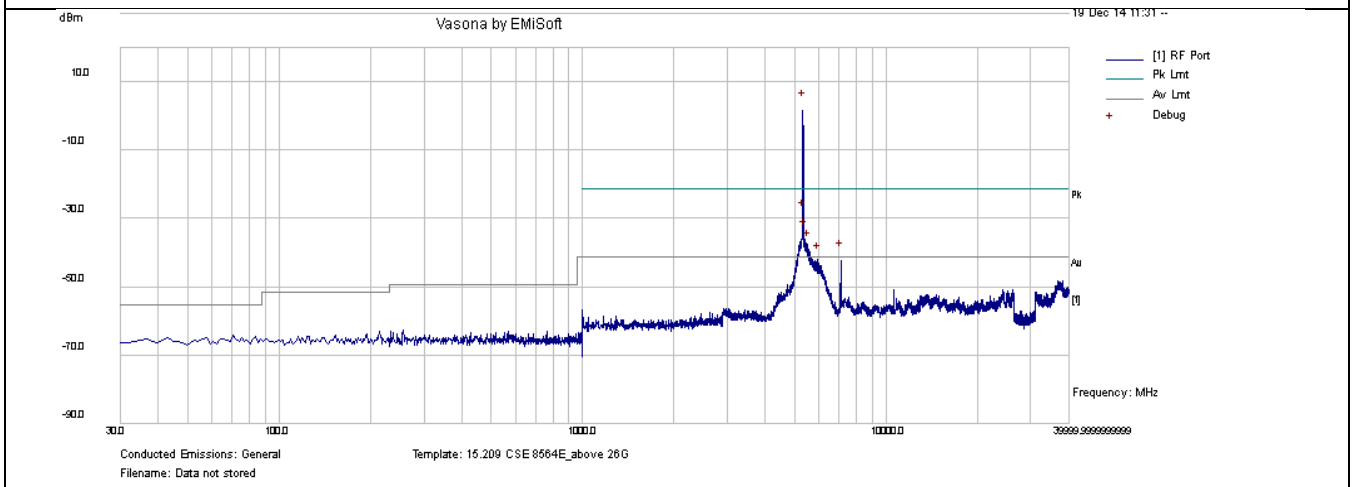


CSE-802.11a 5320MHz-chain1

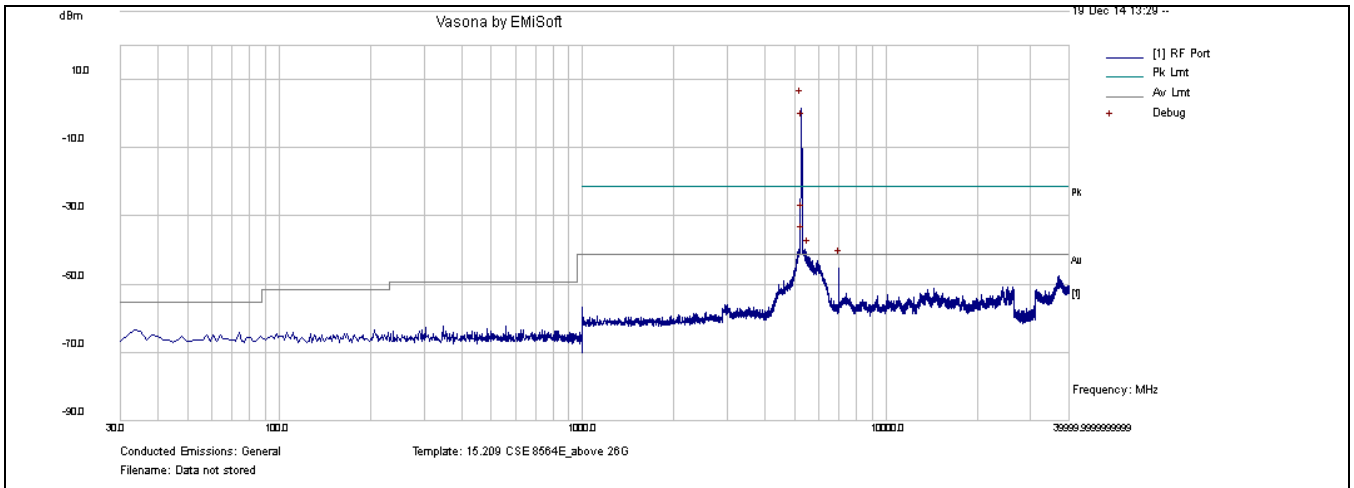


CSE-802.11n-20M 5260MHz-chain0

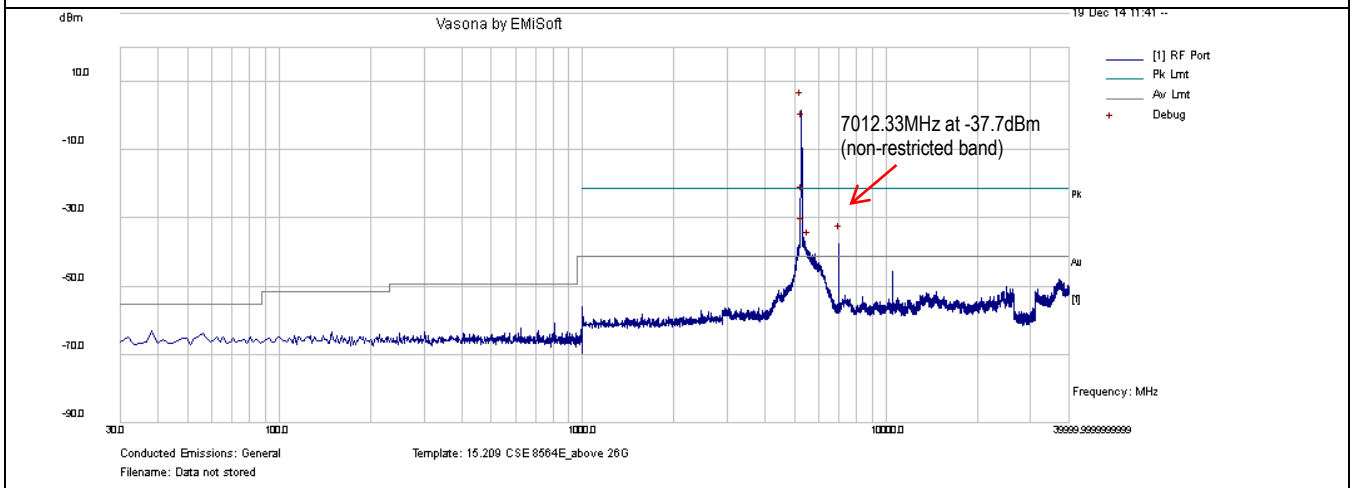


CSE-802.11n-20M 5260MHz-chain1

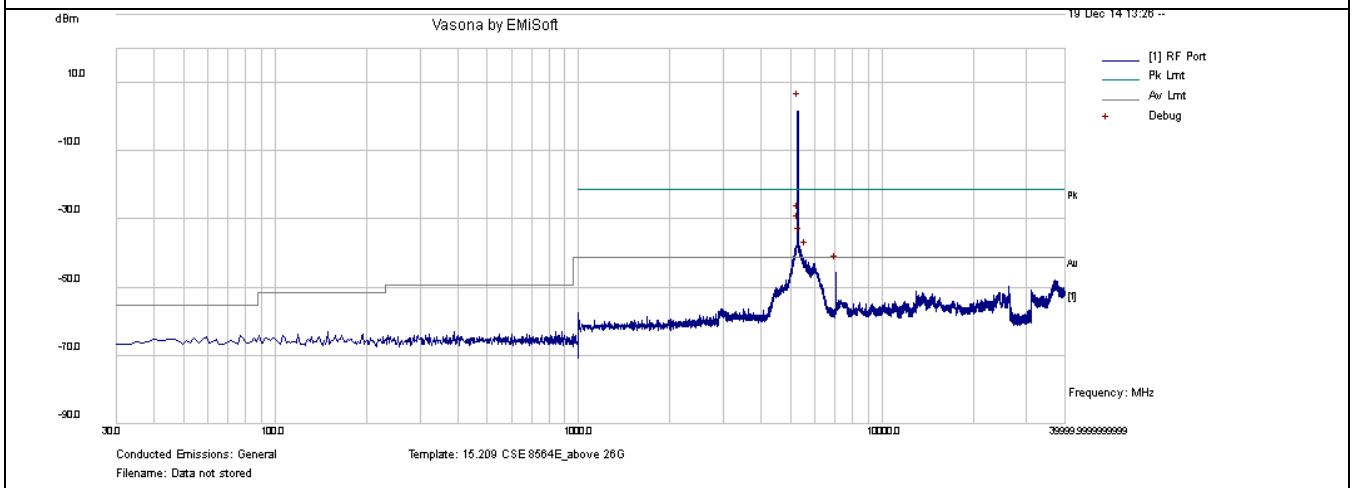


CSE-802.11n-20M 5280MHz-chain0

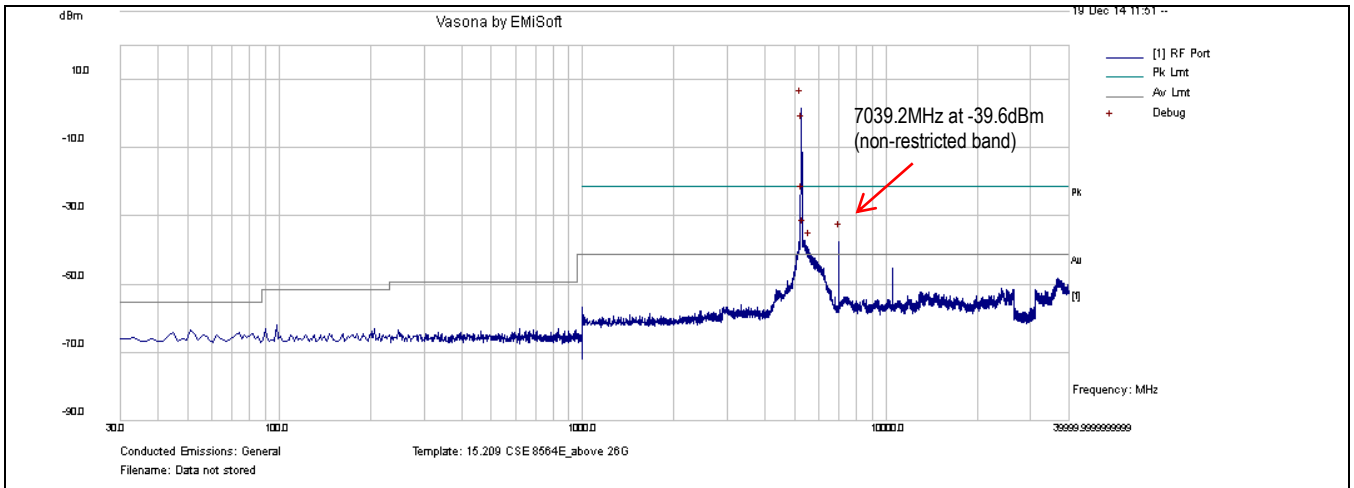


CSE-802.11n-20M 5280MHz-chain1

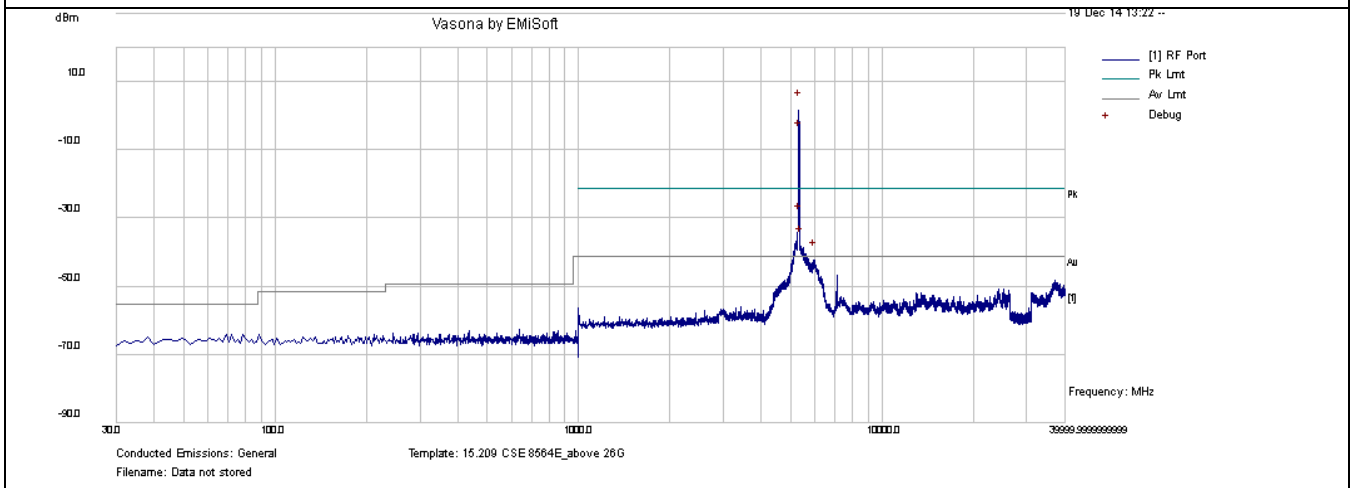


CSE-802.11n-20M 5320MHz-chain0

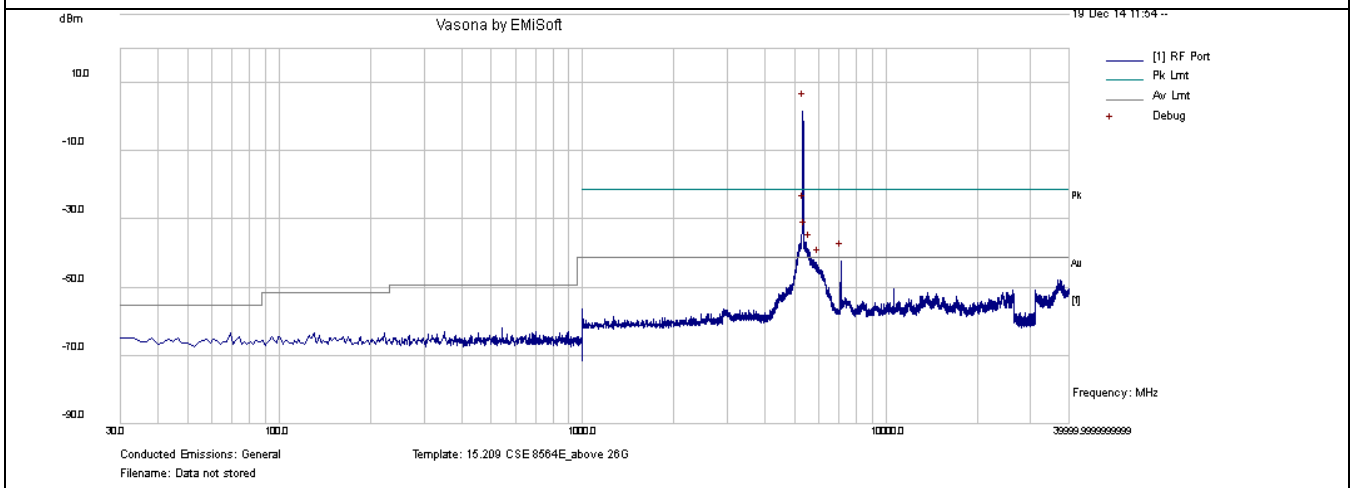


CSE-802.11n-20M 5320MHz-chain1

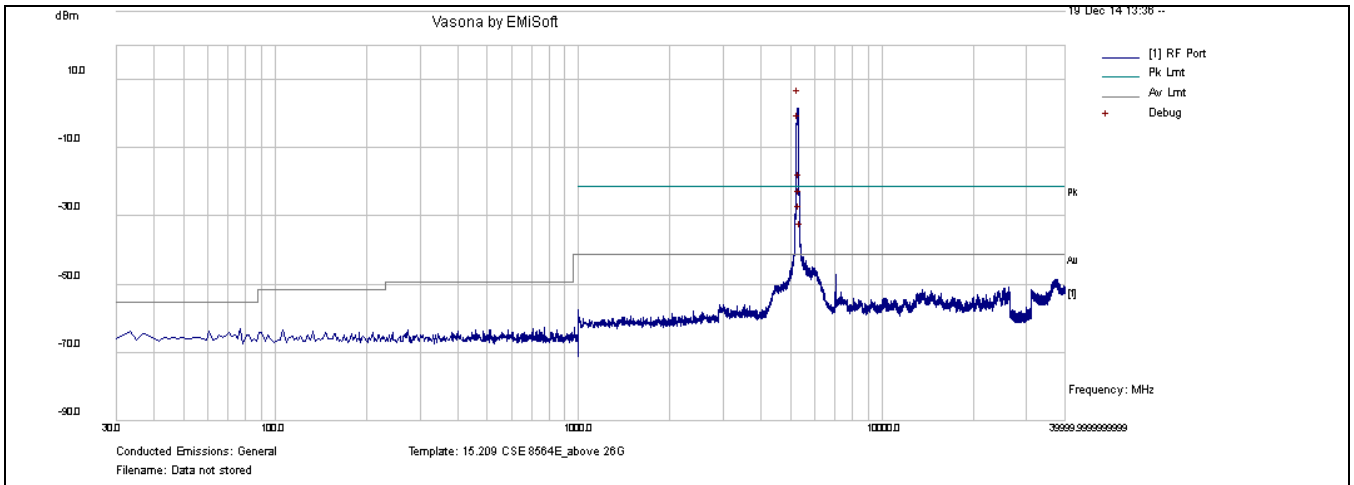


CSE-802.11n-40M 5270MHz-chain0

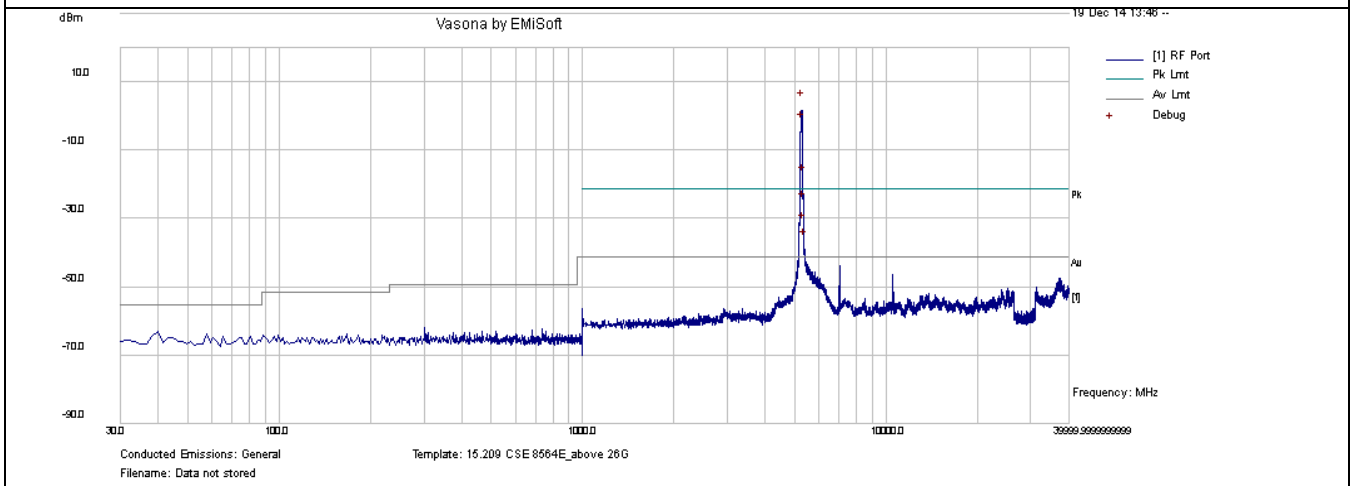


CSE-802.11n-40M 5270MHz-chain1

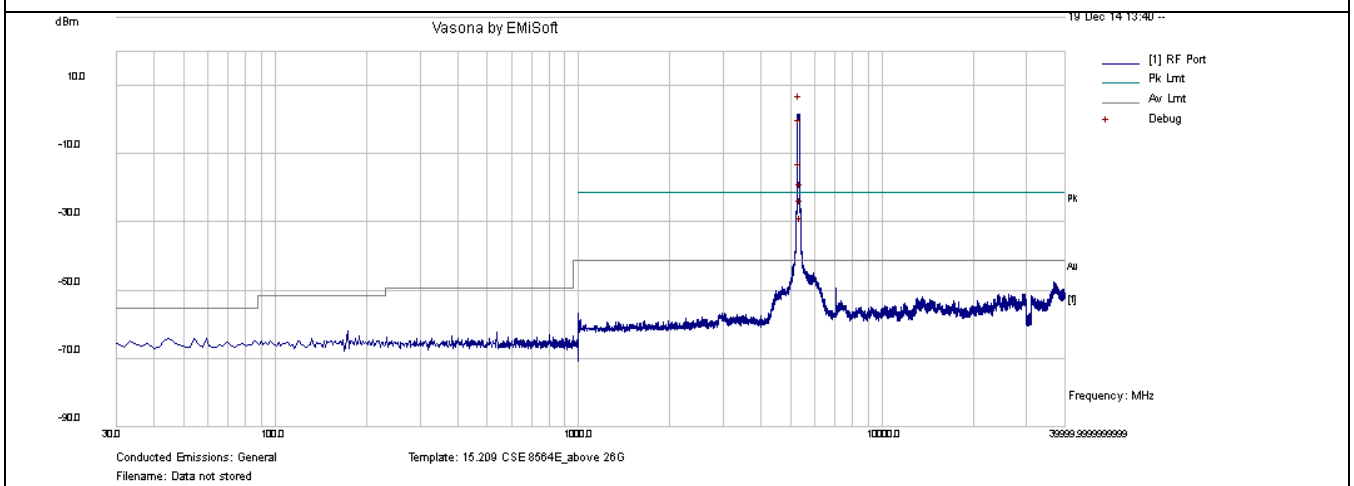


CSE-802.11n-40M 5310MHz-chain0

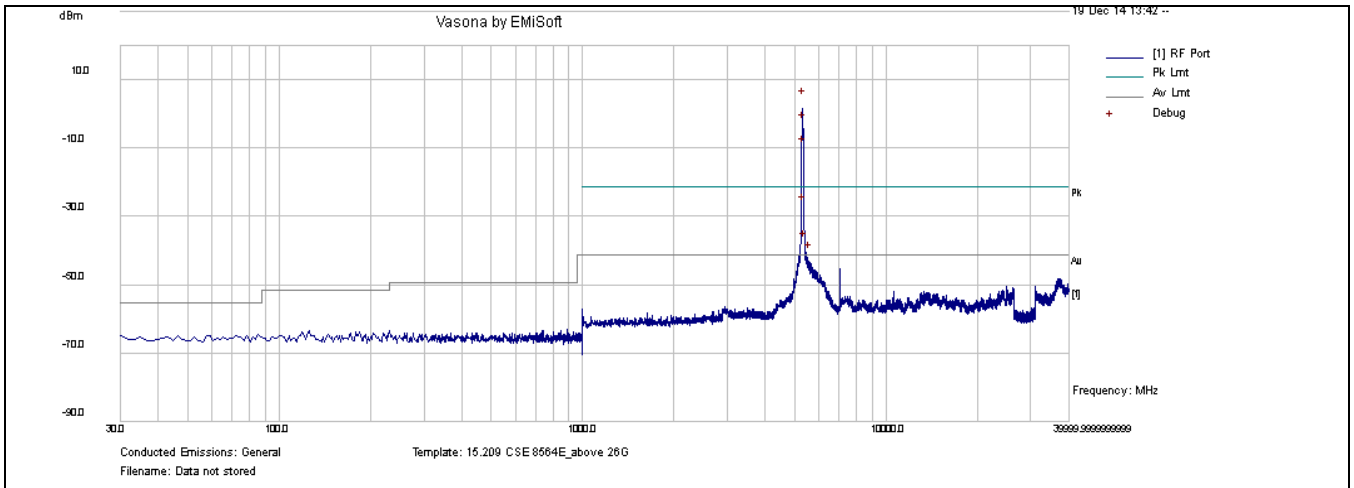


CSE-802.11n-40M 5310MHz-chain1

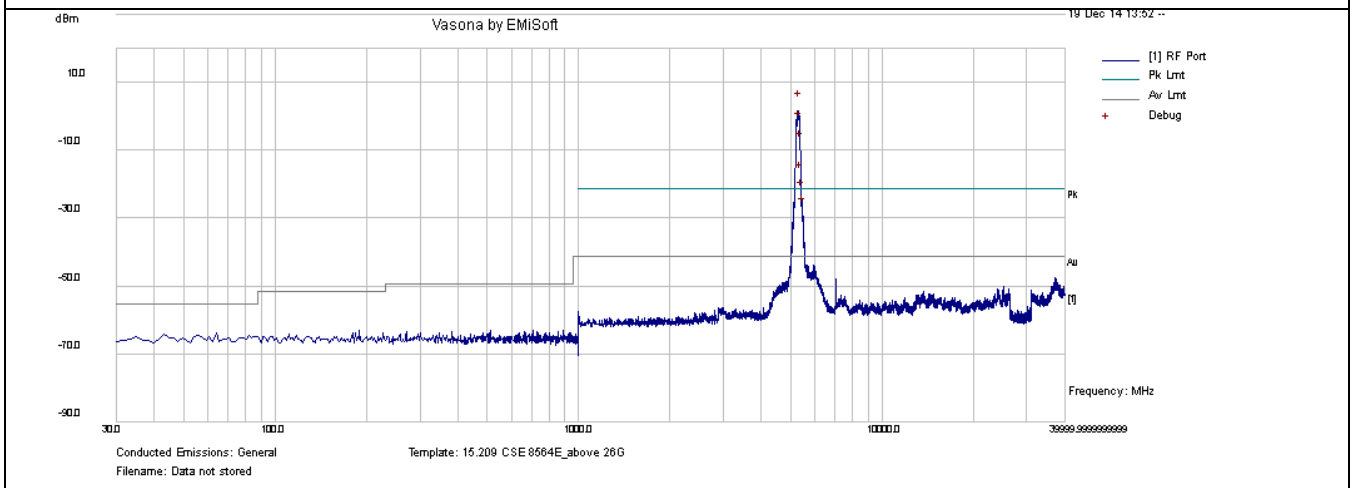


CSE-802.11ac-80M 5290MHz-chain0

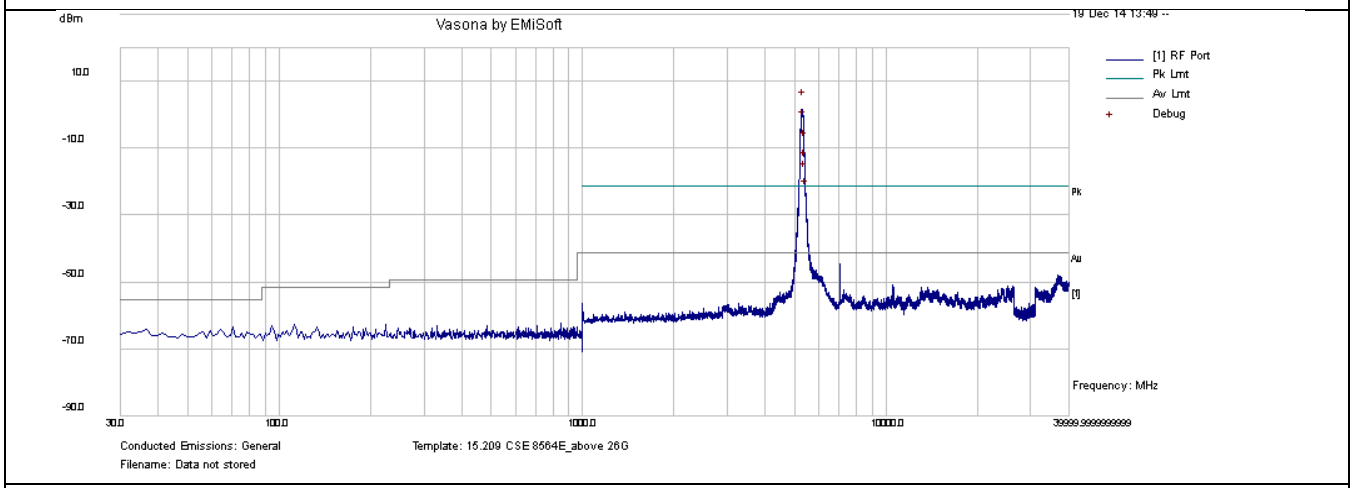


CSE-802.11ac-80M 5290MHz-chain1

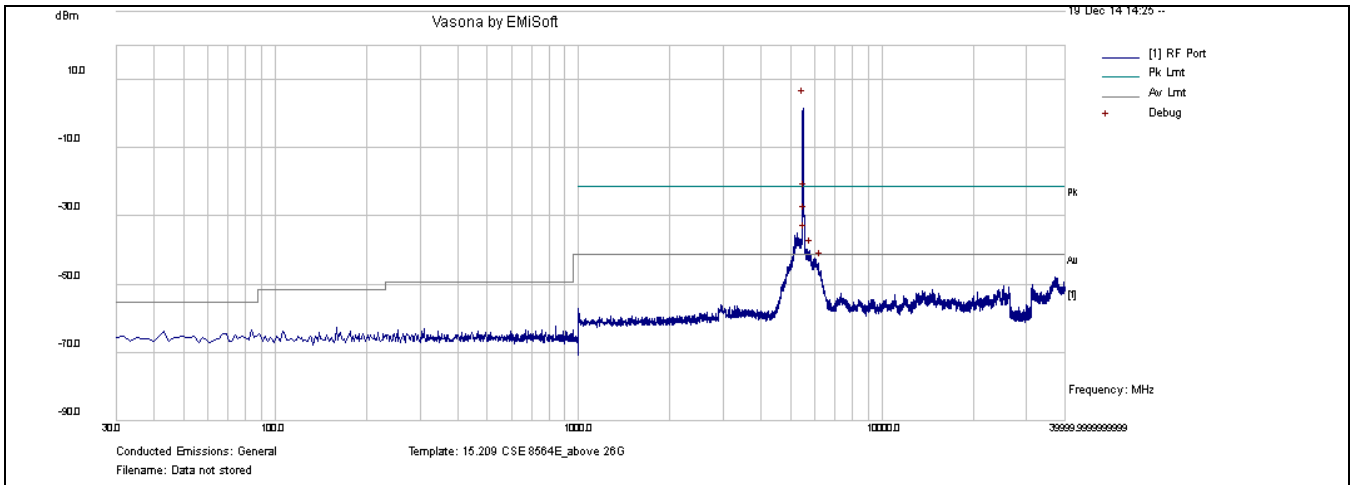


CSE-802.11a 5500MHz-chain0

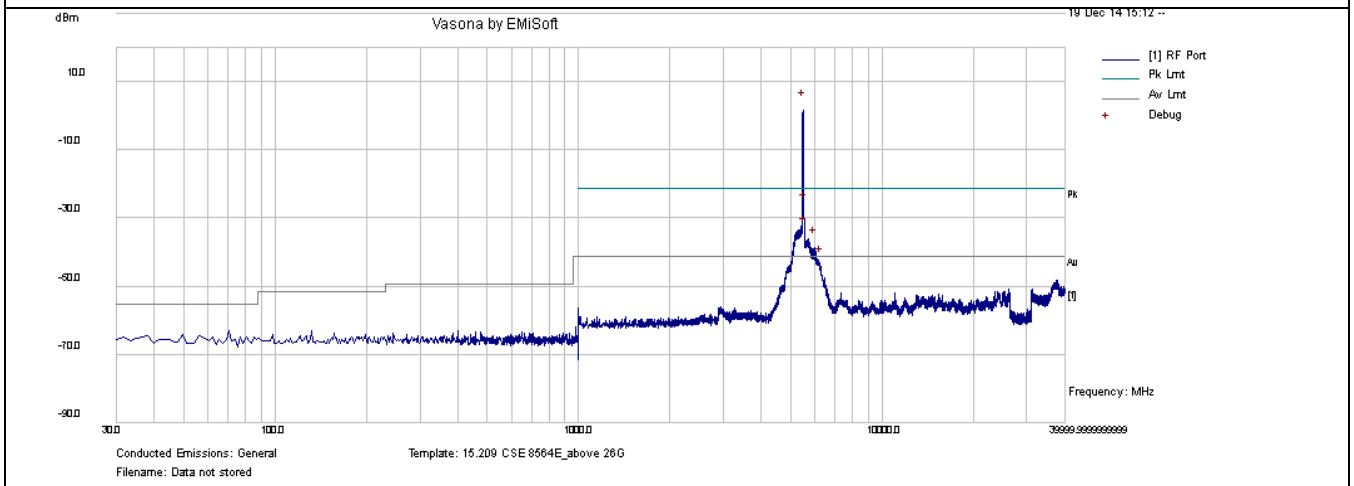


CSE-802.11a 5500MHz-chain1

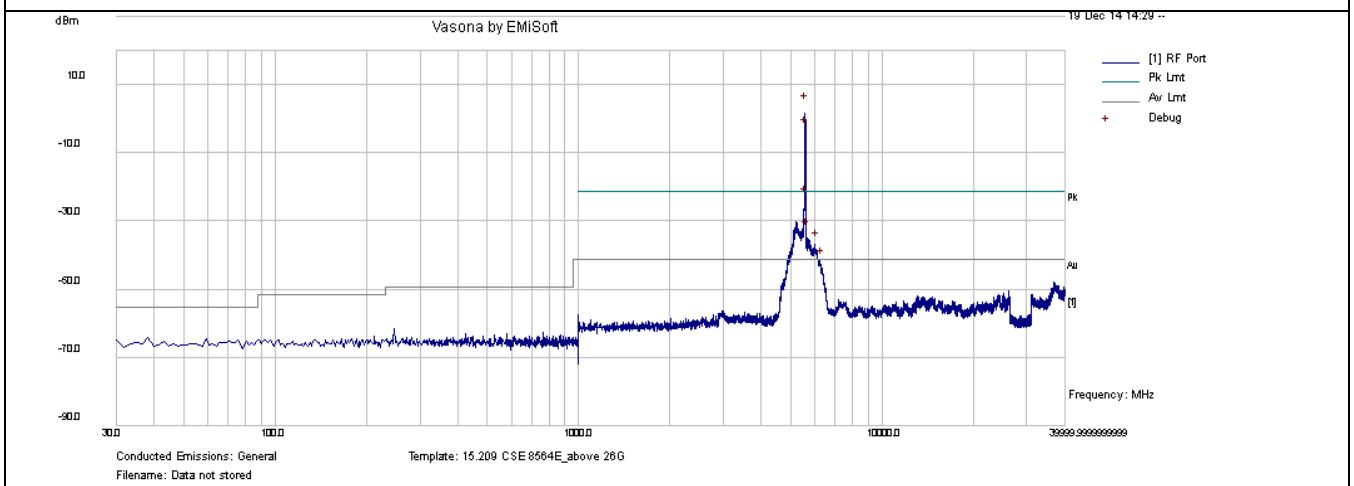


CSE-802.11a 5580MHz-chain0

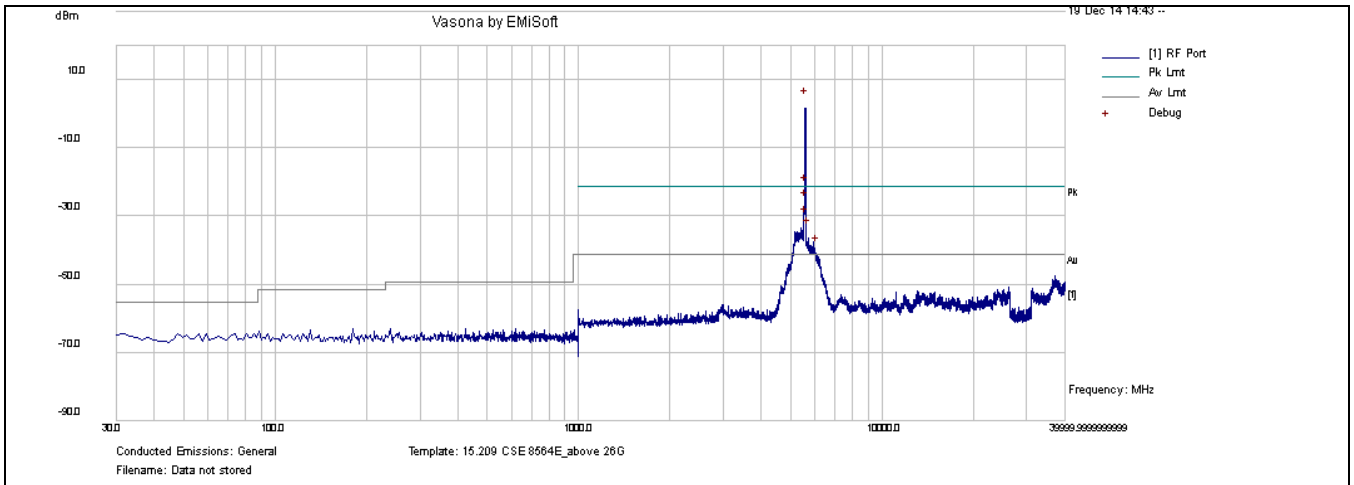


CSE-802.11a 5580MHz-chain1

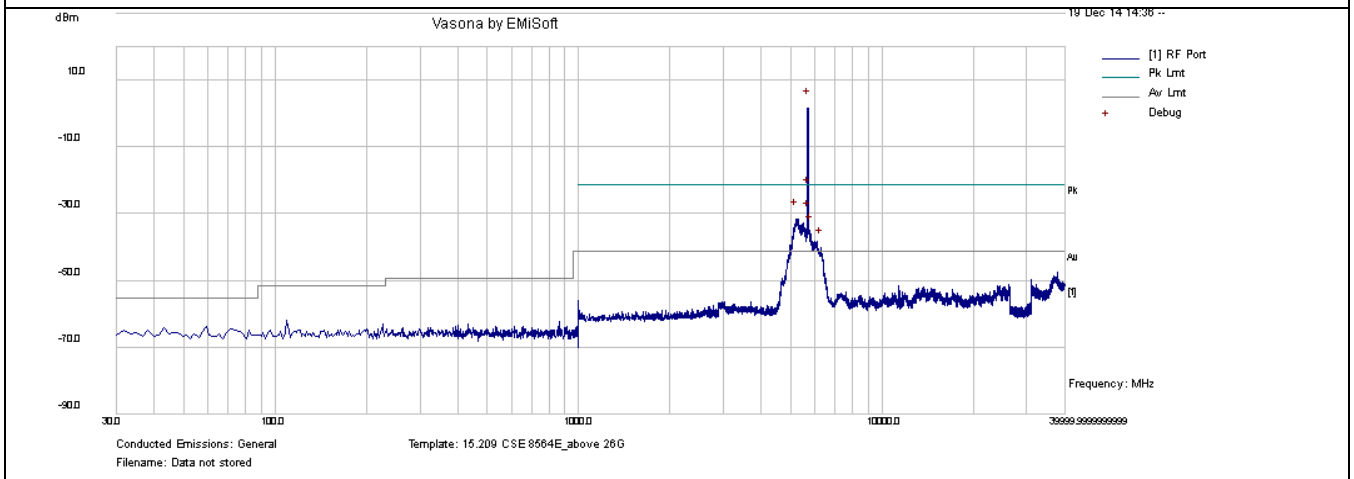


CSE-802.11a 5700MHz-chain0

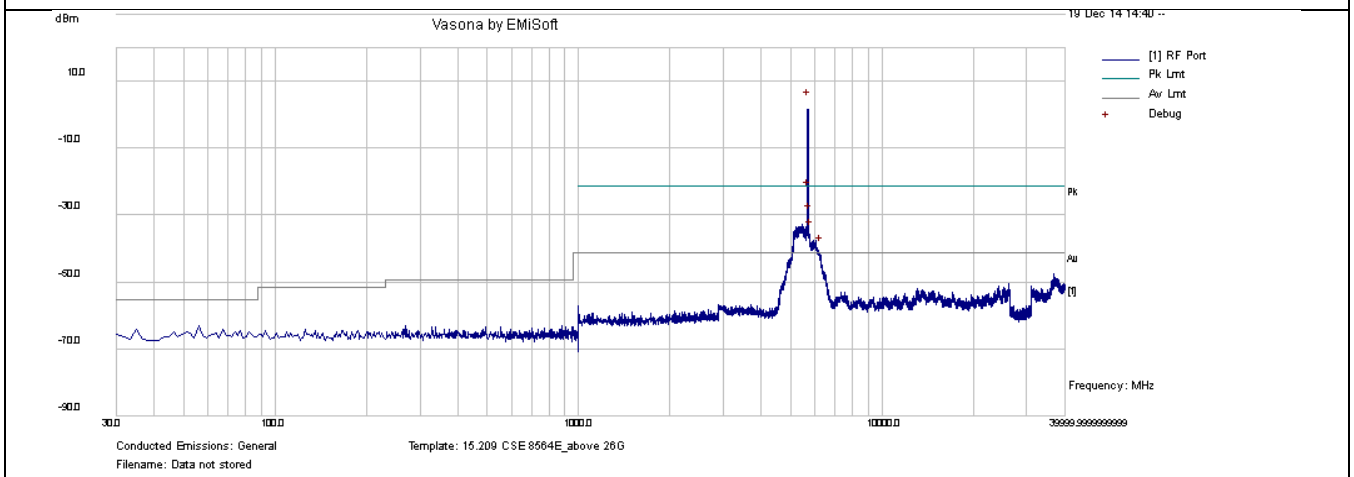


CSE-802.11a 5700MHz-chain1

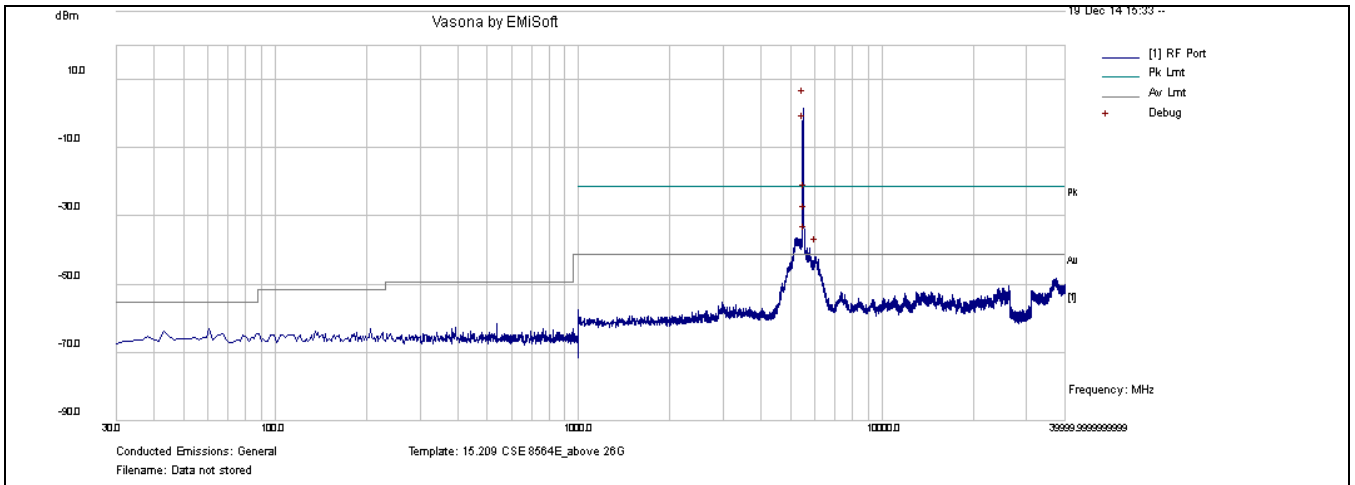


CSE-802.11n-20M 5500MHz-chain0

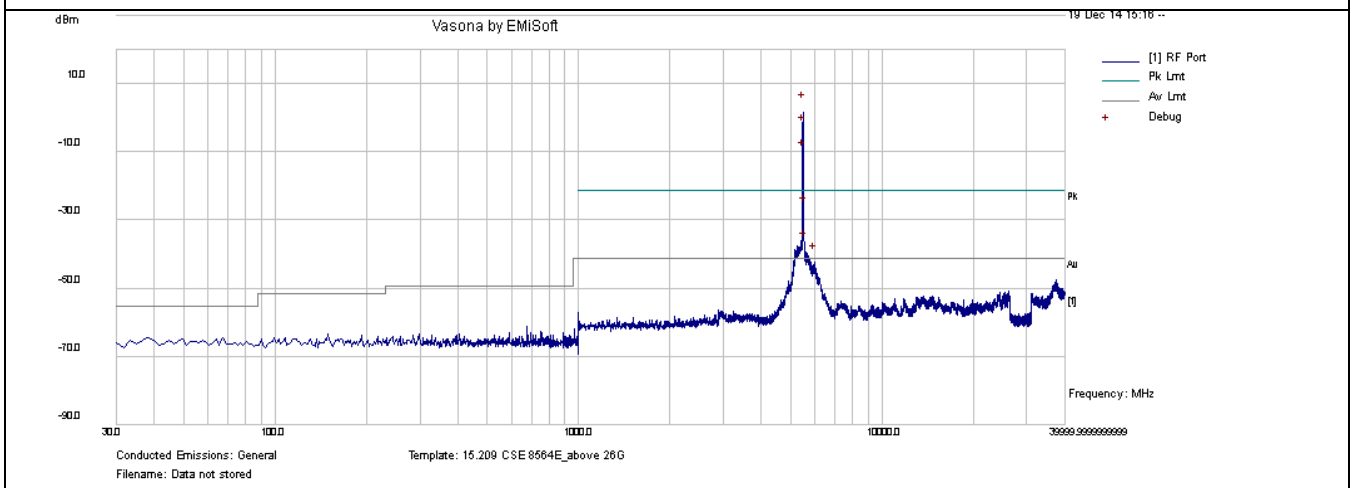


CSE-802.11n-20M 5500MHz-chain1

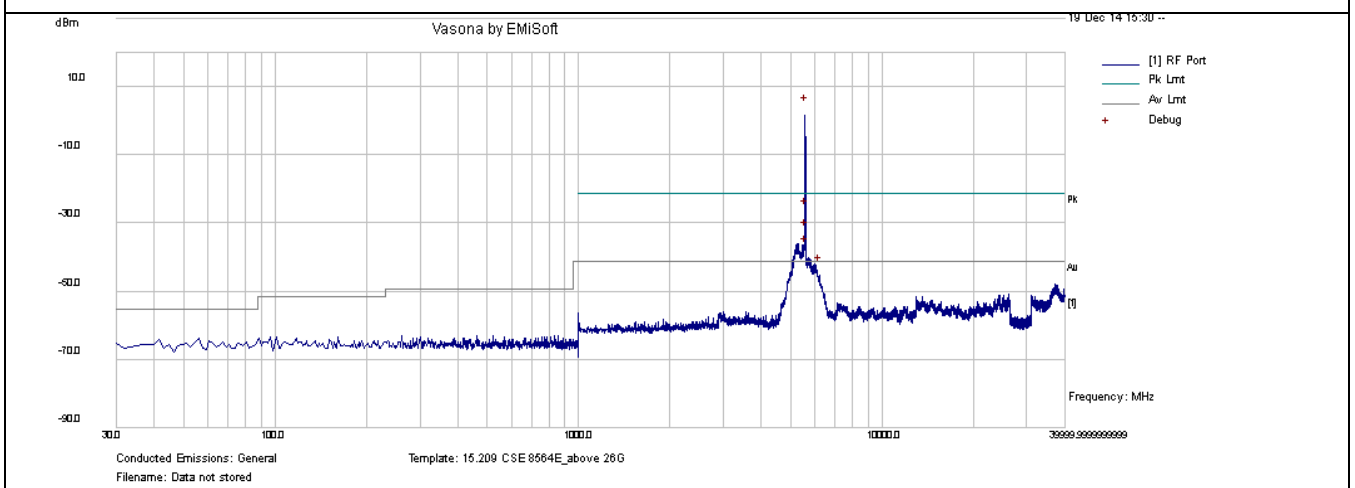


CSE-802.11n-20M 5580MHz-chain0

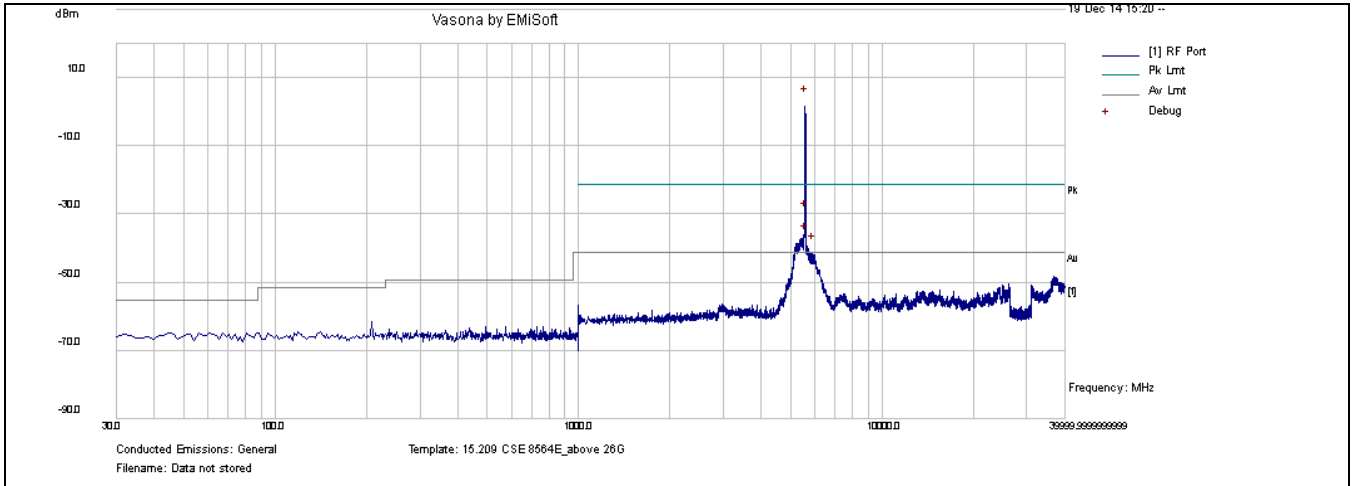


CSE-802.11n-20M 5580MHz-chain1

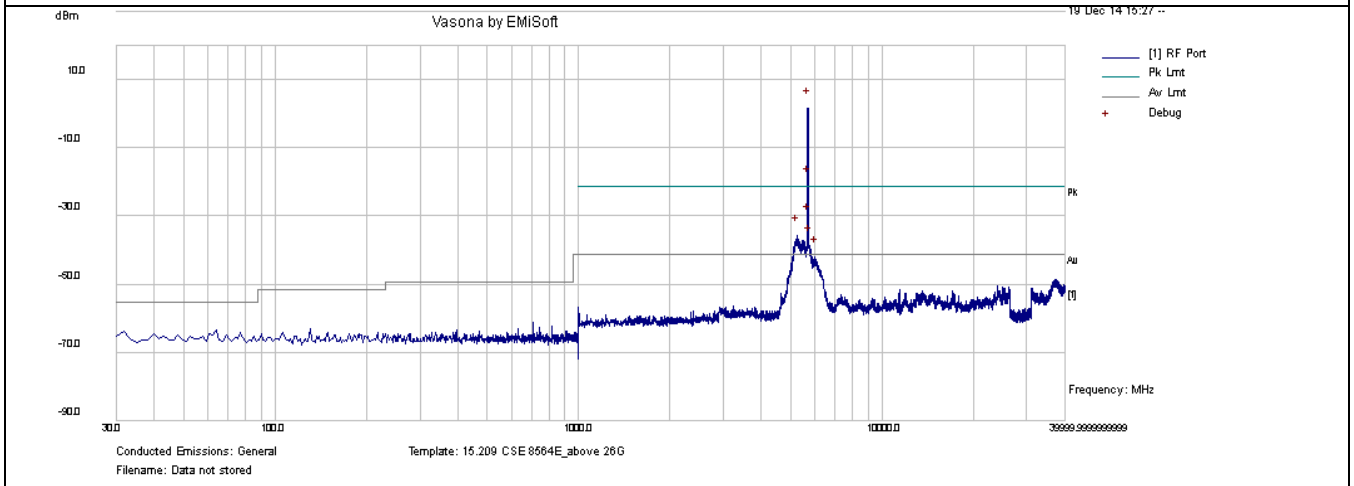


CSE-802.11n-20M 5700MHz-chain0

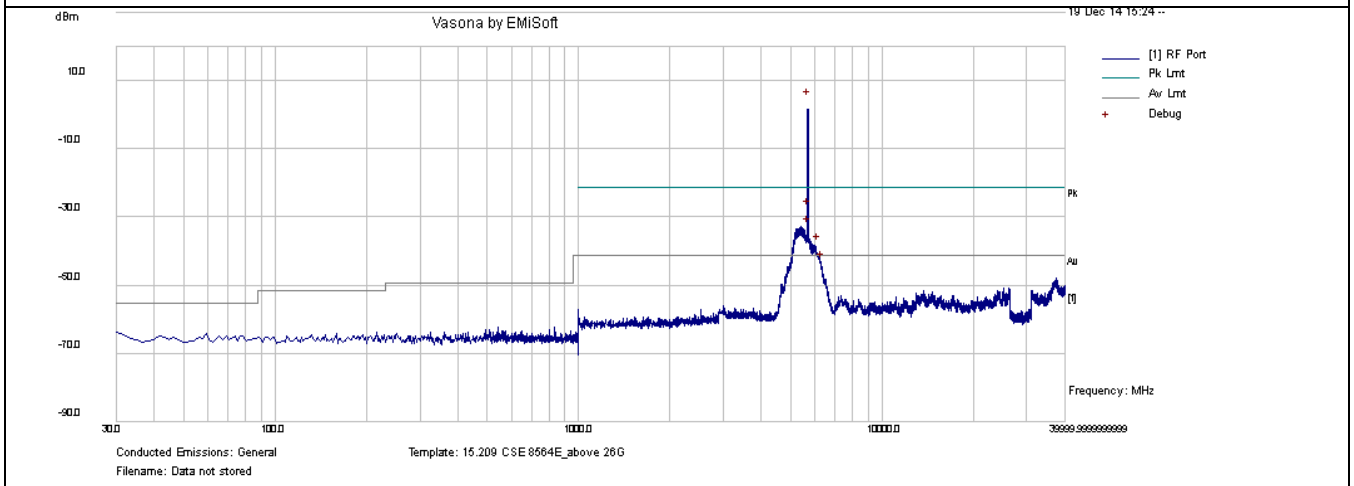


CSE-802.11n-20M 5700MHz-chain1

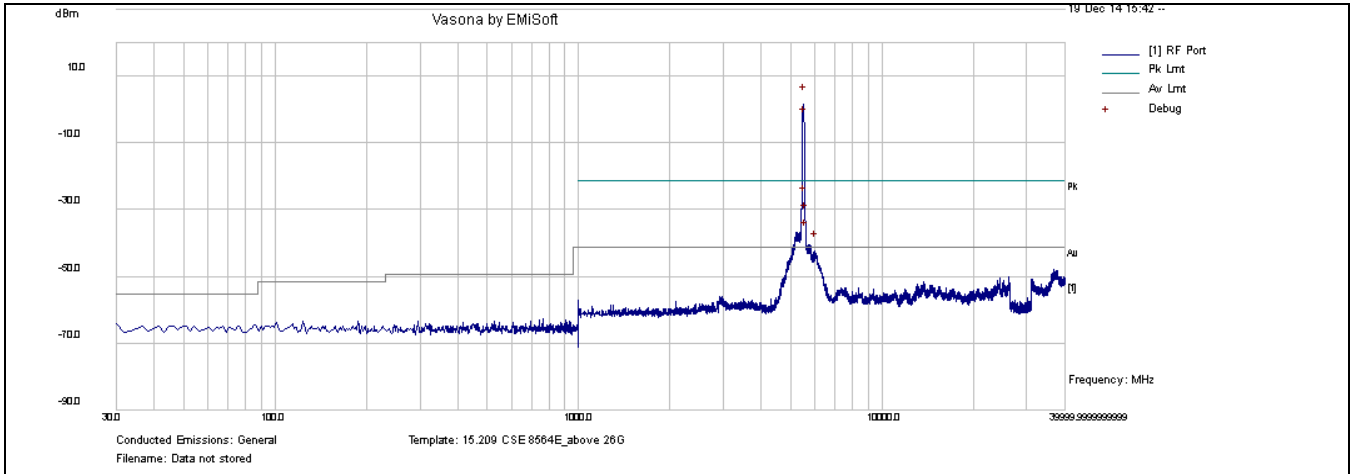


CSE-802.11n-40M-5510MHz-chain0

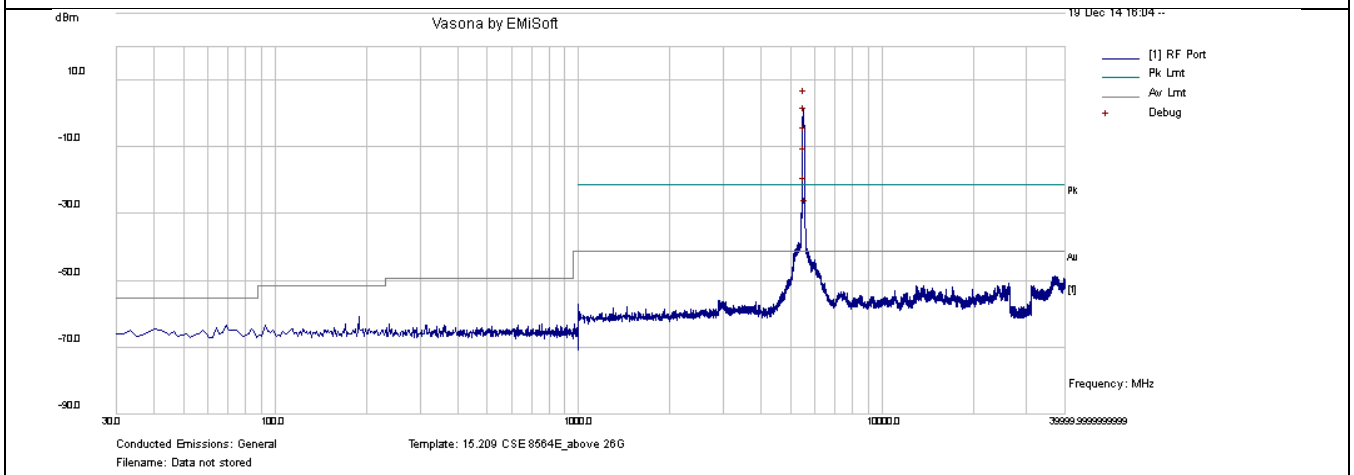


CSE-802.11n-40M-5510MHz-chain1

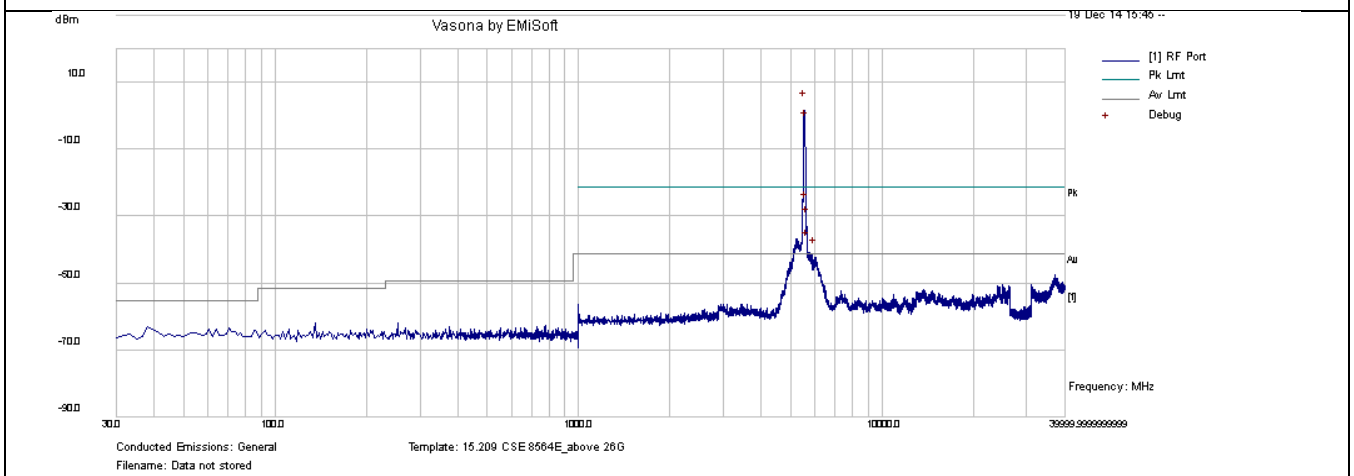


CSE-802.11n-40M-5550MHz-chain0

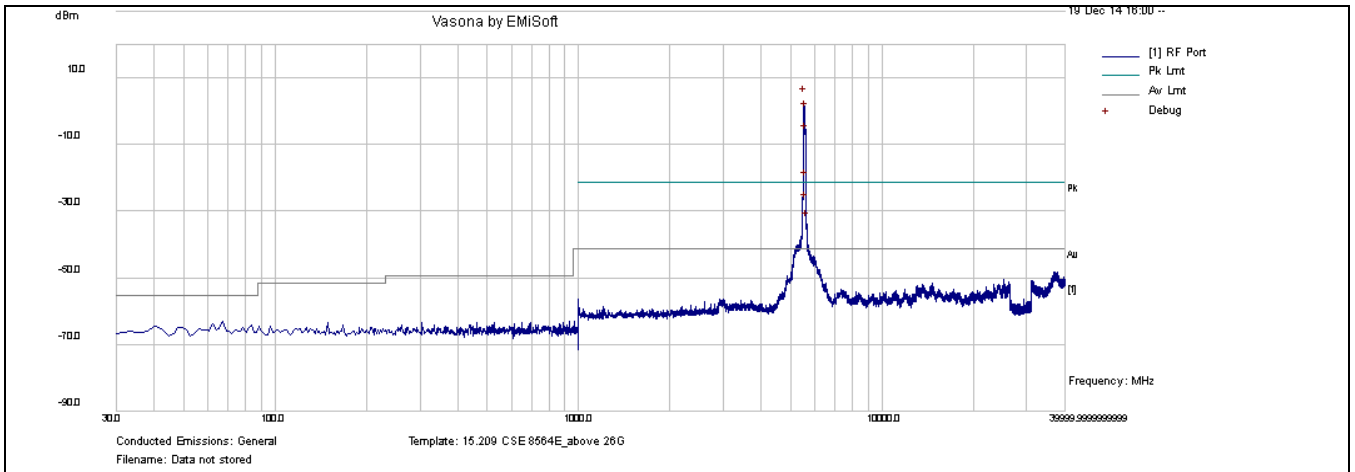


CSE-802.11n-40M-5550MHz-chain1

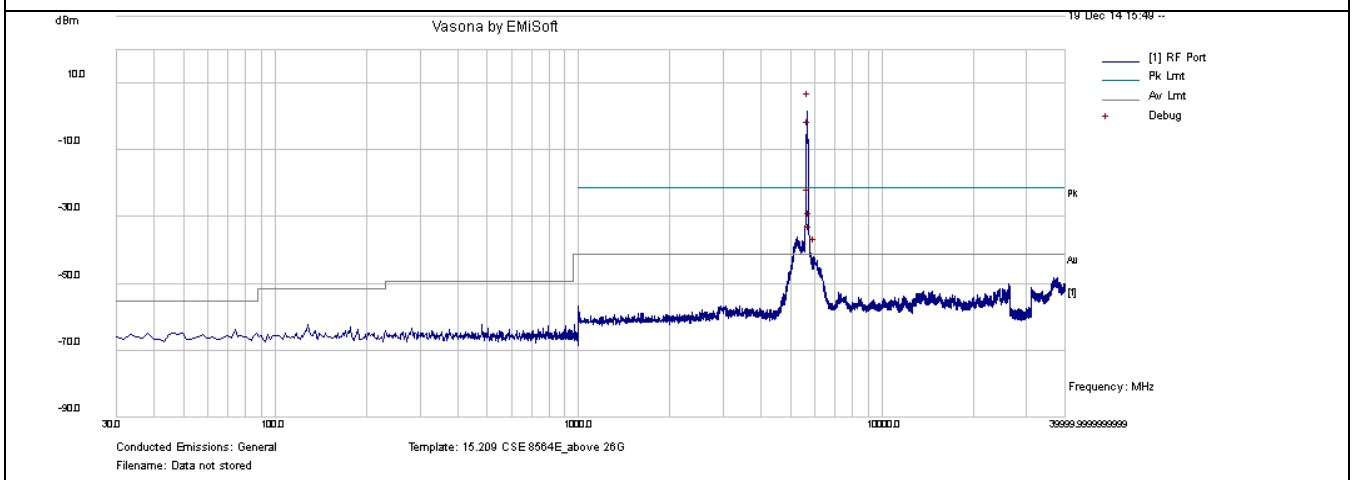


CSE-802.11n-40M-5670MHz-chain0

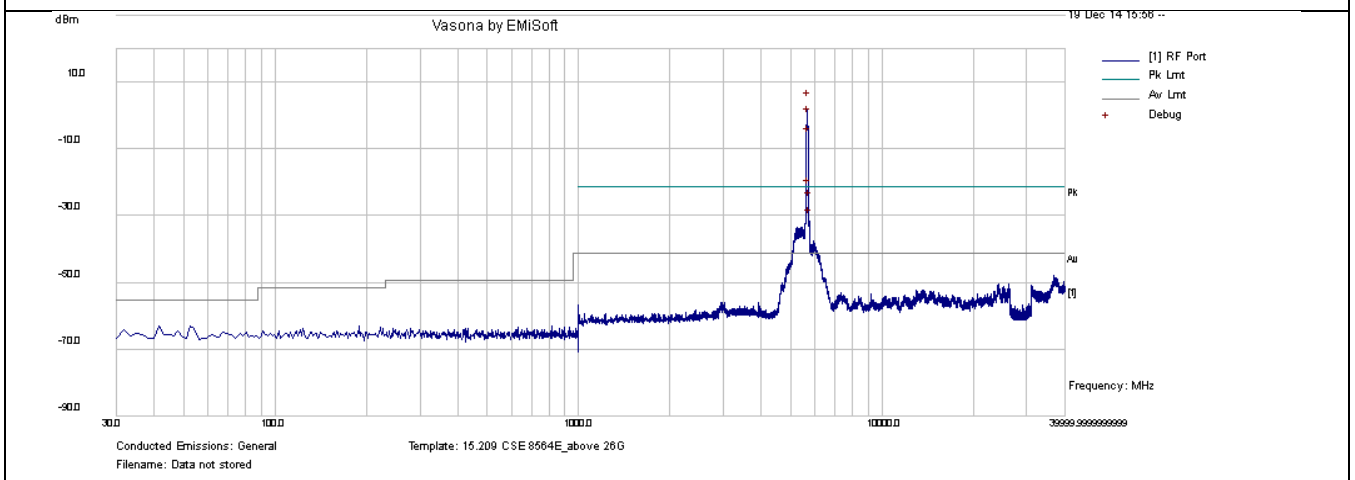


CSE-802.11n-40M-5670MHz-chain1

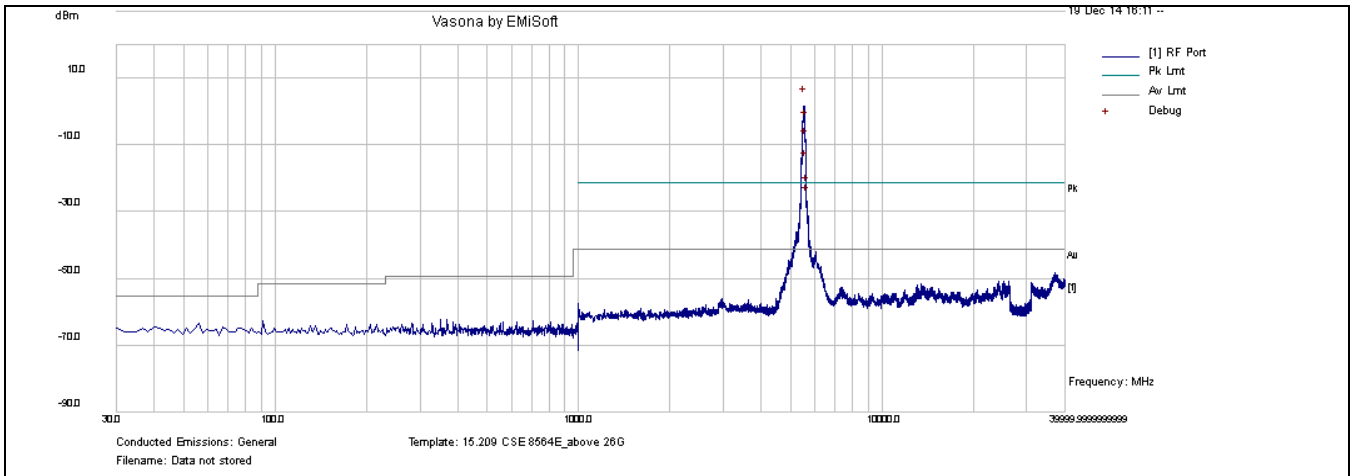


CSE-802.11ac-80M-5530MHz-chain0

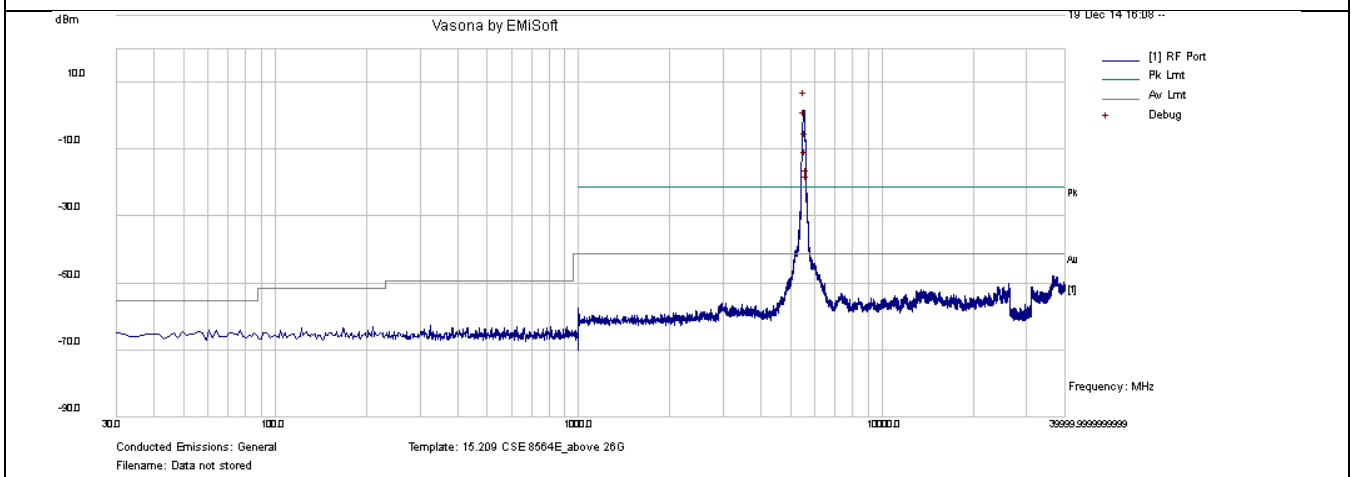

CSE-802.11ac-80M-5530MHz-chain1

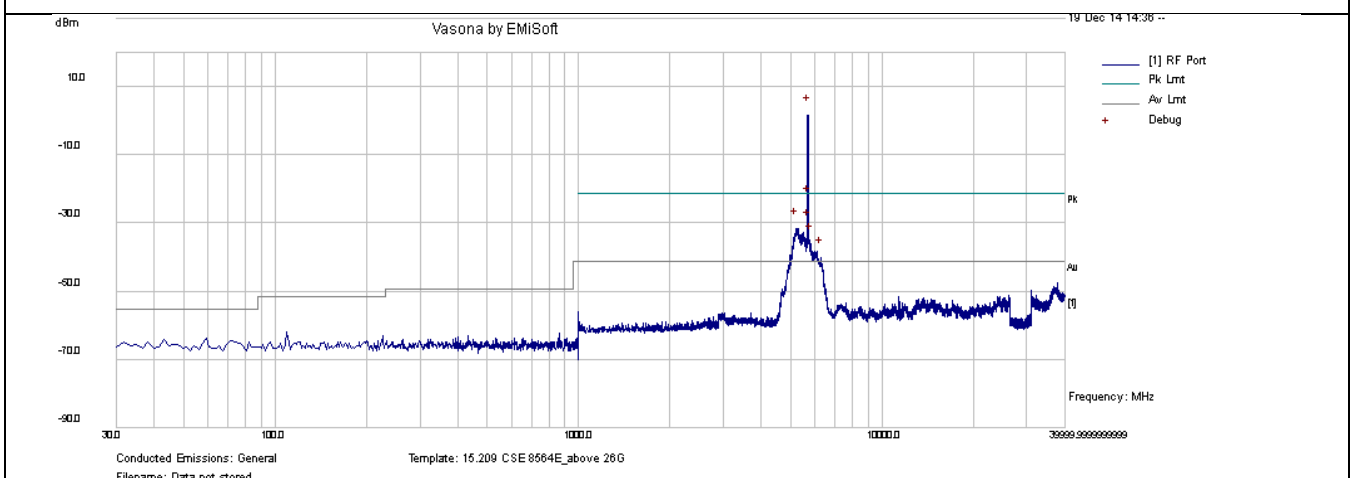

CSE-802.11ac-80M-5690MHz-chain0

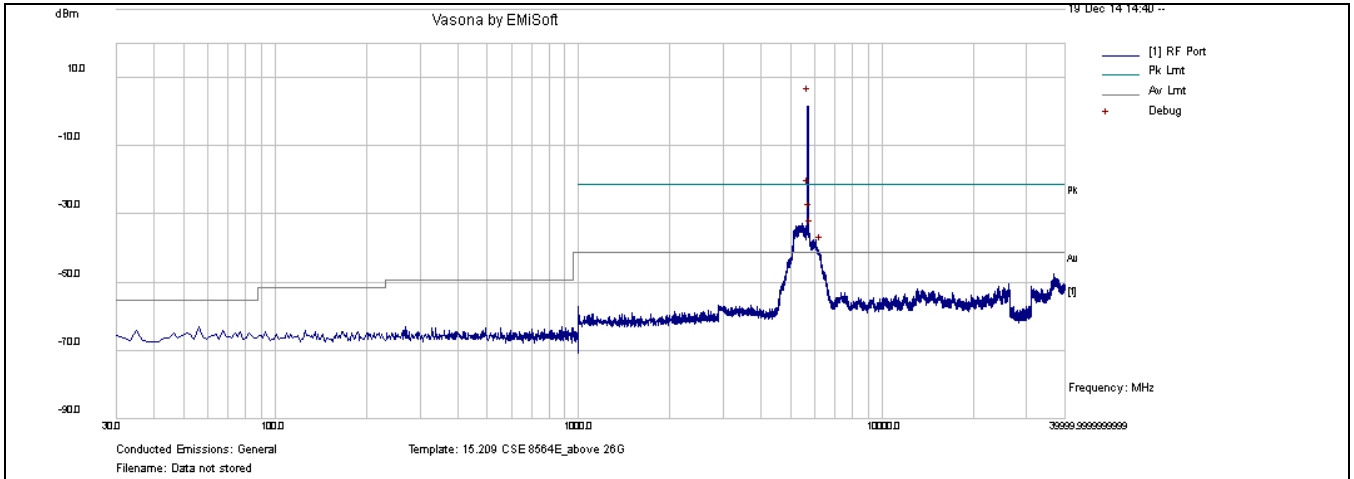

CSE-802.11ac-80M-5690MHz-chain1

10.6 Radiated Emissions below 1GHz

Requirement(s):


Spec	Requirement	Applicable										
47CFR§ 15.407(b) 15.209 (a)	<p>Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges</p> <table border="1"> <thead> <tr> <th>Frequency range (MHz)</th> <th>Field Strength (uV/m)</th> </tr> </thead> <tbody> <tr> <td>30 – 88</td> <td>100</td> </tr> <tr> <td>88 – 216</td> <td>150</td> </tr> <tr> <td>216 960</td> <td>200</td> </tr> <tr> <td>Above 960</td> <td>500</td> </tr> </tbody> </table>	Frequency range (MHz)	Field Strength (uV/m)	30 – 88	100	88 – 216	150	216 960	200	Above 960	500	☒
Frequency range (MHz)	Field Strength (uV/m)											
30 – 88	100											
88 – 216	150											
216 960	200											
Above 960	500											
Test Setup												
Procedure	<ol style="list-style-type: none"> 1. The EUT was switched on and allowed to warm up to its normal operating condition. 2. The test was carried out at the selected frequency points obtained from the EUT characterisation. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: <ol style="list-style-type: none"> a. Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen. b. The EUT was then rotated to the direction that gave the maximum emission. c. Finally, the antenna height was adjusted to the height that gave the maximum emission. 3. A Quasi-peak measurement was then made for that frequency point. 4. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured. 											
Remark	The EUT was scanned up to 1GHz. Both horizontal and vertical polarities were investigated. The results show only the worst case.											
Result	☒ Pass ☐ Fail											

Test Data ☒ Yes (See below) ☐ N/A

Test Plot ☒ Yes (See below) ☐ N/A

Radiated Emission Test Results (Below 1GHz)

Test specification:	Radiated Emission			
Environmental Conditions:	Temp(°C):	21	Result:	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail
	Humidity (%):	40		
	Atmospheric(mbar):	1019		
Mains Power:	120VAC, 60Hz			
Tested by:	Angel Escamilla			
Test Date:	12-10-2014			
Remarks:	802.11ac-80MHz: EUT Tx continuously at 5290MHz			

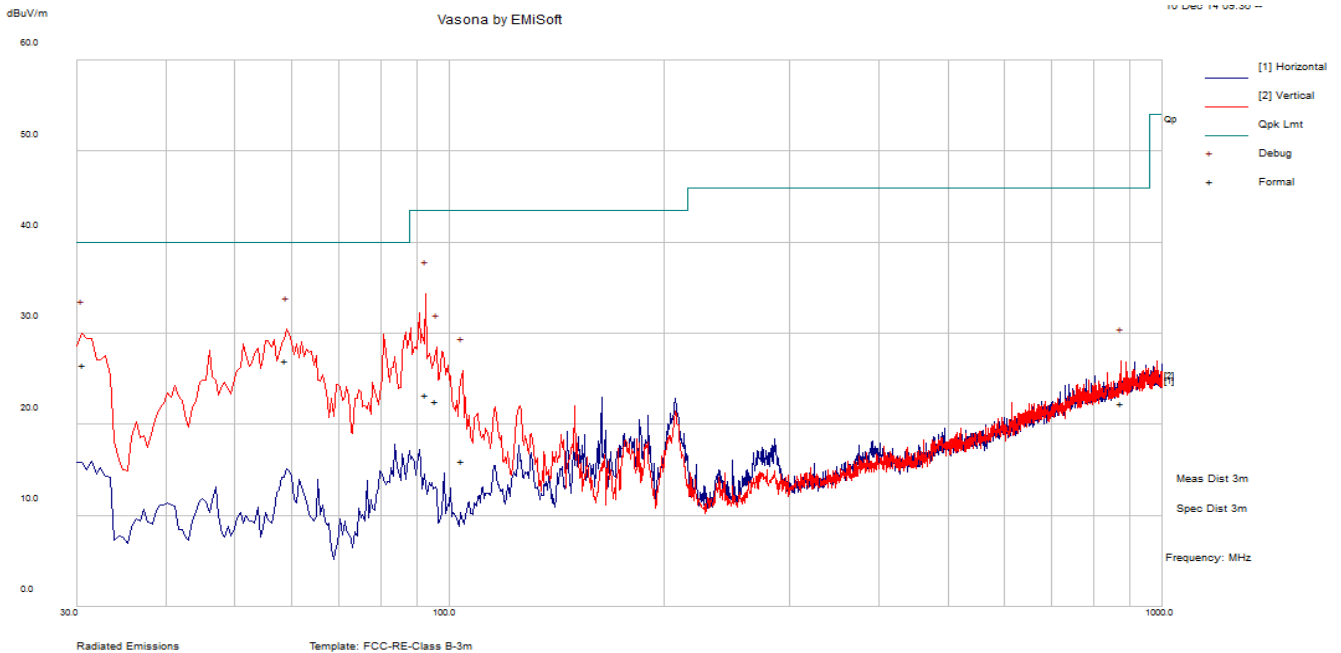


30MHz – 1000MHz at 3 meters

Frequency (MHz)	Raw (dBuV)	Cable Loss (dB)	AF (dB)	Level (dBuV/m)	Measurement Type	Pol (V/H)	Hgt (cm)	Azt (Deg)	Limit (dBuV/m)	Margin (dB)	Pass /Fail
30.62	44.99	1.16	-19.58	26.57	Quasi Max	V	116.00	282.00	40.00	-13.43	Pass
59.02	57.26	1.28	-31.52	27.02	Quasi Max	V	157.00	130.00	40.00	-12.98	Pass
92.59	53.20	1.72	-31.61	23.30	Quasi Max	V	163.00	168.00	43.50	-20.20	Pass
95.92	51.76	1.77	-30.94	22.59	Quasi Max	V	101.00	128.00	43.50	-20.91	Pass
104.00	42.63	1.87	-28.51	15.99	Quasi Max	V	149.00	144.00	43.50	-27.51	Pass
874.67	34.39	4.96	-17.05	22.30	Quasi Max	V	213.00	94.00	46.00	-23.70	Pass

Note: Both horizontal and vertical polarities were investigated. The results above show only the worst case.

Test specification:	Radiated Emission			Result:	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail
Environmental Conditions:	Temp(°C):	21			
	Humidity (%):	40			
	Atmospheric(mbar):	1019			
Mains Power:	120VAC, 60Hz				
Tested by:	Angel Escamilla				
Test Date:	12-10-2014				
Remarks:	802.11ac-80MHz: EUT Tx continuously at 5530MHz				

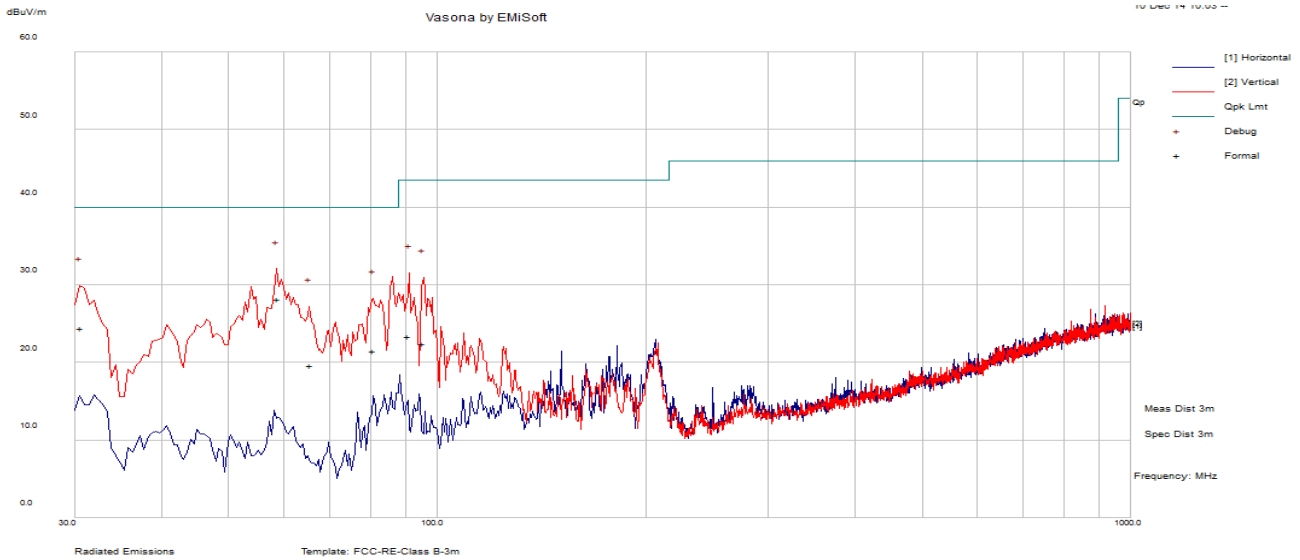

30MHz – 1000MHz at 3 meters

Frequency (MHz)	Raw (dBuV)	Cable Loss (dB)	AF (dB)	Level (dBuV/m)	Measurement Type	Pol (V/H)	Hgt (cm)	Azt (Deg)	Limit (dBuV/m)	Margin (dB)	Pass /Fail
30.62	42.89	1.16	-19.58	24.48	Quasi Max	V	162.00	318.00	40.00	-15.52	Pass
58.84	58.44	1.28	-31.53	28.18	Quasi Max	V	100.00	244.00	40.00	-11.82	Pass
65.55	49.25	1.36	-31.05	19.56	Quasi Max	V	115.00	330.00	40.00	-20.44	Pass
81.04	51.68	1.52	-31.67	21.52	Quasi Max	V	106.00	357.00	40.00	-18.48	Pass
90.98	53.53	1.69	-31.88	23.34	Quasi Max	V	103.00	115.00	43.50	-20.16	Pass
95.37	51.77	1.76	-31.11	22.42	Quasi Max	V	123.00	84.00	43.50	-21.08	Pass

Note: Both horizontal and vertical polarities were investigated. The results above show only the worst case.

10.7 Radiated Spurious Emissions above 1GHz

Requirement(s):



Spec	Item	Requirement	Applicable
47CFR§ 15.407(b)(2), 15.407(b)(6)	(1)	For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.	<input type="checkbox"/>
	(2)	For transmitters operating in the 5.25-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5.25-5.35 GHz band that generate emissions in the 5.15-5.25 GHz band must meet all applicable technical requirements for operation in the 5.15-5.25 GHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5.15-5.25 GHz band.	<input checked="" type="checkbox"/>
	(3)	For transmitters operating in the 5.47-5.725 GHz band: all emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz.	<input checked="" type="checkbox"/>
	(4)	For transmitters operating in the 5.725-5.825 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an EIRP of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an EIRP of -27 dBm/MHz.	<input type="checkbox"/>
	(5)	Restricted band, emission must also comply with the radiated emission limits specified in 15.209	<input checked="" type="checkbox"/>
Test Setup			
Procedure	<ol style="list-style-type: none"> The EUT was switched on and allowed to warm up to its normal operating condition. The test was carried out at the selected frequency points obtained from the EUT characterisation. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: <ol style="list-style-type: none"> Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen. The EUT was then rotated to the direction that gave the maximum emission. Finally, the antenna height was adjusted to the height that gave the maximum emission. An average measurement was then made for that frequency point. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured. 		
Remark	The EUT was scanned up to 40GHz. Both horizontal and vertical polarities were investigated. The results show only the worst case.		
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Equipment Setting

Test	RBW	VBW	Span	Detector	Sweep	Trace	Notes
Radiated Spurious Emission	1MHz	3MHz	1GHz - 40 GHz	Peak	Auto	Max hold	PK Measurement
Radiated Spurious Emission	1MHz	10Hz	1GHz - 40 GHz	Peak	Auto	Max hold	Ave Measurement



Test Data Yes (See below) N/A
Test Plot Yes (See below) N/A

Restricted Band Measurement Plots:

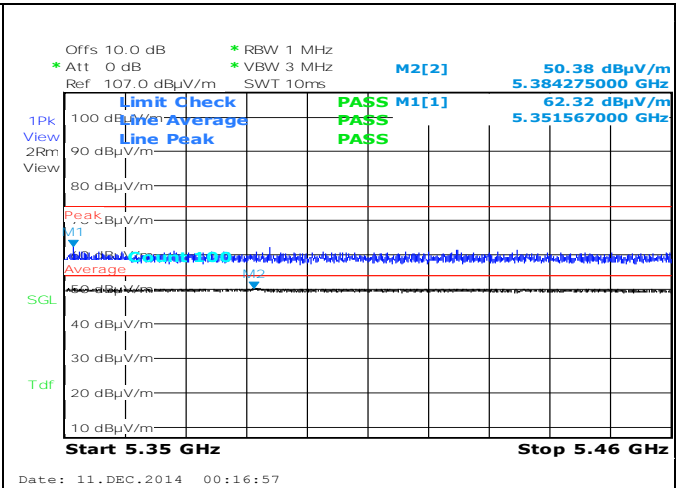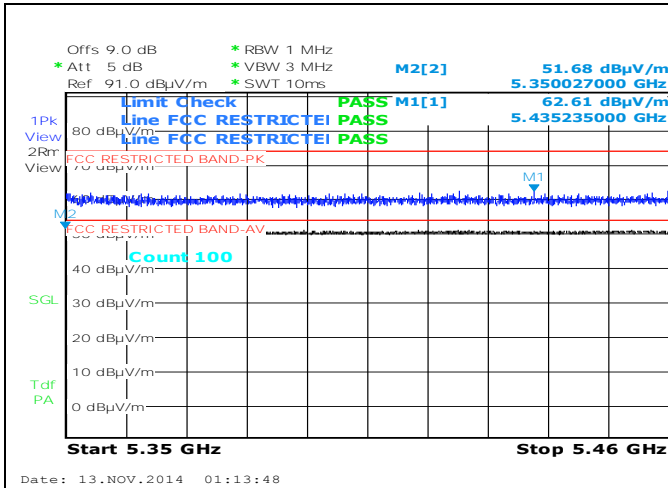



Restricted Band-802.11a 5320M – Edge Freq 5350MHz

Restricted Band-802.11n-20M 5320M – Edge Freq 5350MHz

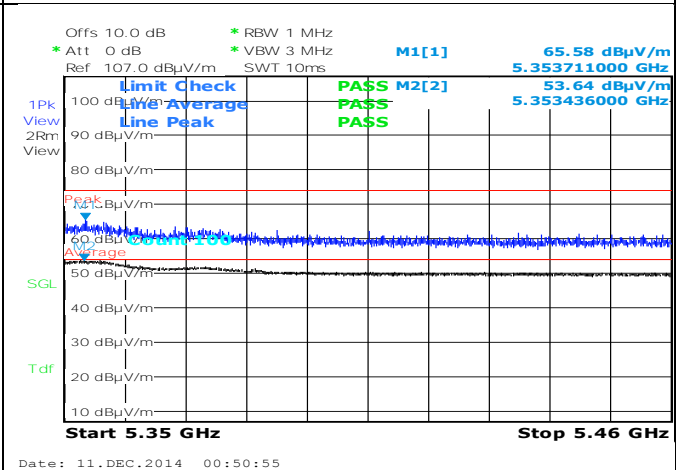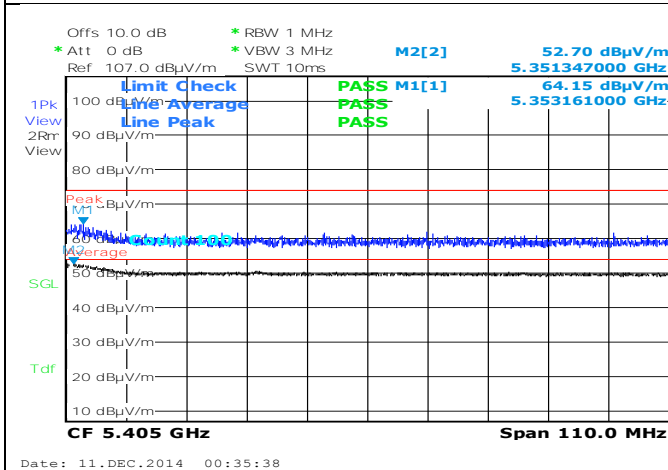



Restricted Band-802.11n-40M 5310M– Edge Freq 5350MHz

Restricted Band-802.11ac-80M 5290M– Edge Freq 5350MHz

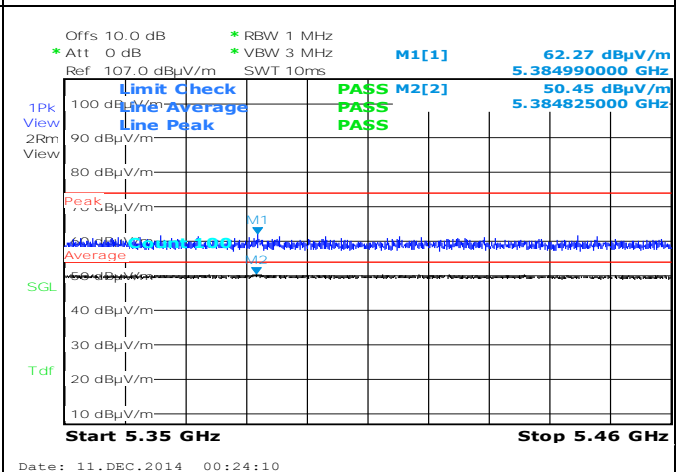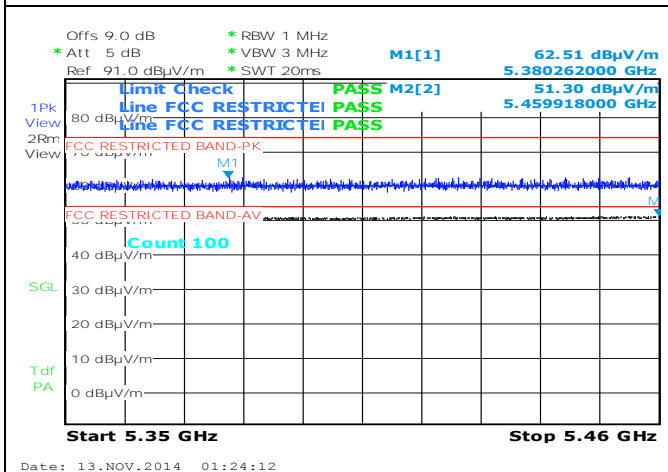

Restricted Band-802.11a 5500M– Edge Freq 5460MHz







Restricted Band-802.11n-20M 5500M– Edge Freq 5460MHz

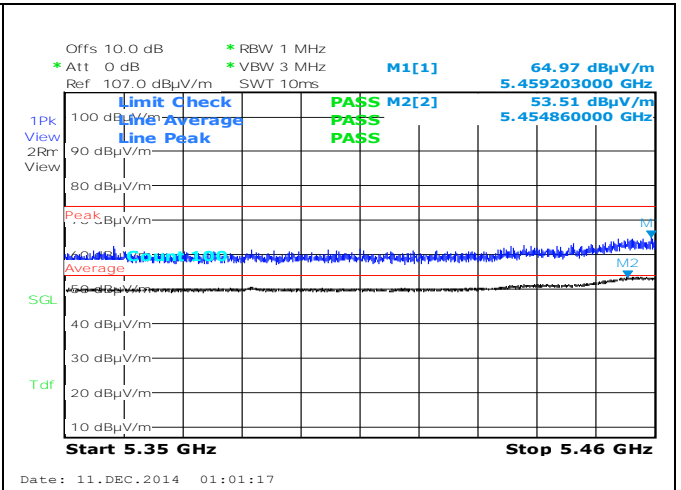
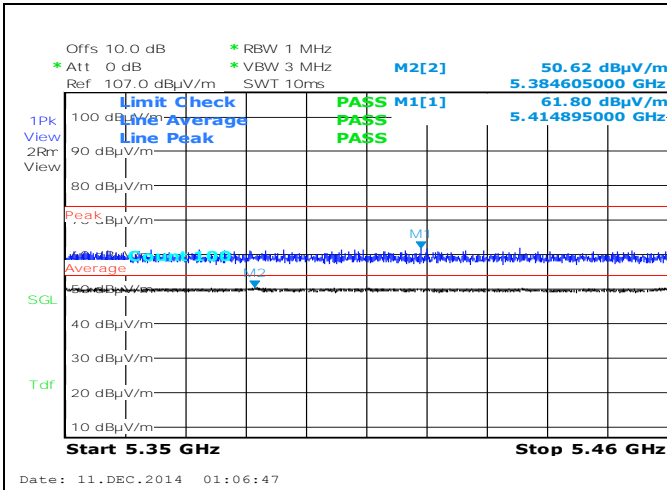


Restricted Band-802.11n-40M 5510M- Edge Freq 5460MHz

Restricted Band-802.11ac-80M 5530M- Edge Freq 5460MHz

Radiated Band Edge Measurement Plots:

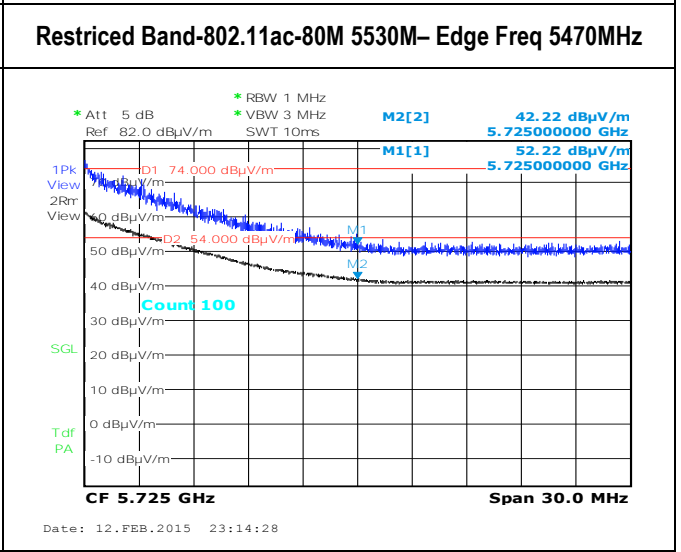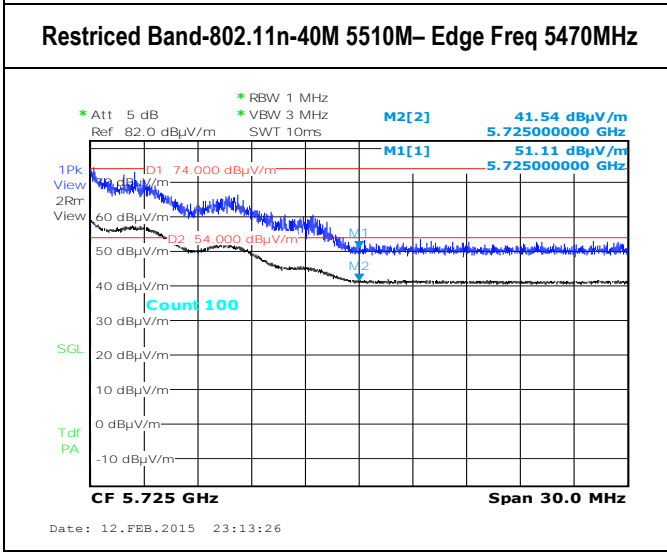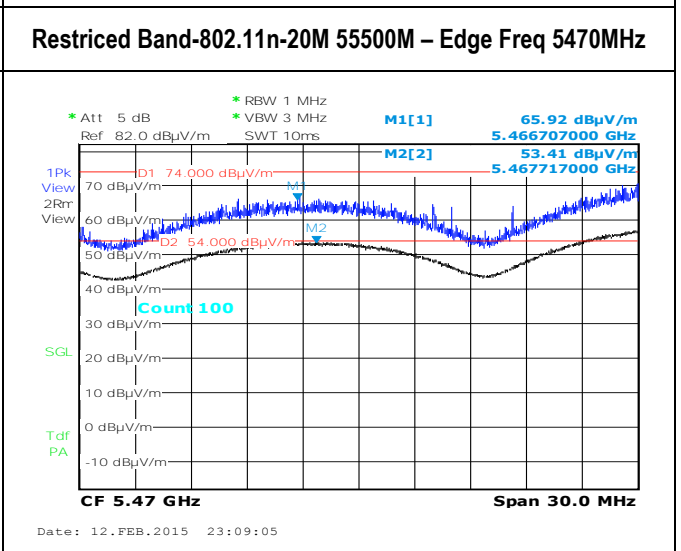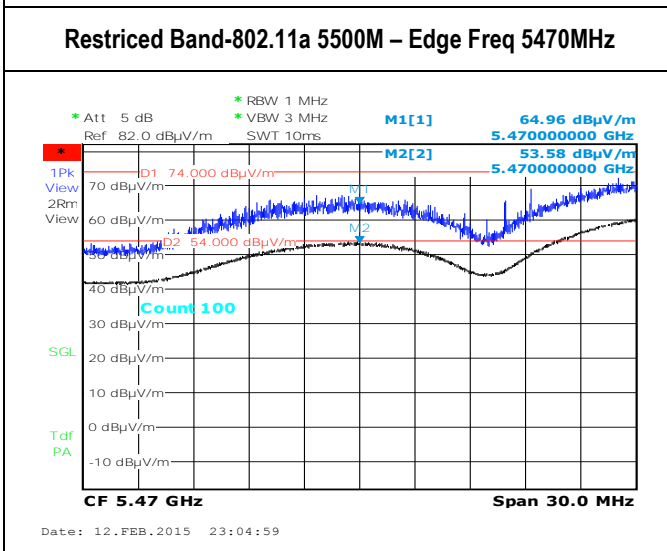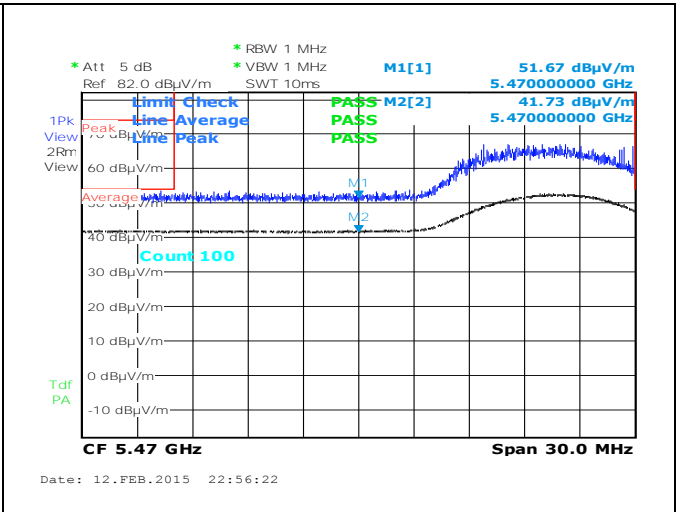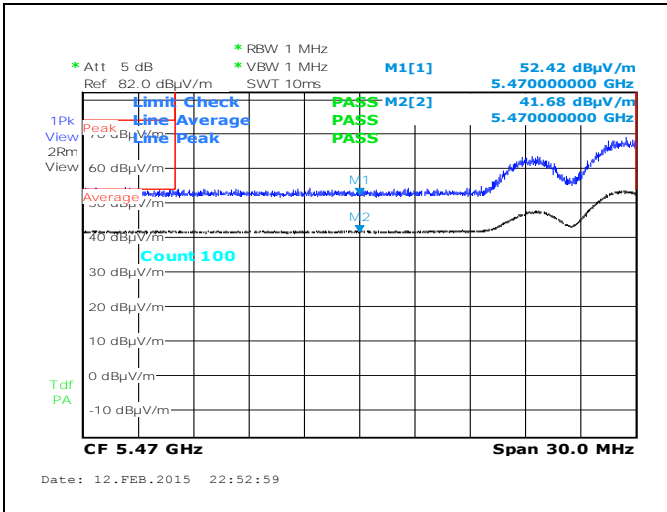

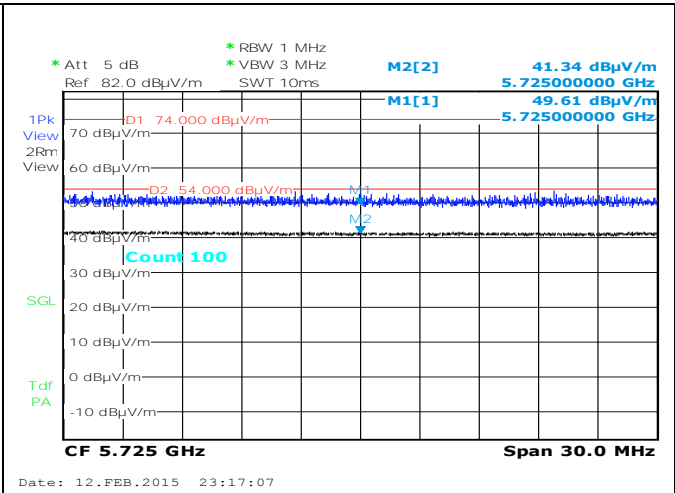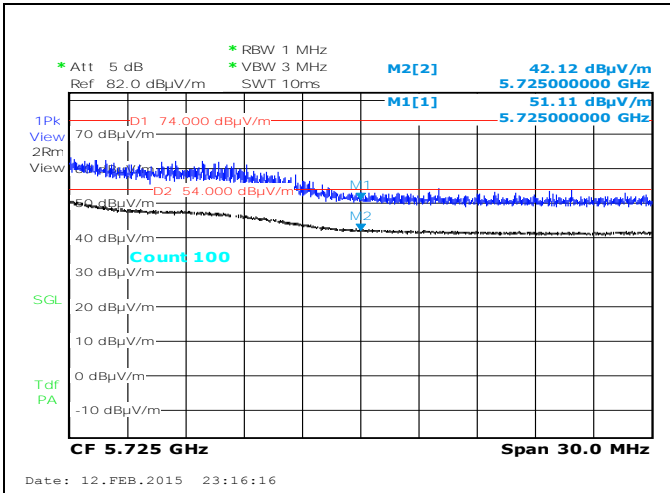

Restricted Band-802.11n-40M 5670M- Edge Freq 5725MHz

Restricted Band-802.11ac-80M 5530M- Edge Freq 5725MHz

Radiated Emission Test Results (Above 1GHz)

1GHz-40GHz – 802.11a – 5260MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
4248.69	44.96	3.33	-0.24	48.05	Peak Max	V	289.00	71.00	74.00	-25.95	Pass
10340.77	42.93	5.23	5.98	54.14	Peak Max	H	154.00	107.00	74.00	-19.86	Pass
15829.48	40.87	6.72	7.31	54.91	Peak Max	H	178.00	128.00	74.00	-19.09	Pass
4248.69	31.65	3.33	-0.24	34.75	Average Max	V	289.00	71.00	54.00	-19.25	Pass
10340.77	29.52	5.23	5.98	40.73	Average Max	H	154.00	107.00	54.00	-13.27	Pass
15829.48	27.00	6.72	7.31	41.03	Average Max	H	178.00	128.00	54.00	-12.97	Pass

1GHz-40GHz – 802.11a – 5280MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
8591.26	44.79	5.23	5.46	55.48	Peak Max	V	131.00	163.00	74.00	-18.52	Pass
10392.34	42.99	5.26	5.89	54.14	Peak Max	V	267.00	58.00	74.00	-19.86	Pass
15678.94	41.65	6.50	8.63	56.78	Peak Max	H	293.00	101.00	74.00	-17.22	Pass
8591.26	32.06	5.23	5.46	42.75	Average Max	V	131.00	163.00	54.00	-11.25	Pass
10392.34	29.40	5.26	5.89	40.54	Average Max	V	267.00	58.00	54.00	-13.46	Pass
15678.94	27.90	6.50	8.63	43.03	Average Max	H	293.00	101.00	54.00	-10.97	Pass

1GHz-40GHz – 802.11a – 5320MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
8498.84	45.01	5.17	5.41	55.59	Peak Max	H	234.00	13.00	74.00	-18.41	Pass
10302.18	43.02	5.20	6.05	54.27	Peak Max	H	253.00	19.00	74.00	-19.73	Pass
15910.64	39.68	6.62	6.60	52.90	Peak Max	V	118.00	78.00	74.00	-21.10	Pass
8498.84	31.74	5.17	5.41	42.31	Average Max	H	234.00	13.00	54.00	-11.69	Pass
10302.18	29.65	5.20	6.05	40.90	Average Max	H	253.00	19.00	54.00	-13.10	Pass
15910.64	26.67	6.62	6.60	39.88	Average Max	V	118.00	78.00	54.00	-14.12	Pass

1GHz-40GHz – 802.11n-20M – 5260MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
8618.53	45.48	5.25	5.48	56.21	Peak Max	H	260.00	41.00	74.00	-17.79	Pass
10316.09	43.57	5.21	6.03	54.81	Peak Max	H	179.00	306.00	74.00	-19.19	Pass
14047.11	43.52	6.11	10.09	59.72	Peak Max	H	214.00	37.00	74.00	-14.28	Pass
8618.53	32.16	5.25	5.48	42.89	Average Max	H	260.00	41.00	54.00	-11.11	Pass
10316.09	29.62	5.21	6.03	40.86	Average Max	H	179.00	306.00	54.00	-13.14	Pass
14047.11	30.00	6.11	10.09	46.20	Average Max	H	214.00	37.00	54.00	-7.80	Pass

1GHz-40GHz – 802.11n-20M – 5280MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
9547.19	44.14	5.37	6.58	56.10	Peak Max	V	290.00	16.00	74.00	-17.90	Pass
10341.69	42.93	5.23	5.98	54.14	Peak Max	H	293.00	70.00	74.00	-19.86	Pass
15546.38	41.40	5.89	9.81	57.09	Peak Max	H	240.00	320.00	74.00	-16.91	Pass
9547.19	31.19	5.37	6.58	43.14	Average Max	V	290.00	16.00	54.00	-10.86	Pass
10341.69	29.45	5.23	5.98	40.66	Average Max	H	293.00	70.00	54.00	-13.34	Pass
15546.38	28.02	5.89	9.81	43.71	Average Max	H	240.00	320.00	54.00	-10.29	Pass

1GHz-40GHz – 802.11n-20M – 5320MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
8612.78	45.24	5.24	5.47	55.96	Peak Max	H	100.00	299.00	74.00	-18.04	Pass
10419.91	43.15	5.28	5.83	54.26	Peak Max	V	102.00	49.00	74.00	-19.74	Pass
14055.41	43.12	6.09	10.11	59.32	Peak Max	V	150.00	177.00	74.00	-14.68	Pass
8612.78	32.18	5.24	5.47	42.89	Average Max	H	100.00	299.00	54.00	-11.11	Pass
10419.91	29.42	5.28	5.83	40.54	Average Max	V	102.00	49.00	54.00	-13.46	Pass
14055.41	29.99	6.09	10.11	46.19	Average Max	V	150.00	177.00	54.00	-7.81	Pass

1GHz-40GHz – 802.11n-40M – 5270MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
8712.75	45.07	5.31	5.53	55.90	Peak Max	V	148.00	61.00	74.00	-18.10	Pass
10299.18	42.75	5.20	6.06	54.01	Peak Max	V	187.00	21.00	74.00	-19.99	Pass
15427.46	42.31	5.57	10.02	57.90	Peak Max	V	120.00	196.00	74.00	-16.10	Pass
8712.75	31.92	5.31	5.53	42.76	Average Max	V	148.00	61.00	54.00	-11.24	Pass
10299.18	29.64	5.20	6.06	40.90	Average Max	V	187.00	21.00	54.00	-13.10	Pass
15427.46	28.68	5.57	10.02	44.27	Average Max	V	120.00	196.00	54.00	-9.73	Pass

1GHz-40GHz – 802.11n-40M – 5310MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
9529.53	44.94	5.42	6.58	56.95	Peak Max	H	163.00	13.00	74.00	-17.05	9529.53
10361.11	42.82	5.24	5.94	54.01	Peak Max	H	164.00	81.00	74.00	-19.99	10361.11
15429.50	42.56	5.57	10.03	58.16	Peak Max	V	104.00	237.00	74.00	-15.84	15429.50
9529.53	31.17	5.42	6.58	43.18	Average Max	H	163.00	13.00	54.00	-10.82	9529.53
10361.11	29.39	5.24	5.94	40.57	Average Max	H	164.00	81.00	54.00	-13.43	10361.11
15429.50	28.65	5.57	10.03	44.25	Average Max	V	104.00	237.00	54.00	-9.75	15429.50

1GHz-40GHz – 802.11ac-80M – 5290MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
4141.10	44.73	3.48	-0.21	47.99	Peak Max	H	117.00	154.00	74.00	-26.01	Pass
8817.49	44.67	4.88	5.58	55.13	Peak Max	V	158.00	266.00	74.00	-18.87	Pass
10327.49	43.18	5.22	6.01	54.41	Peak Max	H	176.00	175.00	74.00	-19.59	Pass
4141.10	31.48	3.48	-0.21	34.74	Average Max	H	117.00	154.00	54.00	-19.26	Pass
8817.49	31.50	4.88	5.58	41.96	Average Max	V	158.00	266.00	54.00	-12.04	Pass
10327.49	29.57	5.22	6.01	40.79	Average Max	H	176.00	175.00	54.00	-13.21	Pass

1GHz-40GHz – 802.11a – 5500MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
8285.35	45.32	4.88	5.00	55.20	Peak Max	V	102.00	122.00	74.00	-18.80	Pass
10358.17	42.57	5.24	5.95	53.76	Peak Max	H	209.00	324.00	74.00	-20.24	Pass
16207.15	41.94	5.94	6.35	54.23	Peak Max	H	153.00	351.00	74.00	-19.77	Pass
8285.35	32.46	4.88	5.00	42.34	Average Max	V	102.00	122.00	54.00	-11.66	Pass
10358.17	29.36	5.24	5.95	40.55	Average Max	H	209.00	324.00	54.00	-13.45	Pass
16207.15	29.01	5.94	6.35	41.30	Average Max	H	153.00	351.00	54.00	-12.70	Pass

1GHz-40GHz – 802.11a – 5580MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
11516.31	33.73	5.15	5.85	44.73	Peak Max	V	134.00	43.00	74.00	-29.27	Pass
14031.06	33.16	6.13	10.06	49.35	Peak Max	H	143.00	123.00	74.00	-24.65	Pass
16263.03	36.56	5.85	6.49	48.90	Peak Max	V	104.00	265.00	74.00	-25.10	Pass
11516.31	28.26	5.15	5.85	39.26	Average	V	134.00	43.00	54.00	-14.74	Pass
14031.06	29.05	6.13	10.06	45.24	Average	H	143.00	123.00	54.00	-8.76	Pass
16263.03	29.28	5.85	6.49	41.62	Average	V	104.00	265.00	54.00	-12.38	Pass

1GHz-40GHz – 802.11a – 5700MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
10402.96	42.49	5.27	5.87	53.63	Peak Max	H	212.00	288.00	74.00	-20.37	Pass
13987.59	43.57	6.14	9.96	59.67	Peak Max	H	104.00	130.00	74.00	-14.33	Pass
17222.10	41.15	5.81	11.11	58.07	Peak Max	V	188.00	315.00	74.00	-15.93	Pass
10402.96	29.31	5.27	5.87	40.44	Average Max	H	212.00	288.00	54.00	-13.56	Pass
13987.59	29.97	6.14	9.96	46.07	Average Max	H	104.00	130.00	54.00	-7.93	Pass
17222.10	27.70	5.81	11.11	44.62	Average Max	V	188.00	315.00	54.00	-9.38	Pass

1GHz-40GHz – 802.11n-20M – 5500MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
9444.55	44.92	5.17	6.48	56.58	Peak Max	V	117.00	166.00	74.00	-17.42	Pass
10358.29	42.57	5.24	5.95	53.76	Peak Max	H	235.00	12.00	74.00	-20.24	Pass
17232.21	41.17	5.82	11.17	58.15	Peak Max	V	190.00	3.00	74.00	-15.85	Pass
9444.55	31.71	5.17	6.48	43.37	Average Max	V	117.00	166.00	54.00	-10.63	Pass
10358.29	29.32	5.24	5.95	40.51	Average Max	H	235.00	12.00	54.00	-13.49	Pass
17232.21	27.56	5.82	11.17	44.54	Average Max	V	190.00	3.00	54.00	-9.46	Pass

1GHz-40GHz – 802.11n-20M – 5580MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
9557.88	45.12	5.34	6.59	57.05	Peak Max	V	100.00	33.00	74.00	-16.95	Pass
11111.18	41.87	4.97	5.58	52.41	Peak Max	V	116.00	206.00	74.00	-21.59	Pass
16751.86	40.50	6.49	8.44	55.44	Peak Max	V	108.00	43.00	74.00	-18.56	Pass
9557.88	31.04	5.34	6.59	42.97	Average Max	V	100.00	33.00	54.00	-11.03	Pass
11111.18	28.73	4.97	5.58	39.27	Average Max	V	116.00	206.00	54.00	-14.73	Pass
16751.86	26.72	6.49	8.44	41.65	Average Max	V	108.00	43.00	54.00	-12.35	Pass

1GHz-40GHz – 802.11n-20M – 5700MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
4053.35	44.50	3.60	-0.19	47.90	Peak Max	V	219.00	59.00	74.00	-26.10	Pass
8627.30	44.92	5.25	5.48	55.66	Peak Max	H	204.00	9.00	74.00	-18.34	Pass
10344.46	43.20	5.23	5.98	54.41	Peak Max	V	261.00	198.00	74.00	-19.59	Pass
4053.35	31.47	3.60	-0.19	34.87	Average Max	V	219.00	59.00	54.00	-19.13	Pass
8627.30	32.06	5.25	5.48	42.79	Average Max	H	204.00	9.00	54.00	-11.21	Pass
10344.46	29.38	5.23	5.98	40.59	Average Max	V	261.00	198.00	54.00	-13.41	Pass

1GHz-40GHz – 802.11n-40M – 5510MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
4110.81	45.43	3.52	-0.21	48.74	Peak Max	H	234.00	271.00	74.00	-25.26	Pass
7927.54	46.73	5.07	4.33	56.13	Peak Max	V	157.00	208.00	74.00	-17.87	Pass
10350.14	42.43	5.23	5.96	53.63	Peak Max	H	333.00	207.00	74.00	-20.37	Pass
4110.81	31.82	3.52	-0.21	35.13	Average Max	H	234.00	271.00	54.00	-18.87	Pass
7927.54	32.84	5.07	4.33	42.23	Average Max	V	157.00	208.00	54.00	-11.77	Pass
10350.14	29.42	5.23	5.96	40.62	Average Max	H	333.00	207.00	54.00	-13.38	Pass

1GHz-40GHz – 802.11n-40M – 5550MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
8618.52	44.69	5.25	5.48	55.42	Peak Max	H	227.00	10.00	74.00	-18.58	Pass
10346.37	42.30	5.23	5.97	53.51	Peak Max	V	105.00	338.00	74.00	-20.49	Pass
14036.93	43.52	6.12	10.07	59.71	Peak Max	V	134.00	334.00	74.00	-14.29	Pass
8618.52	32.22	5.25	5.48	42.94	Average Max	H	227.00	10.00	54.00	-11.06	Pass
10346.37	29.40	5.23	5.97	40.60	Average Max	V	105.00	338.00	54.00	-13.40	Pass
14036.93	29.99	6.12	10.07	46.18	Average Max	V	134.00	334.00	54.00	-7.82	Pass

1GHz-40GHz – 802.11n-40M – 5670MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
8670.48	45.79	5.28	5.50	56.57	Peak Max	H	311.00	209.00	74.00	-17.43	Pass
10312.72	43.03	5.21	6.03	54.27	Peak Max	H	302.00	109.00	74.00	-19.73	Pass
14074.14	42.73	6.07	10.15	58.95	Peak Max	V	122.00	94.00	74.00	-15.05	Pass
8670.48	31.96	5.28	5.50	42.74	Average Max	H	311.00	209.00	54.00	-11.26	Pass
10312.72	29.59	5.21	6.03	40.83	Average Max	H	302.00	109.00	54.00	-13.17	Pass
14074.14	29.88	6.07	10.15	46.09	Average Max	V	122.00	94.00	54.00	-7.91	Pass

1GHz-40GHz – 802.11ac-80M – 5530MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
4121.83	44.75	3.50	-0.21	48.04	Peak Max	H	214.00	315.00	74.00	-25.96	Pass
9521.75	44.65	5.44	6.58	56.67	Peak Max	V	257.00	168.00	74.00	-17.33	Pass
17204.90	41.39	5.80	11.00	58.20	Peak Max	V	225.00	315.00	74.00	-15.80	Pass
4121.83	31.38	3.50	-0.21	34.67	Average Max	H	214.00	315.00	54.00	-19.33	Pass
9521.75	31.15	5.44	6.58	43.18	Average Max	V	257.00	168.00	54.00	-10.82	Pass
17204.90	27.81	5.80	11.00	44.62	Average Max	V	225.00	315.00	54.00	-9.38	Pass

1GHz-40GHz – 802.11ac-80M – 5690MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
4121.83	44.75	3.50	-0.21	48.04	Peak Max	H	214.00	315.00	74.00	-25.96	Pass
9521.75	44.65	5.44	6.58	56.67	Peak Max	V	257.00	168.00	74.00	-17.33	Pass
17204.90	41.39	5.80	11.00	58.20	Peak Max	V	225.00	315.00	74.00	-15.80	Pass
4121.83	31.38	3.50	-0.21	34.67	Average Max	H	214.00	315.00	54.00	-19.33	Pass
9521.75	31.15	5.44	6.58	43.18	Average Max	V	257.00	168.00	54.00	-10.82	Pass
17204.90	27.81	5.80	11.00	44.62	Average Max	V	225.00	315.00	54.00	-9.38	Pass

















Above 1GHz-25GHz- Collocation testing (2.4GHz WLAN & 5GHz WLAN on the main-board transmitting simultaneously)








Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
4340.26	44.66	3.09	-0.26	47.49	Peak Max	V	119.00	96.00	74.00	-26.51	Pass
8654.95	45.20	5.27	5.50	55.97	Peak Max	V	283.00	257.00	74.00	-18.03	Pass
10334.75	42.92	5.22	5.99	54.14	Peak Max	H	146.00	53.00	74.00	-19.86	Pass
4340.26	31.35	3.09	-0.26	34.18	Average Max	V	119.00	96.00	54.00	-19.82	Pass
8654.95	32.04	5.27	5.50	42.81	Average Max	V	283.00	257.00	54.00	-11.19	Pass
10334.75	29.47	5.22	5.99	40.68	Average Max	H	146.00	53.00	54.00	-13.32	Pass

Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Cycle	Cal Due	In use
Conducted Emissions						
R & S Receiver	ESIB 40	100179	04/20/2014	1 Year	04/20/2015	<input checked="" type="checkbox"/>
R&S LISN	ESH2-Z5	861741/013	05/18/2014	1 Year	05/18/2015	<input checked="" type="checkbox"/>
CHASE LISN	MN2050B	1018	07/24/2014	1 Year	07/24/2015	<input checked="" type="checkbox"/>
Sekonic Hygro Hermograph	ST-50	HE01-000092	05/25/2014	1 Year	05/25/2015	<input checked="" type="checkbox"/>
Radiated Emissions						
R & S Receiver	ESL6	100178	03/01/2014	1 Year	03/01/2015	<input checked="" type="checkbox"/>
R & S Receiver	ESIB 40	100179	04/20/2014	1 Year	04/20/2015	<input checked="" type="checkbox"/>
ETS-Lingren Loop Antenna	6512	00049120	05/13/2014	1 Year	05/13/2015	<input type="checkbox"/>
Bi-Log antenna (30MHz~2GHz)	JB1	A030702	07/03/2014	1 Year	07/03/2015	<input checked="" type="checkbox"/>
Horn Antenna (1-26.5GHz)	3115	10SL0059	04/26/2014	1 Year	04/26/2015	<input checked="" type="checkbox"/>
Horn Antenna (18-40 GHz)	AH-840	101013	04/23/2014	1 Year	04/23/2015	<input checked="" type="checkbox"/>
Pre-Amplifier (1-26.5GHz)	8449B	3008A00715	05/30/2014	1 Year	05/30/2015	<input checked="" type="checkbox"/>
Microwave Preamplifier (18-40 GHz)	PA-840	181251	05/30/2014	1 Year	05/30/2015	<input checked="" type="checkbox"/>
3 Meters SAC	3M	N/A	10/13/2014	1 Year	10/13/2015	<input checked="" type="checkbox"/>
10 Meters SAC	10M	N/A	06/05/2014	1 Year	06/05/2015	<input checked="" type="checkbox"/>
Sekonic Hygro Hermograph	ST-50	HE01-000092	05/25/2014	1 Year	05/25/2015	<input checked="" type="checkbox"/>
RF Conducted Measurement						
Spectrum Analyzer	N9010A	MY50210206	05/30/2014	1 Year	05/30/2015	<input checked="" type="checkbox"/>
Spectrum Analyzer	E4407B	US88441016	05/31/2014	1 Year	05/31/2015	<input type="checkbox"/>
R & S Receiver	ESIB 40	100179	04/20/2014	1 Year	04/20/2015	<input checked="" type="checkbox"/>

Annex B. SIEMIC Accreditation

Accreditations	Document	Scope / Remark
ISO 17025 (A2LA)		Please see the documents for the detailed scope
ISO Guide 65 (A2LA)		Please see the documents for the detailed scope
TCB Designation		A1, A2, A3, A4, B1, B2, B3, B4, C
FCC DoC Accreditation		FCC Declaration of Conformity Accreditation
FCC Site Registration		3 meter site
FCC Site Registration		10 meter site
IC Site Registration		3 meter site
IC Site Registration		10 meter site
EU NB		Radio & Telecommunications Terminal Equipment: EN45001 – EN ISO/IEC 17025
		Electromagnetic Compatibility: EN45001 – EN ISO/IEC 17025
Singapore iDA CB(Certification Body)	 	Phase I, Phase II
Vietnam MIC CAB Accreditation		Please see the document for the detailed scope
Hong Kong OFCA		(Phase II) OFCA Foreign Certification Body for Radio and Telecom
		(Phase I) Conformity Assessment Body for Radio and Telecom
Industry Canada CAB		Radio: Scope A – All Radio Standard Specification in Category I
		Telecom: CS-03 Part I, II, V, VI, VII, VIII

Japan Recognized Certification Body Designation		<p>Radio: A1. Terminal equipment for purpose of calling</p> <p>Telecom: B1. Specified radio equipment specified in Article 38-2, Paragraph 1, Item 1 of the Radio Law</p>
Korea CAB Accreditation		<p>EMI: KCC Notice 2008-39, RRL Notice 2008-3: CA Procedures for EMI KN22: Test Method for EMI</p> <p>EMS: KCC Notice 2008-38, RRL Notice 2008-4: CA Procedures for EMS KN24, KN61000-4-2, -4-3, -4-4, -4-5, -4-6, -4-8, -4-11: Test Method for EMS</p>
		<p>Radio: RRL Notice 2008-26, RRL Notice 2008-2, RRL Notice 2008-10, RRL Notice 2007-49, RRL Notice 2007-20, RRL Notice 2007-21, RRL Notice 2007-80, RRL Notice 2004-68</p>
		<p>Telecom: President Notice 20664, RRL Notice 2007-30, RRL Notice 2008-7 with attachments 1, 3, 5, 6; President Notice 20664, RRL Notice 2008-7 with attachment 4</p>
Taiwan NCC CAB Recognition		LP0002, PSTN01, ADSL01, ID0002, IS6100, CNS14336, PLMN07, PLMN01, PLMN08
Taiwan BSMI CAB Recognition		CNS 13438
Japan VCCI		R-3083: Radiation 3 meter site
		C-3421: Main Ports Conducted Interference Measurement
		T-1597: Telecommunication Ports Conducted Interference Measurement
Australia CAB Recognition		<p>EMC: AS/NZS CISPR 11, AS/NZS CISPR 14.1, AS/NZS CISPR22, AS/NZS 61000.6.3, AS/NZS 61000.6.4</p>
		<p>Radio communications: AS/NZS 4281, AS/NZS 4268, AS/NZS 4280.1, AS/NZS 4280.2, AS/NZS 4295, AS/NZS 4582, AS/NZS 4583, AS/NZS 4769.1, AS/NZS 4769.2, AS/NZS 4770, AS/NZS 4771</p>
		<p>Telecommunications: AS/ACIF S002:05, AS/ACIF S003:06, AS/ACIF S004:06 AS/ACIF S006:01, AS/ACIF S016:01, AS/ACIF S031:01, AS/ACIF S038:01, AS/ACIF S040:01, AS/ACIF S041:05, AS/ACIF S043.2:06, AS/ACIF S60950.1</p>
Australia NATA Recognition		AS/ACIF S002, AS/ACIF S003, AS/ACIF S004, AS/ACIF S006, AS/ACIF S016, AS/ACIF S031, AS/ACIF S038, AS/ACIF S040, AS/ACIF S041, AS/ACIF S043.2