




PSD-802.11a-5745M-chain0

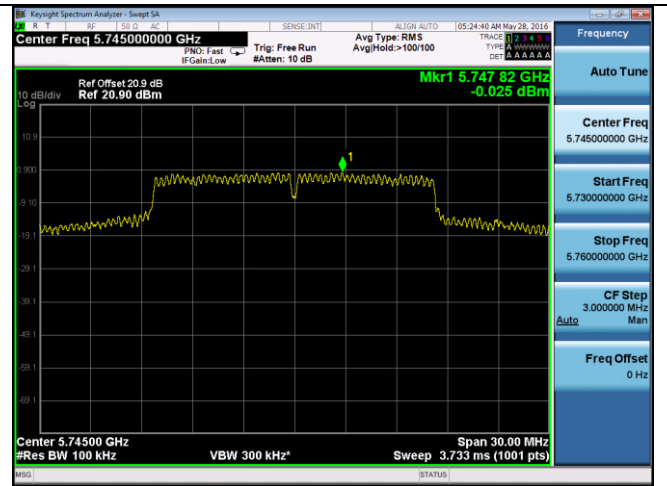


PSD-802.11a-5745M-chain1

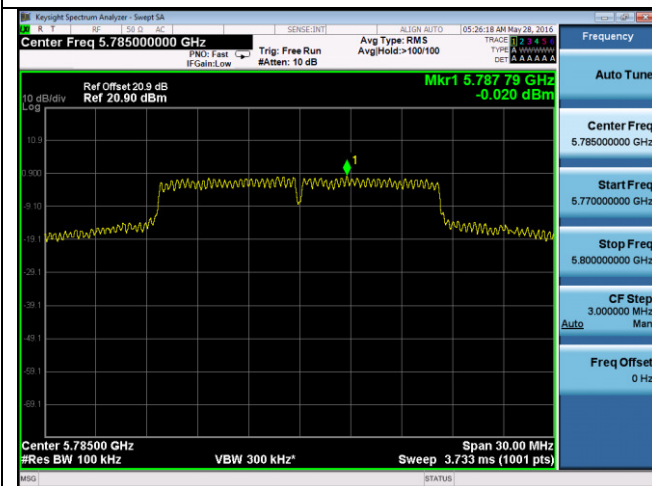


PSD-802.11a-5785M-chain0

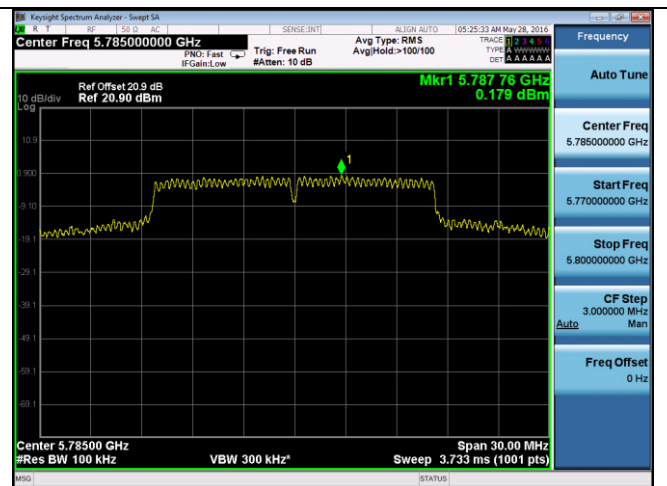


PSD-802.11a-5785M-chain1

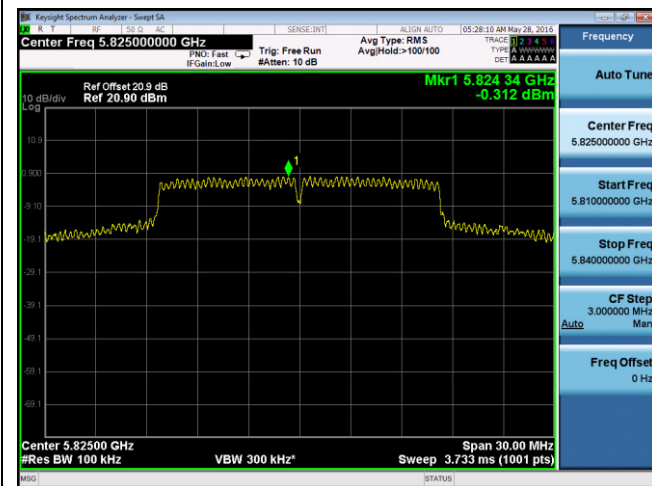


PSD-802.11a-5825M-chain0

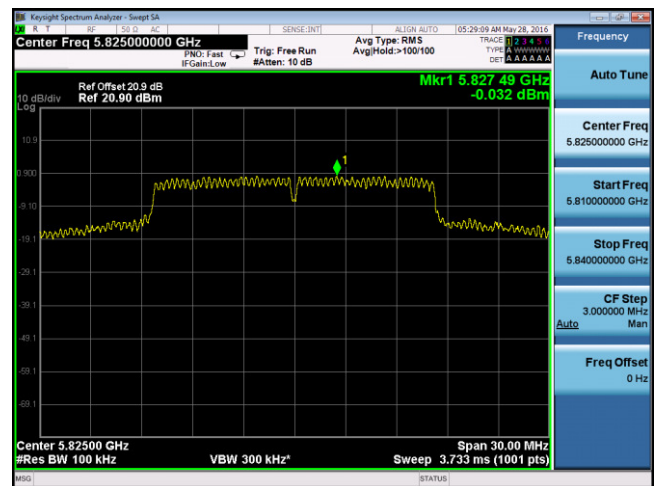


PSD-802.11a-5825M-chain1

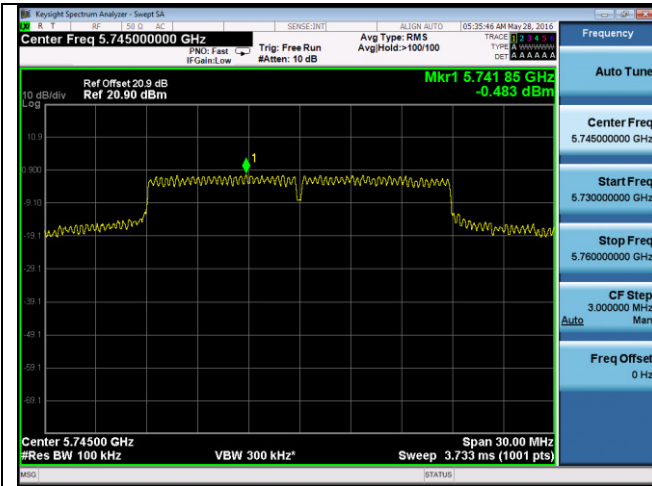


PSD-802.11n-20M -5745M-chain0

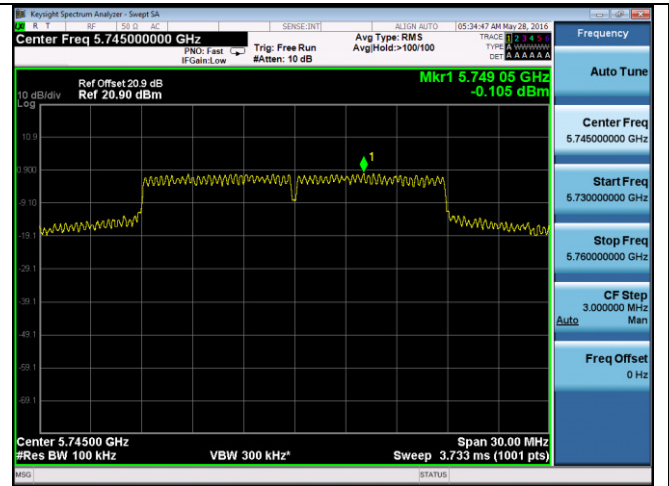


PSD-802.11n-20M -5745M-chain1

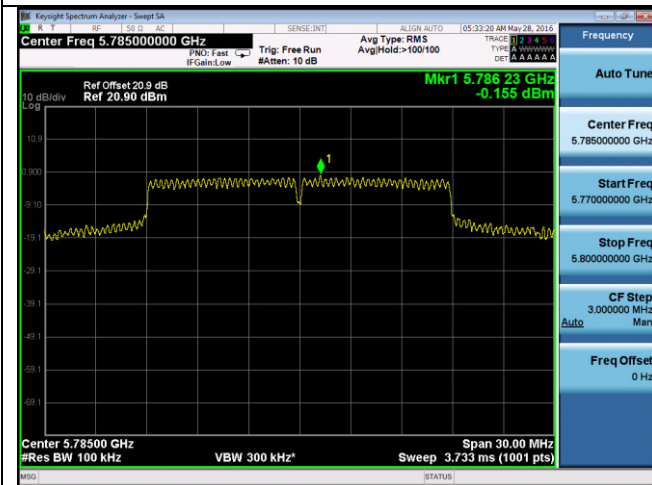


PSD-802.11n-20M -5785M-chain0

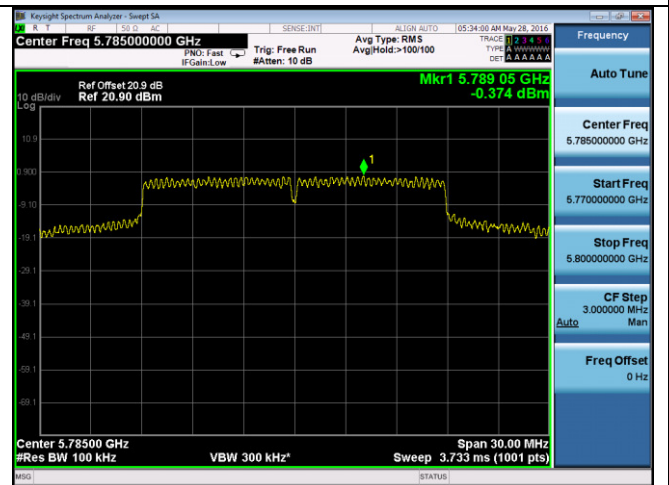


PSD-802.11n-20M -5785M-chain1

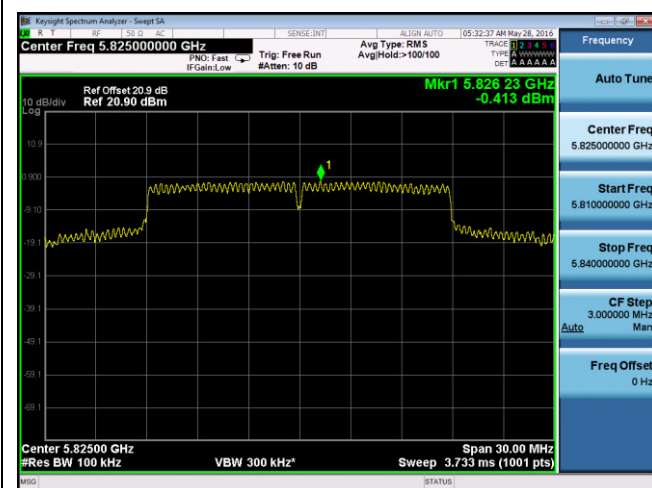

PSD-802.11n-20M -5825M-chain0

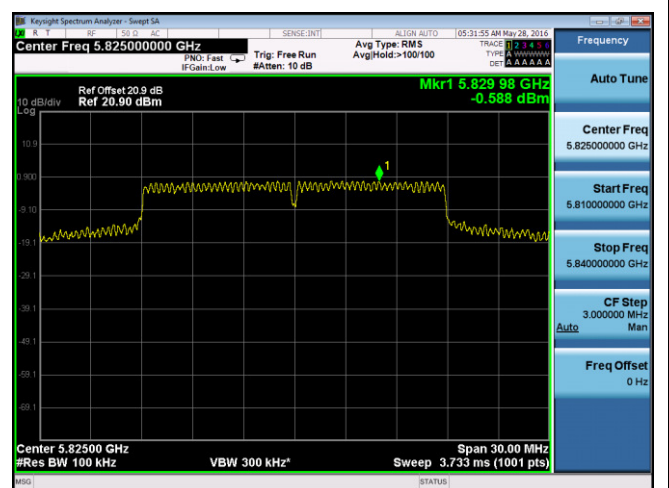


PSD-802.11n-20M -5825M-chain1

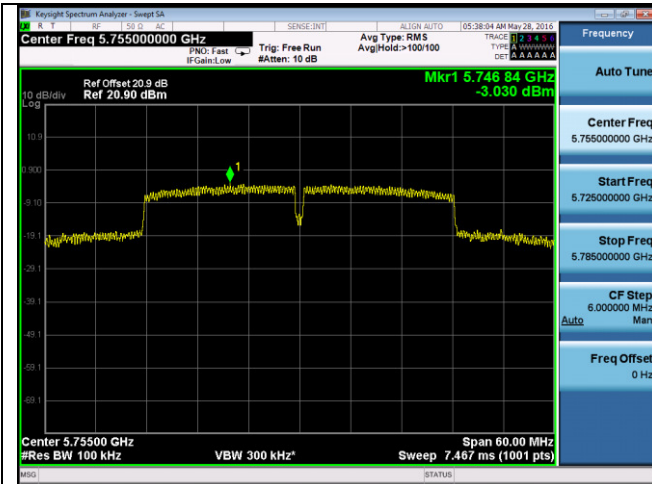


PSD-802.11n-40M-5755M-chain0




PSD-802.11n-40M-5755M-chain1

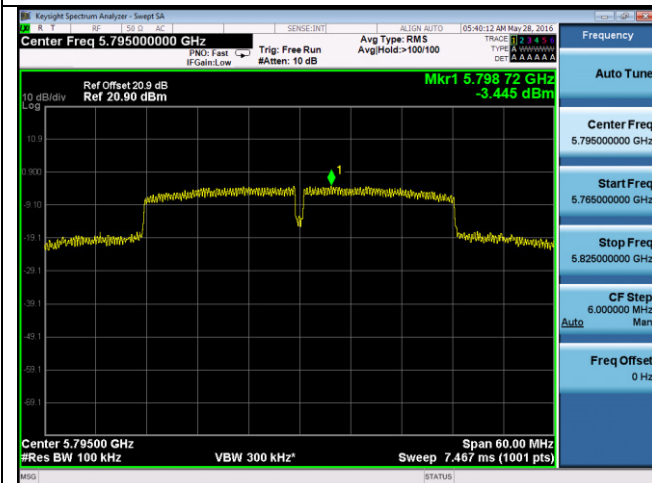

PSD-802.11n-40M-5795M-chain0

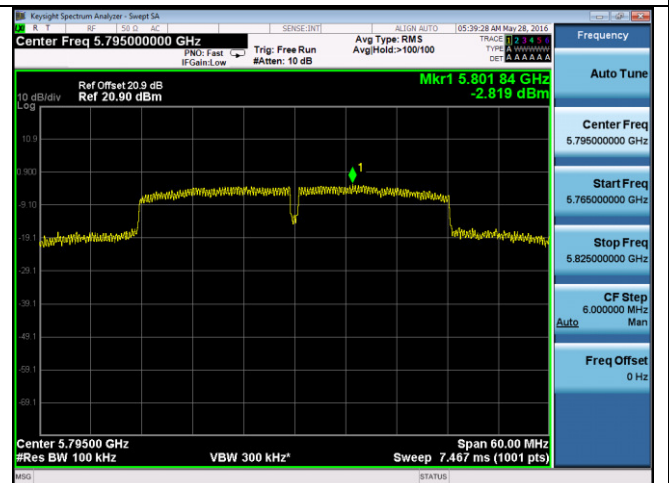

PSD-802.11n-40M-5795M-chain1

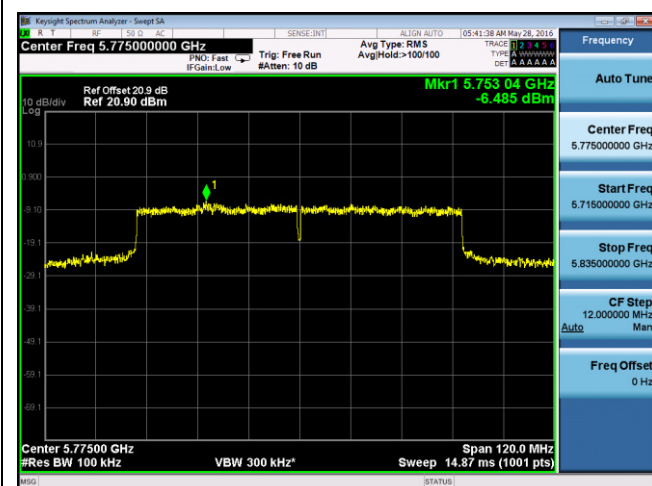


PSD-802.11ac-80M-5775M-chain0



PSD-802.11ac-80M-5775M-chain1

10.5 Band Edge and Emission Mask Measurement



Requirement(s):

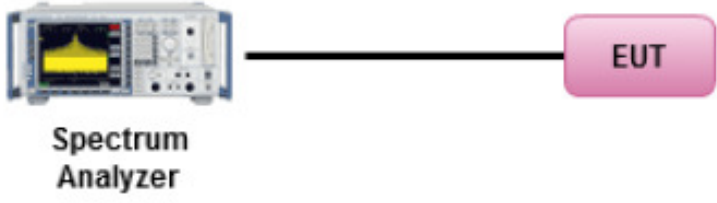Spec	Item	Requirement	Applicable
47CFR§ 15.407(b)(2), 15.407(b)(6)	(1)	For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.	<input checked="" type="checkbox"/>
	(2)	For transmitters operating in the 5.25-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5.25-5.35 GHz band that generate emissions in the 5.15-5.25 GHz band must meet all applicable technical requirements for operation in the 5.15-5.25 GHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5.15-5.25 GHz band.	<input type="checkbox"/>
	(3)	For transmitters operating in the 5.47-5.725 GHz band: all emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz.	<input type="checkbox"/>
	(4)	For transmitters operating in the 5.725-5.825 GHz band: all emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.	<input checked="" type="checkbox"/>
Test Setup	 <p>The diagram illustrates the test setup. On the left is a Spectrum Analyzer with a yellow signal trace on its screen. A black cable connects the Spectrum Analyzer to a pink rounded rectangle labeled 'EUT' (Equipment Under Test) on the right.</p>		
Procedure	<p>789033 D02 General UNII Test Procedures New Rules v01r02, II.F. Method SA-1</p> <p><u>Band Edge measurement:</u></p> <ul style="list-style-type: none"> - For average emissions measurements, follow the procedures described in section II.G.6., "Procedures for Average Unwanted Emissions Measurements above 1000 MHz", except for the following changes: - Set RBW=100kHz - Set VBW=300kHz - Perform a band-power integration across the 1 MHz bandwidth in which the band-edge emission level is to be measured. 		
Remark	Antenna gain was added to the offset.		
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Test Data Yes (See below) N/A
 Test Plot Yes (See below) N/A



Test was done by **Chen Ge** at RF test site.

Test Plots

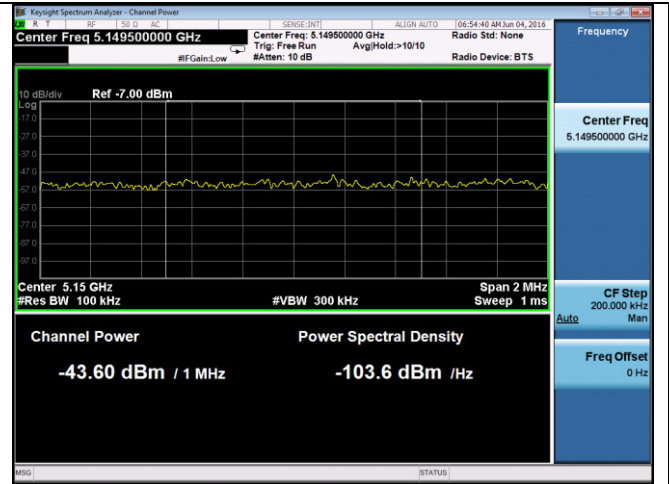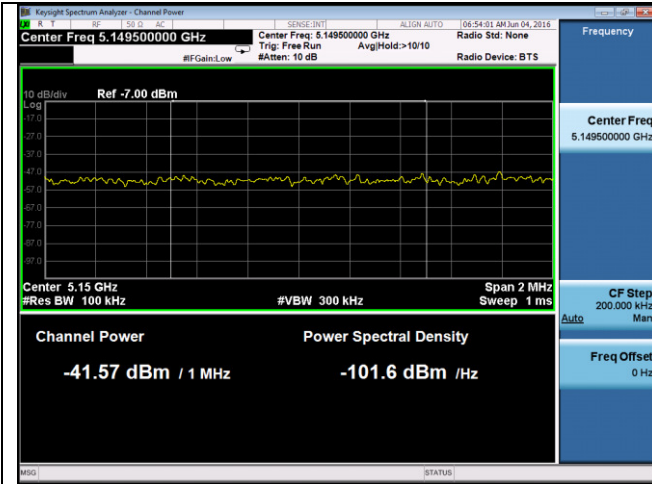


Band Edge-802.11a-5180M-chain0

Band Edge-802.11a-5180M-chain1

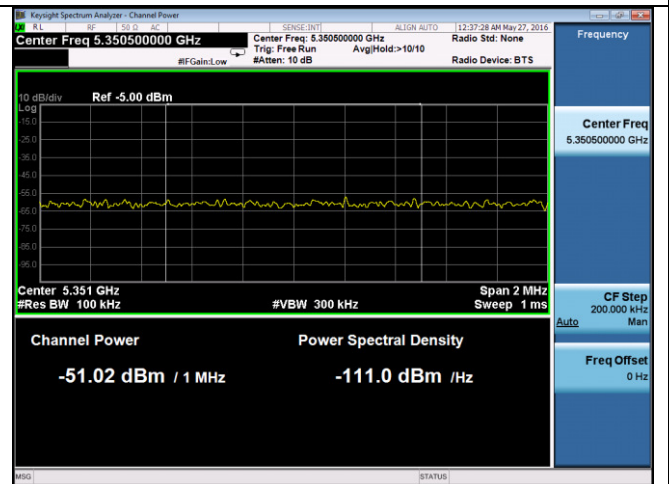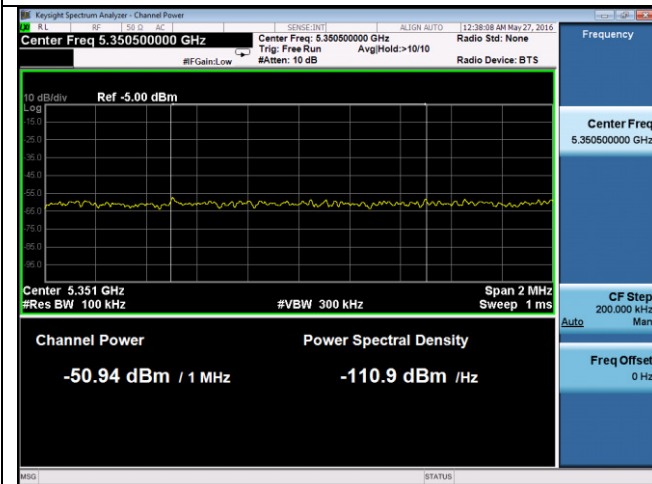


Band Edge -802.11a-5240M-chain0


Band Edge -802.11a-5240M-chain1

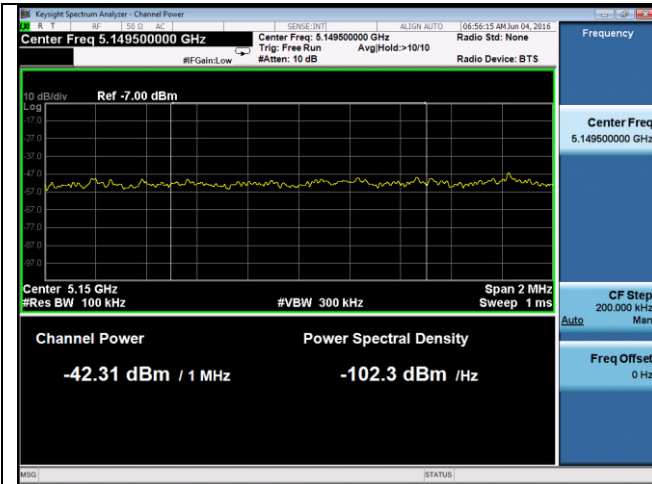


Band Edge -802.11n-20M -5180M-chain0

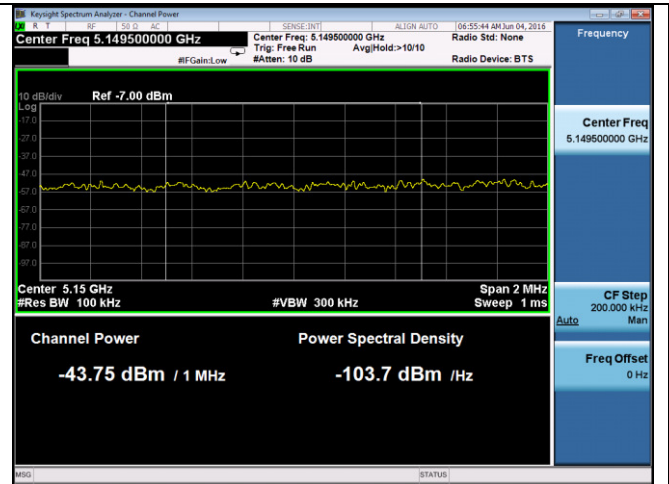


Band Edge -802.11n-20M -5180M-chain1

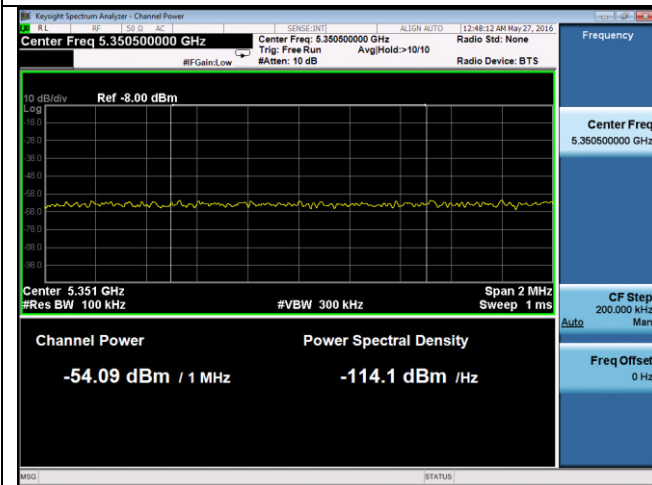


Band Edge -802.11n-20M-5240M-chain0

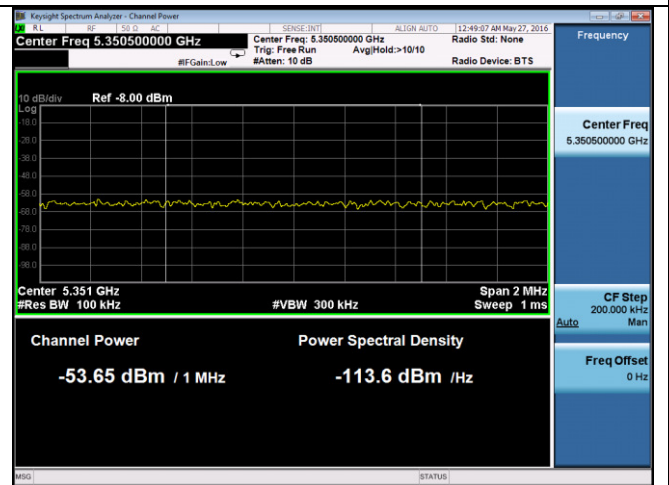


Band Edge -802.11n-20M-5240M-chain1

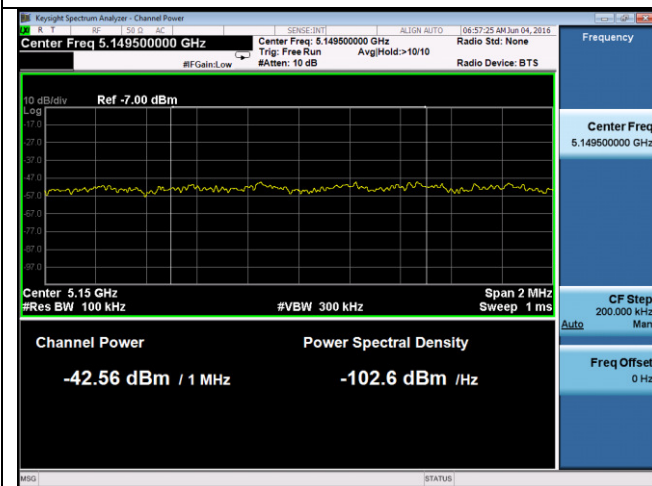


Band Edge -802.11n-40M-5190M-chain0

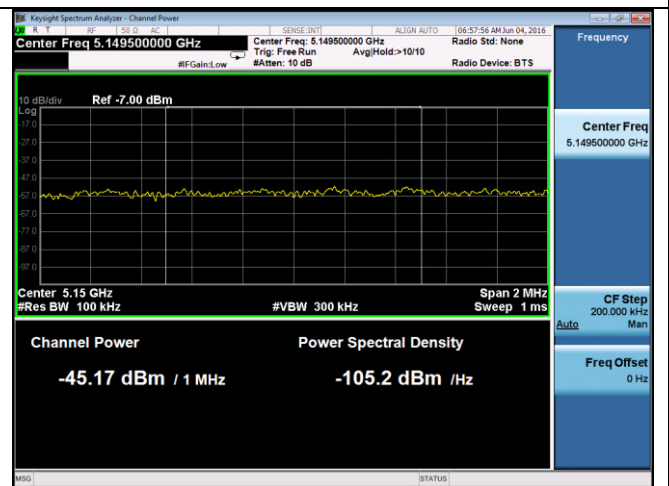


Band Edge -802.11n-40M-5190M-chain1

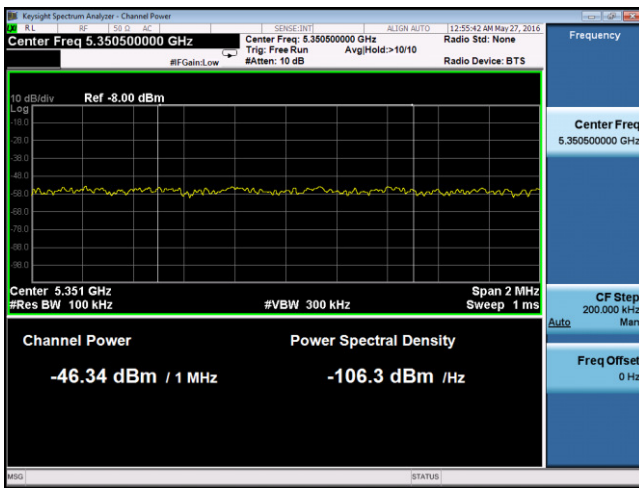


Band Edge -802.11n-40M-5230M-chain0

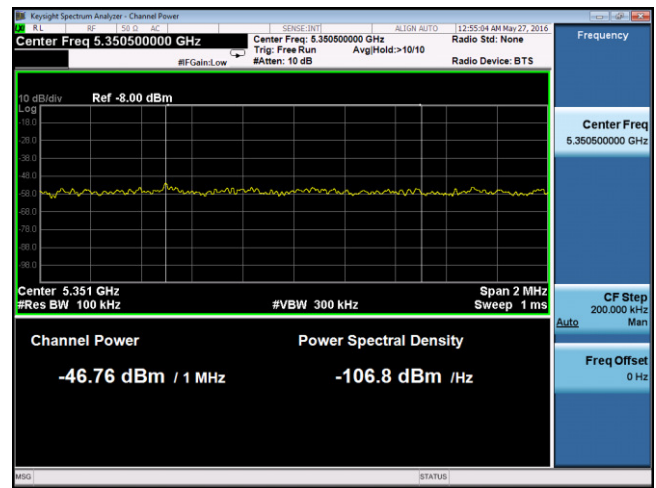


Band Edge -802.11n-40M-5230M-chain1

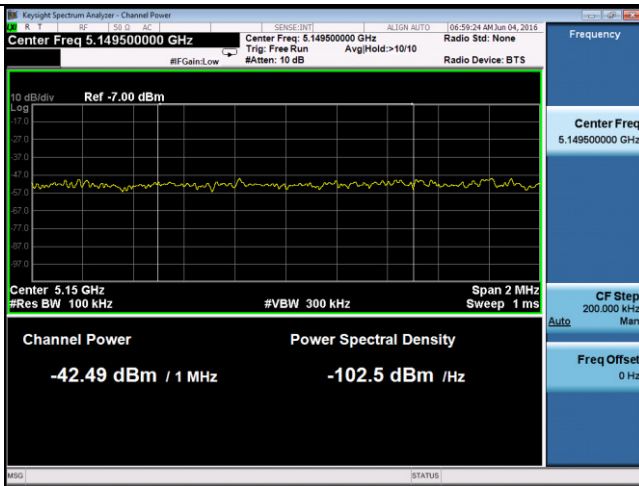


Band Edge -802.11ac-80M-5210M-chain0 (Left)

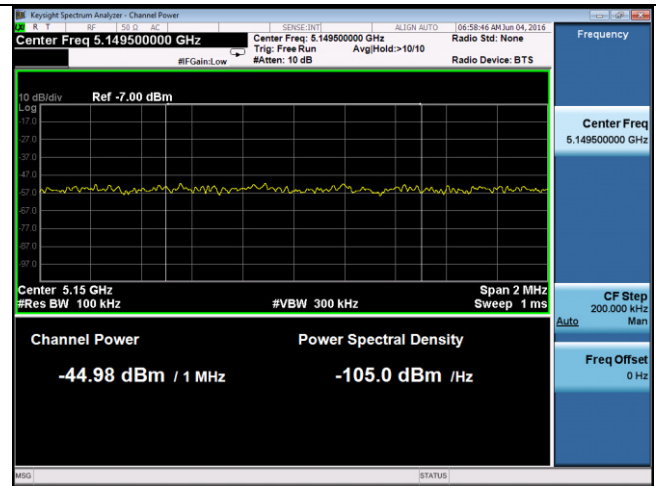

Band Edge -802.11ac-80M-5210M-chain1 (Left)

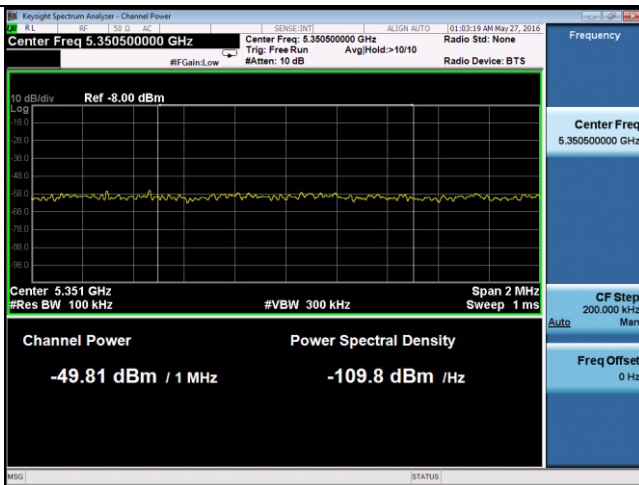


Band Edge -802.11ac-80M-5210M-chain0 (Right)

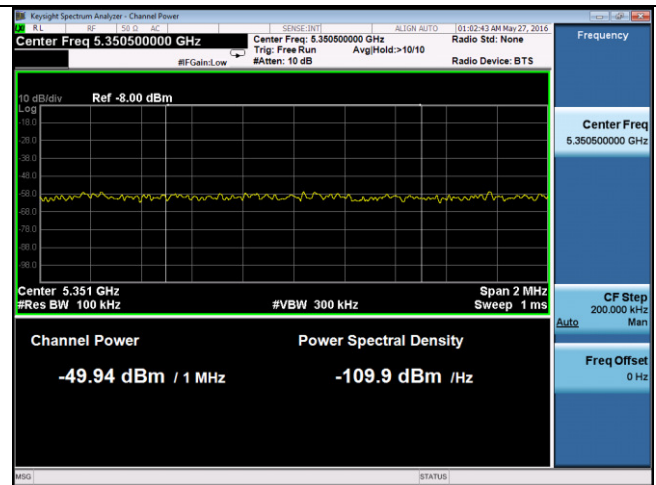


Band Edge -802.11ac-80M-5210M-chain1 (Right)


5.8GHz band:

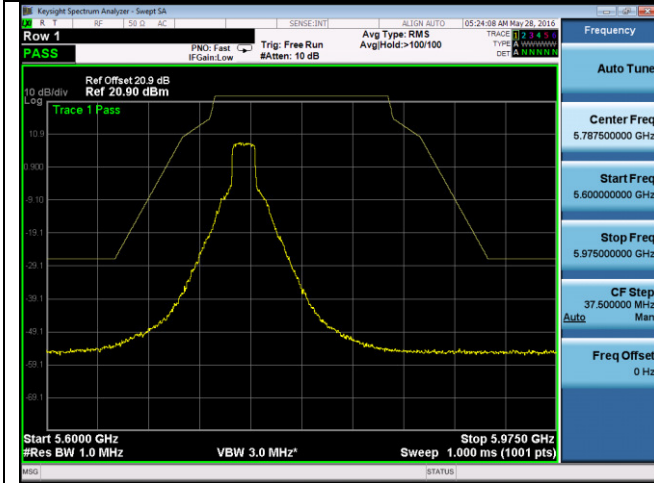


Emission Mask -802.11a-5745M-chain0

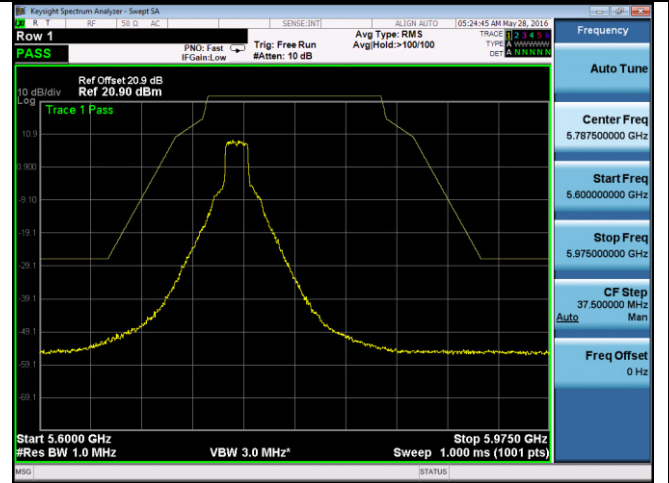


Emission Mask -802.11a-5745M-chain1

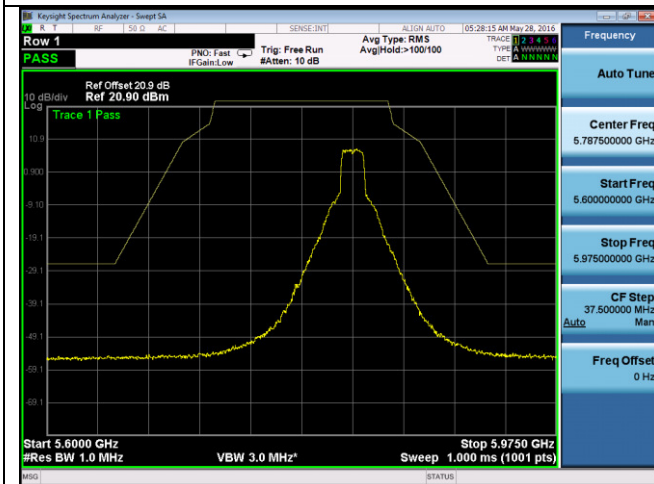


Emission Mask -802.11a-5785M-chain0

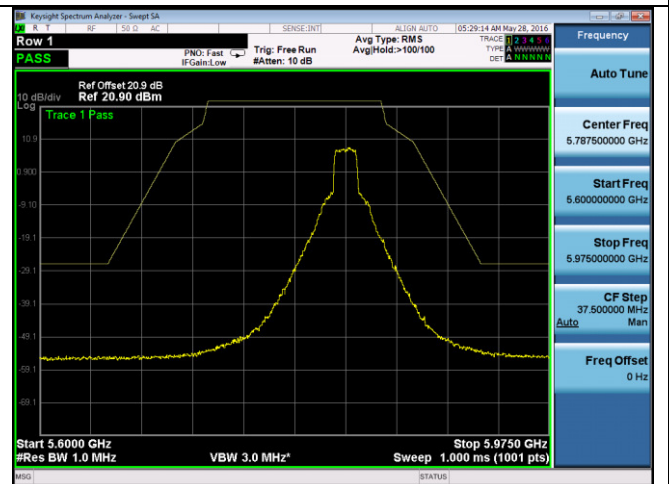


Emission Mask -802.11a-5785M-chain1

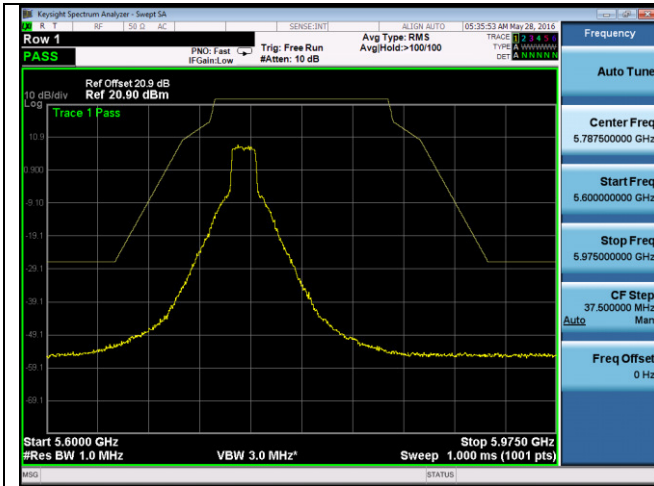


Emission Mask -802.11n-20M -5745M-chain0

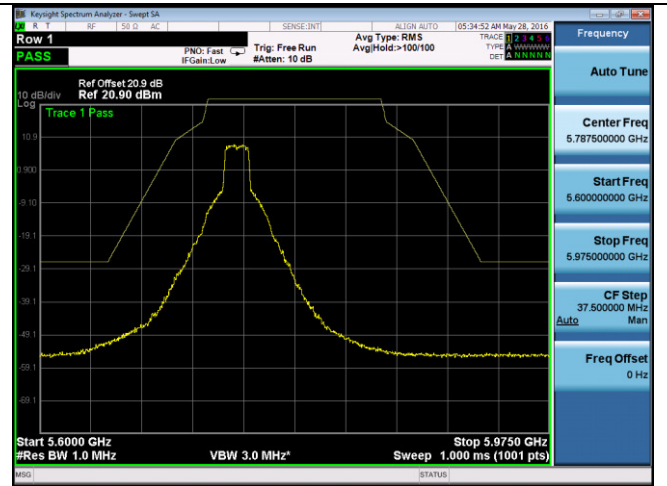


Emission Mask -802.11n-20M -5745M-chain1

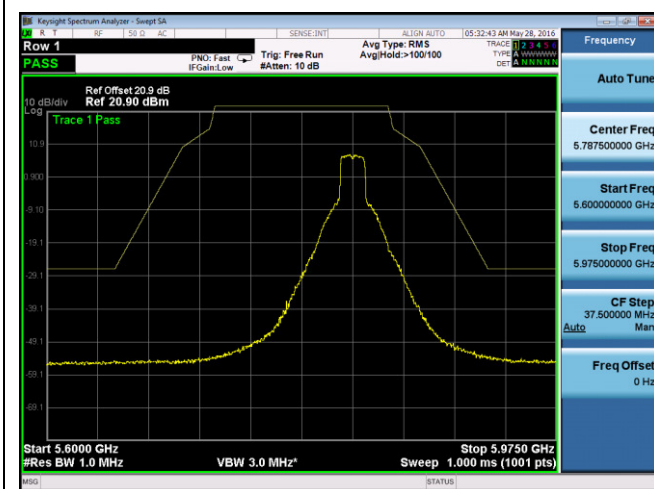


Emission Mask -802.11n-20M -5825M-chain0

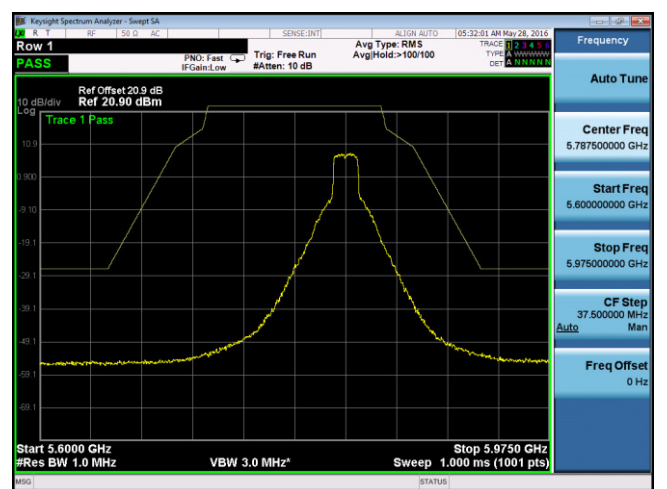


Emission Mask -802.11n-20M -5825M-chain1

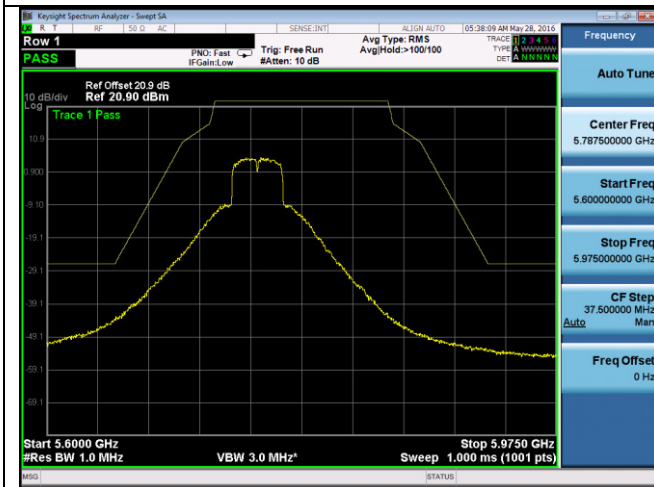


Emission Mask -802.11n-40M -5755M-chain0

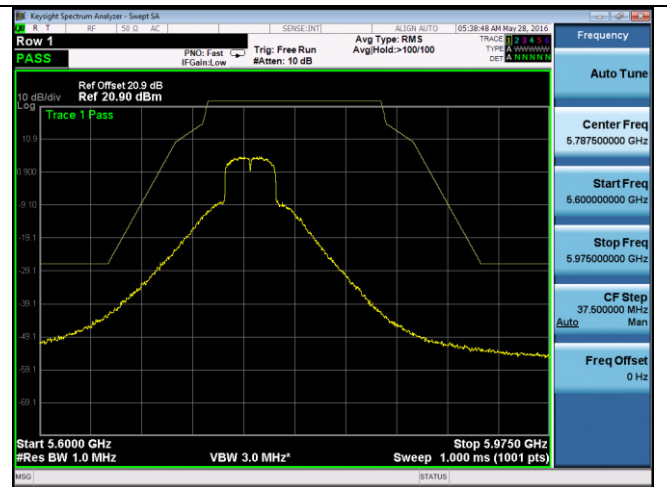


Emission Mask -802.11n-40M -5755M-chain1

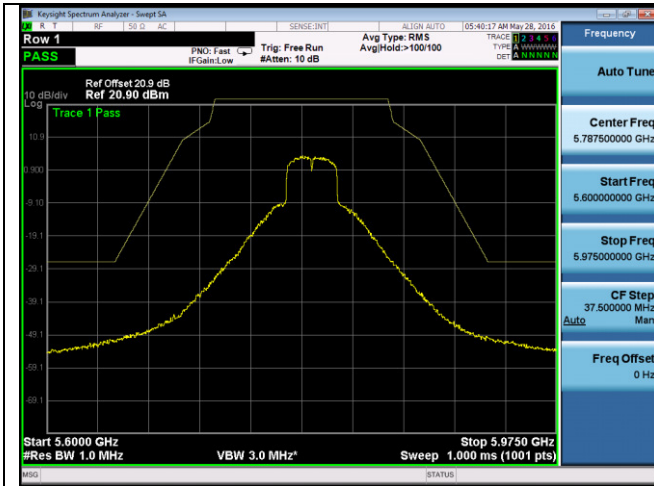


Emission Mask -802.11n-40M-5795M-chain0

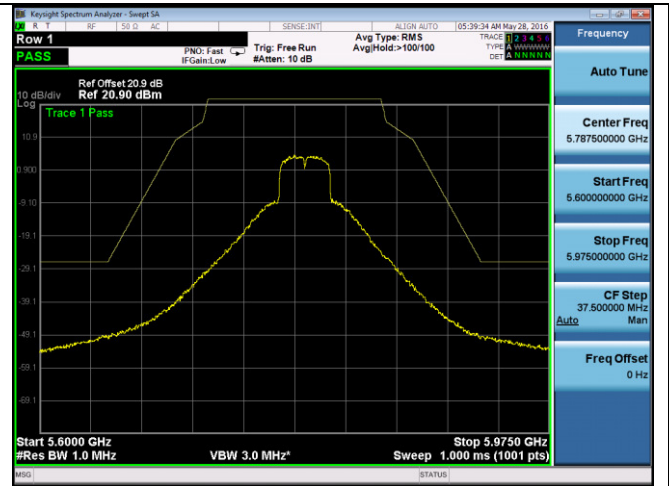

Emission Mask -802.11n-40M-5795M-chain1

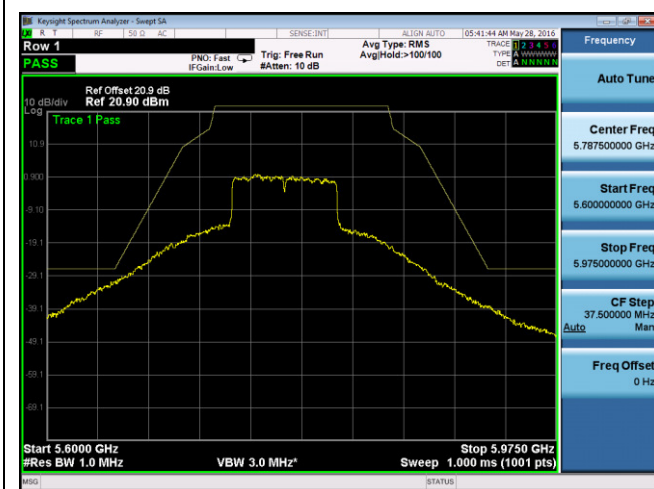

Emission Mask -802.11ac-80M-5775M-chain0

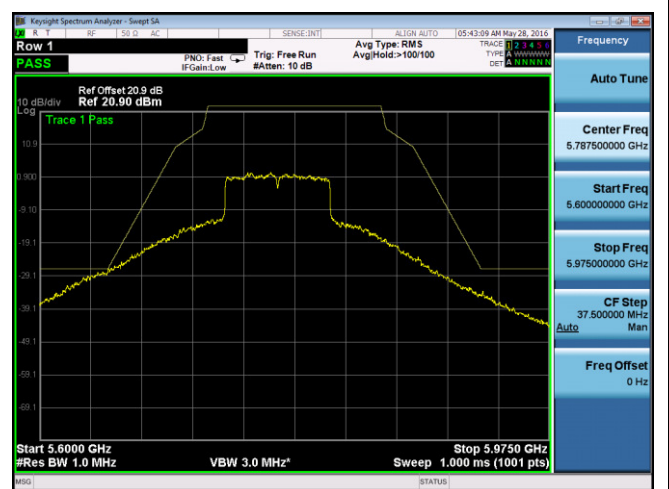

Emission Mask -802.11ac-80M-5775M-chain1

10.6 Radiated Emissions below 1GHz

Requirement(s):

Spec	Requirement	Applicable										
47CFR§ 15.407(b) 15.209 (a)	<p>Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges</p> <table border="1"> <thead> <tr> <th>Frequency range (MHz)</th> <th>Field Strength (uV/m)</th> </tr> </thead> <tbody> <tr> <td>30 – 88</td> <td>100</td> </tr> <tr> <td>88 – 216</td> <td>150</td> </tr> <tr> <td>216 960</td> <td>200</td> </tr> <tr> <td>Above 960</td> <td>500</td> </tr> </tbody> </table>	Frequency range (MHz)	Field Strength (uV/m)	30 – 88	100	88 – 216	150	216 960	200	Above 960	500	☒
Frequency range (MHz)	Field Strength (uV/m)											
30 – 88	100											
88 – 216	150											
216 960	200											
Above 960	500											
Test Setup												
Procedure	<ol style="list-style-type: none"> The EUT was switched on and allowed to warm up to its normal operating condition. The test was carried out at the selected frequency points obtained from the EUT characterisation. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: <ol style="list-style-type: none"> Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen. The EUT was then rotated to the direction that gave the maximum emission. Finally, the antenna height was adjusted to the height that gave the maximum emission. A Quasi-peak measurement was then made for that frequency point. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured. 											
Remark	The EUT was scanned up to 1GHz. Both horizontal and vertical polarities were investigated. The results show only the worst case.											
Result	☒ Pass ☐ Fail											


Test Data ☒ Yes (See below) ☐ N/A

Test Plot ☒ Yes (See below) ☐ N/A

Test was done by Gary Chou at 10m chamber.

Radiated Emission Test Results (Below 1GHz)

Test specification	below 1GHz			Result	Pass
Environmental Conditions:	Temp (°C):	26			
	Humidity (%)	47			
	Atmospheric (mbar):	1020			
Mains Power:	120VAC, 60Hz				
Tested by:	Gary Chou				
Test Date:	06/04/2016				
Remarks:	802.11ac VHT80, 5775MHz				

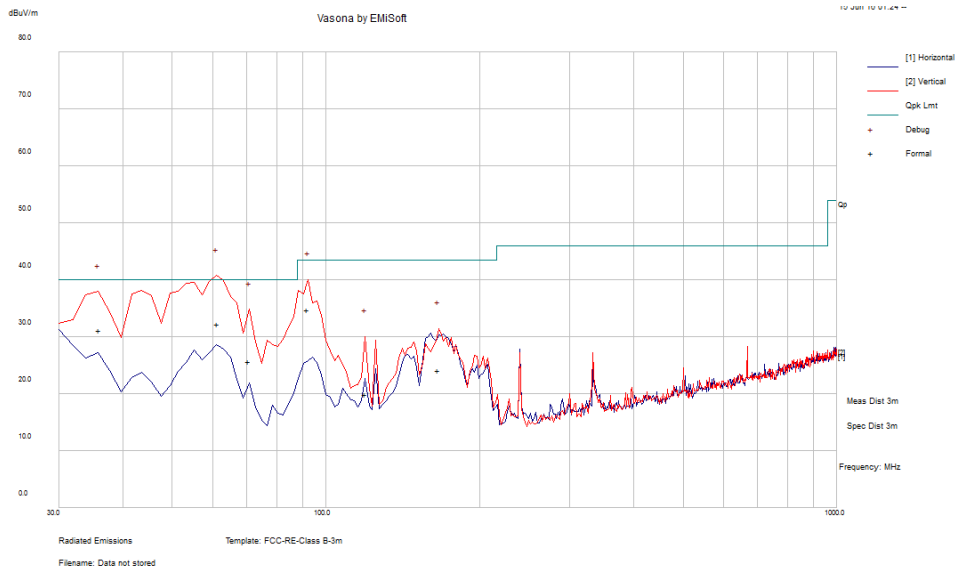


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Po l	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
61.34	62.14	1.21	-31.13	32.22	Quasi Max	V	122	181	40	-7.78	Pass
36.00	51.07	0.87	-20.77	31.16	Quasi Max	V	182	217	40	-8.84	Pass
92.06	64.41	1.49	-31.16	34.73	Quasi Max	V	146	344	43.52	-8.79	Pass
70.70	55.26	1.26	-30.9	25.62	Quasi Max	V	145	340	40	-14.38	Pass
165.86	49.86	1.94	-27.64	24.17	Quasi Max	V	141	13	43.52	-19.35	Pass
119.59	43.91	1.64	-25.6	19.95	Quasi Max	V	101	295	43.52	-23.57	Pass

Note: Both horizontal and vertical polarities were investigated. The results above show only the worst case.

10.7 Radiated Spurious Emissions above 1GHz

Requirement(s):

Spec	Item	Requirement	Applicable
47CFR§ 15.407(b)(2), 15.407(b)(6)	(1)	For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.	<input checked="" type="checkbox"/>
	(2)	For transmitters operating in the 5.25-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5.25-5.35 GHz band that generate emissions in the 5.15-5.25 GHz band must meet all applicable technical requirements for operation in the 5.15-5.25 GHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5.15-5.25 GHz band.	<input type="checkbox"/>
	(3)	For transmitters operating in the 5.47-5.725 GHz band: all emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz.	<input type="checkbox"/>
	(4)	For transmitters operating in the 5.725-5.825 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an EIRP of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an EIRP of -27 dBm/MHz.	<input checked="" type="checkbox"/>
	(5)	Restricted band, emission must also comply with the radiated emission limits specified in 15.209	<input checked="" type="checkbox"/>

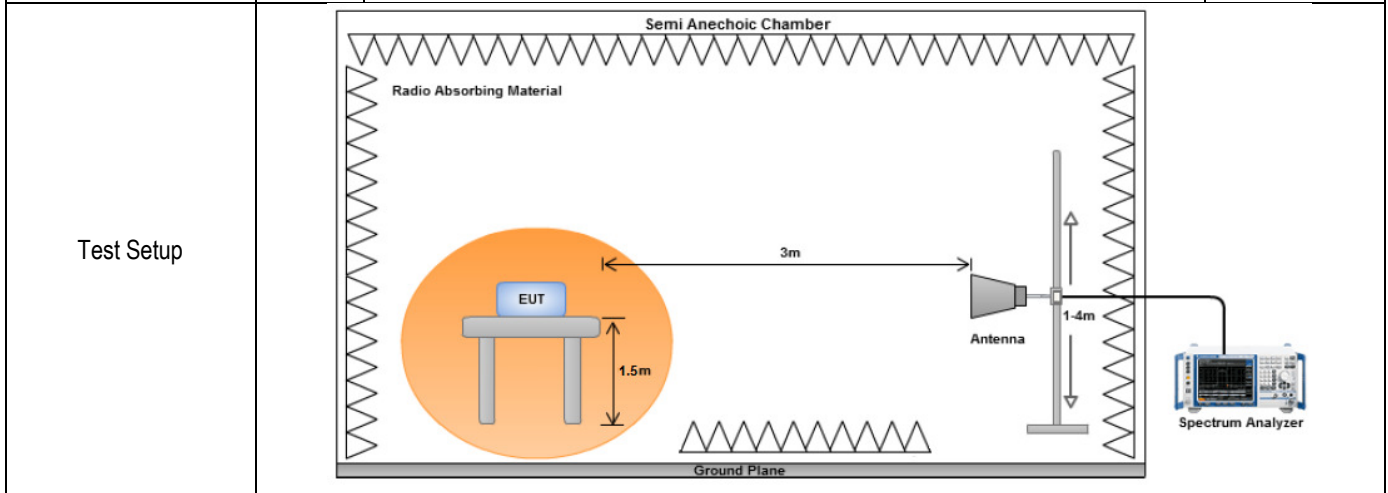

Procedure	<ol style="list-style-type: none"> The EUT was switched on and allowed to warm up to its normal operating condition. The test was carried out at the selected frequency points obtained from the EUT characterisation. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: <ol style="list-style-type: none"> Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen. The EUT was then rotated to the direction that gave the maximum emission. Finally, the antenna height was adjusted to the height that gave the maximum emission. An average measurement was then made for that frequency point. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.
------------------	--

Remark	The EUT was scanned up to 40GHz. Both horizontal and vertical polarities were investigated. The results show only the worst case.
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes (See below) N/A

Test Plot Yes (See below) N/A

Test was done by Gary Chou at 3m and 10m chamber.