

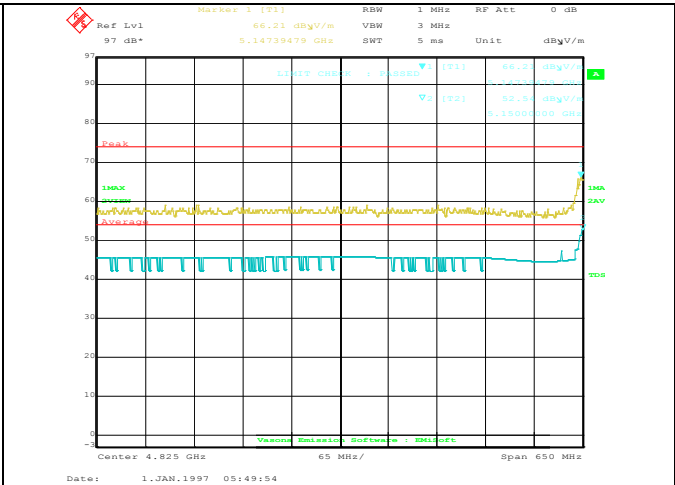
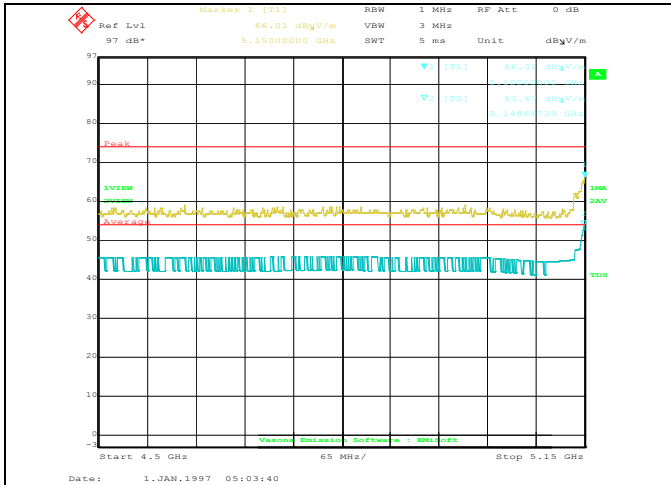


**Restricted Band Measurement Plots:**

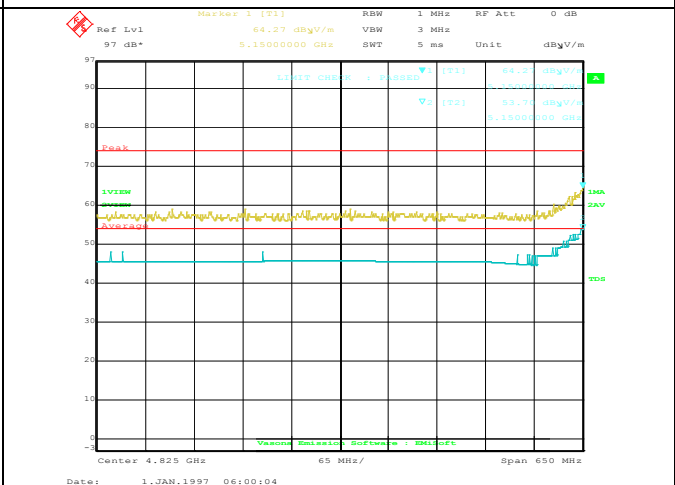

**Restricted Band-802.11a 5180M- Edge Freq 5150MHz**

**Restricted Band-802.11n-20M 5180M- Edge Freq 5150MHz**

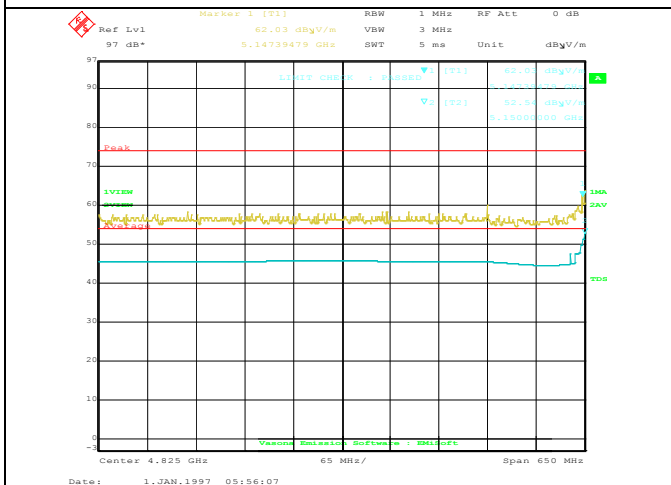

**Restricted Band-802.11n-40M 5190M- Edge Freq 5150MHz**

**Restricted Band-802.11ac-80M 5210M- Edge Freq 5150MHz**

## Radiated Emission Test Results (Above 1GHz)

### 1GHz-40GHz – 802.11a – 5180MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
10361.22	35.19	8.3	9.24	52.73	Peak Max	V	115	174	74	-21.27	Pass
15539.22	41.35	9.02	8.8	59.17	Peak Max	V	194	327	74	-14.83	Pass
10362.5	35.76	8.3	9.24	53.3	Peak Max	H	110	356	74	-20.7	Pass
15539.16	42.03	9.02	8.8	59.85	Peak Max	H	110	356	74	-14.15	Pass
10361.22	25.18	8.3	9.24	42.72	Average Max	V	115	174	54	-11.28	Pass
15539.22	31.34	9.02	8.8	49.16	Average Max	V	194	327	54	-4.84	Pass
10362.5	26.05	8.3	9.24	43.59	Average Max	H	110	356	54	-10.41	Pass
15539.16	32	9.02	8.8	49.82	Average Max	H	110	356	54	-4.18	Pass

### 1GHz-40GHz – 802.11a – 5200MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
10400	32.55	8.32	9.31	50.18	Peak Max	V	115	174	74	-23.82	Pass
15600.22	40.34	9.03	8.92	58.29	Peak Max	V	194	327	74	-15.71	Pass
10400	35.7	8.32	9.31	53.33	Peak Max	H	110	356	74	-20.67	Pass
15600.22	42.57	9.03	8.92	60.52	Peak Max	H	110	356	74	-13.48	Pass
10400	24.23	8.32	9.31	41.86	Average Max	V	115	174	54	-12.14	Pass
15600.22	31.03	9.03	8.92	48.98	Average Max	V	194	327	54	-5.02	Pass
10400	25.98	8.32	9.31	43.61	Average Max	H	110	356	54	-10.39	Pass
15600.22	32.54	9.03	8.92	50.49	Average Max	H	110	356	54	-3.51	Pass

### 1GHz-40GHz – 802.11a – 5240MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
10480.16	35.64	8.32	9.49	53.45	Peak Max	V	115	174	74	-20.55	Pass
15720.16	43.46	9.03	9.03	61.52	Peak Max	V	194	327	74	-12.48	Pass
10480.32	37.81	8.32	9.49	55.62	Peak Max	H	110	356	74	-18.38	Pass
15720.32	44.07	9.03	9.03	62.13	Peak Max	H	110	356	74	-11.87	Pass
10480.16	25.64	8.32	9.49	43.45	Average Max	V	115	174	54	-10.55	Pass
15720.16	32.57	9.03	9.03	50.63	Average Max	V	194	327	54	-3.37	Pass
10480.32	27.66	8.32	9.49	45.47	Average Max	H	110	356	54	-8.53	Pass
15720.32	32.21	9.03	9.03	50.27	Average Max	H	110	356	54	-3.73	Pass

**1GHz-40GHz – 802.11n-20M – 5180MHz**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
10361.31	34.19	8.3	9.24	51.73	Peak Max	V	115	174	74	-22.27	Pass
15539.31	40.02	9.02	8.8	57.84	Peak Max	V	194	327	74	-16.16	Pass
10362.3	34.88	8.3	9.24	52.42	Peak Max	H	110	356	74	-21.58	Pass
15539.48	41.89	9.02	8.8	59.71	Peak Max	H	110	356	74	-14.29	Pass
10361.31	23.85	8.3	9.24	41.39	Average Max	V	115	174	54	-12.61	Pass
15539.31	28.41	9.02	8.8	46.23	Average Max	V	194	327	54	-7.77	Pass
10362.3	24.63	8.3	9.24	42.17	Average Max	H	110	356	54	-11.83	Pass
15539.48	30.75	9.02	8.8	48.57	Average Max	H	110	356	54	-5.43	Pass

**1GHz-40GHz – 802.11n-20M – 5200MHz**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
10400.16	33.16	8.32	9.31	50.79	Peak Max	V	115	174	74	-23.21	Pass
15600.12	41.42	9.03	8.92	59.37	Peak Max	V	194	327	74	-14.63	Pass
10400.16	34.35	8.32	9.31	51.98	Peak Max	H	110	356	74	-22.02	Pass
15600.12	42.23	9.03	8.92	60.18	Peak Max	H	110	356	74	-13.82	Pass
10400.16	24.14	8.32	9.31	41.77	Average Max	V	115	174	54	-12.23	Pass
15600.12	30.32	9.03	8.92	48.27	Average Max	V	194	327	54	-5.73	Pass
10400.16	25.28	8.32	9.31	42.91	Average Max	H	110	356	54	-11.09	Pass
15600.12	32.16	9.03	8.92	50.11	Average Max	H	110	356	54	-3.89	Pass

**1GHz-40GHz – 802.11n-20M – 5240MHz**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
10480.23	34.27	8.32	9.49	52.08	Peak Max	V	115	174	74	-21.92	Pass
15720.23	43.23	9.03	9.03	61.29	Peak Max	V	194	327	74	-12.71	Pass
10480.08	35.89	8.32	9.49	53.7	Peak Max	H	110	356	74	-20.3	Pass
15720.08	43.86	9.03	9.03	61.92	Peak Max	H	110	356	74	-12.08	Pass
10480.23	24.72	8.32	9.49	42.53	Average Max	V	115	174	54	-11.47	Pass
15720.23	32.5	9.03	9.03	50.56	Average Max	V	194	327	54	-3.44	Pass
10480.08	25.42	8.32	9.49	43.23	Average Max	H	110	356	54	-10.77	Pass
15720.08	33.18	9.03	9.03	51.24	Average Max	H	110	356	54	-2.76	Pass

**1GHz-40GHz – 802.11n-40M – 5190MHz**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
10380.14	33.4	8.3	9.17	50.87	Peak Max	V	115	174	74	-23.13	Pass
15570.14	34.36	9.02	8.73	52.11	Peak Max	V	194	327	74	-21.89	Pass
10380.09	33.45	8.3	9.17	50.92	Peak Max	H	110	356	74	-23.08	Pass
15570.09	34.16	9.02	8.73	51.91	Peak Max	H	110	356	74	-22.09	Pass
10380.14	22.49	8.3	9.17	39.96	Average Max	V	115	174	54	-14.04	Pass
15570.14	24.56	9.02	8.73	42.31	Average Max	V	194	327	54	-11.69	Pass
10380.09	22.36	8.3	9.17	39.83	Average Max	H	110	356	54	-14.17	Pass
15570.09	24.65	9.02	8.73	42.4	Average Max	H	110	356	54	-11.6	Pass

**1GHz-40GHz – 802.11n-40M – 5230MHz**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
10460.41	34.39	8.32	9.49	52.2	Peak Max	V	115	174	74	-21.8	Pass
15690.17	40.27	9.03	9.03	58.33	Peak Max	V	194	327	74	-15.67	Pass
10460.09	33.69	8.32	9.49	51.5	Peak Max	H	110	356	74	-22.5	Pass
15690.25	41.41	9.03	9.03	59.47	Peak Max	H	110	356	74	-14.53	Pass
10460.41	22.63	8.32	9.49	40.44	Average Max	V	115	174	54	-13.56	Pass
15690.17	29.19	9.03	9.03	47.25	Average Max	V	194	327	54	-6.75	Pass
10460.09	22.48	8.32	9.49	40.29	Average Max	H	110	356	54	-13.71	Pass
15690.25	30.88	9.03	9.03	48.94	Average Max	H	110	356	54	-5.06	Pass

**1GHz-40GHz – 802.11ac-80M – 5210MHz**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
10420.18	32.58	8.3	9.17	50.05	Peak Max	V	115	174	74	-23.95	Pass
15630.18	36.9	9.04	8.73	54.67	Peak Max	V	194	327	74	-19.33	Pass
10420.25	31.75	8.3	9.17	49.22	Peak Max	H	110	356	74	-24.78	Pass
15630.25	35.31	9.04	8.73	53.08	Peak Max	H	110	356	74	-20.92	Pass
10420.18	22.59	8.3	9.17	40.06	Average Max	V	115	174	54	-13.94	Pass
15630.18	25.11	9.04	8.73	42.88	Average Max	V	194	327	54	-11.12	Pass
10420.25	22.48	8.3	9.17	39.95	Average Max	H	110	356	54	-14.05	Pass
15630.25	25.41	9.04	8.73	43.18	Average Max	H	110	356	54	-10.82	Pass

**1GHz-40GHz – 802.11a – 5745MHz**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
11490.25	45.5	8.54	8.08	62.12	Peak Max	V	115	174	74	-11.88	Pass
17235.22	45.17	9.31	5.24	59.72	Peak Max	V	194	327	74	-14.28	Pass
11490.43	43.66	8.54	8.08	60.28	Peak Max	H	110	356	74	-13.72	Pass
17235.43	46.22	9.31	5.24	60.77	Peak Max	H	110	356	74	-13.23	Pass
11490.25	35.21	8.54	8.08	51.83	Average Max	V	115	174	54	-2.17	Pass
17235.22	34.59	9.31	5.24	49.14	Average Max	V	194	327	54	-4.86	Pass
11490.43	33.33	8.54	8.08	49.95	Average Max	H	110	356	54	-4.05	Pass
17235.43	34.87	9.31	5.24	49.42	Average Max	H	110	356	54	-4.58	Pass

**1GHz-40GHz - 802.11a– 5785MHz**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
11570.14	44.64	8.56	8.02	61.22	Peak Max	V	115	174	74	-12.78	Pass
17355.14	45.01	9.4	4.15	58.56	Peak Max	V	194	327	74	-15.44	Pass
11570.21	41.59	8.56	8.02	58.17	Peak Max	H	110	356	74	-15.83	Pass
17355.21	44.97	9.4	4.15	58.52	Peak Max	H	110	356	74	-15.48	Pass
11570.14	35.5	8.56	8.02	52.08	Average Max	V	115	174	54	-1.92	Pass
17355.14	34.6	9.4	4.15	48.15	Average Max	V	194	327	54	-5.85	Pass
11570.21	31.67	8.56	8.02	48.25	Average Max	H	110	356	54	-5.75	Pass
17355.21	34.17	9.4	4.15	47.72	Average Max	H	110	356	54	-6.28	Pass

**1GHz-40GHz - 802.11a - 5825MHz**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
11650.42	46.07	8.58	8.01	62.66	Peak Max	V	115	174	74	-11.34	Pass
17475.42	45.43	9.38	3.94	58.75	Peak Max	V	194	327	74	-15.25	Pass
11650.23	41.59	8.58	8.01	58.18	Peak Max	H	110	356	74	-15.82	Pass
17475.23	46.76	9.38	3.94	60.08	Peak Max	H	110	356	74	-13.92	Pass
11650.42	35.74	8.58	8.01	52.33	Average Max	V	115	174	54	-1.67	Pass
17475.42	35.63	9.38	3.94	48.95	Average Max	V	194	327	54	-5.05	Pass
11650.23	31.67	8.58	8.01	48.26	Average Max	H	110	356	54	-5.74	Pass
17475.23	35.15	9.38	3.94	48.47	Average Max	H	110	356	54	-5.53	Pass

**1GHz-40GHz – 802.11n-20M – 5745MHz**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
11650.18	43.4	8.54	8.08	60.02	Peak Max	V	115	174	74	-13.98	Pass
17475.18	45.74	9.31	5.24	60.29	Peak Max	V	194	327	74	-13.71	Pass
11650.24	42.73	8.54	8.08	59.35	Peak Max	H	110	356	74	-14.65	Pass
17475.24	44.66	9.31	5.24	59.21	Peak Max	H	110	356	74	-14.79	Pass
11650.18	31.91	8.54	8.08	48.53	Average Max	V	115	174	54	-5.47	Pass
17475.18	34.47	9.31	5.24	49.02	Average Max	V	194	327	54	-4.98	Pass
11650.24	30.72	8.54	8.08	47.34	Average Max	H	110	356	54	-6.66	Pass
17475.24	33.95	9.31	5.24	48.5	Average Max	H	110	356	54	-5.5	Pass

**1GHz-40GHz - 802.11n-20M– 5785MHz**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
11570.14	44.43	8.56	8.02	61.01	Peak Max	V	115	174	74	-12.99	Pass
17355.14	44.31	9.4	4.15	57.86	Peak Max	V	194	327	74	-16.14	Pass
11570.21	41.68	8.56	8.02	58.26	Peak Max	H	110	356	74	-15.74	Pass
17355.21	46.12	9.4	4.15	59.67	Peak Max	H	110	356	74	-14.33	Pass
11570.14	32.87	8.56	8.02	49.45	Average Max	V	115	174	54	-4.55	Pass
17355.14	34.15	9.4	4.15	47.7	Average Max	V	194	327	54	-6.3	Pass
11570.21	30.3	8.56	8.02	46.88	Average Max	H	110	356	54	-7.12	Pass
17355.21	34.31	9.4	4.15	47.86	Average Max	H	110	356	54	-6.14	Pass

**1GHz-40GHz - 802.11n-20M - 5825MHz**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
11650.42	44.66	8.58	8.01	61.25	Peak Max	V	115	174	74	-12.75	Pass
17475.42	44.99	9.38	3.94	58.31	Peak Max	V	194	327	74	-15.69	Pass
11650.23	43.62	8.58	8.01	60.21	Peak Max	H	110	356	74	-13.79	Pass
17475.23	45.9	9.38	3.94	59.22	Peak Max	H	110	356	74	-14.78	Pass
11650.42	32.79	8.58	8.01	49.38	Average Max	V	115	174	54	-4.62	Pass
17475.42	34.97	9.38	3.94	48.29	Average Max	V	194	327	54	-5.71	Pass
11650.23	32.91	8.58	8.01	49.5	Average Max	H	110	356	54	-4.5	Pass
17475.23	36.32	9.38	3.94	49.64	Average Max	H	110	356	54	-4.36	Pass

**1GHz-40GHz – 802.11n-40M – 5755MHz**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
11510.62	41.69	8.54	8.08	58.31	Peak Max	V	115	174	74	-15.69	Pass
17265.62	46.83	9.43	3.05	59.31	Peak Max	V	194	327	74	-14.69	Pass
11510.45	39.48	8.54	8.08	56.1	Peak Max	H	110	356	74	-17.9	Pass
17265.45	46.26	9.43	3.05	58.74	Peak Max	H	110	356	74	-15.26	Pass
11510.62	32.68	8.54	8.08	49.3	Average Max	V	115	174	54	-4.7	Pass
17265.62	35.45	9.43	3.05	47.93	Average Max	V	194	327	54	-6.07	Pass
11510.45	29.78	8.54	8.08	46.4	Average Max	H	110	356	54	-7.6	Pass
17265.45	35.75	9.43	3.05	48.23	Average Max	H	110	356	54	-5.77	Pass

**1GHz-40GHz - 802.11n-40M– 5795MHz**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
11590.43	43.76	8.57	8.02	60.35	Peak Max	V	115	174	74	-13.65	Pass
17385.43	45.92	9.34	3.94	59.2	Peak Max	V	194	327	74	-14.8	Pass
11590.18	41.66	8.57	8.02	58.25	Peak Max	H	110	356	74	-15.75	Pass
17385.18	44.72	9.34	3.94	58	Peak Max	H	110	356	74	-16	Pass
11590.43	33.84	8.57	8.02	50.43	Average Max	V	115	174	54	-3.57	Pass
17385.43	35.16	9.34	3.94	48.44	Average Max	V	194	327	54	-5.56	Pass
11590.18	30.84	8.57	8.02	47.43	Average Max	H	110	356	54	-6.57	Pass
17385.18	34.14	9.34	3.94	47.42	Average Max	H	110	356	54	-6.58	Pass

**1GHz-40GHz - 802.11ac-80M - 5775MHz**
















Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
11550.23	39.52	8.55	8.07	56.14	Peak Max	V	115	174	74	-17.86	Pass
17325.23	45.59	9.35	4.12	59.06	Peak Max	V	194	327	74	-14.94	Pass
11550.42	38.35	8.55	8.07	54.97	Peak Max	H	110	356	74	-19.03	Pass
17325.42	45.74	9.35	4.12	59.21	Peak Max	H	110	356	74	-14.79	Pass
11550.23	30.31	8.55	8.07	46.93	Average Max	V	115	174	54	-7.07	Pass
17325.23	34.72	9.35	4.12	48.19	Average Max	V	194	327	54	-5.81	Pass
11550.42	28.07	8.55	8.07	44.69	Average Max	H	110	356	54	-9.31	Pass
17325.42	35.09	9.35	4.12	48.56	Average Max	H	110	356	54	-5.44	Pass








## Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Cycle	Cal Due	In use
<b>Conducted Emissions</b>						
R & S Receiver	ESIB 40	100179	06/08/2016	1 Year	06/08/2017	<input checked="" type="checkbox"/>
CHASE LISN	MN2050B	1018	08/07/2015	1 Year	08/07/2016	<input checked="" type="checkbox"/>
<b>Radiated Emissions</b>						
R & S Receiver	ESIB 40	1018	08/07/2015	1 Year	08/07/2016	<input checked="" type="checkbox"/>
Bi-Log antenna (30MHz~2GHz)	JB1	A030702	08/12/2015	1 Year	08/12/2016	<input checked="" type="checkbox"/>
Horn Antenna (1GHz~26GHz)	3115	100059	08/25/2015	1 Year	08/25/2016	<input checked="" type="checkbox"/>
Horn Antenna (26GHz~40GHz)	AH-840	101013	08/28/2015	1 Year	08/28/2016	<input checked="" type="checkbox"/>
Pre-Amp (30MHz~40GHz)	LPA-6-30	11140711	02/10/2016	1 Year	02/10/2017	<input checked="" type="checkbox"/>
3 Meters SAC	3M	N/A	08/08/2015	1 Year	08/08/2016	<input checked="" type="checkbox"/>
10 Meters SAC	10M	N/A	09/05/2015	1 Year	09/05/2016	<input checked="" type="checkbox"/>
<b>RF Conducted Measurement</b>						
Spectrum Analyzer	N9010A	10SL0219	08/20/2015	1 Year	08/20/2016	<input checked="" type="checkbox"/>
R & S Receiver	ESIB 40	100179	06/08/2016	1 Year	06/08/2017	<input checked="" type="checkbox"/>
ETS-Lingren USB RF Power Sensor	7002-006	10SL0190	09/03/2015	1 Year	09/03/2016	<input checked="" type="checkbox"/>



## Annex B. SIEMIC Accreditation

Accreditations	Document	Scope / Remark
ISO 17025 (A2LA)		Please see the documents for the detailed scope
ISO Guide 65 (A2LA)		Please see the documents for the detailed scope
TCB Designation		<a href="#">A1, A2, A3, A4, B1, B2, B3, B4, C</a>
FCC DoC Accreditation		FCC Declaration of Conformity Accreditation
FCC Site Registration		3 meter site
FCC Site Registration		10 meter site
IC Site Registration		3 meter site
IC Site Registration		10 meter site
EU NB		<b>Radio &amp; Telecommunications Terminal Equipment:</b> EN45001 – EN ISO/IEC 17025
		<b>Electromagnetic Compatibility:</b> EN45001 – EN ISO/IEC 17025
Singapore iDA CB(Certification Body)		<a href="#">Phase I, Phase II</a>
Vietnam MIC CAB Accreditation		Please see the document for the detailed scope
Hong Kong OFCA		<b>(Phase II)</b> OFCA Foreign Certification Body for Radio and Telecom
		<b>(Phase I)</b> Conformity Assessment Body for Radio and Telecom
Industry Canada CAB		<b>Radio:</b> Scope A – All Radio Standard Specification in Category I
		<b>Telecom:</b> CS-03 Part I, II, V, VI, VII, VIII

Japan Recognized Certification Body Designation		<p><b>Radio:</b> A1. Terminal equipment for purpose of calling</p> <p><b>Telecom:</b> B1. Specified radio equipment specified in Article 38-2, Paragraph 1, Item 1 of the Radio Law</p>
Korea CAB Accreditation		<p><b>EMI:</b> KCC Notice 2008-39, RRL Notice 2008-3: CA Procedures for EMI KN22: Test Method for EMI</p> <p><b>EMS:</b> KCC Notice 2008-38, RRL Notice 2008-4: CA Procedures for EMS KN24, KN61000-4-2, -4-3, -4-4, -4-5, -4-6, -4-8, -4-11: Test Method for EMS</p> <p><b>Radio:</b> RRL Notice 2008-26, RRL Notice 2008-2, RRL Notice 2008-10, RRL Notice 2007-49, RRL Notice 2007-20, RRL Notice 2007-21, RRL Notice 2007-80, RRL Notice 2004-68</p> <p><b>Telecom:</b> President Notice 20664, RRL Notice 2007-30, RRL Notice 2008-7 with attachments 1, 3, 5, 6; President Notice 20664, RRL Notice 2008-7 with attachment 4</p>
Taiwan NCC CAB Recognition		LP0002, PSTN01, ADSL01, ID0002, IS6100, CNS14336, PLMN07, PLMN01, PLMN08
Taiwan BSMI CAB Recognition		CNS 13438
Japan VCCI		<p>R-3083: Radiation 3 meter site</p> <p>C-3421: Main Ports Conducted Interference Measurement</p> <p>T-1597: Telecommunication Ports Conducted Interference Measurement</p>
Australia CAB Recognition		<p><b>EMC:</b> AS/NZS CISPR 11, AS/NZS CISPR 14.1, AS/NZS CISPR22, AS/NZS 61000.6.3, AS/NZS 61000.6.4</p> <p><b>Radio communications:</b> AS/NZS 4281, AS/NZS 4268, AS/NZS 4280.1, AS/NZS 4280.2, AS/NZS 4295, AS/NZS 4582, AS/NZS 4583, AS/NZS 4769.1, AS/NZS 4769.2, AS/NZS 4770, AS/NZS 4771</p> <p><b>Telecommunications:</b> AS/ACIF S002:05, AS/ACIF S003:06, AS/ACIF S004:06 AS/ACIF S006:01, AS/ACIF S016:01, AS/ACIF S031:01, AS/ACIF S038:01, AS/ACIF S040:01, AS/ACIF S041:05, AS/ACIF S043.2:06, AS/ACIF S60950.1</p>
Australia NATA Recognition		AS/ACIF S002, AS/ACIF S003, AS/ACIF S004, AS/ACIF S006, AS/ACIF S016, AS/ACIF S031, AS/ACIF S038, AS/ACIF S040, AS/ACIF S041, AS/ACIF S043.2