


## Appendix B. Radiated Emission Co-location Report

## 1. Results of Radiated Emissions for Co-located


|               |           |                |               |
|---------------|-----------|----------------|---------------|
| Temperature   | 25°C      | Humidity       | 40%           |
| Test Engineer | Andy Tsai | Configurations | 2.4GHz + 5GHz |

Horizontal

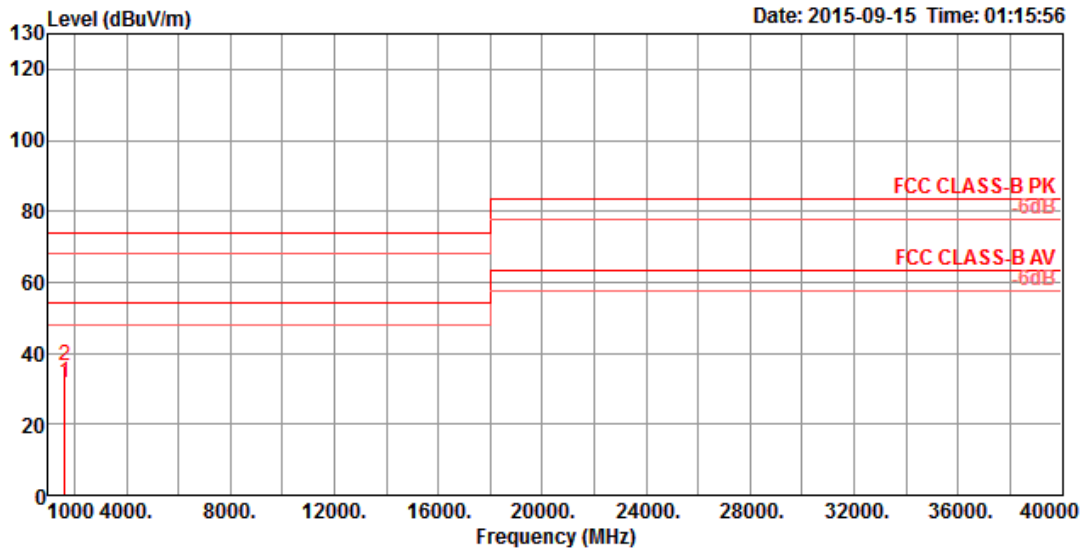

|   | Freq    | Level  | Limit  | Over   | Read  | CableAntenna | Preamp | A/Pos | T/Pos | Remark | Pol/Phase |            |
|---|---------|--------|--------|--------|-------|--------------|--------|-------|-------|--------|-----------|------------|
|   | MHz     | dBuV/m | dBuV/m | dB     | dBuV  | dB           | dB/m   | dB    | cm    | deg    |           |            |
| 1 | 1625.03 | 31.87  | 54.00  | -22.13 | 38.70 | 3.13         | 25.57  | 35.53 | 123   | 160    | Average   | HORIZONTAL |
| 2 | 1625.12 | 36.56  | 74.00  | -37.44 | 43.39 | 3.13         | 25.57  | 35.53 | 123   | 160    | Peak      | HORIZONTAL |

Vertical

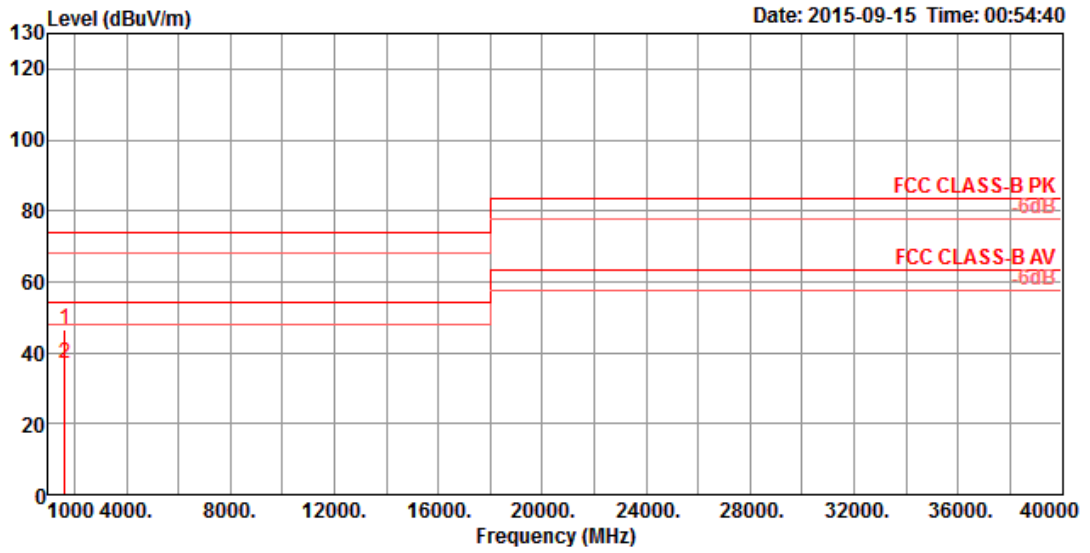

|   | Freq    | Level  | Limit  | Over   | Read  | CableAntenna | Preamp | A/Pos | T/Pos | Remark | Pol/Phase |          |
|---|---------|--------|--------|--------|-------|--------------|--------|-------|-------|--------|-----------|----------|
|   | MHz     | dBuV/m | dBuV/m | dB     | dBuV  | dB           | dB/m   | dB    | cm    | deg    |           |          |
| 1 | 1624.58 | 46.35  | 74.00  | -27.65 | 53.18 | 3.13         | 25.57  | 35.53 | 117   | 290    | Peak      | VERTICAL |
| 2 | 1624.98 | 36.77  | 54.00  | -17.23 | 43.60 | 3.13         | 25.57  | 35.53 | 117   | 290    | Average   | VERTICAL |