| RSE Co-location Result | | | |
|---|---|---|---|
| **Operating Mode** | 2 | **Polarization** | Horizontal |
| **Operating Function** | Place EUT in Z axis (2.4GHz+5GHz) | | |

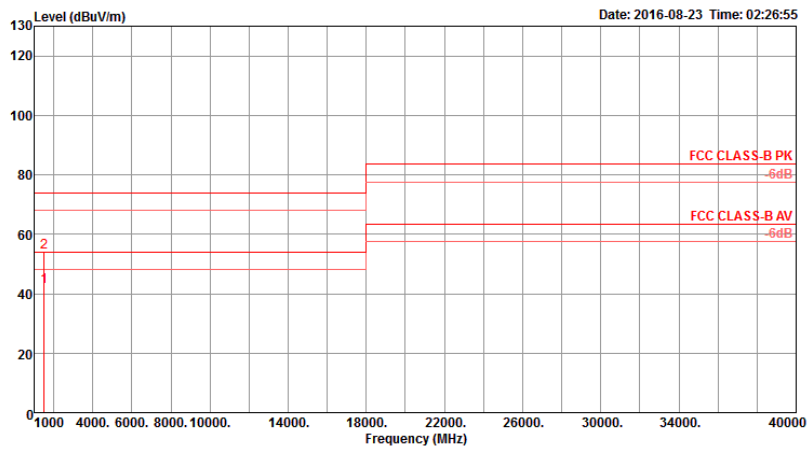


| | Freq | Level | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | A/Pos | T/Pos | Remark | Pol/Phase |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | cm | deg | | |
| 1 | 1516.00 | 42.35 | 54.00 | -11.65 | 47.97 | 3.51 | 25.72 | 34.85 | 150 | 269 | Average | HORIZONTAL |
| 2 | 1516.69 | 53.97 | 74.00 | -20.03 | 59.59 | 3.51 | 25.72 | 34.85 | 150 | 269 | Peak | HORIZONTAL |

| RSE Co-location Result | | | |
|---|---|---|---|
| **Operating Mode** | 2 | **Power Phase** | Vertical |
| **Operating Function** | Place EUT in Z axis Place EUT in Z axis (2.4GHz+5GHz) | | |

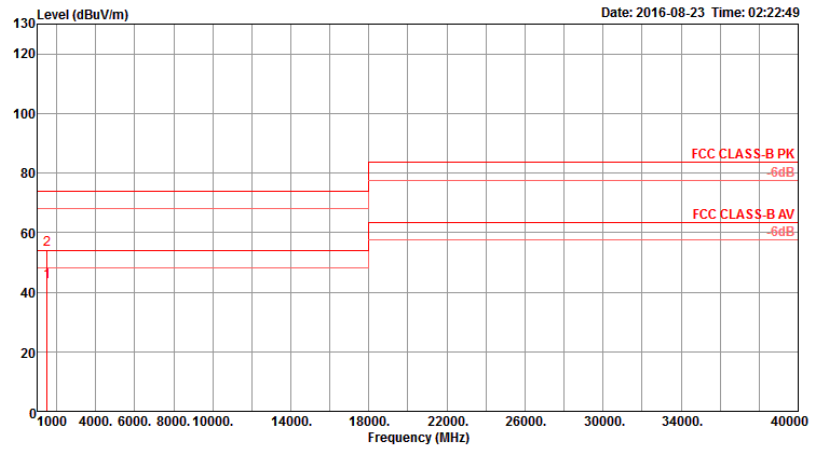


| | Freq | Level | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | A/Pos | T/Pos | Remark | Pol/Phase |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | cm | deg | | |
| 1 | 1516.12 | 43.61 | 54.00 | -10.39 | 49.23 | 3.51 | 25.72 | 34.85 | 171 | 218 | Average | VERTICAL |
| 2 | 1516.53 | 54.21 | 74.00 | -19.79 | 59.83 | 3.51 | 25.72 | 34.85 | 171 | 218 | Peak | VERTICAL |