AFC DEVICE (DUT) TEST REPORT

FCC ID	: S9GR670
Equipment	: R670 Access Point
Brand Name	: RUCKUS
Model Name	: R670
Applicant	: Ruckus Wireless LLC 350 W. Java Dr., Sunnyvale CA 94089 USA
Manufacturer	: Ruckus Wireless LLC 350 W. Java Dr., Sunnyvale CA 94089 USA
Standard	: FCC Part 15.407

The product was received on Mar. 19, 2024 and testing was performed from Apr. 25, 2024 to Jun. 26, 2024. We, Sporton International (USA) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in WiFi Alliance AFC Device (DUT) Compliance Test Plan Version 1.6 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (USA) Inc., the test report shall not be reproduced except in full.

Ni Kao

Approved by: Neil Kao

Sporton International (USA) Inc. 1175 Montague Expressway, Milpitas, CA 95035

TEL: 408 9043300



Table of Contents

Hist	ory of	f This Test Report	- 3
1.	Adm	inistration Data	- 4
	1.1	Testing Laboratory	- 4
	1.2	Applicant	- 4
	1.3	Manufacturer	- 4
	1.4	Applied Standard	- 5
2.	Gene	ral Information	- 5
	2.1	Description of Device Under Test (DUT)	- 5
	2.2	Protocol Test Summary	- 7
	2.3	Support Equipment	- 9
	2.4	Measuring Equipment List	- 9
	2.5	Measurement Uncertainty	- 9
3.	Meas	surement Environment	10
	3.1	Test configuration	10
4.	Proto	col Test Results	11
	4.1	Successful registration and spectrum access request	11
	4.1.1	AFCD.RSA Test Vector	15
	4.1.2	AFCD.RSA RF Transmit Power Measurement – BW 20MHz	15
	4.1.3	AFCD.RSA RF Transmit Power Measurement – BW 40MHz	18
	4.1.4	AFCD.RSA RF Transmit Power Measurement – BW 80MHz	21
	4.1.5	AFCD.RSA RF Transmit Power Measurement – BW 160MHz	24
	4.2	Unsuccessful spectrum access request2	27
	4.2.1	AFCD.USA Test Vectors	28
	4.3	Successful spectrum access update	29
	4.3.1	AFCD.SAU Test Vectors	33
	4.3.2	AFCD.SAU RF Transmit Power Measurement	34
	4.4	Unsuccessful spectrum access update	37
	4.4.1	AFCD.UAU Test Vectors	40
	4.5	Unsuccessful server validation	41
	4.5.1	AFCD.USV Test Vectors	42

Appendix A. Setup Photographs

Appendix B. AFC Test Logs



History of this test report

Report No.	Version	Description	Issue Date
FR240104006H	01	Initial issue of report	Jul. 09, 2024

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- 2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the DUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1. Administration Data

1.1 Testing Laboratory

Test Site	Sporton International (USA) Inc.		
Test Site Location 1175 Montague Expressway, Milpitas, CA 95035 TEL: (408) 904-3300			
Test Site No.	Sporton Site No.		
Test Site No.	TH01-CA		
Test Engineer Thomas Chen			
Temperature	21 ~ 24 °C		
Relative Humidity48 ~ 53 %			

FCC Designation No.: US1250

1.2 Applicant

Company Name	Ruckus Wireless LLC
Address 350 W. Java Dr., Sunnyvale CA 94089 USA	

1.3 Manufacturer

Company Name	Ruckus Wireless LLC	
Address	350 W. Java Dr., Sunnyvale CA 94089 USA	

1.4 Applied Standard

According to the specifications declared by the manufacturer, the DUT must comply with the requirement of the following standards:

	[n.1]. FCC Part 15.407			
[n.2]. FCC KDB 987594 D01 U-NII 6GHz General Requirements v02r02				
	[n.3]. FCC KDB 987594 D05 AFC DUT Test Harness Testing v01r01			
Standards	[n.4]. WiFi Alliance AFC System to AFC Device Interface Specification v1.5, 5 May 2023			
	[n.5]. WiFi Alliance AFC Device (DUT) Compliance Test Plan v1.6, 18 Apr 2024			
	[n.6]. WiFi Alliance AFC Device (DUT) Compliance Test Vectors v1.2, 27 Jun 2023			
	[n.7]. ANSI C63.10-2013			

Remark: All the test items were validated and recorded in accordance with the standards without any modification during the testing.

2. General Information

2.1 Description of Device Under Test (DUT)

Product Feature & Specification				
EUT Type	R670 Access Point			
Brand Name	RUCKUS			
Model Name	R670			
FCC ID	S9GR670			
Device Under Test Type	 Standard Power Access Point (SP AP) Fixed Client 			
Domain Proxy support	with Domain Proxywithout Domain Proxy			
Deployment	IndoorOutdoor			
DUT HW Version	5.4			
DUT FW Version	122.99.0.0.17125986			
DUT SW Version	122.99.0.0.17125986			
DUT Serial Number	922406000117			
Domain Proxy SW Version	1.0			

Note: The antenna gain used for the following sections is from antenna report.



AFC DUT general capabilities declaration						
Item	Question Vendor resp					
		Standard Power Access Point (6SD)				
1	AFC DUT Type.	□ Fixed Client (6FC)				
		Domain Proxy				
2	Does the AFC DUT support sending an Available Spectrum	No				
2	Inquiry Request based on the inquiredFrequencyRange field	(Yes/No)				
3	Does the AFC DUT support sending an Available Spectrum	Yes				
3	Inquiry Request based on the inquired Channels fields?	(Yes/No)				
		□ Frequency based				
4	If the Answer to Items 2 and 3 is "Yes", what is AFC DUT's	□ Channel based				
(For 2, 3)	default inquiry type?	□ Both				
		■ N/A				
5	Does the AFC DUT need to be supplied with BSS configuration	Yes				
5	parameters?	(Yes/No)				
6	Does the AFC DUT manufacturer attest to AFC DUT	Yes				
0	compliance with rules for LPI operation?	(Yes/No)				
	Does the AFC DUT need to be supplied with mandatory	No				
7	registration information to formulate an Available Spectrum					
	Inquiry Request	(Yes/No)				
		Ellipse				
8	If the Answer to Item 7 is "Yes". What is the geographic	Linear Polygon				
(For 7)	Supported by the AFC DUT?	Radial Polygon				
		N/A				
9	Does the AFC DUT support 160 MHz channel width operation?	Yes (Yes/No)				
	Which mothod doop AEC DUT acting on a Eived Client uses for	□ In-band				
10	Which method does AFC DUT acting as a Fixed Client uses for	□ Out-of-band				
	sending an Available Spectrum Inquiry Request?	■ N/A				



2.2 Protocol Test Summary

Section	Test Case ID	Test Description	FCC Requirement	Short Description	Test Result
4.1	AFCD.RSA	Successful registration and spectrum access request	47 CFR Section 15.407(k)(1) 47 CFR Section 15.407(k)(8)(i) 47 CFR Section 15.407(k)(8)(ii) 47 CFR Section 15.407(k)(8)(iii) 47 CFR Section 15.407(l)(ii) 47 CFR 15.407(k)(8)(iv)	Transmit only as instructed by AFC System Register with AFC System prior to initial transmission Provide required registration parameters Registration either directly or via proxy Determination of appropriate channel configuration implied by AFC System response Must contact an AFC system at least once per day to obtain the latest list of available frequencies and the maximum permissible power	PASS
4.2	AFCD.USA	Unsuccessful registration and spectrum access request	47 CFR Section 15.407(k)(1) 47 CFR Section 15.407(k)(8)(i) 47 CFR Section 15.407(k)(8)(ii) 47 CFR Section 15.407(k)(8)(iii)	Transmit only as instructed by AFC System Register with AFC System prior to initial transmission Provide required registration parameters Registration either directly or via proxy	PASS



Section	Test Case ID	Test Description	FCC Requirement	Short Description	Test Result
4.3	AFCD.SAU	Successful spectrum access	47 CFR Section 15.407(k)(8)(i) 47 CFR Section 15.407(k)(8)(ii)	Register with AFC System after change of location Update AFC System upon change of registration parameters	PASS
	update	update	47 CFR Section 15.407(k)(9)(i)	Report location and uncertainty from power-off condition	
			47 CFR Section 15.407(k)(8)(i)	Register with AFC System after change of location	
4.4	AFCD.UAU	Unsuccessful spectrum access	47 CFR Section 15.407(k)(8)(ii)	Update AFC System upon change of registration parameters	PASS
	update	update	47 CFR Section 15.407(k)(9)(i)	Report location and uncertainty from power-off condition	
4.5	AFCD.USV	Unsuccessful server validation	47 CFR Section 15.407(k)(8)(v)	Incorporate adequate security measurements to prevent it from accessing AFC systems not approved by the FCC	PASS

Note: For Protocol Test Results, please find the Appendix B for AFC Test Logs.



2.3 Support Equipment

Name	Manufacturer	Type/Model	Serial Number	FCC ID
Smart phone	Google	Pixel 8 Pro	39031FDJG006Q2	A4RG8V0U

2.4 Measuring Equipment List

Name	Manufacturer	Ture (Medel	Sarial Number	Calibration		
Name	Wanufacturer	Type/Model	Serial Number	Last Cal.	Due Date	
Spectrum Analyzer	Rohde & Schwarz	FSV3044	101128	Oct. 16, 2023	Oct. 15, 2024	
Horn Antenna	SCHWARZBECK	BBHA 9120D	01895	Sep. 25, 2023	Sep. 24, 2024	

2.5 Measurement Uncertainty

Uncertainty of Conducted Power Measurement


Measuring Uncertainty for a Level of Confidence of $95\% (U = 2uc(y))$	0.43dB
--	--------



3. Measurement Environment

Measurement Environment Information				
AFC DUT Test Harness	AFC DUT Test Harness Version (2.0.65.162)			
Operating System	Ubuntu 22.04			
TLS version	V 1.2			

3.1 Test configuration

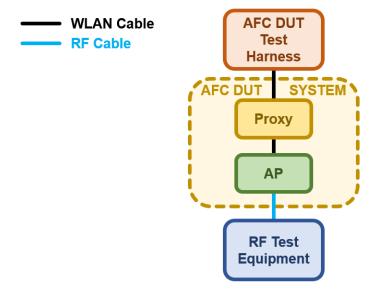

Proxy representing one Standard Power Access Points Test Setup



4. Protocol Test Results

4.1 Successful registration and spectrum access request

#	Description	Results
1	If the AFC DUT is Standard Power Access Point, go to Step 2, else go to	Go to
	Step 12	step 2
	AFC DUT set to Initial Pre-test State.	
	If needed (see Table 5 declaration), configure the AFC DUT with BSS	
	parameters per Table 9 and a temporary test regulatory identifier (e.g., FCC	
2	ID), geographic coordinates, antenna height, and uncertainty parameters.	Done
	Configure the AFC DUT with AFC System URL and server root certificate.	
	Trigger the AFC DUT to send to the AFC DUT Test Harness an Available	
	Spectrum Inquiry Request.	
3	AFC DUT sends a valid Available Spectrum Inquiry Request containing the	PASS
3	inquiredFrequencyRange and/or the inquiredChannels fields*.	FA33
4	AFC DUT Test Harness validates the presence of mandatory registration	PASS
4	information	FA33
	AFC DUT Test Harness sends an Available Spectrum Inquiry Response	
5	containing a list of available frequency ranges and/or channels and the	Done
5	maximum permissible transmit power in the availableFrequencyInfo and/or	
	availableChannelInfo fields.	

#	Description	Results		
	Throughout Step 1 to Step 4, RF Test Equipment monitors the output of the			
	AFC DUT to confirm that the AFC DUT does not transmit:			
	 In the band if the AFC DUT supports only SP operation 			
	Or			
	 Above LPI limits for AFC DUT whose manufacturer attests to its 			
	compliance with rules for LPI operation			
	Wait for 60 seconds			
	RF Test Equipment monitors any transmission by the AFC DUT conforms to			
6	the following:	PASS		
	• For SP only operation, AFC DUT conforms to the conditions contained in			
	the Available Spectrum Inquiry Response and does not exceed			
	emissions limits in adjacent frequencies.			
	 For AFC DUT whose manufacturer attests to its compliance with rules 			
	for LPI operation, AFC DUT transmit power in the band is less than			
	CEILING [LPI limits, SP limits contained in the Available Spectrum			
	Inquiry Response] and does not exceed emissions limits in adjacent			
	frequencies.			
7	Trigger the AFC DUT to send to the AFC DUT Test Harness an Available	Done		
'	Spectrum Inquiry Request.	Done		
8	AFC DUT sends a valid Available Spectrum Inquiry Request containing the	PASS		
0	inquiredFrequencyRange and/or the inquiredChannels fields*.	FA00		
9	AFC DUT Test Harness validates the presence of mandatory registration	PASS		
3	information	FA00		
	AFC DUT Test Harness sends an Available Spectrum Inquiry Response			
10	containing a list of available frequency ranges and/or channels and the			
	maximum permissible transmit power in the availableFrequencyInfo and/or	Done		
	availableChannelInfo fields which are significantly different from Step 5.			



#	Description	Results
	Wait for 5 minutes (configurable)	
	RF Test Equipment monitors any transmission by the AFC DUT conforms to	
	the following:	
	 For SP only operation, AFC DUT conforms to the conditions contained in 	
	the latest Available Spectrum Inquiry Response and does not exceed	
11	emissions limits in adjacent frequencies.	PASS
	 For AFC DUT whose manufacturer attests to its compliance with rules 	
	for LPI operation, AFC DUT transmit power in the band is less than	
	CEILING [LPI limits, SP limits contained in the latest Available Spectrum	
	Inquiry Response] and does not exceed emissions limits in adjacent	
	frequencies.	
12	If the AFC DUT is Fixed Client, go to Step 13 else Stop the test	Test end
13	The AFC DUT set to Initial Pre-test State.	Not
15		applicable
	If needed (see Table 5 declaration), configure the AFC DUT with a temporary	
	test regulatory identifier (e.g., FCC ID), geographic coordinates, antenna	
14	height, and uncertainty parameters.	Not
14	Configure the AFC DUT with AFC System URL and server root certificate.	applicable
	Trigger the AFC DUT to send to the AFC DUT Test Harness an Available	
	Spectrum Inquiry Request using either In-band or Out-of-band methods.	
15	AFC DUT sends a valid Available Spectrum Inquiry Request containing the	Not
15	inquiredFrequencyRange and/or the inquiredChannels fields*	applicable
16	AFC DUT Test Harness validates the presence of mandatory registration	Not
10	information	applicable
	AFC DUT Test Harness sends an Available Spectrum Inquiry Response	
17	containing a list of available frequency ranges and/or channels and the	Not
17	maximum permissible transmit power in the availableFrequencyInfo and/or	applicable
	availableChannelInfo fields.	
	If AFC DUT used Out-of-band method, initiate connection procedure between	Not
18	AFC DUT and SP Access Point by following instructions provided by the AFC	applicable
	DUT Vendor	applicable



#	Description	Results				
	Wait for 60 seconds					
19	RF Test Equipment monitors any transmission by the AFC DUT conforms to					
19	the conditions contained in the Available Spectrum Inquiry Response and	applicable				
	does not exceed emissions limits in adjacent frequencies					
20	Trigger the AFC DUT to send to the AFC DUT Test Harness an Available	Not				
20	Spectrum Inquiry Request using either In-band or Out-of-band methods	applicable				
21	AFC DUT sends a valid Available Spectrum Inquiry Request containing the	Not				
21	inquiredFrequencyRange and/or the inquiredChannels fields*	applicable				
22	AFC DUT Test Harness validates the presence of mandatory registration	Not				
22	information	applicable				
	AFC DUT Test Harness sends an Available Spectrum Inquiry Response					
23	containing a list of available frequency ranges and/or channels and the	Not				
23	maximum permissible transmit power in the availableFrequencyInfo and/or	applicable				
	availableChannelInfo fields which are significantly different from Step 17.					
	If AFC DUT used Out-of-band method, initiate connection procedure between	Not				
24	AFC DUT and SP Access Point by following instructions provided by the AFC	applicable				
	DUT Vendor	applicable				
	Wait for 60 seconds (configurable)					
25	RF Test Equipment monitors any transmission by the AFC DUT conforms to	Not				
20	the conditions contained in the latest Available Spectrum Inquiry Response	applicable				
	and does not exceed emissions limits in adjacent frequencies					

4.1.1 AFCD.RSA Test Vector

Test Vector	Test Category	Results
AFCD.RSA	Successful registration and spectrum access request	PASS


4.1.2 AFCD.RSA RF Transmit Power Measurement – BW 20MHz


			LPI Mode			
Center Frequency [MHz]	BW [MHz]	Antenna Polarization	SA Reading PSD [dBm/MHz]	Antenna Gain [dBi]	Total EIRP PSD [dBm/MHz]	FCC EIRP PSD Limit [dBm/MHz]
6205	00	Н	0.80	3.30	4.10	F
6295 20		V	0.86	3.50	4.36	5


SP AP Mode								
Center Frequency [MHz]	BW [MHz]	Antenna Polarization	SA Reading Power [dBm]	Antenna Gain [dBi]	Total EIRP [dBm]	Max. EIRP Limit [dBm]		
0005		Н	19.62	3.90	23.52	22.20		
6635	20	V	19.91	3.40	23.31	33.20		
5975	20	Н	19.87	3.30	23.17	24.90		
		V	19.28	3.50	22.78	34.80		

Note 1: The path loss between the DUT and the Spectrum Analyzer has been offset and configured in the Spectrum Analyzer.

Note 2: The RF transmission does not maintain a fixed MCS data rate during the AFC test, so the measured power level may not be the worst-case power as shown in Part 15E RF test report.

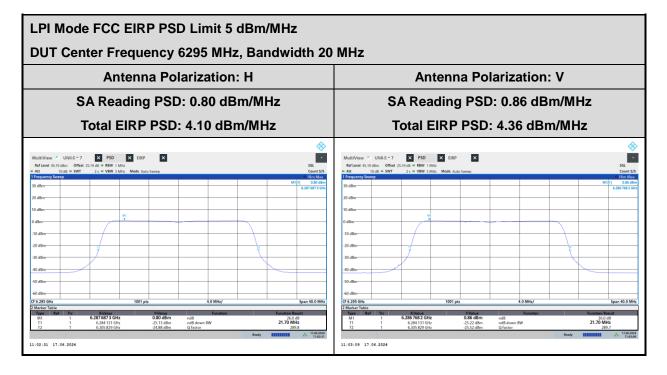

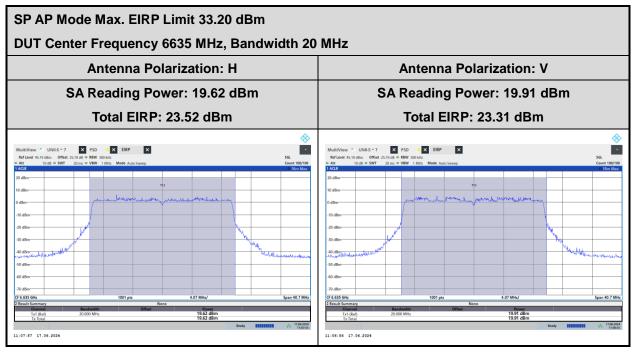

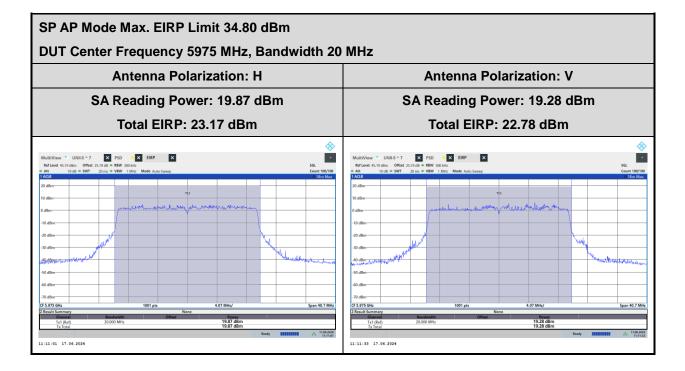




4.1.3 AFCD.RSA RF Transmit Power Measurement – BW 40MHz


	LPI Mode								
Center Frequency [MHz]	BW [MHz]	Antenna Polarization	SA Reading PSD [dBm/MHz]	Antenna Gain [dBi]	Total EIRP PSD [dBm/MHz]	FCC EIRP PSD Limit [dBm/MHz]			
CCOF	5 40	Н	0.33	3.90	4.23	F			
6605		V	0.26	3.40	3.66	5			


SP AP Mode								
Center Frequency [MHz]	BW [MHz]	Antenna Polarization	SA Reading Power [dBm]	Antenna Gain [dBi]	Total EIRP [dBm]	Max. EIRP Limit [dBm]		
0705		Н	19.41	3.90	23.31	25.00		
6725	40	V	19.06	3.40	22.46	35.60		
6645	40	Н	19.38	3.90	23.28	22.10		
		V	19.62	3.40	23.02	32.10		

Note 1: The path loss between the DUT and the Spectrum Analyzer has been offset and configured in the Spectrum Analyzer.

Note 2: The RF transmission does not maintain a fixed MCS data rate during the AFC test, so the measured power level may not be the worst-case power as shown in Part 15E RF test report.

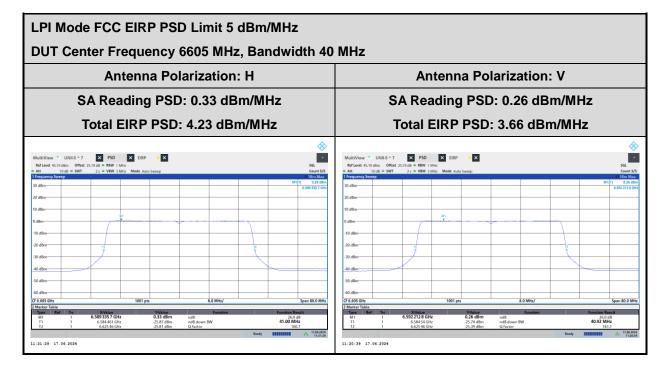

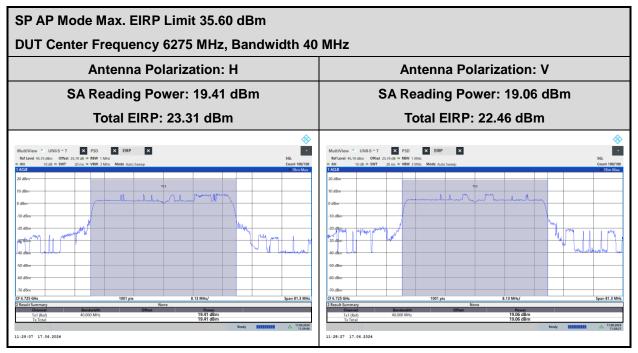

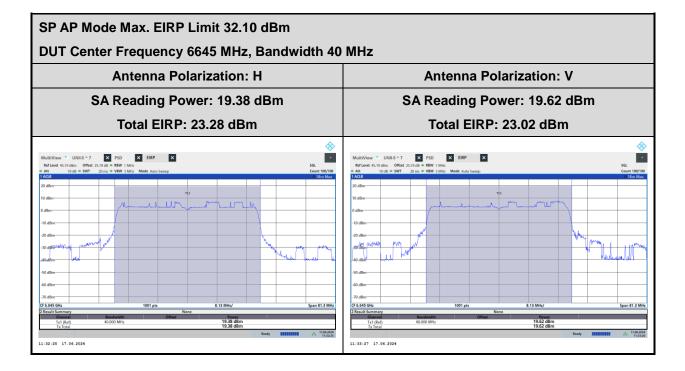




4.1.4 AFCD.RSA RF Transmit Power Measurement – BW 80MHz


			LPI Mode			
Center Frequency [MHz]	BW [MHz]	Antenna Polarization	SA Reading PSD [dBm/MHz]	Antenna Gain [dBi]	Total EIRP PSD [dBm/MHz]	FCC EIRP PSD Limit [dBm/MHz]
04.45	00	Н	-0.26	3.30	3.04	F
6145	80	V	0.13	3.50	3.63	5


SP AP Mode							
Center Frequency [MHz]	BW [MHz]	Antenna Polarization	SA Reading Power [dBm]	Antenna Gain [dBi]	Total EIRP [dBm]	Max. EIRP Limit [dBm]	
0005		Н	20.50	3.30	23.80	22.50	
6065	80	V	20.86	3.50	24.36	32.50	
0705	80	Н	20.49	3.90	24.39	21.20	
6785		V	20.97	3.40	24.37	31.20	

Note 1: The path loss between the DUT and the Spectrum Analyzer has been offset and configured in the Spectrum Analyzer.

Note 2: The RF transmission does not maintain a fixed MCS data rate during the AFC test, so the measured power level may not be the worst-case power as shown in Part 15E RF test report.

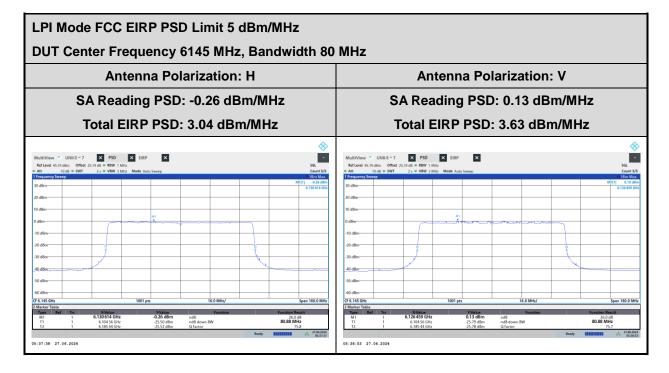

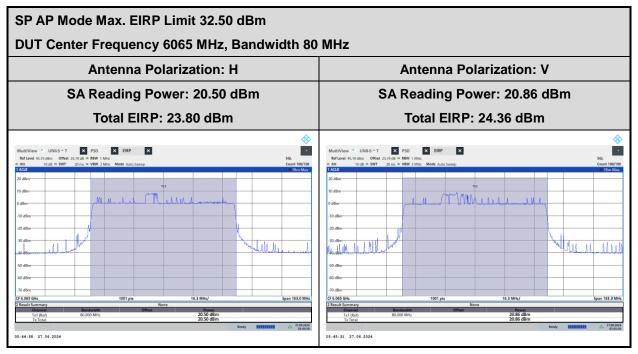

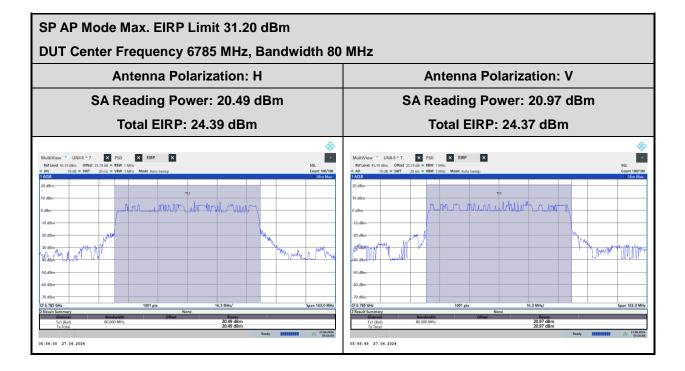



4.1.5 AFCD.RSA RF Transmit Power Measurement – BW 160MHz


			LPI Mode			
Center Frequency [MHz]	BW [MHz]	Antenna Polarization	SA Reading PSD [dBm/MHz]	Antenna Gain [dBi]	Total EIRP PSD [dBm/MHz]	FCC EIRP PSD Limit [dBm/MHz]
0005	400	Н	-0.77	3.90	3.13	F
6825	160	V	-1.02	3.40	2.38	5


SP AP Mode							
Center Frequency [MHz]	BW [MHz]	Antenna Polarization	SA Reading Power [dBm]	Antenna Gain [dBi]	Total EIRP [dBm]	Max. EIRP Limit [dBm]	
0005		Н	22.99	3.30	26.29	24.00	
6025	160	V	23.56	3.50	27.06	31.60	
0005	160	Н	21.12	3.90	25.02	20.20	
6685		V	21.54	3.40	24.94	30.20	


Note 1: The path loss between the DUT and the Spectrum Analyzer has been offset and configured in the Spectrum Analyzer.

Note 2: The RF transmission does not maintain a fixed MCS data rate during the AFC test, so the measured power level may not be the worst-case power as shown in Part 15E RF test report.



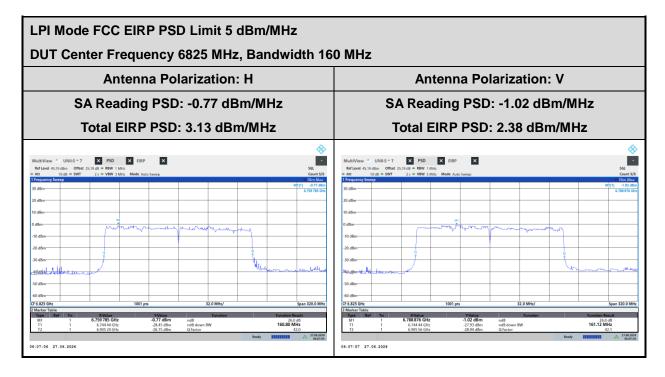

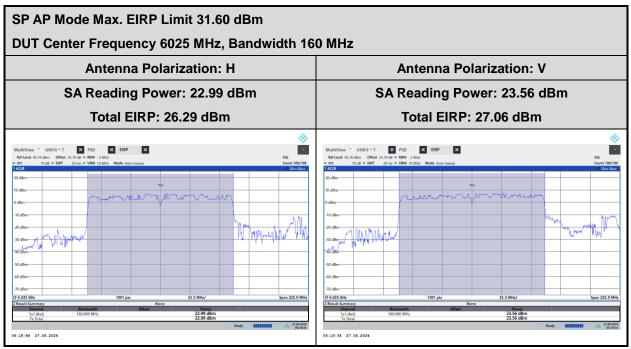

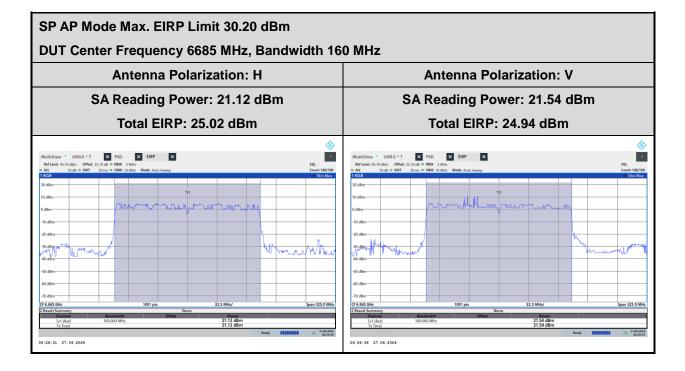



4.2 Unsuccessful spectrum access request

#	Description	Results
4	If the AFC DUT is Standard Power Access Point, go to Step 2, else go to	Go to
1	Step 7	step 2
	AFC DUT set to Initial Pre-test State.	
	If needed (see Table 5 declaration), configure the AFC DUT with BSS	
	parameters per Table 9 and a temporary test regulatory identifier (e.g., FCC	
2	ID), geographic coordinates, antenna height, and uncertainty parameters.	Done
	Configure the AFC DUT with AFC System URL and server root certificate.	
	Trigger the AFC DUT to send to the AFC DUT Test Harness an Available	
	Spectrum Inquiry Request.	
3	AFC DUT sends a valid Available Spectrum Inquiry Request containing the	PASS
3	inquiredFrequencyRange and/or the inquiredChannels fields*.	PASS
4	AFC DUT Test Harness validates mandatory registration information.	PASS
F	AFC DUT Test Harness sends an Available Spectrum Inquiry Response	Dana
5	indicating that no frequency ranges and/or channels are available.	Done
	Throughout Step 2 to Step 5 and subsequent to Step 5, RF Test Equipment	
	monitors the output of the AFC DUT to confirm the following:	
6	 For SP only operation, AFC DUT does not transmit in the band. 	PASS
	 For AFC DUT whose manufacturer attests to its compliance with rules 	
	for LPI operation, the AFC DUT does not transmit above LPI limits.	
7	If the AFC DUT is Fixed Client, go to Step 8 else Stop the test	Test end
8	The AFC DUT set to Initial Pre-test State.	Not
0	The AFC DOT set to miliar Fre-lest State.	applicable
	If needed (see Table 5 declaration), configure the AFC DUT with a temporary	
	test regulatory identifier (e.g., FCC ID or IC ID), geographic coordinates,	
9	antenna height, and uncertainty parameters.	Not
9	Configure the AFC DUT with AFC System URL and server root certificate.	applicable
	Trigger the AFC DUT to send to the AFC DUT Test Harness an Available	
	Spectrum Inquiry Request.	
10	AFC DUT sends a valid Available Spectrum Inquiry Request containing the	Not
10	inquiredFrequencyRange and/or the inquiredChannels fields*.	applicable
11	AFC DUT Test Harness validates mandatory registration information.	Not
		applicable

#	Description	Results
12	AFC DUT Test Harness sends an Available Spectrum Inquiry Response indicating that no frequency ranges and/or channels are available using either In-band or Out-of-band methods.	Not applicable
13	If AFC DUT used Out-of-band method, initiate connection procedure between Fixed Client and SP Access Point by following instructions provided by the AFC DUT Vendor	Not applicable
14	Wait for 60 seconds RF Test Equipment monitors that the AFC DUT does not transmit above maximum transmit power limits advertised by the Standard Power Access Point for Standard Client Devices in the channel.	Not applicable

4.2.1 AFCD.USA Test Vectors

Test Vector	Test Category	Results
AFCD.USA	Unsuccessful spectrum access request	PASS



4.3 Successful spectrum access update

#	Description	Results		
1	If the AFC DUT is Standard Power Access Point, go to Step 2, else go to Step 12	Go to		
		step 2		
	AFC DUT set to Initial Pre-test State.			
	If needed (see Table 5 declaration), configure the DUT with BSS parameters			
	per Table 9 and a temporary test regulatory identifier (e.g., FCC ID), geographic			
2	coordinates, antenna height, and uncertainty parameters.	Done		
	Configure the AFC DUT with AFC System URL and server root certificate.			
	Trigger the AFC DUT to send to the AFC DUT Test Harness an Available			
	Spectrum Inquiry Request.			
3	AFC DUT sends a valid Available Spectrum Inquiry Request containing the	PASS		
3	inquiredFrequencyRange and/or the inquiredChannels fields*.	FA00		
4	AFC DUT Harness validates mandatory registration information.	PASS		
	AFC DUT Test Harness sends an Available Spectrum Inquiry Response			
5	containing a list of available frequency ranges and/or channels and the	Dana		
Э	maximum permissible transmit power in the availableFrequencyInfo and/or	Done		
	availableChannelInfo fields.			

#	Description	Results
	Throughout the preceding steps, RF Test Equipment monitors the output of	
	the AFC DUT to confirm that the AFC DUT does not transmit:	
	 In the band if the AFC DUT supports only SP operation 	
	Or	
	 Above LPI limits for AFC DUT whose manufacturer attests to its 	
	compliance with rules for LPI operation	
	Wait for 60 seconds	
	RF Test Equipment monitors any transmission by the AFC DUT conforms to	
6	the following:	PASS
	 For SP only operation, AFC DUT conforms to the conditions contained 	
	in the Available Spectrum Inquiry Response and does not exceed	
	emissions limits in adjacent frequencies.	
	 For AFC DUT whose manufacturer attests to its compliance with rules 	
	for LPI operation, AFC DUT transmit power in the band is less than	
	CEILING [LPI limits, SP limits contained in the Available Spectrum	
	Inquiry Response] and does not exceed emissions limits in adjacent	
	frequencies.	
	AFC DUT is power cycled.	
	If needed (see Table 5 declaration), configure the AFC DUT with a temporary	
7	test regulatory identifier (e.g., FCC ID), new geographic coordinates, antenna	Done
	height, and uncertainty parameters.	
	Configure the AFC DUT with AFC System URL and server root certificate.	
	Wait for 60 seconds	
	If the AFC DUT does not send an Available Spectrum Inquiry Request, RF	
	Test Equipment monitors the output of the AFC DUT to verify the following	
	and STOP the test	
8	• For SP only operation, AFC DUT does not transmit in the band.	PASS
	 For AFC DUT whose manufacturer attests to its compliance with rules 	
	for LPI operation, the AFC DUT does not transmit above LPI limits.	
	If the AFC DUT sends an Available Spectrum Inquiry Request, then	
	CONTINUE with Step 9	



#	Description	Results
9	AFC DUT Test Harness evaluates validity of mandatory registration information	PASS
10	 AFC DUT Test Harness waits for 60 seconds before sending an Available Spectrum Inquiry Response containing a list of available frequency ranges and/or channels and the maximum permissible transmit power in the availableFrequencyInfo and/or availableChannelInfo fields which are significantly different from Step 5. During the 60 seconds wait time: For AFC DUT whose manufacturer attests to its compliance with rules for LPI operation, RF Test Equipment monitors the output of the AFC DUT to confirm that AFC DUT does not transmit above LPI threshold limits For SP only operation, RF Test Equipment monitors the output of the AFC DUT to confirm that AFC DUT doesn't transmit in the band 	Done
11	 Wait for 60 seconds RF Test Equipment monitors any transmission by the AFC DUT conforms to the following: For SP only operation, AFC DUT conforms to the conditions contained in the Available Spectrum Inquiry Response and does not exceed emissions limits in adjacent frequencies. For AFC DUT whose manufacturer attests to its compliance with rules for LPI operation, AFC DUT transmit power in the band is less than CEILING [LPI limits, SP limits contained in the Available Spectrum Inquiry Response] and does not exceed emissions limits in adjacent frequencies. 	PASS
12	If the AFC DUT is Fixed Client, go to Step 13 else Stop the test	Test end
13	The AFC DUT set to Initial Pre-test State.	Not applicable

#	Description	Results
	If needed (see Table 5 declaration), configure the AFC DUT with a temporary	
	test regulatory identifier (e.g., FCC ID), geographic coordinates, antenna	
14	height, and uncertainty parameters.	Not
14	Configure the AFC DUT with AFC System URL and server root certificate.	applicable
	Trigger the AFC DUT to send to the AFC DUT Test Harness an Available	
	Spectrum Inquiry Request using either In-band or Out-of-band methods.	
15	AFC DUT sends a valid Available Spectrum Inquiry Request containing the	Not
15	inquiredFrequencyRange and/or the inquiredChannels fields*	applicable
16	AFC DUT Test Harness validates the presence of mandatory registration	Not
10	information	applicable
	AFC DUT Test Harness sends an Available Spectrum Inquiry Response	
17	containing a list of available frequency ranges and/or channels and the	Not
	maximum permissible transmit power in the availableFrequencyInfo and/or	applicable
	availableChannelInfo fields.	
	If AFC DUT used Out-of-band method, initiate connection procedure	Not
18	between AFC DUT and SP Access Point by following instructions provided	applicable
	by the AFC DUT Vendor	
	Wait for 60 seconds	
19	RF Test Equipment monitors any transmission by the AFC DUT conforms to	Not
	the conditions contained in the Available Spectrum Inquiry Response and	applicable
	does not exceed emissions limits in adjacent frequencies	
	AFC DUT is power cycled.	
	If needed (see Table 5 declaration), configure the AFC DUT with a temporary	Not
20	test regulatory identifier (e.g., FCC ID), new geographic coordinates, antenna	applicable
	height, and uncertainty parameters.	
	Configure the AFC DUT with AFC System URL and server root certificate	



#	Description	Results
	Wait for 60 seconds	
	If the AFC DUT does not send an Available Spectrum Inquiry Request, RF	
	Test Equipment monitors the output of the AFC DUT to verify the AFC DUT	
21	does not transmit above maximum transmit power limits advertised by the	Not
21	Standard Power Access Point for Standard Client Devices in the channel and	applicable
	STOP the test.	
	If the AFC DUT sends an Available Spectrum Inquiry Request, then	
	CONTINUE with Step 21	
22	AFC DUT Test Harness evaluates validity of mandatory registration	Not
22	information	applicable
	AFC DUT Test Harness waits for 60 seconds before sending an Available	
	Spectrum Inquiry Response containing a list of available frequency ranges	
	and/or channels and the maximum permissible transmit power in the	
	availableFrequencyInfo and/or availableChannelInfo fields which are	Not
23	significantly different from step 17.	applicable
	During the 60 seconds wait time, RF Test Equipment monitors the output of	applicable
	the AFC DUT to confirm that the AFC DUT does not transmit above	
	maximum transmit power limits advertised by the Standard Power Access	
	Point for Standard Client Devices in the channel.	
	If AFC DUT used Out-of-band method, initiate connection procedure	Not
24	between AFC DUT and SP Access Point by following instructions provided	applicable
	by the AFC DUT Vendor	applicable
	Wait for 60 seconds	
25	RF Test Equipment monitors any transmission by the AFC DUT conforms to	Not
20	the conditions contained in the Available Spectrum Inquiry Response and	applicable
	does not exceed emissions limits in adjacent frequencies	

4.3.1 AFCD.SAU Test Vectors

Test Vector	Test Category	Results
AFCD.SAU	Successful spectrum access update	PASS




4.3.2 AFCD.SAU RF Transmit Power Measurement


LPI Mode						
Center Frequency [MHz]	BW [MHz]	Antenna Polarization	SA Reading PSD [dBm/MHz]	Antenna Gain [dBi]	Total EIRP PSD [dBm/MHz]	FCC EIRP PSD Limit [dBm/MHz]
6755	6755	Н	0.30	3.90	4.20	
0755		V	1.04	3.40	4.44	5
6105	20	Н	0.41	3.30	3.71	5
6195		V	-0.06	3.50	3.44	

SP AP Mode						
Center Frequency [MHz]	BW [MHz]	Antenna Polarization	SA Reading Power [dBm]	Antenna Gain [dBi]	Total EIRP [dBm]	Max. EIRP Limit [dBm]
C405	6195	Н	19.98	3.30	23.28	22.20
6195		V	19.51	3.50	23.01	32.30
6055	20 H	Н	20.25	3.30	23.55	34.10
6055		V	19.67	3.50	23.17	34.10


Note 1: The path loss between the DUT and the Spectrum Analyzer has been offset and configured in the Spectrum Analyzer.


Note 2: The RF transmission does not maintain a fixed MCS data rate during the AFC test, so the measured power level may not be the worst-case power as shown in Part 15E RF test report.

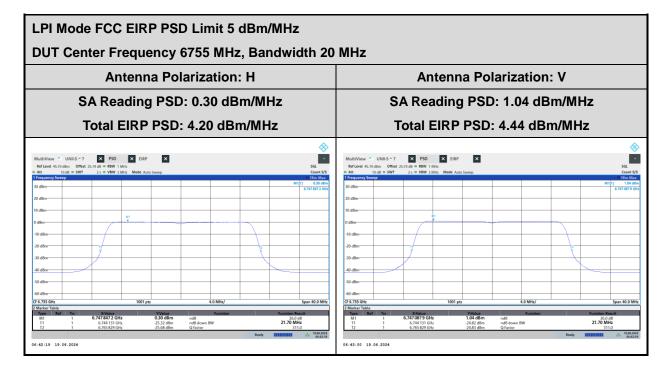

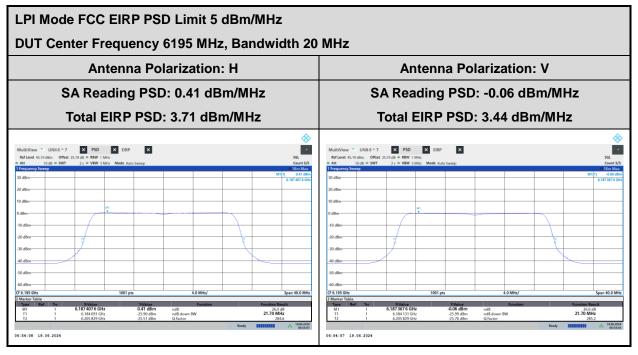



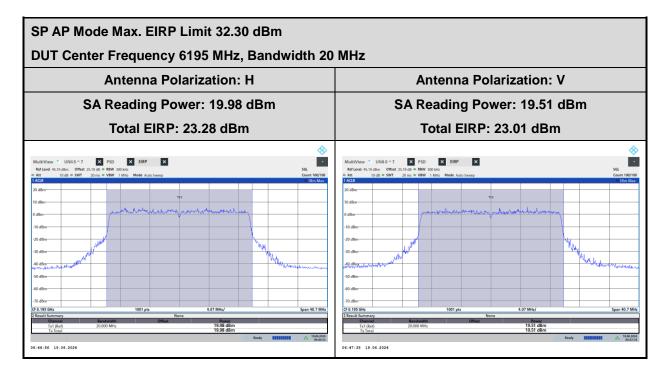

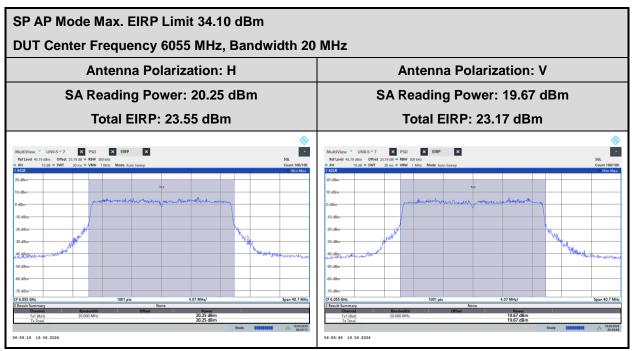



4.4 Unsuccessful spectrum access update

#	Description	Results		
4	If the AEC DUT is Standard Dower Assess Doint, go to Stan 2, also go to Stan 12	Go to		
1	If the AFC DUT is Standard Power Access Point, go to Step 2, else go to Step 12	step 2		
	AFC DUT set to Initial Pre-test State.			
	If needed (see Table 5 declaration), configure the AFC DUT with BSS parameters			
	per Table 9 and a temporary test regulatory identifier (e.g., FCC ID), geographic			
2	coordinates, antenna height, and uncertainty parameters.			
	Configure the DUT with AFC System URL and server root certificate.			
	Trigger the DUT to send to the AFC DUT Test Harness an Available Spectrum			
	Inquiry Request using either In-band or Out-of-band methods.			
3	AFC DUT sends a valid Available Spectrum Inquiry Request containing the	PASS		
3	inquiredFrequencyRange and/or the inquiredChannels fields.	FA33		
4	AFC DUT Test Harness validates mandatory registration information	PASS		
	AFC DUT Test Harness sends an Available Spectrum Inquiry Response			
5	containing a list of available frequency ranges and/or channels and the			
5	maximum permissible transmit power in the availableFrequencyInfo and/or			
	availableChannelInfo fields.			
	Throughout the Step 2 to 5, RF Test Equipment monitors the output of the AFC			
	DUT to confirm that the AFC DUT does not transmit:			
	 In the band if the AFC DUT supports only SP operation 			
	Or			
	 Above LPI limits for AFC DUT whose manufacturer attests to its 			
	compliance with rules for LPI operation			
	Wait for 60 seconds			
6	RF Test Equipment monitors any transmission by the AFC DUT conforms to	PASS		
Ŭ	the following:	17.00		
	 For SP only operation, AFC DUT conforms to the conditions contained in 			
	the Available Spectrum Inquiry Response and does not exceed			
	emissions limits in adjacent frequencies.			
	For AFC DUT whose manufacturer attests to its compliance with rules for LPI			
	operation, AFC DUT transmit power in the band is less than CEILING [LPI			
	limits, SP limits contained in the Available Spectrum Inquiry Response] and			
	does not exceed emissions limits in adjacent frequencies			

AFC DEVICE (DUT) TEST REPORT

#	Description	Results			
	AFC DUT is power cycled.				
	If needed (see Table 5declaration), configure the AFC DUT with a temporary				
7	test regulatory identifier (e.g., FCC ID), new geographic coordinates, antenna	Done			
	height, and uncertainty parameters.				
	Configure the AFC DUT with AFC System URL and server root certificate.				
	Wait for 60 seconds				
	 If the AFC DUT does not send an Available Spectrum Inquiry Request, 				
	RF Test Equipment monitors the output of the DUT to verify the				
	following and STOP the test:				
8	 For SP only operation, AFC DUT does not transmit in the band, 	PASS			
0	 For AFC DUT whose manufacturer attests to its compliance with 	FASS			
	rules for LPI operation, the AFC DUT does not transmit above LPI				
	limits.				
	 If the AFC DUT sends an Available Spectrum Inquiry Request, then 				
	CONTINUE with Step 8				
9	AFC DUT Test Harness evaluates validity of mandatory registration	PASS			
3	information.	1 700			
10	AFC DUT Test Harness sends an Available Spectrum Inquiry Response	Done			
10	indicating that no frequency ranges and/or channels are available.	Done			
	Throughout Step 7 to 10 and subsequent to Step 10 Test Equipment				
	monitors the output of the AFC DUT to confirm that:				
11	For SP only operation, AFC DUT does not transmit in the band.	PASS			
	For AFC DUT whose manufacturer attests to its compliance with rules for LPI				
	operation, the AFC DUT does not transmit above LPI limits.				
12	If the AFC DUT is Fixed Client, go to Step 13 else Stop the test	Test end			
13	The AFC DUT set to Initial Pre-test State.	Not			
15		applicable			

#	Description	Results
	If needed (see Table 5 declaration), configure the DUT with a temporary test	
	regulatory identifier (e.g., FCC ID), geographic coordinates, antenna height,	
14	and uncertainty parameters.	Not
14	Configure the AFC DUT with AFC System URL and server root certificate.	applicable
	Trigger the AFC DUT to send to the AFC DUT Test Harness an Available	
	Spectrum Inquiry Request using either In-band or Out-of-band methods.	
15	AFC DUT sends a valid Available Spectrum Inquiry Request containing the	Not
15	inquiredFrequencyRange and/or the inquiredChannels fields*	applicable
16	AFC DUT Test Harness validates the presence of mandatory registration	Not
10	information	applicable
	AFC DUT Test Harness sends an Available Spectrum Inquiry Response	
17	containing a list of available frequency ranges and/or channels and the	Not
17	maximum permissible transmit power in the availableFrequencyInfo and/or	applicable
	availableChannelInfo fields.	
	If AFC DUT used Out-of-band method, initiate connection procedure	Not
18	between AFC DUT and SP Access Point by following instructions provided	
	by the AFC DUT Vendor	applicable
	Wait for 60 seconds	
19	RF Test Equipment monitors any transmission by the AFC DUT conforms to	Not
19	the conditions contained in the Available Spectrum Inquiry Response and	applicable
	does not exceed emissions limits in adjacent frequencies	
	AFC DUT is power cycled.	
	If needed (see Table 5 declaration), configure the AFC DUT with a temporary	Not
20	test regulatory identifier (e.g., FCC ID or IC ID), new geographic coordinates,	applicable
	antenna height, and uncertainty parameters.	applicable
	Configure the AFC DUT with AFC System URL and server root certificate	
	Wait for 60 seconds	
	If the AFC DUT does not send an Available Spectrum Inquiry Request, RF	
	Test Equipment monitors that the AFC DUT does not transmit above	Not
21	maximum transmit power limits advertised by the Standard Power Access	applicable
	Point for Standard Client Devices in the channel.,	applicable
	If the AFC DUT sends an Available Spectrum Inquiry Request, then	
	CONTINUE with Step 22 else STOP the test	



#	Description	Results
22	AFC DUT Test Harness evaluates validity of mandatory registration	Not
22	information.	applicable
	AFC DUT Test Harness sends an Available Spectrum Inquiry Response	Not
23	indicating that no frequency ranges and/or channels are available.	applicable
	If AFC DUT used Out-of-band method, initiate connection procedure	Net
24	between AFC DUT and SP Access Point by following instructions provided	Not
	by the AFC DUT Vendor	applicable
	Wait for 60 seconds	
25	RF Test Equipment monitors that the AFC DUT does not transmit above	Not
20	maximum transmit power limits advertised by the Standard Power Access	applicable
	Point for Standard Client Devices in the channel.	

4.4.1 AFCD.UAU Test Vectors

Test Vector	Test Category	Results
AFCD.UAU	Unsuccessful spectrum access update	PASS



4.5 Unsuccessful server validation

#	Description	Results	
	The AFC DUT set to Initial Pre-test State.		
	If needed (see Table 5 declaration), configure the AFC DUT with BSS		
	parameters per Table 9 and a temporary test regulatory identifier (e.g., FCC ID),		
	geographic coordinates, antenna height, and uncertainty parameters.		
	Configure the AFC DUT Test Harness with TLS configuration that is the same as		
	the default configuration defined in Section 2.3.1 except for the following:		
	 Run 1: A different server certificate (and private key) with SAN domain 		
	name entry "badafc.com" (i.e. that does not match AFC system URL's		
	domain name); signed by the same root certificate as per Section 2.3.1		
	 Run 2: A different server certificate (and private key) where all attributes 		
	other than Public Key are the same as the server certificate per Section		
	2.3.1, but the certificate is signed by a different root certificate		
	 Run 3: A different server certificate (and private key) with SAN domain 		
	name entry "wfatestorg.org" only (i.e. SAN domain name only matches		
	suffix of AFC server's hostname); signed by the same root certificate as per		
1	Section 2.3.1	Done	
1	 Run 4: A different server certificate (and private key) where all attributes 	Done	
	other than Public Key are the same as the server certificate per Section		
	2.3.1 signed by the same root certificate as per Section 2.3.1, but the server		
	certificate is revoked as indicated in stapled OCSP response		
	 Run 5: Same configuration as per Section 2.3.1, except OCSP stapling is 		
	disabled and CRL/OCSP servers are not available		
	 Run 6: Same configuration as per Section 2.3.1, except stapled OCSP 		
	response has expired and CRL/OCSP servers are not available		
	• Run 7: Same configuration as per Section 2.3.1, except only the TLS cipher		
	suite "eNULL" (no encryption) is enabled		
	 Run 8: N/A (same configuration as per Section 2.3.1) 		
	Configure the DUT with the AFC System URL and the following root certificate:		
	 Runs 1-7: Root certificate as per Section 2.3.1 		
	Run 8: No root certificate		
	Trigger the DUT to send to the AFC DUT Test Harness an Available Spectrum		
	Inquiry Request.		



#	Description	Results
2	AFC DUT Test Harness waits 10 seconds, and verifies no Available Spectrum	PASS
2	Inquiry Request is sent to it.	FA33
3	Steps 1 and 2 are repeated for each of the remaining Runs	PASS

4.5.1 AFCD.USV Test Vectors

Test Vector	Test Category	Results
AFCD.USV	Unsuccessful server validation	PASS

Appendix B. AFC DUT Test Logs and Tool Report

Section	Test Case	Test	FCC Requirement	Short Description	Test		
Section	ID	Description	100 Requirement	Short Description	Result		
			47 CFR Section	Transmit only as instructed by			
	AFCD.RSA Successful registration and spectrum access request	registration and spectrum access	AFCD.RSA AFC.RSA AFC	AFCD.RSASuccessful registration15.407(k)(8)(i) 47 CFR Section 47 CFR Section 	47 CFR Section 15.407(k)(8)(i) 47 CFR Section	Register with AFC System prior to initial transmission Provide required registration	
4.1					via proxy Determination of appropriate	PASS	
		request		Must contact an AFC system at least once per day to obtain the latest list of available frequencies and the maximum permissible power			

Note: For AFCD.RSA test logs, please refer to following files:

- 1. Ruckus R670_RSA31_(20MHz, 40MHz, 80MHz, 160MHz)_AFC DUT Compliance Test Report.pdf
- 2. Ruckus R670_RSA31_(20MHz, 40MHz, 80MHz, 160MHz)_ DUT_Available_Spectrum_Inquiry_Request-Response.pdf



Section	Test Case ID	Test Description	FCC Requirement	Short Description	Test Result
4.2	AFCD.USA		47 CFR Section	Transmit only as instructed by	PASS
		Unsuccessful	15.407(k)(1)	AFC System	
		registration	47 CFR Section	Register with AFC System prior	
		and	15.407(k)(8)(i)	to initial transmission	
		spectrum	47 CFR Section	Provide required registration	
		access	15.407(k)(8)(ii)	parameters	
		request	47 CFR Section	Registration either directly or	
			15.407(k)(8)(iii)	via proxy	

Note: For AFCD.USA test logs, please refer to following files:

- 1. Ruckus R670_USA32_AFC DUT Compliance Test Report.pdf
- 2. Ruckus R670_USA32_DUT_Available_Spectrum_Inquiry_Request-Response.pdf

Section	Test Case ID	Test Description	FCC Requirement	Short Description	Test Result
4.3	AFCD.SAU	Successful spectrum access update	47 CFR Section 15.407(k)(8)(i)	Register with AFC System after change of location	PASS
			47 CFR Section 15.407(k)(8)(ii)	Update AFC System upon change of registration parameters	
			47 CFR Section 15.407(k)(9)(i)	Report location and uncertainty from power-off condition	

Note: For AFCD.SAU test logs, please refer to following files:

- 1. Ruckus R670_SAU33_AFC DUT Compliance Test Report.pdf
- 2. Ruckus R670_SAU33_DUT_Available_Spectrum_Inquiry_Request-Response.pdf



Section	Test Case ID	Test Description	FCC Requirement	Short Description	Test Result
4.4	AFCD.UAU	Unsuccessful spectrum access update	47 CFR Section 15.407(k)(8)(i) 47 CFR Section 15.407(k)(8)(ii) 47 CFR Section 15.407(k)(9)(i)	Register with AFC System after change of location Update AFC System upon change of registration parameters Report location and uncertainty from power-off condition	PASS

Note: For AFCD.UAU test logs, please refer to following files:

1. Ruckus R670_UAU34_AFC DUT Compliance Test Report.pdf

2. Ruckus R670_UAU34_DUT_Available_Spectrum_Inquiry_Request-Response.pdf

Section	Test Case ID	Test Description	FCC Requirement	Short Description	Test Result
4.5	AFCD.USV	Unsuccessful server validation	47 CFR Section 15.407(k)(8)(v)	Incorporate adequate security measurements to prevent it from accessing AFC systems not approved by the FCC	PASS

Note: For AFCD.USV test logs, please refer to following files:

1. Ruckus R670_USV35_AFC DUT Compliance Test Report.pdf