



RF TEST REPORT



Report No.: FCC_RF_SL14121601-RUC-016_DTS Rev2.0
Supersede Report No.: FCC_RF_SL14121601-RUC-016_DTS

Applicant	:	Ruckus Wireless, Inc.
Product Name	:	Access Point
Model No.	:	R710
Test Standard	:	47 CFR 15.247
Test Method	:	ANSI C63.4: 2014 558074 D01 DTS Meas Guidance v03r02
FCC ID	:	S9GR710
IC ID	:	5912A-R710
Dates of test	:	01/09/2015 to 01/30/2015
Issue Date	:	03/18/2015
Test Result	:	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail
Equipment complied with the specification <input checked="" type="checkbox"/>		
Equipment did not comply with the specification <input type="checkbox"/>		

This Test Report is Issued Under the Authority of:

	
Ricky Wang	David Zhang
Test Engineer	Engineer Reviewer

Issued By:
SIEMIC Laboratories
775 Montague Expressway, Milpitas, 95035 CA



775 Montague Expressway, Milpitas, CA 95035, USA • Phone: (+1) 408 526 1188 • Facsimile (+1) 408 526 1088

Visit us at: www.siemic.com; Follow us at:    

Laboratory Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Accreditation Body	Scope
USA	FCC, A2LA	EMC, RF/Wireless, Telecom
Canada	IC, A2LA, NIST	EMC, RF/Wireless, Telecom
Taiwan	BSMI, NCC, NIST	EMC, RF, Telecom, Safety
Hong Kong	OFTA, NIST	RF/Wireless, Telecom
Australia	NATA, NIST	EMC, RF, Telecom, Safety
Korea	KCC/RRA, NIST	EMI, EMS, RF, Telecom, Safety
Japan	VCCI, JATE, TELEC, RFT	EMI, RF/Wireless, Telecom
Mexico	NOM, COFETEL, Caniety	Safety, EMC, RF/Wireless, Telecom
Europe	A2LA, NIST	EMC, RF, Telecom, Safety
Israel	MOC, NIST	EMC, RF, Telecom, Safety

Accreditations for Product Certifications

Country	Accreditation Body	Scope
USA	FCC TCB, NIST	EMC, RF, Telecom
Canada	IC FCB, NIST	EMC, RF, Telecom
Singapore	iDA, NIST	EMC, RF, Telecom
EU	NB	EMC & R&TTE Directive
Japan	MIC (RCB 208)	RF, Telecom
Hong Kong	OFTA (US002)	RF, Telecom

CONTENTS

1 REPORT REVISION HISTORY4

2 EXECUTIVE SUMMARY5

3 CUSTOMER INFORMATION5

4 TEST SITE INFORMATION5

5 MODIFICATION5

6 EUT INFORMATION6

6.1 EUT Description6

6.2 Radio Description6

6.3 EUT Photos - External **Error! Bookmark not defined.**

6.4 EUT Photos - Internal **Error! Bookmark not defined.**

6.5 EUT Test Setup Photos **Error! Bookmark not defined.**

7 SUPPORTING EQUIPMENT/SOFTWARE AND CABLING DESCRIPTION8

7.1 Supporting Equipment8

7.2 Cabling Description8

7.3 Test Software Description8

8 TEST SUMMARY9

9 MEASUREMENT UNCERTAINTY10

10 MEASUREMENTS, EXAMINATION AND DERIVED RESULTS11

10.1 Conducted Emissions11

10.2 6dB Bandwidth14

10.3 Peak Output Power18

10.4 Band Edge20

10.5 Peak Spectral Density23

10.6 Radiated Spurious Emissions in restricted band33

10.7 Radiated Spurious Emissions below 1GHz36

10.8 Radiated Spurious Emissions between 1GHz – 18GHz38

10.9 Radiated Spurious Emissions above 18GHz44

ANNEX A. TEST INSTRUMENT50

ANNEX B. SIEMIC ACCREDITATION51

1 Report Revision History

Report No.	Report Version	Description	Issue Date
FCC_RF_SL14121601-RUC-016_DTS	None	Original	02/17/2015
FCC_RF_SL14121601-RUC-016_DTS Rev1.0	Rev1.0	Update test plots	02/20/2015
FCC_RF_SL14121601-RUC-016_DTS Rev2.0	Rev2.0	Remove EUT photo	03/18/2015

2 Executive Summary

The purpose of this test program was to demonstrate compliance of following product

Company: Ruckus Wireless, Inc.
Product: Access Point
Model: R710

against the current Stipulated Standards. The specified model product stated above has demonstrated compliance with the Stipulated Standard listed on 1st page.

3 Customer information

Applicant Name	:	Ruckus Wireless, Inc.
Applicant Address	:	350 West Java Drive, Sunnyvale, California 94089 U.S.A
Manufacturer Name	:	Ruckus Wireless, Inc.
Manufacturer Address	:	350 West Java Drive, Sunnyvale, California 94089 U.S.A

4 Test site information

Lab performing tests	SIEMIC Laboratories
Lab Address	775 Montague Expressway, Milpitas, CA 95035
FCC Test Site No.	881796
IC Test Site No.	4842D-2
VCCI Test Site No.	A0133

5 Modification

Index	Item	Description	Note
-	-	-	-

6 EUT Information

6.1 EUT Description

Product Name	: Access Point
Model No.	: R710
Trade Name	: Ruckus
Serial No.	: 911543202059
Host Model No.	: N/A
Input Power	: 48VDC (PoE)
Power Adapter Manu/Model	: N/A
Power Adapter SN	: N/A
Product Hardware version	: 705-60398-001
Product Software version	: 812-11303-301
Radio Hardware version	: 705-60398-001
Radio Software version	: 812-11303-301
Test Software version	: 4_9_802_1_CS
Date of EUT received	: 01/05/2015
Equipment Class/ Category	: DTS, UNII
Clock Frequencies	: N/A
Port/Connectors	: PoE, Ethernet

6.2 Radio Description

Radio Type	802.11b	802.11g	802.11a	802.11n-20M	802.11n-40M	802.11ac-80M
Operating Frequency	2412-2462MHz	2412-2462MHz	5180-5240MHz 5745-5825MHz	2412-2462MHz 5180-5240MHz 5745-5825MHz	2422-2452MHz 5190-5230MHz 5755-5795MHz	5210MHz 5775MHz
Modulation	DSSS (CCK, DQPSK, DBPSK)	OFDM-CCK (BPSK, QPSK, 16QAM,64QAM)	OFDM (BPSK, QPSK, 16QAM, 64QAM)	OFDM (BPSK, QPSK, 16QAM, 64QAM)	OFDM (BPSK, QPSK, 16QAM, 64QAM)	OFDM (BPSK, QPSK, 16QAM, 64QAM)
Channel Spacing	5MHz	5MHz	20MHz	5MHz(2.4GHz), 20MHz (5GHz)	40MHz	80MHz
Number of Channels	11	11	9	11(2.4GH) 9 (5GHz)	9(2.4GH) 5(5GHz)	2
Antenna Type	Internal Patch Antenna					
Antenna Gain (Peak)	2.5 dBi (2.4GHz), 3.5 dBi (5 GHz)					
Antenna Connector Type	U.FL					
Note	<p>EUT has 4 antennas, 2 antennas are in horizontal polarity, and 2 antennas in vertical polarity. The 802.11b/g/a is in CDD mode with all 4 antenna transmit simultaneously.</p> <p>Since they're in 90 deg phase shift between the horizontal and vertical antennas, for radiated limit, the result from different polarization antenna will not be combined. So only the result for 2 vertical poparity antennas and 2 horizontal poparity antennas will be combined for MIMO mode separately. For cross-polarized antenna, the total gain—including array gain—is computed separately for each of polarizations using the procedures presented in this document. The highest of the total gains shall apply. For this case, the highest of the total gain will be the directional gain of 2 antennas.</p> <p>For conducted limit like power and psd, the result from all 4 chains will be summed.</p> <p>For 802.11b/g/a mode under CDD mode, the array gain for power will be 0 and for PSD will be 10 log (Nant/Nss) dB to be calculated separately for horizontal and vertical polarity. Reference to the following KDB for clarification. 662911 D01 Multiple Transmitter Output v02r01 662911 D02 MIMO with Cross-Polarized Antennas v01</p>					

EUT Power level setting

Mode	Frequency (MHz)	Power setting
802.11-b	2412	22
802.11-b	2437	22
802.11-b	2462	22
802.11-g	2412	19
802.11-g	2437	22
802.11-g	2462	19
802.11-n-20	2412	19
802.11-n-20	2437	22
802.11-n-20	2462	19
802.11-n-40	2422	19
802.11-n-40	2437	22
802.11-n-40	2452	19

7 Supporting Equipment/Software and cabling Description

7.1 Supporting Equipment

Item	Supporting Equipment Description	Model	Serial Number	Manufacturer	Note
1	Laptop	PP01L Latitude E5440	F1WPF12	Dell	-
2	POE Adapter	740-64157-001	133279963	Ruckus	-

7.2 Cabling Description

Name	Connection Start		Connection Stop		Length / shielding Info		Note
	From	I/O Port	To	I/O Port	Length (m)	Shielding	
RJ45	EUT	RJ45	POE	RJ45	2	Unshielded	-
RJ45	POE	RJ45	Laptop	RJ45	3	Unshielded	-

7.3 Test Software Description

Test Item	Software	Description
RF Testing	Command Line in windows	Set the EUT to transmit continuously in diferent test mode

8 Test Summary

Test Item	Test standard		Test Method/Procedure		Pass / Fail
Restricted Band of Operation	FCC	15.205	FCC	ANSI C63.4 – 2014 558074 D01 DTS Meas Guidance v03r02	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> N/A
AC Conducted Emissions Voltage	FCC	15.207(a)	FCC	ANSI C63.4 – 2014	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> N/A

Test Item	Test standard		Test Method/Procedure		Pass / Fail
Channel Separation	FCC	15.247 (a)(1)	FCC	-	<input type="checkbox"/> Pass <input checked="" type="checkbox"/> N/A
6 dB Bandwidth	FCC	15.247(a)(2)	FCC	558074 D01 DTS Meas Guidance v03r02	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> N/A
Number of Hopping Channels	FCC	15.247(a)(1)	FCC	-	<input type="checkbox"/> Pass <input checked="" type="checkbox"/> N/A
Band Edge and Radiated Spurious Emissions	FCC	15.247(d)	FCC	ANSI C63.4 – 2014 558074 D01 DTS Meas Guidance v03r02	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> N/A
Time of Occupancy	FCC	15.247(a)(1)	FCC	-	<input type="checkbox"/> Pass <input checked="" type="checkbox"/> N/A
Output Power	FCC	15.247(b)	FCC	558074 D01 DTS Meas Guidance v03r02	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> N/A
Receiver Spurious Emissions	FCC	15.247(d)	FCC	-	<input type="checkbox"/> Pass <input checked="" type="checkbox"/> N/A
Antenna Gain > 6 dBi	FCC	15.247(e)	FCC	-	<input type="checkbox"/> Pass <input checked="" type="checkbox"/> N/A
Power Spectral Density	FCC	15.247(e)	FCC	558074 D01 DTS Meas Guidance v03r02	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> N/A
Hybrid System Requirement	FCC	15.247(f)	FCC	-	<input type="checkbox"/> Pass <input checked="" type="checkbox"/> N/A
Hopping Capability	FCC	15.247(g)	FCC	-	<input type="checkbox"/> Pass <input checked="" type="checkbox"/> N/A
Hopping Coordination Requirement	FCC	15.247(h)	FCC	-	<input type="checkbox"/> Pass <input checked="" type="checkbox"/> N/A
RF Exposure requirement	FCC	15.247(i)	FCC	-	<input type="checkbox"/> Pass <input checked="" type="checkbox"/> N/A
Remark	<ol style="list-style-type: none"> All measurement uncertainties do not take into consideration for all presented test results. The applicant shall ensure frequency stability by showing that an emission is maintained within the band of operation under all normal operating conditions as specified in the user's manual. 				

9 Measurement Uncertainty


Emissions			
Test Item	Frequency Range	Description	Uncertainty
Band Edge and Radiated Spurious Emissions	30MHz – 1GHz	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	+5.6dB/-4.5dB
Band Edge and Radiated Spurious Emissions	1GHz – 40GHz	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	+4.3dB/-4.1dB

10 Measurements, Examination and Derived Results

10.1 Conducted Emissions

Conducted Emission Limit

Frequency ranges (MHz)	Limit (dBuV)	
	QP	Average
0.15 ~ 0.5	66 – 56	56 – 46
0.5 ~ 5	56	46
5 ~ 30	60	50

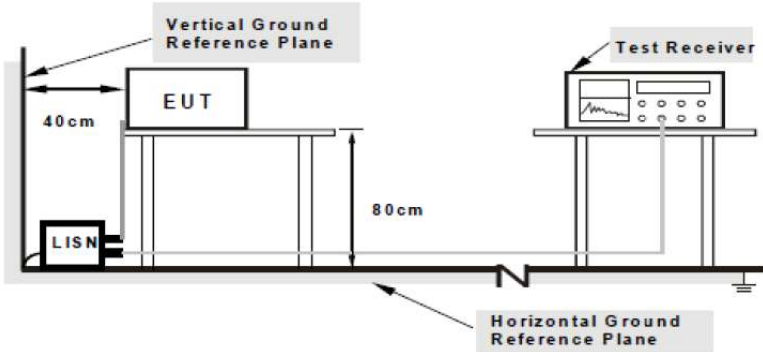
Spec	Item	Requirement	Applicable
47CFR§15.207	a)	For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequency ranges.	<input checked="" type="checkbox"/>
Test Setup	 <p style="text-align: center;">Note: 1.Support units were connected to second LISN. 2.Both of LISNs (AMN) are 80cm from EUT and at least 80cm from other units and other metal planes support units.</p>		
Procedure	<ul style="list-style-type: none"> - The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table, as shown in Annex B. - The power supply for the EUT was fed through a 50Ω/50μH EUT LISN, connected to filtered mains. - The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss coaxial cable. - All other supporting equipment was powered separately from another main supply. 		
Remark	EUT tested with AC 120V 60Hz		
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Test Data Yes N/A

Test Plot Yes (See below) N/A

Conducted Emission Test Results

Test specification:	Conducted Emissions			Result:	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail
Environmental Conditions:	Temp(°C):	21			
	Humidity (%):	42			
	Atmospheric(mbar):	1021			
Mains Power:	120Vac, 60Hz				
Tested by:	George Arias				
Test Date:	01/16/2015				
Remarks	Line				

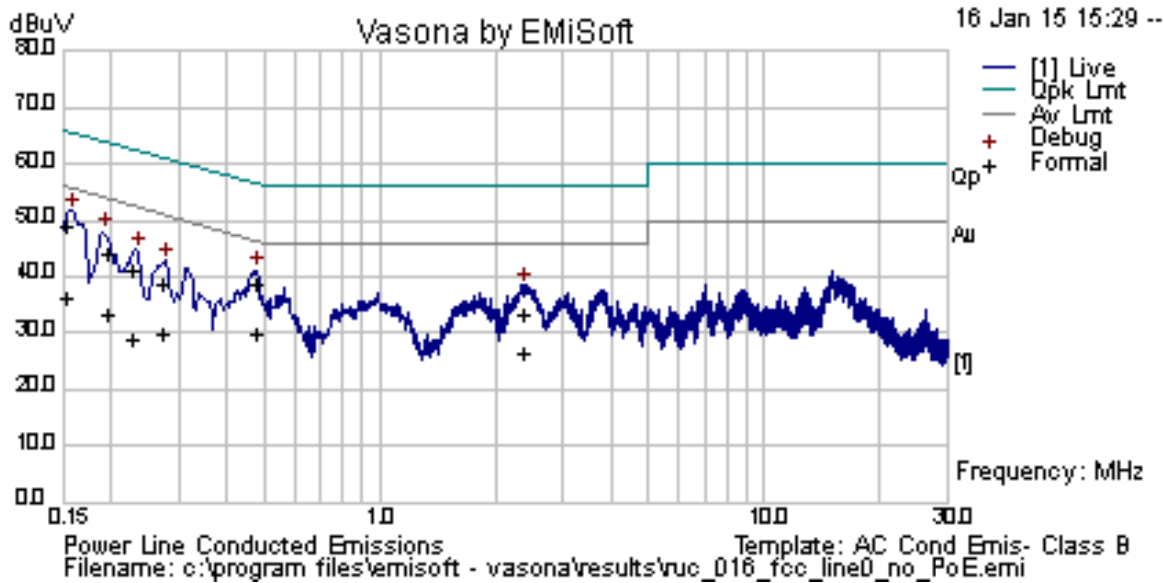


Line Plot at 120Vac, 60Hz

Frequency (MHz)	Raw (dBuV)	Cable Loss (dB)	Factors (dB)	Level (dBuV)	Measurement Type	Line	Limit (dBuV)	Margin (dB)	Pass /Fail
0.15	38.10	10.00	0.76	48.86	Quasi Peak	Line	65.86	-17.00	Pass
0.15	25.70	10.00	0.76	36.46	Average	Line	55.86	-19.40	Pass
0.19	33.46	10.00	0.74	44.20	Quasi Peak	Line	63.85	-19.65	Pass
0.19	22.66	10.00	0.74	33.41	Average	Line	53.85	-20.44	Pass
0.23	30.55	10.00	0.73	41.28	Quasi Peak	Line	62.54	-21.25	Pass
0.23	18.13	10.00	0.73	28.87	Average	Line	52.54	-23.67	Pass
0.27	28.02	10.00	0.72	38.74	Quasi Peak	Line	61.02	-22.28	Pass
0.27	19.17	10.00	0.72	29.89	Average	Line	51.02	-21.12	Pass
0.47	27.98	10.01	0.73	38.72	Quasi Peak	Line	56.44	-17.73	Pass
0.47	19.09	10.01	0.73	29.83	Average	Line	46.44	-16.61	Pass
2.36	22.20	10.02	0.96	33.19	Quasi Peak	Line	56.00	-22.81	Pass
2.36	15.70	10.02	0.96	26.68	Average	Line	46.00	-19.32	Pass

Conducted Emission Test Results

Test specification:	Conducted Emissions			Result:	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail
Environmental Conditions:	Temp(°C):	21			
	Humidity (%):	42			
	Atmospheric(mbar):	1021			
Mains Power:	120Vac, 60Hz				
Tested by:	George Arias				
Test Date:	01/16/2014				
Remarks	Neutral				

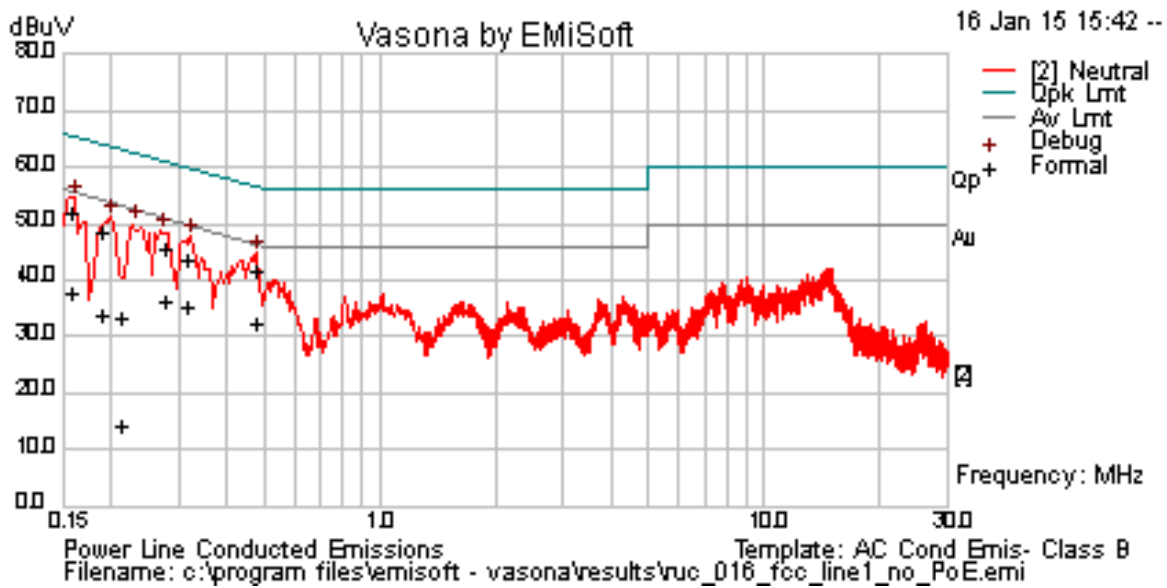


Neutral Plot at 120Vac, 60Hz

Frequency (MHz)	Raw (dBuV)	Cable Loss (dB)	Factors (dB)	Level (dBuV)	Measurement Type	Line	Limit (dBuV)	Margin (dB)	Pass /Fail
0.16	41.30	10.00	0.75	52.06	Quasi Peak	Neutral	65.55	-13.49	Pass
0.16	27.15	10.00	0.75	37.91	Average	Neutral	55.55	-17.64	Pass
0.19	37.71	10.00	0.75	48.46	Quasi Peak	Neutral	64.08	-15.62	Pass
0.19	22.91	10.00	0.75	33.66	Average	Neutral	54.08	-20.42	Pass
0.21	22.76	10.00	0.74	33.50	Quasi Peak	Neutral	63.10	-29.60	Pass
0.21	3.72	10.00	0.74	14.46	Average	Neutral	53.10	-38.64	Pass
0.27	34.83	10.00	0.72	45.55	Quasi Peak	Neutral	61.00	-15.45	Pass
0.27	25.41	10.00	0.72	36.13	Average	Neutral	51.00	-14.87	Pass
0.31	33.01	10.00	0.71	43.72	Quasi Peak	Neutral	59.91	-16.19	Pass
0.31	24.38	10.00	0.71	35.09	Average	Neutral	49.91	-14.81	Pass
0.47	30.93	10.01	0.73	41.68	Quasi Peak	Neutral	56.43	-14.75	Pass
0.47	21.70	10.01	0.73	32.44	Average	Neutral	46.43	-13.98	Pass

Note: The results above show only the worst case.

10.2 6dB Bandwidth

Requirement(s):

Spec	Item	Requirement	Applicable
§ 15.247	a)(2)	6dB BW≥500KHz;	<input checked="" type="checkbox"/>
Test Setup			
Test Procedure	558074 D01 DTS Meas Guidance v03r02, 8.1 DTS bandwidth <u>6dB Emission bandwidth measurement procedure</u> <ul style="list-style-type: none"> - Set RBW = 100 kHz. - Set the video bandwidth (VBW) ≥ 3 x RBW. - Detector = Peak. - Trace mode = max hold. - Sweep = auto couple. - Allow the trace to stabilize. - Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission. 		
Test Date	01/12/2015	Environmental condition	Temperature 23°C Relative Humidity 42% Atmospheric Pressure 1021mbar
Remark	N/A		
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Equipment Setting

TEST	RBW	VBW	SPAN	Detector	SWEEP	Trace	NOTES
6 dB DTS Bandwidth	100KHz	3 x RBW	>EBW	PK	Auto	Max hold	-

Test Data Yes N/A
Test Plot Yes N/A

6dB Bandwidth measurement result for 2.4GHz

Type	Test mode	Freq (MHz)	CH	Result (MHz)	Limit (MHz)	Result
6dB BW	802.11b	2412	Low	9.006	≥0.5	Pass
6dB BW	802.11b	2437	Mid	8.514	≥0.5	Pass
6dB BW	802.11b	2462	High	7.823	≥0.5	Pass
6dB BW	802.11g	2412	Low	16.40	≥0.5	Pass
6dB BW	802.11g	2437	Mid	16.07	≥0.5	Pass
6dB BW	802.11g	2462	High	16.33	≥0.5	Pass
6dB BW	802.11n-20M	2412	Low	17.62	≥0.5	Pass
6dB BW	802.11n-20M	2437	Mid	17.59	≥0.5	Pass
6dB BW	802.11n-20M	2462	High	17.59	≥0.5	Pass
6dB BW	802.11n-40M	2422	Low	35.95	≥0.5	Pass
6dB BW	802.11n-40M	2437	Mid	33.22	≥0.5	Pass
6dB BW	802.11n-40M	2452	High	35.62	≥0.5	Pass

6dB Bandwidth Test Plots



6dB BW -2.4G 802.11b 2412MHz



6dB BW -2.4G 802.11b 2437MHz



6dB BW -2.4G 802.11b 2462MHz




6dB BW -2.4G 802.11g 2412MHz



6dB BW -2.4G 802.11g 2437MHz




6dB BW -2.4G 802.11g 2462MHz

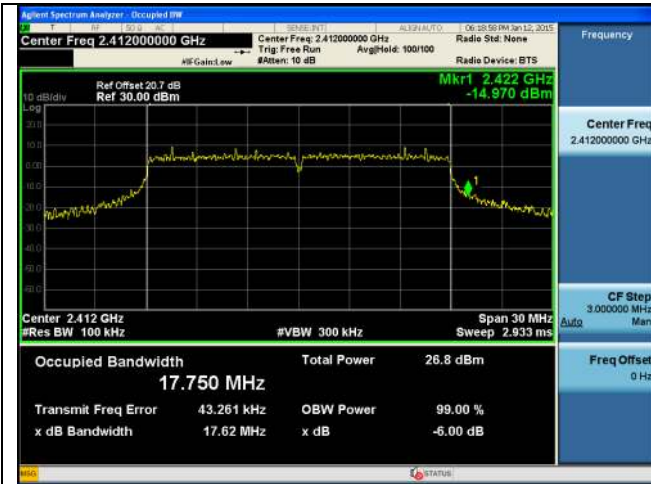


6dB BW -2.4G 802.11n-20M 2412MHz




6dB BW -2.4G 802.11n-20M 2437MHz

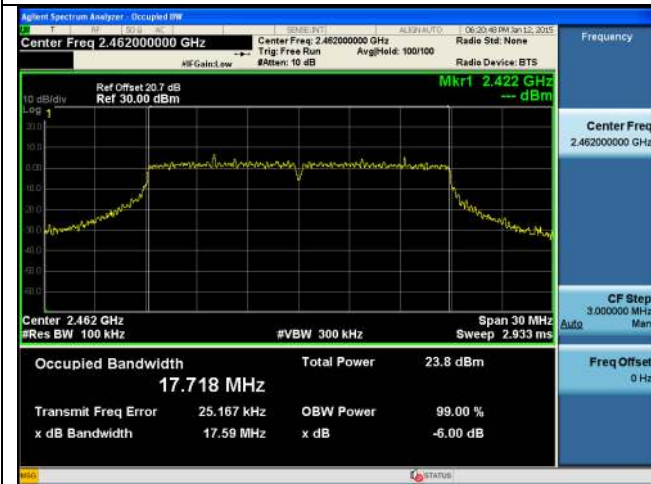


6dB BW -2.4G 802.11n-20M 2462MHz

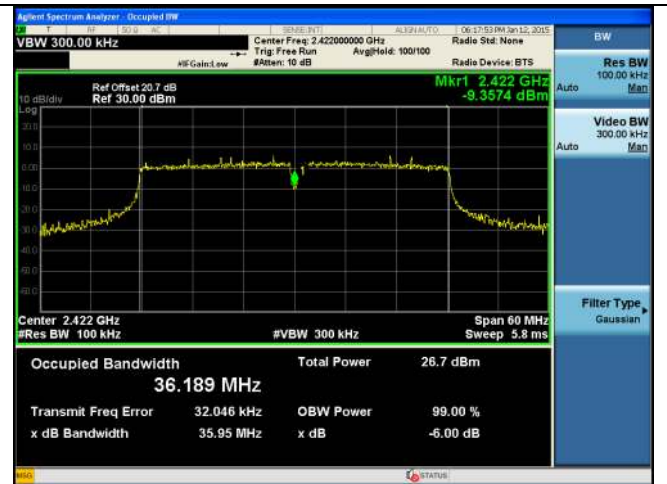

6dB BW -2.4G 802.11n-40M 2422MHz

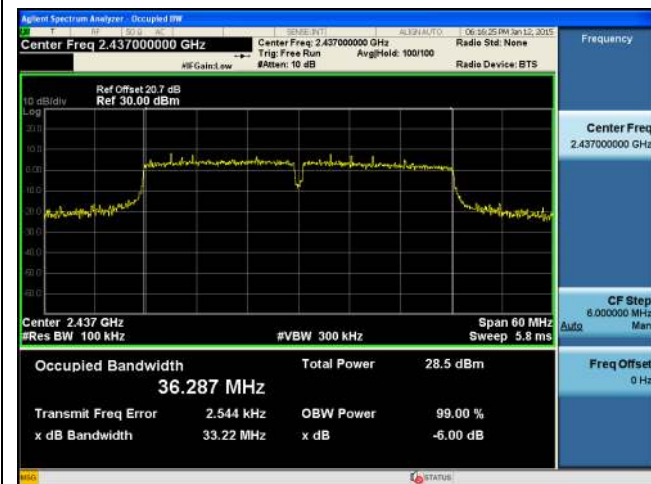


6dB BW -2.4G 802.11n-40M 2437MHz

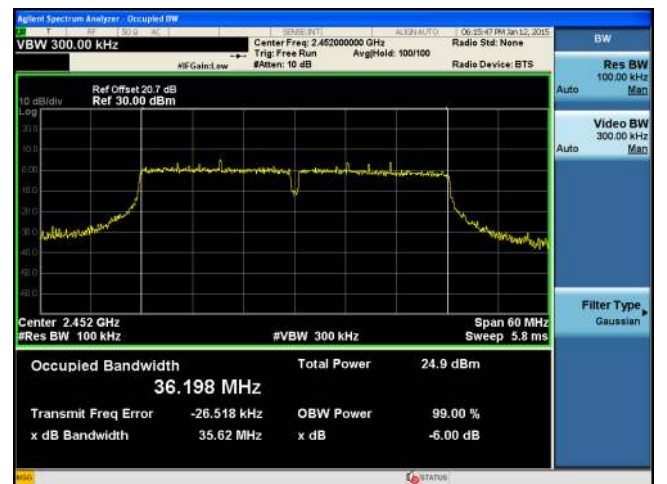

6dB BW -2.4G 802.11n-40M 2452MHz

10.3 Peak Output Power

Requirement(s):

Spec	Item	Requirement	Applicable
§ 15.247	a)	FHSS in 2400-2483.5MHz with ≥ 75 channels: ≤1 Watt	<input type="checkbox"/>
	b)	FHSS in 5725-5850MHz: ≤1 Watt	<input type="checkbox"/>
	c)	For all other FHSS in the 2400-2483.5MHz band: ≤0.125 Watt.	<input type="checkbox"/>
	d)	FHSS in 902-928MHz with ≥ 50 channels: ≤1 Watt	<input type="checkbox"/>
	e)	FHSS in 902-928MHz with ≥ 25 & <50 channels: ≤0.25 Watt	<input type="checkbox"/>
	f)	DSSS in 902-928MHz, 2400-2483.5MHz, 5725-5850MHz: ≤1 Watt	<input checked="" type="checkbox"/>
Test Setup			
Test Procedure	<p>558074 D01 DTS Meas Guidance v03r02, 9.2.2.2</p> <p><u>Measurement using a Power Meter (PM)</u></p> <p>Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.</p> <ul style="list-style-type: none"> - Connect EUT's RF output power to power meter - Set EUT to be continuous transmission mode - Measurement the average output power using power meter and record the result <p>Repeat above steps for different test channel and other modulation type.</p>		
Test Date	01/11/2015	Environmental condition	Temperature 23°C Relative Humidity 44% Atmospheric Pressure 1021mbar
Remark			
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Equipment Setting

TEST	RBW	VBW	SPAN	Detector	SWEEP	Trace	NOTES
PK output power	1MHz	≥3 X RBW	≥1.5 X OBW	RMS	Auto	Trace average	-


Test Data Yes N/A
Test Plot Yes (See below) N/A

Output Power measurement result

Type	Test mode	Freq (MHz)	CH	Conducted Power (dBm)					Limit (dBm)	Result
				Chain1	Chain2	Chain3	Chain4	Combined Power		
Output	802.11b	2412	Low	21.8	22.8	21.8	22.5	28.268	30	Pass
Output	802.11b	2437	Mid	22.5	22.0	22.5	22.4	28.375	30	Pass
Output	802.11b	2462	High	20.9	20.4	21.0	21.1	26.879	30	Pass
Output	802.11g	2412	Low	19.9	19.8	19.8	19.8	25.846	30	Pass
Output	802.11g	2437	Mid	21.8	21.7	21.6	21.7	27.721	30	Pass
Output	802.11g	2462	High	19.3	19.3	19.3	19.4	25.346	30	Pass
Output	802.11n-20M	2412	Low	20.8	20.8	20.5	20.8	26.748	30	Pass
Output	802.11n-20M	2437	Mid	21.9	21.8	21.7	21.8	27.821	30	Pass
Output	802.11n-20M	2462	High	18.1	18.2	18.4	18.7	24.377	30	Pass
Output	802.11n-40M	2422	Low	19.3	19.4	19.3	19.4	25.371	30	Pass
Output	802.11n-40M	2437	Mid	22.1	22.1	21.8	22.0	28.022	30	Pass
Output	802.11n-40M	2452	High	18.7	19.0	18.7	19.0	24.873	30	Pass
Note	<p>Per KDB 662911 D01 Multiple Transmitter Output v02r01, the direction gain for horizontal polarization and vertical polarization is calculated separately.</p> <p>For 2.4GHz horizontal polarization (2 chain), antenna gain = 1 dBi, directional gain = 3 dB, total gain = 4 dBi For 2.4Ghz vertical polarization (2 chains), antenna gain = 2.5 dBi, directional gain = 3 dB, total gain = 5.5 dBi</p> <p>Highest of total gain is 5.5 dBi.</p>									

10.4 Band Edge

Requirement(s):

Spec	Item	Requirement	Applicable
§ 15.247	d)	For non-restricted band, In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB or 30dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, determined by the measurement method on output power to be used. Attenuation below the general limits specified in § 15.209 (a) is not required <input type="checkbox"/> 20 dB down <input checked="" type="checkbox"/> 30 dB down	<input checked="" type="checkbox"/>
Test Setup			
Test Procedure	558074 D01 DTS Meas Guidance v03r02 <u>Band Edge measurement procedure</u> <ol style="list-style-type: none"> 1. Set the EUT to maximum power setting and enable the EUT transmit continuously. 2. Band edge emissions must be at least 30 dB down from the highest emission level within the authorized band as a measured. The attunation shall be be 30 dB instead of 20 dB when RMS conducted output power procedure is used. 3. Change modulation and channel bandwidth then repeat step 1 to 2. 4. Measured and record the results in the test report. 		
Test Date	01/30/2014	Environmental condition	Temperature 22°C Relative Humidity 46% Atmospheric Pressure 1020mbar
Remark	-		
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Equipment Setting

TEST	RBW	VBW	SPAN	Detector	SWEEP	Trace	NOTES
Band Edge	100KHz	≥3 x RBW	135 MHz	RMS	Auto	Trace average	-

Test Data Yes N/A
Test Plot Yes (See below) N/A


Test Plots



Band Edge-2.4G-802.11b Low




Band Edge-2.4G-802.11b High

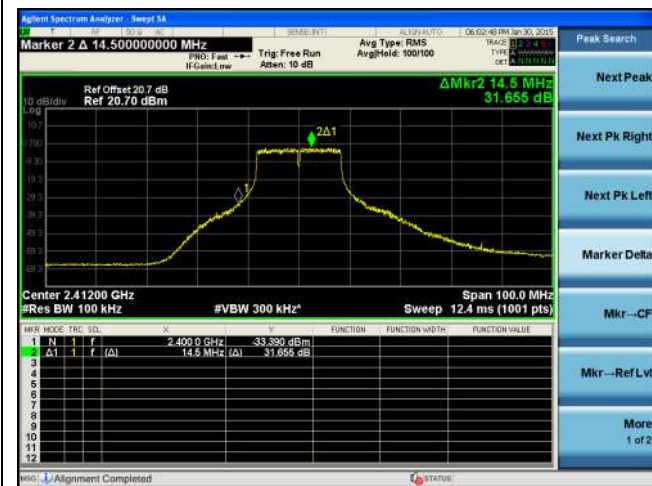


Band Edge-2.4G-802.11g Low



Band Edge-2.4G-802.11g High

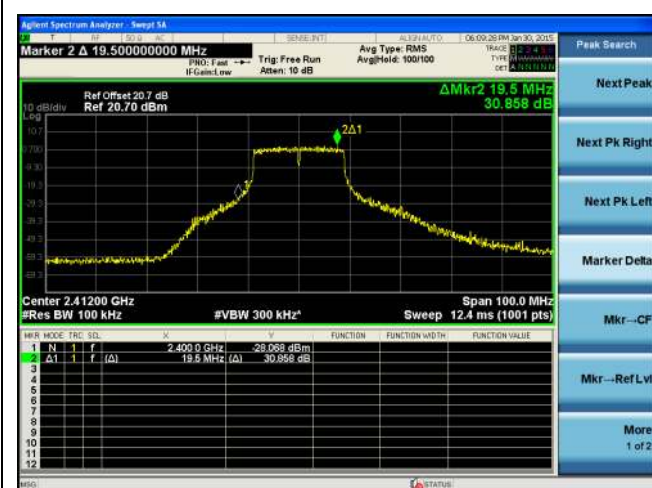

Band Edge-2.4G-802.11n20 Low

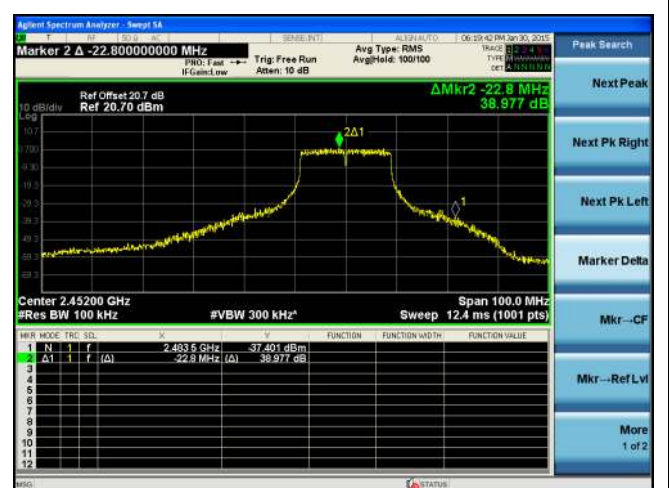

Band Edge-2.4G-802.11n20 High




Band Edge-2.4G-802.11n40 Low



Band Edge-2.4G-802.11n40 High

10.5 Peak Spectral Density

Requirement(s):

Spec	Item	Requirement	Applicable
§ 15.247(e)	e)	DSSS: ≤8dBm/3KHz	<input checked="" type="checkbox"/>
	f)	DSSS in hybrid sys with FH turned off: ≤8dBm/3KHz	<input type="checkbox"/>
Test Setup			
Test Procedure	558074 D01 DTS Meas Guidance v03r02, 10.3 Method AVGPSD-1 <u>Peak spectral density measurement procedure</u> <ul style="list-style-type: none"> - Set analyzer center frequency to DTS channel center frequency. - Set the span to 1.5 times the DTS bandwidth. - Set the RBW to: 3 kHz ≤ RBW ≤ 100 kHz. - Set the VBW ≥ 3 x RBW. - Detector = RMS - Sweep time = auto couple. - Trace mode = Trace average over 100 traces - Allow trace to fully stabilize. - Use the peak marker function to determine the maximum amplitude level within the RBW. - If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat. 		
Test Date	01/12/2015	Environmental condition	Temperature 22°C Relative Humidity 46% Atmospheric Pressure 1020mbar
Remark	-		
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Equipment Setting

TEST	RBW	VBW	SPAN	Detector	SWEEP	Trace	NOTES
PSD	100KHz	≥3x RBW	1.5x DTS BW	RMS	Auto	Trace average	-

Test Data Yes N/A

Test Plot Yes (See below) N/A

PSD measurement results

Type	Test mode	Freq (MHz)	CH	Conducted PSD (dBm/100KHz)					Limit (dBm/3KHz)	Result
				Chain0	Chain1	Chain2	Chain4	Combined PSD		
PSD	802.11b	2412	Low	-0.557	-0.648	-0.859	0.015	5.521	≤8	Pass
PSD	802.11b	2437	Mid	0.499	0.120	0.466	0.480	6.415	≤8	Pass
PSD	802.11b	2462	High	-1.425	-0.599	-0.975	-0.893	5.058	≤8	Pass
PSD	802.11g	2412	Low	-4.902	-4.147	-3.882	-3.814	1.855	≤8	Pass
PSD	802.11g	2437	Mid	-3.460	-3.120	-2.550	-2.174	3.223	≤8	Pass
PSD	802.11g	2462	High	-5.045	-3.979	-3.433	-3.742	2.012	≤8	Pass
PSD	802.11n-20M	2412	Low	-4.069	-3.565	-2.675	-3.284	2.652	≤8	Pass
PSD	802.11n-20M	2437	Mid	-3.142	-3.429	-2.822	-2.498	3.062	≤8	Pass
PSD	802.11n-20M	2462	High	-4.656	-4.233	-3.428	-2.734	2.321	≤8	Pass
PSD	802.11n-40M	2422	Low	-8.866	-8.391	-7.431	-8.301	-2.190	≤8	Pass
PSD	802.11n-40M	2437	Mid	-7.257	-7.078	-5.786	-6.464	-0.587	≤8	Pass
PSD	802.11n-40M	2452	High	-10.554	-9.812	-9.761	-8.874	-3.689	≤8	Pass
Note	<p>Per KDB 662911 D01 Multiple Transmitter Output v02r01, the direction gain for horizontal polarization and vertical polarization is calculated separately.</p> <p>For 2.4GHz horizontal polarization (2 chain), antenna gain = 1 dBi, directional gain = 3 dB, total gain = 4 dBi For 2.4Ghz vertical polarization (2 chains), antenna gain = 2.5 dBi, directional gain = 3 dB, total gain = 5.5 dBi</p> <p>Highest of total gain is 5.5 dBi.</p>									

Test Plots



PSD-2.4G-802.11b Low-chain1



PSD-2.4G-802.11b Low-chain2



PSD-2.4G-802.11b Low-chain3



PSD-2.4G-802.11b Low-chain4



PSD-2.4G-802.11b Mid-chain1



PSD-2.4G-802.11b Mid-chain2



PSD-2.4G-802.11b Mid-chain3



PSD-2.4G-802.11b Mid-chain4



PSD-2.4G-802.11b High-chain1




PSD-2.4G-802.11b High-chain2



PSD-2.4G-802.11b High-chain3




PSD-2.4G-802.11b High-chain4

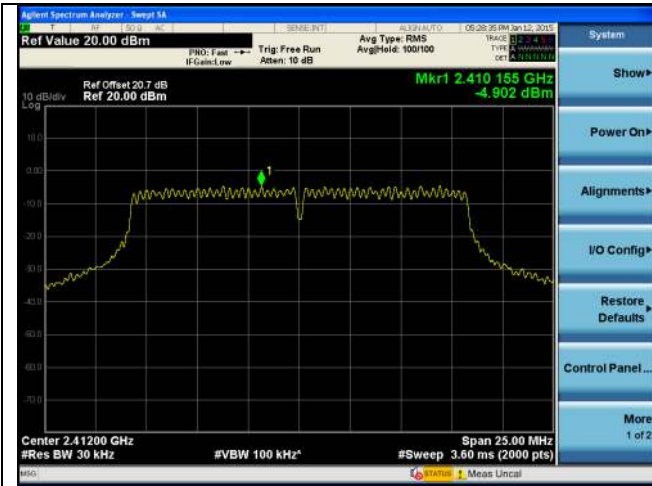

PSD-2.4G-802.11g Low-chain1




PSD-2.4G-802.11g Low-chain2

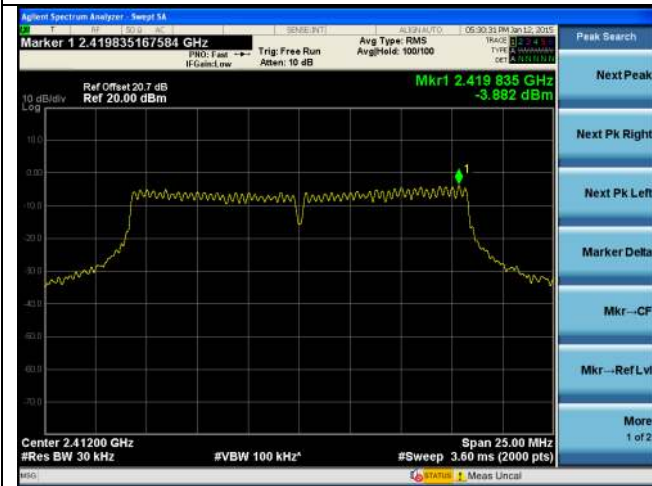


PSD-2.4G-802.11g Low-chain3



PSD-2.4G-802.11g Low-chain4

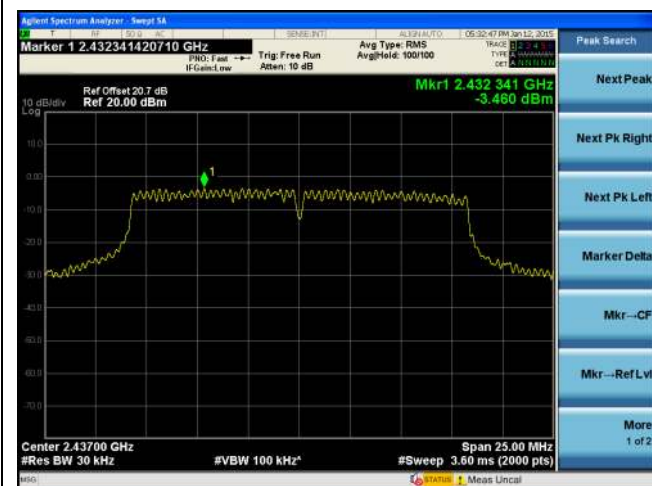

PSD-2.4G-802.11g Mid-chain1

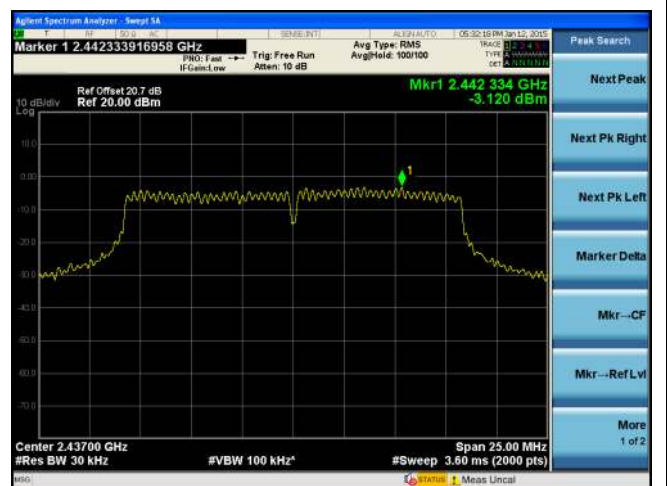


PSD-2.4G-802.11g Mid-chain2



PSD-2.4G-802.11g Mid-chain3




PSD-2.4G-802.11g Mid-chain4

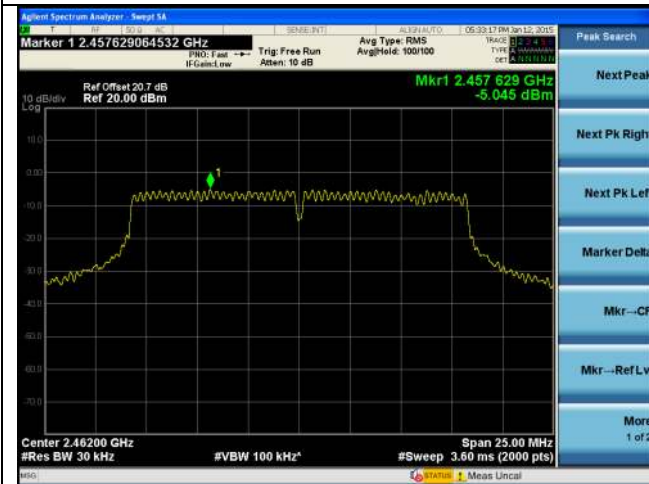


PSD-2.4G-802.11g High-chain1




PSD-2.4G-802.11g High-chain2

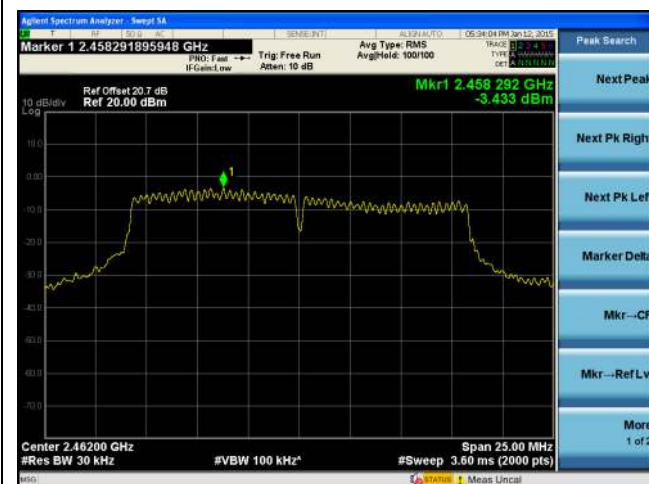

PSD-2.4G-802.11g High-chain3

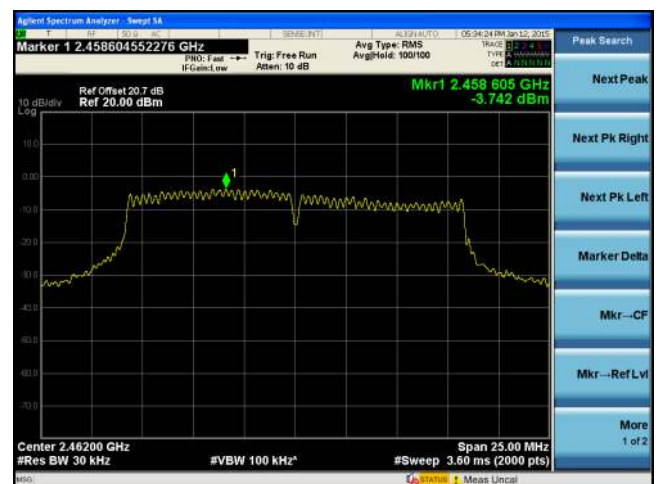

PSD-2.4G-802.11g High-chain4

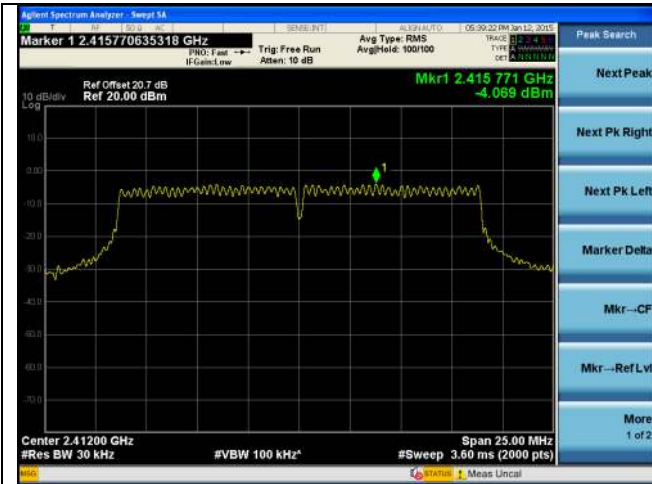

PSD-2.4G-802.11n-20M Low-chain1




PSD-2.4G-802.11n-20M Low-chain2



PSD-2.4G-802.11n-20M Low-chain3




PSD-2.4G-802.11n-20M Low-chain4

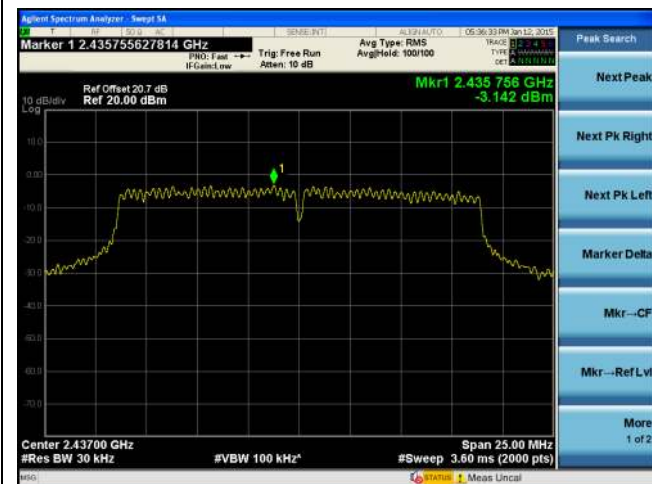

PSD-2.4G-802.11n-20M Mid-chain1




PSD-2.4G-802.11n-20M Mid-chain2

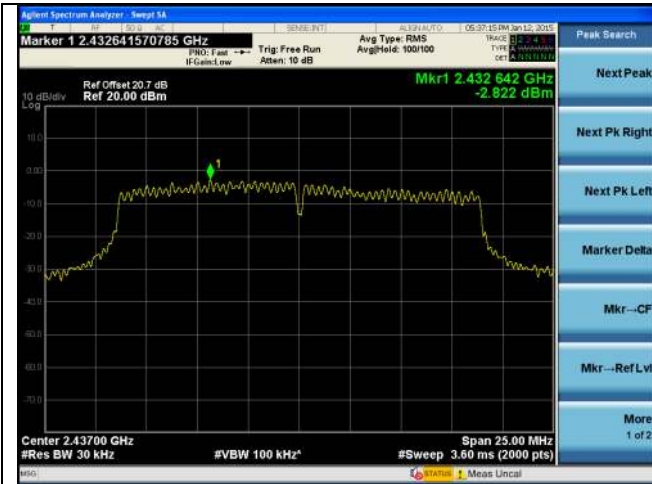

PSD-2.4G-802.11n-20M Mid-chain3




PSD-2.4G-802.11n-20M Mid-chain4

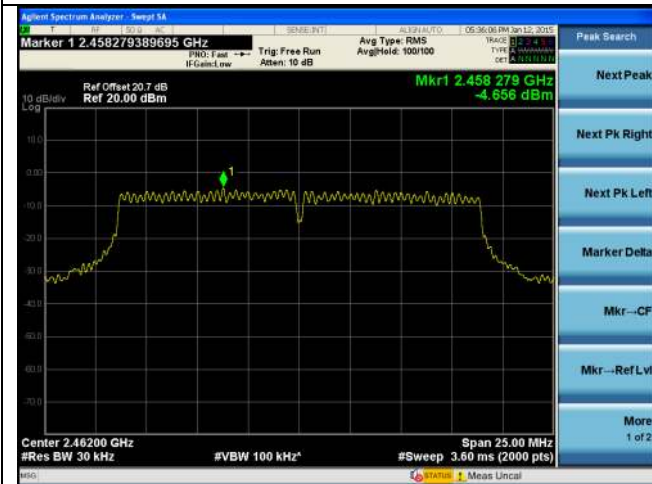

PSD-2.4G-802.11n-20M High-chain1




PSD-2.4G-802.11n-20M High-chain2

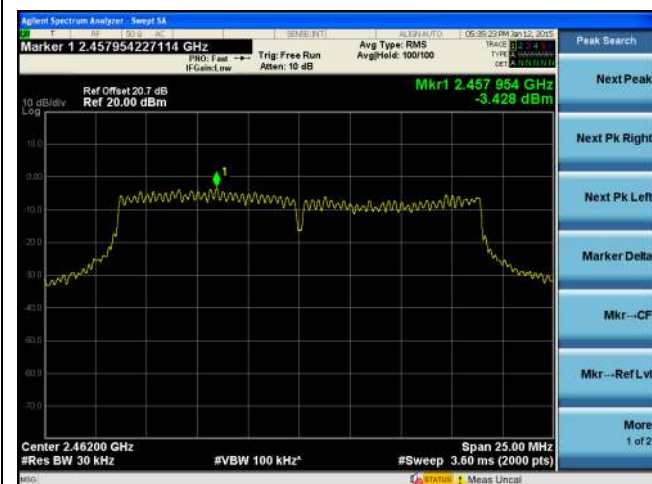

PSD-2.4G-802.11n-20M High-chain3



PSD-2.4G-802.11n-20M High-chain4

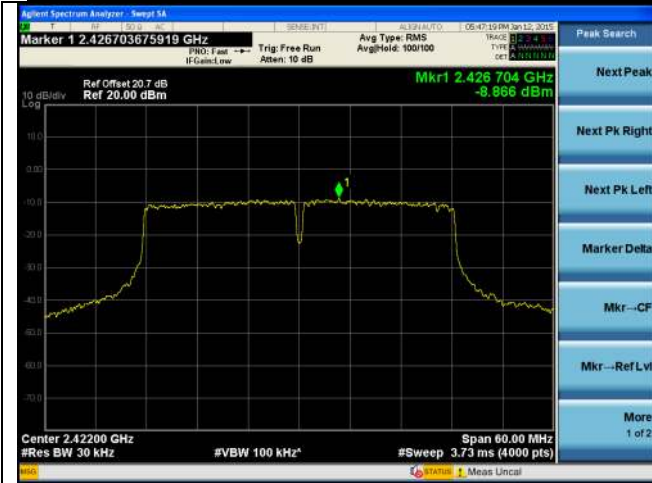

PSD-2.4G-802.11n-40M Low-chain1




PSD-2.4G-802.11n-40M Low-chain2



PSD-2.4G-802.11n-40M Low-chain3




PSD-2.4G-802.11n-40M Low-chain4

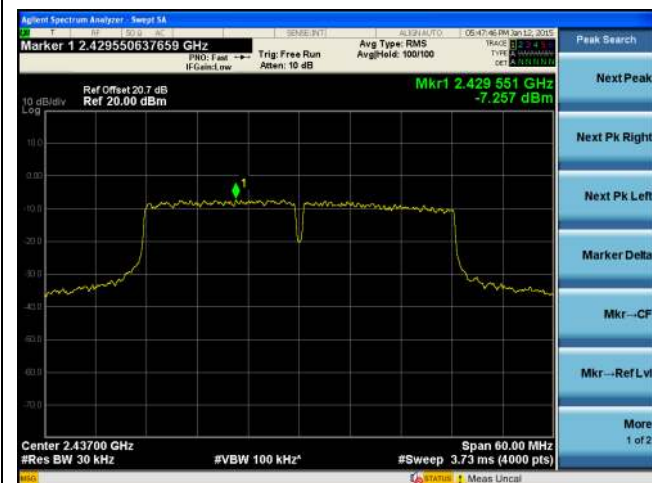

PSD-2.4G-802.11n-40M Mid-chain1




PSD-2.4G-802.11n-40M Mid-chain2

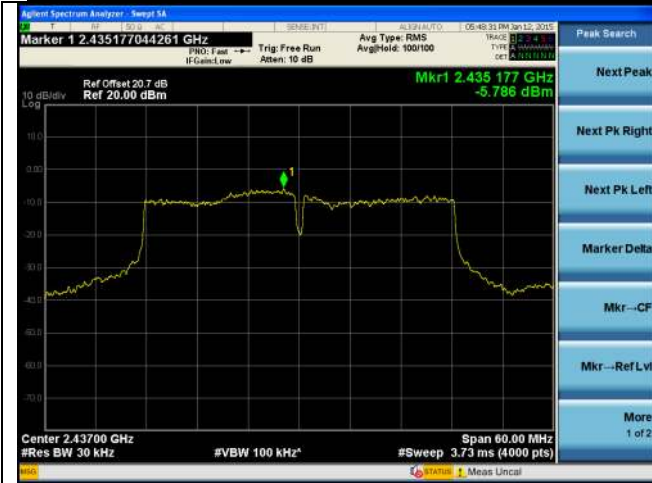

PSD-2.4G-802.11n-40M Mid-chain3



PSD-2.4G-802.11n-40M Mid-chain4

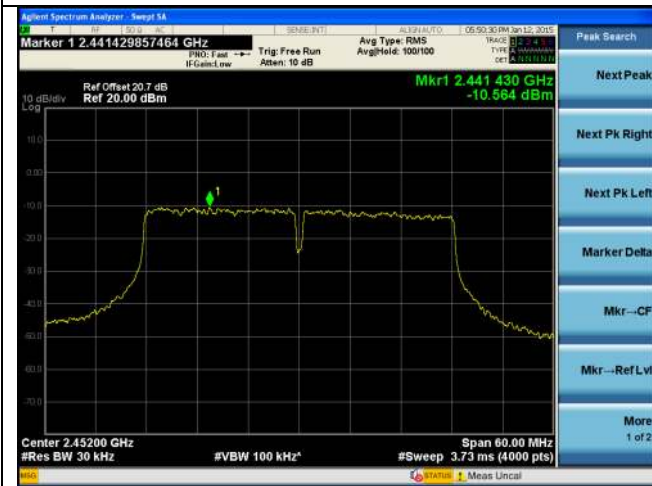

PSD-2.4G-802.11n-40M High-chain1



PSD-2.4G-802.11n-40M High-chain2



PSD-2.4G-802.11n-40M High-chain3



PSD-2.4G-802.11n-40M High-chain4

10.6 Radiated Spurious Emissions in restricted band

Requirement(s):

Requirement(s):



Spec	Item	Requirement	Applicable
47CFR§15.247(d), RSS210(A8.5)	a)	For non-restricted band, In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB or 30dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, determined by the measurement method on output power to be used. Attenuation below the general limits specified in § 15.209(a) is not required <input type="checkbox"/> 20 dB down <input checked="" type="checkbox"/> 30 dB down	<input checked="" type="checkbox"/>
	b)	or restricted band, emission must also comply with the radiated emission limits specified in 15.209	<input checked="" type="checkbox"/>
Test Setup			
Procedure	<ol style="list-style-type: none"> The EUT was switched on and allowed to warm up to its normal operating condition. The test was carried out at the selected frequency points obtained from the EUT characterisation. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: <ol style="list-style-type: none"> Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen. The EUT was then rotated to the direction that gave the maximum emission. Finally, the antenna height was adjusted to the height that gave the maximum emission. An average measurement was then made for that frequency point. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured. 		
Remark	The EUT was scanned up to 40GHz. Both horizontal and vertical polarities were investigated. The results show only the worst case. Radiated measurement was measured with antenna port terminated, there isn't outstanding emission found at the edge of restricted frequency, within x dB margin		
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Equipment Setting

TEST	RBW	VBW	SPAN	Detector	SWEEP	Trace	NOTES
Radiated Spurious Emission	1MHz	3MHz	1GHz - 25 GHz	Peak	Auto	Max hold	PK Measurement
Radiated Spurious Emission	1MHz	3MHz	1GHz - 25 GHz	RMS	Auto	Trace Average (100)	Ave Measurement



Test Data Yes (See below) N/A
Test Plot Yes (See below) N/A

Restricted Band Measurement Plots:

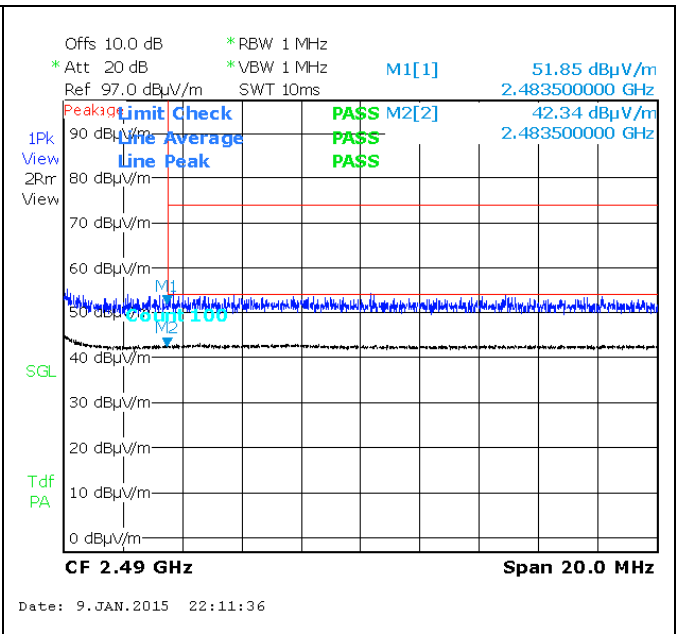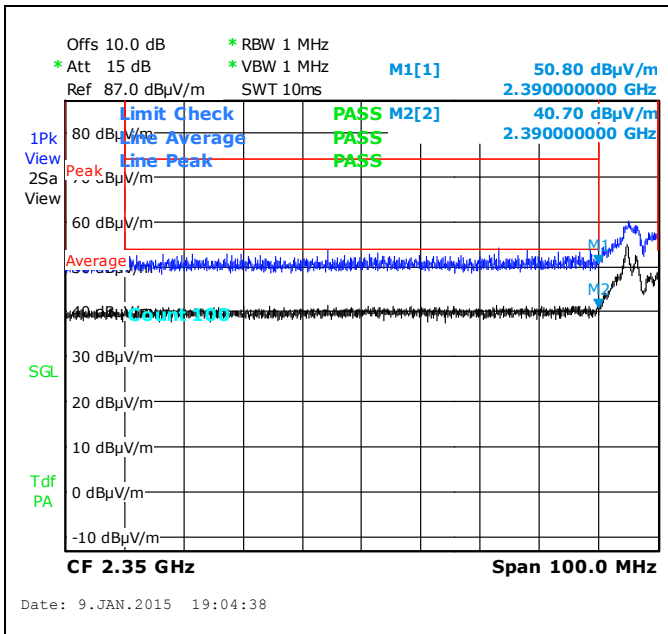



802.11b 2412M-Restricted Band 2310-2390MHz

802.11b 2462M-Restricted Band 2483.5-2500MHz

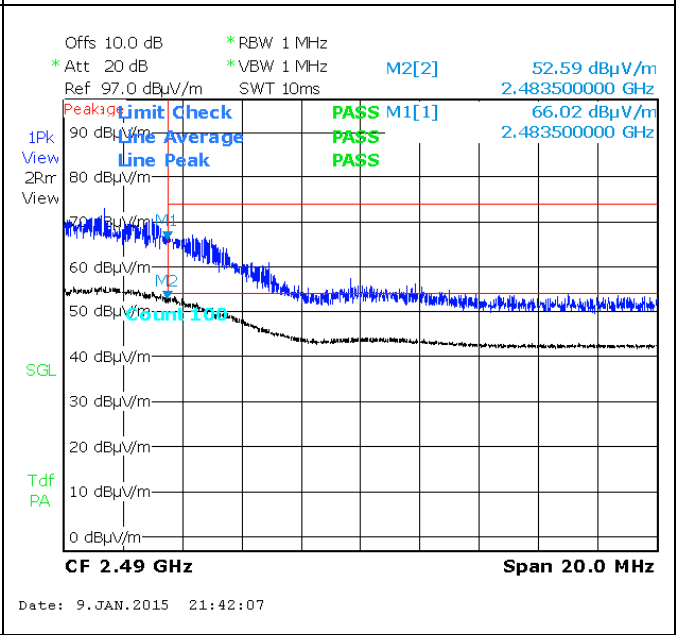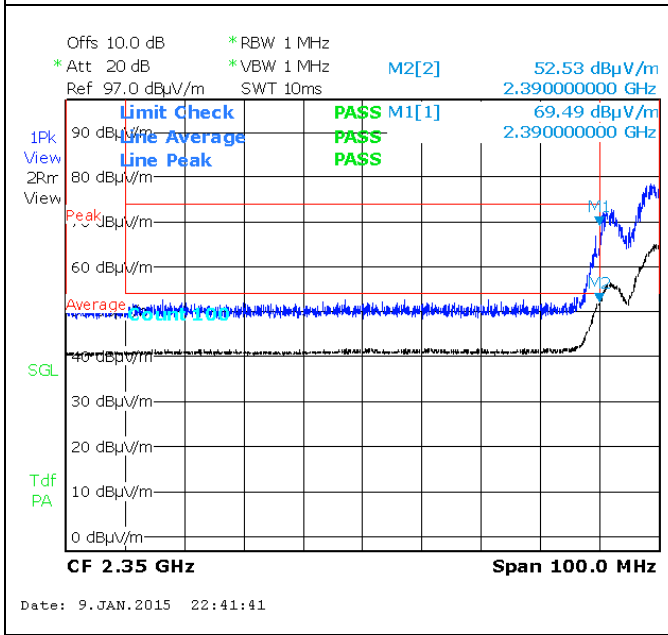



802.11g 2412M-Restricted Band 2310-2390MHz

802.11g 2462M-Restricted Band 2483.5-2500MHz

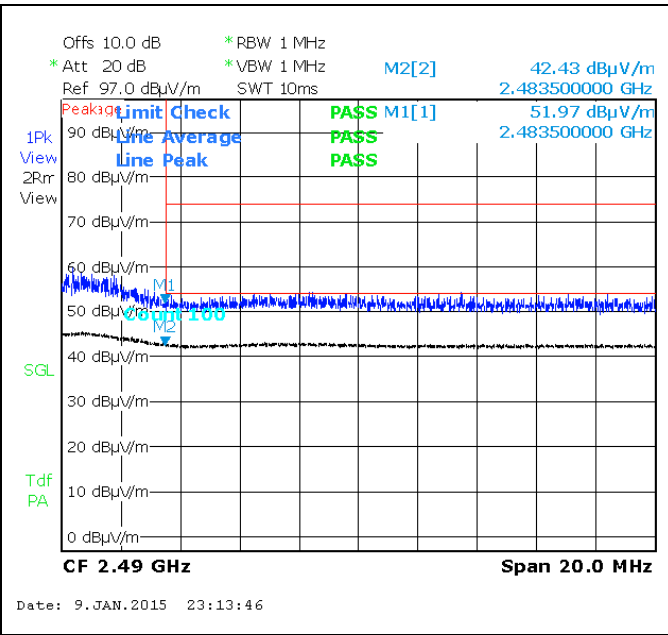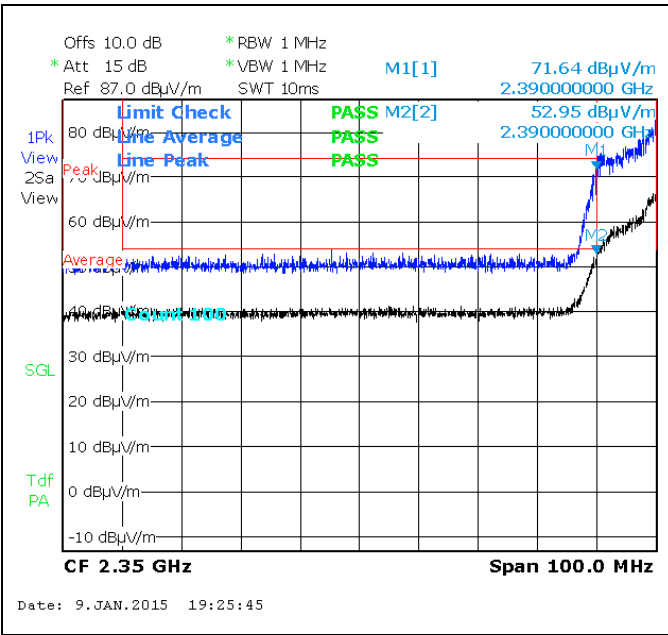

802.11n20 2412M-Restricted Band 2310-2390MHz

802.11n20 2462M-Restricted Band 2483.5-2500MHz

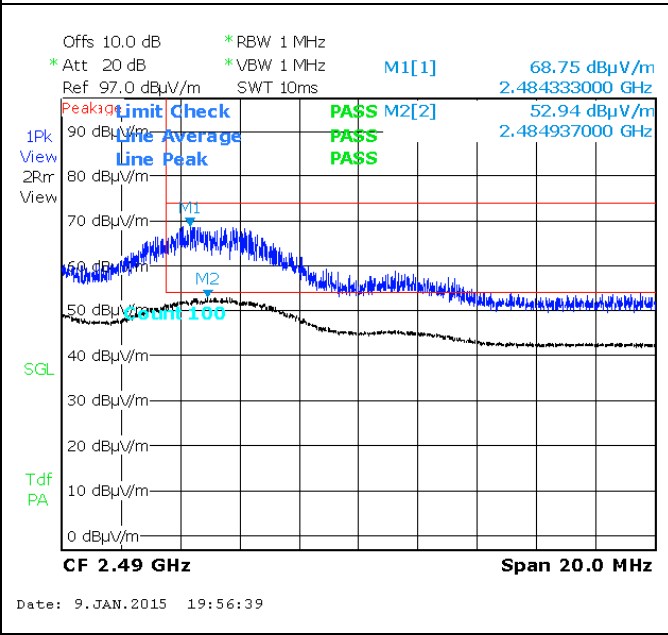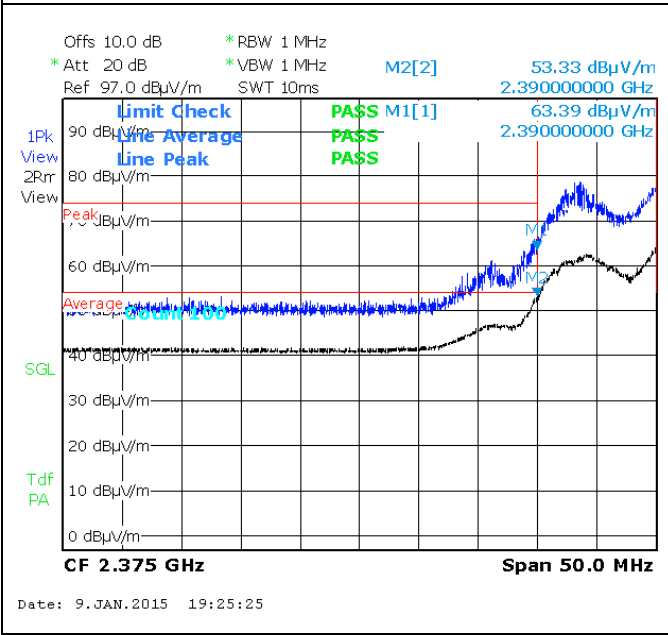


802.11n40 2422M-Restricted Band 2310-2390MHz

802.11n40 2452M-Restricted Band 2483.5-2500MHz

10.7 Radiated Spurious Emissions below 1GHz

Requirement(s):

Spec	Item	Requirement	Applicable										
47CFR§15.247(d)	a)	<p>Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges</p> <table border="1"> <thead> <tr> <th>Frequency range (MHz)</th> <th>Field Strength (uV/m)</th> </tr> </thead> <tbody> <tr> <td>30 – 88</td> <td>100</td> </tr> <tr> <td>88 – 216</td> <td>150</td> </tr> <tr> <td>216 960</td> <td>200</td> </tr> <tr> <td>Above 960</td> <td>500</td> </tr> </tbody> </table>	Frequency range (MHz)	Field Strength (uV/m)	30 – 88	100	88 – 216	150	216 960	200	Above 960	500	☒
Frequency range (MHz)	Field Strength (uV/m)												
30 – 88	100												
88 – 216	150												
216 960	200												
Above 960	500												

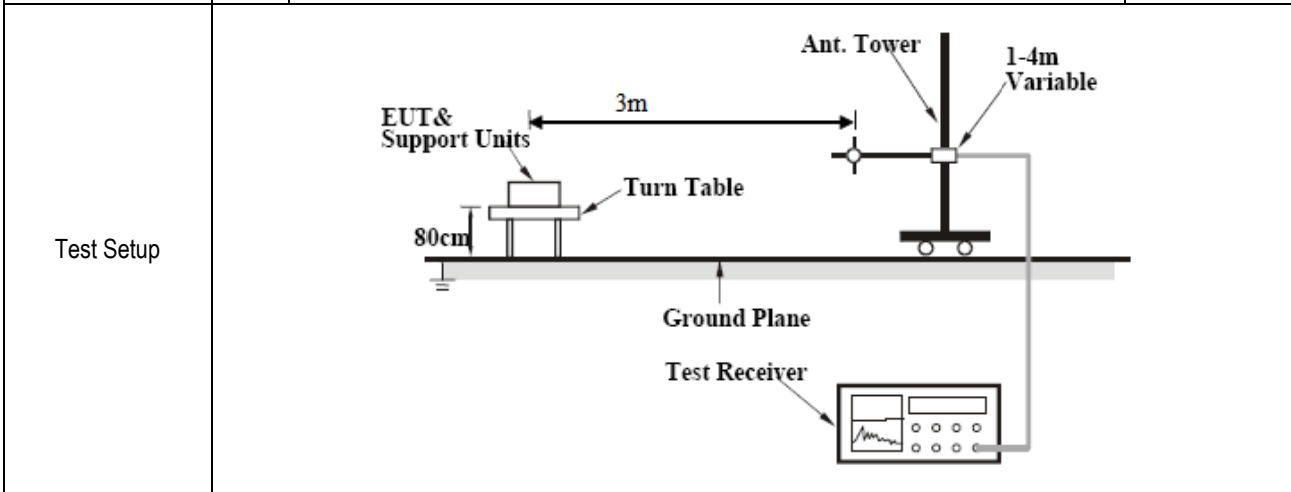

Procedure	<ol style="list-style-type: none"> 1. The EUT was switched on and allowed to warm up to its normal operating condition. 2. The test was carried out at the selected frequency points obtained from the EUT characterisation. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: <ol style="list-style-type: none"> a. Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen. b. The EUT was then rotated to the direction that gave the maximum emission. c. Finally, the antenna height was adjusted to the height that gave the maximum emission. 3. A Quasi-peak measurement was then made for that frequency point. 4. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.
-----------	---

Remark: The EUT was scanned up to 1GHz. Both horizontal and vertical polarities were investigated. The results show only the worst case.


Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail
--------	--

Test Data Yes (See below) N/A

Test Plot Yes (See below) N/A

Radiated Emission Test Results (Below 1GHz)

Test specification	below 1GHz			Result	Pass
Environmental Conditions:	Temp (°C):	26.1			
	Humidity (%)	47.5			
	Atmospheric (mbar):	1020			
Mains Power:	120VAC, 60Hz				
Tested by:	Ricky Wang				
Test Date:	01/29/2015				
Remarks:	N/A				

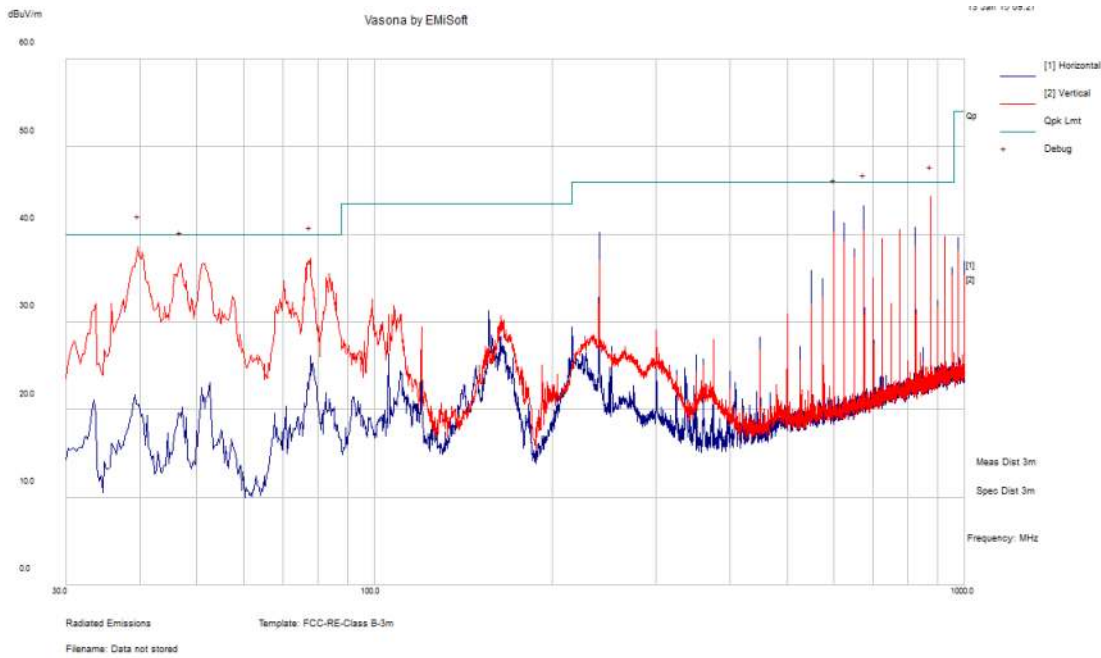

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
39.53	55.71	1.16	-25.82	31.05	Quasi Max	V	108.00	179.00	40.00	-8.95	Pass
875.00	50.66	4.96	-17.04	38.58	Quasi Max	V	100.00	202.00	46.00	-7.42	Pass
674.99	57.38	4.42	-19.57	42.23	Quasi Max	H	188.00	183.00	46.00	-3.77	Pass
77.84	63.87	1.48	-31.43	33.92	Quasi Max	V	124.00	277.00	40.00	-6.08	Pass
46.94	61.10	1.16	-28.76	33.50	Quasi Max	V	100.00	191.00	40.00	-6.50	Pass
599.99	58.06	4.17	-20.60	41.63	Quasi Max	H	100.00	62.00	46.00	-4.37	Pass

Note: Both horizontal and vertical polarities were investigated. The results above show only the worst case.

10.8 Radiated Spurious Emissions between 1GHz – 18GHz

Requirement(s):

Spec	Item	Requirement	Applicable
47CFR§15.247(d), RSS210(A8.5)	a)	For non-restricted band, In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB or 30dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, determined by the measurement method on output power to be used. Attenuation below the general limits specified in § 15.209(a) is not required <input type="checkbox"/> 20 dB down <input checked="" type="checkbox"/> 30 dB down	<input checked="" type="checkbox"/>
	b)	or restricted band, emission must also comply with the radiated emission limits specified in 15.209	<input checked="" type="checkbox"/>
Test Setup			
Procedure	<ol style="list-style-type: none"> The EUT was switched on and allowed to warm up to its normal operating condition. The test was carried out at the selected frequency points obtained from the EUT characterisation. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: <ol style="list-style-type: none"> Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen. The EUT was then rotated to the direction that gave the maximum emission. Finally, the antenna height was adjusted to the height that gave the maximum emission. An average measurement was then made for that frequency point. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured. 		
Remark	The EUT was scanned up to 40GHz. Both horizontal and vertical polarities were investigated. The results show only the worst case. There isn't outstanding emission found at the edge of restricted frequency.		
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Equipment Setting


TEST	RBW	VBW	SPAN	Detector	SWEEP	Trace	NOTES
Radiated Spurious Emission	1MHz	3MHz	1GHz - 25 GHz	Peak	Auto	Max hold	PK Measurement
Radiated Spurious Emission	1MHz	10Hz	1GHz - 25 GHz	Peak	Auto	Max hold	Ave Measurement

Test Data Yes (See below) N/A


Test Plot Yes (See below) N/A

Radiated Emission Test Results (Above 1GHz)


Above 1GHz-18GHz – 802.11b – 2412MHz

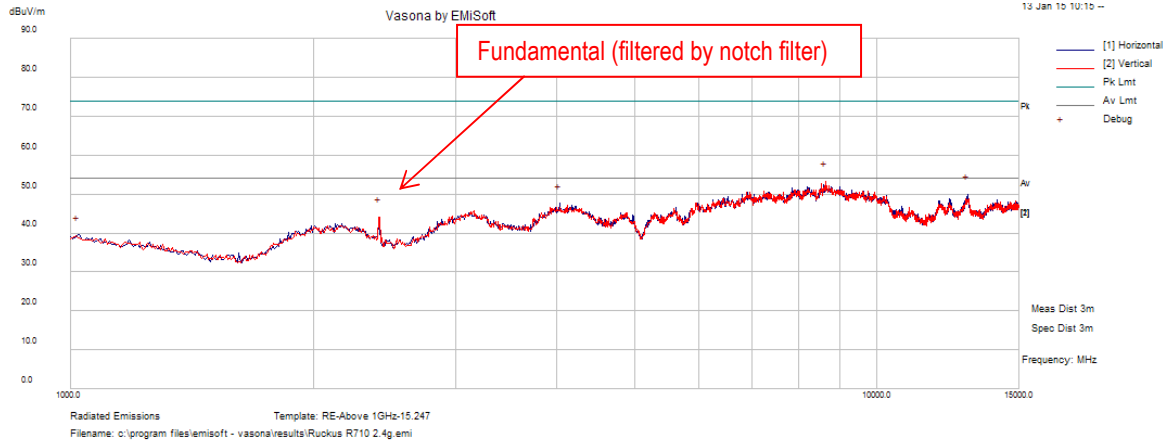


Above 1GHz-18GHz- 802.11b - 2437MHz

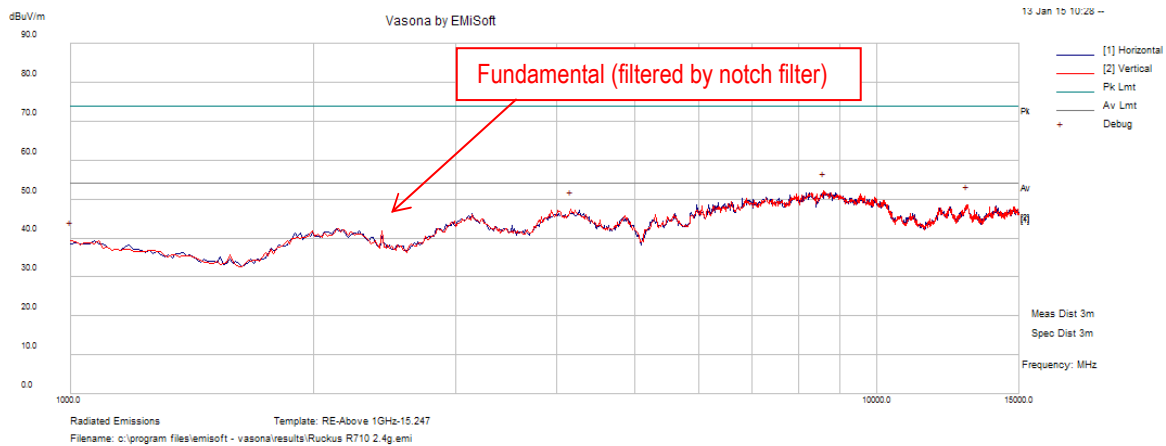


Above 1GHz-18GHz- 802.11b – 2462MHz

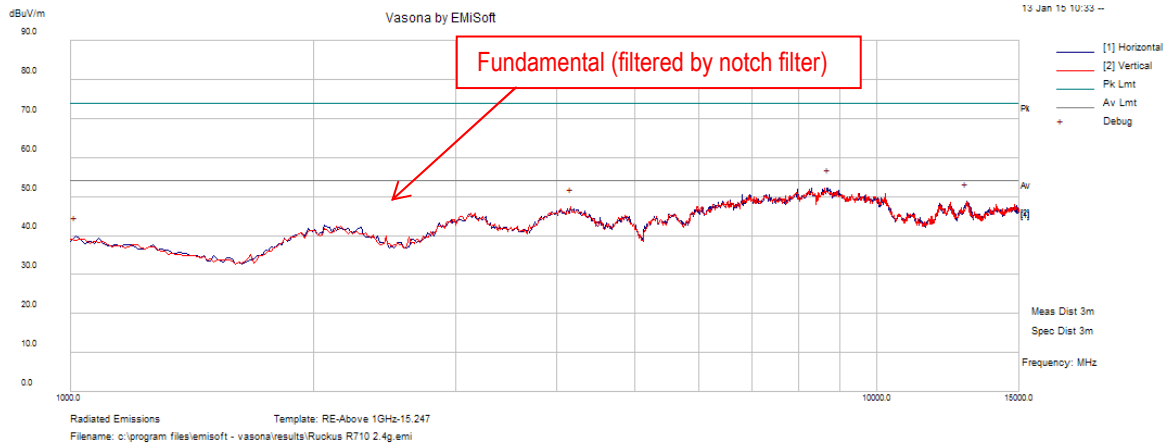


Above 1GHz-18GHz – 802.11g – 2412MHz

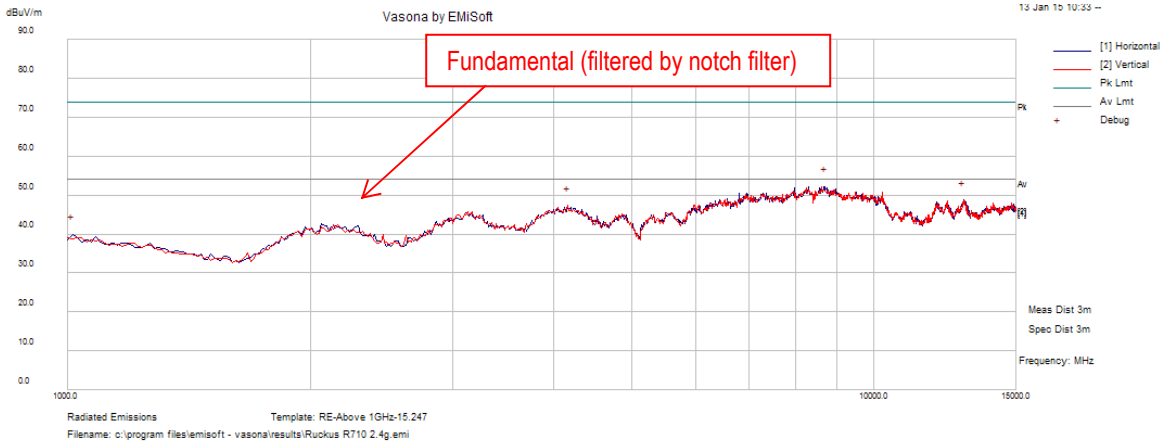


Above 1GHz-18GHz- 802.11g – 2437MHz

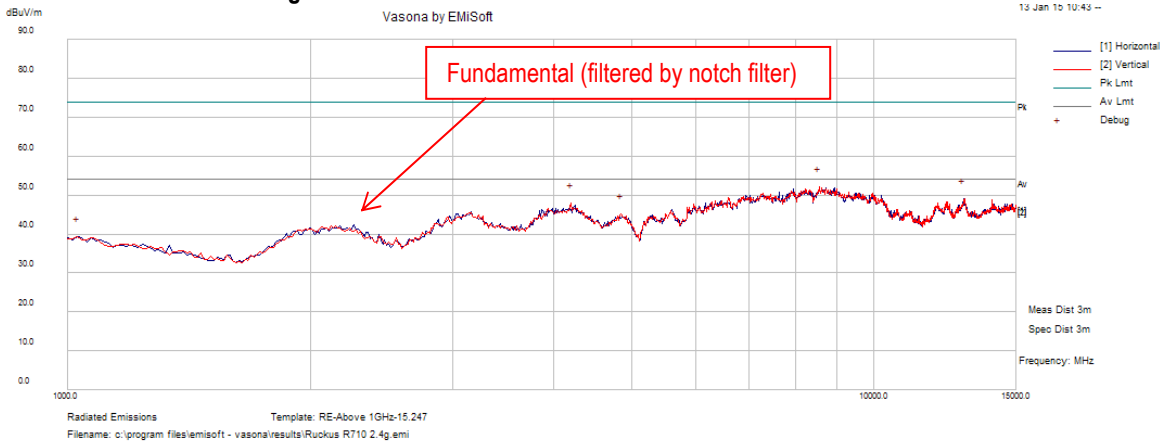


Above 1GHz-18GHz- 802.11g - 2462MHz

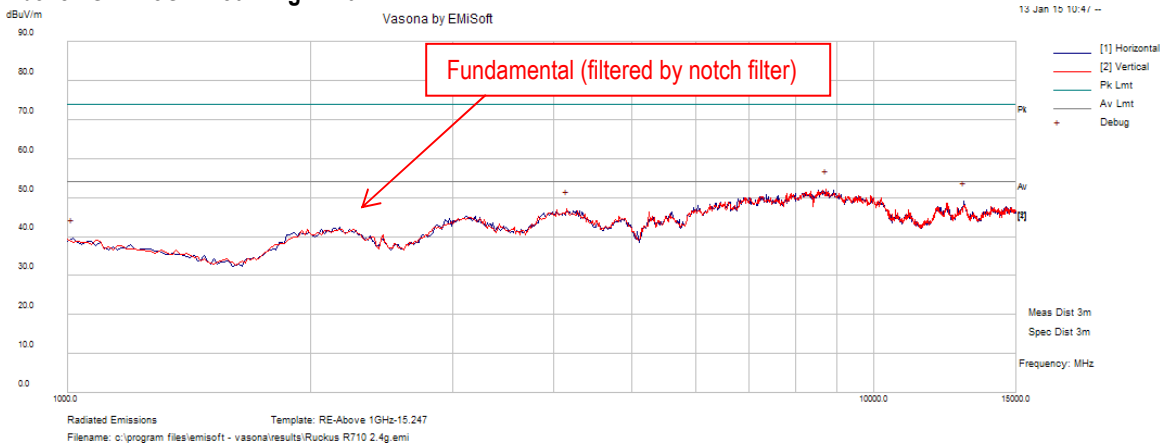


Above 1GHz-18GHz – 802.11n-20M – 2412MHz

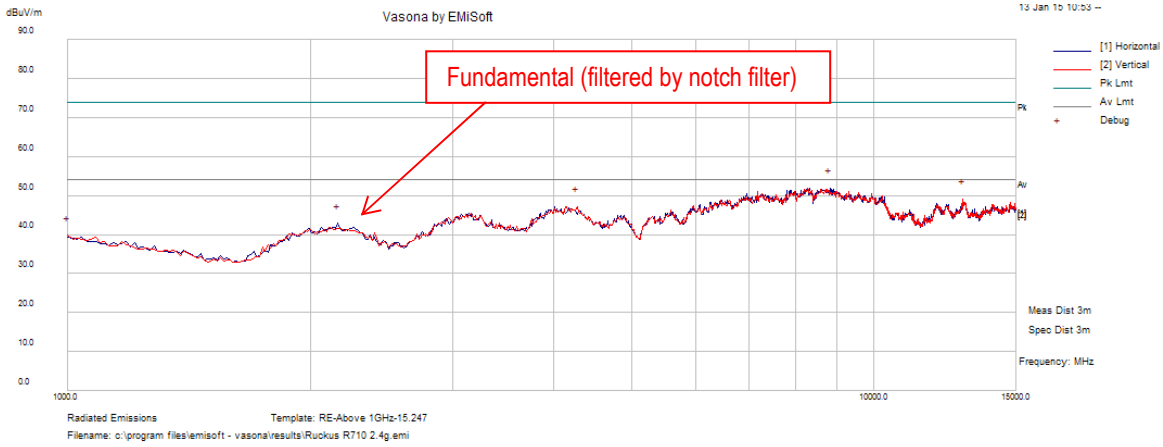


Above 1GHz-18GHz- 802.11n-20M - 2437MHz

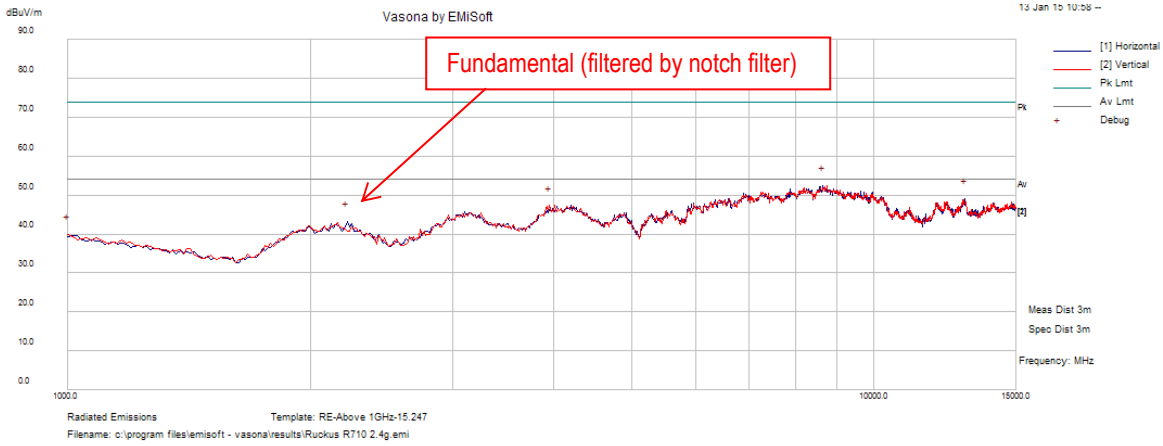


Above 1GHz-18GHz- 802.11b – 2462MHz

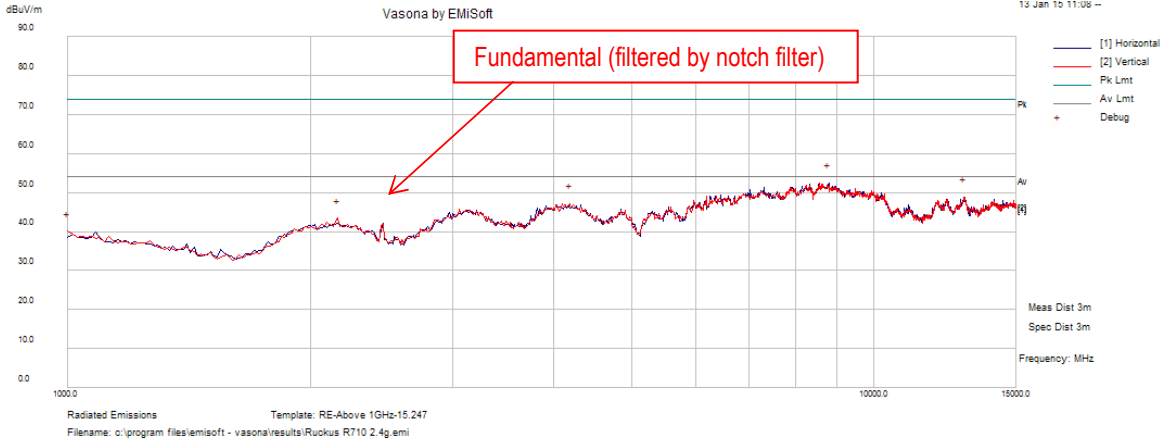


Above 1GHz-18GHz – 802.11n-40M – 2422MHz

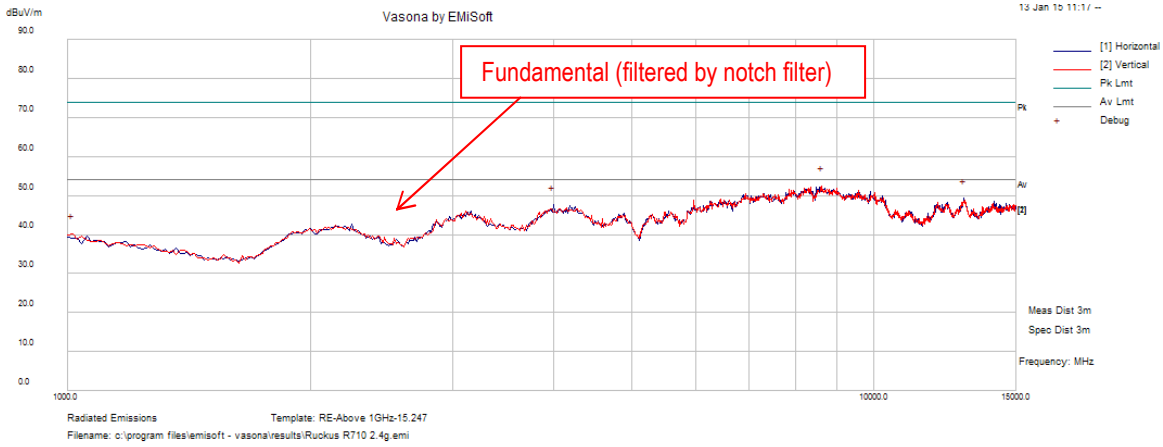


Above 1GHz-18GHz- 802.11n-40M – 2437MHz

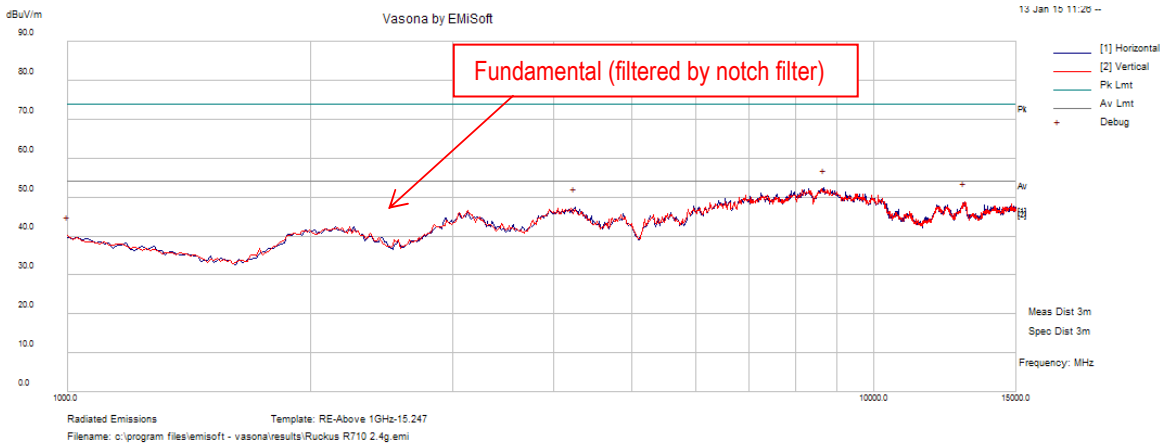

Above 1GHz-18GHz- 802.11n-40M - 2452MHz

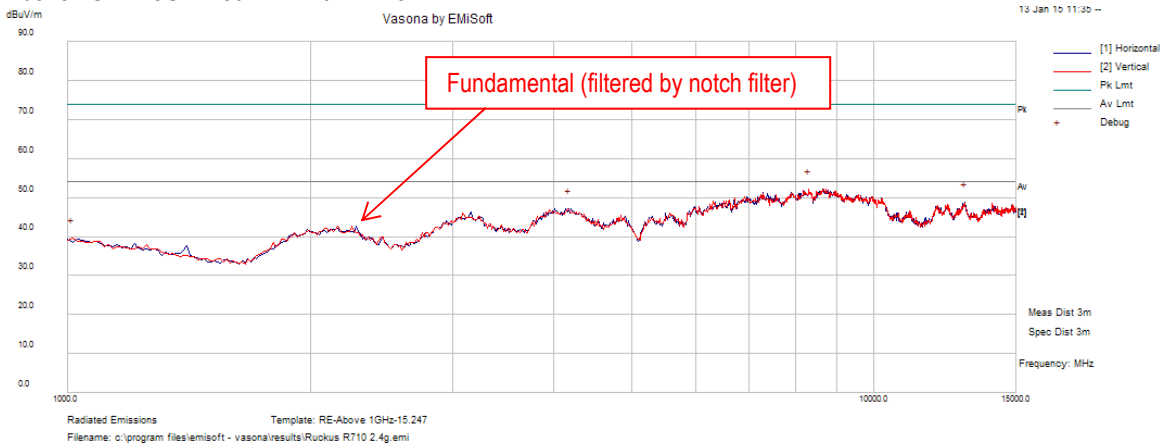

Above 1GHz-18GHz- Collocation testing (2.4GHz WLAN & 5GHz WLAN on the main-board transmitting simultaneously)

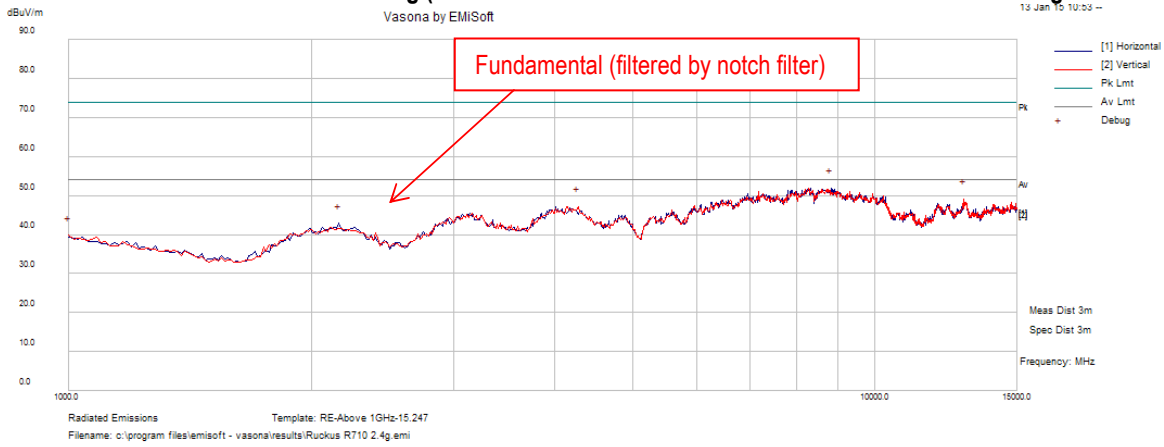

10.9 Radiated Spurious Emissions above 18GHz

Requirement(s):

Spec	Item	Requirement	Applicable
47CFR§15.247(d), RSS210(A8.5)	a)	For non-restricted band, In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB or 30dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, determined by the measurement method on output power to be used. Attenuation below the general limits specified in § 15.209(a) is not required <input type="checkbox"/> 20 dB down <input checked="" type="checkbox"/> 30 dB down	<input checked="" type="checkbox"/>
	b)	or restricted band, emission must also comply with the radiated emission limits specified in 15.209	<input checked="" type="checkbox"/>
Test Setup			
Procedure	<ol style="list-style-type: none"> The EUT was switched on and allowed to warm up to its normal operating condition. The test was carried out at the selected frequency points obtained from the EUT characterisation. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: <ol style="list-style-type: none"> Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen. The EUT was then rotated to the direction that gave the maximum emission. Finally, the antenna height was adjusted to the height that gave the maximum emission. An average measurement was then made for that frequency point. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured. 		
Remark	The EUT was scanned up to 40GHz. Both horizontal and vertical polarities were investigated. No outstanding emission was found except the noise floor emission.		
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Equipment Setting


TEST	RBW	VBW	SPAN	Detector	SWEEP	Trace	NOTES
Radiated Spurious Emission	1MHz	3MHz	1GHz - 25 GHz	Peak	Auto	Max hold	PK Measurement
Radiated Spurious Emission	1MHz	10Hz	1GHz - 25 GHz	Peak	Auto	Max hold	Ave Measurement

Test Data Yes (See below) N/A

Test Plot Yes (See below) N/A

Radiated Emission Test Results (Above 1GHz)


Above 18GHz – 802.11b – 2412MHz

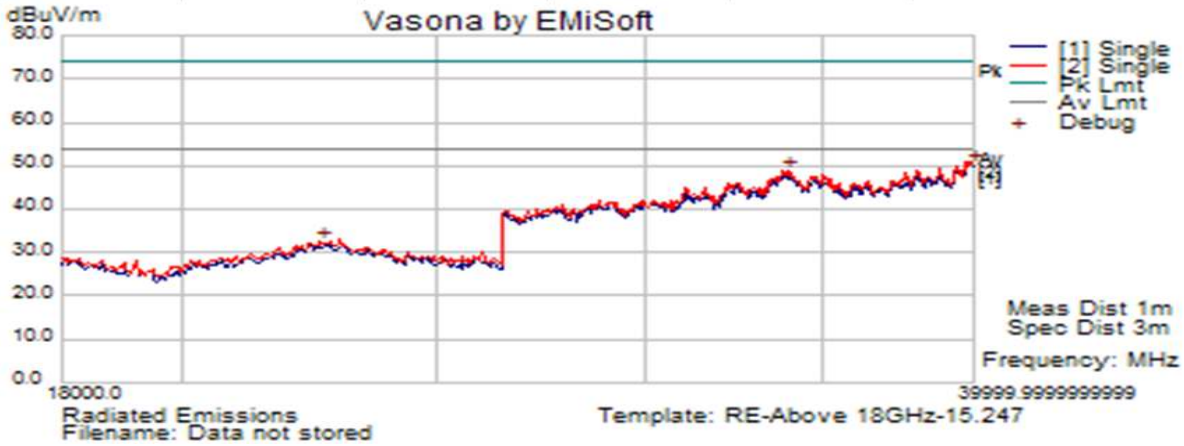


Above 18GHz- 802.11b - 2437MHz




Above 18GHz- 802.11b – 2462MHz

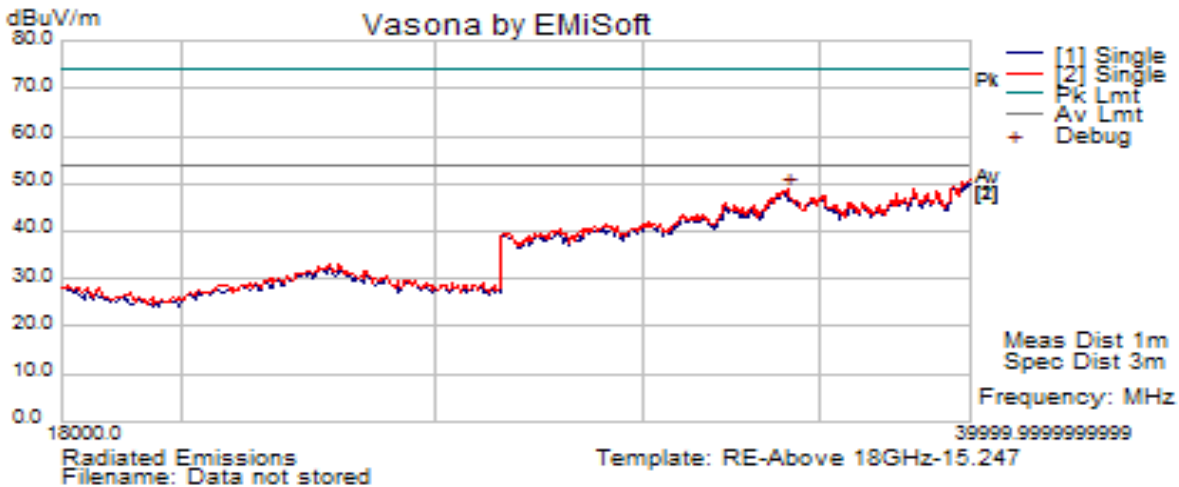


Above 18GHz – 802.11g – 2412MHz

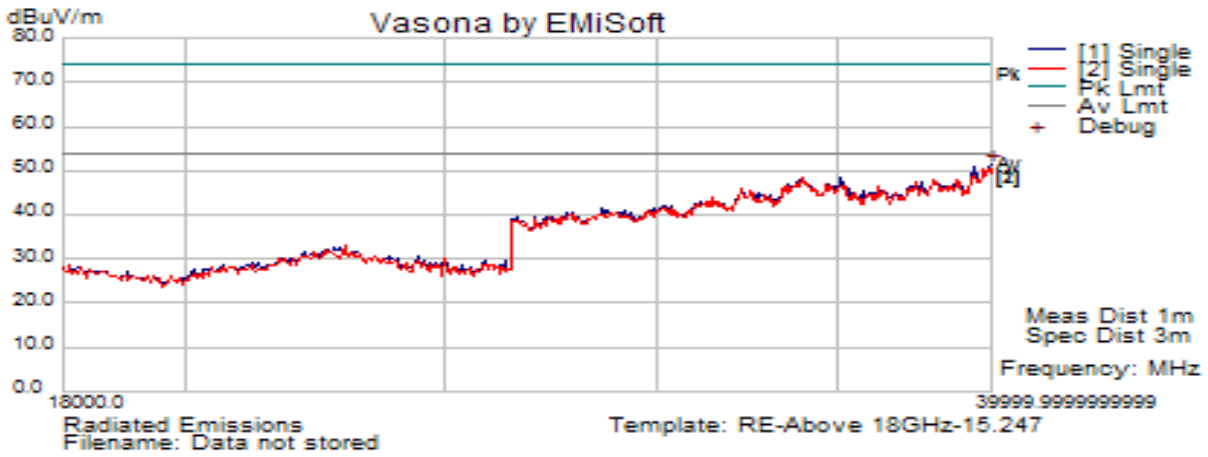


Above 18GHz- 802.11g – 2437MHz

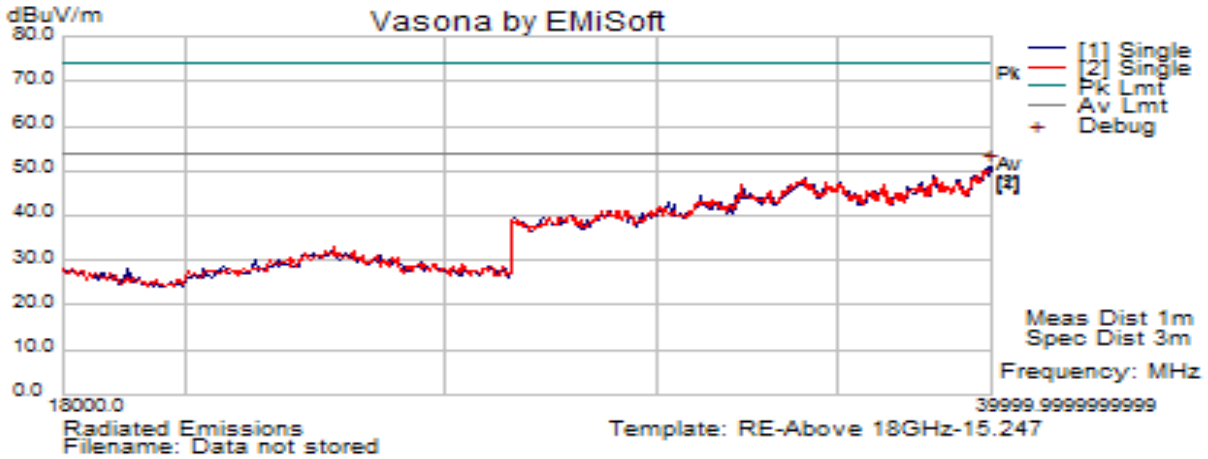


Above 18GHz- 802.11g - 2462MHz

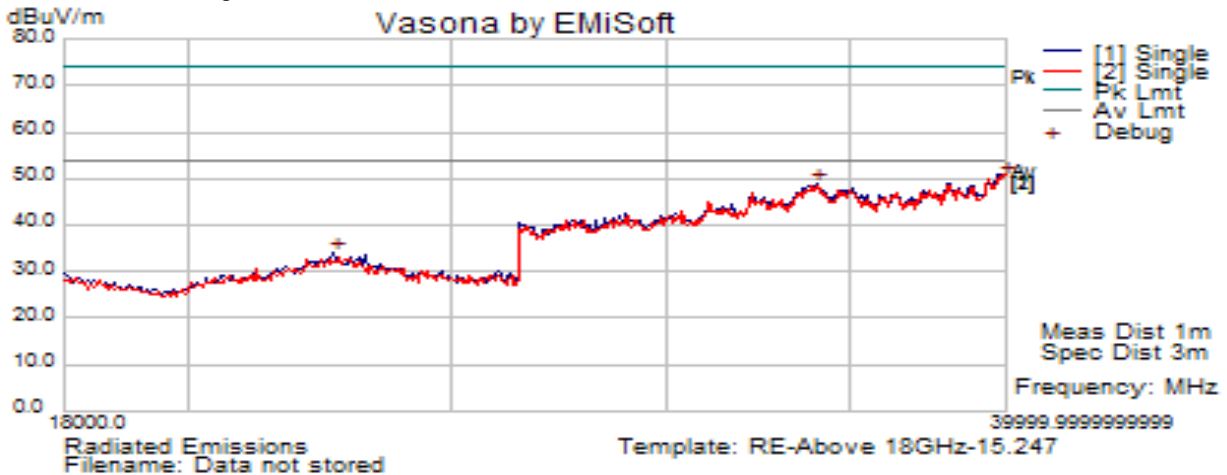


Above 18GHz – 802.11n-20M – 2412MHz

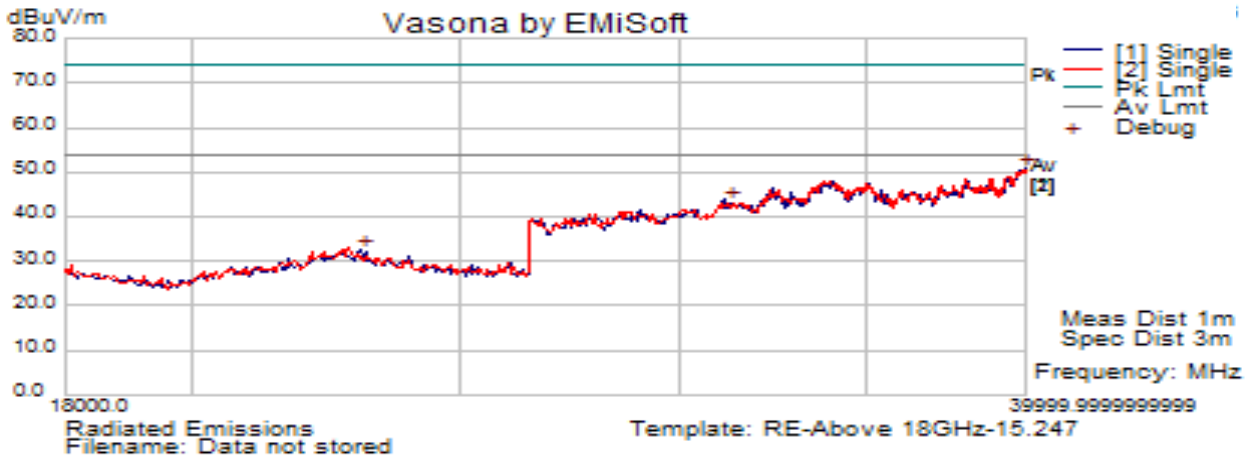


Above 18GHz- 802.11n-20M - 2437MHz

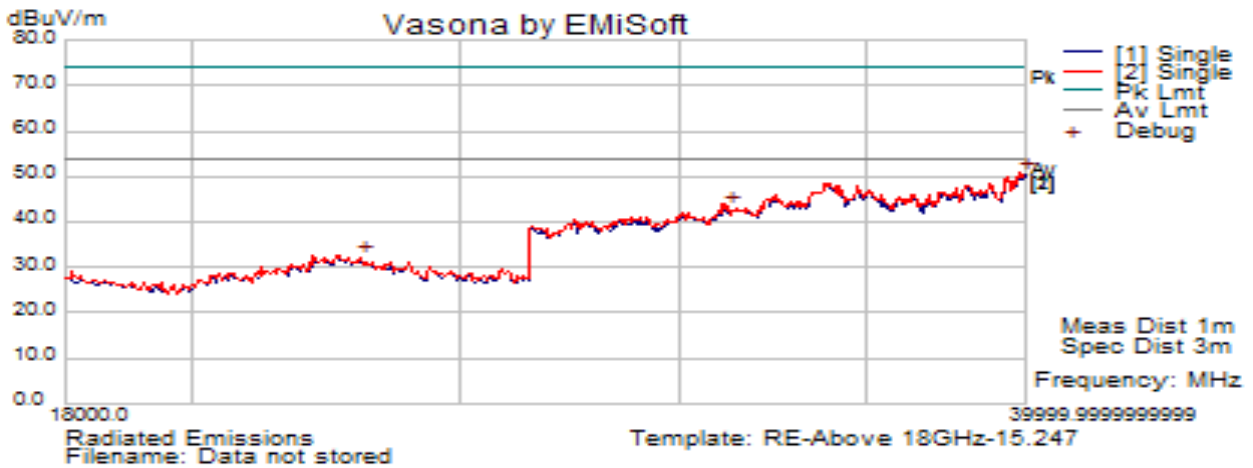


Above 18GHz- 802.11b – 2462MHz

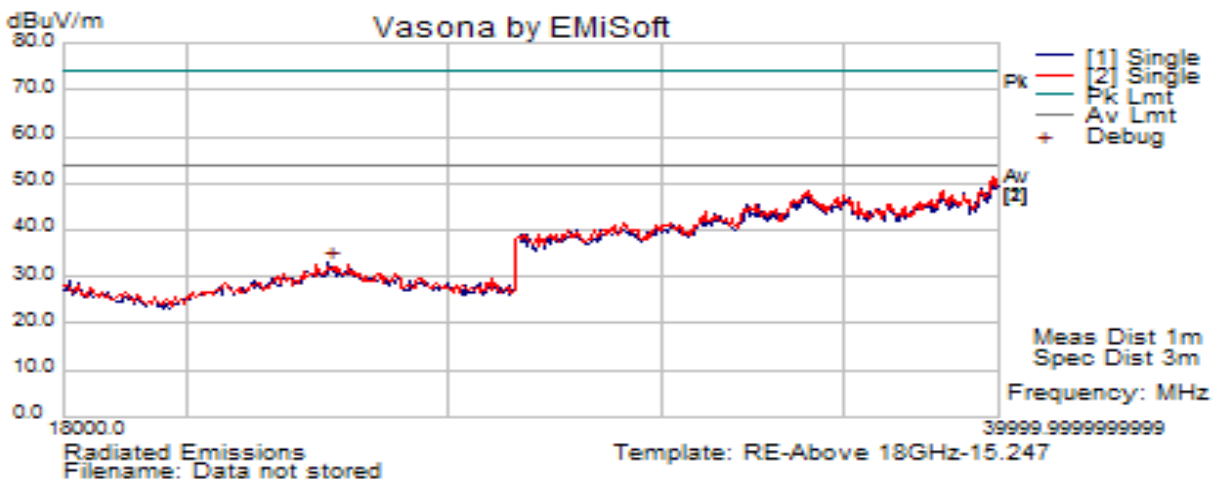


Above 18GHz – 802.11n-40M – 2422MHz

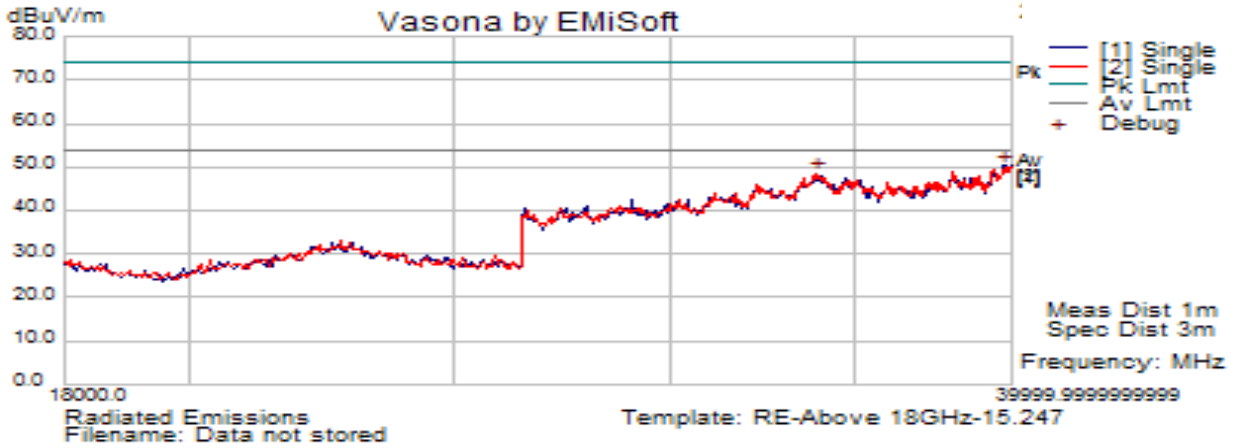


Above 18GHz- 802.11n-40M – 2437MHz

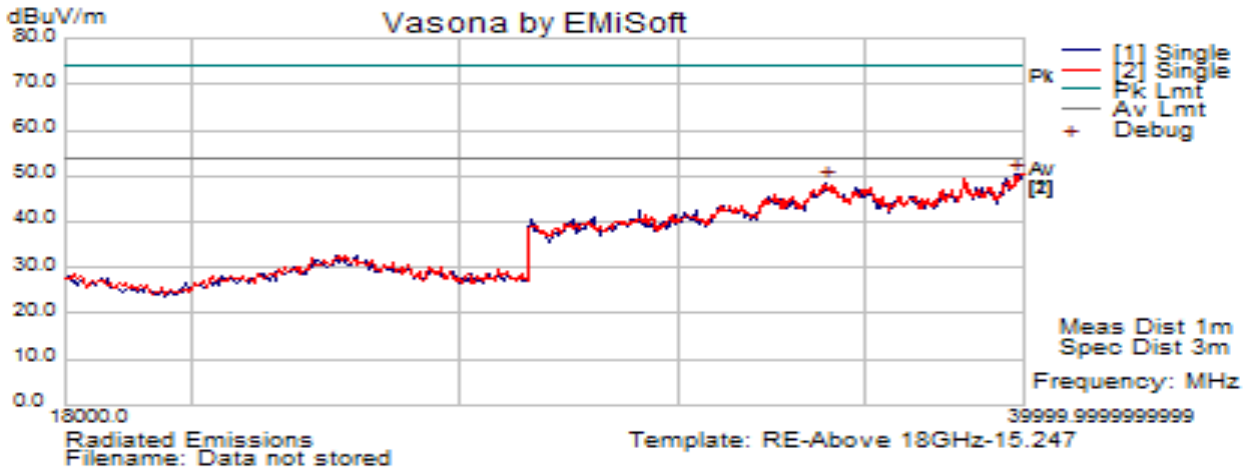

Above 18GHz- 802.11n-40M - 2452MHz

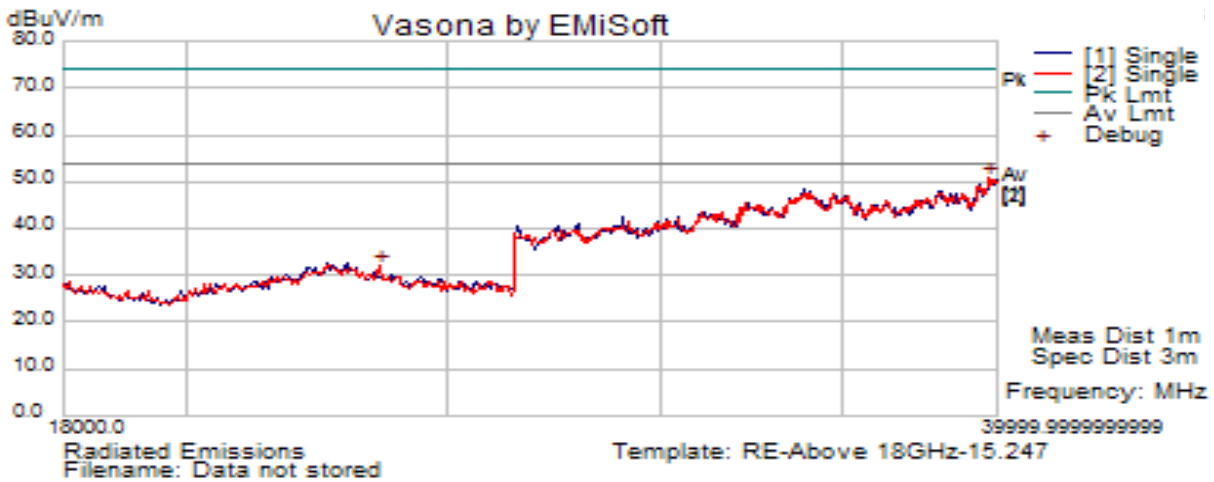



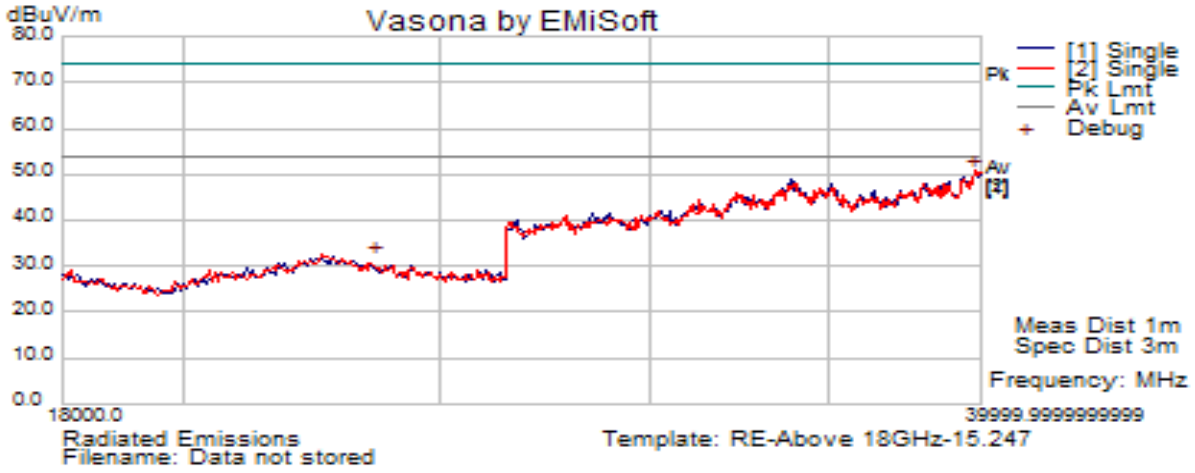













Above 18GHz- Collocation testing (2.4GHz WLAN & 5GHz WLAN on the main-board transmitting simultaneously)










Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Cycle	Cal Due	In use
Conducted Emissions						
R & S Receiver	ESHS10	830223/0009	04/08/2014	1 Year	04/08/2015	<input checked="" type="checkbox"/>
Spectrum Analyzer	FSIQ7	825555/013	05/31/2014	1 Year	04/08/2015	<input checked="" type="checkbox"/>
Schwarzbeck LISN	NNLK 8129	8129-190	08/11/2014	1 Year	08/11/2015	<input checked="" type="checkbox"/>
CHASE LISN	MN2050B	1018	07/31/2014	1 Year	07/31/2015	<input checked="" type="checkbox"/>
Sekonic Hygro Hermograph	ST-50	HE01-000092	05/25/2014	1 Year	05/25/2015	<input checked="" type="checkbox"/>
Radiated Emissions						
R & S Receiver	ESL6	100178	03/01/2014	1 Year	03/04/2015	<input checked="" type="checkbox"/>
R & S Receiver	ESIB 40	100179	05/24/2014	1 Year	05/24/2015	<input checked="" type="checkbox"/>
Bi-Log antenna (30MHz~2GHz)	JB1	A030702	08/12/2014	1 Year	08/12/2015	<input checked="" type="checkbox"/>
Horn Antenna (1-26.5GHz)	3115	10SL0059	08/11/2014	1 Year	08/11/2015	<input checked="" type="checkbox"/>
Horn Antenna (18-40 GHz)	AH-840	101013	08/11/2014	1 Year	08/11/2015	<input checked="" type="checkbox"/>
Pre-Amplifier (100KHz-7GHz)	LPA-6-30	11140711	02/18/2014	1 Year	02/18/2015	<input checked="" type="checkbox"/>
Microwave Preamplifier (18-40 GHz)	PA-840	181251	02/12/2014	1 Year	02/12/2015	<input checked="" type="checkbox"/>
3 Meters SAC	3M	N/A	03/04/2014	1 Year	03/04/2015	<input checked="" type="checkbox"/>
10 Meters SAC	10M	N/A	09/05/2014	1 Year	09/05/2015	<input checked="" type="checkbox"/>
Sekonic Hygro Hermograph	ST-50	HE01-000092	05/25/2014	1 Year	05/25/2015	<input checked="" type="checkbox"/>
RF Conducted Measurement						
Spectrum Analyzer	N9010A	MY50210206	05/30/2014	1 Year	05/30/2015	<input checked="" type="checkbox"/>
Spectrum Analyzer	E4407B	US88441016	05/31/2014	1 Year	05/31/2015	<input type="checkbox"/>
R & S Receiver	ESIB 40	100179	04/20/2014	1 Year	04/20/2015	<input checked="" type="checkbox"/>

Annex B. SIEMIC Accreditation

Accreditations	Document	Scope / Remark
ISO 17025 (A2LA)		Please see the documents for the detailed scope
ISO Guide 65 (A2LA)		Please see the documents for the detailed scope
TCB Designation		A1, A2, A3, A4, B1, B2, B3, B4, C
FCC DoC Accreditation		FCC Declaration of Conformity Accreditation
FCC Site Registration		3 meter site
FCC Site Registration		10 meter site
IC Site Registration		3 meter site
IC Site Registration		10 meter site
EU NB		Radio & Telecommunications Terminal Equipment: EN45001 – EN ISO/IEC 17025
		Electromagnetic Compatibility: EN45001 – EN ISO/IEC 17025
Singapore iDA CB(Certification Body)	 	Phase I, Phase II
Vietnam MIC CAB Accreditation		Please see the document for the detailed scope
Hong Kong OFCA		(Phase II) OFCA Foreign Certification Body for Radio and Telecom
		(Phase I) Conformity Assessment Body for Radio and Telecom
Industry Canada CAB		Radio: Scope A – All Radio Standard Specification in Category I
		Telecom: CS-03 Part I, II, V, VI, VII, VIII

Japan Recognized Certification Body Designation		<p>Radio: A1. Terminal equipment for purpose of calling</p> <p>Telecom: B1. Specified radio equipment specified in Article 38-2, Paragraph 1, Item 1 of the Radio Law</p>
Korea CAB Accreditation		<p>EMI: KCC Notice 2008-39, RRL Notice 2008-3: CA Procedures for EMI KN22: Test Method for EMI</p> <p>EMS: KCC Notice 2008-38, RRL Notice 2008-4: CA Procedures for EMS KN24, KN61000-4-2, -4-3, -4-4, -4-5, -4-6, -4-8, -4-11: Test Method for EMS</p>
		<p>Radio: RRL Notice 2008-26, RRL Notice 2008-2, RRL Notice 2008-10, RRL Notice 2007-49, RRL Notice 2007-20, RRL Notice 2007-21, RRL Notice 2007-80, RRL Notice 2004-68</p>
		<p>Telecom: President Notice 20664, RRL Notice 2007-30, RRL Notice 2008-7 with attachments 1, 3, 5, 6; President Notice 20664, RRL Notice 2008-7 with attachment 4</p>
Taiwan NCC CAB Recognition		LP0002, PSTN01, ADSL01, ID0002, IS6100, CNS14336, PLMN07, PLMN01, PLMN08
Taiwan BSMI CAB Recognition		CNS 13438
Japan VCCI		R-3083: Radiation 3 meter site
		C-3421: Main Ports Conducted Interference Measurement
		T-1597: Telecommunication Ports Conducted Interference Measurement
Australia CAB Recognition		<p>EMC: AS/NZS CISPR 11, AS/NZS CISPR 14.1, AS/NZS CISPR22, AS/NZS 61000.6.3, AS/NZS 61000.6.4</p>
		<p>Radio communications: AS/NZS 4281, AS/NZS 4268, AS/NZS 4280.1, AS/NZS 4280.2, AS/NZS 4295, AS/NZS 4582, AS/NZS 4583, AS/NZS 4769.1, AS/NZS 4769.2, AS/NZS 4770, AS/NZS 4771</p>
		<p>Telecommunications: AS/ACIF S002:05, AS/ACIF S003:06, AS/ACIF S004:06 AS/ACIF S006:01, AS/ACIF S016:01, AS/ACIF S031:01, AS/ACIF S038:01, AS/ACIF S040:01, AS/ACIF S041:05, AS/ACIF S043.2:06, AS/ACIF S60950.1</p>
Australia NATA Recognition		AS/ACIF S002, AS/ACIF S003, AS/ACIF S004, AS/ACIF S006, AS/ACIF S016, AS/ACIF S031, AS/ACIF S038, AS/ACIF S040, AS/ACIF S041, AS/ACIF S043.2