

# RF TEST REPORT



Report No.: FCC\_SL16101901-RUC-037A1 Rev 4.0  
Supersede Report No.: FCC\_SL16101901-RUC-037A1 Rev 3.0

Applicant	:	Ruckus Wireless, Inc.
Product Name	:	ZoneFlex R720 Access Point
Model No.	:	R720
Test Standard	:	47 CFR 15.407
Test Method	:	ANSI C63.4: 2014 789033 D02 General UNII Test Procedures New Rules v01
FCC ID	:	S9GHR720
IC ID	:	5912A-R720
Dates of test	:	12/05/2016 to 01/09/2017
Issue Date	:	01/16/2017
Test Result	:	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail
Equipment complied with the specification [X] Equipment did not comply with the specification [ ]		

This Test Report is Issued Under the Authority of:	
<b>Gary Chou</b>	<b>Chen Ge</b>
Test Engineer	Engineer Reviewer
This test report may be reproduced in full only Test result presented in this test report is applicable to the tested sample only	

Issued By:  
SIEMIC Laboratories  
775 Montague Expressway, Milpitas, 95035 CA



775 Montague Expressway, Milpitas, CA 95035, USA • Phone: (+1) 408 526 1188 • Facsimile (+1) 408 526 1088

Visit us at: [www.siemic.com](http://www.siemic.com); Follow us at:

## Laboratory Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

### Accreditations for Conformity Assessment

Country/Region	Accreditation Body	Scope
USA	FCC, A2LA	EMC, RF/Wireless, Telecom
Canada	IC, A2LA, NIST	EMC, RF/Wireless, Telecom
Taiwan	BSMI, NCC, NIST	EMC, RF, Telecom, Safety
Hong Kong	OFTA, NIST	RF/Wireless, Telecom
Australia	NATA, NIST	EMC, RF, Telecom, Safety
Korea	KCC/RRA, NIST	EMI, EMS, RF, Telecom, Safety
Japan	VCCI, JATE, TELEC, RFT	EMI, RF/Wireless, Telecom
Mexico	NOM, COFETEL, Caniety	Safety, EMC, RF/Wireless, Telecom
Europe	A2LA, NIST	EMC, RF, Telecom, Safety
Israel	MOC, NIST	EMC, RF, Telecom, Safety

### Accreditations for Product Certifications

Country	Accreditation Body	Scope
USA	FCC TCB, NIST	EMC, RF, Telecom
Canada	IC FCB, NIST	EMC, RF, Telecom
Singapore	iDA, NIST	EMC, RF, Telecom
EU	NB	EMC & R&TTE Directive
Japan	MIC (RCB 208)	RF, Telecom
Hong Kong	OFTA (US002)	RF, Telecom

**CONTENTS**

**1 REPORT REVISION HISTORY .....4**

**2 EXECUTIVE SUMMARY .....5**

**3 CUSTOMER INFORMATION .....5**

**4 TEST SITE INFORMATION .....5**

**5 MODIFICATION .....5**

**6 EUT INFORMATION .....6**

6.1 EUT Description .....6

6.2 Radio Description .....6

**7 SUPPORTING EQUIPMENT/SOFTWARE AND CABLING DESCRIPTION .....9**

7.1 Supporting Equipment .....9

7.2 Cabling Description .....9

7.3 Test Software Description .....9

**8 TEST SUMMARY .....10**

**9 MEASUREMENT UNCERTAINTY .....11**

**10 MEASUREMENTS, EXAMINATION AND DERIVED RESULTS .....12**

10.1 Conducted Emissions .....12

10.2 6dB & 26 dB Bandwidth .....15

10.3 Output Power .....35

10.4 Peak Power Spectral Density .....91

10.5 Band Edge Measurement .....155

10.6 Radiated Spurious Emissions below 1GHz .....192

10.7 Radiated Spurious Emissions above 1GHz .....194

**ANNEX A. TEST INSTRUMENT .....209**

**ANNEX B. SIEMIC ACCREDITATION .....210**

## 1 Report Revision History

Report No.	Report Version	Description	Issue Date
FCC_SL16101901-RUC-037A1	None	Original	01/03/2017
FCC_SL16101901-RUC-037A1 Rev 1.0	Rev 1.0	Updated power supply information	01/09/2017
FCC_SL16101901-RUC-037A1 Rev 2.0	Rev 2.0	Updated conducted emission	01/11/2017
FCC_SL16101901-RUC-037A1 Rev 3.0	Rev 3.0	Updated EUT information	01/12/2017
FCC_SL16101901-RUC-037A1 Rev 4.0	Rev 4.0	Updated Beamforming	01/16/2017

## 2 Executive Summary

The purpose of this test program was to demonstrate compliance of following product

Company: Ruckus Wireless, Inc.  
Product: ZoneFlex R720 Access Point  
Model: R720

against the current Stipulated Standards. The specified model product stated above has demonstrated compliance with the Stipulated Standard listed on 1<sup>st</sup> page.

## 3 Customer information

Applicant Name	:	Ruckus Wireless, Inc.
Applicant Address	:	350 West Java Drive, Sunnyvale, California 94089 U.S.A
Manufacturer Name	:	Ruckus Wireless, Inc.
Manufacturer Address	:	350 West Java Drive, Sunnyvale, California 94089 U.S.A

## 4 Test site information

Lab performing tests	SIEMIC Laboratories
Lab Address	775 Montague Expressway, Milpitas, CA 95035
FCC Test Site No.	881796
IC Test Site No.	4842D-2
VCCI Test Site No.	A0133

## 5 Modification

Index	Item	Description	Note
-	-	-	-

## 6 EUT Information

### 6.1 EUT Description

Product Name	R720 Access Point
Model No.	R720
Trade Name	Ruckus
Serial No.	451606000010
Host Model No.	N/A
Input Power	48VDC
Power Adapter Manu/Model	UMEC/UP0451H-54PP
Power Adapter SN	CQ112128
Date of EUT received	12/01/2016
Equipment Class/ Category	DTS, UNII
Port/Connectors	PoE, Ethernet

### 6.2 Radio Description

Radio Type	802.11a	802.11n-20M	802.11n-40M	802.11ac-80M
Operating Frequency	5260-5320MHz 5500-5720MHz	5260-5320MHz 5500-5720MHz	5270-5310MHz 5510-5710MHz	5290MHz, 5530MHz 5610MHz, 5690MHz
Modulation	OFDM (BPSK, QPSK, 16QAM, 64QAM)	OFDM (BPSK, QPSK, 16QAM, 64QAM)	OFDM (BPSK, QPSK, 16QAM, 64QAM)	OFDM (BPSK, QPSK, 16QAM, 64QAM)
Channel Spacing	20MHz	20MHz	40MHz	80MHz
Number of Channels	16	16	6	4
Antenna Type	Internal Omni PCB Antenna			
Antenna Gain (Peak)	5GHz: 3.5dBi			
Antenna Connector Type	U.FL			
Note	<p>EUT has 4 antennas, 2 antennas are in horizontal polarity, and 2 antennas in vertical polarity. The 802.11b/g/a is in CDD mode with all 4 antenna transmit simultaneously.</p> <p>Since they're in 90 deg phase shift between the horizontal and vertical antennas, for radiated limit, the result from different polarization antenna will not be combined. So only the result for 2 vertical polarity antennas and 2 horizontal polarity antennas will be combined for MIMO mode separately. For Cross-polarized antenna, the total gain—including array gain—is computed separately for each of polarizations using the procedures presented in this document. The highest of the total gains shall apply. For this case, the highest of the total gain will be the directional gain of 2 antennas.</p> <p>For conducted limit like power and psd, the result from all 4 chains will be summed.</p> <p>For 802.11b/g/a mode under CDD mode, the array gain for power will be 0 and for PSD will be 10 log (Nant/Nss) dB to be calculated separately for horizontal and vertical polarity. Reference to the following KDB for clarification.  <a href="#">662911 D01 Multiple Transmitter Output v02r01</a>  <a href="#">662911 D02 MIMO with Cross-Polarized Antennas v01</a></p>			

Radio Type	802.11ac-160M	802.11ac-80+80M
Operating Frequency	5250, 5570MHz	5210+5530, 5210+5610, 5210+5775, 5290+5530, 5290+5610, 5290+5775, 5530+5775, 5610+5775
Modulation	OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM)	OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM)
Channel Spacing	160MHz	80MHz
Number of Channels	2	8
Antenna Type	Internal Omni PCB Antenna	Internal Omni PCB Antenna
Antenna Gain (Peak)	5GHz: 3.5dBi	5GHz: 3.5dBi
Antenna Connector Type	U.FL	U.FL
Note	2.4GHz and 5GHz Radio transmit simultaneously	2.4GHz and 5GHz Radio transmit simultaneously

**Note: For 80+80MHz channels, chain 1 and chain 2 are transmitting first 80MHz channel, chain 3 and chain 4 are transmitting second 80MHz channel.**

**The AP supports Beamforming mode and the power setting for Beamforming and Non-Beamforming modes are the same.**

**EUT Power level setting**

Mode	Frequency	Power Setting
802.11-a	5260	14
802.11-a	5280	14
802.11-a	5320	14
802.11-n-20	5260	14
802.11-n-20	5280	14
802.11-n-20	5320	14
802.11-n-40	5270	16
802.11-n-40	5310	16
802.11-ac-80	5290	16
802.11-ac-160	5250	16
802.11-a	5500	14
802.11-a	5580	14
802.11-a	5700	14
802.11-n-20	5500	14
802.11-n-20	5580	14
802.11-n-20	5700	14
802.11-n-40	5510	16
802.11-n-40	5590	16
802.11-n-40	5670	16
802.11-ac-80	5530	16
802.11-ac-80	5610	16
802.11-ac-160	5570	16

**CROSS Band channels power setting**

Mode	Frequency	Power Setting
802.11-a	5720	14
802.11-n-20	5720	14
802.11-n-40	5710	16
802.11-ac-80	5690	16

**Note: All data rate has been verified and worst case was used for all test items.**



## 7 Supporting Equipment/Software and cabling Description

### 7.1 Supporting Equipment

Item	Supporting Equipment Description	Model	Serial Number	Manufacturer	Note
1	Laptop	PP01L Latitude C610	CN-06P823-48643-37P-4153	Dell	-
2	AC/DC power adapter	UP0451H-54PP	CQ2112128	UMEC	-

### 7.2 Cabling Description

Name	Connection Start		Connection Stop		Length / shielding Info		Note
	From	I/O Port	To	I/O Port	Length (m)	Shielding	
							-
							-

### 7.3 Test Software Description

Test Item	Software	Description
RF Testing	QCRT	Set the EUT to transmit continuously in diferent test mode

## 8 Test Summary

Test Item	Test standard		Test Method/Procedure	Pass / Fail
Restricted Band of Operation	FCC	15.205	ANSI C63.4 – 2014 789033 D02 General UNII Test Procedures New Rules v01	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> N/A
AC Conducted Emissions Voltage	FCC	15.207(a)	ANSI C63.4 – 2014	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> N/A

Test Item	Test standard		Test Method/Procedure	Pass / Fail
26 & 6 dB Emission Bandwidth	FCC	15.407 (a) (2)	789033 D02 General UNII Test Procedures New Rules v01	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> N/A
Maximum conducted Output Power	FCC	15.407 (a) (2)	789033 D02 General UNII Test Procedures New Rules v01	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> N/A
Power reduction (Antenna Gain > 6 dBi)	FCC	15.407 (a) (2)	-	<input type="checkbox"/> Pass <input checked="" type="checkbox"/> N/A
Band Edge and Radiated Spurious Emissions	FCC	15.407(b)(2), 15.407(b)(6)	ANSI C63.4 – 2014 789033 D02 General UNII Test Procedures New Rules v01	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> N/A
Power Spectral Density	FCC	15.407 (a) (2)	789033 D02 General UNII Test Procedures New Rules v01	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> N/A
Frequency Stability	FCC	15.407 (g)	-	<input type="checkbox"/> Pass <input checked="" type="checkbox"/> N/A
Transmit Power Control (TPC)	FCC	15.407 (h)(1)	-	<input type="checkbox"/> Pass <input checked="" type="checkbox"/> N/A
User Manual	FCC	-	-	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> N/A

Remark	<ol style="list-style-type: none"> <li>All measurement uncertainties are not taken into consideration for all presented test result.</li> <li>The applicant shall ensure frequency stability by showing that an emission is maintained within the band of operation under all normal operating conditions as specified in the user's manual.</li> </ol>
--------	---

## 9 Measurement Uncertainty


Emissions			
Test Item	Frequency Range	Description	Uncertainty
AC Conducted Emissions	150KHz – 30MHz	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2	±3.5dB
Band Edge and Radiated Spurious Emissions	30MHz – 1GHz	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	+5.6dB/-4.5dB
Band Edge and Radiated Spurious Emissions	1GHz – 40GHz	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	+4.3dB/-4.1dB

## 10 Measurements, Examination and Derived Results

### 10.1 Conducted Emissions

#### Conducted Emission Limit

Frequency ranges (MHz)	Limit (dBuV)	
	QP	Average
0.15 ~ 0.5	66 – 56	56 – 46
0.5 ~ 5	56	46
5 ~ 30	60	50

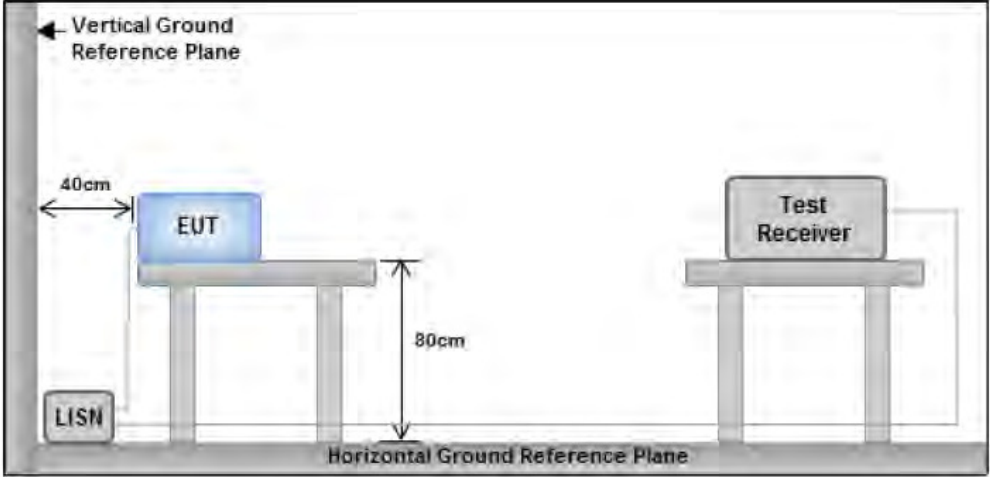Spec	Item	Requirement	Applicable
RSS247(A8.1)	a)	For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 $\mu$ H/50 ohms line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequency ranges.	<input checked="" type="checkbox"/>
Test Setup	 <p style="text-align: center;">Note: 1. Support units were connected to second LISN. 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes</p>		
Procedure	<ul style="list-style-type: none"> <li>- The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table, as shown in Annex B.</li> <li>- The power supply for the EUT was fed through a 50<math>\Omega</math>/50<math>\mu</math>H EUT LISN, connected to filtered mains.</li> <li>- The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss coaxial cable.</li> <li>- All other supporting equipment was powered separately from another main supply.</li> </ul>		
Remark	EUT was tested at 120VAC, 60Hz		
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		


Test Data     Yes                       N/A

Test Plot     Yes (See below)               N/A

Test was done by Gary Chou at Conducted Emission test site.

### Conducted Emission Test Results

Test specification:	Conducted Emissions			
Environmental Conditions:	Temp(°C):	21	Result:	<input checked="" type="checkbox"/> Pass  <input type="checkbox"/> Fail
	Humidity (%):	42		
	Atmospheric(mbar):	1021		
Mains Power:	120Vac, 60Hz			
Tested by:	Gary Chou			
Test Date:	12/05/2016			
Remarks	AC/DC adapter, Line			

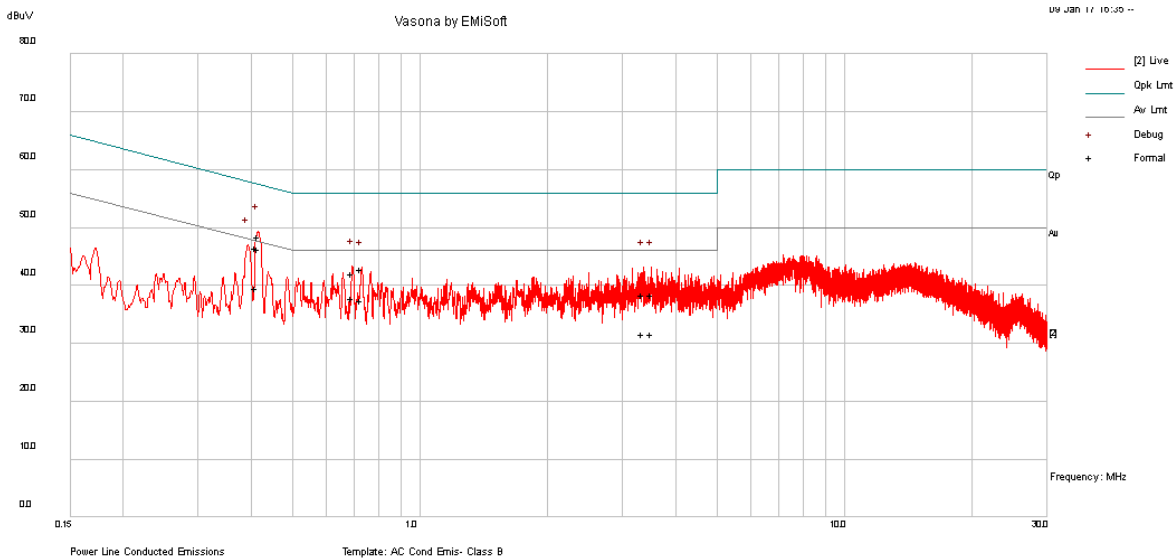


Line Plot at 120Vac, 60Hz

Frequency (MHz)	Raw (dBuV)	Cable Loss (dB)	Factors (dB)	Level (dBuV)	Measurement Type	Line / Neutral	Limit (dBuV)	Margin (dB)	Pass /Fail
0.42	37.77	10.01	0.69	48.46	Quasi Peak	Live	57.55	-9.09	Pass
0.41	35.74	10.01	0.69	46.44	Quasi Peak	Live	57.65	-11.21	Pass
0.69	31.47	10.01	0.56	42.04	Quasi Peak	Live	56	-13.96	Pass
0.73	32.19	10.01	0.56	42.76	Quasi Peak	Live	56	-13.24	Pass
3.51	27.93	10.03	0.5	38.46	Quasi Peak	Live	56	-17.54	Pass
3.35	27.9	10.03	0.5	38.43	Quasi Peak	Live	56	-17.57	Pass
0.42	35.59	10.01	0.69	46.29	Average	Live	47.55	-1.26	Pass
0.41	28.91	10.01	0.69	39.61	Average	Live	47.65	-8.04	Pass
0.69	27.2	10.01	0.56	37.77	Average	Live	46	-8.23	Pass
0.73	26.95	10.01	0.56	37.52	Average	Live	46	-8.48	Pass
3.51	21.1	10.03	0.5	31.63	Average	Live	46	-14.37	Pass
3.35	21.14	10.03	0.5	31.67	Average	Live	46	-14.33	Pass

### Conducted Emission Test Results

Test specification:	Conducted Emissions			Result:	<input checked="" type="checkbox"/> Pass  <input type="checkbox"/> Fail
Environmental Conditions:	Temp(°C):	21			
	Humidity (%):	42			
	Atmospheric(mbar):	1021			
Mains Power:	120Vac, 60Hz				
Tested by:	Gary Chou				
Test Date:	12/05/2016				
Remarks	AC/DC adapter, Neutral				

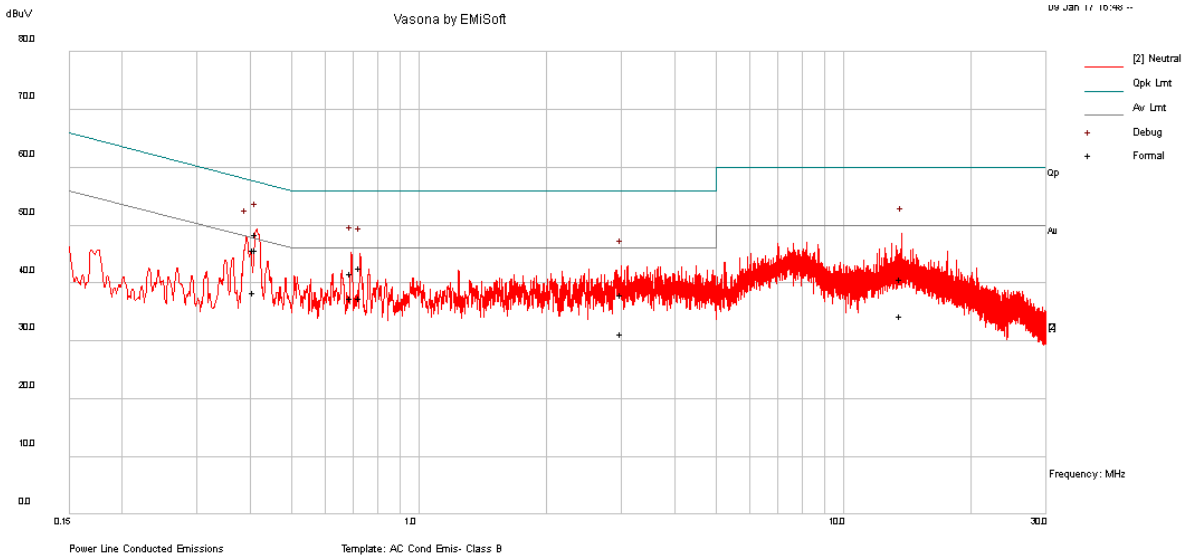


Neutral Plot at 120Vac, 60Hz

Frequency (MHz)	Raw (dBuV)	Cable Loss (dB)	Factors (dB)	Level (dBuV)	Measurement Type	Line / Neutral	Limit (dBuV)	Margin (dB)	Pass /Fail
0.41	37.75	10.01	0.69	48.44	Quasi Peak	Neutral	57.58	-9.13	Pass
0.41	35.03	10.01	0.69	45.73	Quasi Peak	Neutral	57.67	-11.94	Pass
0.69	31.17	10.01	0.56	41.74	Quasi Peak	Neutral	56	-14.26	Pass
0.73	32.04	10.01	0.56	42.61	Quasi Peak	Neutral	56	-13.39	Pass
13.68	30.05	10.06	0.55	40.66	Quasi Peak	Neutral	60	-19.34	Pass
2.99	27.5	10.03	0.5	38.03	Quasi Peak	Neutral	56	-17.97	Pass
0.41	35.13	10.01	0.69	45.82	Average	Neutral	47.58	-1.75	Pass
0.41	27.73	10.01	0.69	38.43	Average	Neutral	47.67	-9.25	Pass
0.69	26.95	10.01	0.56	37.52	Average	Neutral	46	-8.48	Pass
0.73	26.88	10.01	0.56	37.45	Average	Neutral	46	-8.55	Pass
13.68	23.84	10.06	0.55	34.44	Average	Neutral	50	-15.56	Pass
2.99	20.72	10.03	0.5	31.25	Average	Neutral	46	-14.75	Pass

## 10.2 6dB & 26 dB Bandwidth

### Requirement(s):

Spec	Item	Requirement	Applicable
§ 15.407	-	26 dB Emission BW: Report only for reference.	<input checked="" type="checkbox"/>
		6 dB Emission BW: Report only for reference(Cross Band)	<input checked="" type="checkbox"/>
	a) (2)	26 dB Emission BW: Report only for power limit calculation.	<input type="checkbox"/>
Test Setup			
Test Procedure	<p>789033 D02 General UNII Test Procedures New Rules v01</p> <p><u>26dB Emission bandwidth measurement procedure (Other than 5.725-5.85 GHz)</u></p> <ul style="list-style-type: none"> <li>- Use the spectrum analyzer built-in measurement function to determine the 26dB BW. <ul style="list-style-type: none"> <li>o Set RBW = around 1% of emission bandwidth</li> <li>o Set VBW &gt; RBW</li> <li>o Detector = Peak</li> <li>o Trace mode = max hold</li> </ul> </li> <li>- Allow the trace to stabilize.</li> <li>- Capture the plot.</li> <li>- Repeat above steps for different test channel and other modulation type.</li> </ul> <p><u>6dB Emission bandwidth measurement procedure</u></p> <ul style="list-style-type: none"> <li>- Use the spectrum analyzer built-in measurement function to determine the 26dB BW. <ul style="list-style-type: none"> <li>o Set RBW = 100kHz</li> <li>o Set VBW &gt; 3RBW</li> <li>o Detector = Peak</li> <li>o Trace mode = max hold</li> </ul> </li> <li>- Allow the trace to stabilize.</li> <li>- Capture the plot.</li> <li>- Repeat above steps for different test channel and other modulation type.</li> </ul>		
Test Date	12/05/2016 – 12/20/2016	Environmental condition	Temperature 23°C Relative Humidity 42% Atmospheric Pressure 1021mbar
Remark	N/A		
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Test Data     Yes       N/A  
 Test Plot     Yes       N/A

Test was done by Shuo Zhang at RF test site.

**26dB Bandwidth measurement result for 5.3GHz**

Type	Test mode	Freq (MHz)	CH	Result (MHz)
26dB BW	802.11a	5260	Low	18.55
	802.11a	5280	Mid	18.60
	802.11a	5320	High	18.64
	802.11n-20	5260	Low	20.56
	802.11n-20	5280	Mid	19.80
	802.11n-20	5320	High	19.63
	802.11n-40	5270	Low	38.30
	802.11n-40	5310	High	39.43
	802.11ac-80	5290	Mid	82.58
	802.11ac-160	5250	Mid	85.18+84.40

**26dB Bandwidth measurement result for 5.5GHz**

Type	Test mode	Freq (MHz)	CH	Result (MHz)
26dB BW	802.11a	5500	Low	19.46
	802.11a	5580	Mid	19.04
	802.11a	5700	High	18.67
	802.11n-20	5500	Low	20.00
	802.11n-20	5580	Mid	20.10
	802.11n-20	5700	High	19.66
	802.11n-40	5510	Low	39.27
	802.11n-40	5590	Mid	38.92
	802.11n-40	5670	High	39.16
	802.11ac-80	5530	Low	84.66
	802.11ac-80	5610	High	82.54
	802.11ac-160	5570	Low	84.78
			High	85.86

**26dB Bandwidth measurement result for cross channels**


Type	Test mode	Freq (MHz)	CH	Result (MHz)
26dB BW	802.11a	5720	CROSS	18.89
	802.11n-20	5720	CROSS	20.35
	802.11n-40	5710	CROSS	38.54
	802.11ac-80	5690	CROSS	84.25




**6 Bandwidth measurement result for cross channels**

Type	Test mode	Freq (MHz)	CH	Result (MHz)
26dB BW	802.11a	5720	CROSS	15.88
	802.11n-20	5720	CROSS	17.70
	802.11n-40	5710	CROSS	36.36
	802.11ac-80	5690	CROSS	76.05


**26dB Bandwidth Test Plots**  
**W53:**

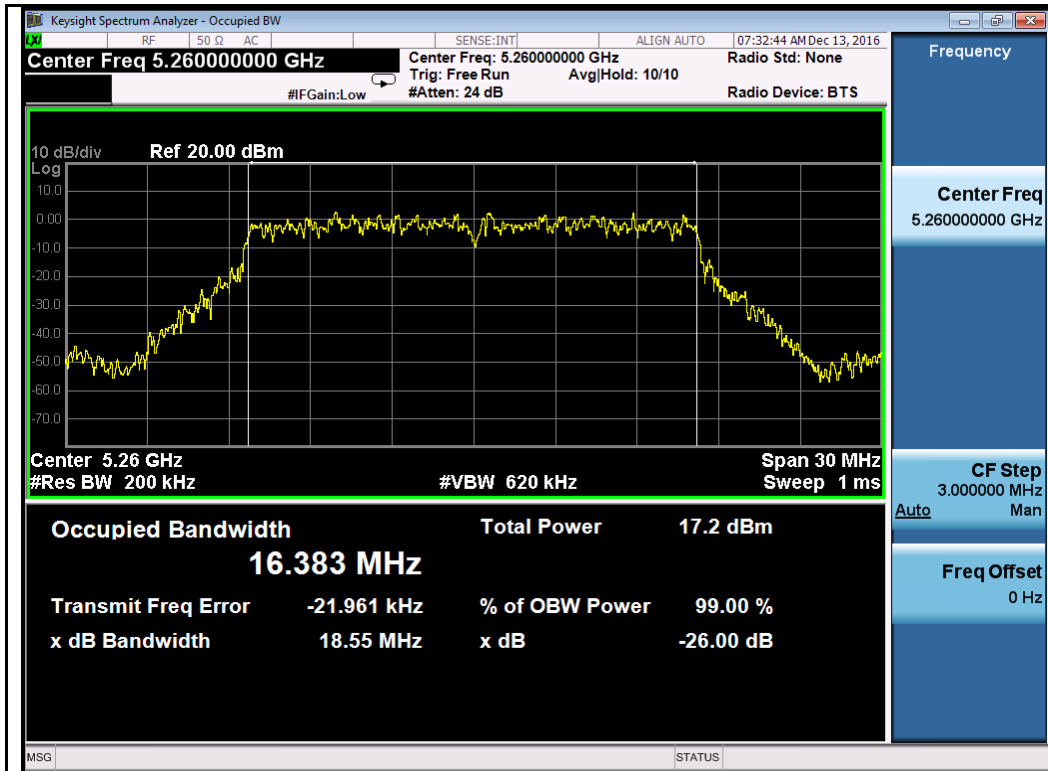


802.11a-5260MHz

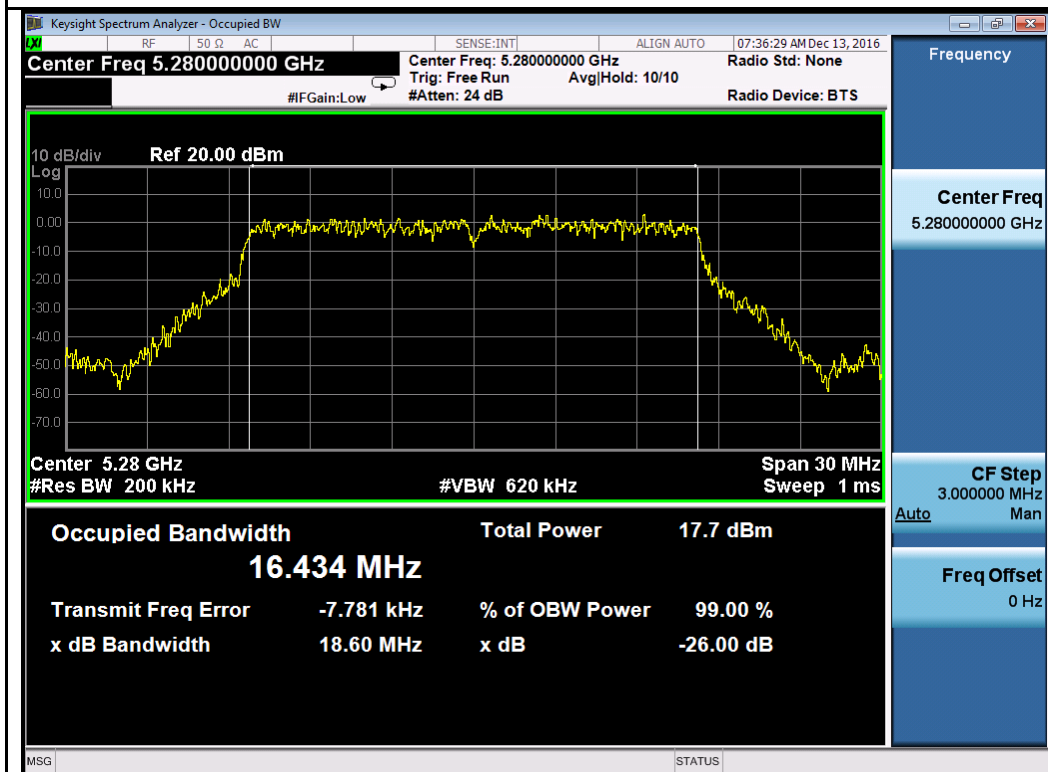


802.11a-5280MHz

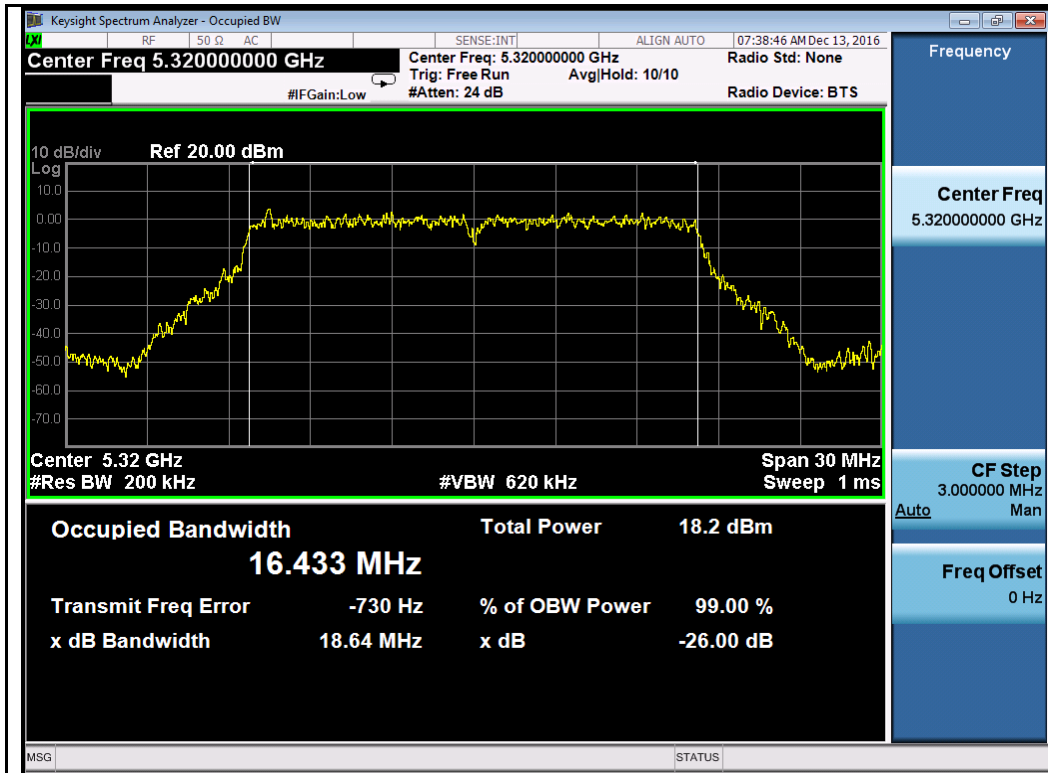


802.11a-5320MHz

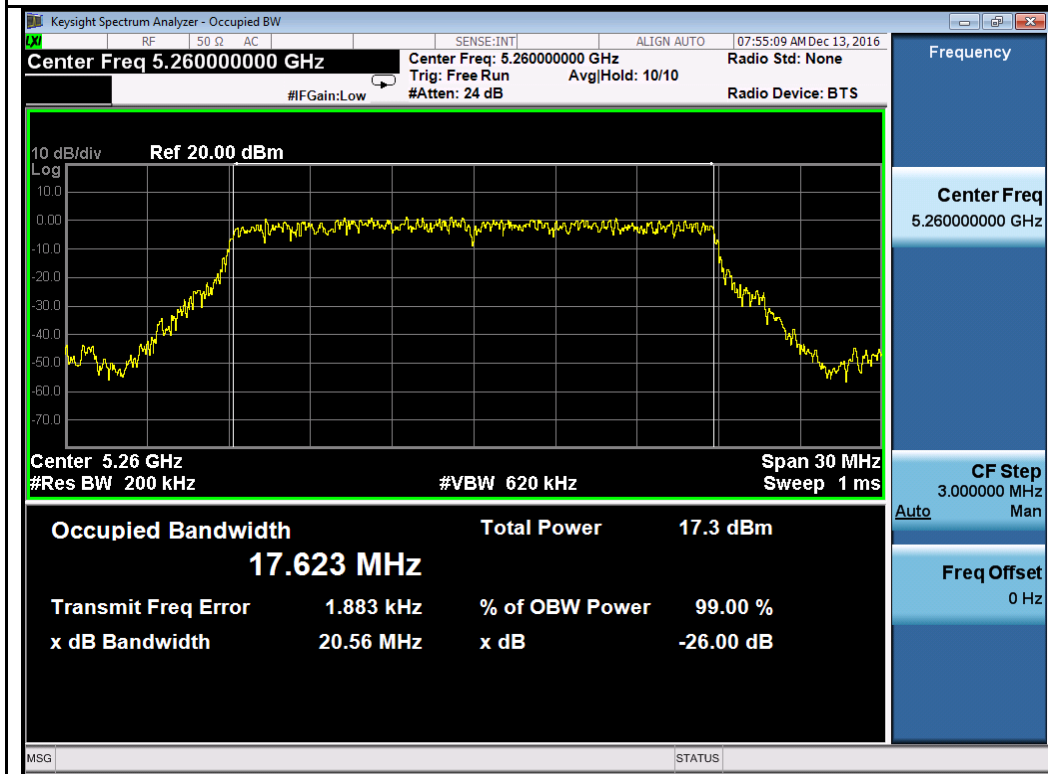


802.11n-HT20-5260MHz

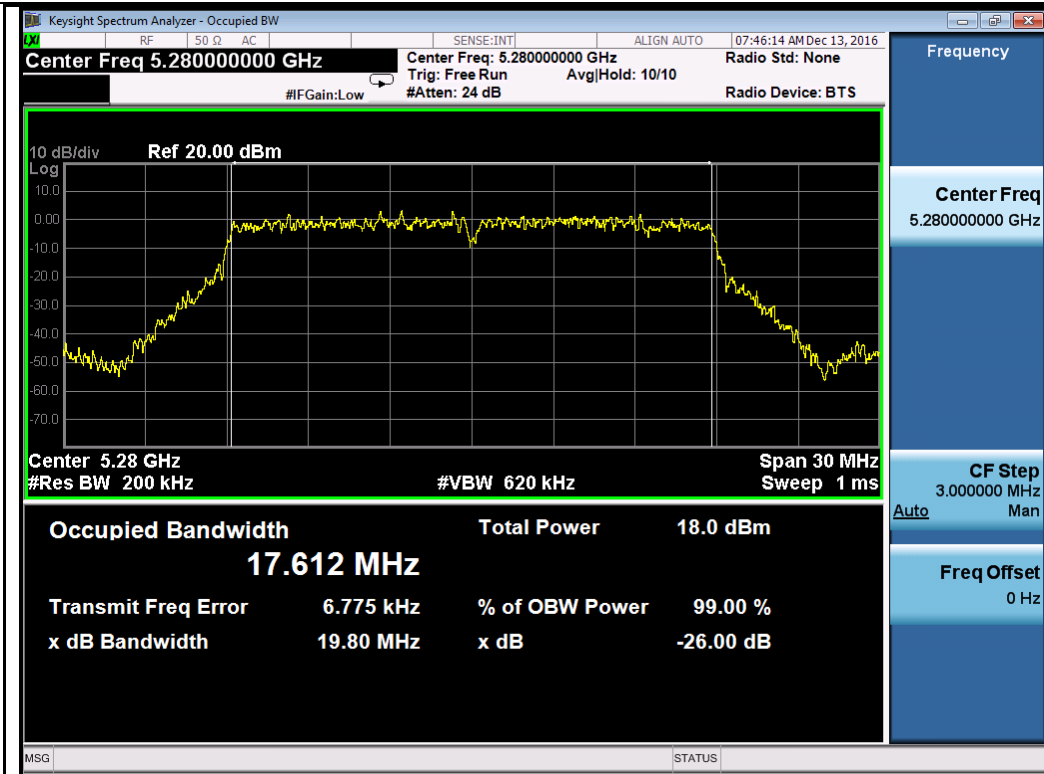


802.11n-HT20-5280MHz

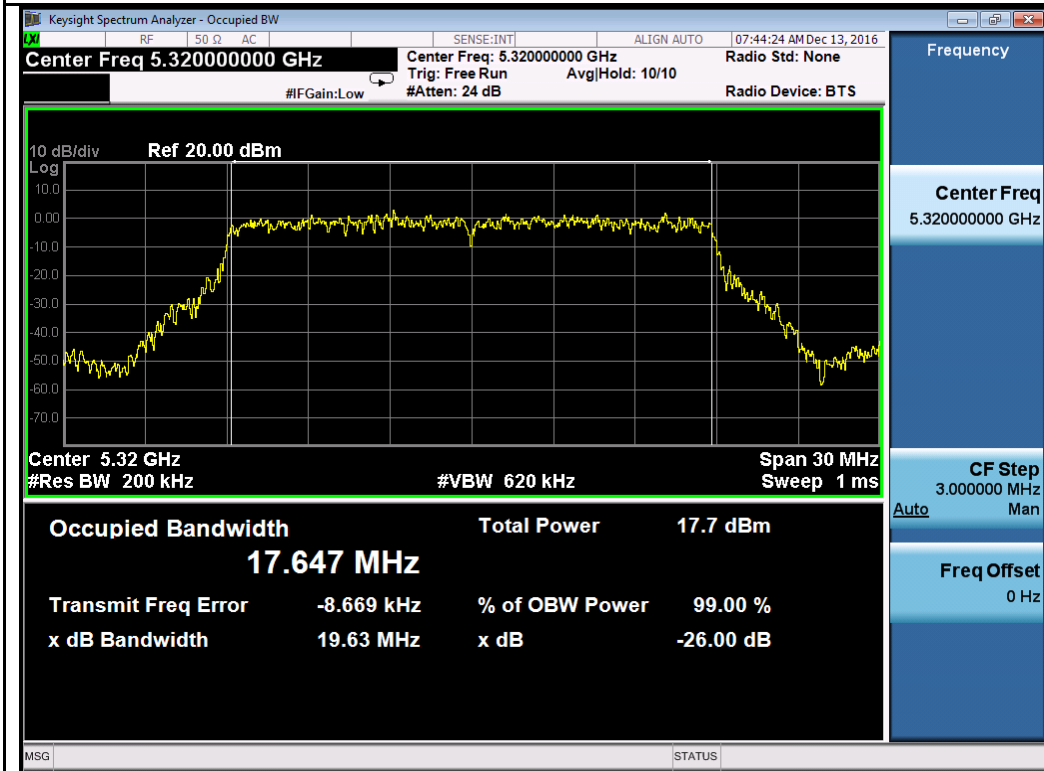


802.11n-HT20-5320MHz

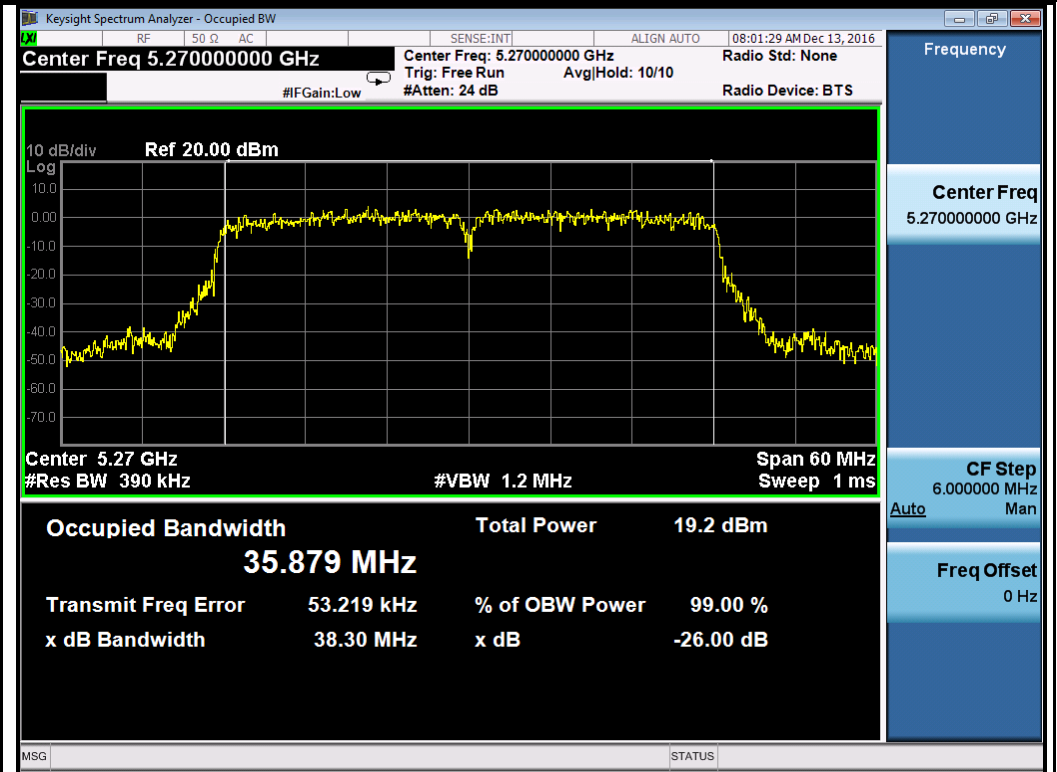


802.11n-HT40-5270MHz

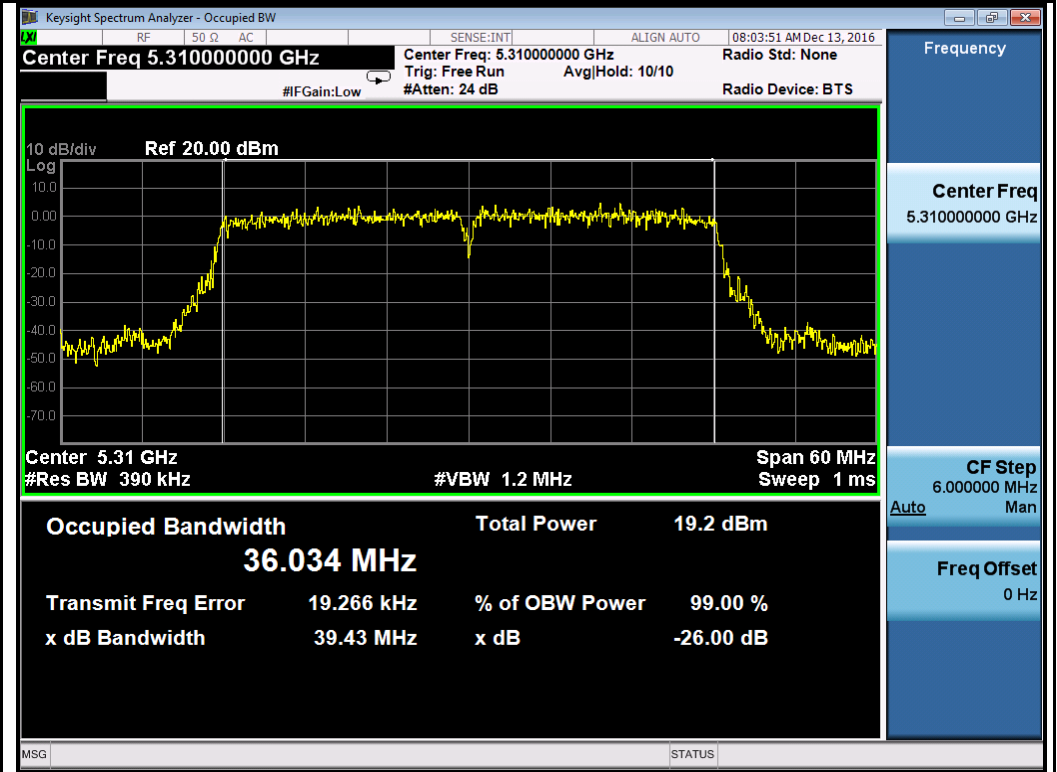


802.11n-HT40-5310MHz

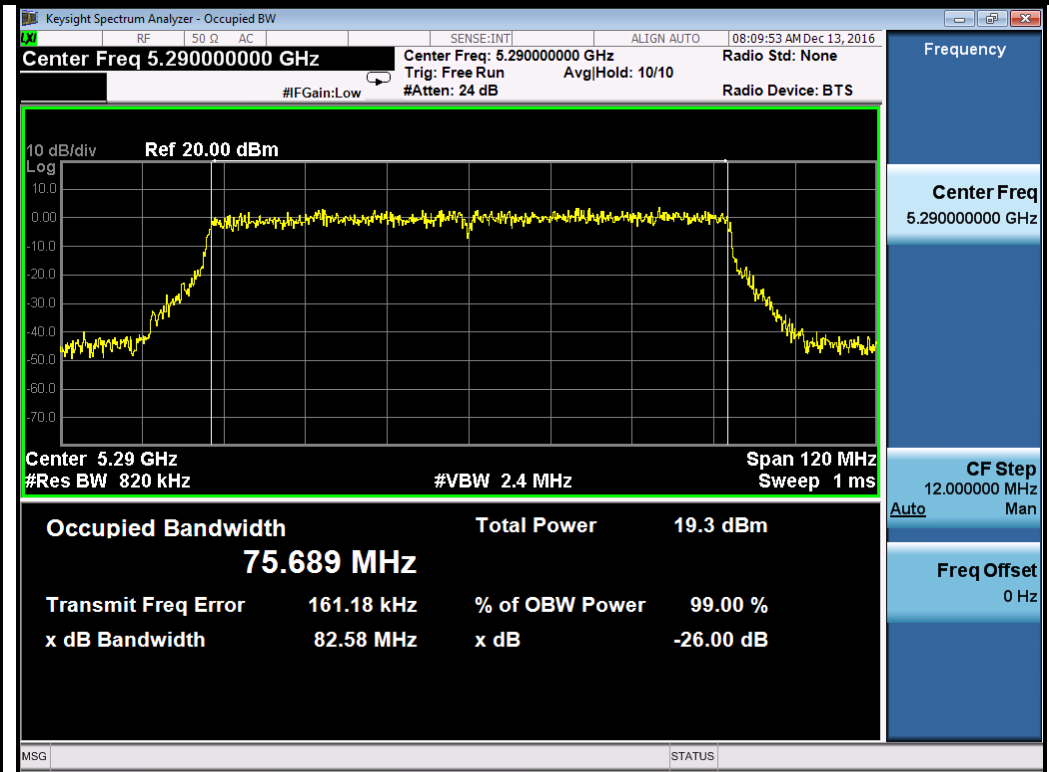


802.11ac-VHT80-5290MHz

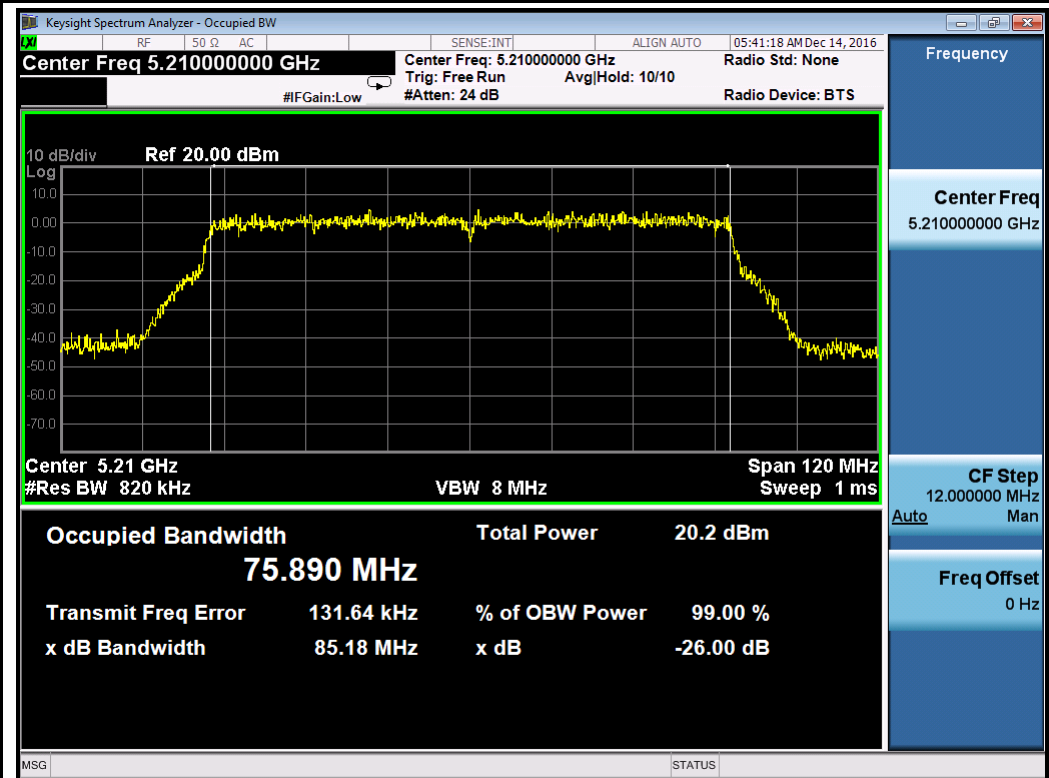


802.11ac-VHT160-5250MHz (1)

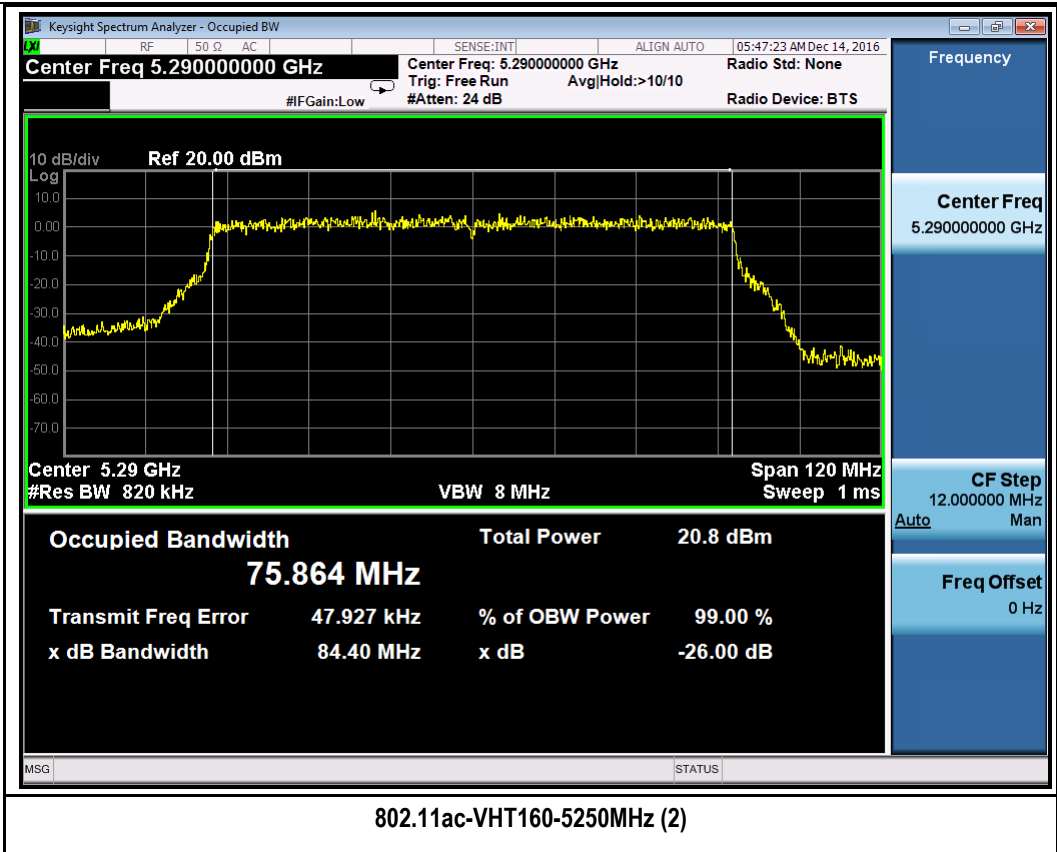

W56:

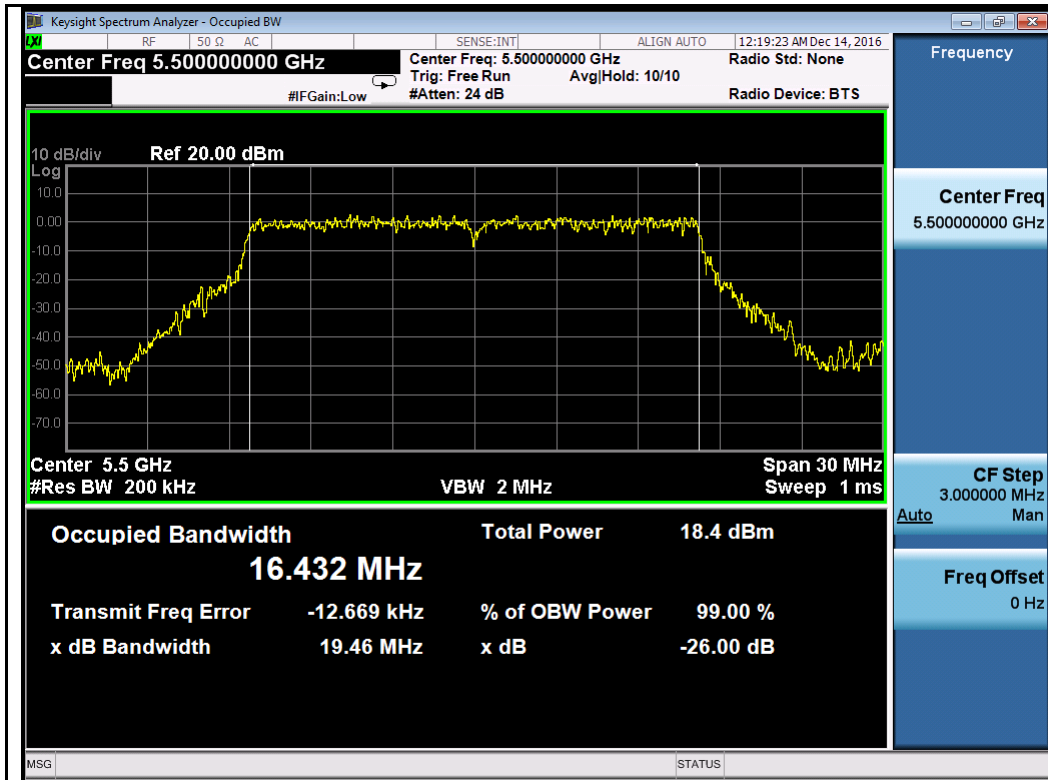


802.11a-5500MHz

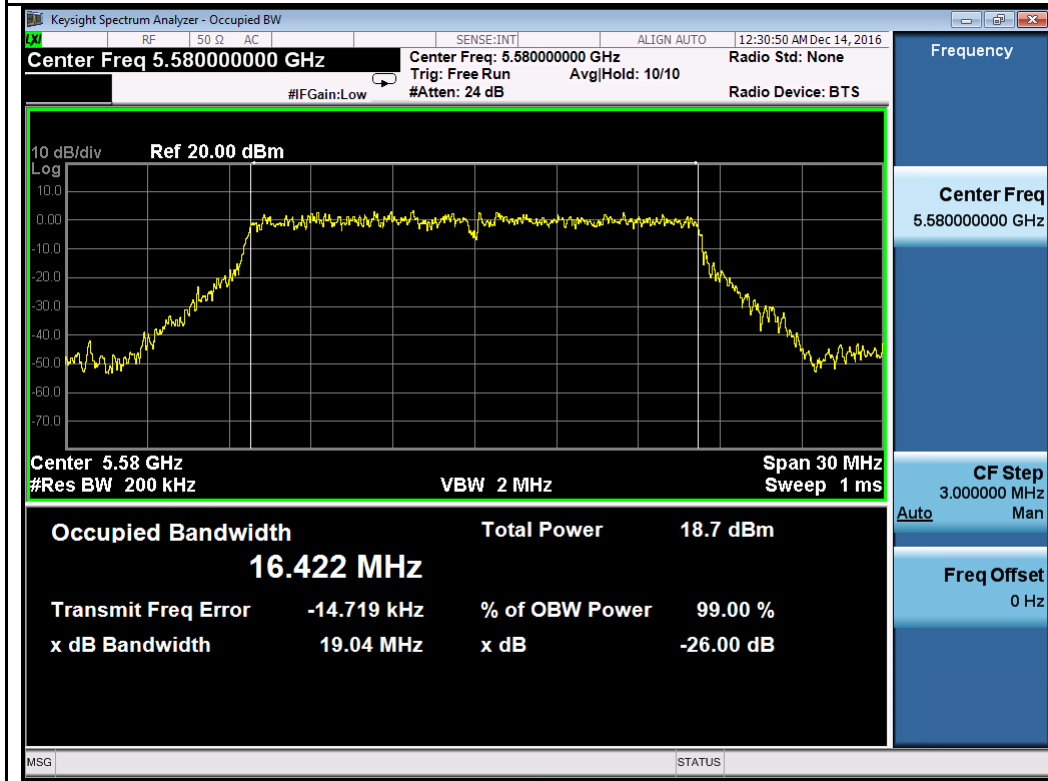


802.11a-5580MHz




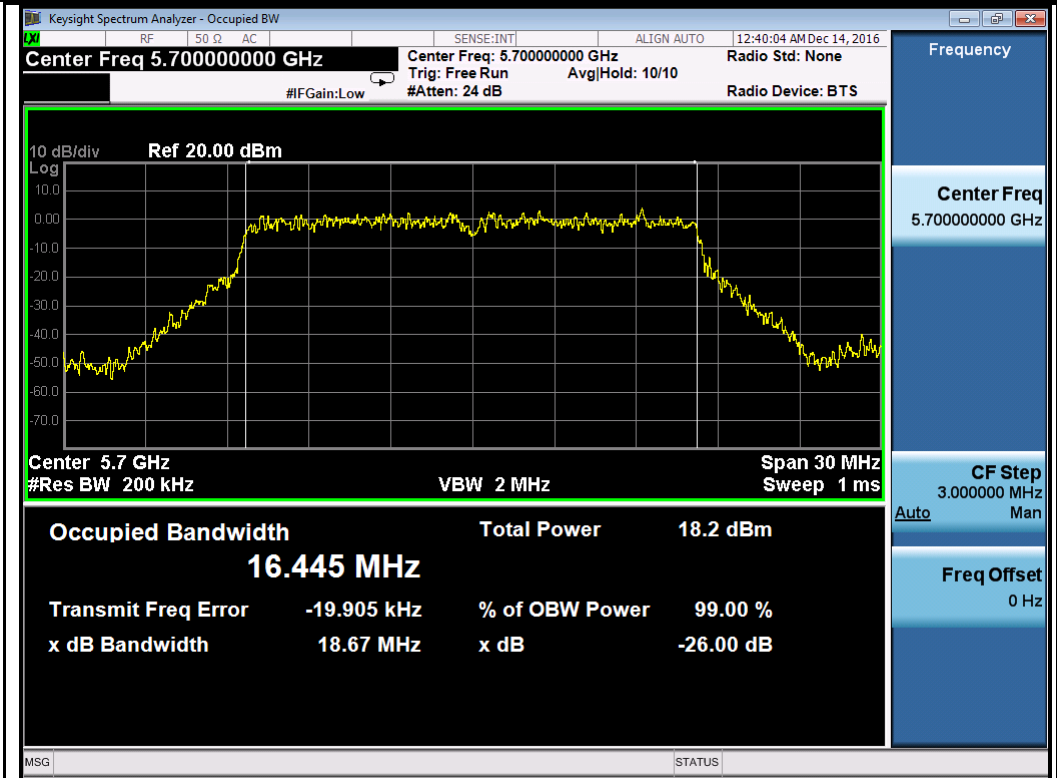


802.11a-5700MHz

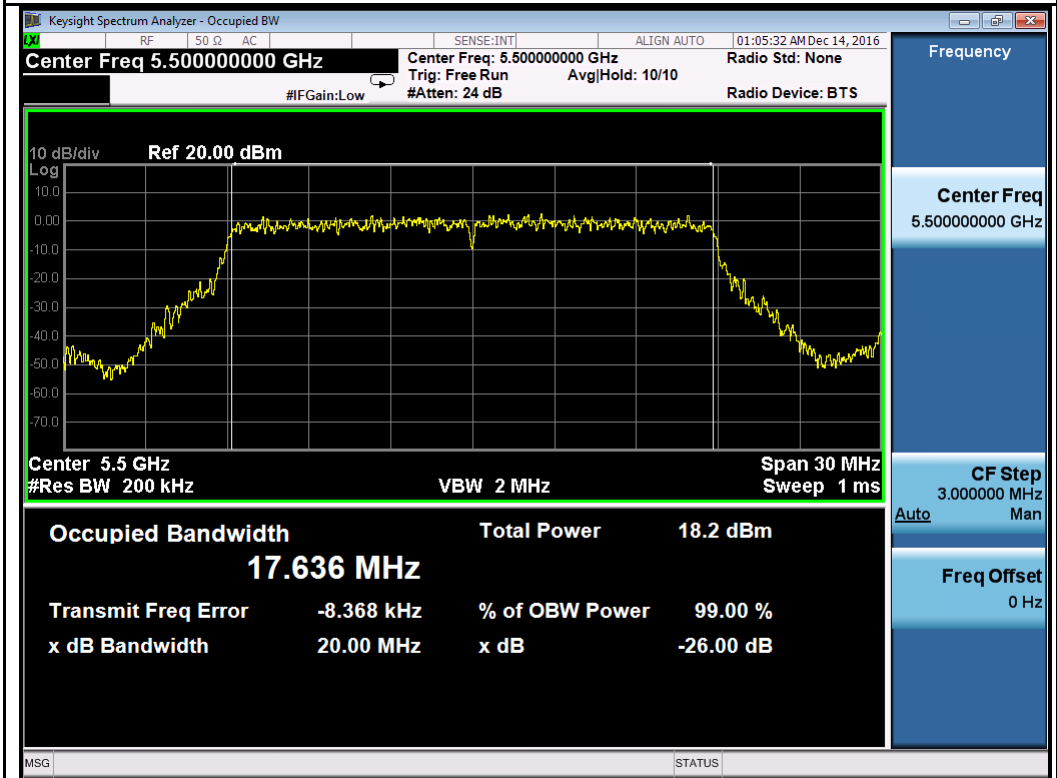


802.11n-HT20-5500MHz

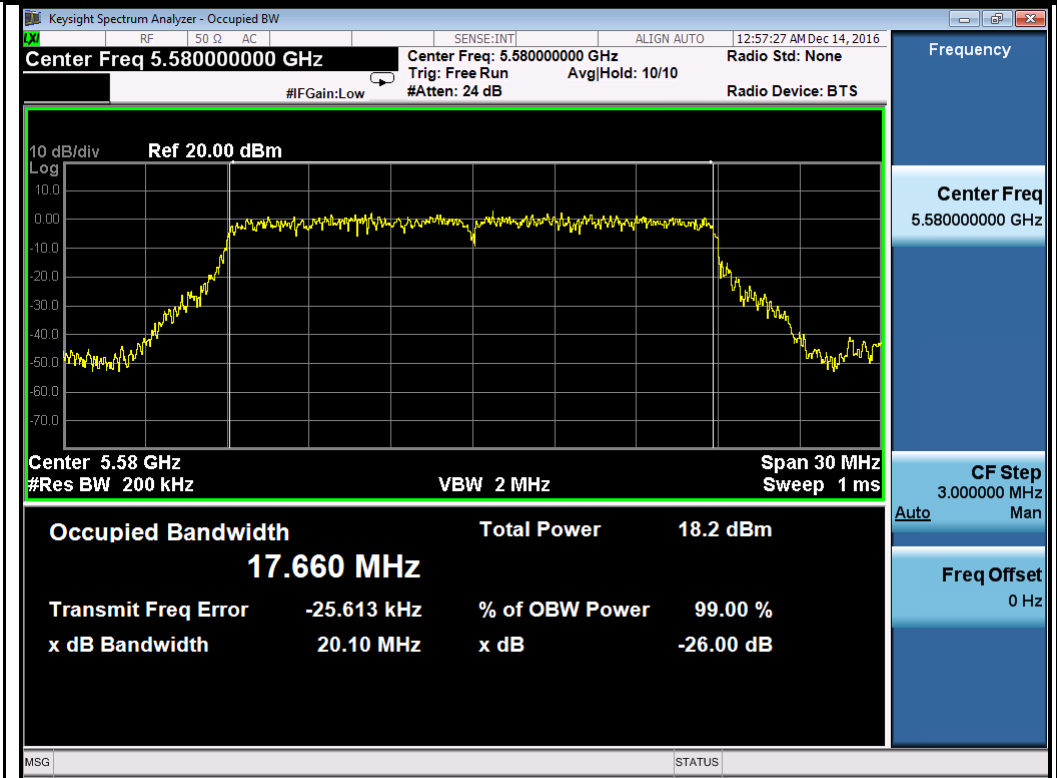


802.11n-HT20-5580MHz

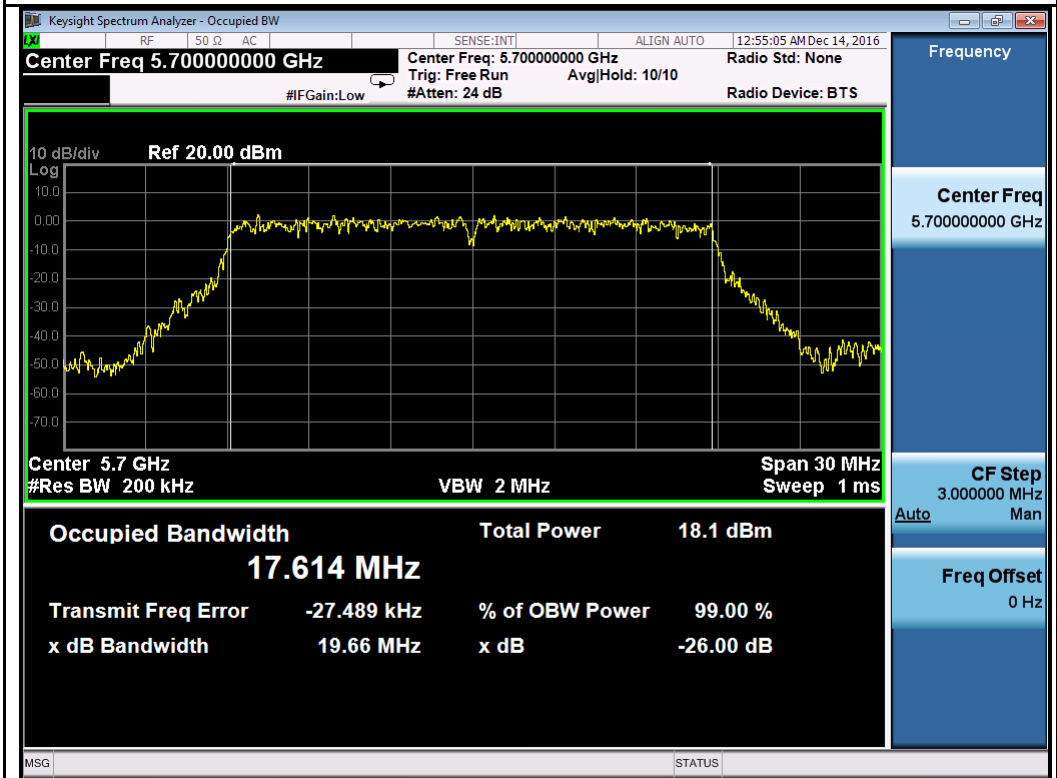


802.11n-HT20-5700MHz

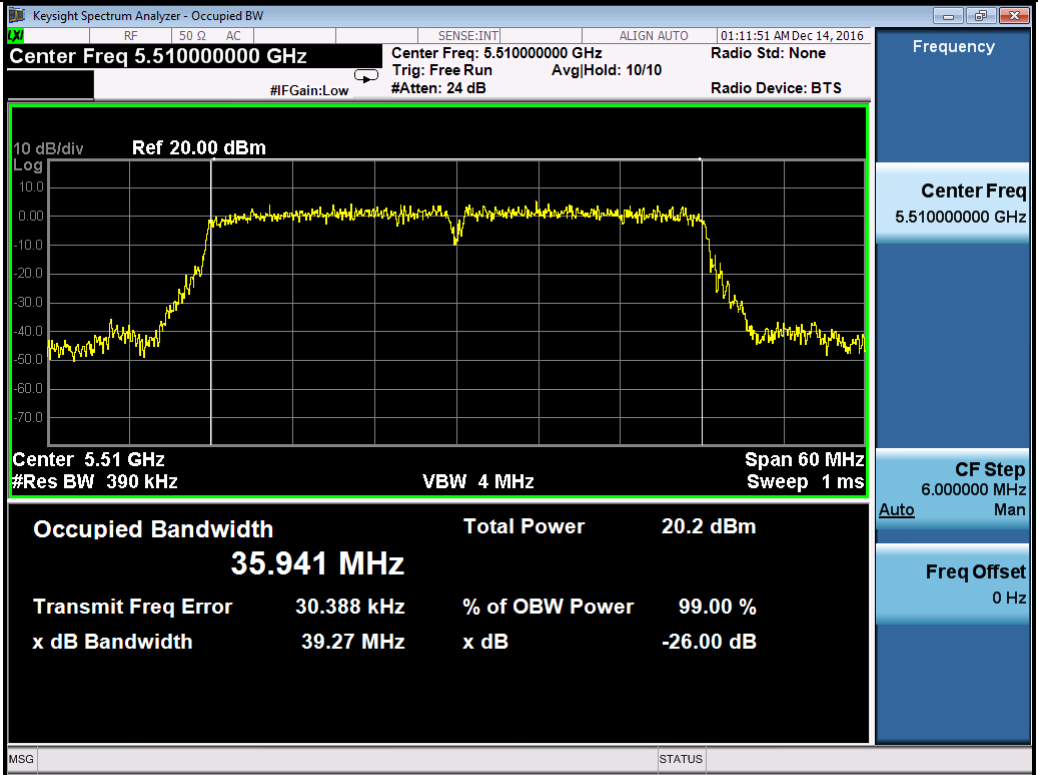


802.11n-HT40-5510MHz

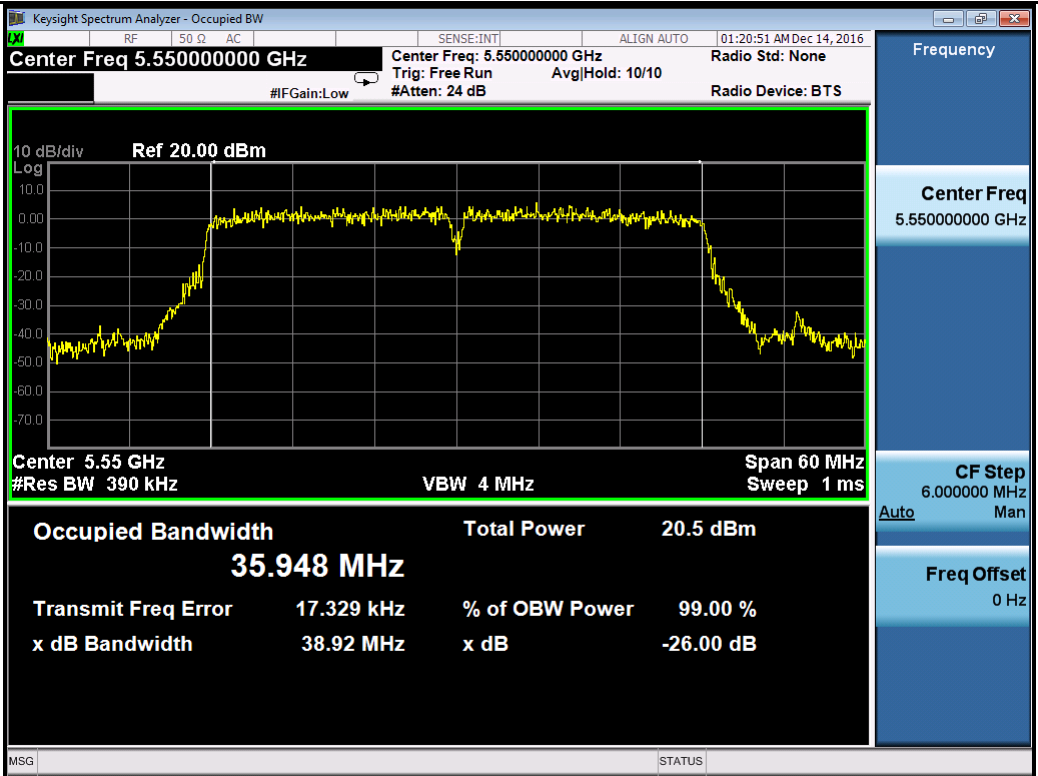



802.11n-HT40-5550MHz

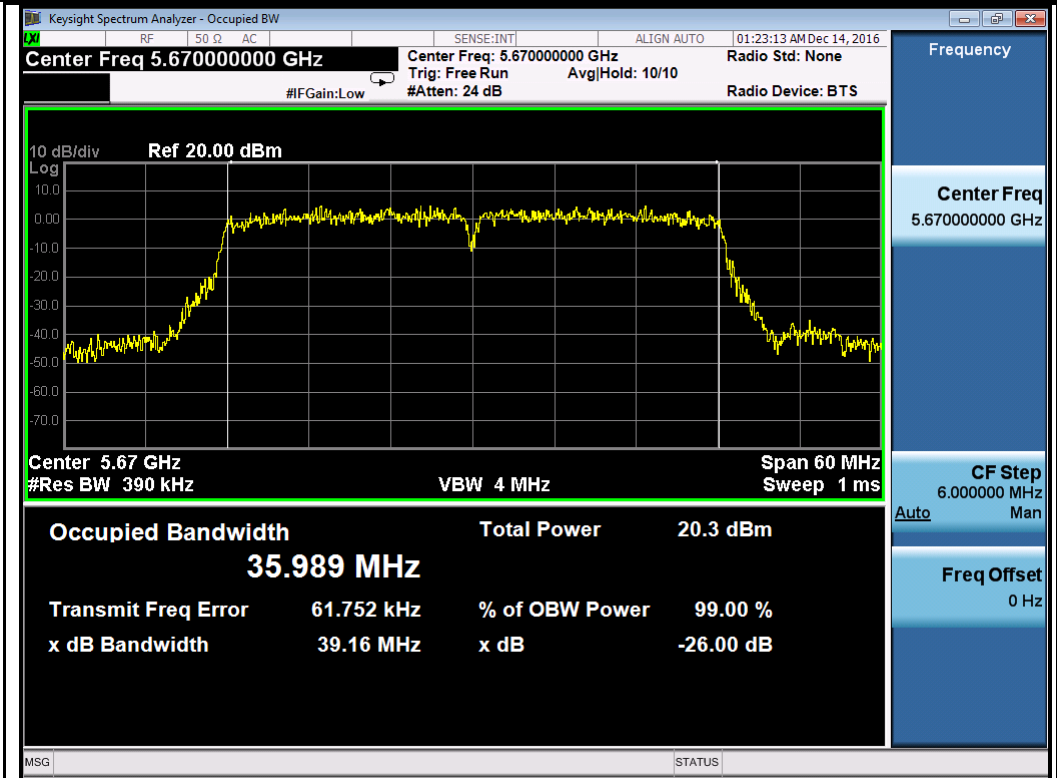


802.11n-HT40-5670MHz

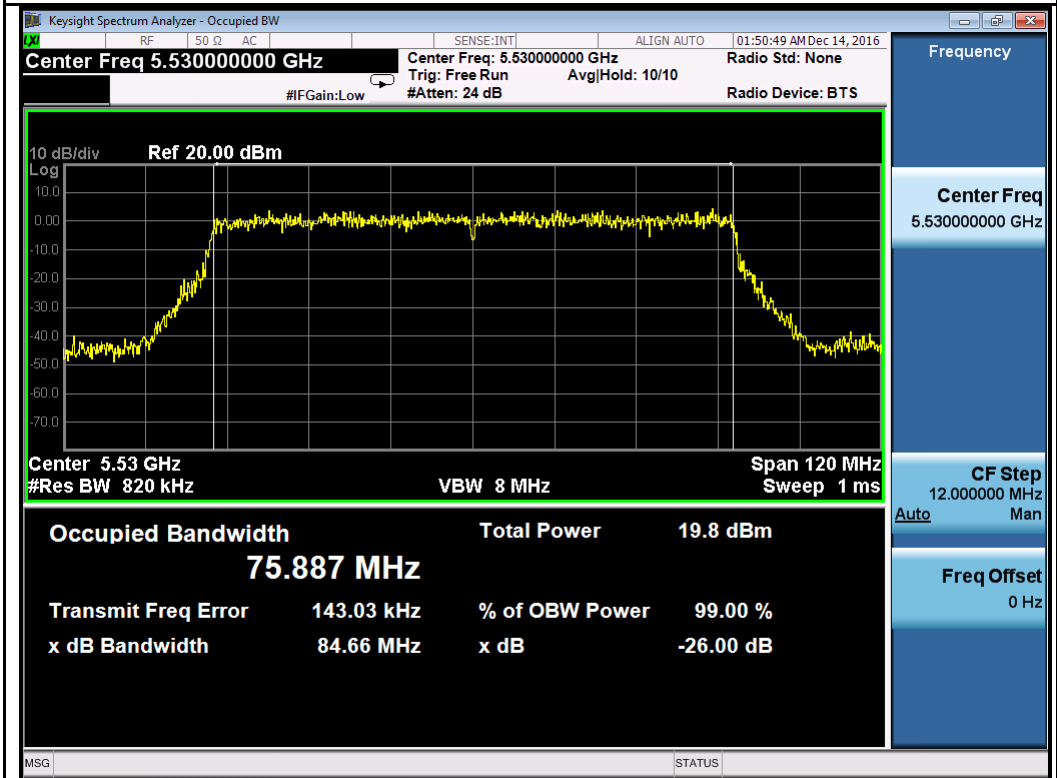


802.11ac-VHT80-5530MHz

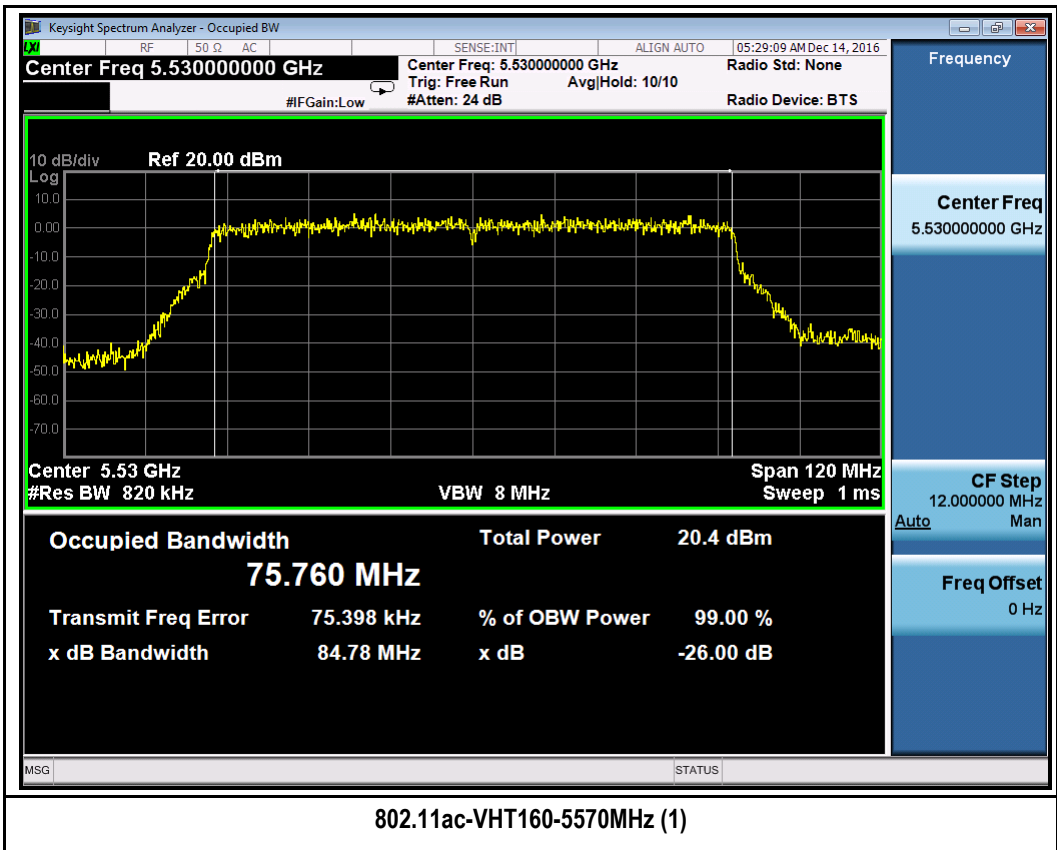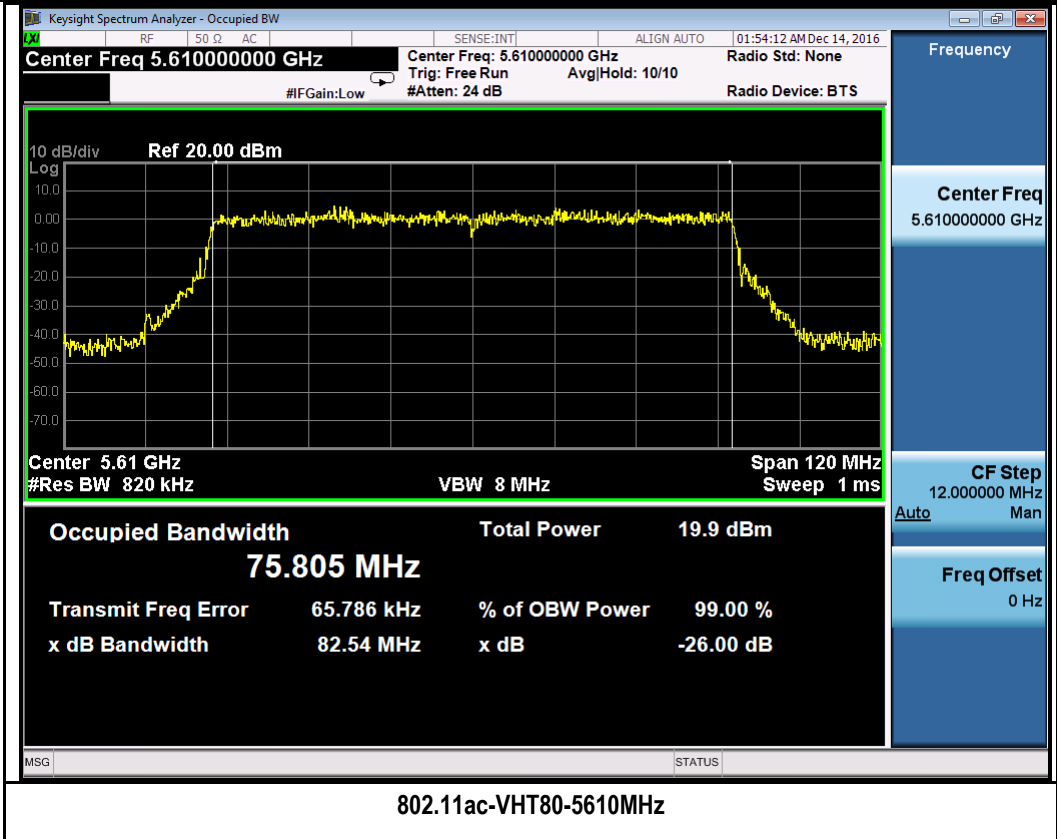


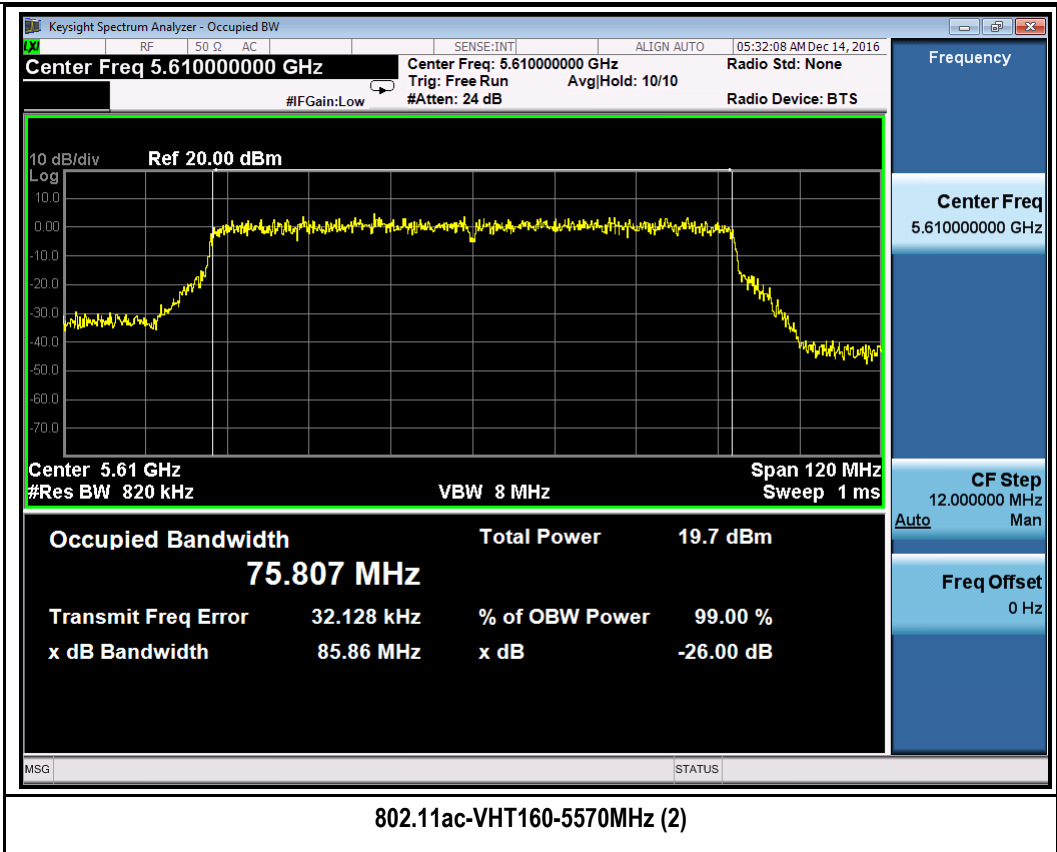


**26dB BW Cross Band:**

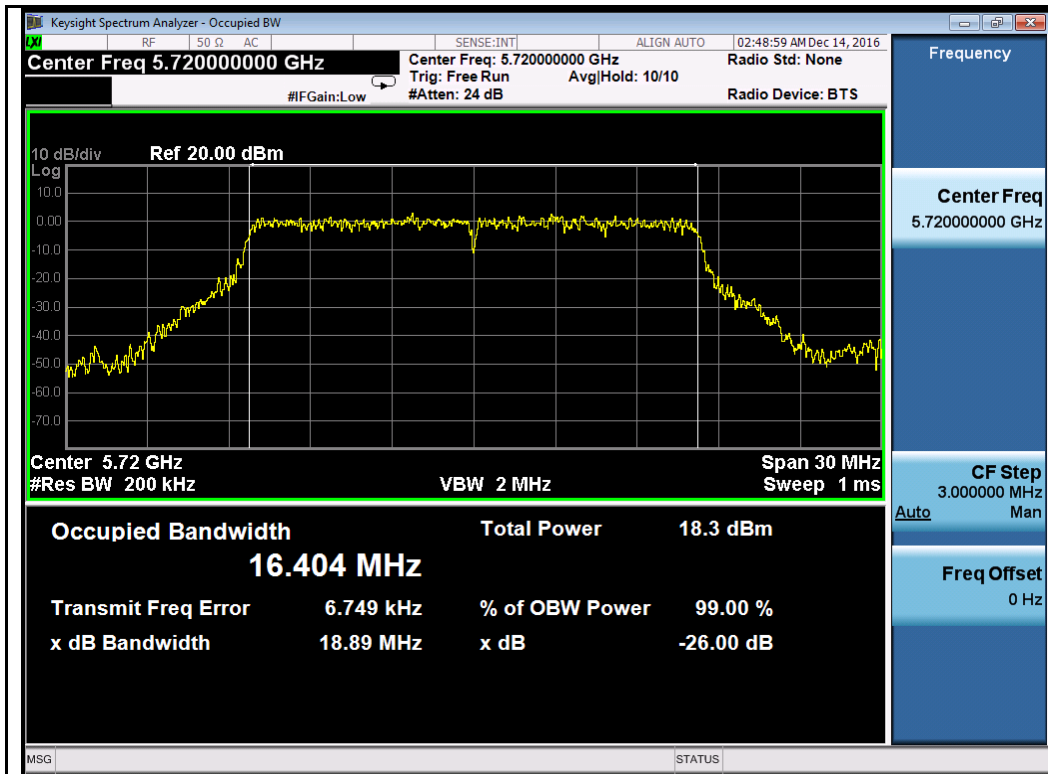


**802.11a-5720MHz**

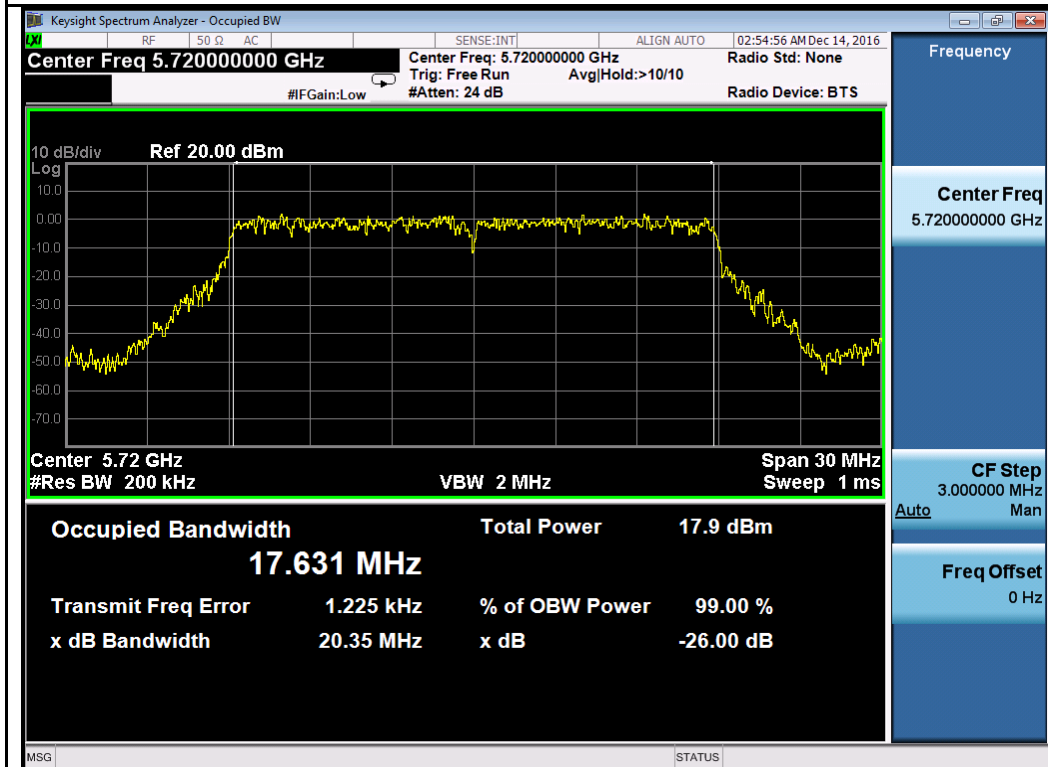

**802.11n-HT20 5720MHz**

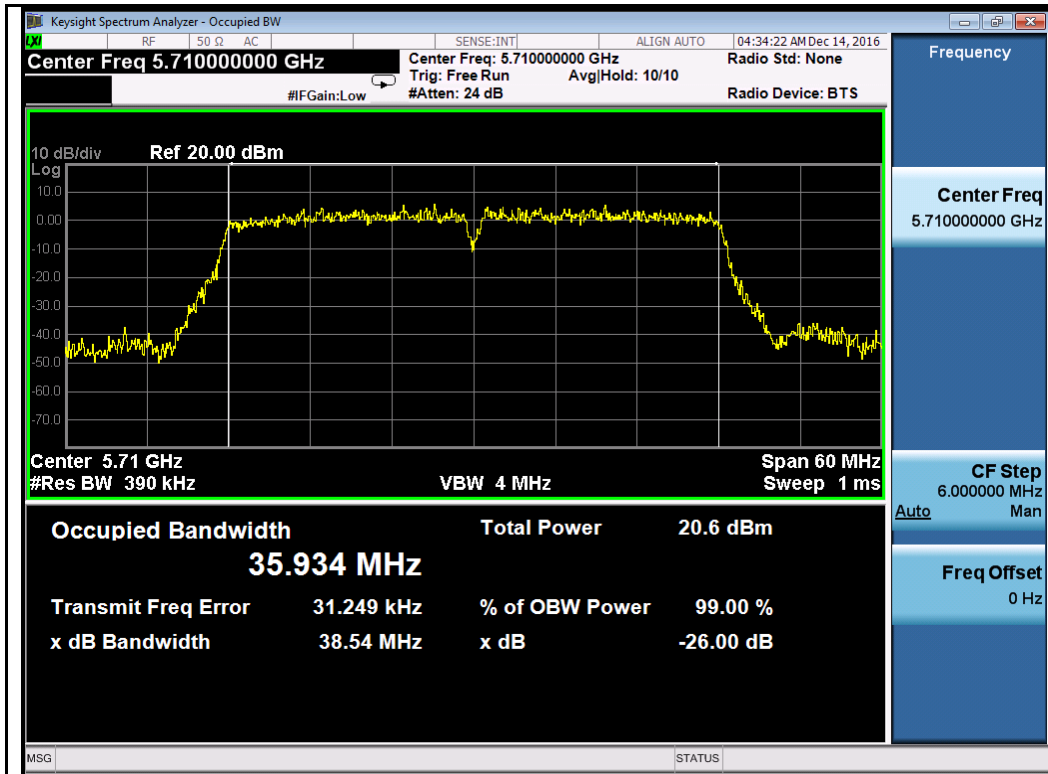


802.11n-HT40 5710MHz

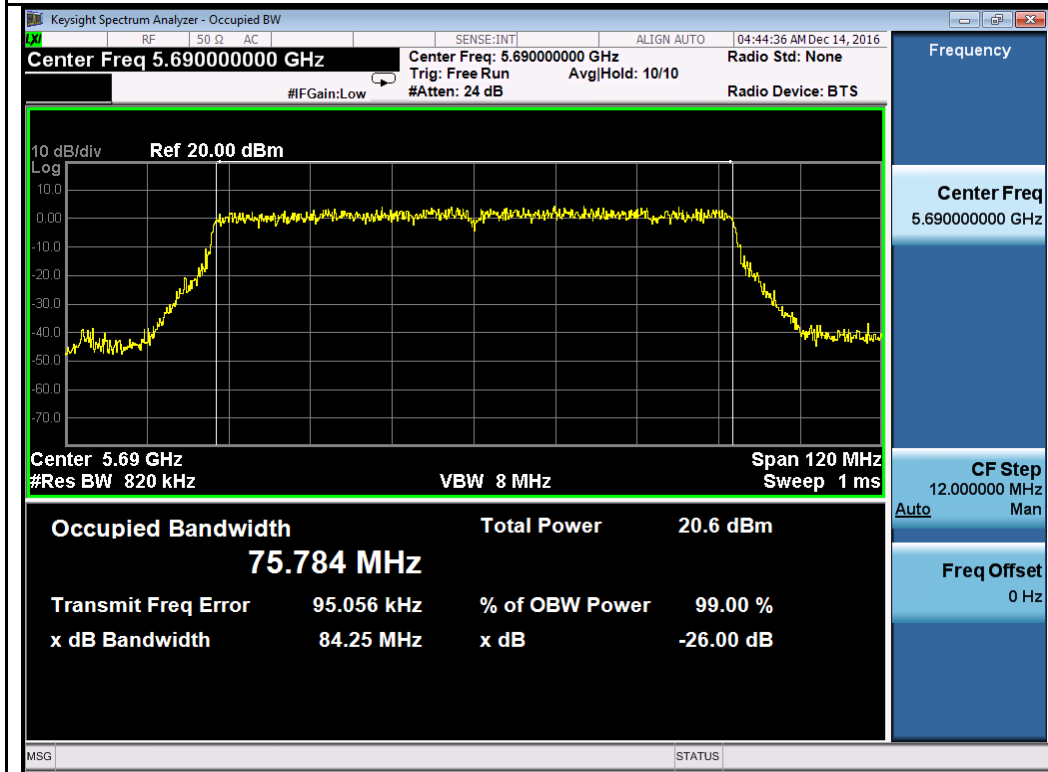


802.11n-HT20-5690MHz





**6dB BW Cross Band:**

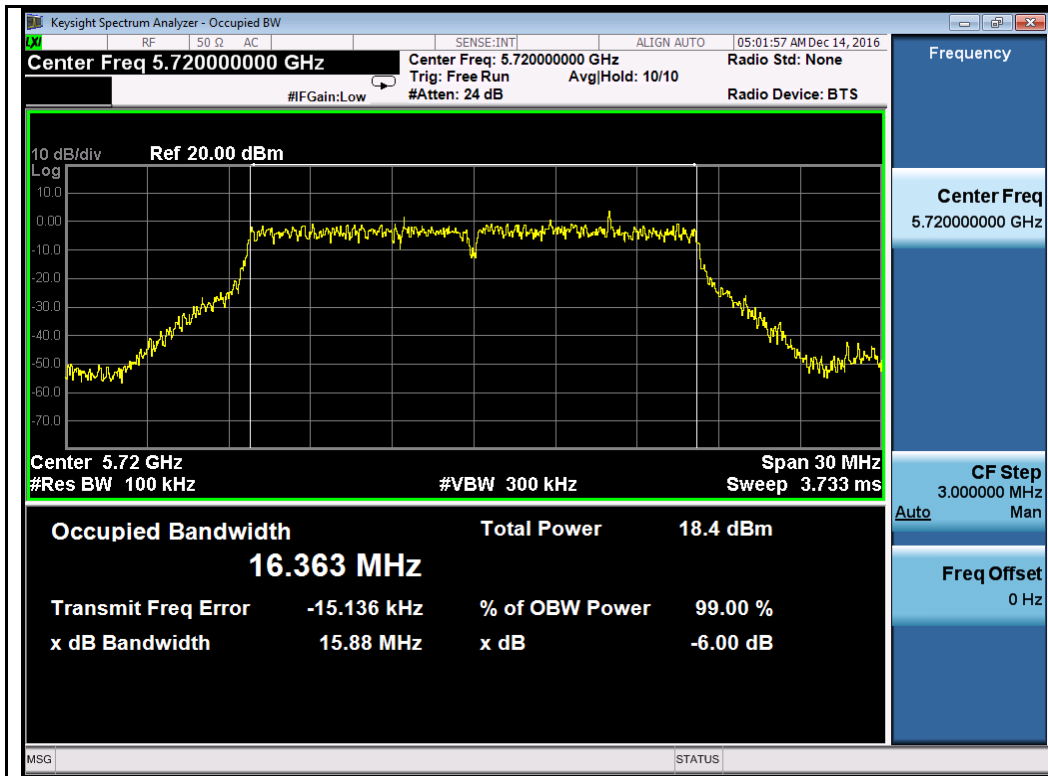

**802.11a-5720MHz**

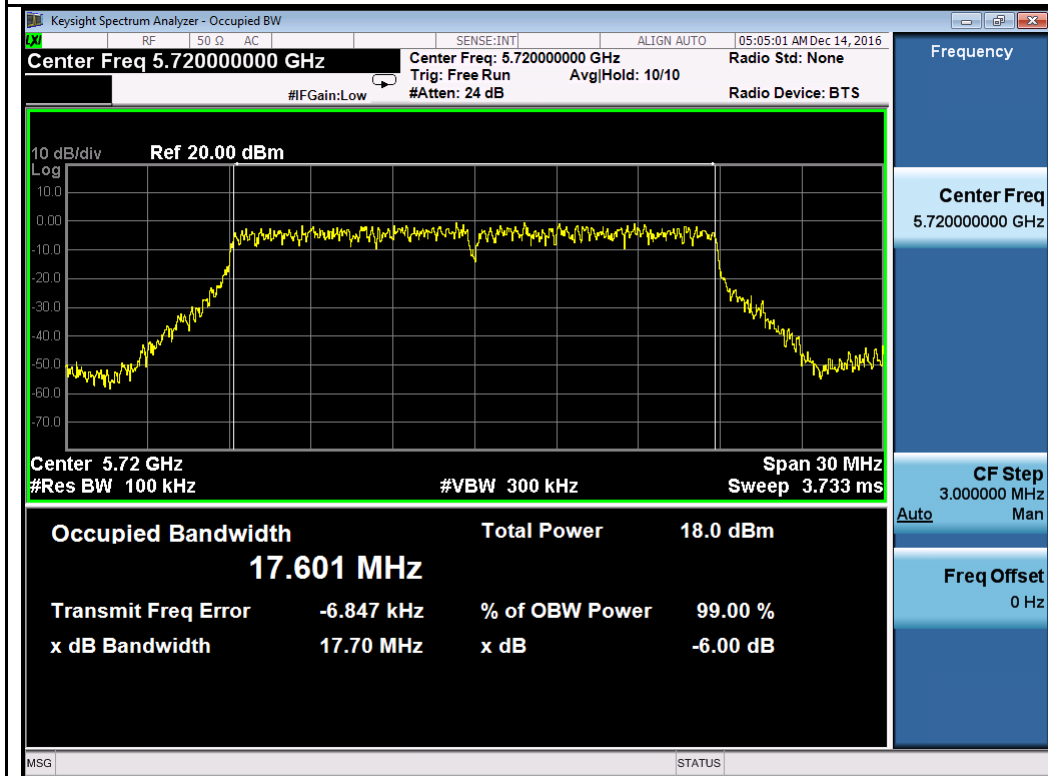

**802.11n-HT20 5720MHz**

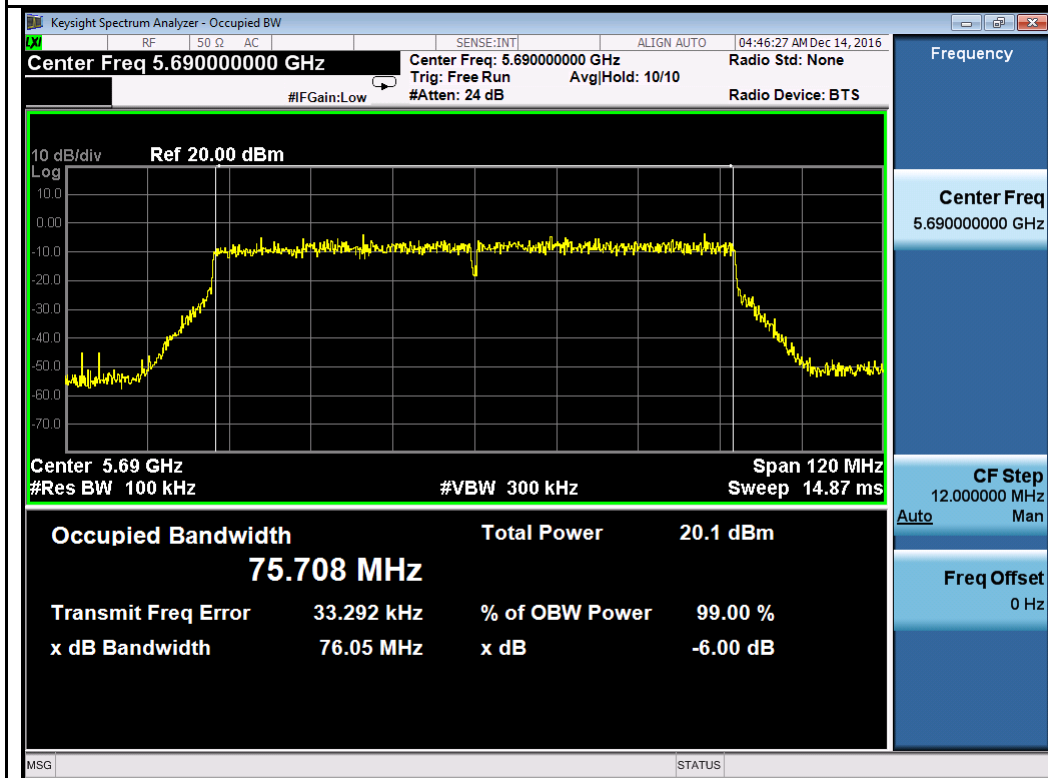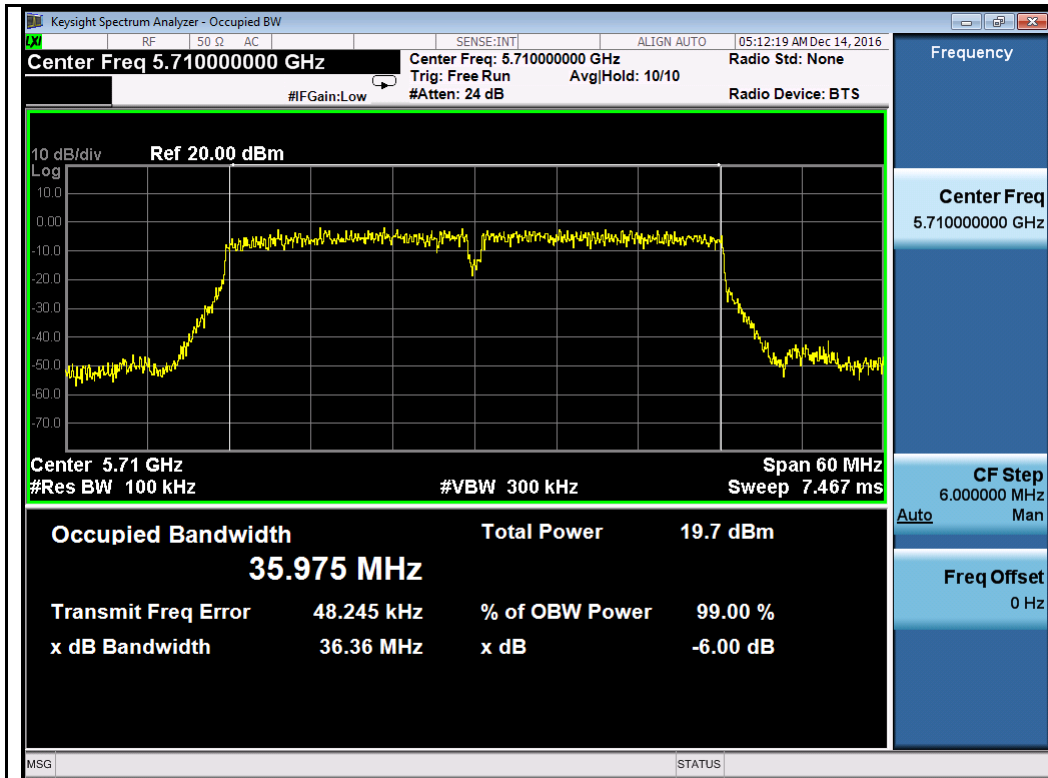

### 10.3 Output Power

**Requirement(s):**

Spec	Item	Requirement	Applicable
§ 15.407	a)(2)	For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm 10 log B, where B is the 26 dB emission bandwidth in megahertz.	<input checked="" type="checkbox"/>
	a)(3)	For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.	<input checked="" type="checkbox"/>



Test Procedure	<p>789033 D02 General UNII Test Procedures New Rules v01r02</p> <p>Measurement using a Spectrum Analyzer or EMI Receiver (SA) Method SA-1 (trace averaging with the EUT transmitting at full power throughout each sweep):</p> <ul style="list-style-type: none"> <li>- Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.</li> <li>- Set RBW = 1 MHz</li> <li>- Set VBW = 3 MHz</li> <li>- Number of points in sweep <math>\geq 2 \times \text{span} / \text{RBW}</math>. (This ensures that bin-to-bin spacing is <math>\leq \text{RBW}/2</math>, so that narrowband signals are not lost between frequency bins.)</li> <li>- Sweep time = auto.</li> <li>- Detector = power averaging (rms), if available. Otherwise, use sample detector mode.</li> <li>- If transmit duty cycle &lt; 98%, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle <math>\geq 98\%</math>, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run."</li> <li>- Trace average at least 100 traces in power averaging (rms) mode.</li> <li>- Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at 1 MHz intervals extending across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the spectrum.</li> </ul>		
----------------	--	--	--

Test Date	12/05/2016 – 12/20/2016	Environmental condition	Temperature 23°C Relative Humidity 44% Atmospheric Pressure 1021mbar
-----------	-------------------------	-------------------------	--

Remark	<p>Per KDB 662911 D01 Multiple Transmitter Output v02r01, the direction gain for horizontal polarization and vertical polarization is calculated separately. For 5Ghz band, peak antenna gain = 3.5 dBi, directional gain = 3 dB, total gain = 6.5 dBi          Highest of total directional gain is 6.5 dBi. The power limit and PSD limit will be reduced by amount of 0.5 dB.          For the Cross band channels, the output power of full bandwidth is compared to the power limit in 5.5G and 5.8G as the worst case.</p>		
--------	--	--	--

Result	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
--------	--	-------------------------------

Test Data  Yes  N/A

Test Plot  Yes (See below)  N/A

Test was done by Shuo Zhang at RF test site.

**Output Power measurement result for 5.3GHz**

Type	Test mode	Freq (MHz)	CH	Conducted Power (dBm)					Limit (dBm)	Result
				Chain1	Chain2	Chain3	Chain4	Combined Power		
Output Power	802.11a	5260	Low	14.32	14.84	14.49	14.60	20.59	23.5	Pass
	802.11a	5280	Mid	14.58	15.08	14.62	14.51	20.72	23.5	Pass
	802.11a	5320	High	14.69	14.37	14.60	14.29	20.51	23.5	Pass
	802.11n-20M	5260	Low	14.25	14.78	14.36	14.35	20.46	23.5	Pass
	802.11n-20M	5280	Mid	14.26	14.84	14.48	14.42	20.53	23.5	Pass
	802.11n-20M	5320	High	14.42	14.38	14.47	14.23	20.40	23.5	Pass
	802.11n-40M	5270	Low	16.47	16.91	16.70	16.45	22.66	23.5	Pass
	802.11n-40M	5310	Mid	16.53	16.89	16.87	16.63	22.75	23.5	Pass
	802.11ac-80M	5290	High	16.38	16.8	16.57	16.47	22.58	23.5	Pass
	802.11ac-160	5250	Mid	17.11	17.38	17.42	17.15	23.29	29.5	Pass

**Output Power measurement result for 5.5GHz**

Type	Test mode	Freq (MHz)	CH	Conducted Power (dBm)					Limit (dBm)	Result
				Chain1	Chain2	Chain3	Chain4	Combined Power		
Output Power	802.11a	5500	Low	15.11	15.05	14.78	14.98	21.00	23.5	Pass
	802.11a	5580	Mid	15.14	15.25	14.99	15.35	21.21	23.5	Pass
	802.11a	5700	High	14.79	15.50	14.88	14.76	21.01	23.5	Pass
	802.11n-20M	5500	Low	14.75	15.12	14.76	15.07	20.95	23.5	Pass
	802.11n-20M	5580	Mid	15.03	15.07	14.78	15.11	21.02	23.5	Pass
	802.11n-20M	5700	High	14.67	15.37	14.58	14.74	20.87	23.5	Pass
	802.11n-40M	5510	Low	17.01	17.09	16.97	17.11	23.07	23.5	Pass
	802.11n-40M	5550	Mid	17.18	17.30	17.07	17.39	23.26	23.5	Pass
	802.11n-40M	5670	High	17.32	17.37	16.88	17.10	23.19	23.5	Pass
	802.11ac-80M	5530	Low	16.80	16.96	16.86	17.07	22.94	23.5	Pass
	802.11ac-80M	5610	High	16.67	16.96	16.37	16.46	22.64	23.5	Pass
		802.11ac-160M	5570	Mid	17.22	17.47	16.68	16.94	23.11	23.5

**Output Power measurement result for CROSS channels (in band 5470-5725MHz)**


Type	Test mode	Freq (MHz)	CH	Conducted Power (dBm)					Limit (dBm)	Result
				Chain1	Chain2	Chain3	Chain4	Combined Power		
Output Power	802.11a	5720	CROSS	14.70	15.49	14.71	14.78	20.95	23.5	Pass
	802.11n-20M	5720	CROSS	14.54	15.15	14.46	14.56	20.71	23.5	Pass
	802.11n-40M	5710	CROSS	17.17	17.66	16.82	16.94	23.18	23.5	Pass
	802.11ac-80M	5690	CROSS	17.20	17.22	16.71	16.77	23.00	23.5	Pass

**Output Power measurement result for CROSS channels (in band 5725-5850MHz)**


Type	Test mode	Freq (MHz)	CH	Conducted Power (dBm)					Limit (dBm)	Result
				Chain1	Chain2	Chain3	Chain4	Combined Power		
Output Power	802.11a	5720	CROSS	14.70	15.49	14.71	14.78	20.95	29.5	Pass
	802.11n-20M	5720	CROSS	14.54	15.15	14.46	14.56	20.71	29.5	Pass
	802.11n-40M	5710	CROSS	17.17	17.66	16.82	16.94	23.18	29.5	Pass
	802.11ac-80M	5690	CROSS	17.20	17.22	16.71	16.77	23.00	29.5	Pass

**Test Plot for W53:**


**Chain 1:**

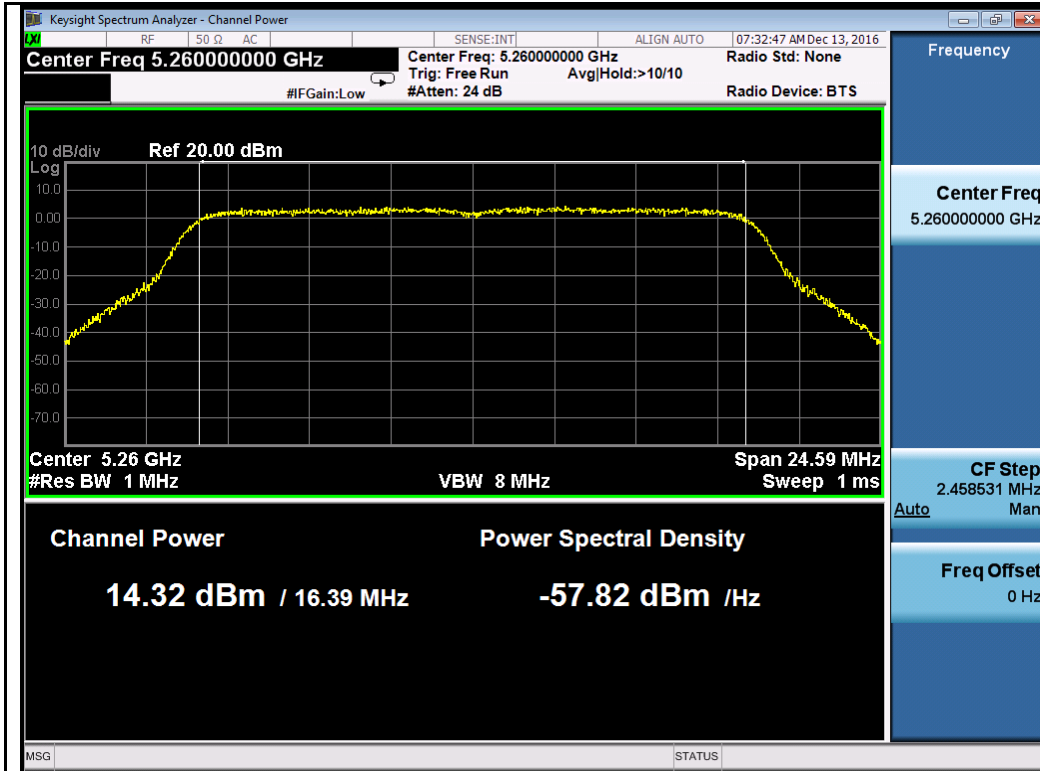


802.11a-5260M

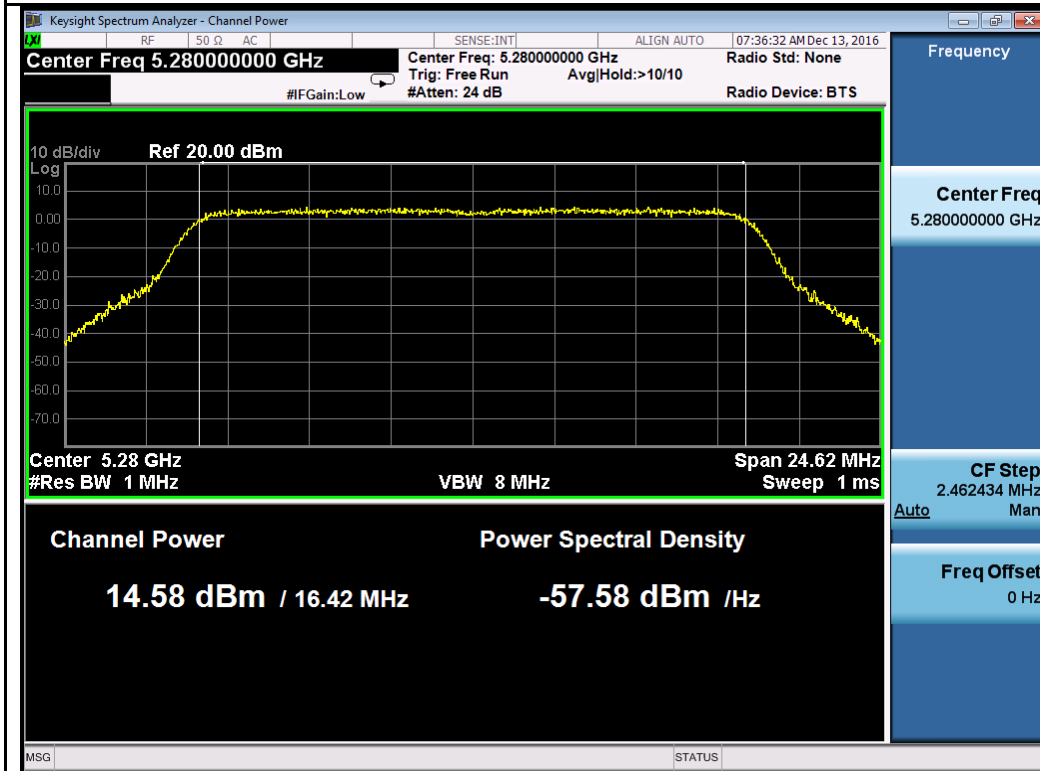


802.11a-5280M

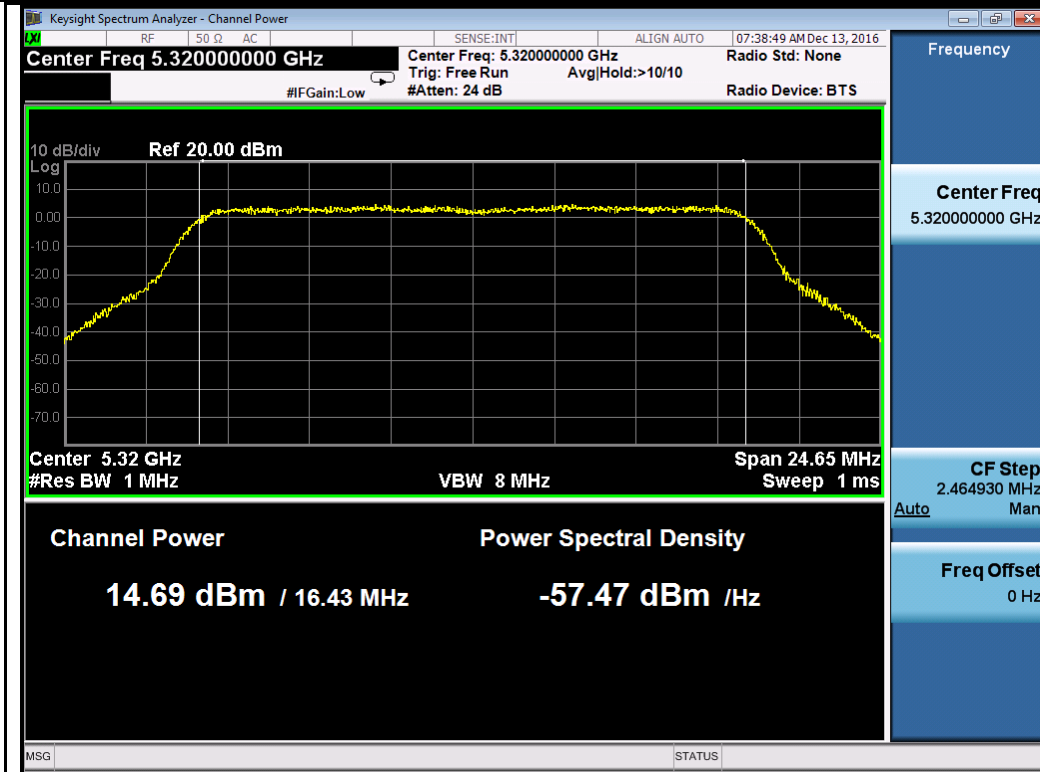


802.11a-5320M

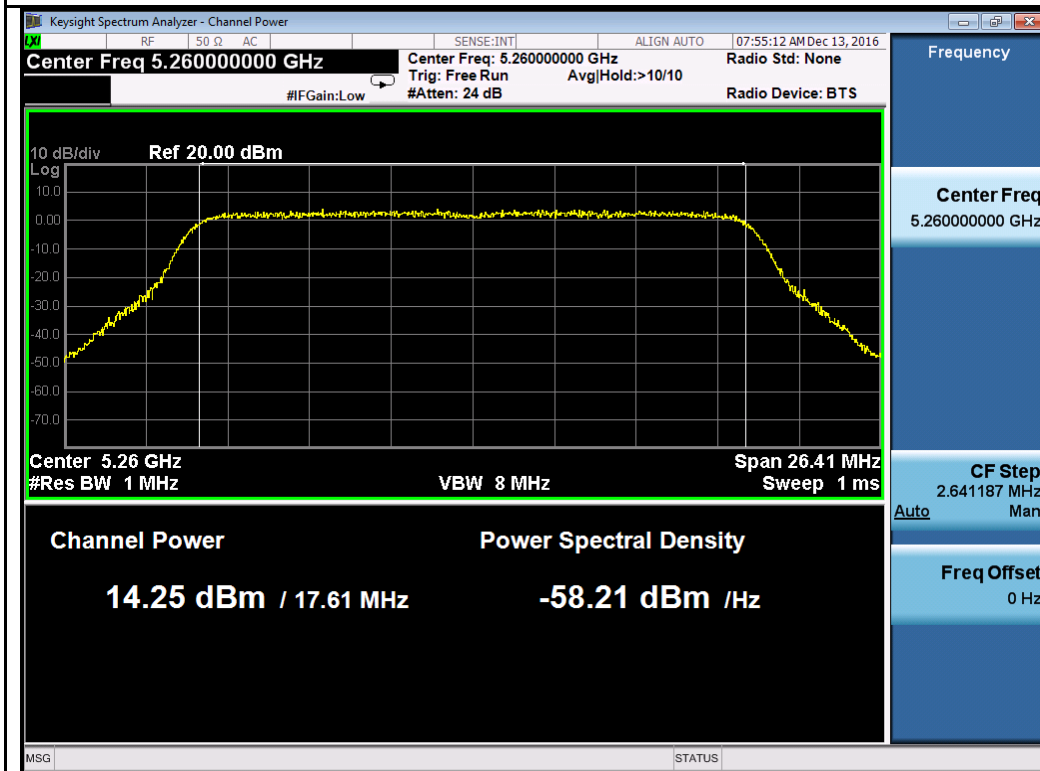

802.11n-HT20 5260M

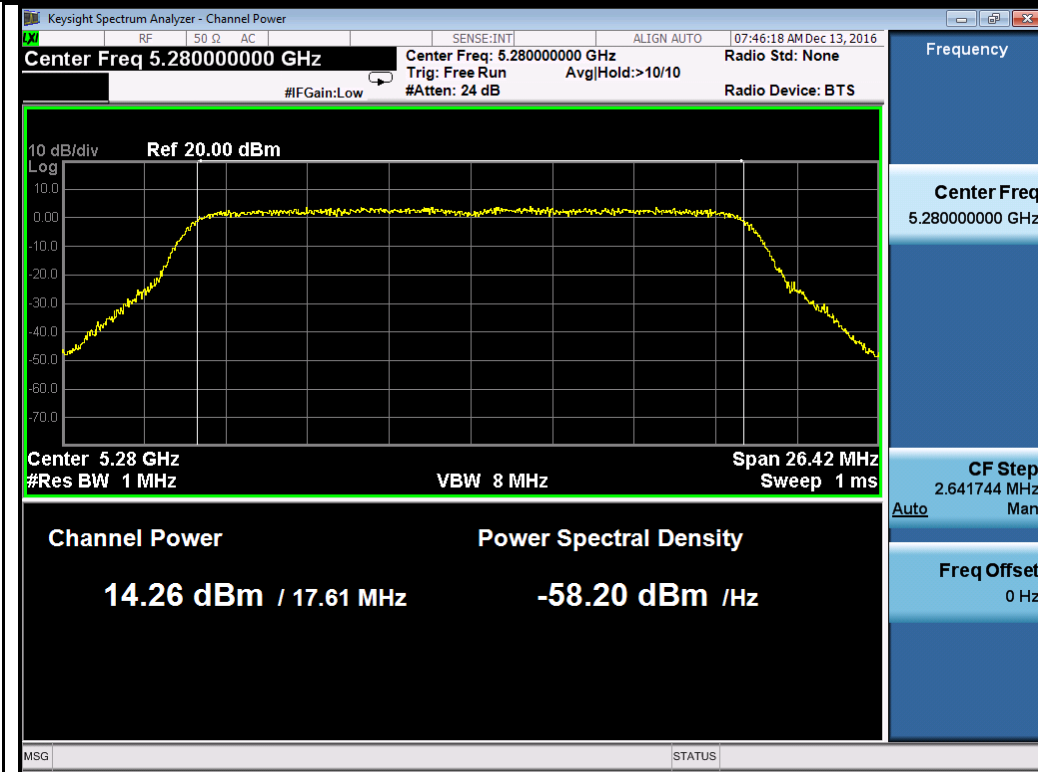


802.11n-HT20 5280M

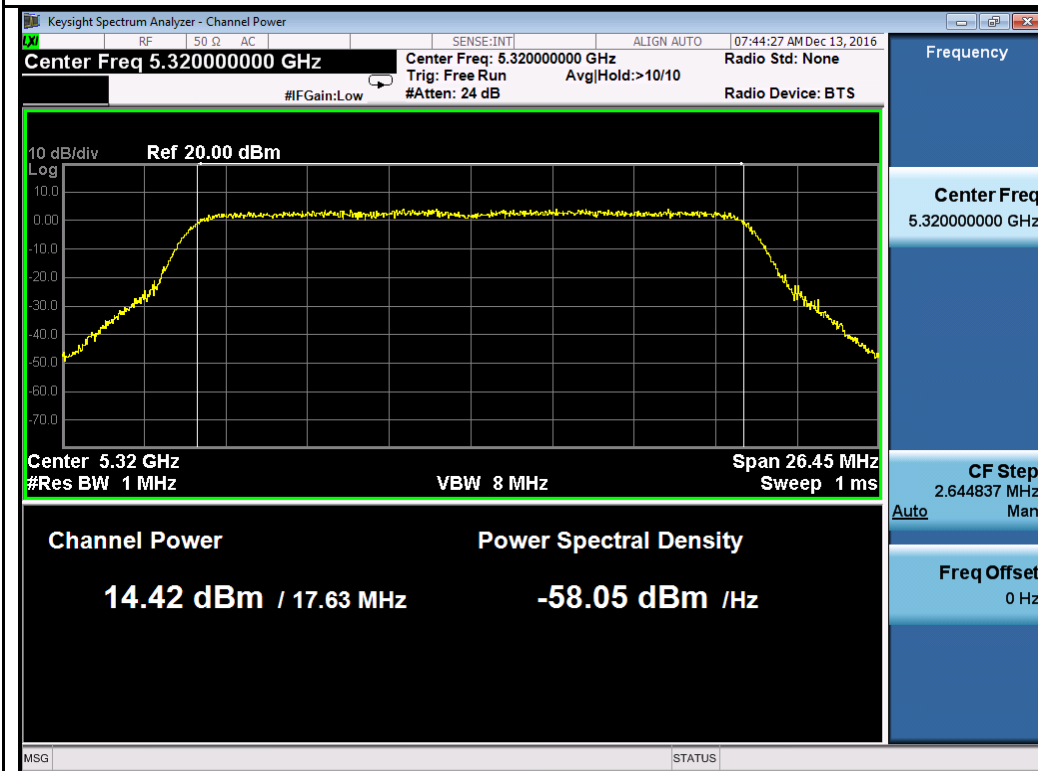


802.11n-HT20 5320M




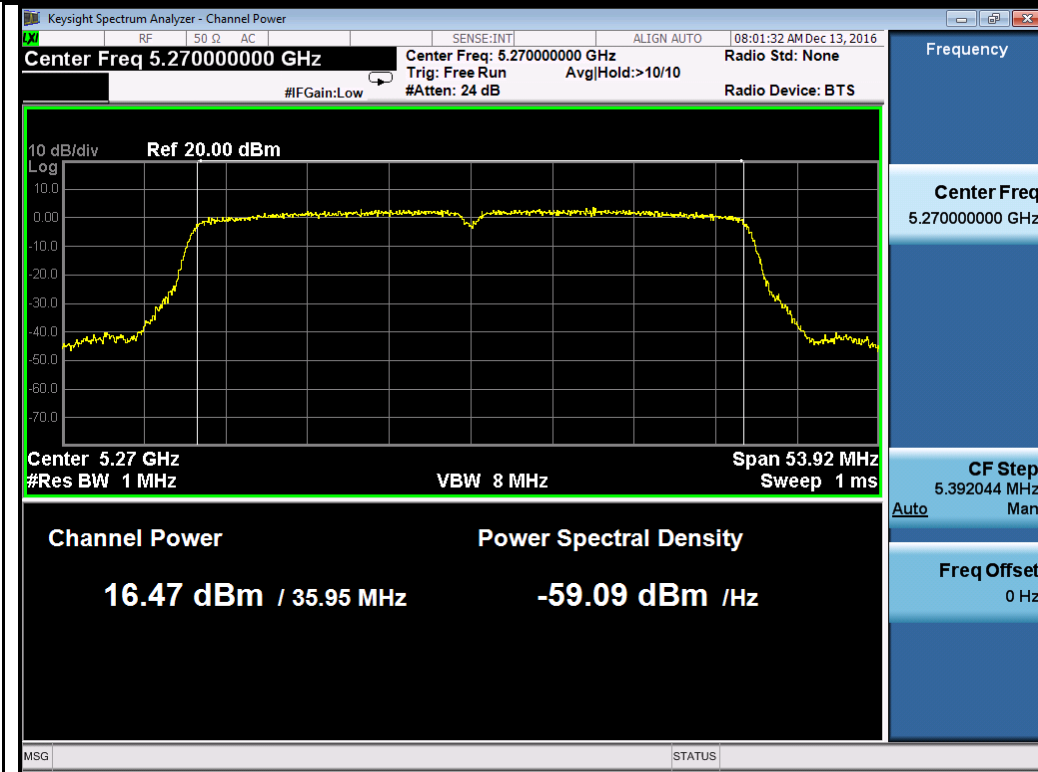


802.11n-HT40 5270M

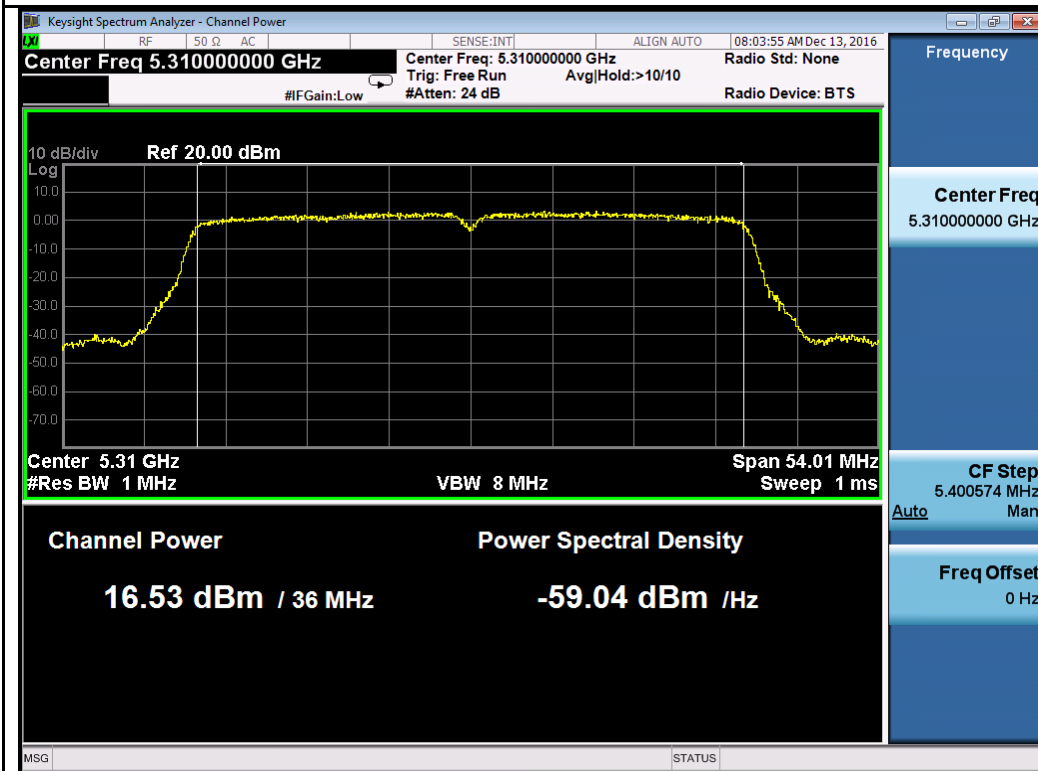

802.11n-HT40 5310M

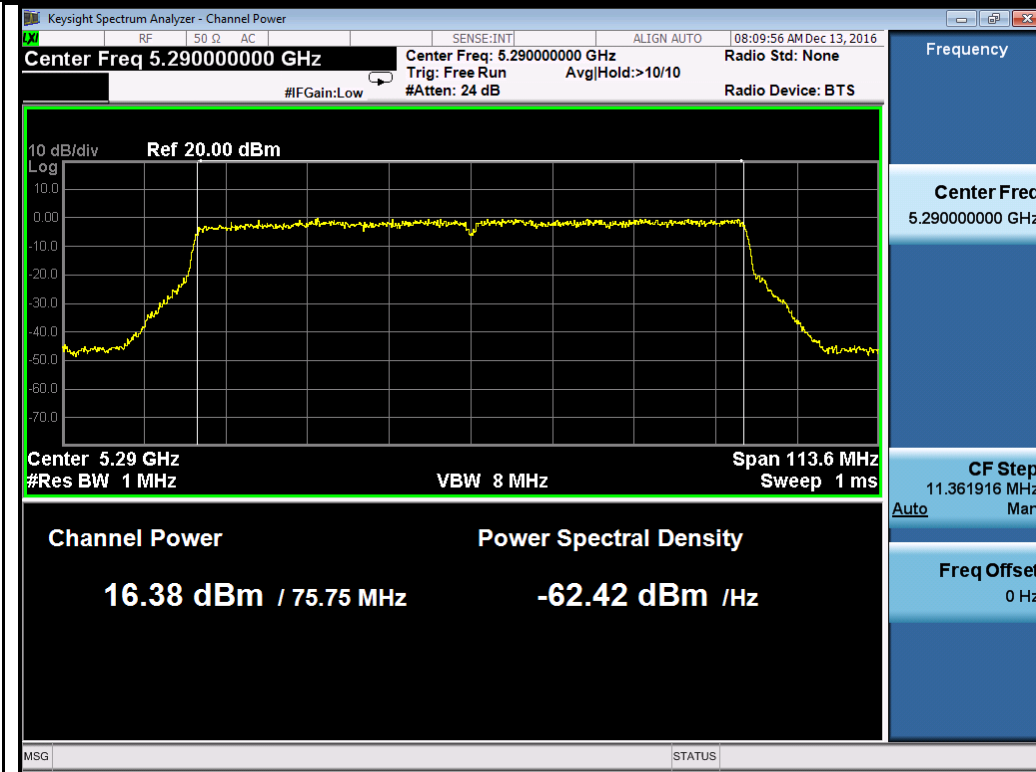


802.11ac-VHT80 5290M

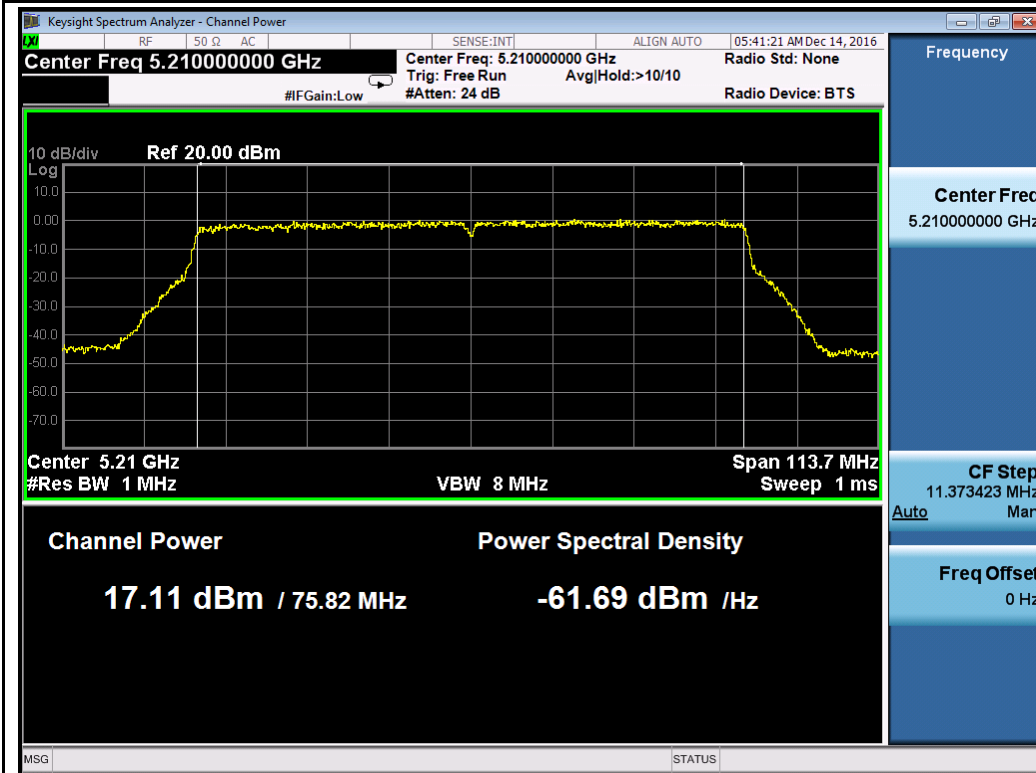


802.11ac-VHT160 5250M


**Chain 2:**

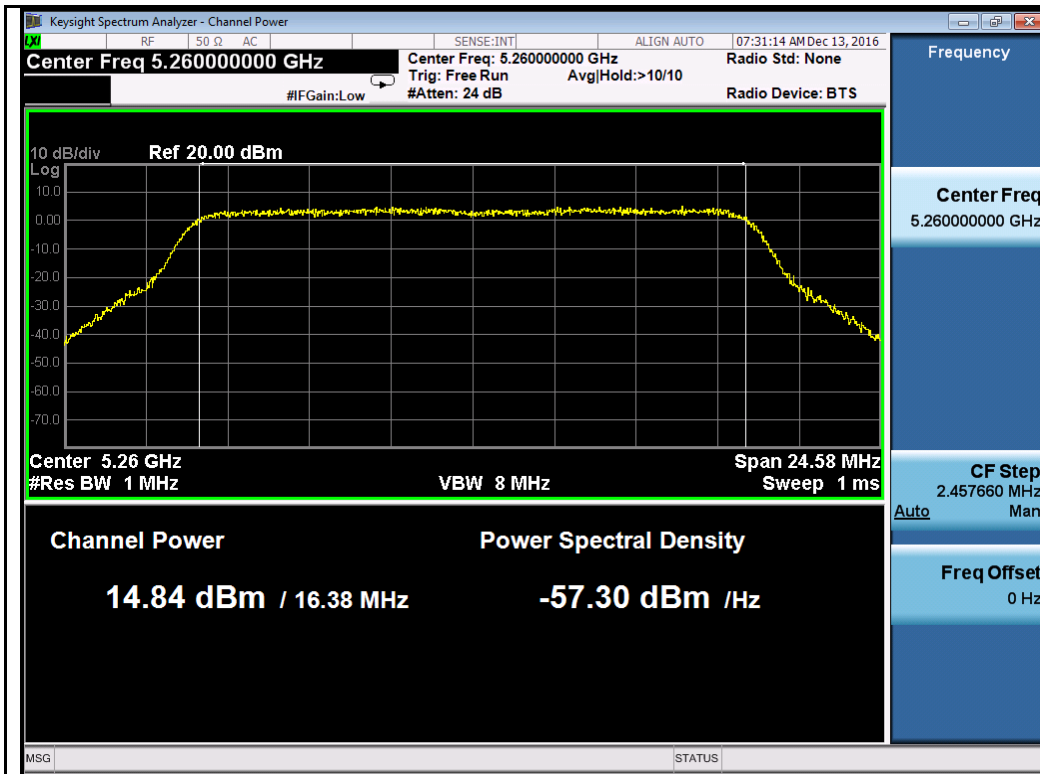


802.11a-5260M

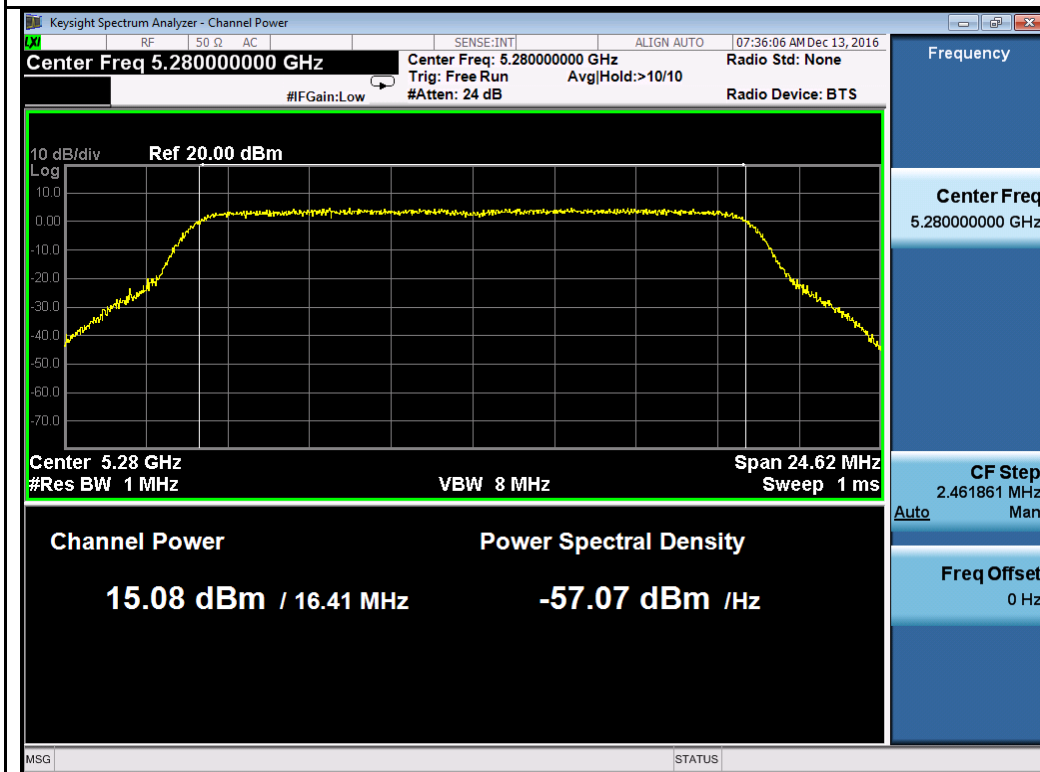


802.11a-5280M

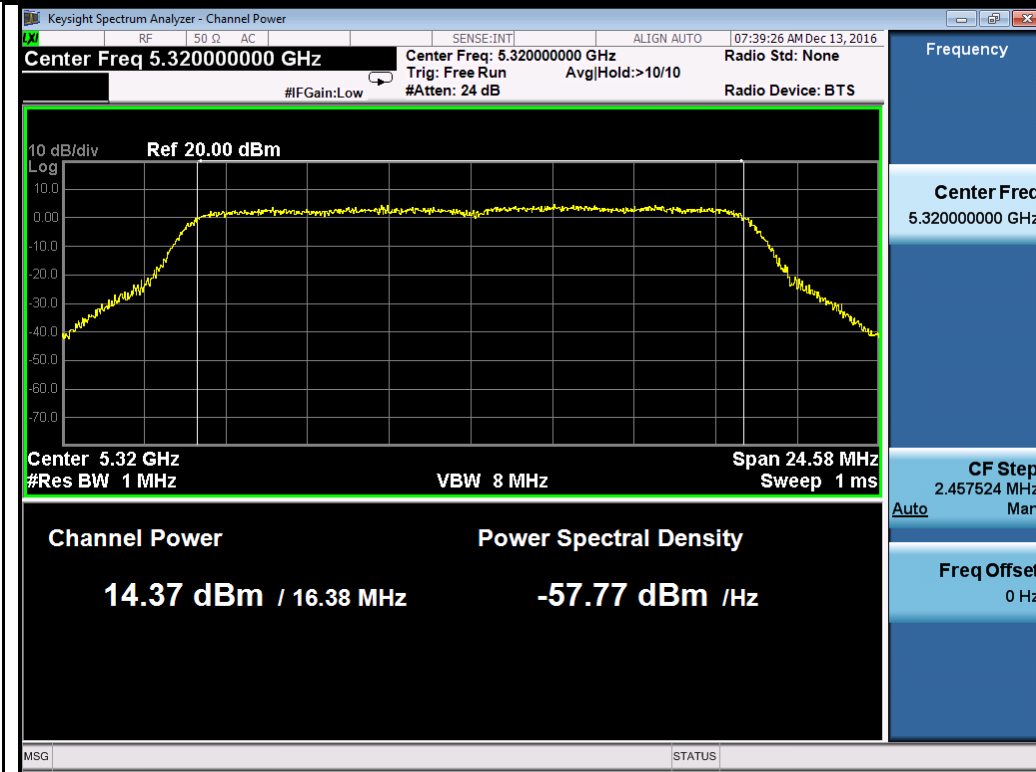


802.11a-5320M

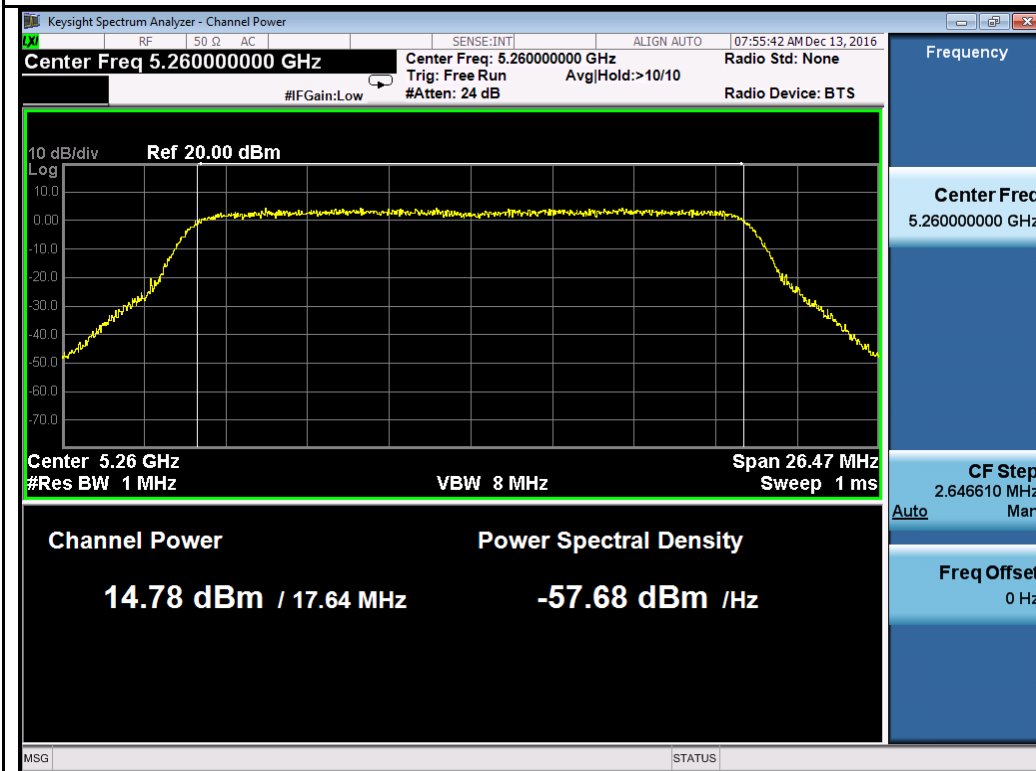


802.11n-HT20 5260M

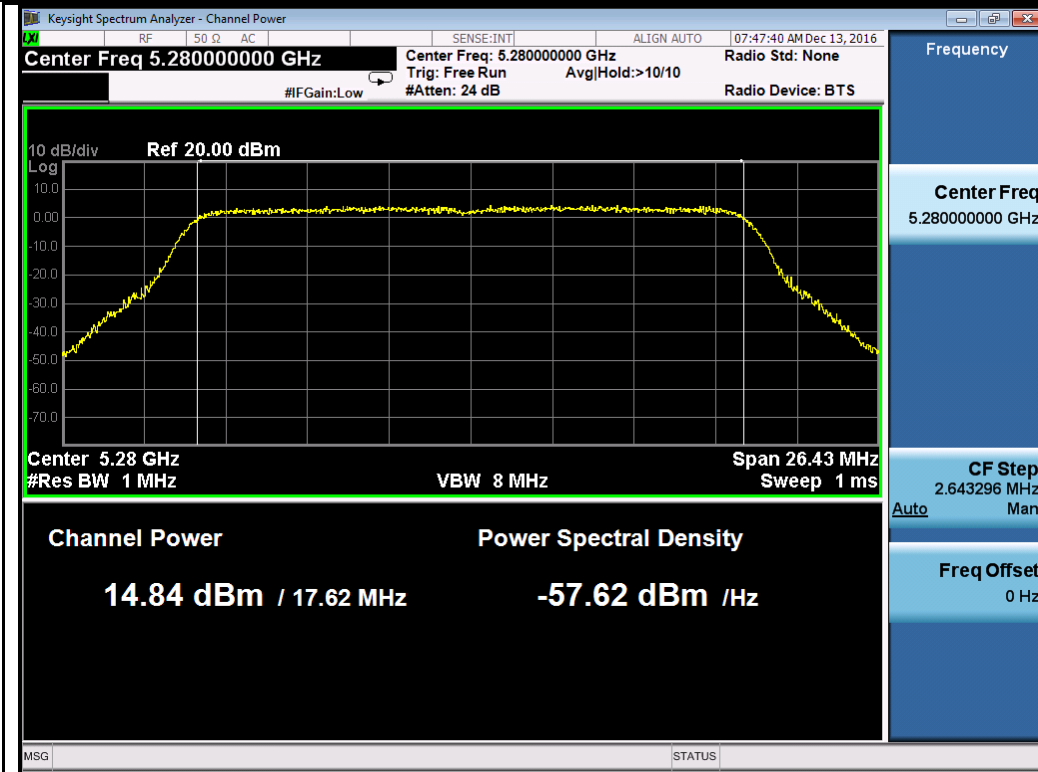


802.11n-HT20 5280M

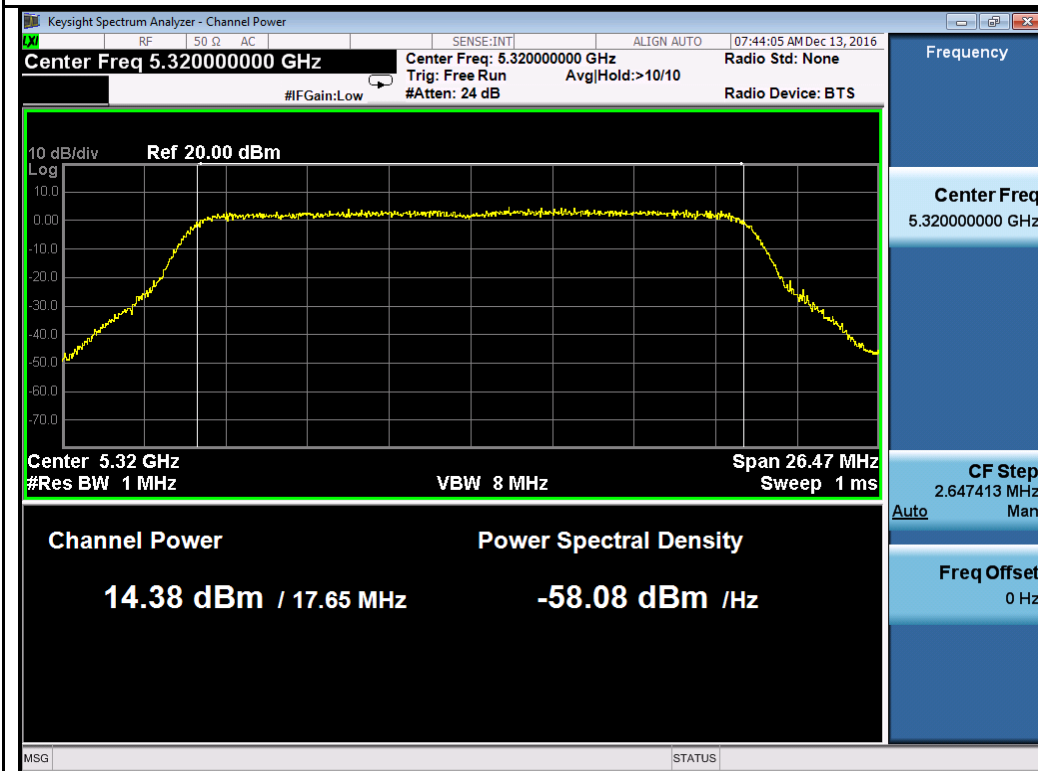


802.11n-HT20 5320M

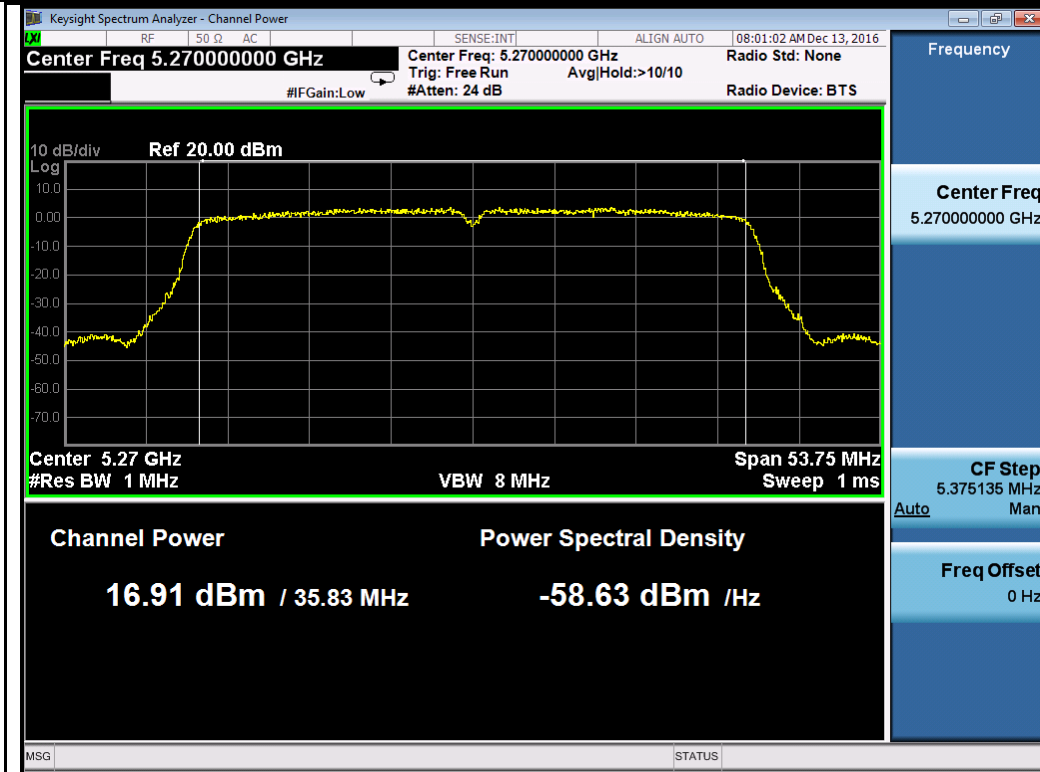


802.11n-HT40 5270M

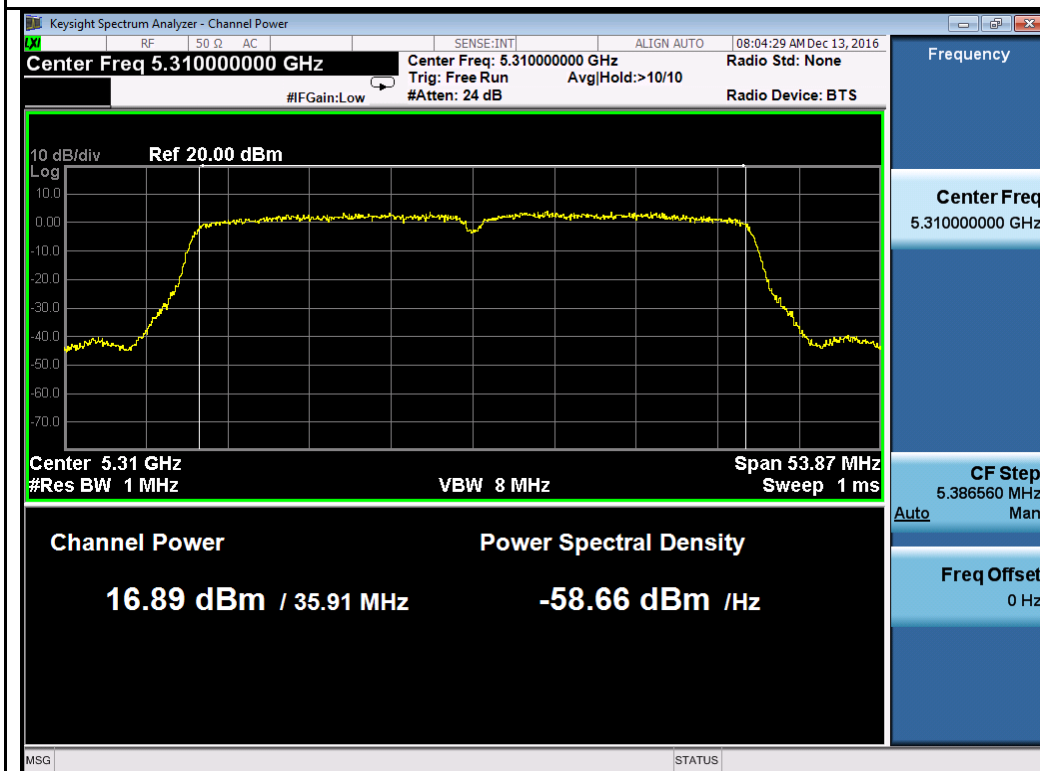

802.11n-HT40 5310M

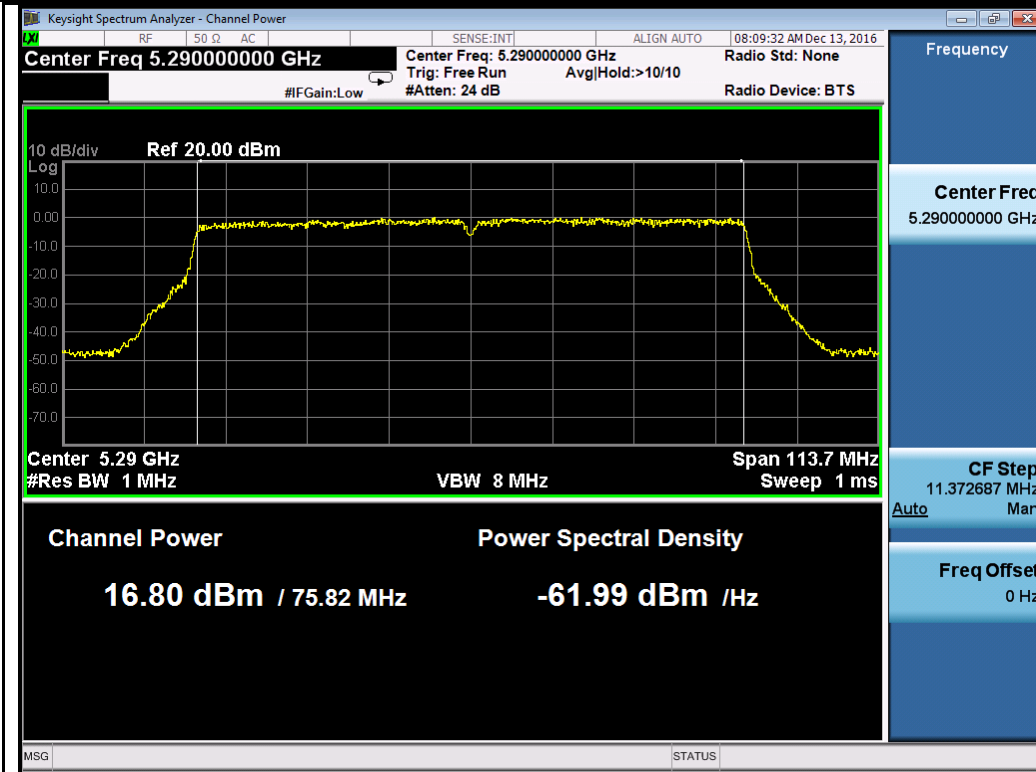


802.11ac-VHT80 5290M

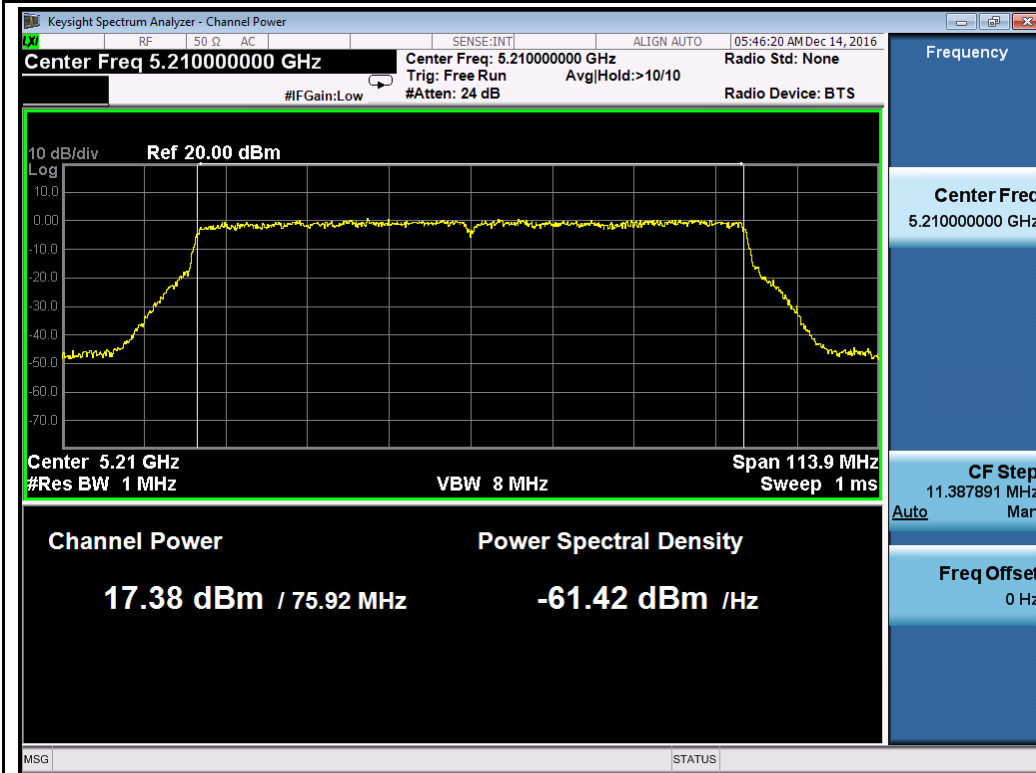


802.11ac-VHT160 5250M

**Chain 3:**

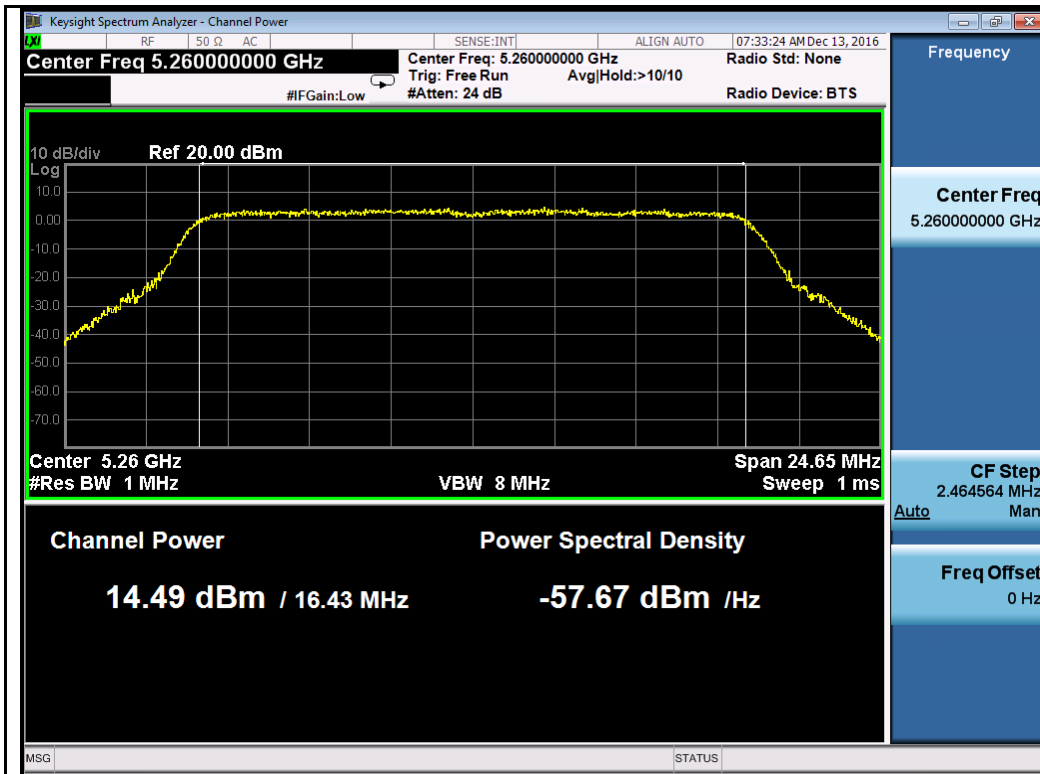


802.11a-5260M

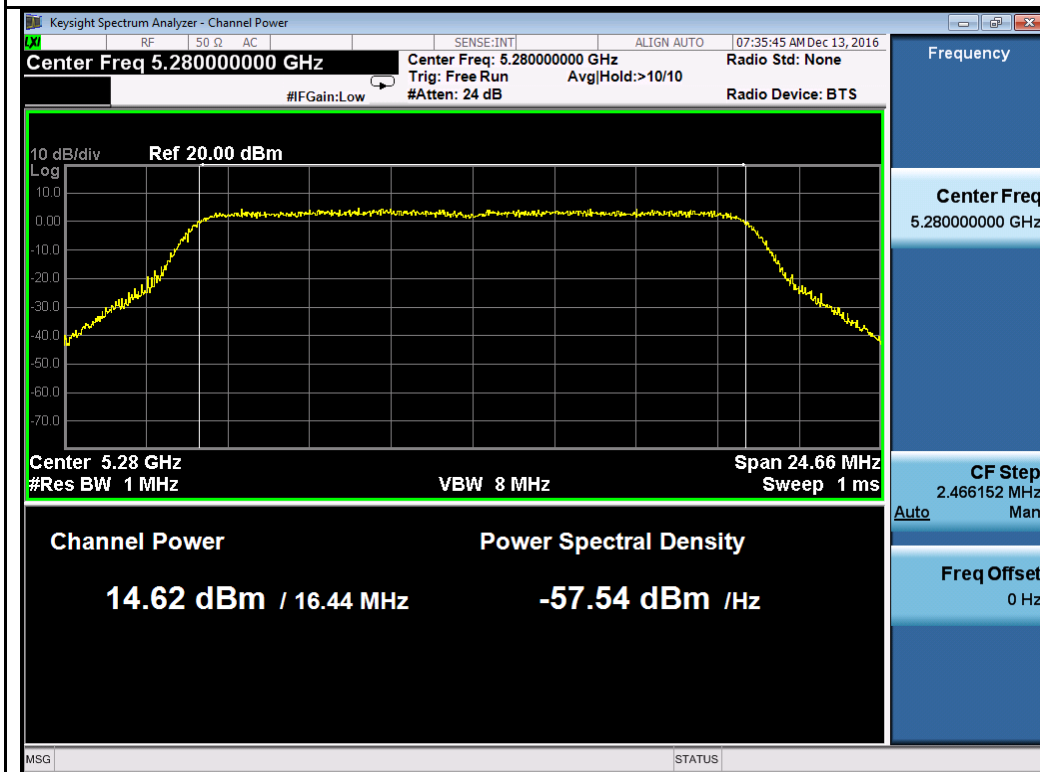


802.11a-5280M




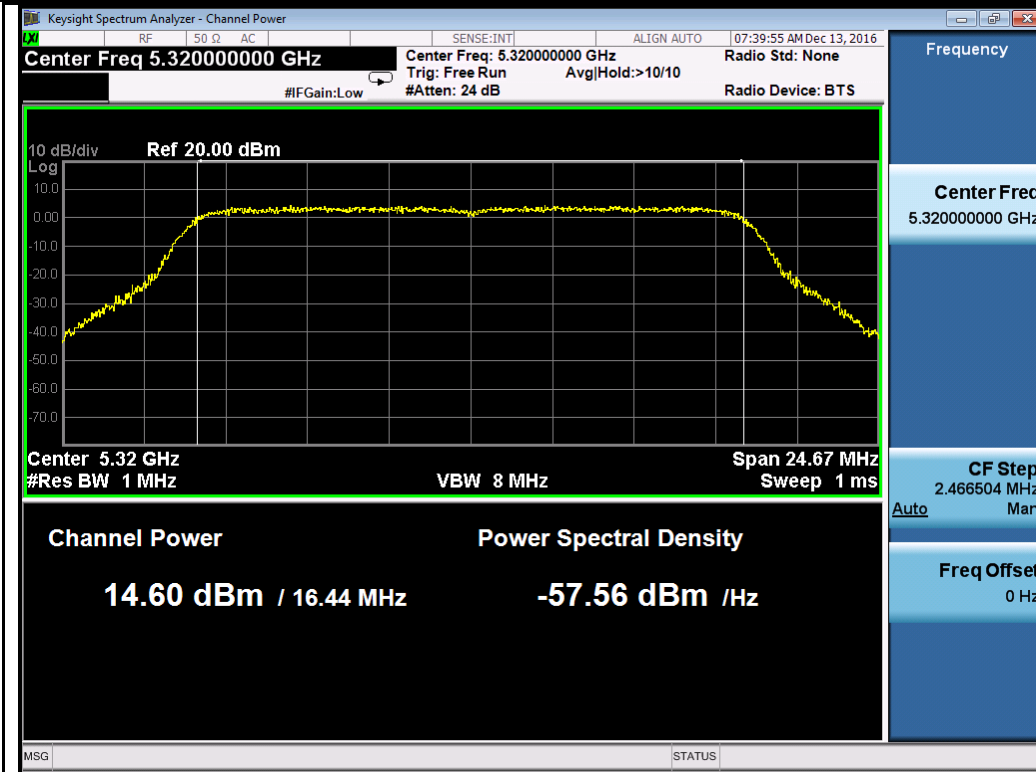


802.11a-5320M

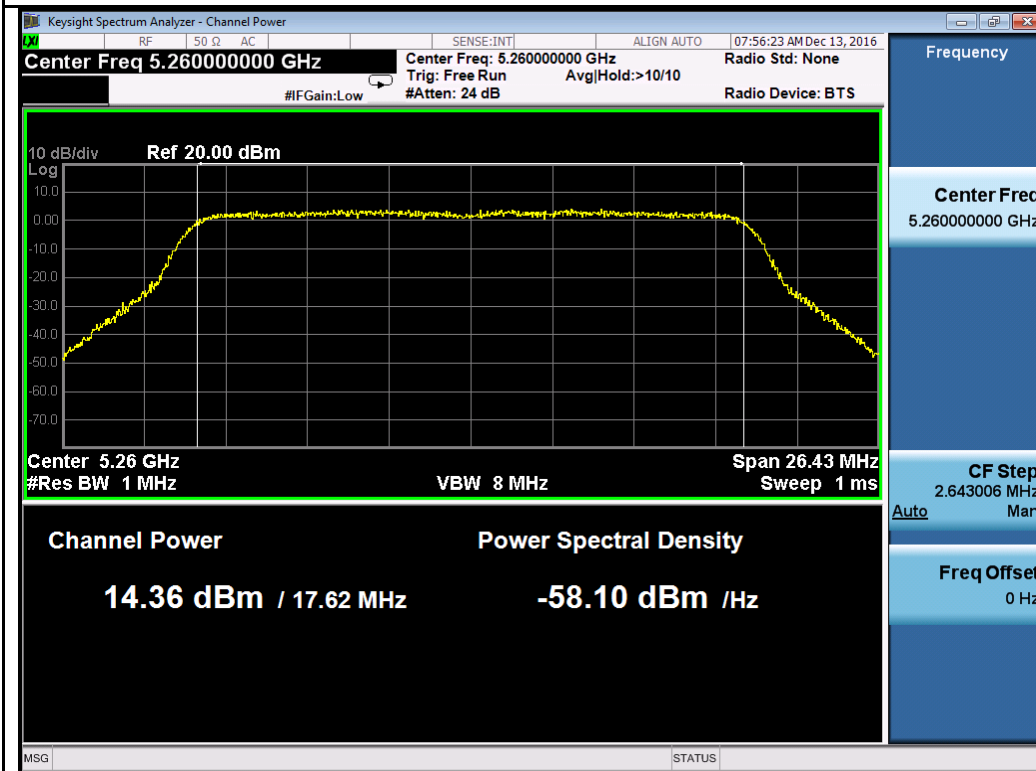


802.11n-HT20 5260M

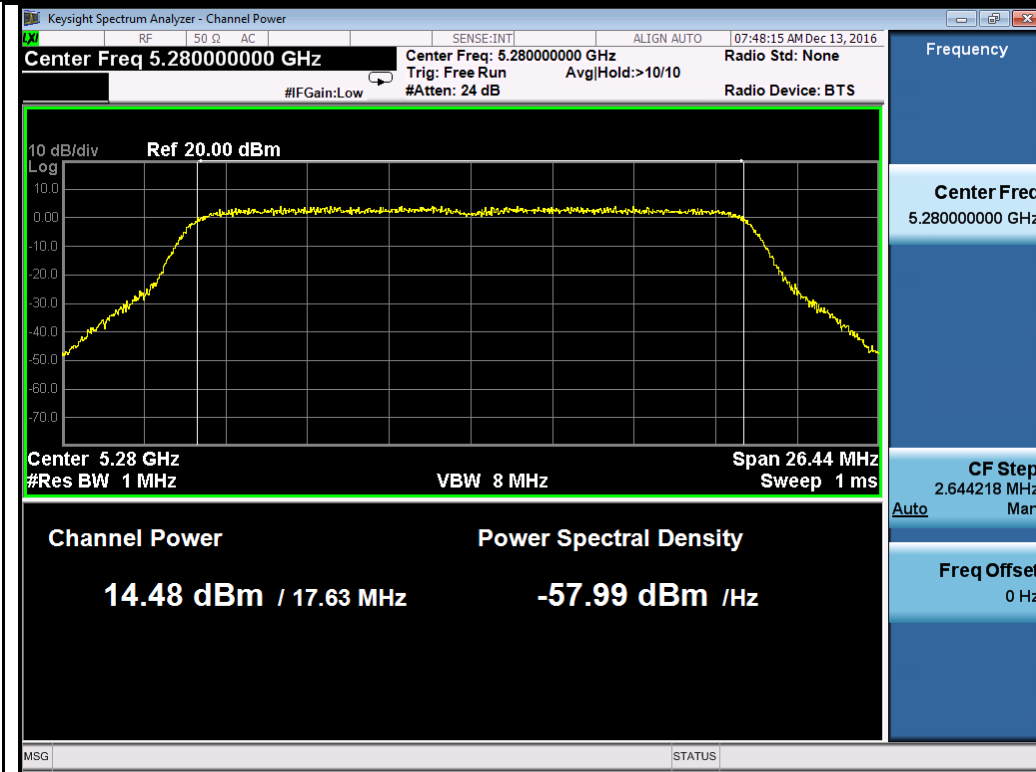


802.11n-HT20 5280M

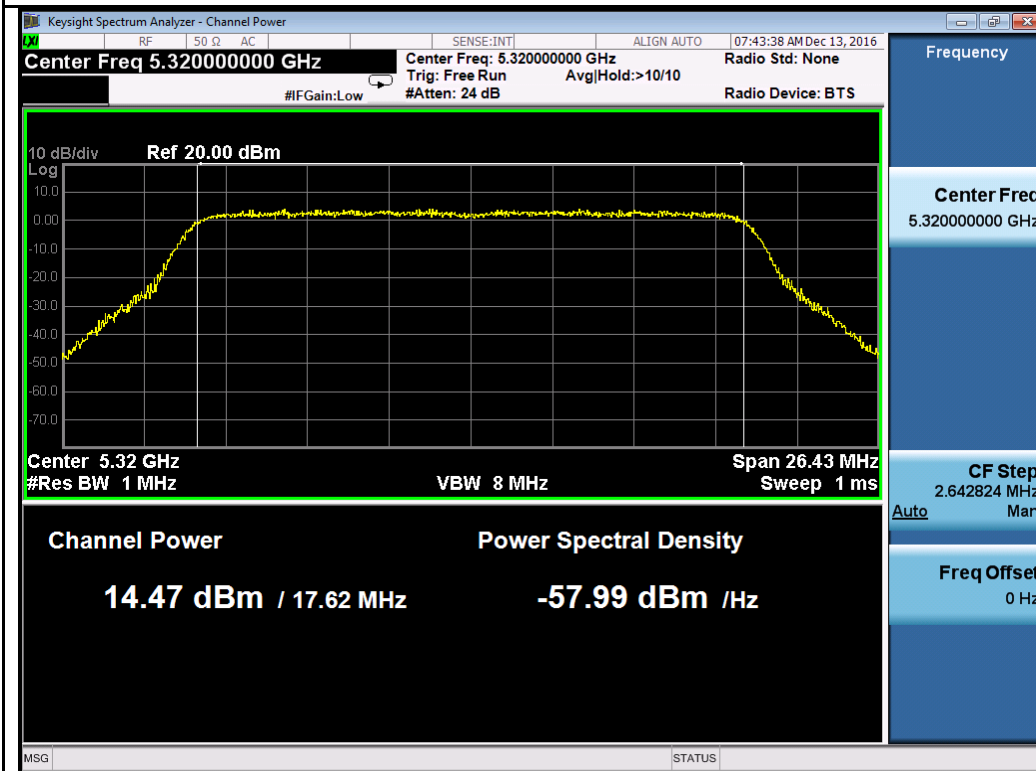


802.11n-HT20 5320M

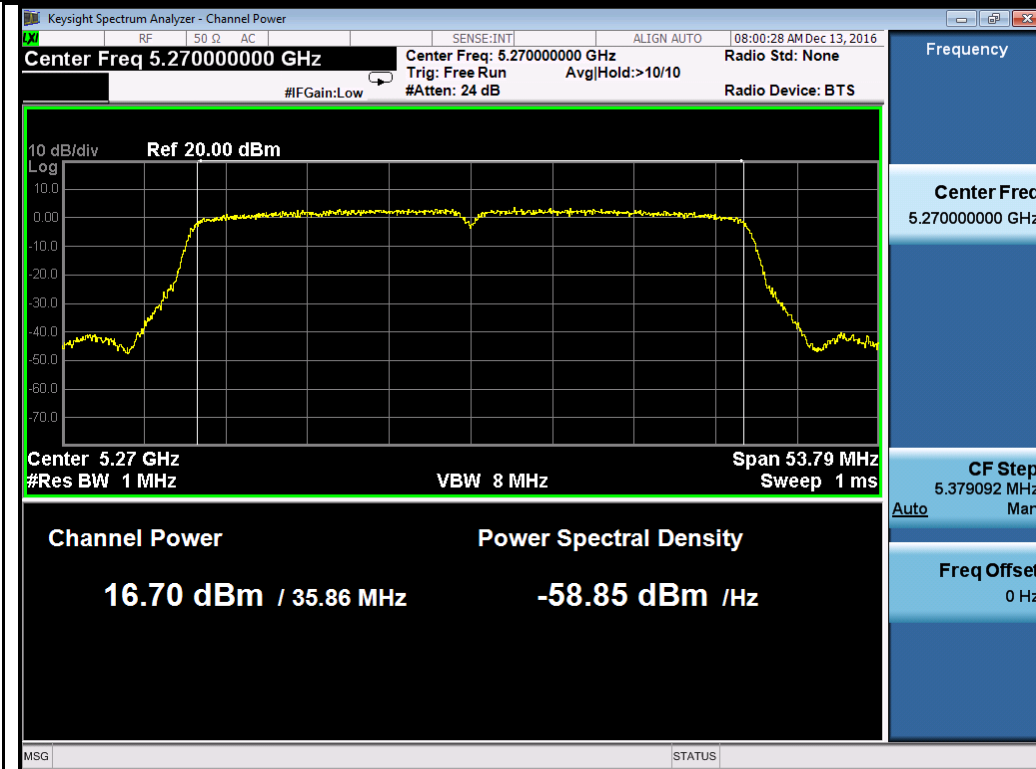


802.11n-HT40 5270M

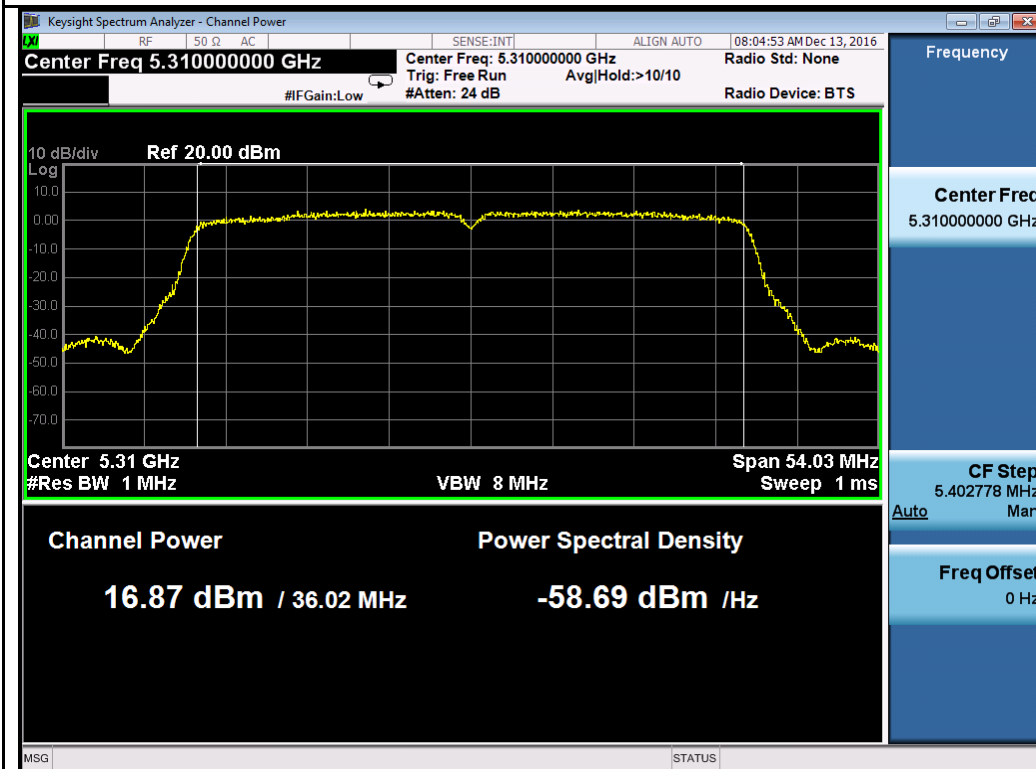

802.11n-HT40 5310M


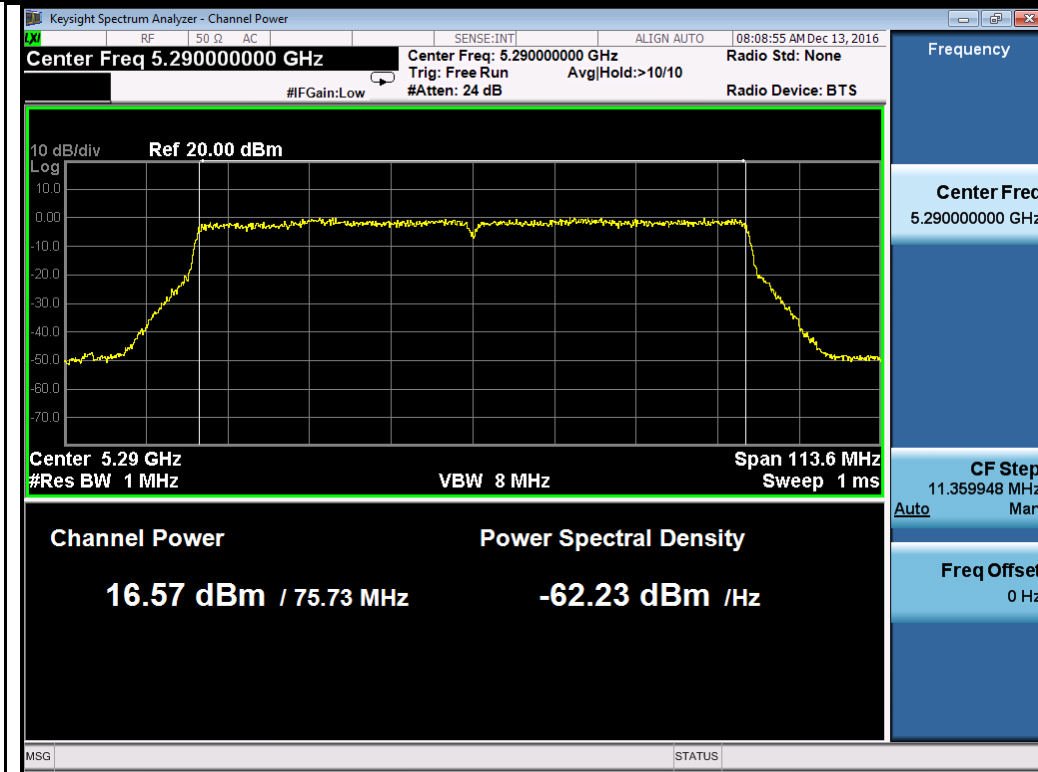



802.11ac-VHT80 5290M

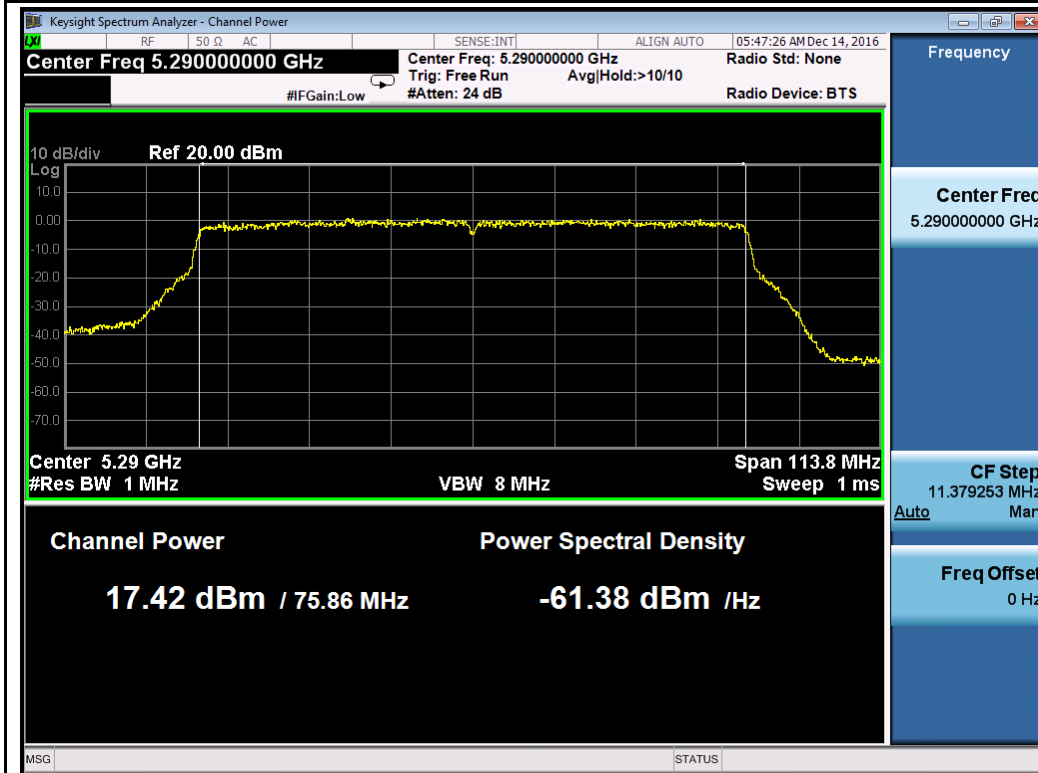


802.11ac-VHT160 5250M

**Chain 4:**

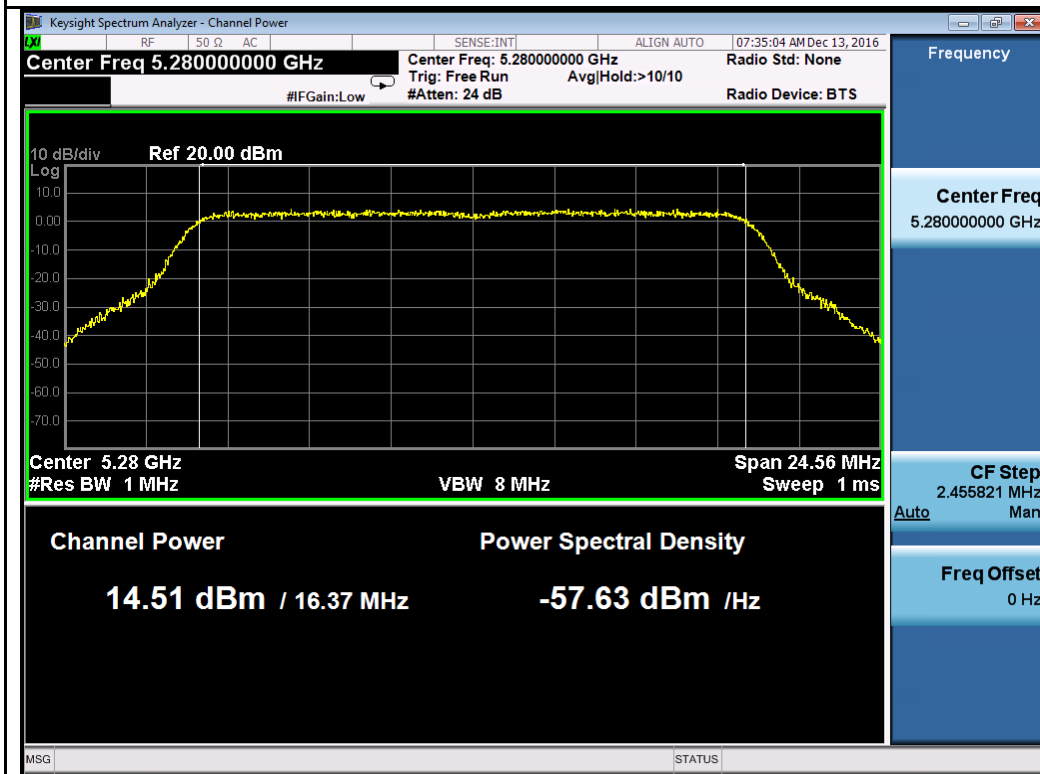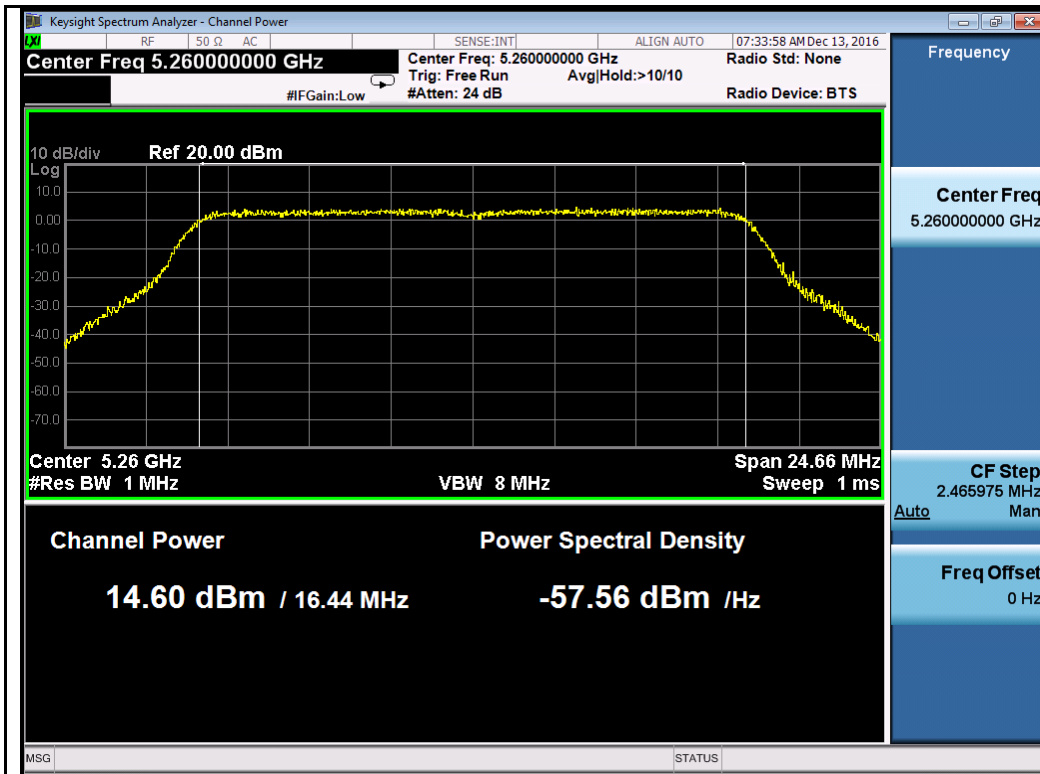


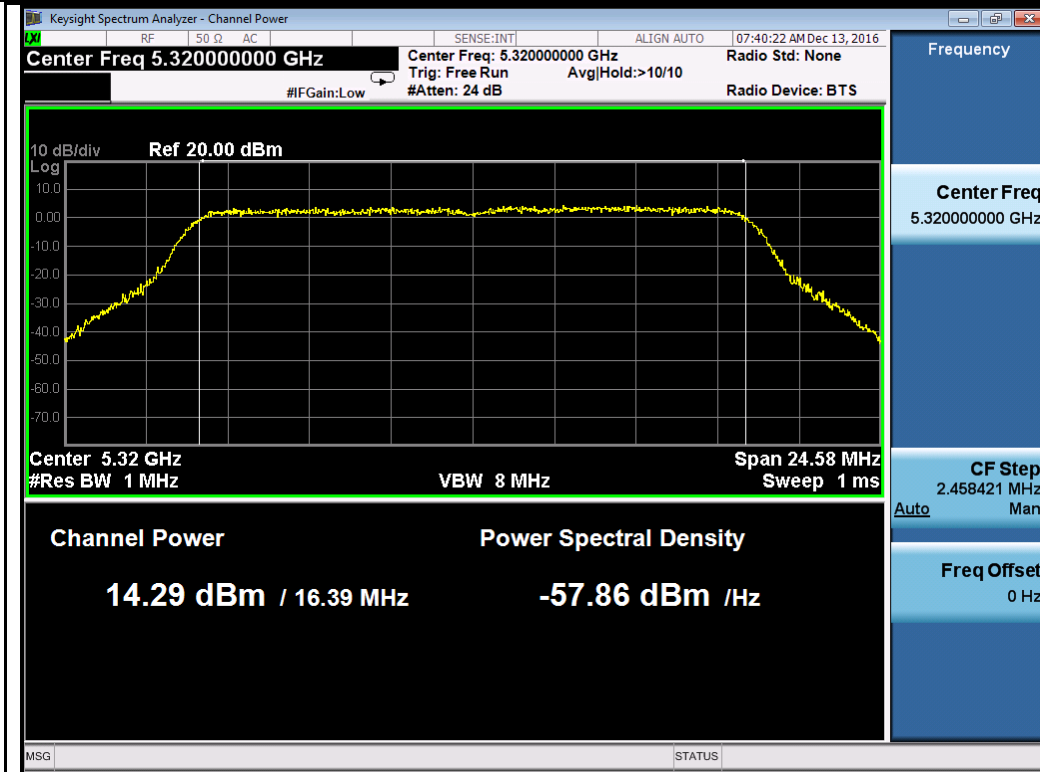


802.11a-5320M

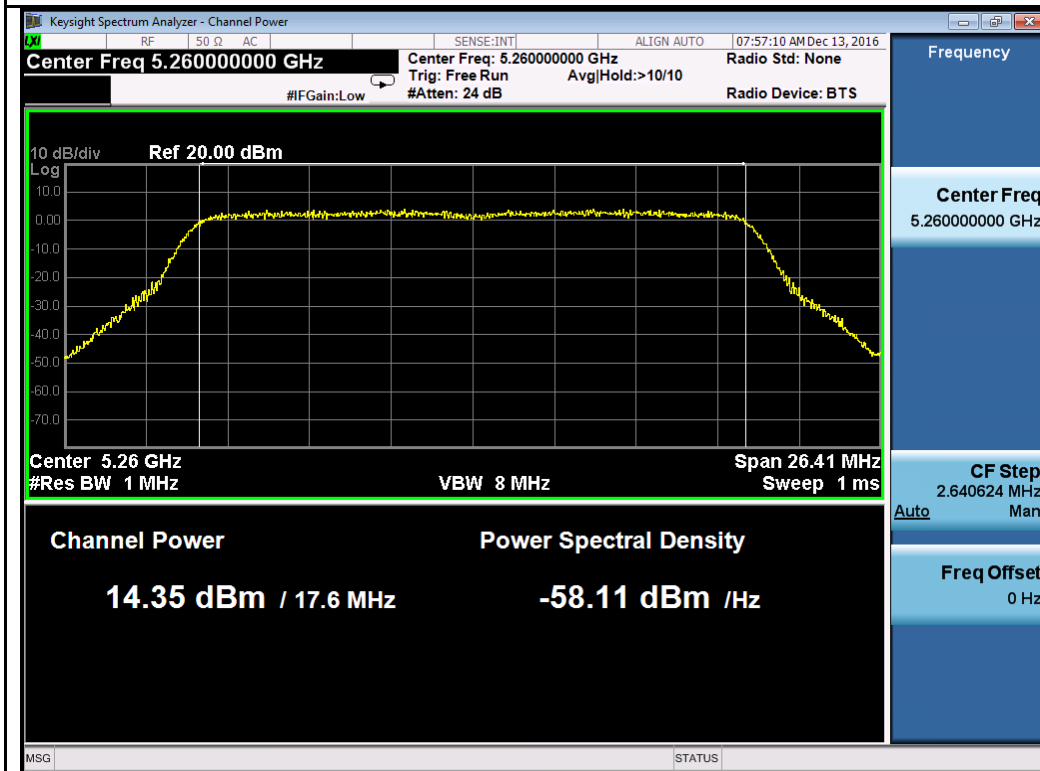


802.11n-HT20 5260M

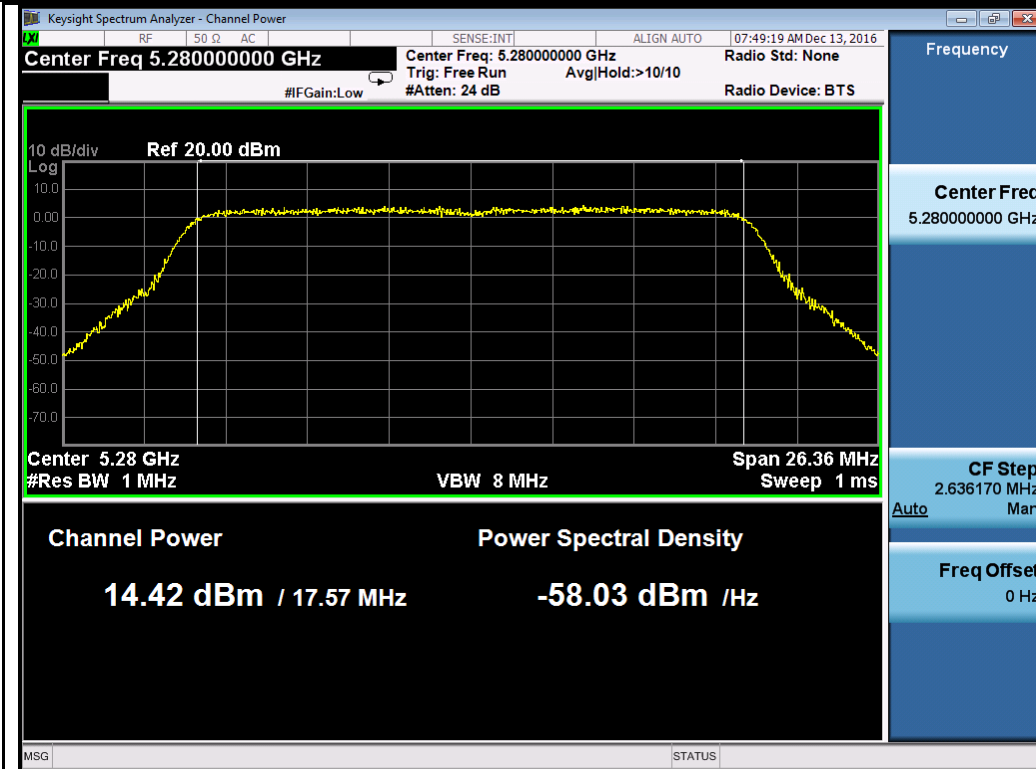


802.11n-HT20 5280M

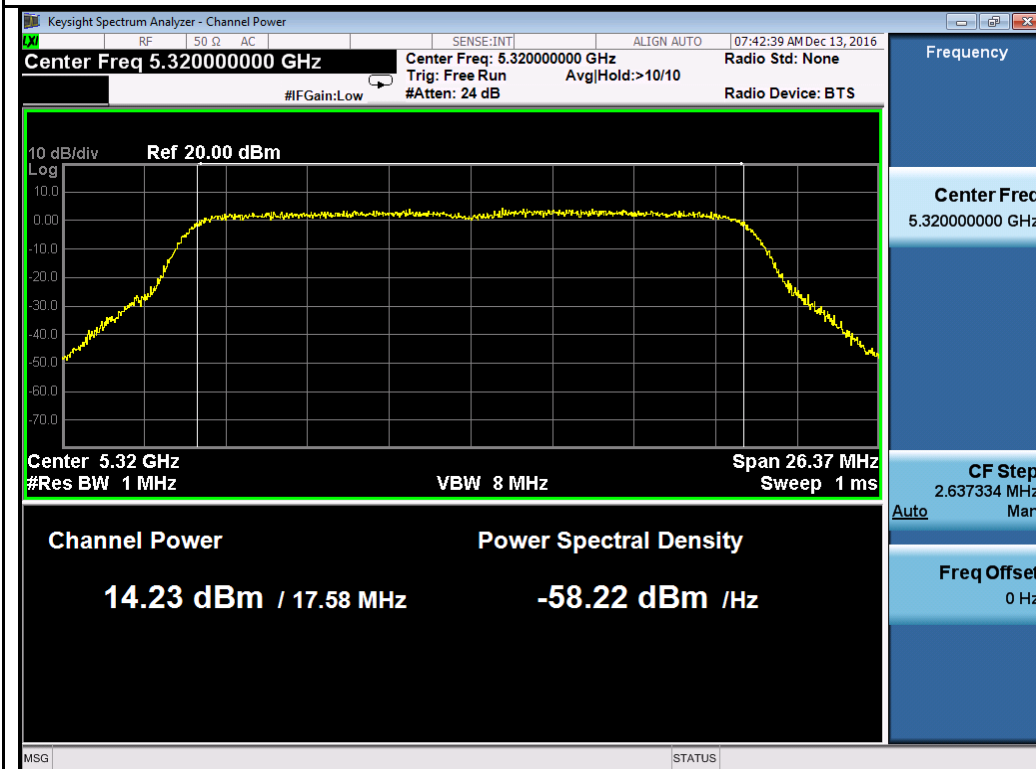

802.11n-HT20 5320M

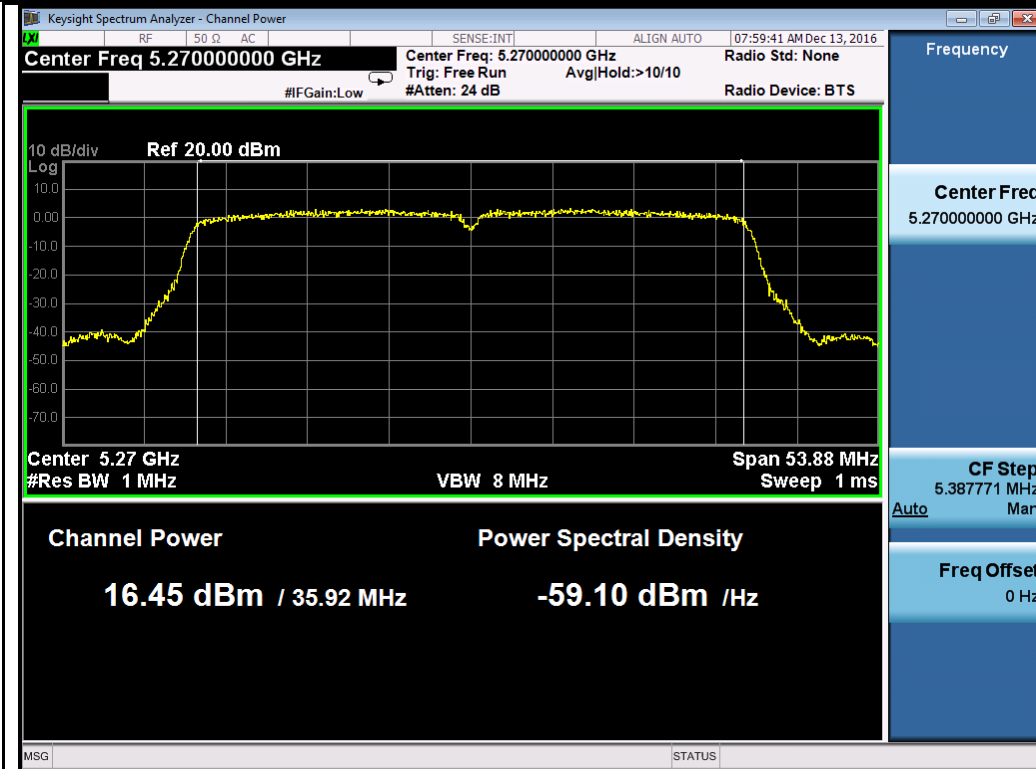


802.11n-HT40 5270M

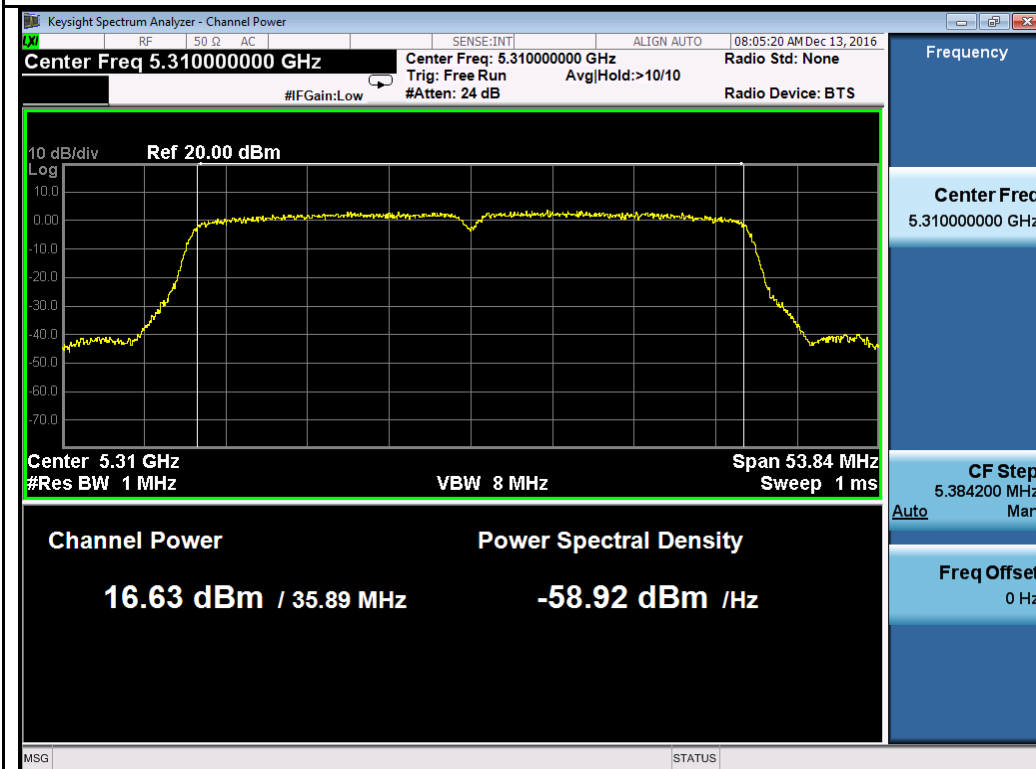


802.11n-HT40 5310M



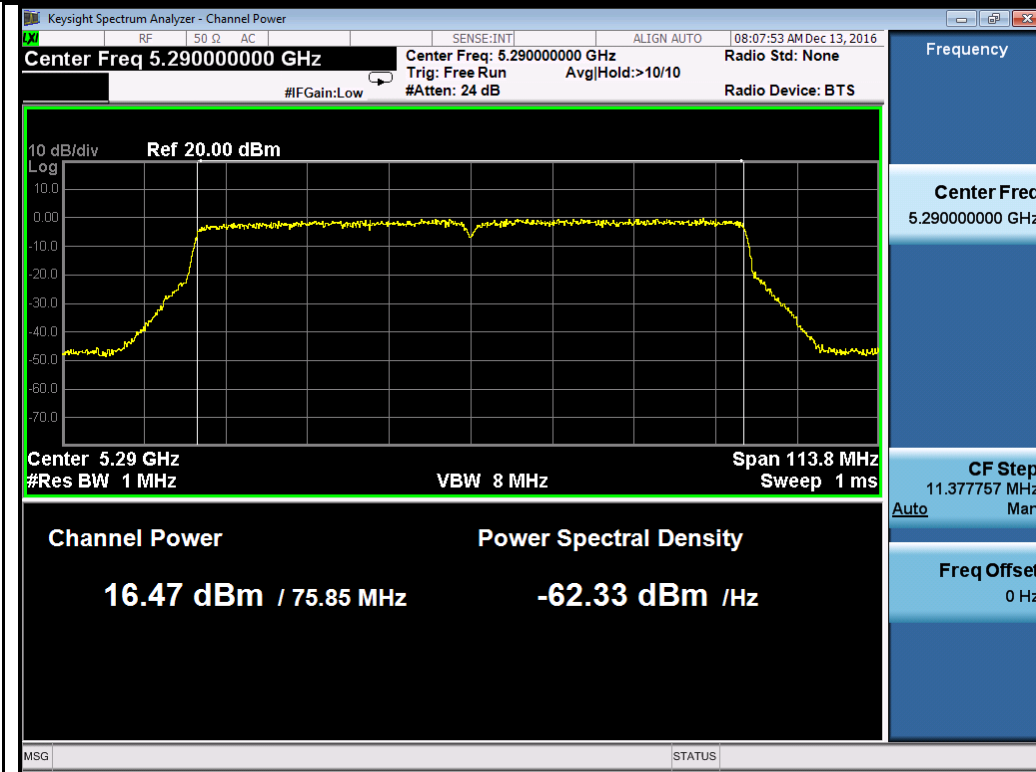


802.11ac-VHT80 5290M

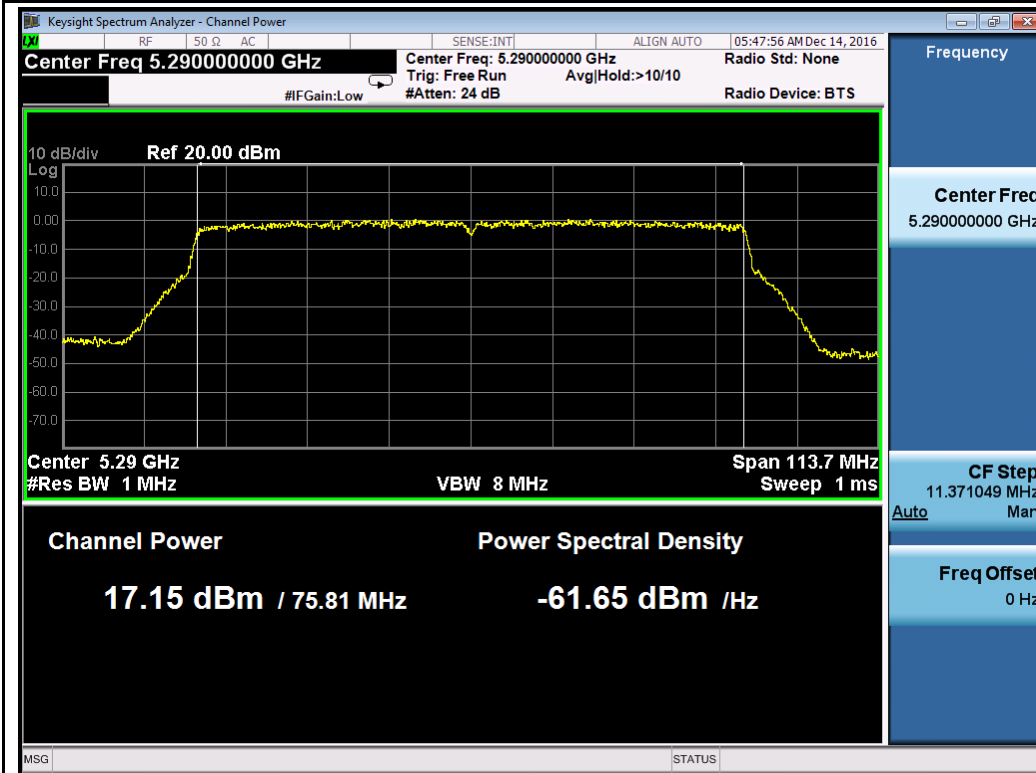


802.11ac-VHT160 5250M

**Test Plot for W56:**


**Chain 1:**

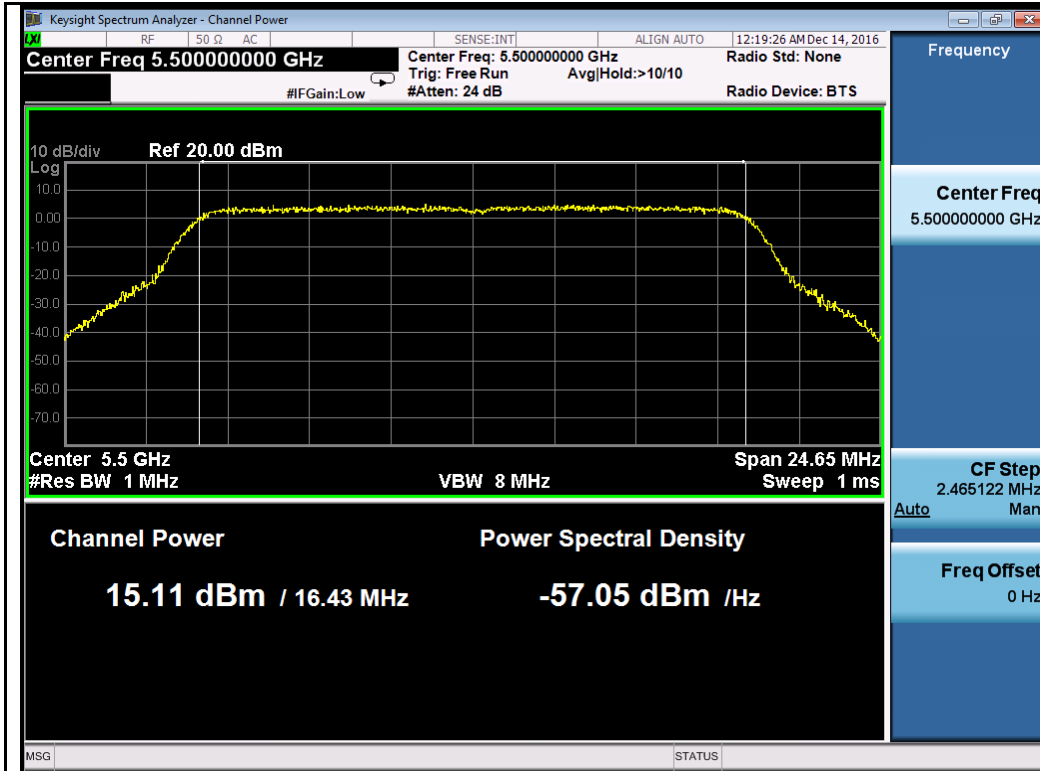


802.11a-5500M

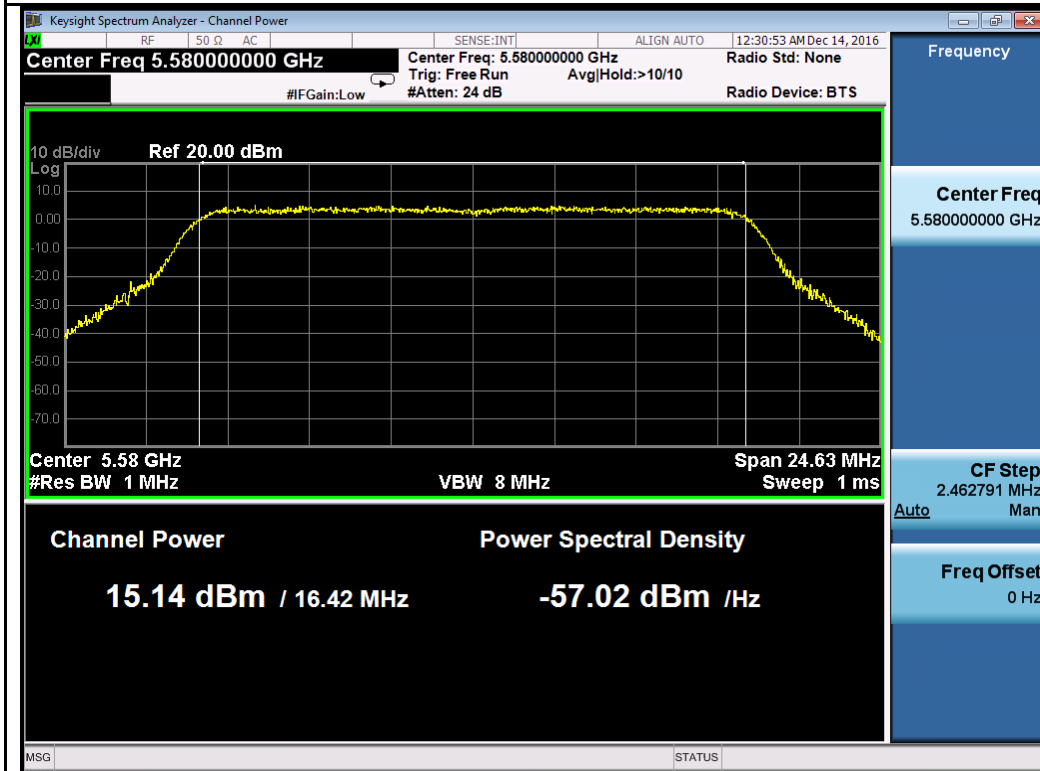


802.11a-5580M

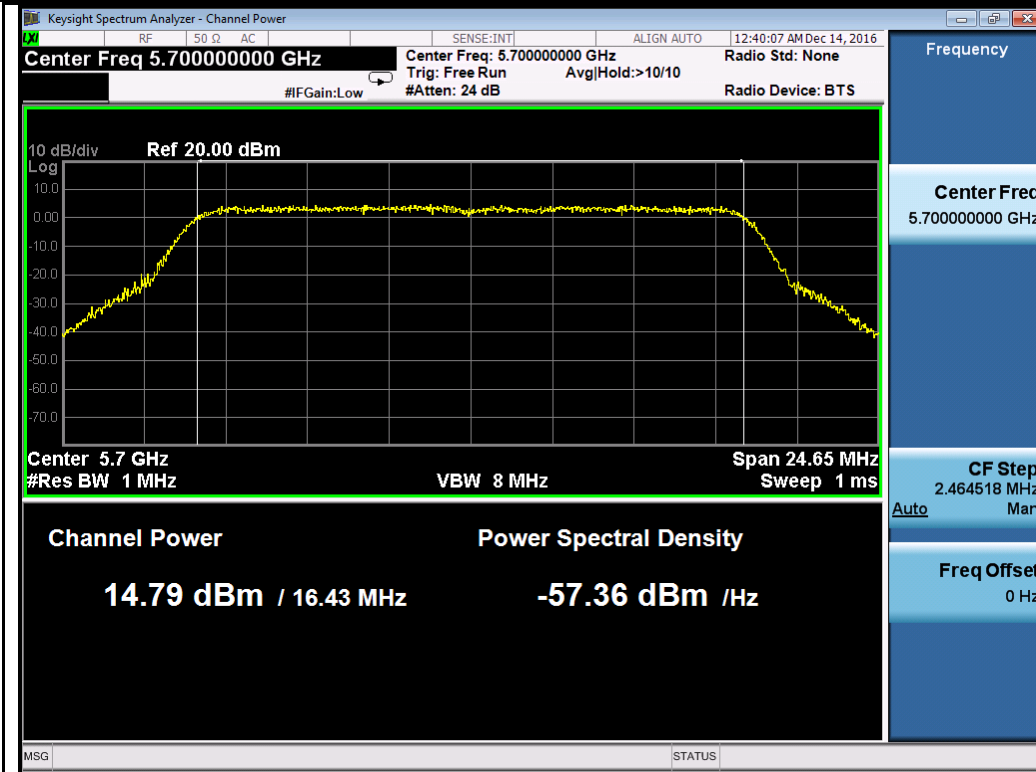


802.11a-5700M

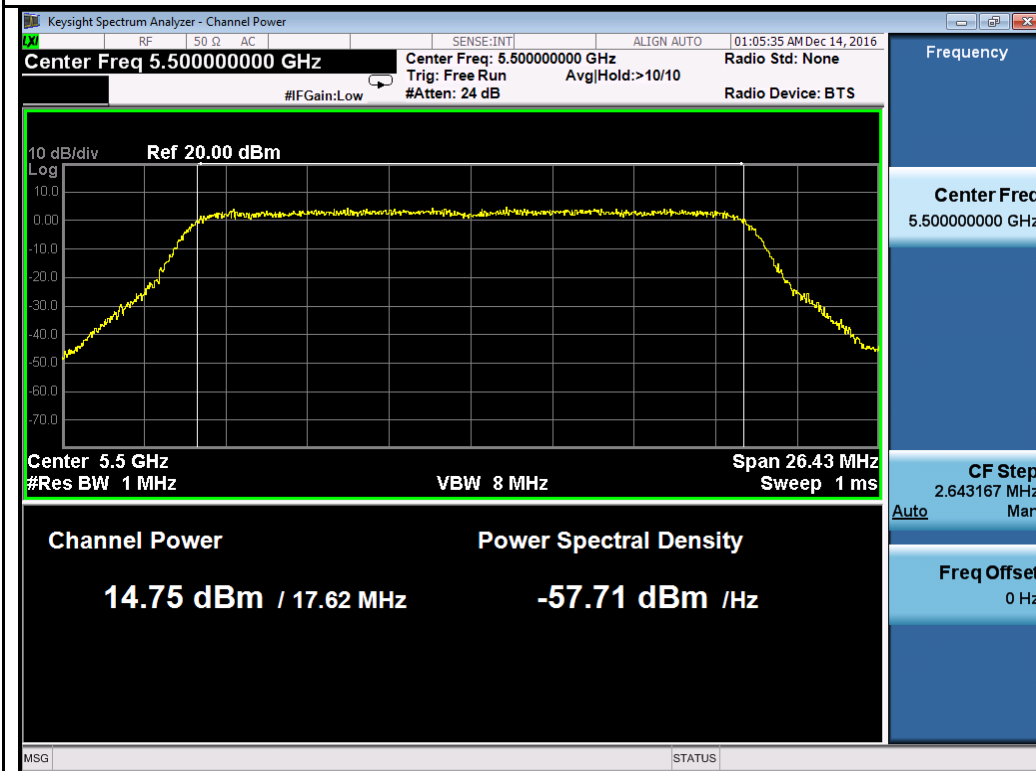


802.11n-HT20 5500M

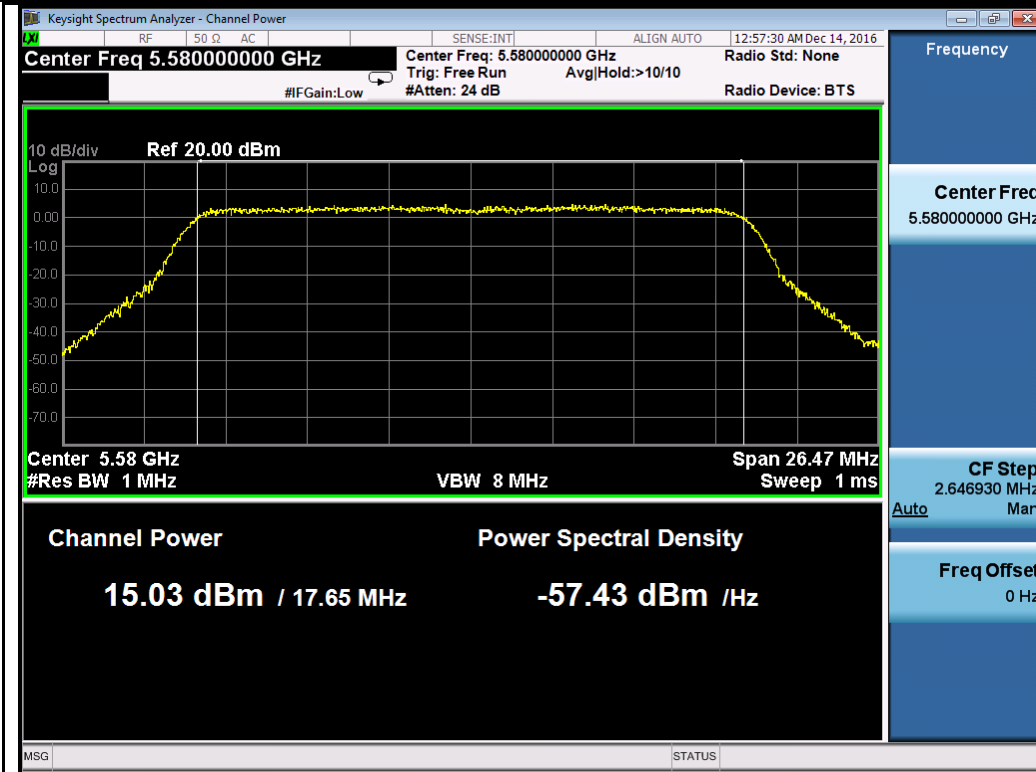


802.11n-HT20 5580M

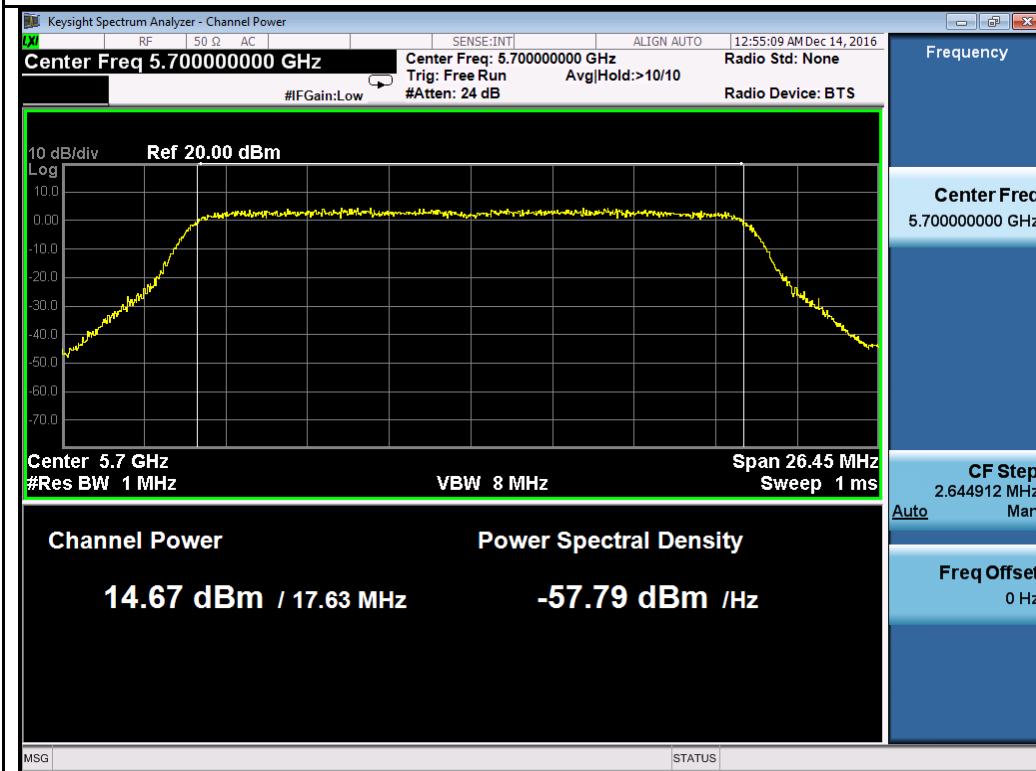


802.11n-HT20 5700M

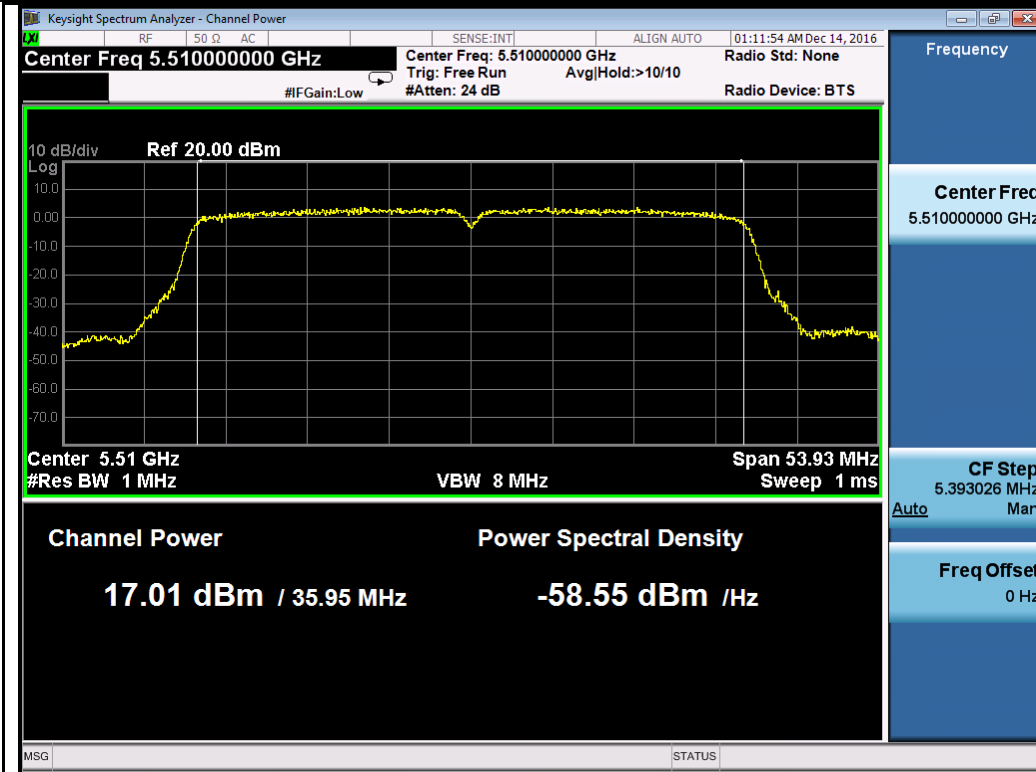


802.11n-HT40 5510M

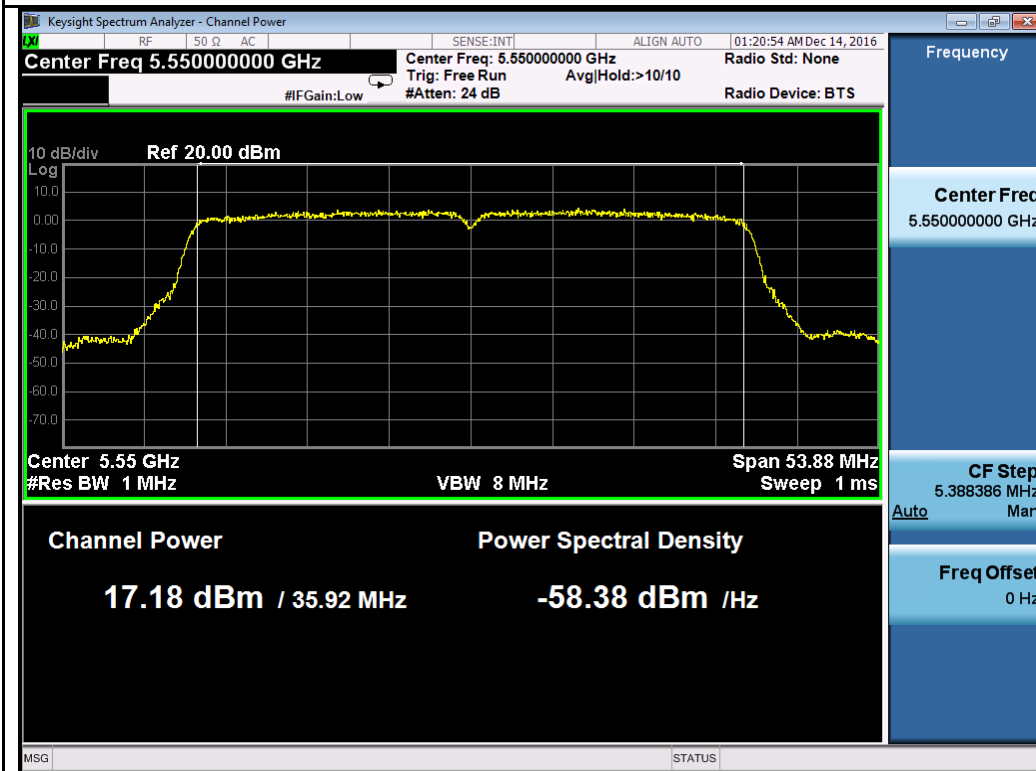


802.11n-HT40 5550M

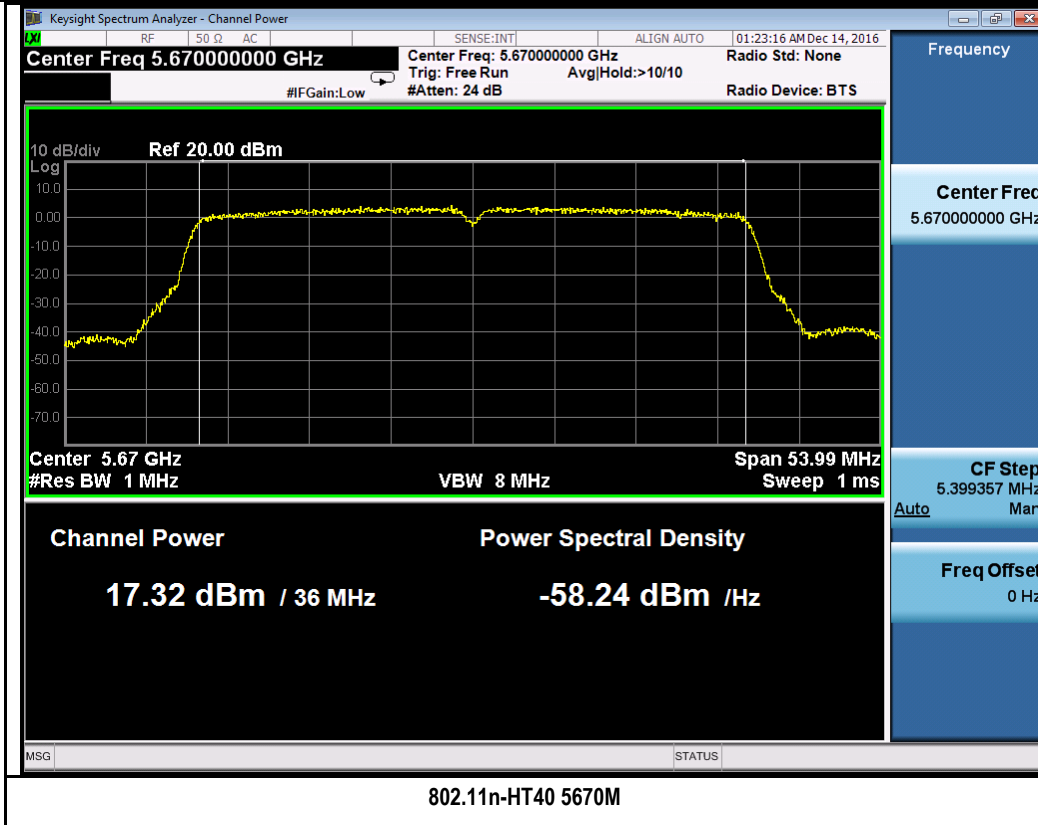


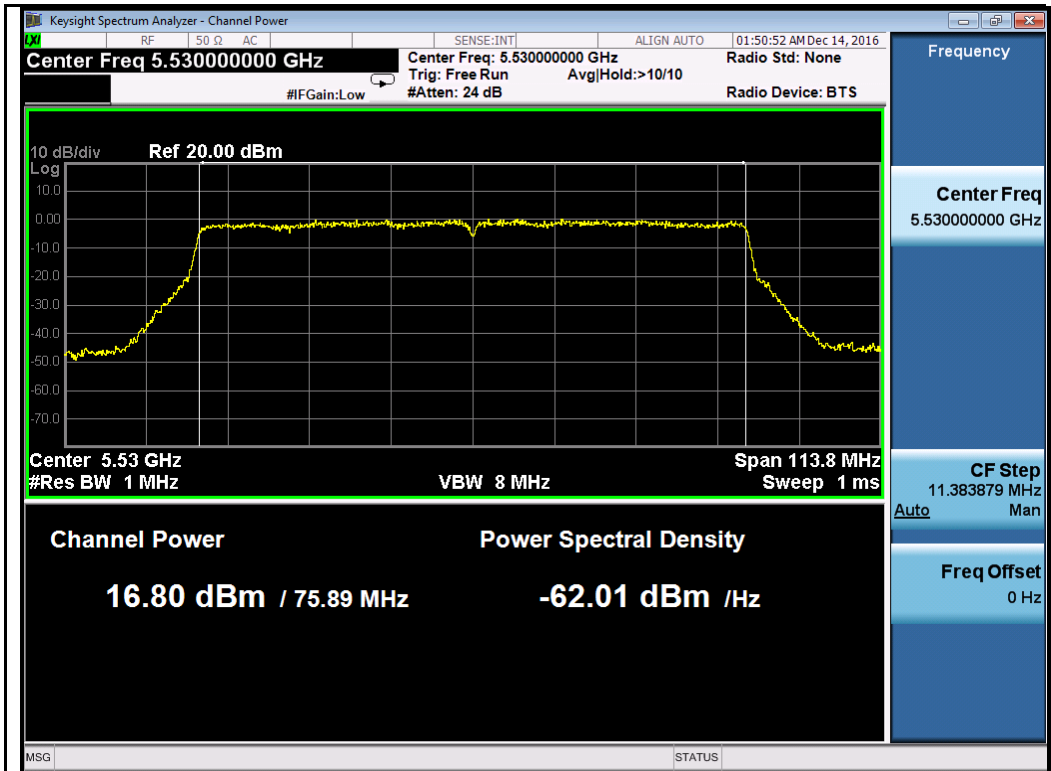


802.11ac-VHT80 5530M

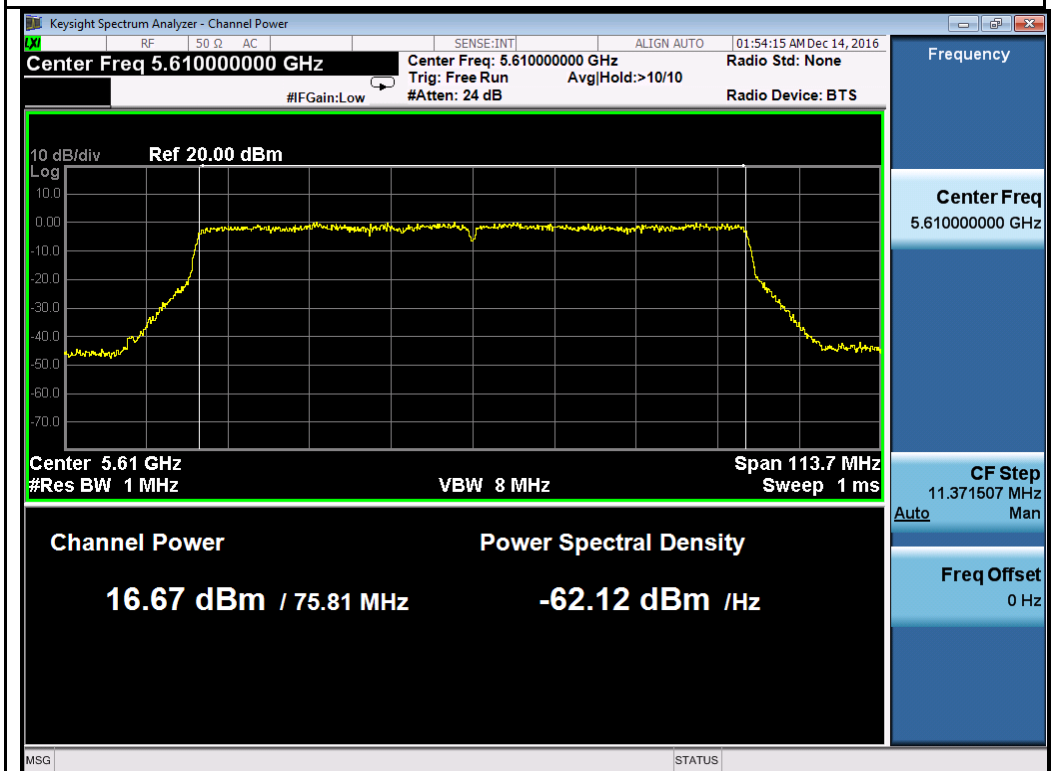



802.11ac-VHT80 5610M


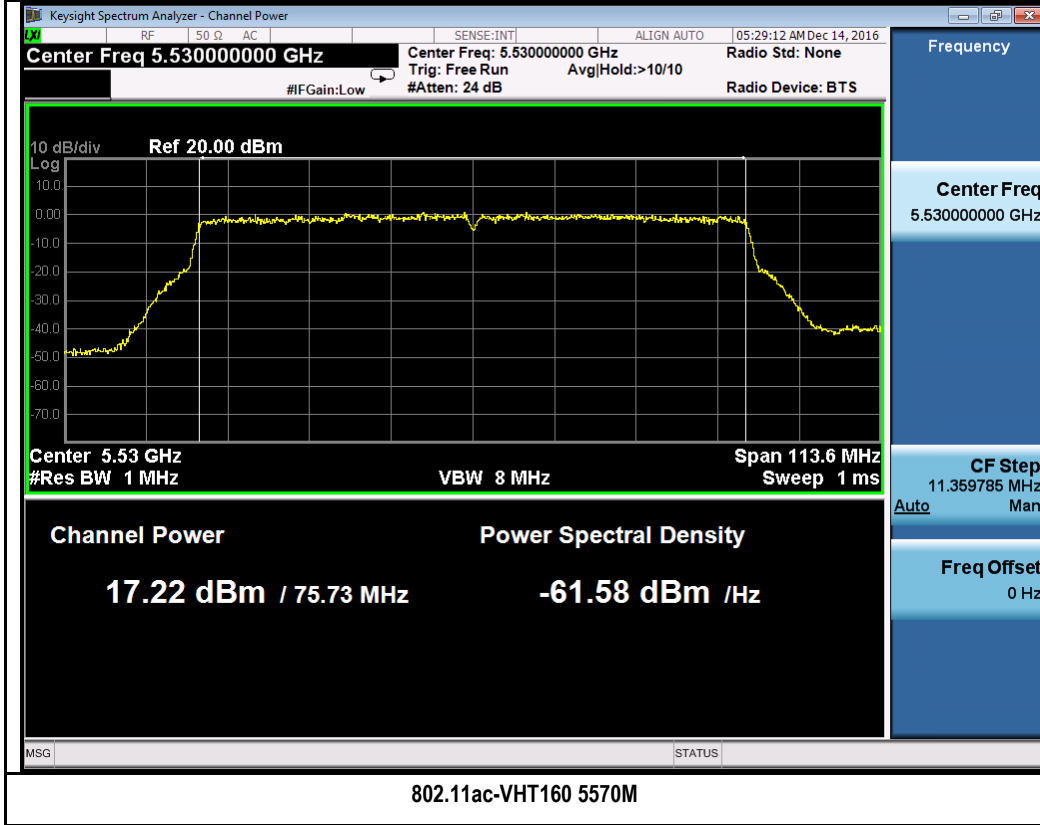




Chain 2:

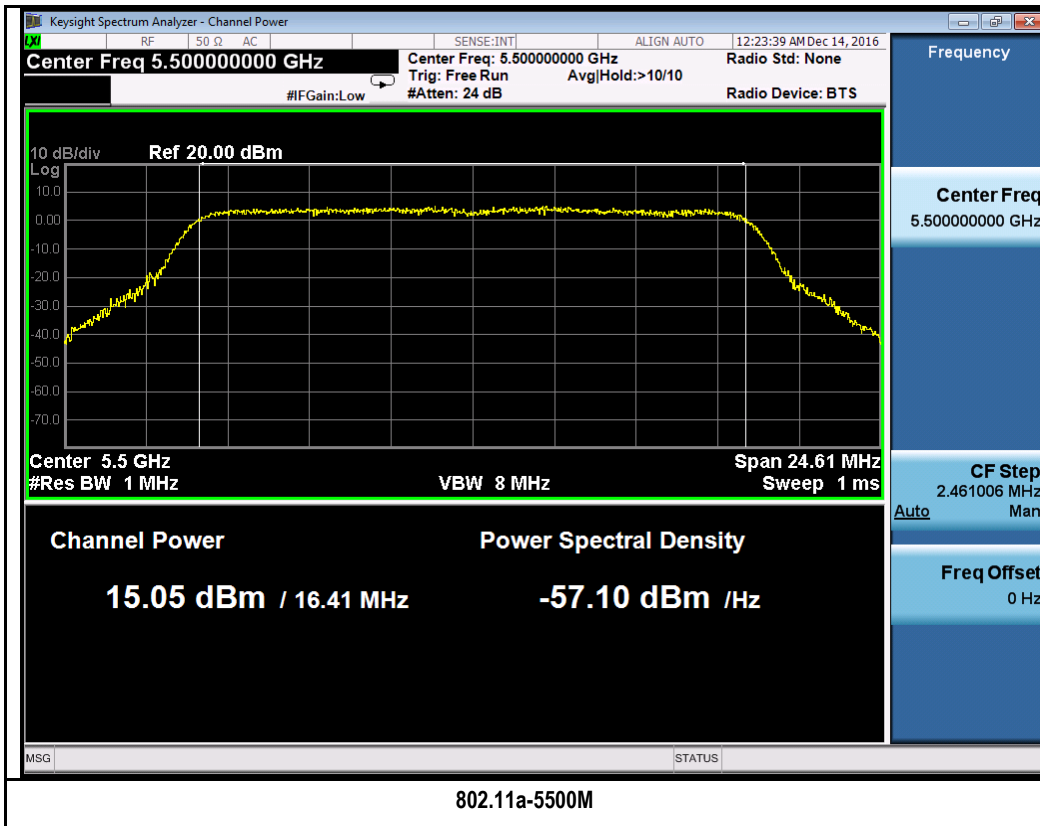




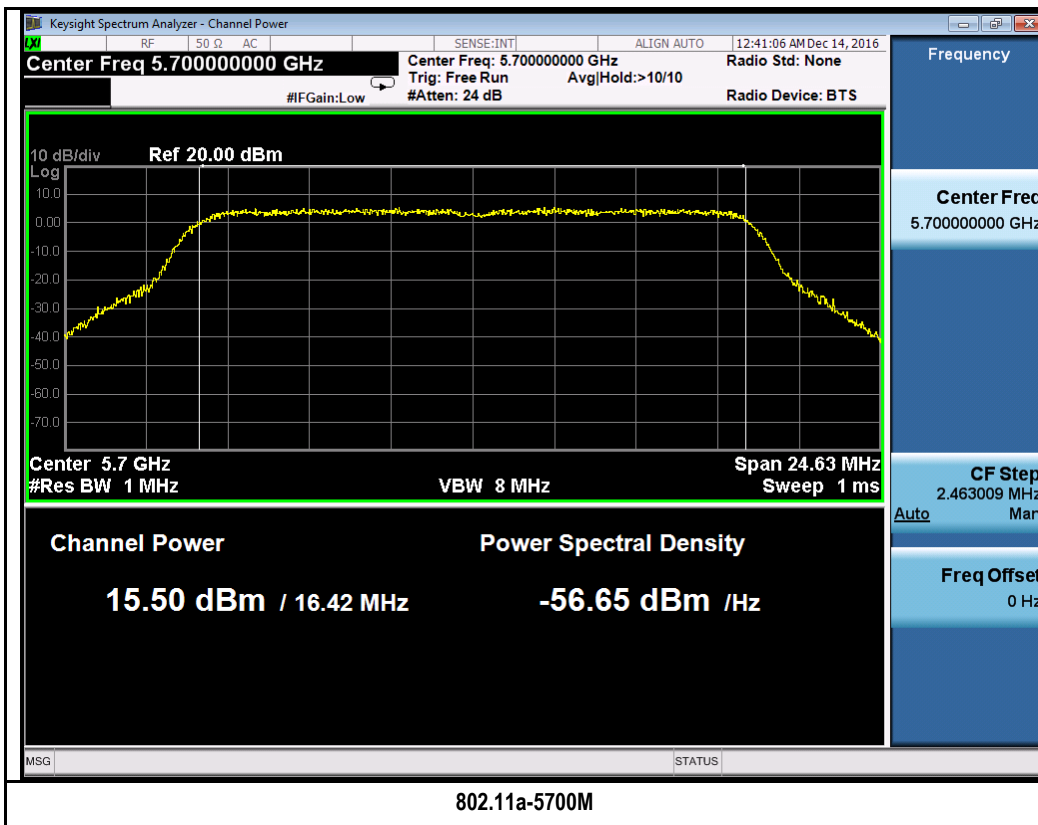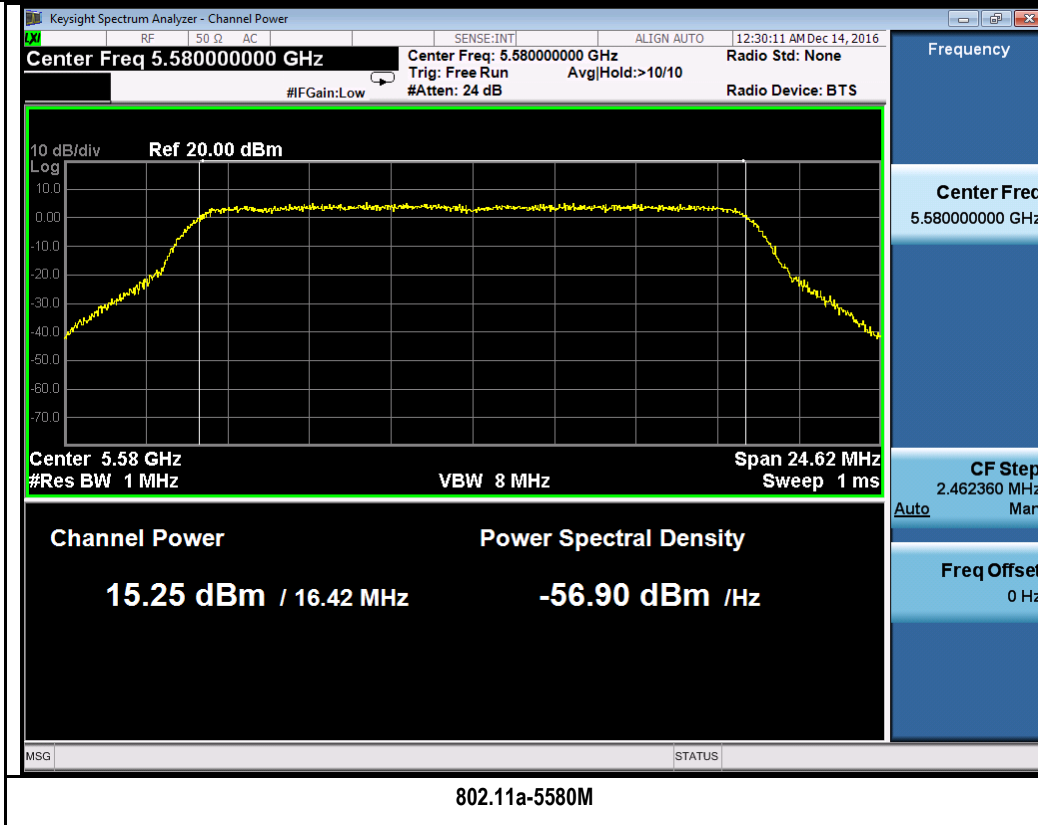


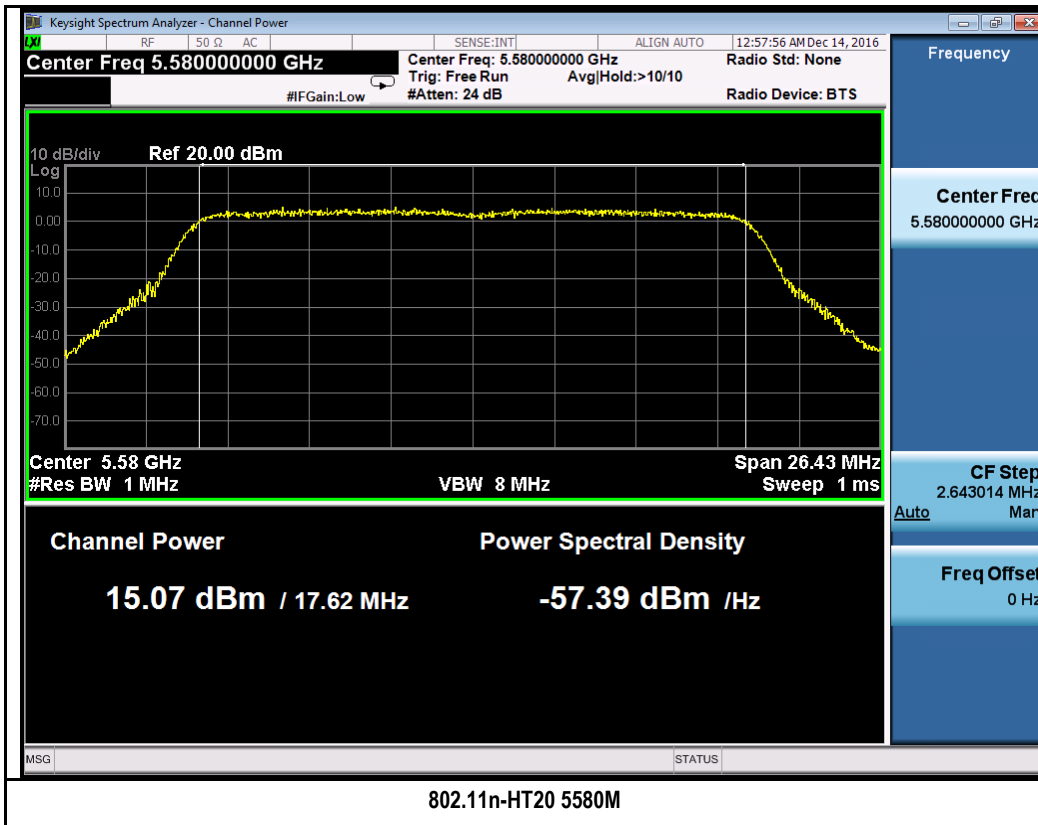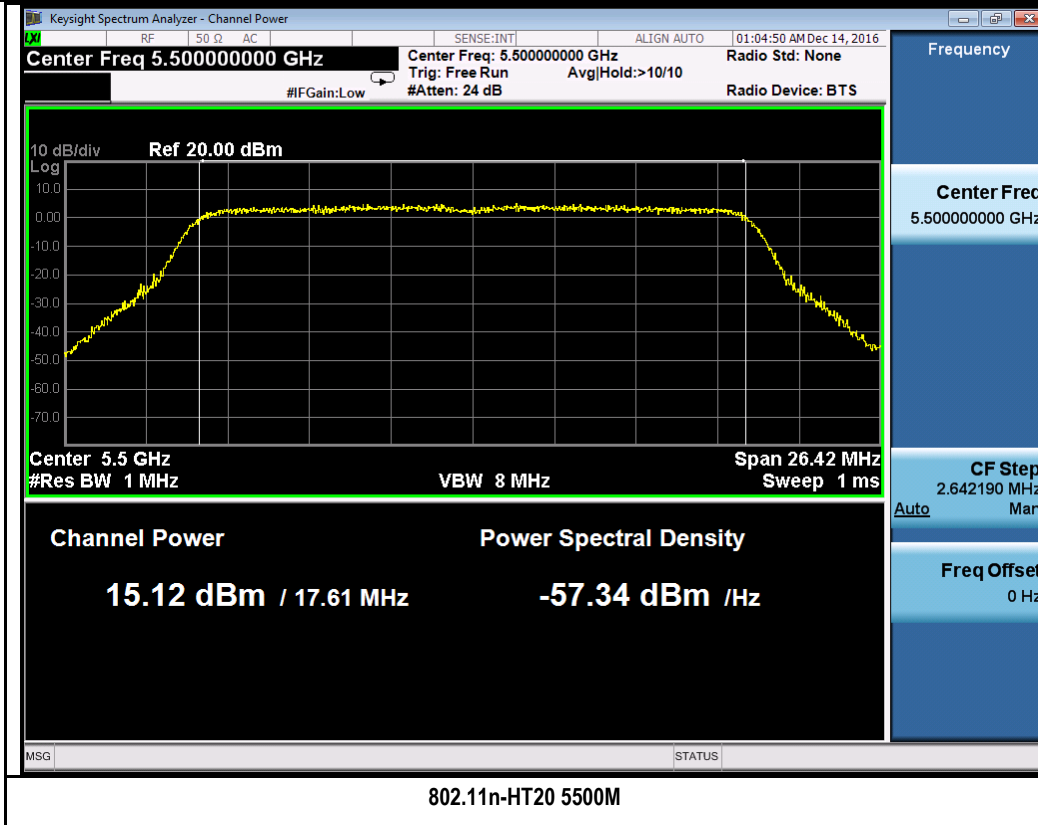

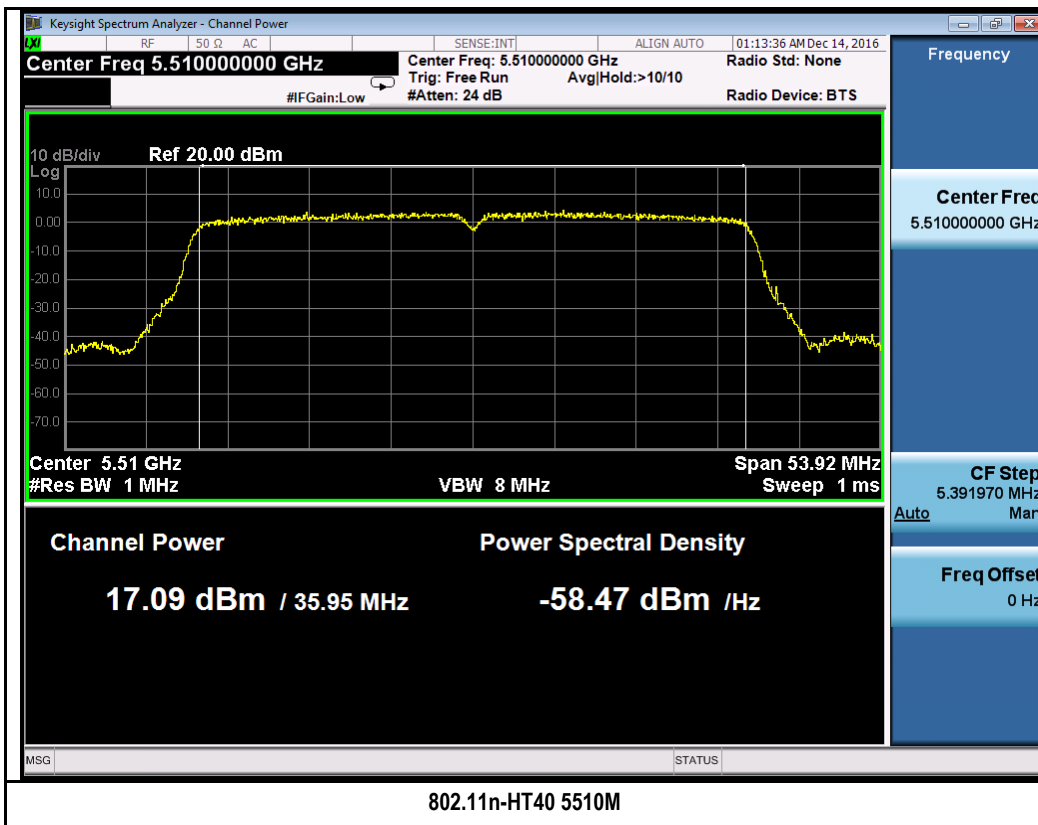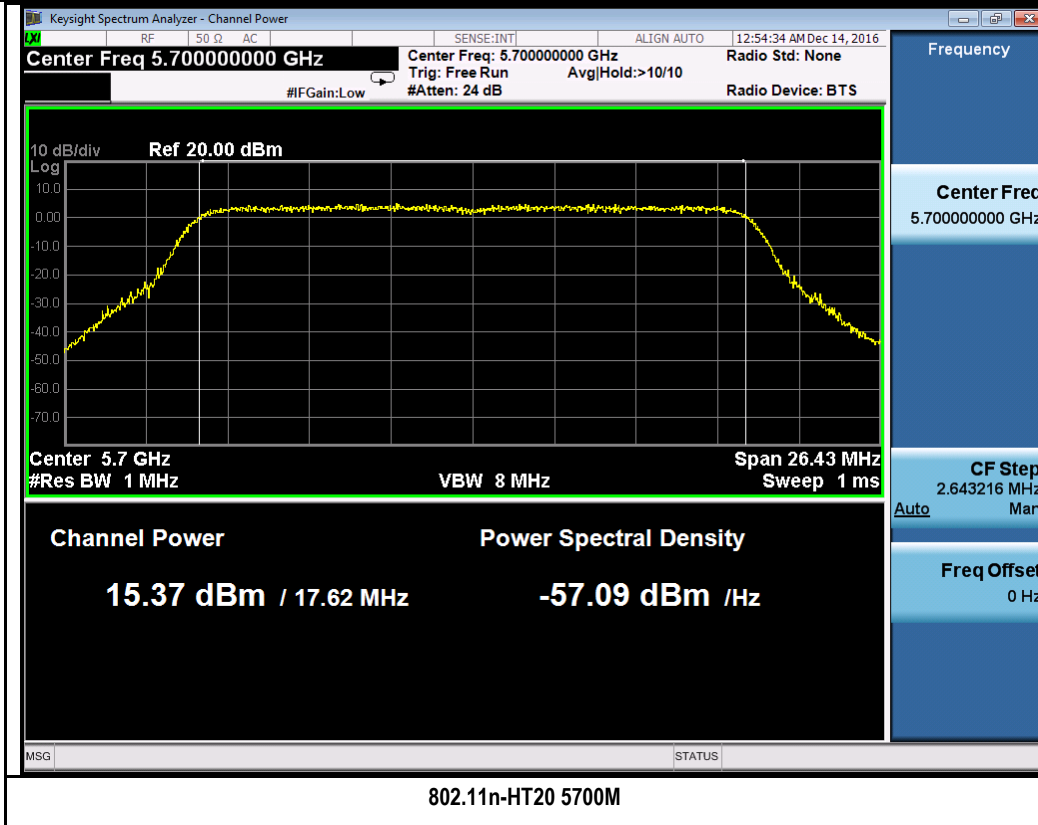


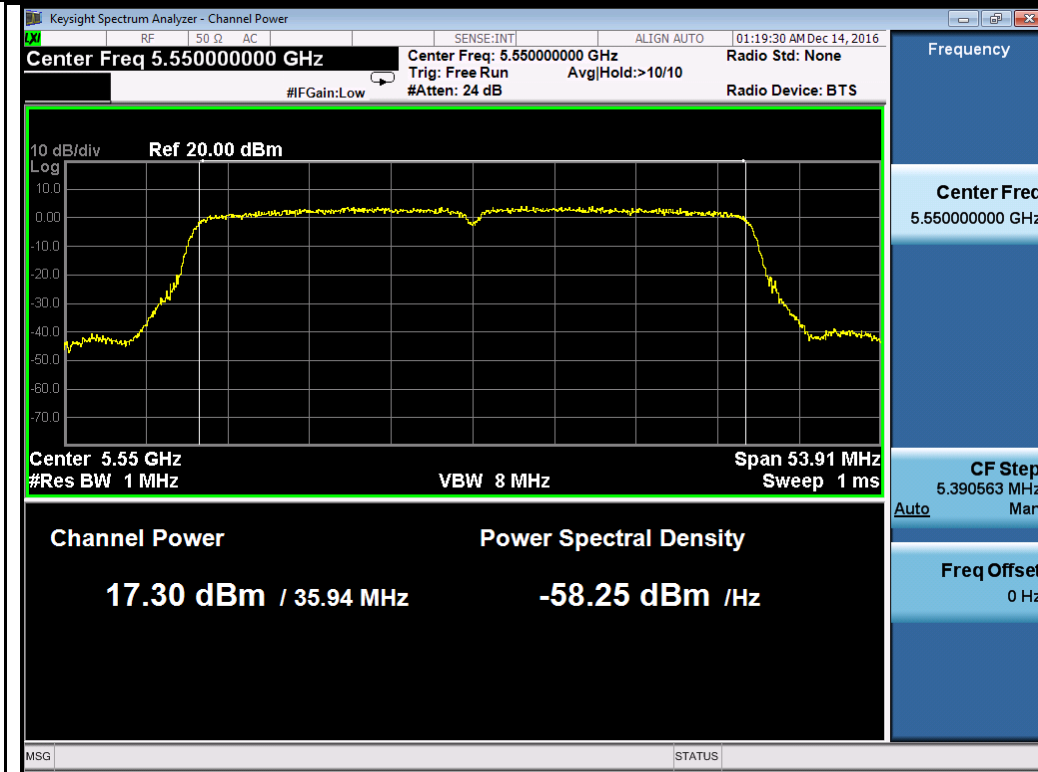


802.11n-HT40 5550M

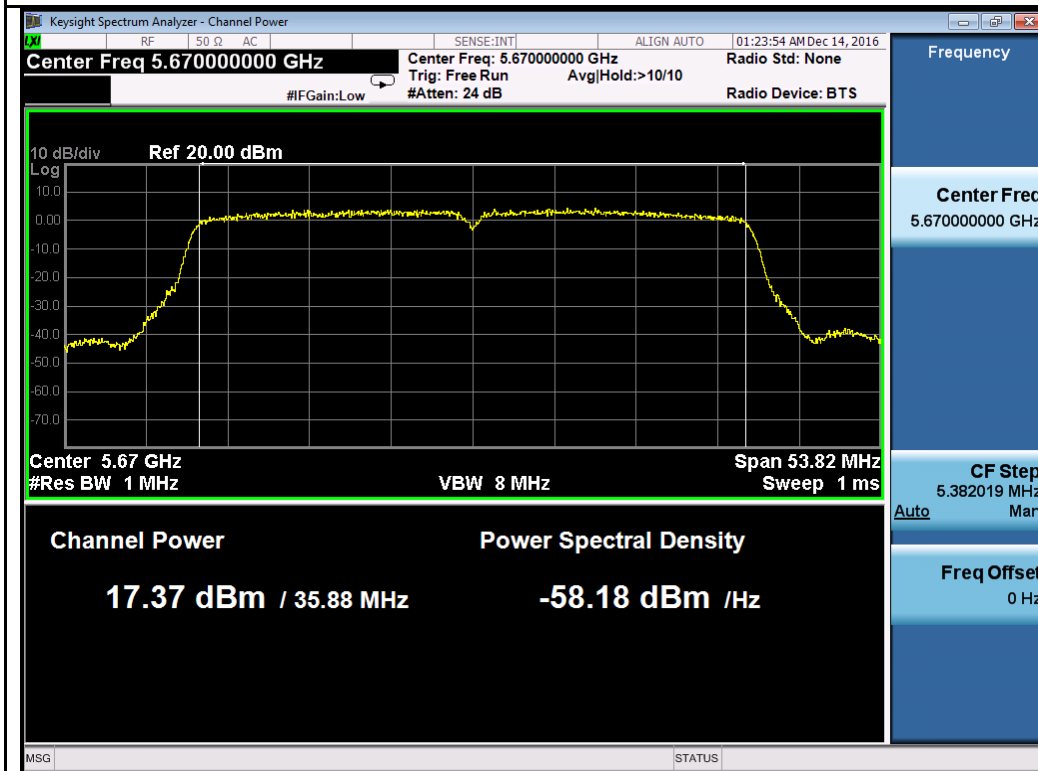

802.11n-HT40 5670M

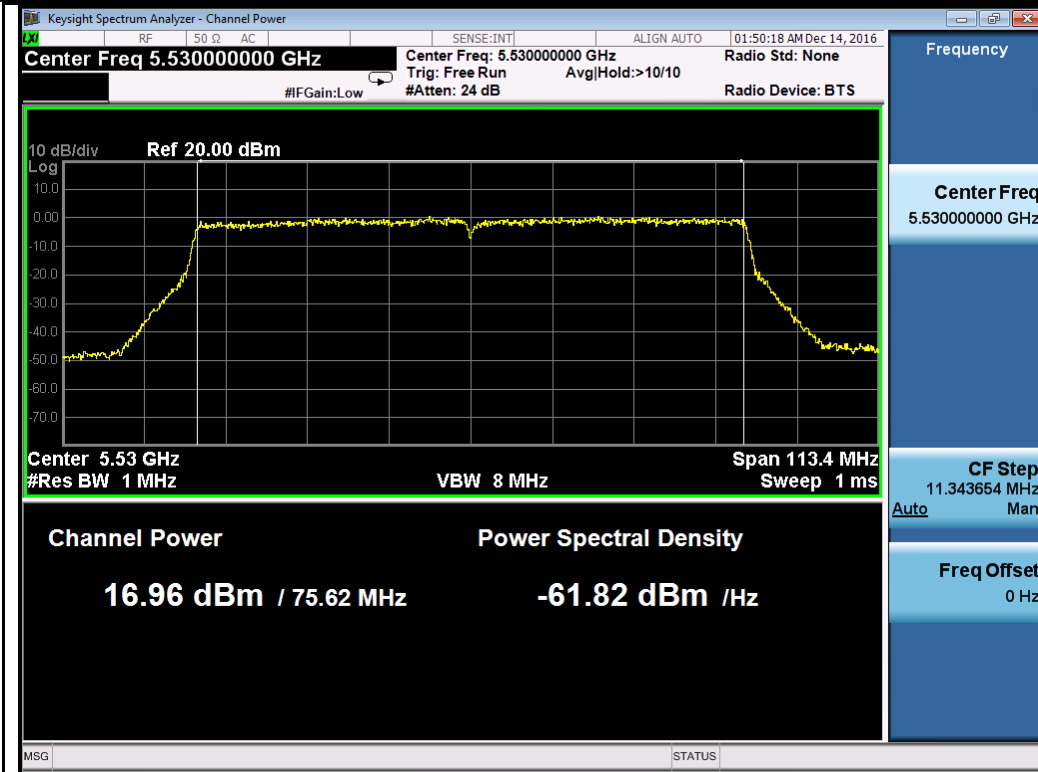

802.11ac-VHT80 5530M

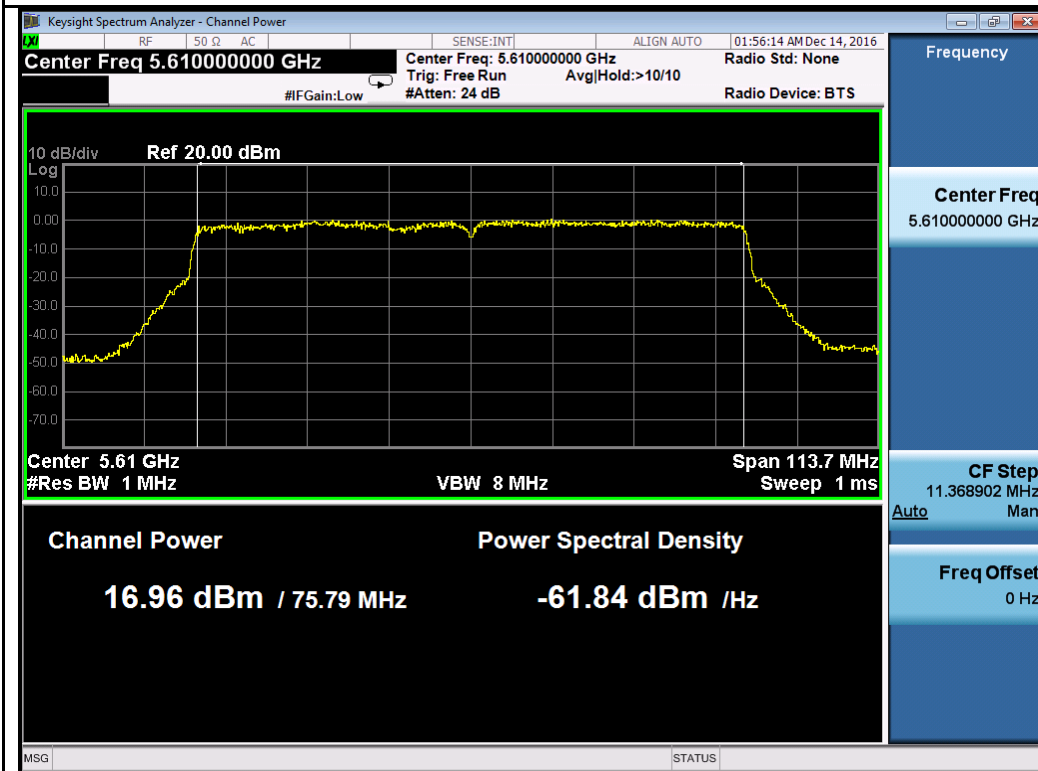

802.11ac-VHT80 5610M